

FCC PART 27
FCC PART 22H, PART 24E
MEASUREMENT AND TEST REPORT

For

Sky Phone LLC

1348 Washington Av., Suite 350, Miami Beach, Florida, United States

FCC ID: 2ABOSGCELITE50LW

Report Type: Original Report	Product Type: 3G/4G Smart Phone
Test Engineer: Haiguo Li	<i>Haiguo Li</i>
Report Number: RSZ151113001-00D	
Report Date: 2015-12-14	
Reviewed By: Candy Li	<i>Candy Li</i>
Prepared By: RF Engineer	
Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
JUSTIFICATION	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §1.1307(B) & §2.1093 - RF EXPOSURE INFORMATION.....	8
APPLICABLE STANDARD	8
TEST RESULT	8
FCC §2.1047 - MODULATION CHARACTERISTIC	9
FCC § 2.1046, § 22.913 (A) & § 24.232 (C) & § 27.50 - RF OUTPUT POWER.....	10
APPLICABLE STANDARDS.....	10
TEST PROCEDURE	10
TEST EQUIPMENT LIST AND DETAILS.....	11
TEST DATA	11
FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH.....	34
APPLICABLE STANDARDS.....	34
TEST PROCEDURE	34
TEST EQUIPMENT LIST AND DETAILS.....	34
TEST DATA	35
FCC §2.1051, §22.917(A) & §24.238(A) & §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS ..	84
APPLICABLE STANDARDS.....	84
TEST PROCEDURE	84
TEST EQUIPMENT LIST AND DETAILS.....	84
TEST DATA	85
FCC §2.1053, §22.917 & §24.238 & §27.53 - SPURIOUS RADIATED EMISSIONS	117
APPLICABLE STANDARDS.....	117
TEST PROCEDURE	117
TEST EQUIPMENT LIST AND DETAILS.....	118
TEST DATA	118
FCC §22.917(A) & §24.238(A) & §27.53 - BAND EDGES.....	122
APPLICABLE STANDARDS.....	122
TEST PROCEDURE	122
TEST EQUIPMENT LIST AND DETAILS.....	123
TEST DATA	123

FCC §2.1055, §22.355 & §24.235 & §27.54 - FREQUENCY STABILITY.....173
 APPLICABLE STANDARDS.....173
 TEST PROCEDURE173
 TEST EQUIPMENT LIST AND DETAILS.....174
 TEST DATA174

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Sky Phone LLC*'s product, model number: *ELITE 5.0LW (FCC ID: 2ABOSGCELITE50LW)* or the "EUT" in this report was a *3G/4G Smart Phone*, which was measured approximately: 145 mm (L) × 73 mm (W) × 9 mm (H), rated with input voltage: DC 3.8V rechargeable Li-ion battery or DC 5.0V from adapter.

Adapter Information:

Model: TL6D-0501000

Input AC: 100-240V, 50/60Hz, 0.15A

Output DC: 5.0V, 1.0A

**All measurement and test data in this report was gathered from production sample serial number: 1507084 (Assigned by Shenzhen BACL). The EUT supplied by the applicant was received on 2015-11-13.*

Objective

This type approval report is prepared on behalf of *Sky Phone LLC* in accordance with Part 2, Part 22-Subpart H, Part 24-Subpart E and Part 27 of the Federal Communication Commissions rules.

The objective is to determine the compliance of EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability, and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP, Part 15.247 DSS & DTS submissions with FCC ID: 2ABOSGCELITE50LW.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E - Personal Communication Services

Part 27 – Miscellaneous wireless communications services

Applicable Standards: TIA/EIA 603-D, ANSI C63.4-2014.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 5.91 dB for 30MHz-1GHz and 4.92 dB for above 1GHz, 1.95dB for conducted measurement.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp.(Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on October 31, 2103. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.


Equipment Modifications

No modifications were made to the EUT.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	1201.002K50
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891
Agilent	Wireless Communications Test Set	8960	MY50266471

Block Diagram of Test Setup

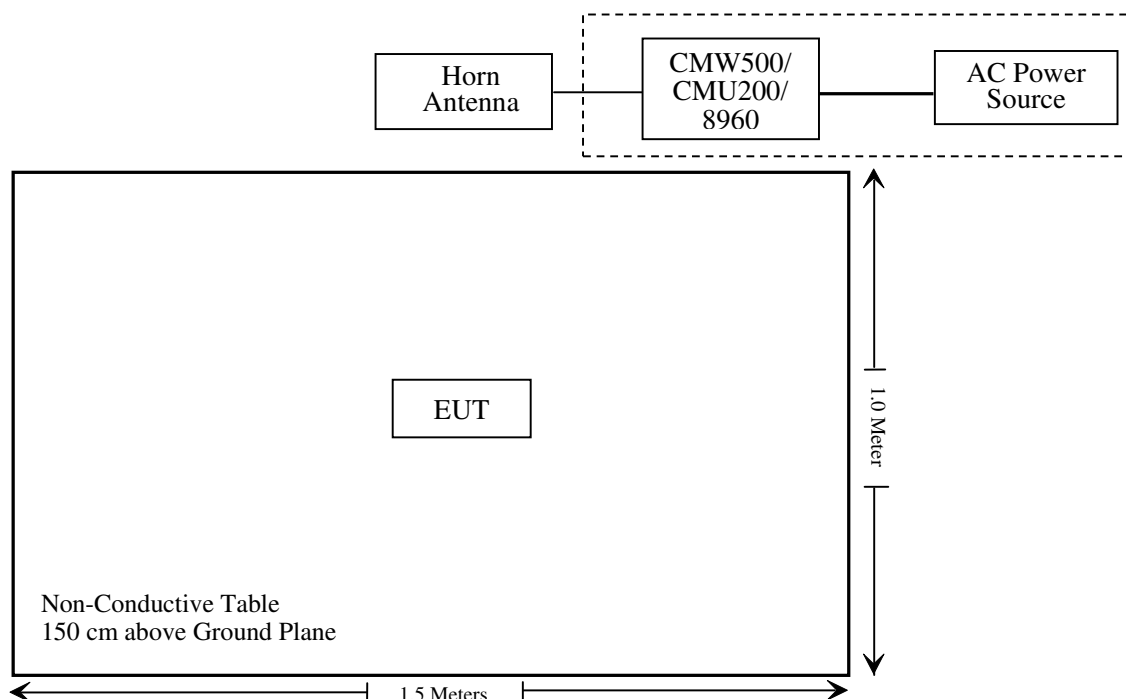

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 (b)(1), §2.1093	RF Exposure Information	Compliance*
§2.1046; § 22.913 (a); § 24.232 (c); §27.50 (d) (i)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905; § 22.917; § 24.238; §27.53 (c)	Occupied Bandwidth	Compliance
§ 2.1051; § 22.917 (a); § 24.238 (a); §27.53(c) (g)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917 (a); § 24.238 (a); §27.53 (c) (g)	Spurious Radiated Emissions	Compliance
§ 22.917 (a); § 24.238 (a); §27.53 (c) (g);	Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235; §27.54;	Frequency stability	Compliance

Note: * Please refer to SAR report released by BACL, report number: RSZ151113001-20.

FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION

Applicable Standard

FCC§1.1307, §2.1093.

Test Result

Compliance, please refer to the SAR report: RSZ151113001-20.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d) , Part 22H & 24E, Part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046, § 22.913 (a) & § 24.232 (c) & § 27.50 - RF OUTPUT POWER**Applicable Standards**

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications..


According to §27.50(d), the maximum EIRP must not exceed 1Watts (30dBm) for 1710-1755MHz. The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

According to §27.50(c), Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

According to §27.50(d), the maximum EIRP must not exceed 1Watts (30dBm) for 1710-1755MHz.

Test Procedure*Conducted method:*

The RF output of the transmitter was connected to the CMW500/CMU200/8960 through sufficient attenuation.

*Radiated method:*

TIA603-D section 2.2.17

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2015-11-03	2016-11-03
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2014-12-07	2017-12-06
HP	Synthesized Sweeper	HP 8341B	2624A00116	2015-07-02	2016-07-01
COM POWER	Dipole Antenna	AD-100	041000	2015-08-18	2016-08-18
A.H. System	Horn Antenna	SAS-200/571	135	2013-02-11	2016-02-10
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2014-12-11	2015-12-11
Sunol Sciences	Horn Antenna	DRH-118	A052604	2014-12-29	2017-12-28
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2014-11-23	2015-11-23
Agilent	WIRELESS COMMUNICATIONS TEST SET	8960	MY50266471	2015-01-13	2016-01-13
R&S	Wideband Radio Communication tester	CMW500	1201.002K50-146520-wh	2014-11-23	2015-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0kPa

The testing was performed by Haiguo Li on 2015-11-19.

Conducted Power**Cellular Band (Part 22H)**

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	128	824.2	31.78	38.45
	190	836.6	31.90	38.45
	251	848.8	31.50	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	128	824.2	31.74	31.21	29.54	28.50	38.45
	190	836.6	31.89	31.11	29.44	28.46	38.45
	251	848.8	31.48	30.92	29.29	28.28	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
EGPRS	128	824.2	26.63	25.24	23.15	22.49	38.45
	190	836.6	26.74	25.35	23.31	22.66	38.45
	251	848.8	26.58	25.38	23.27	22.66	38.45

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band V)	Normal	RMC12.2k		22.21	22.35	22.21
		Rel 6 HSDPA	1	21.08	21.18	21.19
			2	20.98	21.14	21.07
			3	21.20	21.27	21.23
			4	20.97	21.14	21.08
		Rel 6 HSUPA	1	21.08	21.19	21.16
			2	20.98	21.08	21.08
			3	21.12	21.29	21.23
			4	20.95	21.07	21.12
			5	21.19	21.23	21.26
		DC-HSDPA	1	21.17	21.25	20.68
			2	20.80	21.13	20.46
			3	21.19	20.30	20.85
			4	20.67	21.53	21.01
		HSPA+	1	21.02	21.14	21.25

PCS Band (Part 24E)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	512	1850.2	28.63	33
	661	1880.0	29.05	33
	810	1909.8	28.54	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	512	1850.2	28.66	27.92	26.15	25.18	33
	661	1880.0	29.06	27.81	26.13	25.08	33
	810	1909.8	28.55	27.85	26.14	25.07	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
EGPRS	512	1850.2	25.90	24.08	22.12	20.95	33
	661	1880.0	26.21	24.32	22.30	21.09	33
	810	1909.8	26.05	24.32	22.25	20.97	33

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band II)	Normal	RMC12.2k		22.29	22.85	22.45
		Rel 6 HSDPA	1	21.21	21.28	21.35
			2	21.17	21.22	21.30
			3	21.29	21.39	21.46
			4	21.09	21.20	21.27
		Rel 6 HSUPA	1	21.21	21.25	21.34
			2	21.17	21.21	21.29
			3	21.32	21.30	21.46
			4	21.13	21.17	21.31
			5	21.28	21.29	21.45
		DC-HSDPA	1	20.79	21.06	20.89
			2	20.82	21.11	20.90
			3	20.64	20.44	21.28
			4	21.00	21.05	20.96
		HSPA+	1	21.12	21.01	21.32

AWS Band (Part 27)

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band IV)	Normal	RMC12.2k		22.16	22.15	22.25
		Rel 6 HSDPA	1	21.10	21.12	21.14
			2	20.98	21.07	21.05
			3	21.19	21.17	21.17
			4	21.07	21.02	21.05
		Rel 6 HSUPA	1	21.10	21.04	21.16
			2	21.07	20.99	21.12
			3	21.20	21.16	21.23
			4	21.07	20.92	21.11
			5	21.16	21.11	21.20
		DC-HSDPA	1	20.73	21.30	21.02
			2	20.61	20.60	20.78
			3	21.03	21.00	20.67
			4	21.17	20.66	21.13
		HSPA+	1	20.86	20.95	20.96

Peak-to-average ratio (PAR)**Cellular Band**

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	0.23	13
	Middle	0.21	13
	High	0.25	13

Mode	Channel	PAR (dB)	Limit (dB)
EGPRS	Low	2.31	13
	Middle	2.32	13
	High	2.35	13

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (BPSK)	Low	2.85	13
	Middle	2.77	13
	High	2.82	13
HSDPA (16QAM)	Low	2.72	13
	Middle	2.79	13
	High	2.81	13
HSUPA (BPSK)	Low	2.85	13
	Middle	2.73	13
	High	2.82	13

PCS Band

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	0.28	13
	Middle	0.22	13
	High	0.24	13

Mode	Channel	PAR (dB)	Limit (dB)
EGPRS	Low	2.26	13
	Middle	2.39	13
	High	2.31	13

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (BPSK)	Low	2.75	13
	Middle	2.62	13
	High	2.78	13
HSDPA (16QAM)	Low	2.78	13
	Middle	2.61	13
	High	2.73	13
HSUPA (BPSK)	Low	2.79	13
	Middle	2.58	13
	High	2.73	13

AWS Band

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (BPSK)	Low	2.91	13
	Middle	3.02	13
	High	2.97	13
HSDPA (16QAM)	Low	2.98	13
	Middle	2.93	13
	High	2.98	13
HSUPA (BPSK)	Low	2.87	13
	Middle	2.81	13
	High	2.89	13

Radiated Power**ERP & EIRP****GSM Mode:**

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H/24E	
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
ERP for Cellular Band (Part 22H), Middle Channel										
836.60	96.58	125	2.1	H	27.6	0.67	0	26.93	38.45	11.52
836.60	98.18	334	1.1	V	29.2	0.67	0	28.53	38.45	9.92
ERP for PCS Band (Part 24E), Middle Channel										
1880.00	89.21	155	1.5	H	20.5	1.40	7.30	26.40	33	6.60
1880.00	88.76	27	2.1	V	19.5	1.40	7.30	25.40	33	7.60

EDGE Mode:

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H/24E	
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
ERP for Cellular Band (Part 22H), Middle Channel										
836.60	93.67	182	2.2	H	24.7	0.67	0	24.03	38.45	14.42
836.60	94.15	25	1.0	V	25.2	0.67	0	24.53	38.45	13.92
EIRP for PCS Band (Part 24E), Middle Channel										
1880.00	85.67	277	1.5	H	17.0	1.40	7.30	22.90	33	10.1
1880.00	86.79	172	1.4	V	17.6	1.40	7.30	23.50	33	9.50

WCDMA Mode:

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H/24E/27	
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
ERP for WCDMA Band V (Part 22H), Middle Channel										
836.60	91.75	250	2.2	H	22.8	0.67	0	22.13	38.45	16.32
836.60	92.11	304	2.4	V	23.1	0.67	0	22.43	38.45	16.02
ERP for WCDMA Band II (Part 24E), Middle Channel										
1880.00	84.69	79	2.0	H	16.0	1.40	7.30	21.90	33	11.10
1880.00	86.17	165	1.3	V	16.9	1.40	7.30	22.80	33	10.20
ERP for WCDMA Band IV (Part 27), High Channel										
1752.60	87.63	182	1.6	H	16.9	1.40	7.10	22.60	30	7.40
1752.60	86.34	136	1.8	V	15.7	1.40	7.10	21.40	30	8.60

Note:

All above data were tested with no amplifier.

Absolute Level = SG Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

LTE Band 2:**Maximum Output Power**

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4	QPSK	RB Size=1, RB Offset=0	22.18	22.14	22.06
		RB Size=1, RB Offset=2	22.43	22.32	22.26
		RB Size=1, RB Offset=5	22.53	22.41	22.35
		RB Size=3, RB Offset=0	22.13	22.07	22.03
		RB Size=3, RB Offset=1	22.78	22.74	22.63
		RB Size=3, RB Offset=2	21.86	21.78	21.66
		RB Size=6, RB Offset=0	22.01	21.95	21.85
	16QAM	RB Size=1, RB Offset=0	22.28	22.19	22.13
		RB Size=1, RB Offset=2	22.57	22.52	22.41
		RB Size=1, RB Offset=5	22.47	22.37	22.28
		RB Size=3, RB Offset=0	21.93	21.89	21.83
		RB Size=3, RB Offset=1	22.38	22.30	22.24
		RB Size=3, RB Offset=2	22.08	21.99	21.94
		RB Size=6, RB Offset=0	22.13	22.04	21.94
3.0	QPSK	RB Size=1, RB Offset=0	22.63	22.55	22.48
		RB Size=1, RB Offset=7	22.77	22.71	22.61
		RB Size=1, RB Offset=14	22.72	22.67	22.57
		RB Size=8, RB Offset=0	22.17	22.12	22.04
		RB Size=8, RB Offset=4	22.10	21.99	21.94
		RB Size=8, RB Offset=7	22.45	22.36	22.28
		RB Size=15, RB Offset=0	21.92	21.82	21.71
	16QAM	RB Size=1, RB Offset=0	22.08	22.00	21.88
		RB Size=1, RB Offset=7	21.89	21.77	21.73
		RB Size=1, RB Offset=14	22.07	21.98	21.89
		RB Size=8, RB Offset=0	22.39	22.30	22.23
		RB Size=8, RB Offset=4	22.08	22.01	21.93
		RB Size=8, RB Offset=7	22.31	22.27	22.18
		RB Size=15, RB Offset=0	22.80	22.73	22.60

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	22.84	22.78	22.75
		RB Size=1, RB Offset=12	22.06	21.96	21.92
		RB Size=1, RB Offset=24	22.13	22.08	21.98
		RB Size=12, RB Offset=0	22.37	22.25	22.13
		RB Size=12, RB Offset=6	21.96	21.93	21.82
		RB Size=12, RB Offset=11	22.40	22.31	22.20
		RB Size=25, RB Offset=0	22.50	22.45	22.34
	16QAM	RB Size=1, RB Offset=0	22.52	22.46	22.38
		RB Size=1, RB Offset=12	22.70	22.64	22.59
		RB Size=1, RB Offset=24	22.03	21.91	21.84
		RB Size=12, RB Offset=0	22.63	22.52	22.40
		RB Size=12, RB Offset=6	22.02	21.92	21.86
		RB Size=12, RB Offset=11	22.76	22.64	22.56
		RB Size=25, RB Offset=0	22.43	22.31	22.26
10.0	QPSK	RB Size=1, RB Offset=0	22.16	22.12	22.08
		RB Size=1, RB Offset=24	22.58	22.55	22.48
		RB Size=1, RB Offset=49	22.36	22.24	22.14
		RB Size=25, RB Offset=0	22.35	22.26	22.21
		RB Size=25, RB Offset=12	22.13	22.02	21.96
		RB Size=25, RB Offset=24	22.41	22.34	22.31
		RB Size=50, RB Offset=0	22.59	22.55	22.47
	16QAM	RB Size=1, RB Offset=0	22.72	22.60	22.56
		RB Size=1, RB Offset=24	22.06	22.02	21.93
		RB Size=1, RB Offset=49	22.09	22.04	22.01
		RB Size=25, RB Offset=0	22.45	22.33	22.23
		RB Size=25, RB Offset=12	22.79	22.68	22.58
		RB Size=25, RB Offset=24	22.42	22.32	22.20
		RB Size=50, RB Offset=0	22.44	22.39	22.33

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15.0	QPSK	RB Size=1, RB Offset=0	22.26	22.16	22.07
		RB Size=1, RB Offset=37	22.18	22.12	22.03
		RB Size=1, RB Offset=74	22.40	22.33	22.28
		RB Size=36, RB Offset=0	22.66	22.63	22.59
		RB Size=36, RB Offset=18	21.95	21.89	21.84
		RB Size=36, RB Offset=37	22.60	22.53	22.48
		RB Size=75, RB Offset=0	22.70	22.59	22.51
	16QAM	RB Size=1, RB Offset=0	22.69	22.59	22.47
		RB Size=1, RB Offset=37	21.95	21.87	21.84
		RB Size=1, RB Offset=74	22.50	22.46	22.36
		RB Size=36, RB Offset=0	22.16	22.06	21.94
		RB Size=36, RB Offset=18	22.64	22.60	22.55
		RB Size=36, RB Offset=37	22.81	22.75	22.66
		RB Size=75, RB Offset=0	22.48	22.39	22.30
20.0	QPSK	RB Size=1, RB Offset=0	22.31	22.21	22.16
		RB Size=1, RB Offset=49	21.95	21.88	21.76
		RB Size=1, RB Offset=99	22.04	21.93	21.90
		RB Size=50, RB Offset=0	22.39	22.29	22.22
		RB Size=50, RB Offset=24	22.38	22.31	22.21
		RB Size=50, RB Offset=49	22.04	21.98	21.85
		RB Size=100, RB Offset=0	22.66	22.54	22.48
	16QAM	RB Size=1, RB Offset=0	22.20	22.13	22.06
		RB Size=1, RB Offset=49	22.27	22.16	22.07
		RB Size=1, RB Offset=99	22.77	22.67	22.55
		RB Size=50, RB Offset=0	22.34	22.24	22.20
		RB Size=50, RB Offset=24	22.47	22.35	22.22
		RB Size=50, RB Offset=49	22.36	22.24	22.12
		RB Size=100, RB Offset=0	22.15	22.05	21.95

EIRP:**QPSK:**

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 24E
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)
Middle Channel									
1.4 MHz Bandwidth									
1880.00	83.87	116	1.1	H	15.2	1.40	7.30	21.10	33
1880.00	82.13	202	1.6	V	12.9	1.40	7.30	18.80	33
3 MHz Bandwidth									
1880.00	84.58	198	1.3	H	15.9	1.40	7.30	21.80	33
1880.00	83.29	50	1.9	V	14.1	1.40	7.30	20.00	33
5 MHz Bandwidth									
1880.00	83.08	9	2.2	H	14.4	1.40	7.30	20.30	33
1880.00	82.6	169	1.5	V	13.4	1.40	7.30	19.30	33
10 MHz Bandwidth									
1880.00	83.65	269	1.2	H	15.0	1.40	7.30	20.90	33
1880.00	83.15	359	2.0	V	13.9	1.40	7.30	19.80	33
15 MHz Bandwidth									
1880.00	83.59	40	2.0	H	14.9	1.40	7.30	20.80	33
1880.00	82.12	320	1.1	V	12.9	1.40	7.30	18.80	33
20 MHz Bandwidth									
1880.00	84.55	98	2.0	H	15.9	1.40	7.30	21.80	33
1880.00	83.08	251	1.8	V	13.8	1.40	7.30	19.70	33

16QAM:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 24E
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)
Middle Channel									
1.4 MHz Bandwidth									
1880.00	84.33	154	1.0	H	15.7	1.40	7.30	21.60	33
1880.00	82.6	218	1.8	V	13.4	1.40	7.30	19.30	33
3 MHz Bandwidth									
1880.00	84.82	303	2.2	H	16.1	1.40	7.30	22.00	33
1880.00	83.17	219	1.3	V	13.9	1.40	7.30	19.80	33
5 MHz Bandwidth									
1880.00	83.12	57	1.2	H	14.4	1.40	7.30	20.30	33
1880.00	82.45	28	1.8	V	13.2	1.40	7.30	19.10	33
10 MHz Bandwidth									
1880.00	83.52	91	1.8	H	14.8	1.40	7.30	20.70	33
1880.00	83.54	111	2.4	V	14.3	1.40	7.30	20.20	33
15 MHz Bandwidth									
1880.00	83.72	228	1.0	H	15.0	1.40	7.30	20.90	33
1880.00	83.23	126	1.9	V	14.0	1.40	7.30	19.90	33
20 MHz Bandwidth									
1880.00	83.33	164	1.8	H	14.7	1.40	7.30	20.60	33
1880.00	82.45	34	1.9	V	13.2	1.40	7.30	19.10	33

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
16QAM (1RB Size)	5.32	≤ 13	Pass
16QAM (100RB Size)	6.37	≤ 13	Pass

LTE Band 4:**Maximum Output Power**

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4	QPSK	RB Size=1, RB Offset=0	22.35	22.24	22.20
		RB Size=1, RB Offset=2	22.60	22.51	22.43
		RB Size=1, RB Offset=5	22.65	22.62	22.52
		RB Size=3, RB Offset=0	22.05	21.95	21.86
		RB Size=3, RB Offset=1	22.51	22.46	22.40
		RB Size=3, RB Offset=2	22.00	21.91	21.85
		RB Size=6, RB Offset=0	22.26	22.19	22.13
	16QAM	RB Size=1, RB Offset=0	22.82	22.75	22.62
		RB Size=1, RB Offset=2	22.26	22.19	22.12
		RB Size=1, RB Offset=5	21.98	21.89	21.77
		RB Size=3, RB Offset=0	22.18	22.06	21.98
		RB Size=3, RB Offset=1	22.69	22.66	22.61
		RB Size=3, RB Offset=2	22.53	22.44	22.33
		RB Size=6, RB Offset=0	21.89	21.85	21.74
3.0	QPSK	RB Size=1, RB Offset=0	22.05	21.98	21.91
		RB Size=1, RB Offset=7	22.25	22.20	22.15
		RB Size=1, RB Offset=14	22.30	22.20	22.13
		RB Size=8, RB Offset=0	21.85	21.80	21.73
		RB Size=8, RB Offset=4	22.26	22.20	22.14
		RB Size=8, RB Offset=7	21.88	21.84	21.72
		RB Size=15, RB Offset=0	22.09	22.06	22.01
	16QAM	RB Size=1, RB Offset=0	22.55	22.48	22.44
		RB Size=1, RB Offset=7	21.92	21.81	21.69
		RB Size=1, RB Offset=14	21.97	21.92	21.82
		RB Size=8, RB Offset=0	22.64	22.52	22.41
		RB Size=8, RB Offset=4	22.53	22.48	22.38
		RB Size=8, RB Offset=7	21.98	21.94	21.82
		RB Size=15, RB Offset=0	22.12	22.08	21.98

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	22.21	22.15	22.08
		RB Size=1, RB Offset=12	22.61	22.52	22.44
		RB Size=1, RB Offset=24	22.38	22.25	22.20
		RB Size=12, RB Offset=0	21.86	21.74	21.71
		RB Size=12, RB Offset=6	22.87	22.79	22.67
		RB Size=12, RB Offset=11	22.67	22.63	22.55
		RB Size=25, RB Offset=0	21.95	21.86	21.74
	16QAM	RB Size=1, RB Offset=0	21.92	21.82	21.74
		RB Size=1, RB Offset=12	22.22	22.09	22.06
		RB Size=1, RB Offset=24	22.71	22.59	22.55
		RB Size=12, RB Offset=0	22.33	22.27	22.23
		RB Size=12, RB Offset=6	22.74	22.69	22.62
		RB Size=12, RB Offset=11	22.82	22.69	22.63
		RB Size=25, RB Offset=0	21.84	21.76	21.65
10.0	QPSK	RB Size=1, RB Offset=0	22.17	22.10	22.06
		RB Size=1, RB Offset=24	22.10	22.00	21.90
		RB Size=1, RB Offset=49	22.02	21.92	21.82
		RB Size=25, RB Offset=0	22.82	22.78	22.70
		RB Size=25, RB Offset=12	22.41	22.29	22.23
		RB Size=25, RB Offset=24	22.22	22.15	22.04
		RB Size=50, RB Offset=0	22.46	22.42	22.32
	16QAM	RB Size=1, RB Offset=0	22.88	22.80	22.76
		RB Size=1, RB Offset=24	22.01	21.88	21.76
		RB Size=1, RB Offset=49	22.04	21.91	21.84
		RB Size=25, RB Offset=0	22.09	22.03	21.92
		RB Size=25, RB Offset=12	22.39	22.28	22.24
		RB Size=25, RB Offset=24	21.98	21.86	21.75
		RB Size=50, RB Offset=0	22.52	22.46	22.41

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15.0	QPSK	RB Size=1, RB Offset=0	22.23	22.18	22.08
		RB Size=1, RB Offset=37	22.18	22.11	22.04
		RB Size=1, RB Offset=74	22.45	22.35	22.31
		RB Size=36, RB Offset=0	22.20	22.10	22.00
		RB Size=36, RB Offset=18	22.78	22.74	22.68
		RB Size=36, RB Offset=37	21.98	21.87	21.80
		RB Size=75, RB Offset=0	22.12	22.04	21.99
	16QAM	RB Size=1, RB Offset=0	22.18	22.06	22.01
		RB Size=1, RB Offset=37	22.03	21.99	21.88
		RB Size=1, RB Offset=74	22.33	22.22	22.14
		RB Size=36, RB Offset=0	22.08	22.04	21.97
		RB Size=36, RB Offset=18	22.26	22.15	22.11
		RB Size=36, RB Offset=37	22.76	22.72	22.62
		RB Size=75, RB Offset=0	22.50	22.42	22.39
20.0	QPSK	RB Size=1, RB Offset=0	22.38	22.27	22.24
		RB Size=1, RB Offset=49	22.12	22.01	21.90
		RB Size=1, RB Offset=99	22.10	21.98	21.89
		RB Size=50, RB Offset=0	22.34	22.26	22.19
		RB Size=50, RB Offset=24	22.23	22.13	22.09
		RB Size=50, RB Offset=49	21.96	21.88	21.76
		RB Size=100, RB Offset=0	22.15	22.06	21.96
	16QAM	RB Size=1, RB Offset=0	22.64	22.57	22.44
		RB Size=1, RB Offset=49	22.00	21.94	21.89
		RB Size=1, RB Offset=99	22.26	22.22	22.18
		RB Size=50, RB Offset=0	22.71	22.62	22.51
		RB Size=50, RB Offset=24	22.61	22.52	22.48
		RB Size=50, RB Offset=49	22.25	22.21	22.10
		RB Size=100, RB Offset=0	22.80	22.73	22.61

EIRP:**QPSK:**

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 27
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)
Middle Channel									
1.4 MHz Bandwidth									
1732.50	84.74	351	1.4	H	16.0	1.60	6.90	21.30	30
1732.50	83.83	93	2.4	V	14.6	1.60	6.90	19.90	30
3 MHz Bandwidth									
1732.50	83.97	76	1.6	H	15.2	1.60	6.90	20.50	30
1732.50	82.04	208	2.3	V	12.8	1.60	6.90	18.10	30
5 MHz Bandwidth									
1732.50	83.61	92	1.1	H	14.8	1.60	6.90	20.10	30
1732.50	82.73	232	1.3	V	13.5	1.60	6.90	18.80	30
10MHz Bandwidth									
1732.50	83.65	205	1.1	H	14.9	1.60	6.90	20.20	30
1732.50	83.99	68	1.8	V	14.8	1.60	6.90	20.10	30
15 MHz Bandwidth									
1732.50	84.41	106	2.4	H	15.6	1.60	6.90	20.90	30
1732.50	82.16	282	2.2	V	12.9	1.60	6.90	18.20	30
20 MHz Bandwidth									
1732.50	84.08	148	1.4	H	15.3	1.60	6.90	20.60	30
1732.50	83.14	79	1.2	V	13.9	1.60	6.90	19.20	30

16QAM:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 24E
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)
Middle Channel									
1.4 MHz Bandwidth									
1732.50	83.5	259	1.9	H	14.7	1.60	6.90	20.00	30
1732.50	83.63	18	2.4	V	14.4	1.60	6.90	19.70	30
3 MHz Bandwidth									
1732.50	83.04	148	2.3	H	14.3	1.60	6.90	19.60	30
1732.50	82.93	101	1.9	V	13.7	1.60	6.90	19.00	30
5 MHz Bandwidth									
1732.50	83.67	244	2.1	H	14.9	1.60	6.90	20.20	30
1732.50	82.59	352	1.4	V	13.4	1.60	6.90	18.70	30
10 MHz Bandwidth									
1732.50	84.57	298	2.0	H	15.8	1.60	6.90	21.10	30
1732.50	82.32	249	2.1	V	13.1	1.60	6.90	18.40	30
15 MHz Bandwidth									
1732.50	84.97	56	1.2	H	16.2	1.60	6.90	21.50	30
1732.50	83.66	208	2.3	V	14.4	1.60	6.90	19.70	30
20 MHz Bandwidth									
1732.50	84.35	95	2.3	H	15.6	1.60	6.90	20.90	30
1732.50	83.03	295	1.7	V	13.8	1.60	6.90	19.10	30

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
16QAM (1RB Size)	5.15	≦ 13	Pass
16QAM (100RB Size)	6.53	≦ 13	Pass

LTE Band 12:**Maximum Output Power**

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4	QPSK	RB Size=1, RB Offset=0	22.04	21.96	21.90
		RB Size=1, RB Offset=2	22.70	22.63	22.51
		RB Size=1, RB Offset=5	22.47	22.36	22.25
		RB Size=3, RB Offset=0	21.99	21.88	21.79
		RB Size=3, RB Offset=1	22.11	22.04	21.97
		RB Size=3, RB Offset=2	21.84	21.79	21.71
		RB Size=6, RB Offset=0	22.71	22.59	22.53
	16QAM	RB Size=1, RB Offset=0	22.10	21.98	21.91
		RB Size=1, RB Offset=2	22.84	22.80	22.76
		RB Size=1, RB Offset=5	22.80	22.69	22.58
		RB Size=3, RB Offset=0	22.37	22.33	22.24
		RB Size=3, RB Offset=1	22.71	22.64	22.56
		RB Size=3, RB Offset=2	22.51	22.43	22.33
		RB Size=6, RB Offset=0	22.63	22.60	22.57
3	QPSK	RB Size=1, RB Offset=0	22.04	21.96	21.85
		RB Size=1, RB Offset=7	22.68	22.60	22.56
		RB Size=1, RB Offset=14	21.78	21.73	21.68
		RB Size=8, RB Offset=0	22.68	22.64	22.52
		RB Size=8, RB Offset=4	22.71	22.62	22.50
		RB Size=8, RB Offset=7	22.54	22.43	22.34
		RB Size=15, RB Offset=0	22.80	22.71	22.65
	16QAM	RB Size=1, RB Offset=0	22.62	22.52	22.46
		RB Size=1, RB Offset=7	22.03	21.94	21.90
		RB Size=1, RB Offset=14	22.47	22.38	22.34
		RB Size=8, RB Offset=0	22.07	22.01	21.93
		RB Size=8, RB Offset=4	22.69	22.59	22.49
		RB Size=8, RB Offset=7	22.28	22.21	22.12
		RB Size=15, RB Offset=0	22.38	22.28	22.25

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5	QPSK	RB Size=1, RB Offset=0	22.34	22.26	22.16
		RB Size=1, RB Offset=12	22.54	22.47	22.43
		RB Size=1, RB Offset=24	22.83	22.79	22.68
		RB Size=12, RB Offset=0	21.86	21.74	21.70
		RB Size=12, RB Offset=6	22.05	21.98	21.89
		RB Size=12, RB Offset=11	22.45	22.41	22.29
		RB Size=25, RB Offset=0	21.98	21.88	21.79
	16QAM	RB Size=1, RB Offset=0	22.64	22.59	22.56
		RB Size=1, RB Offset=12	22.27	22.18	22.08
		RB Size=1, RB Offset=24	22.29	22.21	22.11
		RB Size=12, RB Offset=0	22.43	22.34	22.26
		RB Size=12, RB Offset=6	22.51	22.44	22.39
		RB Size=12, RB Offset=11	22.19	22.12	22.09
		RB Size=25, RB Offset=0	22.83	22.77	22.65
10	QPSK	RB Size=1, RB Offset=0	21.82	21.76	21.63
		RB Size=1, RB Offset=24	22.23	22.16	22.12
		RB Size=1, RB Offset=49	22.63	22.57	22.50
		RB Size=25, RB Offset=0	22.69	22.60	22.54
		RB Size=25, RB Offset=12	21.98	21.87	21.78
		RB Size=25, RB Offset=24	22.30	22.21	22.18
		RB Size=50, RB Offset=0	22.68	22.59	22.55
	16QAM	RB Size=1, RB Offset=0	21.95	21.89	21.82
		RB Size=1, RB Offset=24	21.81	21.77	21.73
		RB Size=1, RB Offset=49	22.43	22.34	22.23
		RB Size=25, RB Offset=0	22.21	22.17	22.07
		RB Size=25, RB Offset=12	22.49	22.40	22.30
		RB Size=25, RB Offset=24	22.81	22.75	22.70
		RB Size=50, RB Offset=0	21.99	21.95	21.88

ERP:**QPSK:**

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 27
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)
Middle Channel									
1.4 MHz Bandwidth									
707.00	88.69	217	1.0	H	21.7	0.67	0	21.03	34.77
707.00	88.06	90	1.3	V	21.1	0.67	0	20.43	34.77
3 MHz Bandwidth									
707.00	88.45	109	2.0	H	21.5	0.67	0	20.83	34.77
707.00	89.55	275	1.5	V	22.6	0.67	0	21.93	34.77
5 MHz Bandwidth									
707.00	88.87	147	1.3	H	21.9	0.67	0	21.23	34.77
707.00	89.72	55	2.5	V	22.7	0.67	0	22.03	34.77
10 MHz Bandwidth									
707.00	89.5	331	1.1	H	22.5	0.67	0	21.83	34.77
707.00	88.44	339	2.4	V	21.4	0.67	0	20.73	34.77

16QAM:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 24E
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)
Middle Channel									
1.4 MHz Bandwidth									
707.00	88.25	138	1.5	H	21.3	0.67	0	20.63	34.77
707.00	88.79	223	1.6	V	21.8	0.67	0	21.13	34.77
3 MHz Bandwidth									
707.00	89.69	125	1.6	H	22.7	0.67	0	22.03	34.77
707.00	88.17	360	1.4	V	21.2	0.67	0	20.53	34.77
5 MHz Bandwidth									
707.00	89.45	316	2.1	H	22.5	0.67	0	21.83	34.77
707.00	88.01	344	1.1	V	21.0	0.67	0	20.33	34.77
10 MHz Bandwidth									
707.00	89.57	49	2.2	H	22.6	0.67	0	21.93	34.77
707.00	88.58	179	2.4	V	21.6	0.67	0	20.93	34.77

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
16QAM (1RB Size)	4.37	≤ 13	Pass
16QAM (100RB Size)	5.33	≤ 13	Pass

LTE Band 17:**Maximum Output Power**

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	22.52	22.47	22.45
		RB Size=1, RB Offset=12	22.03	21.96	21.83
		RB Size=1, RB Offset=24	22.13	22.01	21.95
		RB Size=12, RB Offset=0	22.72	22.65	22.52
		RB Size=12, RB Offset=6	21.91	21.93	21.74
		RB Size=12, RB Offset=11	21.82	21.75	21.63
		RB Size=25, RB Offset=0	22.31	22.24	22.15
	16QAM	RB Size=1, RB Offset=0	22.75	22.65	22.52
		RB Size=1, RB Offset=12	22.31	22.34	22.22
		RB Size=1, RB Offset=24	22.43	22.43	22.33
		RB Size=12, RB Offset=0	22.16	21.92	21.91
		RB Size=12, RB Offset=6	22.13	21.93	21.92
		RB Size=12, RB Offset=11	22.07	21.94	21.95
		RB Size=25, RB Offset=0	22.03	21.93	21.84
10.0	QPSK	RB Size=1, RB Offset=0	21.92	21.84	21.71
		RB Size=1, RB Offset=24	22.75	22.65	22.53
		RB Size=1, RB Offset=49	22.53	22.42	22.33
		RB Size=25, RB Offset=0	22.05	21.93	21.84
		RB Size=25, RB Offset=12	22.45	22.34	22.33
		RB Size=25, RB Offset=24	22.33	22.25	22.24
		RB Size=50, RB Offset=0	21.92	21.82	21.75
	16QAM	RB Size=1, RB Offset=0	22.31	22.21	22.11
		RB Size=1, RB Offset=24	22.54	22.42	22.43
		RB Size=1, RB Offset=49	22.23	22.20	22.05
		RB Size=25, RB Offset=0	22.32	22.32	22.24
		RB Size=25, RB Offset=12	22.33	22.23	22.13
		RB Size=25, RB Offset=24	22.34	22.24	22.27
		RB Size=50, RB Offset=0	22.62	22.52	22.43

ERP:**QPSK:**

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 27
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)
Middle Channel									
5 MHz Bandwidth									
710.00	89.86	60	2.3	H	22.9	0.67	0	22.23	34.77
710.00	89.23	110	1.5	V	22.2	0.67	0	21.53	34.77
10 MHz Bandwidth									
710.00	89.85	138	1.1	H	22.9	0.67	0	22.23	34.77
710.00	89.36	326	1.6	V	22.4	0.67	0	21.73	34.77

16QAM:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 24E
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)
Middle Channel									
5 MHz Bandwidth									
710.00	88.44	221	1.0	H	21.4	0.67	0	20.73	34.77
710.00	89.68	83	1.7	V	22.7	0.67	0	22.03	34.77
10 MHz Bandwidth									
710.00	89.78	21	1.9	H	22.8	0.67	0	22.13	34.77
710.00	89.39	105	1.5	V	22.4	0.67	0	21.73	34.77

Note:

All above data were tested with no amplifier

Absolute Level = SG Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
16QAM (1RB Size)	6.05	≤ 13	Pass
16QAM (50RB Size)	6.26	≤ 13	Pass

FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH


Applicable Standards

FCC 47 §2.1049, §22.917, §22.905, §24.238 and §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 5 kHz (Cellular /PCS) & 100 kHz (WCDMA) and the 26 dB & 99% bandwidth was recorded.

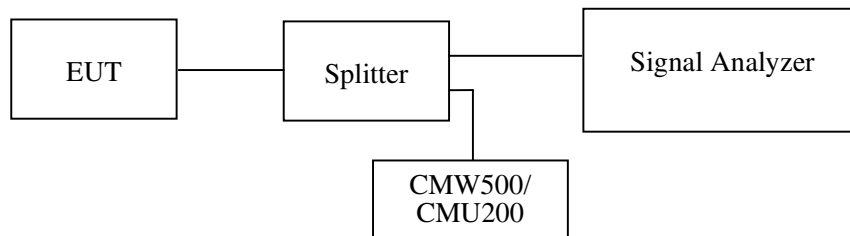

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2015-06-13	2016-06-13
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2014-12-11	2015-12-11
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2014-11-23	2015-11-23
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23
R&S	Wideband Radio Communication tester	CMW500	1201.002K50-146520-wh	2014-11-23	2015-11-23
R&S	Wideband Radio Communication tester	CMW500	1201.002K50-146520-wh	2015-11-23	2016-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24~25 °C
Relative Humidity:	48~50 %
ATM Pressure:	100.0~101.0 kPa

The testing was performed by Haiguo Li on 2015-11-20 and 2015-12-12.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables and plots.

Cellular Band (Part 22H)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	836.6	244.49	314.63
EGPRS(8PSK)	836.6	248.49	308.62

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA (BPSK)	836.6	4.188	4.870
HSUPA (BPSK)	836.6	4.228	4.850
HSDPA (16QAM)	836.6	4.228	4.870

PCS Band (Part 24E)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	1880.0	248.49	316.63
EGPRS(8PSK)	1880.0	246.49	308.62


Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA (BPSK)	1880.0	4.208	4.870
HSUPA (BPSK)	1880.0	4.208	4.870
HSDPA (16QAM)	1880.0	4.208	4.850

AWS Band (Part 27)


Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA (BPSK)	1732.6	4.208	4.890
HSUPA (BPSK)	1732.6	4.208	4.910
HSDPA (16QAM)	1732.6	4.228	4.890



Cellular Band (Part 22H)

99% Occupied & 26 dB Emissions Bandwidth for GSM (GMSK) Mode

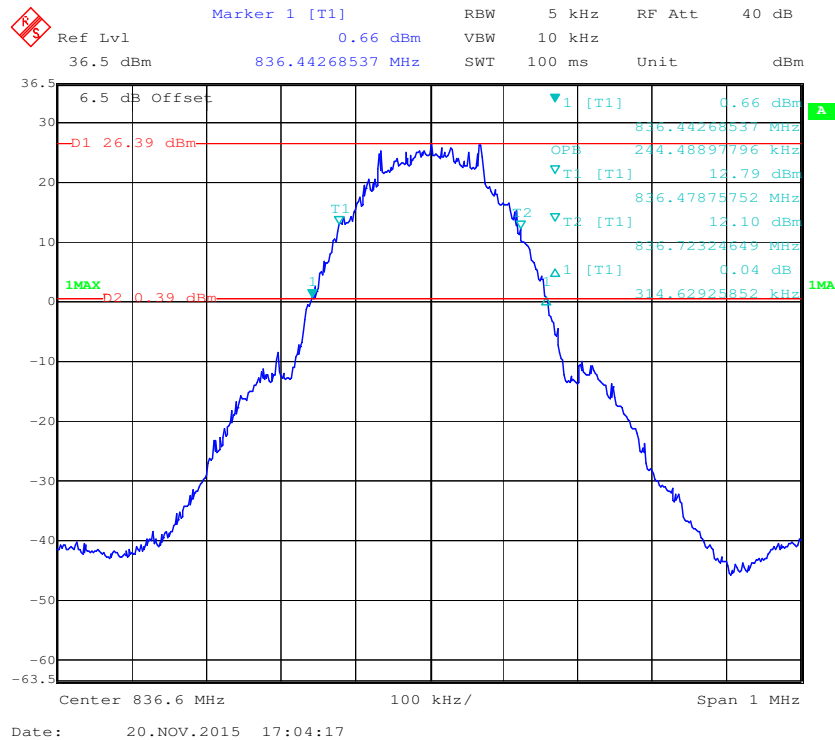


99% Occupied & 26 dB Emissions Bandwidth for EDGE Mode

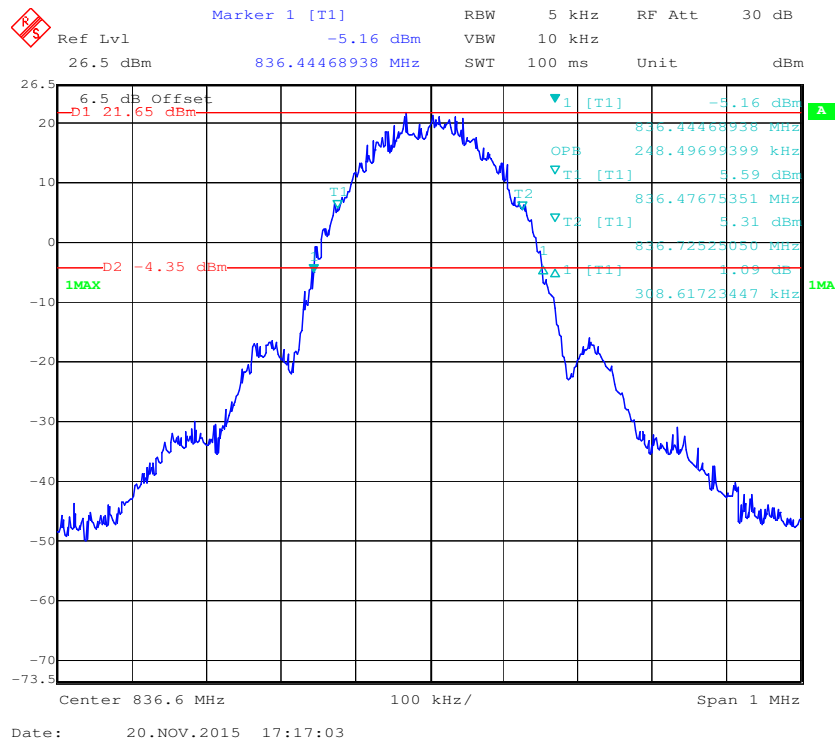

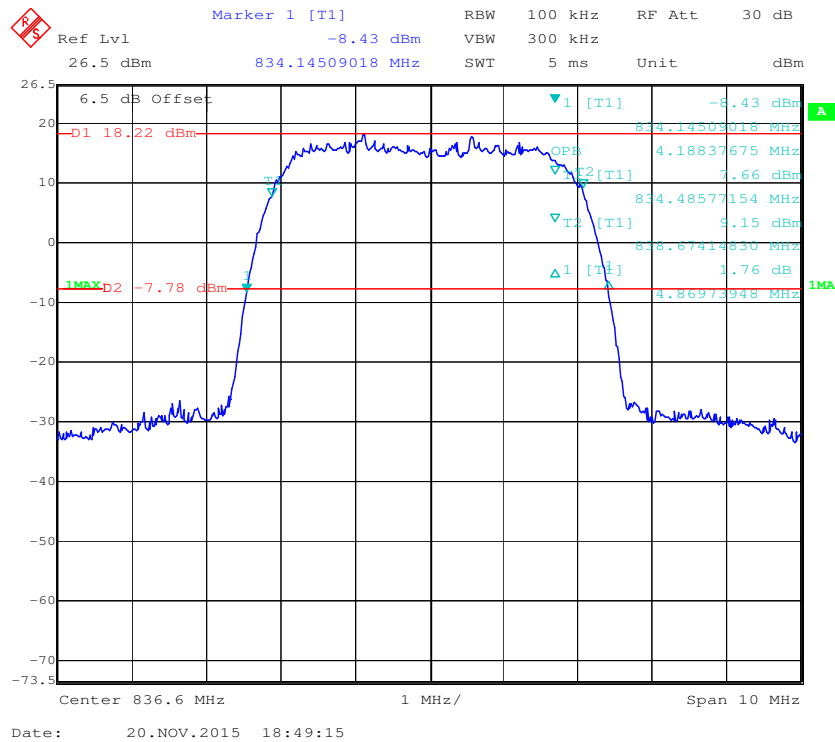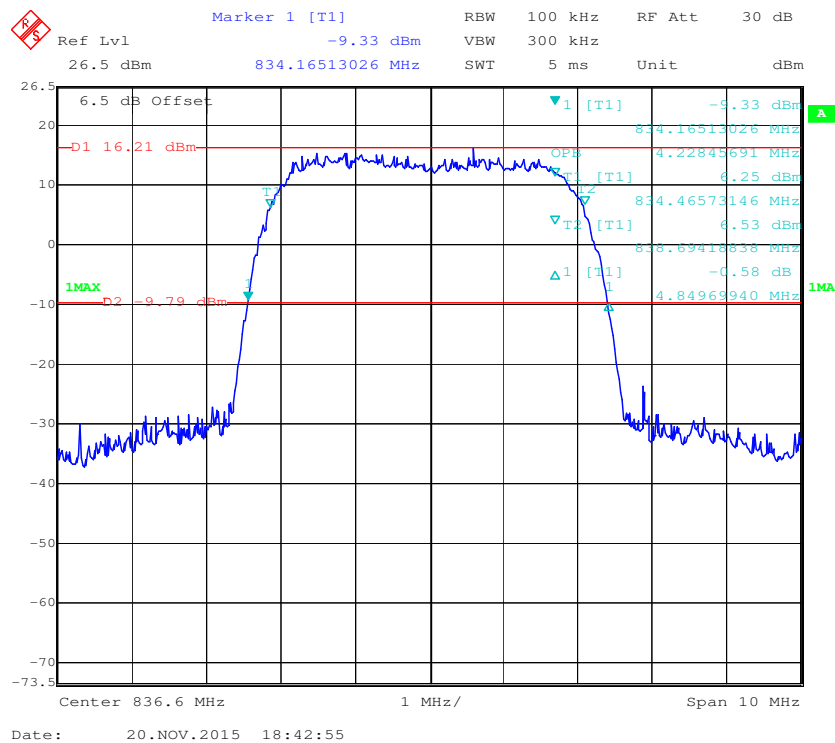
99% Occupied & 26 dB Emissions Bandwidth for WCDMA (BPSK) Mode**99% Occupied & 26 dB Emissions Bandwidth for HSUPA (BPSK) Mode**



99% Occupied & 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode


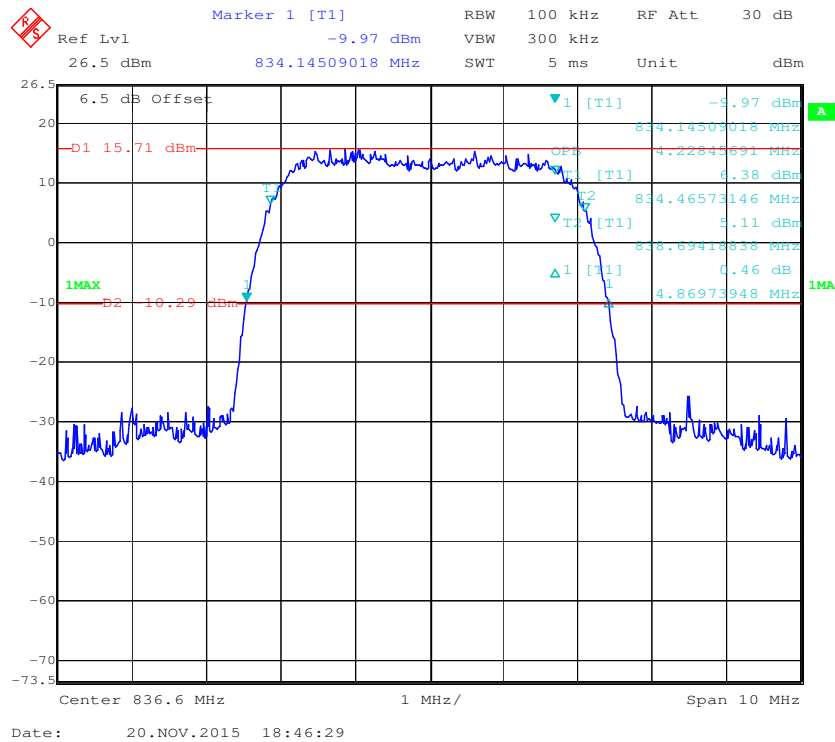




PCS Band (Part 24E)

99% Occupied & 26 dB Emissions Bandwidth for GSM (GMSK) Mode

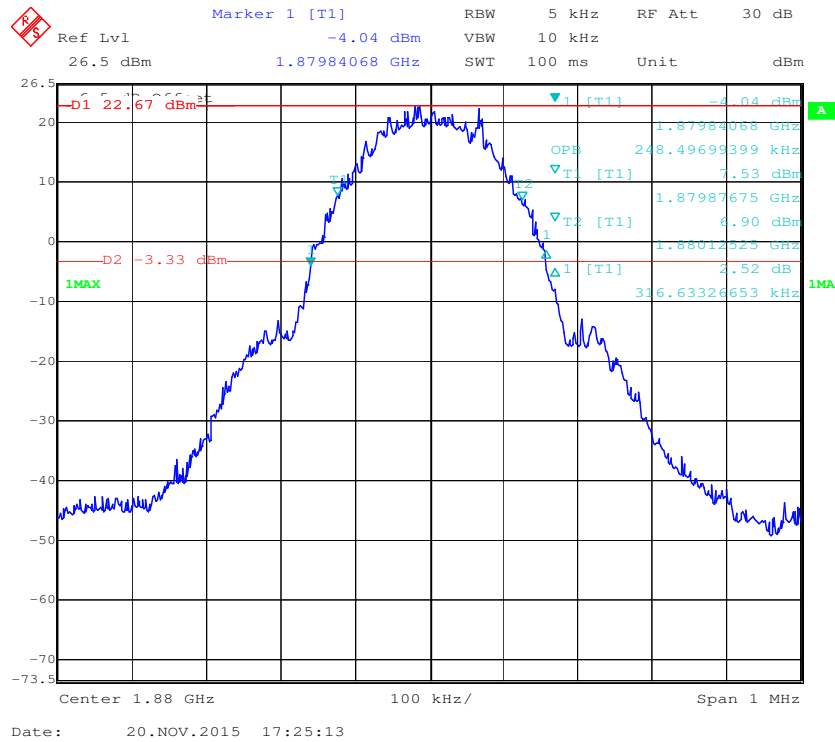


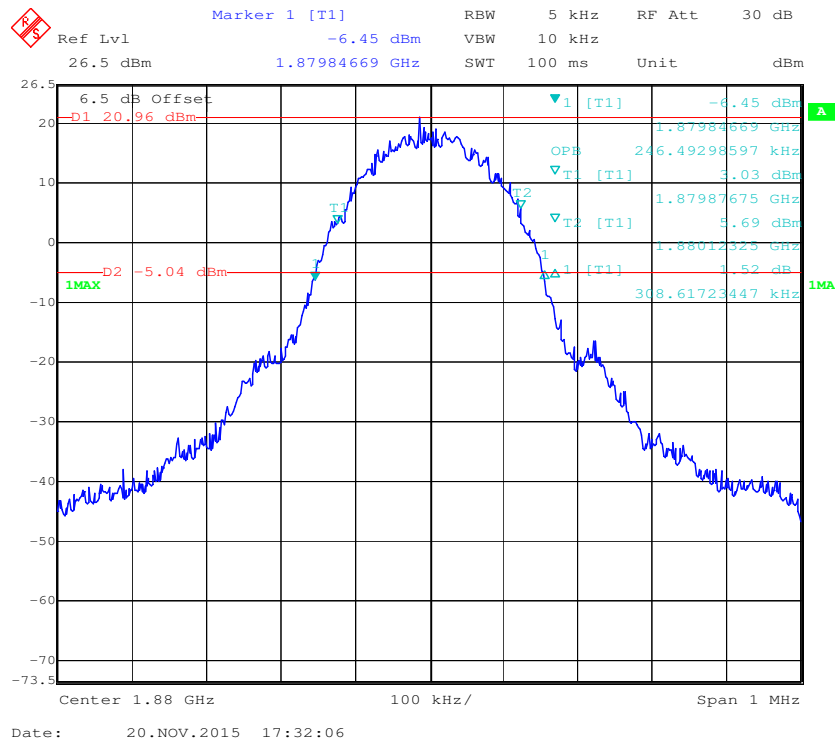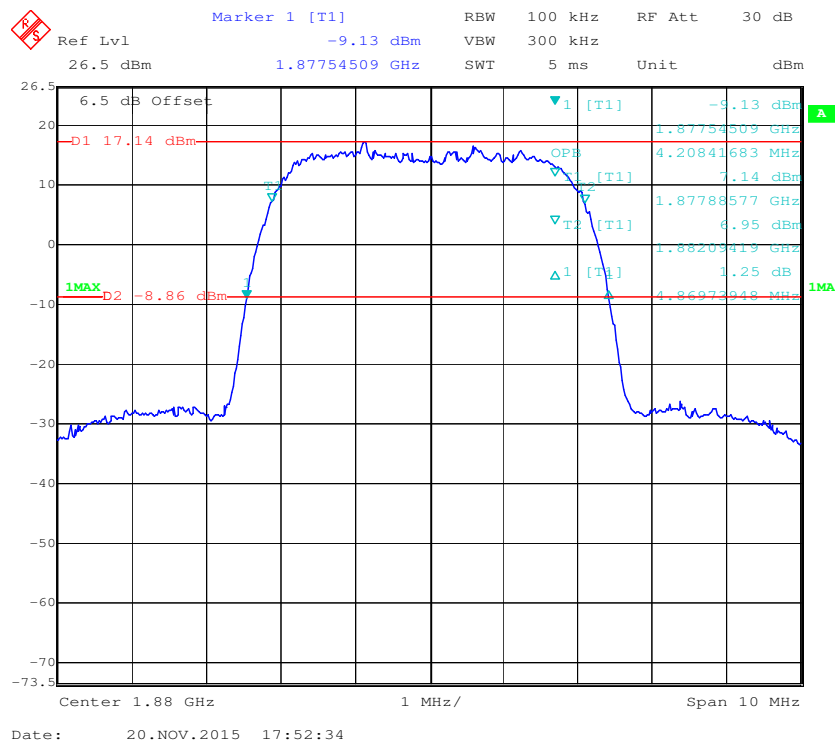99% Occupied & 26 dB Emissions Bandwidth for EGPRS Mode**999% Occupied & 26 dB Emissions Bandwidth for WCDMA (BPSK) Mode**

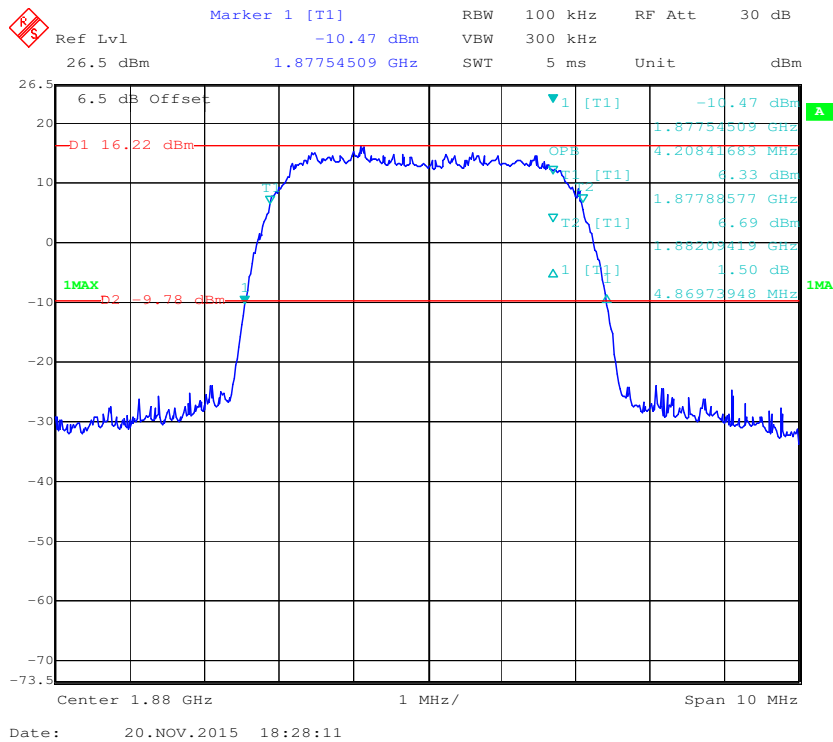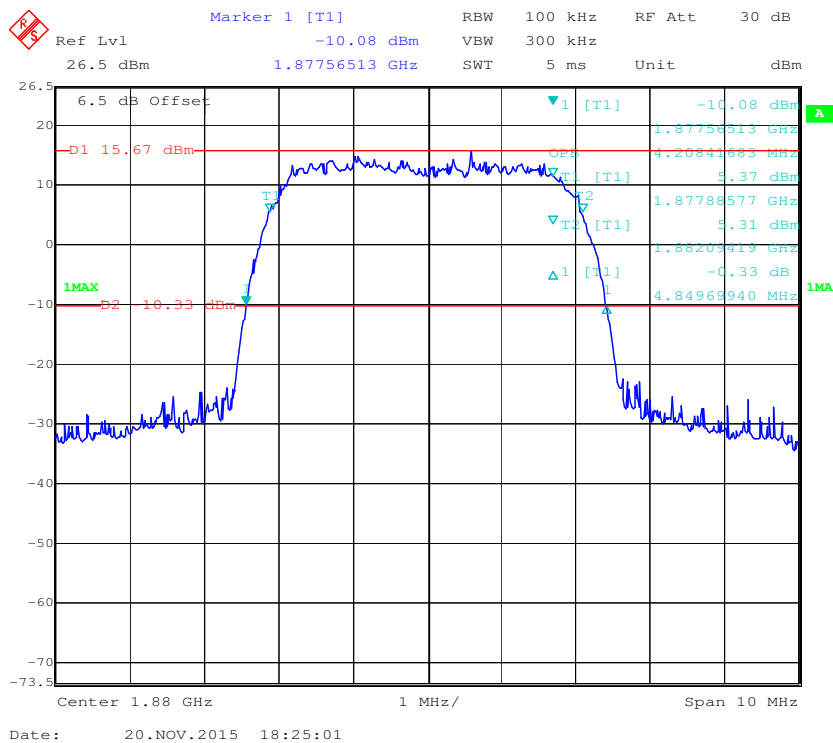99% Occupied & 26 dB Emissions Bandwidth for HSUPA (BPSK) Mode**99% Occupied & 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode**

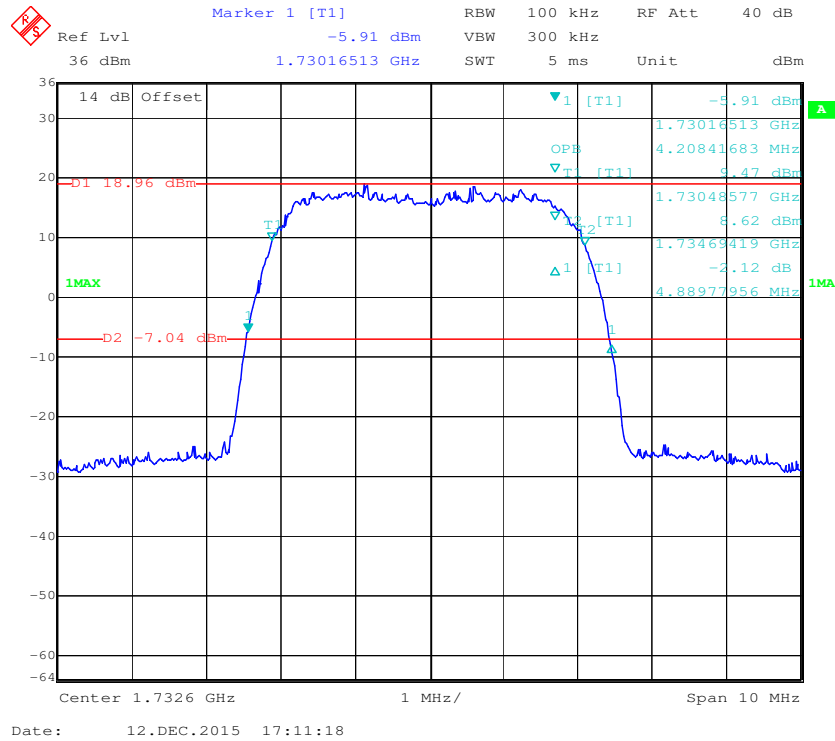
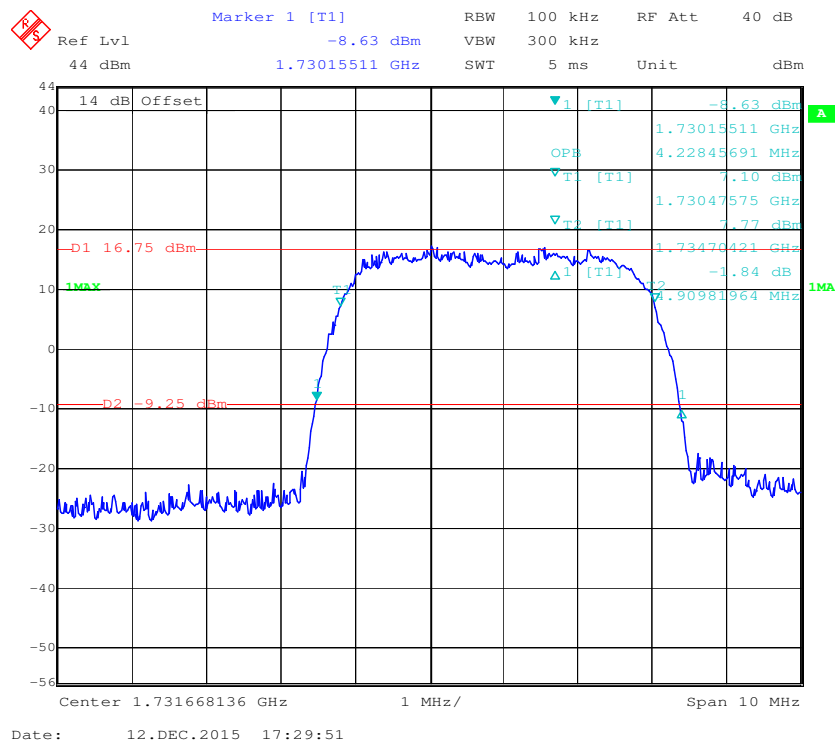
AWS Band (Part 27)**99% Occupied & 26 dB Emissions Bandwidth for WCDMA (BPSK) Mode****99% Occupied & 26 dB Emissions Bandwidth for HSUPA (BPSK) Mode**



99% Occupied & 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode

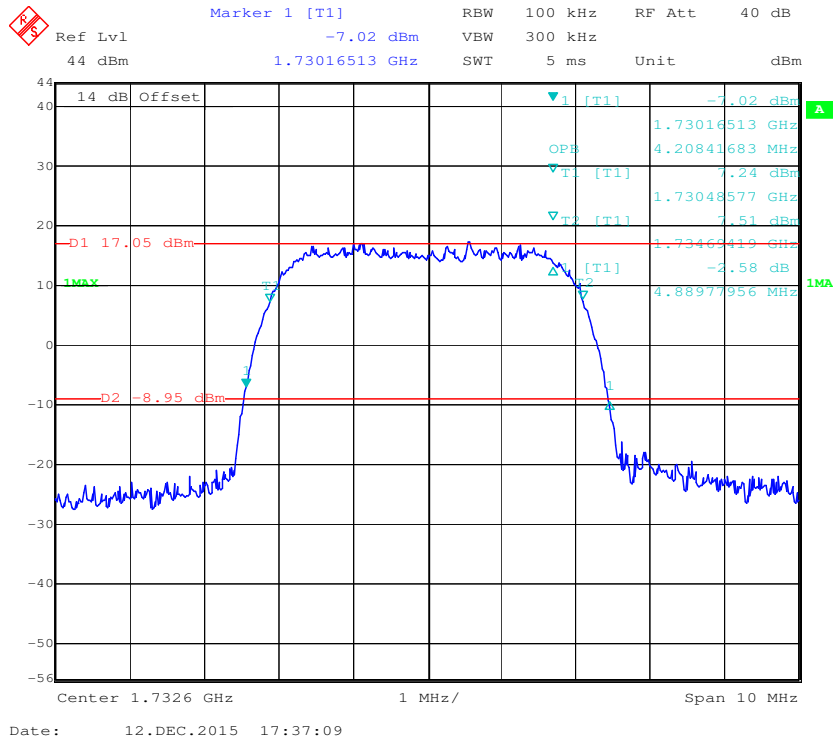


LTE Band 2: (Middle Channel)

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
1.4	QPSK	1.105	1.268
	16QAM	1.105	1.268
3.0	QPSK	2.693	2.922
	16QAM	2.693	2.898
5.0	QPSK	4.549	5.130
	16QAM	4.529	5.090
10.0	QPSK	8.978	9.860
	16QAM	8.938	9.699
15.0	QPSK	13.587	15.030
	16QAM	13.527	14.970
20.0	QPSK	18.036	19.479
	16QAM	17.956	19.399

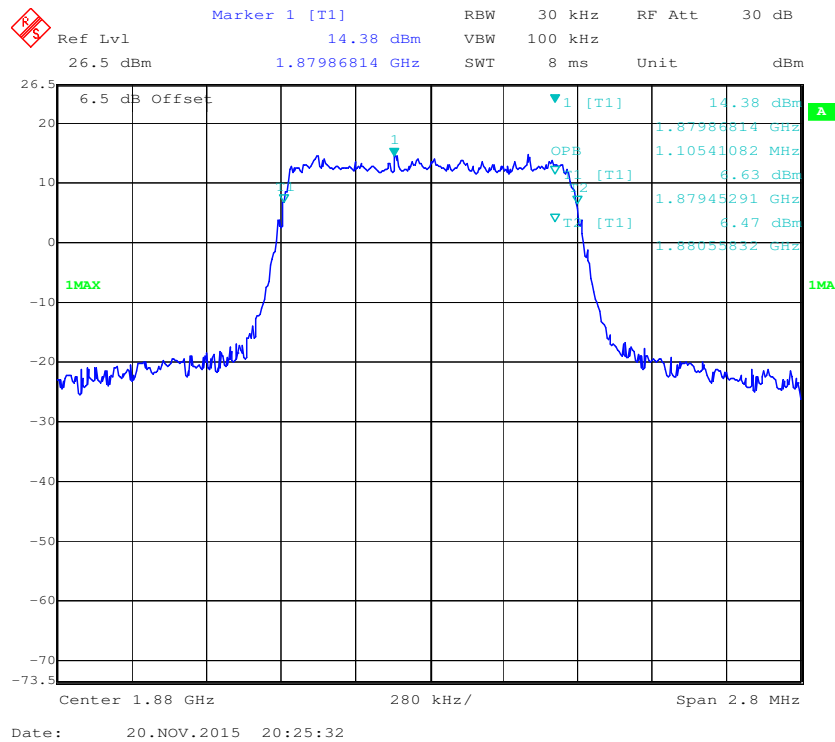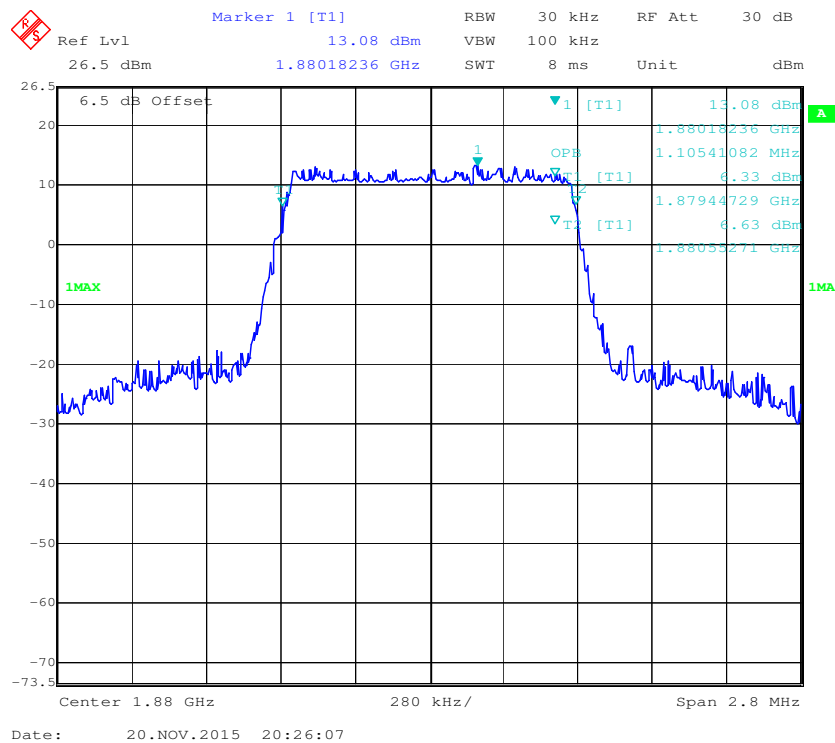
QPSK (1.4 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (1.4 MHz) - 99% Occupied Bandwidth, Middle channel**

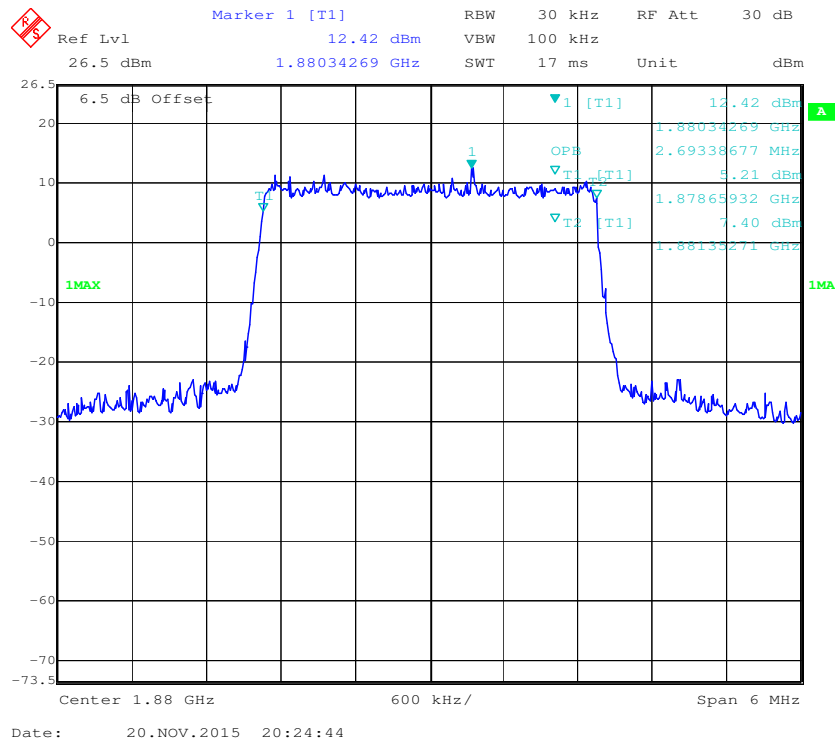
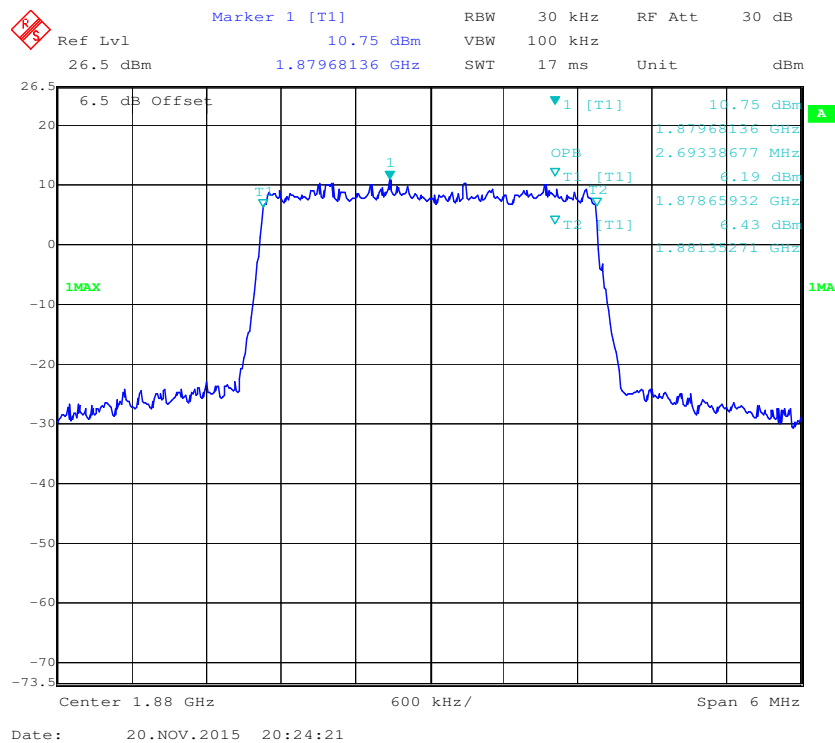
QPSK (3.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (3.0 MHz) - 99% Occupied Bandwidth, Middle channel**



QPSK (5.0 MHz) - 99% Occupied Bandwidth, Middle channel

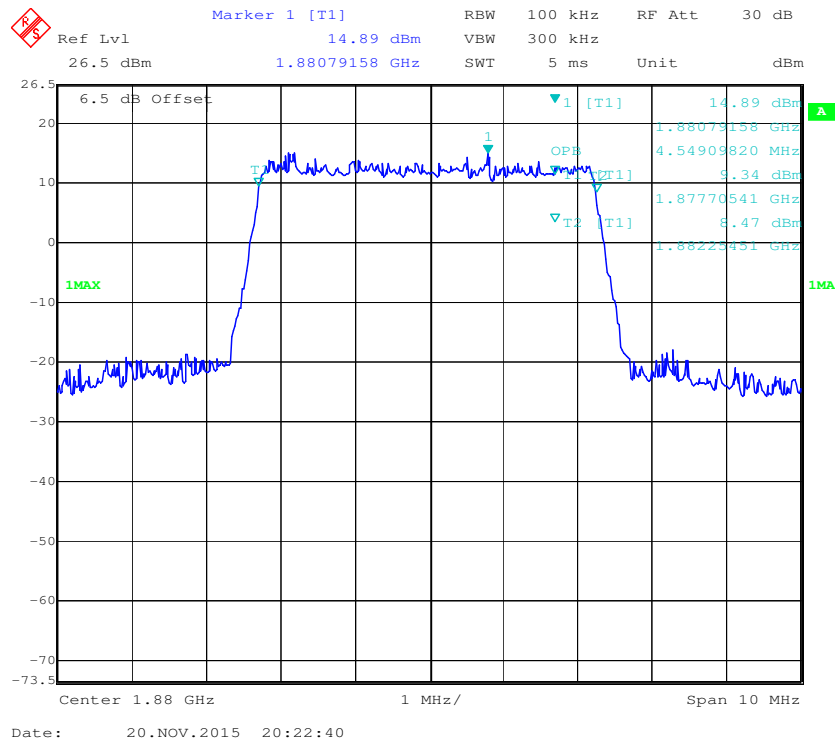

16-QAM (5.0 MHz) - 99% Occupied Bandwidth, Middle channel

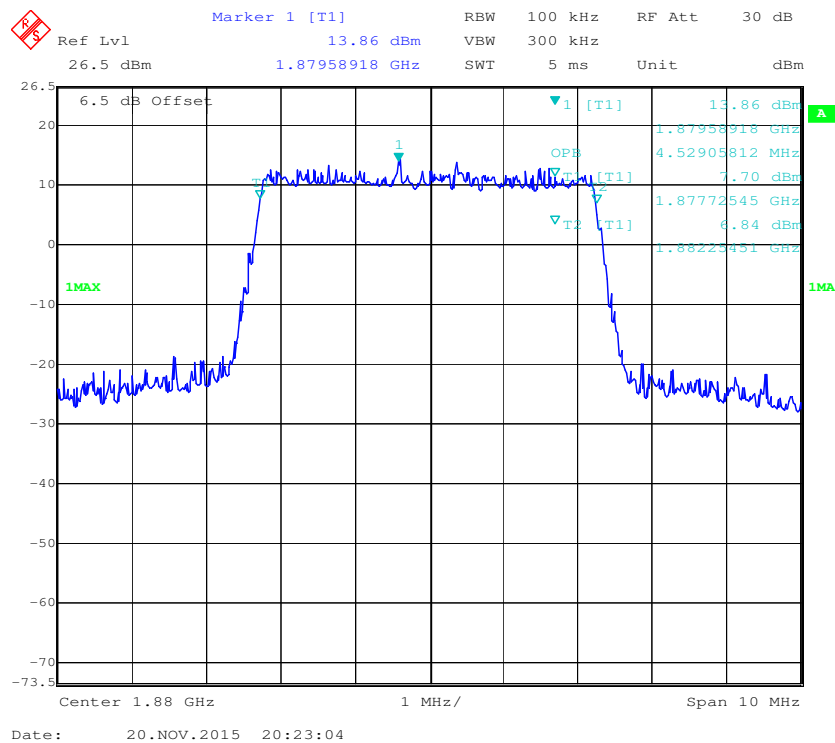

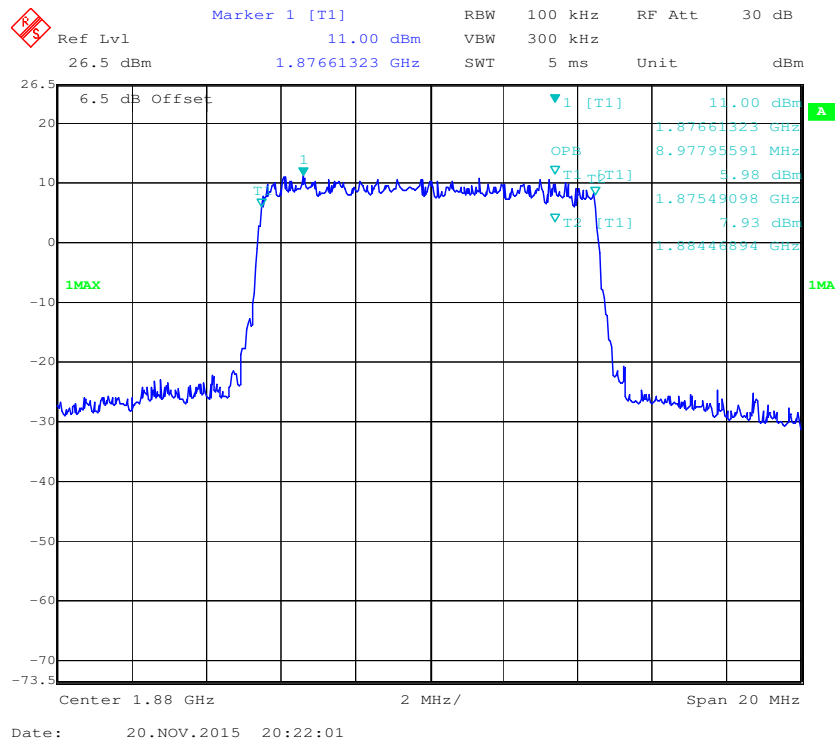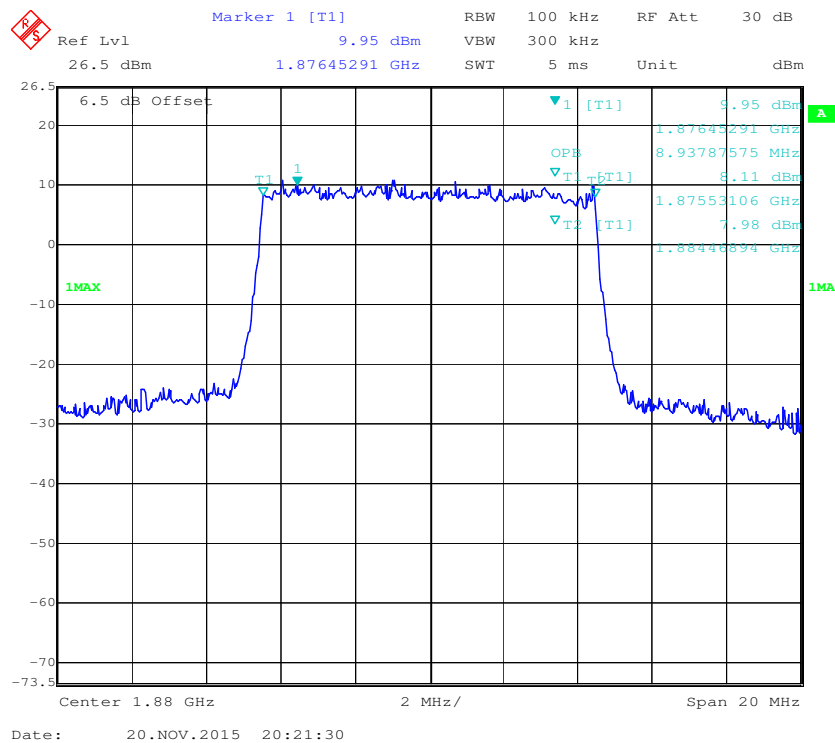QPSK (10.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (10.0 MHz) - 99% Occupied Bandwidth, Middle channel**

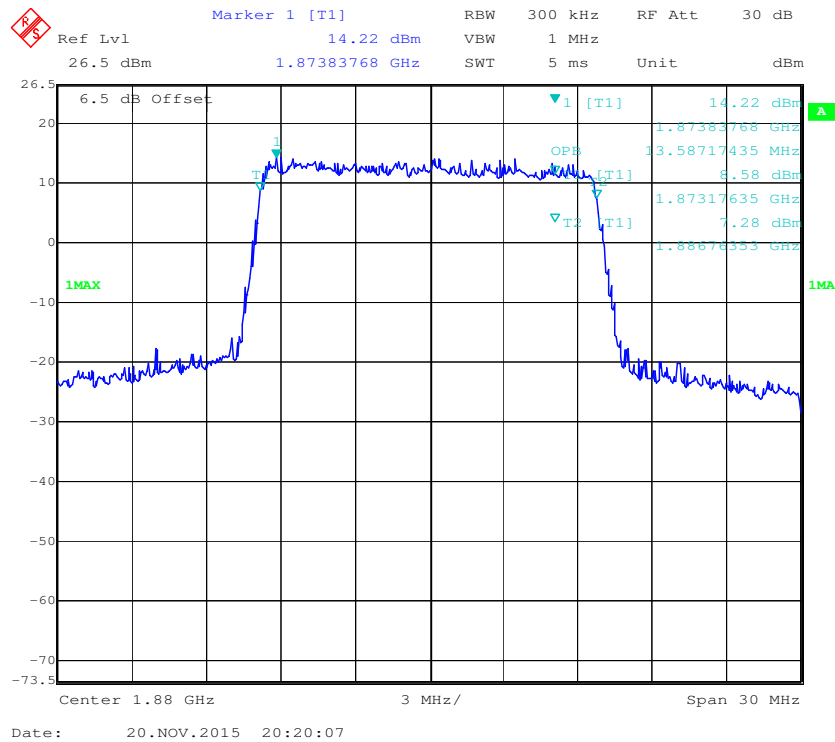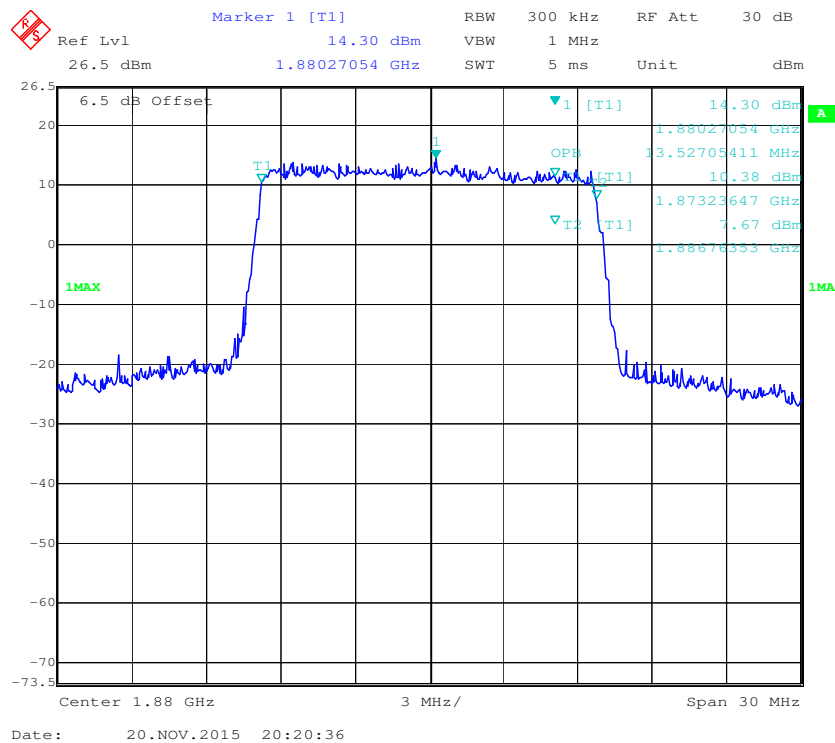QPSK (15.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (15.0 MHz) - 99% Occupied Bandwidth, Middle channel**

Ref Lvl 26.5 dBm

Marker 1 [T1] 13.72 dBm

RBW 300 kHz

VBW 1 MHz

RF Att 30 dB

SWT 5 ms

Unit dBm

6.5 dB Offset

1MAX

1MA

Center 1.88 GHz

4 MHz/

Span 40 MHz

Date: 20.NOV.2015 20:19:30

Ref Lvl 12.25 dBm RBW 300 kHz RF Att 30 dB

26.5 dBm 1.87322645 GHz SWB 5 ms Unit dBm

6.5 dB Offset

1MAX

1

T1

T2

1 [T1]

OPB

1.87322645 GHz

17.95591182 MHz

8.92 dBm

1.87098196 GHz


7.03 dBm

1.86893788 GHz


Center 1.88 GHz 4 MHz/ Span 40 MHz

Date: 20.NOV.2015 20:19:08


QPSK (1.4 MHz) - 26 dB Bandwidth, Middle channel

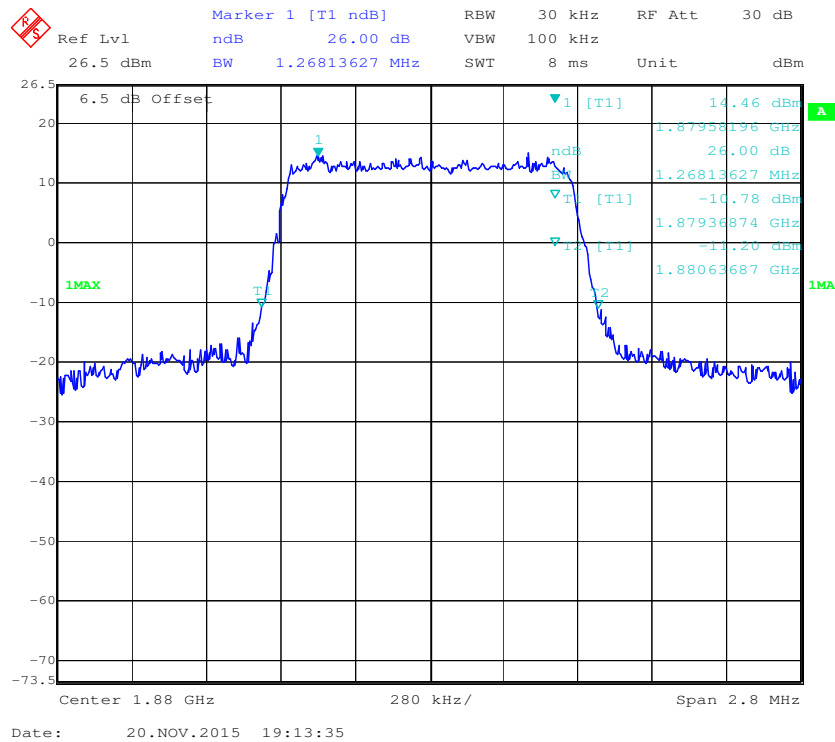


16-QAM (1.4 MHz) - 26 dB Bandwidth, Middle channel

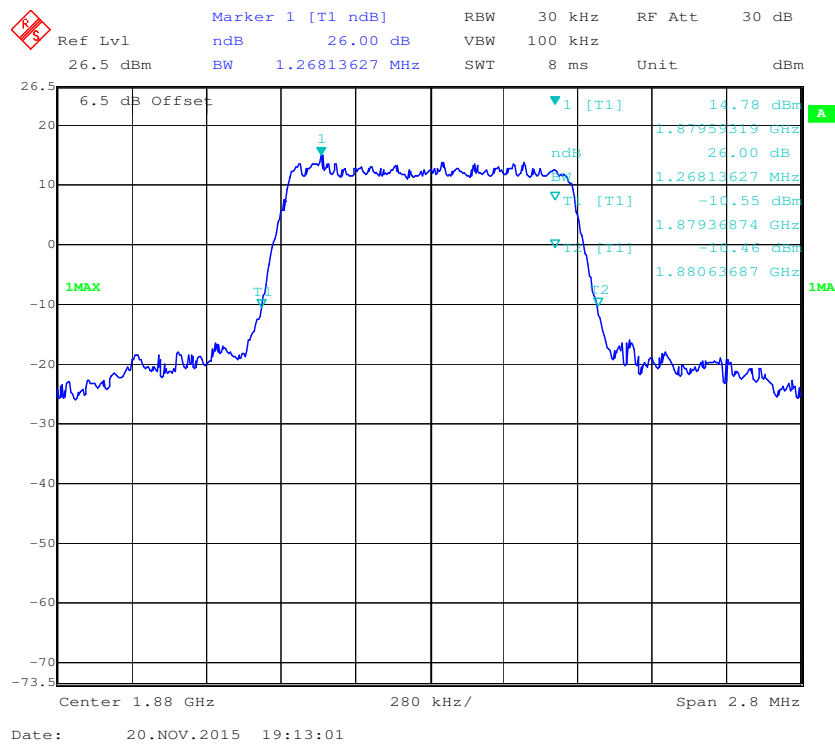


QPSK (3.0 MHz) - 26 dB Bandwidth, Middle channel

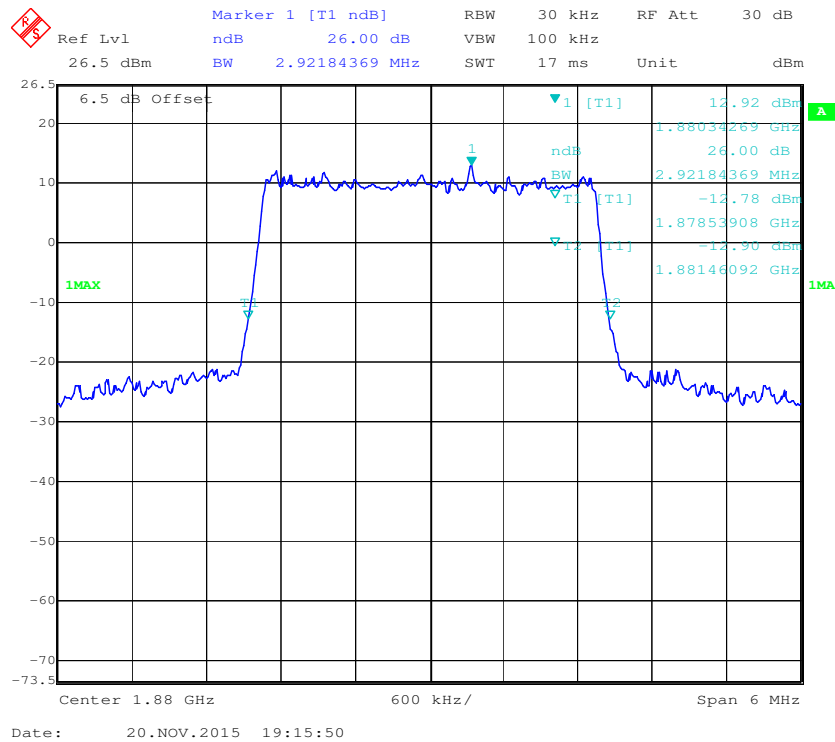


16-QAM (3.0 MHz) - 26 dB Bandwidth, Middle channel


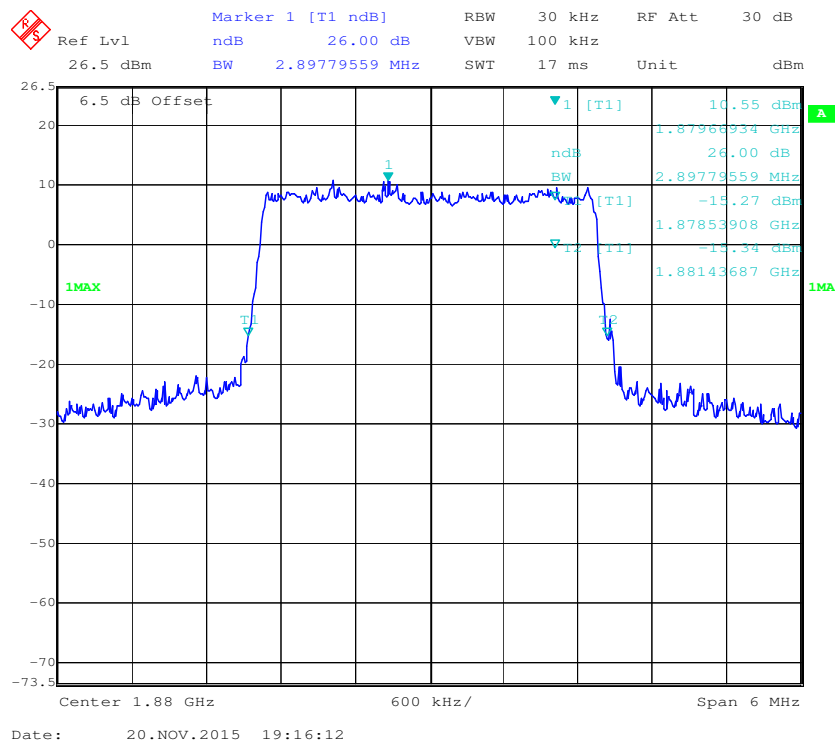




QPSK (5.0 MHz) - 26 dB Bandwidth, Middle channel


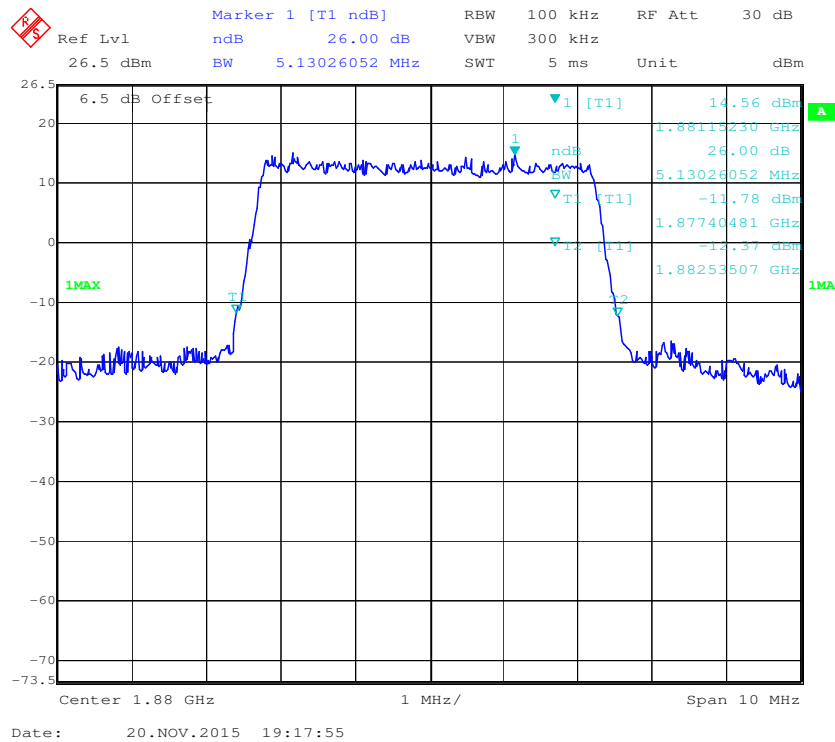


16-QAM (5.0 MHz) - 26 dB Bandwidth, Middle channel

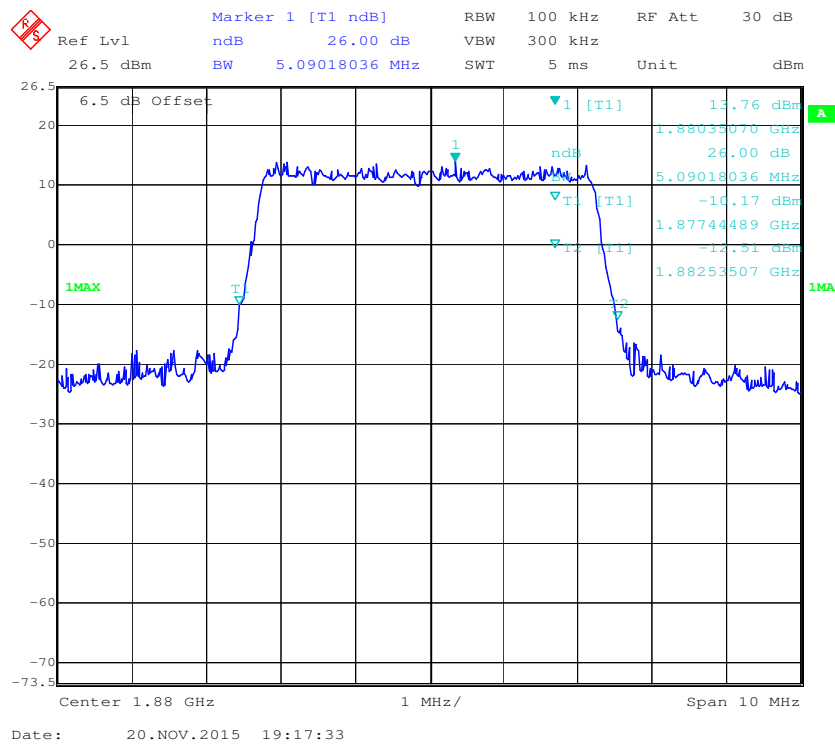

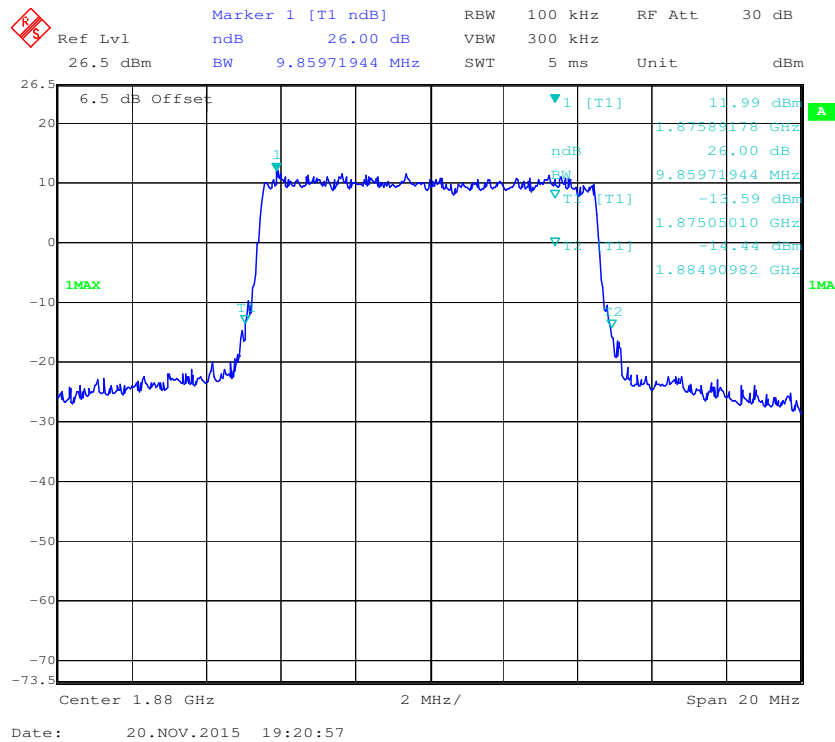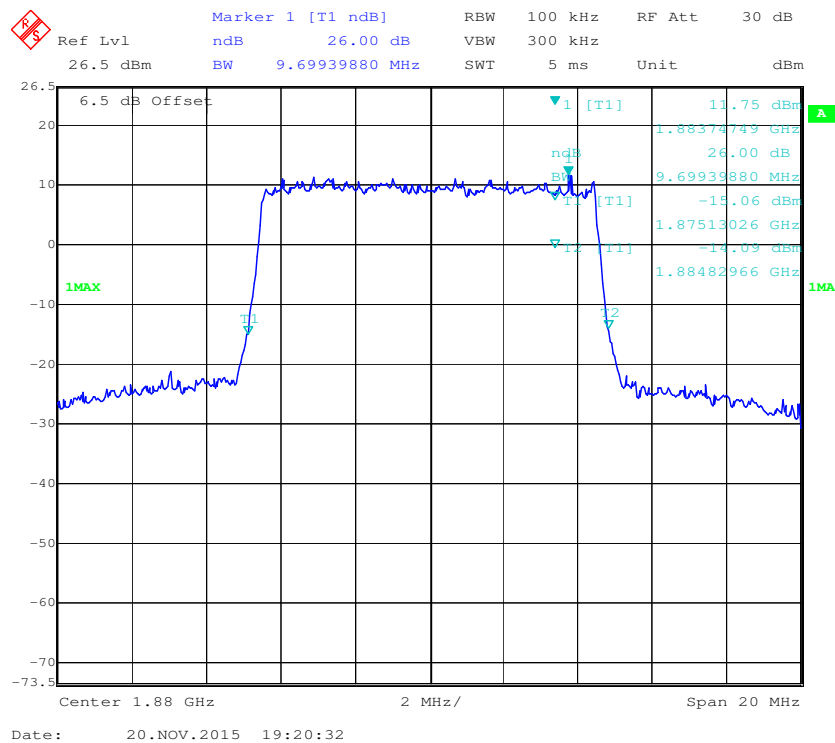QPSK (10.0 MHz) - 26 dB Bandwidth, Middle channel**16-QAM (10.0 MHz) - 26 dB Bandwidth, Middle channel**

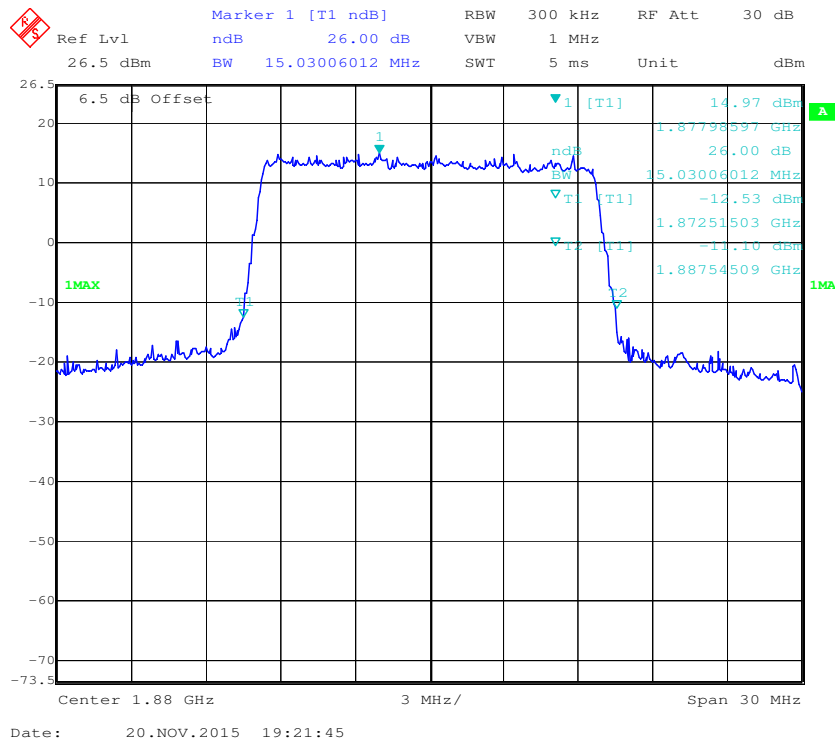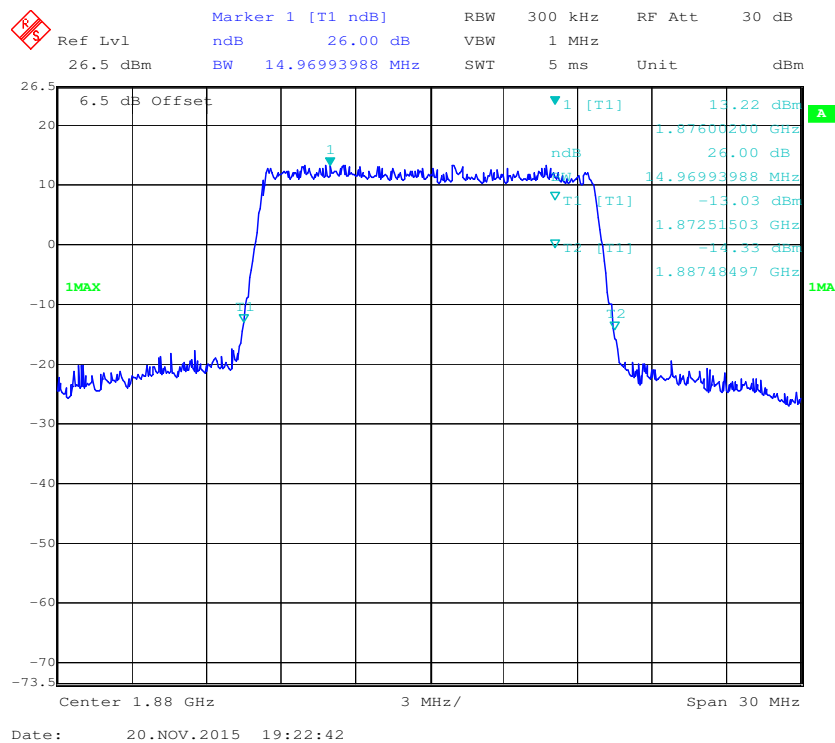QPSK (15.0 MHz) - 26 dB Bandwidth, Middle channel**16-QAM (15.0 MHz) - 26 dB Bandwidth, Middle channel**

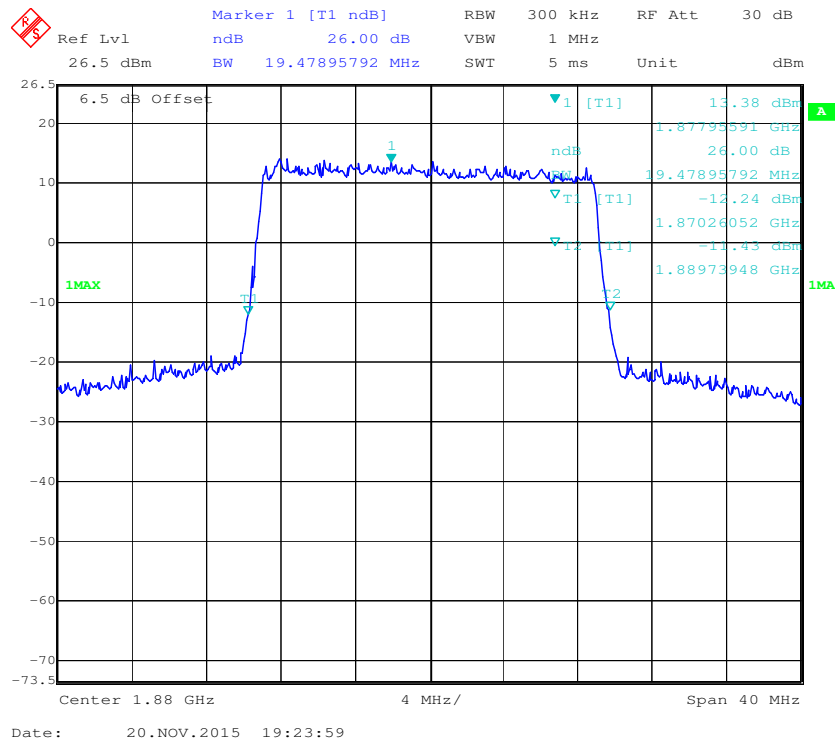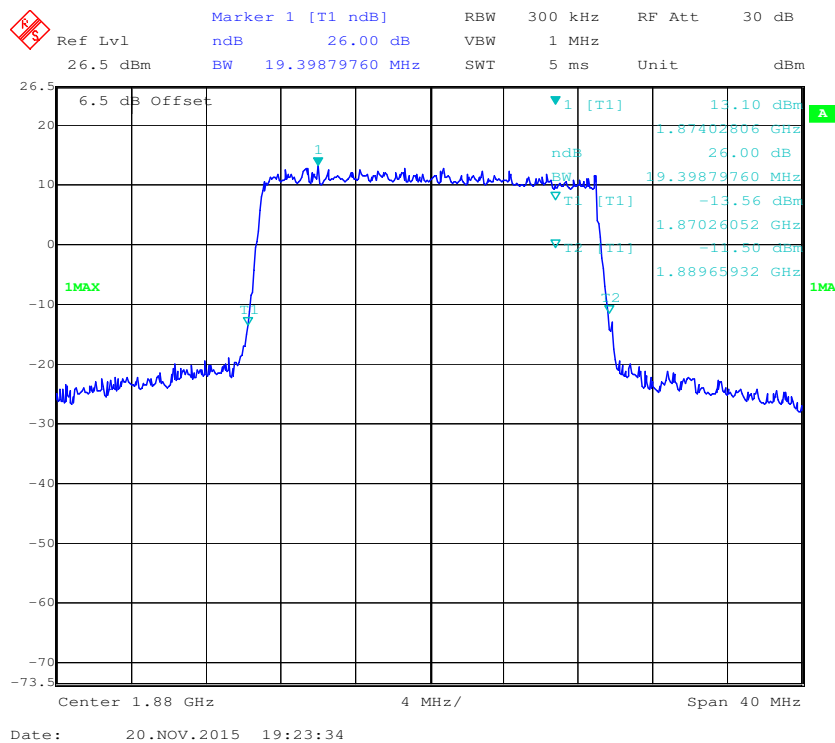QPSK (20.0 MHz) - 26 dB Bandwidth, Middle channel**16-QAM (20.0 MHz) - 26 dB Bandwidth, Middle channel**

LTE Band 4: (Middle Channel)

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
1.4	QPSK	1.100	1.274
	16QAM	1.105	1.279
3.0	QPSK	2.693	2.934
	16QAM	2.693	2.946
5.0	QPSK	4.549	5.090
	16QAM	4.549	5.070
10.0	QPSK	9.018	9.780
	16QAM	8.978	9.820
15.0	QPSK	13.527	14.970
	16QAM	13.587	15.030
20.0	QPSK	18.036	19.640
	16QAM	18.036	19.560

6.5 dB Offset

Marker 1 [T1] 14.58 dBm

Ref Lvl 26.5 dBm 1.73237375 GHz RBW 30 kHz RF Att 30 dB

SWT 8 ms Unit dBm

1 [T1] 14.58 dBm

1.73237375 GHz

1.09979960 MHz

5.58 dBm

1.73195291 GHz

6.85 dBm

1.73305271 GHz

1MAX

Center 1.7325 GHz 280 kHz/ Span 2.8 MHz

Date: 20.NOV.2015 20:12:53



Ref Lvl 26.5 dBm
 Marker 1 [T1] 14.71 dBm
 RBW 30 kHz
 VBW 100 kHz
 RF Att 30 dB
 26.5 dBm 1.73287876 GHz
 SWT 8 ms Unit dBm



6.5 dB Offset



1MAX



1 [T1] 14.71 dBm
 1.73287876 GHz
 1.10541082 MHz
 6.60 dBm
 1.73194729 GHz
 8.27 dBm
 1.73305271 GHz



Center 1.7325 GHz 280 kHz/ Span 2.8 MHz

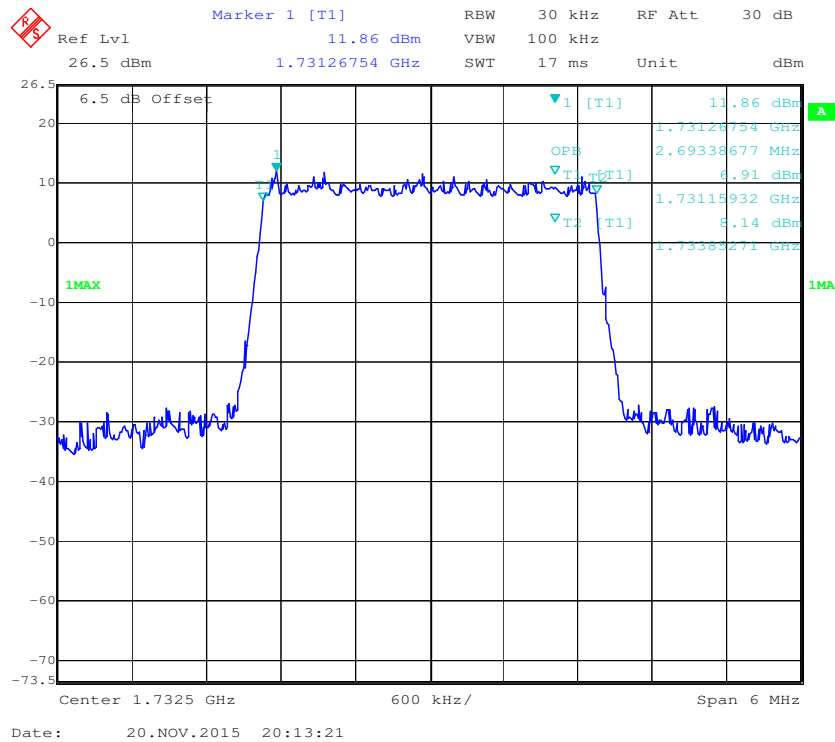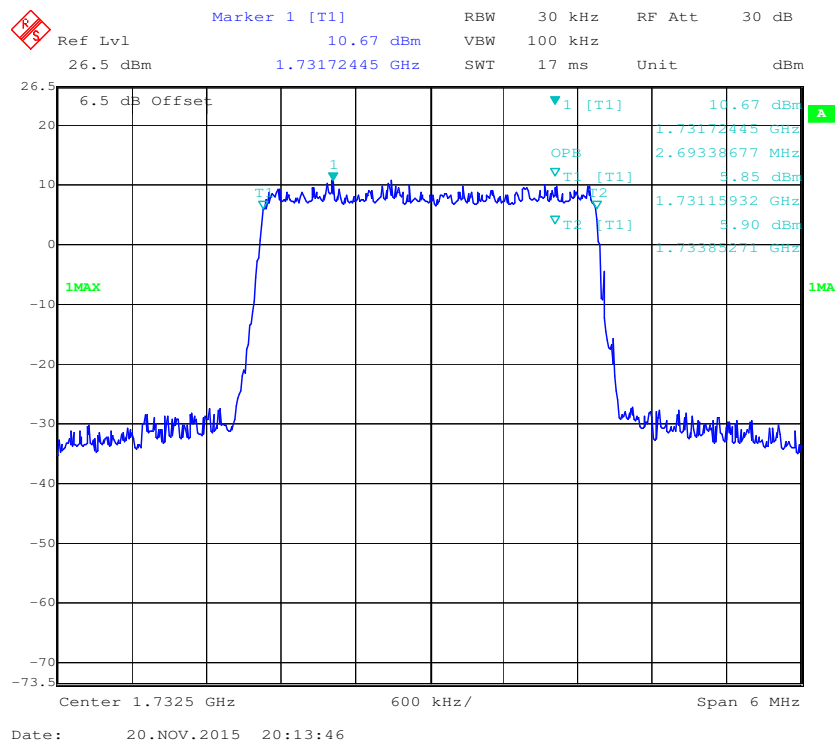QPSK (3.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (3.0 MHz) - 99% Occupied Bandwidth, Middle channel**

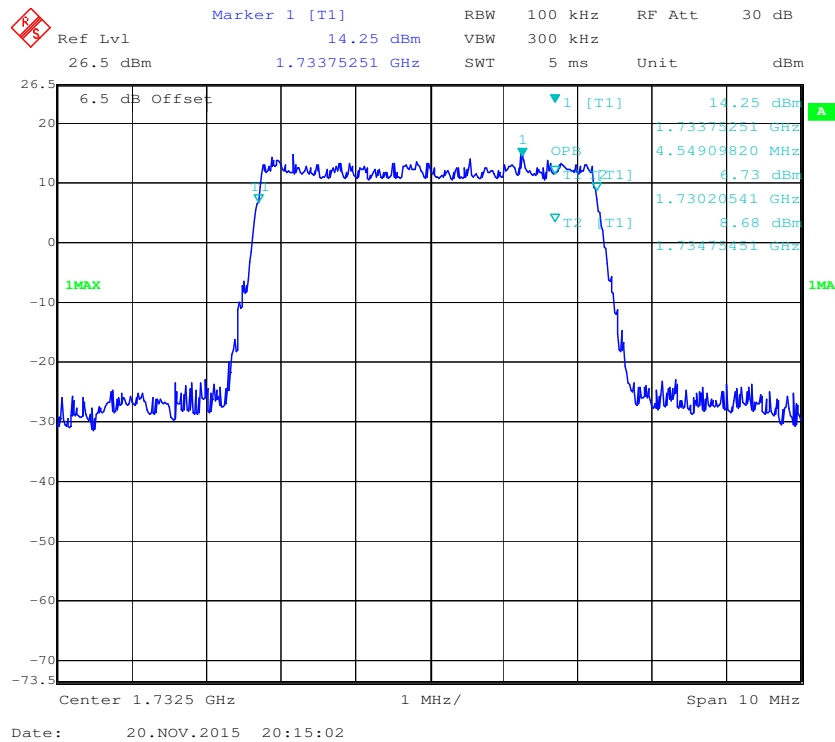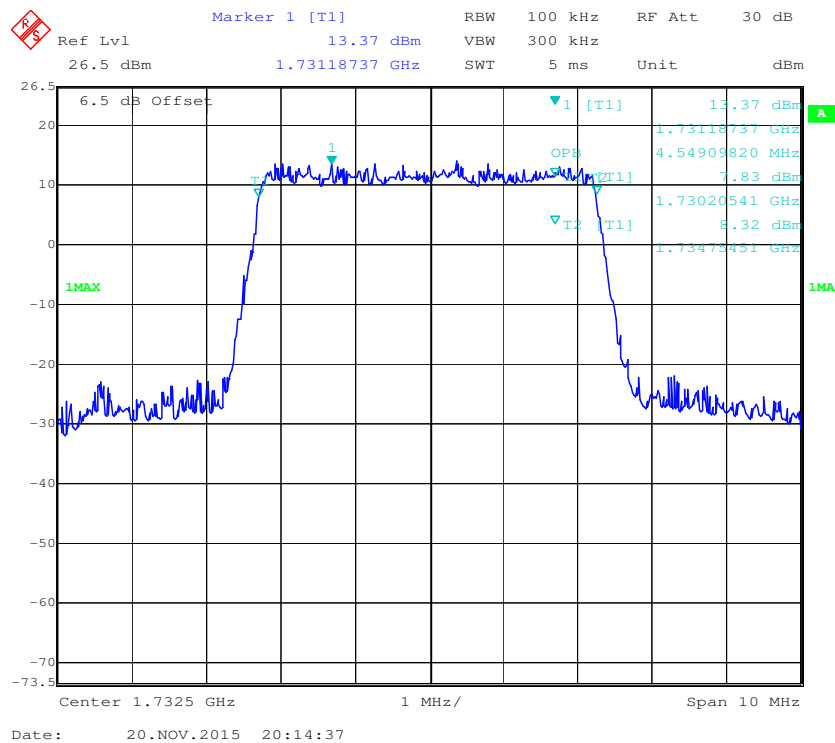
QPSK (5.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (5.0 MHz) - 99% Occupied Bandwidth, Middle channel**

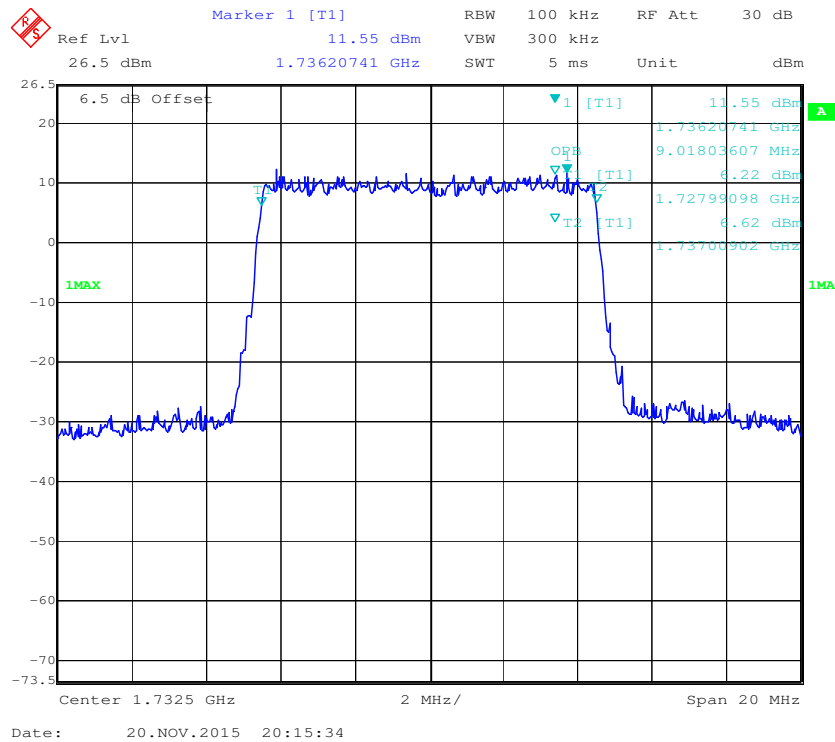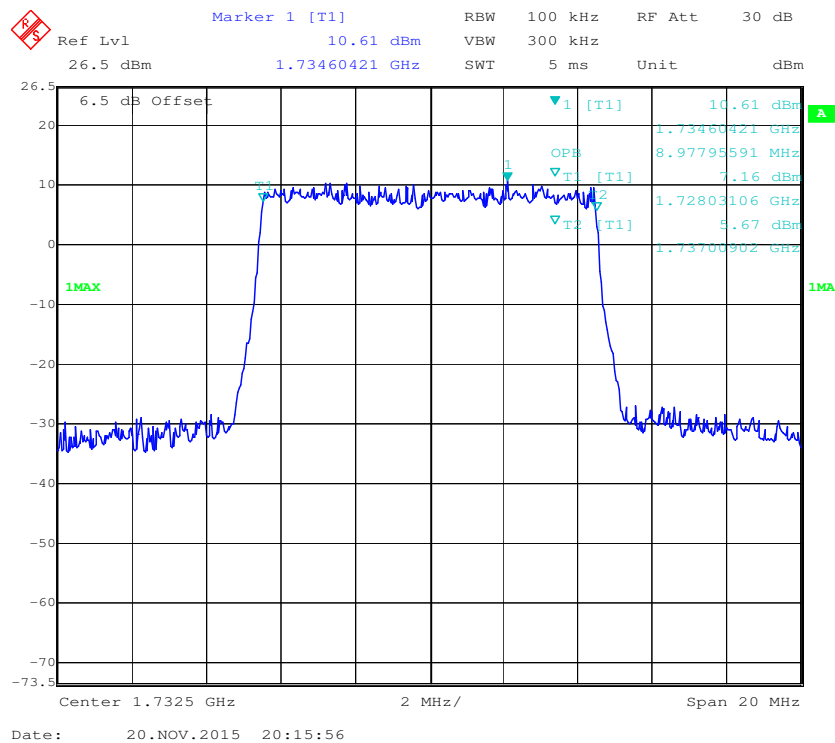QPSK (10.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (10.0 MHz) - 99% Occupied Bandwidth, Middle channel**

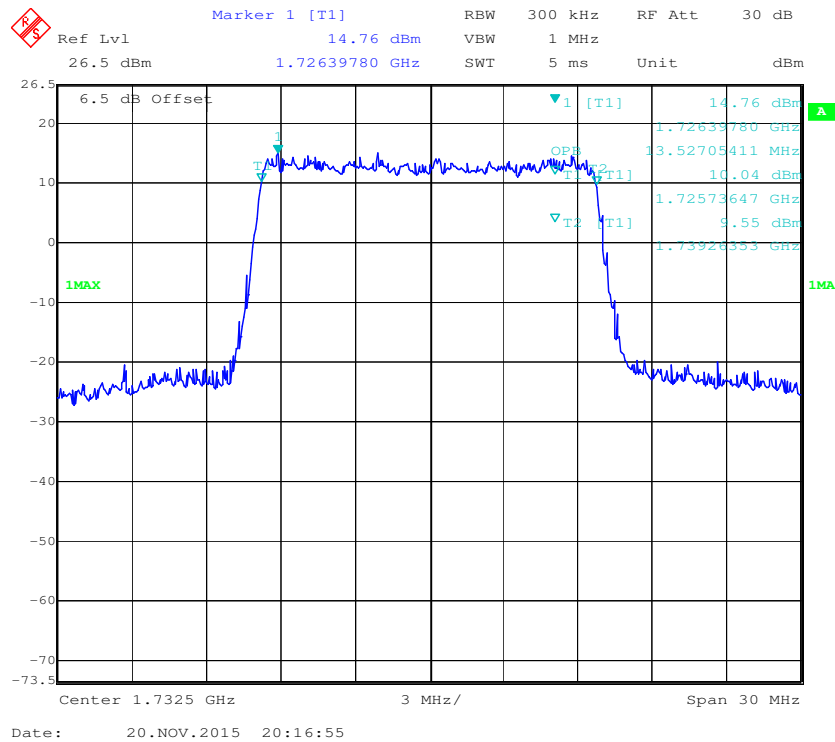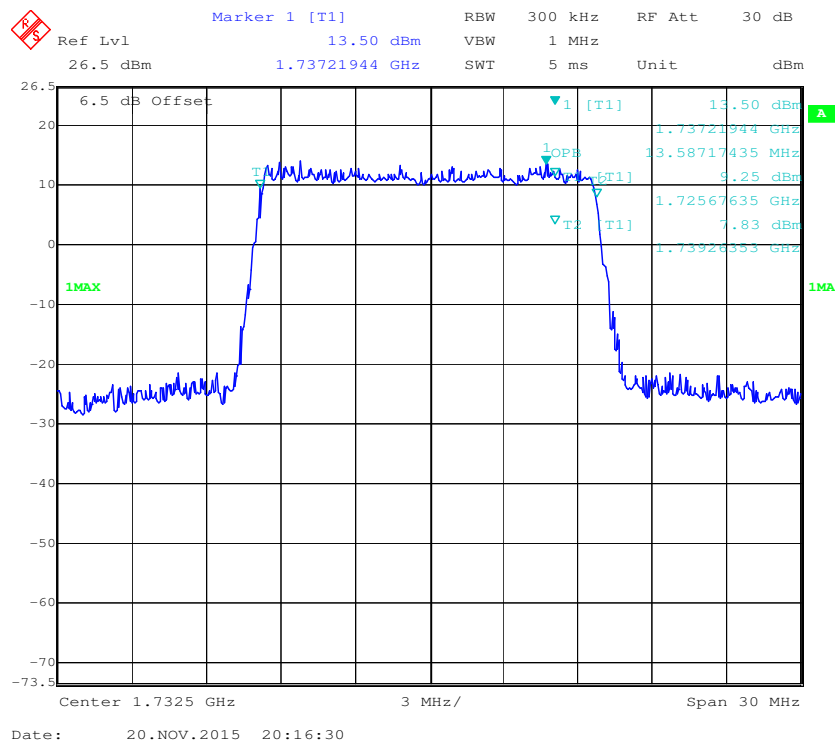
QPSK (15.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (15.0 MHz) - 99% Occupied Bandwidth, Middle channel**

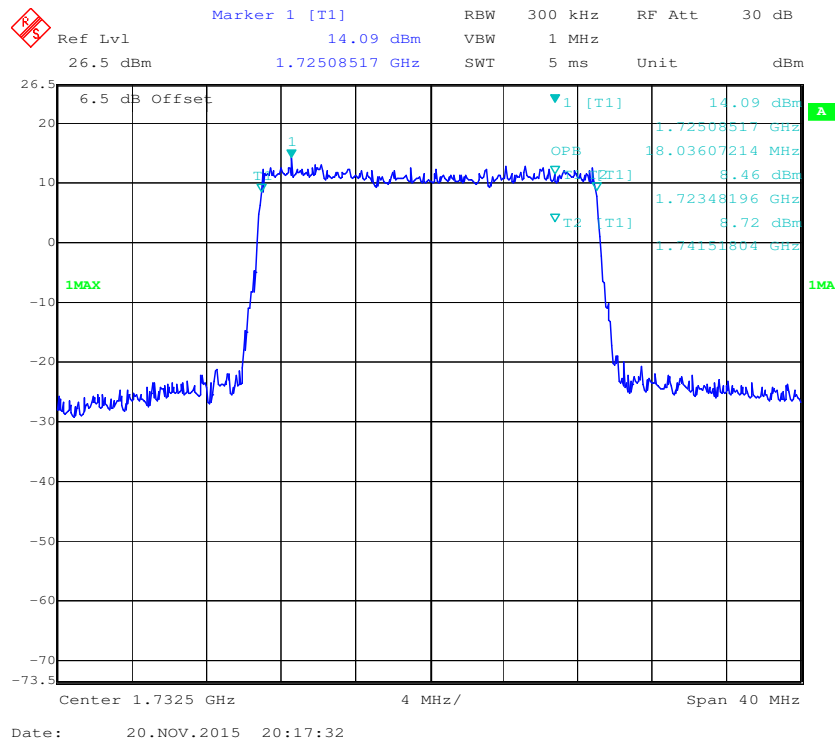
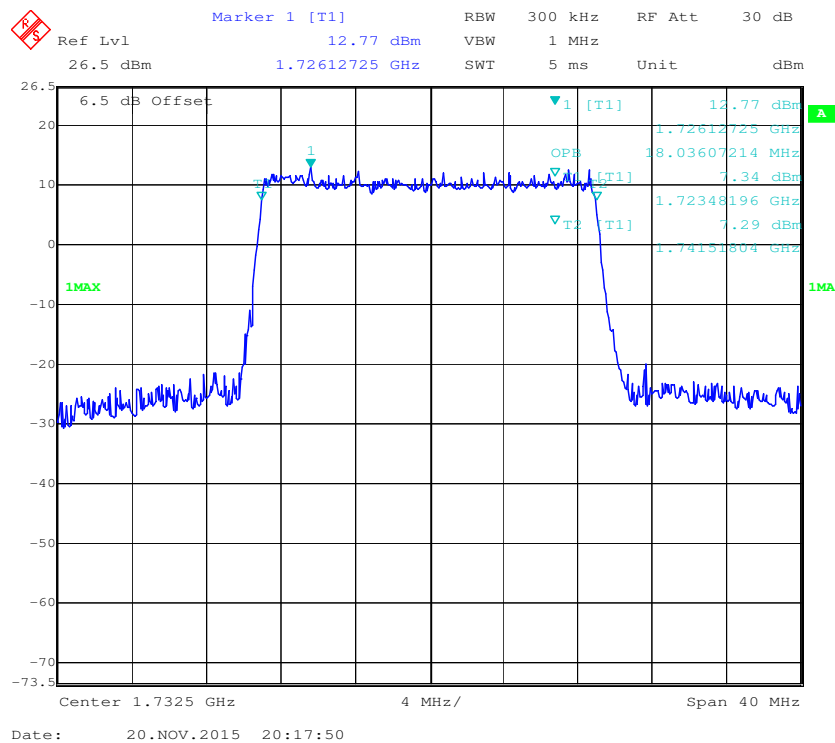
QPSK (20.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (20.0 MHz) - 99% Occupied Bandwidth, Middle channel**

QPSK (1.4 MHz) - 26 dB Bandwidth, Middle channel

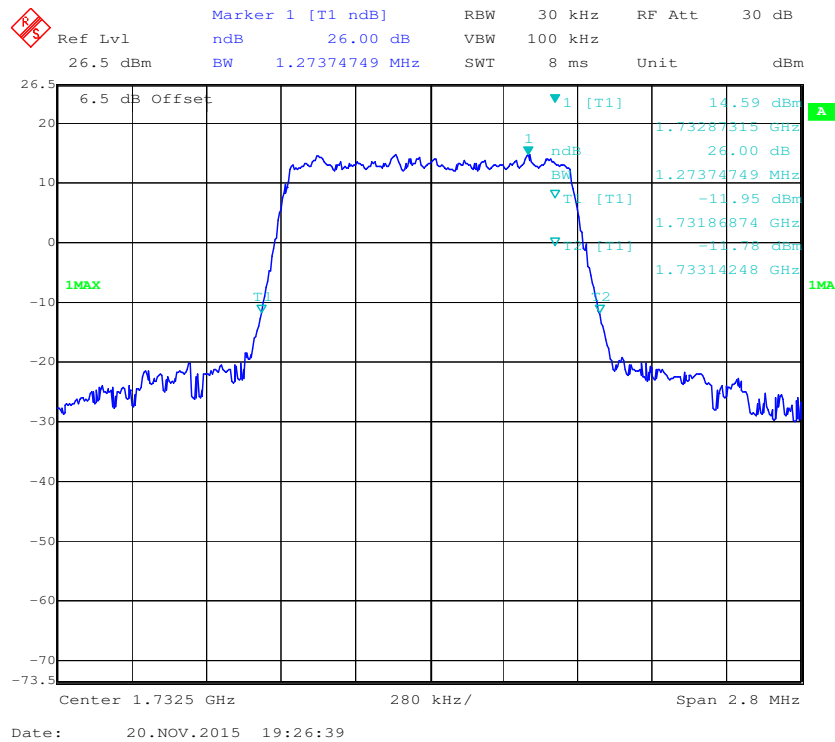

16-QAM (1.4 MHz) - 26 dB Bandwidth, Middle channel

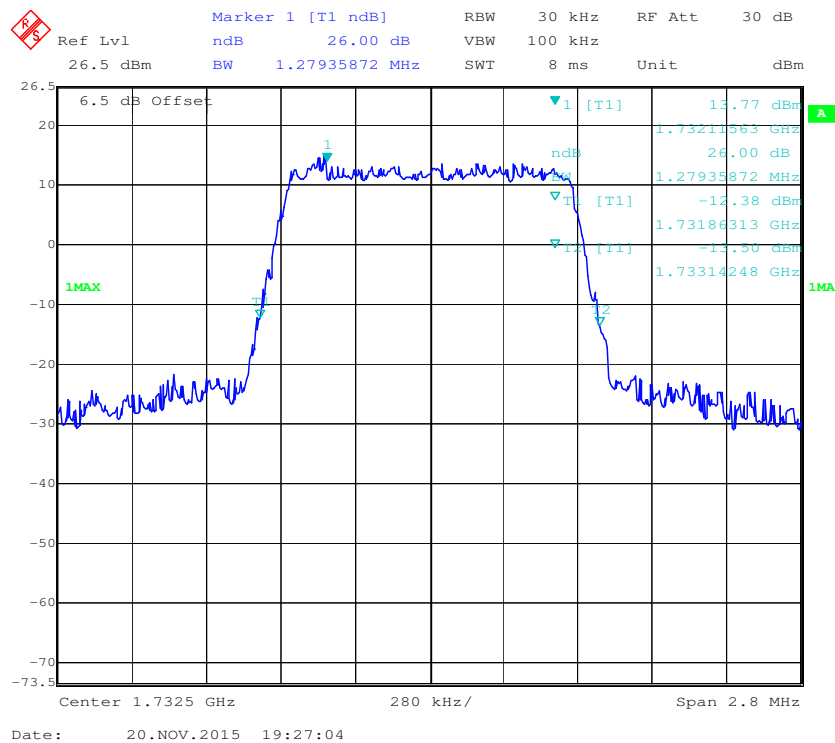

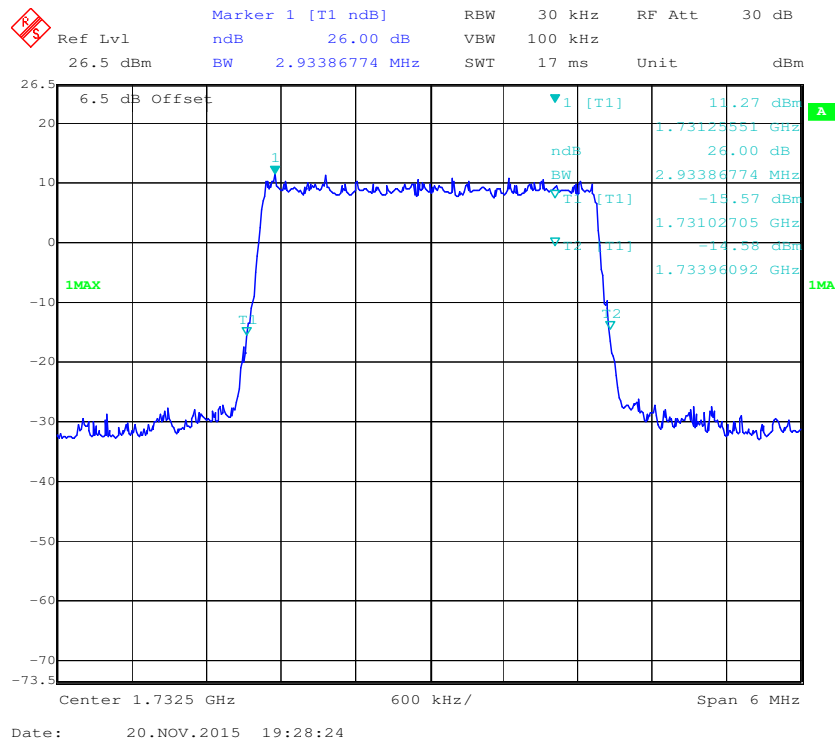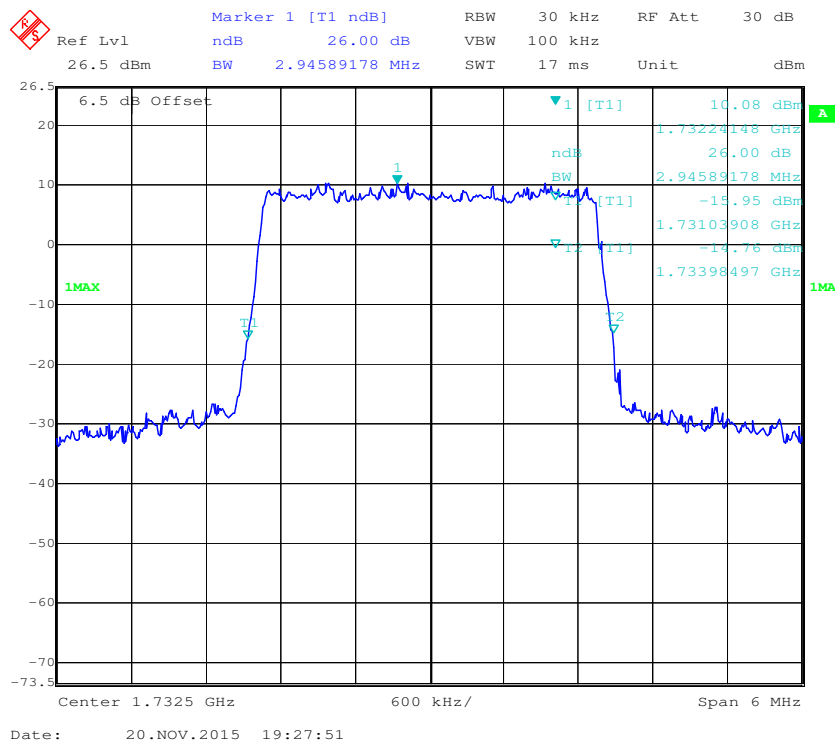QPSK (3.0 MHz) - 26 dB Bandwidth, Middle channel**16-QAM (3.0 MHz) - 26 dB Bandwidth, Middle channel**

Ref Lvl 26.5 dBm BW 5.09018036 MHz RBW 100 kHz VBW 300 kHz RF Att 30 dB

6.5 dB Offset

1MAX

1 14.82 dBm

1.73331162 GHz

ndB 26.00 dB

5.09018036 MHz

T1 [T1] -10.74 dBm

1.72994489 GHz

T2 [T1] -13.06 dBm

1.73503507 GHz

Center 1.7325 GHz 1 MHz/ Span 10 MHz

Date: 20.NOV.2015 19:29:12

Ref Lvl 26.5 dBm BW 5.07014028 MHz SWT 5 ms Unit dBm

6.5 dB Offset

1MAX

1

14.05 dBm

1.73208918 GHz

26.00 dB

5.07014028 MHz

T1 [T1]

-12.51 dBm

1.72994489 GHz



-12.63 dBm

1.73501503 GHz


1MA

Center 1.7325 GHz 1 MHz/ Span 10 MHz


Date: 20.NOV.2015 19:29:42

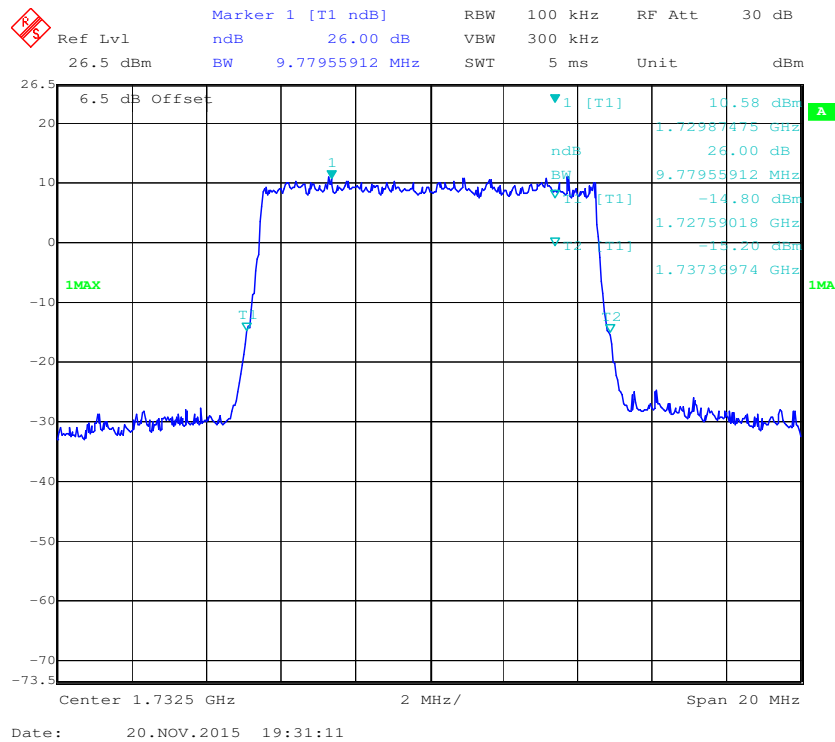
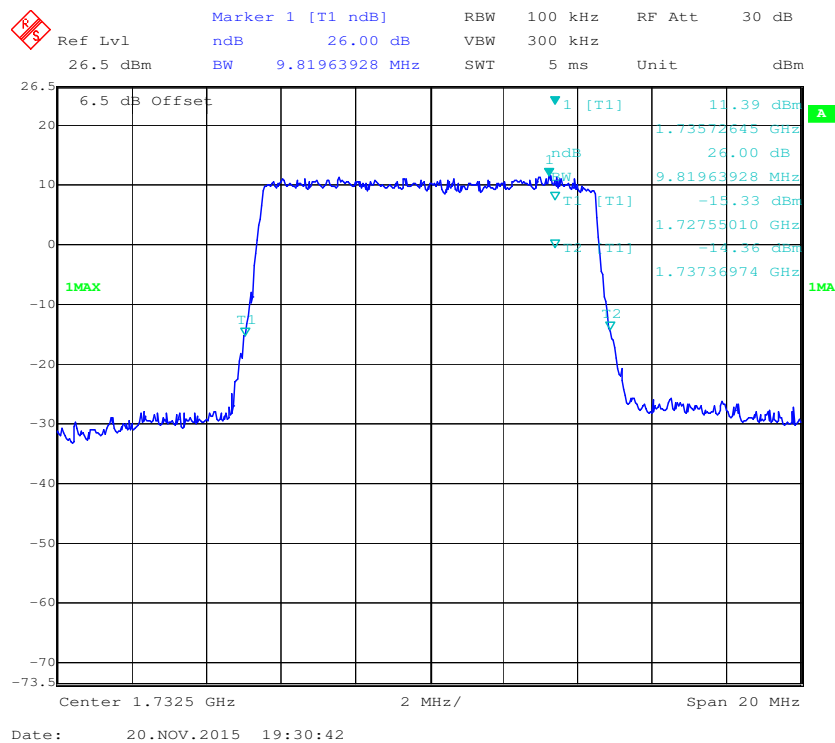
QPSK (10.0 MHz) - 26 dB Bandwidth, Middle channel**16-QAM (10.0 MHz) - 26 dB Bandwidth, Middle channel**

QPSK (15.0 MHz) - 26 dB Bandwidth, Middle channel

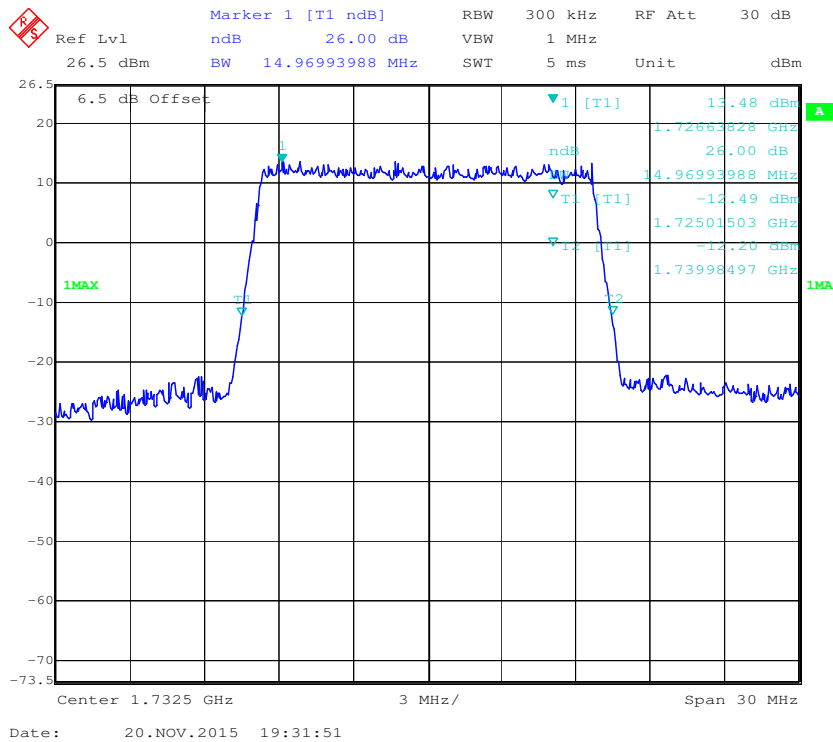

16-QAM (15.0 MHz) - 26 dB Bandwidth, Middle channel

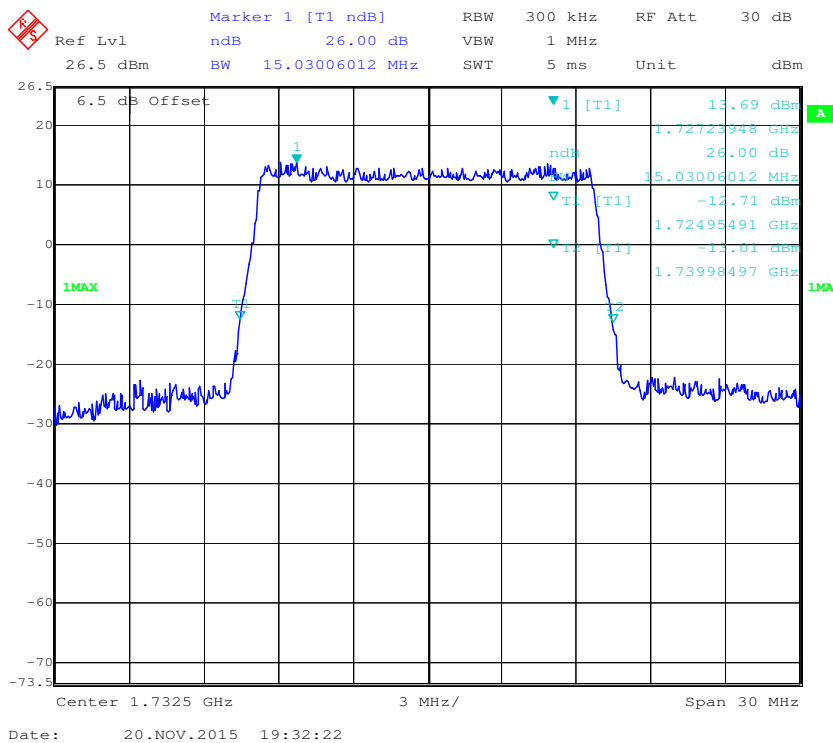


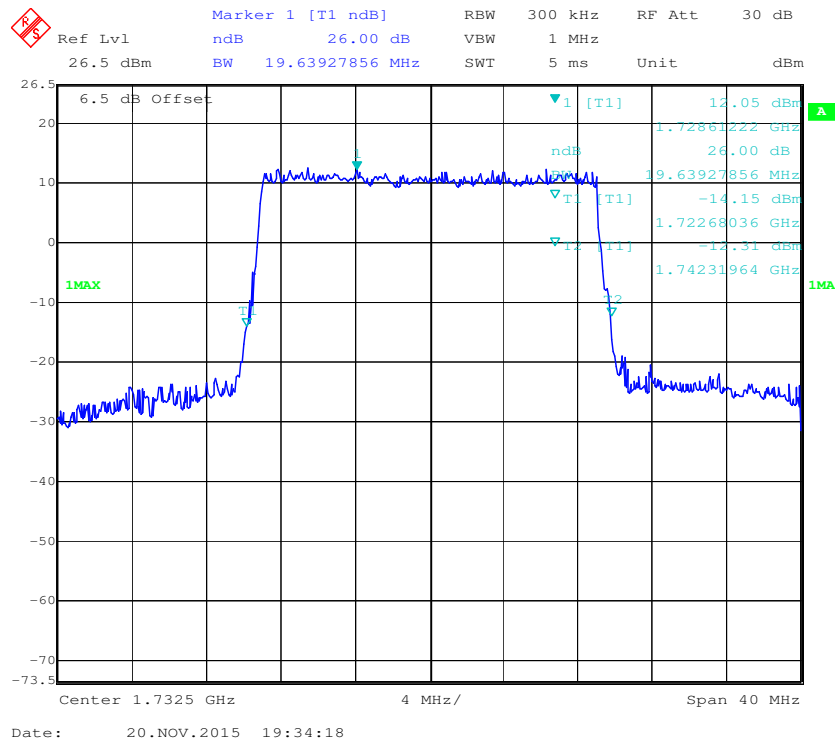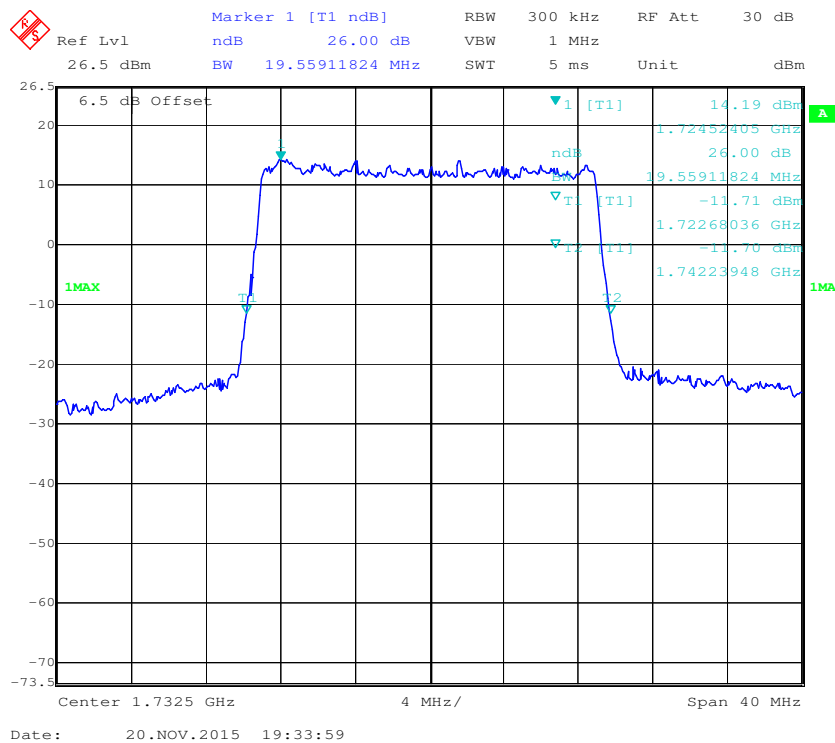QPSK (20.0 MHz) - 26 dB Bandwidth, Middle channel**16-QAM (20.0 MHz) - 26 dB Bandwidth, Middle channel**


LTE Band 12: (Middle Channel)



Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
1.4	QPSK	1.094	1.257
	16QAM	1.105	1.274
3.0	QPSK	2.693	2.910
	16QAM	2.693	2.934
5.0	QPSK	4.569	5.090
	16QAM	4.549	5.110
10.0	QPSK	9.018	9.820
	16QAM	9.018	9.780

QPSK (1.4 MHz) - 99% Occupied Bandwidth, Middle channel

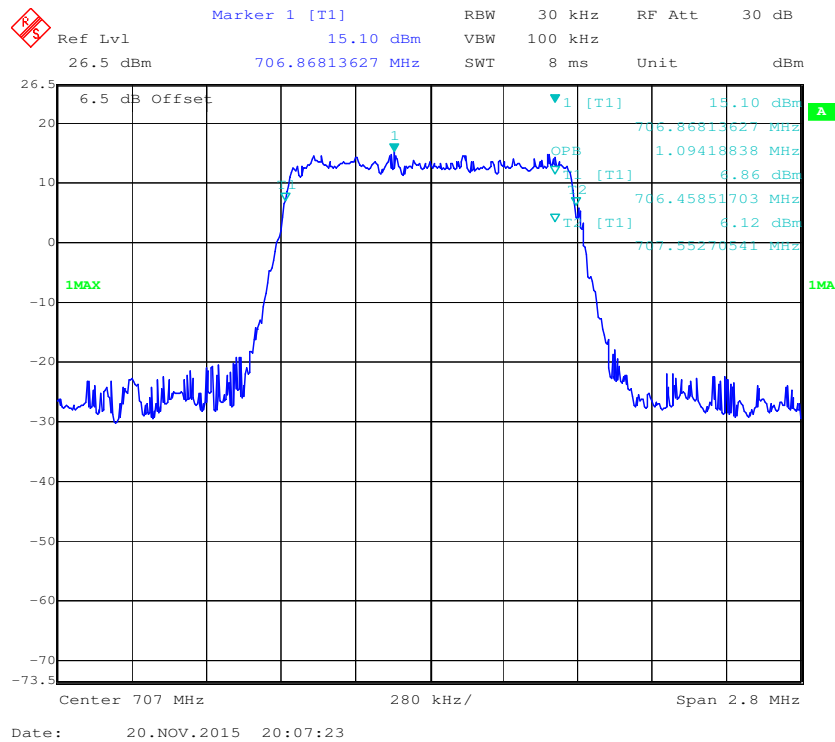


16-QAM (1.4 MHz) - 99% Occupied Bandwidth, Middle channel

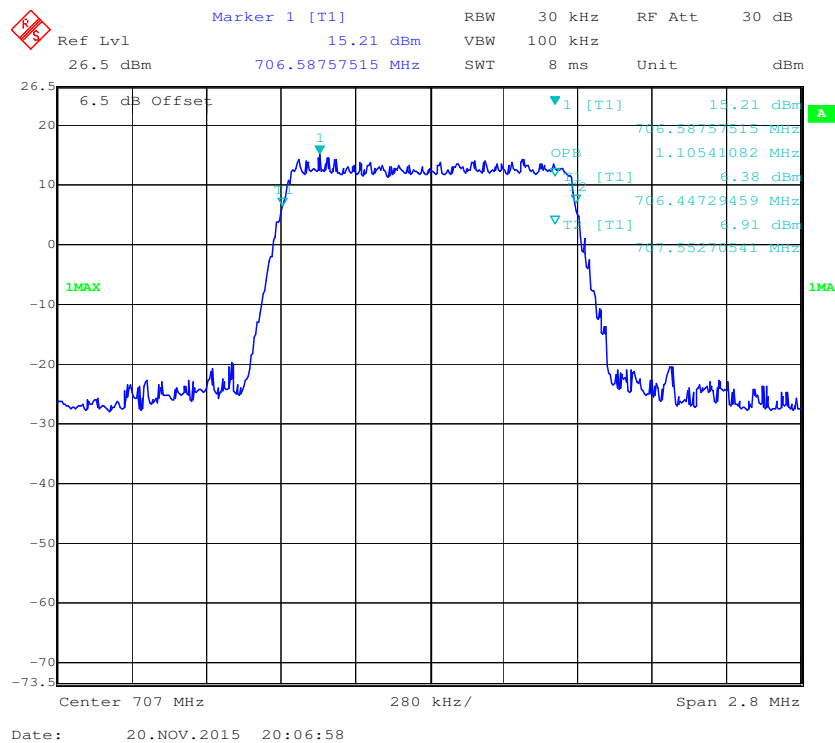


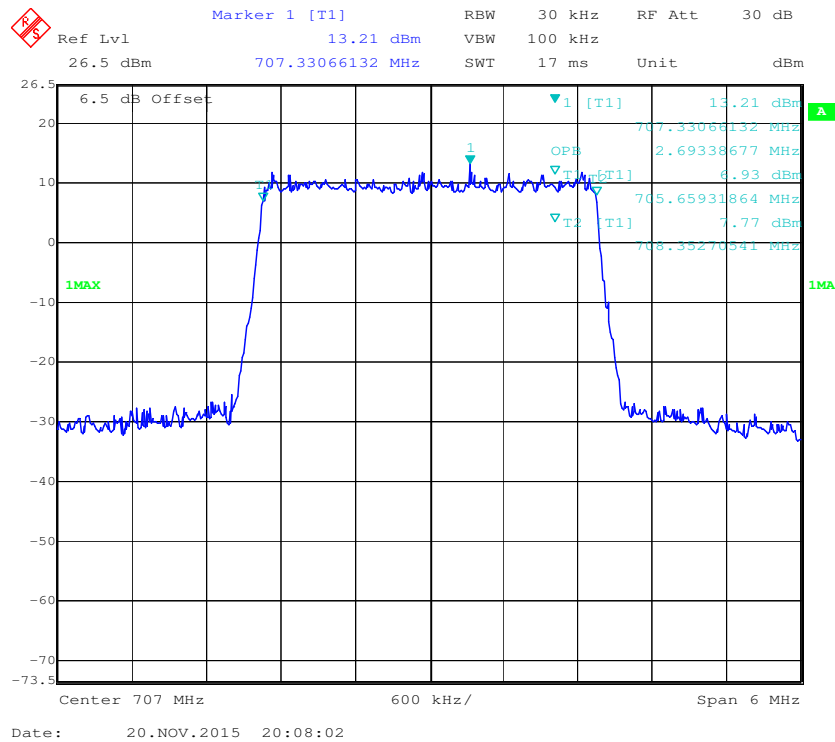
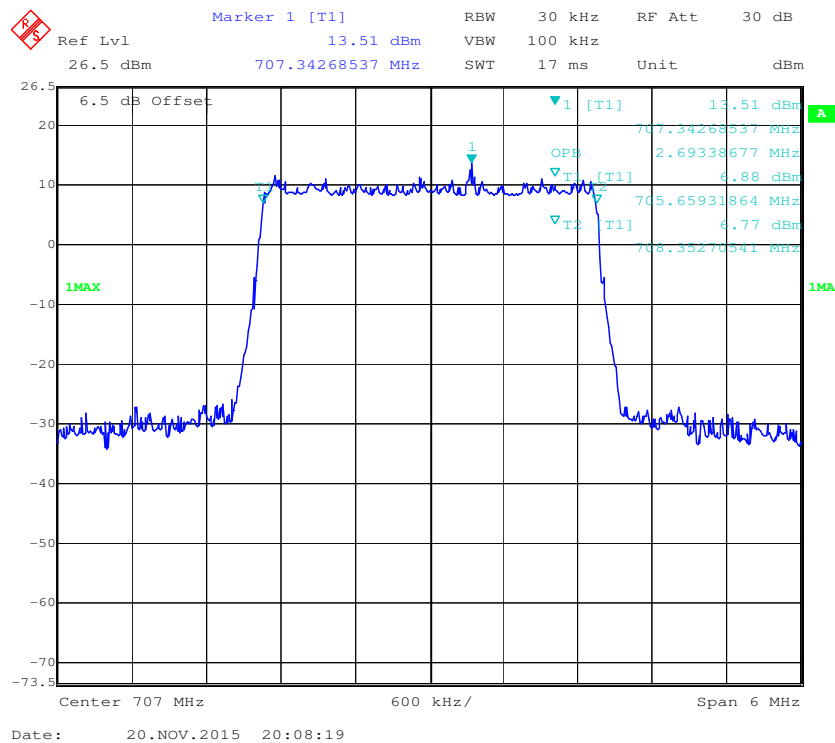
QPSK (3.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (3.0 MHz) - 99% Occupied Bandwidth, Middle channel**



QPSK (5.0 MHz) - 99% Occupied Bandwidth, Middle channel


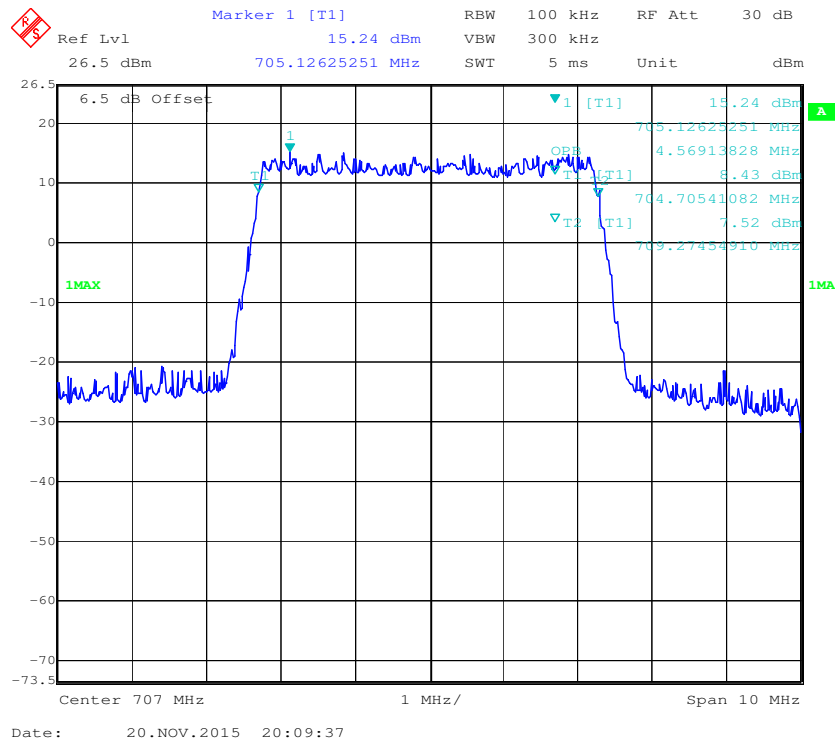




16-QAM (5.0 MHz) - 99% Occupied Bandwidth, Middle channel


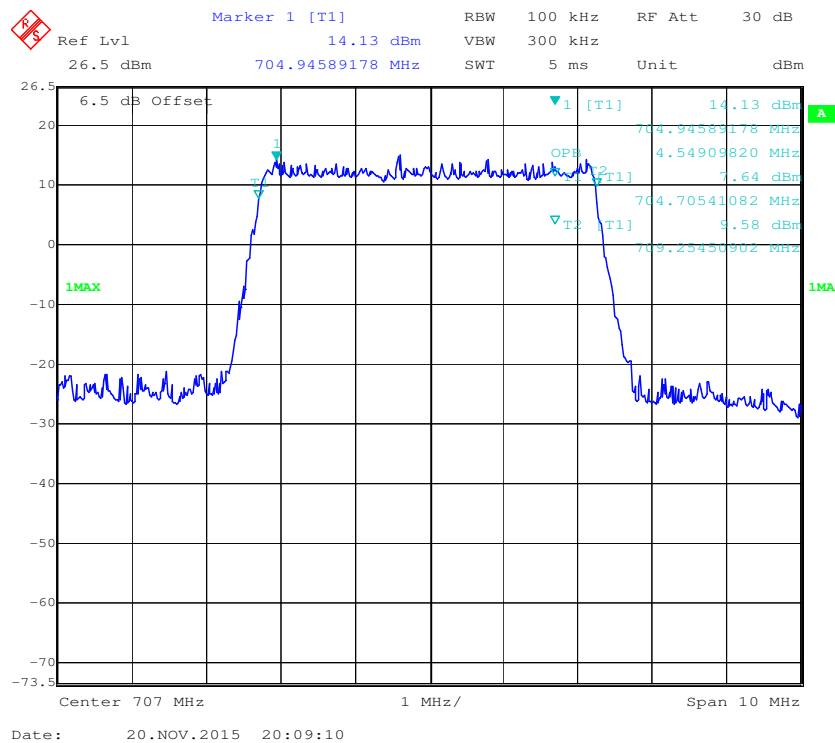


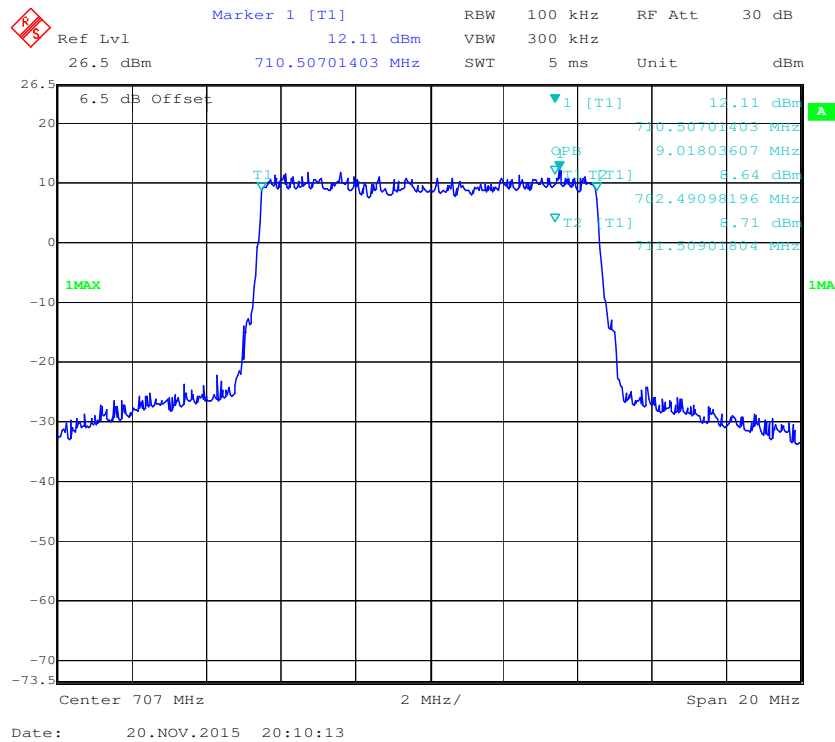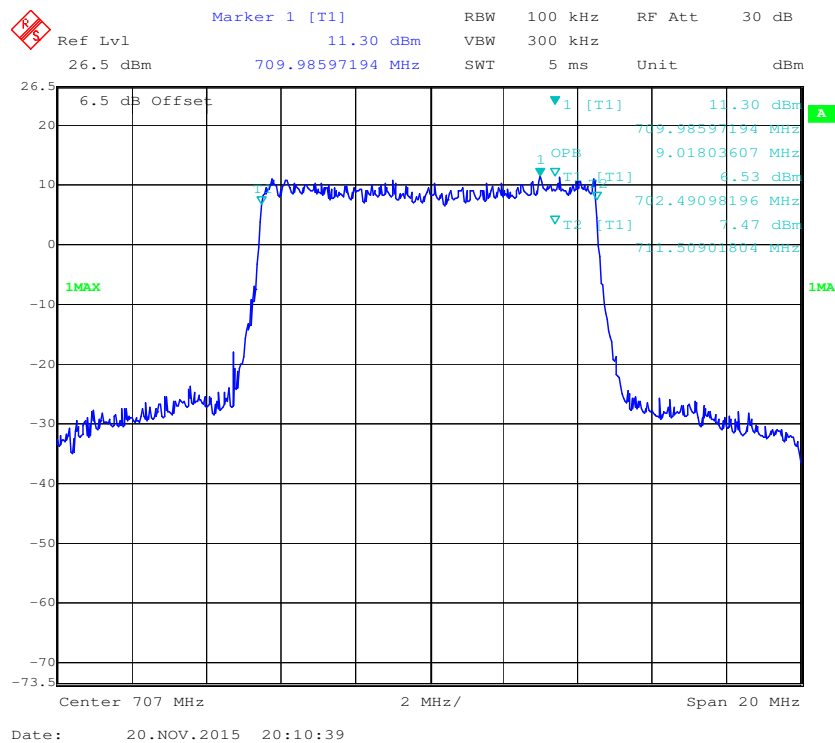QPSK (10.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (10.0MHz) - 99% Occupied Bandwidth, Middle channel**

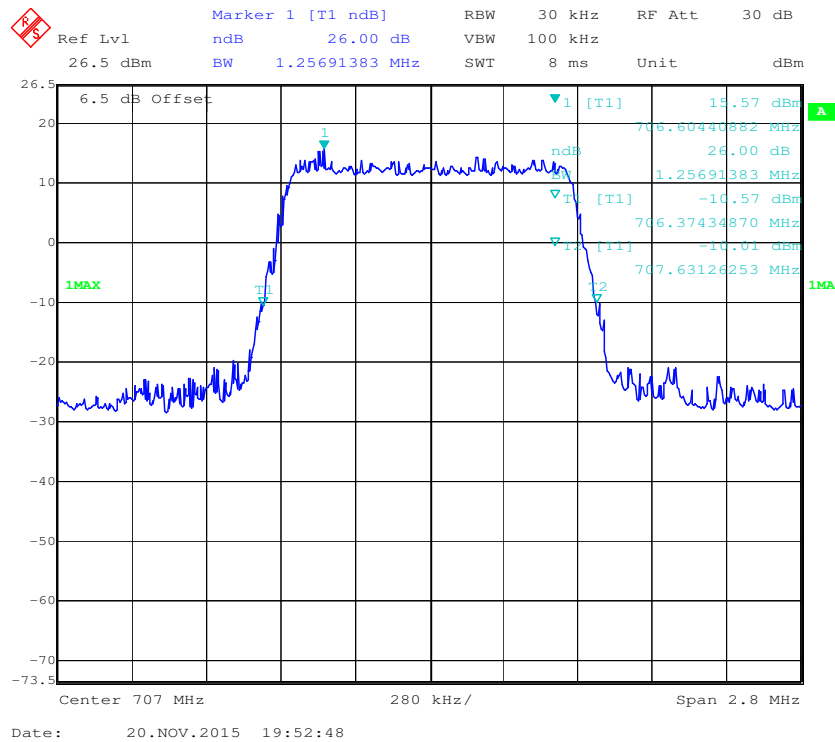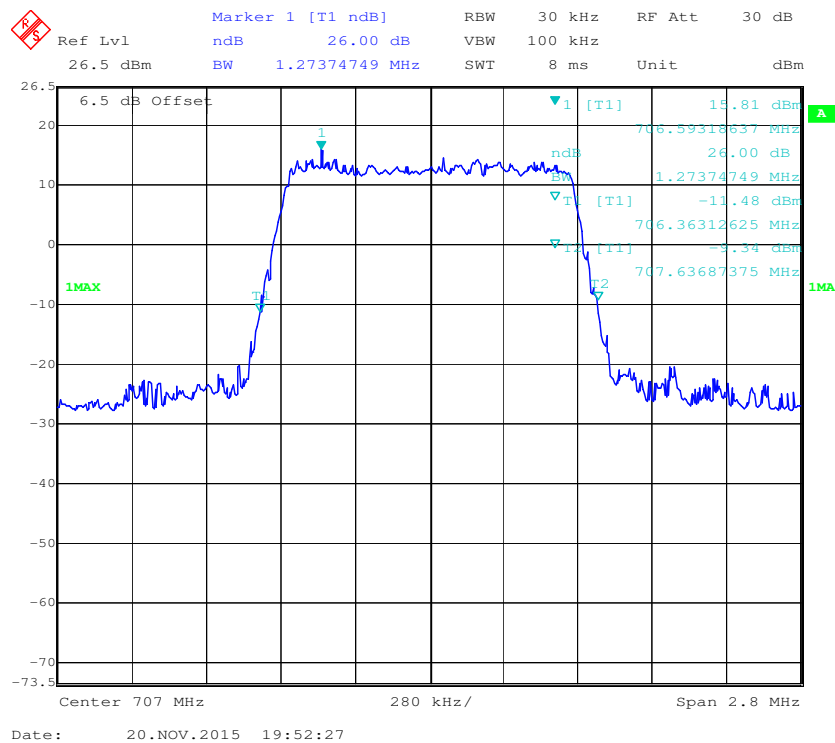QPSK (1.4 MHz) - 26 dB Bandwidth, Middle channel**16-QAM (1.4 MHz) - 26 dB Bandwidth, Middle channel**

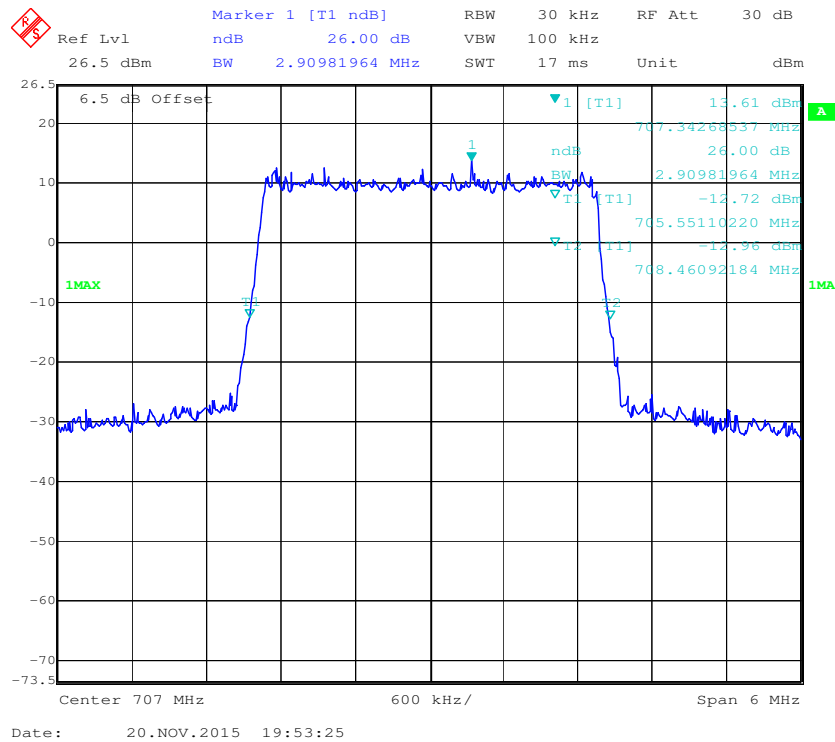
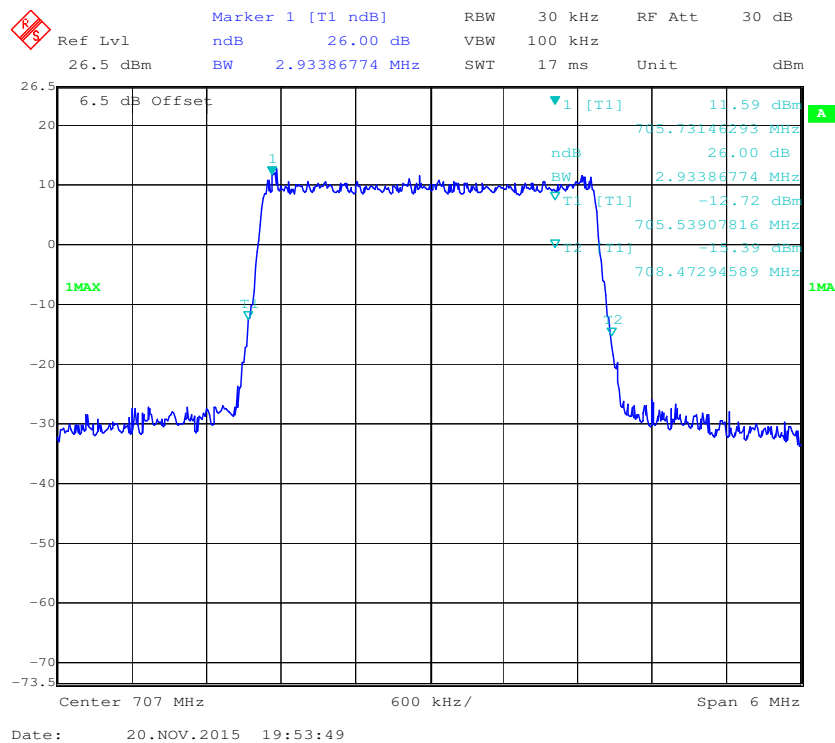
QPSK (3.0MHz) - 26 dB Bandwidth, Middle channel**16-QAM (3.0 MHz) - 26 dB Bandwidth, Middle channel**

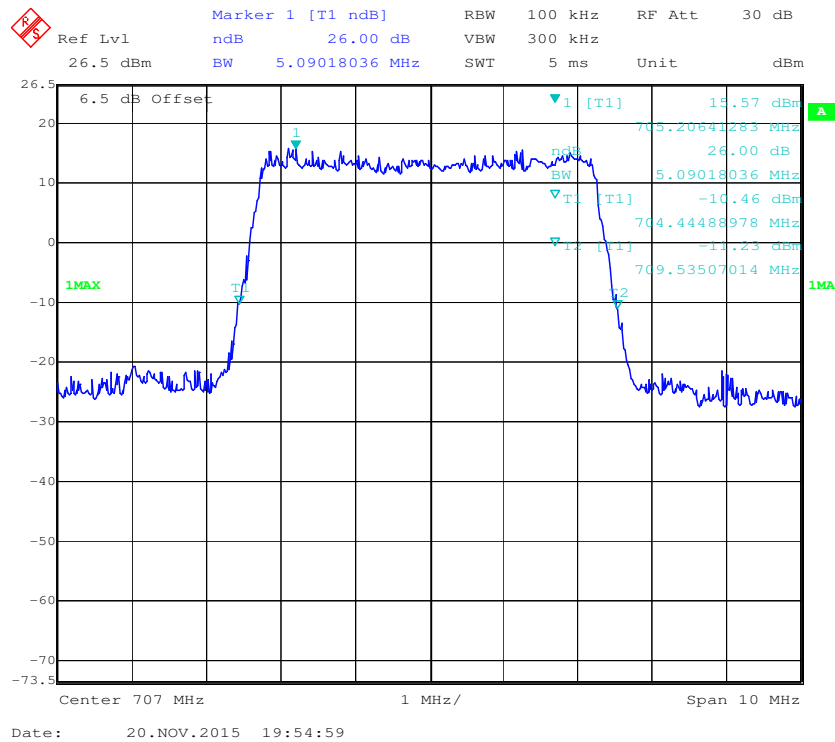
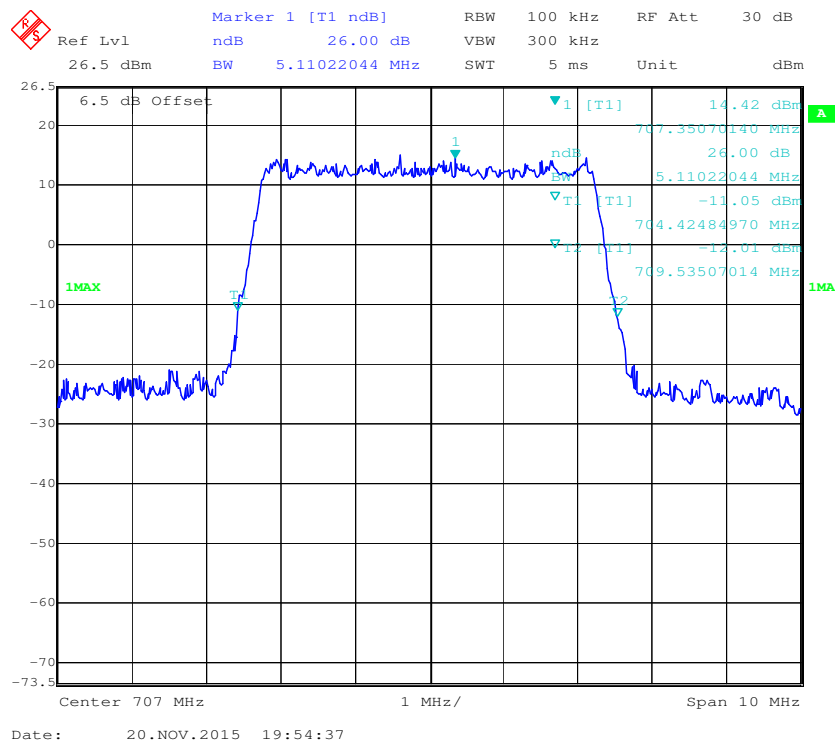
QPSK (5.0 MHz) - 26 dB Bandwidth, Middle channel**16-QAM (5.0 MHz) - 26 dB Bandwidth, Middle channel**

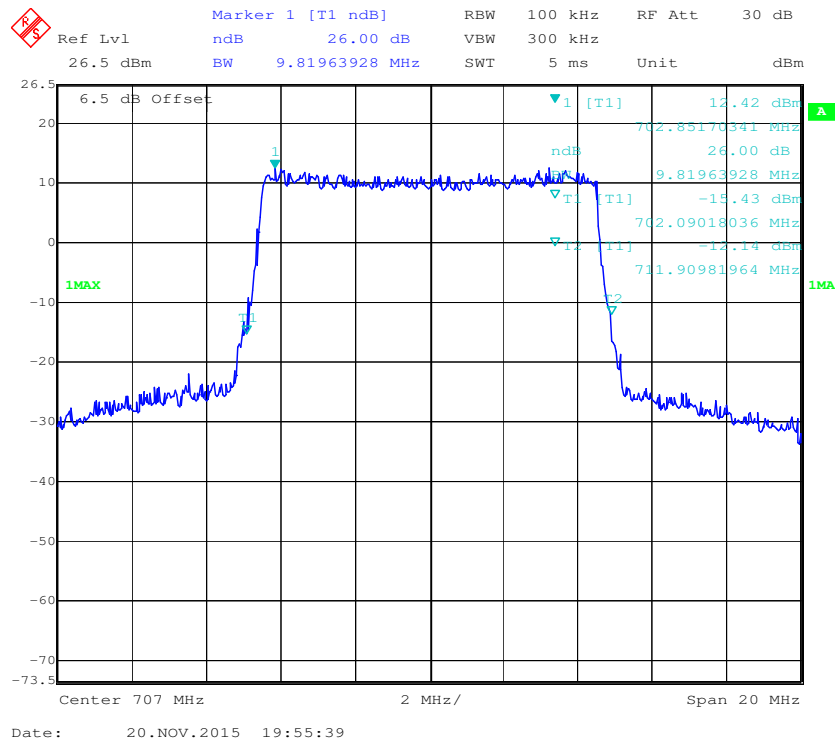
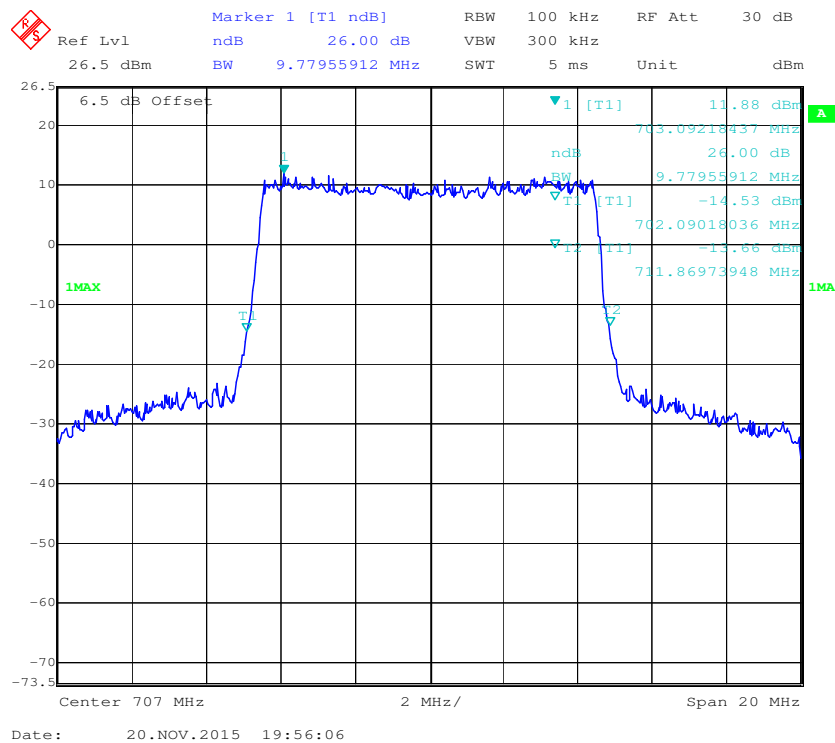
QPSK (10.0 MHz) - 26 dB Bandwidth, Middle channel**16-QAM (10.0 MHz) - 26 dB Bandwidth, Middle channel**



Band 17: (Middle Channel)

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
5.0	QPSK	4.549	5.110
	16QAM	4.549	5.090
10.0	QPSK	8.978	9.619
	16QAM	8.978	9.739

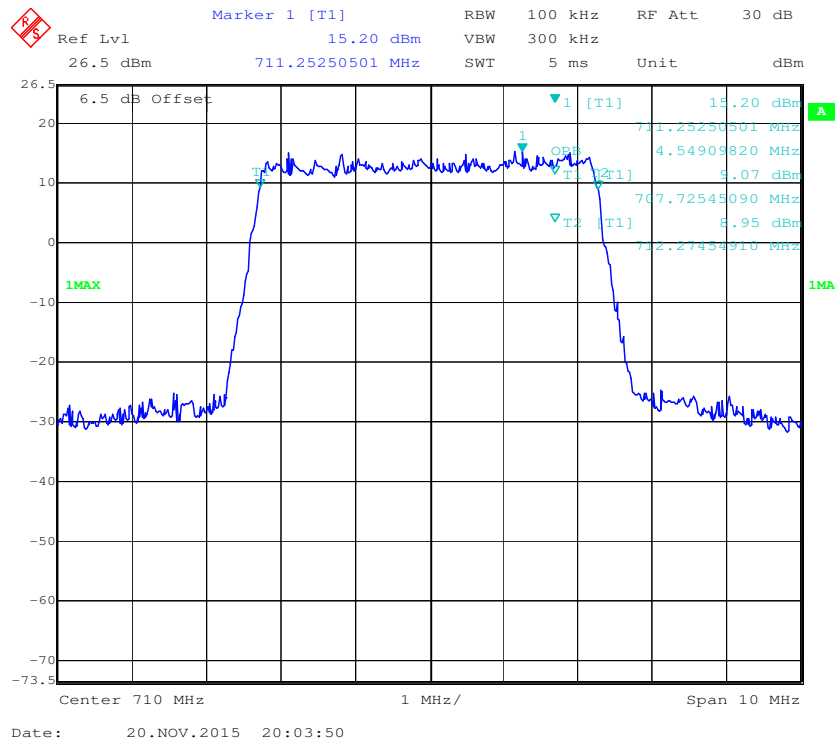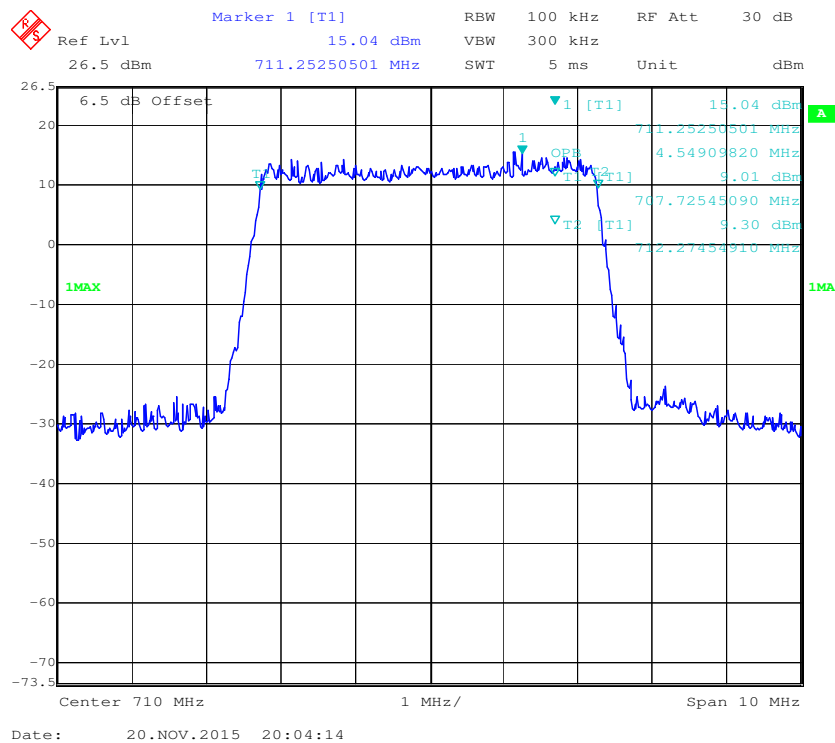QPSK (5.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (5.0 MHz) - 99% Occupied Bandwidth, Middle channel**

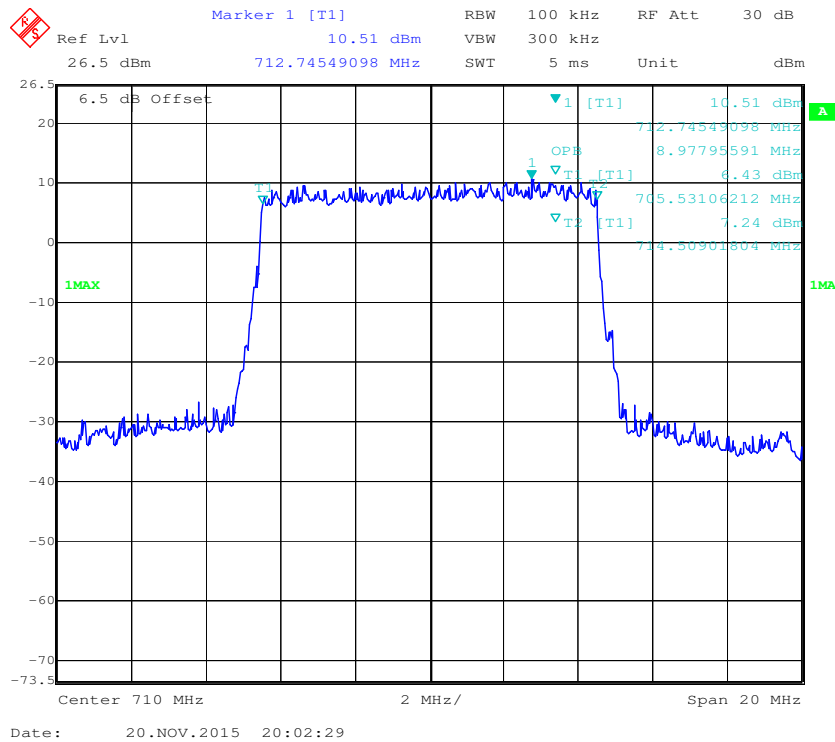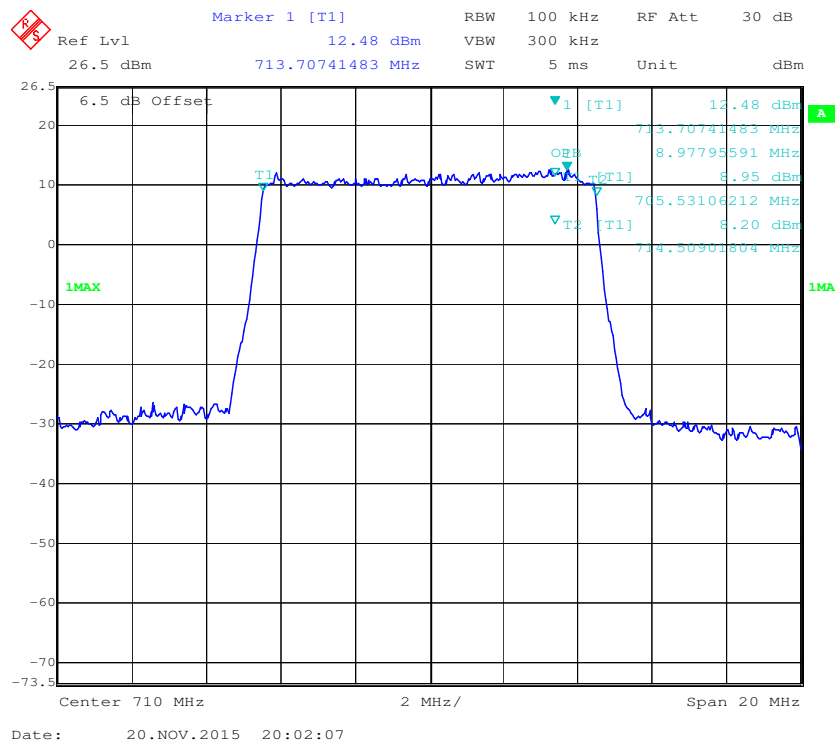QPSK (10.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (10.0 MHz) - 99% Occupied Bandwidth, Middle channel**

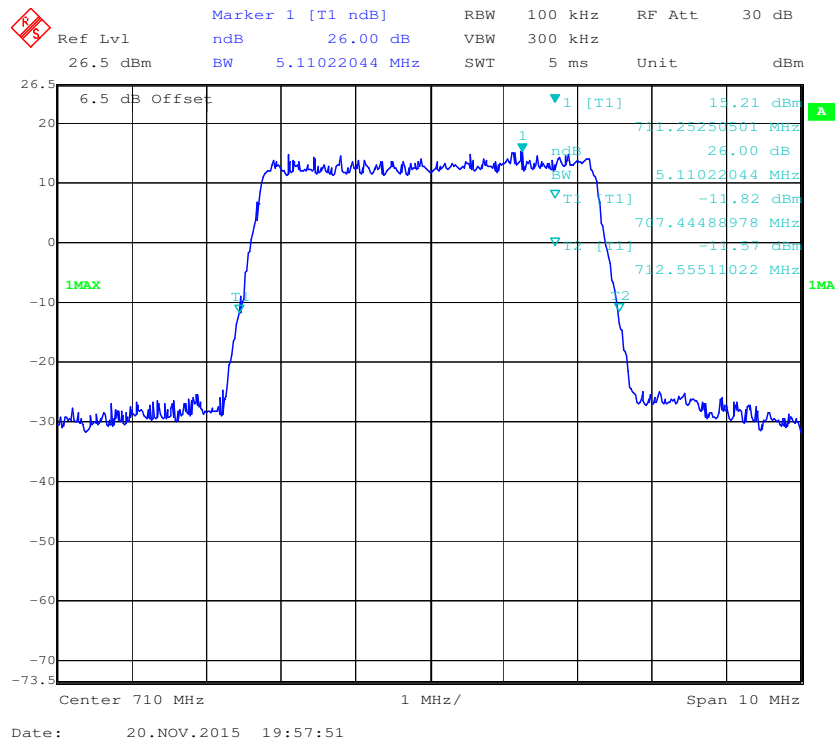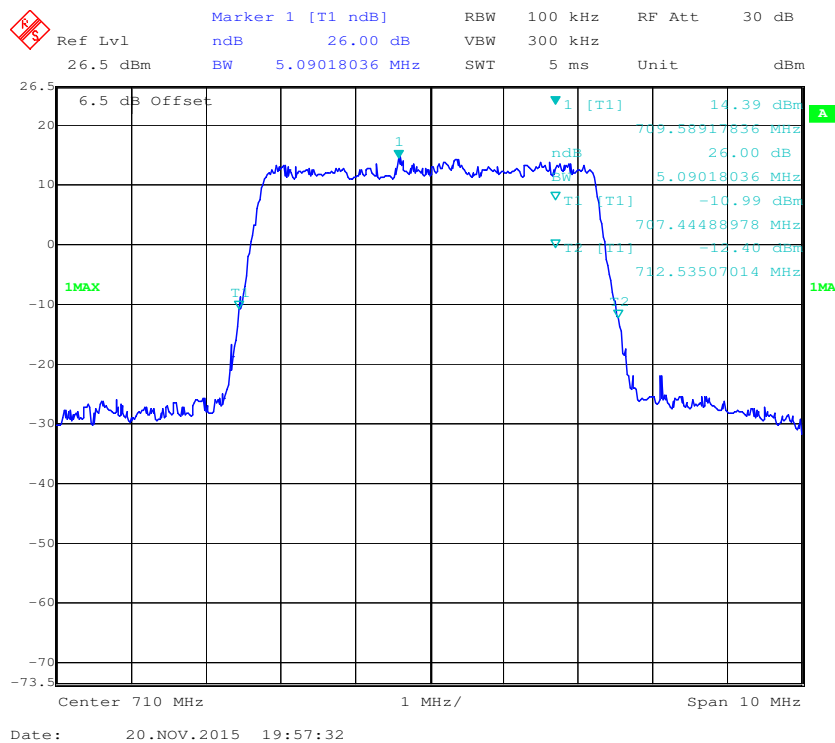QPSK (5.0 MHz) - 26 dB Bandwidth, Middle channel**16-QAM (5.0 MHz) - 26 dB Bandwidth, Middle channel**

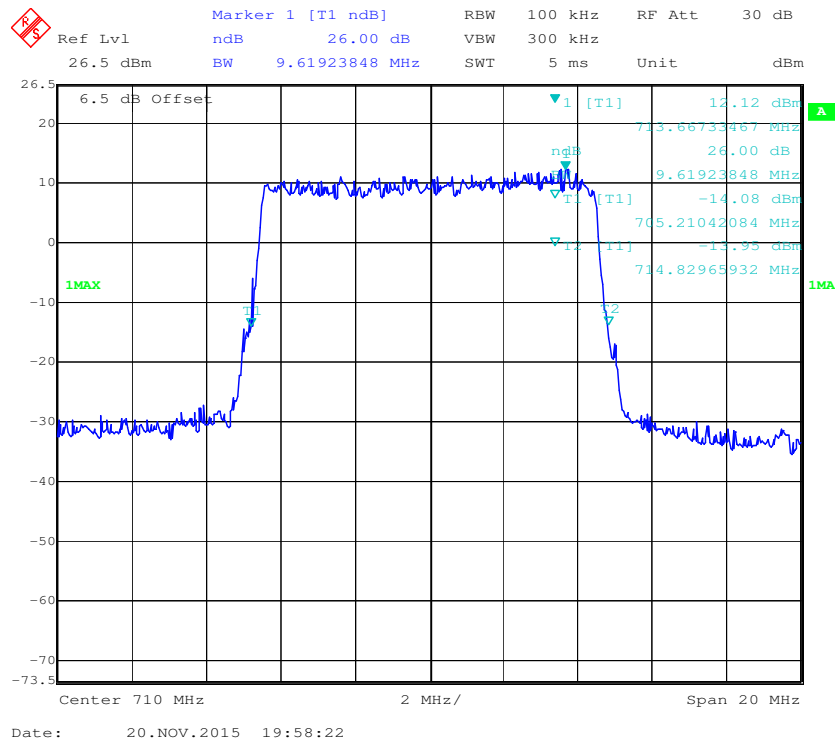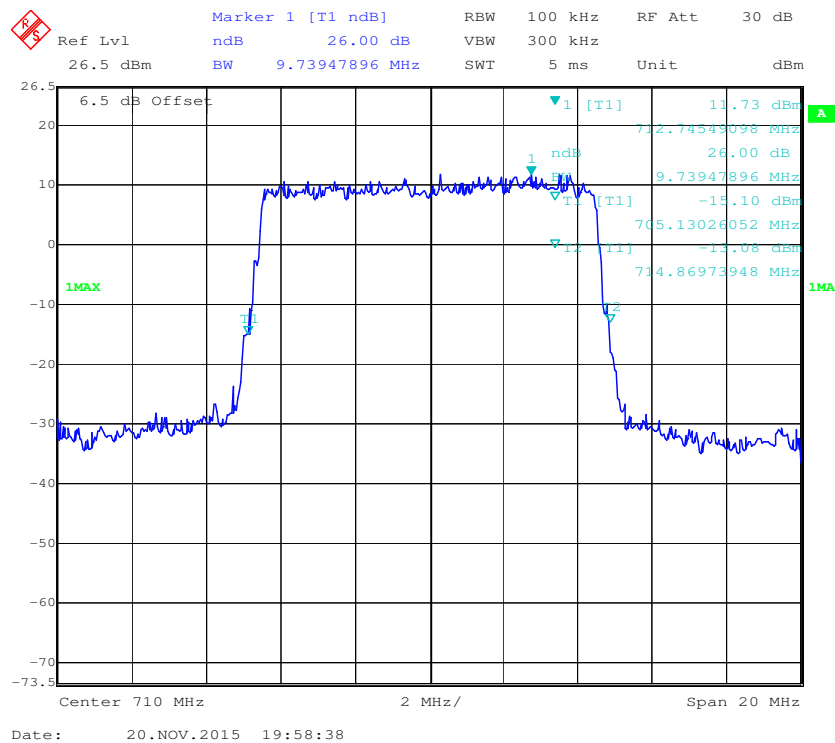QPSK (10.0 MHz) - 26 dB Bandwidth, Middle channel**16-QAM (10.0 MHz) - 26 dB Bandwidth, Middle channel**

FCC §2.1051, §22.917(a) & §24.238(a) & §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standards

FCC §2.1051, §22.917(a) and §24.238(a) and §27.53.

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

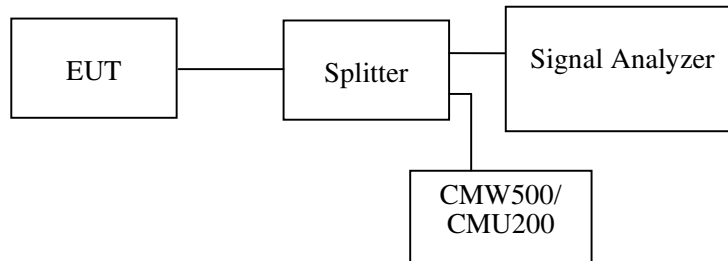

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2014-12-11	2015-12-11
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2014-11-23	2015-11-23
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23
R&S	Wideband Radio Communication tester	CMW500	1201.002K50-146520-wh	2014-11-23	2015-11-23
R&S	Wideband Radio Communication tester	CMW500	1201.002K50-146520-wh	2015-11-23	2016-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	24~25 °C
Relative Humidity:	48~50 %
ATM Pressure:	100.0~101.0 kPa

The testing was performed by Haiguo Li on 2015-11-20 and 2015-12-12.


Please refer to the following plots.

Cellular Band (Part 22H)


30 MHz – 1 GHz (GSM Mode)

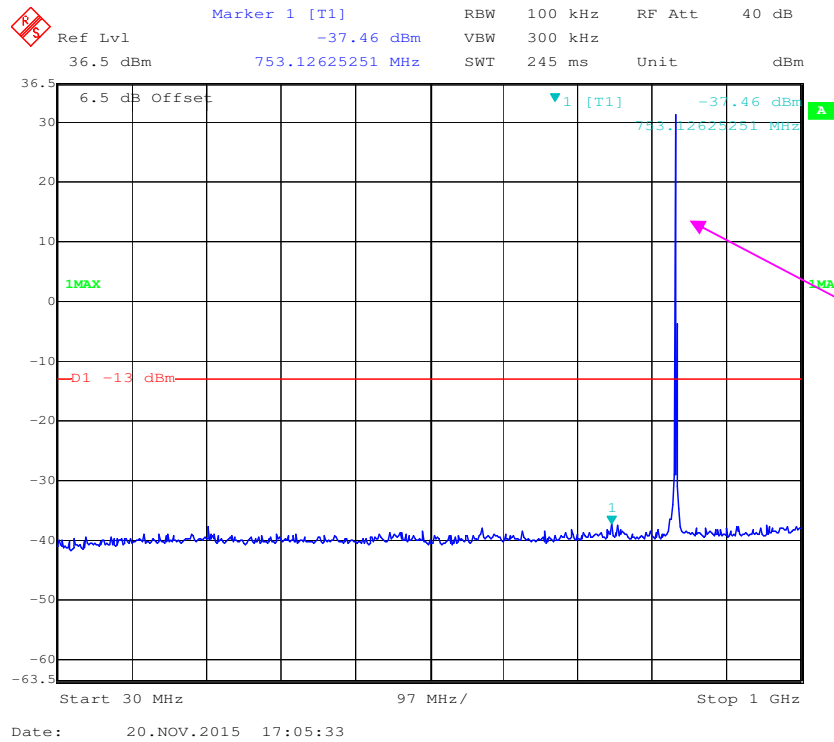


1 GHz – 10 GHz (GSM Mode)

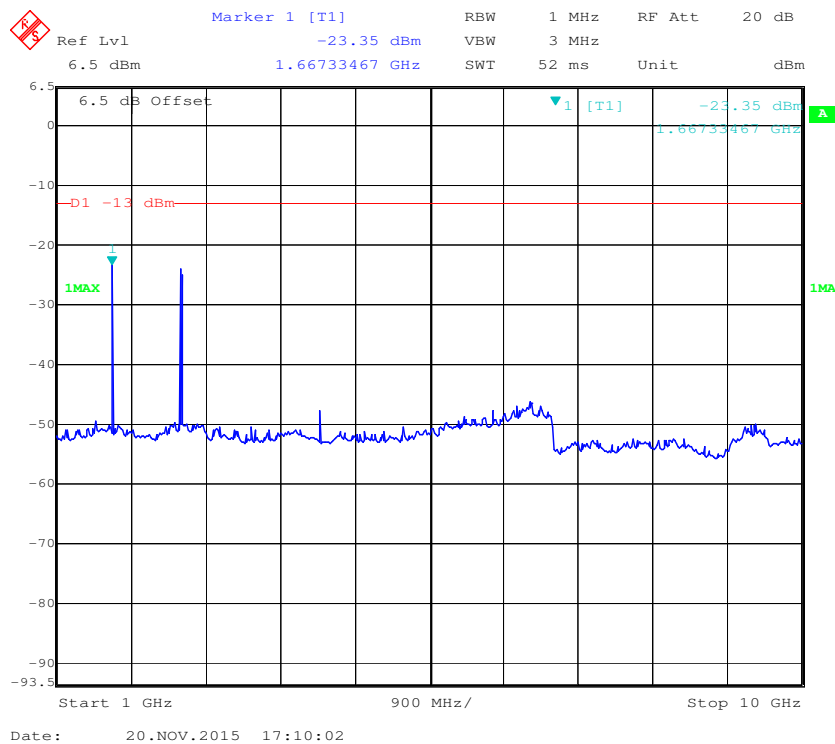

30 MHz – 1 GHz (WCDMA Mode)

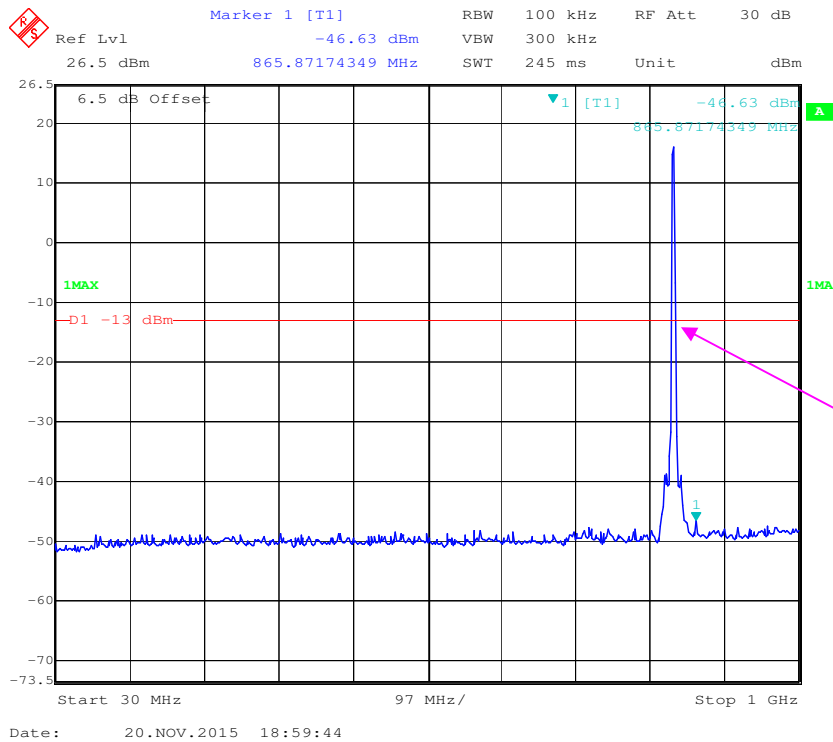


1 GHz – 10 GHz (WCDMA Mode)

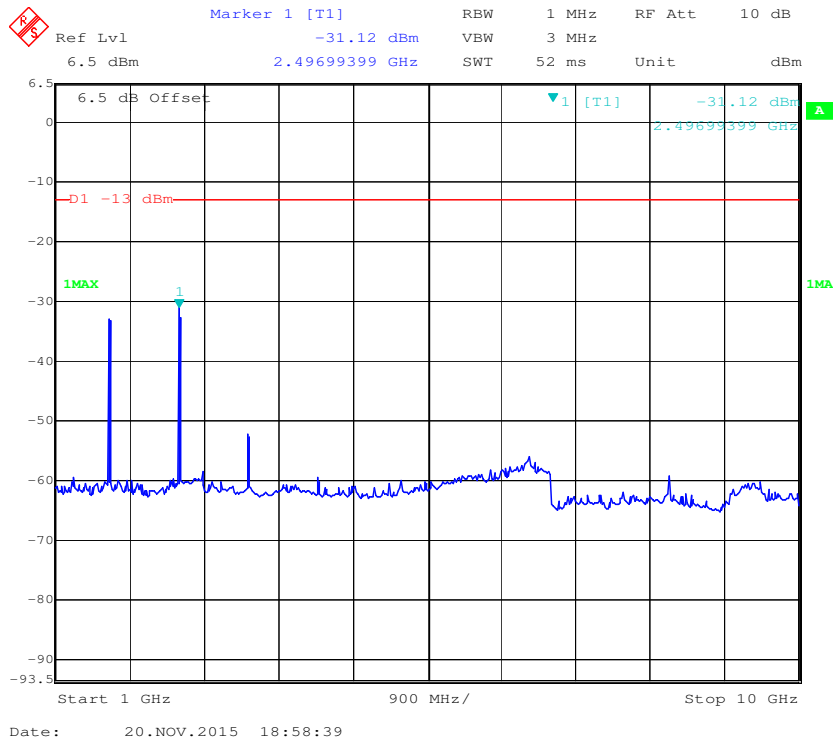


PCS Band (Part 24E)



30 MHz – 1 GHz (GSM Mode)

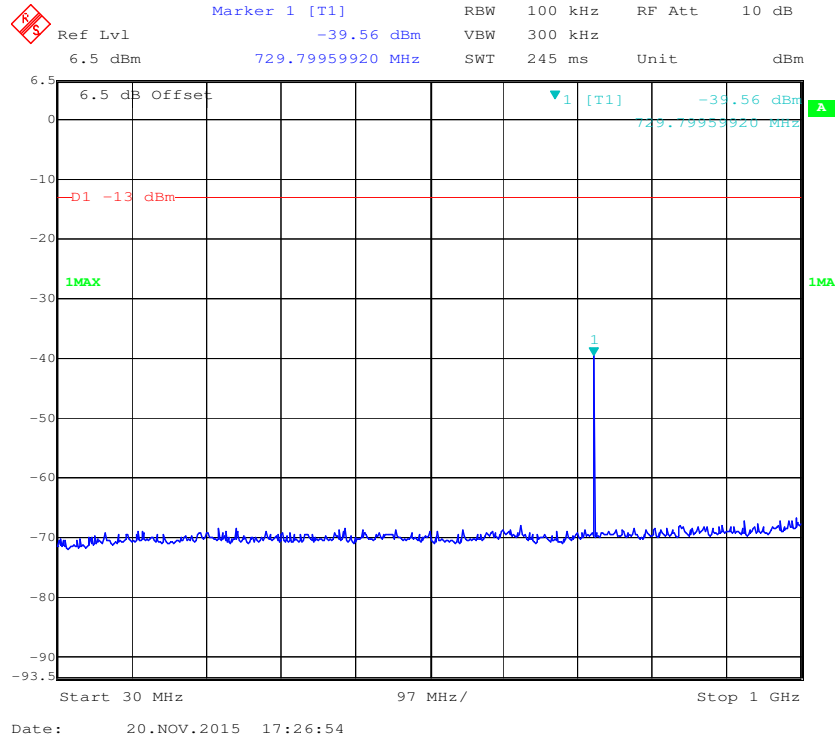


1 GHz – 2 GHz (GSM Mode)

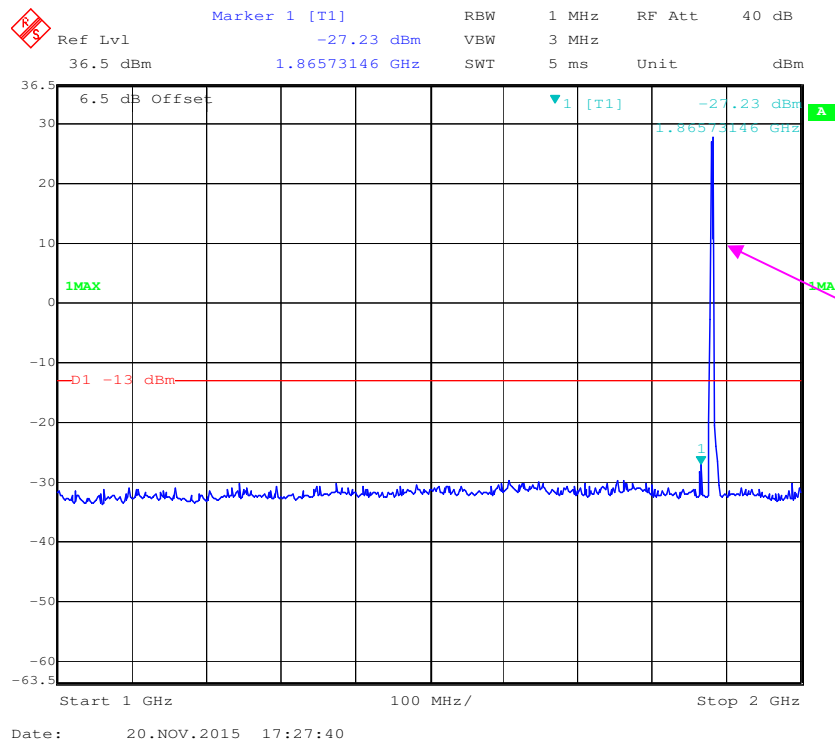


Fundamental test

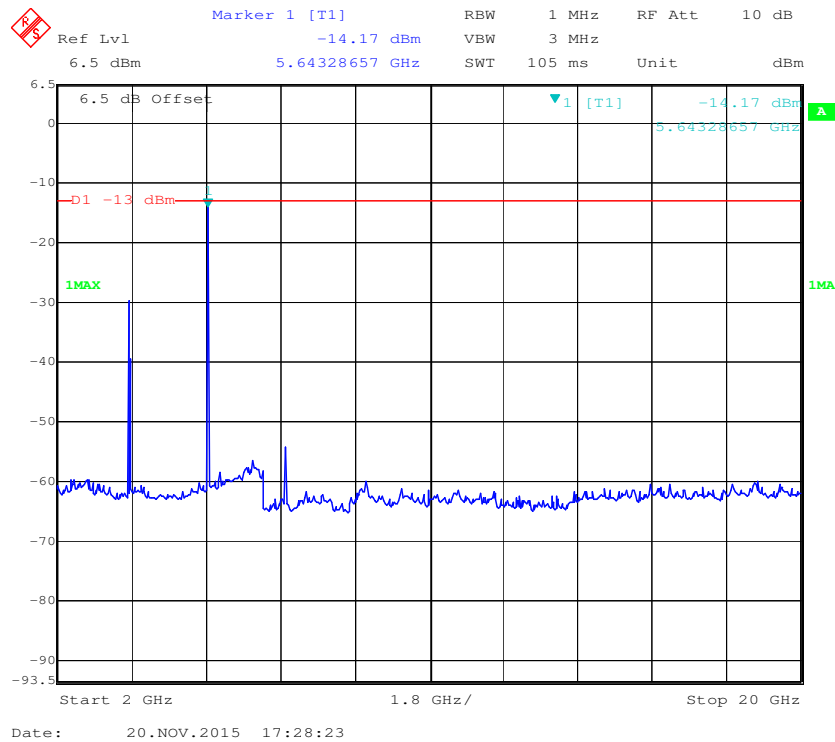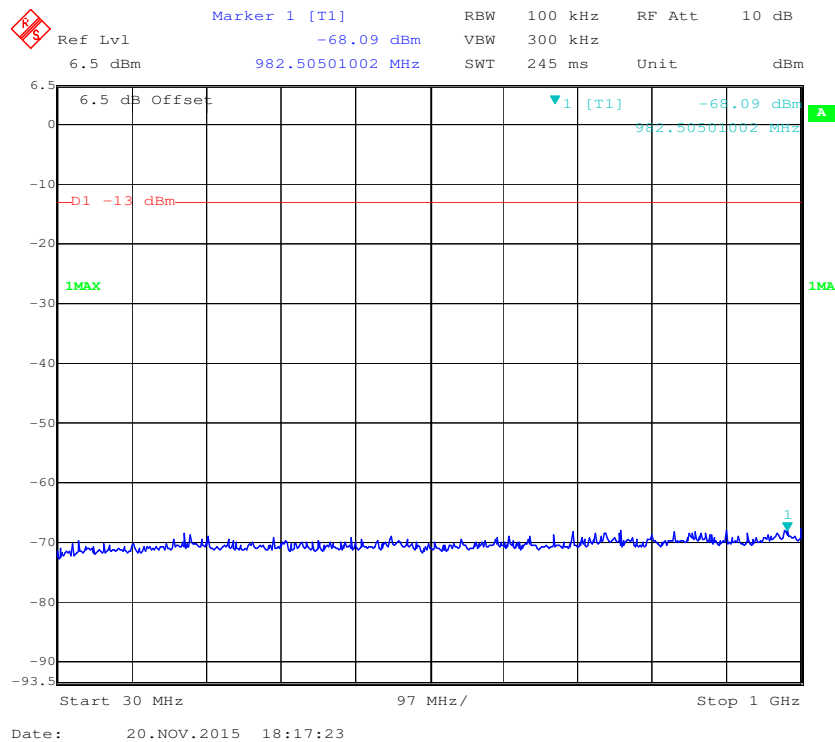2 GHz – 20 GHz (GSM Mode)**30 MHz – 1 GHz (WCDMA Mode)**

1 GHz – 2 GHz (WCDMA Mode)

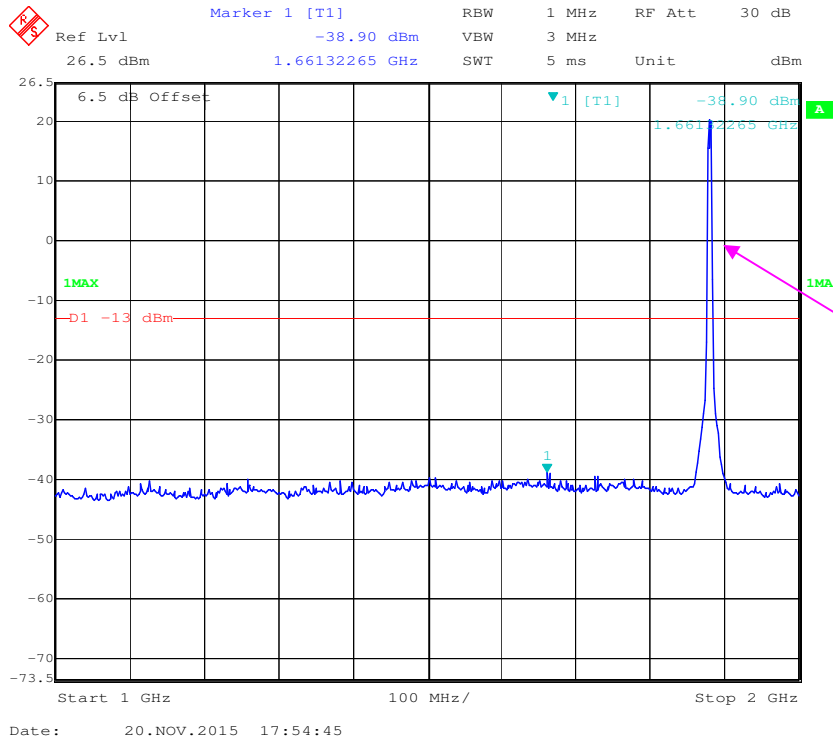


2 GHz – 20 GHz (WCDMA Mode)

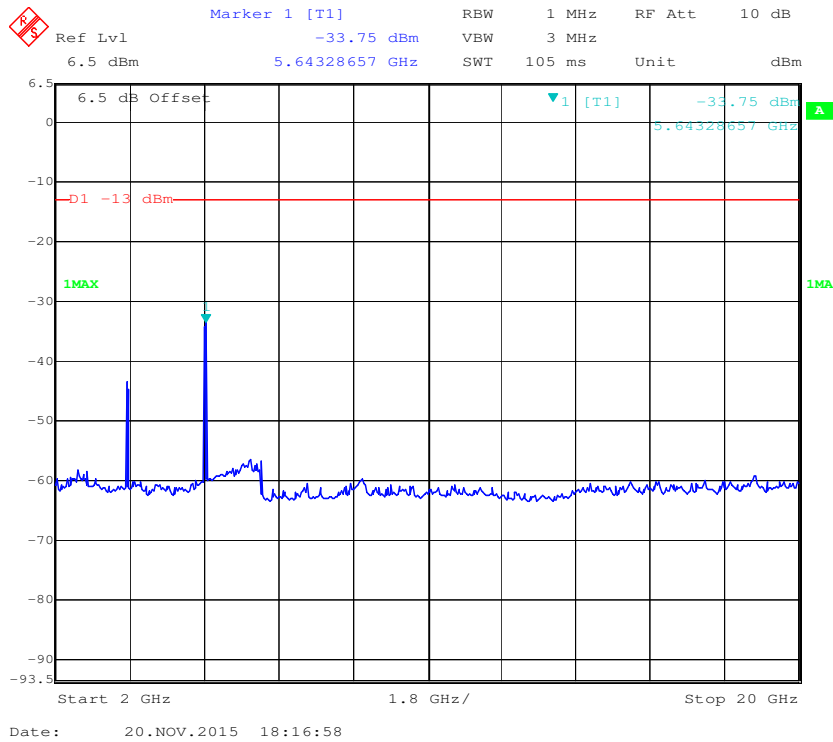


AWS Band (Part 27)


30 MHz – 1 GHz (WCDMA Mode)

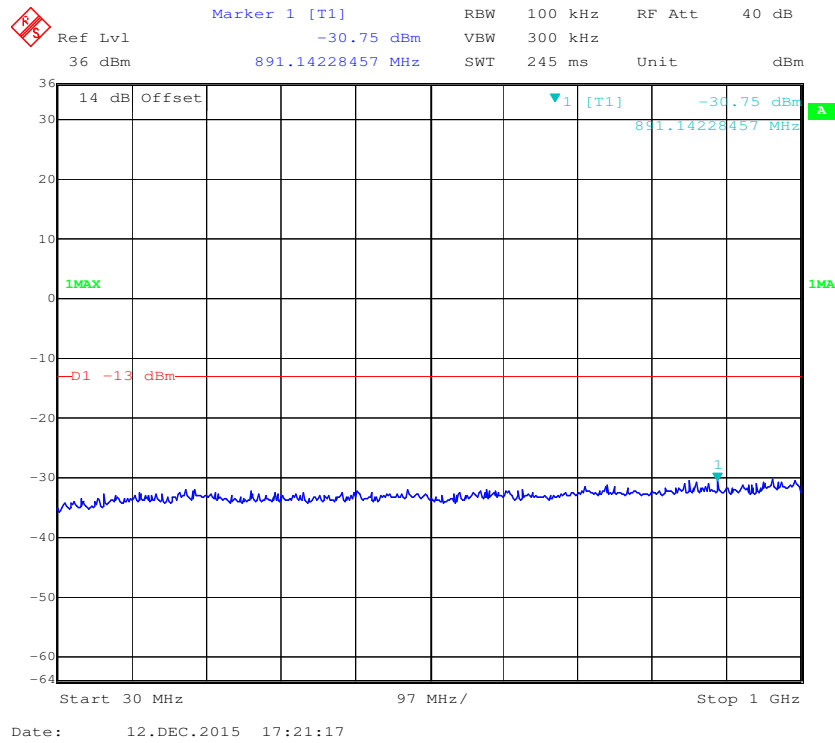

1 GHz – 2 GHz (WCDMA Mode)

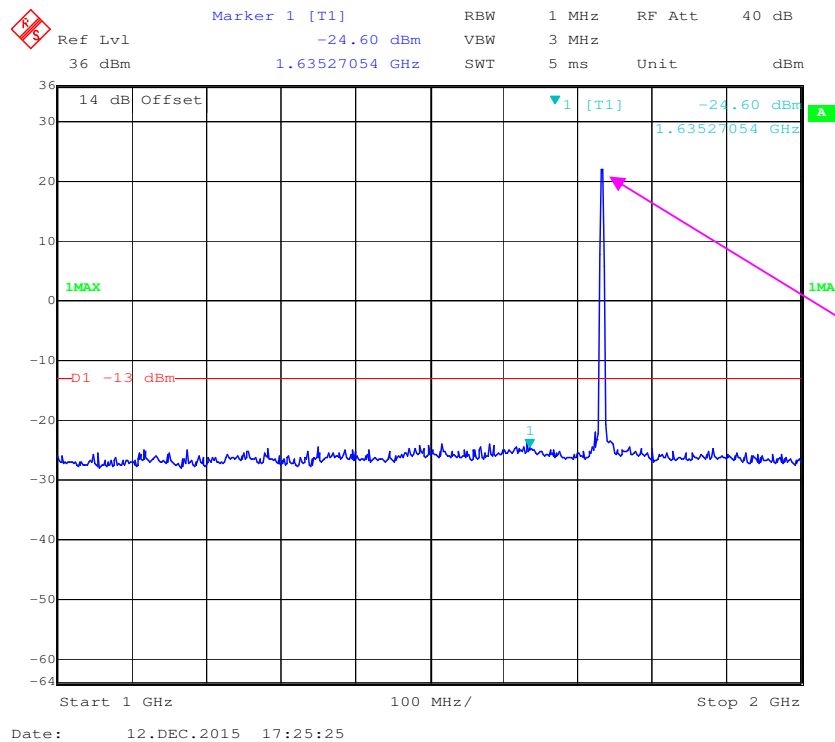


2 GHz – 20 GHz (WCDMA Mode)

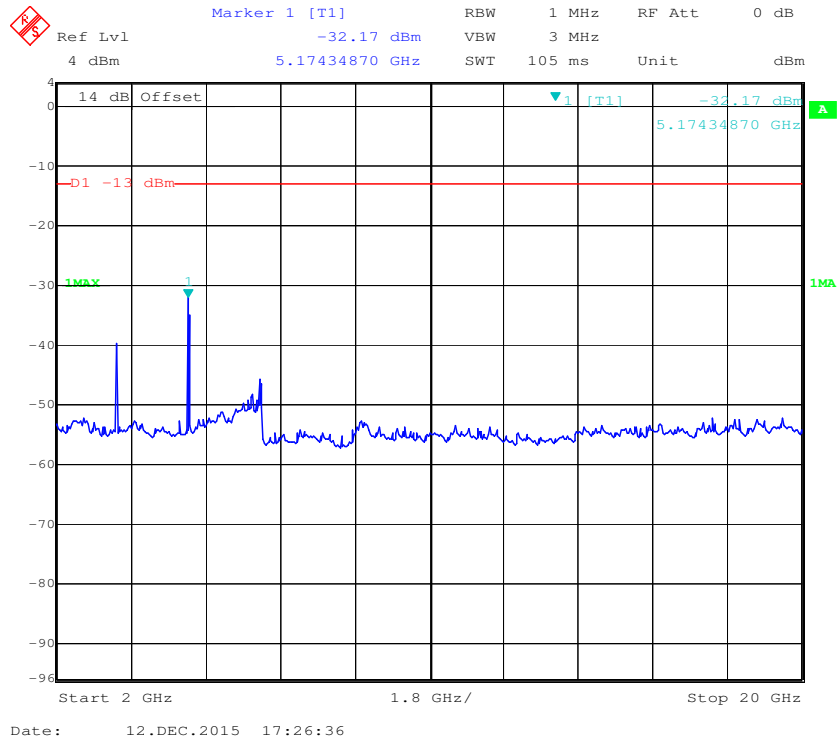


LTE Band 2:



30 MHz - 1 GHz (1.4 MHz, Middle Channel)

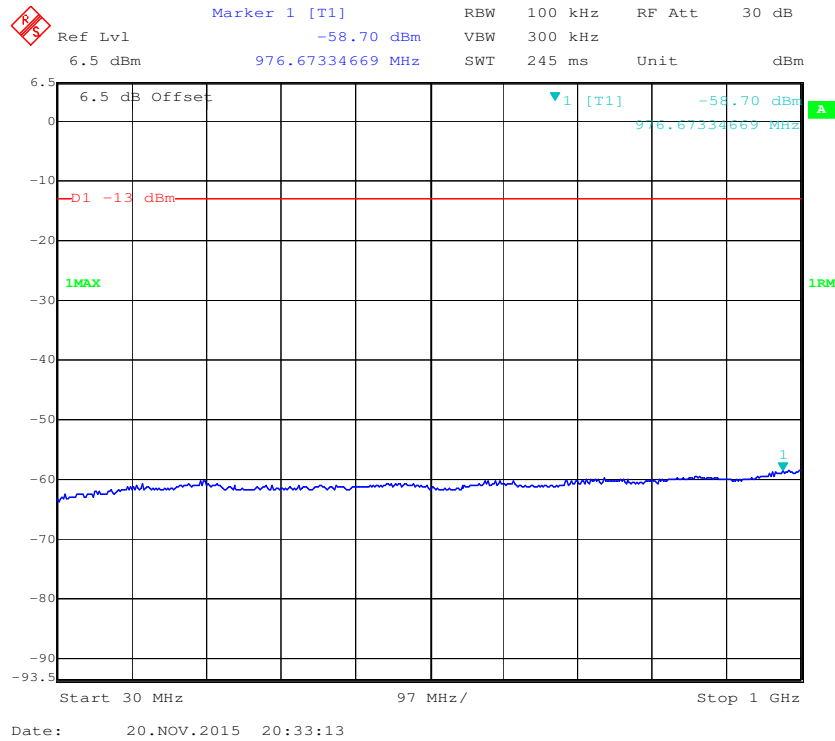


1 GHz - 2 GHz (1.4 MHz, Middle Channel)

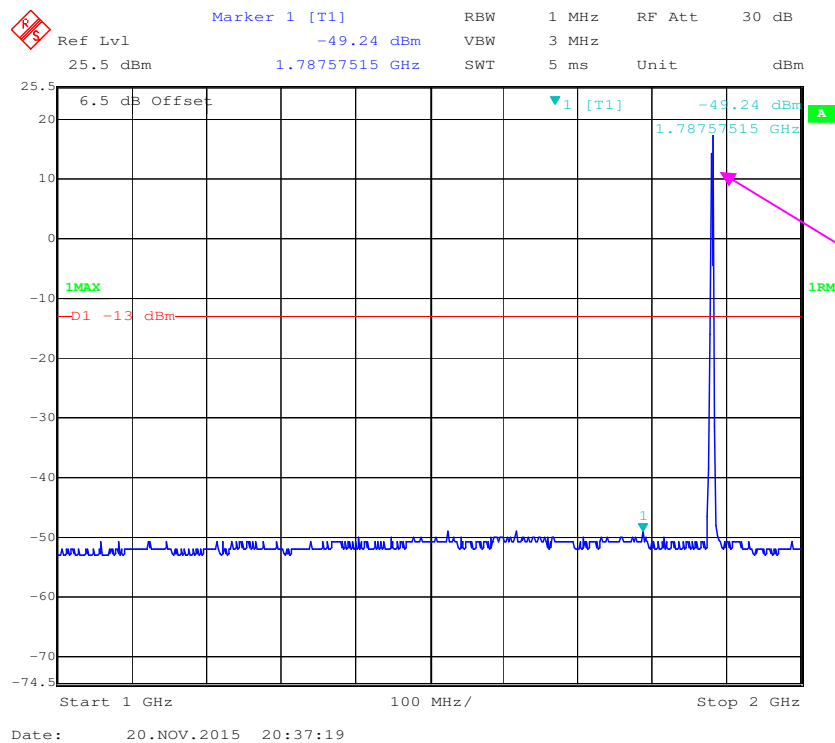


Fundamental test

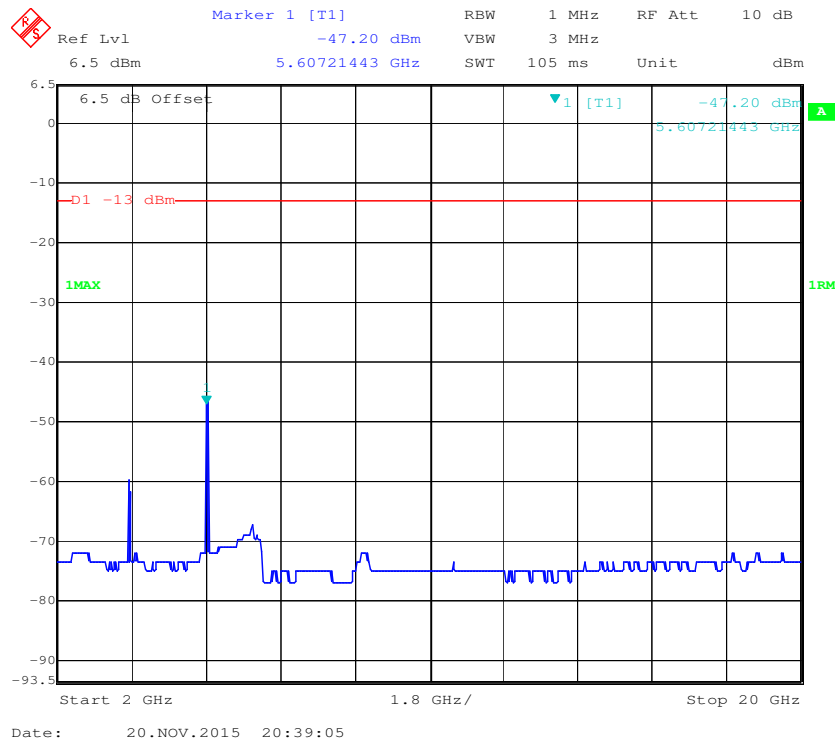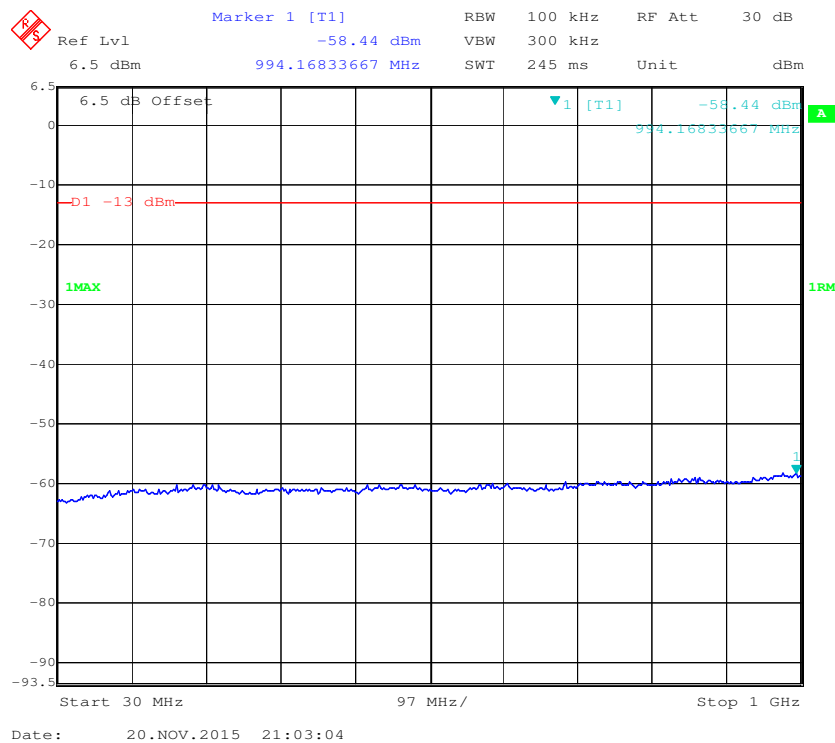2 GHz – 20 GHz (1.4 MHz, Middle Channel)**30 MHz - 1 GHz (3.0 MHz, Middle Channel)**


1 GHz – 2 GHz (3.0 MHz, Middle Channel)

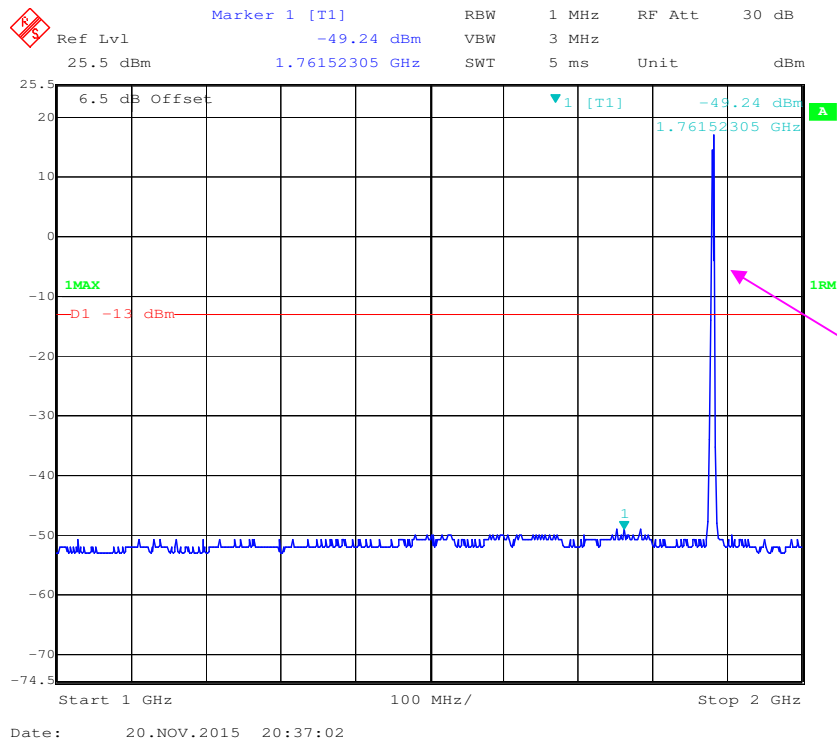


2 GHz – 20 GHz (3.0 MHz, Middle Channel)

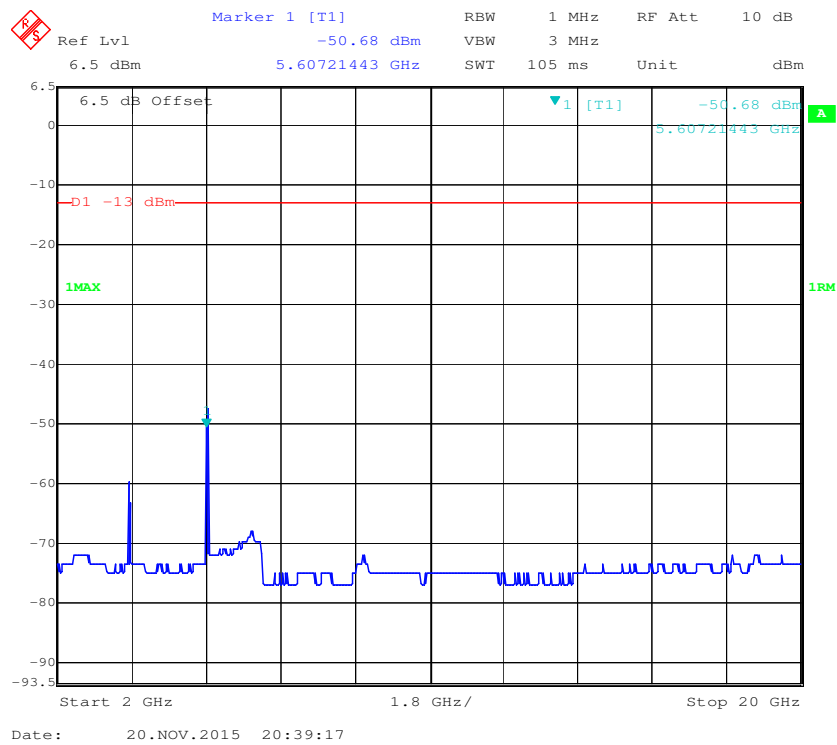


30 MHz - 1 GHz (5.0 MHz, Middle Channel)

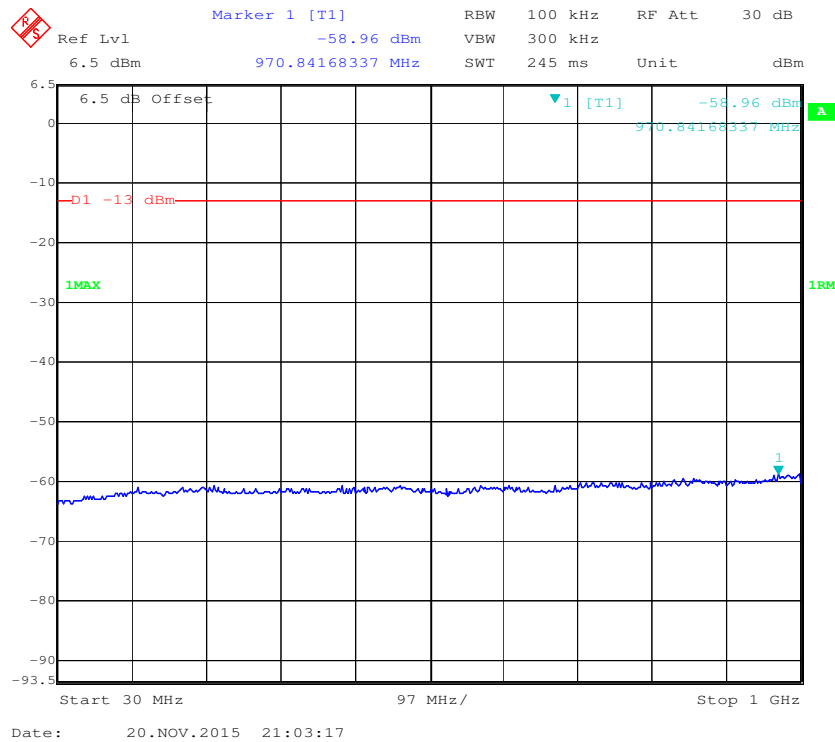


1 GHz - 2 GHz (5.0 MHz, Middle Channel)

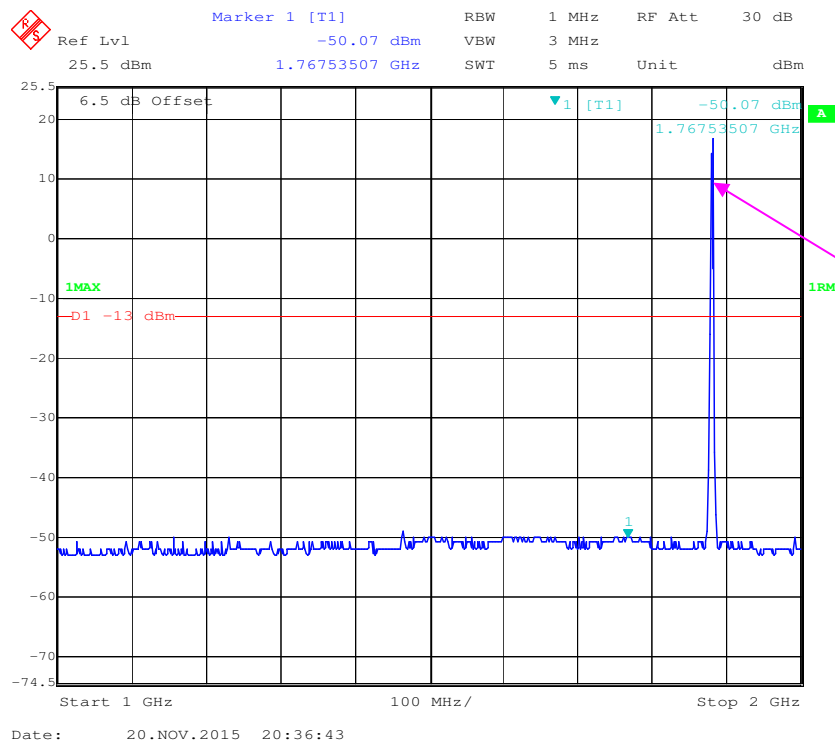


2 GHz – 20 GHz (5.0 MHz, Middle Channel)

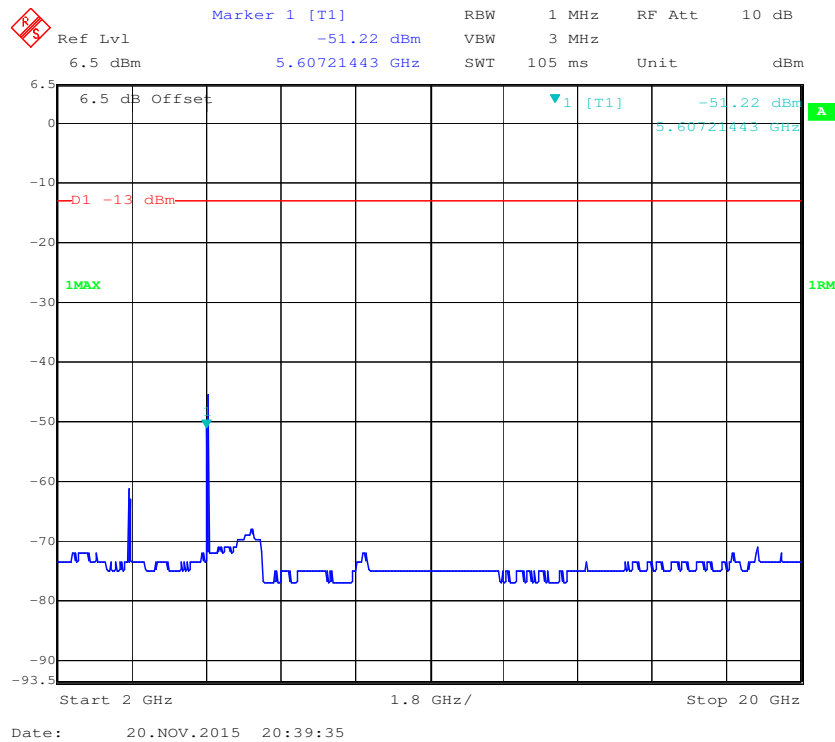


30 MHz - 1 GHz (10.0 MHz, Middle Channel)

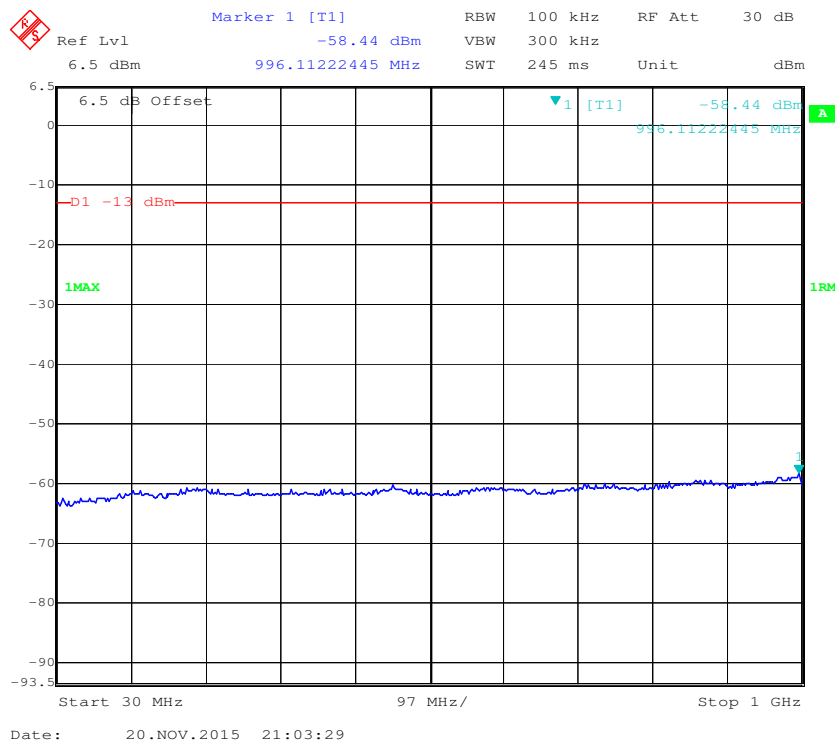


1 GHz – 2 GHz (10.0 MHz, Middle Channel)

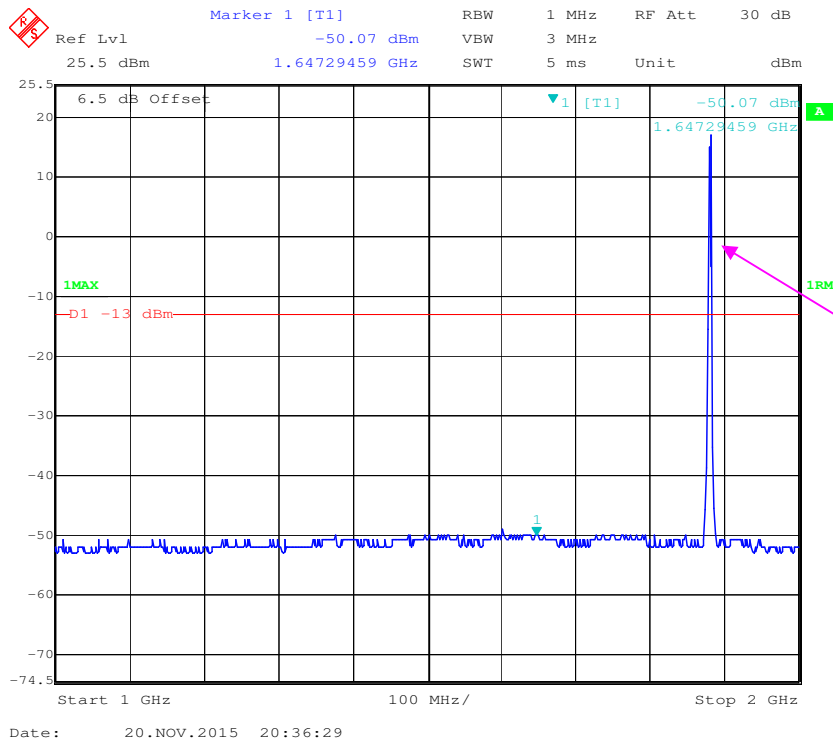


2 GHz – 20 GHz (10.0 MHz, Middle Channel)

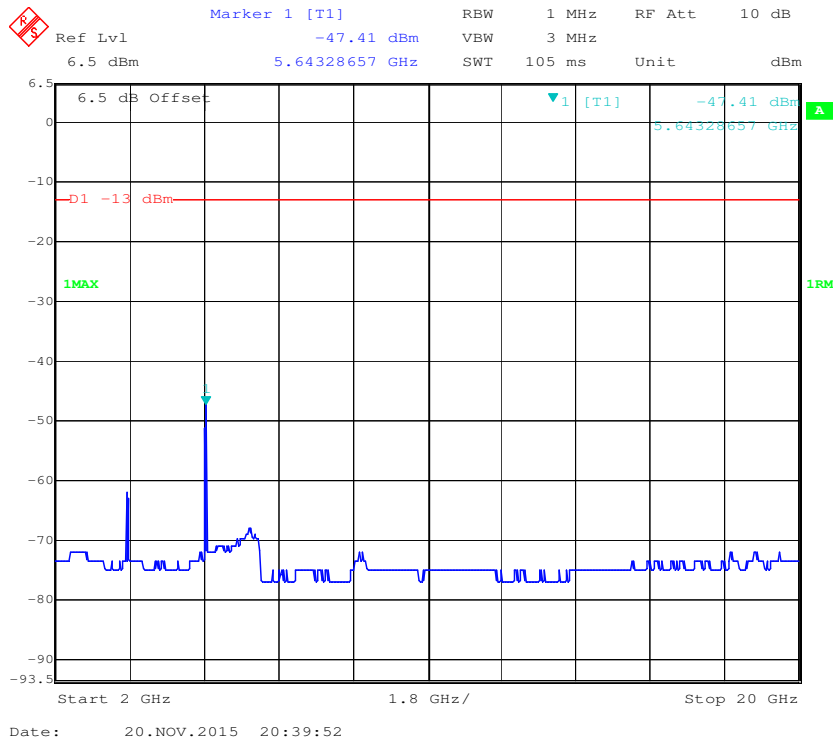


30 MHz - 1 GHz (15.0 MHz, Middle Channel)

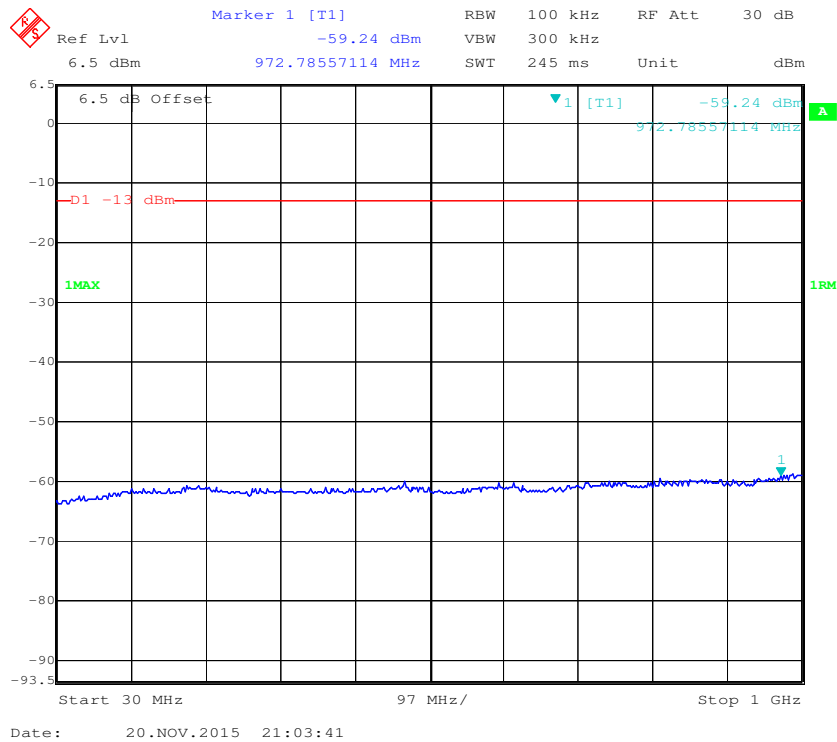


1 GHz - 2 GHz (15.0 MHz, Middle Channel)

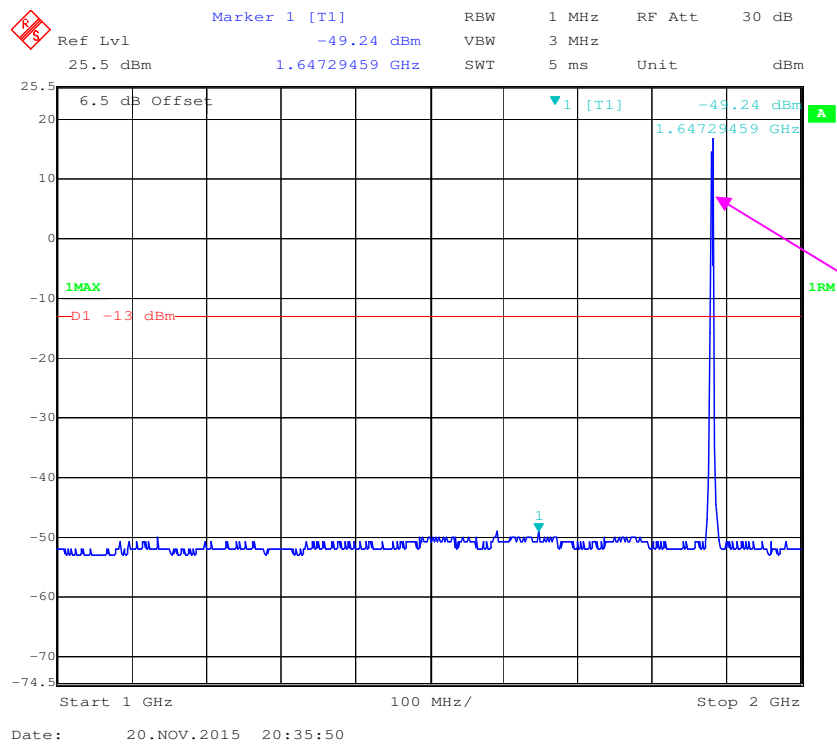


2 GHz –20 GHz (15.0 MHz, Middle Channel)

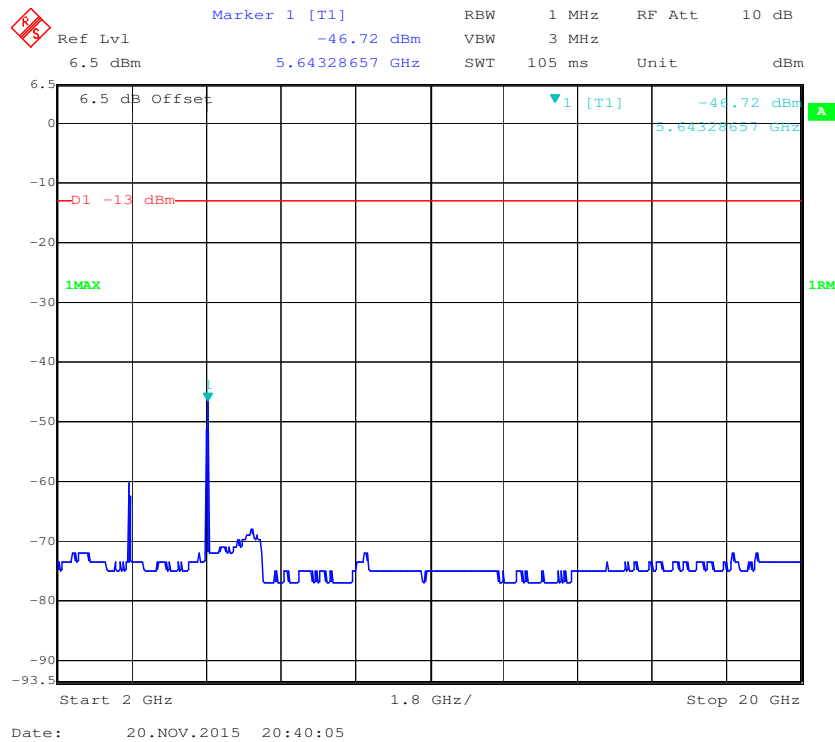


30 MHz - 1 GHz (20.0 MHz, Middle Channel)

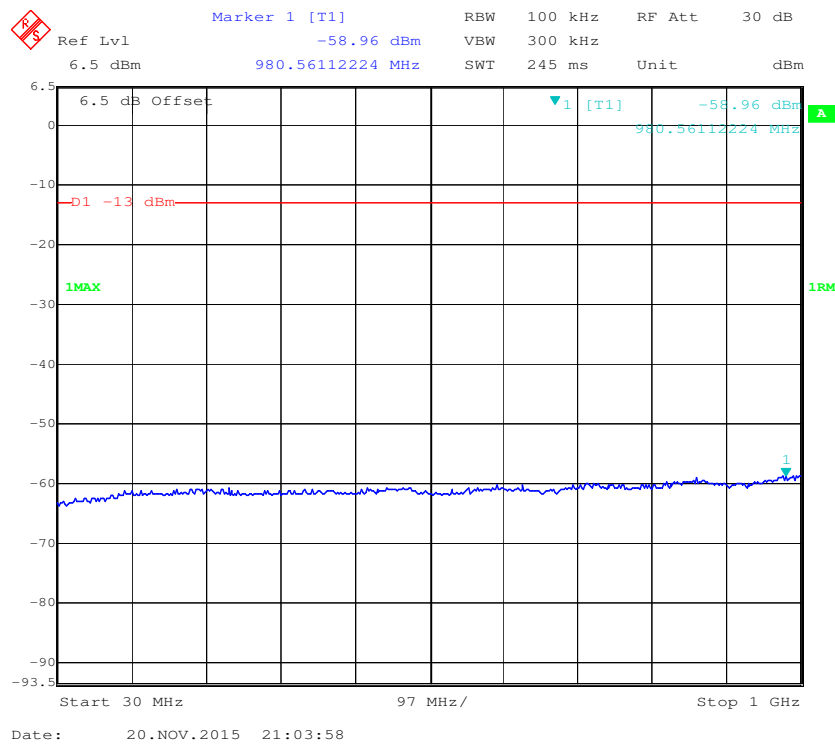

1 GHz –2 GHz (20.0 MHz, Middle Channel)

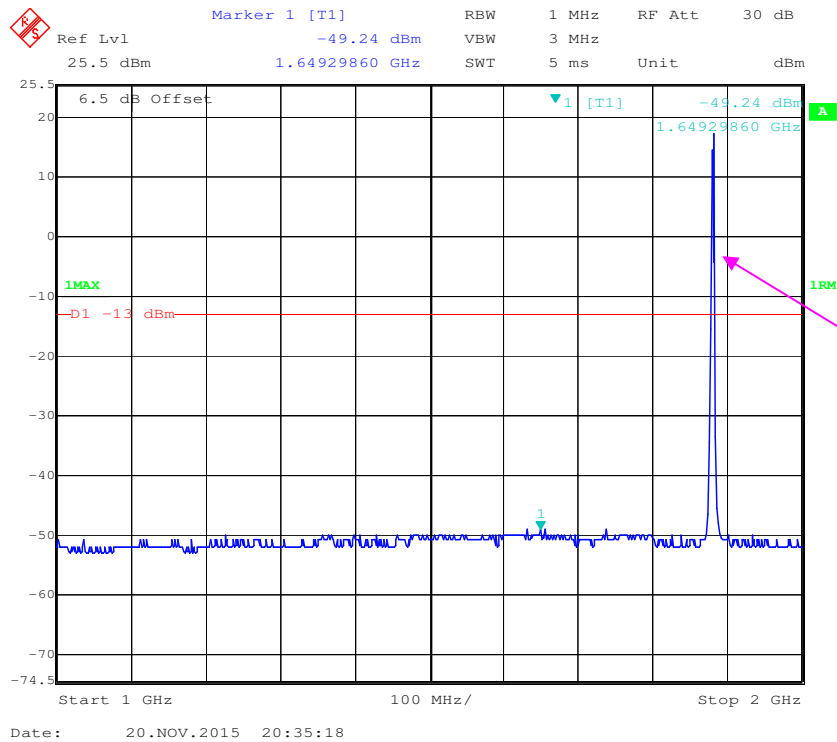


2 GHz –20 GHz (20.0 MHz, Middle Channel)

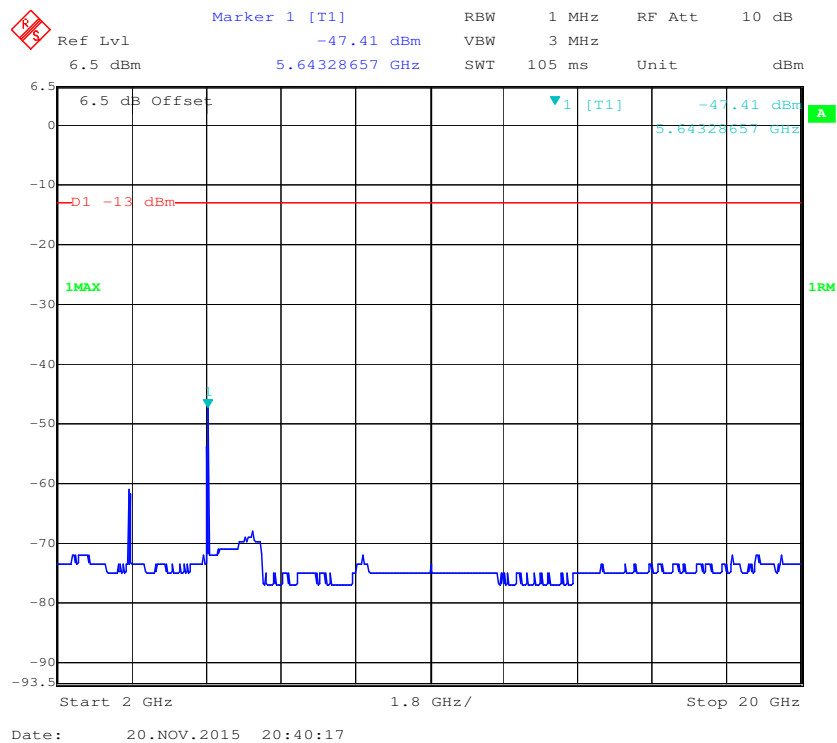


LTE Band 4:

30 MHz - 1 GHz (1.4 MHz, Middle Channel)

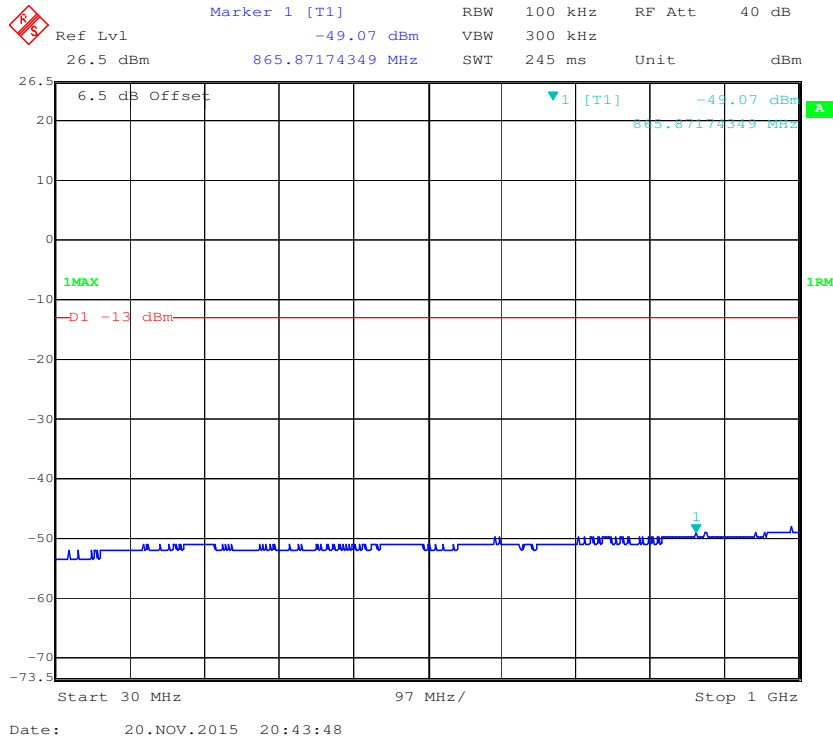


1 GHz - 2 GHz (1.4 MHz, Middle Channel)

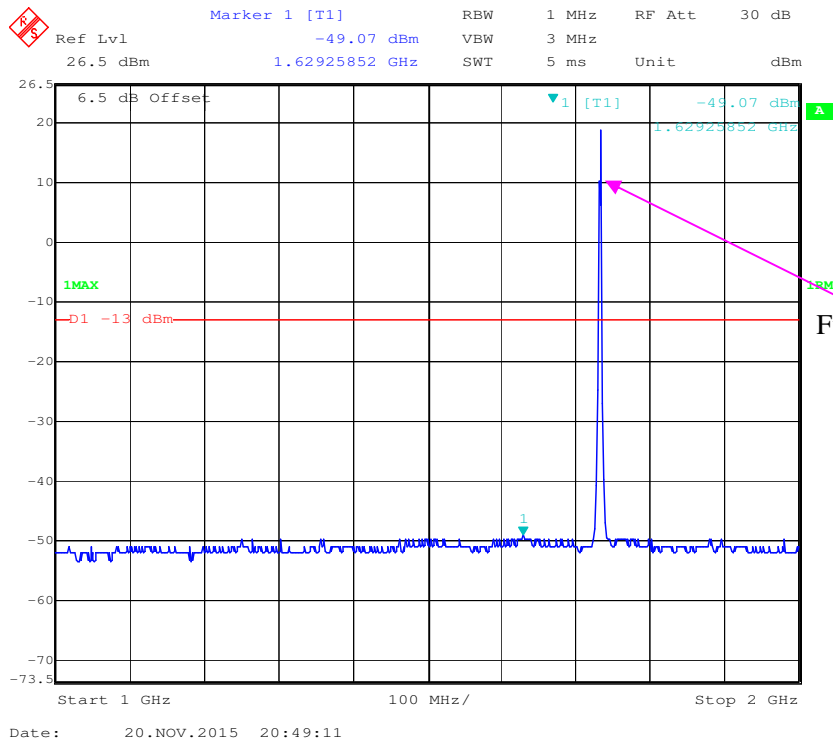


Fundamental test


2 GHz – 20 GHz (1.4 MHz, Middle Channel)

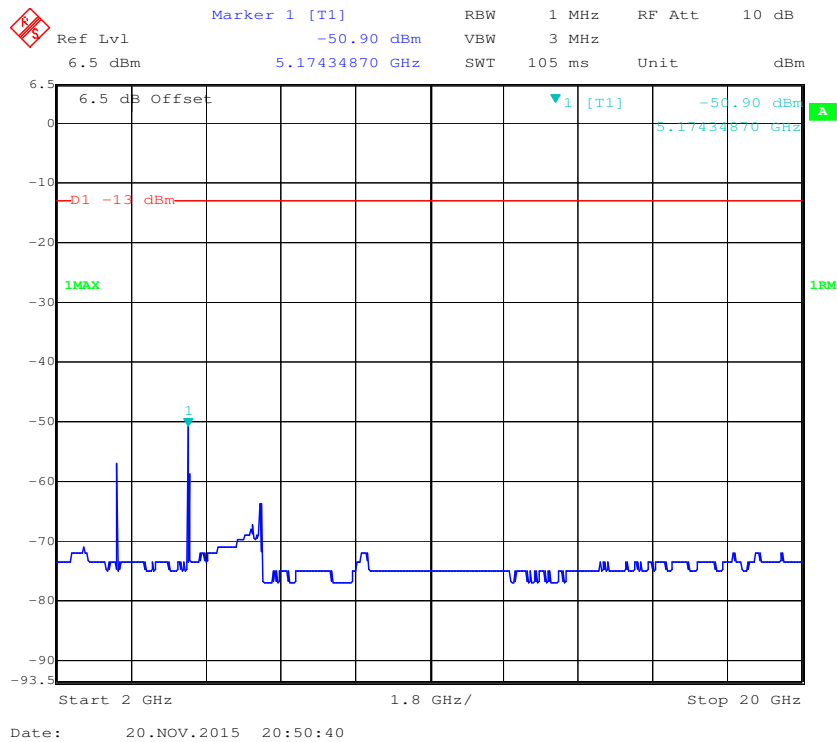


30 MHz - 1 GHz (3.0 MHz, Middle Channel)

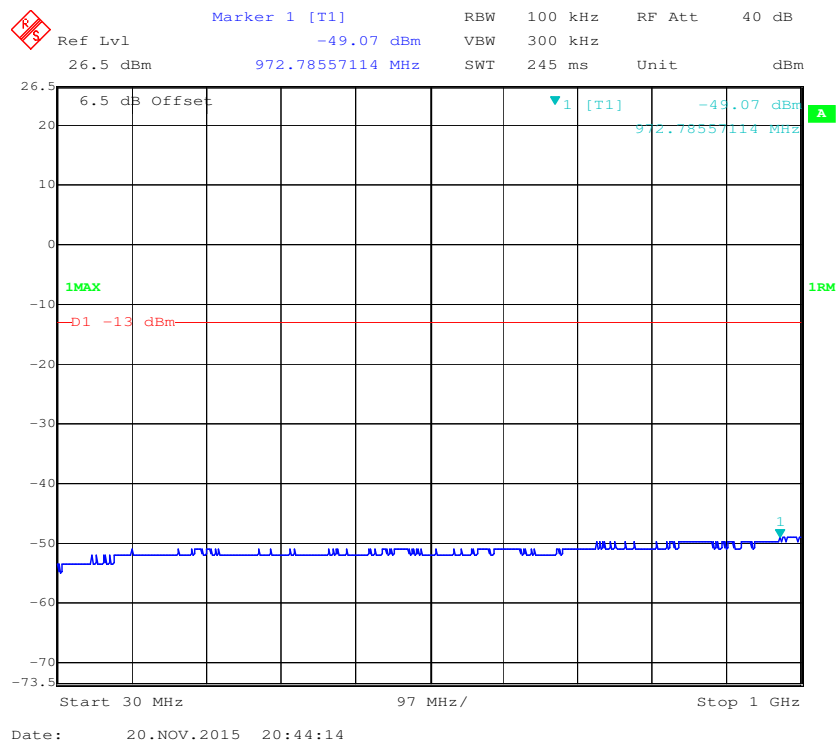


1 GHz – 2 GHz (3.0 MHz, Middle Channel)

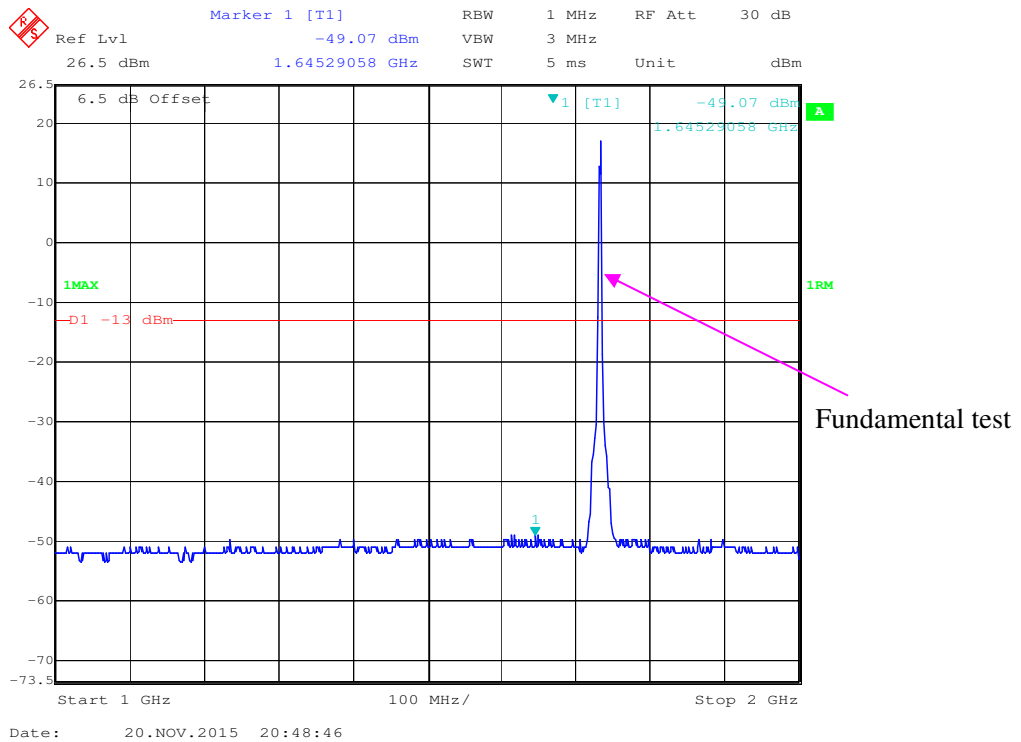


2 GHz – 20 GHz (3.0 MHz, Middle Channel)

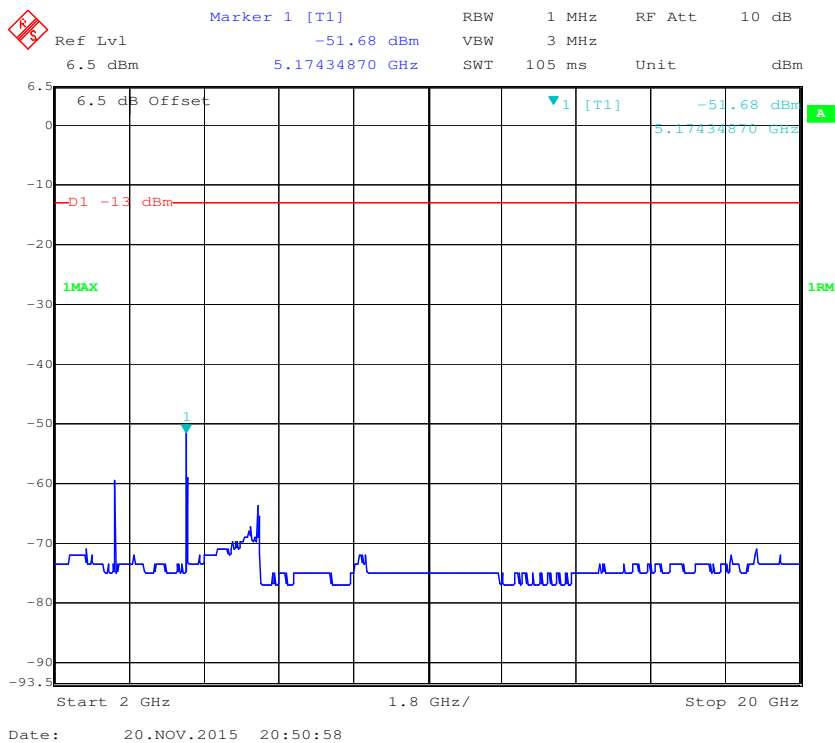


30 MHz - 1 GHz (5.0 MHz, Middle Channel)

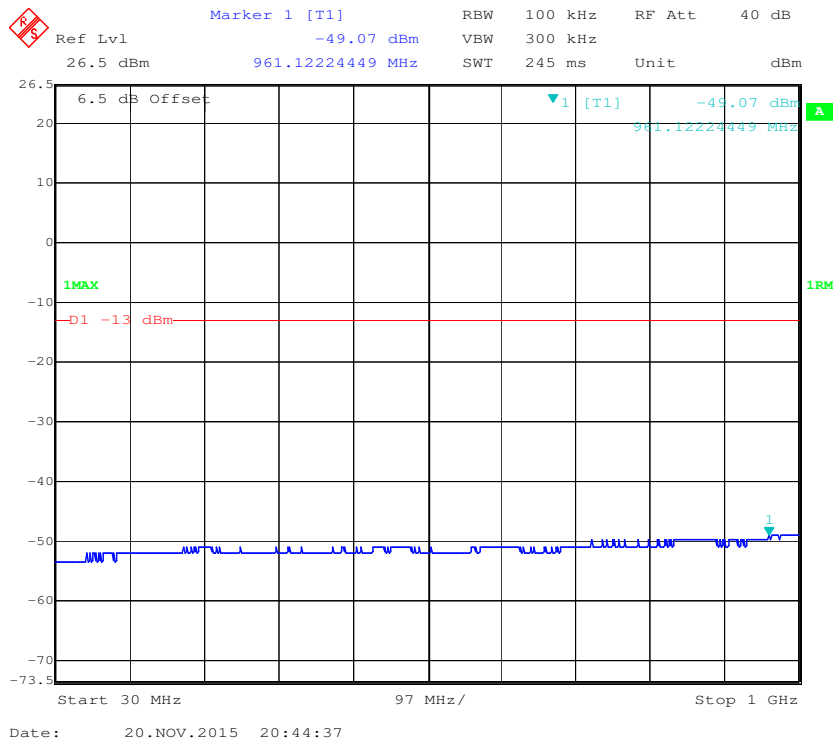


1 GHz - 2 GHz (5.0 MHz, Middle Channel)

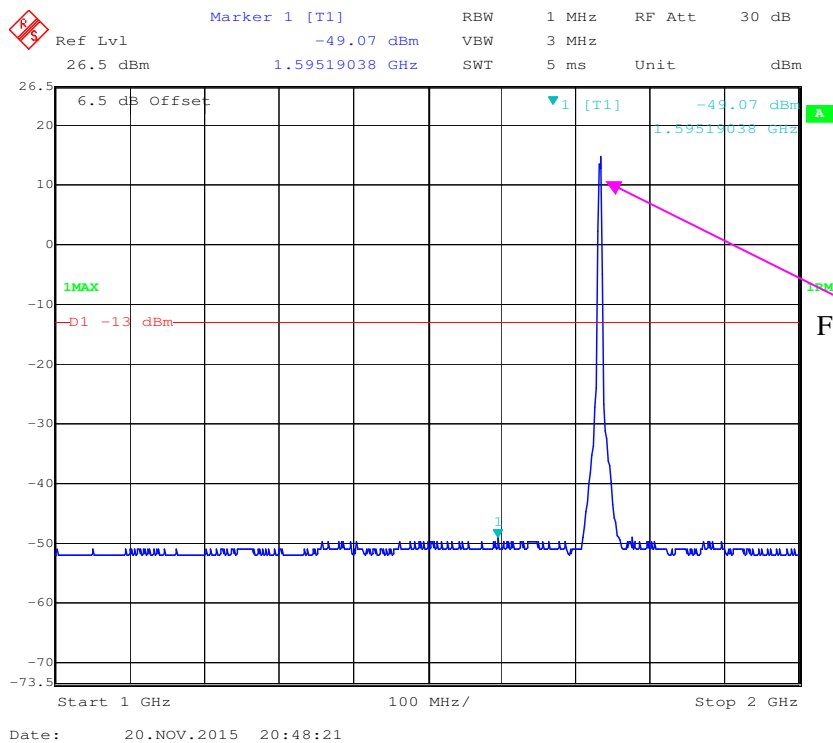


2 GHz – 20 GHz (5.0 MHz, Middle Channel)

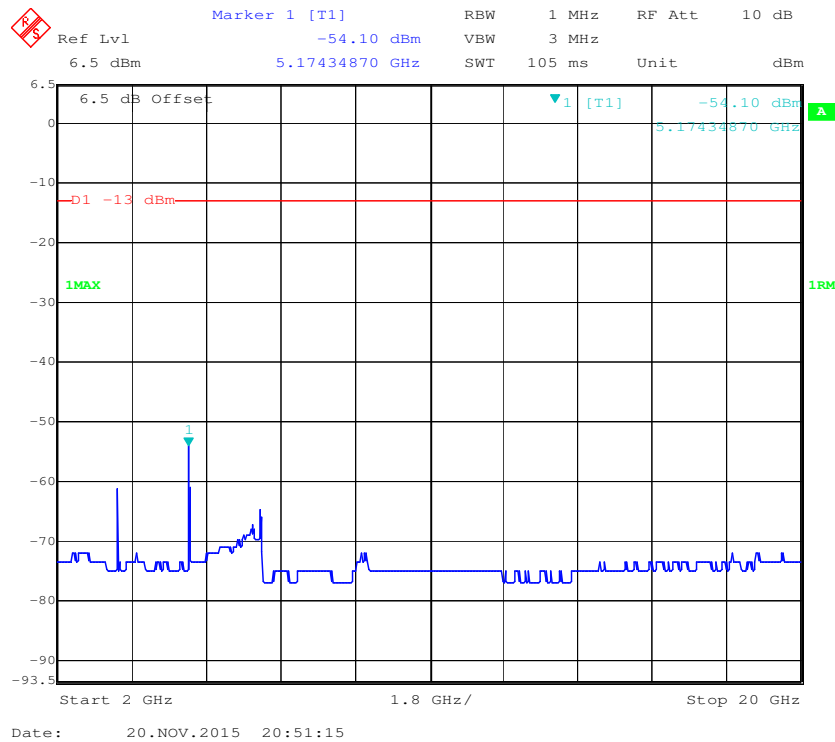


30 MHz - 1 GHz (10.0 MHz, Middle Channel)

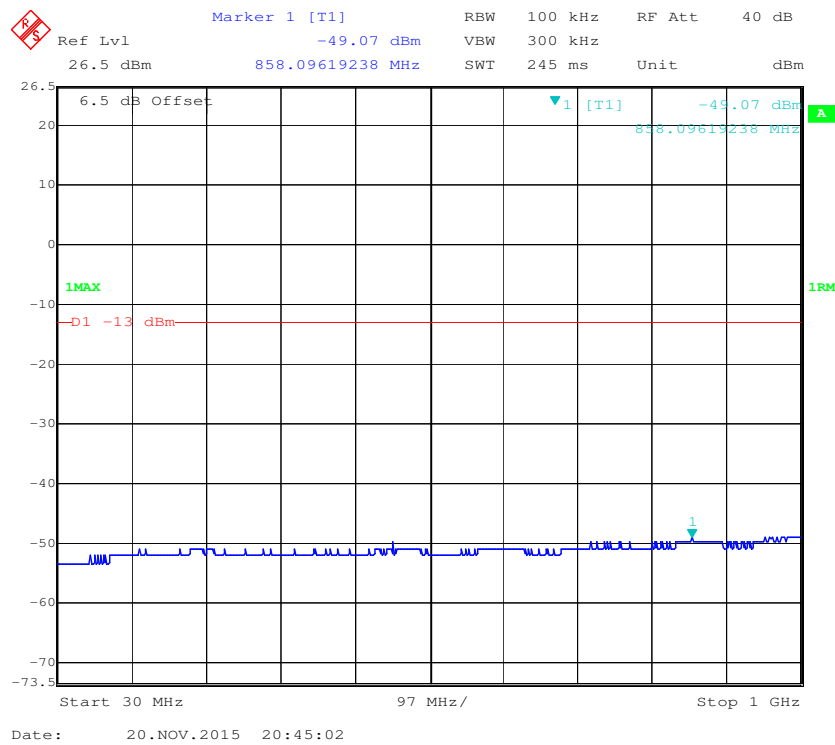


1 GHz – 2 GHz (10.0 MHz, Middle Channel)

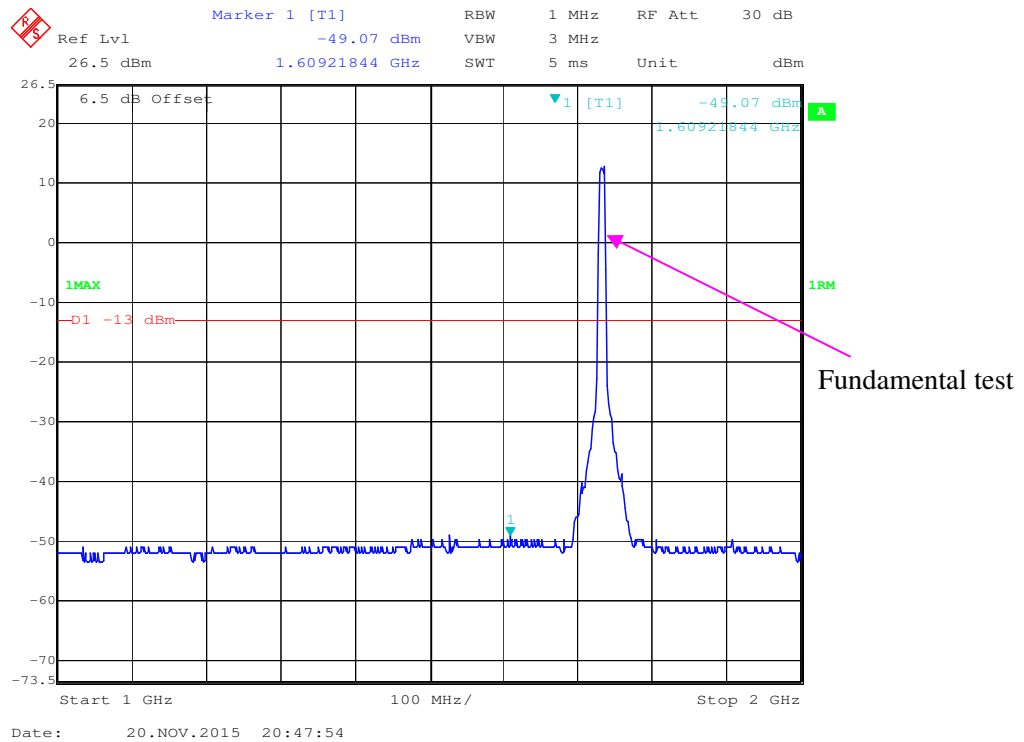


2 GHz – 20 GHz (10.0 MHz, Middle Channel)

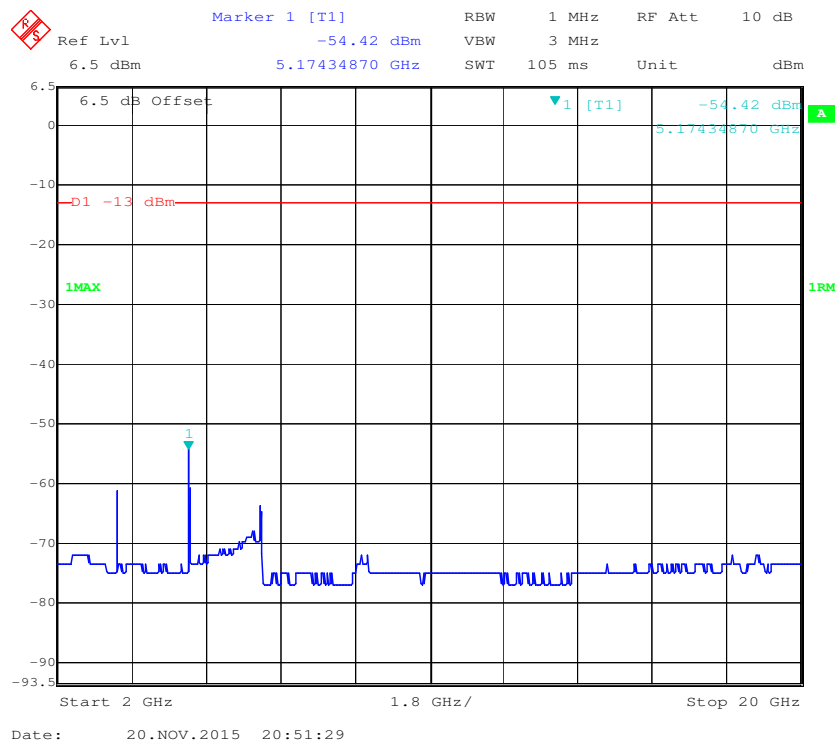


30 MHz - 1 GHz (15.0 MHz, Middle Channel)

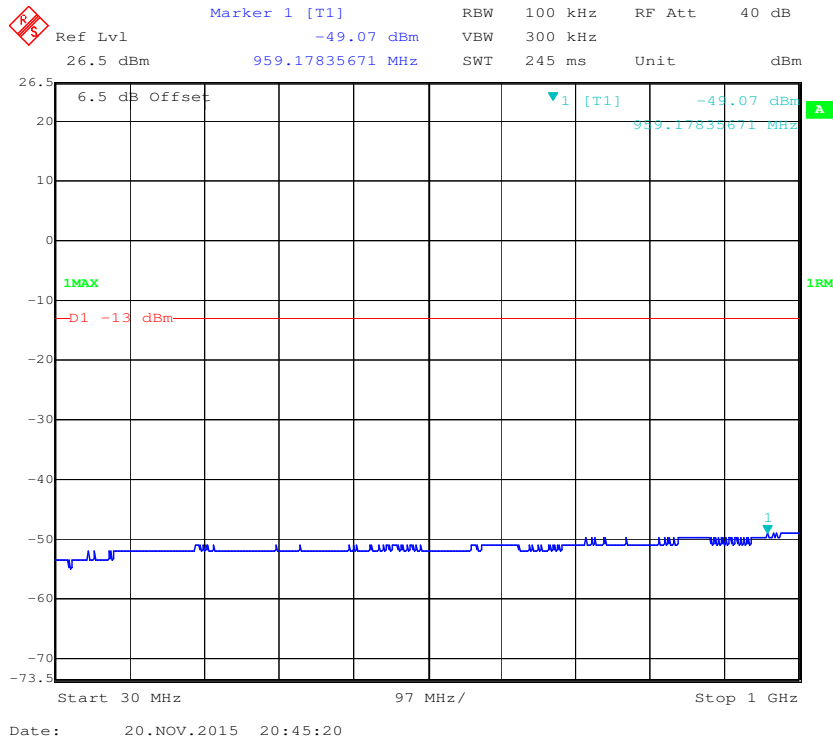


1 GHz - 2 GHz (15.0 MHz, Middle Channel)

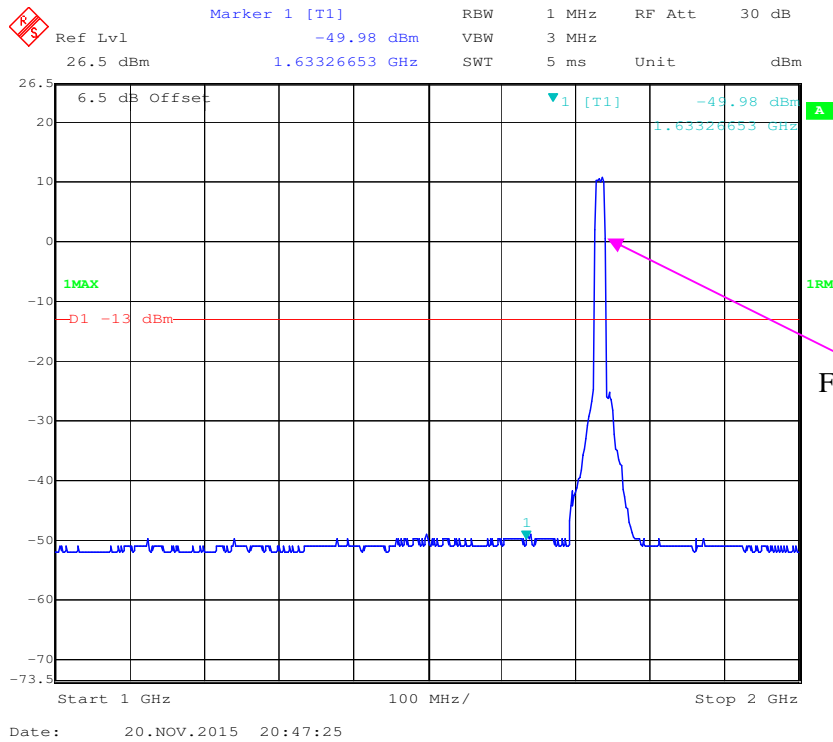


2 GHz – 20GHz (15.0 MHz, Middle Channel)

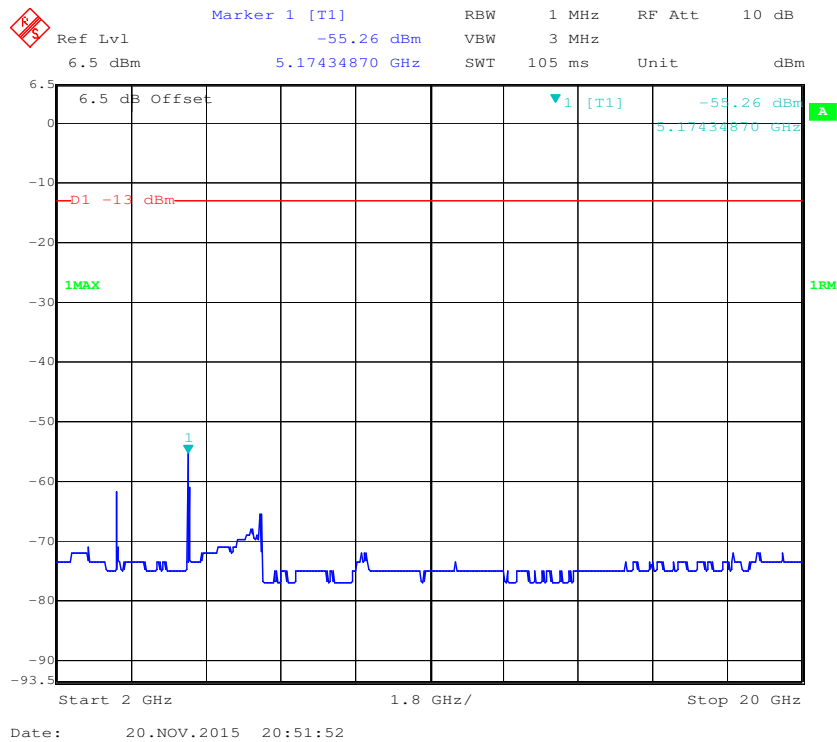


30 MHz - 1 GHz (20.0 MHz, Middle Channel)


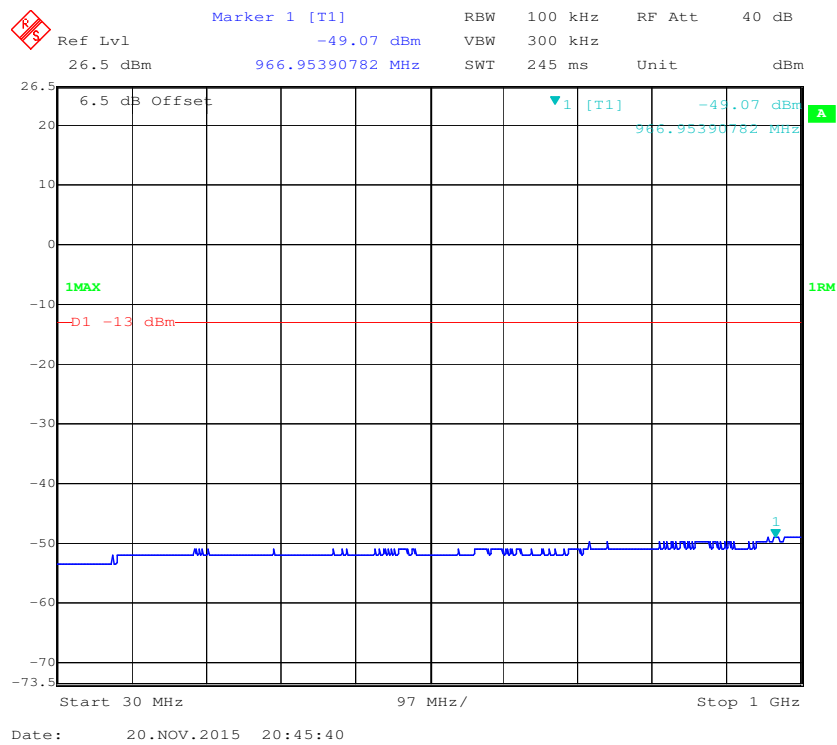


1 GHz –2 GHz (20.0 MHz, Middle Channel)

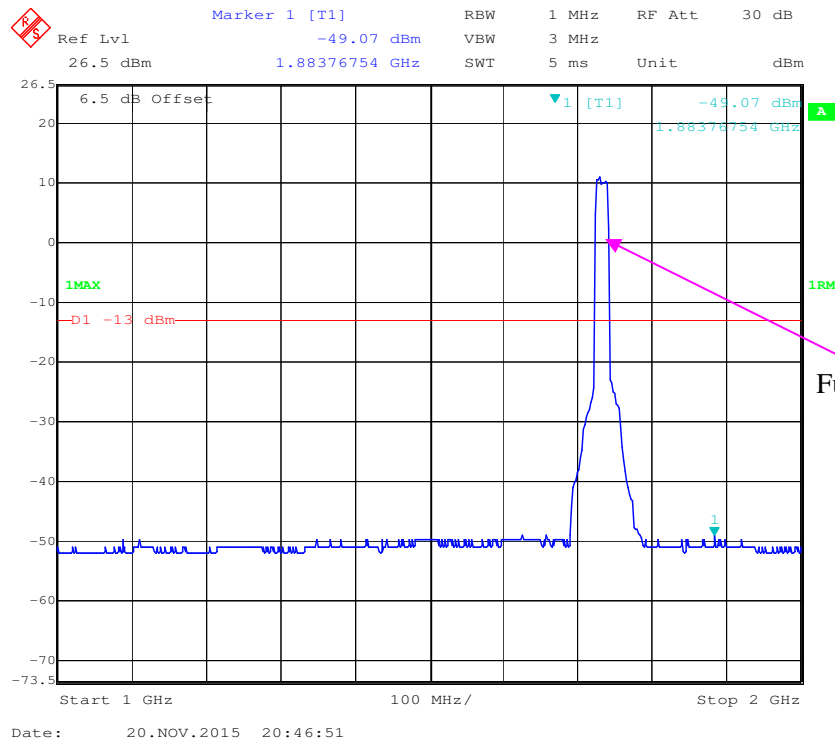


2 GHz –20 GHz (20.0 MHz, Middle Channel)

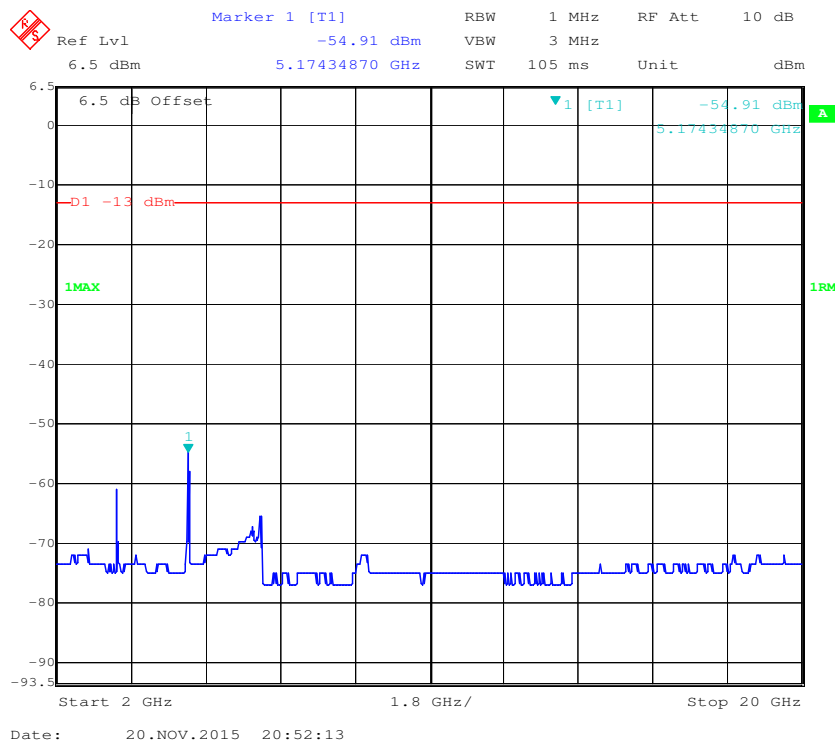


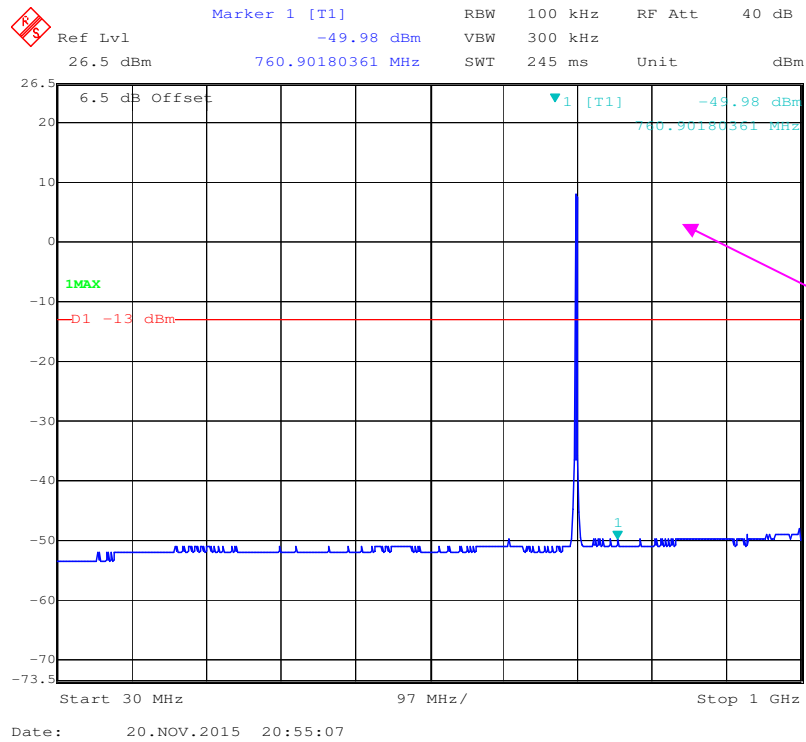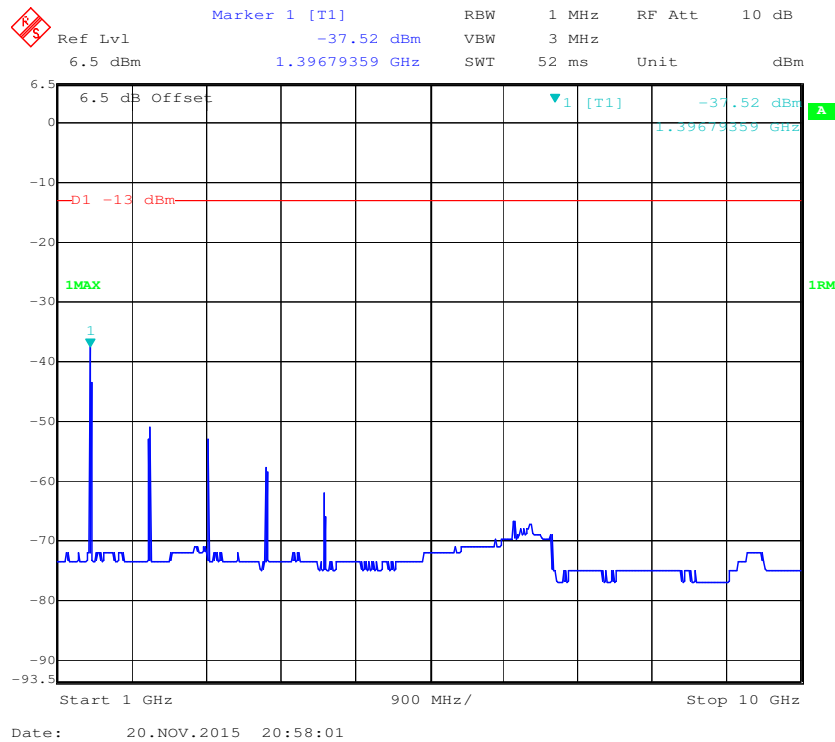LTE Band 12:**30 MHz - 1 GHz (1.4 MHz, Middle Channel)****1 GHz – 10 GHz (1.4 MHz, Middle Channel)**


30 MHz - 1 GHz (3.0 MHz, Middle Channel)

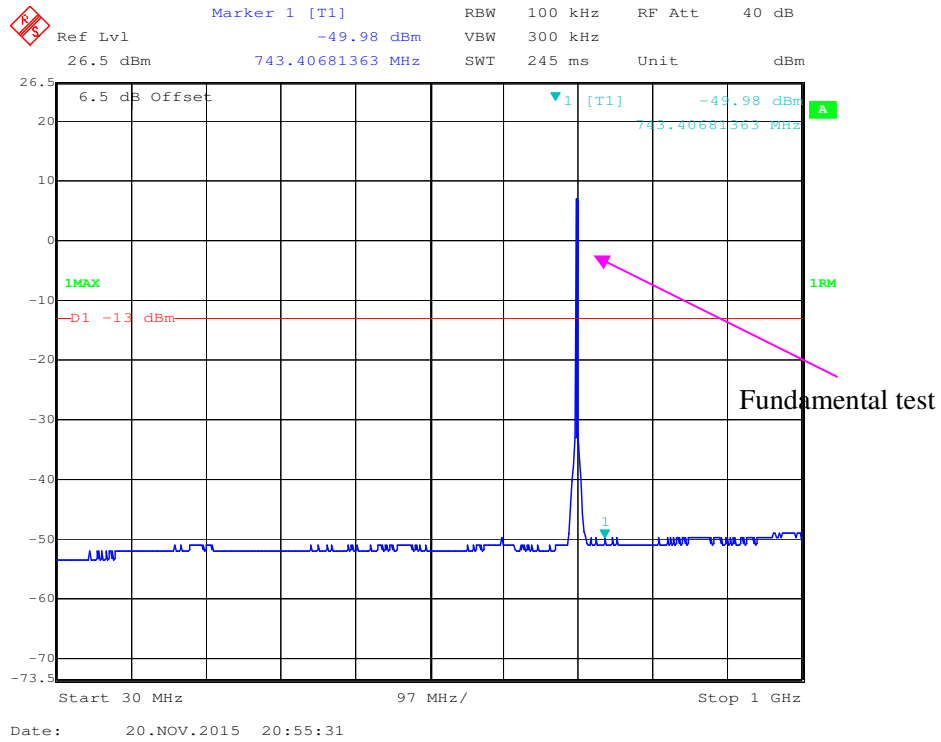


1 GHz – 10 GHz (3.0 MHz, Middle Channel)

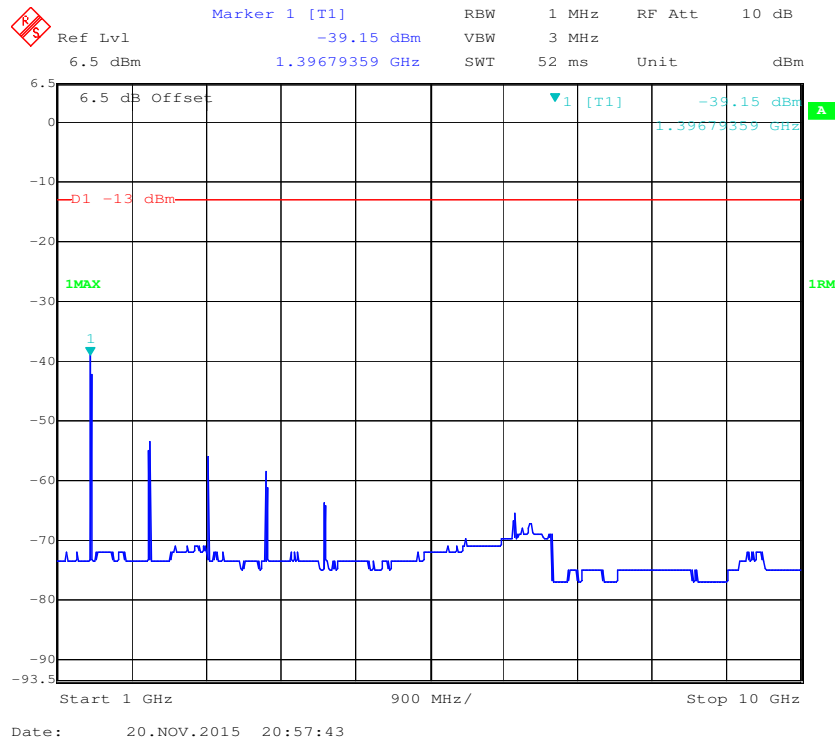


30 MHz - 1 GHz (5.0 MHz, Middle Channel)

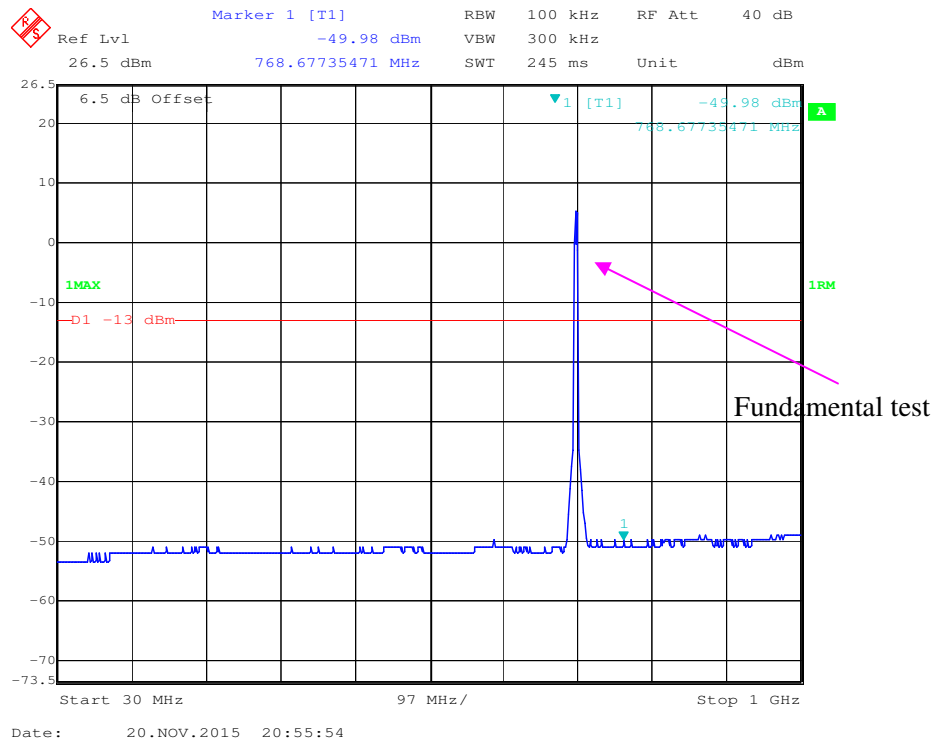


1 GHz – 10 GHz (5.0 MHz, Middle Channel)


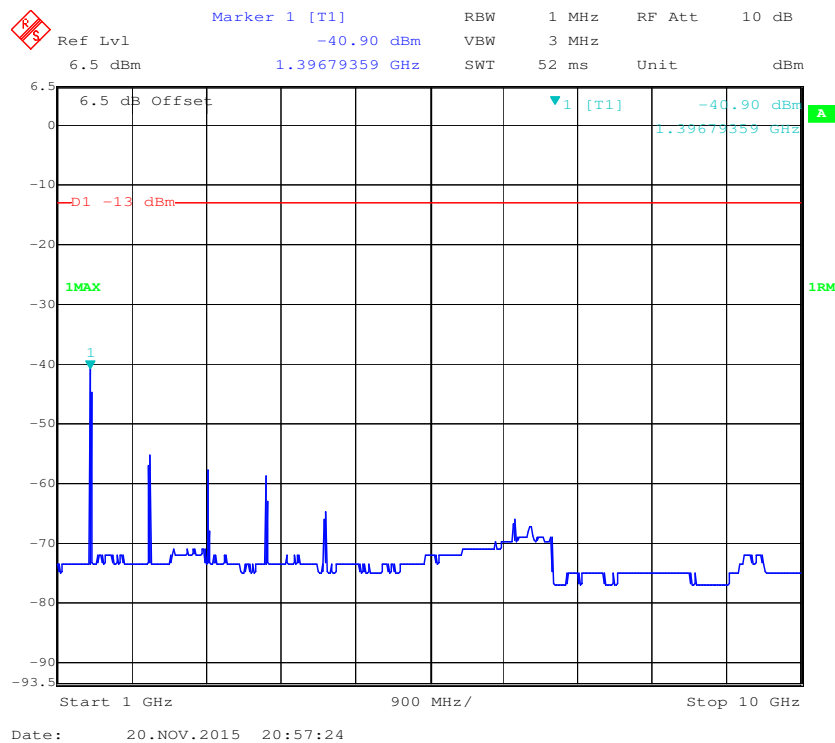


30 MHz - 1 GHz (10.0 MHz, Middle Channel)

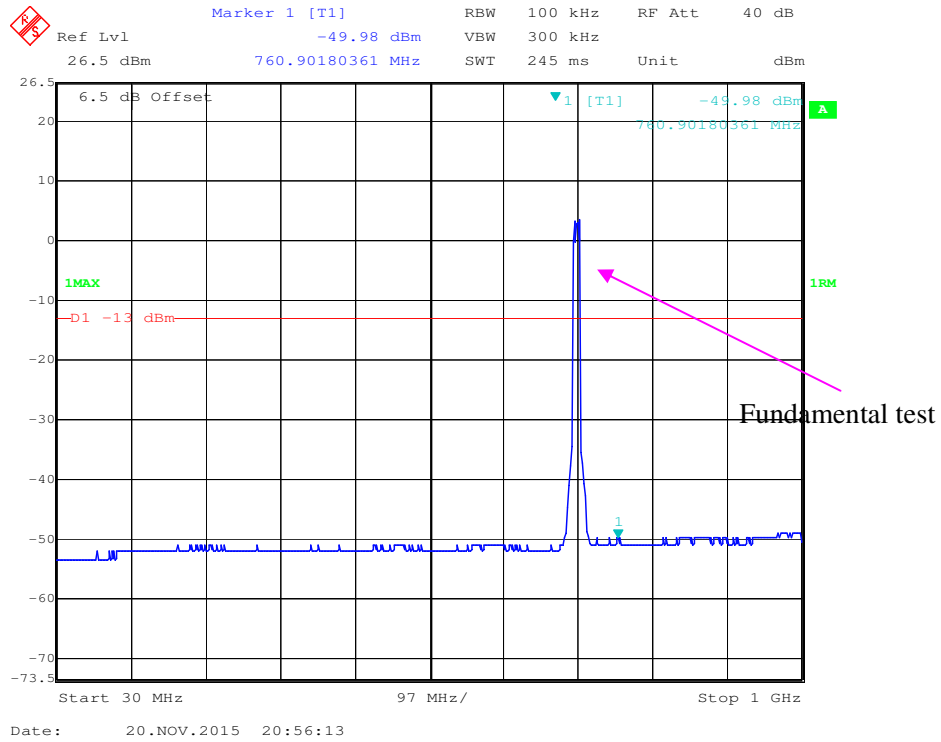


1 GHz – 10 GHz (10.0 MHz, Middle Channel)

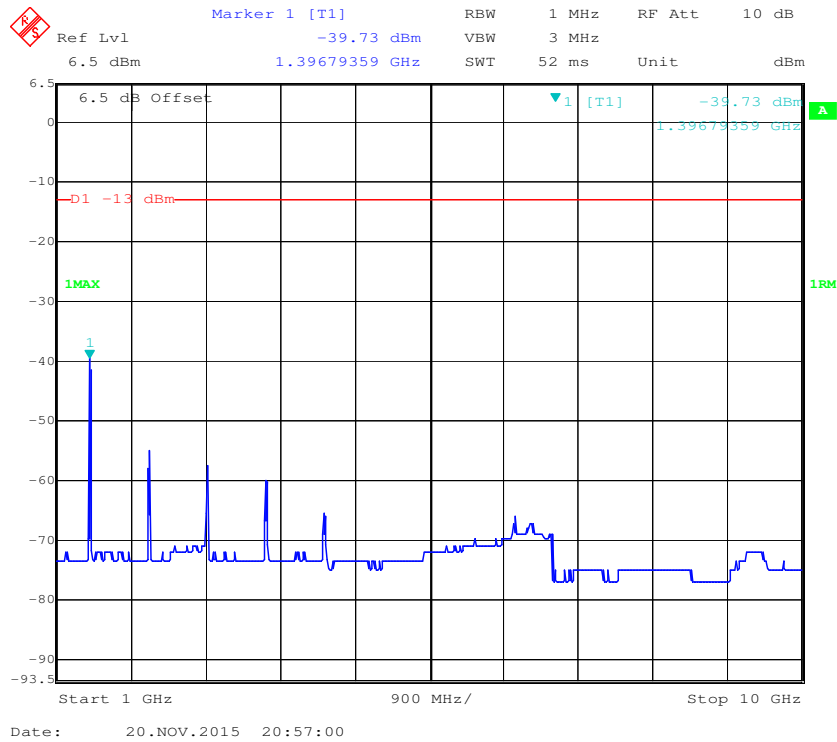


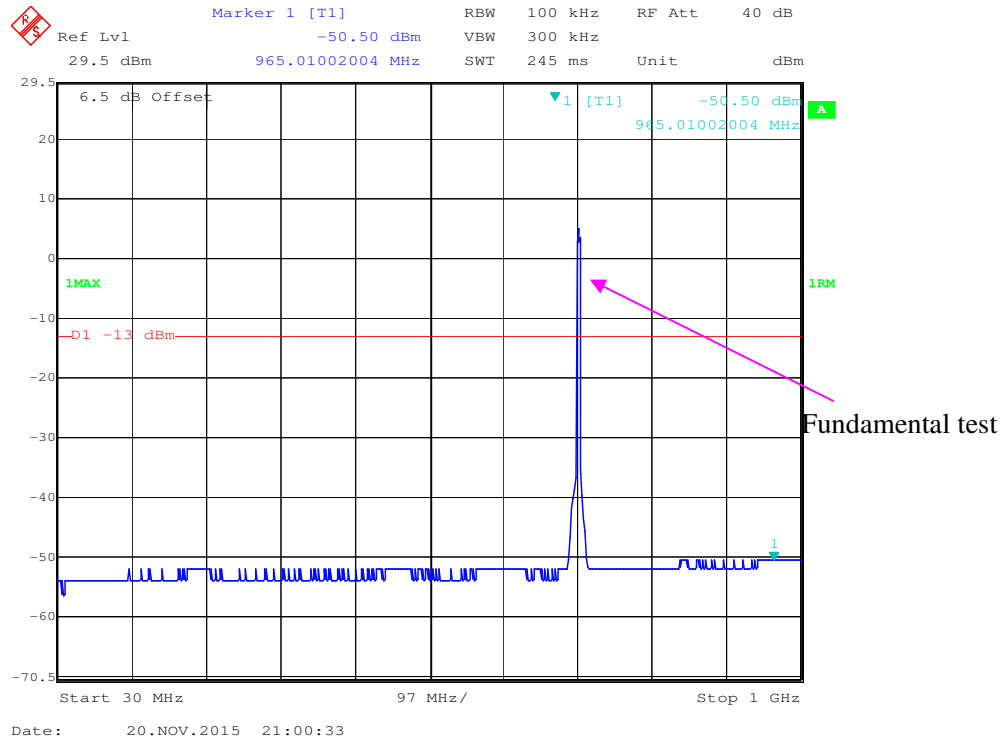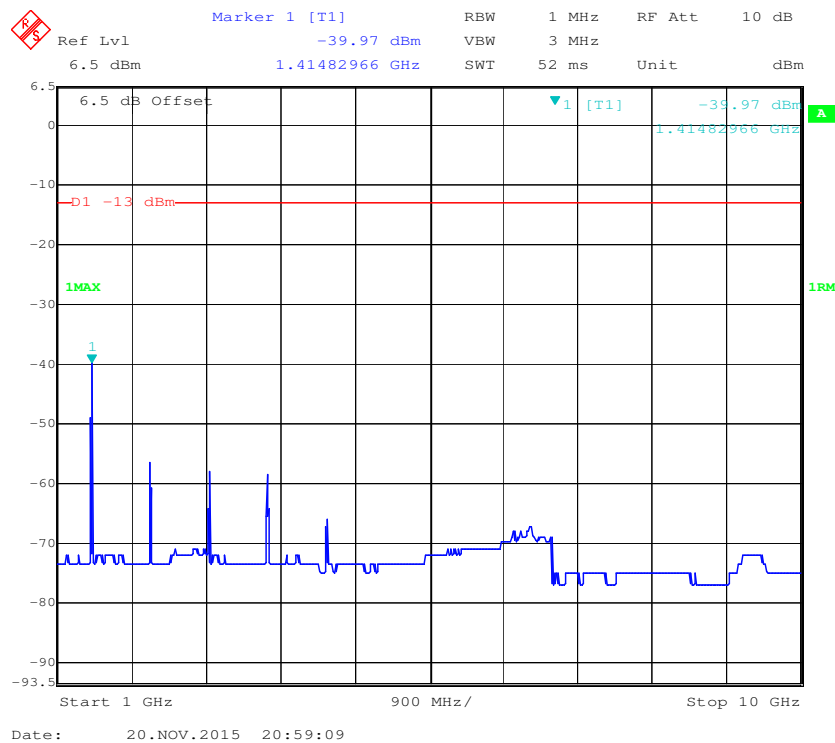LTE Band 17:**30 MHz - 1 GHz (5.0 MHz, Middle Channel)****1 GHz – 10 GHz (5.0 MHz, Middle Channel)**

30 MHz - 1 GHz (10.0 MHz, Middle Channel)

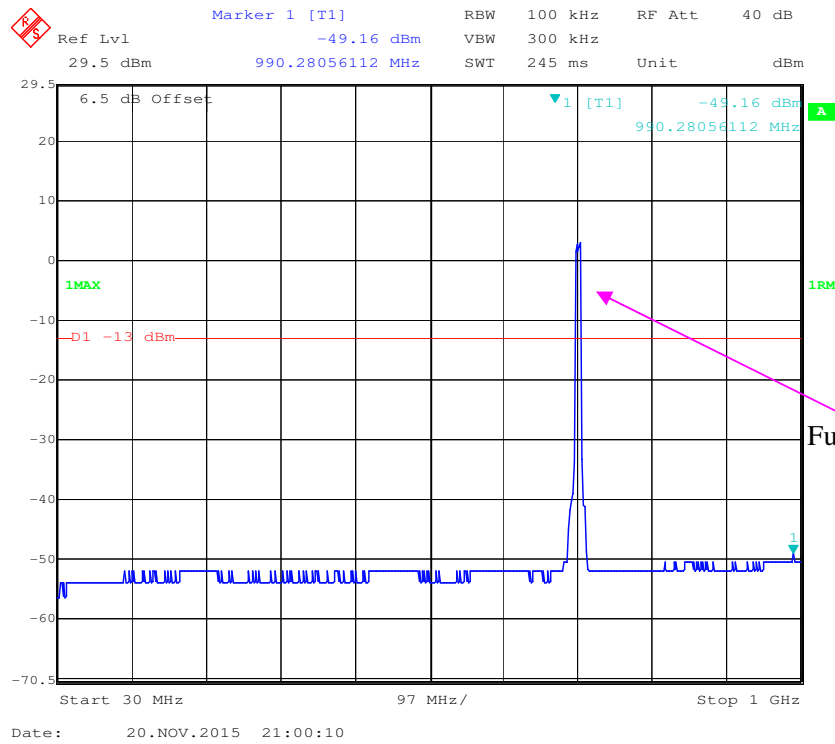

1 GHz - 10 GHz (10.0 MHz, Middle Channel)

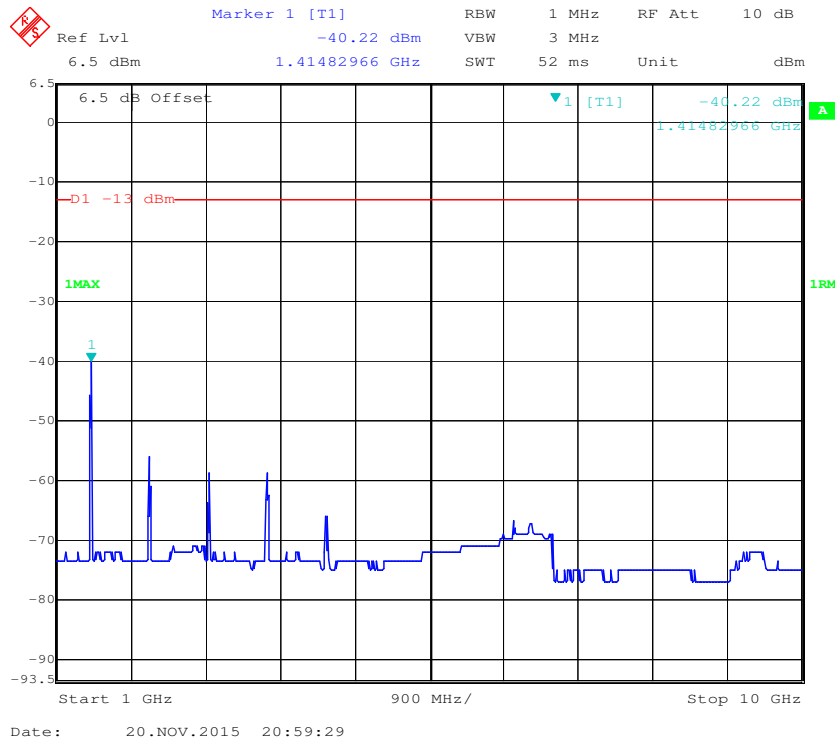

FCC §2.1053, §22.917 & §24.238 & §27.53 - SPURIOUS RADIATED EMISSIONS

Applicable Standards

FCC § 2.1053, §22.917 and § 24.238 and § 27.53.

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg (\text{TX pwr in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \log_{10} (\text{power out in Watts})$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Horn Antenna	DRH-118	A052604	2014-12-29	2017-12-28
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2014-12-07	2017-12-06
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2014-12-11	2015-12-11
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2015-04-23	2016-04-23
HP	Amplifier	HP8447E	1937A01046	2015-05-06	2016-05-06
HP	Signal Generator	HP 8341B	2624A00116	2015-07-02	2016-07-01
COM POWER	Dipole Antenna	AD-100	041000	2015-08-18	2016-08-18
A.H. System	Horn Antenna	SAS-200/571	135	2013-02-11	2016-02-10
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2015-11-03	2016-11-03
Electro-Mechanics	Horn Antenna	3116	9510-2270	2013-10-14	2016-10-13
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2014-11-23	2015-11-23
R&S	Wideband Radio Communication tester	CMW500	1201.002K50-146520-wh	2014-11-23	2015-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Haiguo Li on 2015-11-19.

Test mode: Transmitting

Test mode: Transmitting (Pre-scan with Low, Middle, High channel, and the worse case data as below)

30 MHz ~ 10 GHz:

Cellular Band (Part 22H)

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H	
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
GSM Mode, Middle channel										
172.06	45.14	347	1.3	H	-51.9	0.28	0	-52.18	-13	39.18
172.06	47.20	129	2.3	V	-49.8	0.28	0	-50.08	-13	37.08
1673.20	58.76	33	1.8	H	-36.9	1.60	6.90	-31.60	-13	18.60
1673.20	59.61	50	2.0	V	-36.5	1.60	6.90	-31.20	-13	18.20
2509.80	55.27	170	2.5	H	-38.3	1.70	8.60	-31.40	-13	18.40
2509.80	53.18	111	2.2	V	-40.7	1.70	8.60	-33.80	-13	20.80
3346.40	49.27	195	1.8	H	-41.1	1.90	9.80	-33.20	-13	20.20
3346.40	49.05	202	1.3	V	-41.9	1.90	9.80	-34.00	-13	21.00
WCDMA Mode, Middle channel										
172.06	46.64	201	1.2	H	-50.4	0.28	0	-50.68	-13	37.68
172.06	46.56	7	1.9	V	-50.4	0.28	0	-50.68	-13	37.68
1673.20	55.67	327	2.2	H	-40.0	1.60	6.90	-34.70	-13	21.70
1673.20	53.21	276	2.3	V	-42.9	1.60	6.90	-37.60	-13	24.60
2509.80	50.19	346	1.9	H	-43.4	1.70	8.60	-36.50	-13	23.50
2509.80	51.36	348	1.3	V	-42.5	1.70	8.60	-35.60	-13	22.60
3346.40	48.75	20	1.7	H	-41.6	1.90	9.80	-33.70	-13	20.70
3346.40	48.27	92	1.7	V	-42.7	1.90	9.80	-34.80	-13	21.80

30 MHz ~ 20 GHz:**PCS Band (Part 24E)**

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 24E	
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
GSM Mode, Middle channel										
172.06	46.16	315	1.7	H	-50.8	0.28	0	-51.08	-13	38.08
172.06	47.68	245	2.2	V	-49.3	0.28	0	-49.58	-13	36.58
3760.00	50.18	42	2.2	H	-36.9	1.90	9.90	-28.90	-13	15.90
3760.00	48.75	314	1.1	V	-37.9	1.90	9.90	-29.90	-13	16.90
WCDMA Mode, Middle channel										
172.06	46.76	62	1.6	H	-50.2	0.28	0	-50.48	-13	37.48
172.06	46.25	40	1.2	V	-50.7	0.28	0	-50.98	-13	37.98
3760.00	48.75	145	2.0	H	-38.3	1.90	9.90	-30.30	-13	17.30
3760.00	49.63	152	1.9	V	-37.0	1.90	9.90	-29.00	-13	16.00

AWS Band (Part 27)

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 27	
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
WCDMA Mode, High channel										
172.16	45.34	181	1.5	H	-51.7	0.28	0	-51.98	-13	38.98
172.16	44.58	230	1.7	V	-52.4	0.28	0	-52.68	-13	39.68
3505.20	47.56	135	2.0	H	-42.4	1.90	10.00	-34.30	-13	21.30
3505.20	46.78	11	1.7	V	-43.3	1.90	10.00	-35.20	-13	22.20

Test mode: Transmitting (Pre-scan with all the bandwidth, and worse case as below)

Frequency	Receiver	Turntable	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H&24E&27	
(MHz)	Reading (dBμV)	Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
Band 2										
235.48	35.24	105	1.6	H	-61.8	0.31	0	-62.11	-13	49.11
235.48	34.85	83	2.1	V	-62.1	0.31	0	-62.41	-13	49.41
3760.00	39.58	159	1.9	H	-47.5	1.90	9.90	-39.50	-13	26.50
3760.00	38.73	341	1.4	V	-47.9	1.90	9.90	-39.90	-13	26.90
5640.00	38.98	121	2.0	H	-43.6	2.10	10.30	-35.40	-13	22.40
5640.00	37.73	46	1.8	V	-44.2	2.10	10.30	-36.00	-13	23.00
Band 4										
235.48	35.74	237	1.5	H	-61.3	0.31	0	-61.61	-13	48.61
235.48	34.32	248	1.9	V	-62.7	0.31	0	-63.01	-13	50.01
3465.00	39.13	33	1.5	H	-44.7	1.90	10.00	-36.60	-13	23.60
3465.00	38.07	292	1.7	V	-45.9	1.90	10.00	-37.80	-13	24.80
5197.50	38.53	157	2.2	H	-43.8	1.80	10.10	-35.50	-13	22.50
5197.50	37.68	51	1.7	V	-43.9	1.80	10.10	-35.60	-13	22.60
Band 12										
235.48	35.29	338	2.5	H	-61.7	0.31	0	-62.01	-13	49.01
235.48	34.13	11	1.1	V	-62.9	0.31	0	-63.21	-13	50.21
1414.00	39.89	33	1.2	H	-56.7	1.20	6.40	-51.50	-13	38.50
1414.00	38.17	174	1.8	V	-58.5	1.20	6.40	-53.30	-13	40.30
2121.00	37.52	317	1.4	H	-55.1	1.60	7.80	-48.90	-13	35.90
2121.00	35.27	189	1.6	V	-56.9	1.60	7.80	-50.70	-13	37.70
Band 17										
235.48	35.41	313	1.2	H	-61.6	0.31	0	-61.91	-13	48.91
235.48	34.36	306	2.3	V	-62.6	0.31	0	-62.91	-13	49.91
1420.00	39.14	341	2.4	H	-57.5	1.20	6.40	-52.30	-13	39.30
1420.00	38.03	183	1.3	V	-58.6	1.20	6.40	-53.40	-13	40.40
2130.00	37.9	291	2.4	H	-54.7	1.60	7.80	-48.50	-13	35.50
2130.00	35.22	237	1.4	V	-57.0	1.60	7.80	-50.80	-13	37.80

Note:

- 1) Absolute Level = SG Level - Cable loss + Antenna Gain
- 2) Margin = Limit- Absolute Level

FCC §22.917(a) & §24.238(a) & §27.53 - BAND EDGES

Applicable Standards

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


According to FCC §27.53, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency

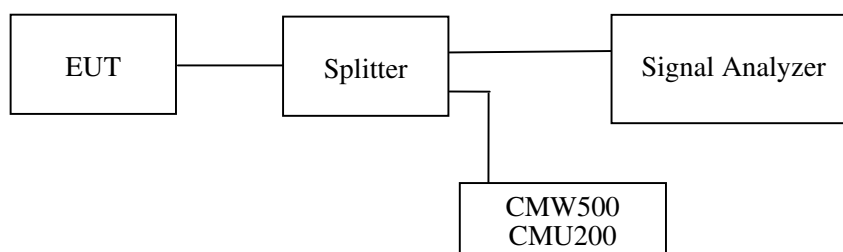

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2015-06-13	2016-06-13
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2014-12-11	2015-12-11
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2014-11-23	2015-11-23
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23
R&S	Wideband Radio Communication tester	CMW500	1201.002K50-146520-wh	2014-11-23	2015-11-23
R&S	Wideband Radio Communication tester	CMW500	1201.002K50-146520-wh	2015-11-23	2016-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	24~25 °C
Relative Humidity:	48~51 %
ATM Pressure:	100.0~101.0 kPa

The testing was performed by Haiguo Li from 2015-11-20 to 2015-12-17.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following plots.


Cellular Band, Left Band Edge for GSM (GMSK) Mode

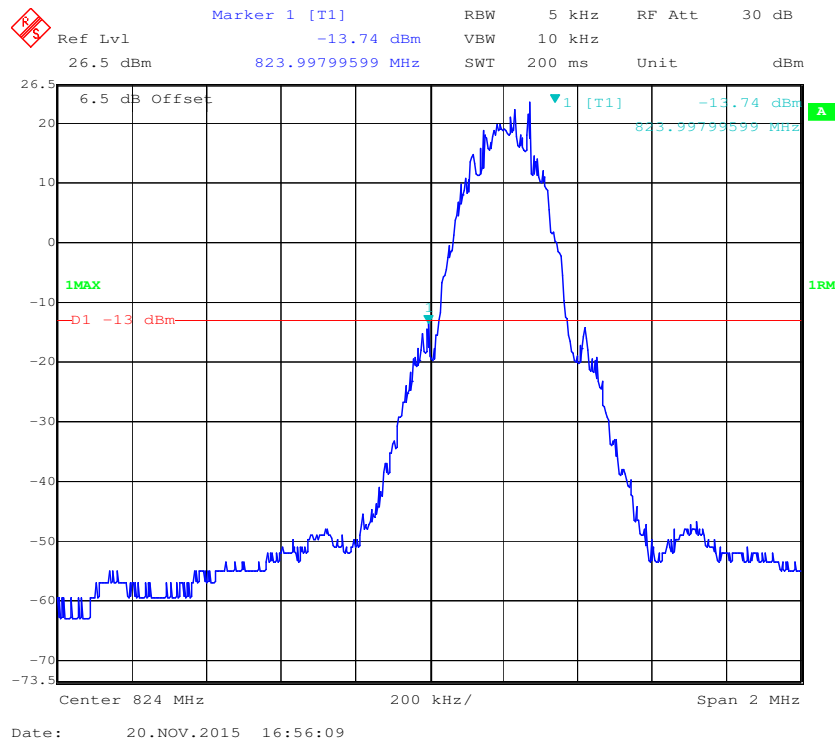


Cellular Band, Right Band Edge for GSM (GMSK) Mode


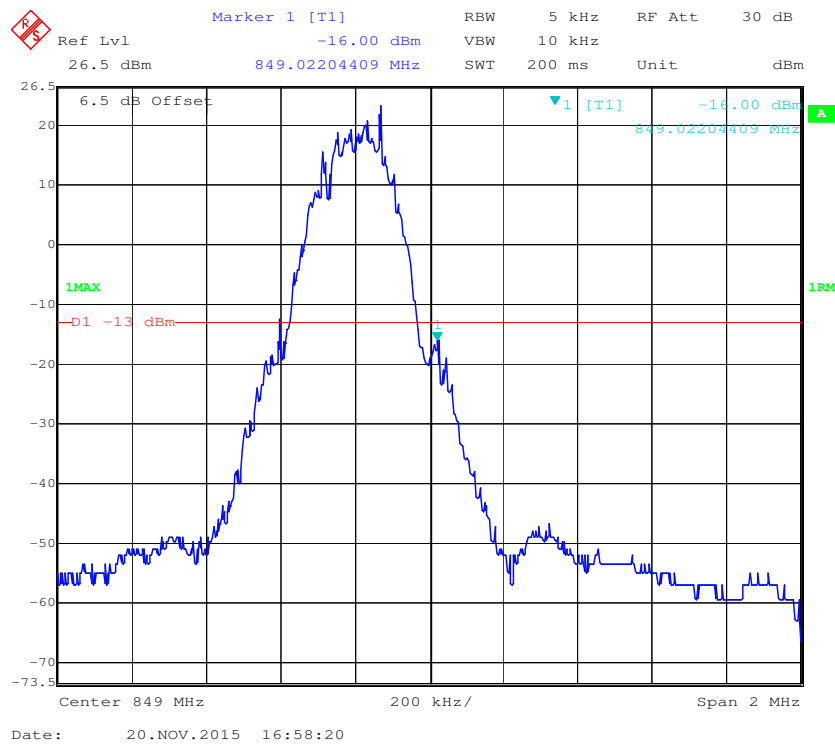


Cellular Band, Left Band Edge for EGPRS Mode

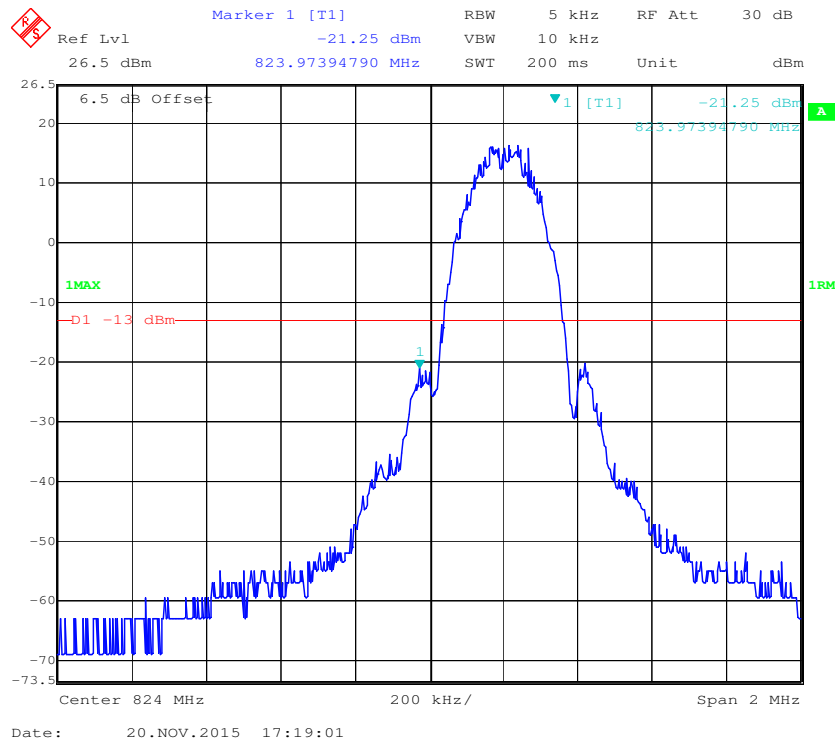


Cellular Band, Right Band Edge for EGPRS Mode

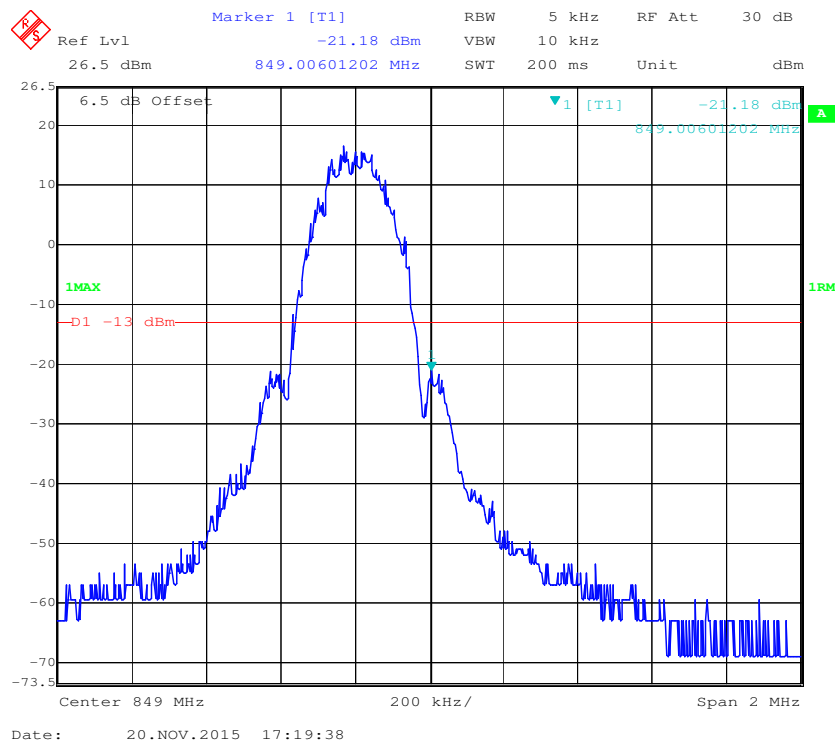


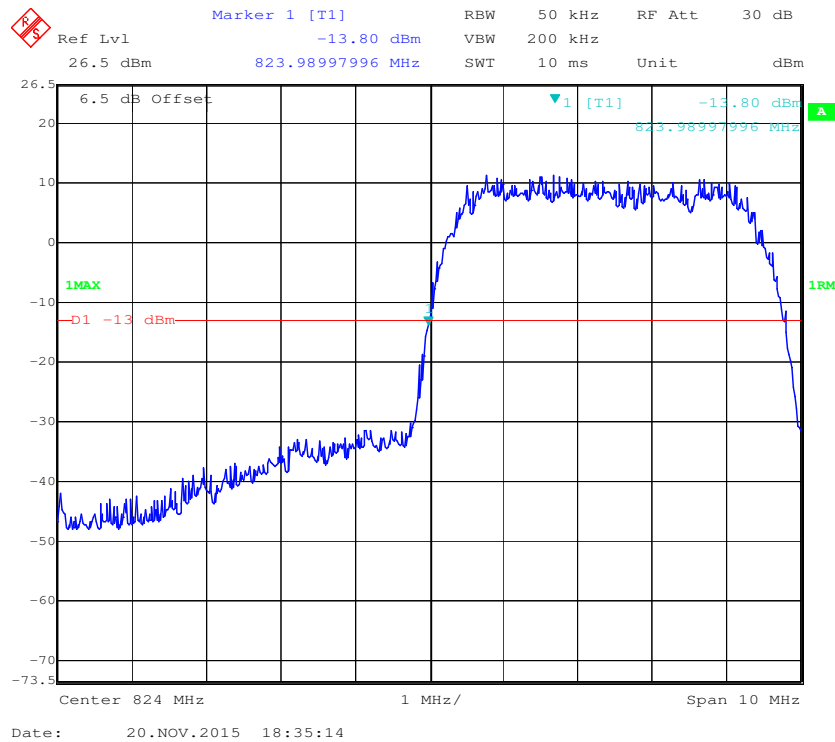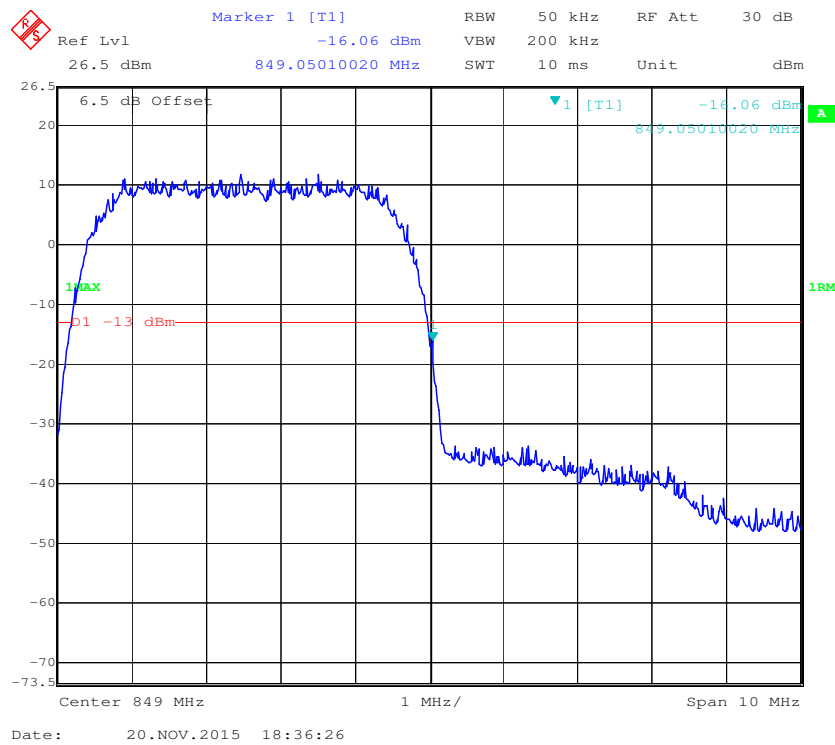Cellular Band, Left Band Edge for WCDMA (BPSK) Mode**Cellular Band, Right Band Edge for WCDMA (BPSK) Mode**


Cellular Band, Left Band Edge for HSDPA (16QAM) Mode

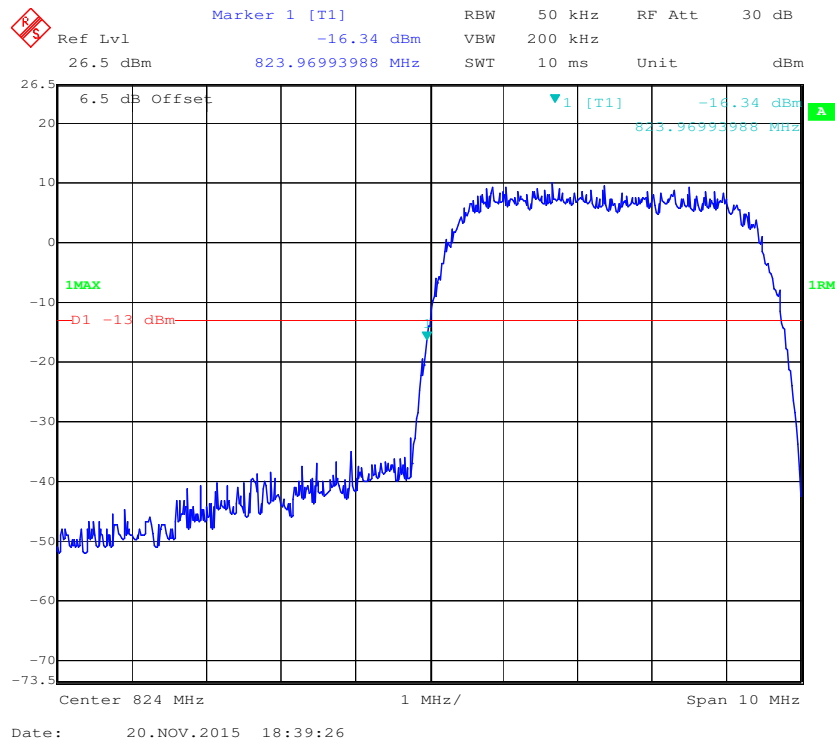


Cellular Band, Right Band Edge for HSDPA (16QAM) Mode

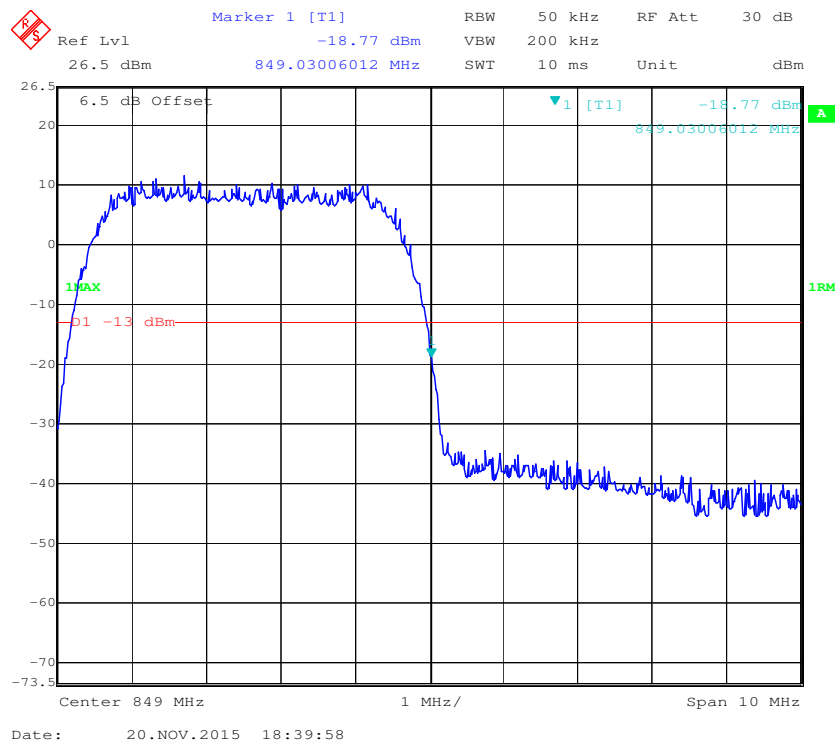


Cellular Band, Left Band Edge for HSUPA (BPSK) Mode

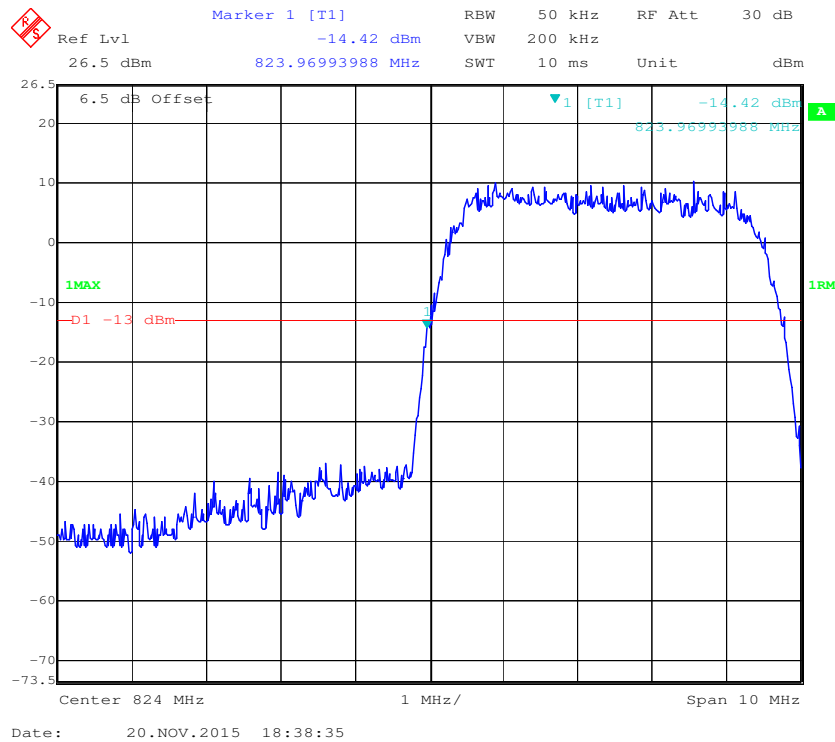


Cellular Band, Right Band Edge for HSUPA (BPSK) Mode

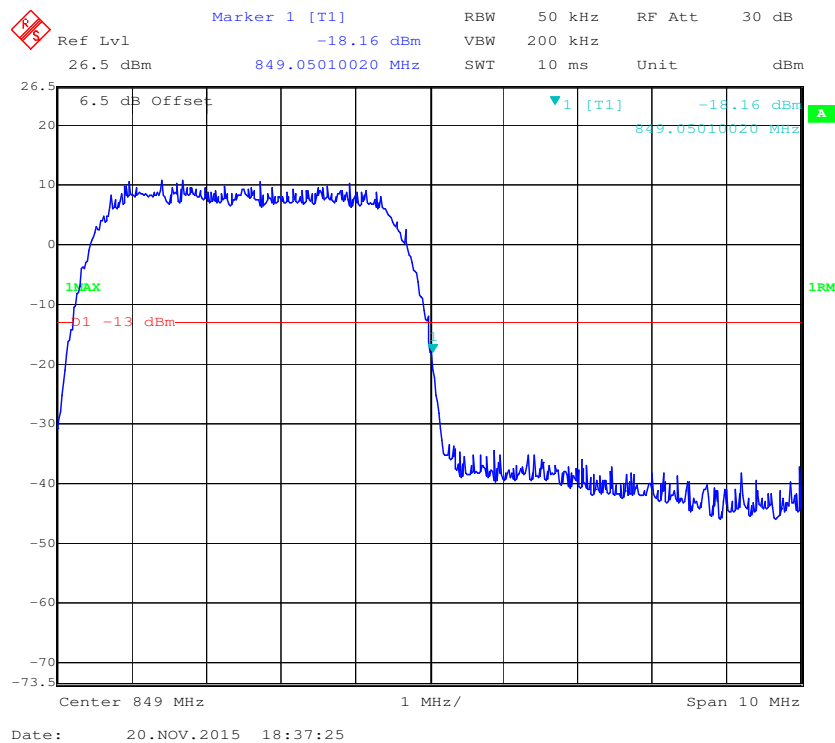


PCS Band, Left Band Edge for GSM (GMSK) Mode

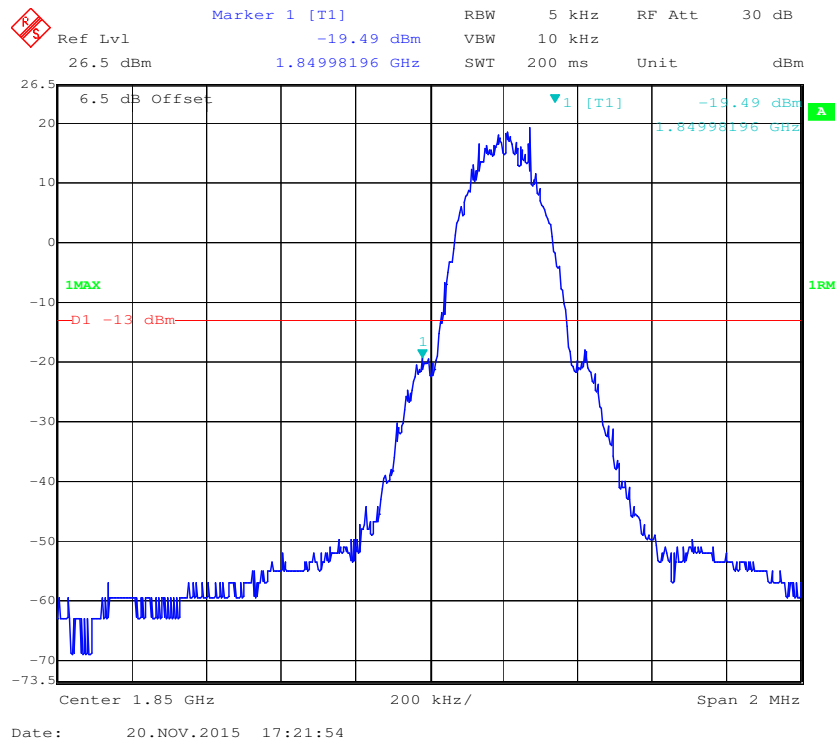


PCS Band, Right Band Edge for GSM (GMSK) Mode


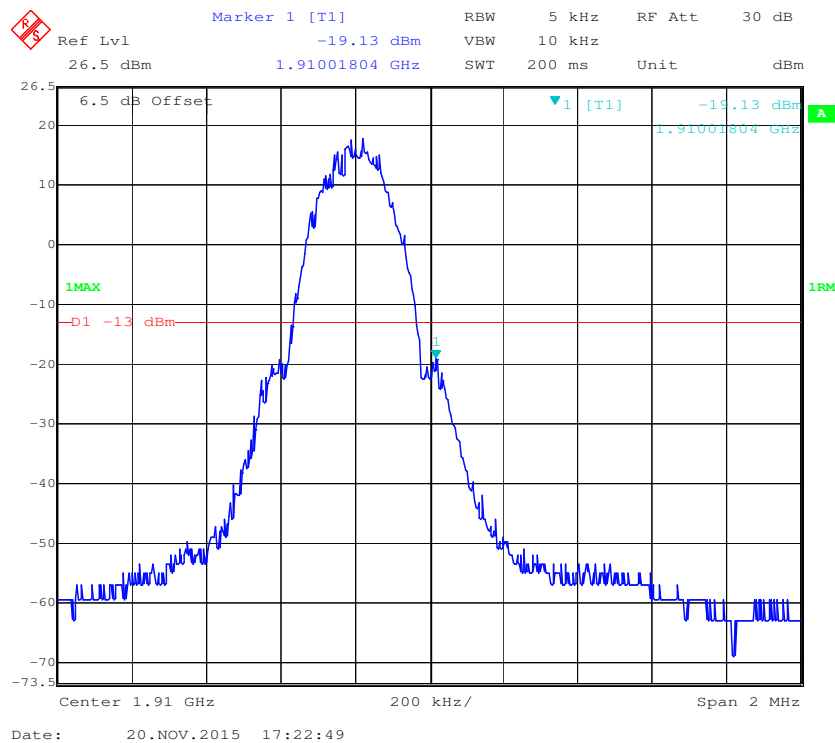


PCS Band, Left Band Edge for EGPRS Mode

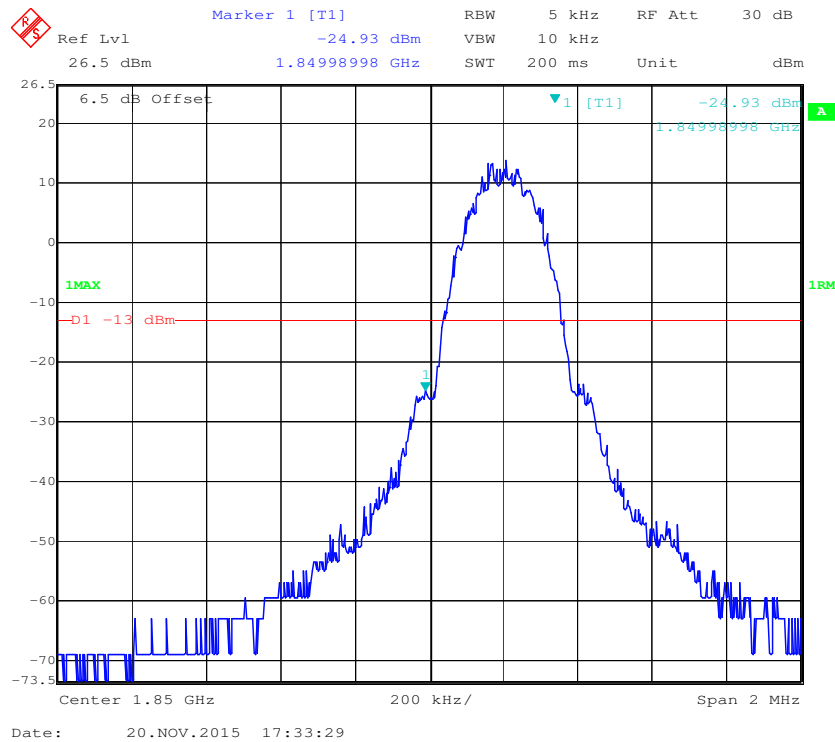


PCS Band, Right Band Edge for EGPRS Mode

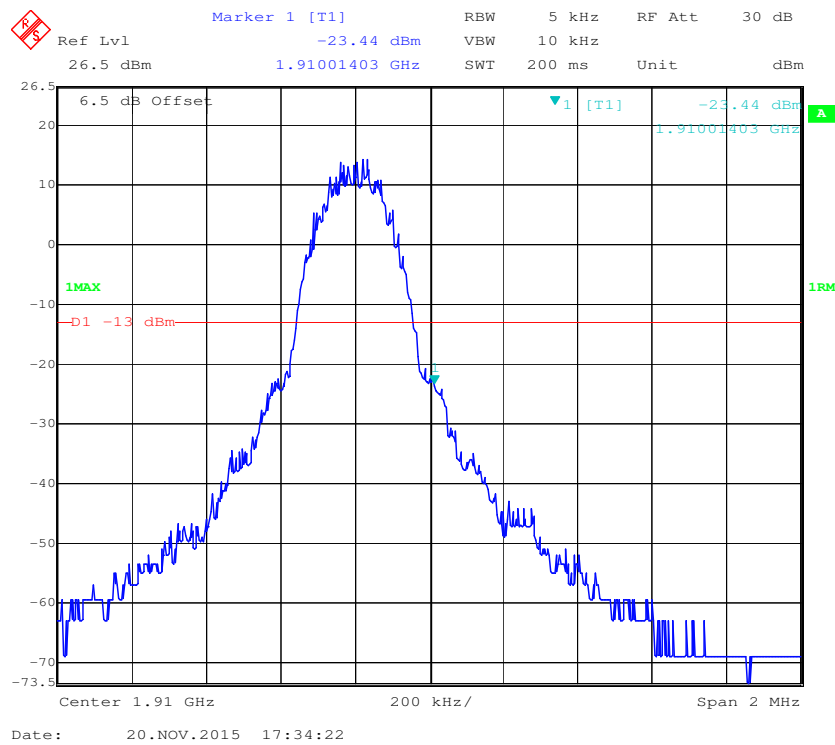


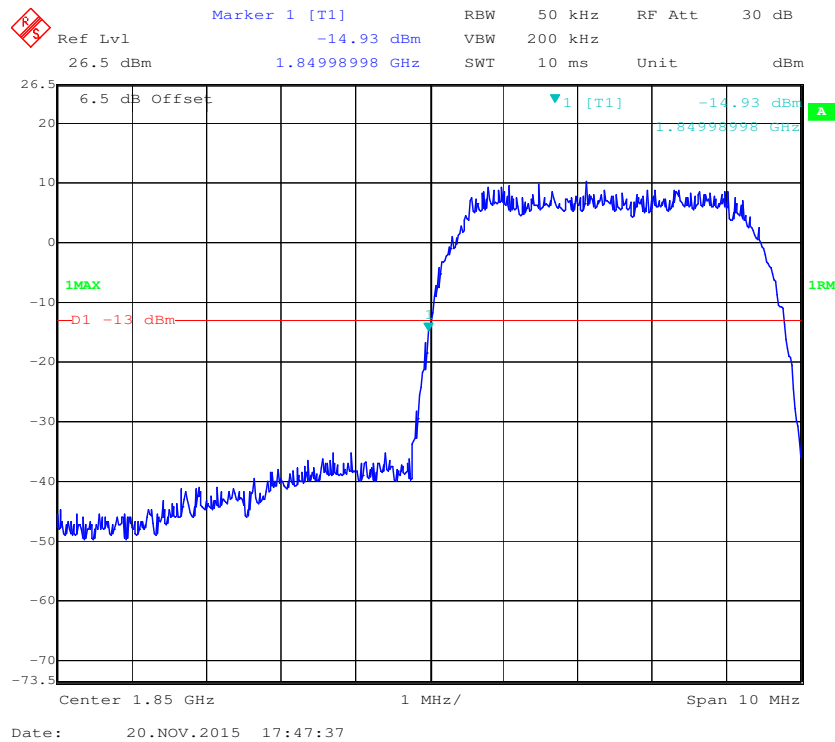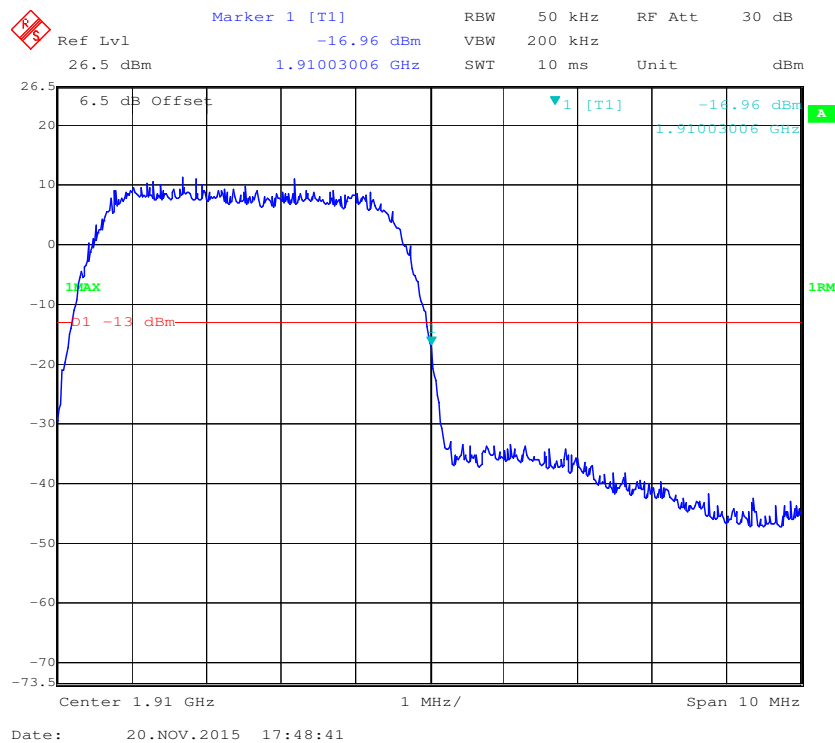PCS Band, Left Band Edge for WCDMA (BPSK) Mode**PCS Band, Right Band Edge for WCDMA (BPSK) Mode**


PCS Band, Left Band Edge for HSDPA (16QAM) Mode

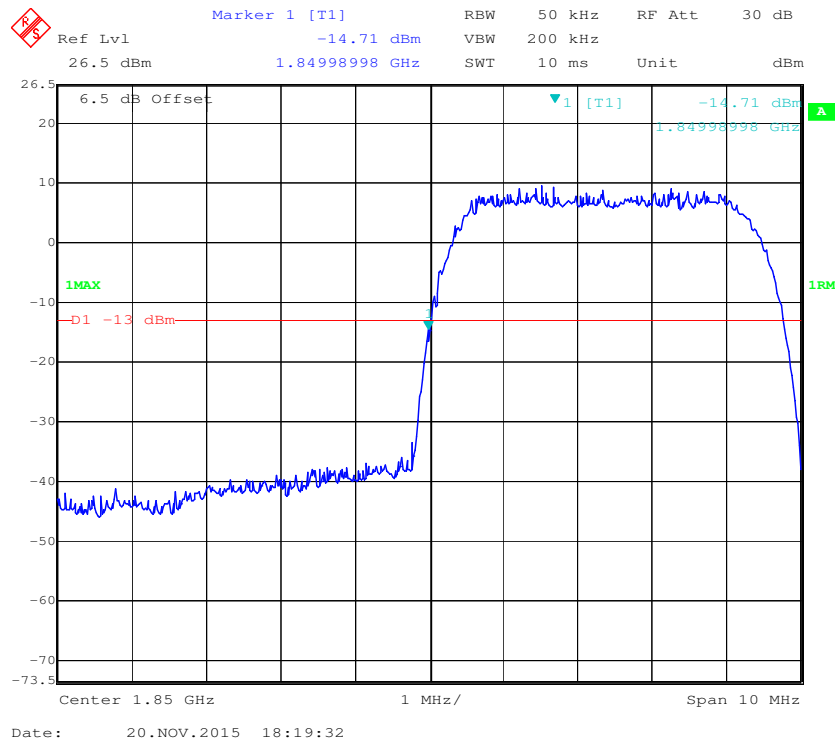


PCS Band, Right Band Edge for HSDPA (16QAM) Mode


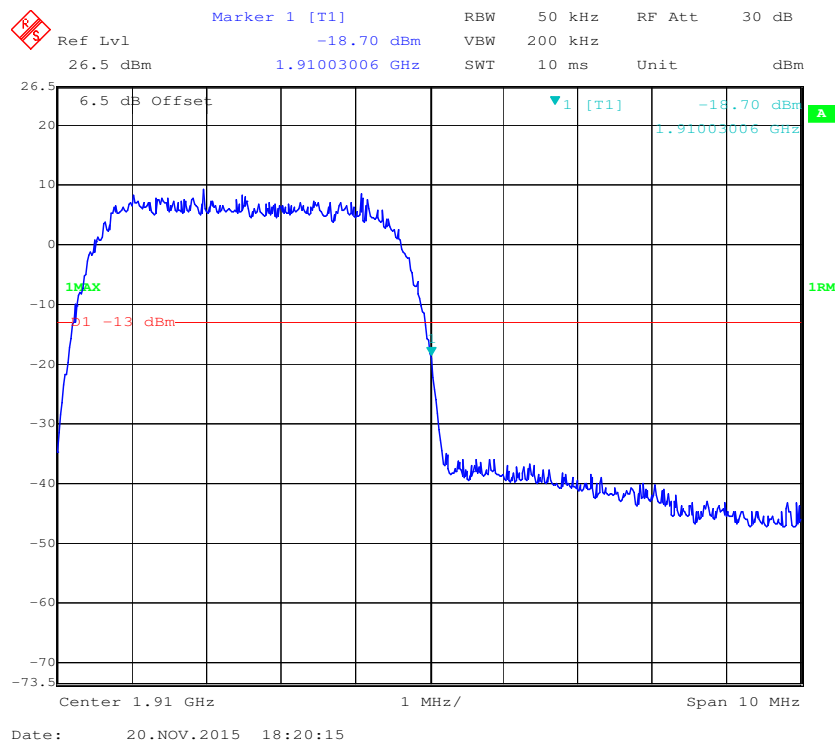




PCS Band, Left Band Edge for HSUPA (BPSK) Mode

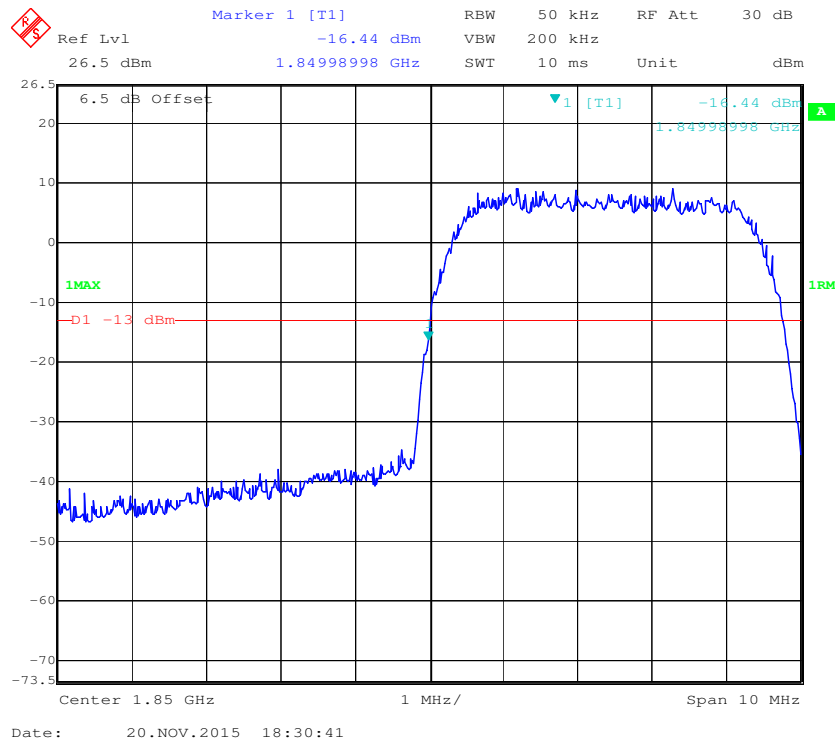


PCS Band, Right Band Edge for HSUPA (BPSK) Mode

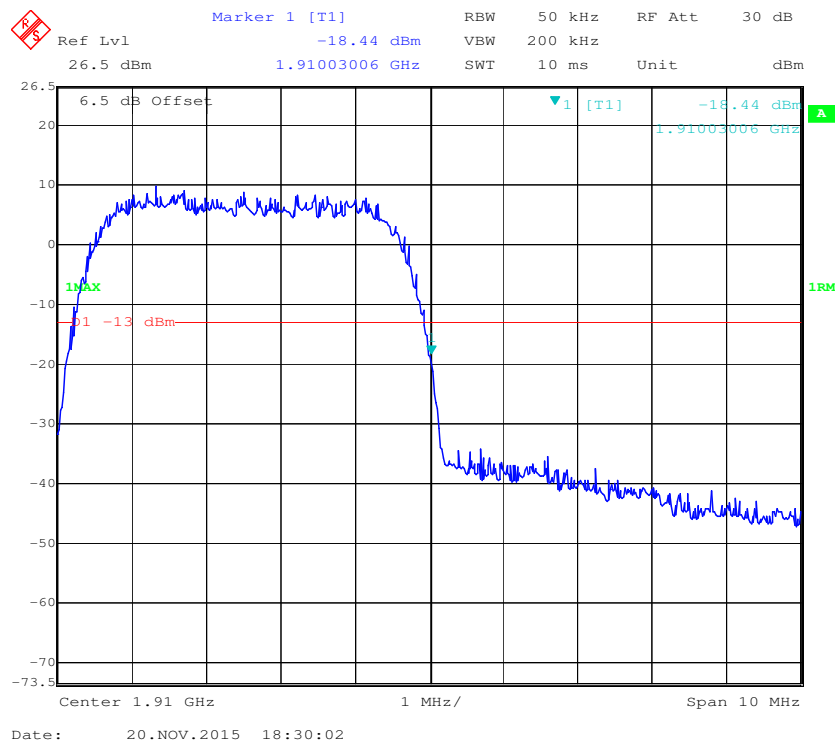

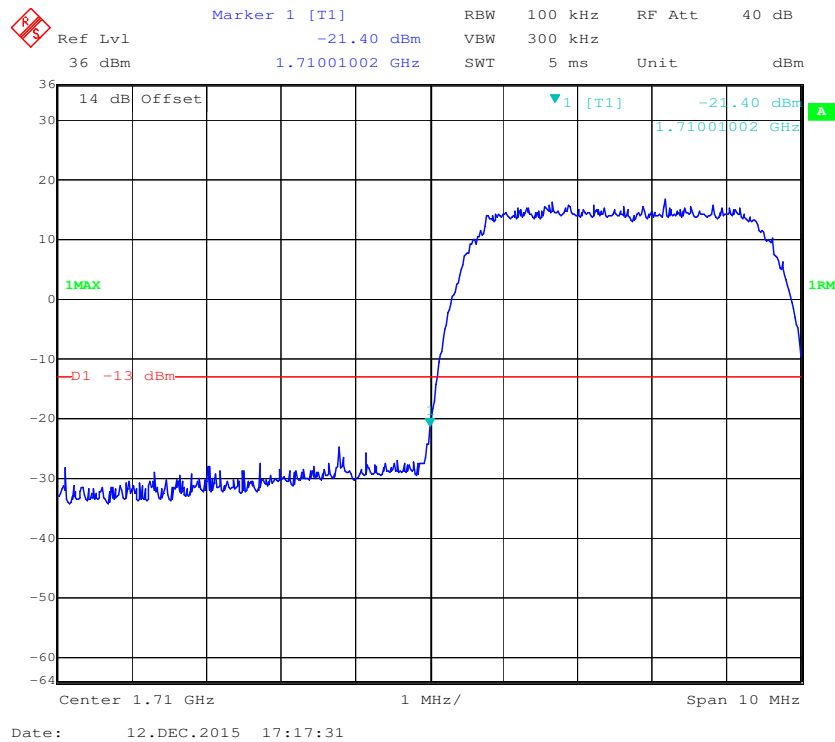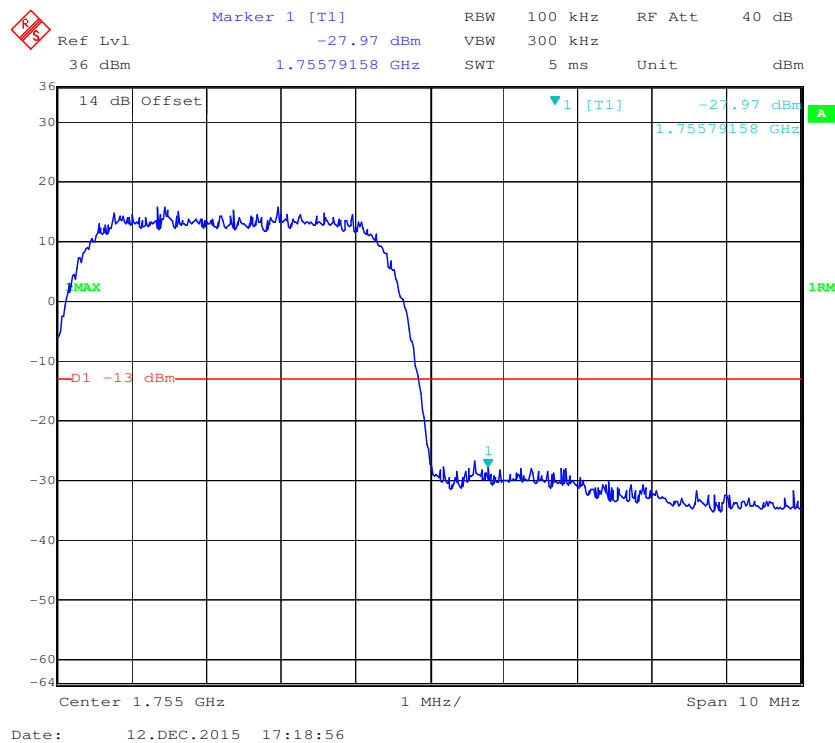
AWS Band, Left Band Edge for WCDMA (BPSK) Mode**AWS Band, Right Band Edge for WCDMA (BPSK) Mode**

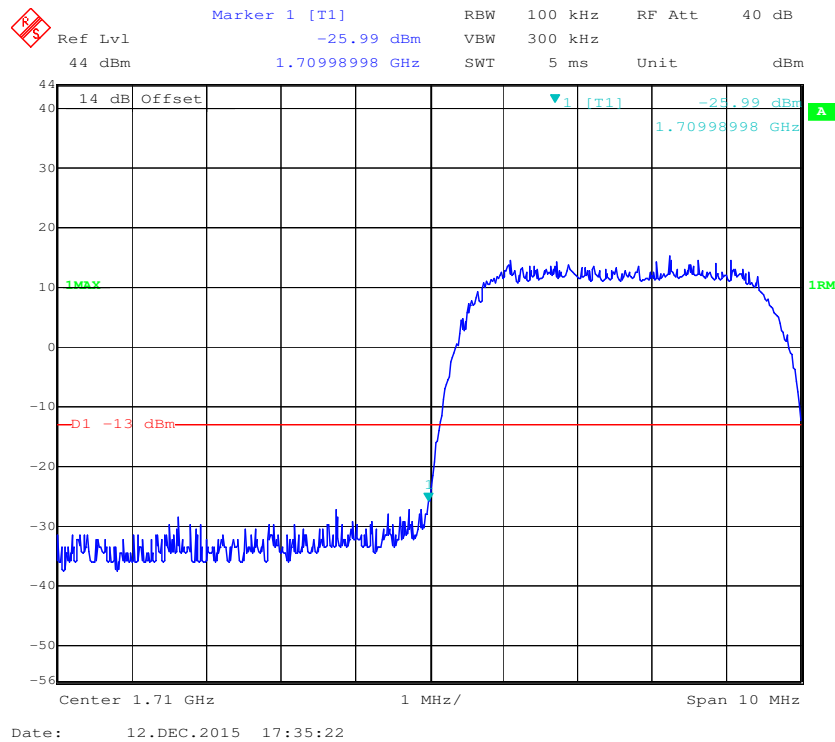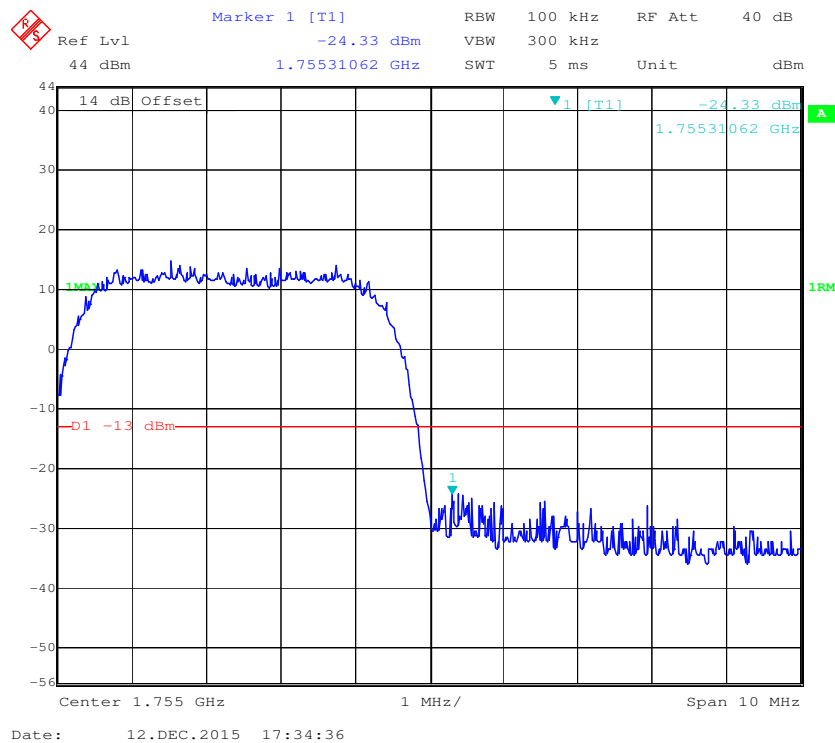AWS Band, Left Band Edge for HSDPA (16QAM) Mode**AWS Band, Right Band Edge for HSDPA (16QAM) Mode**

AWS Band, Left Band Edge for HSUPA (BPSK) Mode

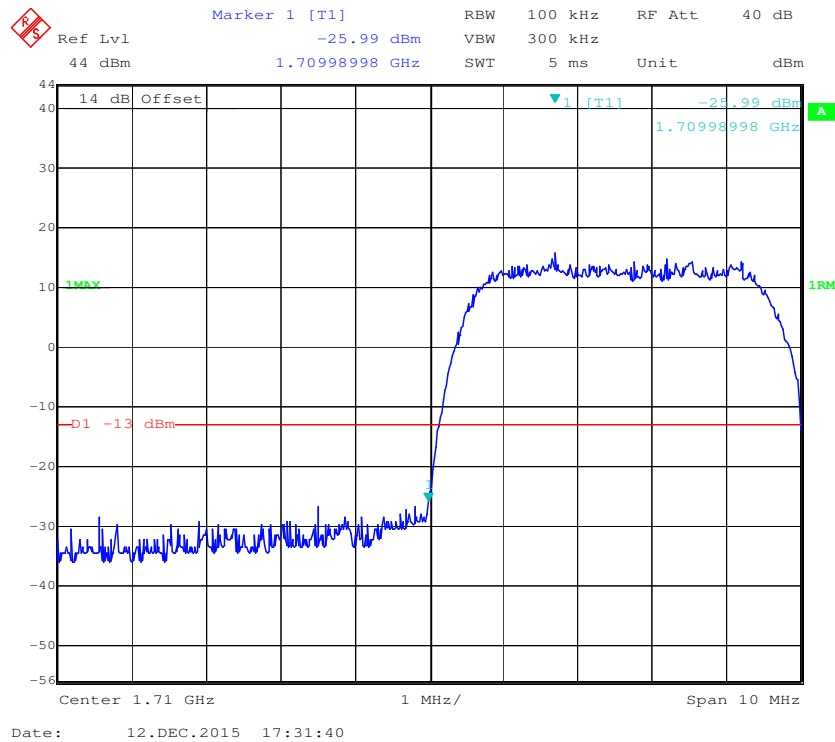


AWS Band, Right Band Edge for HSUPA (BPSK) Mode

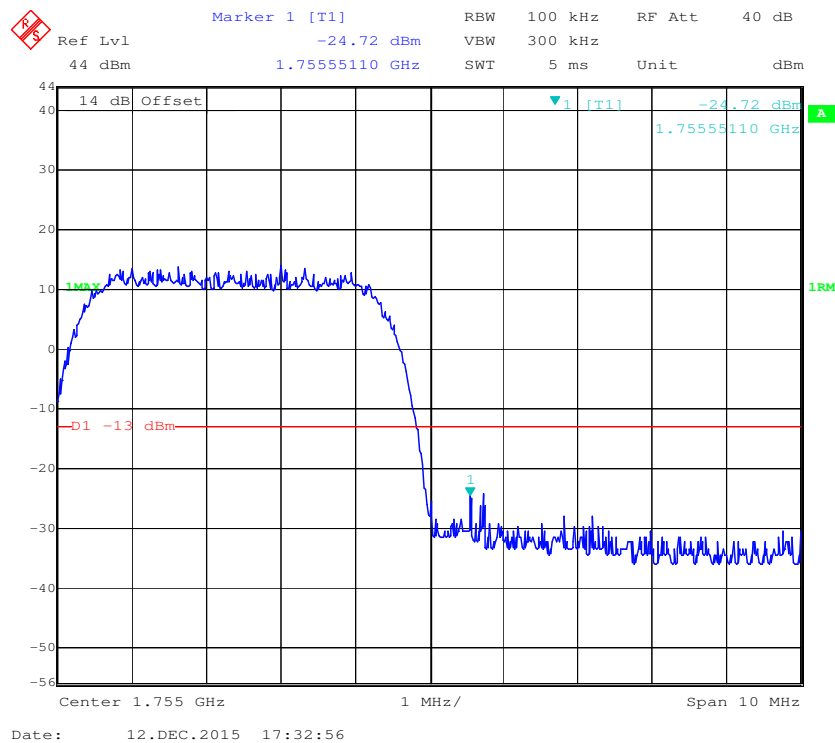


Band 2:


QPSK (1.4 MHz, FULL RB) - Left Band Edge

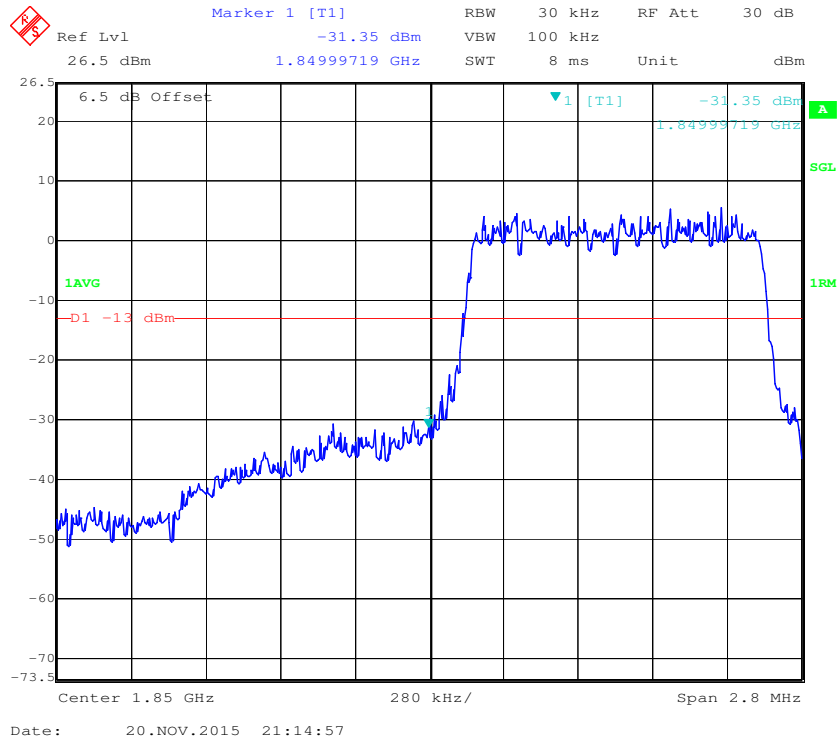


QPSK (1.4 MHz, FULL RB) - Right Band Edge

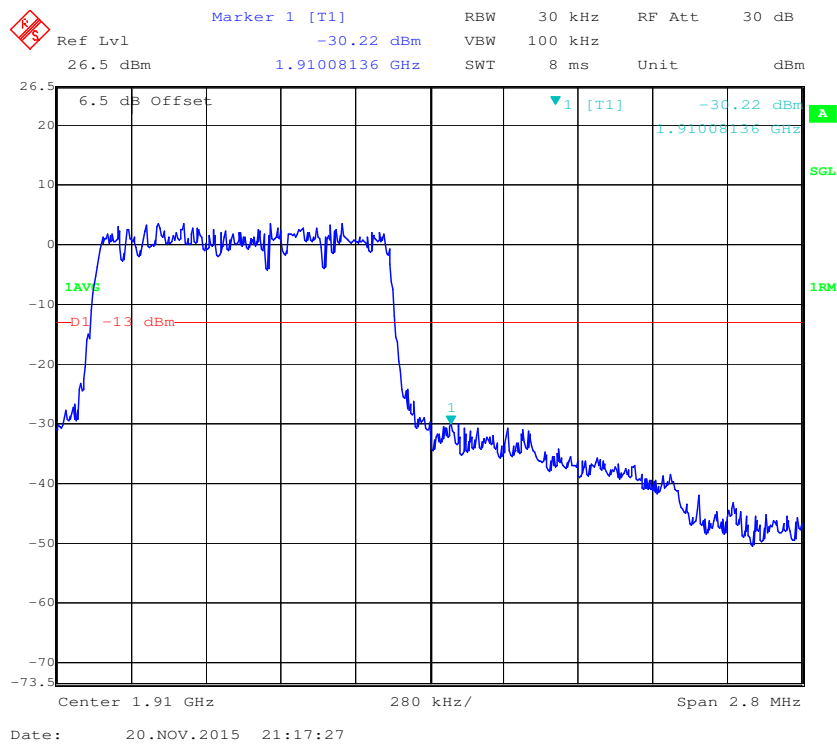


16-QAM (1.4 MHz, FULL RB) - Left Band Edge

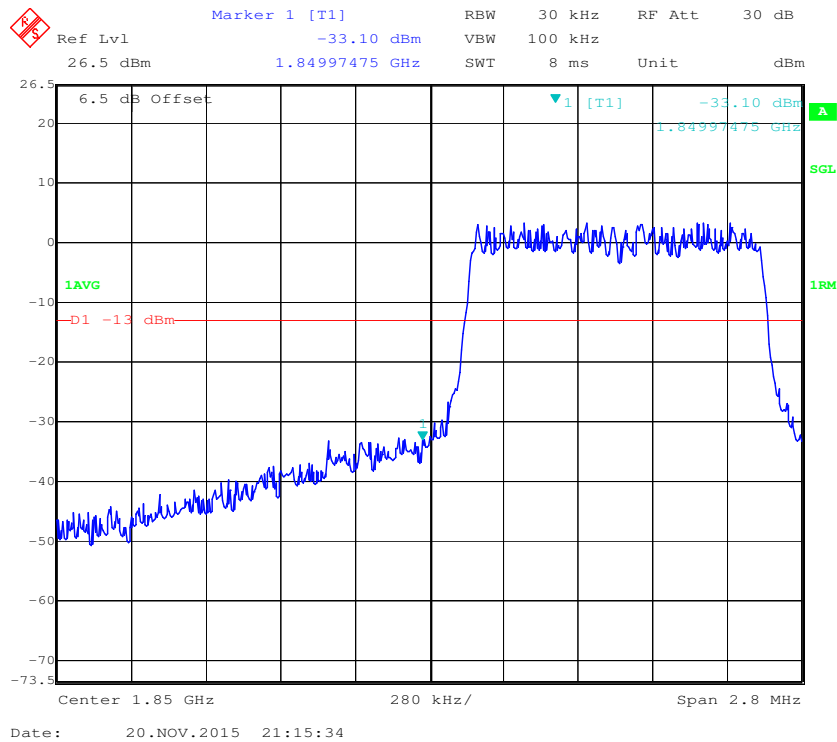


16-QAM (1.4 MHz, FULL RB) - Right Band Edge

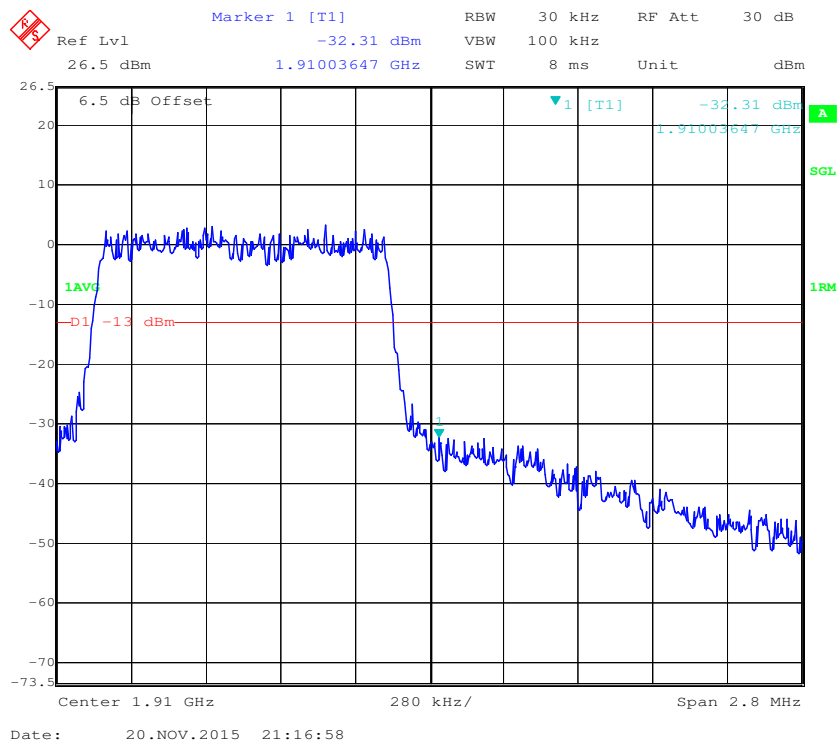


QPSK (3.0 MHz, FULL RB) - Left Band Edge

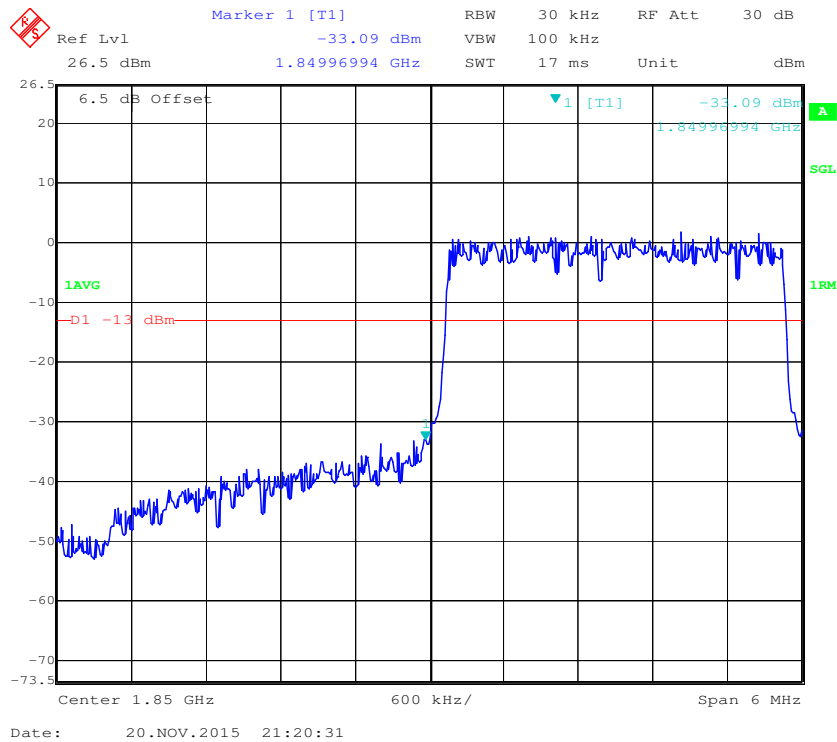


QPSK (3.0 MHz, FULL RB) - Right Band Edge

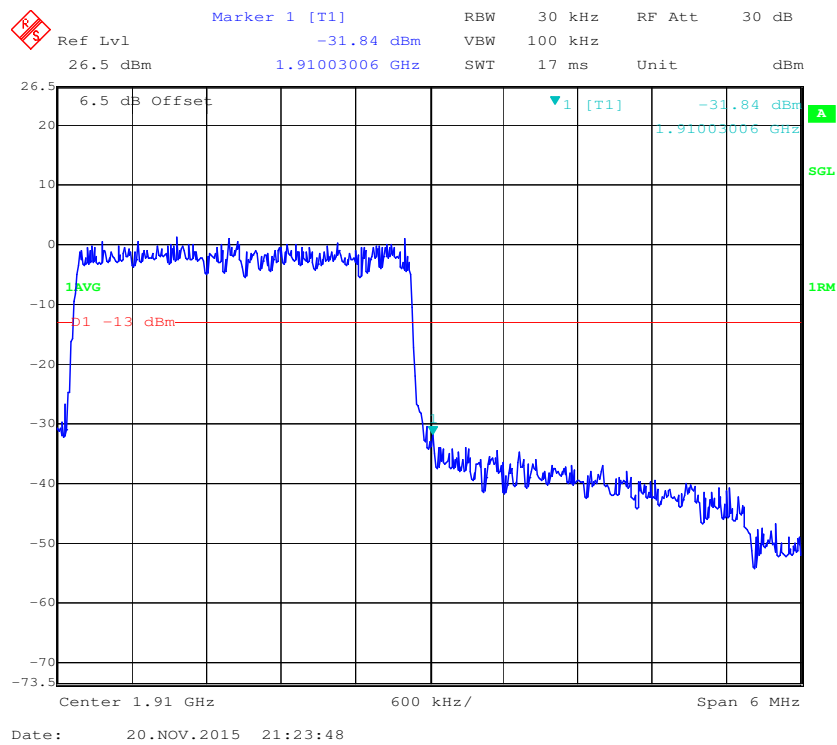


16-QAM (3.0 MHz, FULL RB) - Left Band Edge

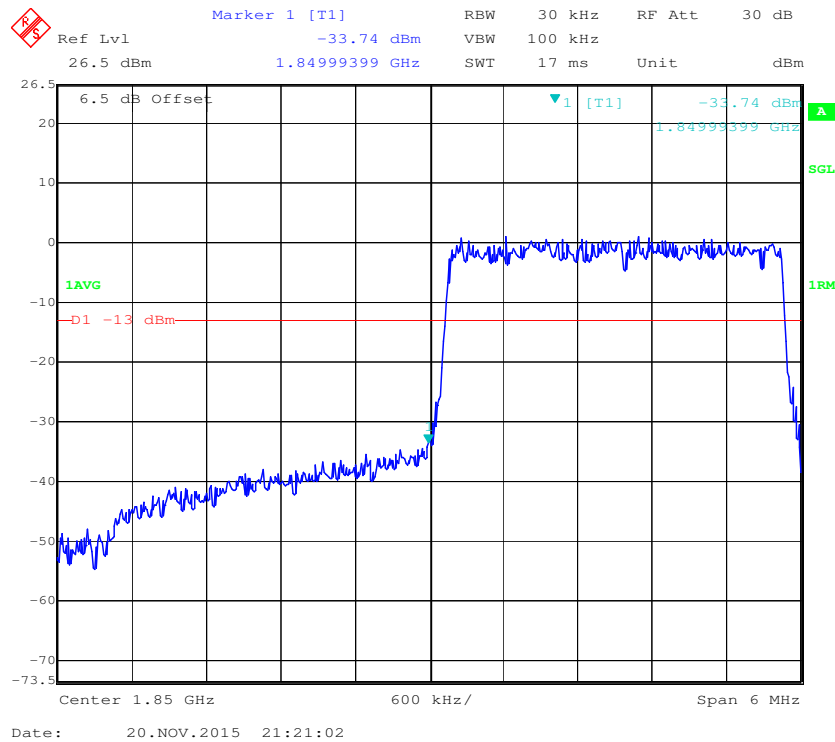


16-QAM (3.0 MHz, FULL RB) - Right Band Edge


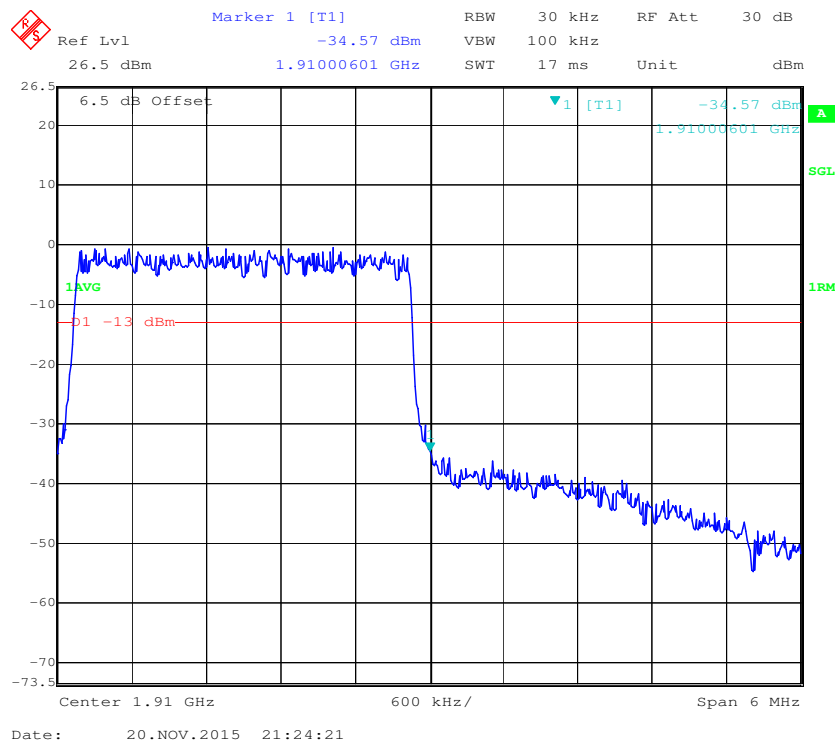


QPSK (5.0 MHz, FULL RB) - Left Band Edge

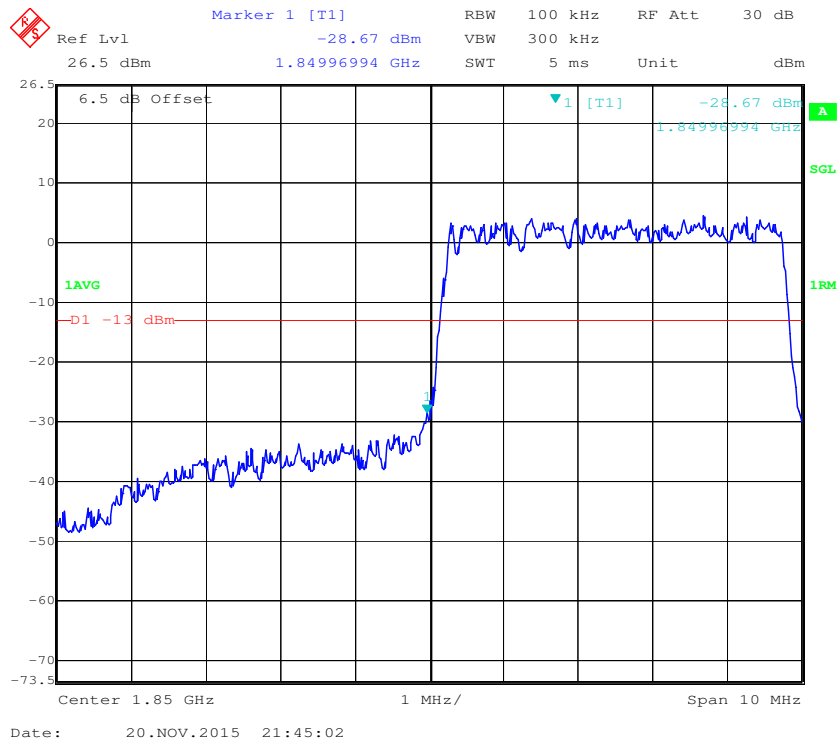


QPSK (5.0 MHz, FULL RB) - Right Band Edge

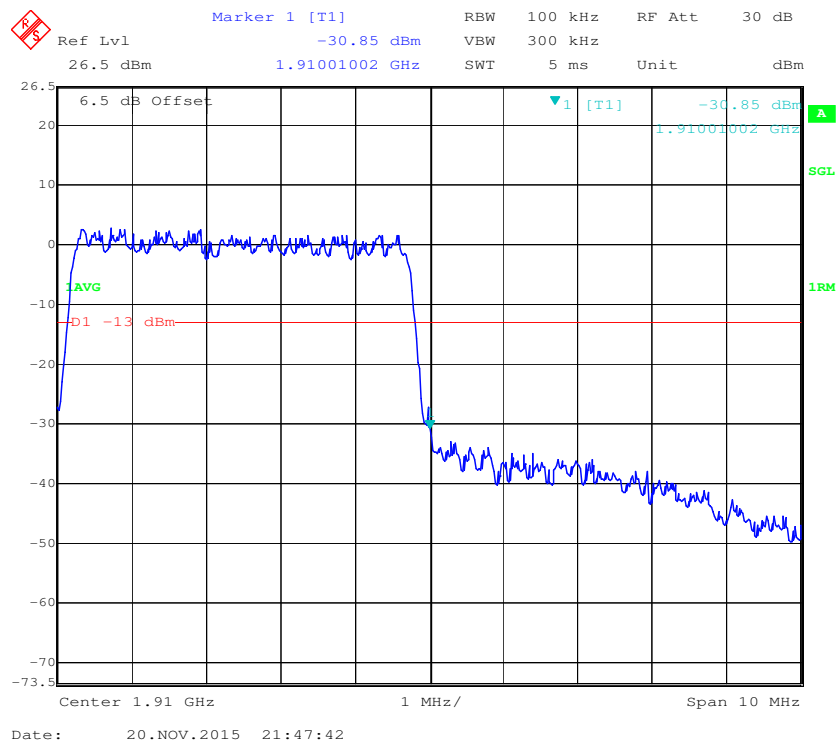


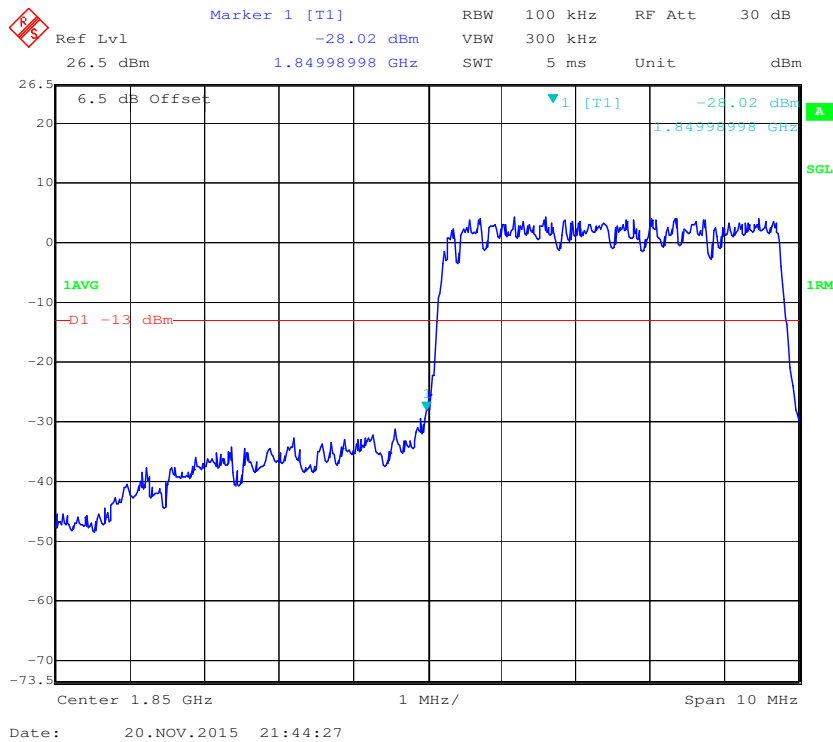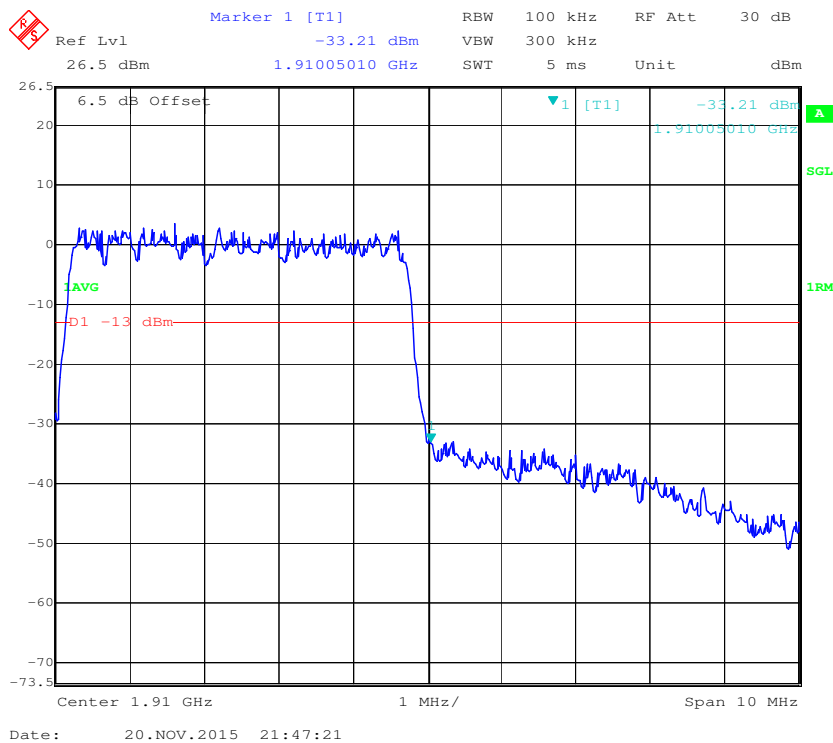16-QAM (5.0 MHz, FULL RB) - Left Band Edge**16-QAM (5.0 MHz, FULL RB) - Right Band Edge**


QPSK (10.0 MHz, FULL RB) - Left Band Edge

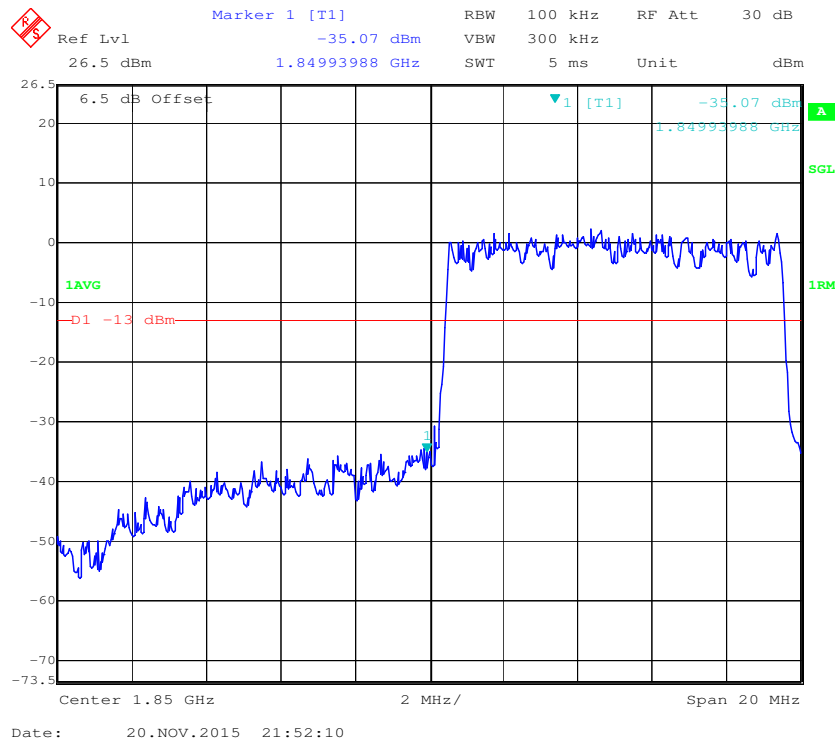


QPSK (10.0 MHz, FULL RB) - Right Band Edge

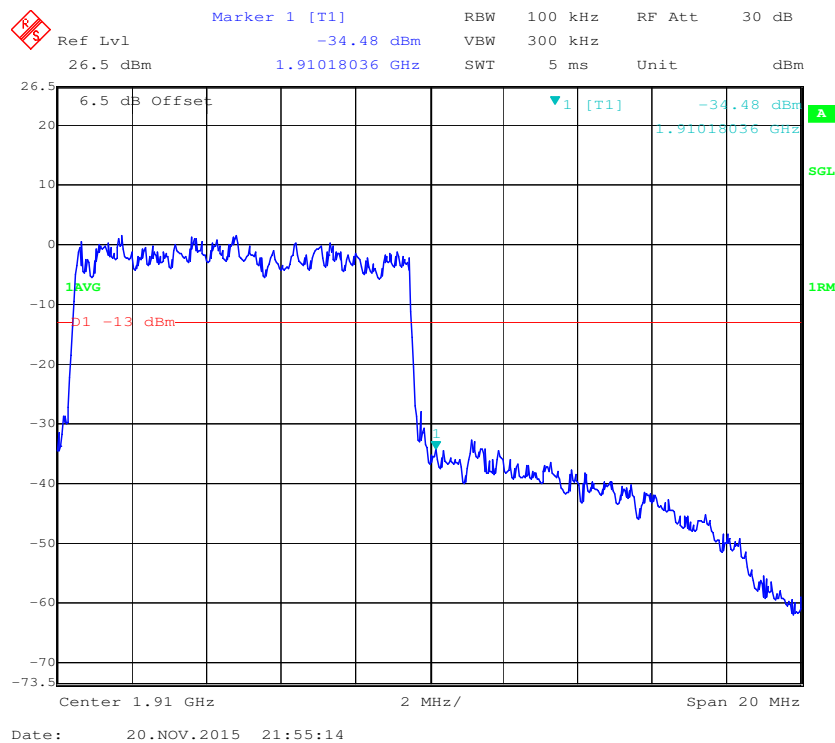


16-QAM (10.0 MHz, FULL RB) - Left Band Edge

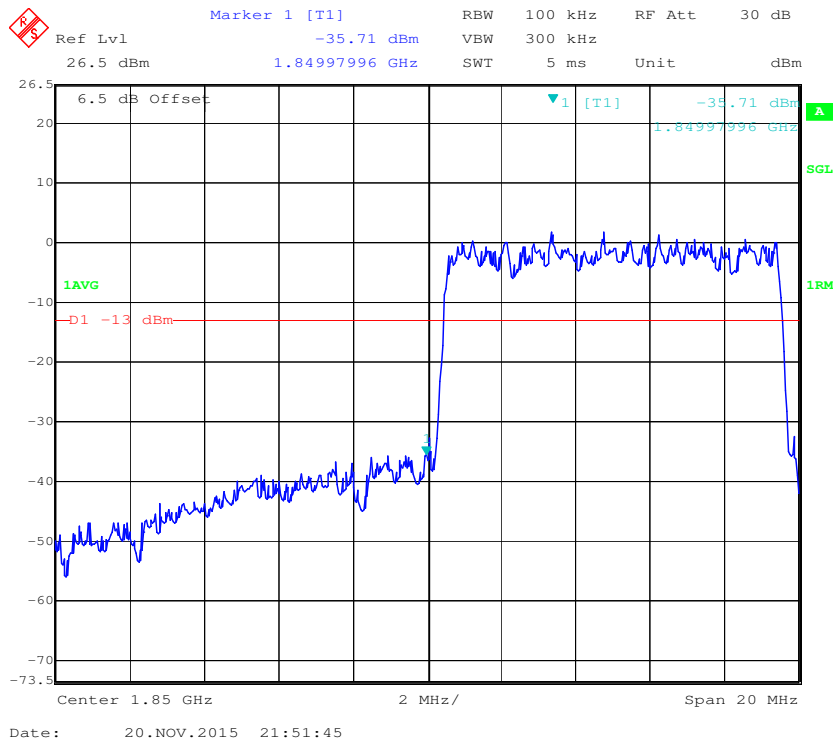


16-QAM (10.0 MHz, FULL RB) - Right Band Edge


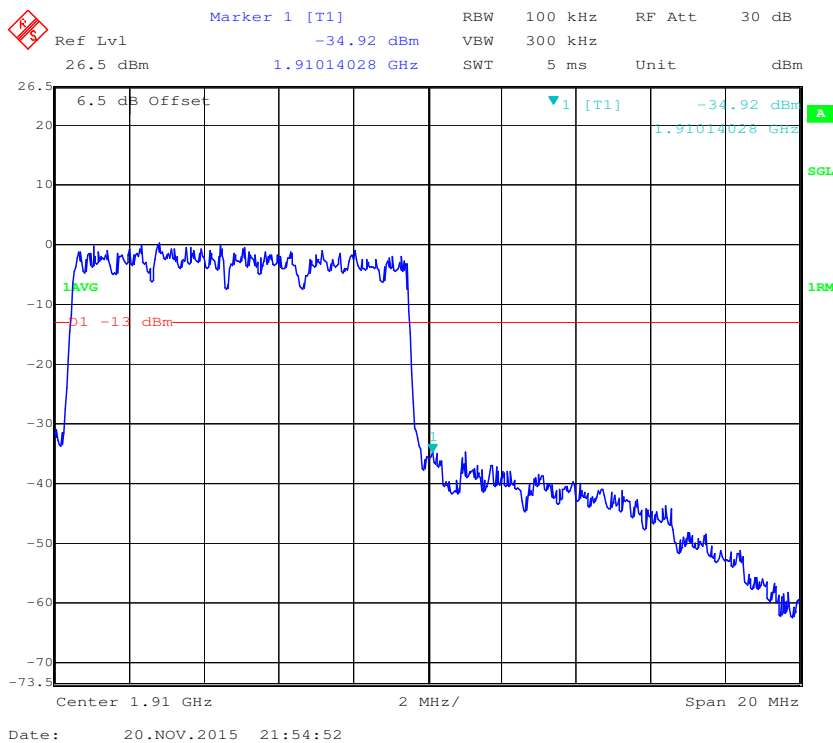




QPSK (15.0 MHz, FULL RB) - Left Band Edge

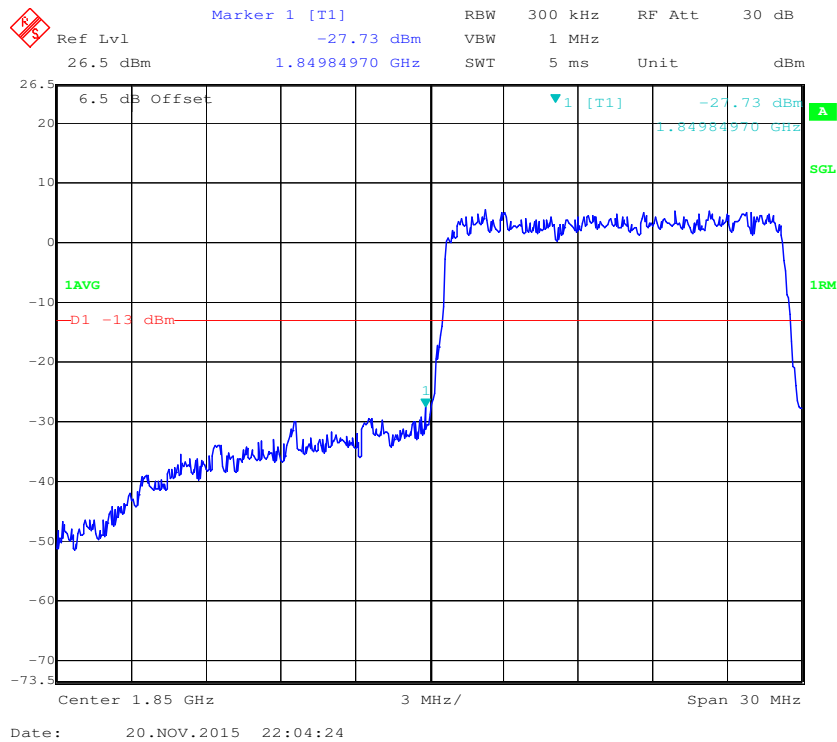


QPSK (15.0 MHz, FULL RB) - Right Band Edge

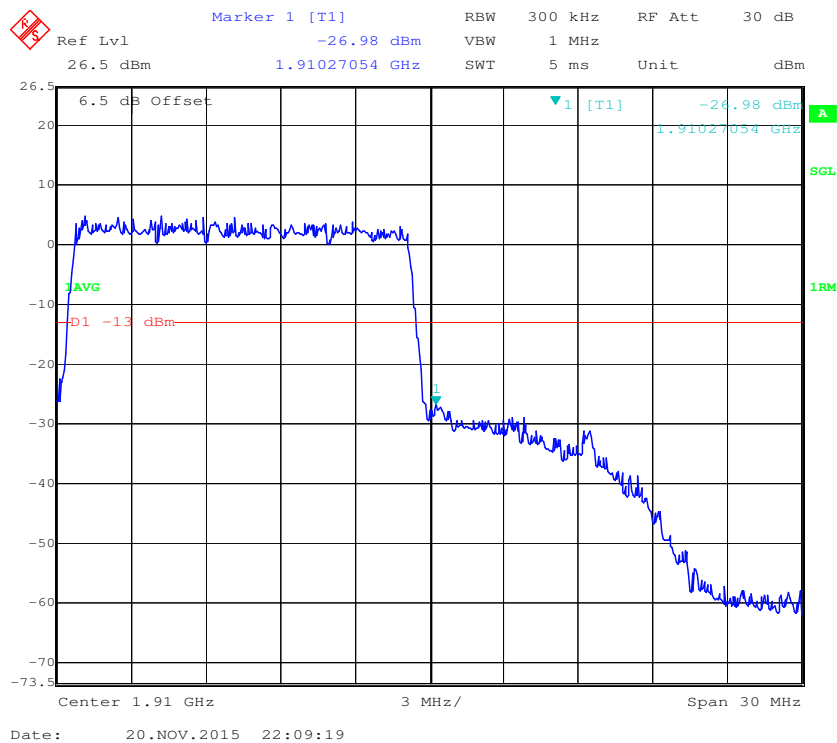

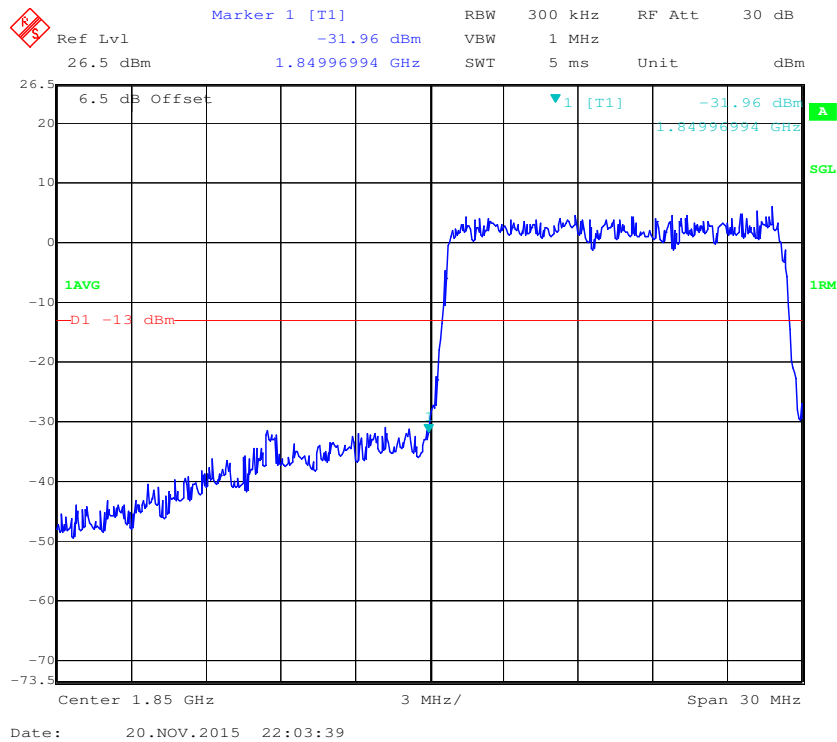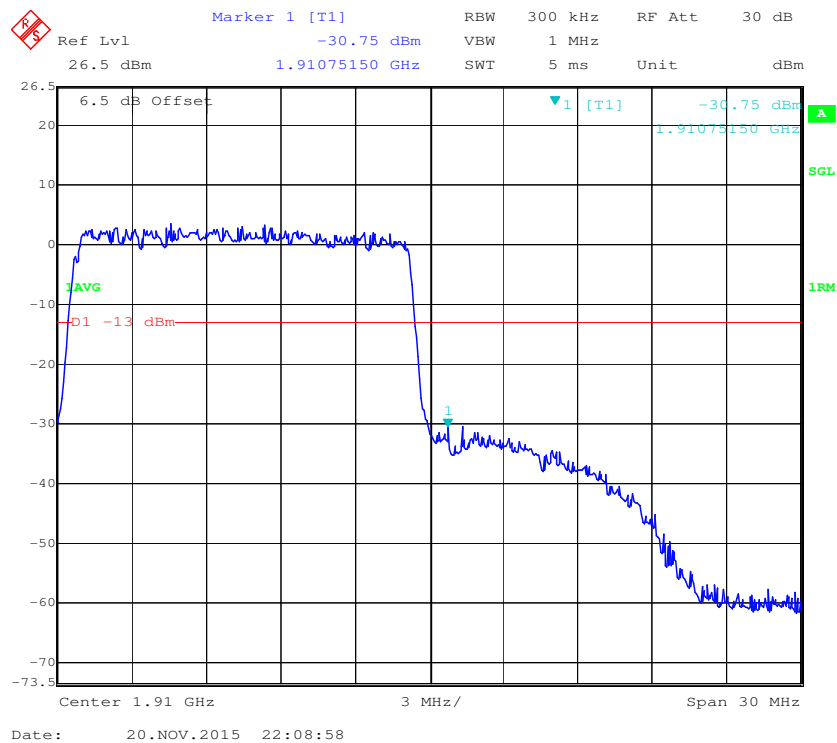
16-QAM (15.0 MHz, FULL RB) - Left Band Edge**16-QAM (15.0 MHz, FULL RB) - Right Band Edge**

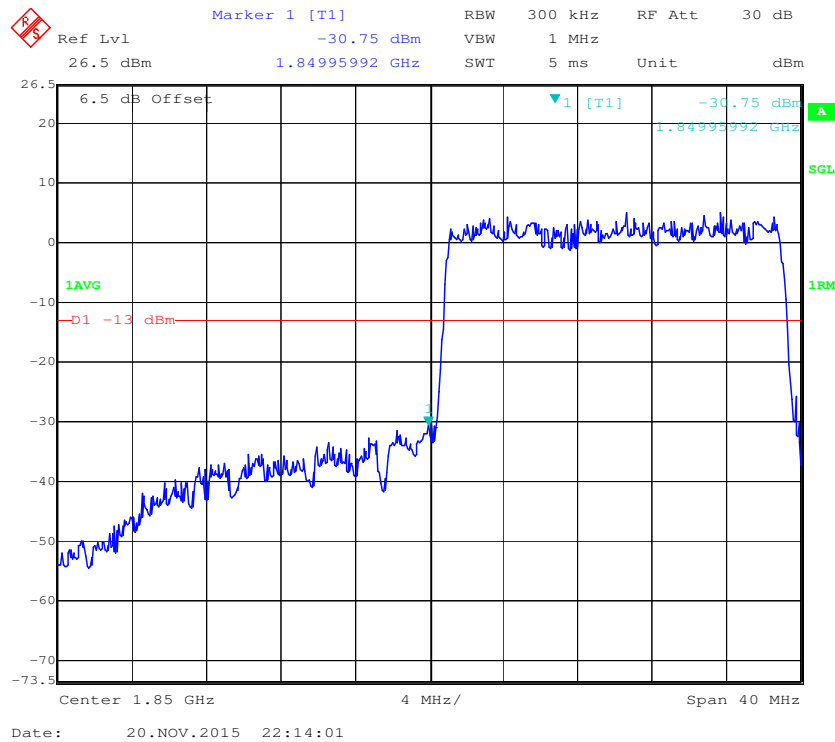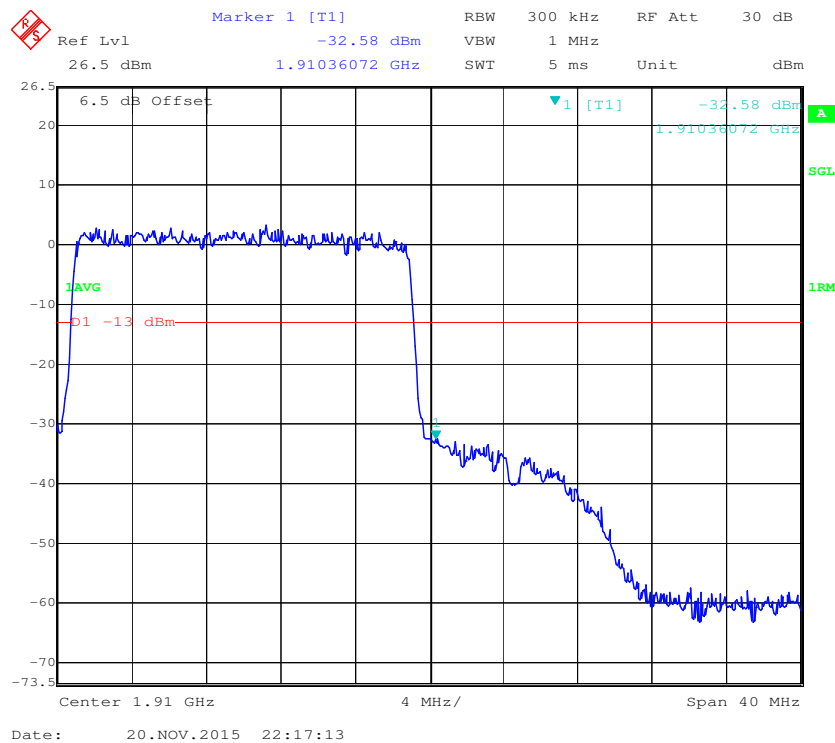QPSK (20.0 MHz, FULL RB) - Left Band Edge**QPSK (20.0 MHz, FULL RB) - Right Band Edge**

16-QAM (20.0 MHz, FULL RB) - Left Band Edge

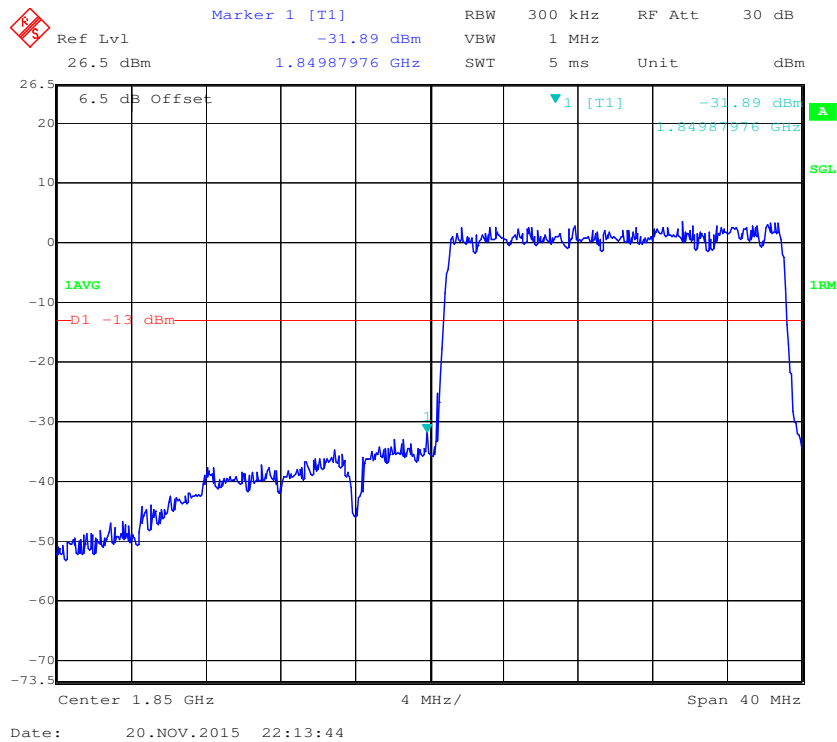


16-QAM (20.0 MHz, FULL RB) - Right Band Edge

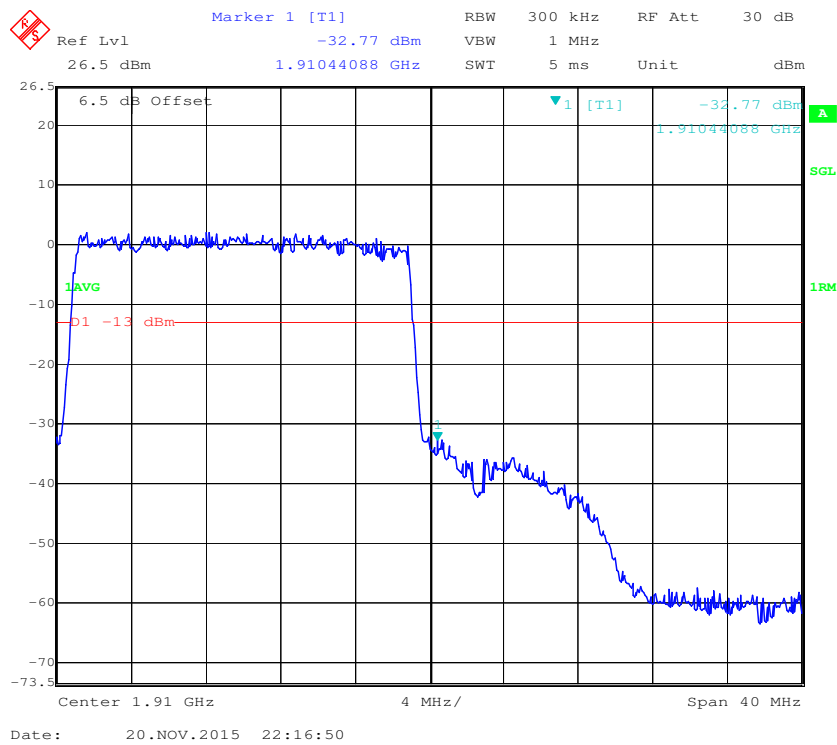


Band 4:


QPSK (1.4 MHz, FULL RB) - Left Band Edge

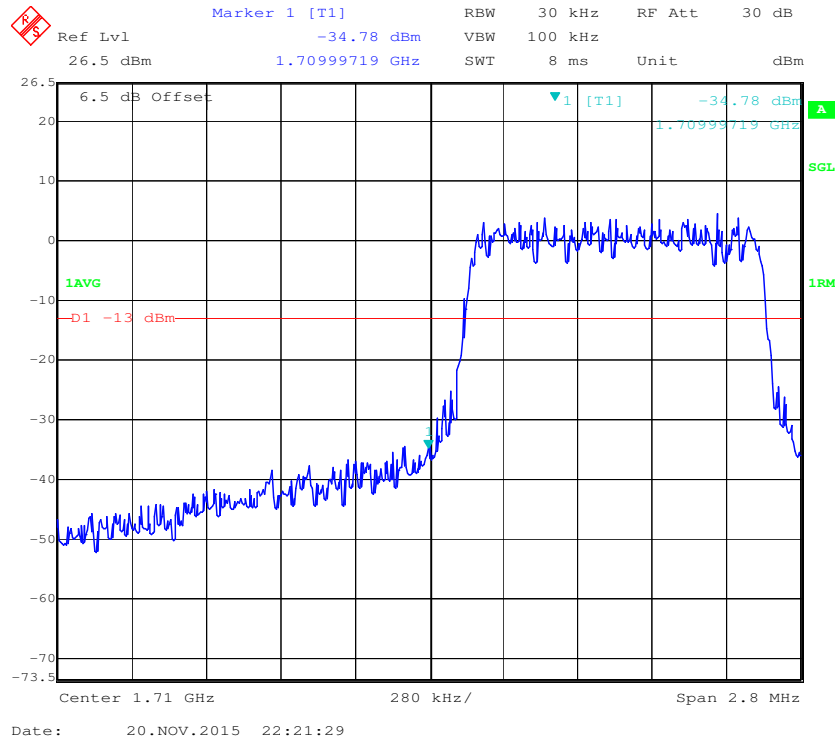


QPSK (1.4 MHz, FULL RB) - Right Band Edge

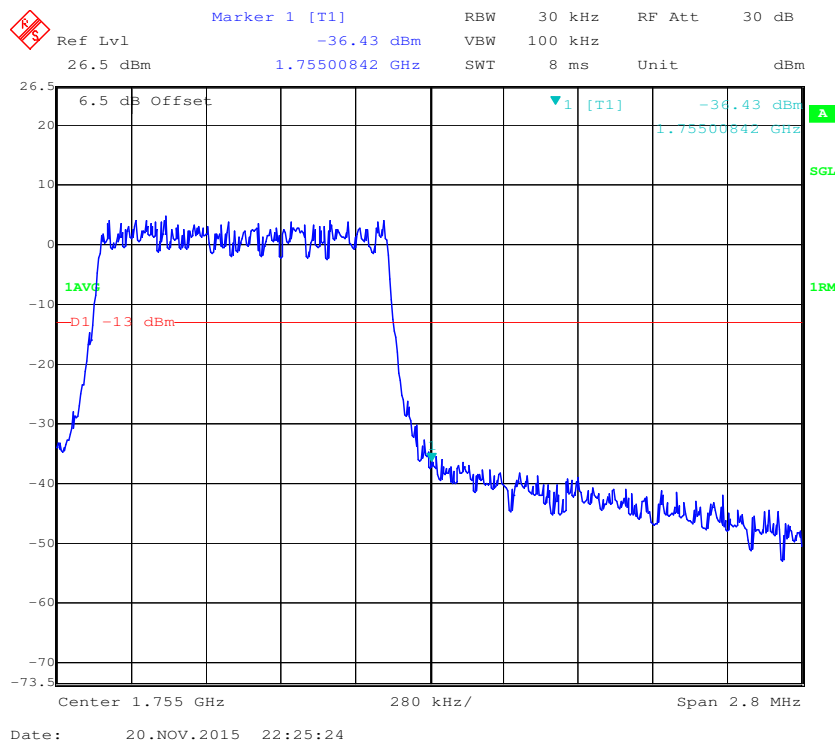


16-QAM (1.4 MHz, FULL RB) - Left Band Edge

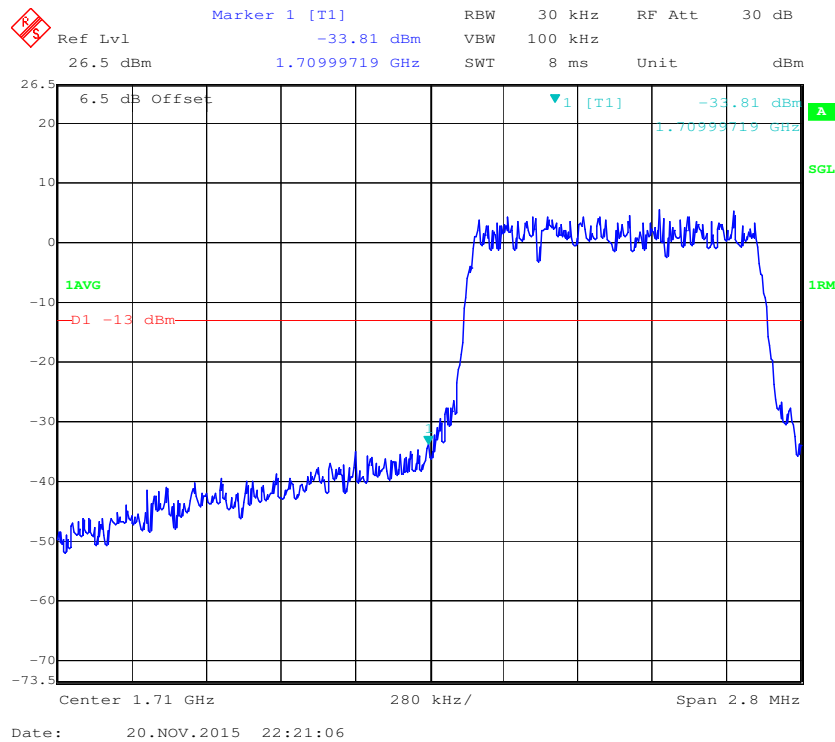


16-QAM (1.4 MHz, FULL RB) - Right Band Edge

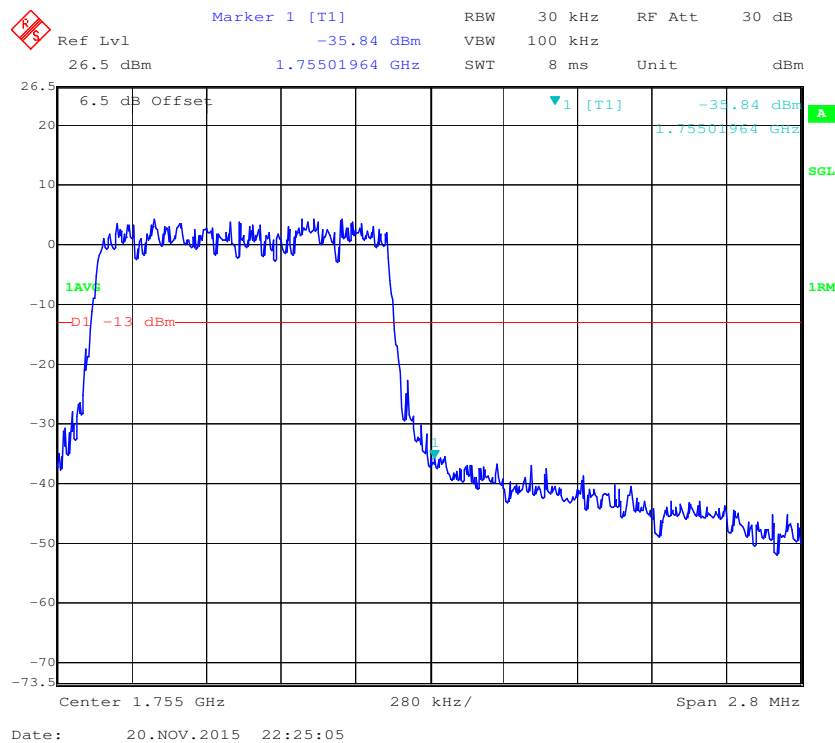


QPSK (3.0 MHz, FULL RB) - Left Band Edge

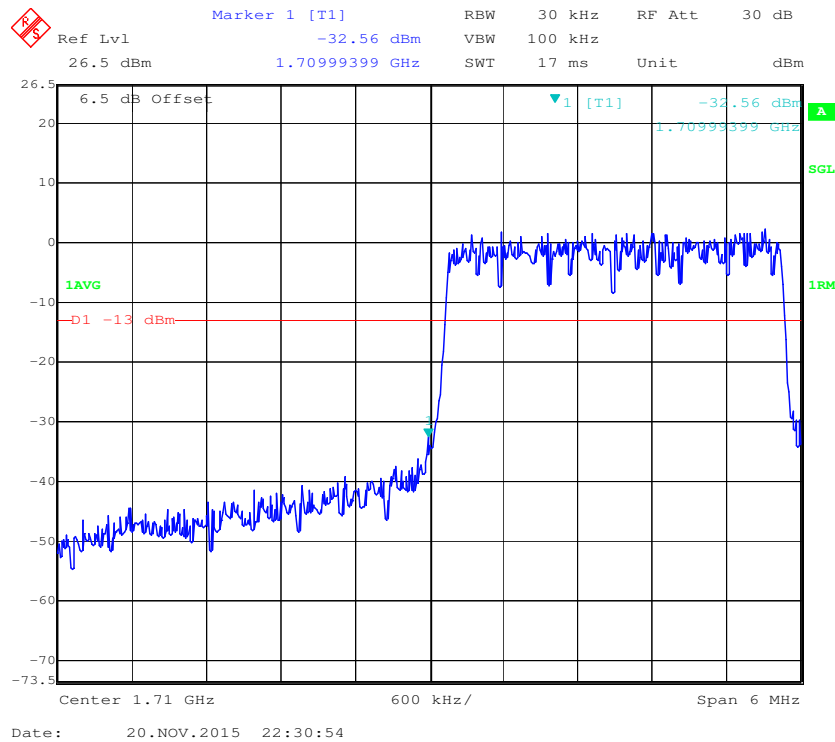


QPSK (3.0 MHz, FULL RB) - Right Band Edge

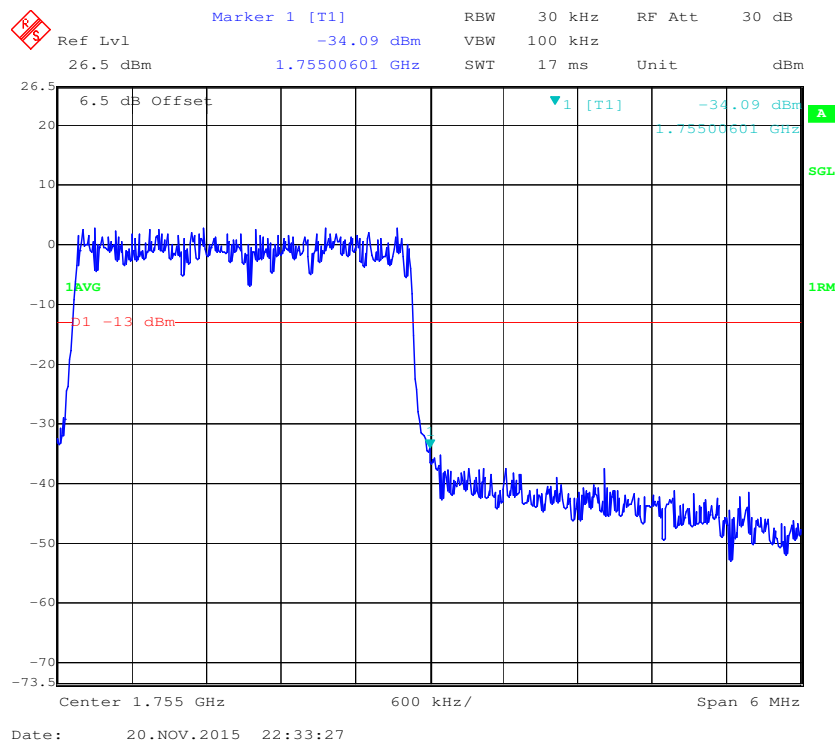


16-QAM (3.0 MHz, FULL RB) - Left Band Edge

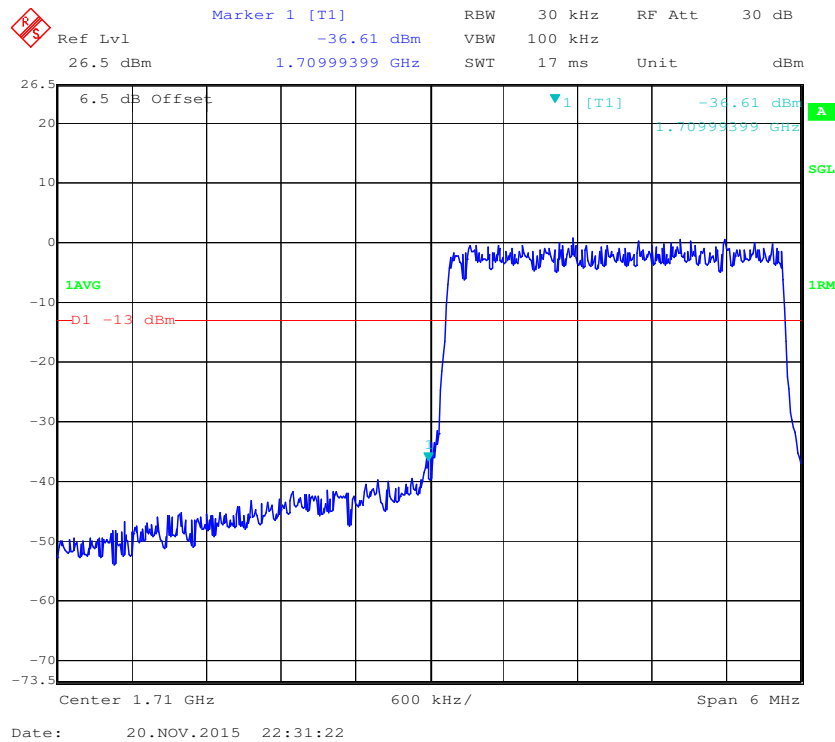


16-QAM (3.0 MHz, FULL RB) - Right Band Edge


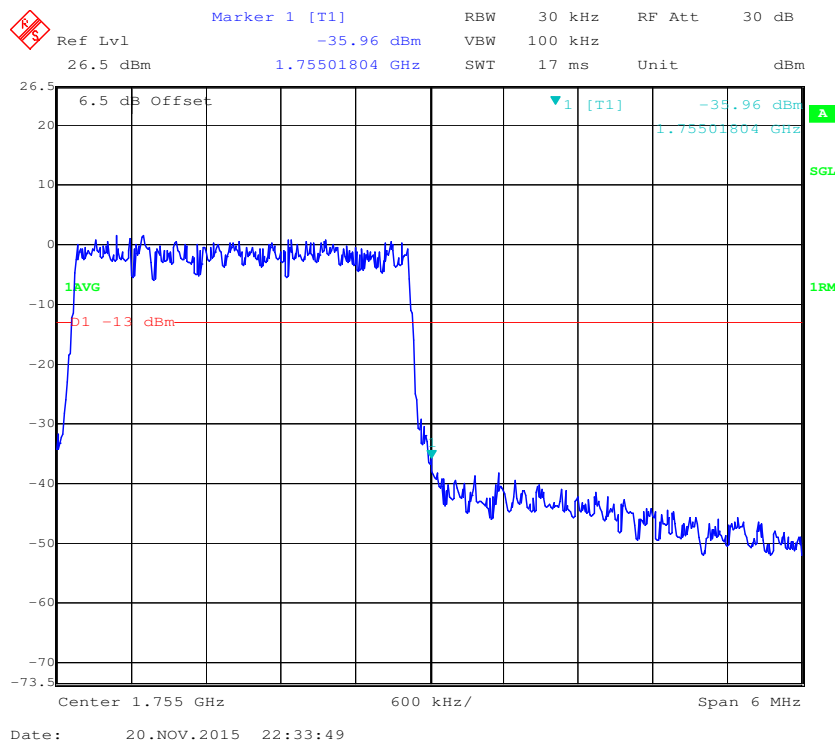


QPSK (5.0 MHz, FULL RB) - Left Band Edge

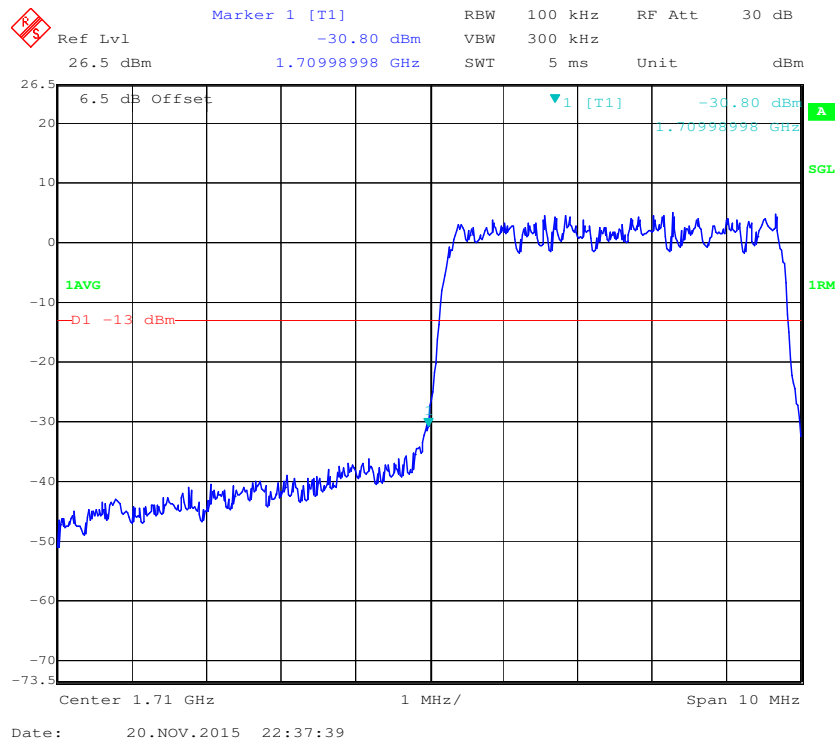


QPSK (5.0 MHz, FULL RB) - Right Band Edge

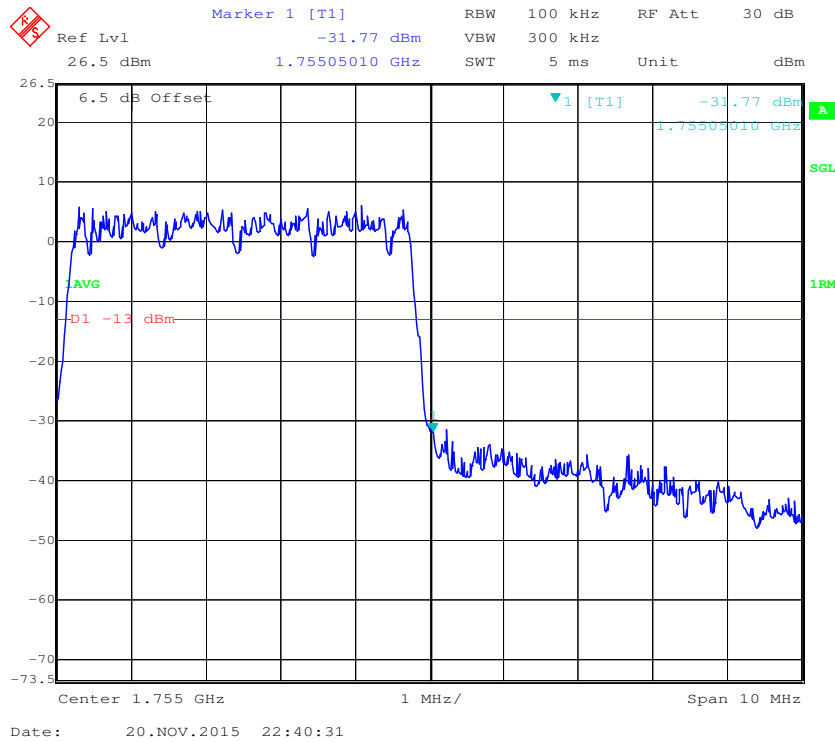


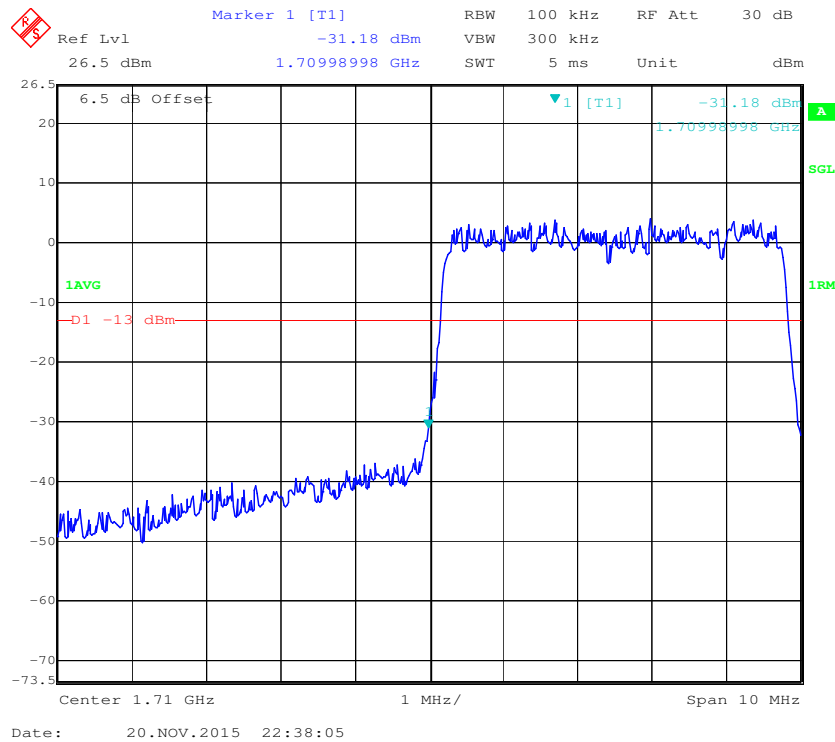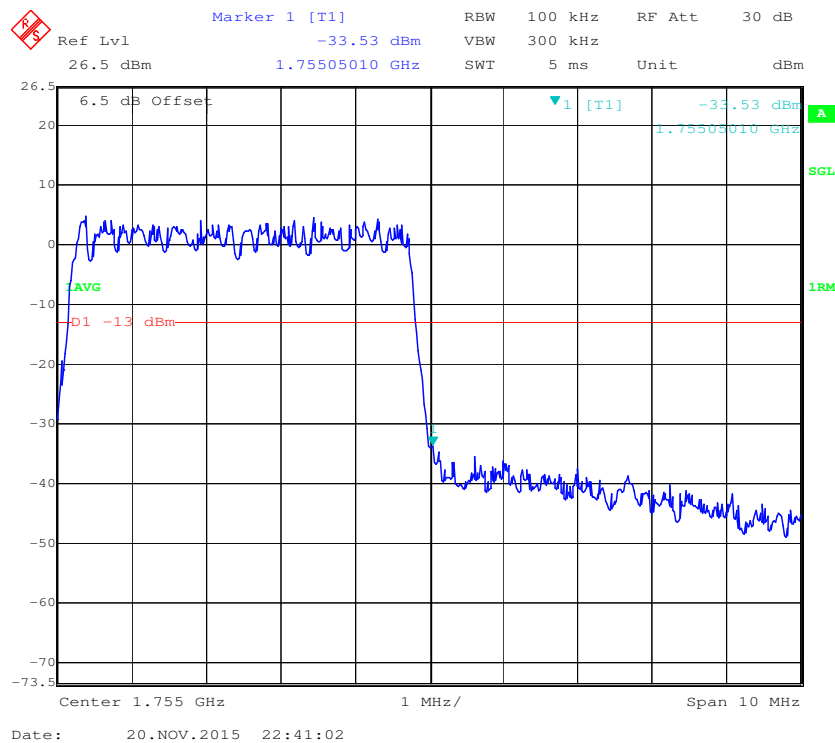16-QAM (5.0 MHz, FULL RB) - Left Band Edge**16-QAM (5.0 MHz, FULL RB) - Right Band Edge**


QPSK (10.0 MHz, FULL RB) - Left Band Edge

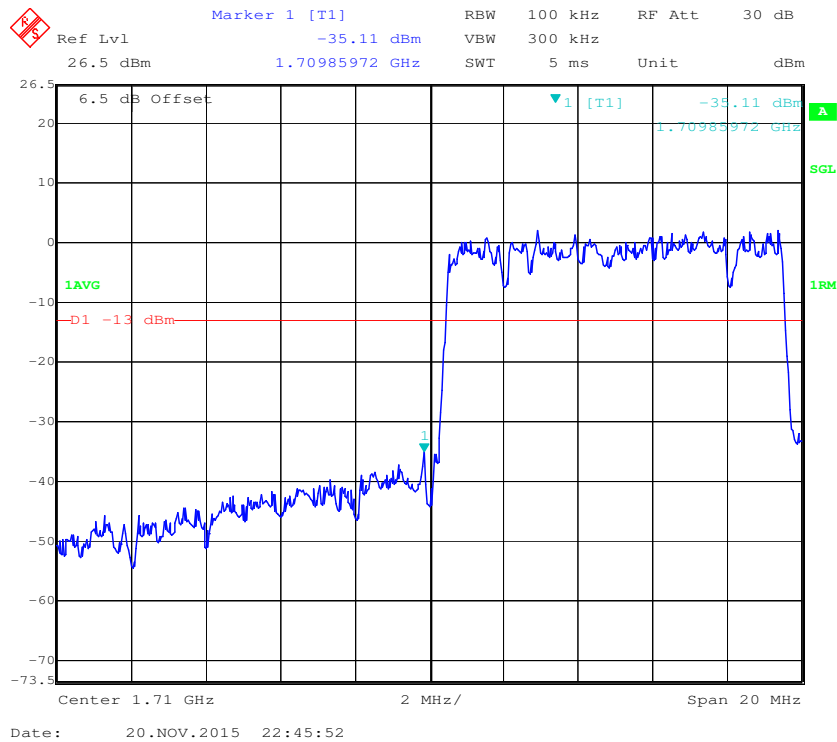


QPSK (10.0 MHz, FULL RB) - Right Band Edge

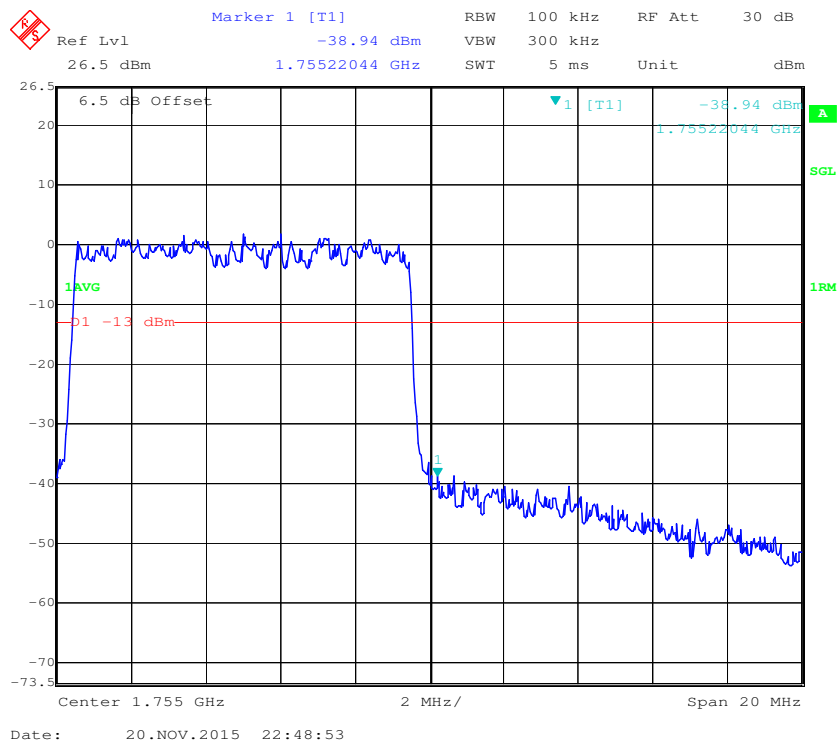


16-QAM (10.0 MHz, FULL RB) - Left Band Edge

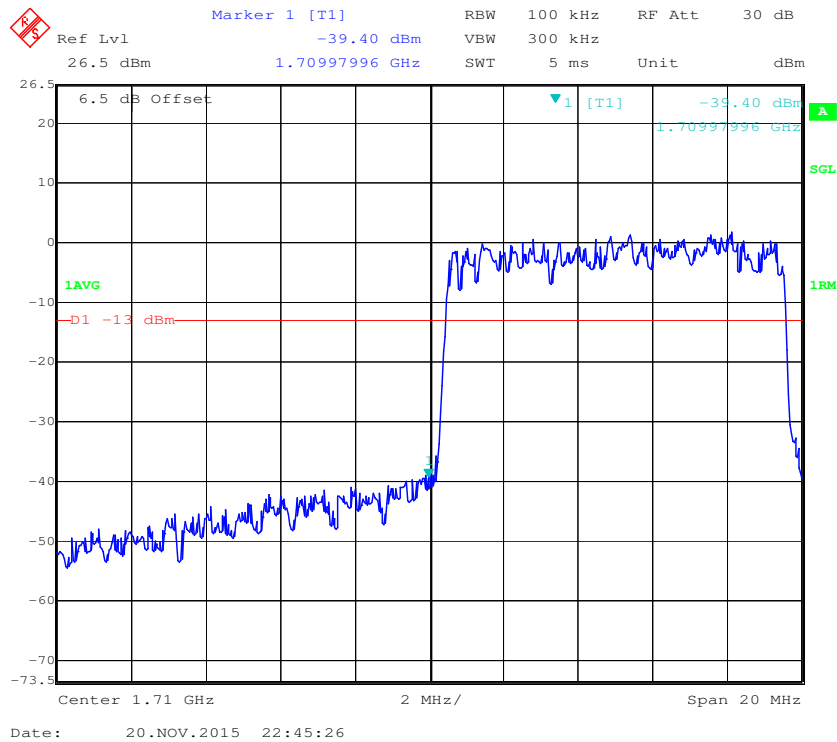


16-QAM (10.0 MHz, FULL RB) - Right Band Edge


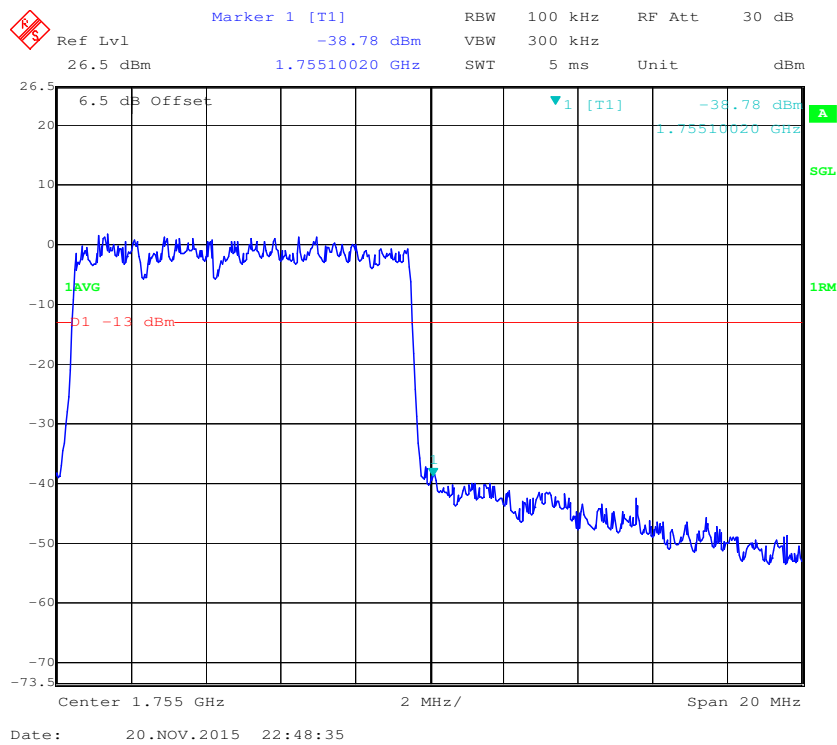


QPSK (15.0 MHz, FULL RB) - Left Band Edge

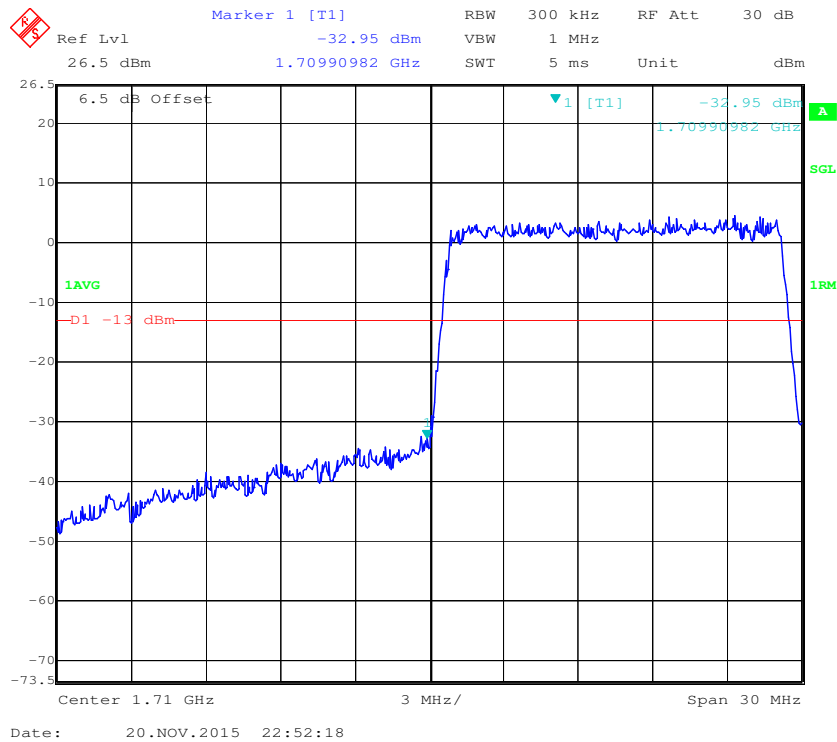


QPSK (15.0 MHz, FULL RB) - Right Band Edge

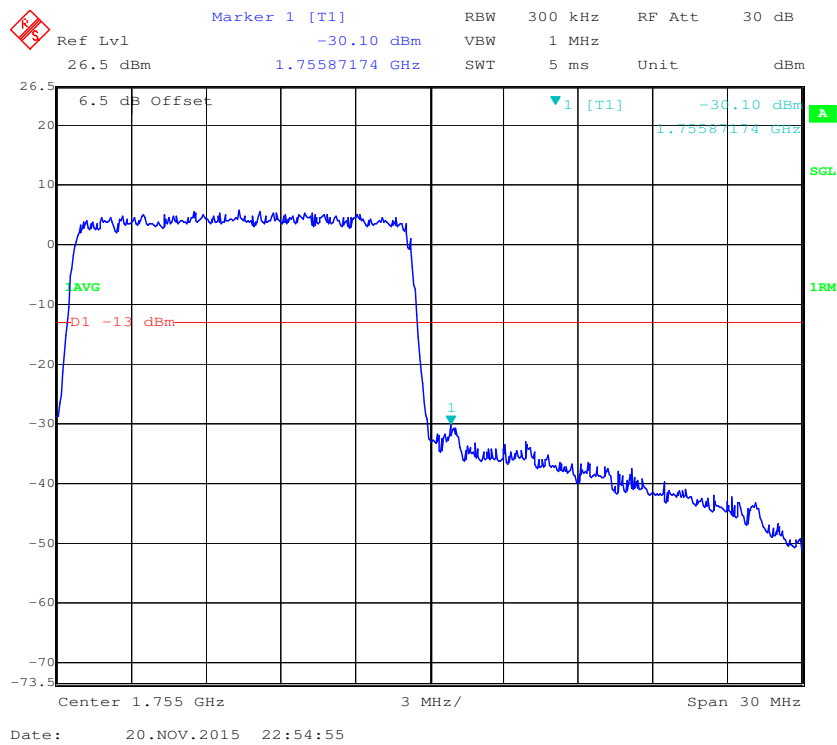


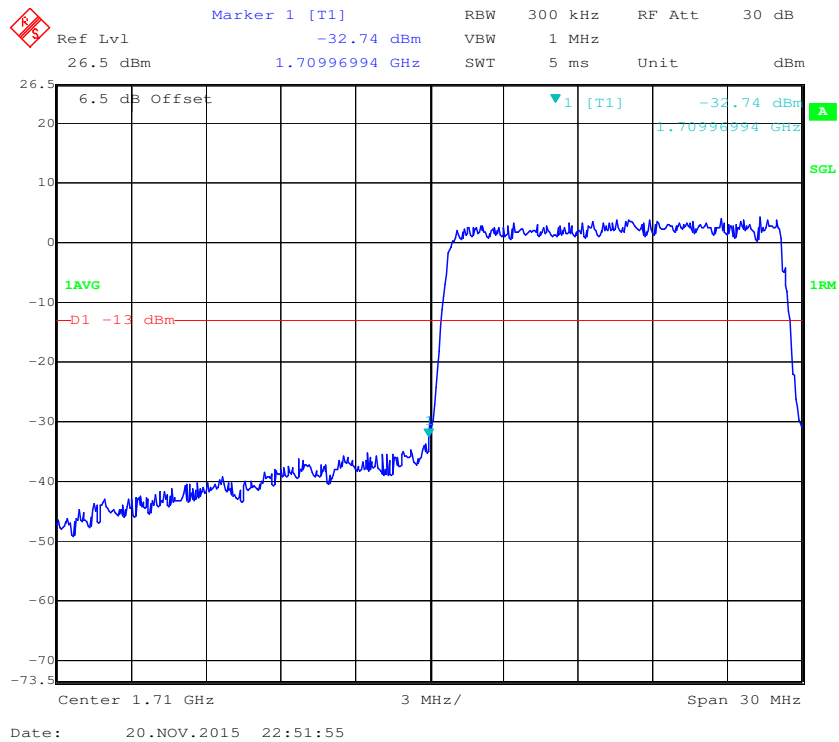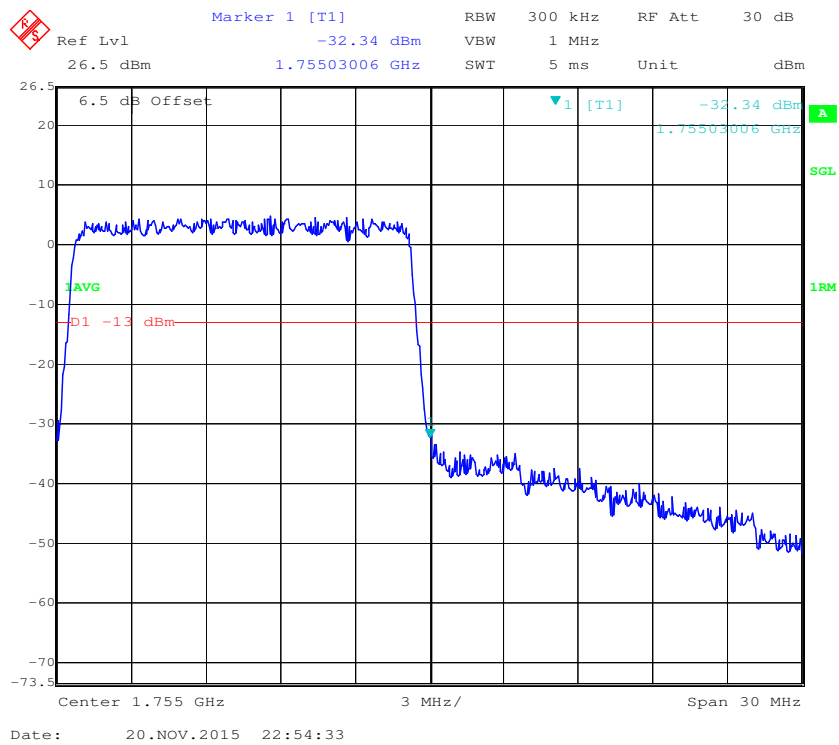16-QAM (15.0 MHz, FULL RB) - Left Band Edge**16-QAM (15.0 MHz, FULL RB) - Right Band Edge**


QPSK (20.0 MHz, FULL RB) - Left Band Edge

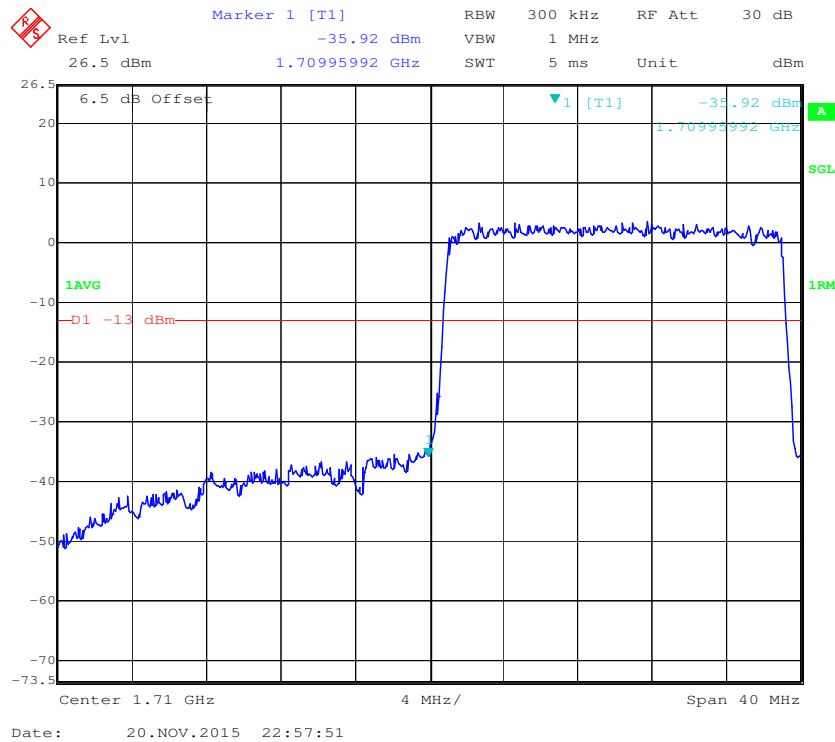


QPSK (20.0 MHz, FULL RB) - Right Band Edge

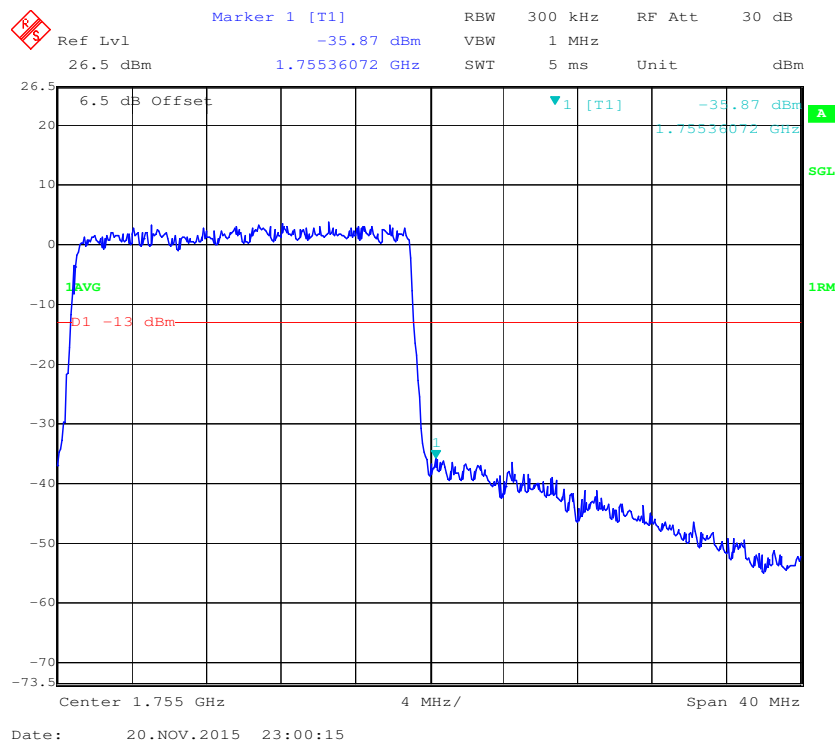

16-QAM (20.0 MHz, FULL RB) - Left Band Edge

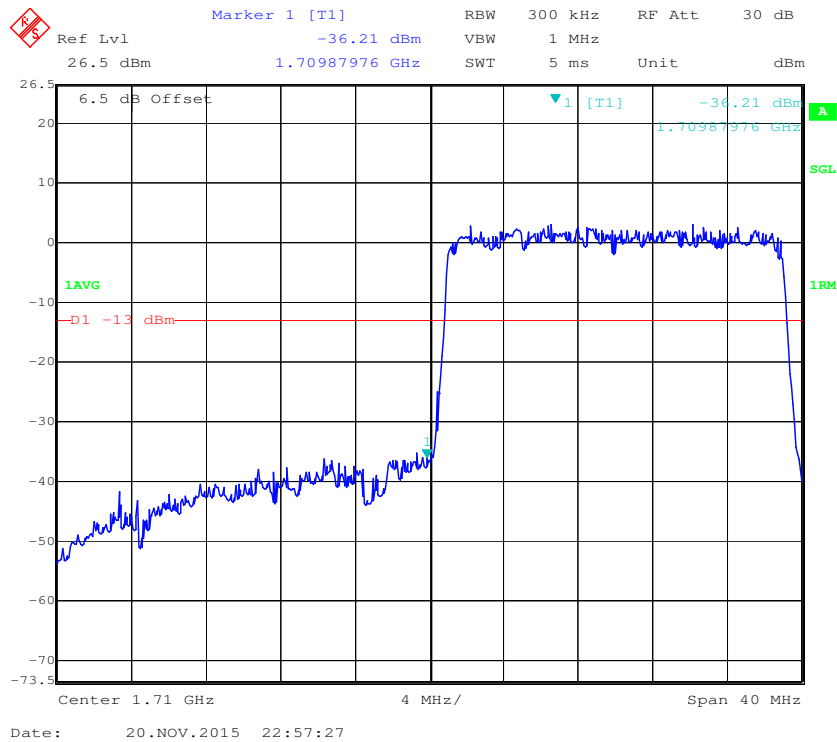


16-QAM (20.0 MHz, FULL RB) - Right Band Edge

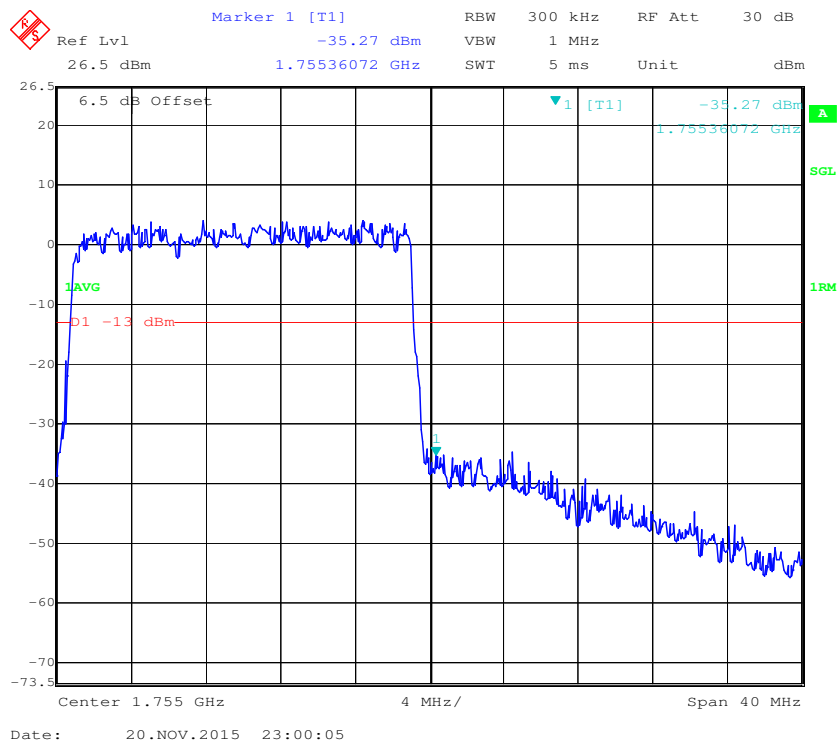


Band 12:


QPSK (1.4 MHz, FULL RB) - Left Band Edge

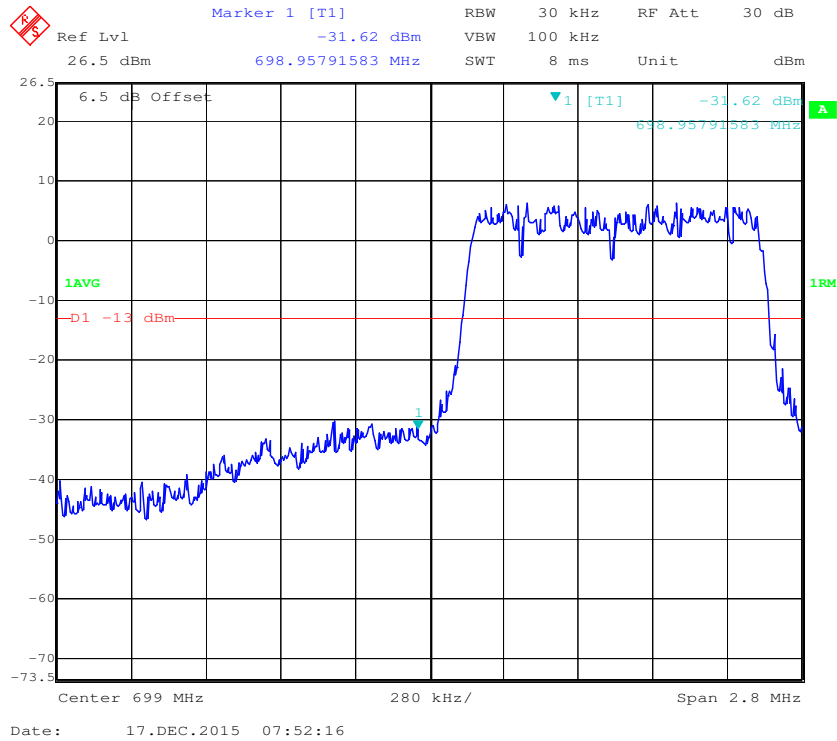


QPSK (1.4 MHz, FULL RB) - Right Band Edge

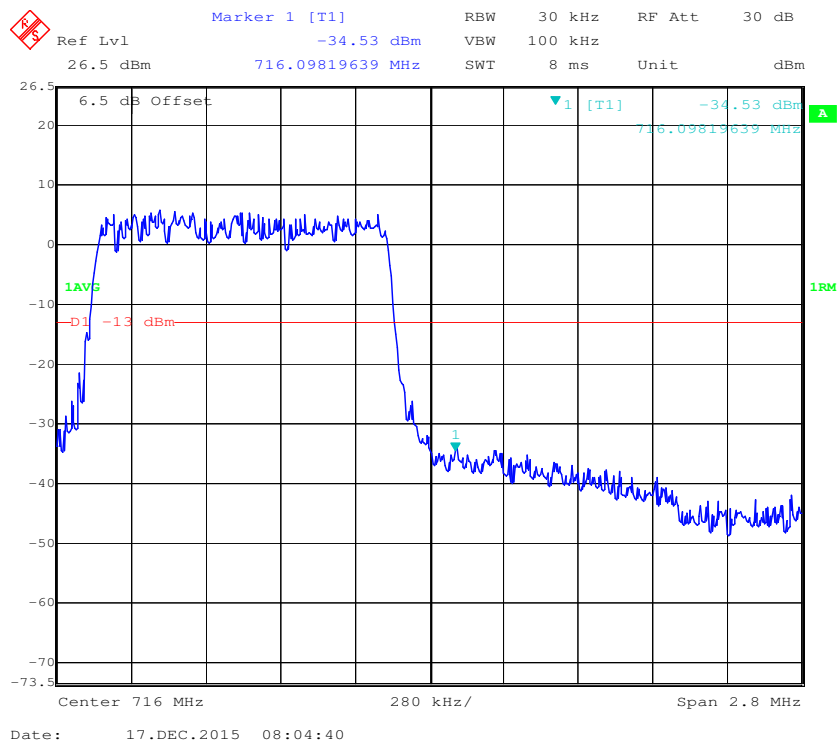


16-QAM (1.4 MHz, FULL RB) - Left Band Edge

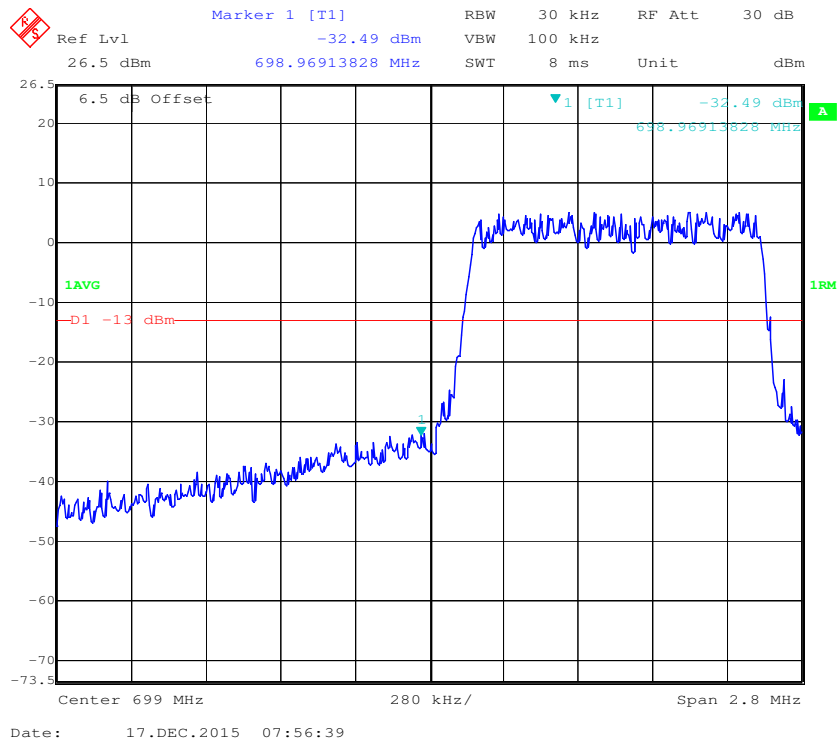


16-QAM (1.4 MHz, FULL RB) - Right Band Edge


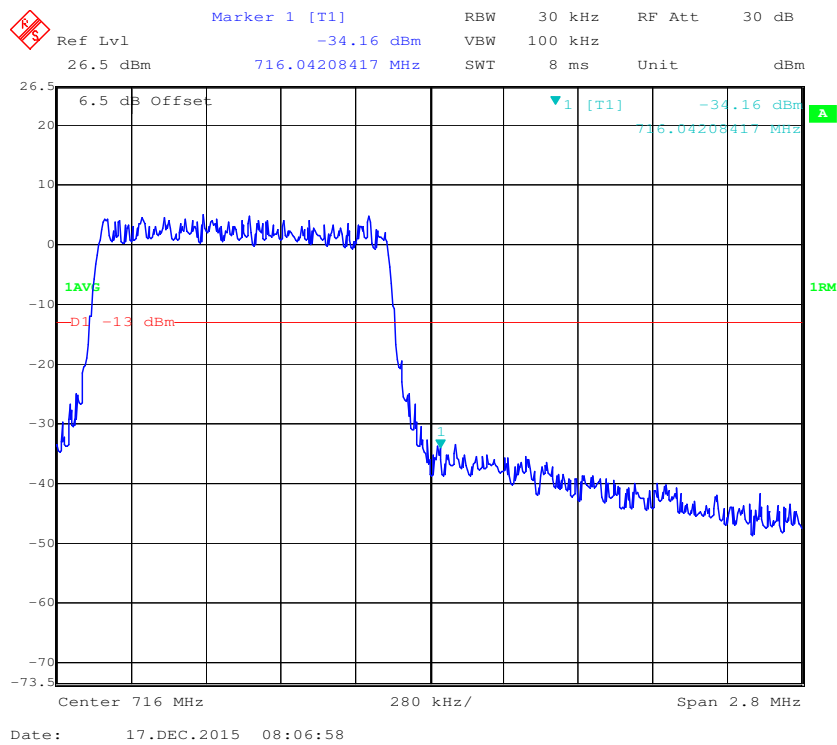




QPSK (3.0 MHz, FULL RB) - Left Band Edge

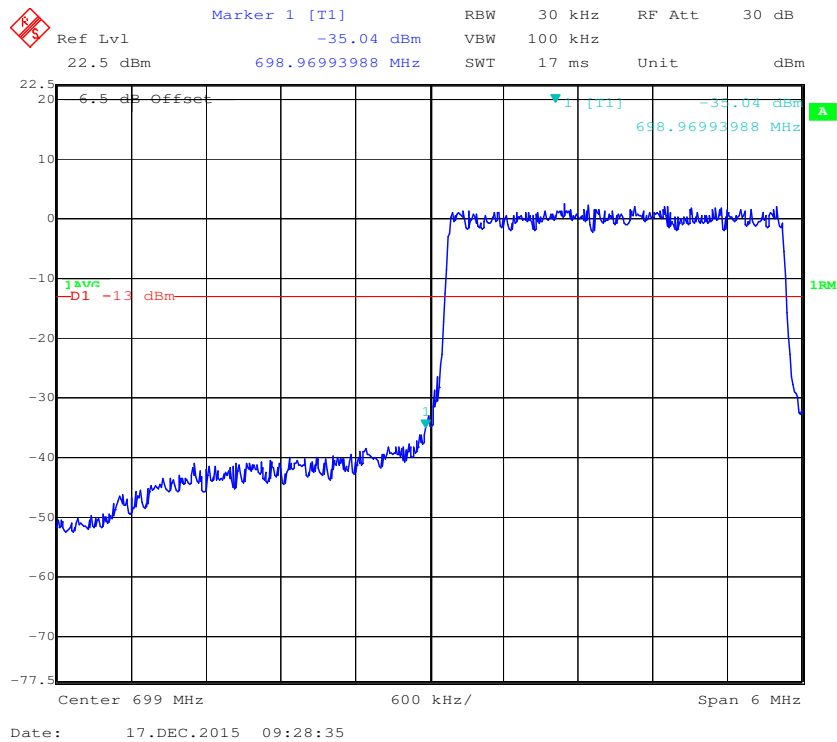


QPSK (3.0 MHz, FULL RB) - Right Band Edge

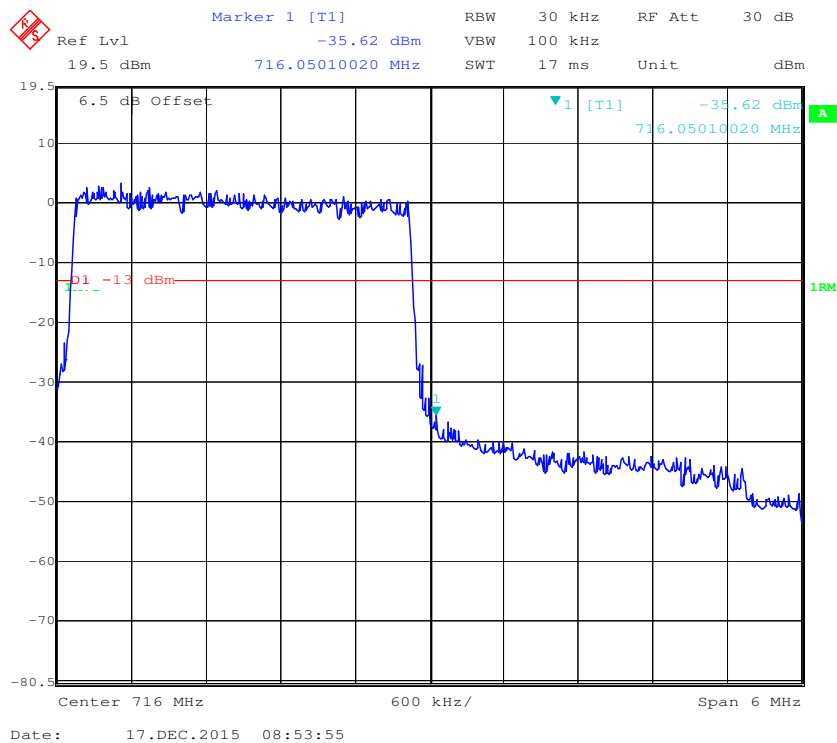

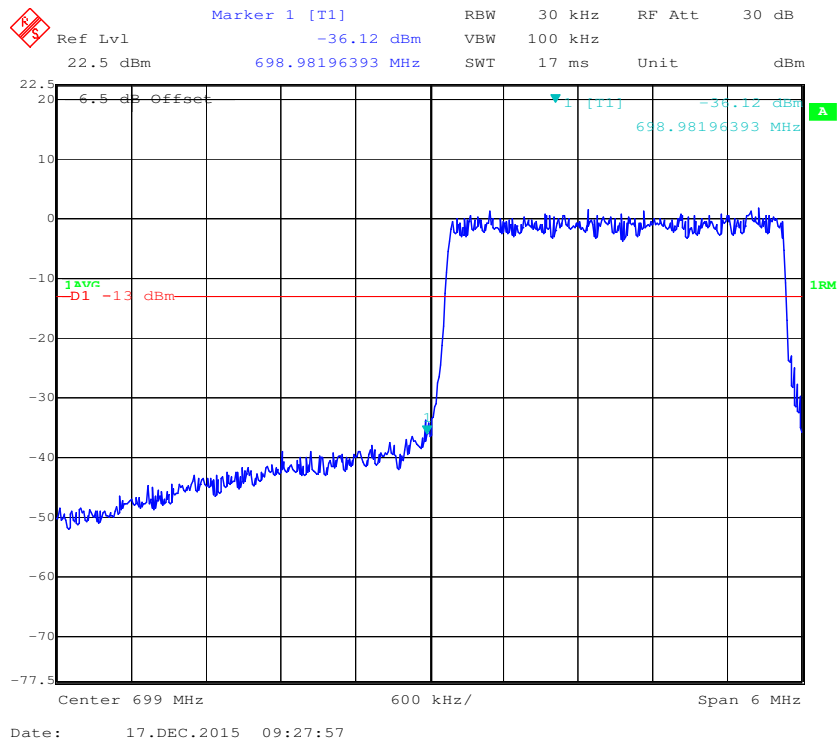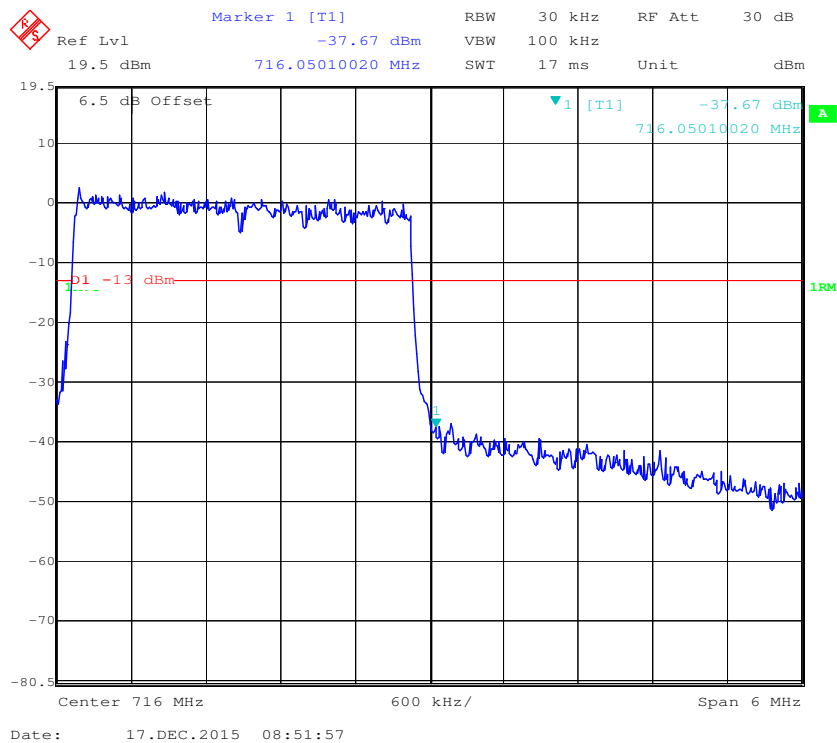
16-QAM (3.0 MHz, FULL RB) - Left Band Edge**16-QAM (3.0 MHz, FULL RB) - Right Band Edge**

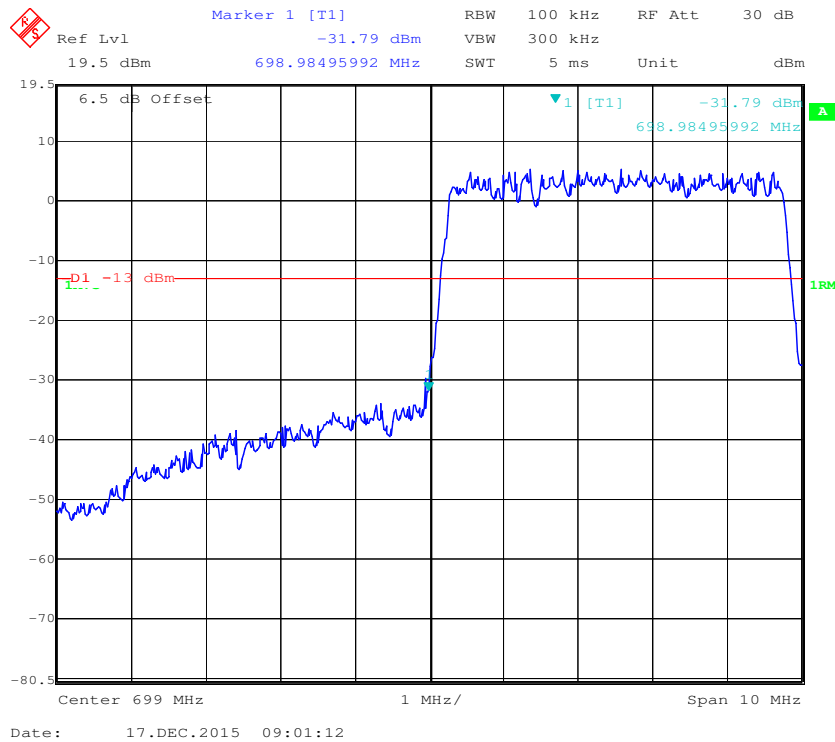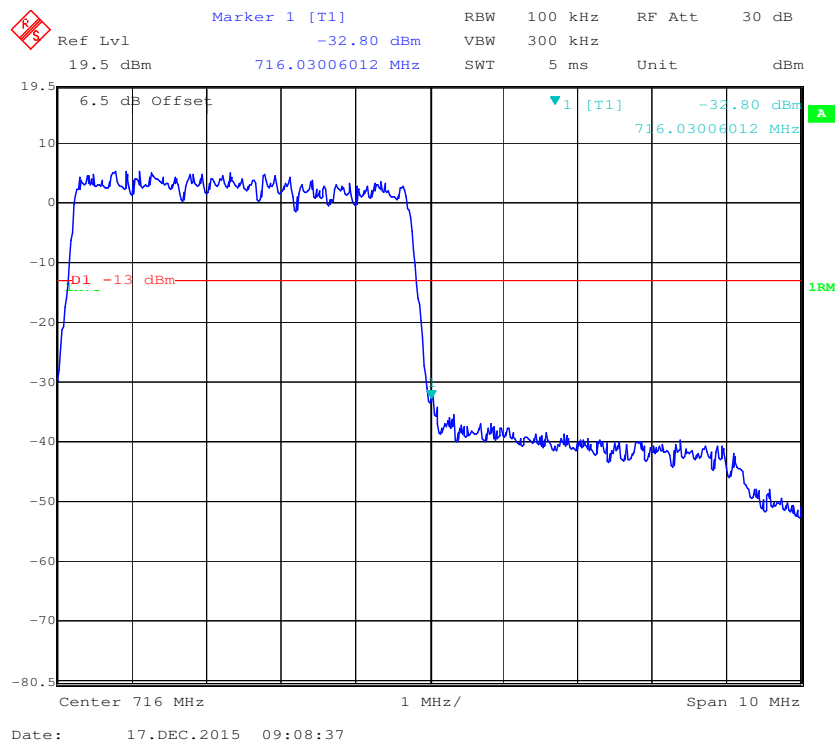QPSK (5.0 MHz, FULL RB) - Left Band Edge**QPSK (5.0 MHz, FULL RB) - Right Band Edge**


16-QAM (5.0 MHz, FULL RB) - Left Band Edge

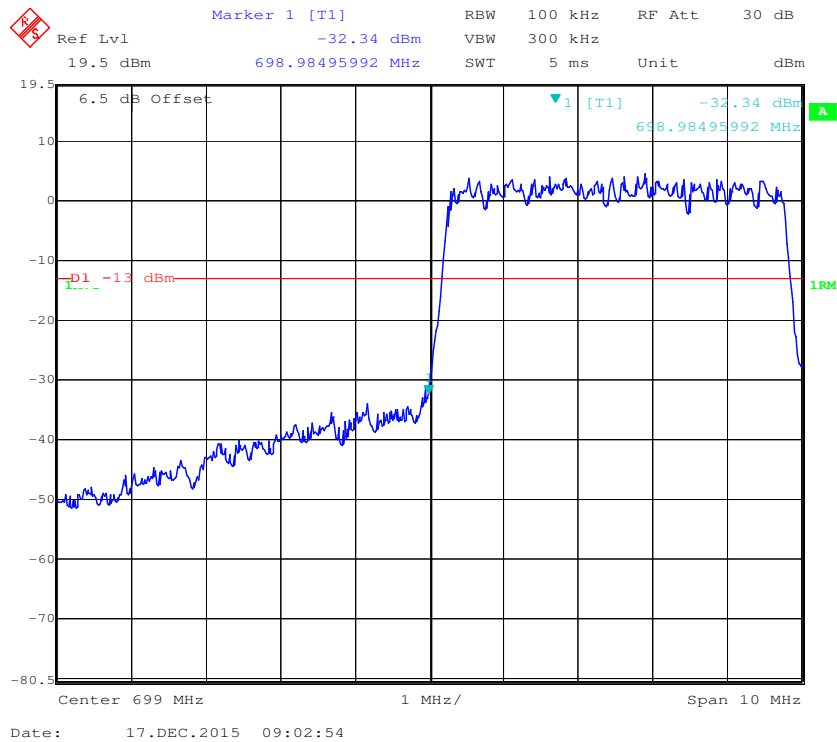


16-QAM (5.0 MHz, FULL RB) - Right Band Edge

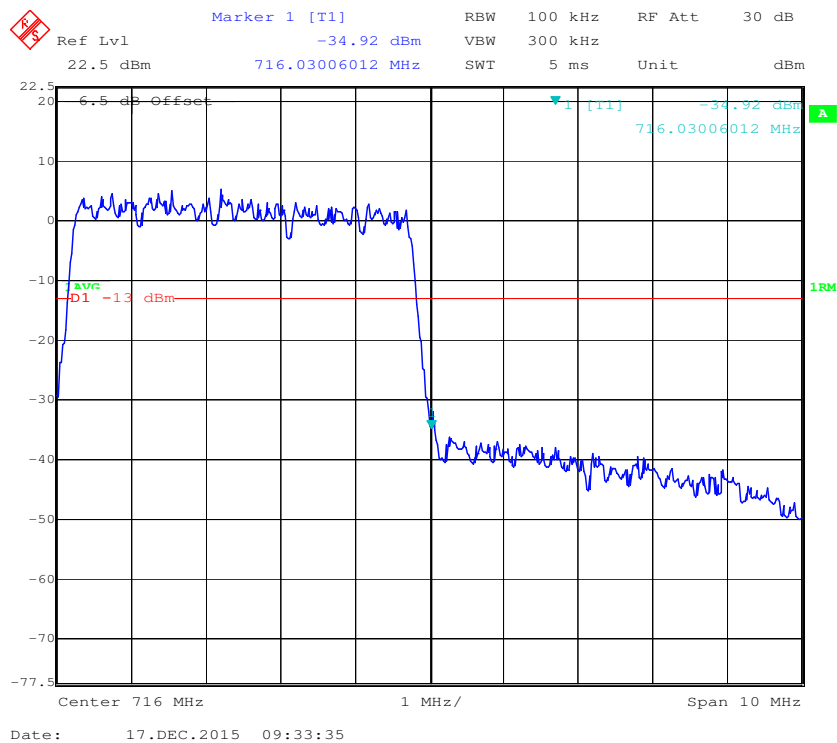


QPSK (10.0 MHz, FULL RB) - Left Band Edge

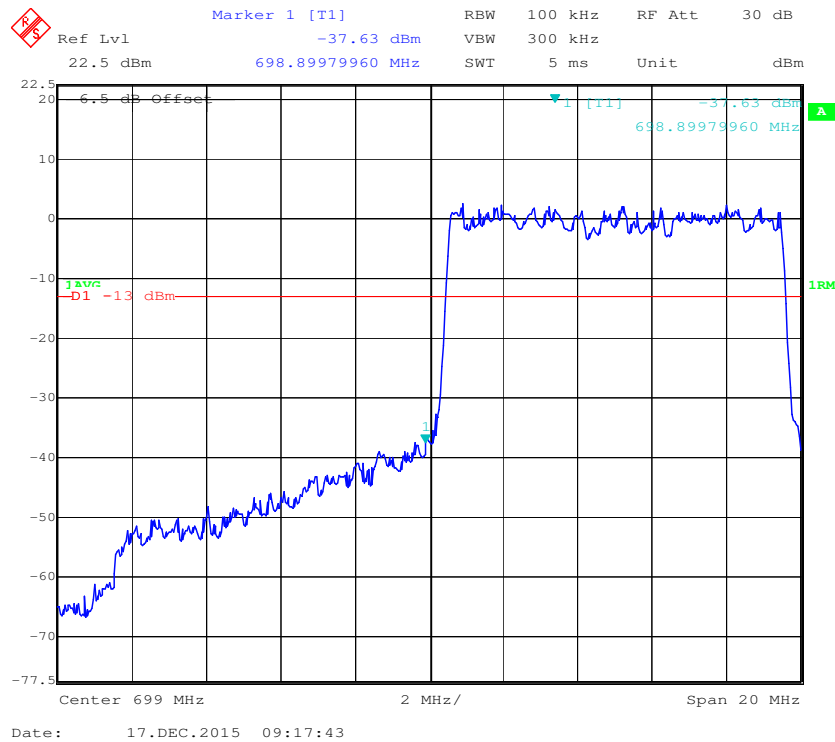


QPSK (10.0 MHz, FULL RB) - Right Band Edge


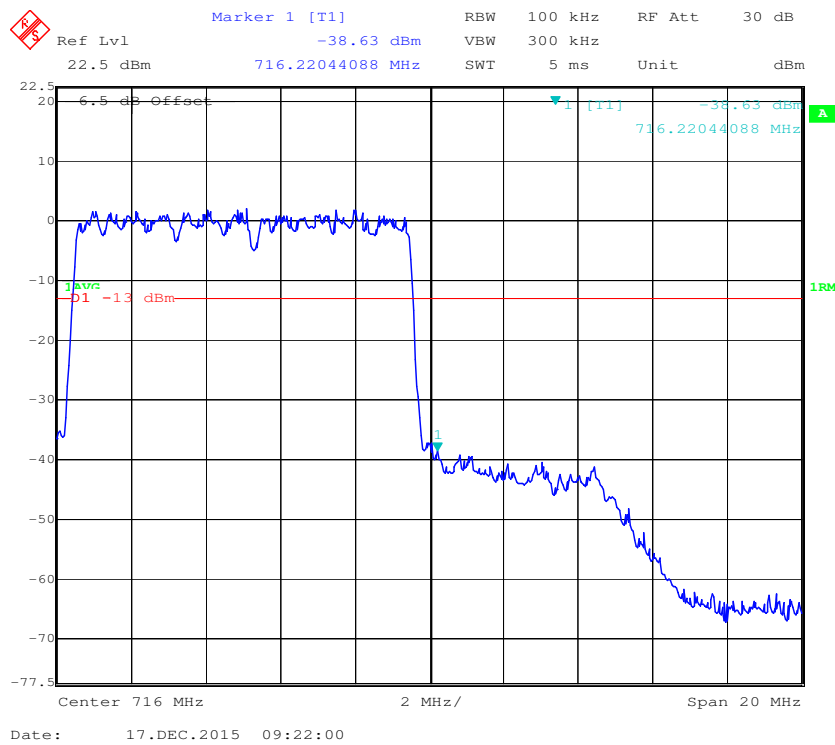


16-QAM (10.0 MHz, FULL RB) - Left Band Edge

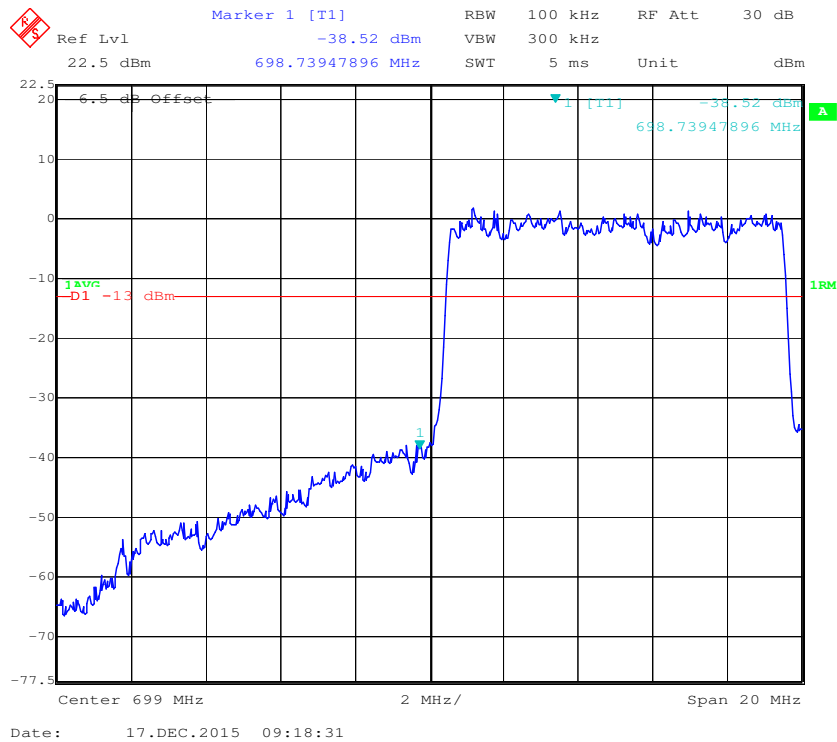


16-QAM (10.0 MHz, FULL RB) - Right Band Edge

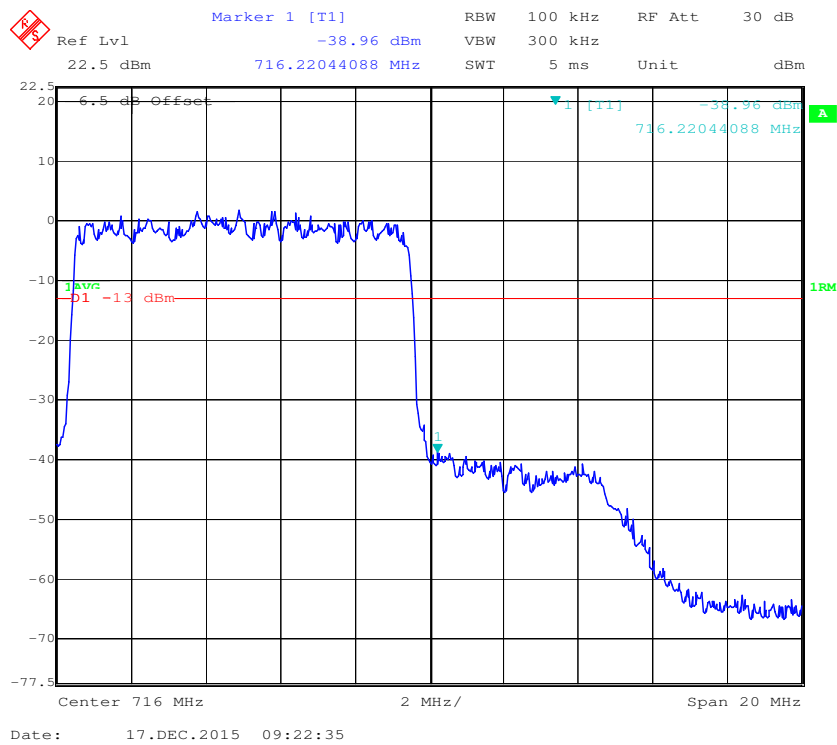


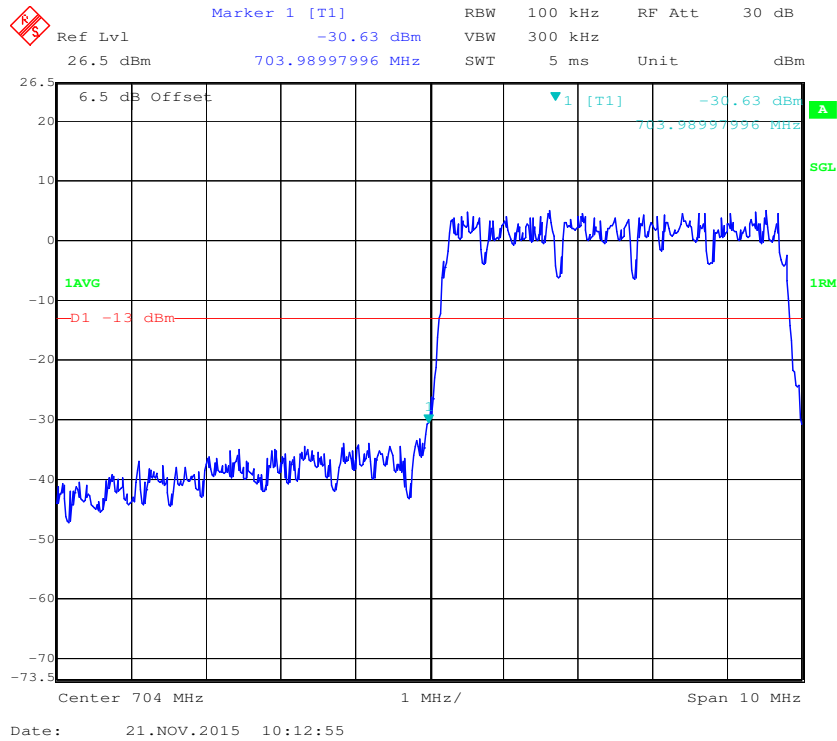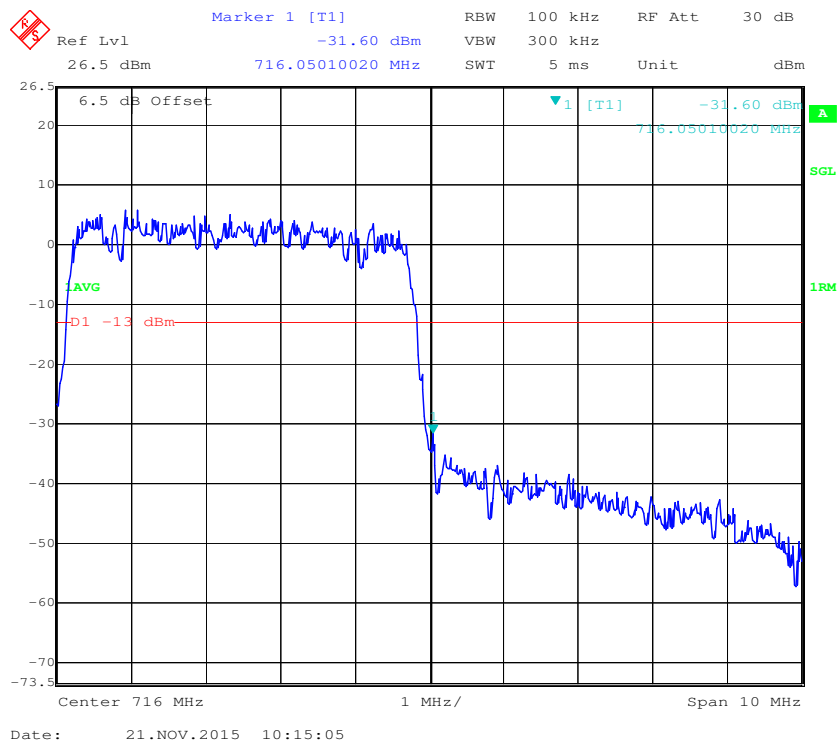Band 17:**QPSK (5.0 MHz, FULL RB) - Left Band Edge****QPSK (5.0 MHz, FULL RB) - Right Band Edge**


16-QAM (5.0 MHz, FULL RB) - Left Band Edge

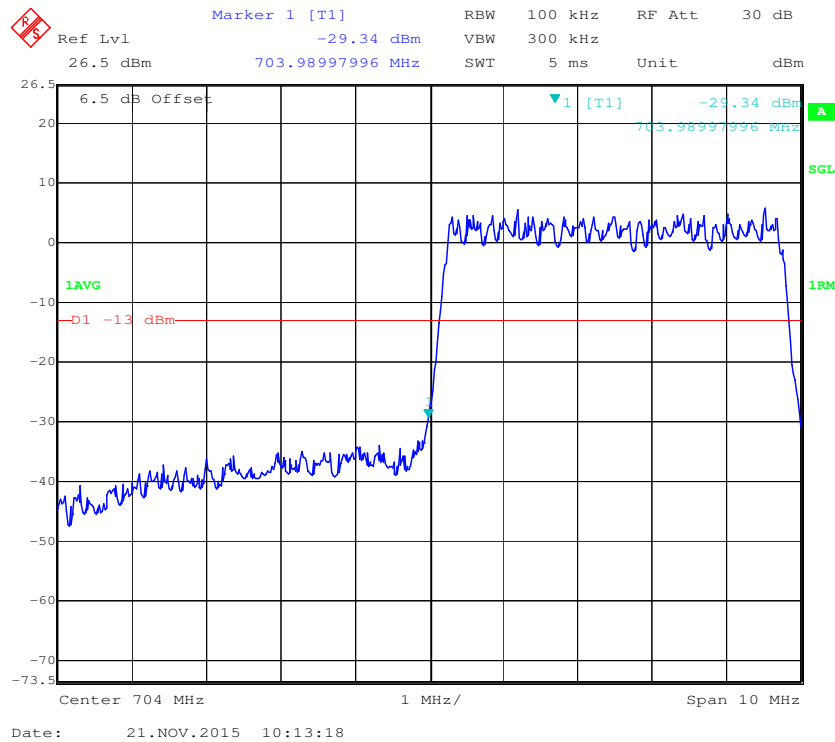


16-QAM (5.0 MHz, FULL RB) - Right Band Edge


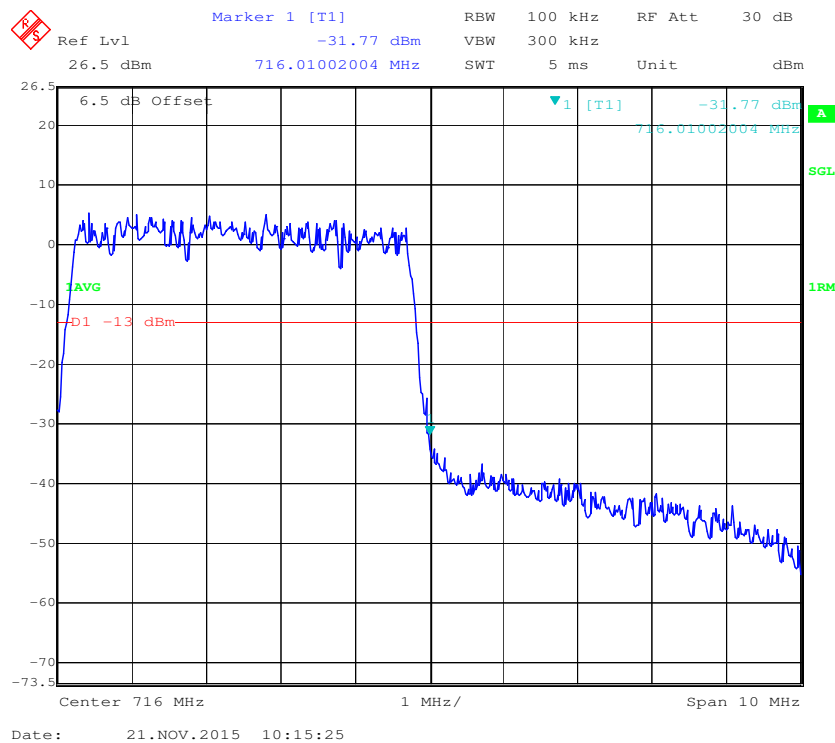


QPSK (10.0 MHz, FULL RB) - Left Band Edge

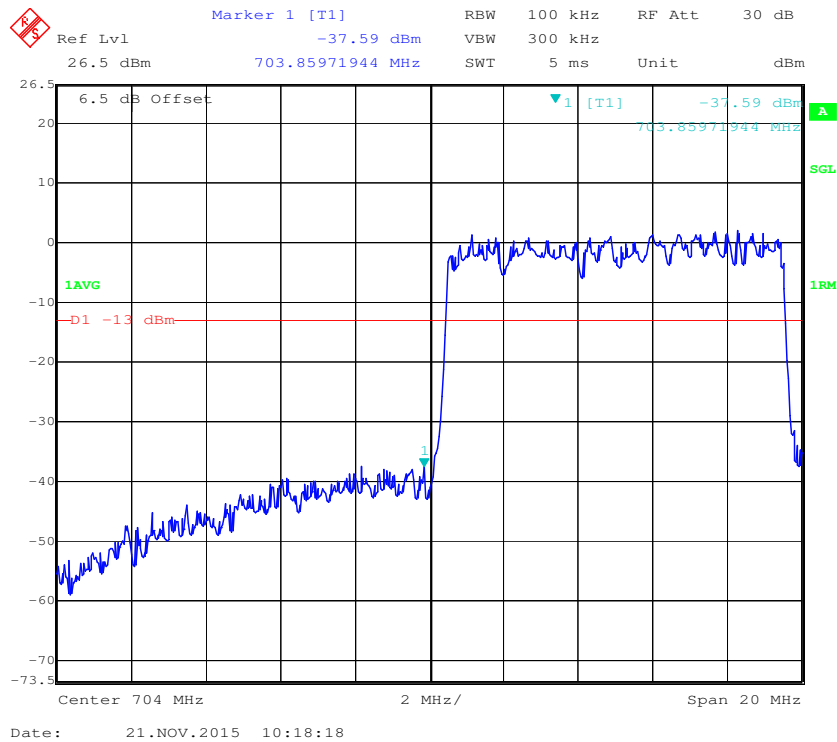

QPSK (10.0 MHz, FULL RB) - Right Band Edge

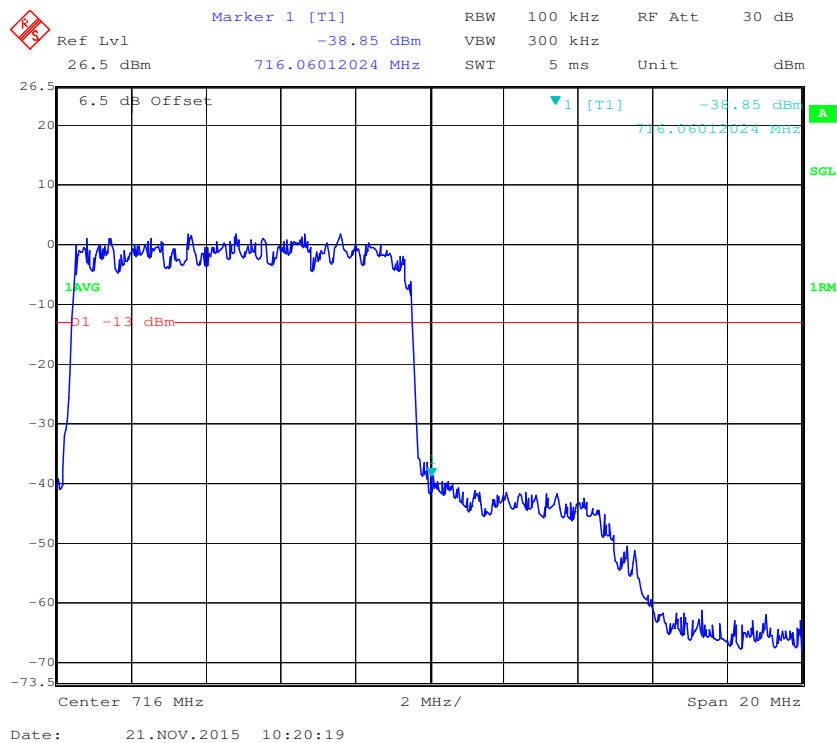

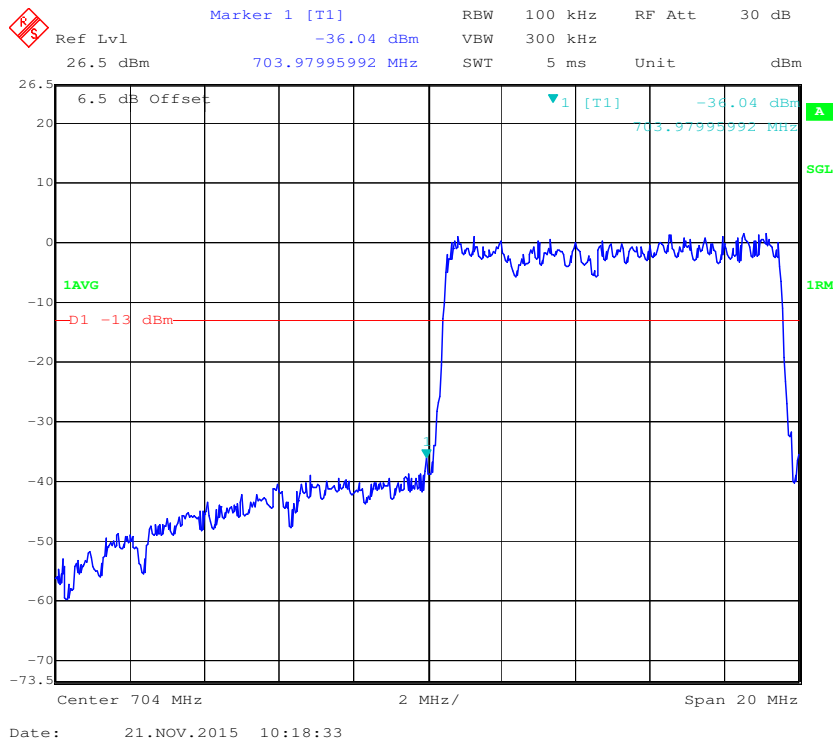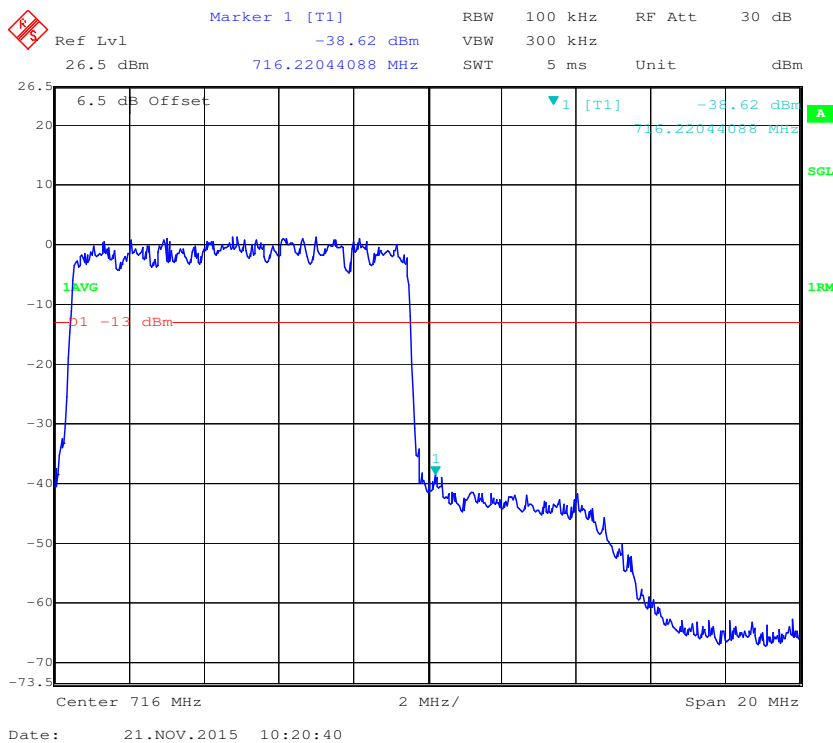16-QAM (10.0 MHz, FULL RB) - Left Band Edge**16-QAM (10.0 MHz, FULL RB) - Right Band Edge**

FCC §2.1055, §22.355 & §24.235 & §27.54 - FREQUENCY STABILITY**Applicable Standards**

FCC § 2.1055, §22.355, §24.235 and & §27.54.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

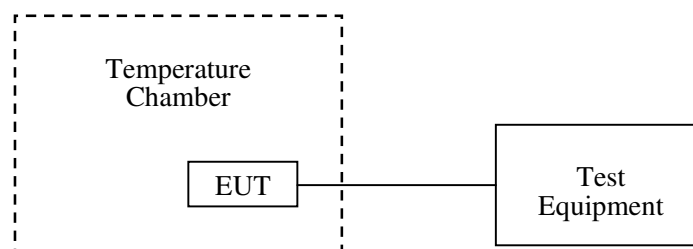

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ESPEC	Temperature & Humidity Chamber	EL-10KA	09107726	2015-11-01	2016-11-01
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2014-11-23	2015-11-23
R&S	Wideband Radio Communication tester	CMW500	1201.002K50-146520-wh	2014-11-23	2015-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa

The testing was performed by Haiguo Li on 2015-11-19.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables.

Cellular Band (Part 22H)**GSM Mode**

Middle Channel, $f_0=836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.8	19	0.02271	2.5
-20		18	0.02152	2.5
-10		16	0.01913	2.5
0		15	0.01793	2.5
10		18	0.02152	2.5
20		17	0.02032	2.5
30		15	0.01793	2.5
40		19	0.02271	2.5
50		17	0.02032	2.5
25	V min.= 3.5	16	0.01913	2.5
25	V max.= 4.2	19	0.02271	2.5

EDGE Mode

Middle Channel, $f_0=836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.8	17	0.02032	2.5
-20		15	0.01793	2.5
-10		16	0.01913	2.5
0		15	0.01793	2.5
10		17	0.02032	2.5
20		18	0.02152	2.5
30		16	0.01913	2.5
40		18	0.02152	2.5
50		16	0.01913	2.5
25	V min.= 3.5	17	0.02032	2.5
25	V max.= 4.2	15	0.01793	2.5

WCDMA Mode

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.8	18	0.02152	2.5
-20		19	0.02271	2.5
-10		15	0.01793	2.5
0		17	0.02032	2.5
10		16	0.01913	2.5
20		15	0.01793	2.5
30		14	0.01673	2.5
40		19	0.02271	2.5
50		19	0.02271	2.5
25	V min.= 3.5	15	0.01793	2.5
25	V max.= 4.2	17	0.02032	2.5

PCS Band (Part 24E)**GSM Mode**

Middle Channel, $f_0 = 1880.0$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.8	23	0.01223	pass
-20		28	0.01489	pass
-10		22	0.01170	pass
0		26	0.01383	pass
10		25	0.01330	pass
20		25	0.01330	pass
30		29	0.01543	pass
40		21	0.01117	pass
50		28	0.01489	pass
25	V min.= 3.5	25	0.01330	pass
25	V max.= 4.2	28	0.01489	pass

EDGE Mode

Middle Channel, $f_0 = 1880.0$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.8	22	0.01170	pass
-20		31	0.01649	pass
-10		24	0.01277	pass
0		24	0.01277	pass
10		24	0.01277	pass
20		22	0.01170	pass
30		28	0.01489	pass
40		20	0.01064	pass
50		26	0.01383	pass
25	V min.= 3.5	28	0.01489	pass
25	V max.= 4.2	30	0.01596	pass

WCDMA Mode

Middle Channel, $f_0 = 1880.0$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.8	23	0.01223	pass
-20		29	0.01543	pass
-10		22	0.01170	pass
0		26	0.01383	pass
10		25	0.01330	pass
20		21	0.01117	pass
30		31	0.01649	pass
40		21	0.01117	pass
50		28	0.01489	pass
25	V min.= 3.5	26	0.01383	pass
25	V max.= 4.2	29	0.01543	pass

AWS Band

Middle Channel, $f_0 = 1732.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.8	20	0.01154	pass
-20		20	0.01154	pass
-10		18	0.01039	pass
0		18	0.01039	pass
10		18	0.01039	pass
20		15	0.00866	pass
30		15	0.00866	pass
40		15	0.00866	pass
50		18	0.01039	pass
-30		18	0.01039	pass
25	V min.= 3.5	19	0.01097	pass
25	V max.= 4.2	20	0.01154	pass

Band 2:

	Temperature (°C)	QPSK (Hz)	QPSK (ppm)	Result
10.0 MHz, Middle Channel	-30	22	0.01170	Pass
	-20	29	0.01543	Pass
	-10	22	0.01170	Pass
	0	27	0.01436	Pass
	10	28	0.01489	Pass
	20	20	0.01064	Pass
	30	29	0.01543	Pass
	40	24	0.01277	Pass
	50	27	0.01436	Pass
	Voltage (V_{DC})	QPSK (Hz)	QPSK (ppm)	Result
	3.8	23	0.01223	Pass
	3.5	30	0.01596	Pass
	4.2	26	0.01383	Pass

Band 4:

	Temperature (°C)	QPSK (Hz)	QPSK (ppm)	Result
10.0 MHz, Middle Channel	-30	24	0.01385	Pass
	-20	28	0.01616	Pass
	-10	24	0.01385	Pass
	0	24	0.01385	Pass
	10	27	0.01558	Pass
	20	23	0.01328	Pass
	30	32	0.01847	Pass
	40	24	0.01385	Pass
	50	29	0.01674	Pass
	Voltage (V_{DC})	QPSK (Hz)	QPSK (ppm)	Result
	3.8	31	0.01789	Pass
	3.5	21	0.01212	Pass
	4.2	28	0.01616	Pass

Band 12:

	Temperature (°C)	QPSK (Hz)	QPSK (ppm)	Result
10.0 MHz, Middle Channel	-30	18	0.02546	Pass
	-20	19	0.02687	Pass
	-10	15	0.02122	Pass
	0	15	0.02122	Pass
	10	18	0.02546	Pass
	20	15	0.02122	Pass
	30	16	0.02263	Pass
	40	19	0.02687	Pass
	50	18	0.02546	Pass
	Voltage (V_{DC})	QPSK (Hz)	QPSK (ppm)	Result
	3.8	15	0.02122	Pass
	3.5	15	0.02122	Pass
	4.2	18	0.02546	Pass

Band 17:

	Temperature (°C)	QPSK (Hz)	QPSK (ppm)	Result
10.0 MHz, Middle Channel	-30	16	0.02254	Pass
	-20	19	0.02676	Pass
	-10	15	0.02113	Pass
	0	14	0.01972	Pass
	10	19	0.02676	Pass
	20	16	0.02254	Pass
	30	17	0.02394	Pass
	40	16	0.02254	Pass
	50	14	0.01972	Pass
	Voltage (V_{DC})	QPSK (Hz)	QPSK (ppm)	Result
	3.8	18	0.02535	Pass
	3.5	14	0.01972	Pass
	4.2	18	0.02535	Pass

***** END OF REPORT *****