

**FCC RF EXPOSURE
CERTIFICATION TEST REPORT**

For

Station W

MODEL NUMBER: NSW2-WW, NSW2-BK

REPORT NUMBER: 4791496662.1-1-RF-2

ISSUE DATE: September 27, 2024

FCC ID: 2ADLI-NSW2-BK-WW

Prepared for

**KODA ELECTRONICS (HK) CO., LTD.
2/F Mandarin Commercial House, 38 Morrison Hill Road, WanChai, HK**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	September 27, 2024	Initial Issue	

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. DESCRIPTION OF EUT	6
5. REQUIREMENT	7

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: KODA ELECTRONICS (HK) CO., LTD.
Address: 2/F Mandarin Commercial House, 38 Morrison Hill Road,
WanChai, HK

Manufacturer Information

Company Name: Rich Glory Electronics Co., Ltd.
Address: NO.10 Xiling Road, Fengcheng Street, Xinfeng County,
Shaoguan City, China.

EUT Information

EUT Name: Station W
Model: NSW2-WW
Serial Model: NSW2-BK
Brand: Nonstop
Sample Received Date: September 26, 2024
Sample Status: Normal
Sample ID: 7643803
Date of Tested: September 26, 2024 to September 27, 2024

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC 47CFR§1.1307	PASS
FCC 47CFR§1.1310	PASS
FCC 47CFR§2.1093	PASS
FCC 47CFR§2.1091	PASS

Prepared By:



Wite Chen

Engineer Project Associate

Checked By:



Kebo Zhang

Senior Project Engineer

Approved By:



Stephen Guo

Operations Manager

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC 47CFR§1.1307(b)(1), FCC 47CFR§1.1310, FCC 47CFR§2.1093, KDB 680106 D01 Wireless Power Transfer v04.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p>ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p>VCCI (Registration No.: G-20192, R-20202, C-20153 and T-20155) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20192 and C-20153 Shielding Room B, the VCCI registration No. is C-20153 and T-20155</p>
---------------------------	--

Note: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

4. DESCRIPTION OF EUT

EUT Name	Station W	
Model	NSW2-WW	
Serial Model	NSW2-BK	
Model Difference	Their Circuit, PCB layout and Electrical parts of the products are identical to the basic model except the color. We select "NSW2-WW" as the representative model for compliance test.	
Product Description	Operation Frequency	111KHz ~ 140KHz
Rated Output Power	10 W	
Antenna type	Coil	
Ratings	Input: AC 100-240V~, 50/60Hz, 0.8A Output: 9Vdc, 3.5A Battery: 3.7V, 200mA, 0.74Wh	

5. TEST MODE

Test Mode	Description
Mode 1	Charging with 10 W (1 % battery status of client device)
Mode 2	Charging with 10 W (50 % battery status of client device)
Mode 3	Charging with 10 W (99 % battery status of client device)
Mode 4	Wireless charger working (no load)

Note: All the modes had been tested, but only the worst data(Mode 1) was recorded in the report.

REQUIREMENT


LIMIT

Frequency Range (MHz)	E-field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (Minutes)
0.3 -- 1.34	614	1.63	(100)*	30
1.34 -- 30	824/f	2.19/f	(180/f ²)*	30
30 -- 300	27.5	0.073	0.2	30
300 -- 1500	--	--	f/1500	30
1500 -- 100,000	--	--	1.0	30

METHOD OF MEASUREMENT

- The RF exposure test was performed in shielded chamber.
- The geometric centre of probe was placed at 15 cm test distance surrounding the device and 20 cm above the top surface.
- The measurement probe used to search of highest strength.
- The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- The EUT were measured according to the dictates of KDB 680106 D01 Wireless Power Transfer v04.

BLOCK DIAGRAM OF TEST SETUP

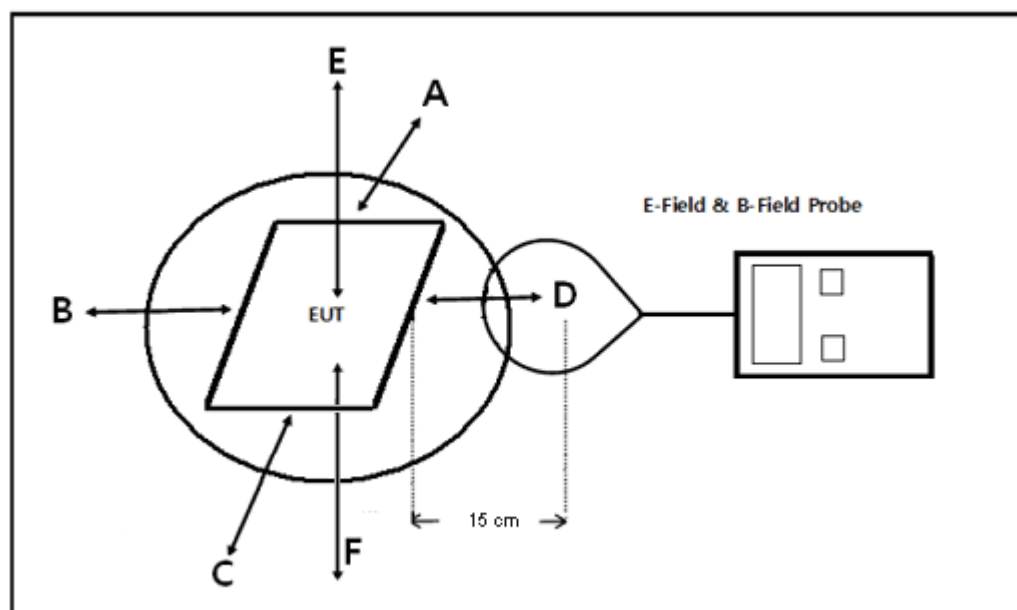

Note: As bottom point is not required to test for desktop devices, so we scanning all the surfaces and recorded the worst level in E.

EQUIPMENT APPROVAL CONSIDERATIONS

The EUT comply with KDB680106 D01 Wireless Power Transfer v04.

1) Power transfer frequency is less than 1 MHz.

Yes; the device operated in the frequency range 111 kHz to 140 kHz.

2) The output power from each transmitting element (e.g., coil) is less than or equal to 15 watts.

Yes; the maximum output power of each primary coil is 10 watts.

3) A client device providing the maximum permitted load is placed in physical contact with the transmitter (i.e., the surfaces of the transmitter and client device enclosures need to be in physical contact).

Yes; Client device is placed directly in contact with the transmitter.

4) Only § 2.1091-Mobile exposure conditions apply (i.e., this provision does not cover § 2.1093-Portable exposure conditions).

Yes; The EUT is a mobile device.

5) The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit, per KDB 447498, Table 1. These measurements shall be taken along the principal axes of the device, with one axis oriented along the direction of the estimated maximum field strength, and for three points per axis or until a 1/d (inverse distance from the emitter structure) field strength decay is observed. Symmetry considerations may be used for test reduction purposes. The device shall be operated in documented worst-case compliance scenarios (i.e., the ones that lead to the maximum field components), and while all the radiating structures (e.g., coils or antennas) that by design can simultaneously transmit are energized at their nominal maximum power.

Yes; The EUT's field strength levels are less than 50% of the MPE limit.

6) For systems with more than one radiating structure, the conditions specified in (5) must be met when the system is fully loaded (i.e., clients absorbing maximum power available), and with all the radiating structures operating at maximum power at the same time, as per design conditions. If the design allows one or more radiating structures to be powered at a higher level while other radiating structures are not powered, then those cases must be tested as well. For instance, a device may use three RF coils powered at 5 W, or one coil powered at 15 W: in this case, both scenarios shall be tested.

Yes; the transfer system includes only single primary and secondary coils.

MEASURING INSTRUMENT USED

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Electric and Magnetic Field Analyzer	Narda	EHP-200A	170WX90204	June 6, 2024	June 5, 2025

E FIELD AND H FIELD STRENGTH TEST RESULT

Test Mode	Description
Mode 1	Charging with 10 W (1 % battery status of client device)
Mode 2	Charging with 10 W (50 % battery status of client device)
Mode 3	Charging with 10 W (99 % battery status of client device)
Mode 4	Wireless charger working (no load)

Note: All the modes had been tested, but only the worst data was recorded in the report.

H-Filed Strength at 15 cm from the edges surrounding the EUT and 20 cm above the top surface of the EUT (A/m)

Test Position	H-Filed Strength Measure Result	Limits (A/m)
	Mode 1	
	A/m	
A	0.3402	1.63
B	0.2908	1.63
C	0.2859	1.63
D	0.2672	1.63
E	0.3706	1.63
F	0.2853	1.63

E-Filed Strength at 15 cm from the edges surrounding the EUT and 20 cm above the top surface of the EUT (V/m)

Test Position	E-Filed Strength Measure Result	Limits (V/m)
	Mode 1	
	V/m	
A	0.9779	614
B	1.0701	614
C	1.0686	614
D	0.9178	614
E	1.2240	614
F	1.0147	614

Note: The geometric center of the probe is placed around the device. The test results of the 15 cm test distance can cover the test results of the 20 cm test distance.

END OF REPORT