


MODEL GD-1218-R Fig. 1

General - Shows front view of model.

Upper enclosure - min 3.0 mm thick, overall (WDXH) 616×445.5×37mm

Secured to the Bottom Enclosure, Fig. 2.

Cover sheet - Provided as an overlay on the Upper Enclosure, Fig. 1.

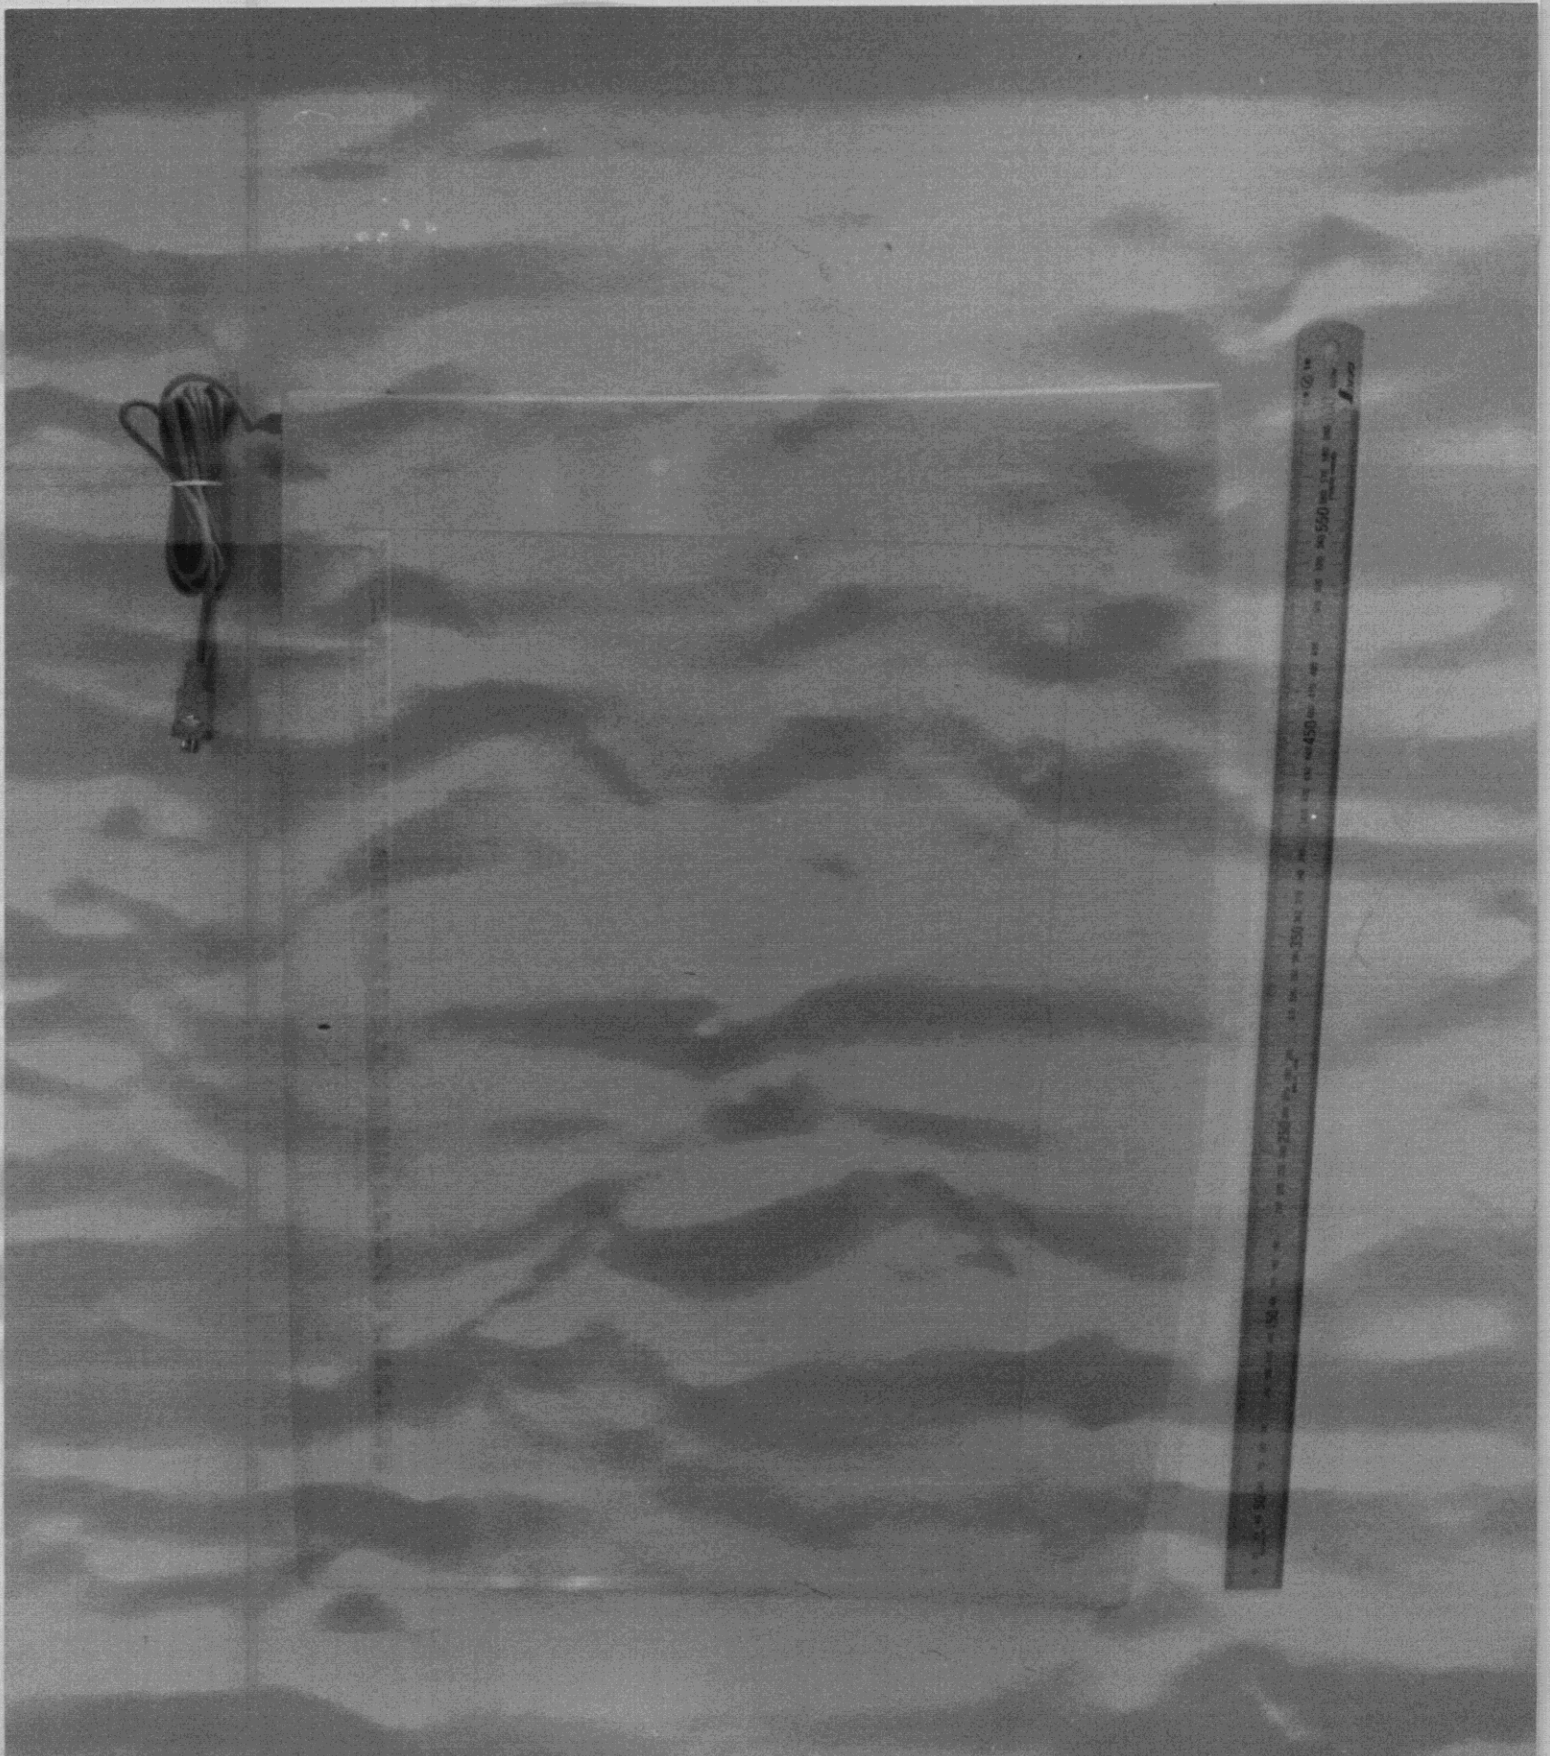


MODEL GD-1218-R Fig. 2

General - Shows rear view of model.

Bottom enclosure - min 3.0 mm thick, overall (WDXH) 616×445.5×37mm

Secured to the Upper Enclosure

Product label - See Label Designs, Fig. 10, for details.

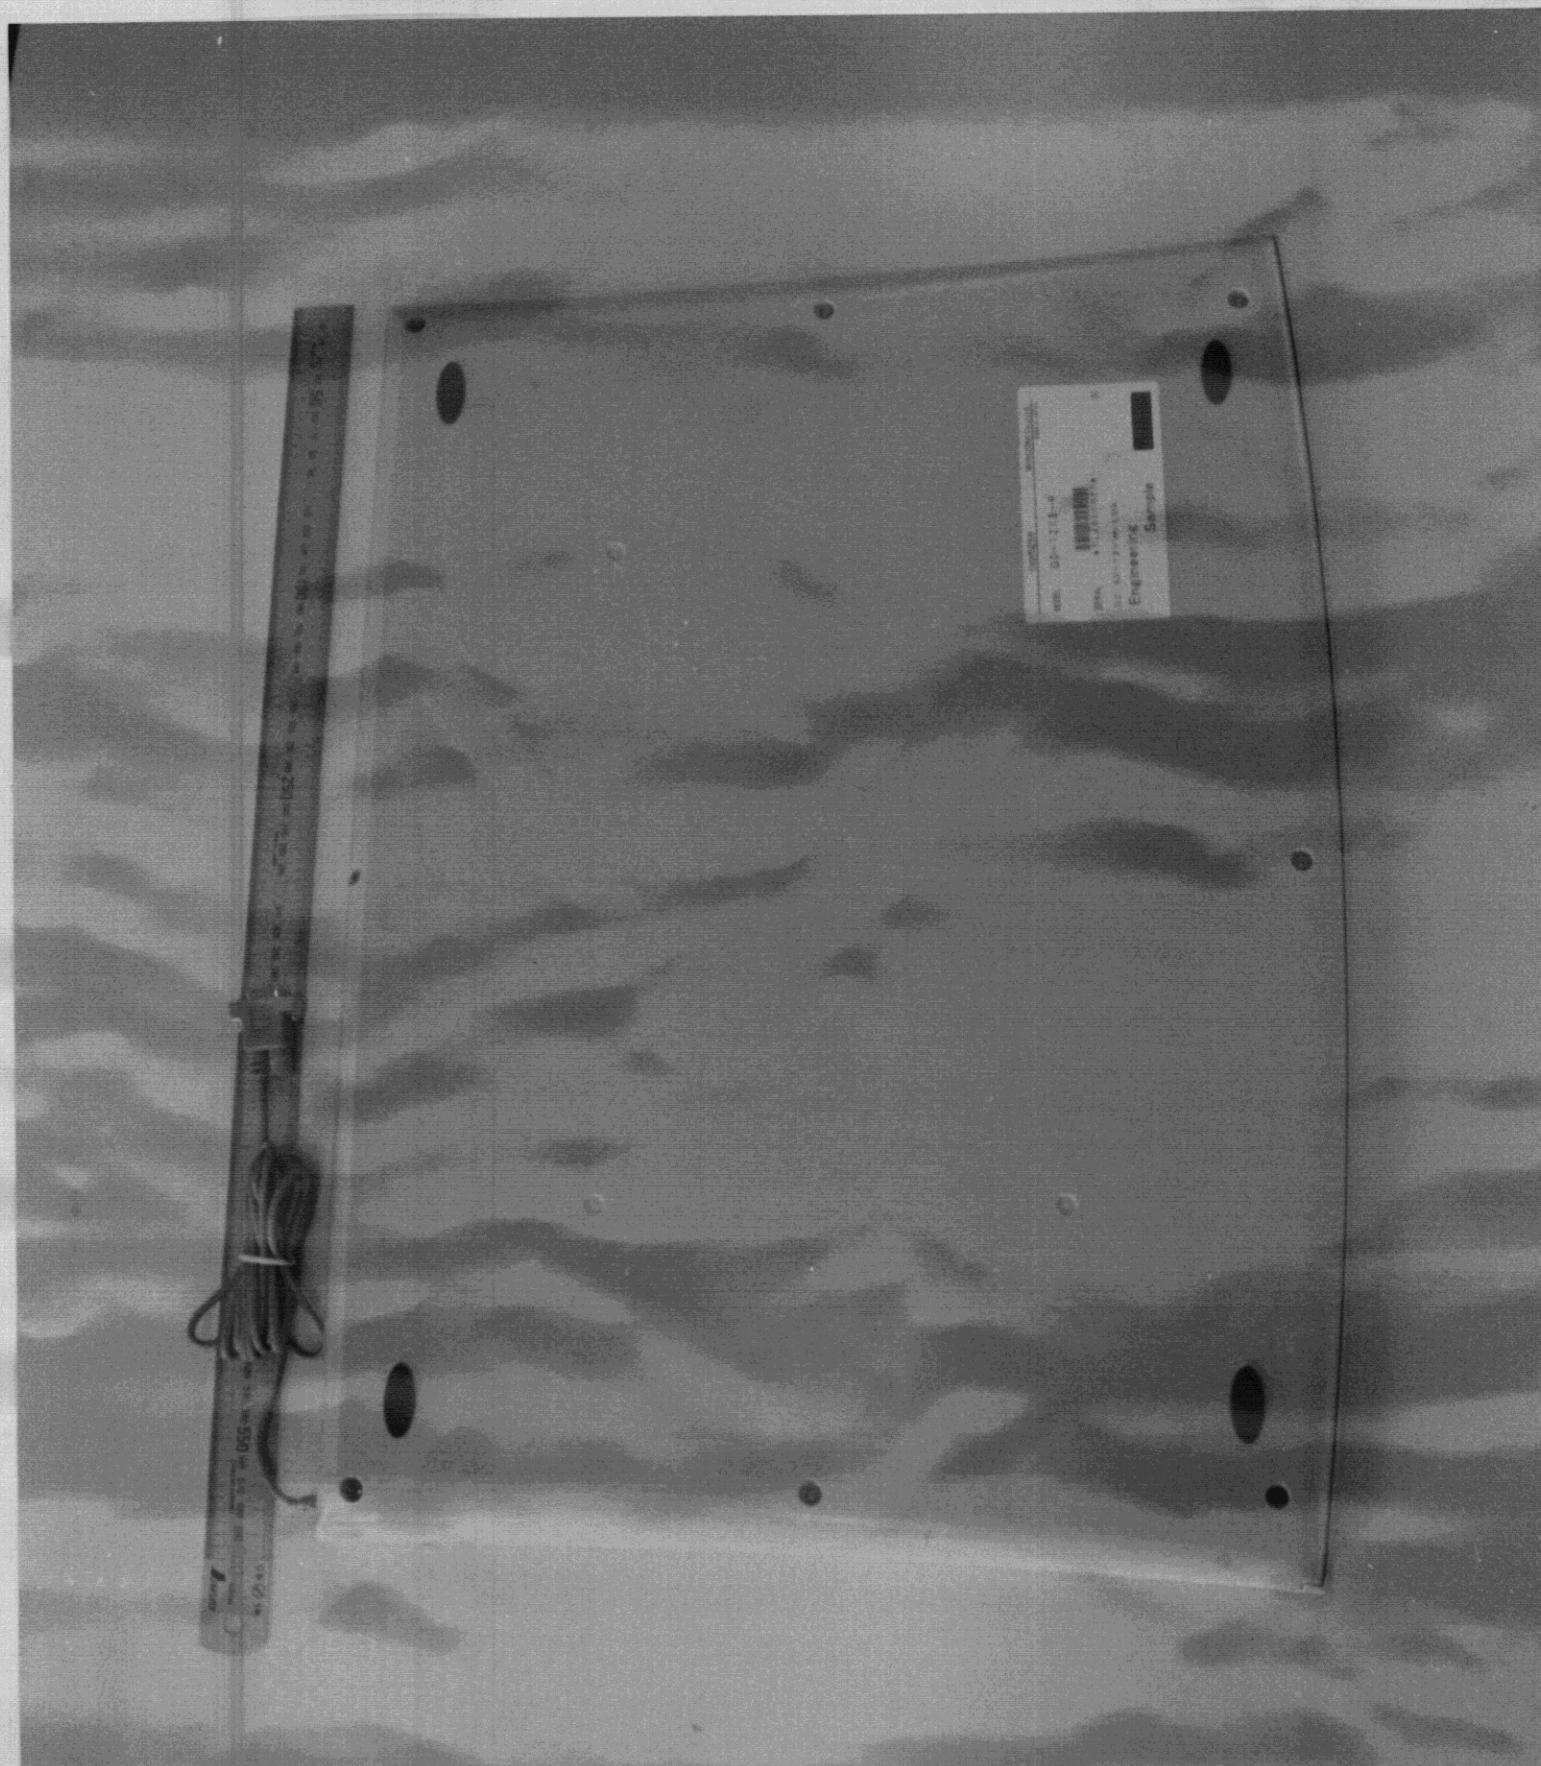


MODEL GD-1218-R Fig. 3

General - Shows internal contents of model.


Sensor printed wiring board - Secondary circuit.

Separator - 10mm thick.



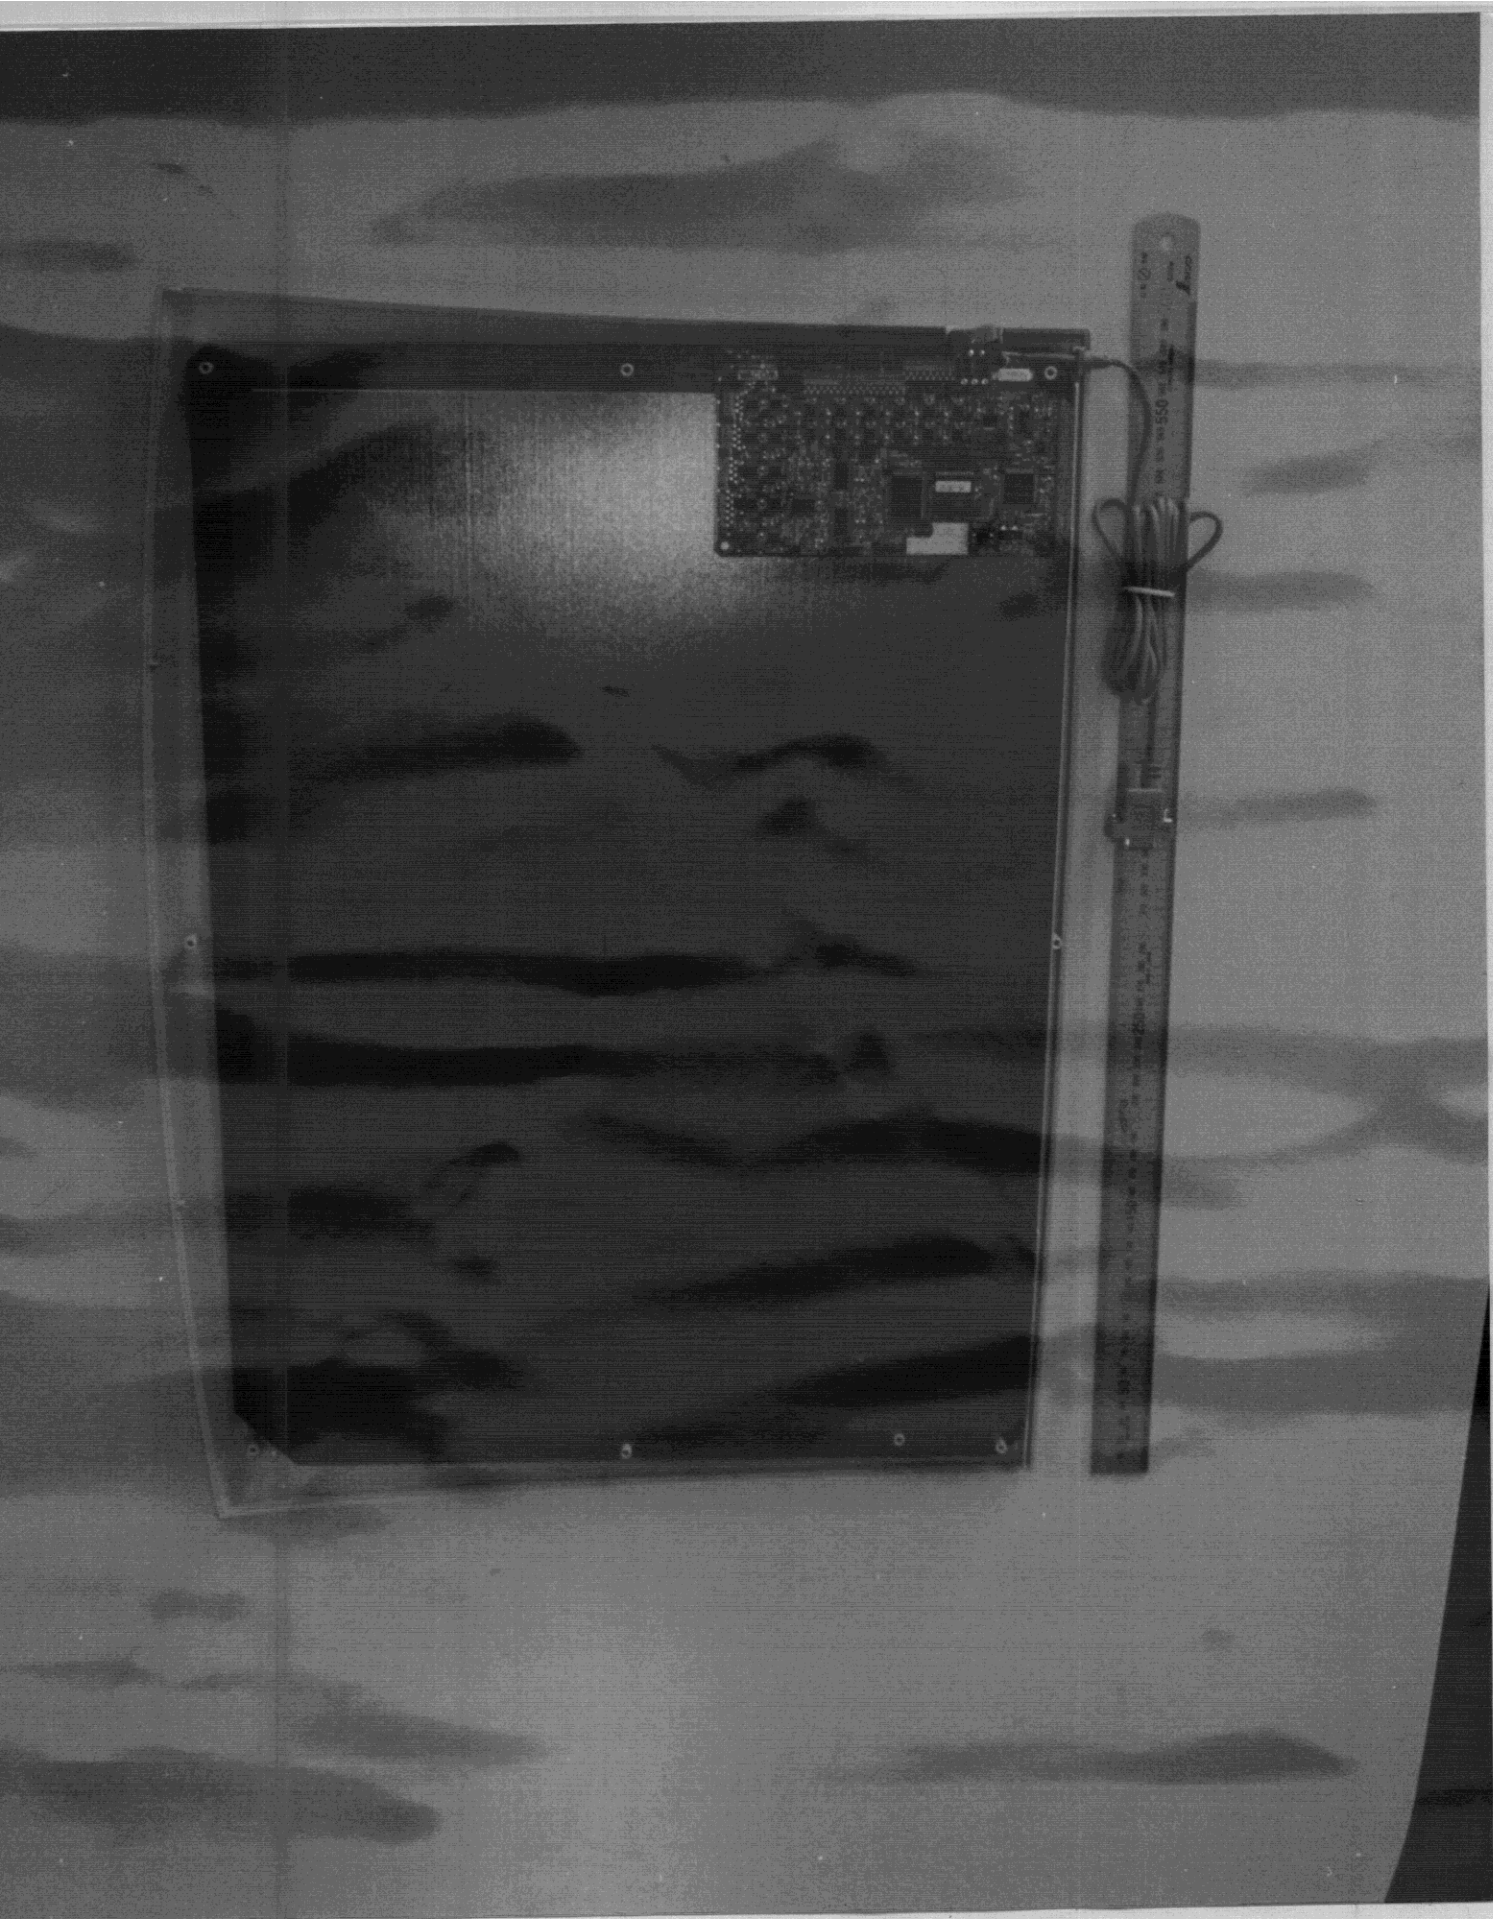


General - Shows internal election of model

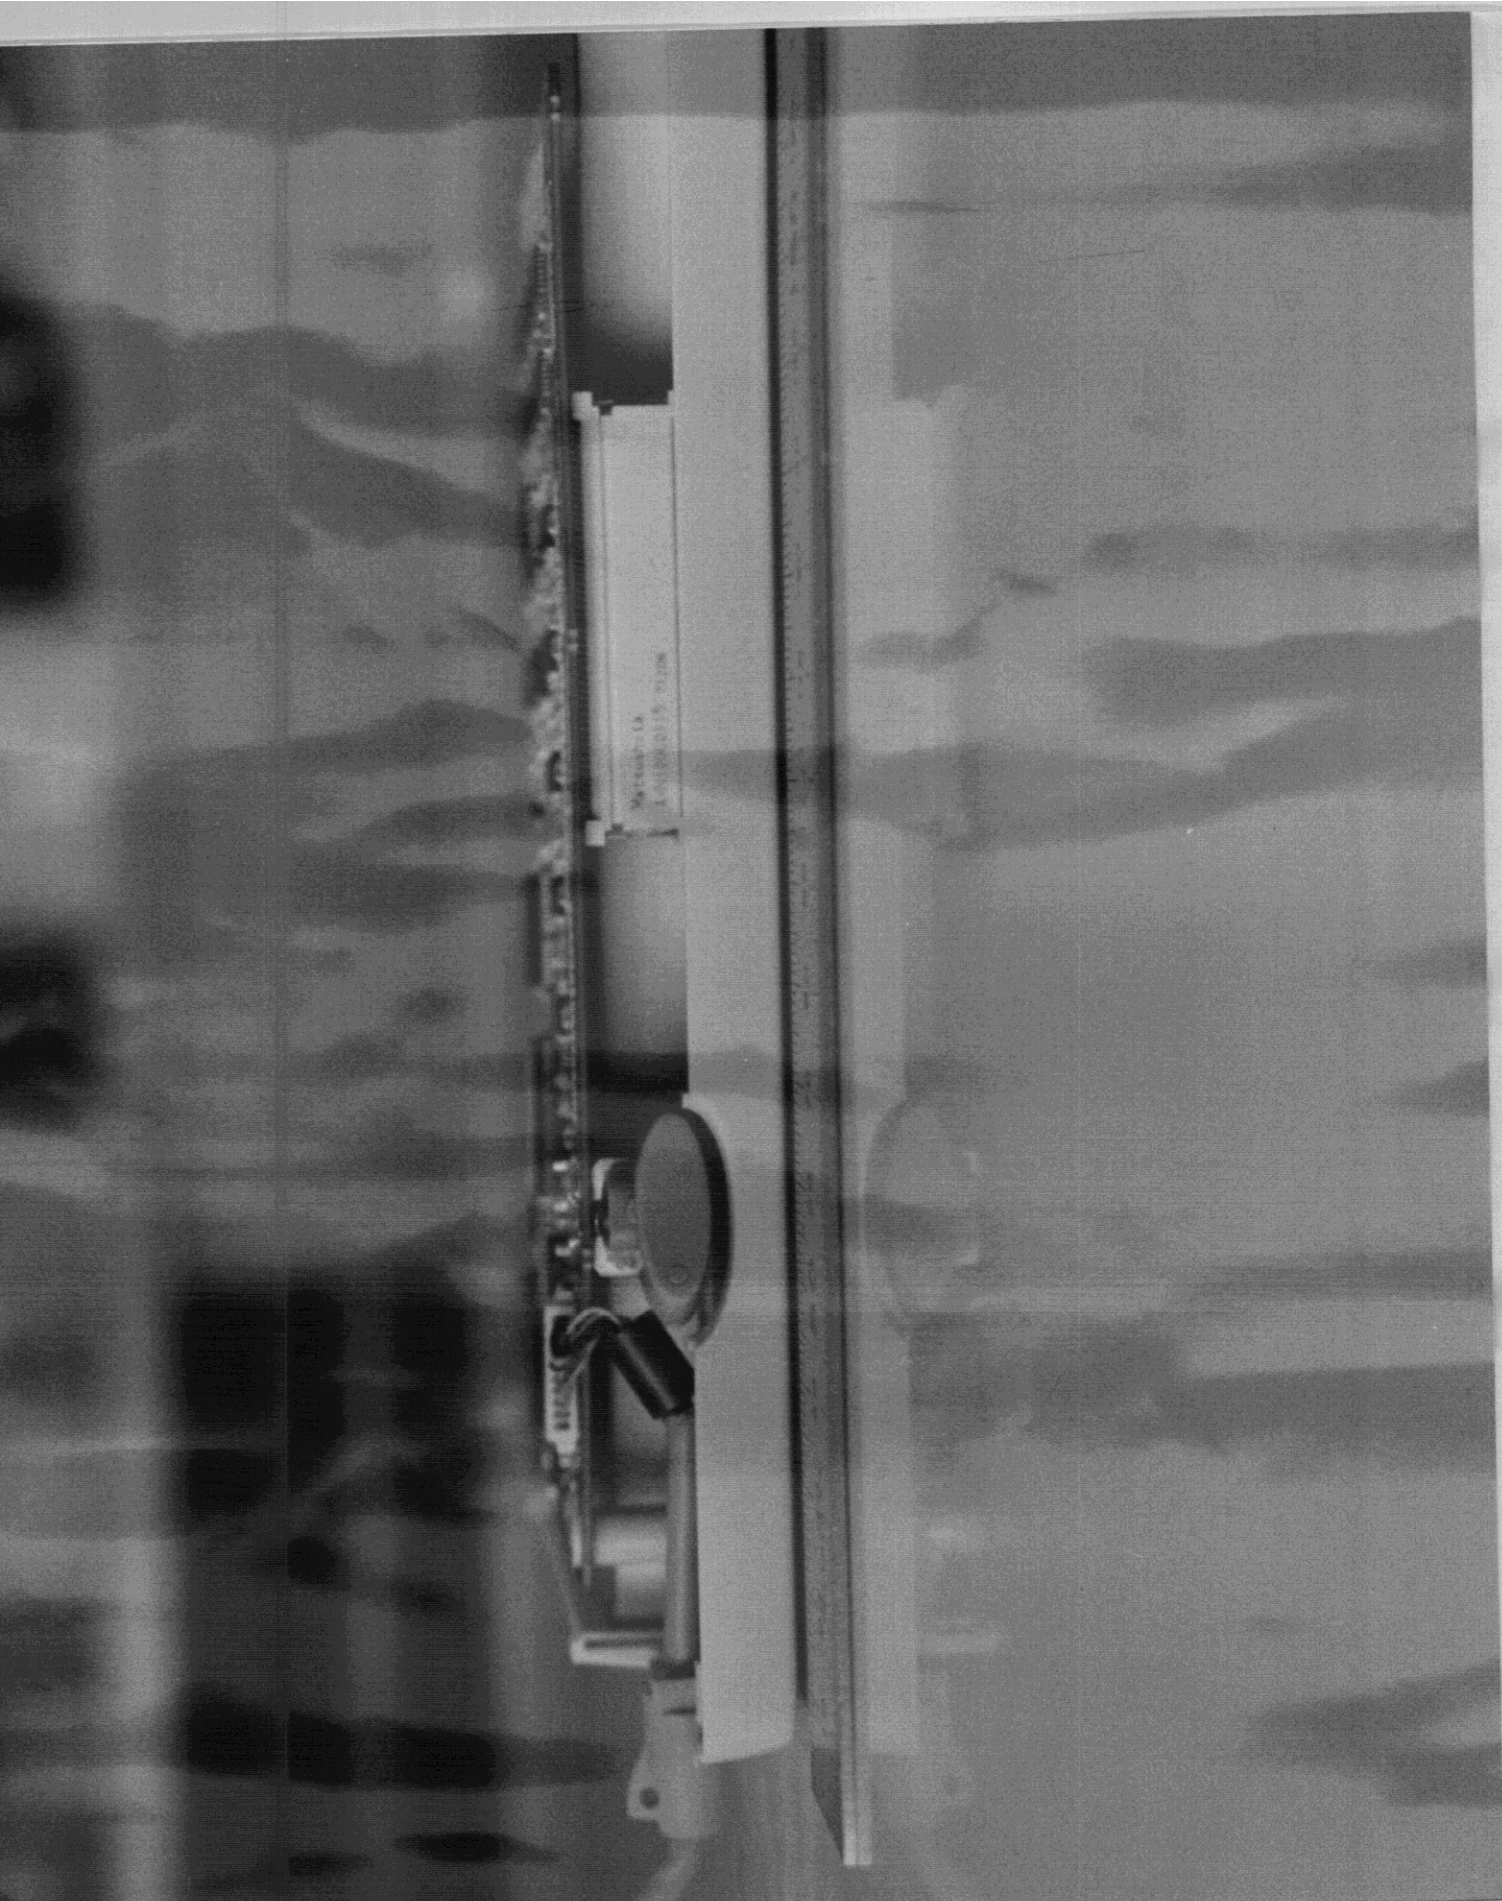


General - Shows internal of Model 110M Sec.
Shield sheet - 0.2 mm thick of Fe-Si Alloy sheet.
Control printed Wiring Board - Secondary circuit.
Connector - Secondary circuit 100 pins.
Power Switch - Secondary circuit.
Cable - 2.5m(8.2ft). Secondary circuit. With FERRITE CORE.


General - Shows rear control P.W.B. of model.

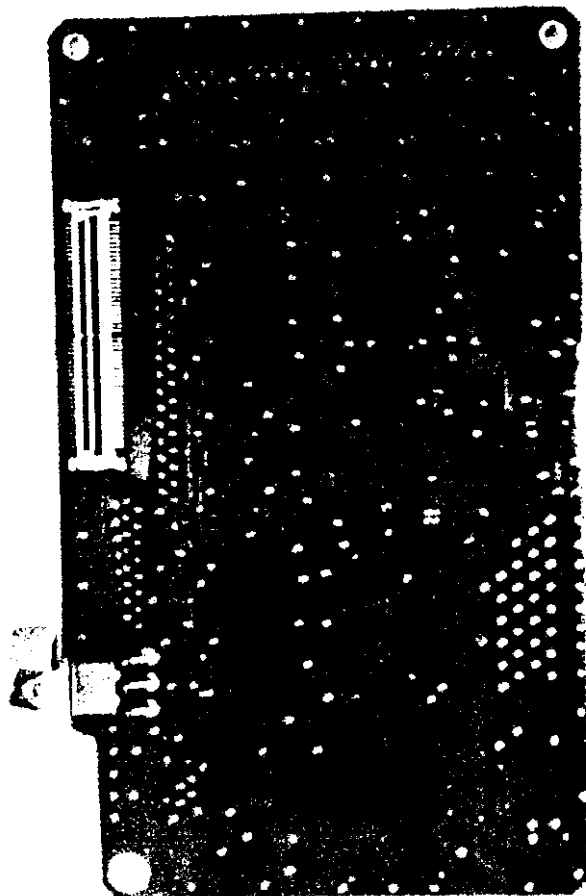

MODEL GD-1218-R Fig. 8

General - Shows front control P.W.B. of model.

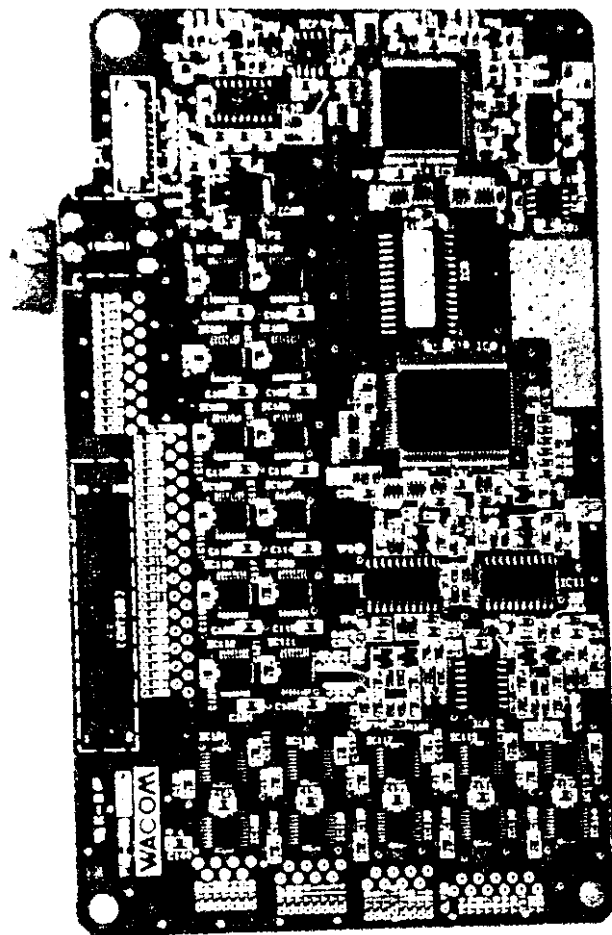

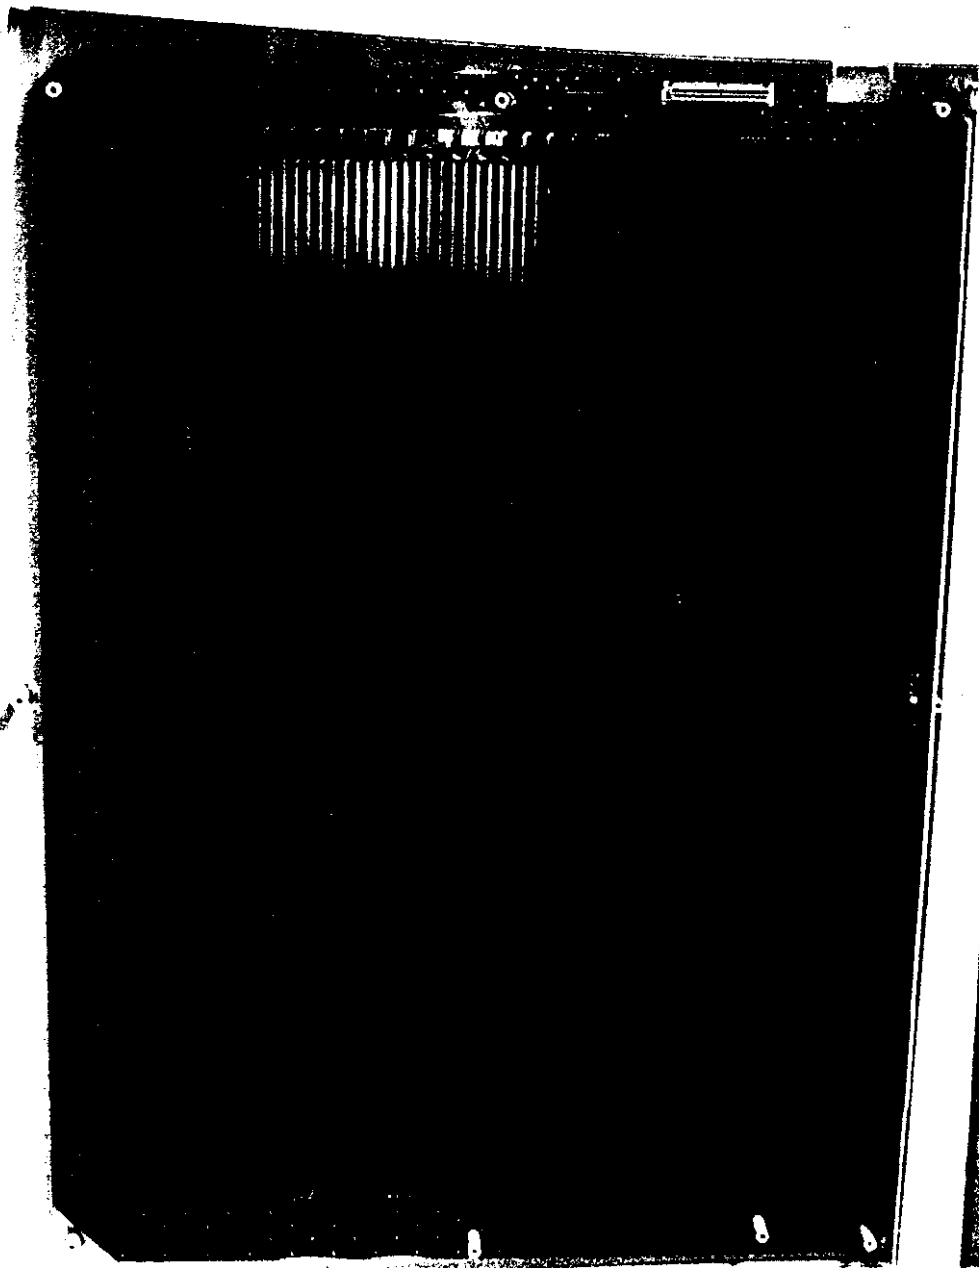

General - Shows rear sensor P.W.B. of model.