


File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00001.EMI

Date: 2022-06-06

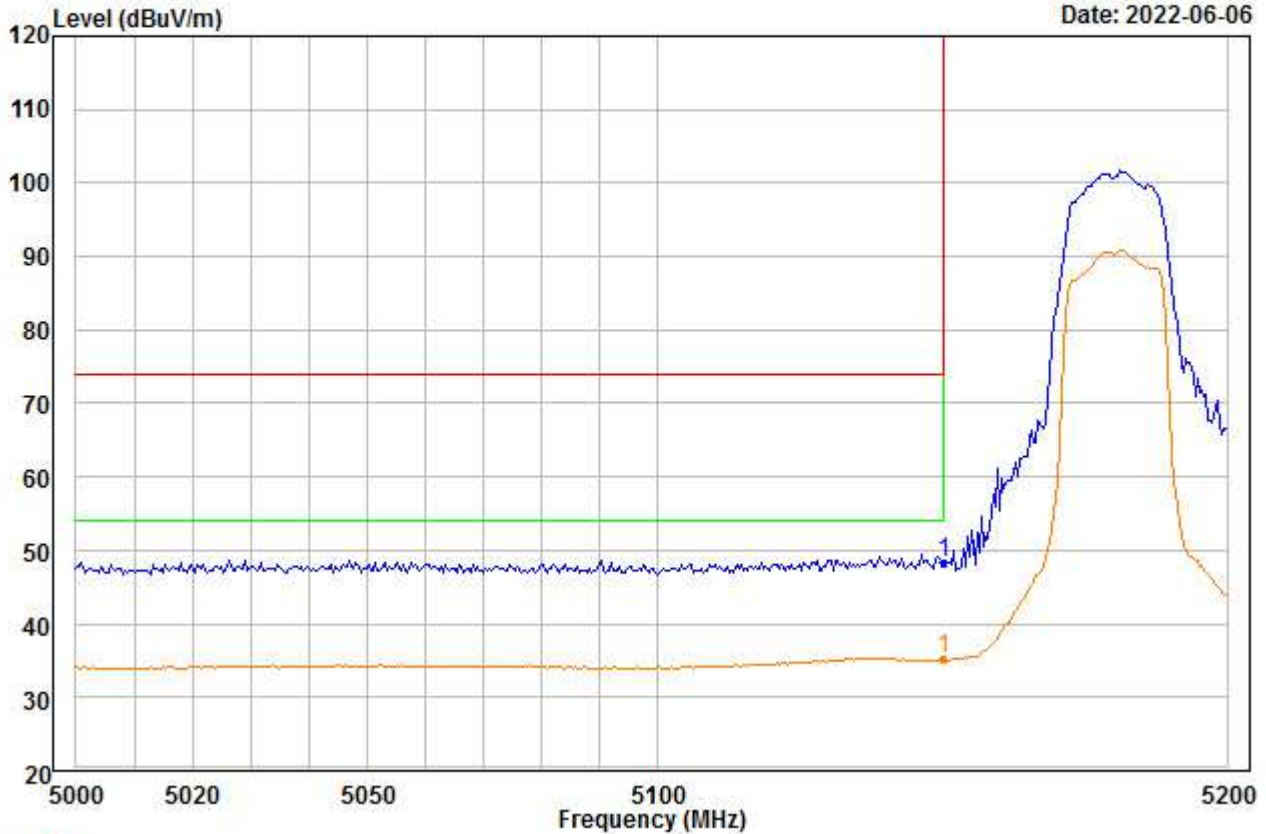

Trace: 1


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5180
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit		
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5150.000	49.99	34.88	46.33	0.00	9.78	48.32	74.00	-25.68	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00002.EMI

Date: 2022-06-06

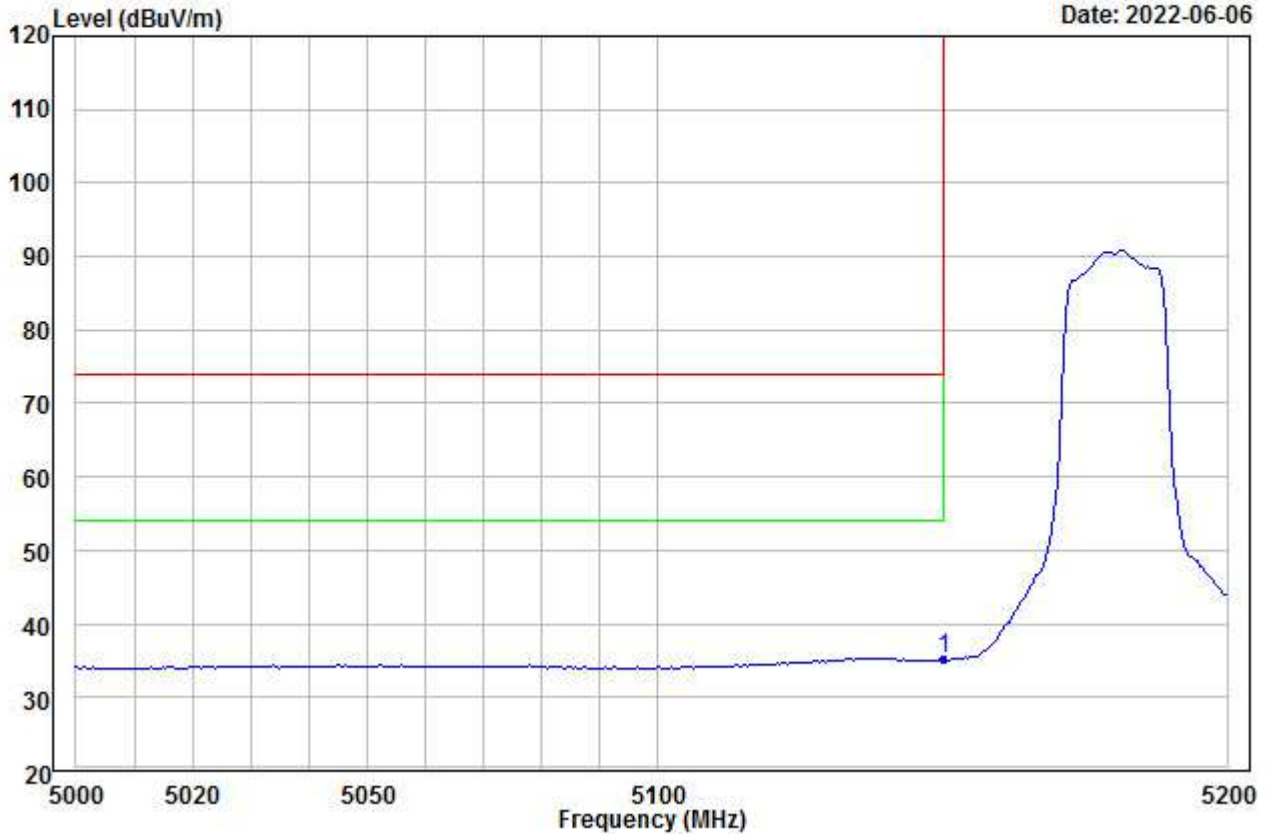


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5180
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit		
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5150.000	36.81	34.88	46.33	0.00	9.78	35.14	54.00	-18.86	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00003.EMI

Date: 2022-06-06

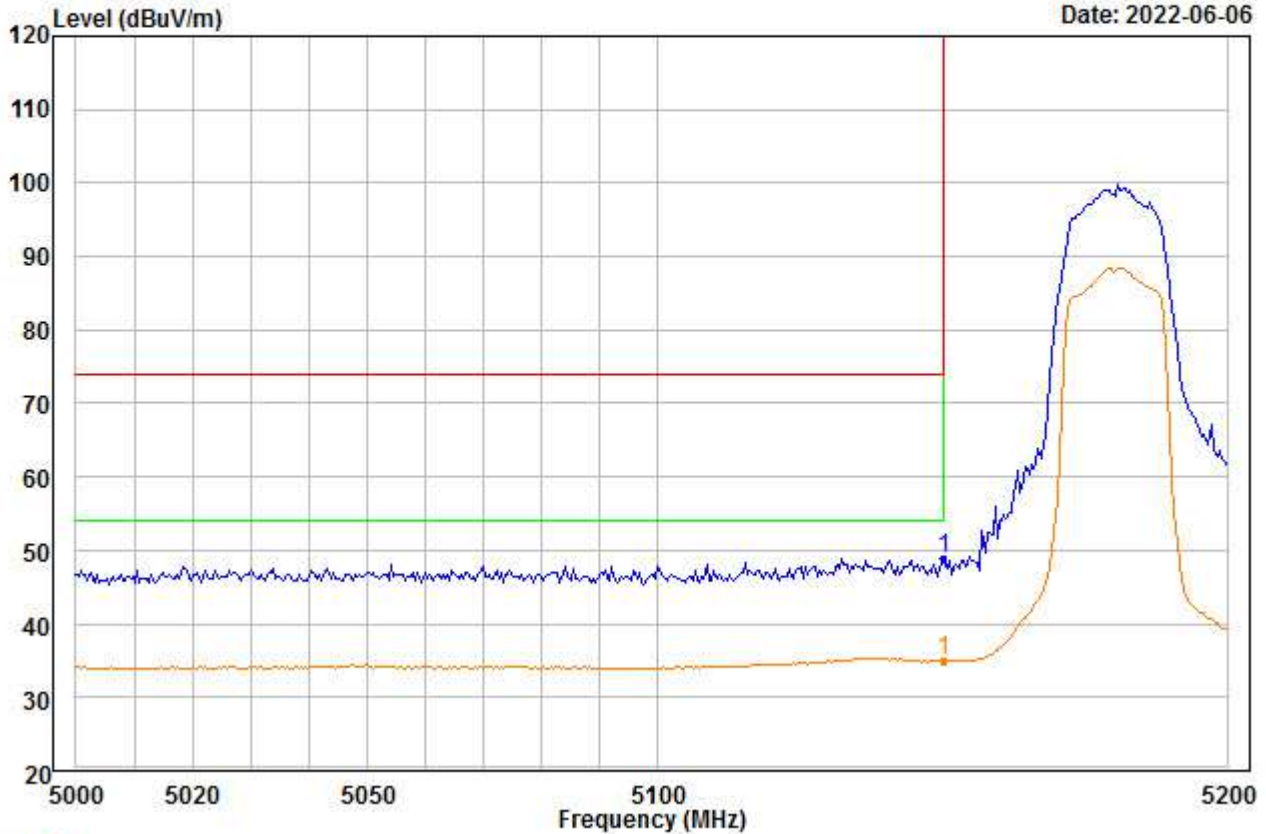

Trace: 1


Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5180
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5150.000	50.51	34.88	46.33	0.00	9.78	48.84	74.00	-25.16	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00004.EMI

Date: 2022-06-06

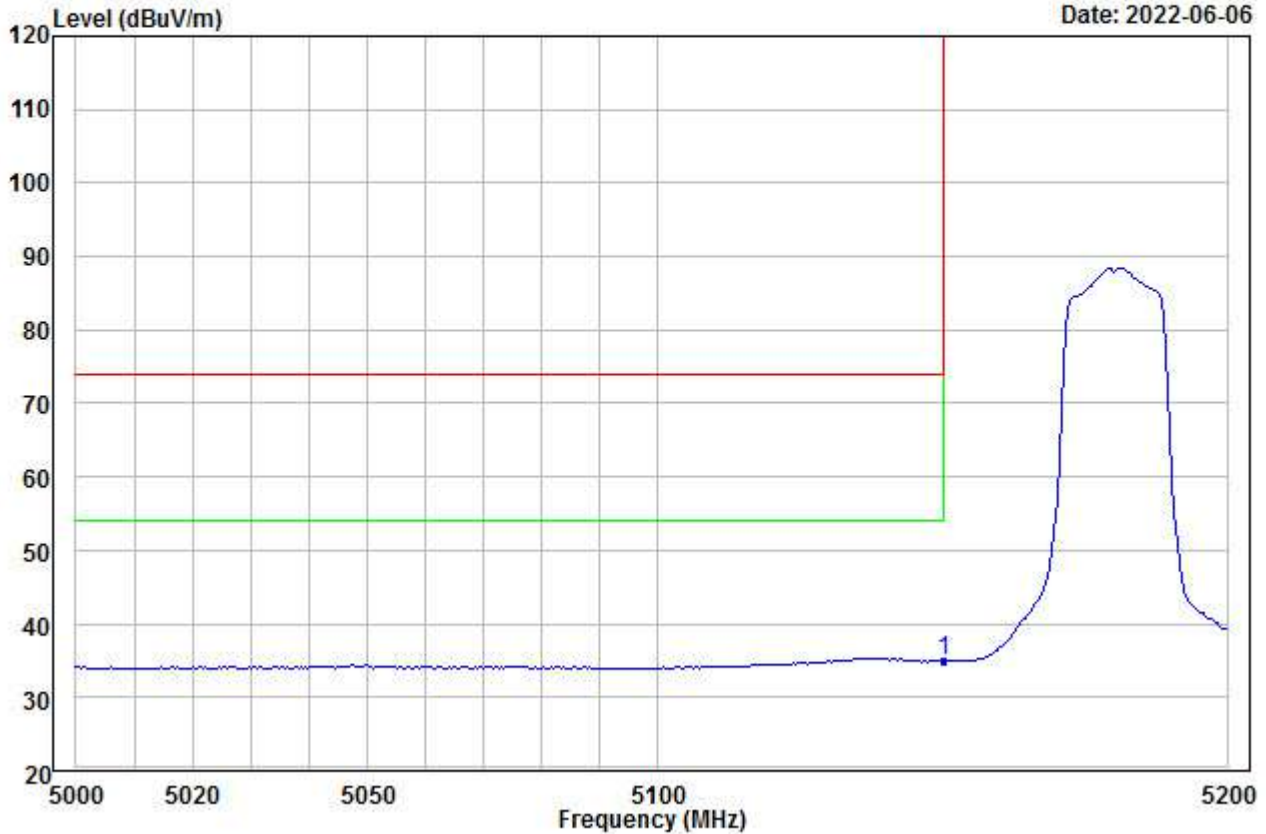


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5180
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP	5150.000	36.56	34.88	46.33	0.00	9.78	34.89	54.00	-19.11	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00005.EMI

Date: 2022-06-06

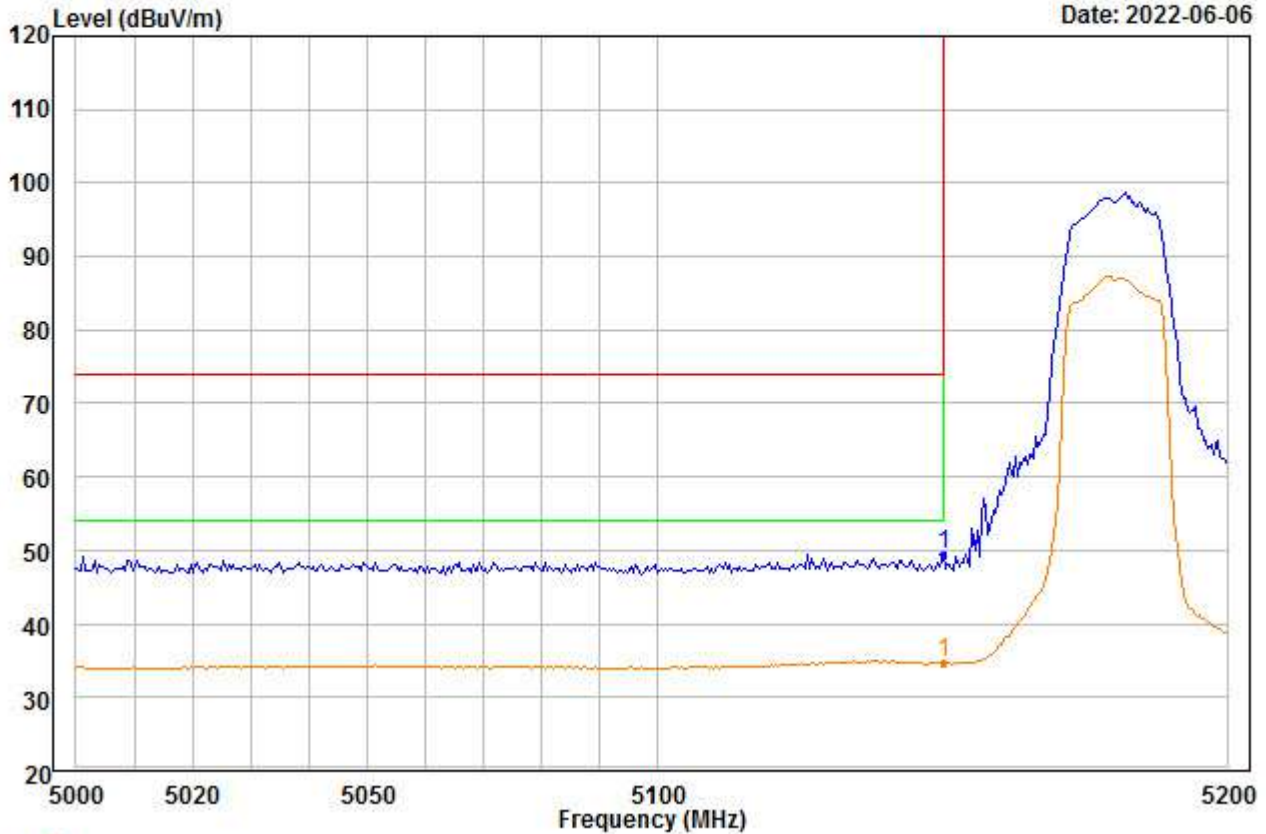

Trace: 1


Condition : Vertical
Temp.(C)/Hum.(%) : 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5180
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5150.000	51.19	34.88	46.33	0.00	9.78	49.52	74.00	-24.48	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00006.EMI

Date: 2022-06-06

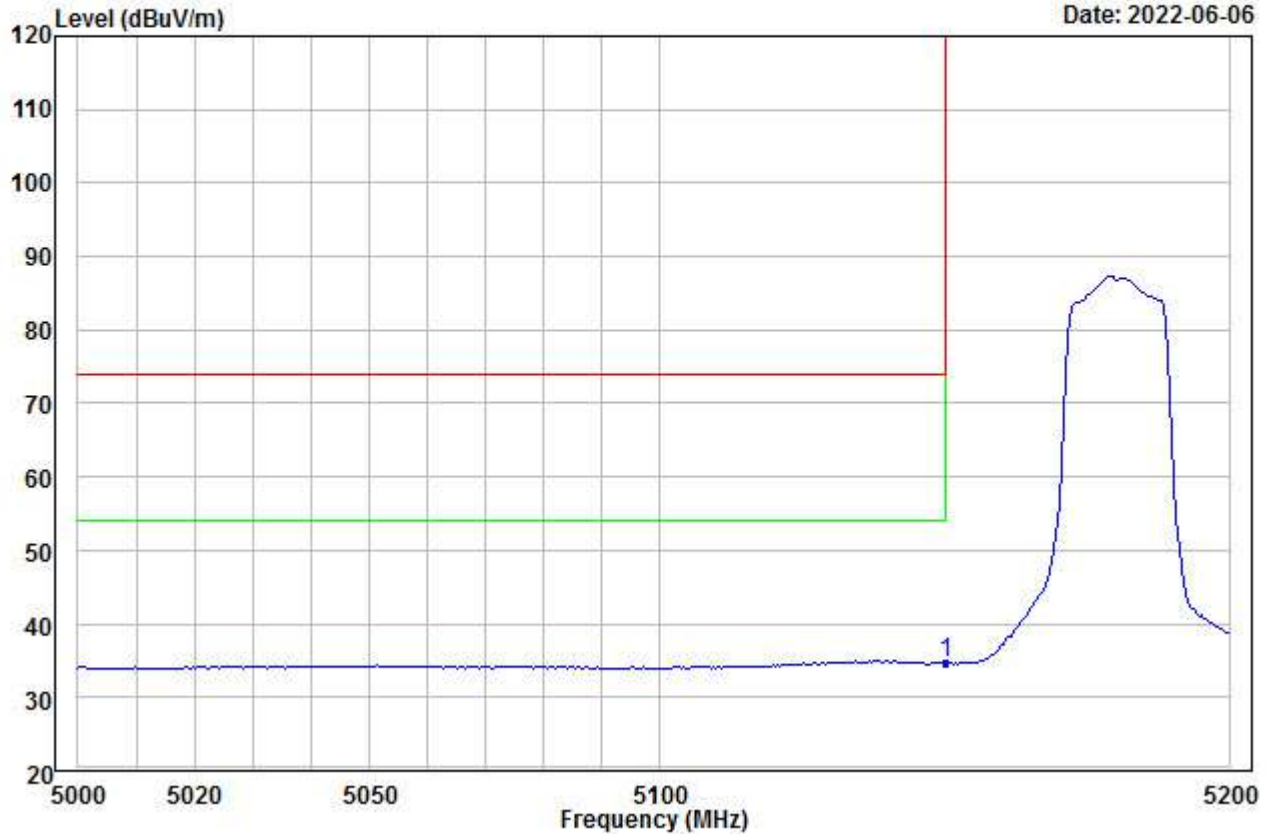


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5180
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5150.000	36.30	34.88	46.33	0.00	9.78	34.63	54.00	-19.37	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00007.EMI

Date: 2022-06-06

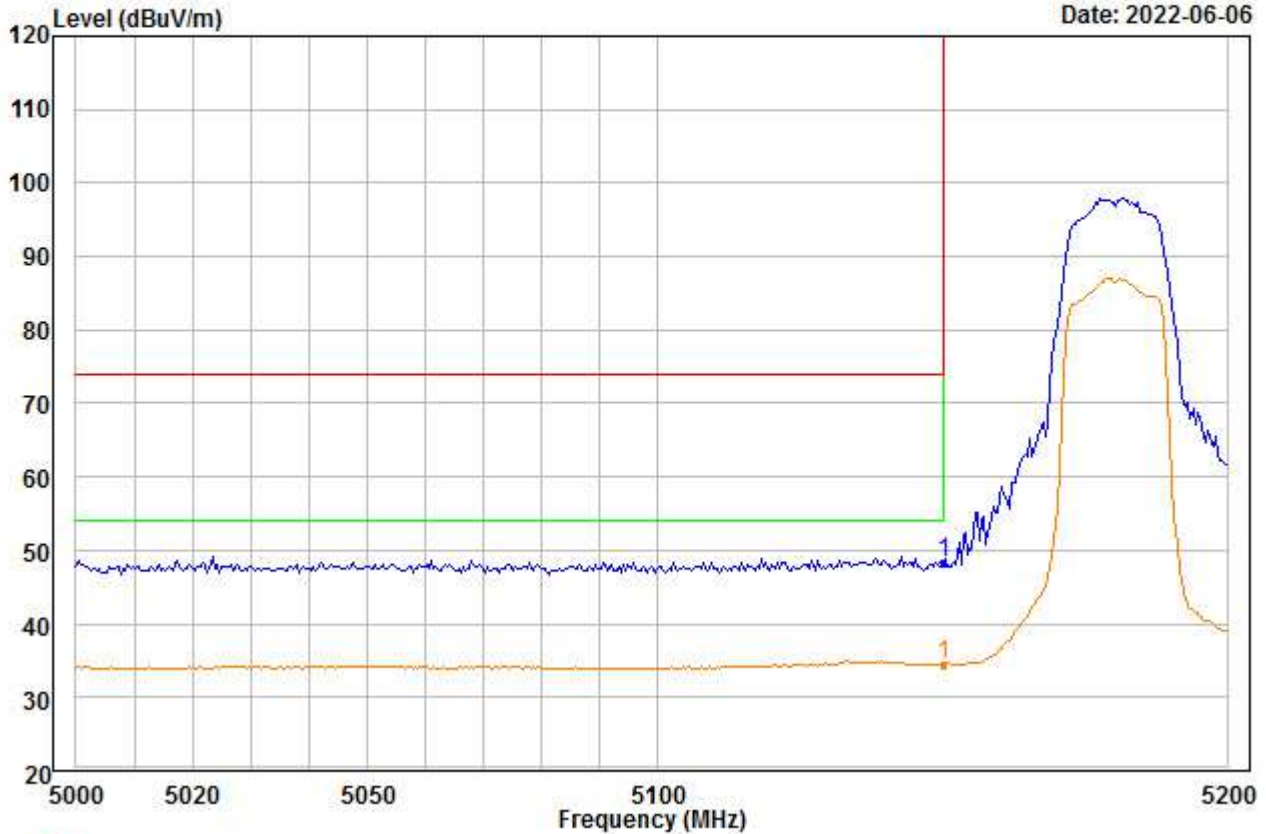


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%) : 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5180
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit		
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5150.000	49.91	34.88	46.33	0.00	9.78	48.24	74.00	-25.76	---	--- Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00008.EMI

Date: 2022-06-06

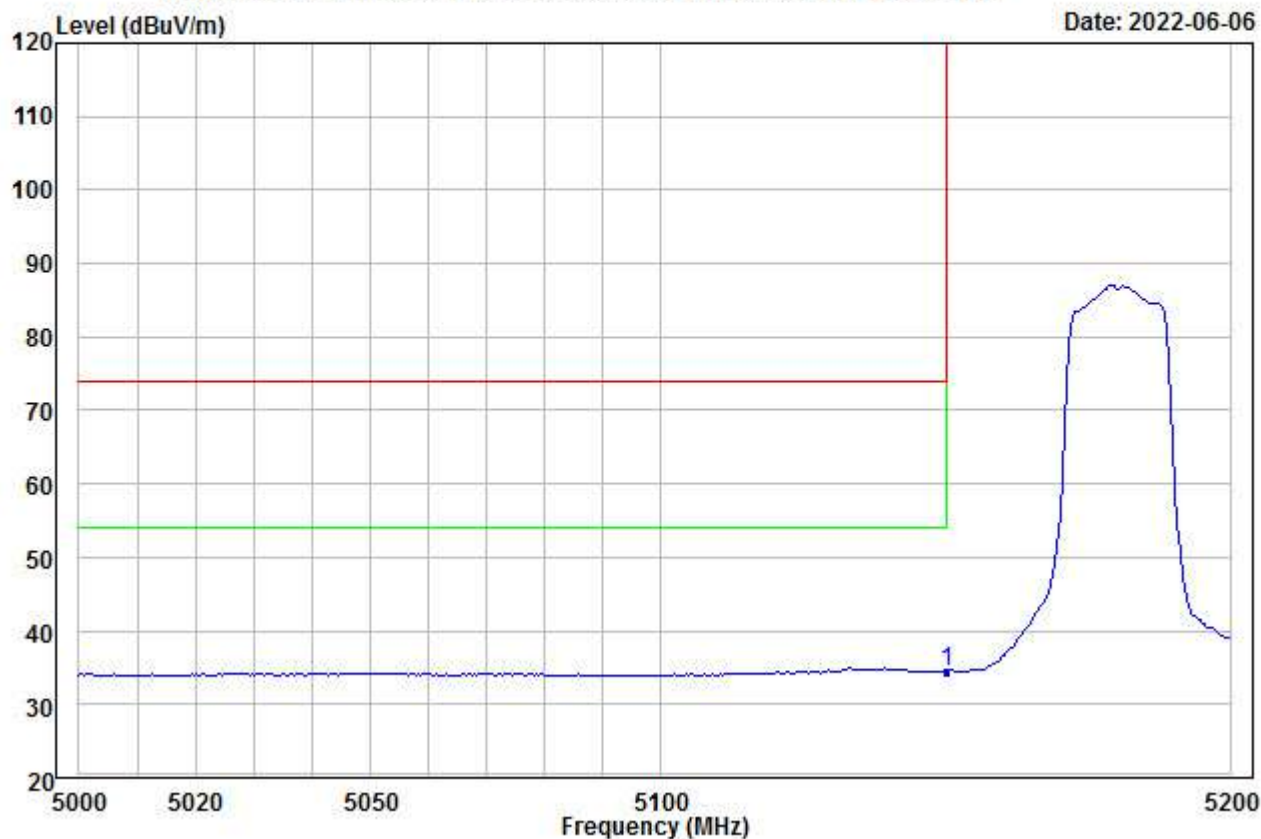


Condition : Horizontal
 Temp.(C)/Hum.(%) : 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5180
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit		
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5150.000	36.15	34.88	46.33	0.00	9.78	34.48	54.00	-19.52	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00009.EMI

Date: 2022-06-06

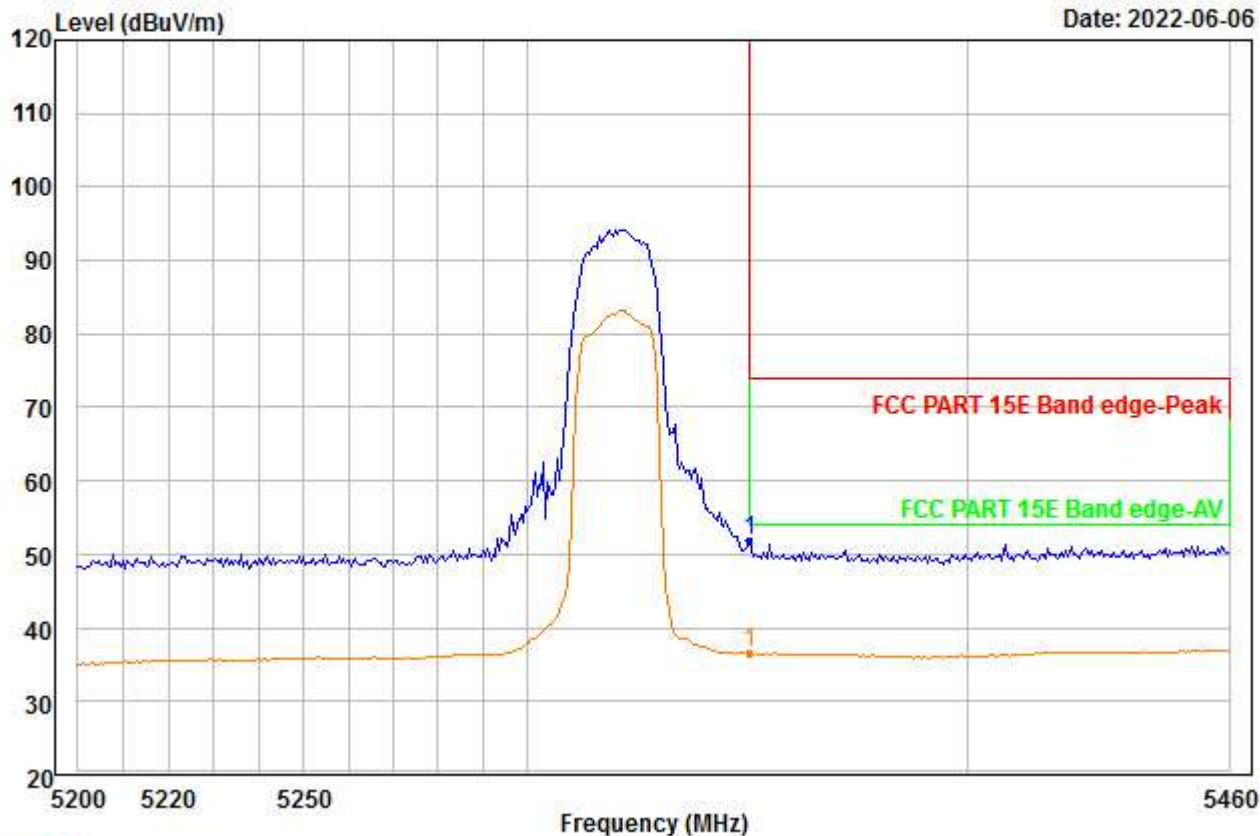


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5320
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit		
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	52.67	35.12	45.97	0.00	10.18	52.00	74.00	-22.00	---	--- Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00010.EMI

Date: 2022-06-06

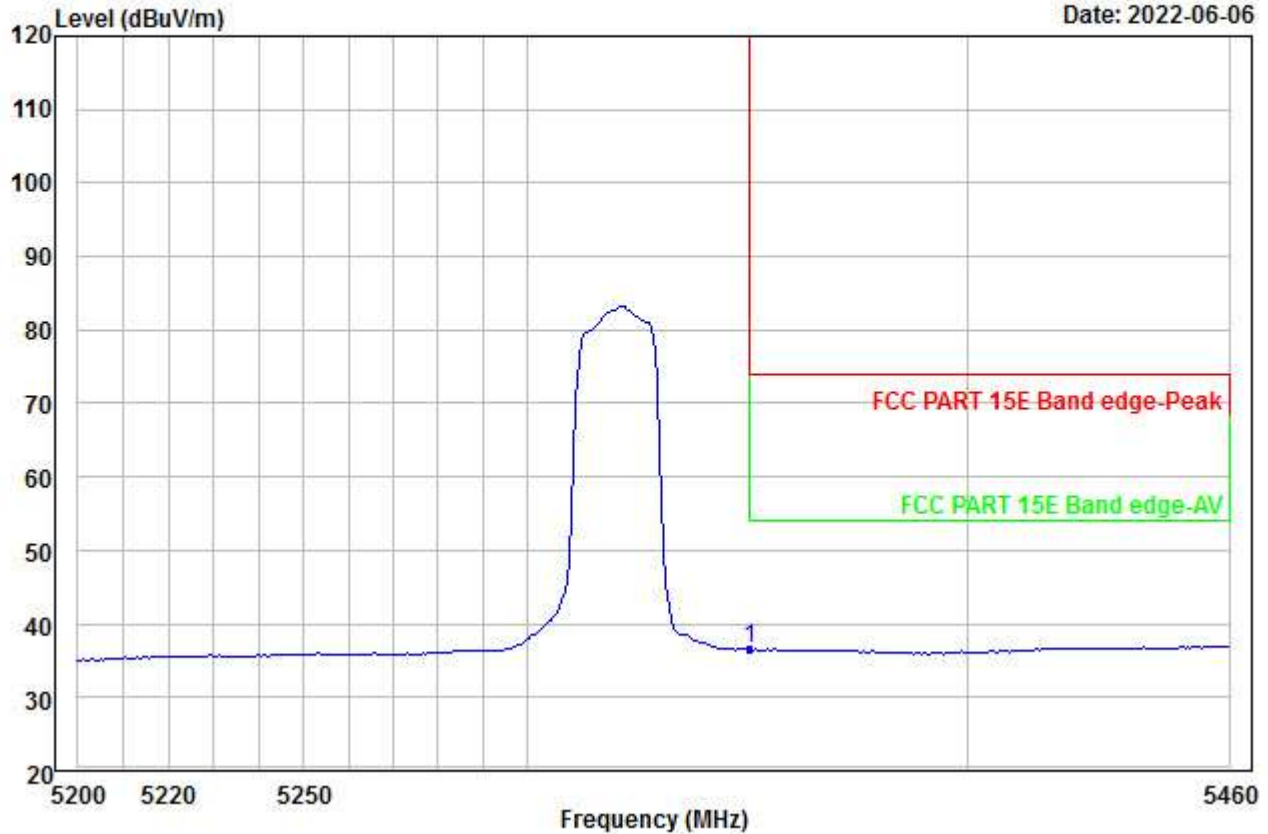


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5320
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	37.20	35.12	45.97	0.00	10.18	36.53	54.00	-17.47	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00011.EMI

Date: 2022-06-06

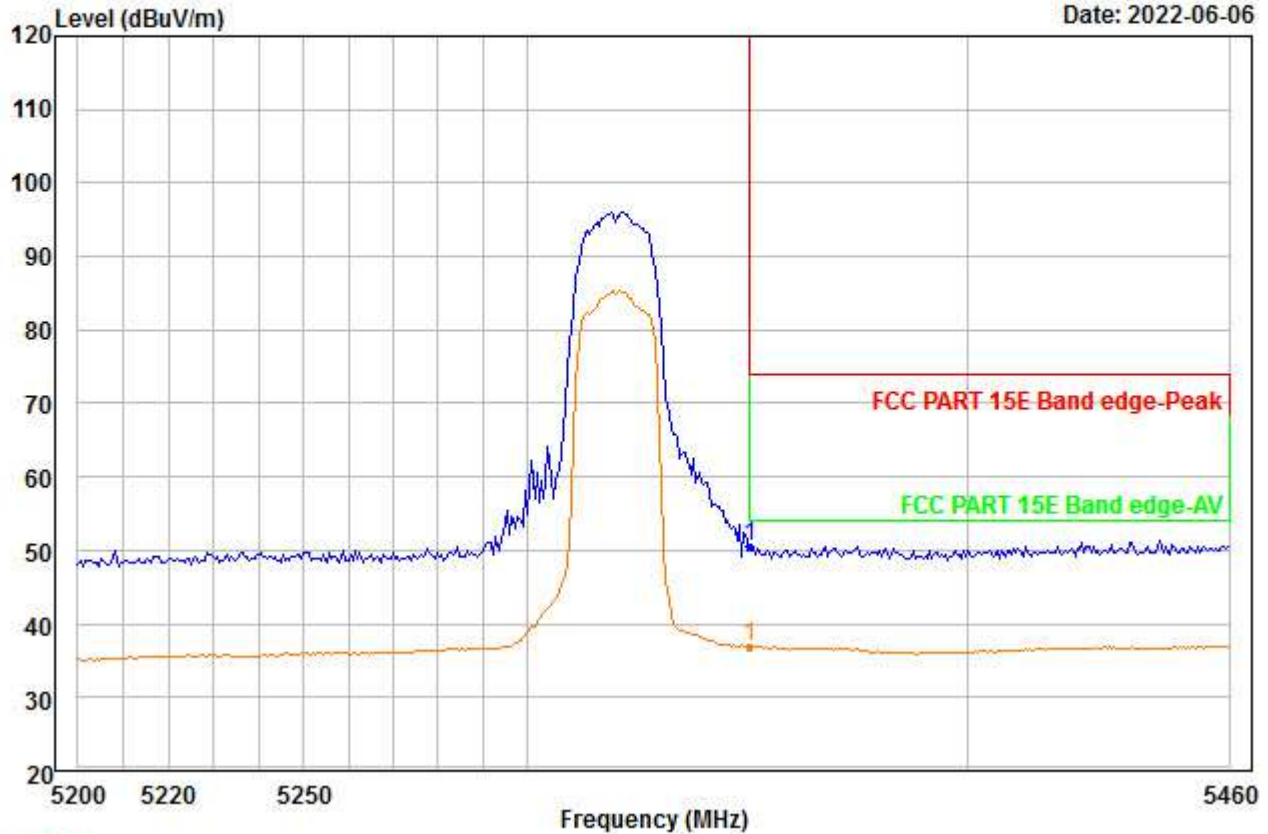

Trace: 1


Condition : Vertical
Temp.(C)/Hum.(%) : 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5320
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	51.21	35.12	45.97	0.00	10.18	50.54	74.00	-23.46	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00012.EMI

Date: 2022-06-06

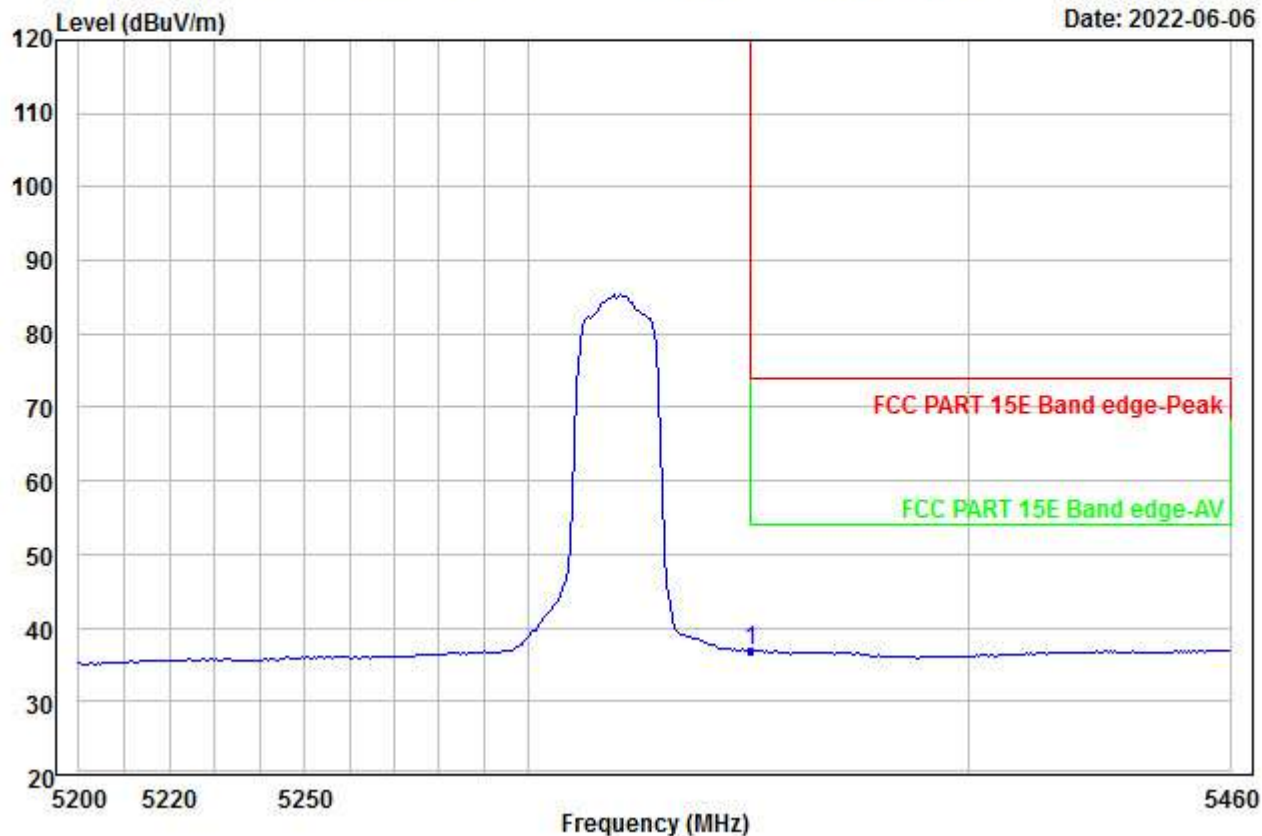


Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5320
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	37.50	35.12	45.97	0.00	10.18	36.83	54.00	-17.17	---	---

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00013.EMI

Date: 2022-06-06

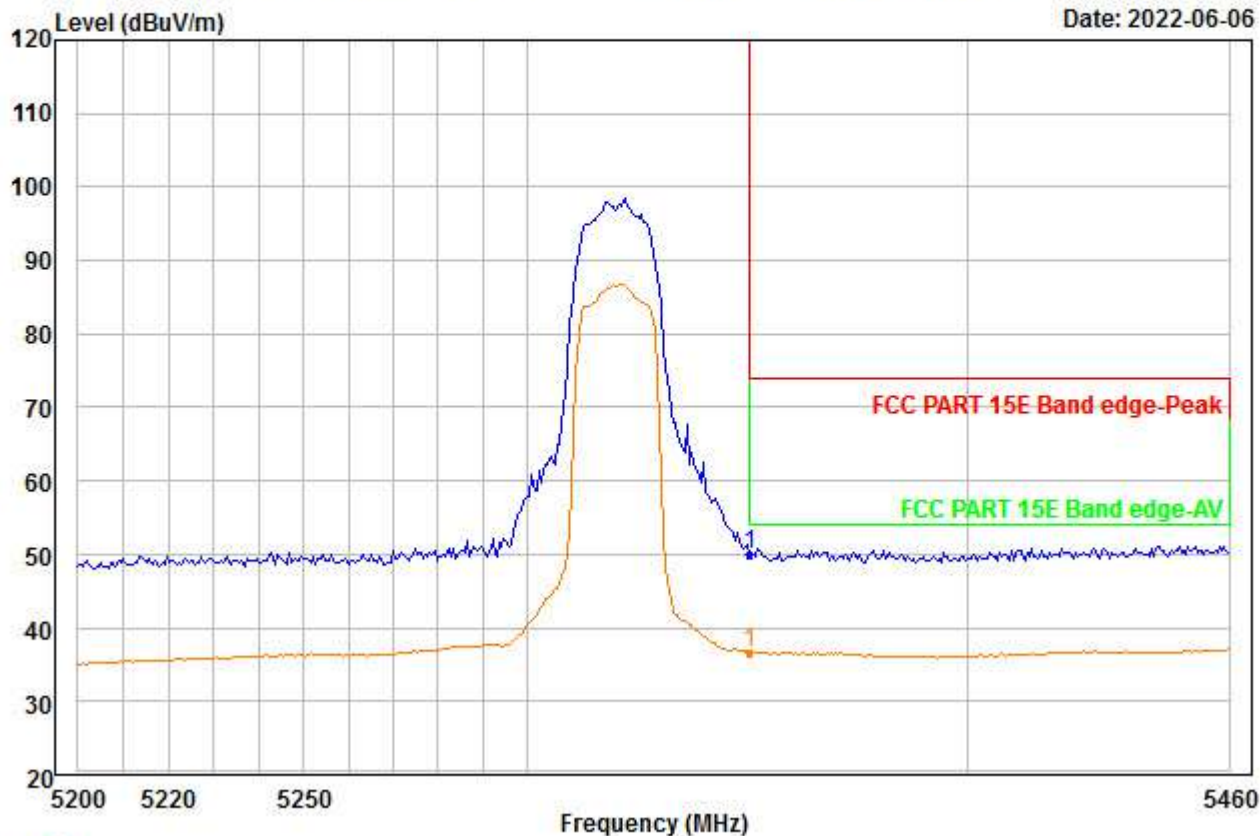

Trace: 1


Condition : Vertical
Temp.(C)/Hum.(%) : 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5320
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	50.59	35.12	45.97	0.00	10.18	49.92	74.00	-24.08	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00014.EMI

Date: 2022-06-06

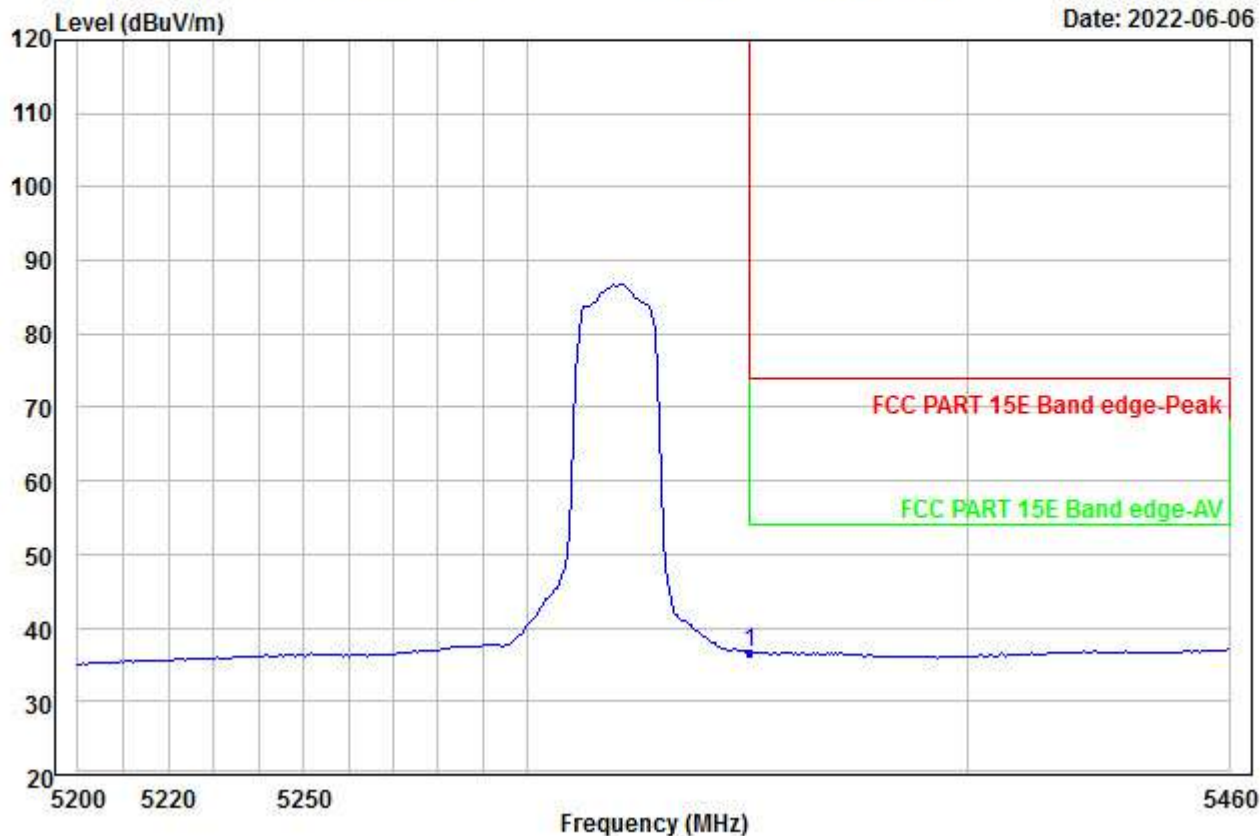


Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5320
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	37.41	35.12	45.97	0.00	10.18	36.74	54.00	-17.26	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00015.EMI

Date: 2022-06-06

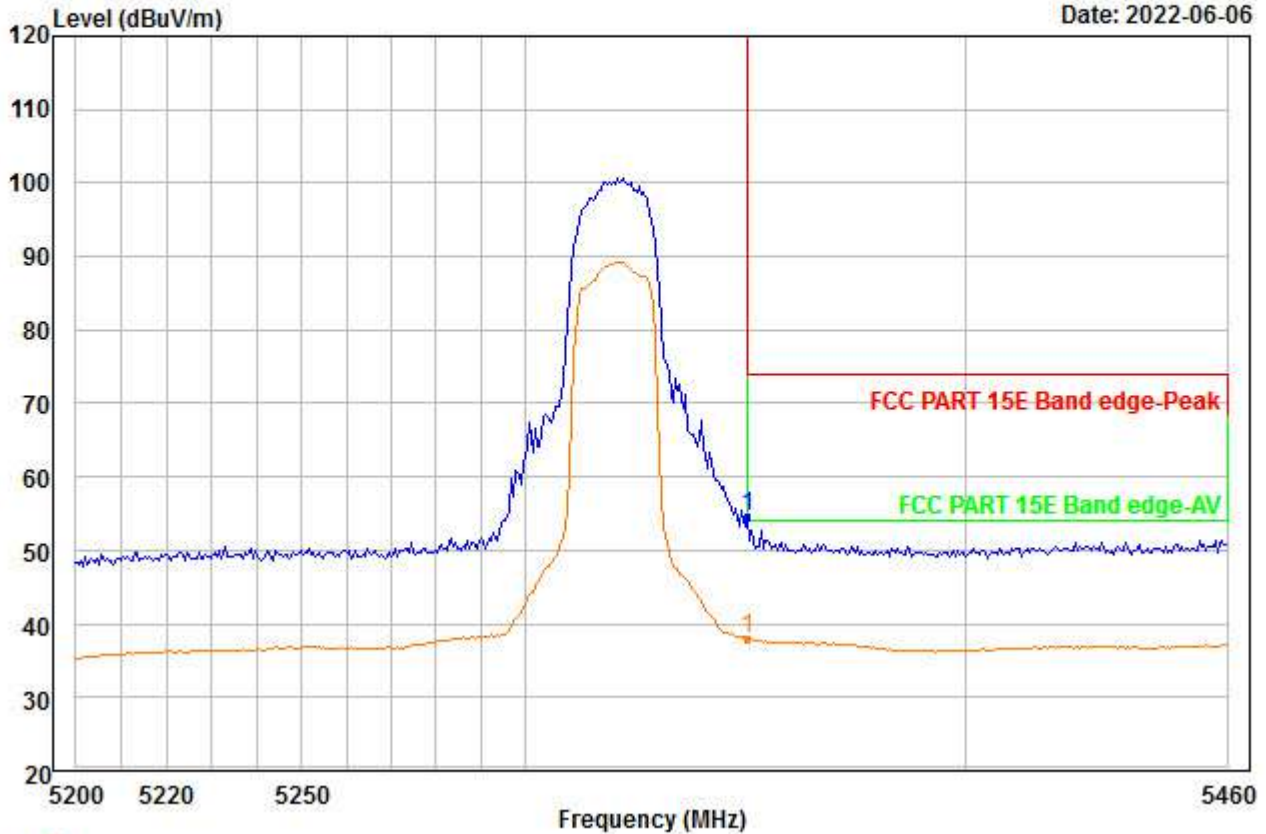


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%) : 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5320
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit		
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	55.20	35.12	45.97	0.00	10.18	54.53	74.00	-19.47	---	--- Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00016.EMI

Date: 2022-06-06

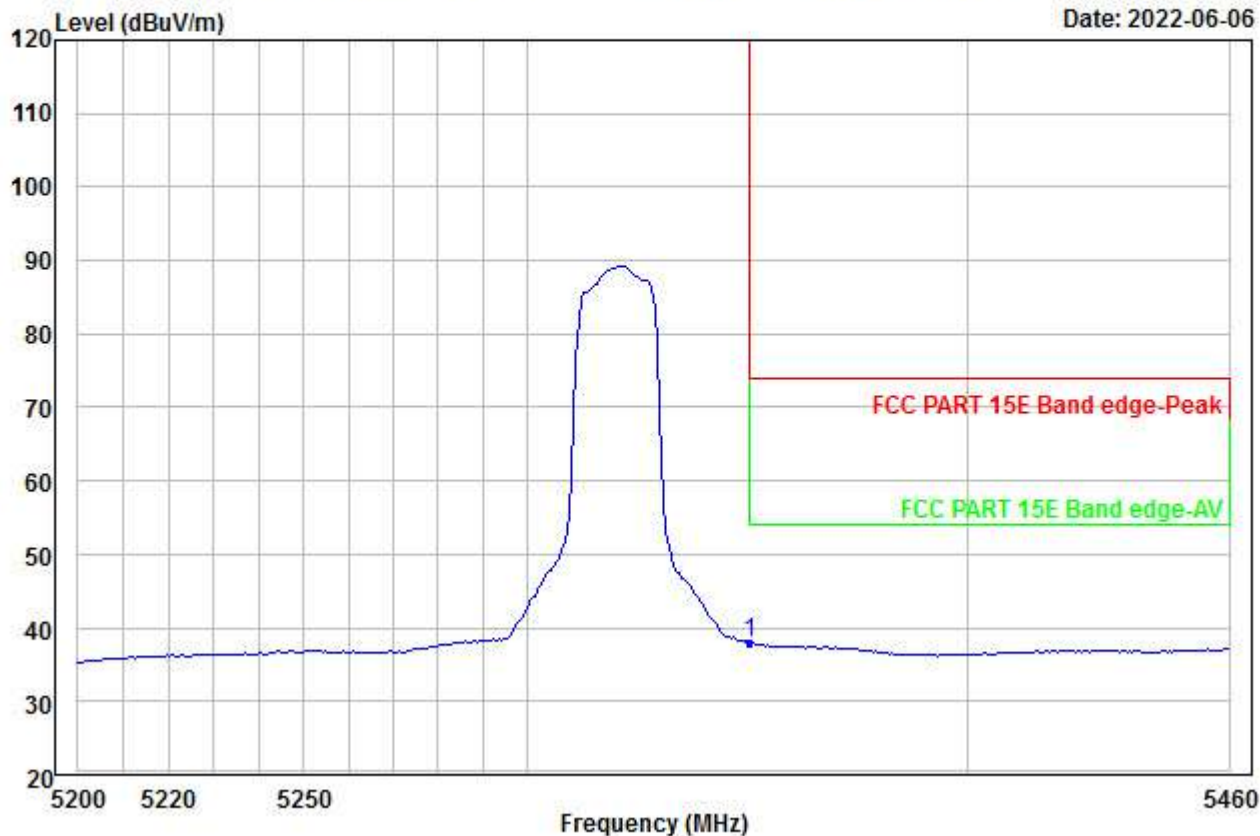


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5320
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit		
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	38.73	35.12	45.97	0.00	10.18	38.06	54.00	-15.94	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00017.EMI

Date: 2022-06-06

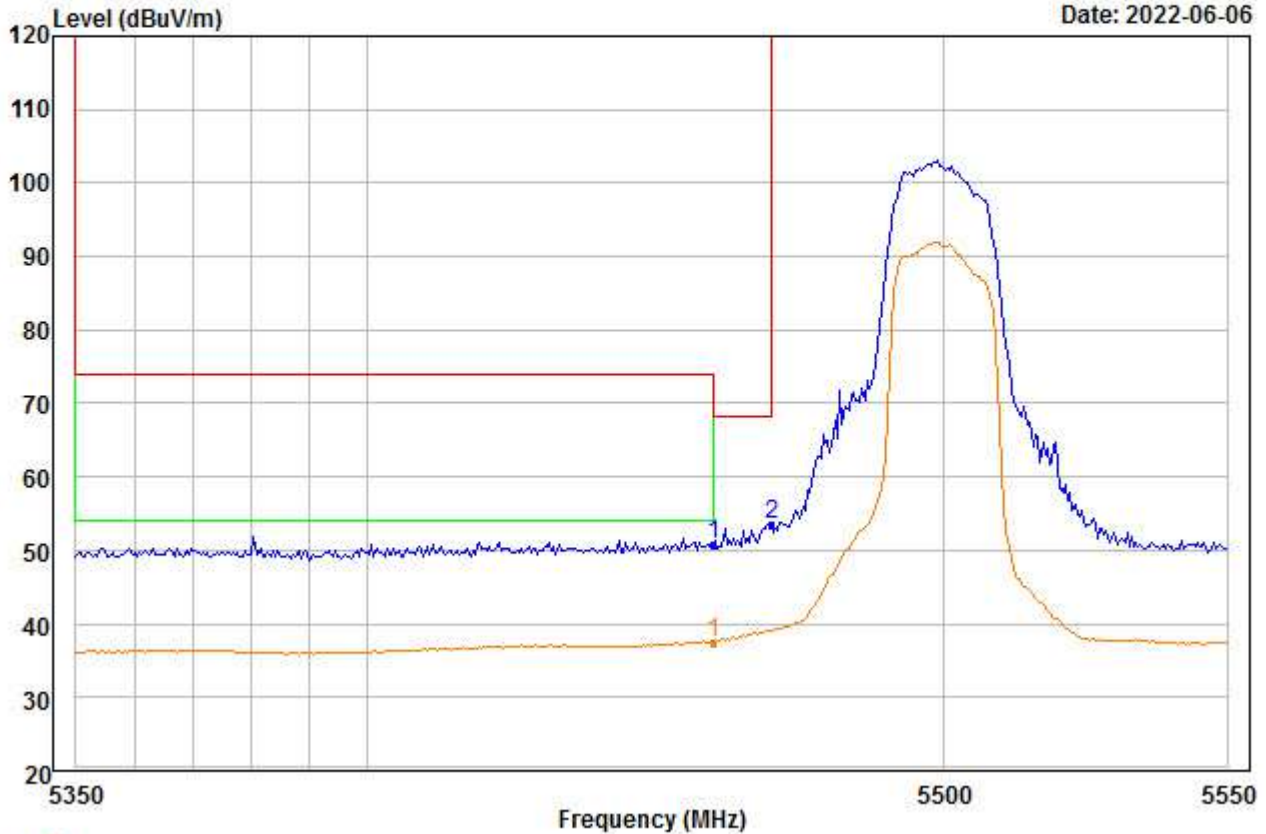


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5500
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5460.000	50.96	35.25	45.77	0.00	10.44	50.88	68.20	-17.32	---	---	Peak
2 PP	5470.000	53.42	35.26	45.75	0.00	10.47	53.40	68.20	-14.80	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00018.EMI

Date: 2022-06-06

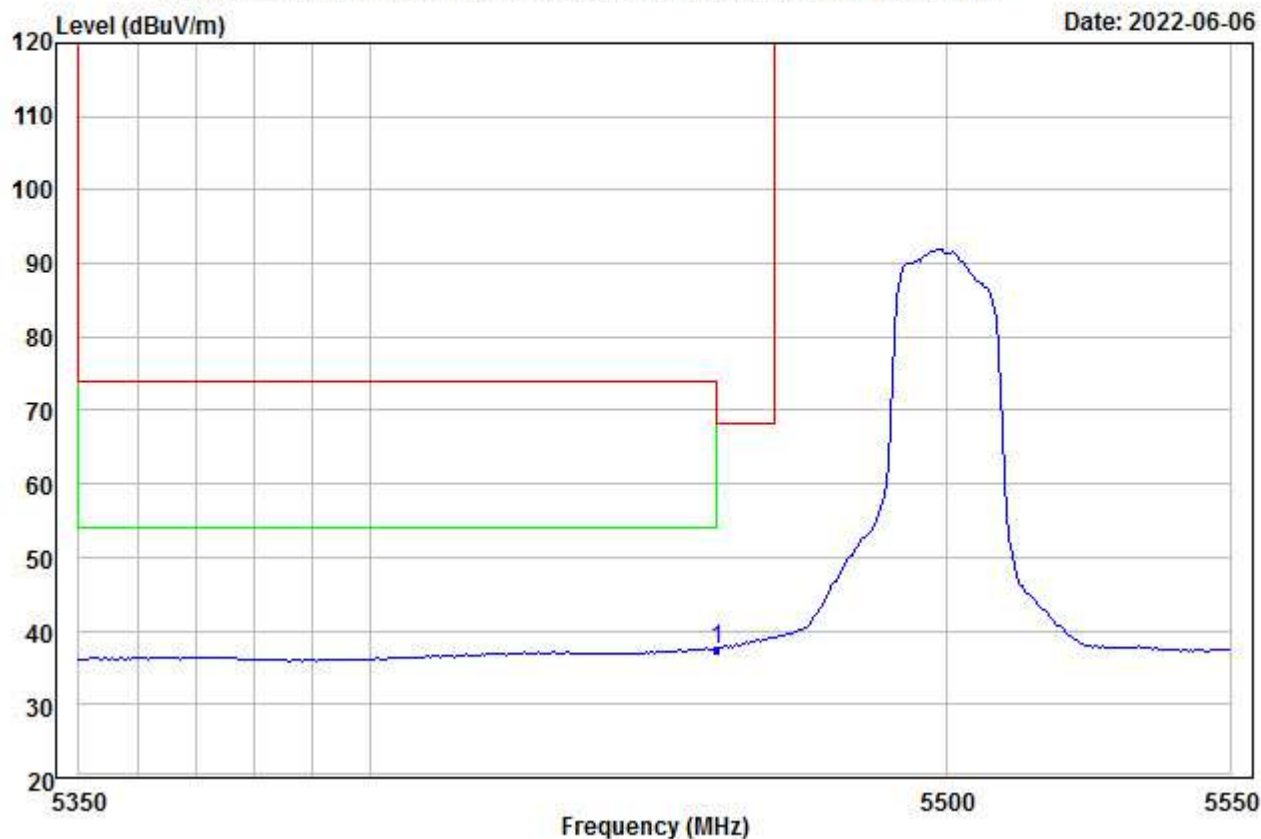


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5500
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5460.000	37.62	35.25	45.77	0.00	10.44	37.54	54.00	-16.46	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00019.EMI

Date: 2022-06-06

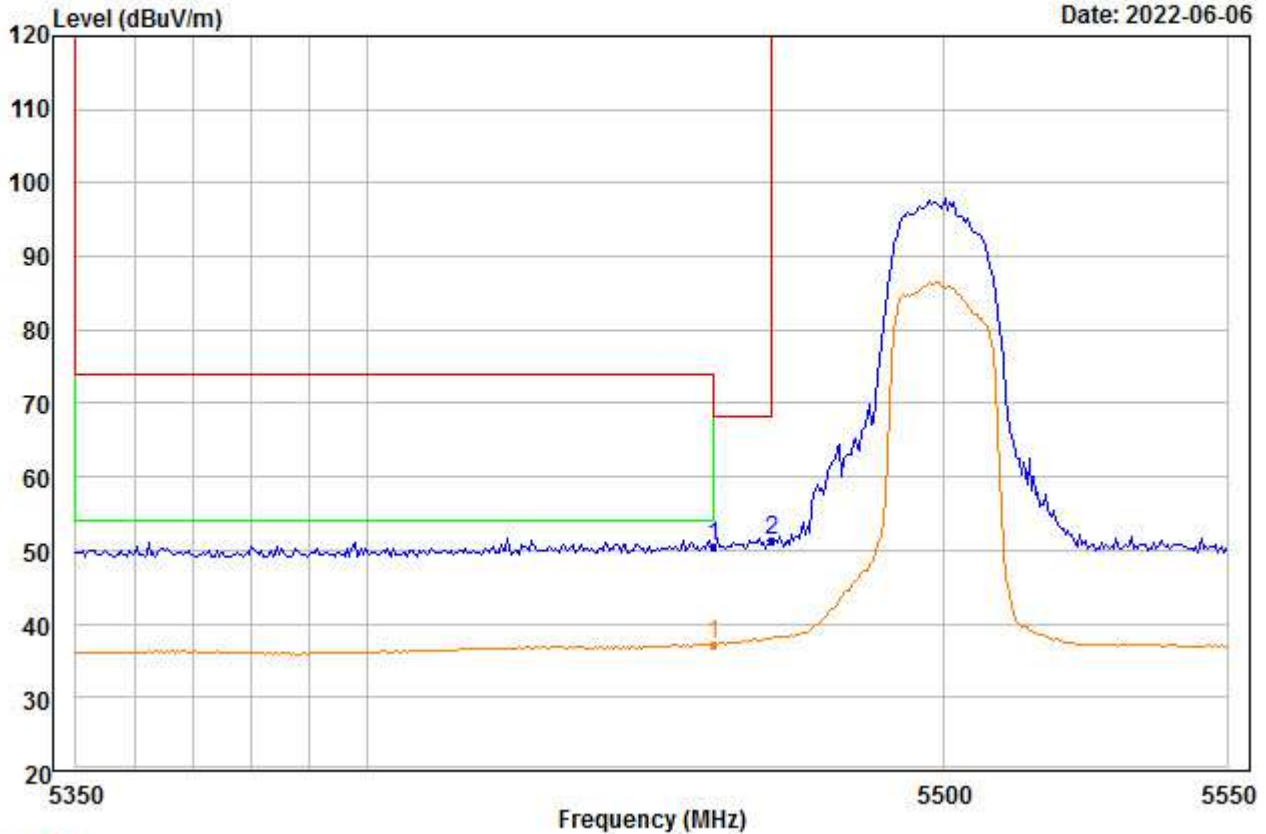


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5500
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5460.000	50.70	35.25	45.77	0.00	10.44	50.62	68.20	-17.58	---	---	Peak
2 PP	5470.000	51.25	35.26	45.75	0.00	10.47	51.23	68.20	-16.97	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00020.EMI

Date: 2022-06-06

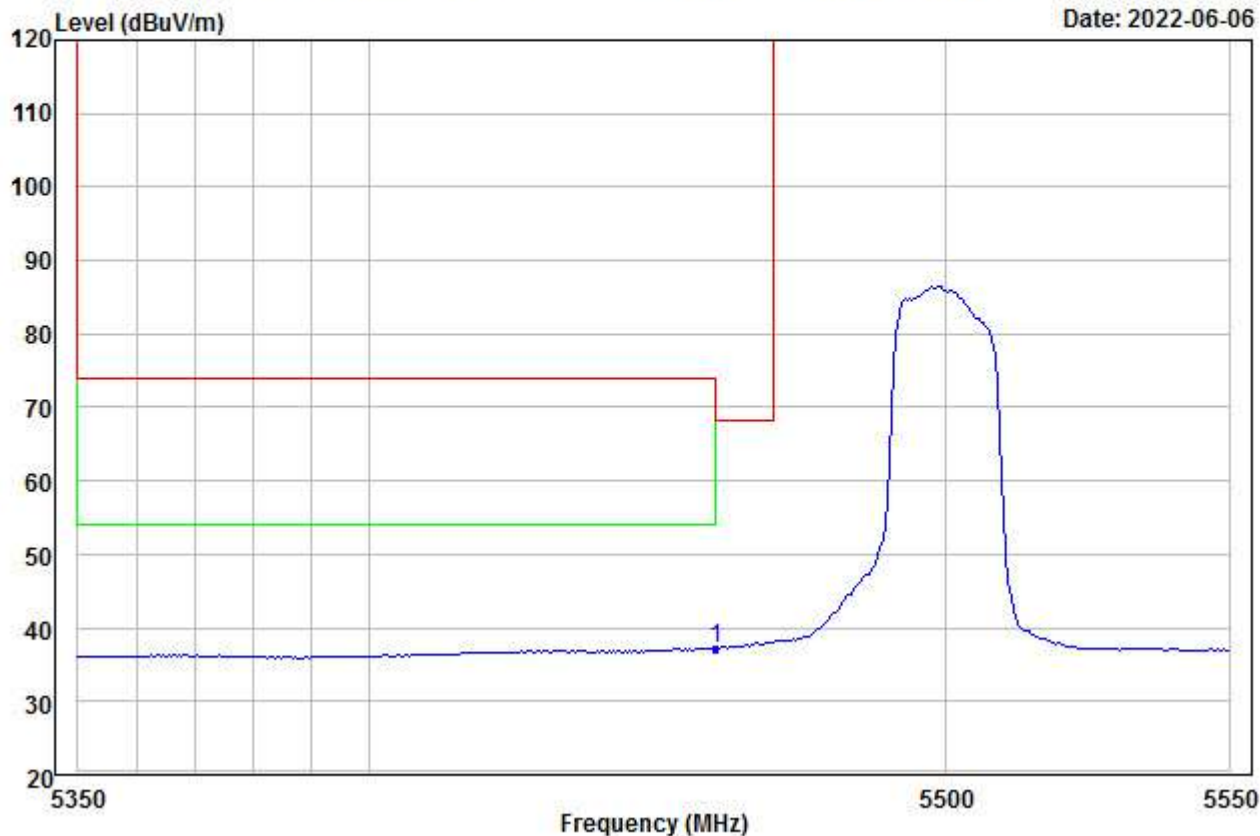


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5500
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5460.000	37.25	35.25	45.77	0.00	10.44	37.17	54.00	-16.83	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00021.EMI

Date: 2022-06-06

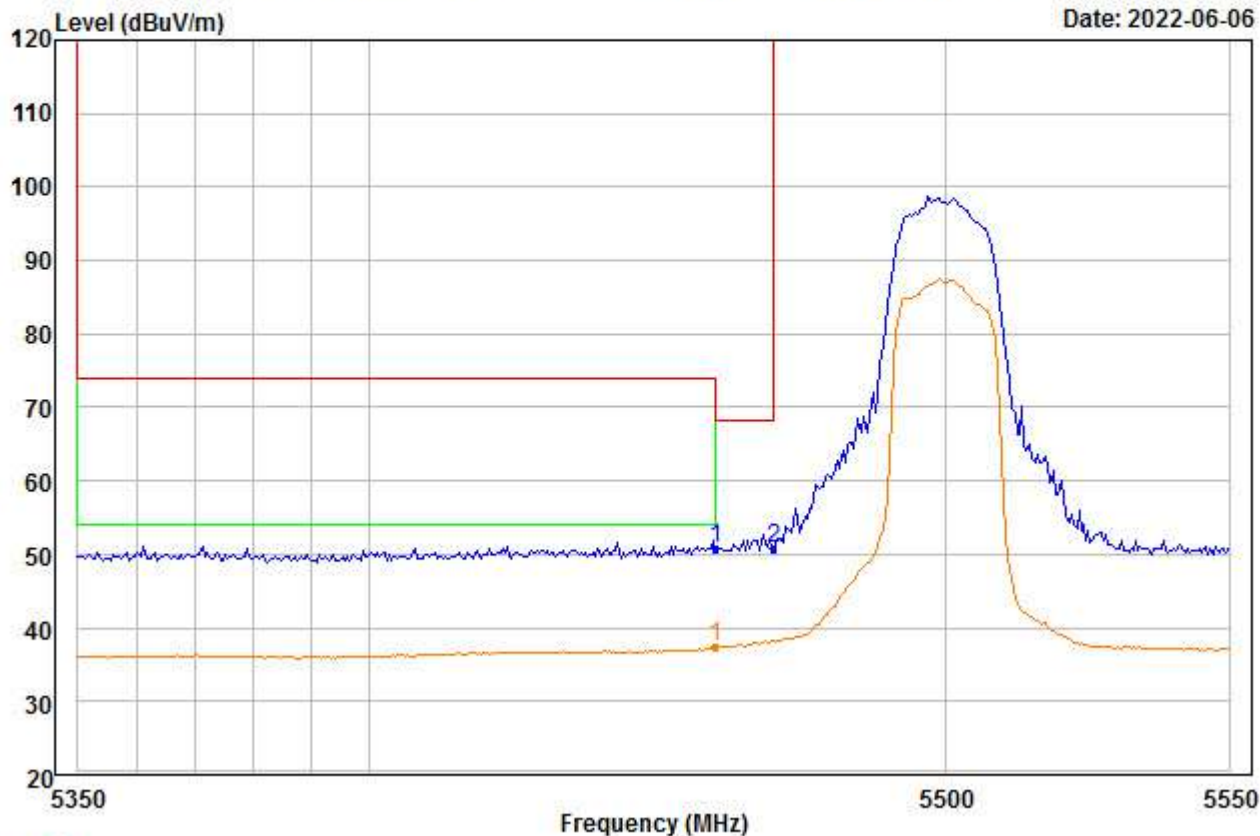


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5500
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5460.000	50.87	35.25	45.77	0.00	10.44	50.79	68.20	-17.41	---	---	Peak
2 PP	5470.000	50.89	35.26	45.75	0.00	10.47	50.87	68.20	-17.33	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00022.EMI

Date: 2022-06-06

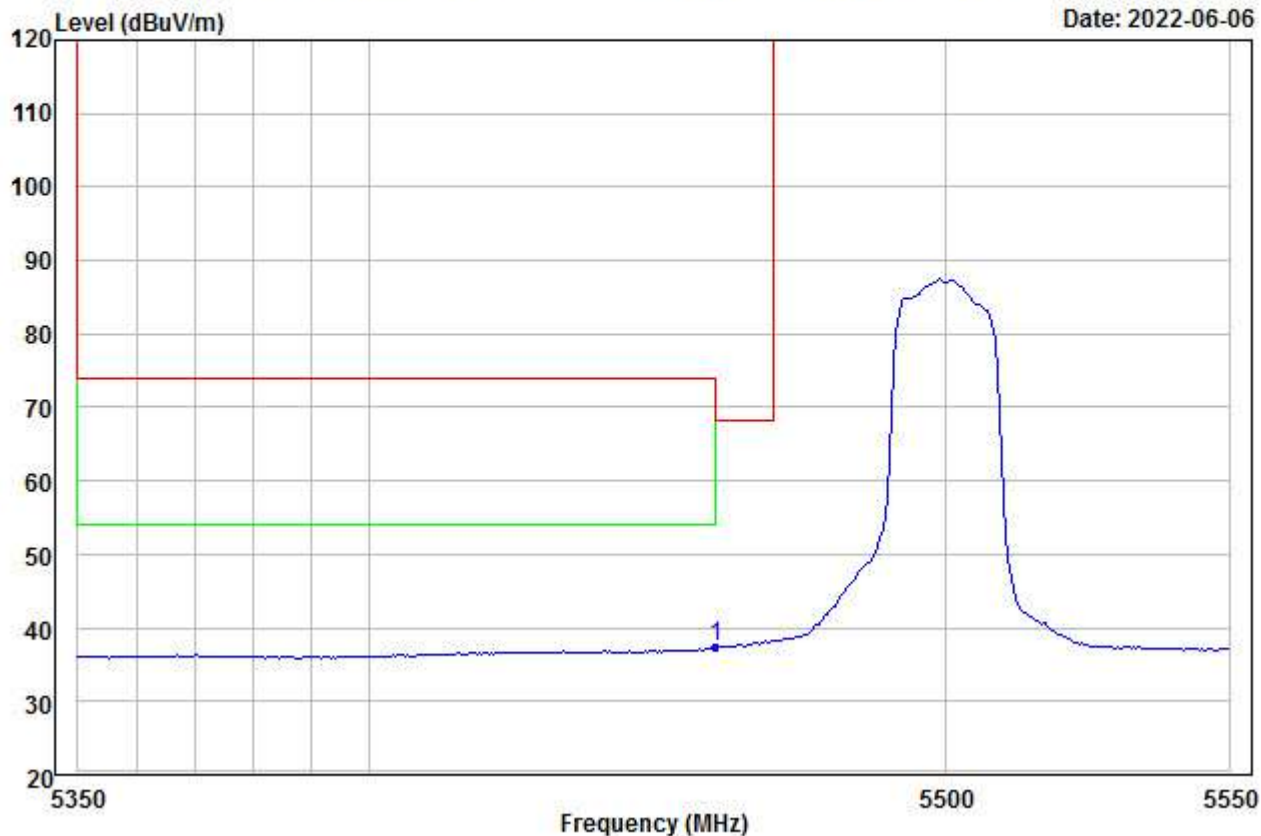


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5500
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5460.000	37.45	35.25	45.77	0.00	10.44	37.37	54.00	-16.63	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00023.EMI

Date: 2022-06-06

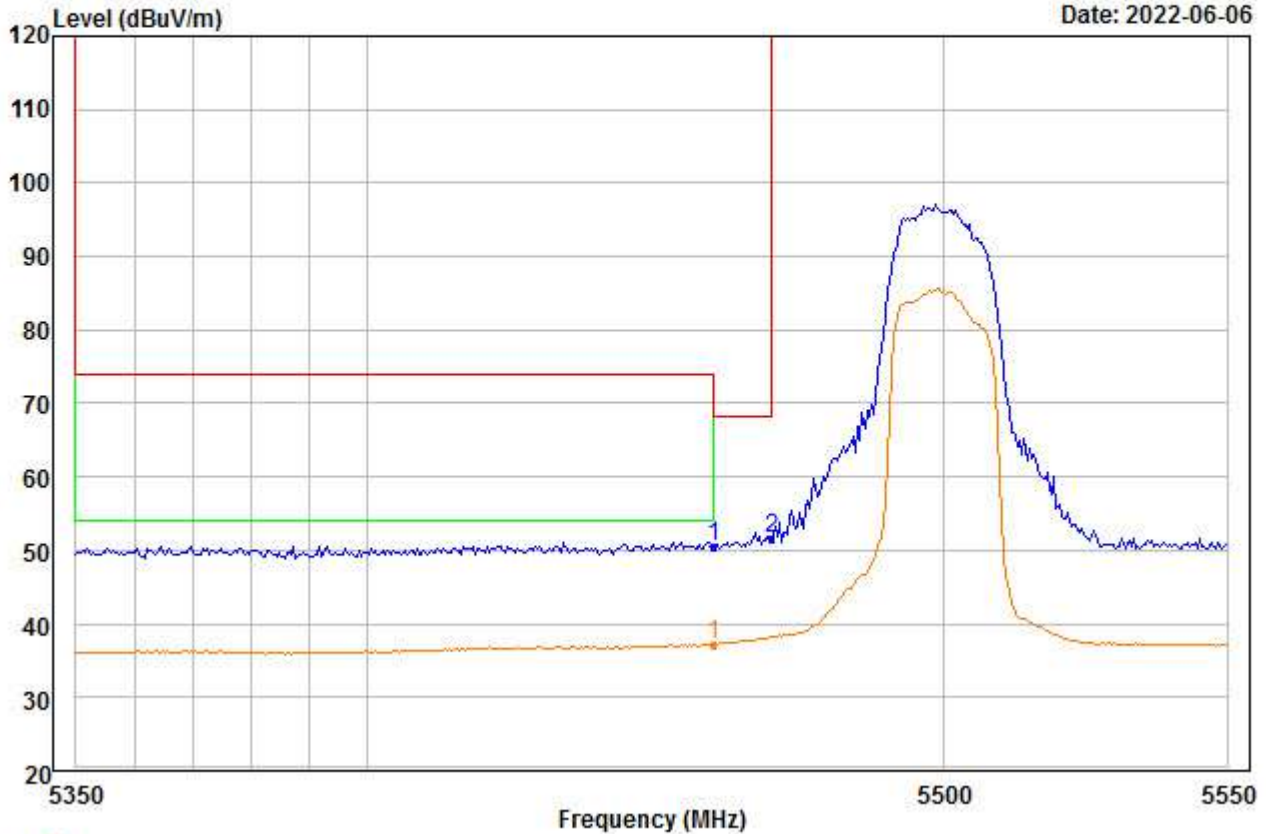


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5500
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5460.000	50.55	35.25	45.77	0.00	10.44	50.47	68.20	-17.73	---	---	Peak
2 PP	5470.000	51.53	35.26	45.75	0.00	10.47	51.51	68.20	-16.69	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00024.EMI

Date: 2022-06-06

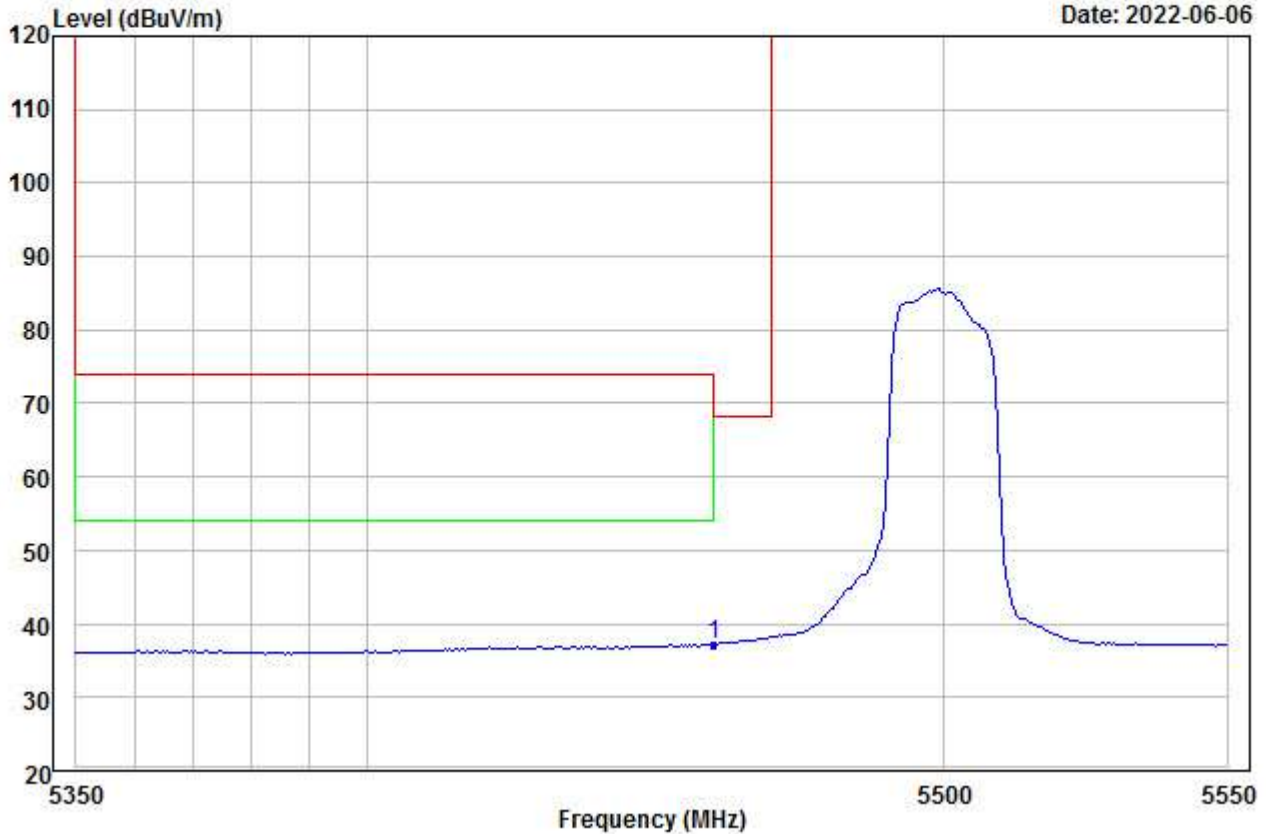


Condition : Horizontal
Temp.(C)/Hum.(%) : 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5500
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5460.000	37.25	35.25	45.77	0.00	10.44	37.17	54.00	-16.83	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00025.EMI

Date: 2022-06-06

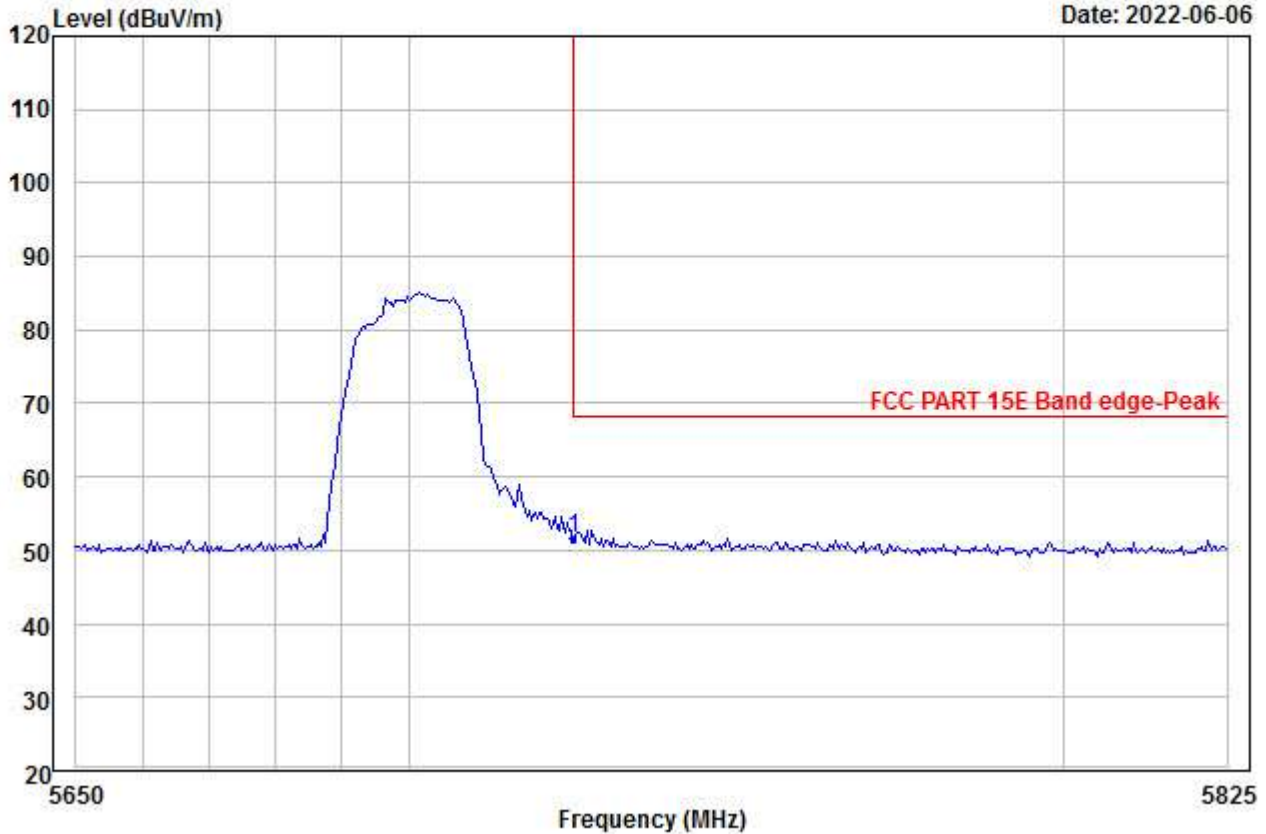


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5700
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5725.000	51.95	35.26	45.57	0.00	9.94	51.58	68.20	-16.62	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00026.EMI

Date: 2022-06-06

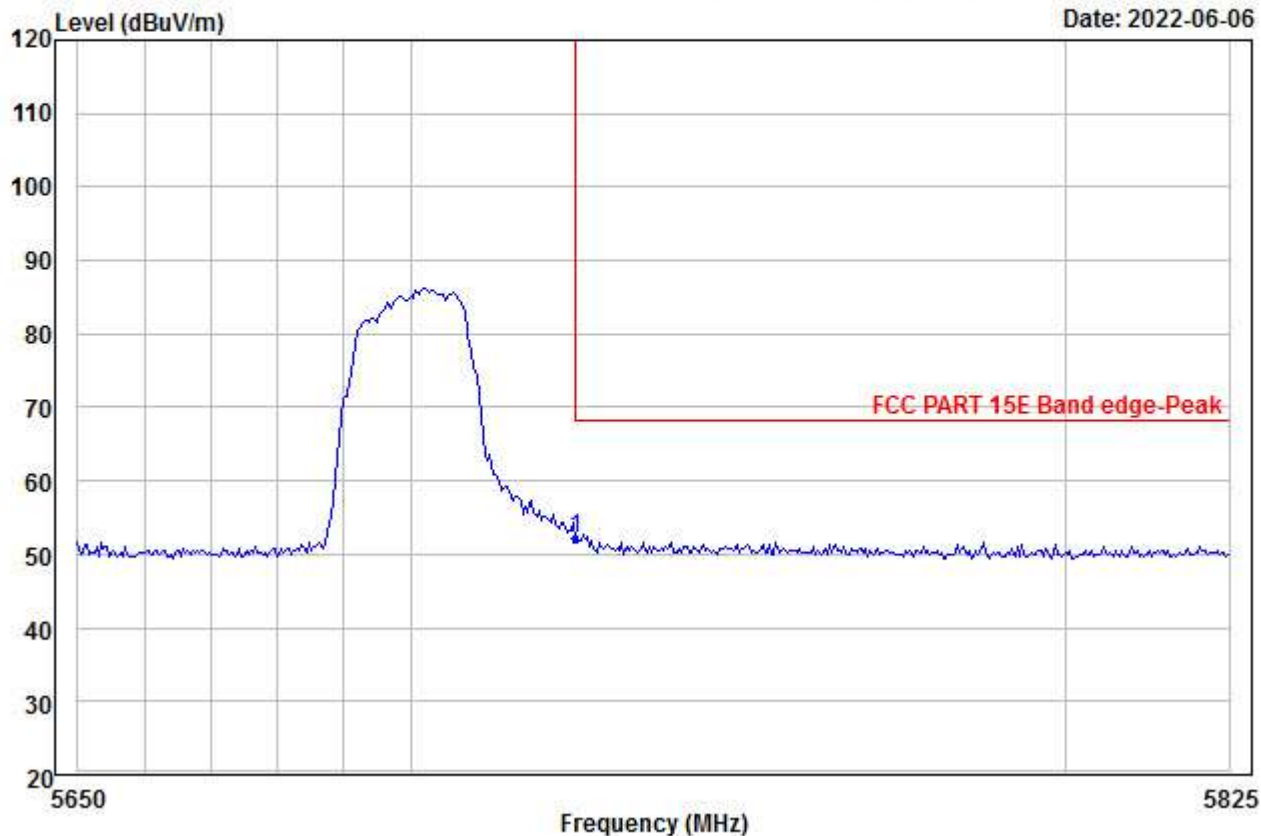


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5700
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5725.000	52.61	35.26	45.57	0.00	9.94	52.24	68.20	-15.96	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00027.EMI

Date: 2022-06-06

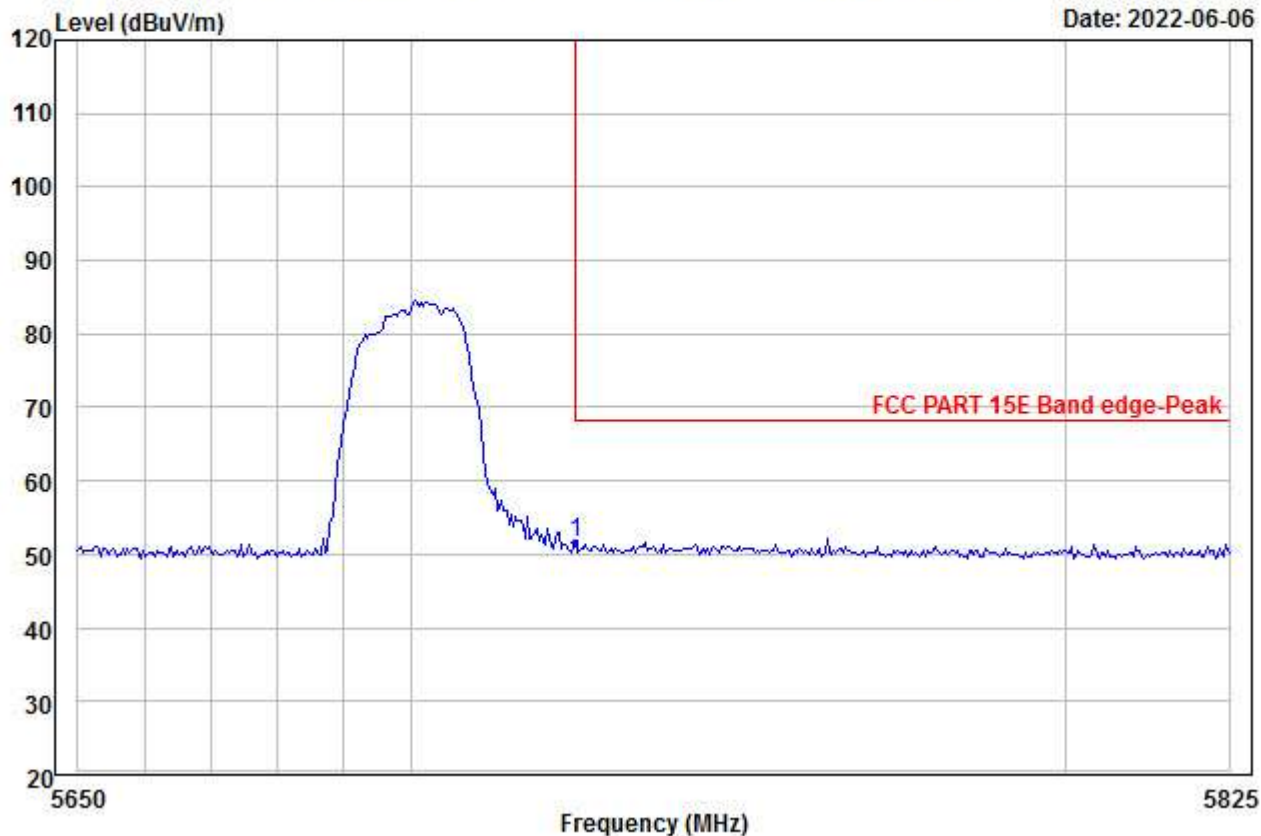


Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5700
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5725.000	52.07	35.26	45.57	0.00	9.94	51.70	68.20	-16.50	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00028.EMI

Date: 2022-06-06

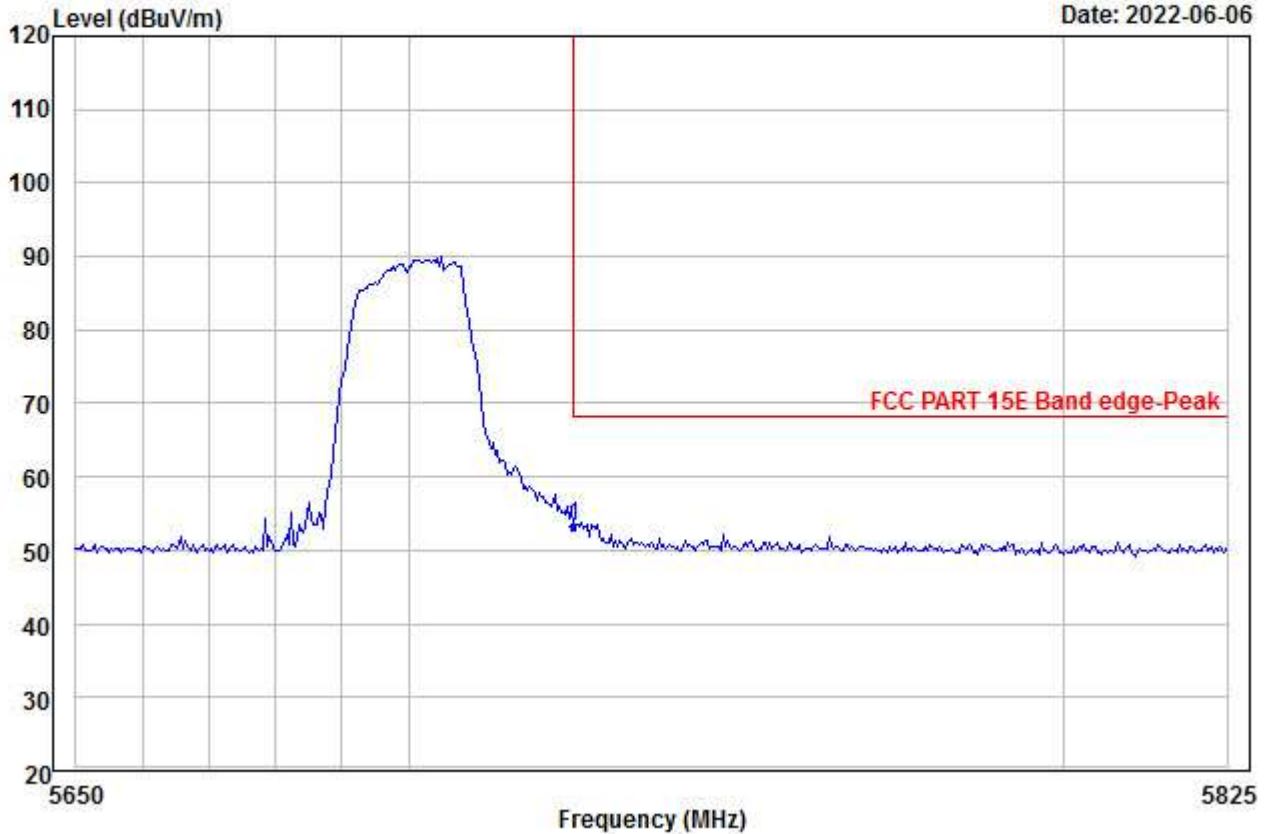


Condition : Horizontal
 Temp.(C)/Hum.(%) : 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5700
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5725.000	53.66	35.26	45.57	0.00	9.94	53.29	68.20	-14.91	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00029.EMI

Date: 2022-06-06

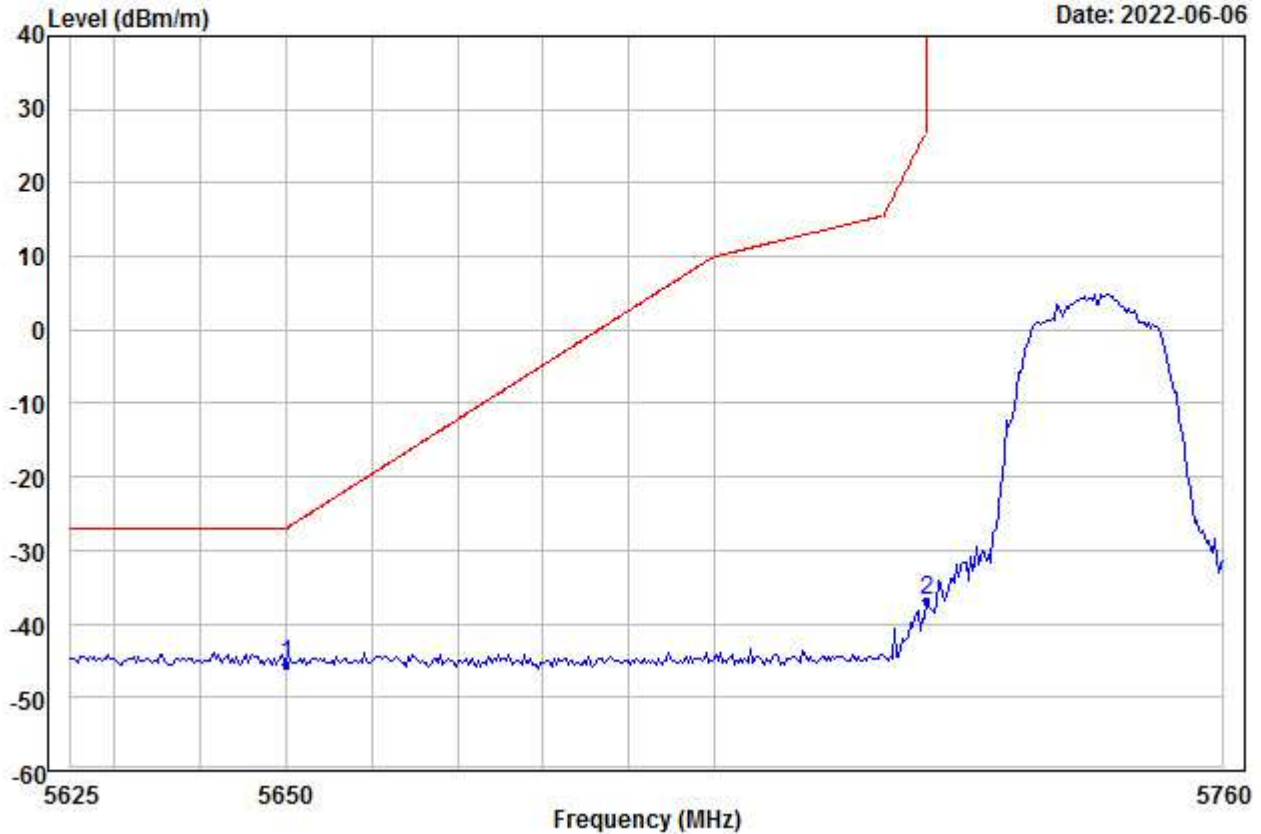


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5745
Remark :

		Read	Ant	Preamp	Aux	Cable			Limit	Over	APos	TPos	Rema
		Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit			
		MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1	PP	5650.000	-57.02	35.27	45.61	0.00	21.88	-45.48	-27.00	-18.48	---	---	Peak
2		5725.000	-48.13	35.26	45.57	0.00	21.68	-36.76	27.00	-63.76	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00030.EMI

Date: 2022-06-06

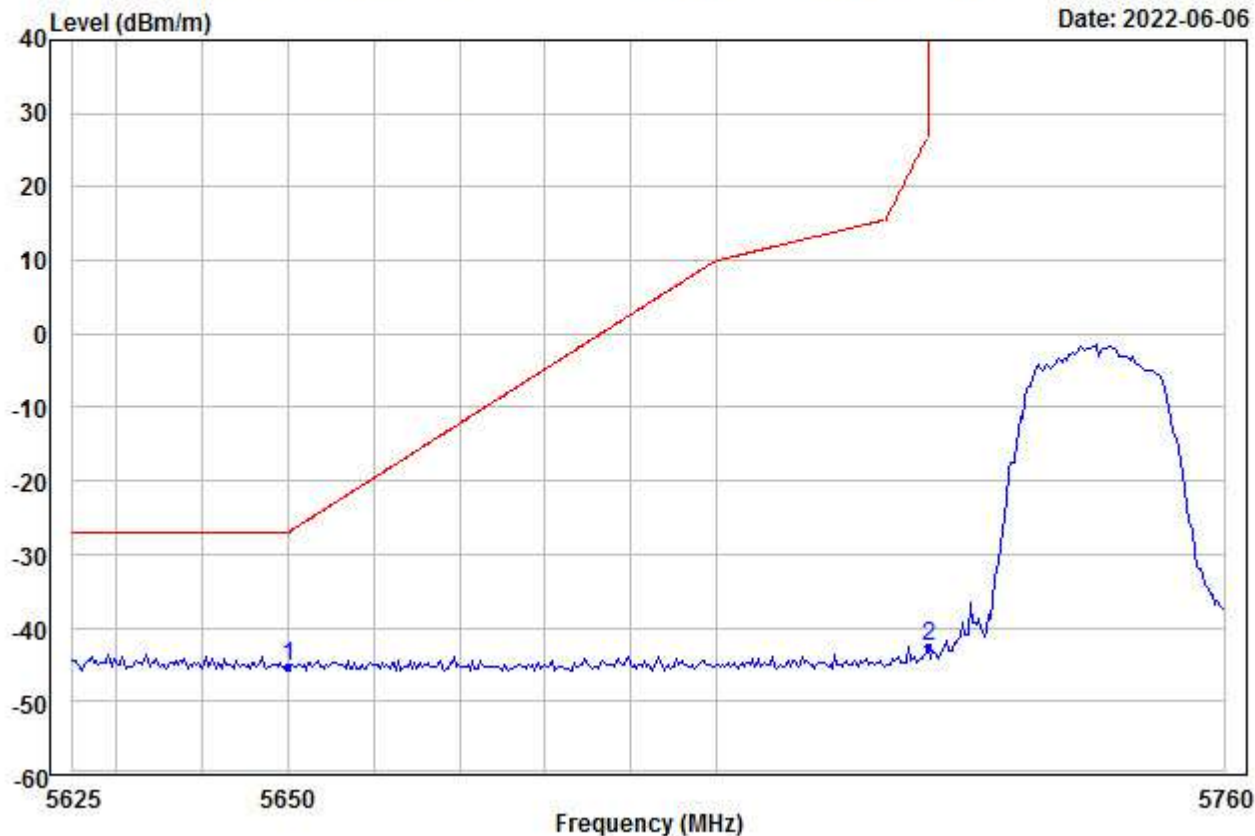


Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5745
Remark :

		Read	Ant	Preamp	Aux	Cable		Limit	Over	APos	TPos	Rema
	Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit			
	MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1 PP	5650.000	-56.81	35.27	45.61	0.00	21.88	-45.27	-27.00	-18.27	---	---	Peak
2	5725.000	-53.99	35.26	45.57	0.00	21.68	-42.62	27.00	-69.62	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00031.EMI

Date: 2022-06-06

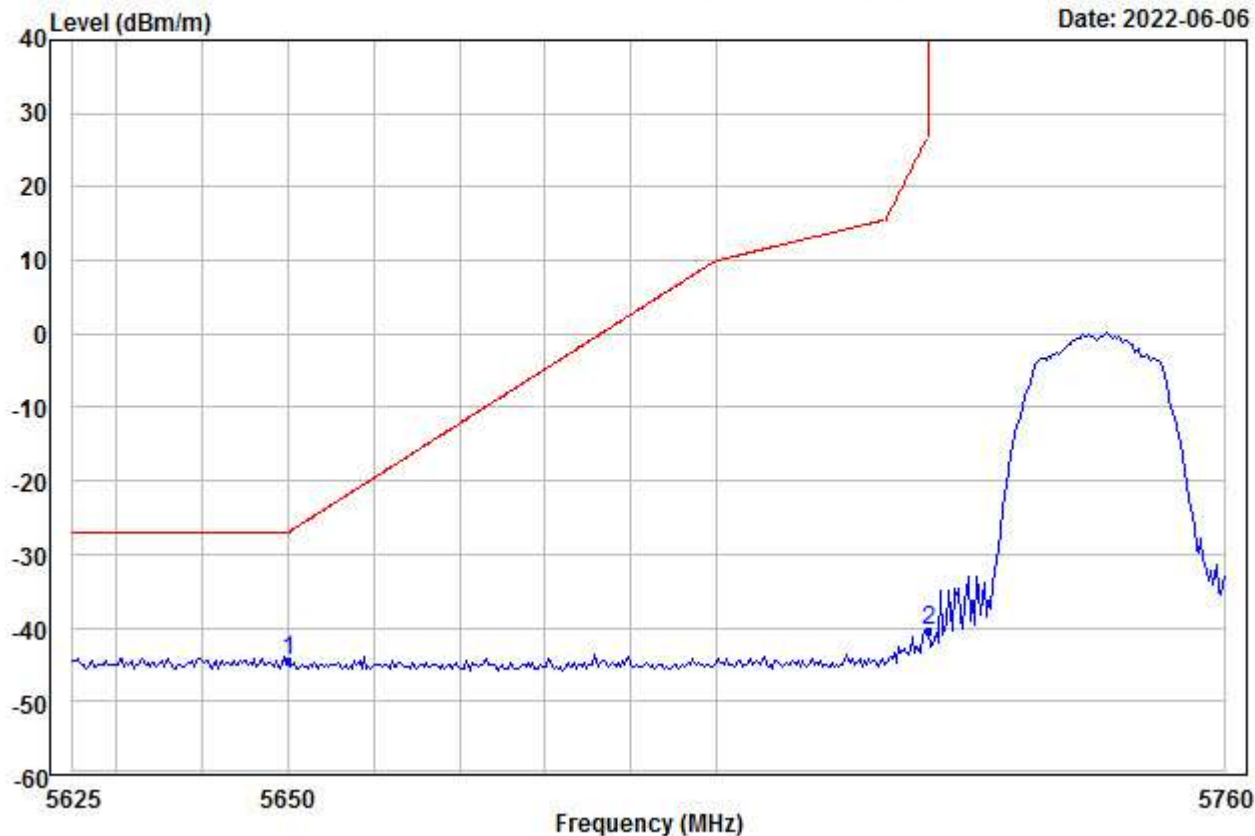


Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5745
Remark :

		Read	Ant	Preamp	Aux	Cable		Limit	Over	APos	TPos	Rema
	Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit			
	MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1 PP	5650.000	-56.08	35.27	45.61	0.00	21.88	-44.54	-27.00	-17.54	---	---	Peak
2	5725.000	-51.81	35.26	45.57	0.00	21.68	-40.44	27.00	-67.44	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00032.EMI

Date: 2022-06-06

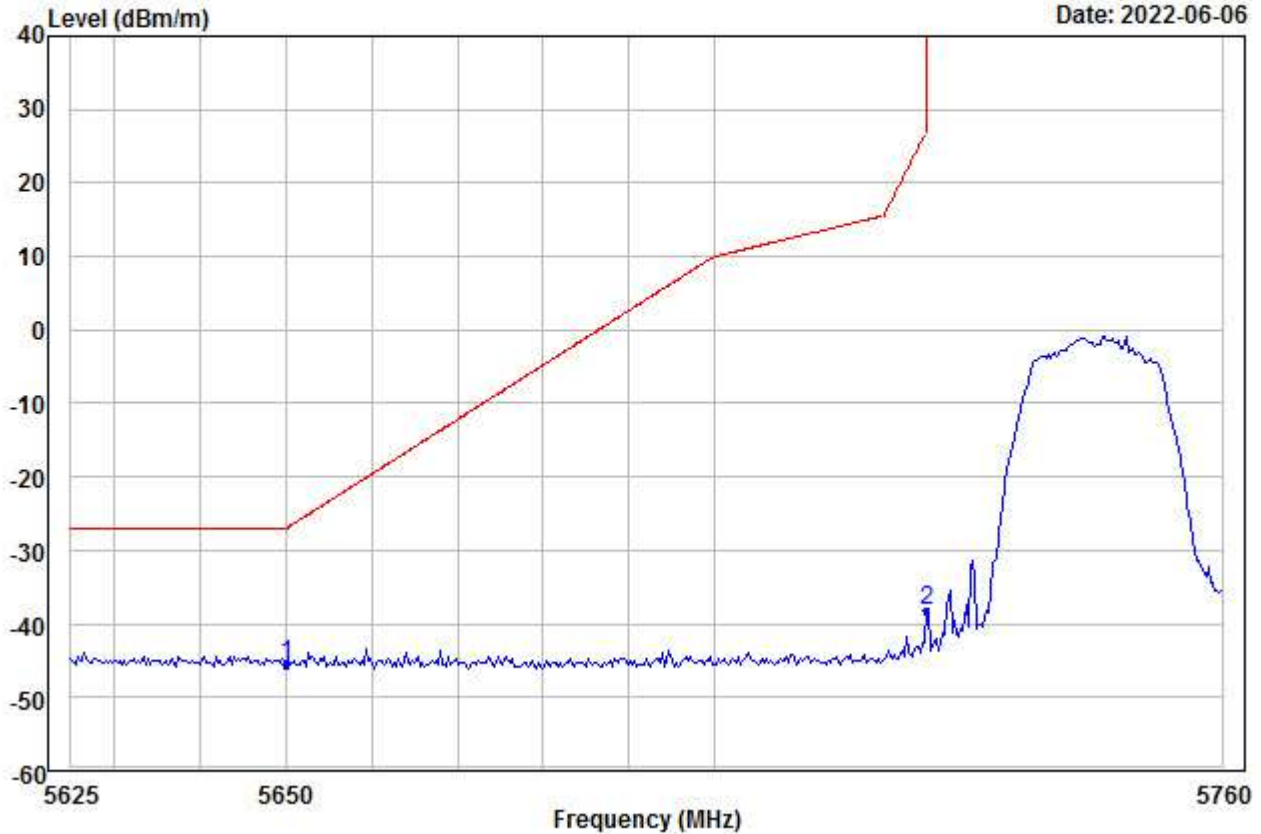


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5745
Remark :

		Read	Ant	Preamp	Aux	Cable		Limit	Over	APos	TPos	Rema
	Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit			
	MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1 PP	5650.000	-57.17	35.27	45.61	0.00	21.88	-45.63	-27.00	-18.63	---	---	Peak
2	5725.000	-49.62	35.26	45.57	0.00	21.68	-38.25	27.00	-65.25	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00033.EMI

Date: 2022-06-06

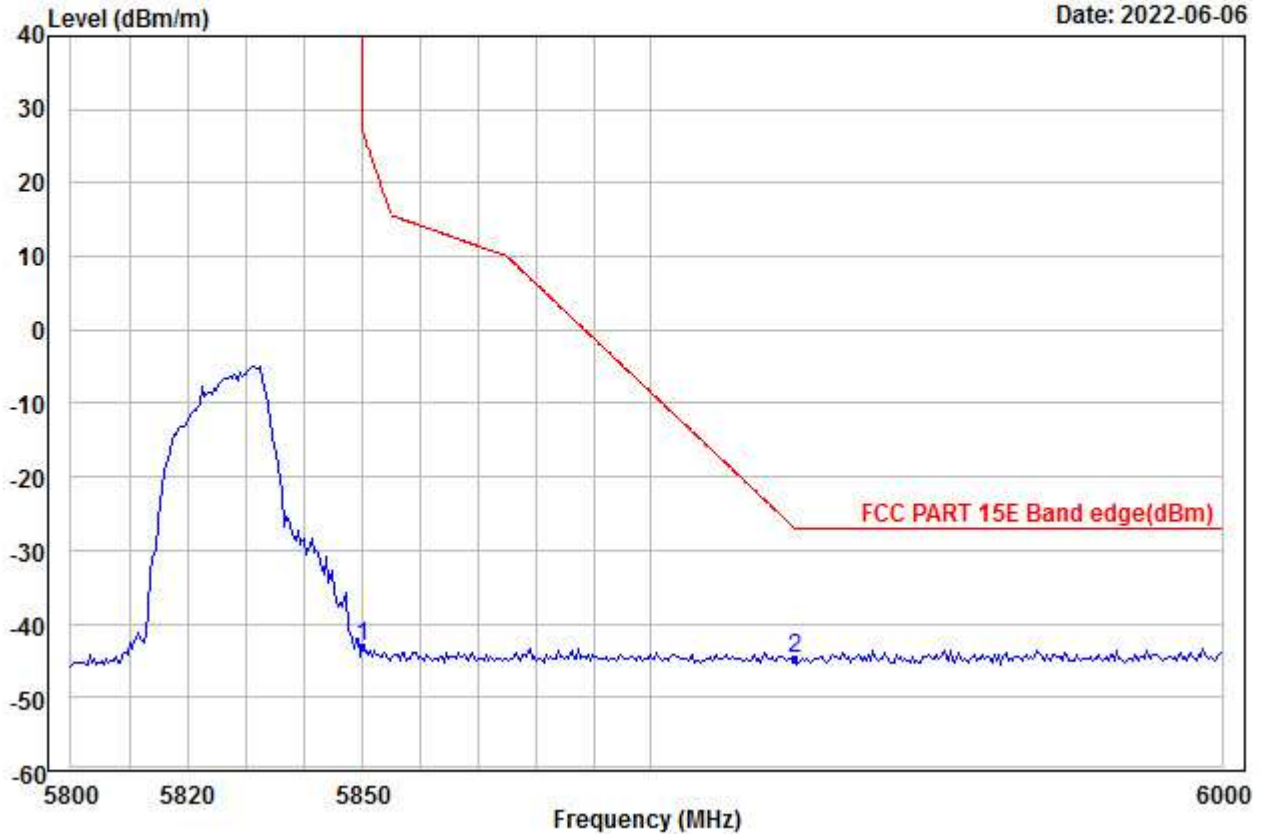


Condition : Horizontal
Temp.(C)/Hum.(%) : 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5825
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1	5850.000	-54.28	35.23	45.49	0.00	21.47	-43.07	27.00	-70.07	---	---	Peak
2 PP	5925.000	-55.85	35.22	45.44	0.00	21.44	-44.63	-27.00	-17.63	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00034.EMI

Date: 2022-06-06

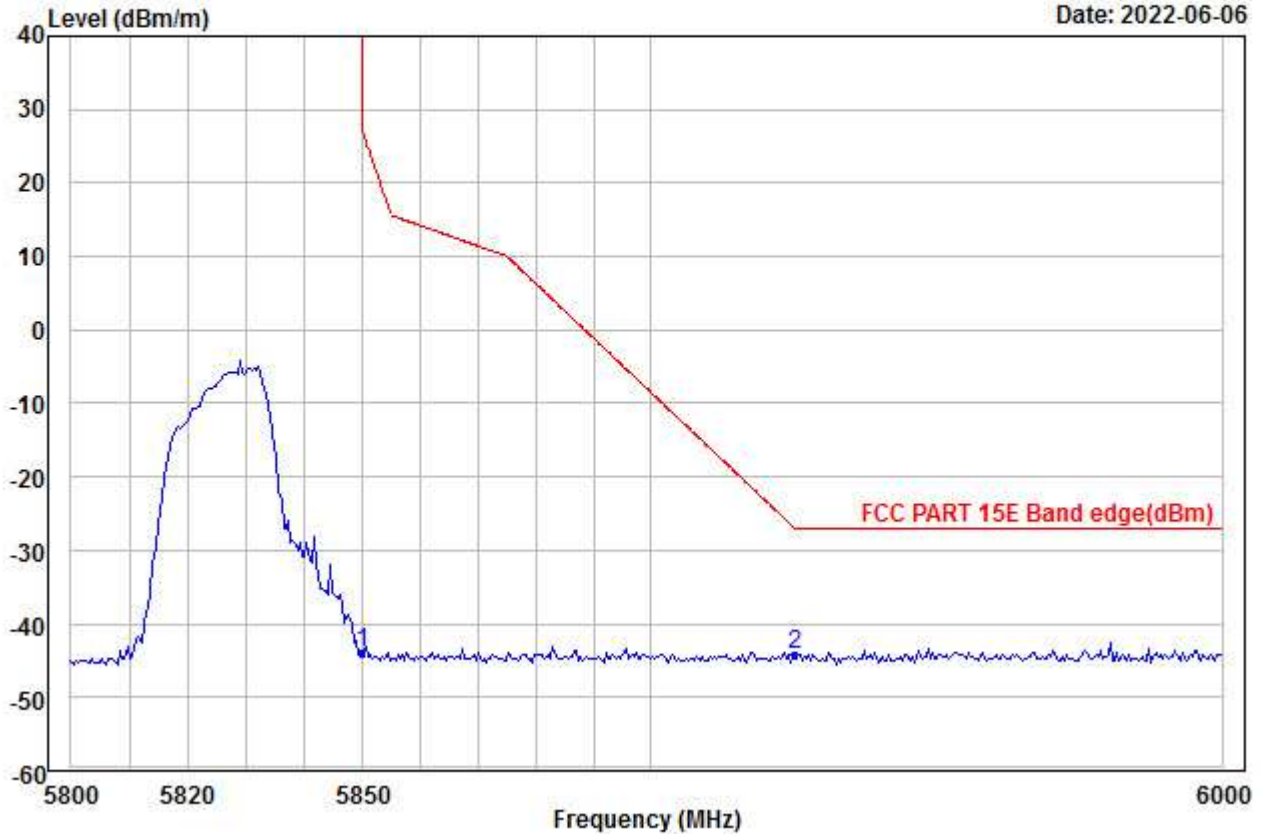


Condition : Vertical
 Temp.(C)/Hum.(%) : 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5825
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1	5850.000	-55.04	35.23	45.49	0.00	21.47	-43.83	27.00	-70.83	---	---	Peak
2 PP	5925.000	-55.43	35.22	45.44	0.00	21.44	-44.21	-27.00	-17.21	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00035.EMI

Date: 2022-06-06

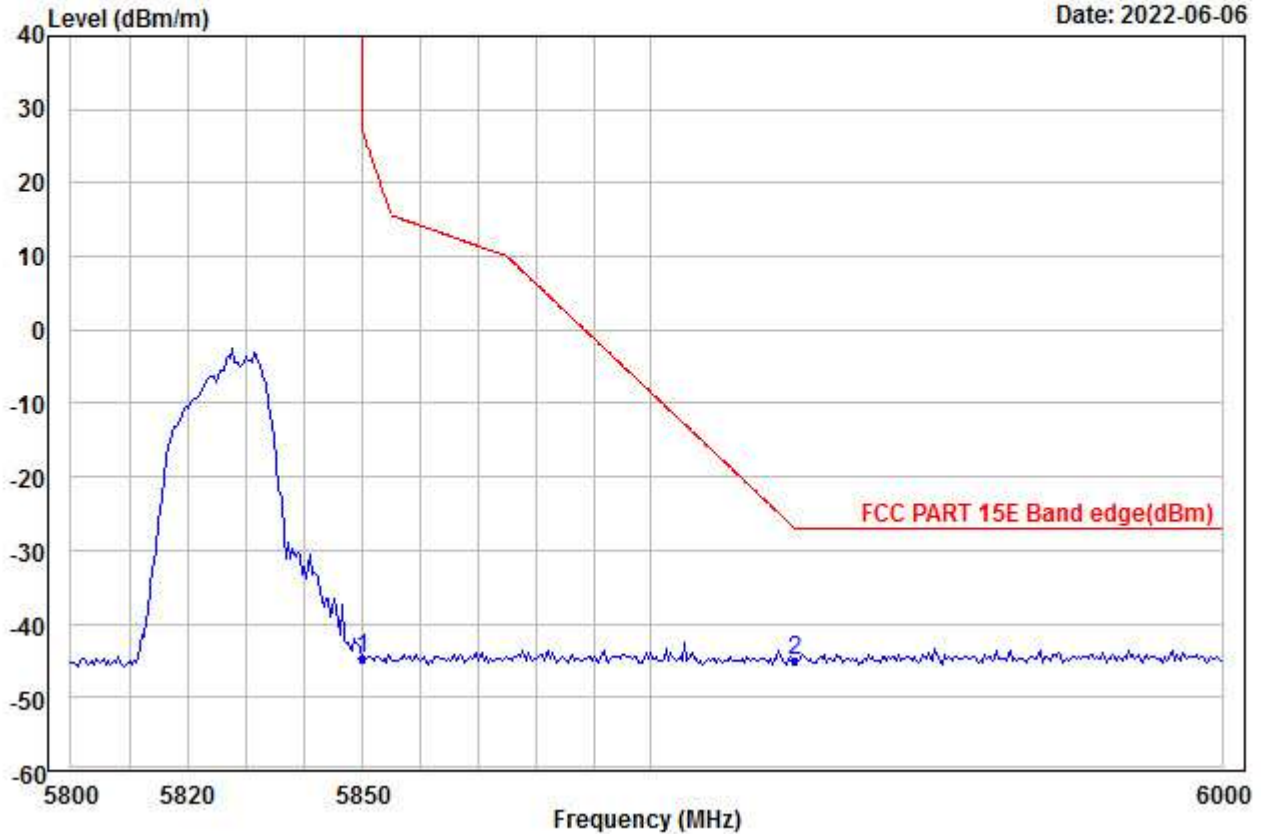


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5825
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1	5850.000	-55.96	35.23	45.49	0.00	21.47	-44.75	27.00	-71.75	---	---	Peak
2 PP	5925.000	-56.25	35.22	45.44	0.00	21.44	-45.03	-27.00	-18.03	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00036.EMI

Date: 2022-06-06

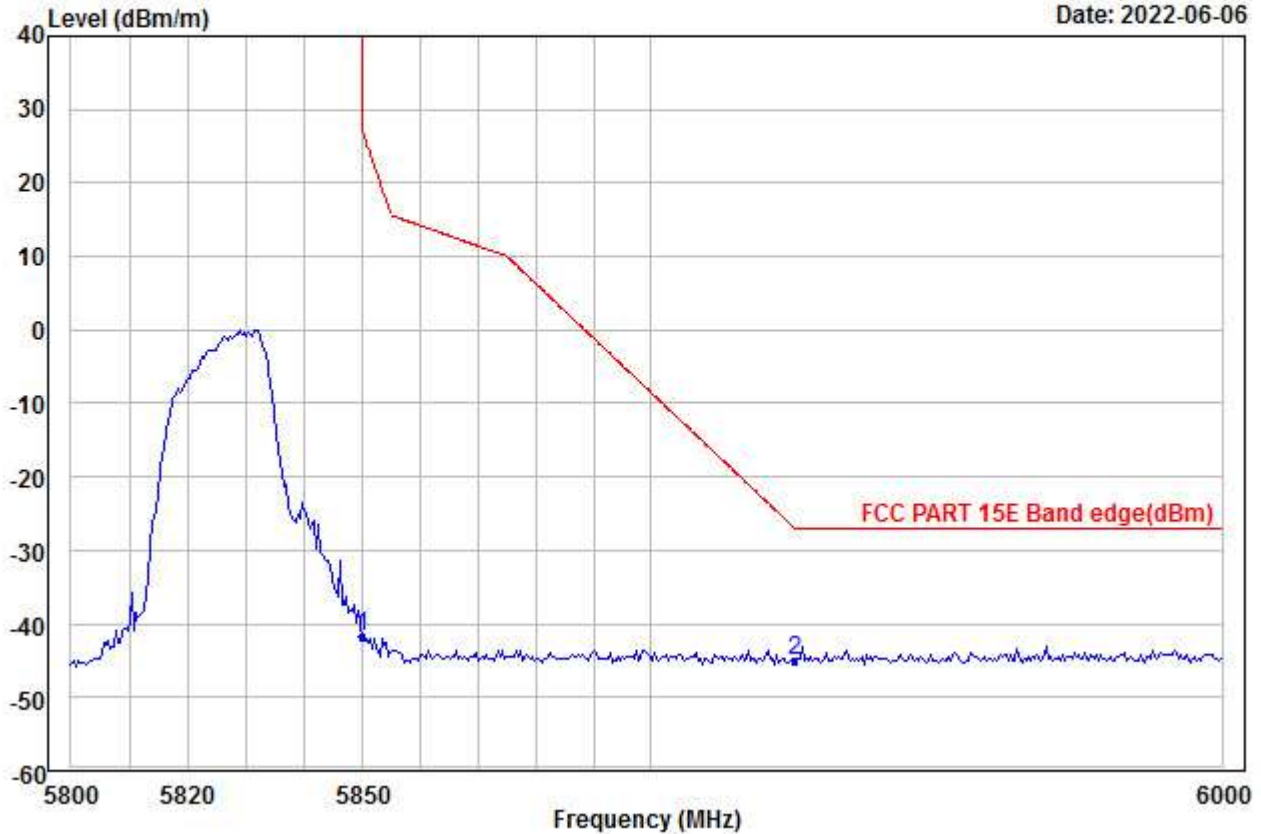


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5825
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1	5850.000	-53.05	35.23	45.49	0.00	21.47	-41.84	27.00	-68.84	---	---	Peak
2 PP	5925.000	-56.23	35.22	45.44	0.00	21.44	-45.01	-27.00	-18.01	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00037.EMI

Date: 2022-06-06

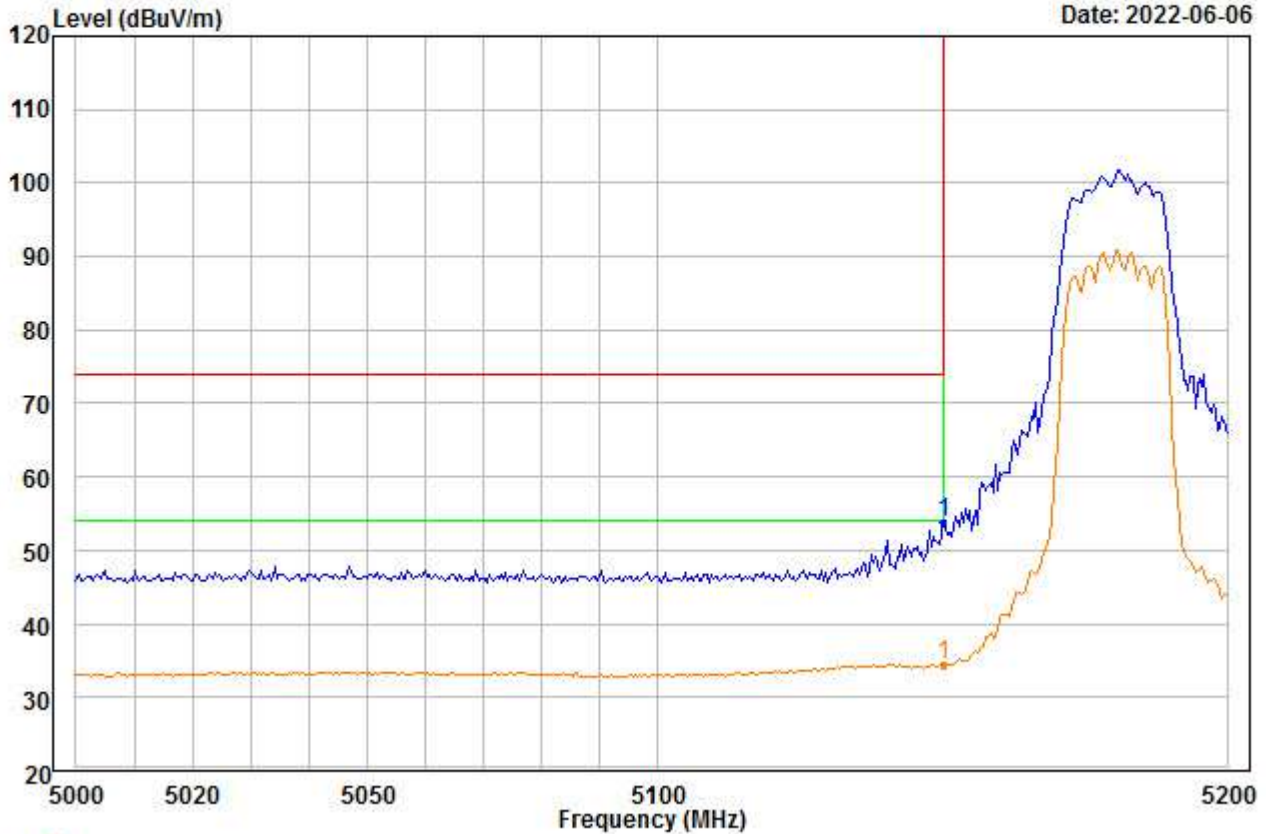


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%) : 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5180
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit		
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5150.000	55.46	34.88	46.33	0.00	9.78	53.79	74.00	-20.21	---	---

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00038.EMI

Date: 2022-06-06

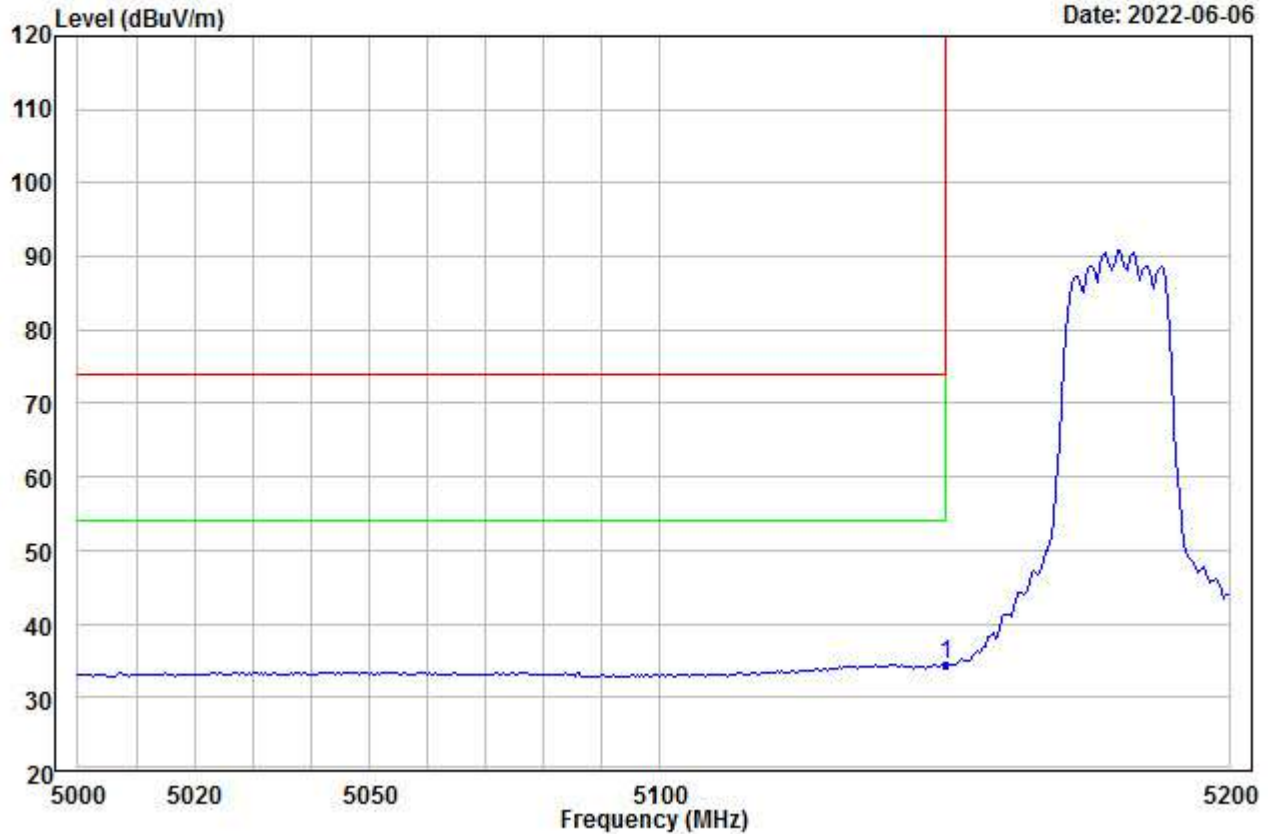


Condition : Horizontal
 Temp.(C)/Hum.(%) : 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5180
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit		
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5150.000	36.24	34.88	46.33	0.00	9.78	34.57	54.00	-19.43	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00039.EMI

Date: 2022-06-06

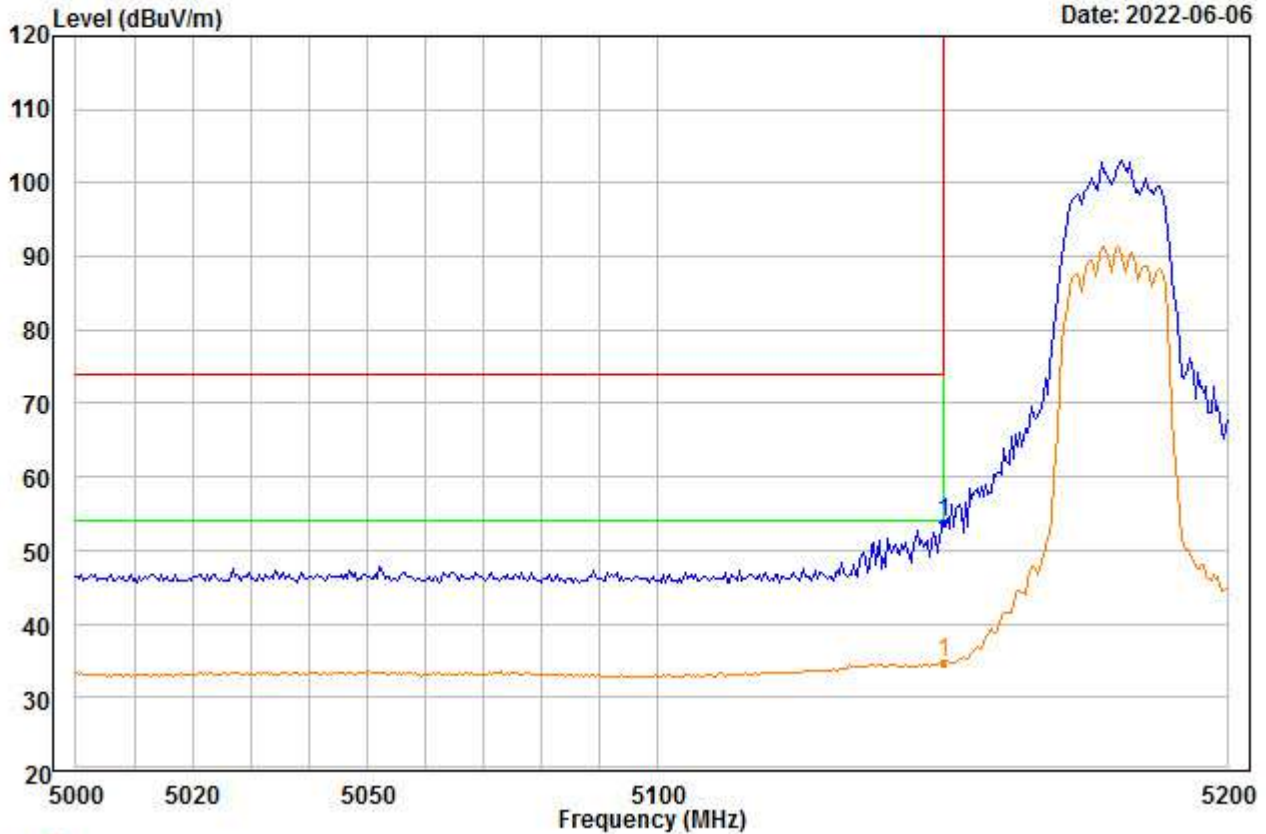


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N20_ANT0+1_5180
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit		
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5150.000	55.59	34.88	46.33	0.00	9.78	53.92	74.00	-20.08	---	---

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00040.EMI

Date: 2022-06-06

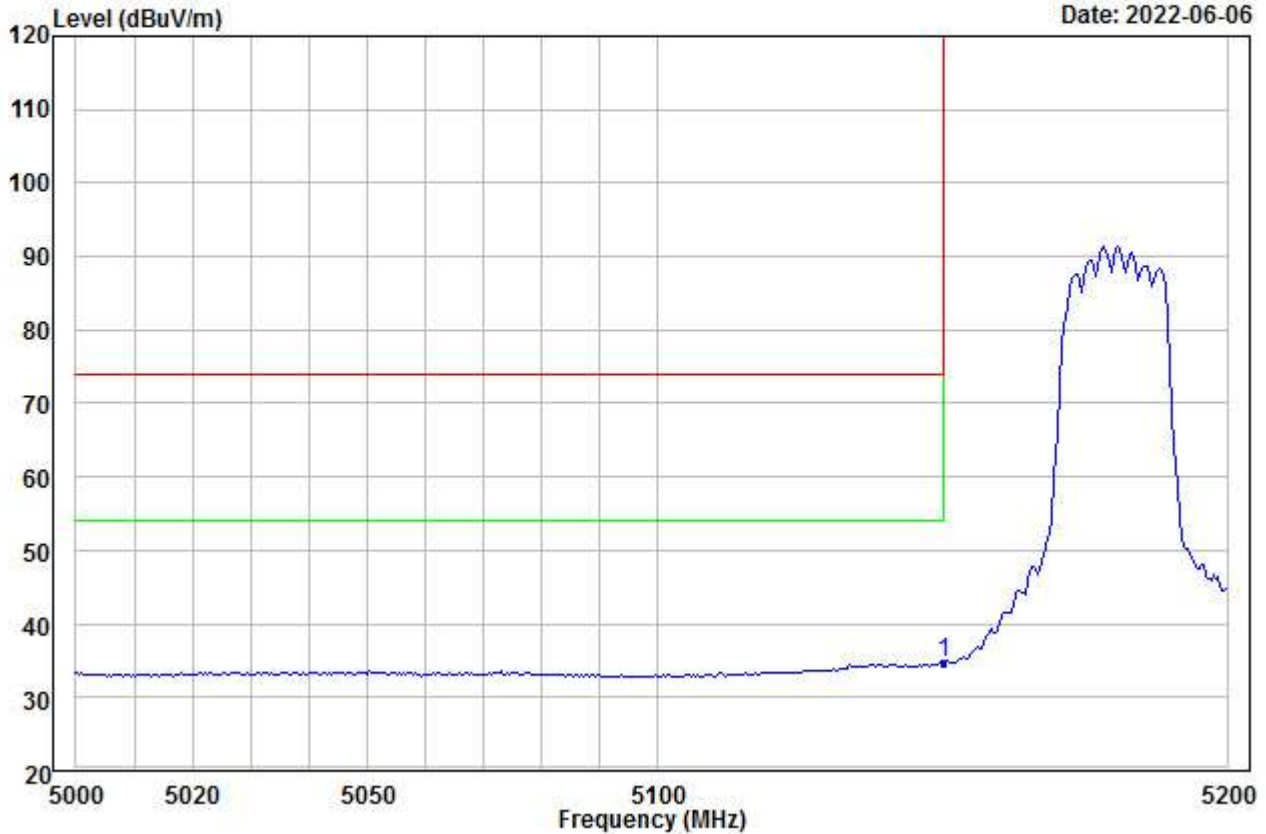


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5180
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit		
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5150.000	36.36	34.88	46.33	0.00	9.78	34.69	54.00	-19.31	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00041.EMI

Date: 2022-06-06

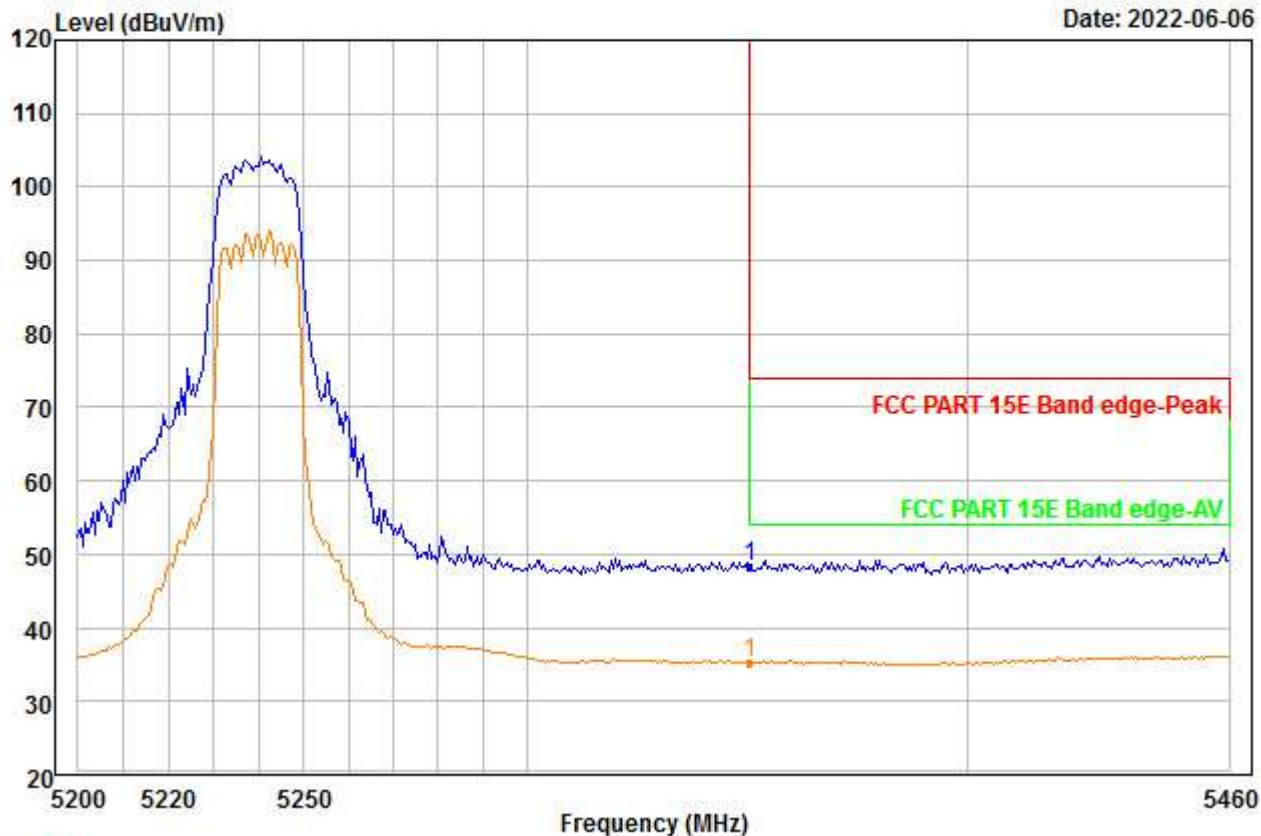


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N20_ANT0+1_5240
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit		
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	48.98	35.12	45.97	0.00	10.18	48.31	74.00	-25.69	---	--- Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00042.EMI

Date: 2022-06-06

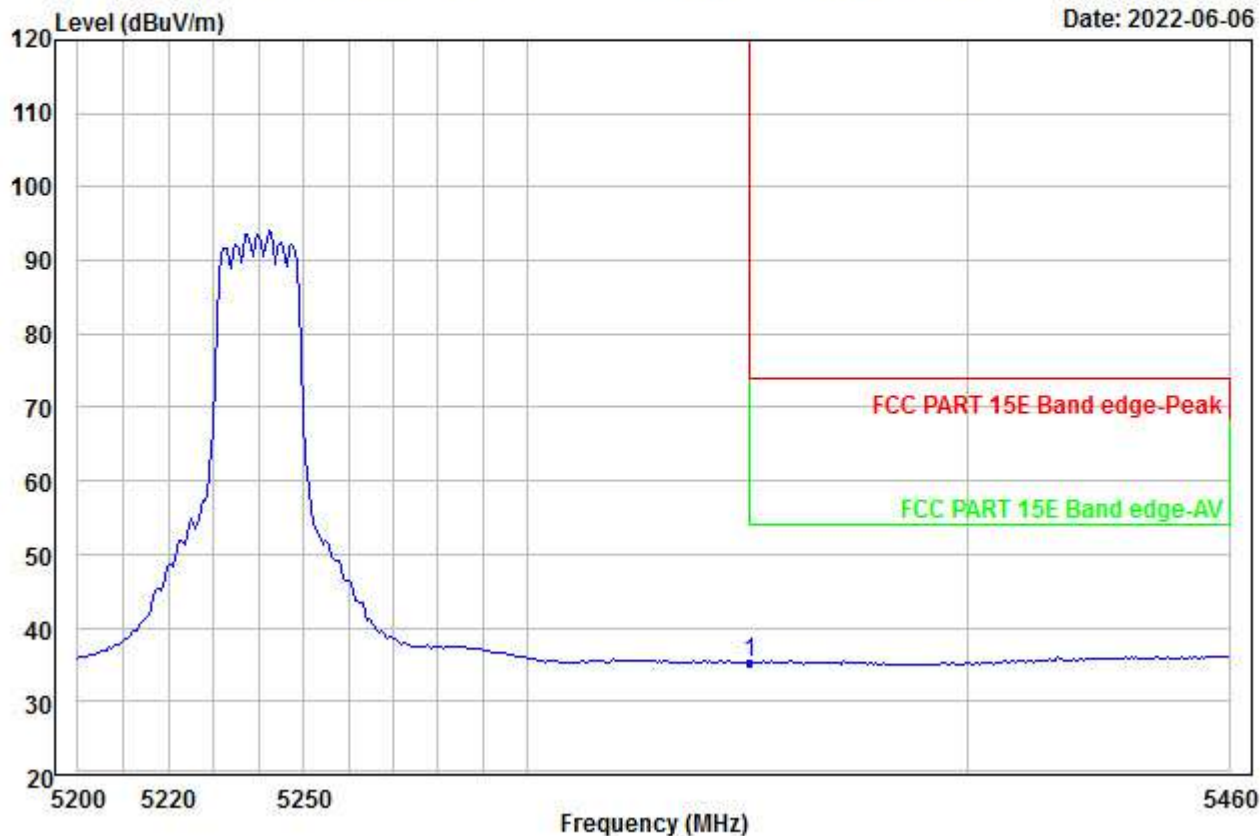


Condition : Vertical
 Temp.(C)/Hum.(%) : 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5240
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	36.01	35.12	45.97	0.00	10.18	35.34	54.00	-18.66	---	---

Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00043.EMI

Date: 2022-06-06

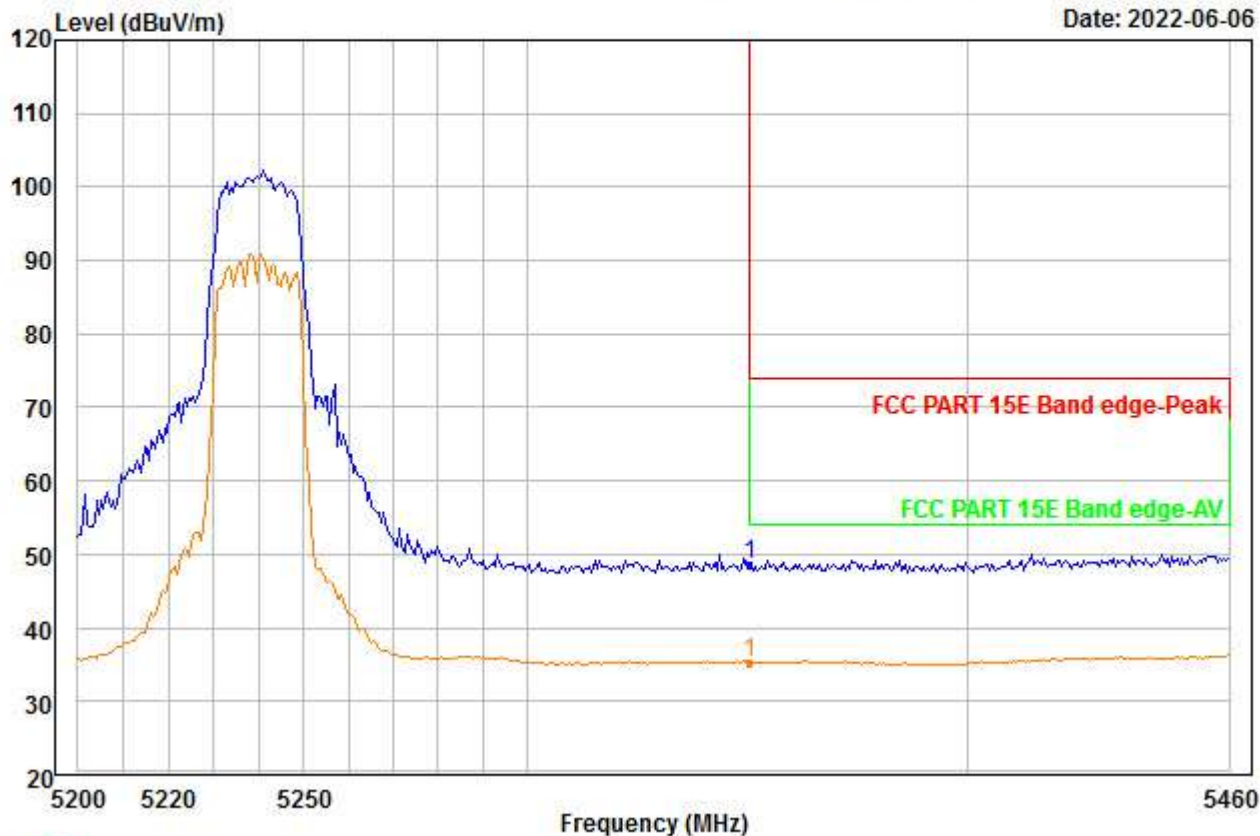

Trace: 1


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N20_ANT0+1_5240
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	49.31	35.12	45.97	0.00	10.18	48.64	74.00	-25.36	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00044.EMI

Date: 2022-06-06

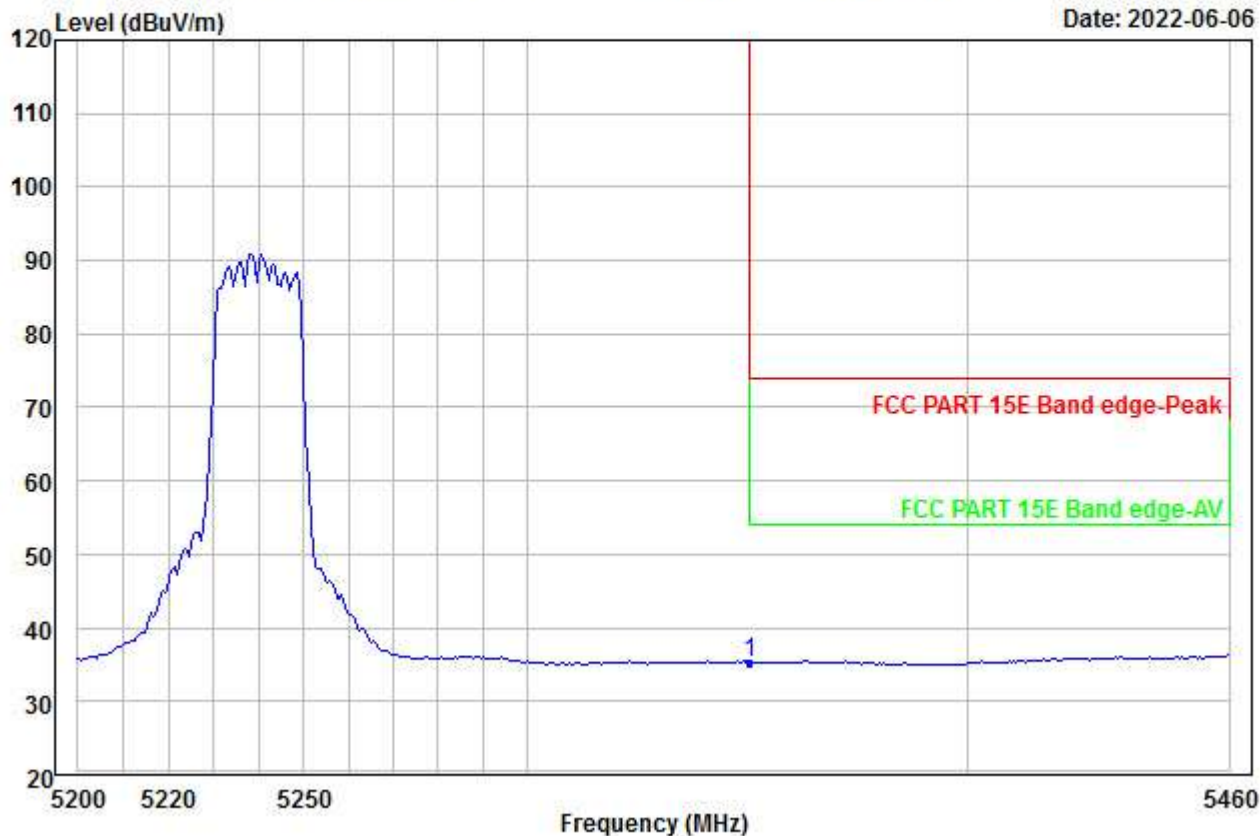


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N20_ANT0+1_5240
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	36.05	35.12	45.97	0.00	10.18	35.38	54.00	-18.62	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00045.EMI

Date: 2022-06-06

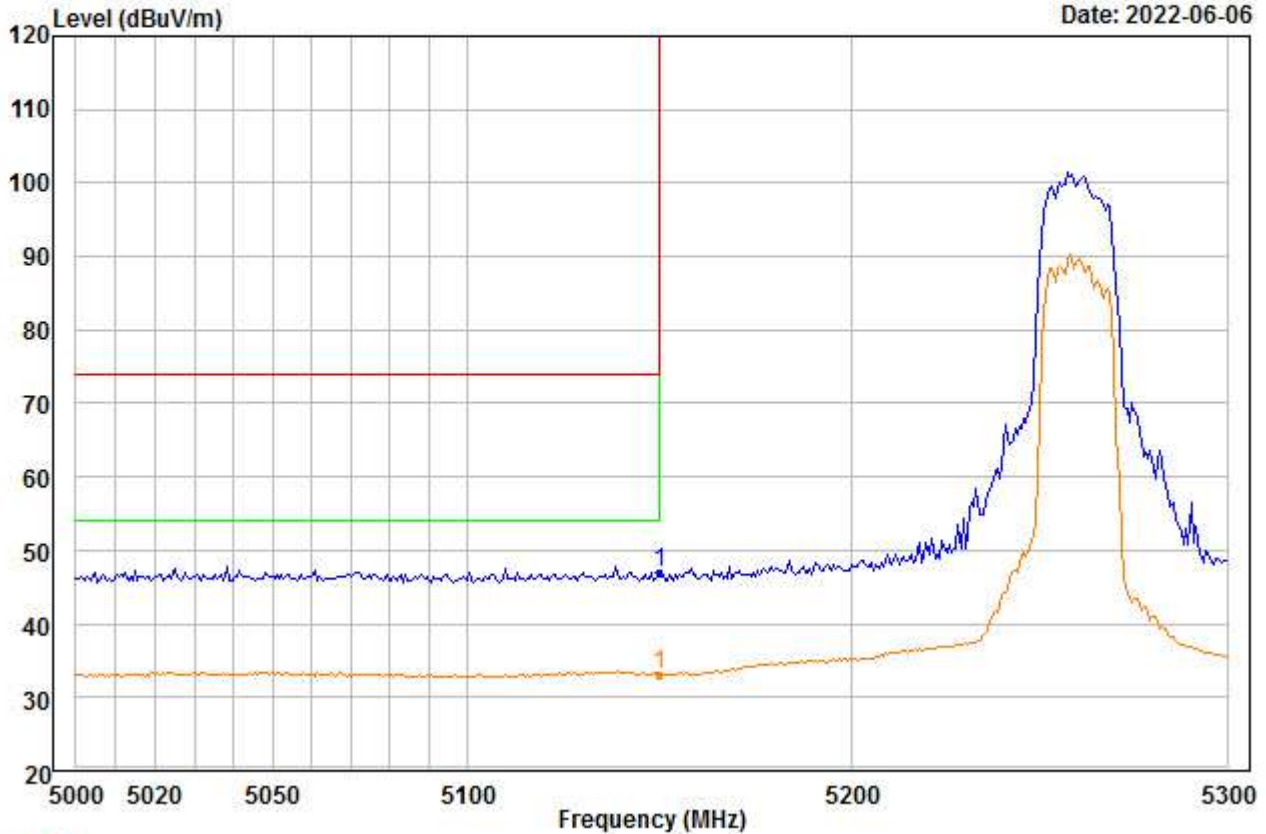


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N20_ANT0+1_5260
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit		
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5150.000	48.51	34.88	46.33	0.00	9.78	46.84	74.00	-27.16	---	---

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00046.EMI

Date: 2022-06-06

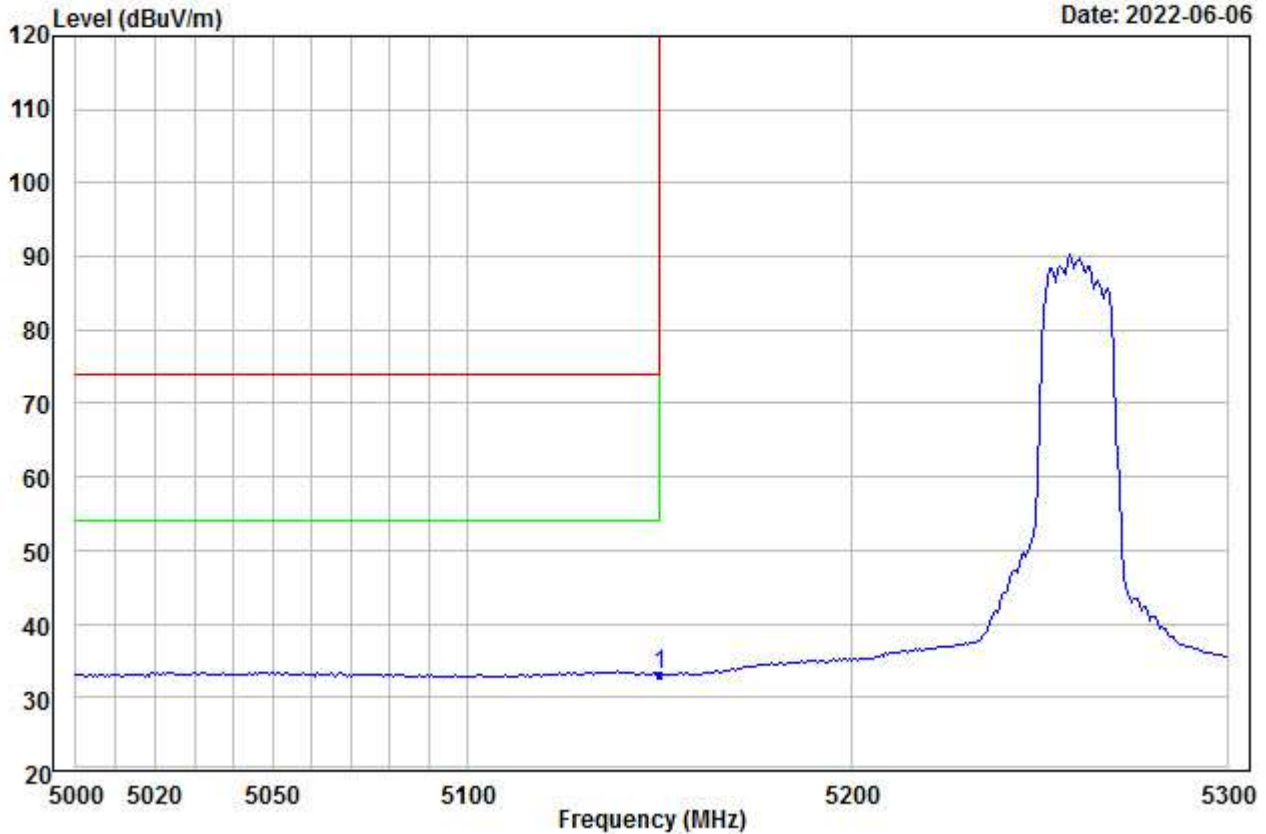


Condition : Horizontal
 Temp.(C)/Hum.(%) : 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit		
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5150.000	34.71	34.88	46.33	0.00	9.78	33.04	54.00	-20.96	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00047.EMI

Date: 2022-06-06

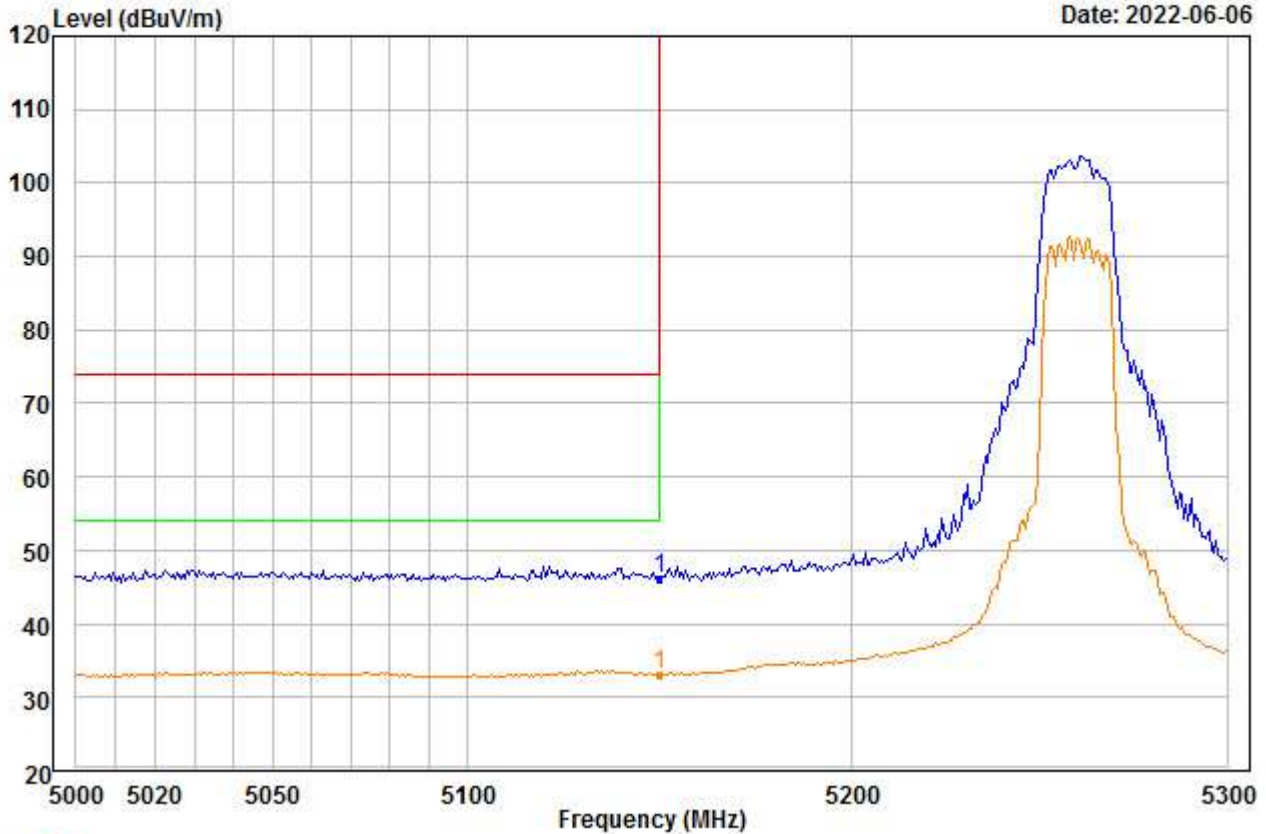

Trace: 1


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5150.000	47.89	34.88	46.33	0.00	9.78	46.22	74.00	-27.78	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00048.EMI

Date: 2022-06-06

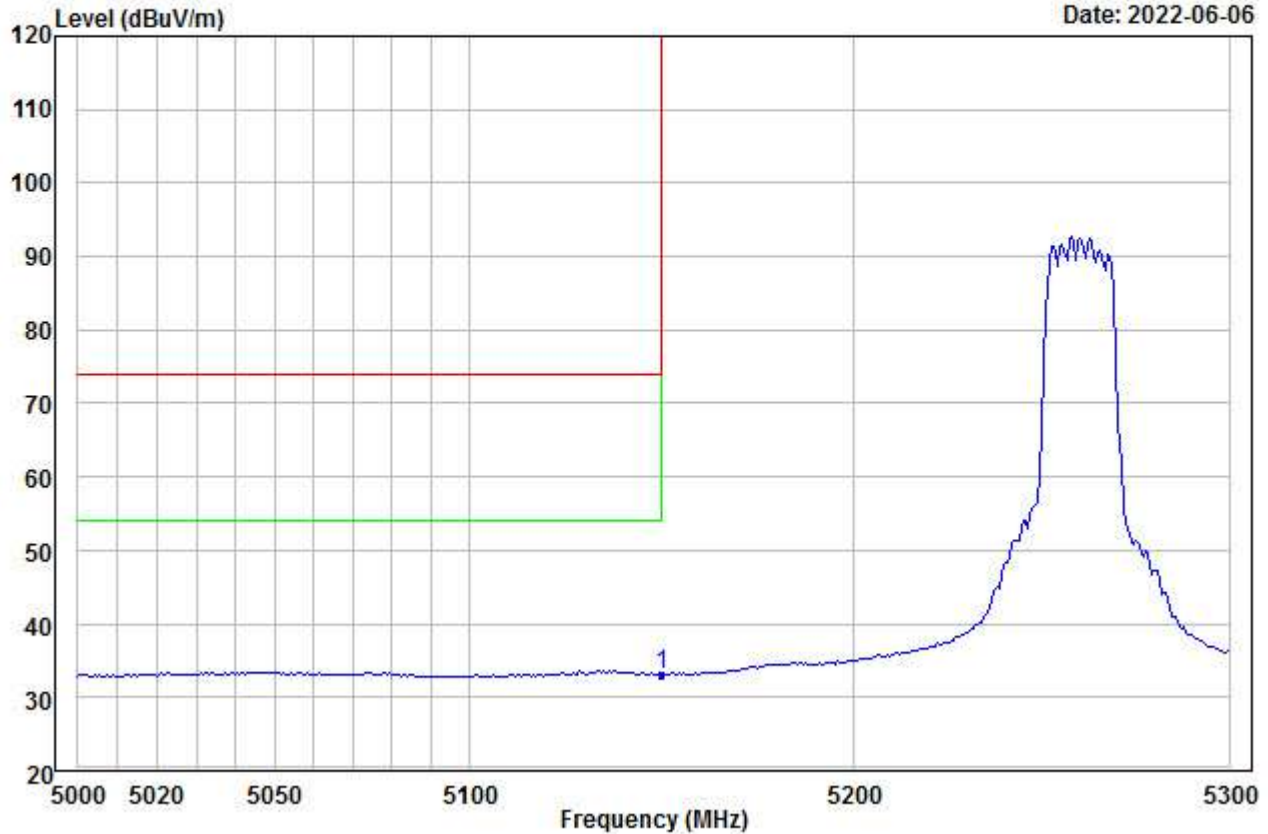


Condition : Vertical
 Temp.(C)/Hum.(%) : 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5150.000	34.79	34.88	46.33	0.00	9.78	33.12	54.00	-20.88	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00049.EMI

Date: 2022-06-06

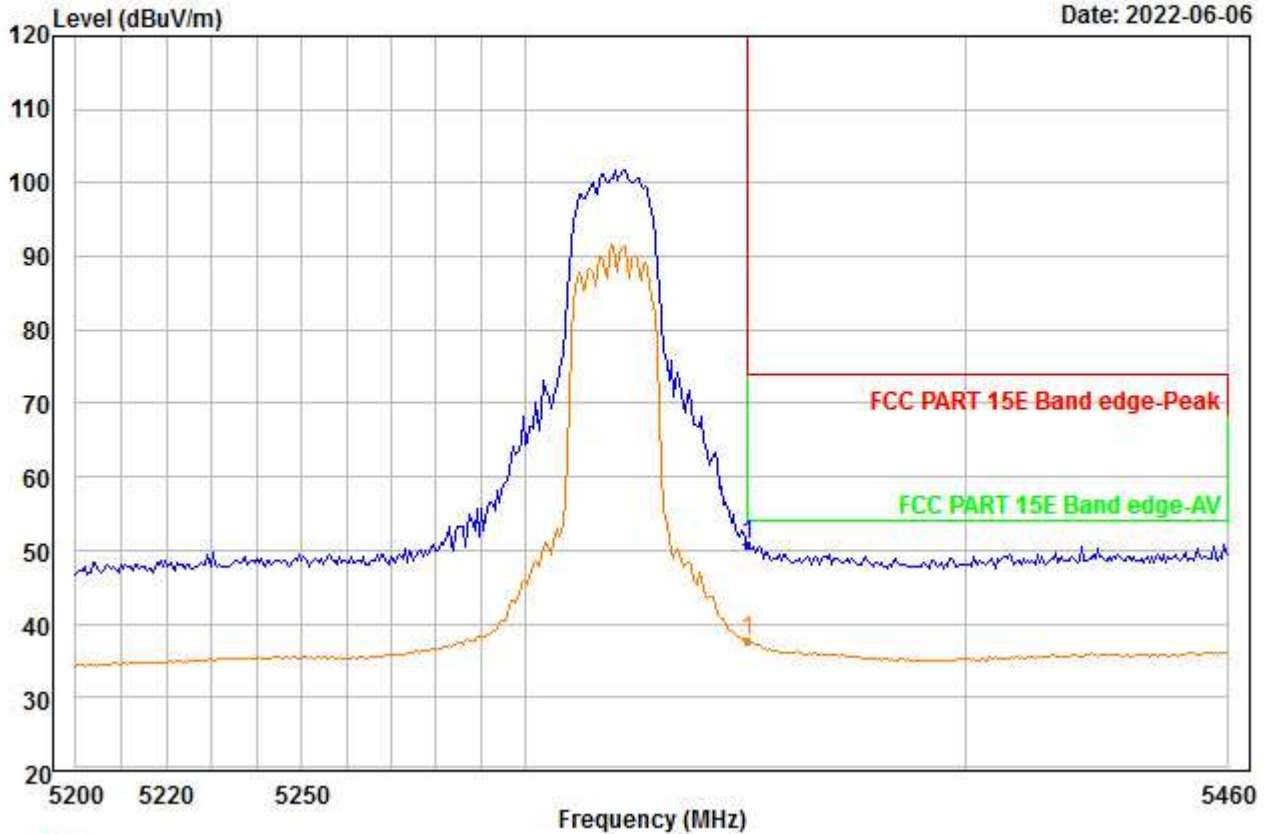

Trace: 1


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5320
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	51.38	35.12	45.97	0.00	10.18	50.71	74.00	-23.29	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00050.EMI

Date: 2022-06-06

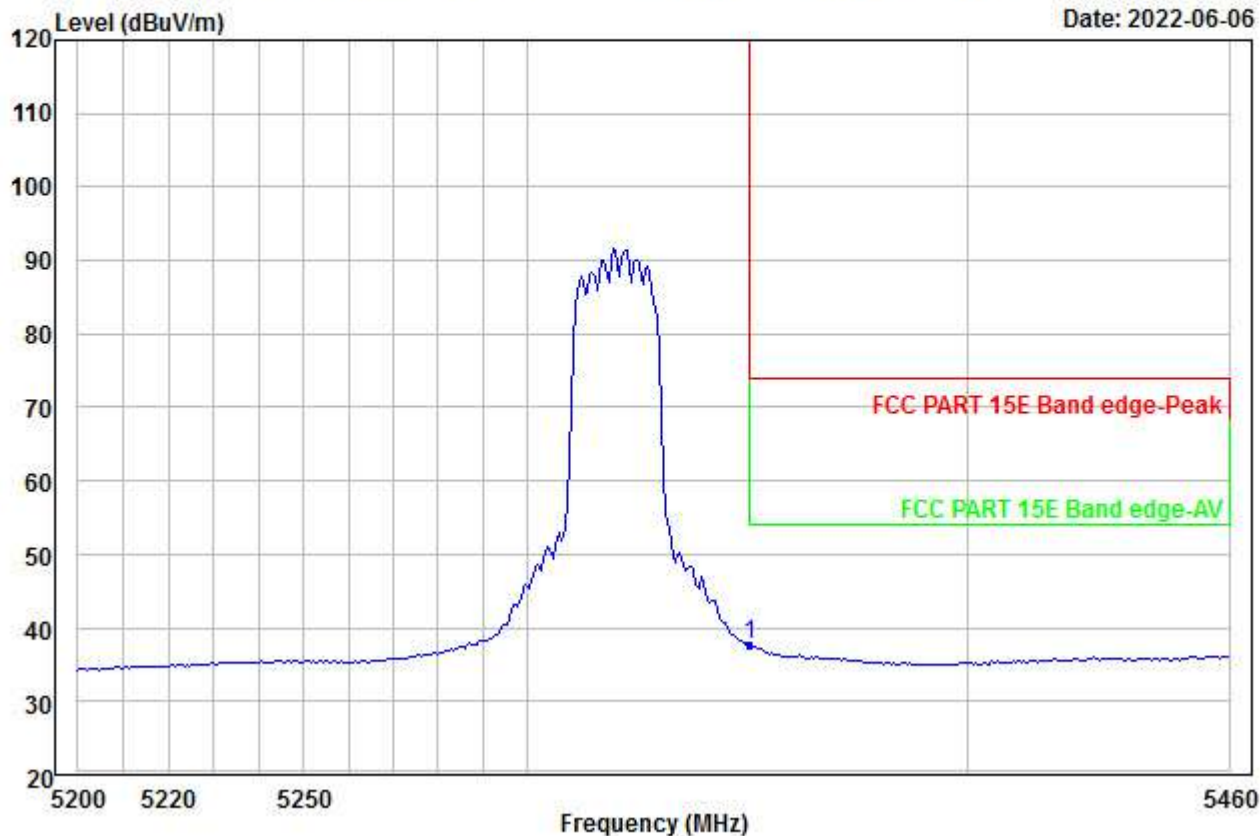


Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N20_ANT0+1_5320
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	38.27	35.12	45.97	0.00	10.18	37.60	54.00	-16.40	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00051.EMI

Date: 2022-06-06

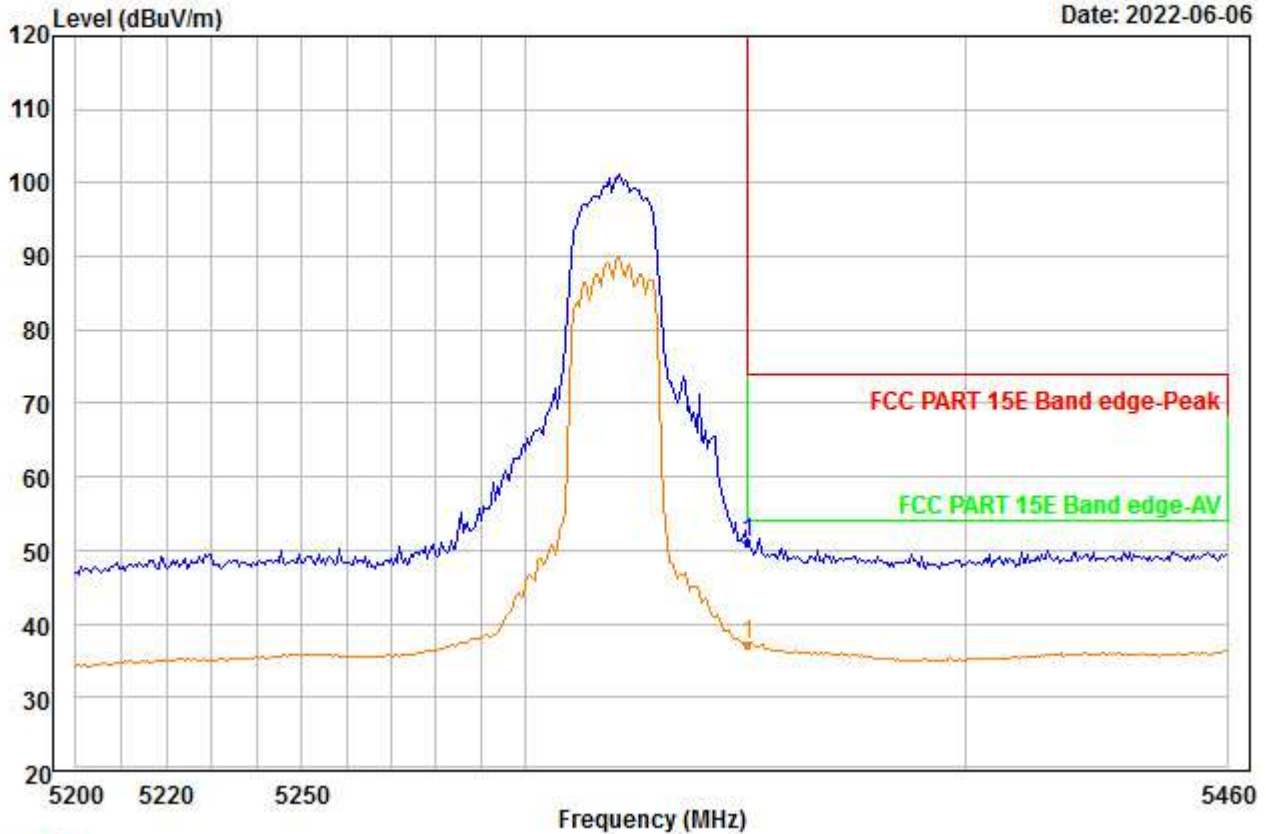

Trace: 1


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N20_ANT0+1_5320
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	51.71	35.12	45.97	0.00	10.18	51.04	74.00	-22.96	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00052.EMI

Date: 2022-06-06

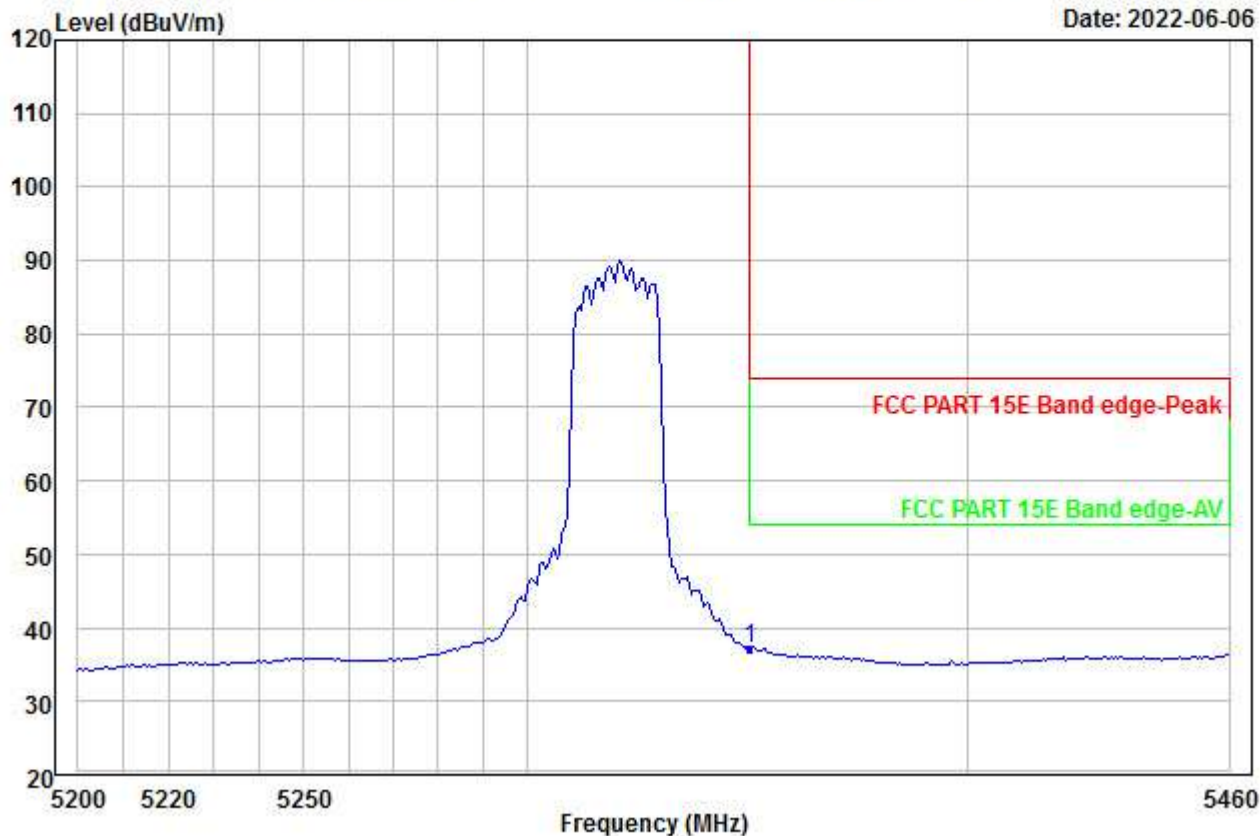


Condition : Horizontal
 Temp.(C)/Hum.(%) : 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5320
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit		
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	37.92	35.12	45.97	0.00	10.18	37.25	54.00	-16.75	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00053.EMI

Date: 2022-06-06

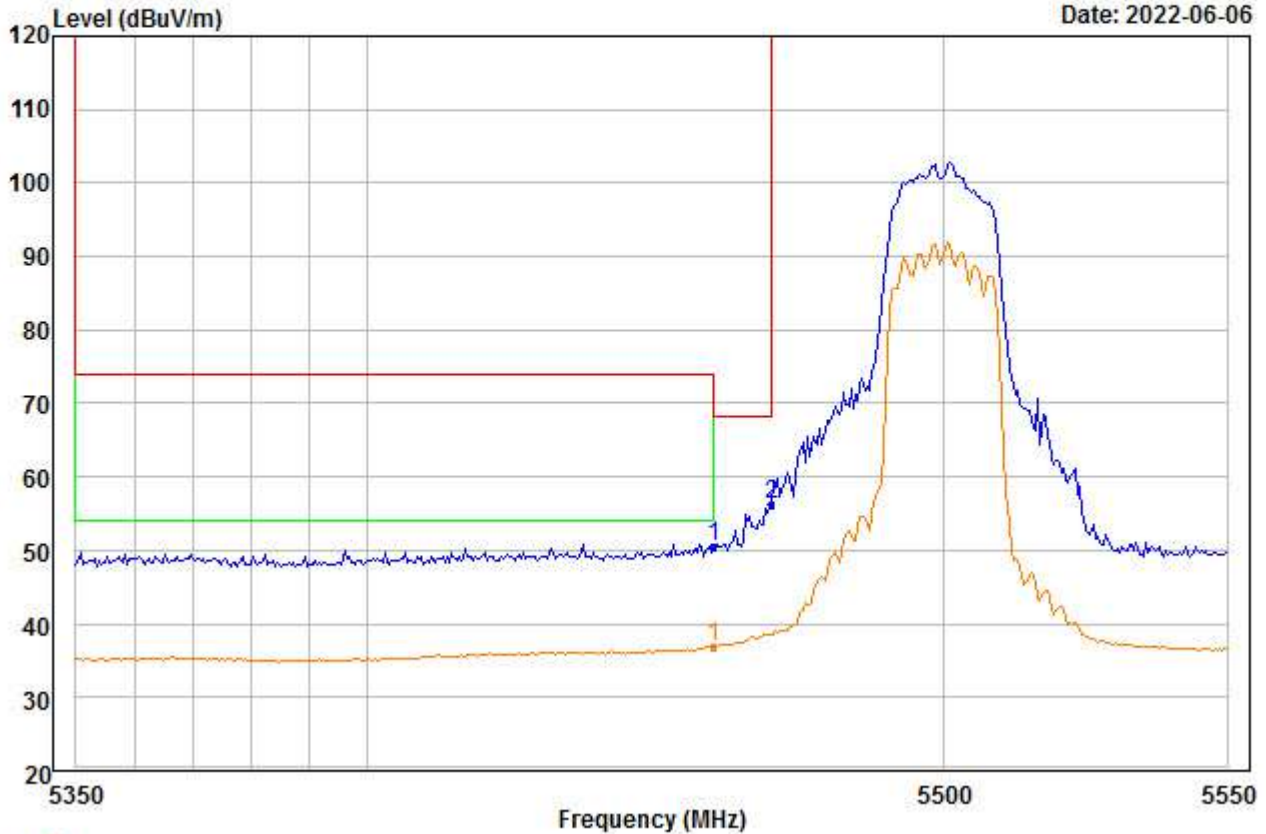


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N20_ANT0+1_5500
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5460.000	50.59	35.25	45.77	0.00	10.44	50.51	68.20	-17.69	---	---	Peak
2 PP	5470.000	56.29	35.26	45.75	0.00	10.47	56.27	68.20	-11.93	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00054.EMI

Date: 2022-06-06

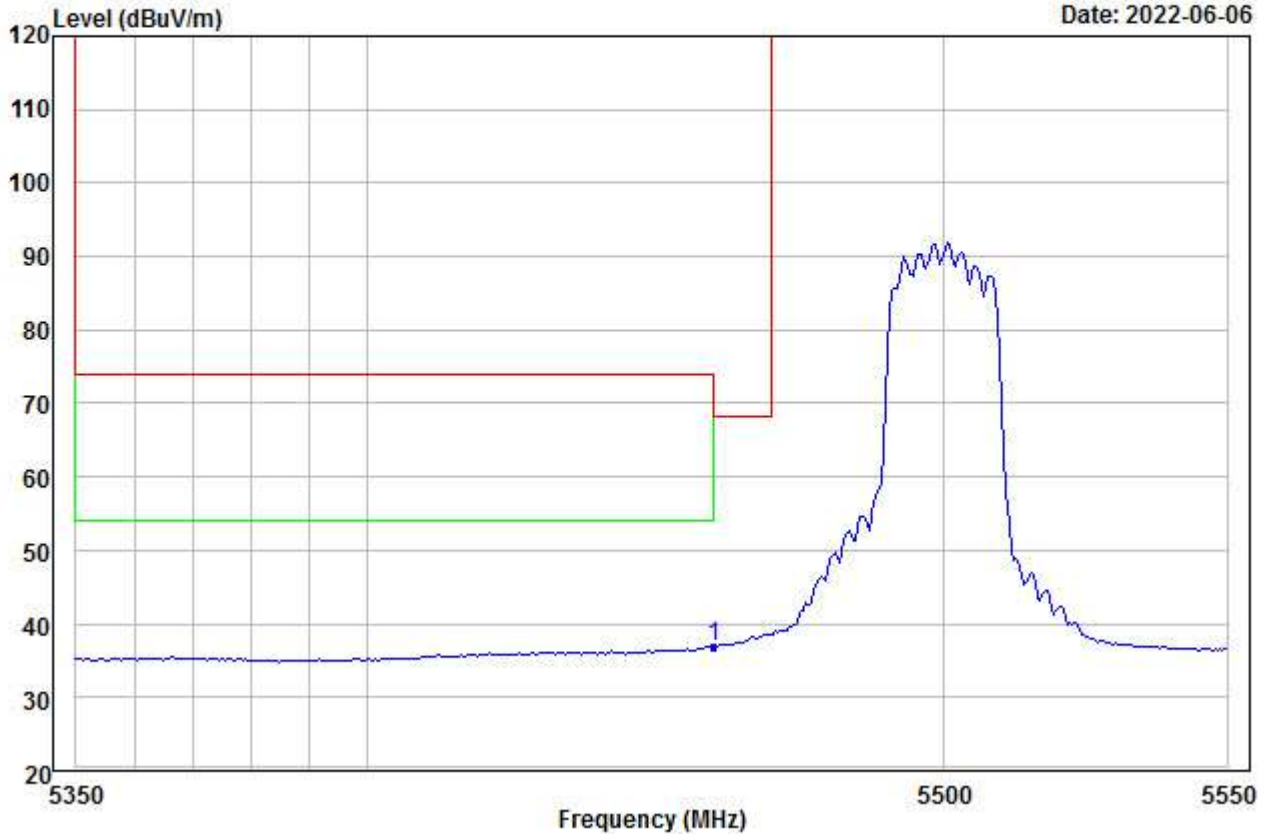


Condition : Horizontal
 Temp.(C)/Hum.(%) : 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5500
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP	5460.000	36.96	35.25	45.77	0.00	10.44	36.88	54.00	-17.12	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00055.EMI

Date: 2022-06-06

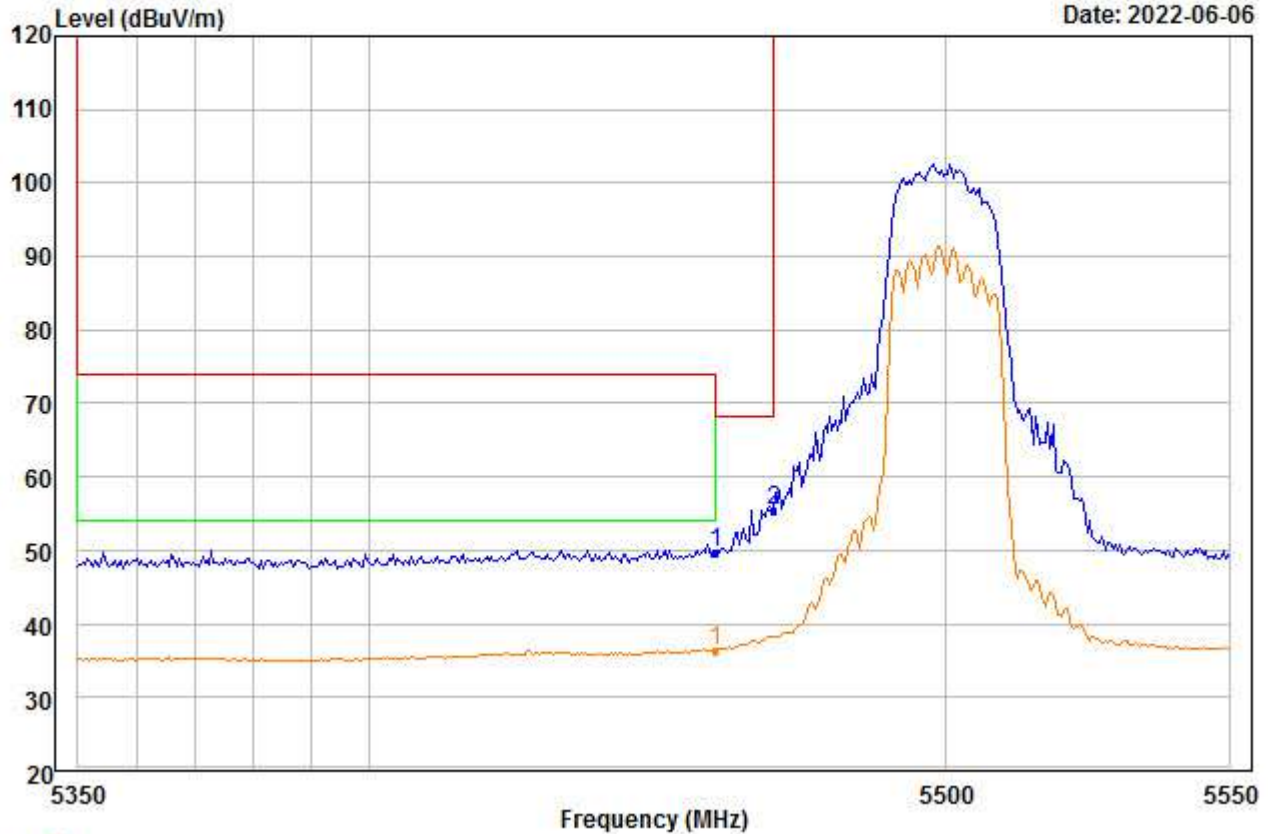


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N20_ANT0+1_5500
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5460.000	49.79	35.25	45.77	0.00	10.44	49.71	68.20	-18.49	---	---	Peak
2 PP	5470.000	55.33	35.26	45.75	0.00	10.47	55.31	68.20	-12.89	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00056.EMI

Date: 2022-06-06

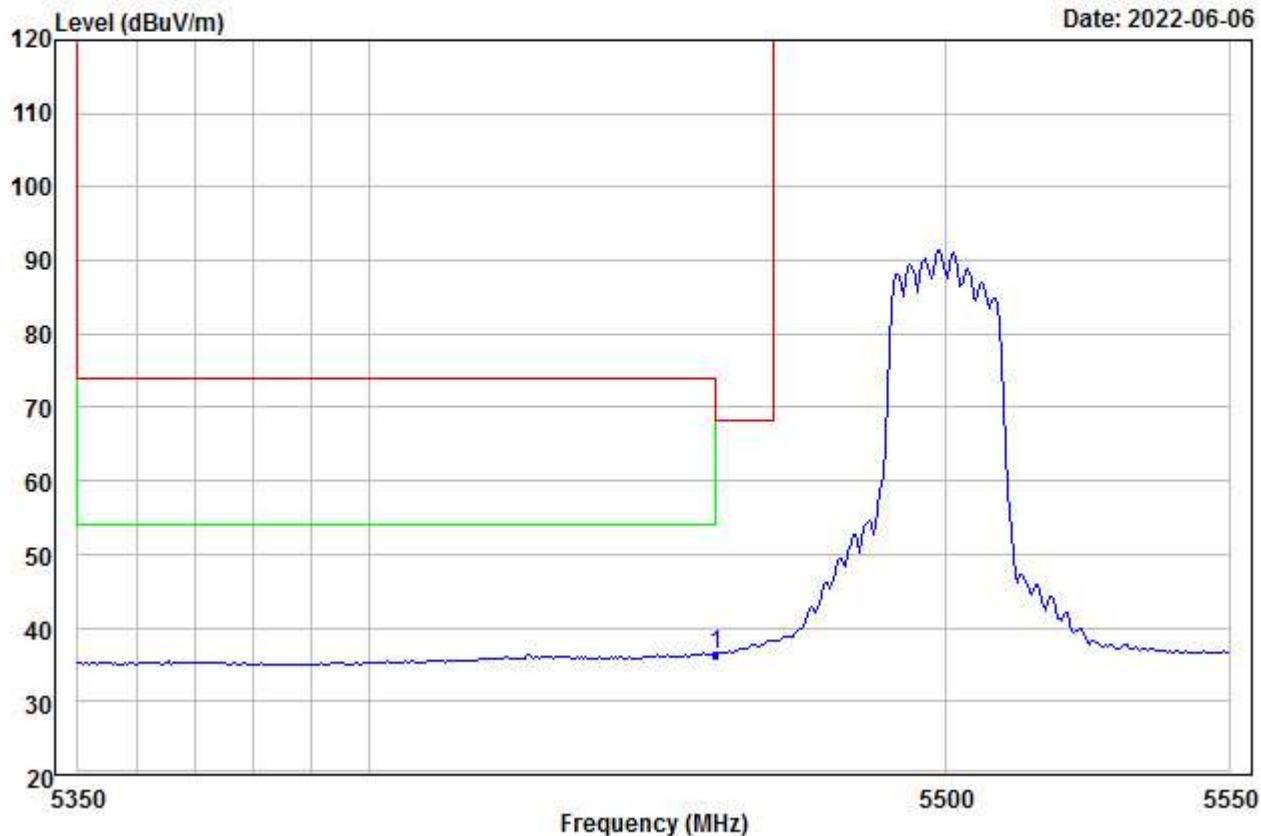


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5500
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit		
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5459.820	36.55	35.25	45.77	0.00	10.44	36.47	54.00	-17.53	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00057.EMI

Date: 2022-06-06

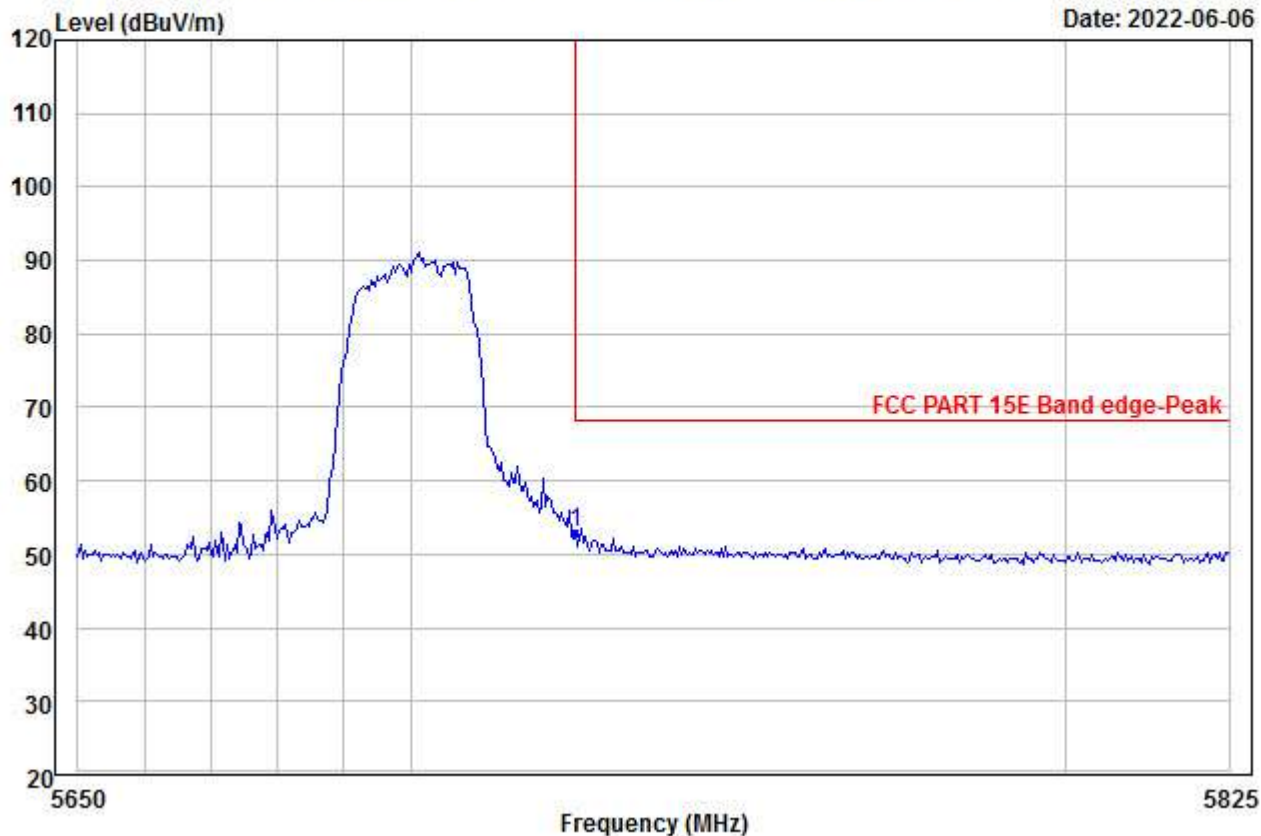


Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N20_ANT0+1_5700
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5725.000	53.45	35.26	45.57	0.00	9.94	53.08	68.20	-15.12	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00058.EMI

Date: 2022-06-06

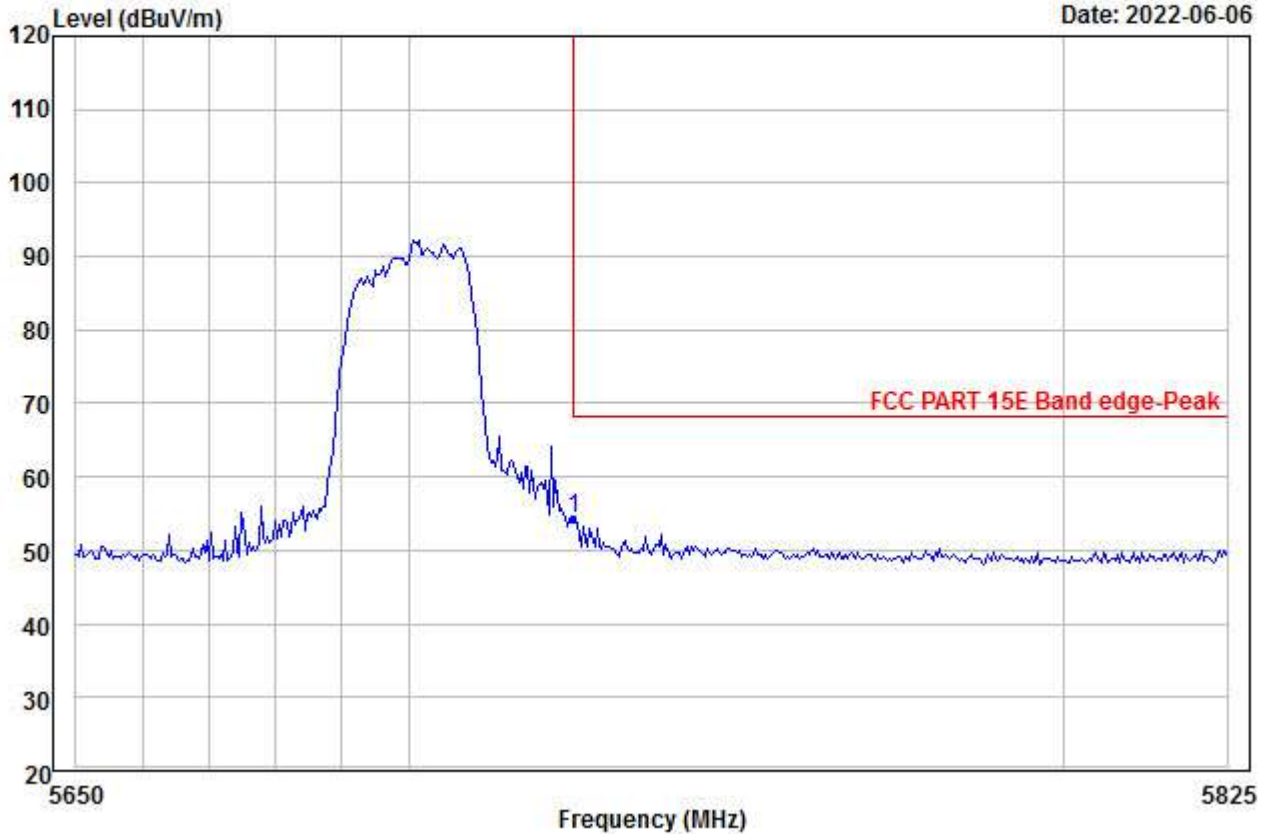


Condition : Horizontal
 Temp.(C)/Hum.(%) : 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5700
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5725.000	54.64	35.26	45.57	0.00	9.94	54.27	68.20	-13.93	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00059.EMI

Date: 2022-06-06

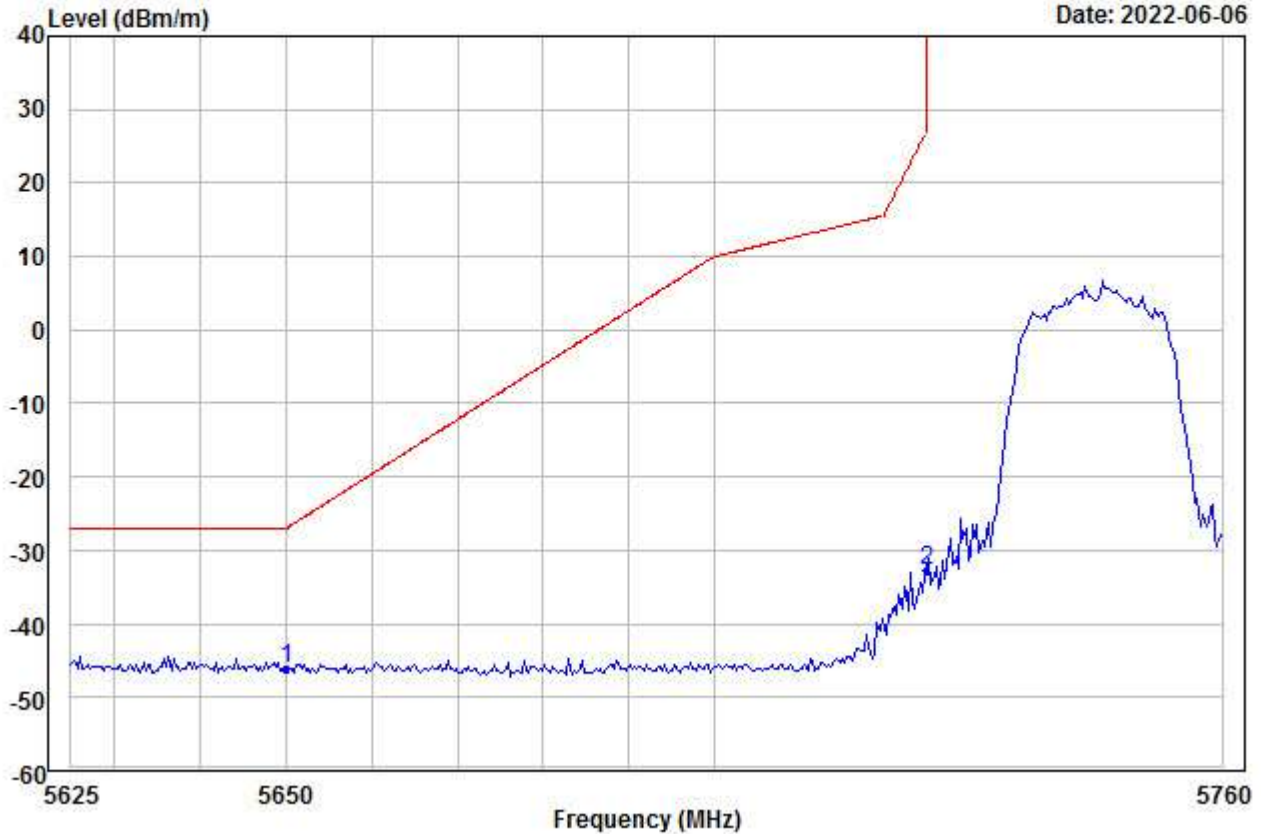


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N20_ANT0+1_5745
Remark :

		Read	Ant	Preamp	Aux	Cable		Limit	Over	APos	TPos	Rema
	Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit			
	MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1 PP	5650.000	-57.77	35.27	45.61	0.00	21.88	-46.23	-27.00	-19.23	---	---	Peak
2	5725.000	-44.10	35.26	45.57	0.00	21.68	-32.73	27.00	-59.73	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00060.EMI

Date: 2022-06-06

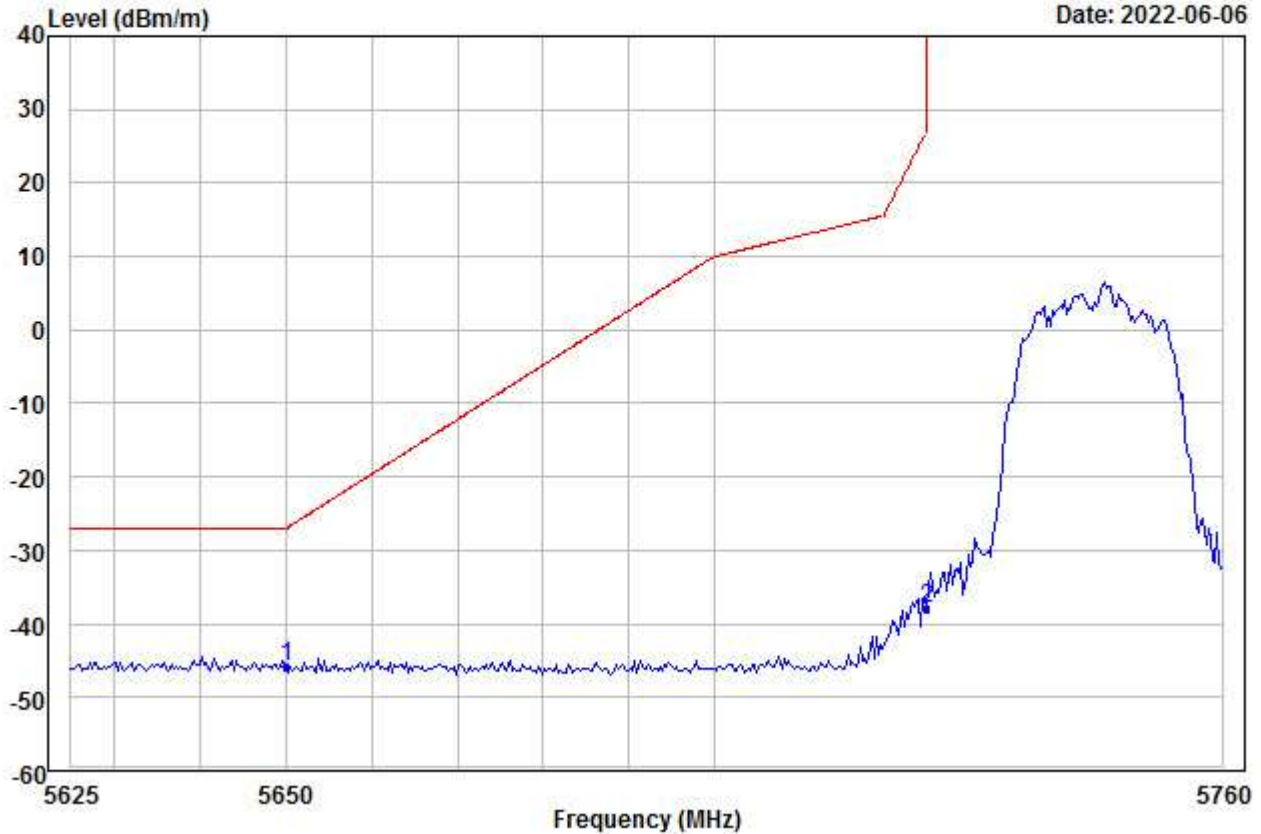


Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N20_ANT0+1_5745
Remark :

		Read	Ant	Preamp	Aux	Cable			Limit	Over	APos	TPos	Rema
		Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit			
		MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1	PP	5650.000	-57.42	35.27	45.61	0.00	21.88	-45.88	-27.00	-18.88	---	---	Peak
2		5725.000	-49.17	35.26	45.57	0.00	21.68	-37.80	27.00	-64.80	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00061.EMI

Date: 2022-06-06

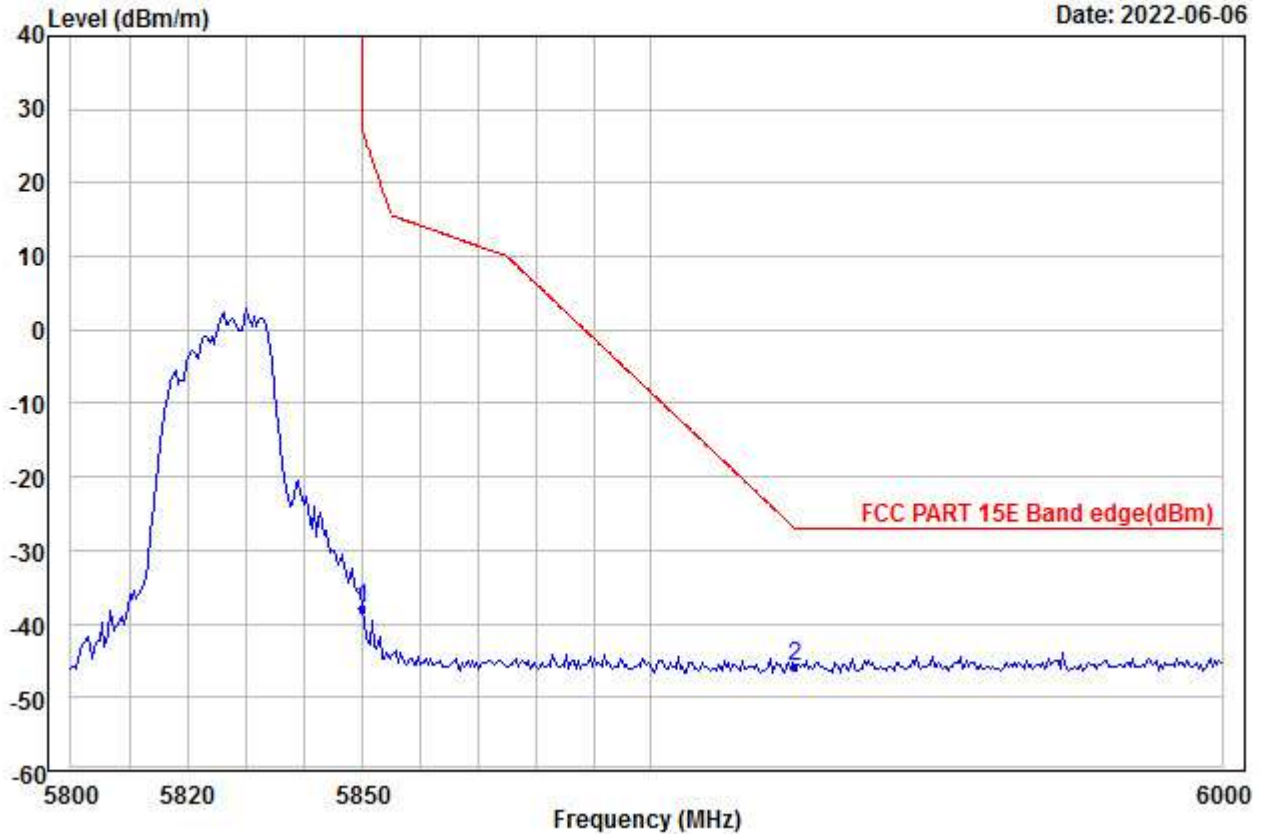


Condition : Vertical
 Temp.(C)/Hum.(%) : 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5825
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1	5850.000	-49.00	35.23	45.49	0.00	21.47	-37.79	27.00	-64.79	---	---	Peak
2 PP	5925.000	-57.17	35.22	45.44	0.00	21.44	-45.95	-27.00	-18.95	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00062.EMI

Date: 2022-06-06

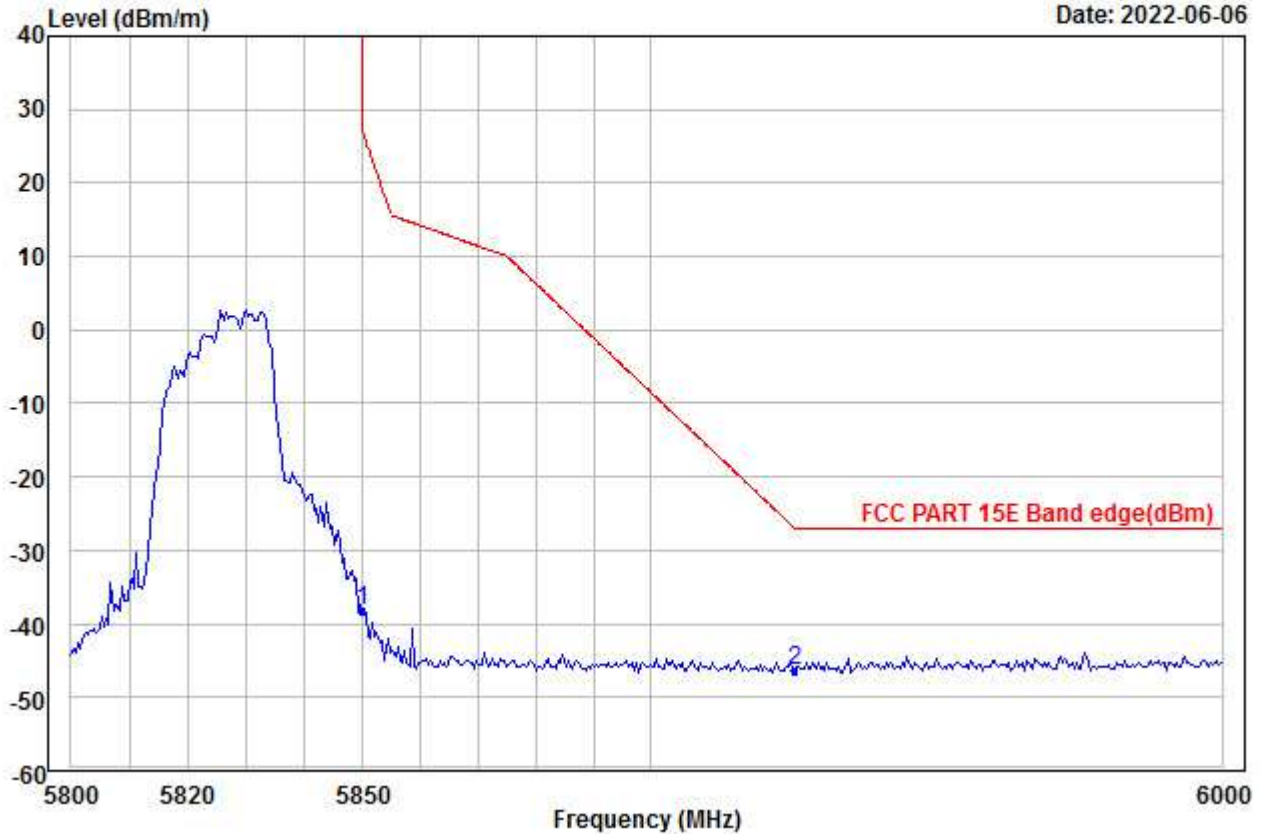


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N20_ANT0+1_5825
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1	5850.000	-49.45	35.23	45.49	0.00	21.47	-38.24	27.00	-65.24	---	---	Peak
2 PP	5925.000	-57.60	35.22	45.44	0.00	21.44	-46.38	-27.00	-19.38	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00063.EMI

Date: 2022-06-06

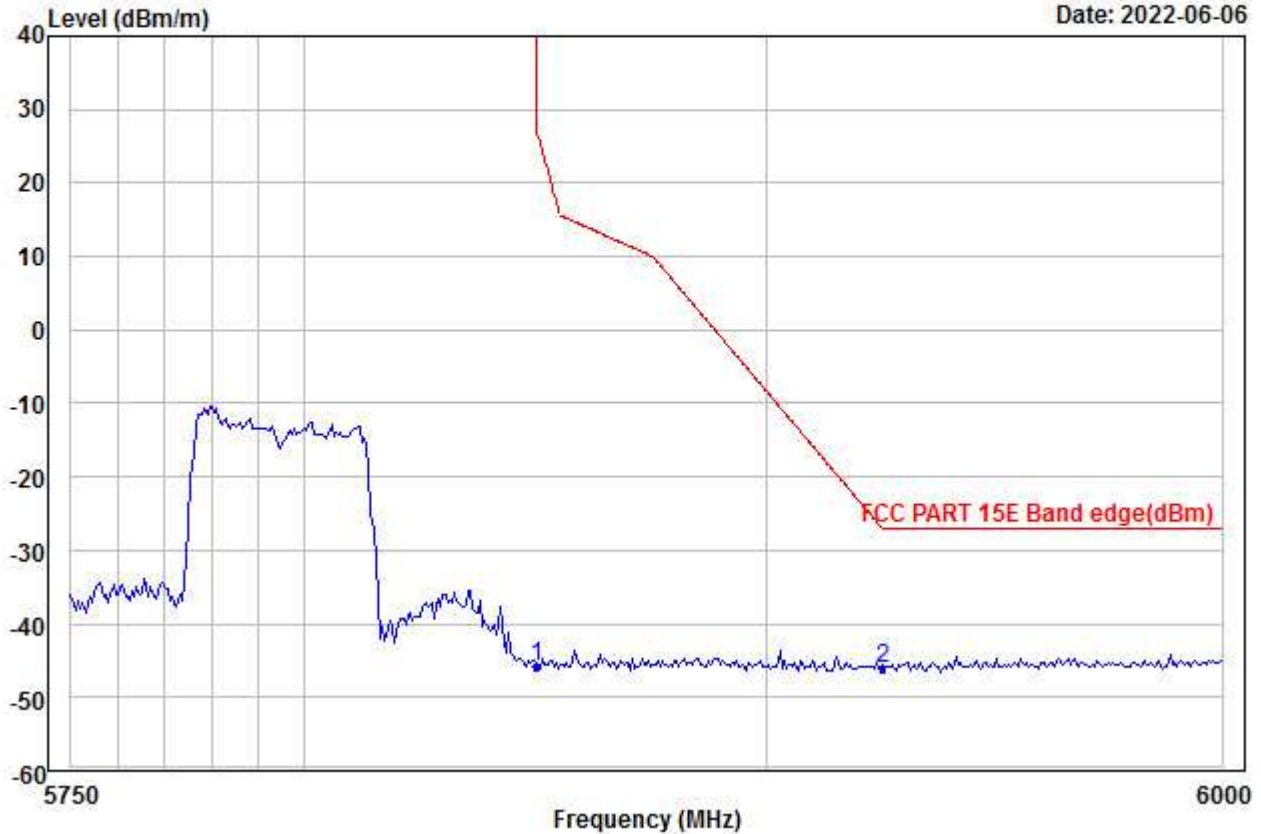


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5795
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1	5850.000	-57.00	35.23	45.49	0.00	21.47	-45.79	27.00	-72.79	---	---	Peak
2 PP	5925.000	-57.29	35.22	45.44	0.00	21.44	-46.07	-27.00	-19.07	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00064.EMI

Date: 2022-06-06

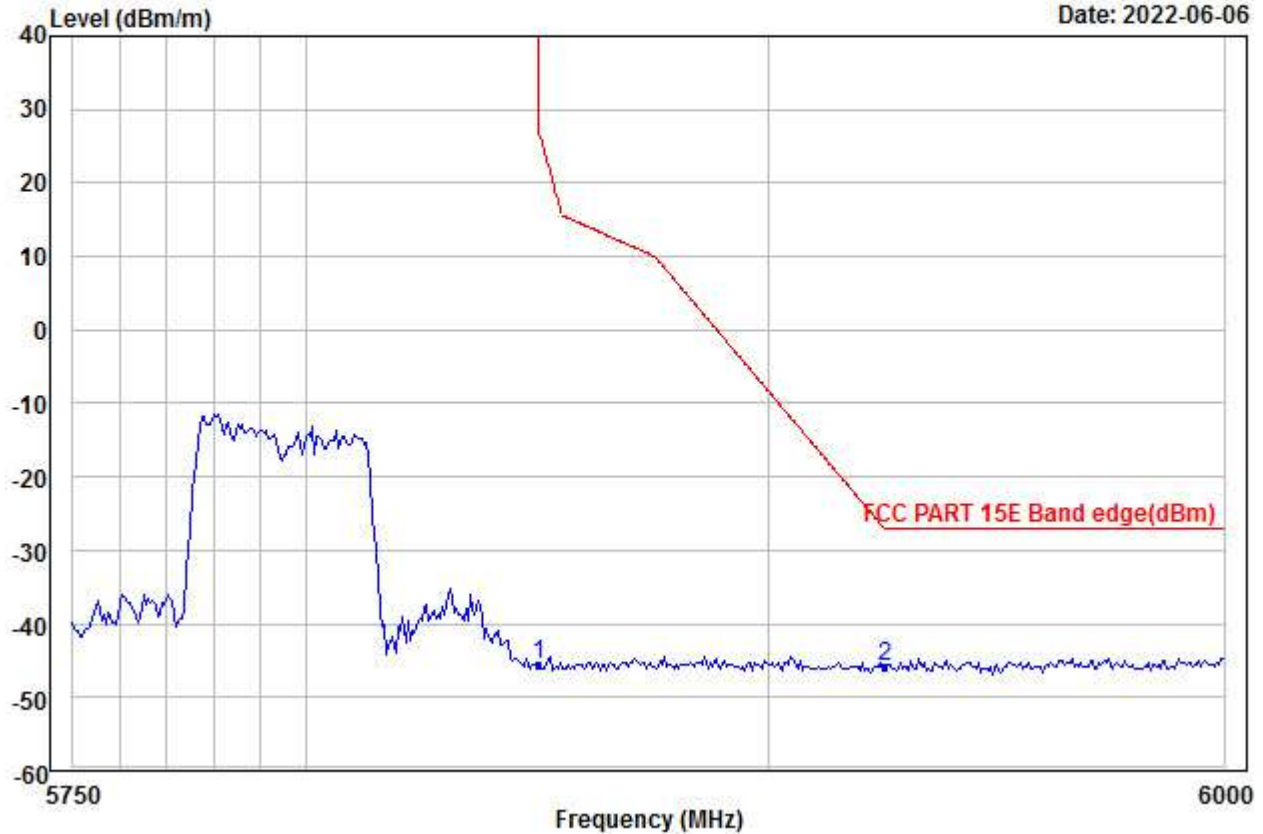


Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5795
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1	5850.000	-56.71	35.23	45.49	0.00	21.47	-45.50	27.00	-72.50	---	---	Peak
2 PP	5925.000	-56.95	35.22	45.44	0.00	21.44	-45.73	-27.00	-18.73	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00065.EMI

Date: 2022-06-06

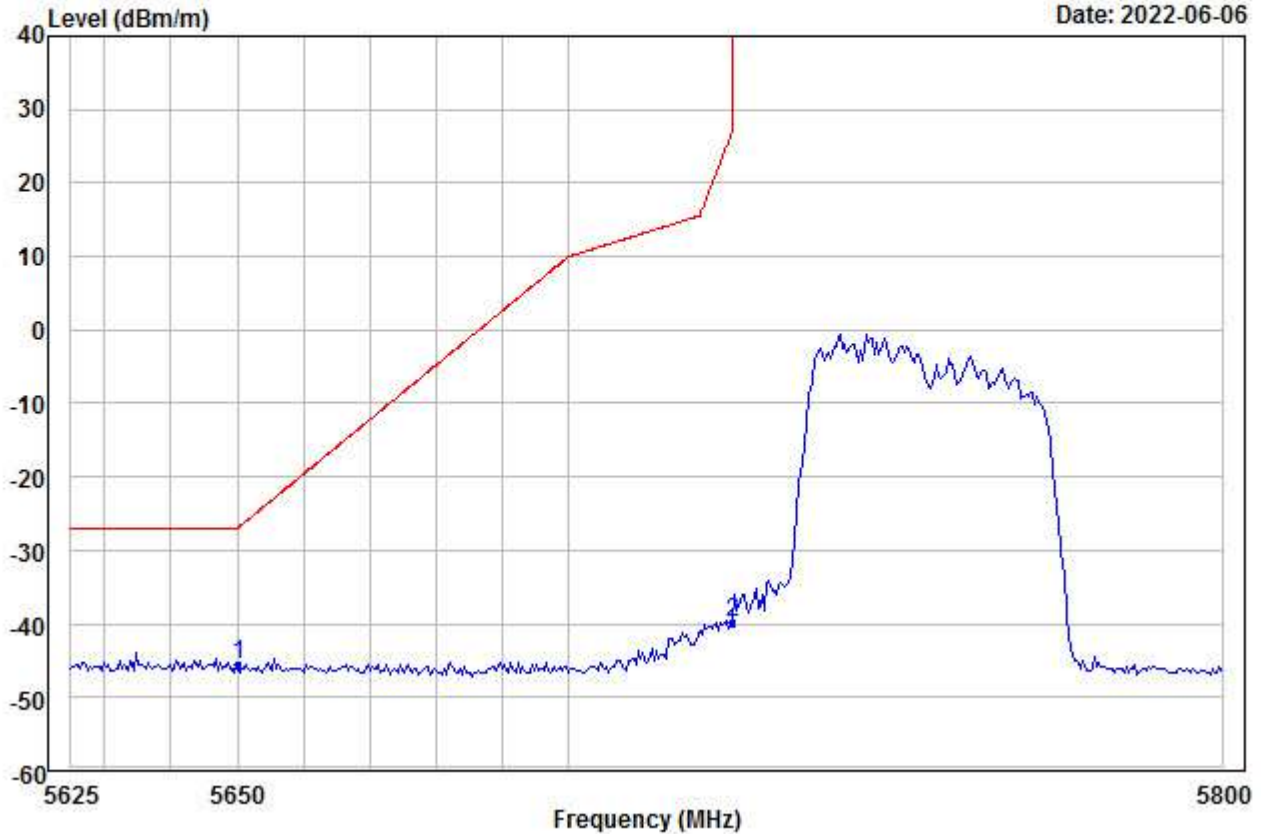


Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5755
Remark :

		Read	Ant	Preamp	Aux	Cable		Limit	Over	APos	TPos	Rema	
		Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit			
		MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1	PP	5650.000	-57.00	35.27	45.61	0.00	21.88	-45.46	-27.00	-18.46	---	---	Peak
2		5725.000	-51.25	35.26	45.57	0.00	21.68	-39.88	27.00	-66.88	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00066.EMI

Date: 2022-06-06

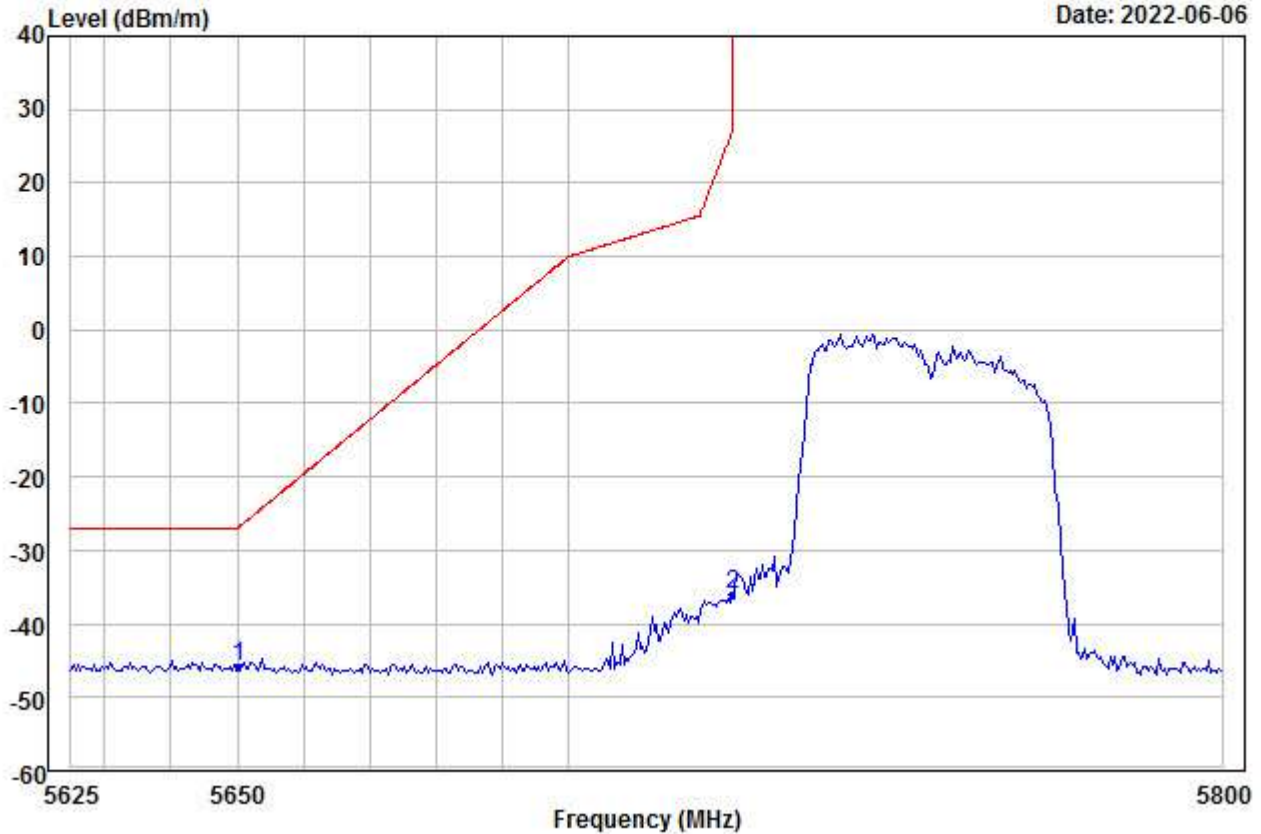


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5755
Remark :

		Read	Ant	Preamp	Aux	Cable			Limit	Over	APos	TPos	Rema
		Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit			
		MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1	PP	5650.000	-57.35	35.27	45.61	0.00	21.88	-45.81	-27.00	-18.81	---	---	Peak
2		5725.000	-47.40	35.26	45.57	0.00	21.68	-36.03	27.00	-63.03	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00067.EMI

Date: 2022-06-06

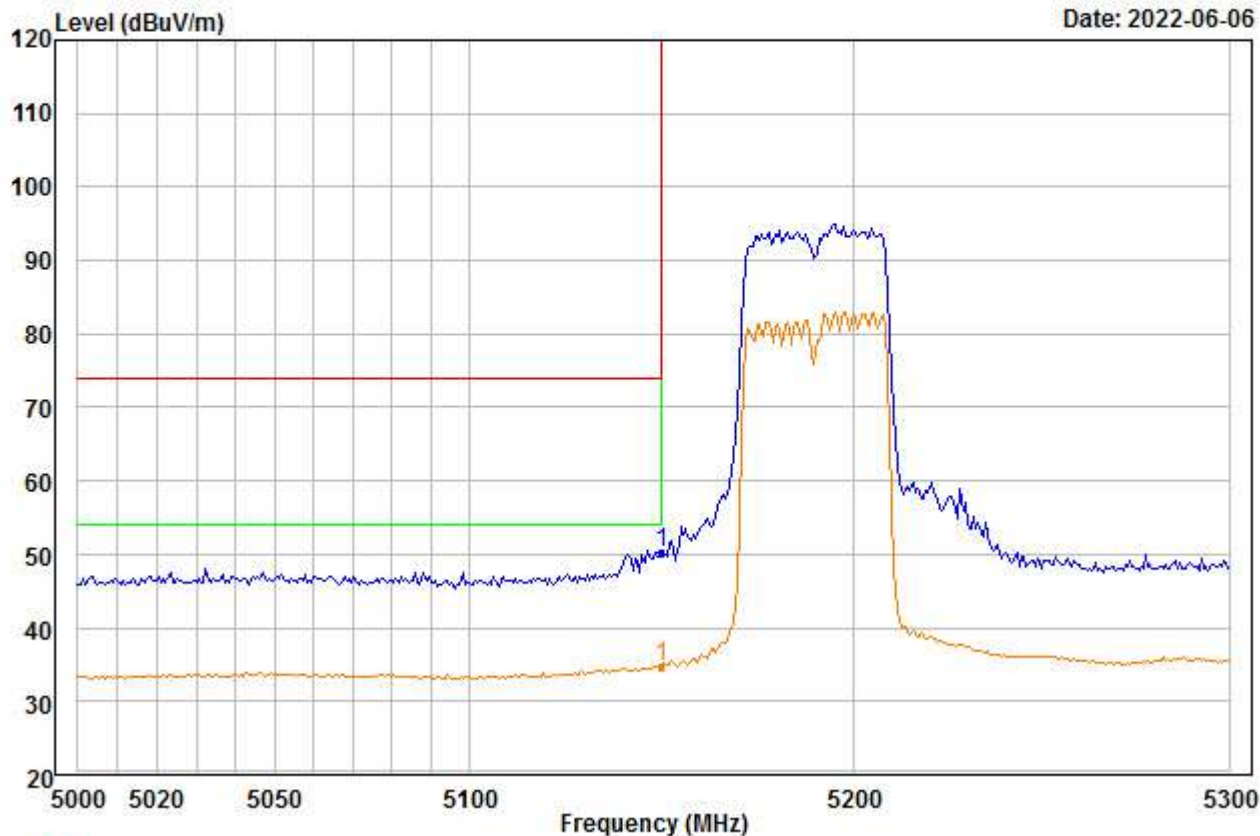

Trace: 1


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5190
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit		Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5150.000	52.01	34.88	46.33	0.00	9.78	50.34	74.00	-23.66	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00068.EMI

Date: 2022-06-06

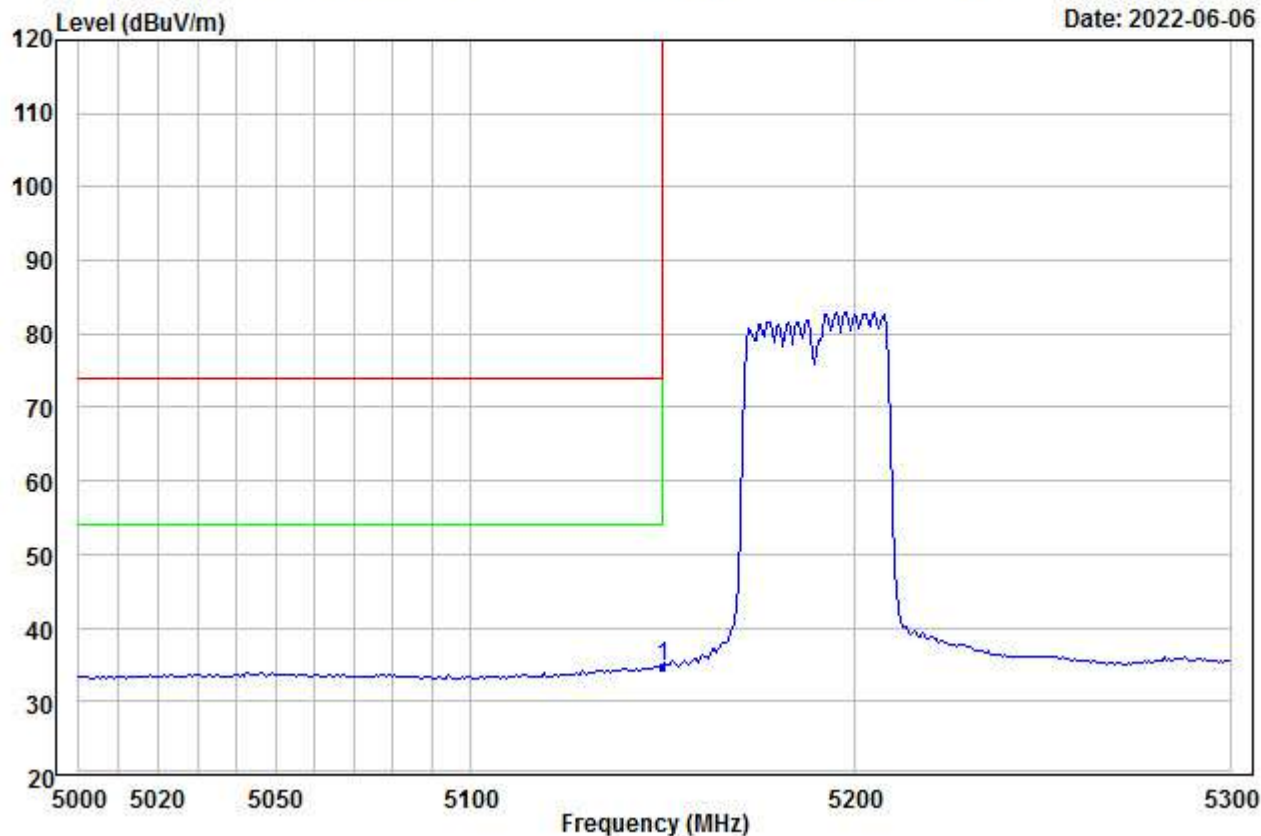


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5190
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit		Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5150.000	36.43	34.88	46.33	0.00	9.78	34.76	54.00	-19.24	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00069.EMI

Date: 2022-06-06

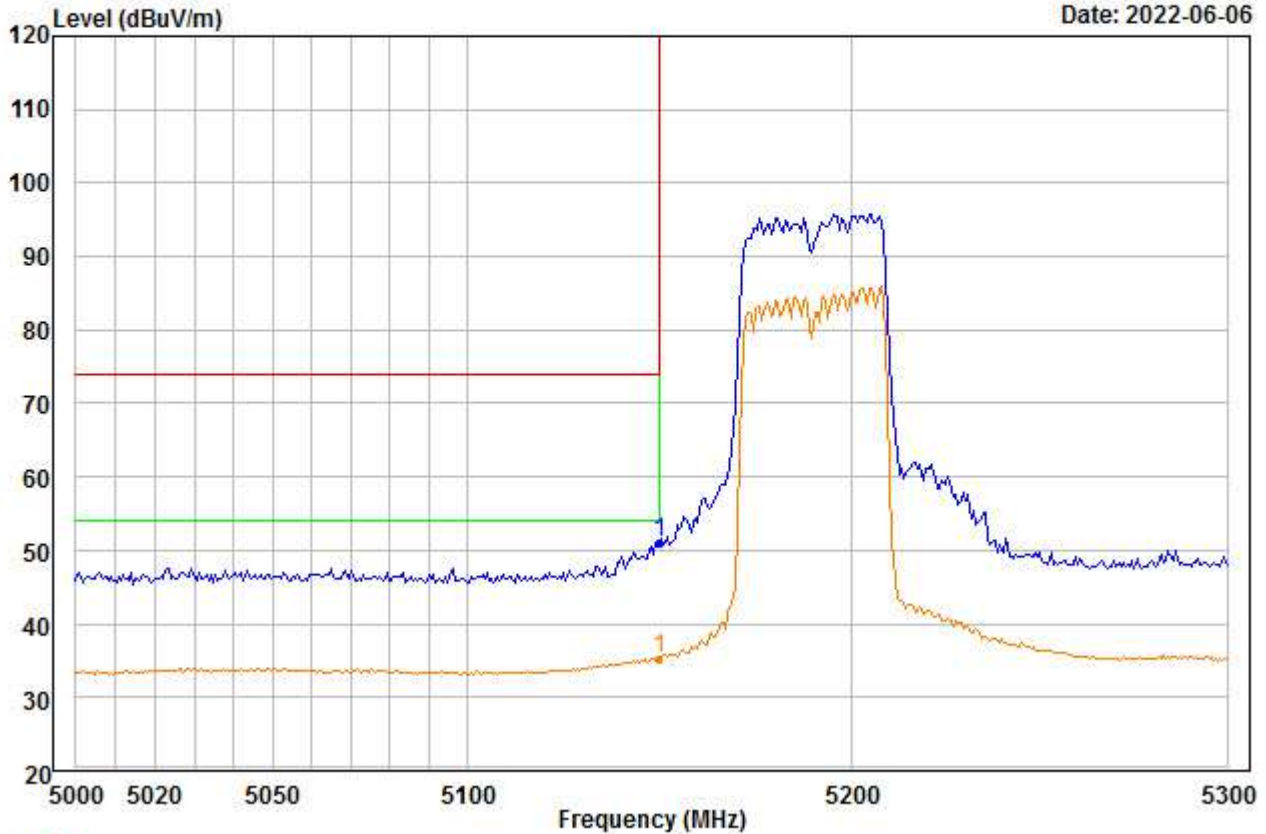

Trace: 1


Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5190
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit		Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5150.000	52.80	34.88	46.33	0.00	9.78	51.13	74.00	-22.87	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00070.EMI

Date: 2022-06-06

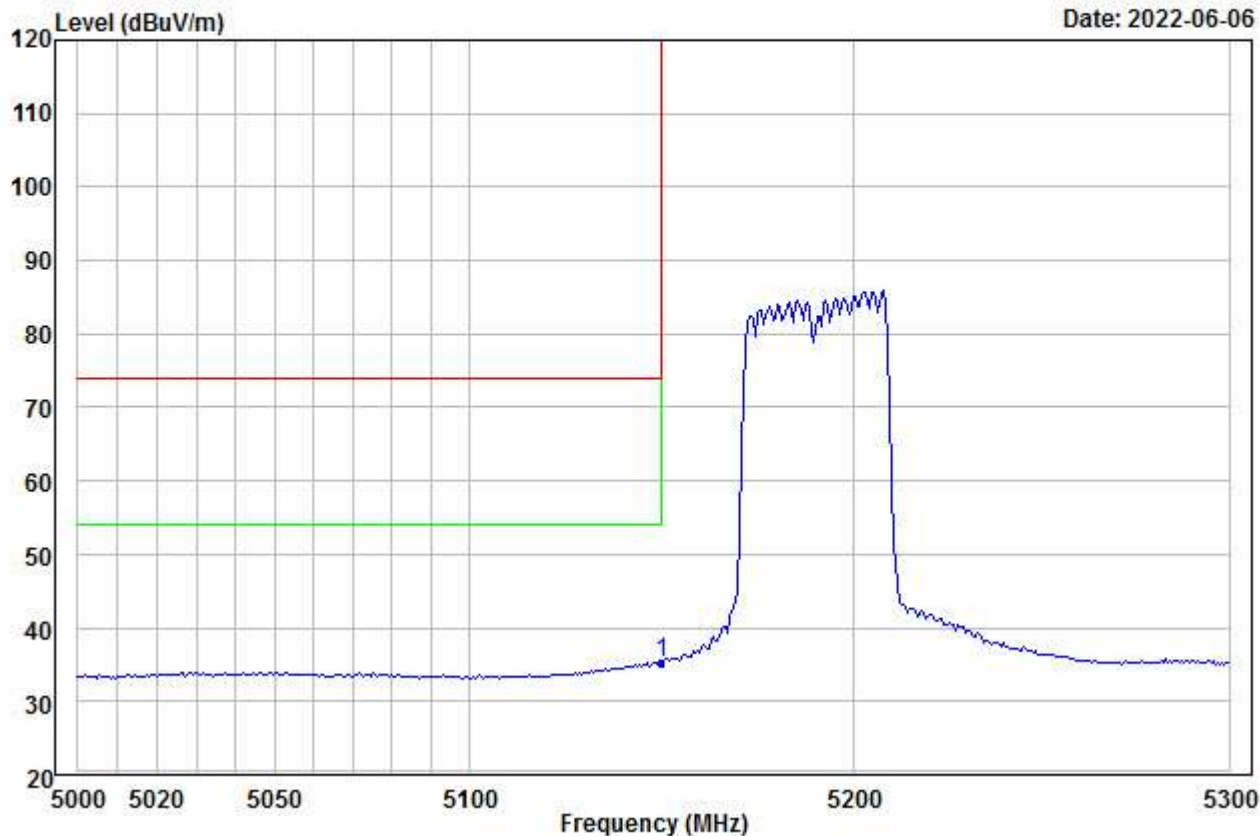


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5190
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP	5150.000	36.80	34.88	46.33	0.00	9.78	35.13	54.00	-18.87	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00071.EMI

Date: 2022-06-06

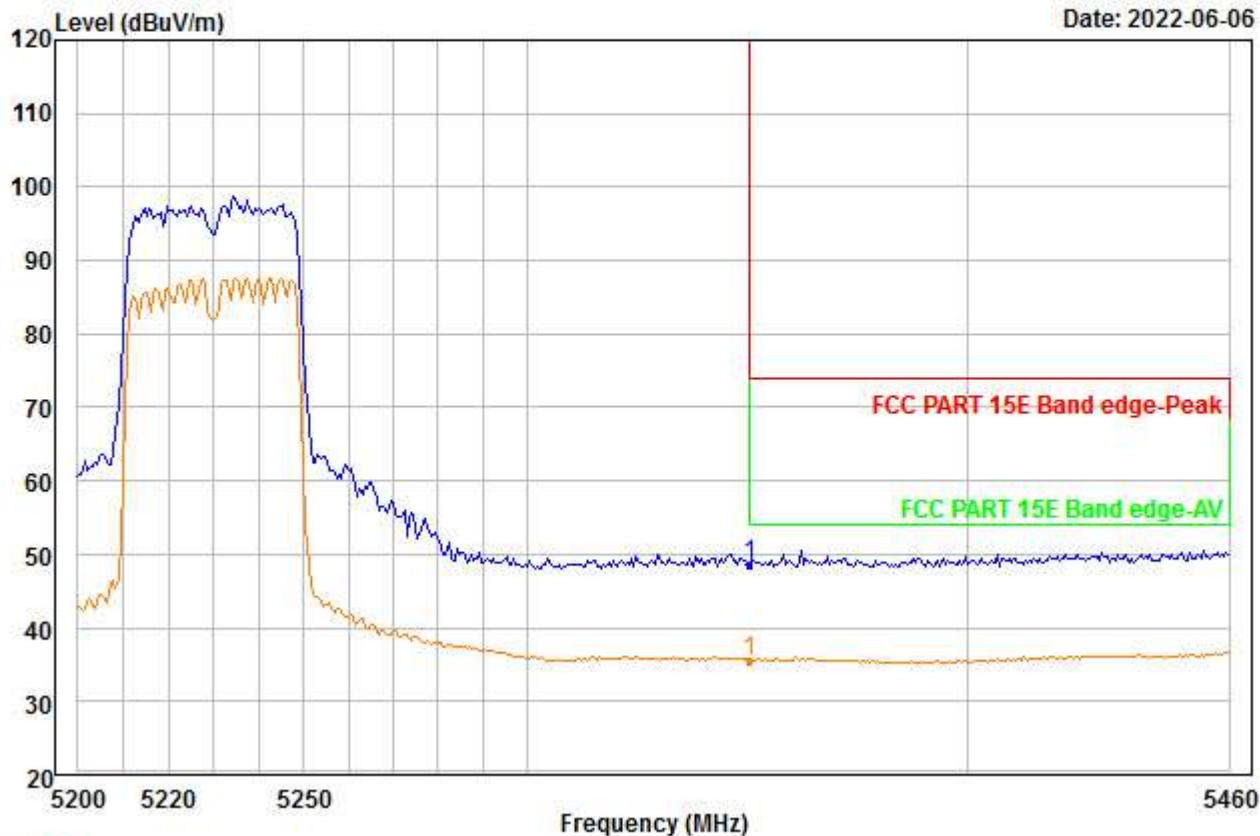

Trace: 1


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5230
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	49.22	35.12	45.97	0.00	10.18	48.55	74.00	-25.45	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00072.EMI

Date: 2022-06-06

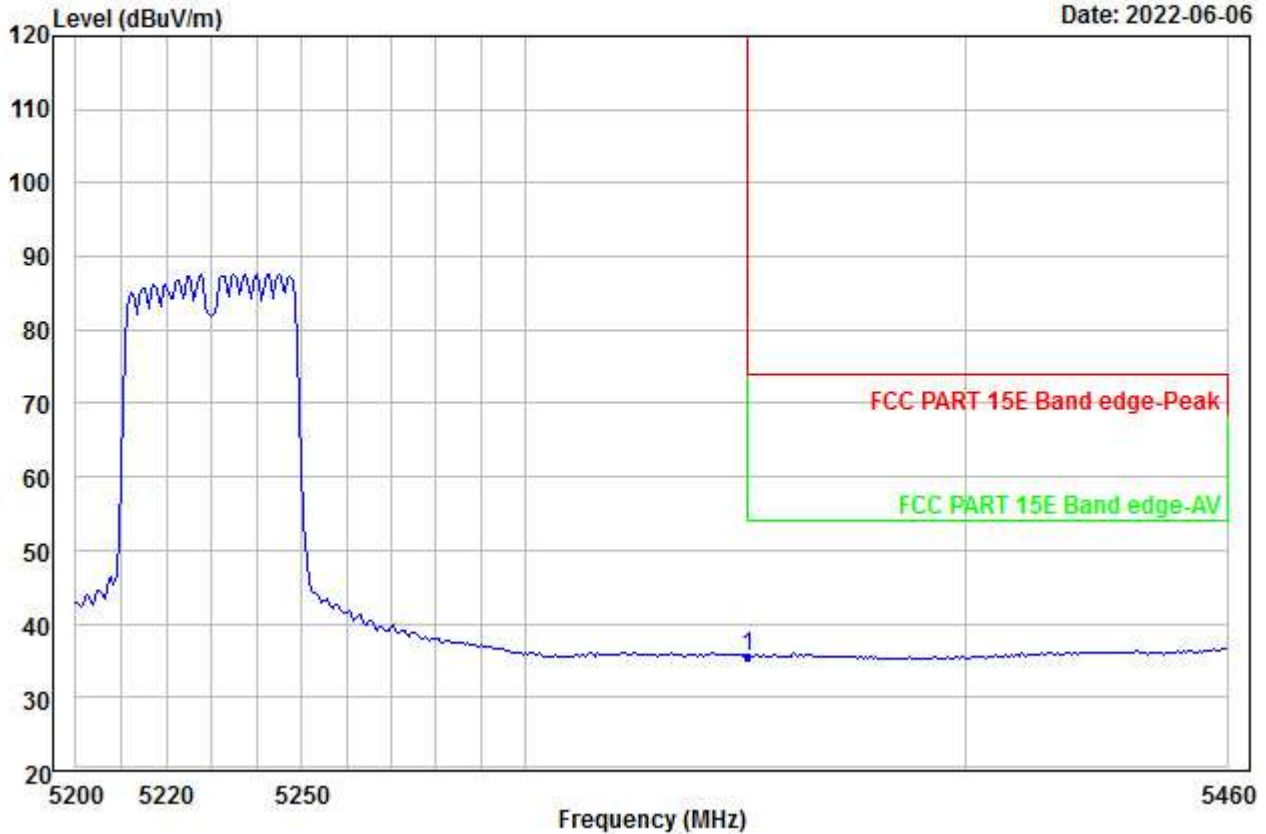


Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5230
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP	5350.000	36.28	35.12	45.97	0.00	10.18	35.61	54.00	-18.39	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00073.EMI

Date: 2022-06-06

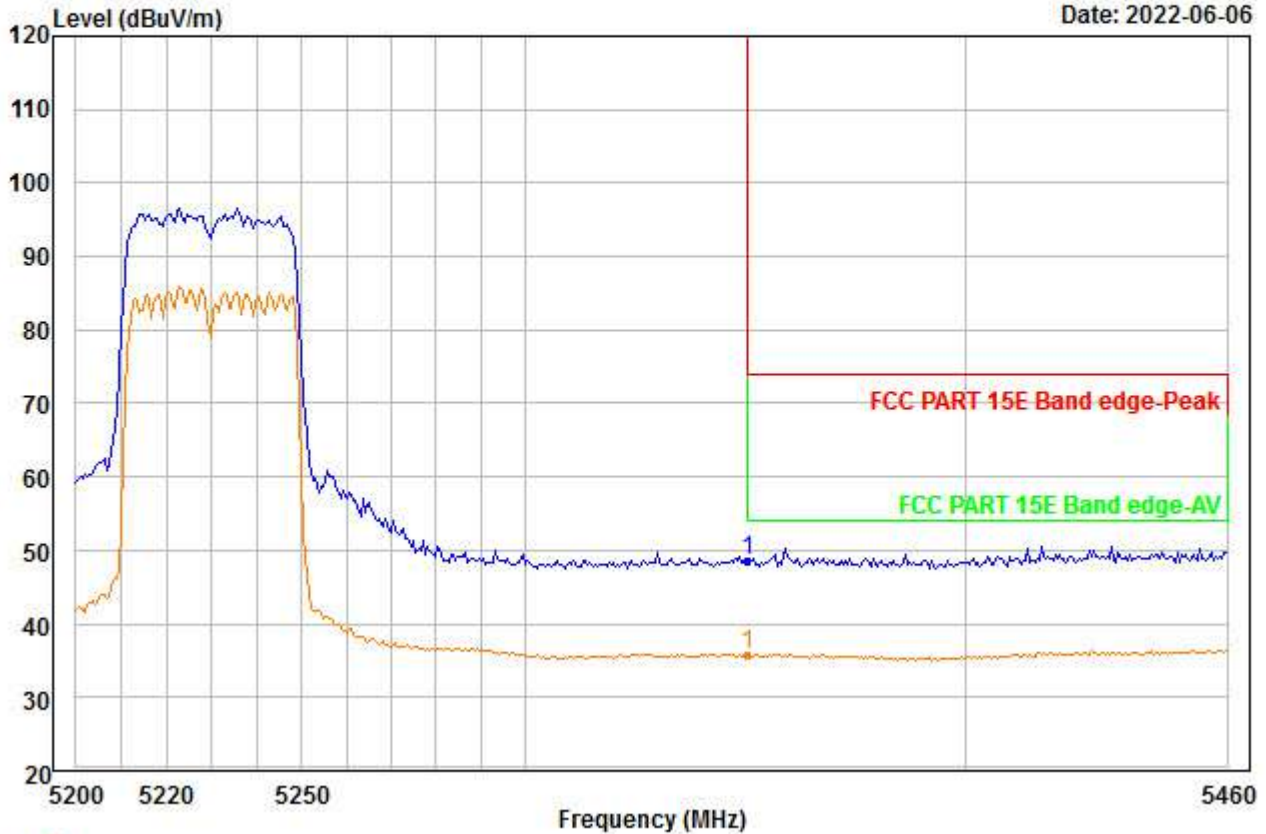

Trace: 1


Condition : Horizontal
Temp.(C)/Hum.(%) : 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5230
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	49.31	35.12	45.97	0.00	10.18	48.64	74.00	-25.36	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00074.EMI

Date: 2022-06-06

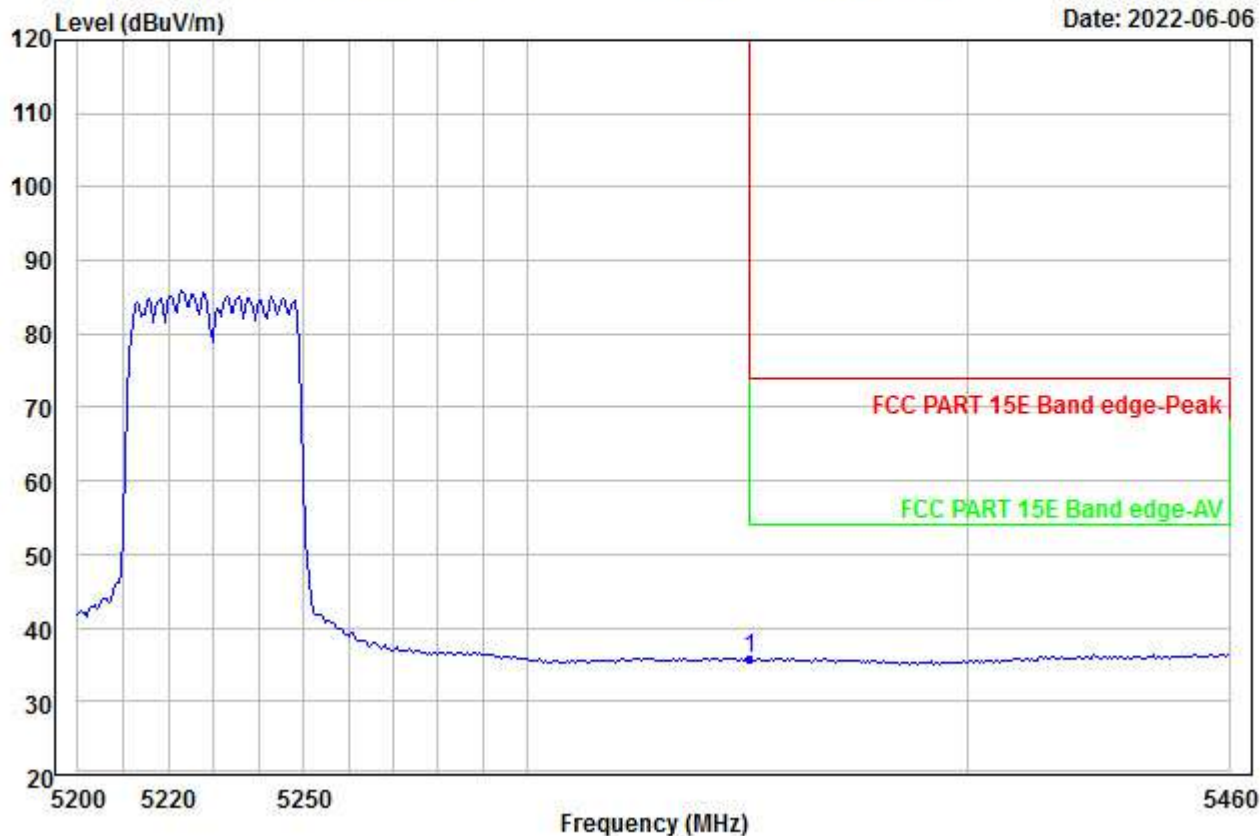


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5230
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	36.58	35.12	45.97	0.00	10.18	35.91	54.00	-18.09	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00075.EMI

Date: 2022-06-06

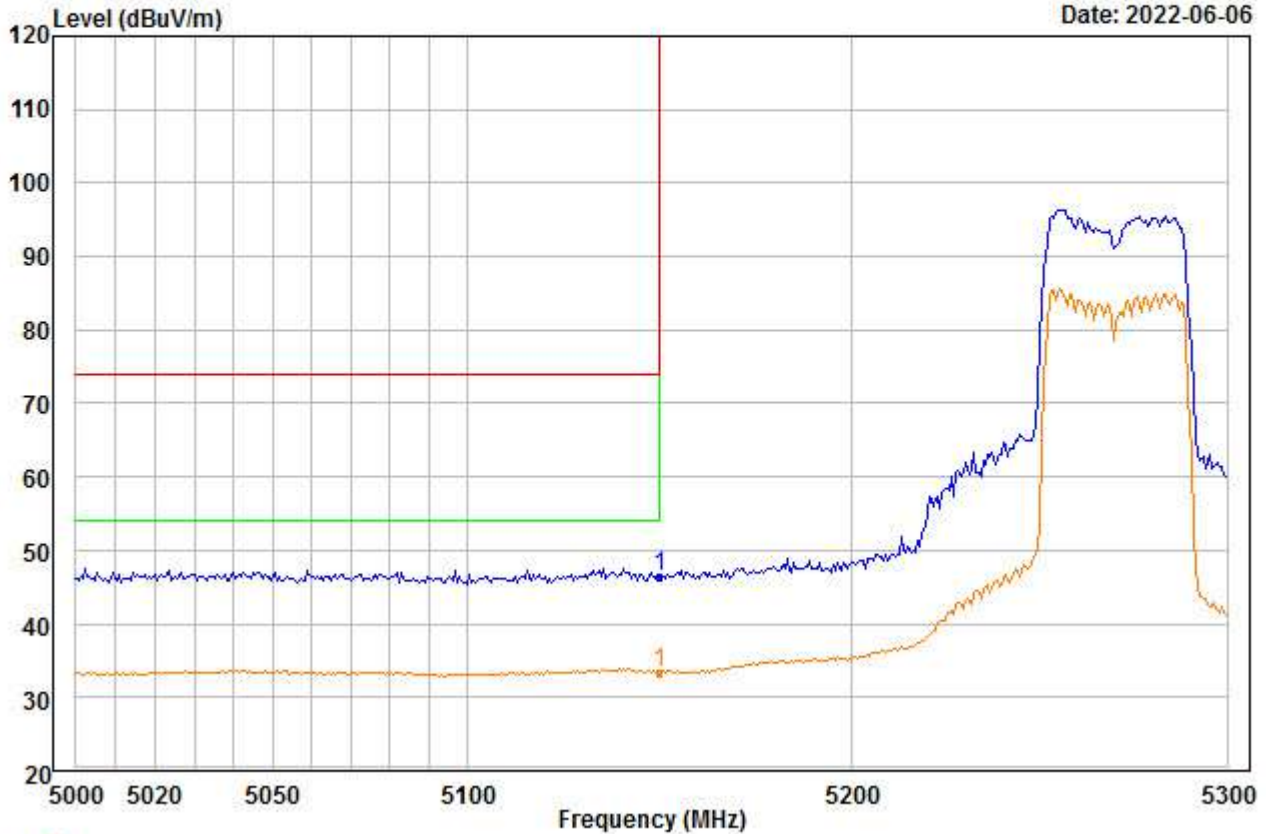

Trace: 1


Condition : Horizontal
Temp.(C)/Hum.(%) : 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5270
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit		
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5150.000	48.13	34.88	46.33	0.00	9.78	46.46	74.00	-27.54	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00076.EMI

Date: 2022-06-06

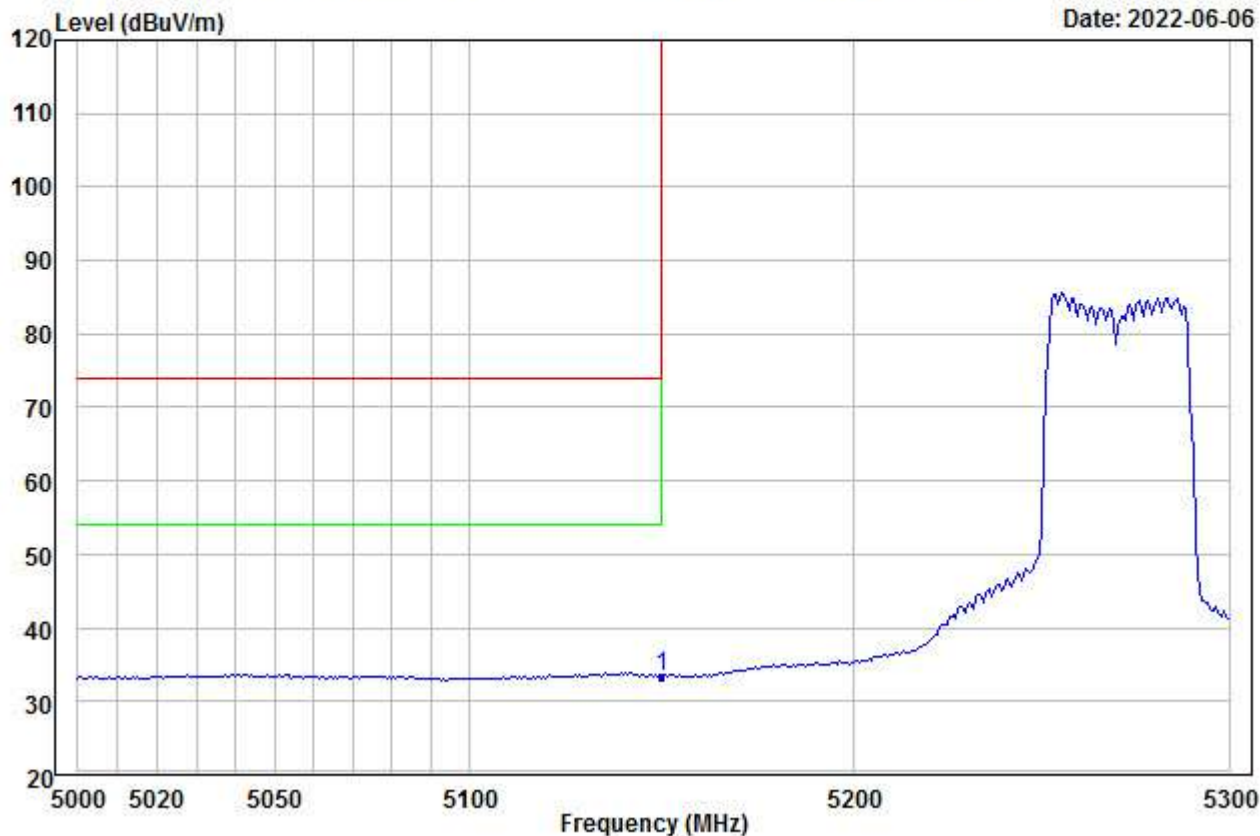


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5270
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5150.000	35.15	34.88	46.33	0.00	9.78	33.48	54.00	-20.52	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00077.EMI

Date: 2022-06-06

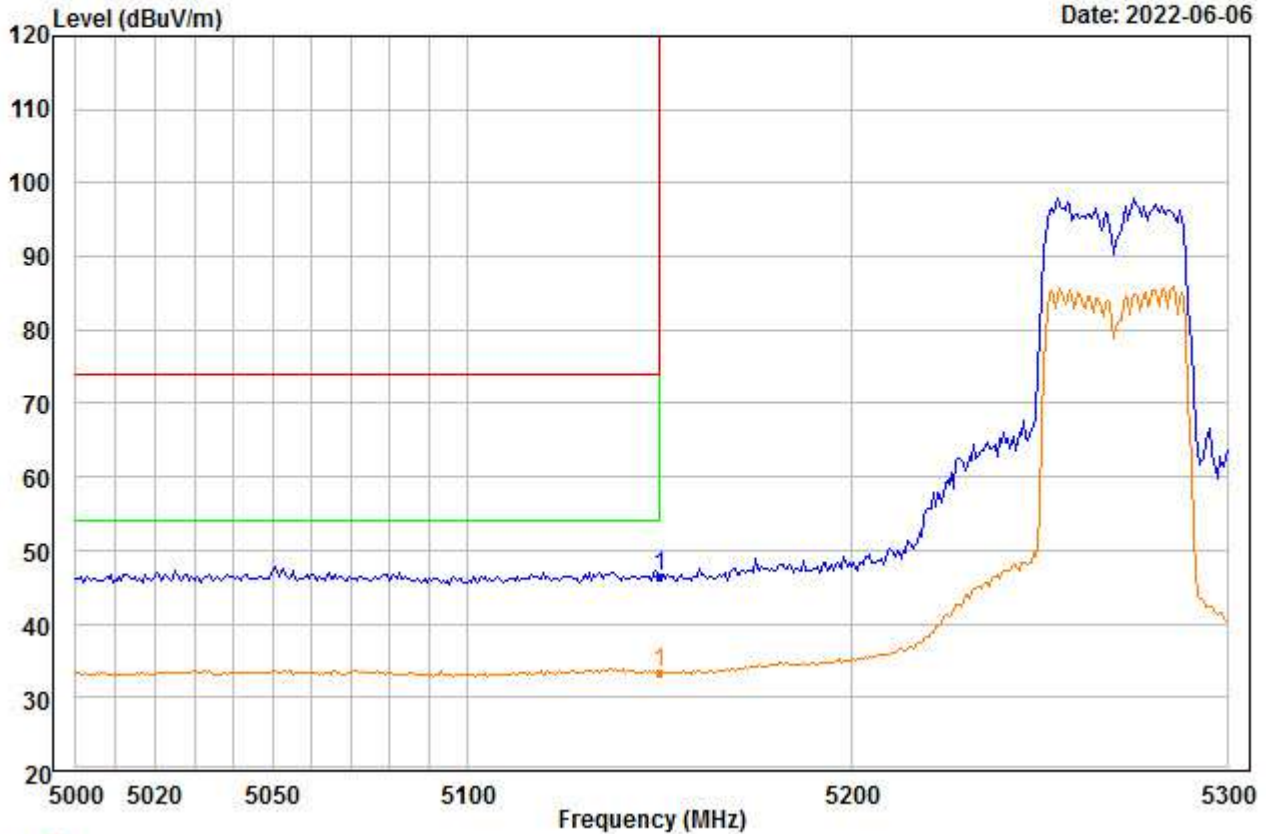

Trace: 1


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5270
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5150.000	48.14	34.88	46.33	0.00	9.78	46.47	74.00	-27.53	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00078.EMI

Date: 2022-06-06

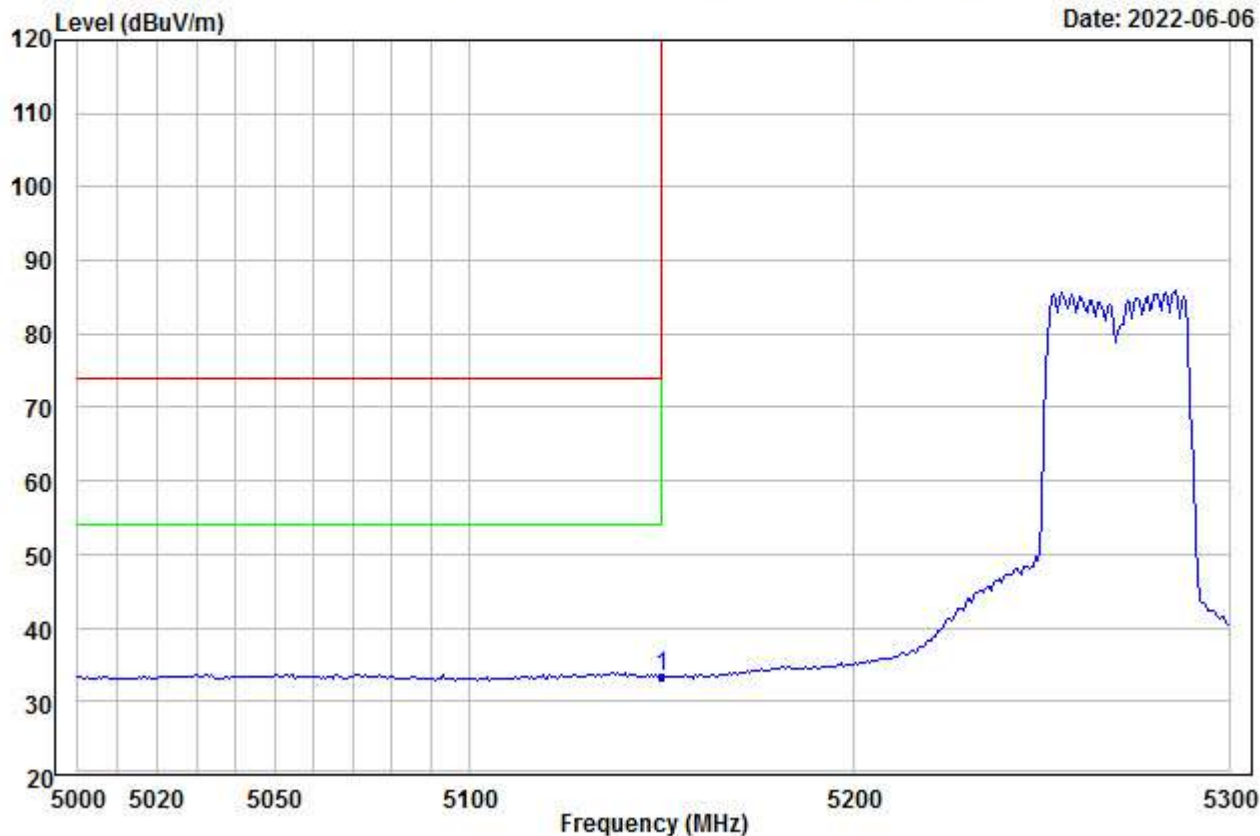


Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5270
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5150.000	35.04	34.88	46.33	0.00	9.78	33.37	54.00	-20.63	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00079.EMI

Date: 2022-06-06

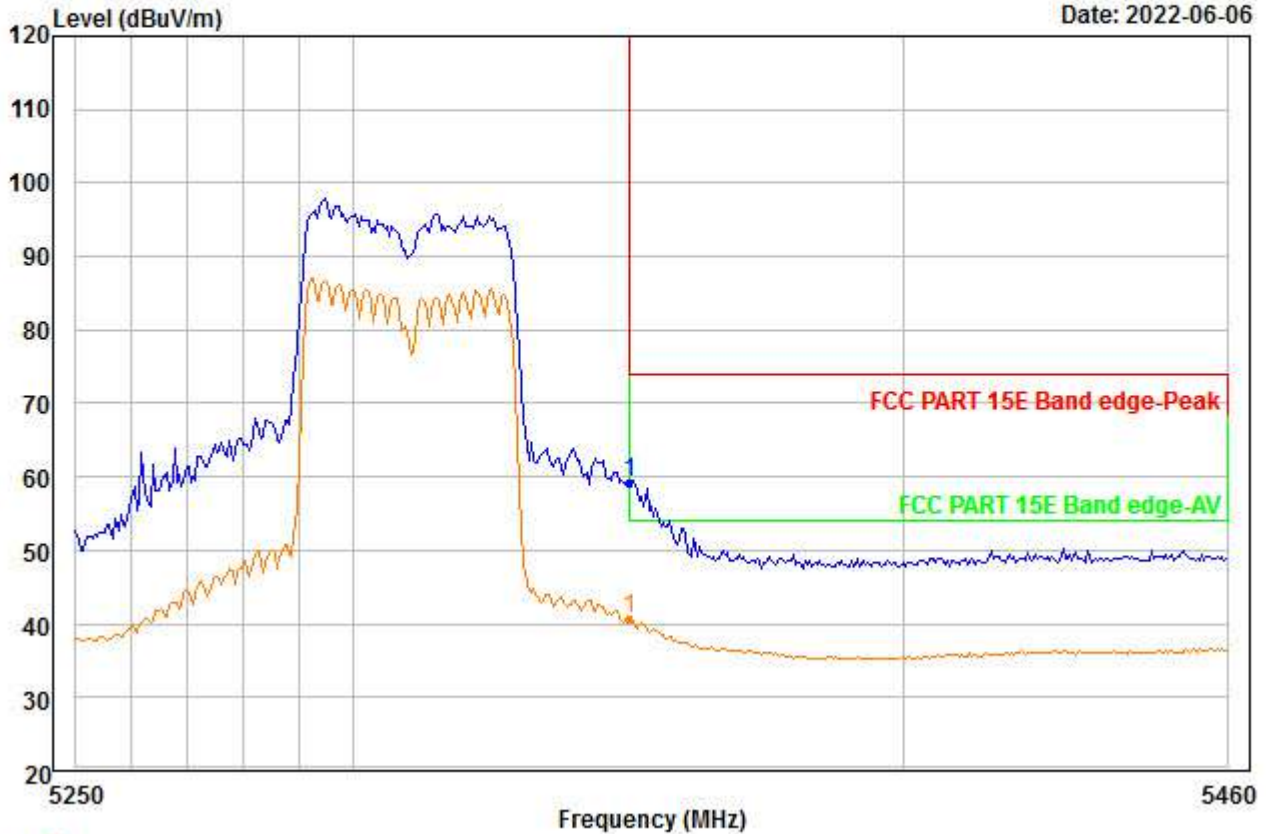

Trace: 1


Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5310
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	59.80	35.12	45.97	0.00	10.18	59.13	74.00	-14.87	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00080.EMI

Date: 2022-06-06

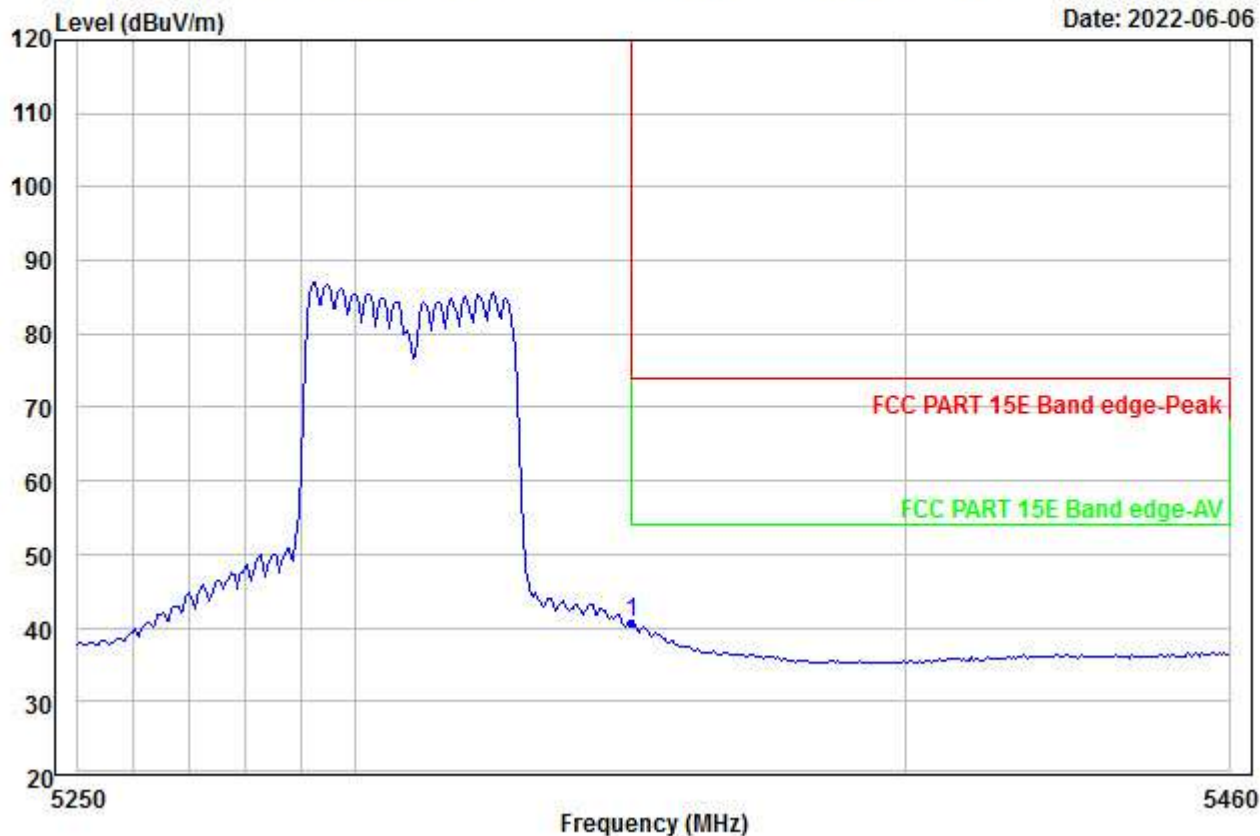


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5310
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	41.48	35.12	45.97	0.00	10.18	40.81	54.00	-13.19	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00081.EMI

Date: 2022-06-06

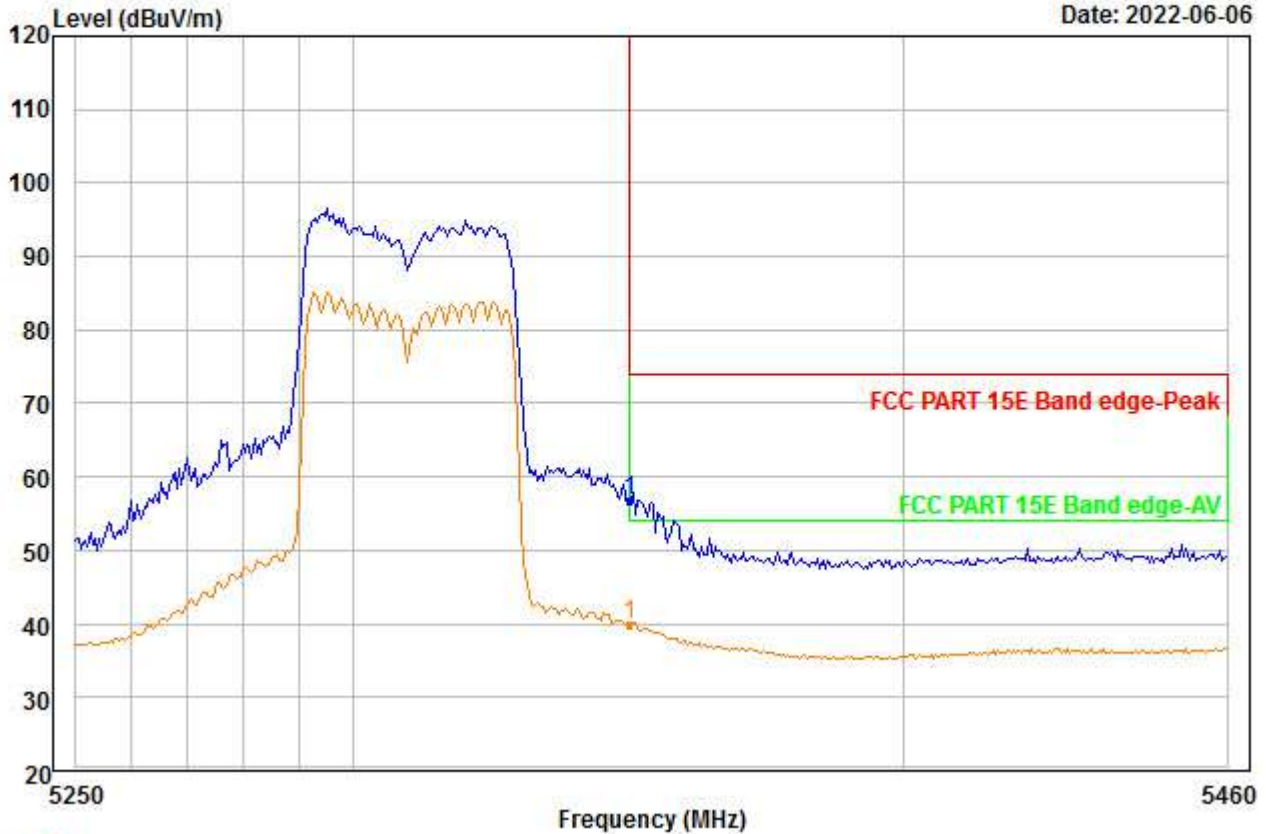


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5310
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit		
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	57.51	35.12	45.97	0.00	10.18	56.84	74.00	-17.16	---	--- Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00082.EMI

Date: 2022-06-06

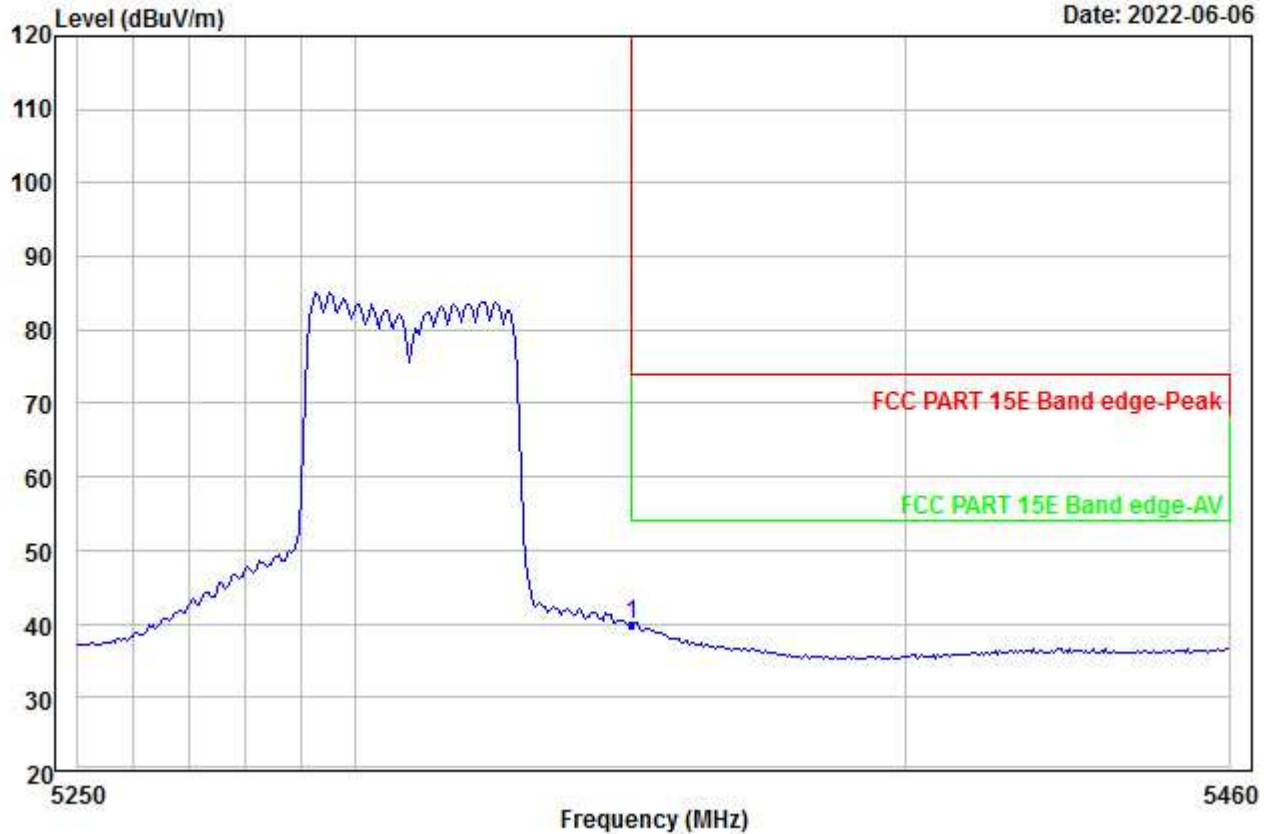


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5310
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	40.58	35.12	45.97	0.00	10.18	39.91	54.00	-14.09	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00083.EMI

Date: 2022-06-06

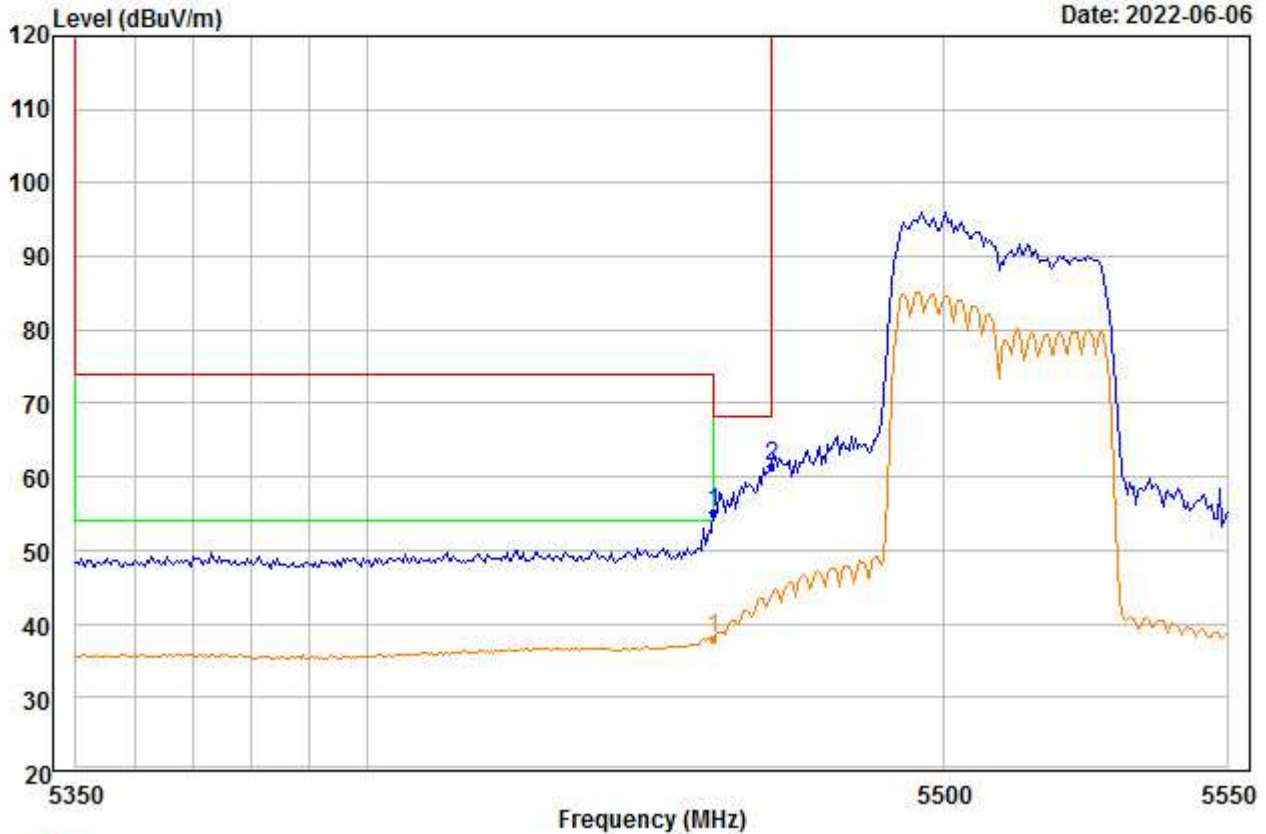


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5510
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5460.000	55.35	35.25	45.77	0.00	10.44	55.27	68.20	-12.93	---	---	Peak
2 PP	5470.000	61.49	35.26	45.75	0.00	10.47	61.47	68.20	-6.73	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00084.EMI

Date: 2022-06-06

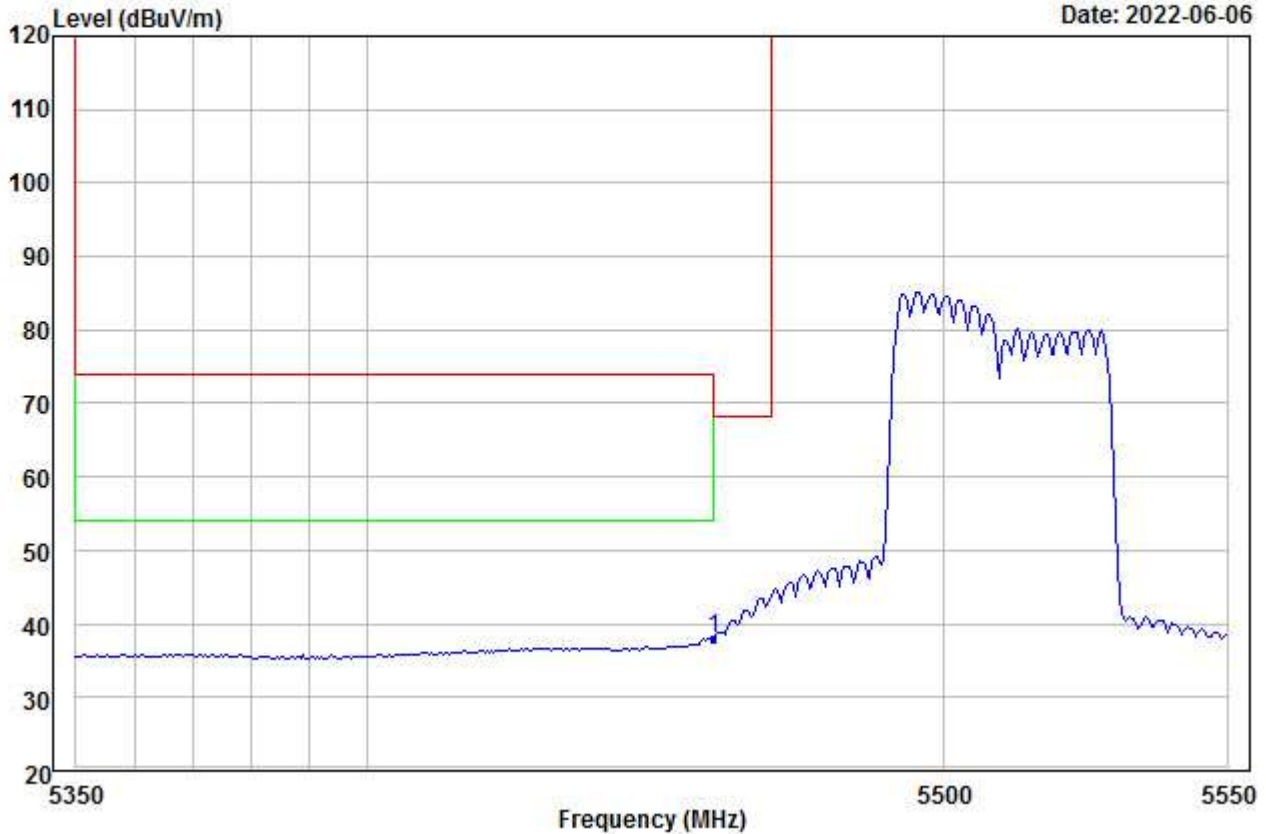


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5510
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5460.000	38.17	35.25	45.77	0.00	10.44	38.09	54.00	-15.91	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00085.EMI

Date: 2022-06-06

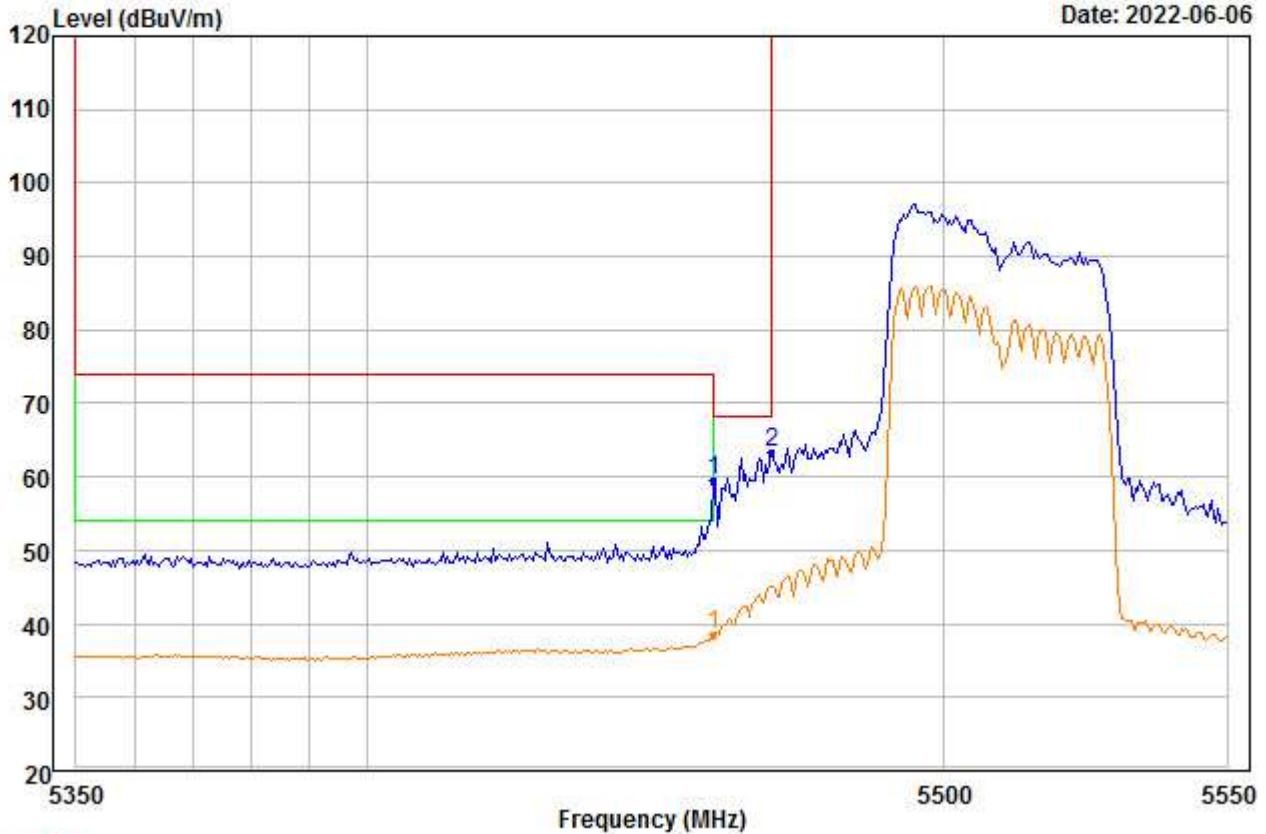


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5510
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5460.000	59.56	35.25	45.77	0.00	10.44	59.48	68.20	-8.72	---	---	Peak
2 PP	5470.000	63.28	35.26	45.75	0.00	10.47	63.26	68.20	-4.94	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00086.EMI

Date: 2022-06-06

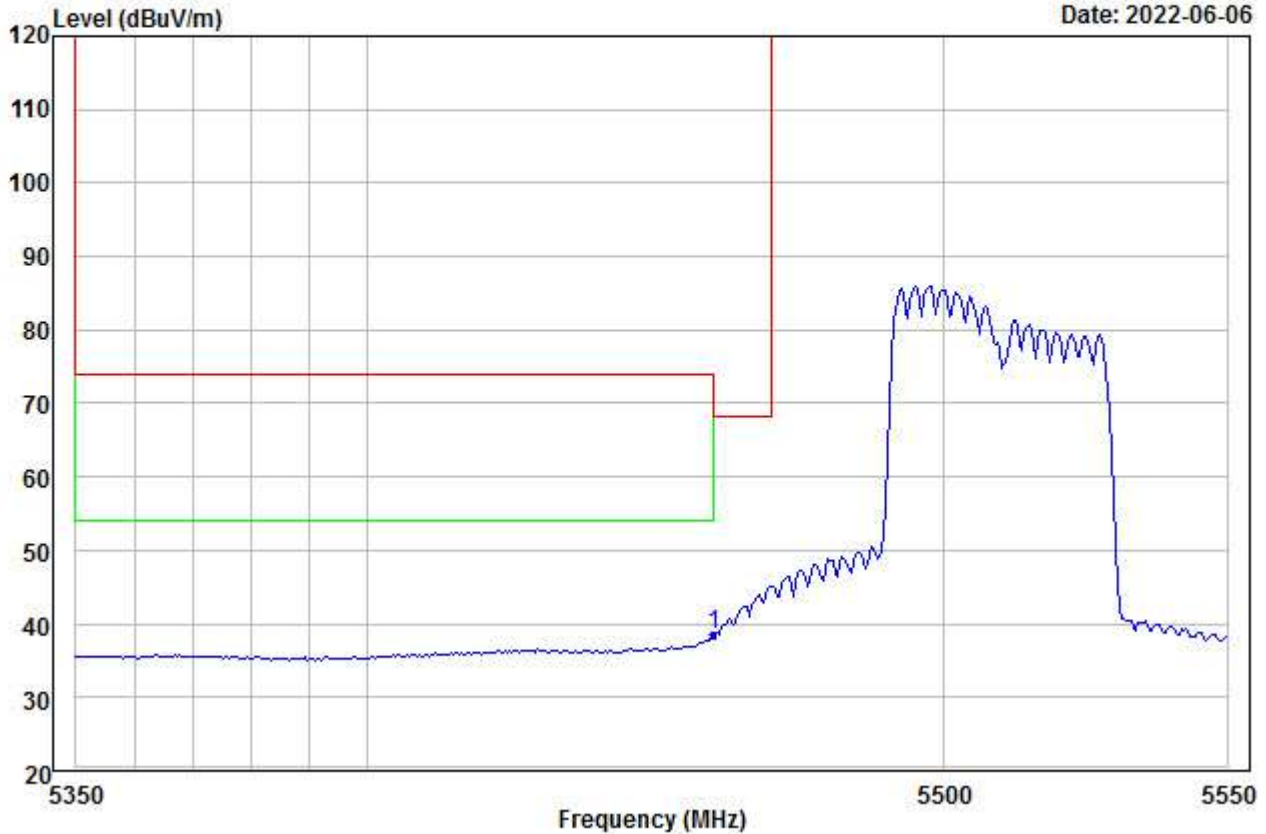


Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5510
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5460.000	38.62	35.25	45.77	0.00	10.44	38.54	54.00	-15.46	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00087.EMI

Date: 2022-06-06

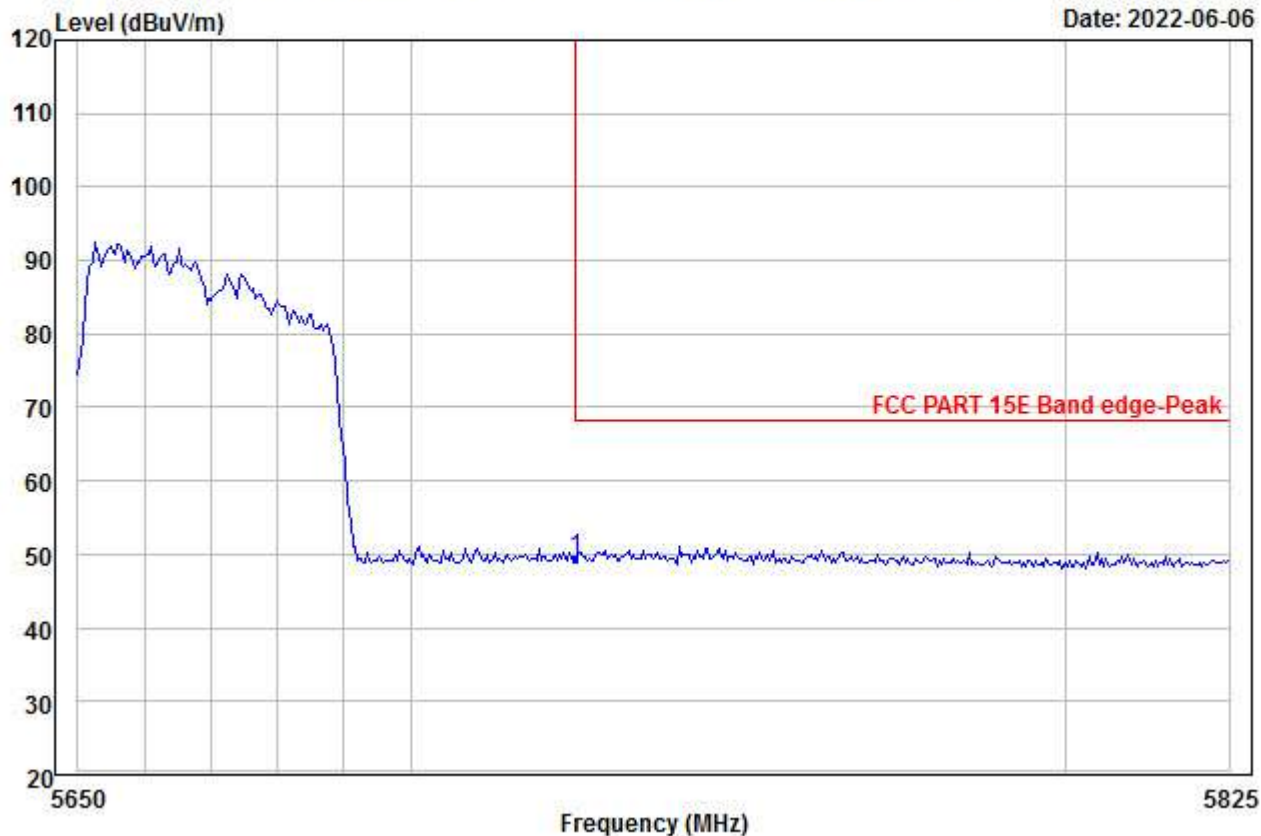


Condition : Vertical
 Temp.(C)/Hum.(%) : 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5670
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5725.000	49.89	35.26	45.57	0.00	9.94	49.52	68.20	-18.68	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00088.EMI

Date: 2022-06-06

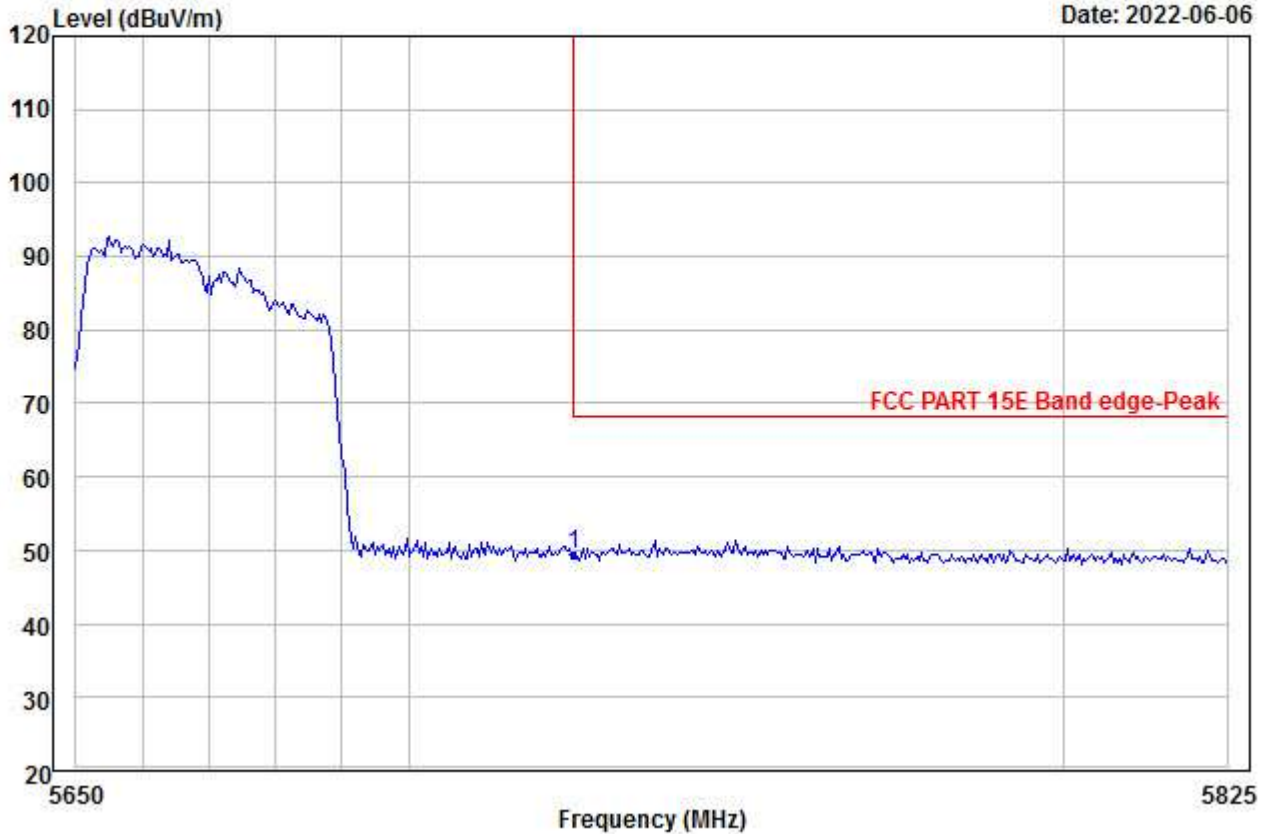


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5670
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5725.000	49.81	35.26	45.57	0.00	9.94	49.44	68.20	-18.76	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00089.EMI

Date: 2022-06-06

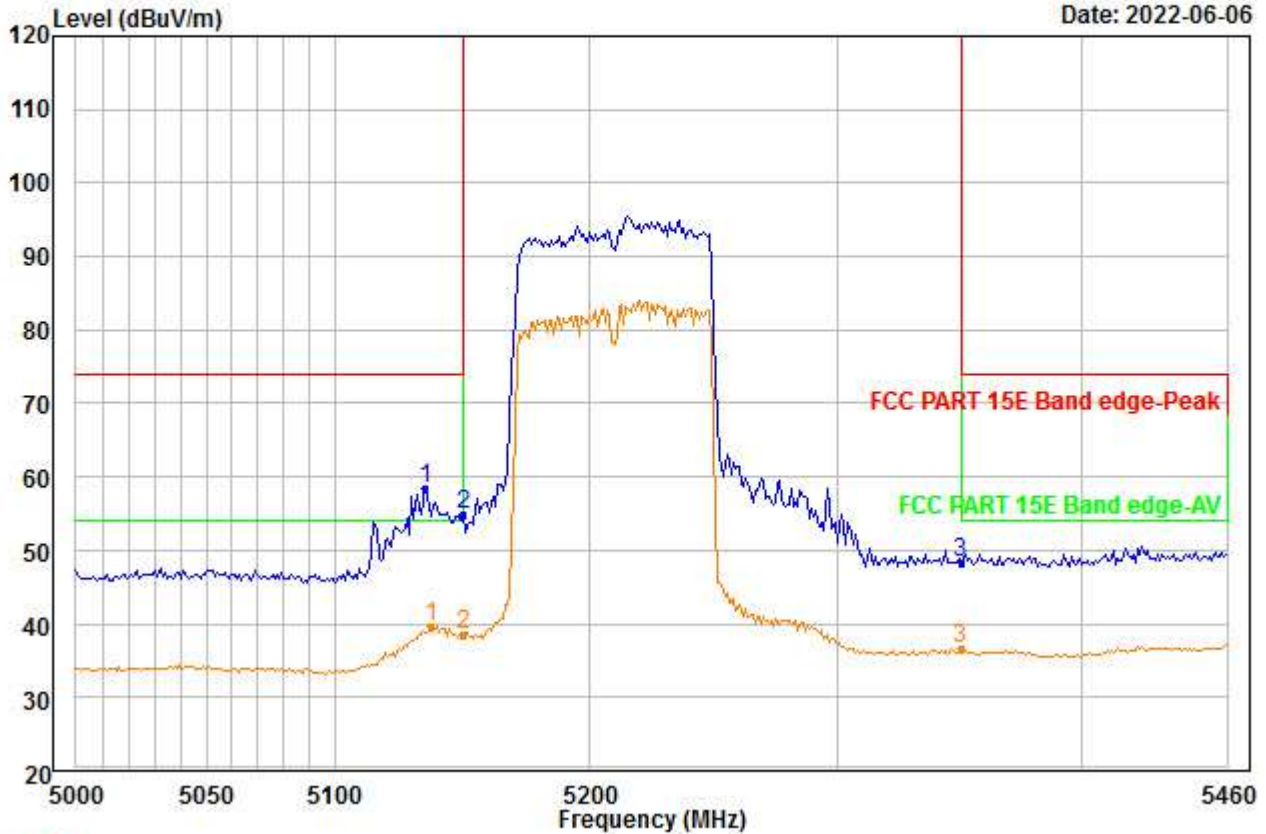


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC80_ANT0+1_5210
Remark :

		Read	Ant	Preamp	Aux	Cable			Limit	Over	APos	TPos	Rema
		Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit			
		MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	PP	5135.511	60.28	34.86	46.36	0.00	9.76	58.54	74.00	-15.46	---	---	Peak
2		5150.000	56.61	34.88	46.33	0.00	9.78	54.94	74.00	-19.06	---	---	Peak
3		5350.000	48.97	35.12	45.97	0.00	10.18	48.30	74.00	-25.70	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00090.EMI

Date: 2022-06-06

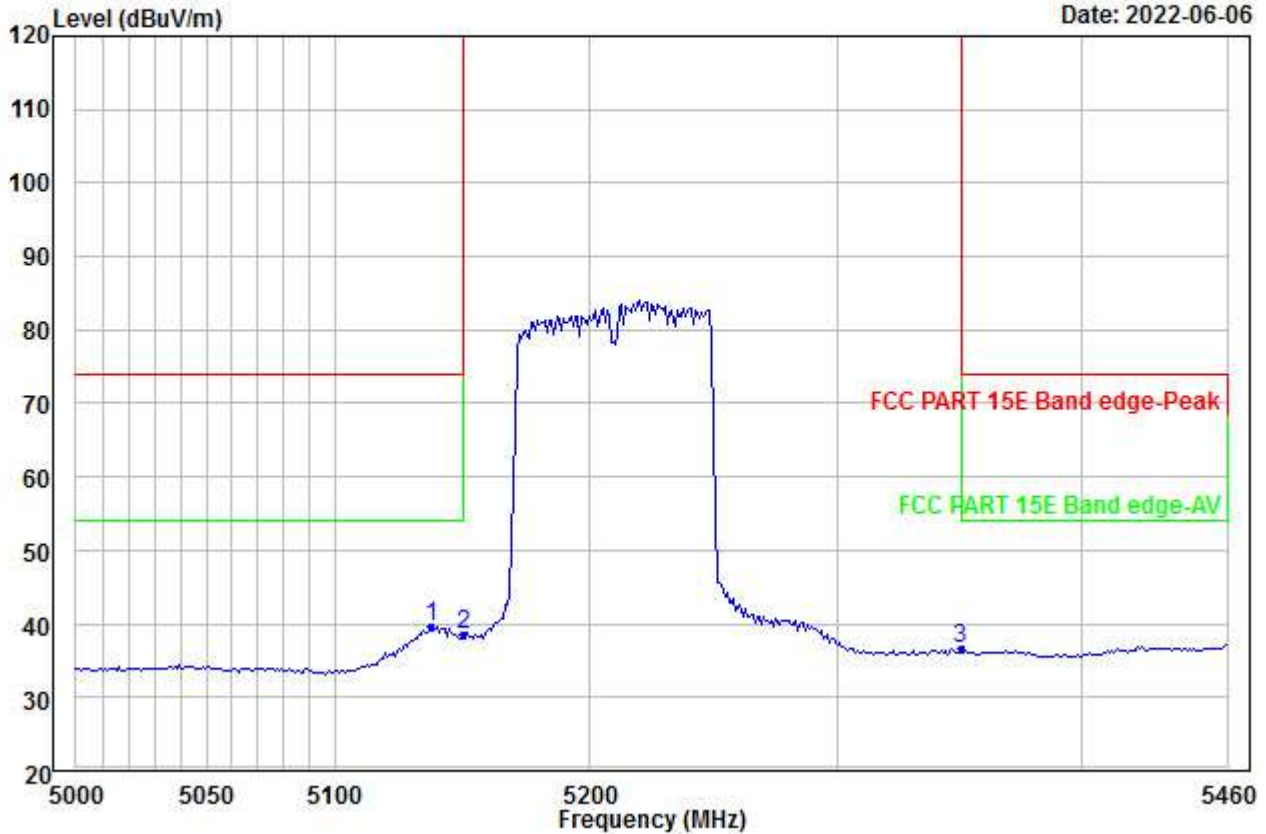


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC80_ANT0+1_5210
Remark :

		Read	Ant	Preamp	Aux	Cable		Limit	Over	APos	TPos	Rema
Freq		Level	Factor	Factor	Factor	Loss	Level	Line	Limit			
MHz		dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	PP 5137.354	41.32	34.86	46.35	0.00	9.77	39.60	54.00	-14.40	---	---	Aver
2	5150.000	40.30	34.88	46.33	0.00	9.78	38.63	54.00	-15.37	---	---	Aver
3	5350.000	37.31	35.12	45.97	0.00	10.18	36.64	54.00	-17.36	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00091.EMI

Date: 2022-06-06

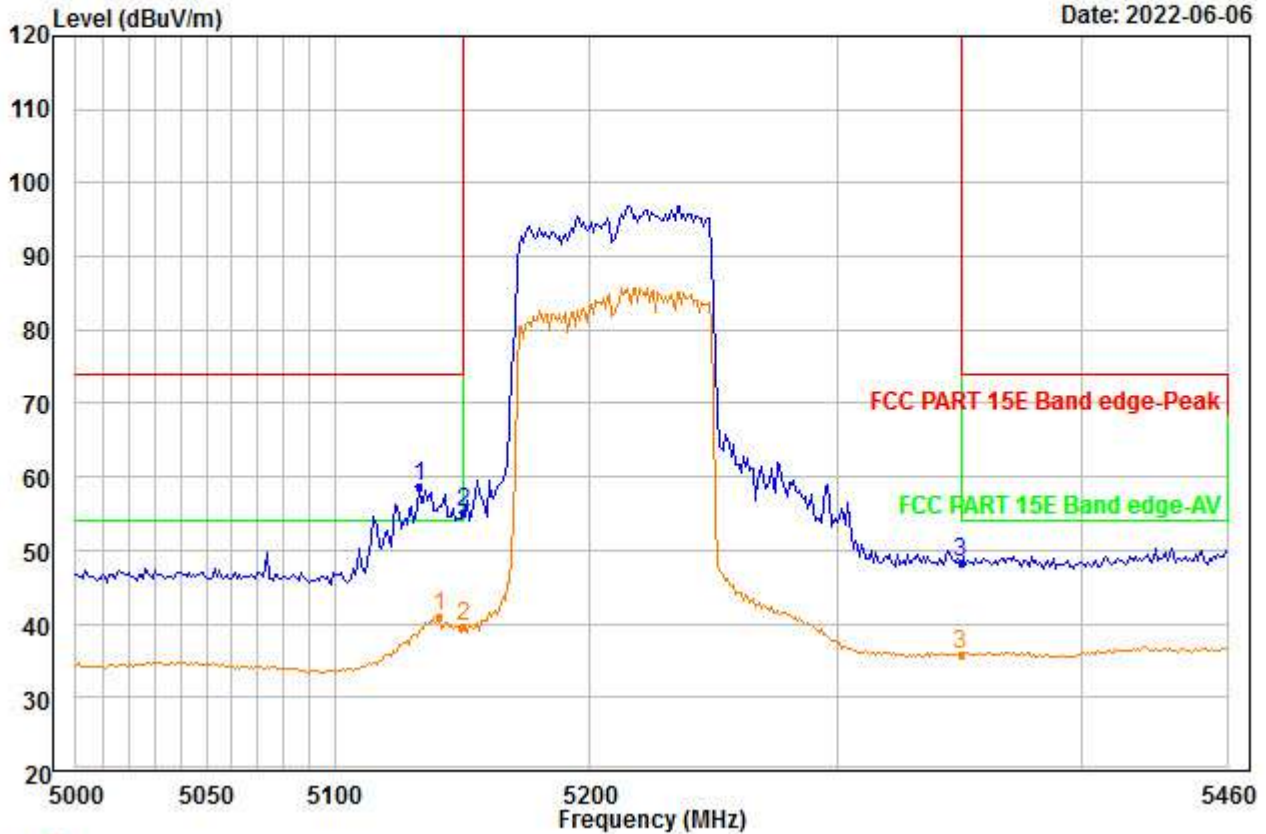


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC80_ANT0+1_5210
Remark :

		Read	Ant	Preamp	Aux	Cable		Limit	Over	APos	TPos	Rema	
		Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit			
		MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	PP	5132.746	60.54	34.86	46.36	0.00	9.76	58.80	74.00	-15.20	---	---	Peak
2		5150.000	56.88	34.88	46.33	0.00	9.78	55.21	74.00	-18.79	---	---	Peak
3		5350.000	49.10	35.12	45.97	0.00	10.18	48.43	74.00	-25.57	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00092.EMI

Date: 2022-06-06

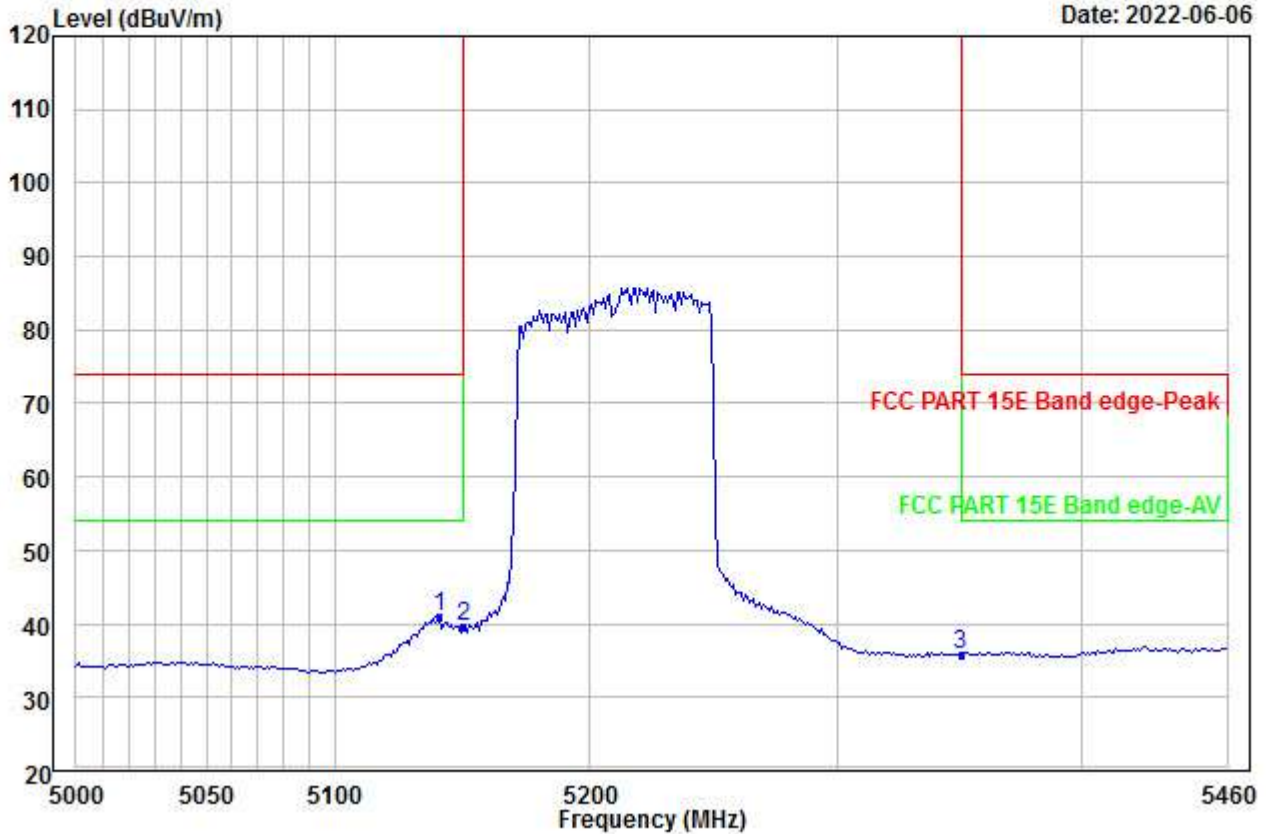


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5210
 Remark :

		Read	Ant	Preamp	Aux	Cable		Limit	Over	APos	TPos	Rema
Freq		Level	Factor	Factor	Factor	Loss	Level	Line	Limit			
MHz		dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	PP 5141.042	42.73	34.87	46.35	0.00	9.77	41.02	54.00	-12.98	---	---	Aver
2	5150.000	41.31	34.88	46.33	0.00	9.78	39.64	54.00	-14.36	---	---	Aver
3	5350.000	36.45	35.12	45.97	0.00	10.18	35.78	54.00	-18.22	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00093.EMI

Date: 2022-06-06

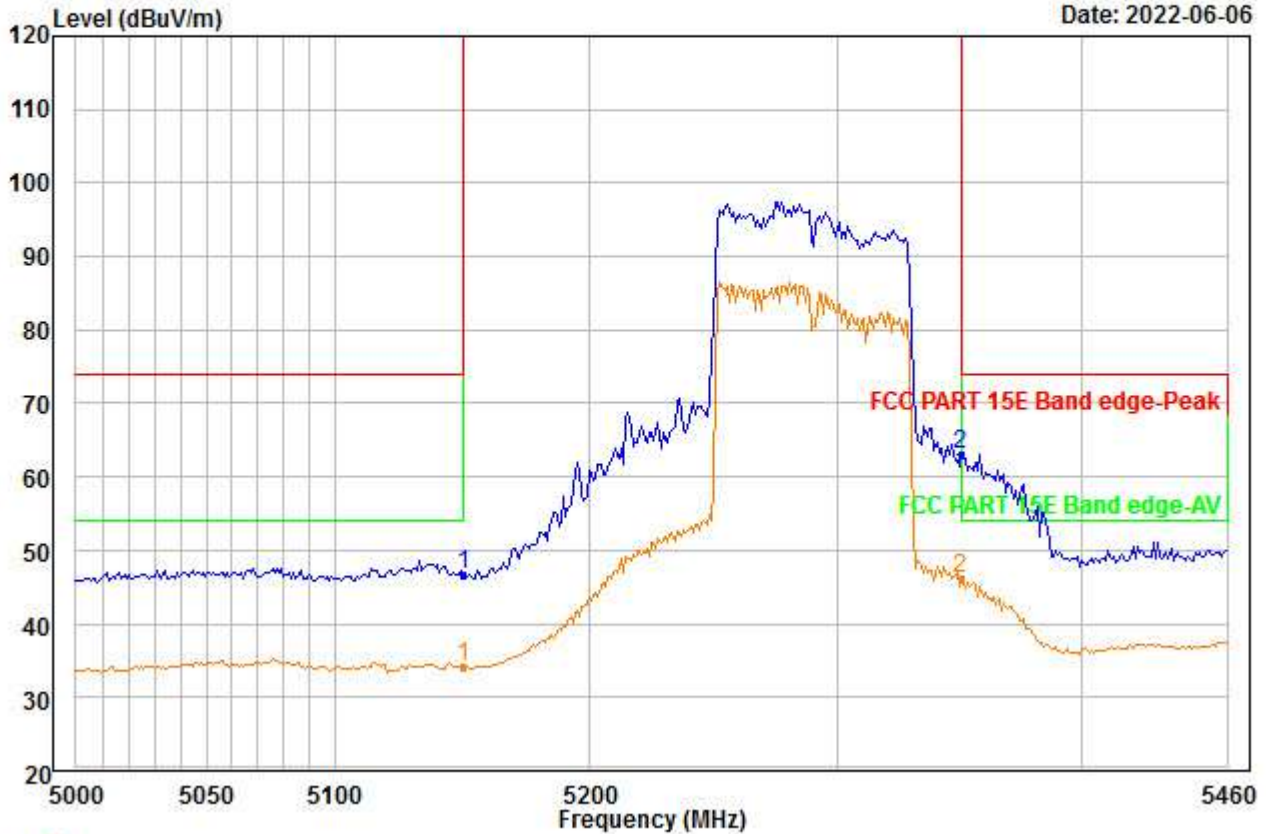


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5290
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5150.000	48.30	34.88	46.33	0.00	9.78	46.63	74.00	-27.37	---	---	Peak
2 PP	5350.000	63.68	35.12	45.97	0.00	10.18	63.01	74.00	-10.99	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00094.EMI

Date: 2022-06-06

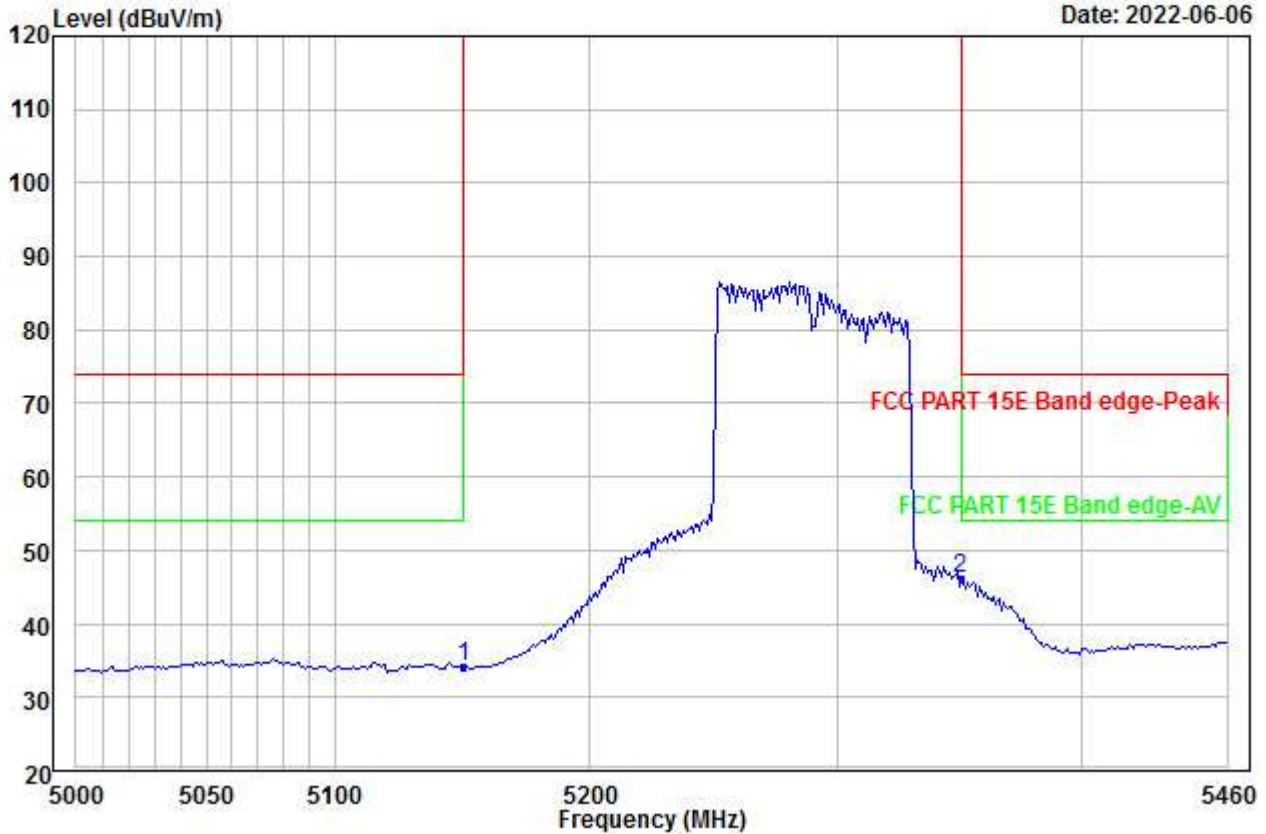


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5290
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5150.000	35.88	34.88	46.33	0.00	9.78	34.21	54.00	-19.79	---	---	Aver
2 PP	5350.000	46.83	35.12	45.97	0.00	10.18	46.16	54.00	-7.84	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00095.EMI

Date: 2022-06-06

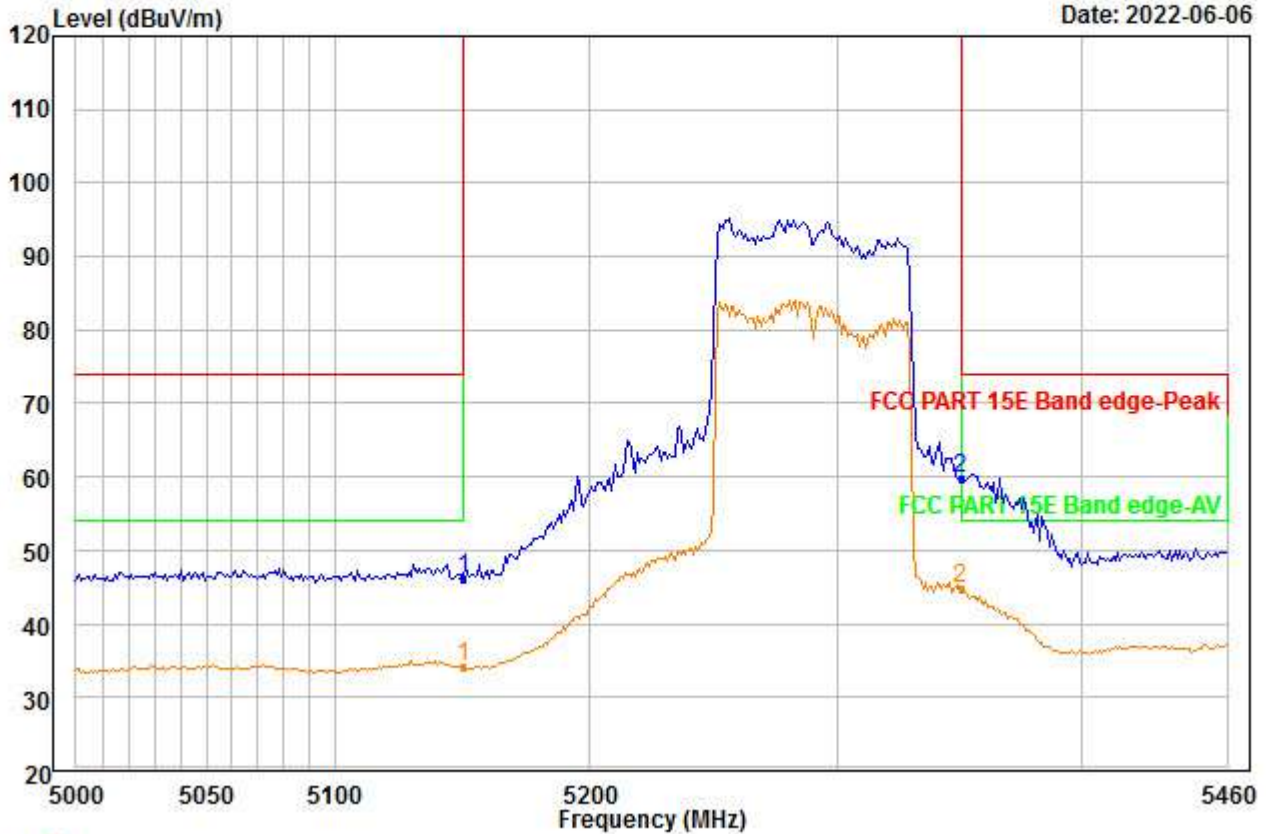


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5290
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5150.000	47.91	34.88	46.33	0.00	9.78	46.24	74.00	-27.76	---	---	Peak
2 PP	5350.000	60.38	35.12	45.97	0.00	10.18	59.71	74.00	-14.29	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00096.EMI

Date: 2022-06-06

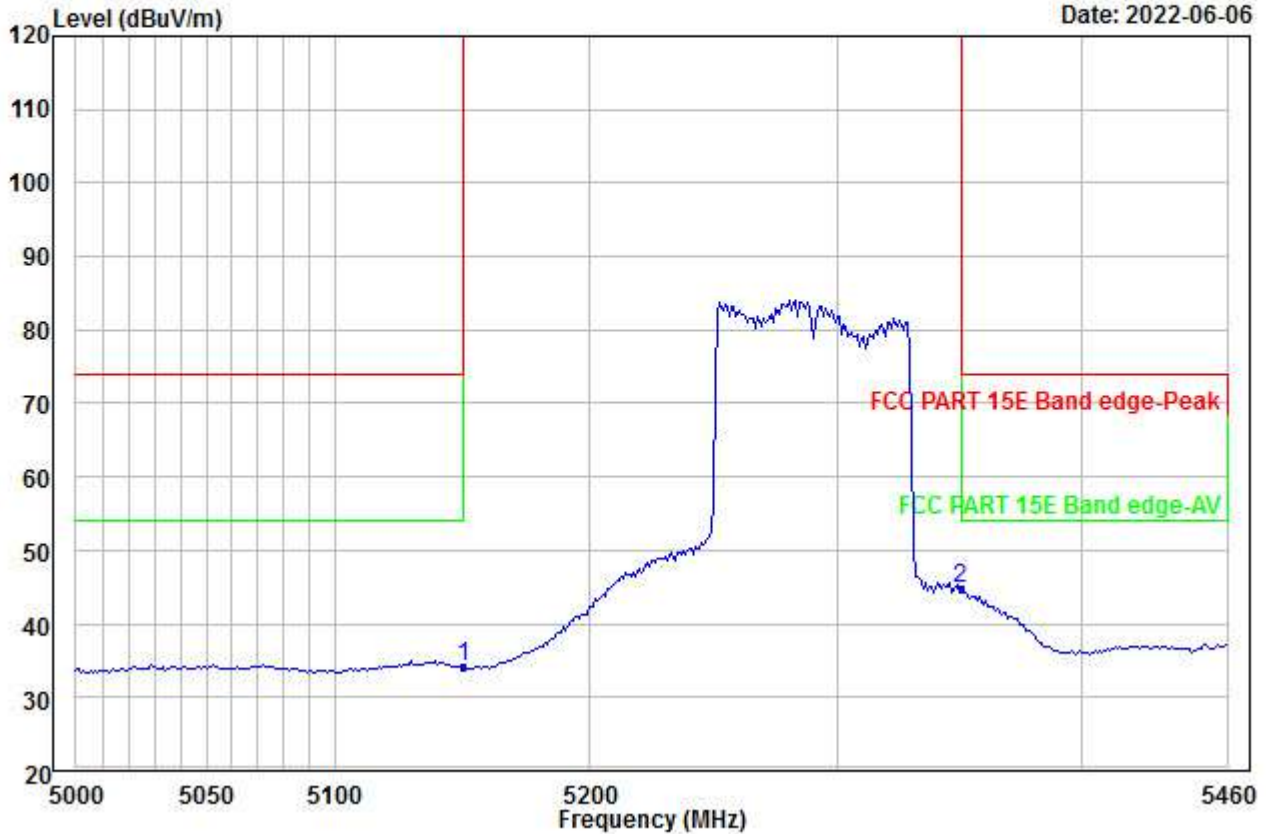


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5290
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5150.000	35.77	34.88	46.33	0.00	9.78	34.10	74.00	-39.90	---	---	Peak
2 PP	5350.000	45.51	35.12	45.97	0.00	10.18	44.84	74.00	-29.16	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00097.EMI

Date: 2022-06-06

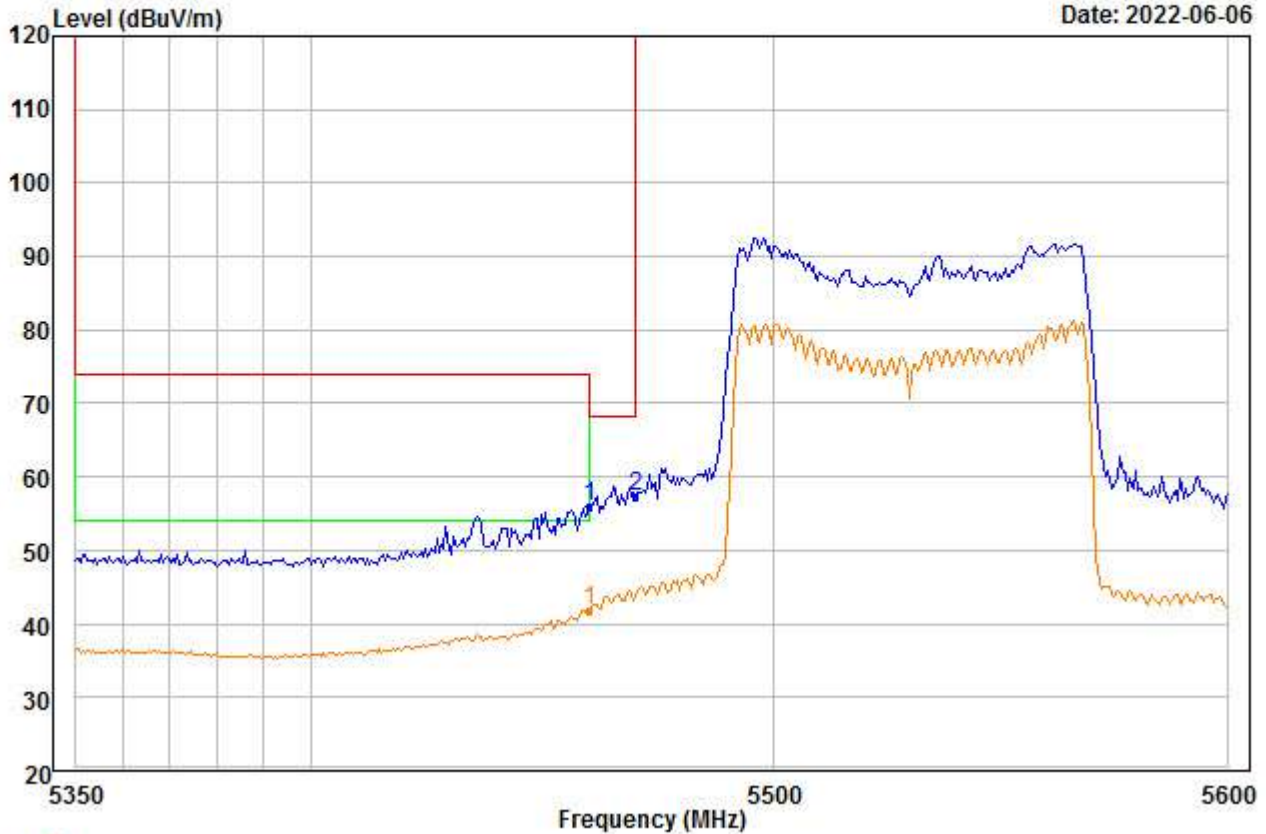


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC80_ANT0+1_5530
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5460.000	55.93	35.25	45.77	0.00	10.44	55.85	68.20	-12.35	---	---	Peak
2 PP	5470.000	57.31	35.26	45.75	0.00	10.47	57.29	68.20	-10.91	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00098.EMI

Date: 2022-06-06

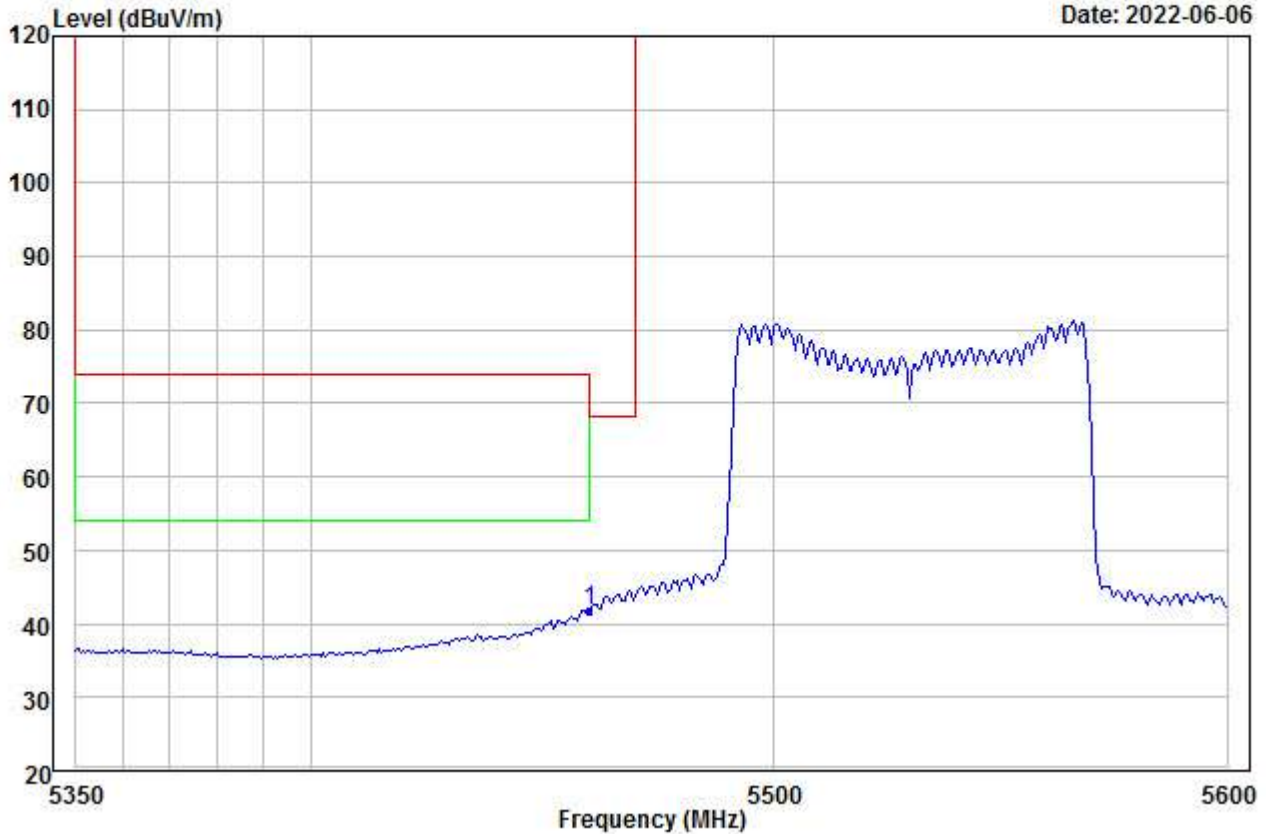


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC80_ANT0+1_5530
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5460.000	41.88	35.25	45.77	0.00	10.44	41.80	54.00	-12.20	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00099.EMI

Date: 2022-06-06

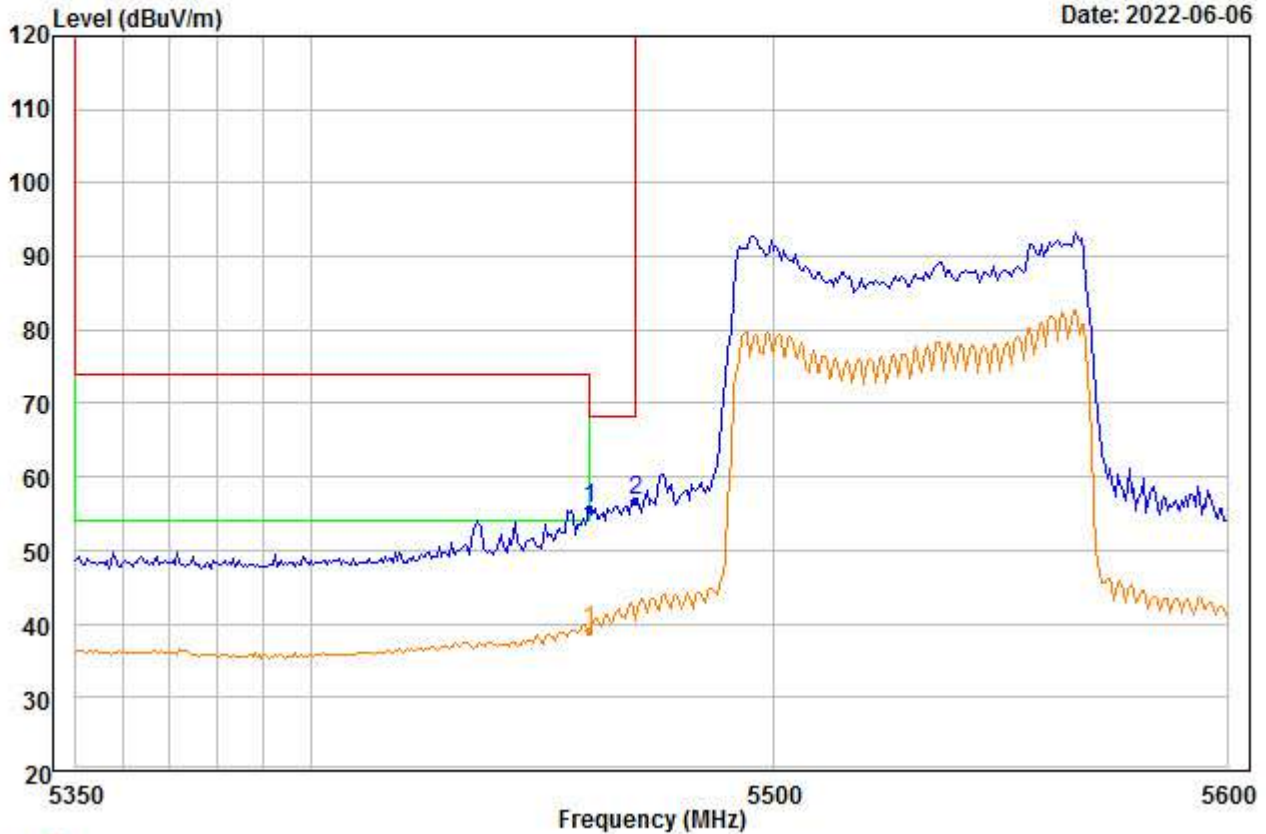


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC80_ANT0+1_5530
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5460.000	55.85	35.25	45.77	0.00	10.44	55.77	68.20	-12.43	---	---	Peak
2 PP	5470.000	56.85	35.26	45.75	0.00	10.47	56.83	68.20	-11.37	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00100.EMI

Date: 2022-06-06

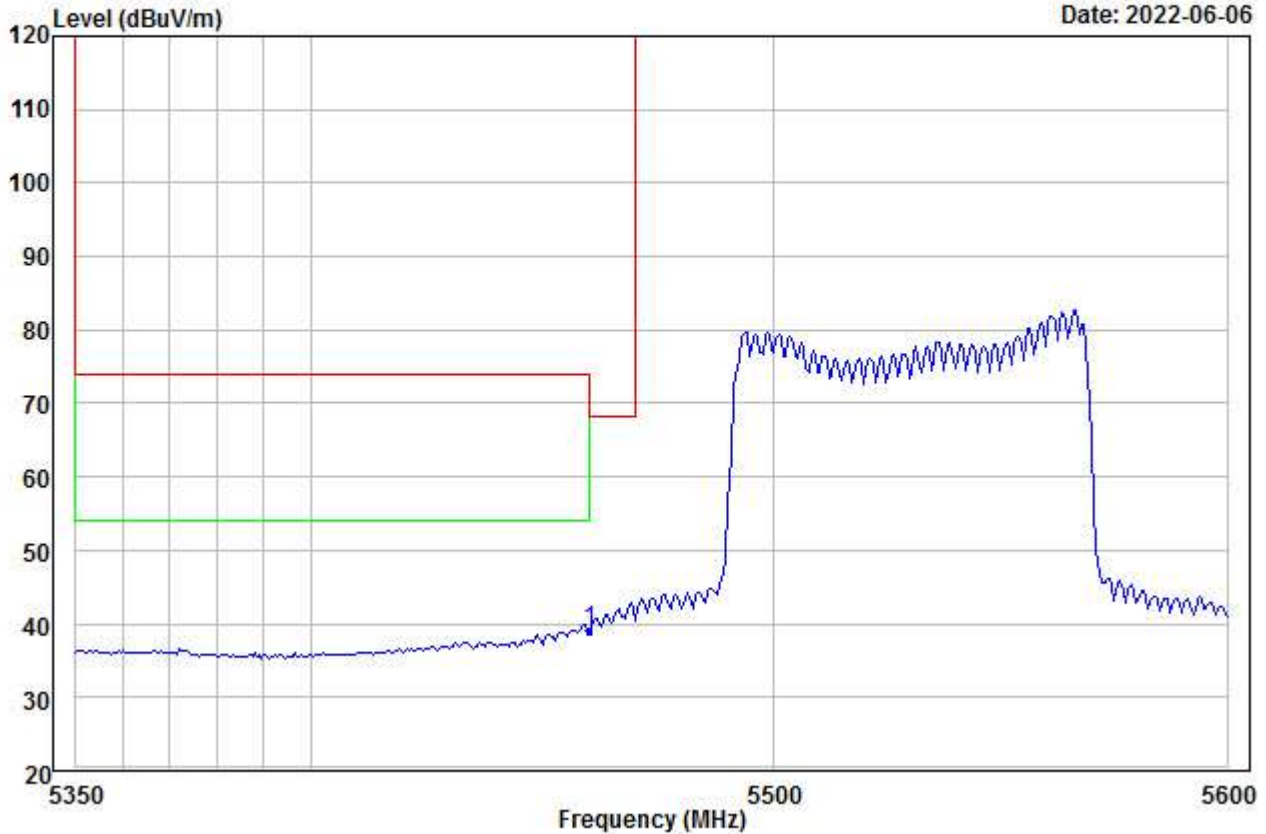


Condition : Vertical
 Temp.(C)/Hum.(%) : 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5530
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5460.000	39.19	35.25	45.77	0.00	10.44	39.11	54.00	-14.89	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00101.EMI

Date: 2022-06-06

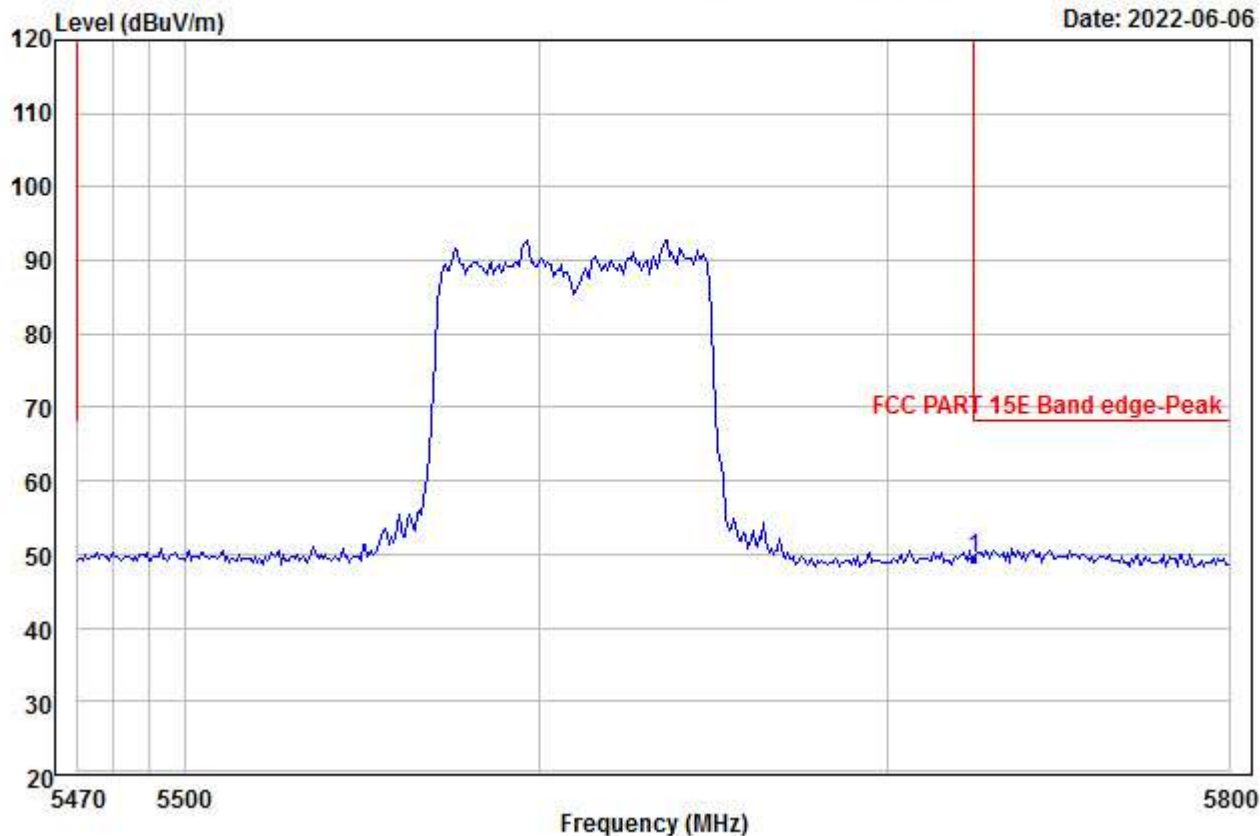


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5610
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5725.000	49.93	35.26	45.57	0.00	9.94	49.56	68.20	-18.64	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00102.EMI

Date: 2022-06-06

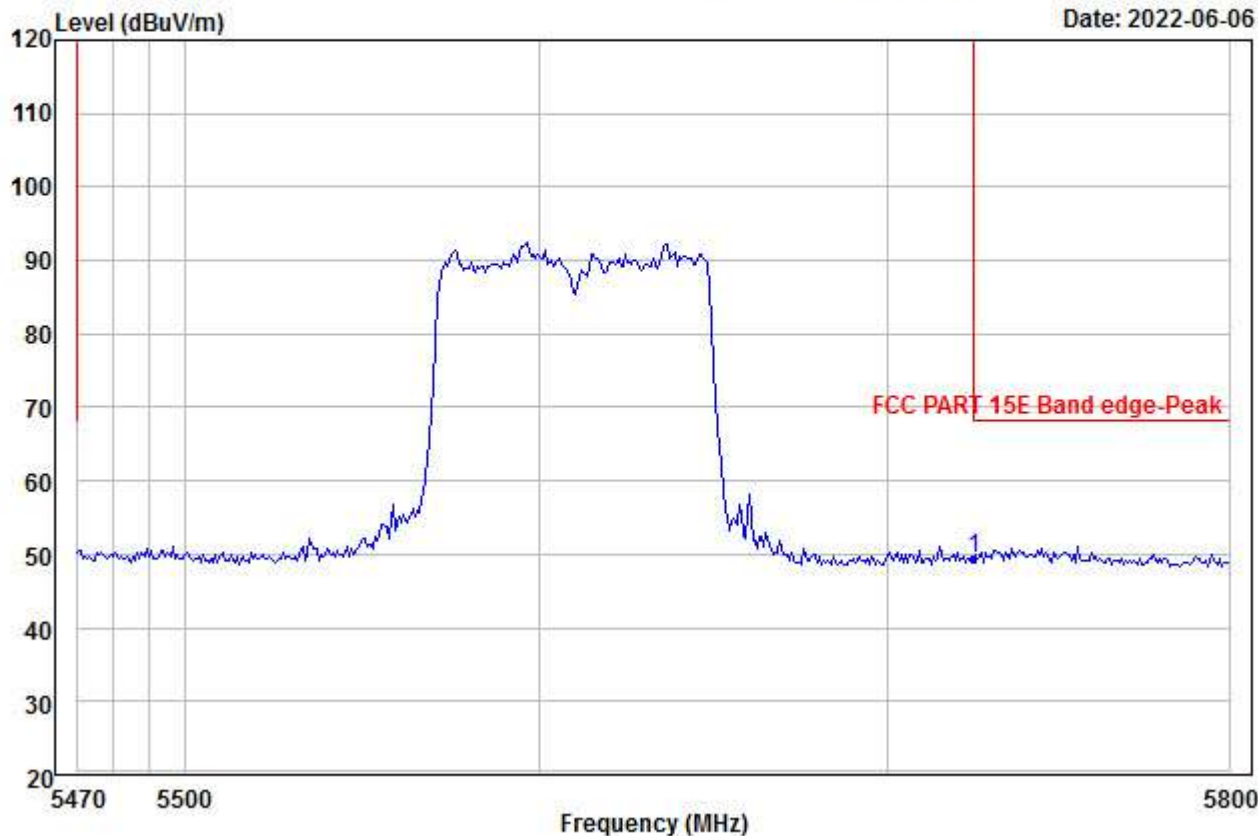


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5610
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5725.000	49.90	35.26	45.57	0.00	9.94	49.53	68.20	-18.67	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00103.EMI

Date: 2022-06-06

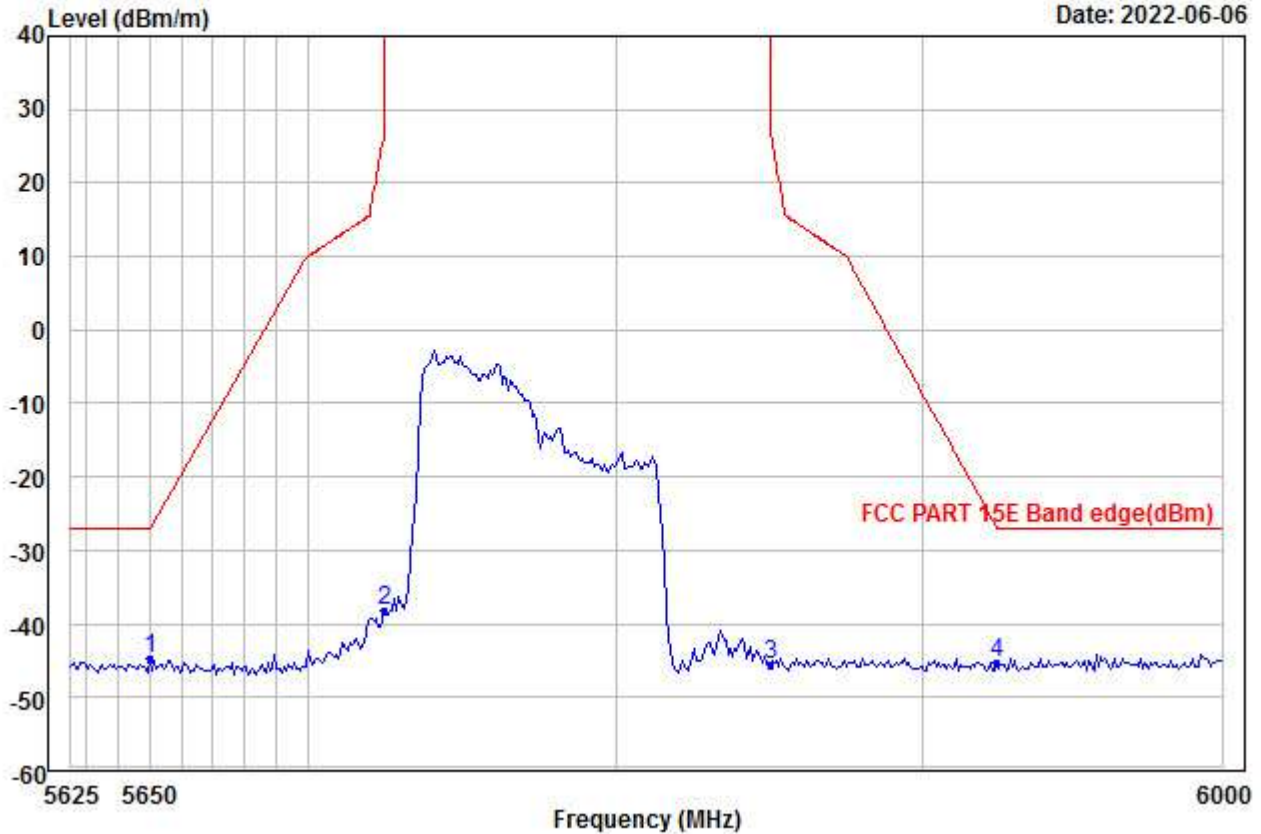


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5775
 Remark :

		Read	Ant	Preamp	Aux	Cable	Level	Limit	Over	APos	TPos	Rem:
	Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit			
	MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1 PP	5650.000	-56.38	35.27	45.61	0.00	21.88	-44.84	-27.00	-17.84	---	---	Peak
2	5725.000	-49.70	35.26	45.57	0.00	21.68	-38.33	27.00	-65.33	---	---	Peak
3	5850.000	-56.66	35.23	45.49	0.00	21.47	-45.45	27.00	-72.45	---	---	Peak
4	5925.000	-56.52	35.22	45.44	0.00	21.44	-45.30	-27.00	-18.30	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00104.EMI

Date: 2022-06-06

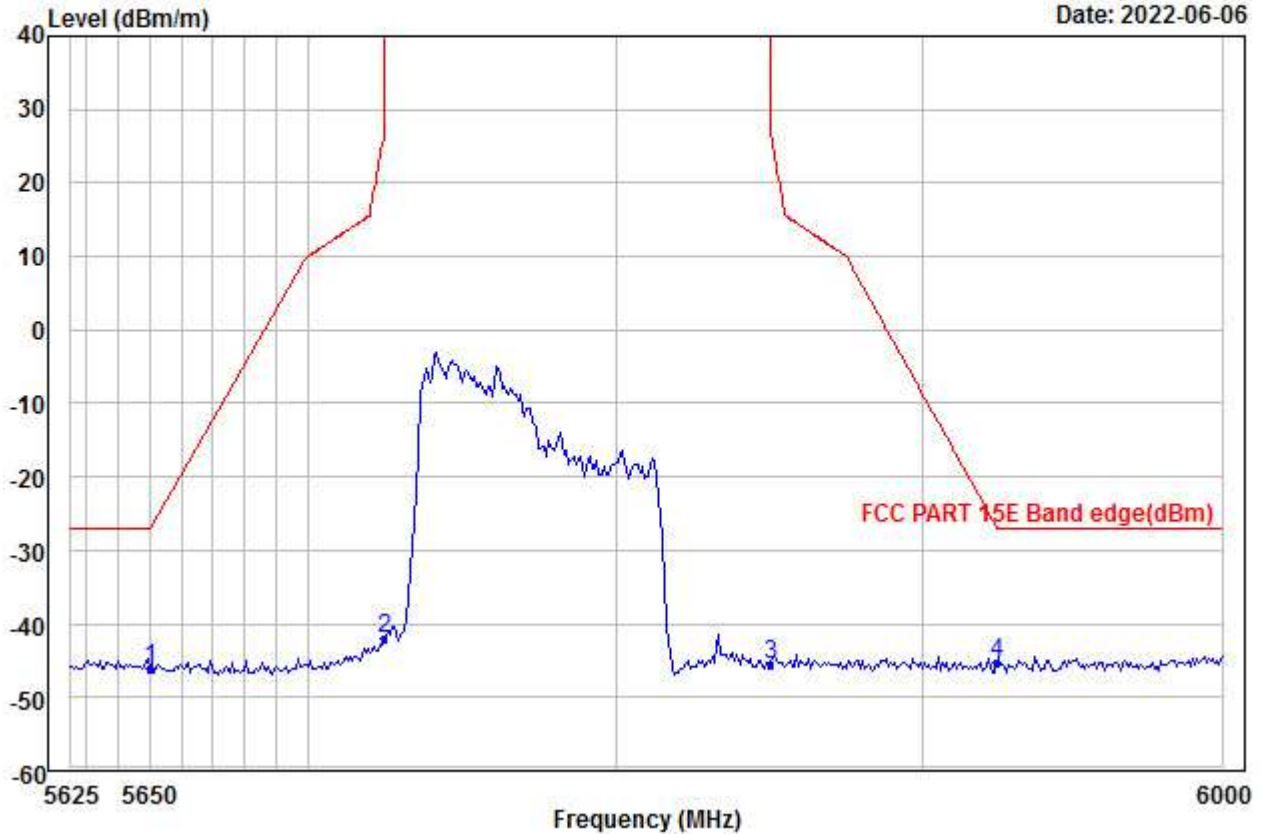


Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC80_ANT0+1_5775
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1	5650.000	-57.56	35.27	45.61	0.00	21.88	-46.02	-27.00	-19.02	---	---	Peak
2	5725.000	-53.29	35.26	45.57	0.00	21.68	-41.92	27.00	-68.92	---	---	Peak
3	5850.000	-56.87	35.23	45.49	0.00	21.47	-45.66	27.00	-72.66	---	---	Peak
4 PP	5925.000	-56.52	35.22	45.44	0.00	21.44	-45.30	-27.00	-18.30	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00105.EMI

Date: 2022-06-06

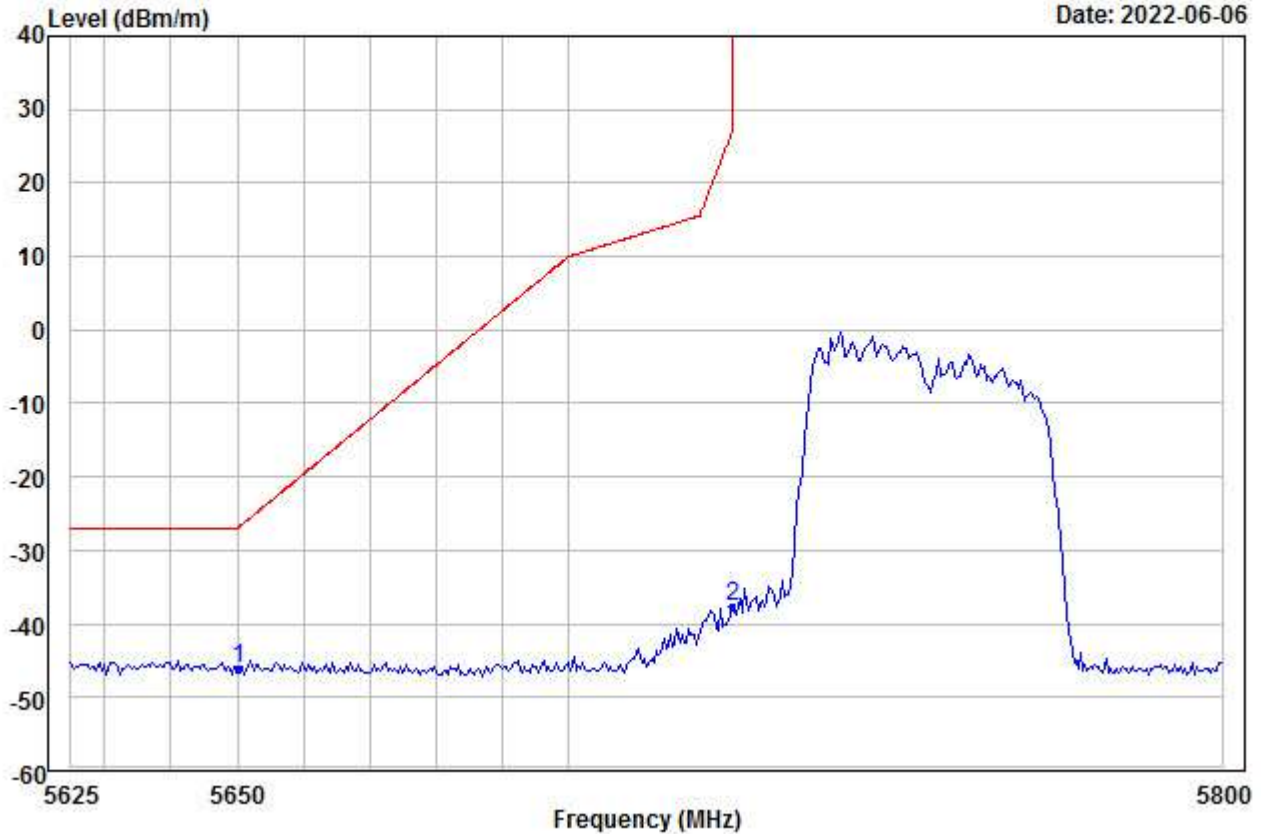


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5775
 Remark :

		Read	Ant	Preamp	Aux	Cable		Limit	Over	APos	TPos	Rema
	Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit			
	MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1 PP	5650.000	-57.51	35.27	45.61	0.00	21.88	-45.97	-27.00	-18.97	---	---	Peak
2	5725.000	-49.00	35.26	45.57	0.00	21.68	-37.63	27.00	-64.63	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00106.EMI

Date: 2022-06-06

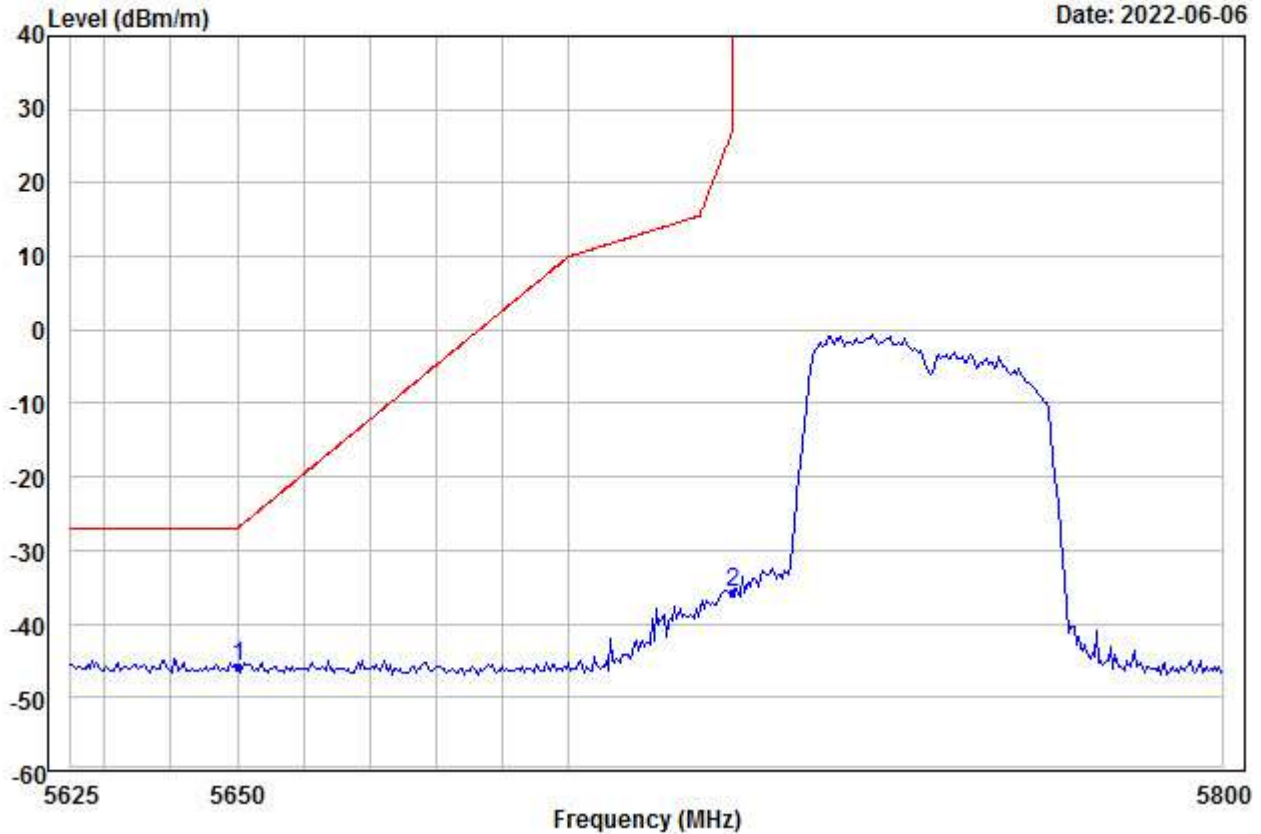


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC40_ANT0+1_5775
Remark :

		Read	Ant	Preamp	Aux	Cable			Limit	Over	APos	TPos	Rema
		Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit			
		MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1	PP	5650.000	-57.31	35.27	45.61	0.00	21.88	-45.77	-27.00	-18.77	---	---	Peak
2		5725.000	-47.09	35.26	45.57	0.00	21.68	-35.72	27.00	-62.72	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00107.EMI

Date: 2022-06-06

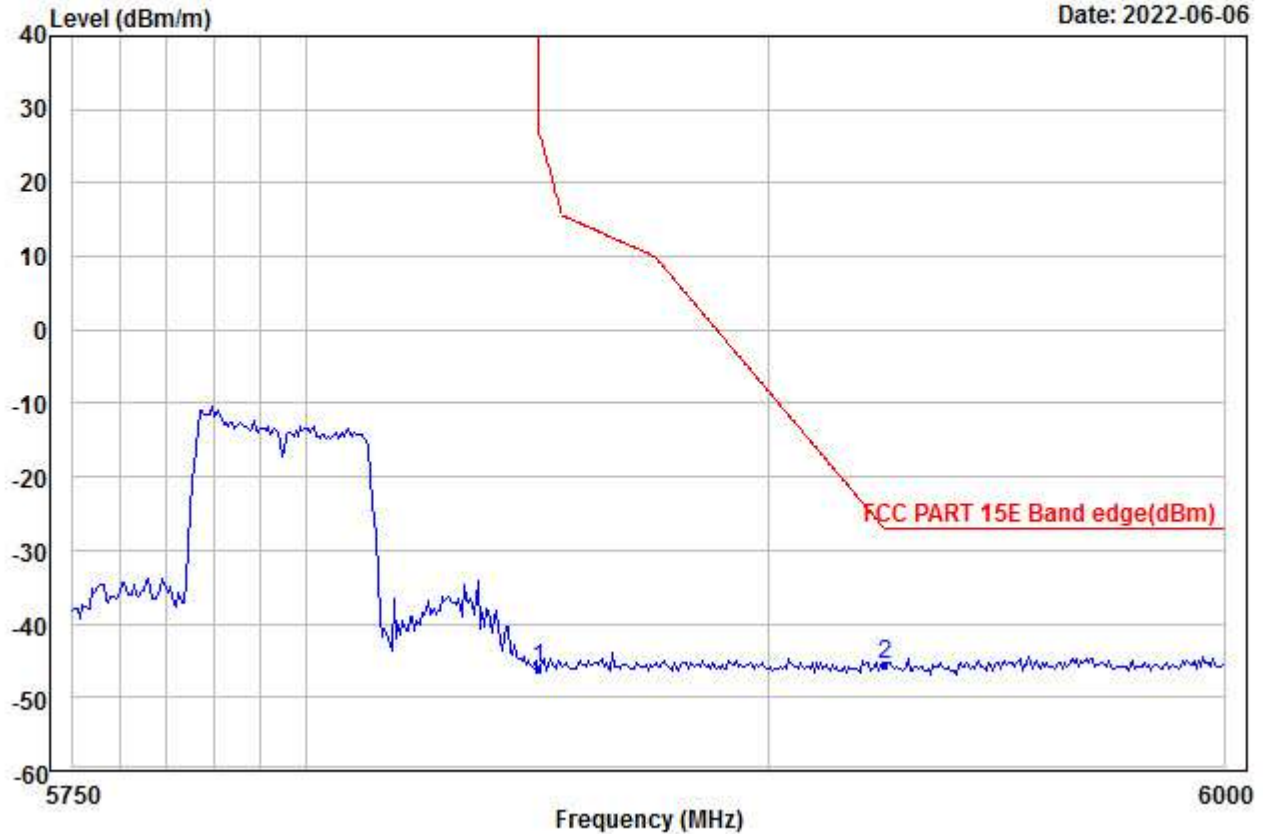


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC40_ANT0+1_5795
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1	5850.000	-57.22	35.23	45.49	0.00	21.47	-46.01	27.00	-73.01	---	---	Peak
2 PP	5925.000	-56.88	35.22	45.44	0.00	21.44	-45.66	-27.00	-18.66	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00108.EMI

Date: 2022-06-06

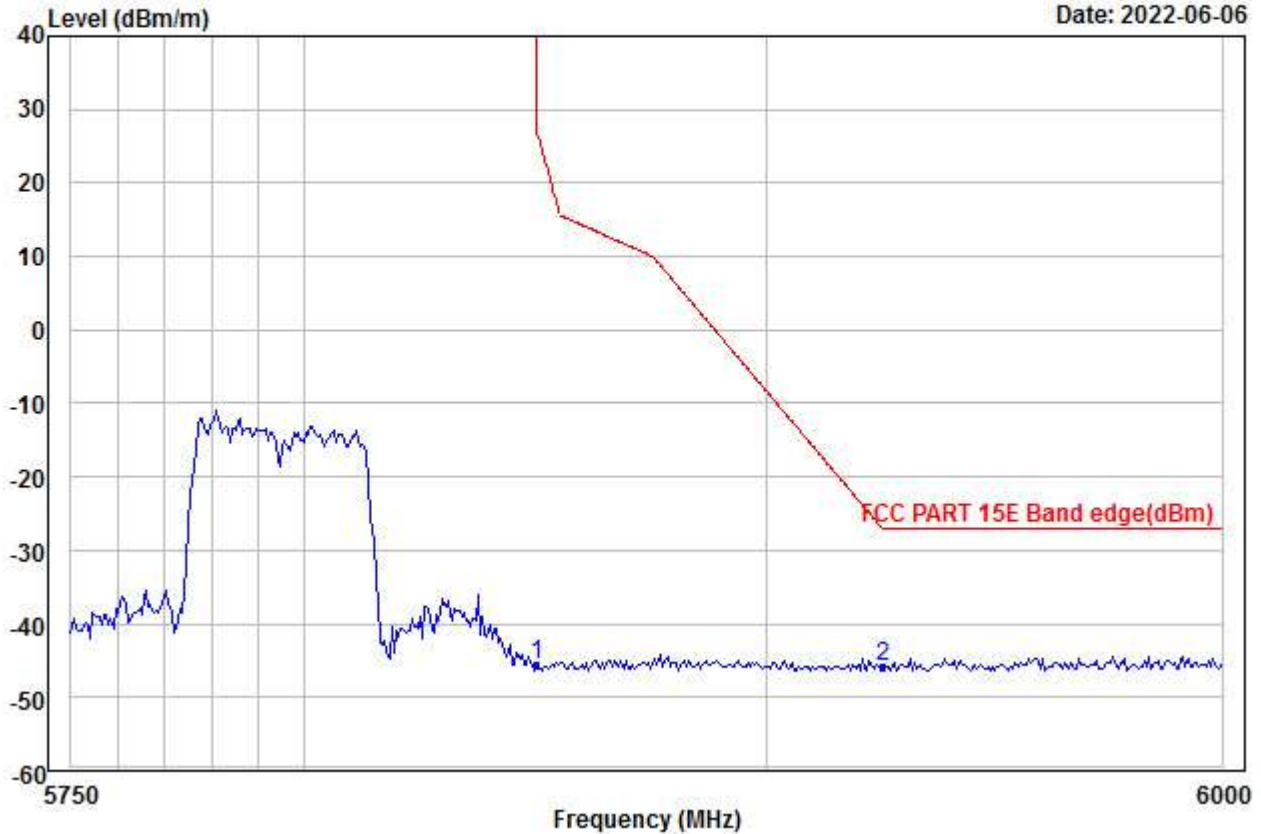


Condition : Vertical
Temp.(C)/Hum.(%) : 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC40_ANT0+1_5795
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1	5850.000	-56.73	35.23	45.49	0.00	21.47	-45.52	27.00	-72.52	---	---	Peak
2 PP	5925.000	-56.93	35.22	45.44	0.00	21.44	-45.71	-27.00	-18.71	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00109.EMI

Date: 2022-06-06

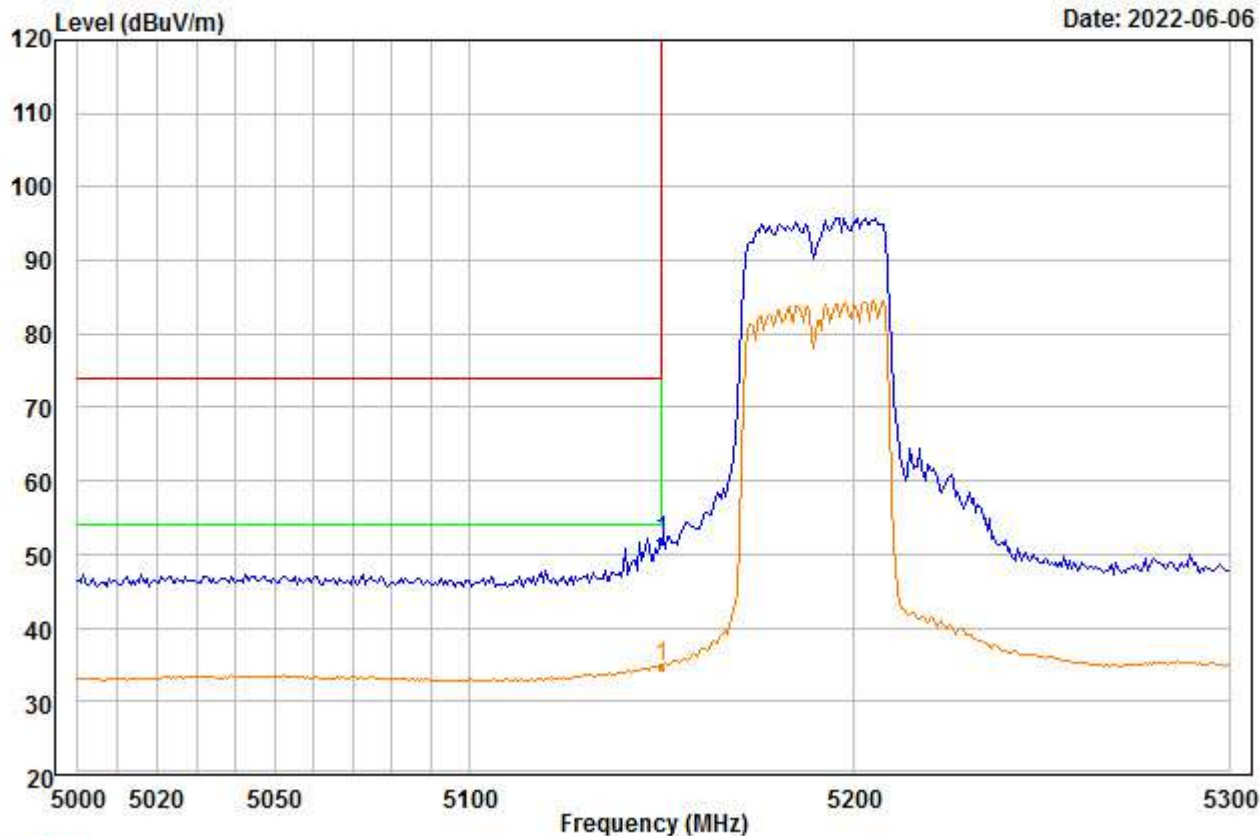

Trace: 1


Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC40_ANT0+1_5190
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit		Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5150.000	53.48	34.88	46.33	0.00	9.78	51.81	74.00	-22.19	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00110.EMI

Date: 2022-06-06

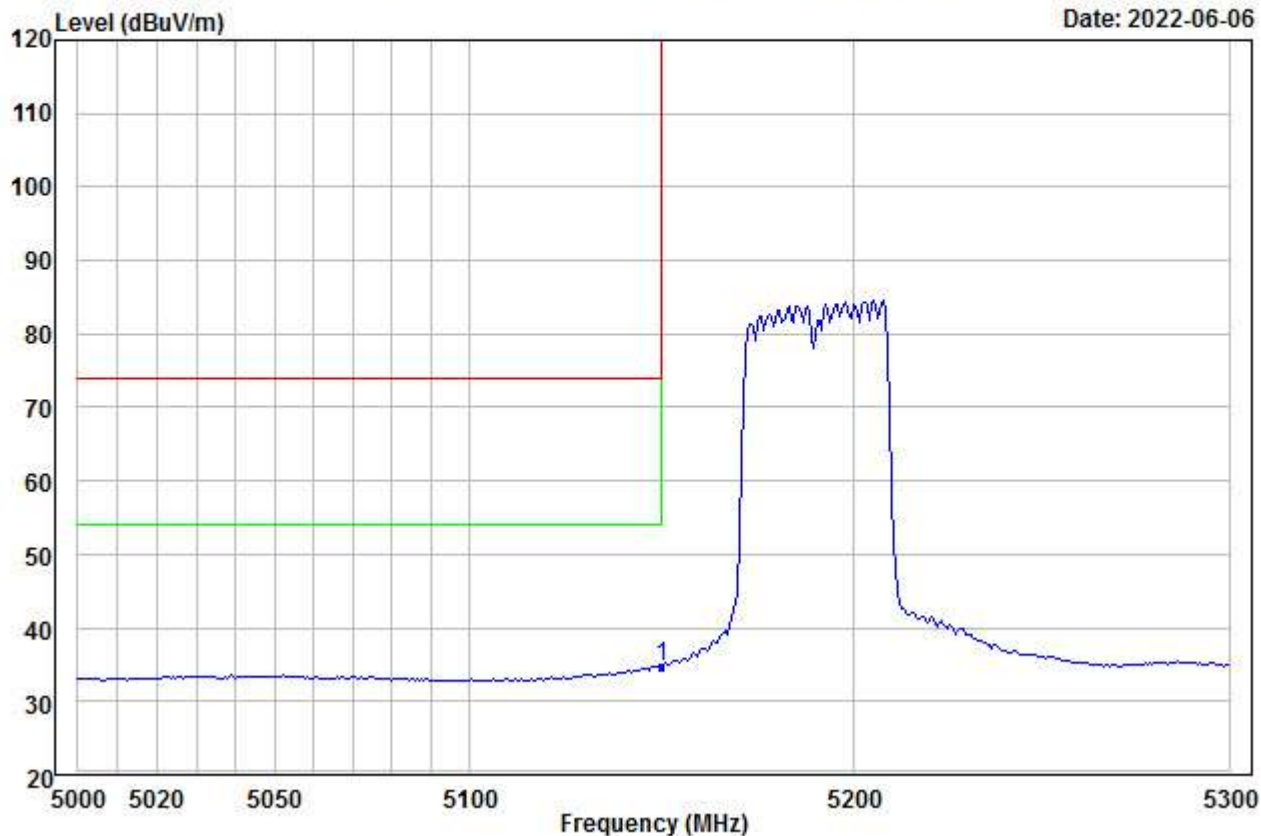


Condition : Vertical
 Temp.(C)/Hum.(%) : 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5190
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5150.000	36.25	34.88	46.33	0.00	9.78	34.58	54.00	-19.42	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00111.EMI

Date: 2022-06-06

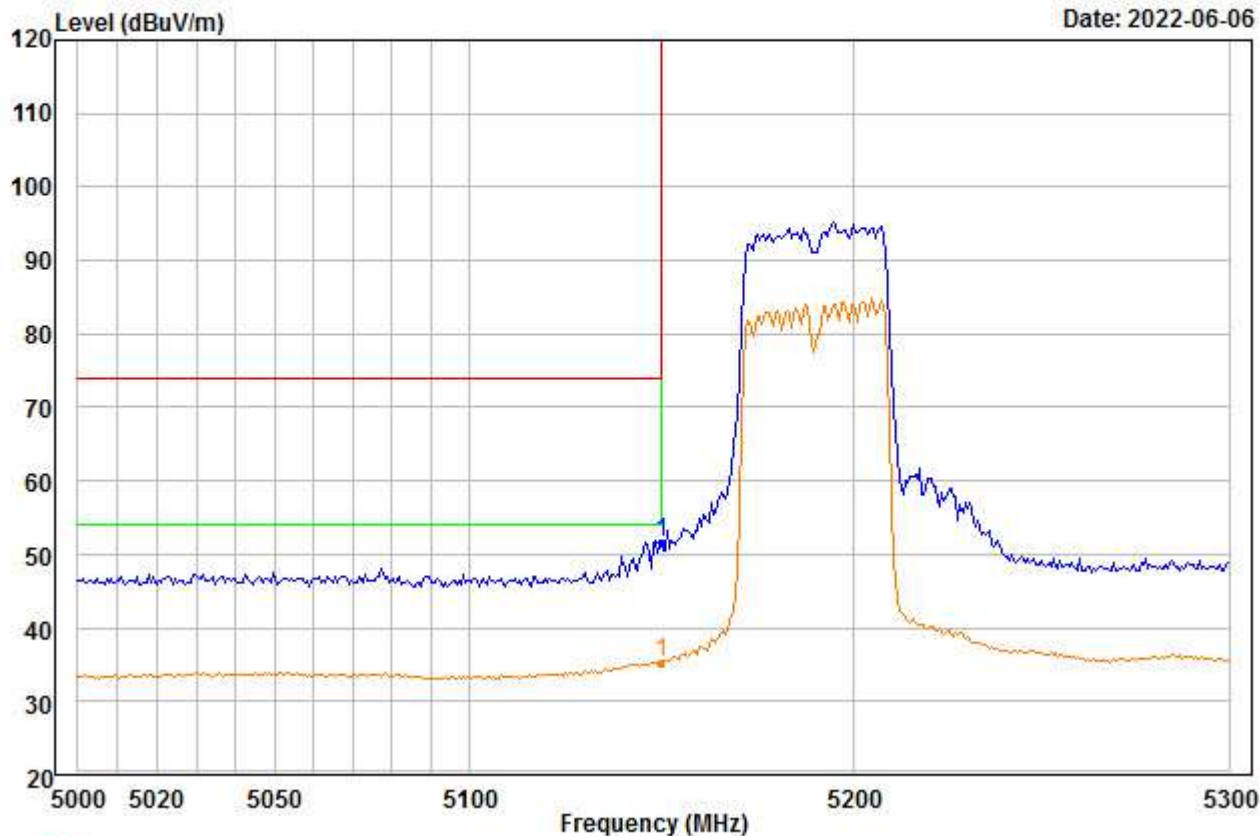

Trace: 1


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC40_ANT0+1_5190
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5150.000	53.16	34.88	46.33	0.00	9.78	51.49	74.00	-22.51	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00112.EMI

Date: 2022-06-06

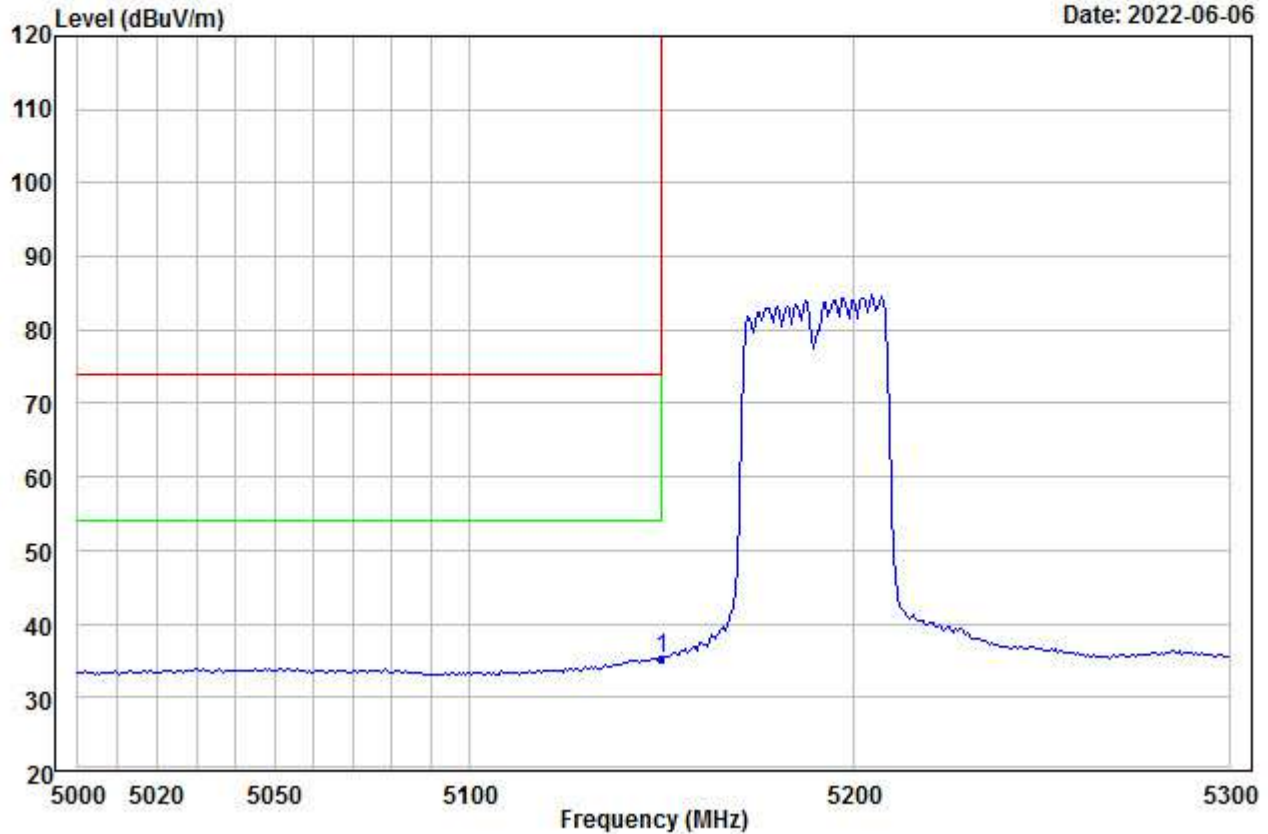

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC40_ANT0+1_5190
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP	5150.000	36.93	34.88	46.33	0.00	9.78	35.26	54.00	-18.74	---	---	Aver