

RADIO TEST REPORT

Test Report No. 15510558H-A-R1

Customer	ALPS ALPINE CO., LTD.
Description of EUT	Hand Unit
Model Number of EUT	TWB1G0655
FCC ID	CWTWB1G0655
Test Regulation	FCC Part 15 Subpart C
Test Result	Complied
Issue Date	March 26, 2025
Remarks	-

Representative test engineerJunki Nagatomi
Engineer**Approved by**Shinichi Miyazono
Leader

CERTIFICATE 5107.02

- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.
- ☒ There is no testing item of "Non-accreditation".

Report Cover Page - Form-ULID-003532 (DCS:13-EM-F0429) Issue# 24.0

ANNOUNCEMENT

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested. (Laboratory was not involved in sampling.)
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided by the customer for this report is identified in SECTION 1.
- The laboratory is not responsible for information provided by the customer which can impact the validity of the results.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

REVISION HISTORY

Original Test Report No. 15510558H-A

This report is a revised version of 15510558H-A. 15510558H-A is replaced with this report.

Revision	Test Report No.	Date	Page Revised Contents
- (Original)	15510558H-A	December 12, 2024	-
1	15510558H-A-R1	March 26, 2025	2.2 Radio Specification Delete Antenna Gain of UWB

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	ICES	Interference-Causing Equipment Standard
AC	Alternating Current	IEC	International Electrotechnical Commission
AFH	Adaptive Frequency Hopping	IEEE	Institute of Electrical and Electronics Engineers
AM	Amplitude Modulation	IF	Intermediate Frequency
Amp, AMP	Amplifier	ILAC	International Laboratory Accreditation Conference
ANSI	American National Standards Institute	ISED	Innovation, Science and Economic Development Canada
Ant, ANT	Antenna	ISO	International Organization for Standardization
AP	Access Point	JAB	Japan Accreditation Board
ASK	Amplitude Shift Keying	LAN	Local Area Network
Atten., ATT	Attenuator	LIMS	Laboratory Information Management System
AV	Average	MCS	Modulation and Coding Scheme
BPSK	Binary Phase-Shift Keying	MRA	Mutual Recognition Arrangement
BR	Bluetooth Basic Rate	N/A	Not Applicable
BT	Bluetooth	NIST	National Institute of Standards and Technology
BT LE	Bluetooth Low Energy	NS	No signal detect.
BW	BandWidth	NSA	Normalized Site Attenuation
Cal Int	Calibration Interval	NVLAP	National Voluntary Laboratory Accreditation Program
CCK	Complementary Code Keying	OBW	Occupied Band Width
Ch., CH	Channel	OFDM	Orthogonal Frequency Division Multiplexing
CISPR	Comite International Special des Perturbations Radioelectriques	P/M	Power meter
CW	Continuous Wave	PCB	Printed Circuit Board
DBPSK	Differential BPSK	PER	Packet Error Rate
DC	Direct Current	PHY	Physical Layer
D-factor	Distance factor	PK	Peak
DFS	Dynamic Frequency Selection	PN	Pseudo random Noise
DQPSK	Differential QPSK	PRBS	Pseudo-Random Bit Sequence
DSSS	Direct Sequence Spread Spectrum	PSD	Power Spectral Density
EDR	Enhanced Data Rate	QAM	Quadrature Amplitude Modulation
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	QP	Quasi-Peak
EMC	ElectroMagnetic Compatibility	QPSK	Quadri-Phase Shift Keying
EMI	ElectroMagnetic Interference	RBW	Resolution Band Width
EN	European Norm	RDS	Radio Data System
ERP, e.r.p.	Effective Radiated Power	RE	Radio Equipment
EU	European Union	RF	Radio Frequency
EUT	Equipment Under Test	RMS	Root Mean Square
Fac.	Factor	RSS	Radio Standards Specifications
FCC	Federal Communications Commission	Rx	Receiving
FHSS	Frequency Hopping Spread Spectrum	SA, S/A	Spectrum Analyzer
FM	Frequency Modulation	SG	Signal Generator
Freq.	Frequency	SVSWR	Site-Voltage Standing Wave Ratio
FSK	Frequency Shift Keying	TR	Test Receiver
GFSK	Gaussian Frequency-Shift Keying	Tx	Transmitting
GNSS	Global Navigation Satellite System	VBW	Video BandWidth
GPS	Global Positioning System	Vert.	Vertical
Hori.	Horizontal	WLAN	Wireless LAN

CONTENTS	PAGE
SECTION 1: Customer Information	5
SECTION 2: Equipment Under Test (EUT).....	5
SECTION 3: Test Specification, Procedures & Results	7
SECTION 4: Operation of EUT during testing	10
SECTION 5: Radiated Spurious Emission.....	12
SECTION 6: Automatically deactivate	14
SECTION 7: -20 dB Bandwidth and 99% emission bandwidth	14
SECTION 8: Average Output Power	14
APPENDIX 1: Test Data	15
Automatically deactivate	15
Average Output Power.....	16
Radiated Emission (Fundamental and Spurious Emission)	17
-20 dB Bandwidth / 99% emission bandwidth.....	19
APPENDIX 2: Test Instruments	20
APPENDIX 3: Photographs of Test Setup	21
Radiated Spurious Emission.....	21
Worst Case Position	23
Average Output Power.....	25

SECTION 1: Customer Information

Company Name	ALPS ALPINE CO., LTD.
Address	6-3-36, Furukawanakazato, Osaki-city, Miyagi-pref, 989-6181, Japan
Telephone Number	+81-229-23-5111
Contact Person	Yuji Ouchi

The information provided by the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer Information
- SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
- SECTION 4: Operation of EUT during testing

SECTION 2: Equipment Under Test (EUT)

2.1 Identification of EUT

Description	Hand Unit
Model Number	TWB1G0655
Serial Number	Refer to SECTION 4.2
Condition	Engineering prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	No Modification by the test lab
Receipt Date	September 29 and October 23, 2024
Test Date	October 24 and November 7, 2024

2.2 Product Description

General Specification

Rating	DC 3 V
Operating temperature	-20 deg. C to 60 deg. C

Radio Specification

[Transmitter]

Equipment Type	Transmitter
Frequency of Operation	433.92 MHz
Type of Modulation	FSK

[UWB]

Equipment Type	Transceiver
Frequency of Operation	7987.2 MHz (7737.6 MHz to 8236.8 MHz) (ch9)
Type of Modulation	BPM-BPSK and BPSK

[LF receiver]

Equipment Type	Receiver
Frequency of Operation	125 kHz

*The EUT has following key variation:

TWB1G0655	2-button: 2KEY 3-button: 3KEY-1, 3KEY-2 4-button: 4KEY-1, 4KEY-2 5-button: 5KEY-1, 5KEY-2 6-button: 6KEY-1, 6KEY-2 7-button: 7KEY
-----------	--

The differences of tested model and variation models are only the number of switch and design.
They are not influence for RF performance.

Therefore the test was performed with the representative 5-button type (5KEY-1).

SECTION 3: Test Specification, Procedures & Results

3.1 Test Specification

Test Specification	FCC Part 15 Subpart C The latest version on the first day of the testing period
Title	FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators Section 15.231 Periodic operation in the band 40.66-40.70 MHz and above 70 MHz.

3.2 Procedures and Results

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Conducted emission	FCC: ANSI C63.10:2013 6 Standard test methods ISED: RSS-Gen 8.8	FCC: Section 15.207 ISED: RSS-Gen 8.8	N/A	N/A	*1)
Automatically Deactivate	FCC: ANSI C63.10:2013 6 Standard test methods ISED: -	FCC: Section 15.231(a)(1) ISED: RSS-210 A1.2	N/A	Complied	Radiated
Electric Field Strength of Fundamental Emission	FCC: ANSI C63.10:2013 6 Standard test methods ISED: RSS-Gen 6.12	FCC: Section 15.231(b) ISED: RSS-210 A1.3	3.5 dB 433.920 MHz Vertical AV	Complied	Radiated
Electric Field Strength of Spurious Emission	FCC: ANSI C63.10:2013 6 Standard test methods ISED: RSS-Gen 6.13	FCC: Section 15.205 Section 15.209 Section 15.231(b) ISED: RSS-210 A1.3 RSS-Gen 8.9	13.8 dB 1301.760 MHz Vertical AV	Complied	Radiated
-20 dB Bandwidth	FCC: ANSI C63.10:2013 6 Standard test methods ISED: -	FCC: Section 15.231(c) ISED: Reference data	N/A	Complied	Radiated

Note: UL Japan, Inc.'s EMI Work Procedures: Work Instructions-ULID-003591 and Work Instructions-ULID-003593.

*1) The test is not applicable since the EUT does not have AC Mains.

FCC Part 15.31 (e)

The test was performed with the New Battery during the tests.
Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT.
Therefore, the equipment complies with the antenna requirement of Section 15.203.

3.3 Addition to Standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99% emission bandwidth	ANSI C63.10:2013 6 Standard test methods	Reference data	N/A	-	Radiated

Note: UL Japan, Inc.'s EMI Work Procedures: Work Instructions-ULID-003591 and Work Instructions-ULID-003593.

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

Measurement uncertainty is not taken into account when stating conformity with a specified requirement.
Note: When margins obtained from test results are less than the measurement uncertainty, the test results may exceed the limit.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k = 2$.

Radiated emission

Measurement distance	Frequency range	Unit	Calculated Uncertainty (+/-)
3 m	9 kHz to 30 MHz	dB	3.3
10 m		dB	3.1
3 m	30 MHz to 200 MHz	Horizontal	5.0
		Vertical	5.0
	200 MHz to 1000 MHz	Horizontal	5.2
		Vertical	6.2
10 m	30 MHz to 200 MHz	Horizontal	5.5
		Vertical	5.4
	200 MHz to 1000 MHz	Horizontal	5.5
		Vertical	5.5
3 m	1 GHz to 6 GHz	dB	5.1
	6 GHz to 18 GHz	dB	5.4
1 m	10 GHz to 18 GHz	dB	5.4
	18 GHz to 26.5 GHz	dB	5.3
	26.5 GHz to 40 GHz	dB	4.8
0.5 m	26.5 GHz to 40 GHz	dB	5.0

Antenna Terminal Conducted

Item	Unit	Calculated Uncertainty (+/-)
Antenna terminated conducted emission / Power density / Burst power	dB	3.47
Adjacent channel power (ACP)	dB	2.28
Bandwidth (OBW)	%	0.96
Time readout (time span upto 100 msec)	%	0.11
Time readout (time span upto 1000 msec)	%	0.11
Time readout (time span upto 60 sec)	%	0.02
Power measurement (Power meter < 8 GHz)	dB	1.46
Power measurement (Call box < 6 GHz)	dB	1.69
Frequency readout (Frequency counter)	ppm	0.67
Frequency readout (Spectrum analyzer frequency readout function)	ppm	2.13
Temperature (constant temperature bath)	deg. C	0.69
Humidity (constant temperature bath)	%RH	2.98
Modulation characteristics	%	6.93
Frequency for mobile	ppm	0.08
Contention-based protocol	dB	2.26

3.5 Test Location

UL Japan, Inc. Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 Japan

Telephone: +81-596-24-8999

*A2LA Certificate Number: 5107.02 / FCC Test Firm Registration Number: 884919

ISED Lab Company Number: 2973C / CAB identifier: JP0002

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.5 measurement room	6.4 x 6.4 x 3.0	6.4 x 6.4	-	-
No.6 shielded room	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.10 shielded room	3.8 x 2.8 x 2.8	3.8 x 2.8	-	-
No.11 measurement room	4.0 x 3.4 x 2.5	N/A	-	-
No.12 measurement room	2.6 x 3.4 x 2.5	N/A	-	-
Large Chamber	16.9 x 22.1 x 10.17	16.9 x 22.1	-	10 m
Small Chamber	5.3 x 6.69 x 3.59	5.3 x 6.69	-	-

3.6 Test Data, Test Instruments, and Test Set Up

Refer to APPENDIX.

SECTION 4: Operation of EUT during testing

4.1 Operating Mode(s)

Test mode	Remarks
1) Transmitting mode (Tx 433.92 MHz) *1)	PKE(Smart) mode (Unlock button)
2) Transmitting mode (Tx 433.92 MHz) *1)	RKE (Keyless) mode (Lock button)
3) Normal use mode (Tx 433.92 MHz)	PKE(Smart) mode (Unlock button)
4) Normal use mode (Tx 433.92 MHz)	RKE (Keyless) mode (Lock button)
* The system was configured in typical fashion (as a user would normally use it) for testing.	
*Power of the EUT was set by the software as follows; Software: <u>Mode 1, 2</u> 5AB-01458Z49+5AB-01459A03 (Date: 2024.10 18, Storage location: EUT memory) <u>Mode 3, 4</u> 5AB-01458A05+5AB-01459A03 (Date: 2024.09 13, Storage location: EUT memory)	
*This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.	
Justification: The system was configured in typical fashion (as a user would normally use it) for testing.	


*1) The software of this mode is the same as one of normal product, except that EUT continues to transmit (For Normal use mode, EUT stops to transmit in a given time, even if transceiver button is being pressed.).

This EUT has two modes which mechanical key is inserted or not. The worst case was confirmed with and without mechanical key inserted, as a result, the test with mechanical key inserted was the worst case. Therefore, the test with mechanical key inserted was performed only.

It was confirmed between mode 3 and mode 4 at pre-check, Automatically deactivate test was made at representative mode 3 since no difference was found each mode.

It was confirmed between mode 1 and mode 2 at pre-check, Average Output Power and Radiated Spurious Emission tests were made at representative mode 1 since no difference was found each mode.

4.2 Configuration and Peripherals

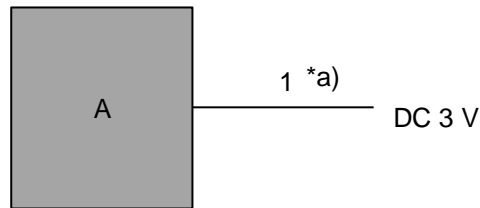

*a) This cable was attached only for Antenna terminal conducted tests, and it is not installed the end product. Also, the attachment of this cable does not affect the RF performance.

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT

No.	Item	Model number	Serial Number	Manufacturer	Remark
A	Hand Unit	TWB1G0655	240927_22 *1) 240927_15 *2) 240927_14 *3)	ALPS ALPINE CO., LTD.	EUT

*1) Used for Automatically deactivate

*2) Used for Average Output Power

*3) Used for other tests except for Automatically deactivate and Average Output Power

List of Cables Used

No.	Name	Length (m)	Shield		Remark
			Cable	Connector	
1	DC Cable	0.5	Unshielded	Unshielded	*1)

*1) Used for Average Output Power only

SECTION 5: Radiated Spurious Emission

Test Procedure

[For below 30 MHz]

The noise level was checked by moving a search-coil (Loop Antenna) close to the EUT.

[For 30 MHz to 1 GHz]

EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane.

The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane.

The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The measuring antenna height was varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The measurements were performed for both vertical and horizontal antenna polarization.


The radiated emission measurements were made with the following detector function of the test receiver / spectrum analyzer.

Test Antennas are used as below;

Frequency	Below 30 MHz	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Loop	Biconical	Logperiodic	Horn


Frequency	From 9 kHz to 90 kHz and From 110 kHz to 150 kHz	From 90 kHz to 110 kHz	From 150 kHz to 490 kHz	From 490 kHz to 30 MHz	From 30 MHz to 1 GHz	Above 1 GHz
Detector Type	Peak	Peak	Peak	Peak	Peak and Peak with Duty factor	Peak and Peak with Duty factor
IF Bandwidth	200 Hz	200 Hz	9.1 kHz	9.1 kHz	120 kHz	PK: S/A: RBW: 1 MHz, VBW: 3 MHz

[Test Setup]
Below 1 GHz

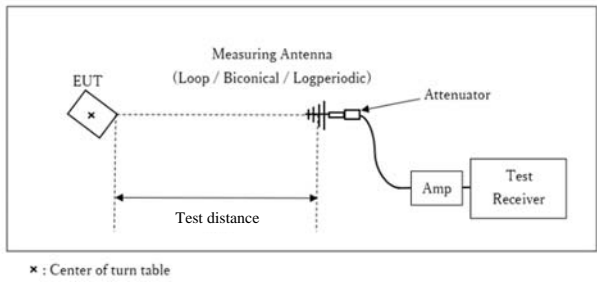

Test Distance: 3 m

1 GHz to 4.4 GHz

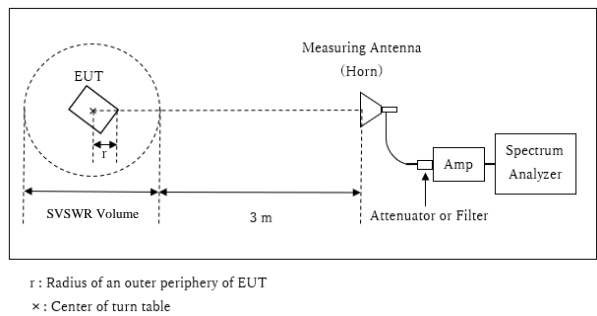

Distance Factor: $20 \times \log (4.00 \text{ m} / 3.0 \text{ m}) = 2.50 \text{ dB}$

* Test Distance: $(3 + \text{SVSWR Volume} / 2) - r = 4.00 \text{ m}$

SVSWR Volume : 2.0 m
(SVSWR Volume has been calibrated based on CISPR 16-1-4.)
 $r = 0.0 \text{ m}$

* The test was performed with $r = 0.0 \text{ m}$ since EUT is small and it was the rather conservative condition.

The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range : 9 kHz to 4.4 GHz
Test data : APPENDIX
Test result : Pass

SECTION 6: Automatically deactivate

Test Procedure

The measurement was performed with Electric field strength using a spectrum analyzer.

Test data : APPENDIX
Test result : Pass

SECTION 7: -20 dB Bandwidth and 99% emission bandwidth

Test Procedure

The test was measured with a spectrum analyzer using a test fixture.

Test	Span	RBW	VBW	Sweep	Detector	Trace	Instrument used
-20 dB Bandwidth / 99% emission bandwidth	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak *1)	Max Hold *1)	Spectrum Analyzer
*1) Peak hold was applied as Worst-case measurement.							

Test data : APPENDIX
Test result : Pass

SECTION 8: Average Output Power

Test Procedure

Average Output Power was measured with a Power Meter to measure Burst Average.
The test data is reference data for RF Exposure.


Test data : APPENDIX

APPENDIX 1: Test Data

Automatically deactivate

Test place	Ise EMC Lab. No.6 Measurement room
Date	October 24, 2024
Temperature / Humidity	24 deg. C / 48 % RH
Engineer	Junki Nagatomi
Mode	Mode 3

Time of Transmitting [s]	Limit [s]	Result
0.282	5.00	Pass

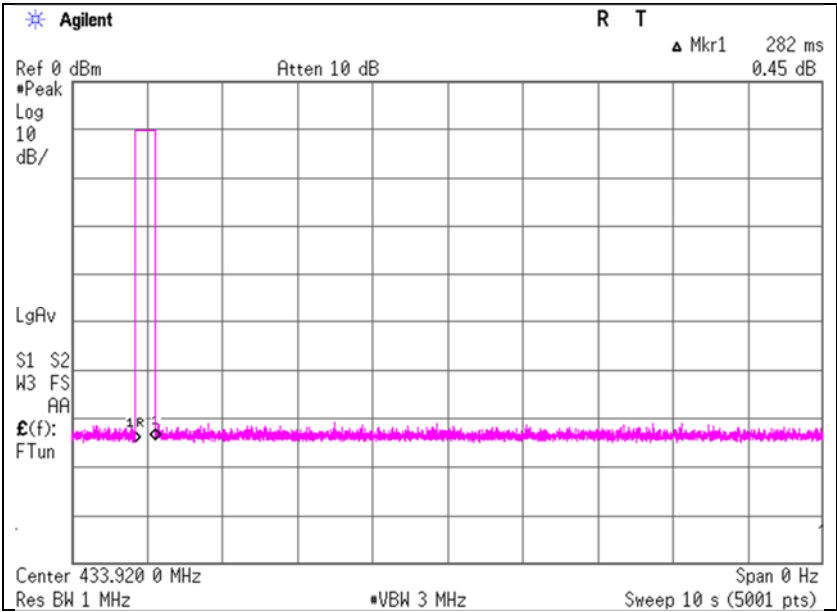

Average Output Power
(Reference data for RF Exposure)

Test place	Ise EMC Lab. No.6 Measurement room
Date	November 7, 2024
Temperature / Humidity	21 deg. C / 45 % RH
Engineer	Yuichiro Yamazaki
Mode	Mode 1

Freq.	Reading (P/M) [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Conducted Power	
				Result (Burst)	
				[dBm]	[mW]
433.92	-10.77	0.15	9.75	-0.87	0.82

Sample Calculation:

Conducted Power Result = Reading + Cable Loss + Atten. Loss

*The equipment and cables were not used for factor 0 dB of the data sheets.

*Since Burst Power is higher than Time Average Power, the test was performed at Burst Power to be more conservative.

Radiated Emission (Fundamental and Spurious Emission)

Test place	Ise EMC Lab.	No.1
Semi Anechoic Chamber	No.1	November 7, 2024
Date	November 7, 2024	November 7, 2024
Temperature / Humidity	21 deg. C / 45 % RH	22 deg. C / 33 % RH
Engineer	Yuichiro Yamazaki	Takeshi Hiyaji
	(Below 1 GHz)	(Above 1 GHz)
Mode	Mode 1	

Polarity [Hori/Vert]	Frequency [MHz]	Reading (PK) [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (PK) [dBuV/m]	Result (PK with Duty Factor) [dBuV/m]	Limit (PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (PK) [dB]	Margin (AV) [dB]	Inside or Outside of Restricted Bands	Remarks
Hori.	433.920	87.5	16.1	11.5	38.5	0.0	76.6	76.6	100.8	80.8	24.2	4.2	Carrier	
Hori.	867.840	41.2	21.7	14.1	38.1	0.0	38.9	38.9	80.8	60.8	41.9	21.9	Outside	
Hori.	1301.760	45.8	26.1	4.8	36.6	0.0	40.1	40.1	73.9	53.9	33.8	13.8	Inside	
Hori.	1735.680	46.2	25.1	5.1	36.3	0.0	40.1	40.1	80.8	60.8	40.7	20.7	Outside	
Hori.	2169.600	45.2	28.1	5.2	36.1	-	42.4	42.4	80.8	60.8	38.4	18.4	Outside	Floor noise
Hori.	2603.520	45.4	27.6	5.4	36.1	0.0	42.3	42.3	80.8	60.8	38.5	18.5	Outside	
Hori.	3037.440	44.9	28.4	5.7	36.2	-	42.8	42.8	80.8	60.8	38.0	18.0	Outside	Floor noise
Hori.	3471.360	43.9	28.5	5.9	35.9	-	42.4	42.4	80.8	60.8	38.4	18.4	Outside	Floor noise
Hori.	3905.280	43.5	29.6	6.2	35.7	-	43.6	43.6	73.9	53.9	30.3	10.3	Inside	Floor noise
Hori.	4339.200	42.3	30.4	6.3	35.6	-	43.4	43.4	73.9	53.9	30.5	10.5	Inside	Floor noise
Vert.	433.920	88.2	16.1	11.5	38.5	0.0	77.3	77.3	100.8	80.8	23.5	3.5	Carrier	
Vert.	867.840	42.7	21.7	14.1	38.1	0.0	40.4	40.4	80.8	60.8	40.4	20.4	Outside	
Vert.	1301.760	45.4	26.1	4.8	36.6	0.0	39.7	39.7	73.9	53.9	34.2	14.2	Inside	
Vert.	1735.680	46.1	25.1	5.1	36.3	0.0	40.0	40.0	80.8	60.8	40.8	20.8	Outside	
Vert.	2169.600	45.5	28.1	5.2	36.1	-	42.7	42.7	80.8	60.8	38.1	18.1	Outside	Floor noise
Vert.	2603.520	45.6	27.6	5.4	36.1	0.0	42.5	42.5	80.8	60.8	38.3	18.3	Outside	
Vert.	3037.440	44.2	28.4	5.7	36.2	-	42.1	42.1	80.8	60.8	38.7	18.7	Outside	Floor noise
Vert.	3471.360	43.7	28.5	5.9	35.9	-	42.2	42.2	80.8	60.8	38.6	18.6	Outside	Floor noise
Vert.	3905.280	43.3	29.6	6.2	35.7	-	43.4	43.4	73.9	53.9	30.5	10.5	Inside	Floor noise
Vert.	4339.200	42.3	30.4	6.3	35.6	-	43.4	43.4	73.9	53.9	30.5	10.5	Inside	Floor noise

Sample calculation:

Result of PK = Reading + Ant Factor + Loss {Cable + Attenuator + Filter (above 1 GHz) + Distance factor (above 1 GHz)} - Gain (Amplifier)

Result of PK with Duty factor (PK / W) = Reading + Ant Factor + Loss {Cable + Attenuator + Filter (above 1 GHz) + Distance factor (above 1 GHz)} - Gain (Amplifier) + Duty factor

For above 1 GHz: Distance Factor: $20 \times \log(4.0 \text{ m}/3.0 \text{ m}) = 2.50 \text{ dB}$

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



Since the peak emission result satisfied the average limit, duty factor was omitted.

Although Duty of this product was 100% or less, the result of AV (PK with Duty factor) was calculated by applying Duty 100 % as worst.

If Gain 0.0 dB shown in the above table, pre-amplifier was not used to avoid the influence of carrier power. The pre-amplifier used for carrier frequency measurement was not saturated.

Radiated Spurious Emission
(Plot data, Worst case for Fundamental Emission)

Test place	Ise EMC Lab.	No.1
Semi Anechoic Chamber	No.1	No.1
Date	November 7, 2024	November 7, 2024
Temperature / Humidity	21 deg. C / 45 % RH	22 deg. C / 33 % RH
Engineer	Yuichiro Yamazaki	Takeshi Hiyaji
	(Below 1 GHz)	(Above 1 GHz)
Mode	Mode 1	

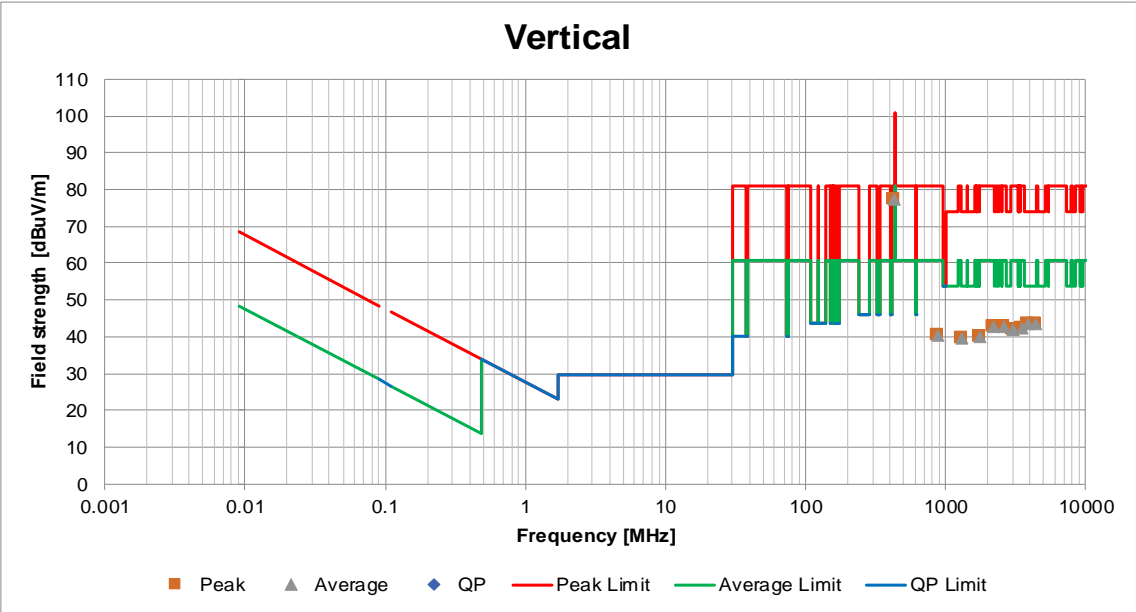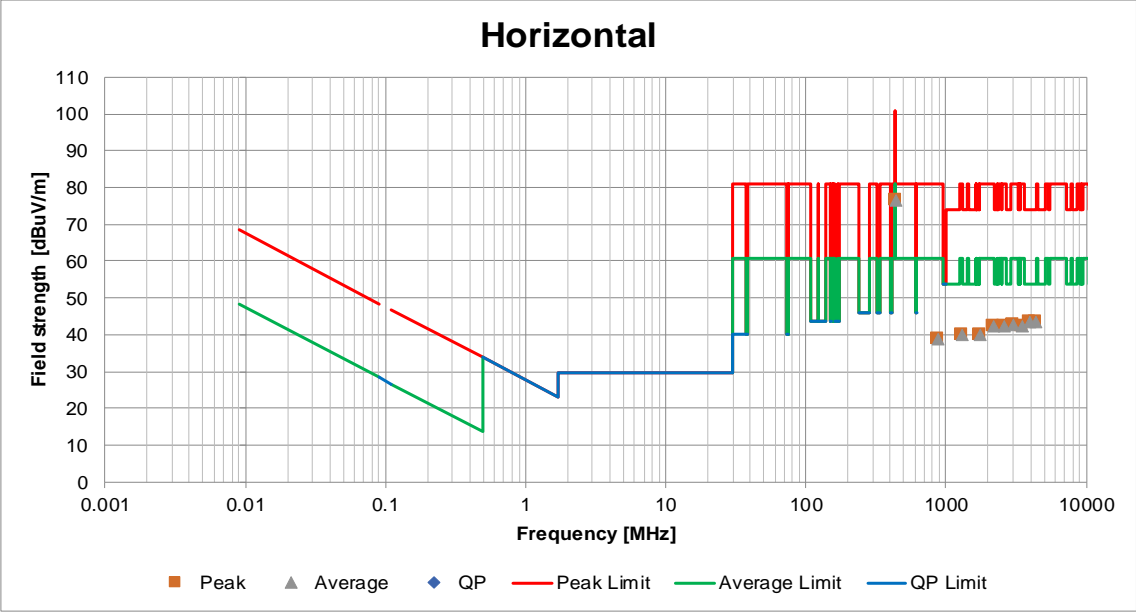


-20 dB Bandwidth / 99% emission bandwidth

Test place Ise EMC Lab. No.6 Measurement room
Date October 24, 2024
Temperature / Humidity 24 deg. C / 48 % RH
Engineer Junki Nagatomi
Mode Mode 1, 2

Mode1		
Bandwidth Limit : Fundamental Frequency 433.92 MHz x 0.25 % = 1084.800 kHz		
-20 dB Bandwidth [kHz]	Bandwidth Limit [kHz]	Result
83.2660	1084.800	Pass
99% emission bandwidth [kHz]	Bandwidth Limit [kHz]	Result
98.9714	1084.800	Pass

Mode2		
Bandwidth Limit : Fundamental Frequency 433.92 MHz x 0.25 % = 1084.800 kHz		
-20 dB Bandwidth [kHz]	Bandwidth Limit [kHz]	Result
20.8240	1084.800	Pass
99% emission bandwidth [kHz]	Bandwidth Limit [kHz]	Result
20.8031	1084.800	Pass

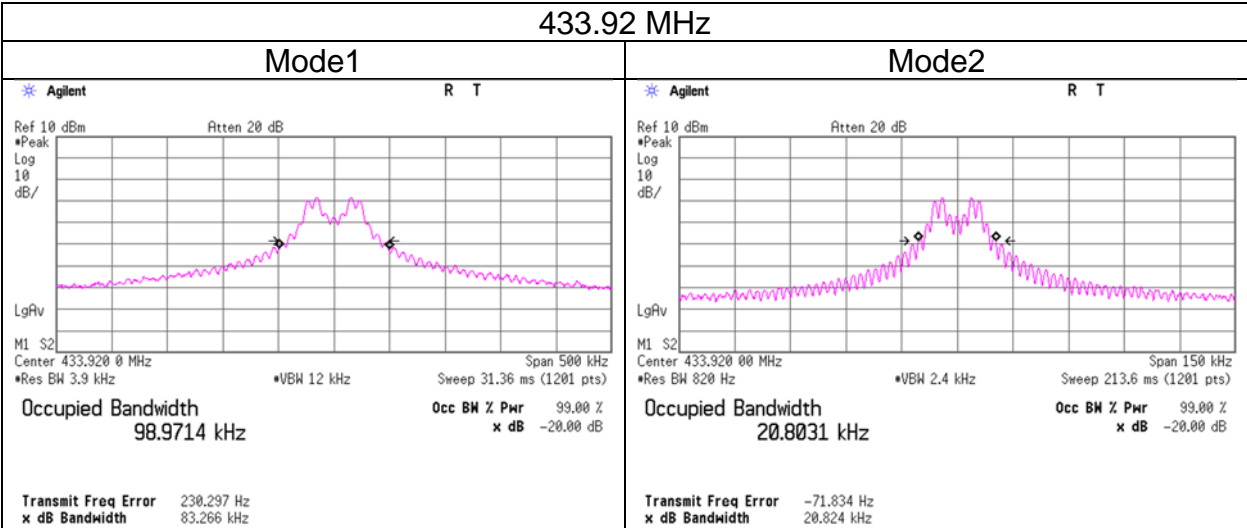

APPENDIX 2: Test Instruments

Test Equipment

Test Item	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	142645	Loop Antenna	UL Japan	-	-	-	-
RE	141198	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	VHA9103+BBA9106	2513	07/10/2024	12
RE	141213	Attenuator(6dB)	Weinschel Corp	2	BK7971	11/16/2023	12
RE	141350	Coaxial Cable	Suhner/storm/Agilent/TSJ	-	-	03/05/2024	12
RE	141393	Microwave Cable	Junkosha	MWX221	1604S254(1 m) / 1608S088(5 m)	07/06/2024	12
RE	141511	Horn Antenna 1-18GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	253	09/09/2024	12
RE	141530	Digital Tester	Fluke Corporation	FLUKE 26-3	78030621	02/01/2024	12
RE	141558	Digital Tester(TRUE RMS MULTIMETER)	Fluke Corporation	115	17930030	05/17/2024	12
RE	141568	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	2901	01/10/2024	12
RE	141576	Pre Amplifier	Keysight Technologies Inc	8449B	3008A01671	02/17/2024	12
RE	141585	Pre Amplifier	L3 Narda-MITEQ	MLA-10K01-B01-35	1237616	02/17/2024	12
RE	141950	EMI Test Receiver	Rohde & Schwarz	ESU26	100412	11/20/2023	12
RE	141978	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY46180899	05/09/2024	12
RE	141994	AC1_Semi Anechoic Chamber(SVSWR)	TDK	Semi Anechoic Chamber 10m	DA-06881	04/20/2023	24
RE	141998	AC1_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 10m	DA-06881	12/06/2023	24
RE	142226	Measure, Tape, Steel	KOMELON	KMC-36	-	-	-
RE	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
RE	242170	Logperiodic Antenna	Schwarzbeck Mess-Elektronik OHG	VUSLP9111B	00728	11/29/2023	12
RE	242978	High Pass Filter 1-13 GHz	Pasternak	PE87FL1018	D.C. 2215	02/02/2024	12
RE	244712	Thermo-Hygrometer	HIOKI E.E. CORPORATION	LR5001	231202106	01/25/2024	12
AT	141244	Attenuator(10dB)	Weinschel - API Technologies Corp	WA8-10-34	A198	02/17/2024	12
AT	141327	Coaxial Cable	UL Japan	-	-	02/09/2024	12
AT	141530	Digital Tester	Fluke Corporation	FLUKE 26-3	78030621	02/01/2024	12
AT	141558	Digital Tester(TRUE RMS MULTIMETER)	Fluke Corporation	115	17930030	05/17/2024	12
AT	141568	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	2901	01/10/2024	12
AT	141805	Power Meter	Anritsu Corporation	ML2495A	6K00003338	08/22/2024	12
AT	141840	Power sensor	Anritsu Corporation	MA2411B	011737	08/22/2024	12
AT	141978	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY46180899	05/09/2024	12
AT	244712	Thermo-Hygrometer	HIOKI E.E. CORPORATION	LR5001	231202106	01/25/2024	12

*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item:

RE: Radiated Emission

AT: Antenna Terminal Conducted