



FCC Part 15, Subpart C Test Report

FCC ID: 2AR2STAB8907RE

Applicant: MMD Hong Kong Holding Limited

Address: Unit 1006, 10th Floor, C-Bons International Center, 108 Wai Yip Street, Kwun Tong, Kowloon, Hong Kong

Manufacturer: MMD Hong Kong Holding Limited

Address: Unit 1006, 10th Floor, C-Bons International Center, 108 Wai Yip Street, Kwun Tong, Kowloon, Hong Kong

Product(s): Soundbar speaker

Brand(s): PHILIPS or 

Test Model(s): TAB8907

Series Model(s): See section 2.1

Test Date: Apr. 06, 2022 ~ Apr. 25, 2022

Issued Date: May 17, 2022

Issued By: Hwa-Hsing (Dongguan) Testing Co., Ltd.

Address: No.101, Bld. N1, Yuyuan 2Rd, Yuyuan Industrial Park, HuangJiang Town, Dongguan, China

Test Firm Registration No.: 915896

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.249)
ANSI C63.10:2013

The above equipment has been tested by **Hwa-Hsing (Dongguan) Testing Co., Ltd.**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :



Tank Tan

Reviewed by :



Scott He

Approved by :



Harry Li

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the federal government. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](http://www.hwa-hsing.com)
Address: [No.101, Bld N1, Yuyuan 2Rd, Yuyuan Industrial Park, HuangJiang Town, Dongguan, China](http://www.hwa-hsing.com)

Tel: [0769-83078199](tel:0769-83078199)
Web: www.hwa-hsing.com
E-Mail: customerservice.dg@hwa-hsing.com

Release
Ver. 1.5



Table of Contents

Release Control Record	3
1. Summary of Test Results	4
1.1 Measurement Uncertainty	4
1.2 Modification Record	4
2. General Information	5
2.1 General Description of EUT	5
2.2 Channel listing:	6
2.3 Test Mode Applicability and Tested Channel Detail	7
2.4 Description of Support Units	8
2.5 Configuration of System under Test	8
3. Test Types and Results	9
3.1 Radiated Emission and Band-edge Measurement	9
3.1.1 Limits of radiated emission and band-edge measurement	9
3.1.2 Test Instruments	10
3.1.3 Test Procedures	11
3.1.4 Deviation from Test Standard	12
3.1.5 Test Setup	13
3.1.6 EUT Operating Conditions	14
3.1.7 Test Results	15
3.2 Conducted Emission Measurement	22
3.2.1 Limits of Conducted Emission Measurement	22
3.2.2 Test Instruments	22
3.2.3 Test Procedures	22
3.2.4 Deviation from Test Standard	22
3.2.5 Test setup	22
3.2.6 EUT Operating Conditions	23
3.2.7 Test Results	24
3.3 Occupied Bandwidth Measurement	26
3.3.1 Limits of Occupied Bandwidth Measurement	26
3.3.2 Test Setup	26
3.3.3 Test Instruments	26
3.3.4 Test Procedure	27
3.3.5 Deviation from Test Standard	27
3.3.6 EUT Operating Conditions	27
3.3.7 Test Result	27
4. Pictures of Test Arrangements	29
Appendix – Information on The Testing Laboratories	30



Release Control Record

Issue No.	Description	Date Issued
220218KH02-1-RF-US-04	Original Release	May 17, 2022



1. Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.249) ANSI C63.10:2013			
Clause	Test Item	Result	Remarks
§15.203	Antenna Requirement	Pass	Meet the requirement of limit.
§15.207 (a)	Conducted Emission	Pass	Meet the requirement of limit.
§15.205	Restricted Band of Operation	Pass	Meet the requirement of limit.
§15.209 §15.249(a)	Radiated Emission	Pass	Meet the requirement of limit.
§15.215(c)	20dB Bandwidth Test	Pass	Meet the requirement of limit.

Note: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

1.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

The listed uncertainties are the worst cases uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.66 dB
Radiated Emissions up to 1 GHz	9KHz ~ 30MHz	2.16 dB
	30MHz ~ 1000MHz	3.47 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	4.84 dB
	18GHz ~ 40GHz	4.67 dB

1.2 Modification Record

There were no modifications required for compliance.



2. General Information

2.1 General Description of EUT

Product(s)	Soundbar speaker	
Test Model(s)	TAB8907	
Sample No.	HS220312-02-04; HS220312-02-05	
Series Model(s)	TAB8907RE, TAB8907/10, TAB8907RE/10, TAB8907/37, TAB8907RE/37, TAB8907/98, TAB8907RE/98 TAB8907xx/yy(x=A-Z or blank, yy=00-99 or blank for country code)	
Status of EUT	Engineering Prototype	
Power Supply Rating	100-240V~, 50/60Hz, 45W	
Modulation technology	GFSK	
Operating Frequency	5729~5850MHz	
Antenna Type	FPC Antenna	
Antenna Gain	3.0dBi	
Maximum Field strength	94.62dBuV/m	
RF Exposure Calculate	0.869mW	≤1mW Test Exemption by KDB 447498 D04
Antenna Connector	I-PEX	
Accessory Device	IR remote control	
Cable Supplied	AC Lines: 150cm	

Note:

1. Please refer to the EUT photo document (Reference No.: 220218KH02-1-01&-02) for detailed product photo.
2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.
3. Model difference: These models are only different for model name for trade purpose.
4. These models have been testing and submitted at the same time with the FCC ID: 2AR2STAB8507RE, and these models all only difference for the AC power board, so this report evaluates AC-conducted emission & Radiated emission below 1GHz and copy the RF data from the 220218KH01-1-RF-US-04 report



2.2 Channel listing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5729	22	5771	43	5813
2	5731	23	5773	44	5815
3	5733	24	5775	45	5817
4	5735	25	5777	46	5819
5	5737	26	5779	47	5821
6	5739	27	5781	48	5823
7	5741	28	5783	49	5825
8	5743	29	5785	50	5827
9	5745	30	5787	51	5829
10	5747	31	5789	52	5831
11	5749	32	5791	53	5833
12	5751	33	5793	54	5835
13	5753	34	5795	55	5837
14	5755	35	5797	56	5839
15	5757	36	5799	57	5841
16	5759	37	5801	58	5843
17	5761	38	5803	59	5845
18	5763	39	5805	60	5847
19	5765	40	5807	61	5850
20	5767	41	5809		
21	5769	42	5811		



2.3 Test Mode Applicability and Tested Channel Detail

Applicable test items	X-Axis	Y-Axis	Z-Axis	Voltage Supply
AC Power Conducted Emission	N/A	N/A	N/A	AC120V/60Hz
Radiated Emissions	√	√	√	
Restricted Band of Operation	N/A	N/A	N/A	
Occupied Bandwidth	N/A	N/A	N/A	
1. The EUT had been pre-tested on the positioned of each 3 Axis. 2. "N/A" means no effect.				

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Radiated Emission Test (Above 1GHz):

EUT Configure Mode	Tested Channel	Modulation Technology	Data Rate (Mbps)
TX	1; 31; 61	GFSK	1.0

Radiated Emission Test (Below 1GHz):

EUT Configure Mode	Tested Channel	Modulation Technology	Data Rate (Mbps)
TX	1	GFSK	1.0

Power Line Conducted Emission Test:

EUT Configure Mode	Tested Channel	Modulation Technology	Data Rate (Mbps)
TX	1; 31; 61	GFSK	1.0

Antenna Port Conducted Measurement:

EUT Configure Mode	Tested Channel	Modulation Technology	Data Rate (Mbps)
TX	1; 31; 61	GFSK	1.0

Test Condition:

Applicable test items	Environmental Conditions	Tested by
AC Power Conducted Emission	25deg. C, 65%RH	Jim Xu
Radiated Emissions	25deg. C, 65%RH	Jim Xu
Antenna Port Conducted Measurement	25deg. C, 65%RH	Dragon long



2.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	N/A	N/A	N/A	N/A	N/A

Insert Cable Connections to/from EUT provided by test team.

No.	Signal Cable Description Of The Above Support Units
1.	N/A

2.5 Configuration of System under Test

WIRELESS TX/RX:

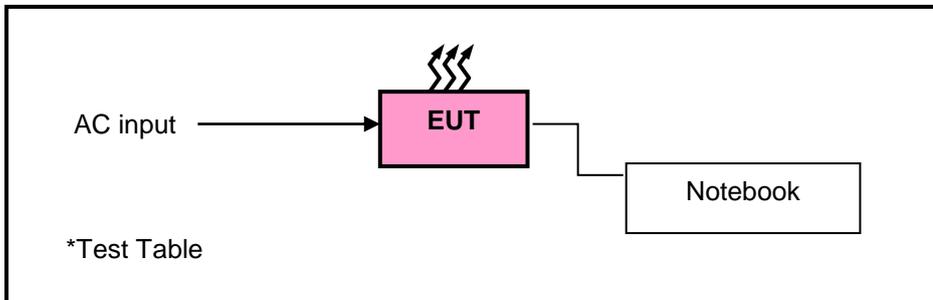



3. Test Types and Results

3.1 Radiated Emission and Band-edge Measurement

3.1.1 Limits of radiated emission and band-edge measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

* DTS emissions in non-restricted frequency bands Subclause 11.11 of ANSI C63.10 is applicable.

* DTS emissions in restricted frequency bands Subclause 11.12 of ANSI C63.10 is applicable

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field strength of fundamental (milli-volts/meter)	Field strength of harmonics (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



3.1.2 Test Instruments

Radiated emission below 30MHz:

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	100962	2023-01-13
3m Semi-anechoic Chamber	MAORUI	9m*6m*6m	NSEMC003	2023-04-15*
Test software	FARAD	FARAD	EZ_EMCV1.1.4.2	N/A
Loop Antenna	EMCI	HLA 6121	56735	2023-04-15*
Preamplifier	EMCI	EMC001340	980201	2022-09-08
Antenna Tower	MF	MFA-440H	NA	NA
Turn Table	MF	MFT-201SS	NA	NA
Antenna Tower&Turn Table Controller	MF	MF-7802	NA	NA

Frequency Range below 1GHz:

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
3m Semi-anechoic Chamber	MAORUI	9m*6m*6m	NSEMC003	2023-04-15*
EMI Test Receiver	Rohde&Schwarz	ESR7	100962	2023-01-13
Broadband antenna	Schwarzbeck	VULB 9168	00937	2023-09-12*
Signal Amplifier	Com-power	PAM-103	18020051	2022-09-08
Attenuator	Rohde&Schwarz	TS2GA-6dB	18101101	N/A
Test software	FARAD	FARAD	EZ_EMCV1.1.4.2	N/A

Frequency Range 1-18GHz:

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
3m Semi-anechoic Chamber	MAORUI	9m*6m*6m	NSEMC003	2023-04-15*
Horn Antenna	Schwarzbeck	BBHA 9120D	01959	2022-09-12*
Broadband Coaxial Preamplifier	Com-power	PAM-118A	1804003	2022-09-07
Spectrum	Keysight	N9020A	MY51240612	2022-09-08
Antenna Tower	MF	MFA-440H	NA	NA
Turn Table	MF	MFT-201SS	NA	NA
Antenna Tower&Turn Table Controller	MF	MF-7802	NA	NA

Frequency Range 18-40GHz:

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
3m Semi-anechoic Chamber	MAORUI	9m*6m*6m	NSEMC003	2023-04-15*
Spectrum Analyzer	Rohde&Schwarz	FSV-40N	101783	2023-01-13
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170242	2023-04-10*
Pre-Amplifier	EMCI	EMC 184045	980102	2023-01-12
Antenna Tower	MF	MFA-440H	NA	NA
Turn Table	MF	MFT-201SS	NA	NA
Antenna Tower&Turn Table Controller	MF	MF-7802	NA	NA

Note: 1. The calibration interval of the above test instruments is 12/24months(*) and the calibrations are traceable to CEPREI/CHINA.

2. The test was performed in 966



3.1.3 Test Procedures

a. **Peak emission levels are measured by setting the instrument as follow:**

1) RBW & VBW setting as a function of frequency:

Frequency	RBW	VBW
9kHz~150kHz	200Hz	600Hz
0.15MHz~30MHz	9kHz	30kHz
30MHz~1000MHz	120kHz	300kHz
>1000MHz	1MHz	3MHz

- 2) Detector = peak.
- 3) Sweep time = auto.
- 4) Trace mode = max hold.
- 5) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

Note: If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement

b. **Average emission levels are measured by setting the instrument as follow:**

● **Trace averaging with continuous EUT transmission at full power**

If the EUT can be configured or modified to transmit continuously (D ≥ 98%), then the average emission levels shall be measured using the following method (with EUT transmitting continuously):

- 1) RBW=1 MHz (unless otherwise specified).
- 2) VBW ≥ 3 *RBW.
- 3) Detector =RMS
- 4) Sweep time = auto.
- 5) Perform a trace average of at least 100 traces.

● **Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction**

If continuous transmission of the EUT (D ≥ 98%) cannot be achieved and the duty cycle is constant (duty cycle variations are less than ±2%), then the following procedure shall be used

- 1) The EUT shall be configured to operate at the maximum achievable duty cycle.
- 2) Measure the duty cycle D of the transmitter output signal as described in 11.6.
- 3) RBW=1 MHz (unless otherwise specified).
- 4) VBW ≥ 3 *RBW.
- 5) Detector =RMS
- 6) Sweep time = auto.
- 7) Perform a trace average of at least 100 traces.

A correction factor shall be added to the measurement results prior to comparing with the emission limit to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

- *If power averaging (rms) mode was used in step 5). then the applicable correction factor is [10 10g (1/ D)], where D is the duty cycle.
- **If linear voltage averaging mode was used in step f). then the applicable correction factor is [20 10g (1/D)], where D is the duty cycle.
- ***If a specific emission is demonstrated to be continuous (D > 98%) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that



● **Reduced VBW Averaging across ON and OFF times of the EUT transmissions with max hold**

If continuous transmission of the EUT ($D > 98\%$) cannot be achieved and the duty cycle is not constant (duty cycle variations exceed $\pm 2\%$), then the following procedure shall be used:

- 1) RBW = 1 MHz.
 - 2) VBW $\geq 1/T$.
 - 3) Detector = peak
 - 4) Sweep time = auto.
 - 5) Trace mode = max hold.
 - 6) Allow max hold to run for at least $[50 \times (1/D)]$ traces
- c. The EUT was placed on the top of a rotating table 0.8 meters (below 1GHz) / 1.5 meters (1-18GHz) / 1.5 meters (18-40GHz) above the reference ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The EUT was set 3 meters away from the interference-receiving antenna (Below 1GHz) & (Above 1-18GHz), which was mounted on the top of a variable-height antenna tower. The EUT was set 1 meters away from the interference-receiving antenna (18-40GHz).
- e. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- f. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- g. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- h. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz & 360kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth = 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth = $1/T$ for Average (Duty cycle $< 98\%$) detection at frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is = 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.


3.1.4 Deviation from Test Standard

No deviation.




3.1.5 Test Setup

Radiated emission below 30MHz:

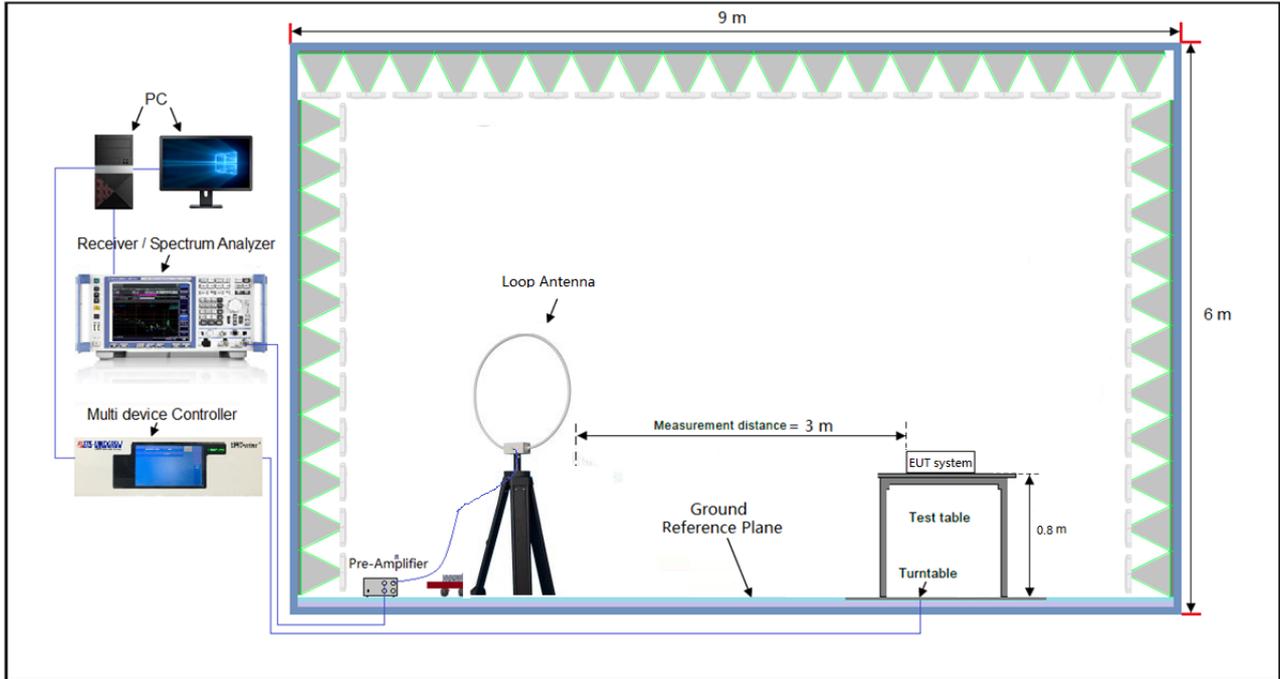


Frequency Range below 1GHz:

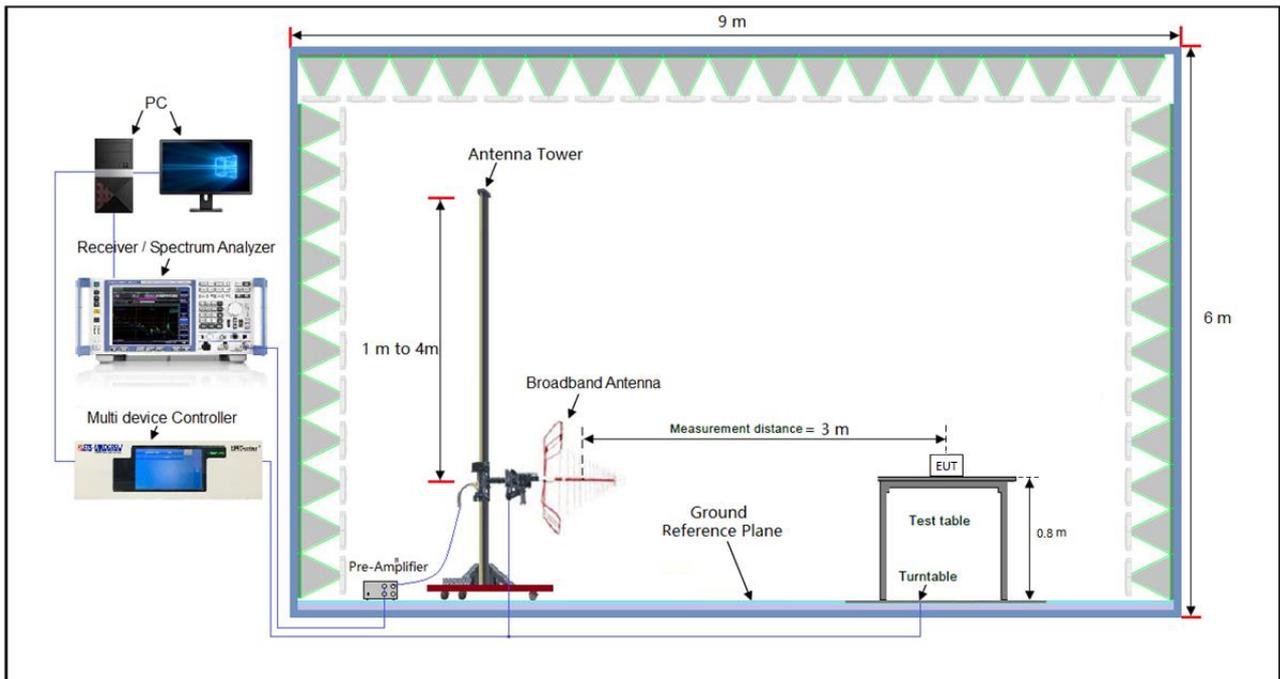




Frequency Range 1-18GHz:

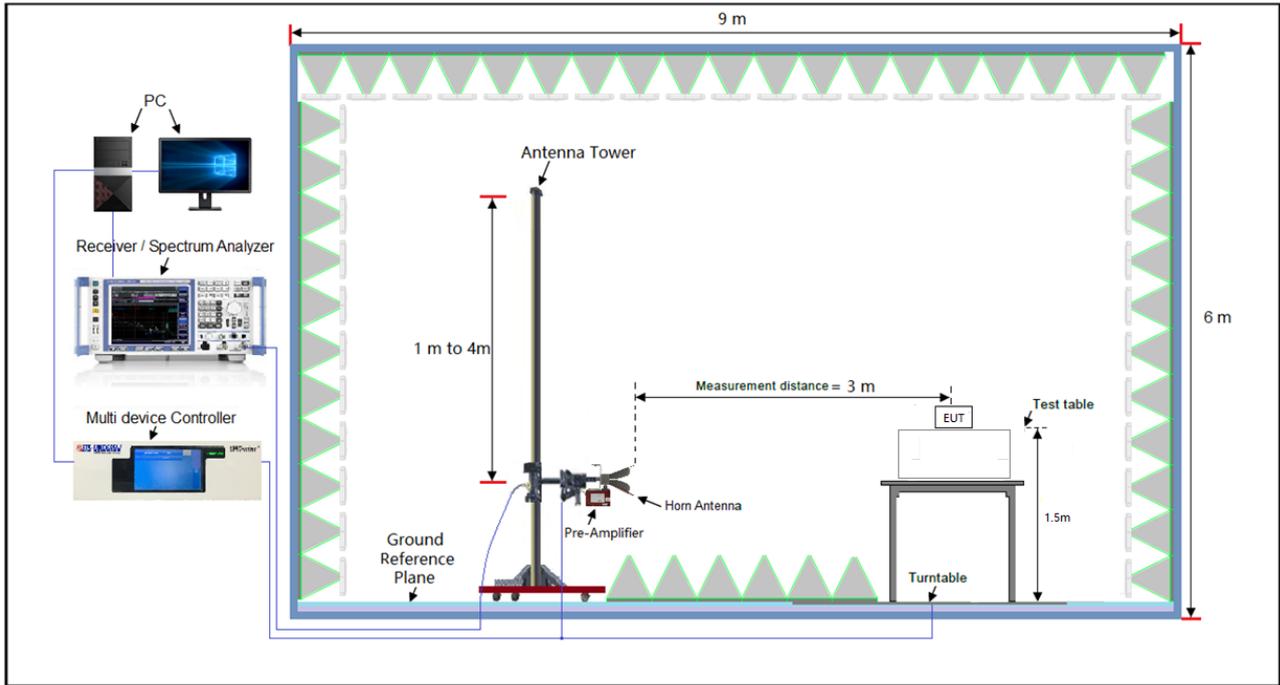

Frequency Range 18-40GHz:

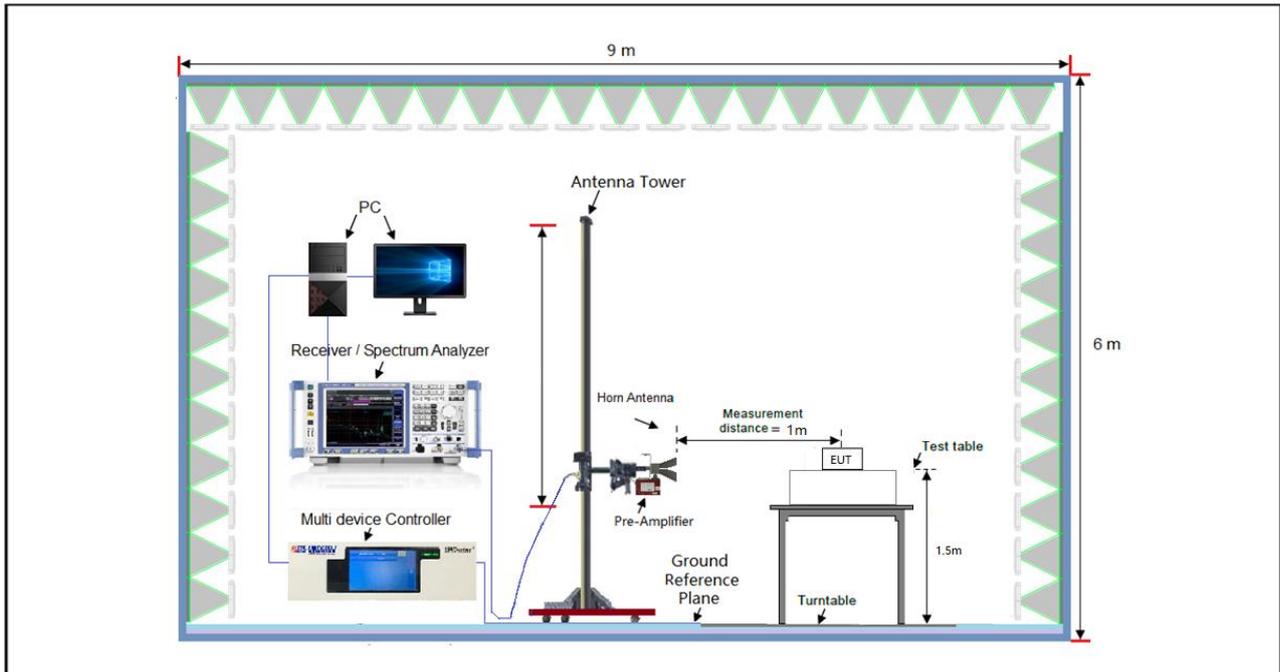

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.6 EUT Operating Conditions

- a. Placed the EUT on the testing table.
- b. Set the EUT under transmission condition continuously at specific channel frequency.



3.1.7 Test Results


9kHz ~ 30MHz Data:

The amplitude of spurious emissions attenuated more than 20dB below the permissible value is not required to be report.

30MHz ~ 1GHz Worst-Case Data:

Test Mode	TX		
Test Channel	Channel 1	Frequency Range	30MHz ~ 1GHz
Detector Function	Peak (PK) & Quasi-peak (QP)	Tested By	Jim Xu

Antennal Polarity & Test Distance: Horizontal at 3m

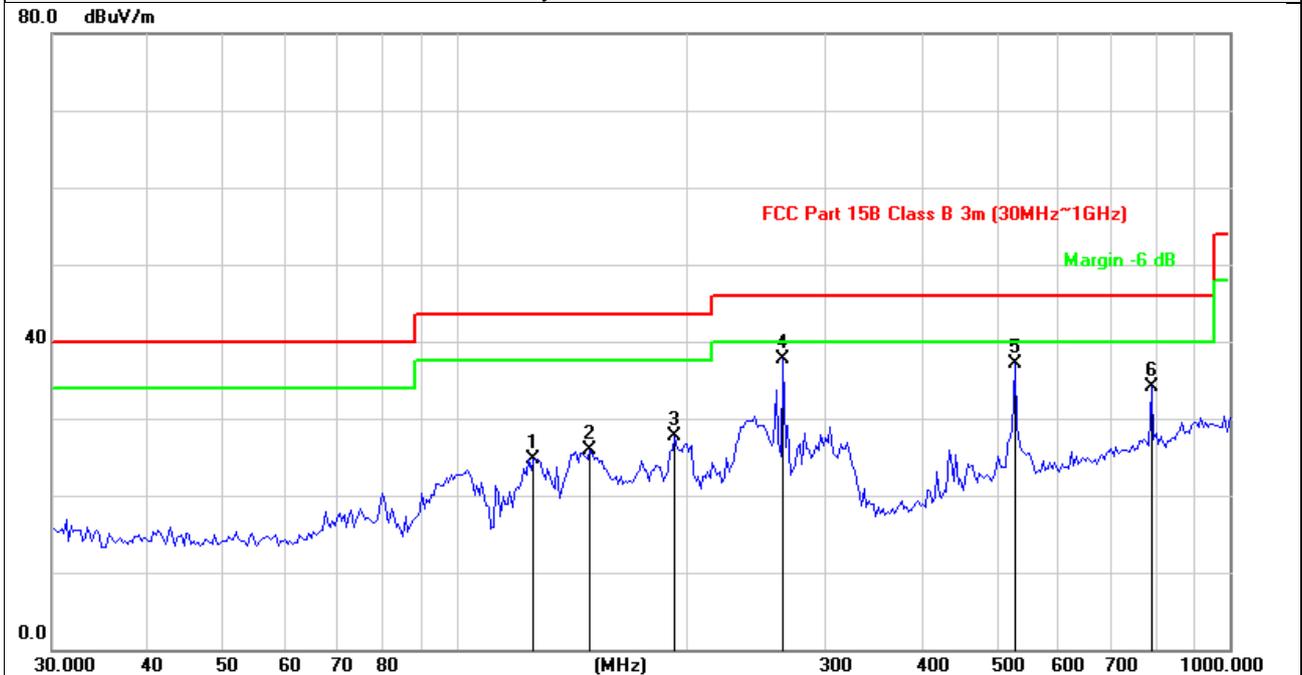


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	125.8059	40.64	-15.84	24.80	43.50	-18.70	peak	200	125
2	148.9175	40.49	-14.67	25.82	43.50	-17.68	peak	100	236
3	191.7841	43.58	-15.88	27.70	43.50	-15.80	peak	200	288
4	264.9709	52.64	-14.94	37.70	46.00	-8.30	peak	100	245
5	527.5707	45.67	-8.58	37.09	46.00	-8.91	peak	100	230
6	793.0281	37.51	-3.31	34.20	46.00	-11.80	peak	200	78

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value



Test Mode	TX		
Test Channel	Channel 1	Frequency Range	30MHz ~ 1GHz
Detector Function	Peak (PK) & Quasi-peak (QP)	Tested By	Jim Xu

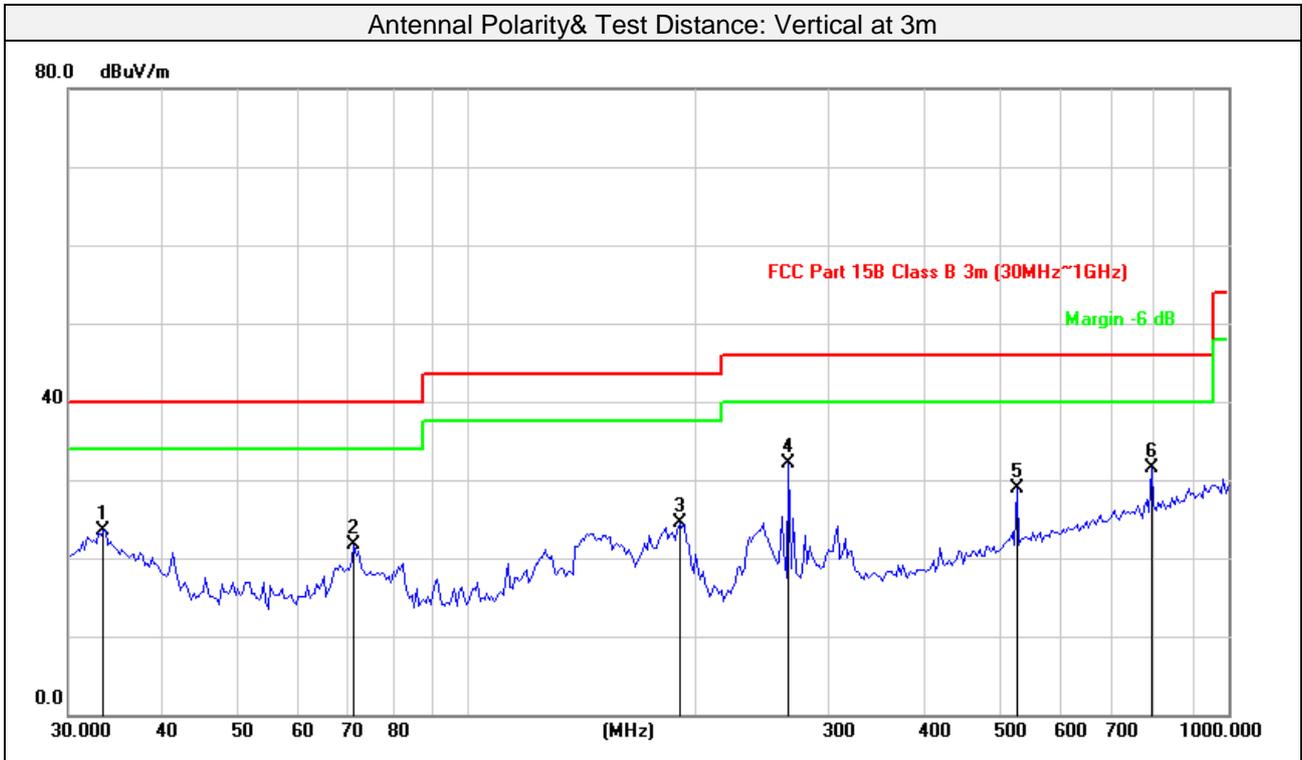

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	33.3349	40.25	-16.78	23.47	40.00	-16.53	peak	100	125
2	71.2033	38.90	-17.14	21.76	40.00	-18.24	peak	100	236
3	190.4411	40.21	-15.73	24.48	43.50	-19.02	peak	200	288
4	264.9709	47.04	-14.94	32.10	46.00	-13.90	peak	300	45
5	527.5707	37.54	-8.58	28.96	46.00	-17.04	peak	200	178
6	793.0281	34.88	-3.31	31.57	46.00	-14.43	peak	100	56


Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value



Above 1GHz Data:

Test Mode	Lowest channel TX		
Test channel	Channel 1	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) & Quasi-peak (QP)	Tested By	Jim Xu

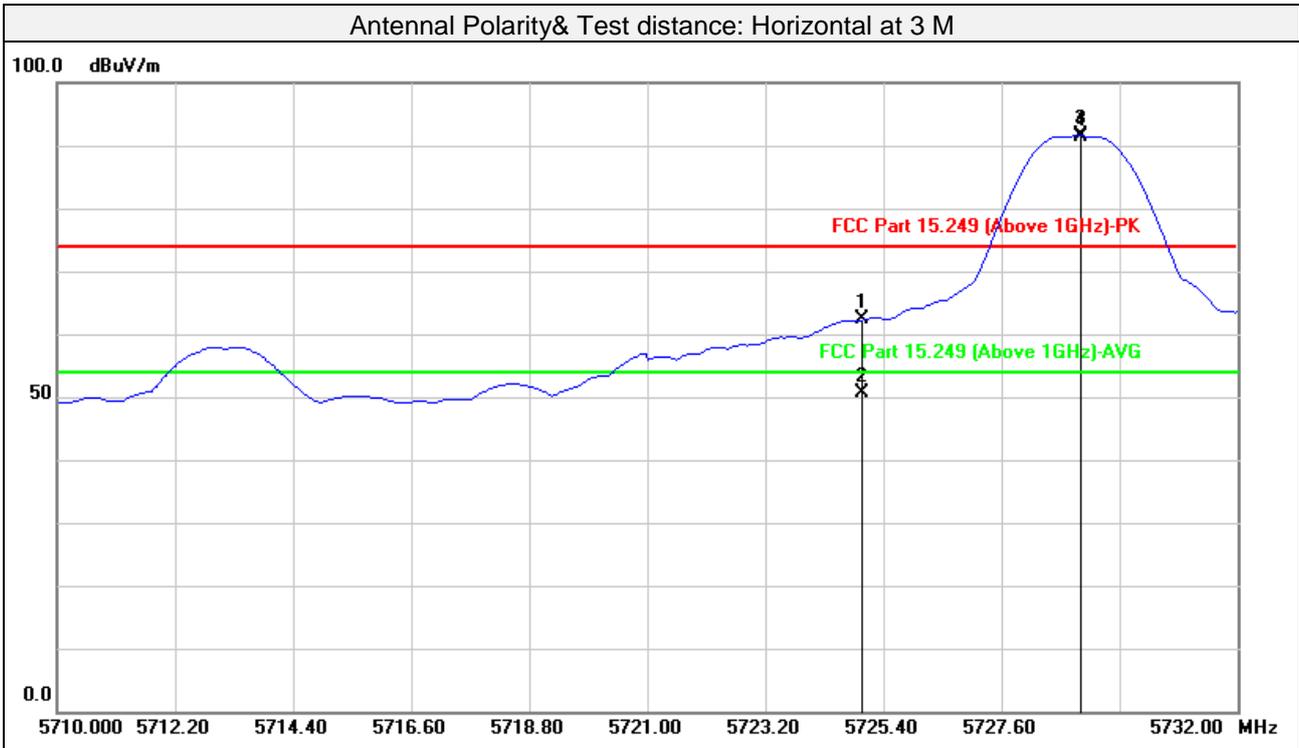


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	5725.000	55.62	6.71	62.33	74.00	-11.67	peak	390	30
2	5725.000	43.82	6.71	50.53	54.00	-3.47	AVG	390	30
3	5729.090	84.82	6.71	91.53	114.00	-22.47	peak	390	30
4	5729.090	84.55	6.71	91.26	94.00	-2.74	AVG	390	30
5	11458.000	41.14	16.06	57.20	74.00	-16.80	peak	227	34
6	11458.000	33.96	16.06	50.02	54.00	-3.98	AVG	227	34
7	17187.000	36.68	23.65	60.33	74.00	-13.67	peak	100	166
8	17187.000	25.27	23.65	48.92	54.00	-5.08	AVG	100	166

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. The other spurious emissions attenuated more than 20 dB below the permissible value is not required to be report



Test Mode	Low channel TX		
Test channel	Channel 1	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) & Average (AVG)	Tested By	Jim Xu

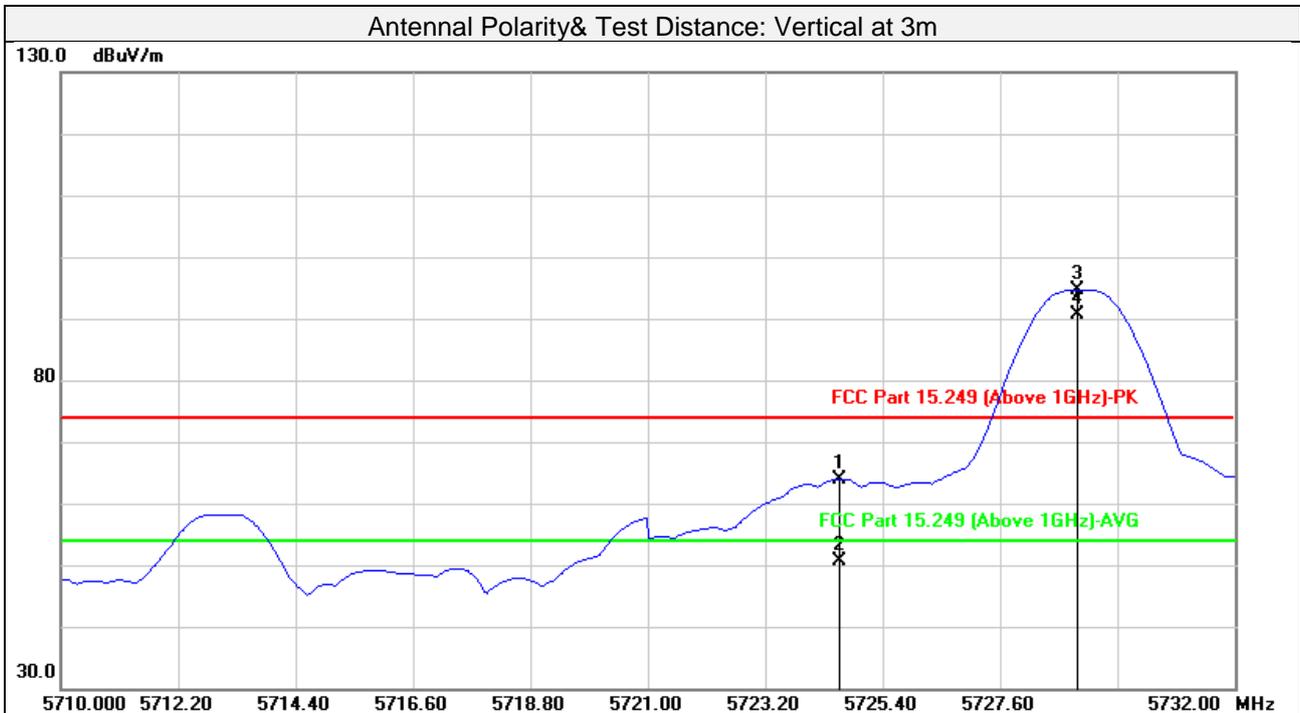

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	5724.593	57.26	6.71	63.97	74.00	-10.03	peak	100	258
2	5724.593	43.94	6.71	50.65	54.00	-3.35	AVG	100	258
3	5729.046	87.91	6.71	94.62	114.00	-19.38	peak	100	258
4	5729.046	83.97	6.71	90.68	94.00	-3.32	AVG	100	258
5	11458.000	41.35	16.06	57.41	74.00	-16.59	peak	209	3
6	11458.000	34.32	16.06	50.38	54.00	-3.62	AVG	209	3
7	17187.000	35.94	23.65	59.59	74.00	-14.41	peak	100	159
8	17187.000	24.26	23.65	47.91	54.00	-6.09	AVG	100	159

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. The other spurious emissions attenuated more than 20 dB below the permissible value is not required to be report



Test Mode	Mid channel TX		
Test channel	Channel 31	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) & Average (AVG)	Tested By	Jim Xu

Antennal Polarity& Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	5789.000	83.90	6.78	90.68	114.00	-23.32	peak	100	164
2	5789.000	83.36	6.78	90.14	94.00	-3.86	peak	100	164
3	11578.000	41.56	16.10	57.66	74.00	-16.34	peak	321	26
4	11578.000	34.10	16.10	50.20	54.00	-3.80	AVG	321	26
5	17367.000	36.24	24.83	61.07	74.00	-12.93	peak	100	255
6	17367.000	23.45	24.83	48.28	54.00	-5.72	AVG	100	255


Antennal Polarity& Test Distance: Vertical at 3 M									
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	5789.000	87.06	6.78	93.84	114.00	-20.16	peak	100	247
2	5789.000	86.34	6.78	93.12	94.00	-0.88	AVG	100	247
3	11578.000	42.16	16.10	58.26	74.00	-15.74	peak	100	24
4	11578.000	34.56	16.10	50.66	54.00	-3.34	AVG	100	24
5	17367.000	35.31	24.83	60.14	74.00	-13.86	peak	100	199
6	17367.000	23.32	24.83	48.15	54.00	-5.85	AVG	100	199

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. The other spurious emissions attenuated more than 20 dB below the permissible value is not required to be report



Test Mode	High channel TX		
Test channel	Channel 61	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) & Average (AVG)	Tested By	Jim Xu

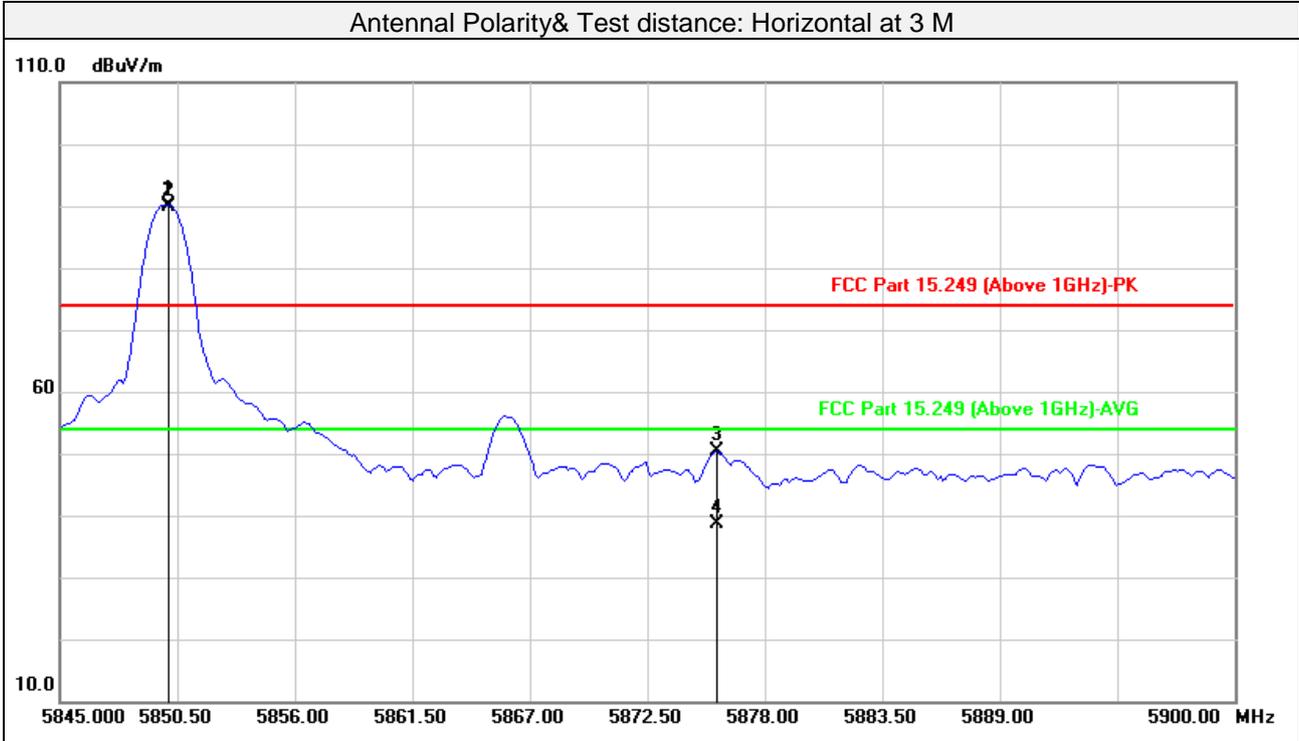


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	5850.070	83.34	6.85	90.19	114.00	-23.81	peak	391	299
2	5850.070	83.15	6.85	90.00	94.00	-4.00	AVG	391	299
3	5875.752	43.39	6.88	50.27	74.00	-23.73	peak	391	299
4	5875.752	31.68	6.88	38.56	54.00	-15.44	AVG	391	299
5	11700.000	38.96	16.14	55.10	74.00	-18.90	peak	100	314
6	11700.000	31.85	16.14	47.99	54.00	-6.01	AVG	100	314
7	17550.000	34.93	26.01	60.94	74.00	-13.06	peak	100	201
8	17550.000	22.66	26.01	48.67	54.00	-5.33	AVG	100	201

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. The other spurious emissions attenuated more than 20 dB below the permissible value is not required to be report



Test Mode	High channel TX		
Test channel	Channel 61	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu

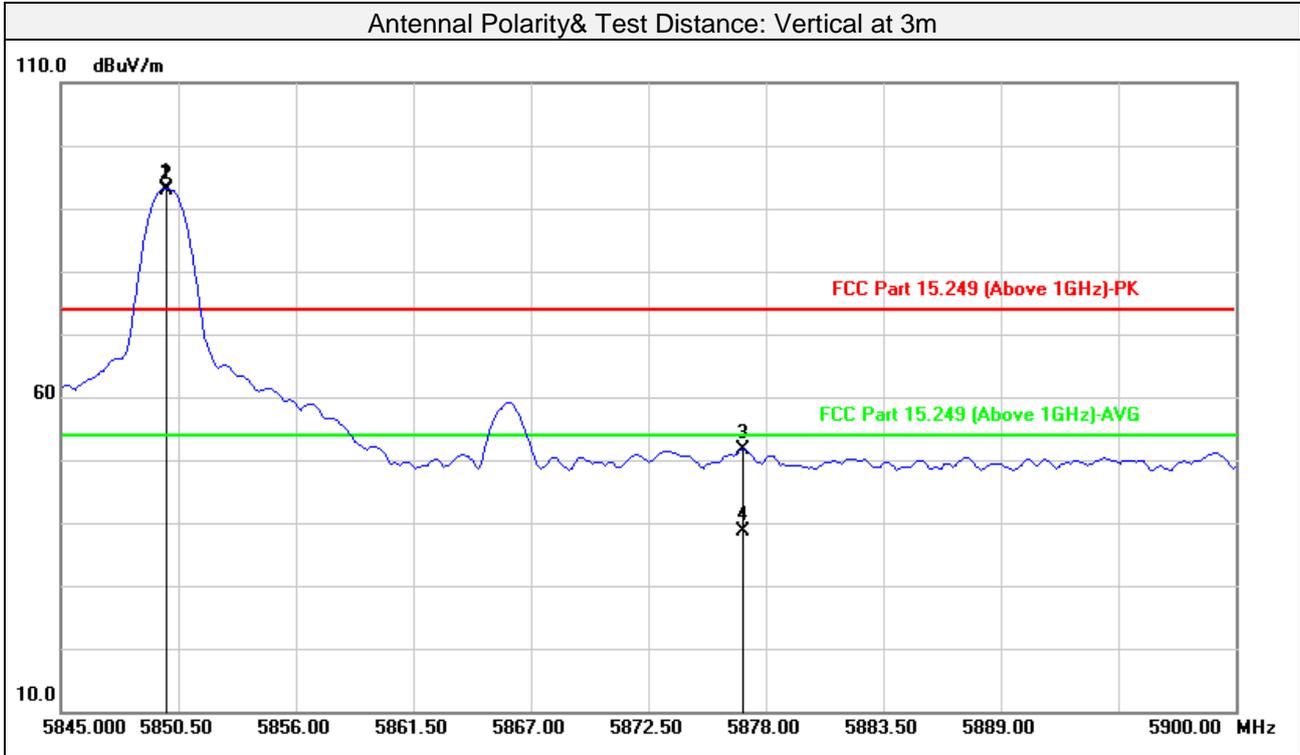

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	5849.960	86.19	6.85	93.04	114.00	-20.96	peak	126	257
2	5849.960	86.04	6.85	92.89	94.00	-1.11	AVG	126	257
3	5876.964	44.70	6.88	51.58	74.00	-22.42	peak	126	257
4	5876.964	31.64	6.88	38.52	54.00	-15.48	AVG	126	257
5	11700.000	41.43	16.14	57.57	74.00	-16.43	peak	195	315
6	11700.000	34.19	16.14	50.33	54.00	-3.67	AVG	195	315
7	17550.000	35.52	26.01	61.53	74.00	-12.47	peak	100	215
8	17550.000	23.94	26.01	49.95	54.00	-4.05	AVG	100	215

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. The other spurious emissions attenuated more than 20 dB below the permissible value is not required to be report



3.2 Conducted Emission Measurement

3.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

- Note: 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Due Date of Calibration
EMI Test Receiver Rohde&Schwarz	ESR 7	101961	2023-01-13
Artificial Mains Network Rohde&Schwarz	ENV216	3560.6550.15	2023-01-12
Test software FARAD	EZ_EMCC V1.1.4.2	N/A	N/A

- Note: 1. The calibration interval of the above test instruments is 12 months (The Antenna and Chamber was 24 months) and the calibrations are traceable to CEPREI/CHINA.
 2. The test was performed in Shielded Room 1.

3.2.3 Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit – 20dB) was not recorded.

Note: All modes of operation were investigated and the worst-case emissions are reported.

3.2.4 Deviation from Test Standard


No deviation.

3.2.5 Test setup



3.2.7 Test Results

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
-----------------	----------------	--	--------------------------------------

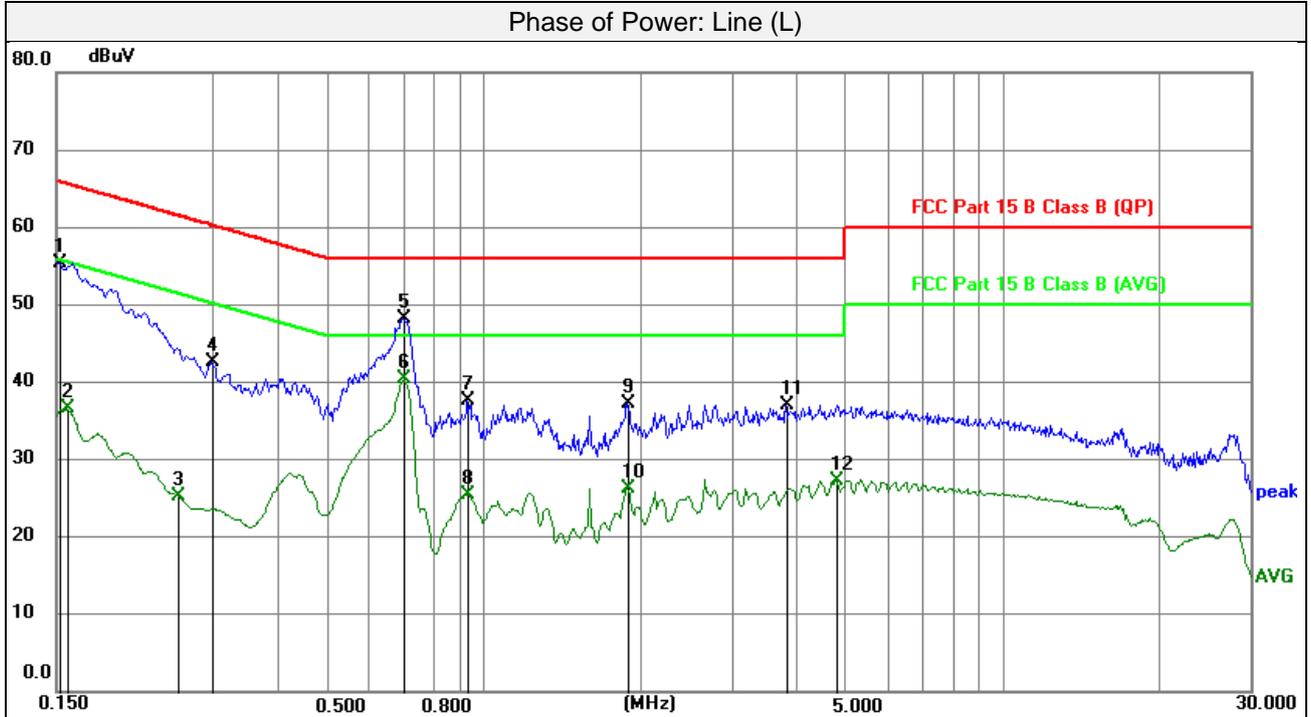


No	Frequency (MHz)	Reading (dBuV)	Correction Factor (dB)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1522	45.15	10.18	55.33	65.88	-10.55	peak
2	0.1568	26.35	10.17	36.52	55.63	-19.11	AVG
3	0.2580	15.12	10.16	25.28	51.50	-26.22	AVG
4	0.2985	32.48	10.18	42.66	60.28	-17.62	peak
5	0.7035	38.06	10.10	48.16	56.00	-7.84	peak
6	0.7035	30.25	10.10	40.35	46.00	-5.65	AVG
7	0.9307	27.60	10.06	37.66	56.00	-18.34	peak
8	0.9307	15.46	10.06	25.52	46.00	-20.48	AVG
9	1.8893	27.19	10.10	37.29	56.00	-18.71	peak
10	1.8893	16.10	10.10	26.20	46.00	-19.80	AVG
11	3.8378	26.95	10.09	37.04	56.00	-18.96	peak
12	4.7828	17.22	10.06	27.28	46.00	-18.72	AVG

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value



Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
-----------------	----------------	--	--------------------------------------

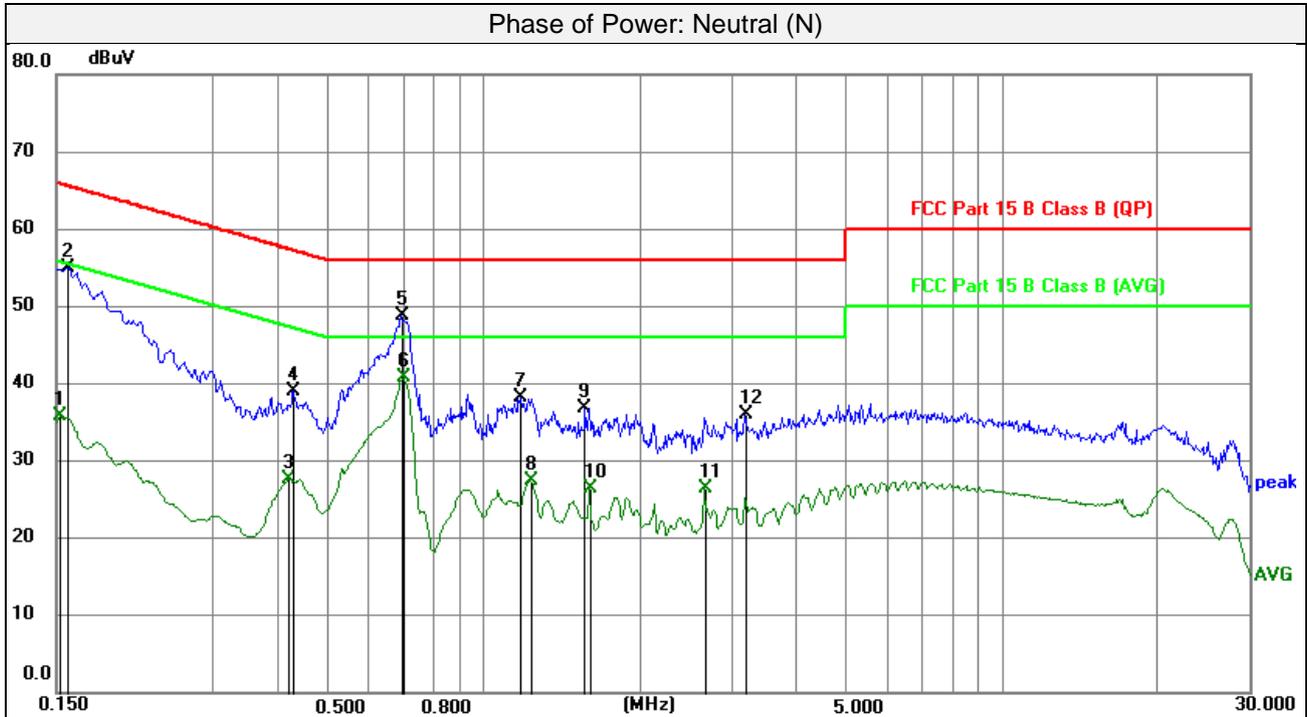

No.	Frequency (MHz)	Reading (dBuV)	Correction Factor (dB)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1522	25.54	10.18	35.72	55.88	-20.16	AVG
2	0.1568	44.75	10.17	54.92	65.63	-10.71	peak
3	0.4222	17.48	10.09	27.57	47.40	-19.83	AVG
4	0.4312	28.98	10.09	39.07	57.23	-18.16	peak
5	0.6967	38.61	10.10	48.71	56.00	-7.29	peak
6	0.7035	30.61	10.10	40.71	46.00	-5.29	AVG
7	1.1827	28.19	10.06	38.25	56.00	-17.75	peak
8	1.2323	17.28	10.06	27.34	46.00	-18.66	AVG
9	1.5720	26.74	10.08	36.82	56.00	-19.18	peak
10	1.6035	16.40	10.08	26.48	46.00	-19.52	AVG
11	2.6723	16.27	10.09	26.36	46.00	-19.64	AVG
12	3.2055	25.86	10.09	35.95	56.00	-20.05	peak

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.




3.3 Occupied Bandwidth Measurement

3.3.1 Limits of Occupied Bandwidth Measurement

According to FCC 15.215(c), must be designed to ensure that the Occupied bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

3.3.2 Test Setup

Subclause 11.8 of ANSI C63.10 is applicable.

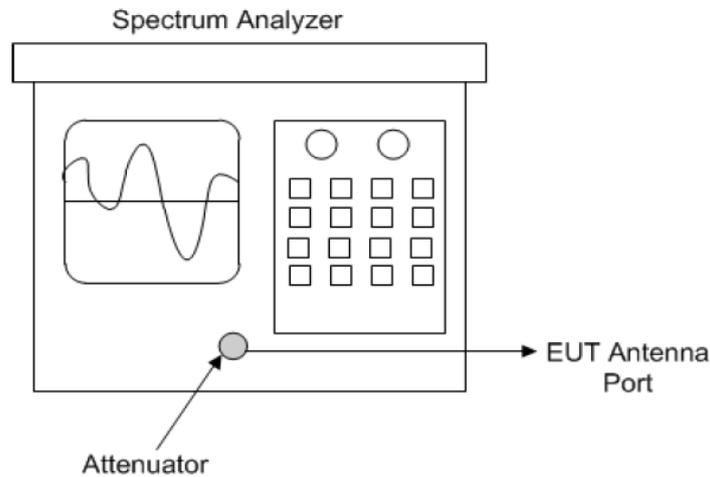

3.3.3 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Due Date of Calibration
Spectrum Keysight	N9020A	MY51240612	2022-09-08
Spectrum Analyzer Rohde&Schwarz	FSV-40N	101783	2023-01-13
Power Meter 10Hz~18GHz Tonscend	JS0806-2	188060126	2022-09-08
Signal generator Keysight	E4421B	GB40051020	2022-09-12
Signal generator Keysight	N5182A	MY47420944	2022-09-08
Test Software Tonscend	JS0806-2	NA	NA
Hygrothermograph Yuhuaze	HTC-1	NA	2022-09-09

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA.
2. The test was performed in Chamber 1.



3.3.4 Test Procedure

Option 1:

- a. Set resolution bandwidth (RBW) = 30kHz
- b. Set the video bandwidth (VBW) ≥ 3 x RBW
- c. Detector = Peak.
- d. Trace mode = max hold.
- e. Sweep = auto couple.
- f. Allow the trace to stabilize.
- g. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 20dB relative to the maximum level measured in the fundamental emission

3.3.5 Deviation from Test Standard

No deviation.


3.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.3.7 Test Result

Test Mode	Channel	Frequency (MHz)	20dB Occupied Bandwidth (MHz)	Verdict
TX	1	5729	1.094	Pass
	31	5789	1.037	Pass
	61	5850	0.943	Pass

Test Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Verdict
TX	1	5729	1.5704	Pass
	31	5789	1.5035	Pass
	61	5850	1.4337	Pass

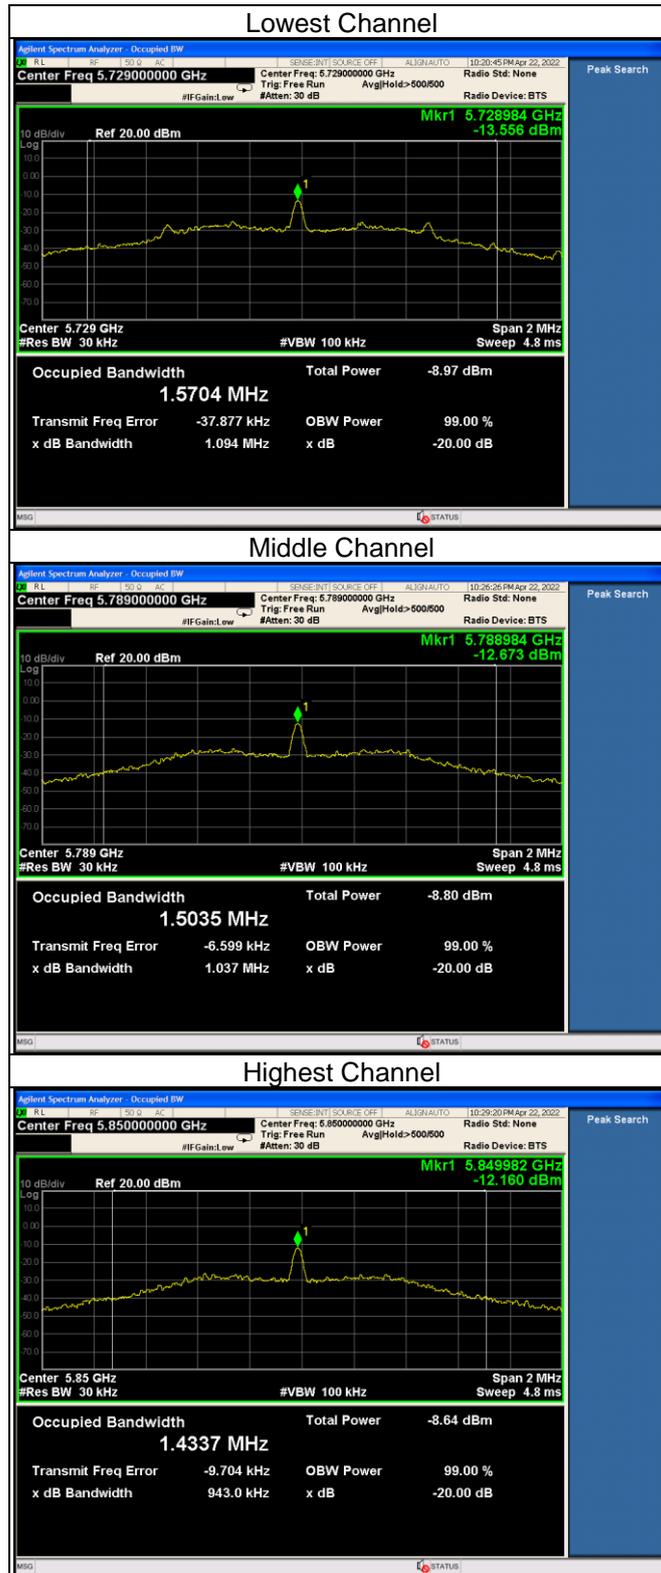



4. Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).



Appendix – Information on The Testing Laboratories

We, [Hwa-Hsing \(Dongguan\) Co., Ltd.](#), A global provider of TESTING and CERTIFICATION services for consumer products, electronic products and wireless information technology products. Adhering to the core values “HONEST and TRUSTWORTHY, OBJECTIVE and IMPARTIALITY, RIGOROUS and AFFICIENT”, commitment to provide professional, perfect and efficient comprehensive ONE-STOP solution of TESTING and CERTIFICATION services for Manufacturers, Buyers, Traders, Brands, Retailers. Assist client to better manage risk, protect their brands, reduce costs and cut time to over 150 markets in global. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lab Address: [No.101, Bld N1, Yuyuan 2Rd, Yuyuan Industrial Park, HuangJiang Town, Dongguan, China](#)

Contact Tel: [0769-83078199](tel:0769-83078199)

Email: Customerservice.dg@hwa-hsing.com

Web Site: www.hwa-hsing.com

--- END ---