



## ANSI/IEEE Std. C95.1-1992

In accordance with the requirements of FCC Report and Order:

ET Docket 93-62 ; FCC 47 CFR Part 2 ( 2.1093)

IC RSS-102 Issue 4, March 2010

IEC 62209-2:2010

## FCC SAR TEST REPORT

For

Product Name: 802.11a/b/g/n/ac WLAN + Bluetooth PCI-E Mini Card

Model No.: BCM94352Z

Series Model: N/A

Test Report Number:

C140425S02-SF

Issued for

Broadcom Corporation

190 MATHILDA PLACE SUNNYVALE, CA 94086, U.S.A.

Issued by

Compliance Certification Services Inc.

Kun shan Laboratory

No.10 Weiye Rd., Innovation park, Eco&Tec,  
Development Zone, Kunshan City, Jiangsu, China

TEL: 86-512-57355888

FAX: 86-512-57370818



TESTING CERT #2541.01

**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by A2LA or any government agencies. The test results in the report only apply to the tested sample.



## Revision History

| Revision | REPORT NO.    | Date          | Page Revised | Contents   |
|----------|---------------|---------------|--------------|--|
| Original | C140425S02-SF | May 16, 2014  | N/A          | N/A  |
| 01       | C140425S02-SF | June 9, 2014  | All          | Revise IC  |
| 01       | C140425S02-SF | June 9, 2014  | 23 to 29     | Update turn-up procedure form                                |
| 01       | C140425S02-SF | June 9, 2014  | 30           | Revise SAR exclusion threshold                               |
| 01       | C140425S02-SF | June 9, 2014  | Section 10.9 | Remove the second repeated measurement information           |
| 01       | C140425S02-SF | June 9, 2014  | All          | Update frequency 5785MHz test plots and relevant information |
| 02       | C140425S02-SF | June 19, 2014 | All          | Add appendix E output power test result                      |
| 03       | C140425S02-SF | June 24, 2014 | 5,23         | Remove 802.11n HT40 information                              |
| 03       | C140425S02-SF | June 24, 2014 | 33,39        | Add simultaneous transmission description                    |



## TABLE OF CONTENTS

|  |           |
|--|-----------|
| <b>1. CERTIFICATE OF COMPLIANCE (SAR EVALUATION)</b>             | <b>4</b>  |
| <b>2. EUT DESCRIPTION</b>  | <b>5</b>  |
| 2.1 MAXIMUM RF OUTPUT POWER AMONG PRODUCTION UNITS               | 5         |
| <b>3. REQUIREMENTS FOR COMPLIANCE TESTING DEFINED BY THE FCC</b> | <b>7</b>  |
| <b>4. TEST METHODOLOGY</b>                                       | <b>7</b>  |
| <b>5. TEST CONFIGURATION</b>                                     | <b>7</b>  |
| <b>6. DOSIMETRIC ASSESSMENT SETUP</b>                            | <b>8</b>  |
| 6.1 MEASUREMENT SYSTEM DIAGRAM                                   | 9         |
| 6.2 SYSTEM COMPONENTS  | 10        |
| <b>7. EVALUATION PROCEDURES</b>                                  | <b>13</b> |
| <b>8. MEASUREMENT UNCERTAINTY</b>                                | <b>17</b> |
| <b>9. EXPOSURE LIMIT</b>   | <b>18</b> |
| <b>10. MEASUREMENT RESULTS</b>                                   | <b>19</b> |
| 10.1 TEST LIQUIDS CONFIRMATION                                   | 19        |
| 10.2 LIQUID MEASUREMENT RESULTS                                  | 20        |
| 10.3 SYSTEM PERFORMANCE CHECK                                    | 21        |
| 10.4 EUT TUNE-UP PROCEDURES AND TEST MODE                        | 23        |
| 10.5 STANDALONE SAR TEST EXCLUSION                               | 29        |
| 10.6 SAR TEST CONFIGURATIONS                                     | 31        |
| 10.7 ANTENNA LOCATION  | 32        |
| 10.8 BODY TEST EXCLUSION THRESHOLDS                              | 34        |
| 10.9 SAR MEASUREMENT RESULTS                                     | 35        |
| 10.10 REPEATED SAR MEASUREMENT                                   | 38        |
| 10.11 SAR HANDSETS MULTI XMITER ASSESSMENT                       | 39        |
| <b>11. EQUIPMENT LIST &amp; CALIBRATION STATUS</b>               | <b>40</b> |
| <b>12. FACILITIES</b>  | <b>41</b> |
| <b>13. REFERENCES</b>  | <b>41</b> |
| <b>14. ATTACHMENTS</b>   | <b>42</b> |
| <b>Appendix A: DUT AND SAR STEUP Photo</b>                       | <b>43</b> |
| <b>Appendix B: Plots of Performance Check</b>                    | <b>43</b> |
| <b>Appendix C: DASY Calibration Certificate</b>                  | <b>50</b> |
| <b>Appendix D: Plots of SAR Test Result</b>                      | <b>92</b> |
| <b>Appendix E: OUTPUT POWER TEST RESULT</b>                      | <b>92</b> |



## 1. CERTIFICATE OF COMPLIANCE (SAR EVALUATION)

|   |   |
|---|---|
| <b>Product Name:</b>  | 802.11a/b/g/n/ac WLAN + Bluetooth PCI-E Mini Card                             |
| <b>Model Name.:</b>   | BCM94352Z   |
| <b>Series Model:</b>  | N/A   |
| <b>Devices supporting GPRS/EGPRS:</b>   | No  |
| <b>Device Category:</b>   | PORTABLE DEVICES  |
| <b>Exposure Category:</b>   | GENERAL POPULATION/UNCONTROLLED EXPOSURE                                      |
| <b>Date of Test:</b>  | April 23, 2014 to May 3, 2014   |
| <b>Applicant:</b>   | <b>Broadcom Corporation</b><br>190 MATHILDA PLACE SUNNYVALE, CA 94086, U.S.A. |
| <b>Manufacturer:</b>  | <b>Broadcom Corporation</b><br>190 MATHILDA PLACE SUNNYVALE, CA 94086, U.S.A. |
| <b>Application Type:</b>  | Certification   |
| <b>APPLICABLE STANDARDS AND TEST PROCEDURES</b>   |   |
| <b>STANDARDS AND TEST PROCEDURES</b>  | <b>TEST RESULT</b>  |
| ANSI/IEEE C95.1-1992<br>RSS-102 issue 4: 2010   | No non-compliance noted   |
| <b>Deviation from Applicable Standard</b>   |   |
| None  |   |
| The device was tested by Compliance Certification Services Inc. in accordance with the measurement methods and procedures specified in KDB 865664 The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties. |   |

**Approved by:**

Jeff Fang  
RF Manager  
Compliance Certification Services Inc.

**Tested by:**

Luck Fu  
Test Engineer  
Compliance Certification Services Inc.



## 2. EUT DESCRIPTION

|                               |   |
|-------------------------------|---|
| <b>Product Name:</b>          | 802.11a/b/g/n/ac WLAN + Bluetooth PCI-E Mini Card   |
| <b>Model Name.:</b>           | BCM94352Z   |
| <b>Series Model:</b>          | N/A   |
| <b>FCC ID:</b>                | QDS-BRCM1076  |
| <b>IC:</b>                    | 4324A-BRCM1076  |
| <b>Power reduction:</b>       | NO  |
| <b>DTM Description:</b>       | N/A   |
| <b>Device Category:</b>       | Production unit   |
| <b>Frequency Range:</b>       | WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz<br>WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz<br>WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz<br>WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz<br>WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz<br>Bluetooth: 2402 MHz ~ 2480 MHz |
| <b>Max. Reported SAR(1g):</b> | Body:<br>WLAN 2.4GHz Band:1.44 W/kg<br>WLAN 5.2GHz Band:1.44 W/kg<br>WLAN 5.3GHz Band:1.42 W/kg<br>WLAN 5.5GHz Band:1.41 W/kg<br>WLAN 5.8GHz Band:1.44 W/kg   |
| <b>Modulation Technique:</b>  | 802.11a/b/g/n HT20/HT40/VHT20/VHT40/VHT80<br>Bluetooth:3.0 + EDR, 8-DPSK<br>Bluetooth:4.0   |
| <b>Operating Mode:</b>        | Maximum continuous output   |

### Tested System Details

| Product           | Manufacturer | Model No.         |
|-------------------|--------------|-------------------|
| Notebook Computer | Lenovo       | Lenovo Yoga 2 Pro |

### 2.1 MAXIMUM RF OUTPUT POWER AMONG PRODUCTION UNITS

| Band / Mode | Average Power(dBm) |                    |
|-------------|--------------------|--------------------|
|             | V3.0 + EDR, GFSK   | V3.0 + EDR, 8-DPSK |
| Bluetooth   | 5.1                | 5.2                |
| Band / Mode | Average Power(dBm) |                    |
|             | BLE4.0, GFSK       |                    |
| Bluetooth   | -2.17              |                    |

| Band / Frequency (MHz) |      | IEEE 802.11 Average Power (dBm) |       |      |        |       |       |
|------------------------|------|---------------------------------|-------|------|--------|-------|-------|
|                        |      | Chain0                          |       |      | Chain1 |       |       |
|                        |      | 11b                             | 11g   | HT20 | 11b    | 11g   | HT20  |
| 2.4GHz Band            | 2412 | 14.3                            | 14.28 | 14.2 | 13.8   | 13.75 | 13.65 |
|                        | 2422 |                                 |       |      |        |       |       |
|                        | 2437 | 14.3                            | 14.28 | 14.2 | 13.8   | 13.75 | 13.65 |
|                        | 2452 |                                 |       |      |        |       |       |
|                        | 2462 | 14.3                            | 14.28 | 14.2 | 13.8   | 13.75 | 13.65 |



# Compliance Certification Services Inc.

Report No: C140425S02-SF

FCC ID: QDS-BRCM1076

Date of Issue : June 24, 2014

IC: 4324A-BRCM1076

| Band / Frequency<br>(MHz) |      | IEEE 802.11 Average Power (dBm) |               |               |       |        |               |               |       |
|---------------------------|------|---------------------------------|---------------|---------------|-------|--------|---------------|---------------|-------|
|                           |      | Chain0                          |               |               |       | Chain1 |               |               |       |
|                           |      | 11a                             | HT20<br>VTH20 | HT40<br>VHT40 | VHT80 | 11a    | HT20<br>VTH20 | HT40<br>VHT40 | VHT80 |
| 5.2GHz<br>Band            | 5180 | 12                              | 12            |               |       | 12.2   | 12.1          |               |       |
|                           | 5190 |                                 |               | 12            |       |        |               | 12.1          |       |
|                           | 5200 | 12                              | 12            |               |       | 12.2   | 12.1          |               |       |
|                           | 5210 |                                 |               |               | 12.5  |        |               |               | 13    |
|                           | 5220 | 12                              | 12            |               |       | 12.2   | 12.1          |               |       |
|                           | 5230 |                                 |               | 12            |       |        |               | 12.1          |       |
|                           | 5240 | 12                              | 12            |               |       | 12.2   | 12.1          |               |       |
| 5.3GHz<br>Band            | 5260 | 11.9                            | 11.8          |               |       | 14     | 13.9          |               |       |
|                           | 5270 |                                 |               | 11.8          |       |        |               | 13.9          |       |
|                           | 5280 | 11.9                            | 11.8          |               |       | 14     | 13.9          |               |       |
|                           | 5290 |                                 |               |               | 13.2  |        |               |               | 13.8  |
|                           | 5300 | 11.9                            | 11.8          |               |       | 14     | 13.9          |               |       |
|                           | 5310 |                                 |               | 11.8          |       |        |               | 13.9          |       |
|                           | 5320 | 11.9                            | 11.8          |               |       | 14     | 13.9          |               |       |
| 5.5GHz<br>Band            | 5500 | 13.5                            | 13.5          |               |       | 14     | 13.9          |               |       |
|                           | 5510 |                                 |               | 13.4          |       |        |               | 13.9          | 12    |
|                           | 5520 | 13.5                            | 13.4          |               |       | 14     | 13.9          |               |       |
|                           | 5530 |                                 |               |               | 11.5  |        |               |               |       |
|                           | 5540 | 13.5                            | 13.4          |               |       | 14     | 13.9          |               |       |
|                           | 5550 |                                 |               | 13.4          |       |        |               | 13.9          | 12    |
|                           | 5560 | 13.5                            | 13.4          |               |       | 14     | 13.9          |               |       |
|                           | 5580 | 13.5                            | 13.4          |               |       | 14     | 13.9          |               |       |
|                           | 5600 | 13.5                            | 13.4          |               |       | 14     | 13.9          |               |       |
|                           | 5610 |                                 |               |               | 11.5  |        |               |               |       |
|                           | 5620 | 13.5                            | 13.4          |               |       | 14     | 13.9          |               |       |
|                           | 5630 |                                 |               |               |       |        |               |               |       |
|                           | 5640 | 13.5                            | 13.4          |               |       | 14     | 13.9          |               |       |
|                           | 5650 |                                 |               |               |       |        |               |               |       |
|                           | 5660 | 13.5                            | 13.4          |               |       | 14     | 13.9          |               |       |
|                           | 5670 |                                 |               | 13.4          |       |        |               | 13.9          | 12    |
|                           | 5680 | 13.5                            | 13.4          |               |       | 14     | 13.9          |               |       |
|                           | 5690 |                                 |               |               | 11.5  |        |               |               |       |
|                           | 5700 | 13.5                            | 13.4          |               |       | 14     | 13.9          |               |       |
| 5.8GHz<br>Band            | 5745 | 14                              | 13.9          |               |       | 14     | 13.9          |               |       |
|                           | 5755 |                                 |               | 13.9          |       |        |               | 13.9          |       |
|                           | 5765 | 14                              | 13.9          |               |       | 14     | 13.9          |               |       |
|                           | 5775 |                                 |               |               | 14    |        |               |               | 14    |
|                           | 5785 | 14                              | 13.9          |               |       | 14     | 13.9          |               |       |
|                           | 5795 |                                 |               | 13.9          |       |        |               | 13.9          |       |
|                           | 5805 | 14                              | 13.9          |               |       | 14     | 13.9          |               |       |
|                           | 5825 | 14                              | 13.9          |               |       | 14     | 13.9          |               |       |



### 3. REQUIREMENTS FOR COMPLIANCE TESTING DEFINED BY THE FCC

The US Federal Communications Commission has released the report and order "Guidelines for Evaluating the Environmental Effects of RF Radiation", ET Docket No. 93-62 in August 1996. The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 W/Kg for an uncontrolled environment and 8.0 W/Kg for an occupational/controlled environment as recommended by the ANSI/IEEE standard C95.1-1992.

### 4. TEST METHODOLOGY

The Specific Absorption Rate (SAR) testing specification, method and procedure for this device is in accordance with the following standards:

- ☒ FCC 47 CFR Part 2 ( 2.1093)
- ☒ ANSI/IEEE C95.1-1992
- ☒ IEEE 1528-2003
- ☒ IEEE 1528-2013
- ☒ RSS-102 issue 4: 2010
- ☒ Notice 2013-DRS0911
- ☒ KDB 447498 D01v05r02 General RF Exposure Guidance v05
- ☒ KDB 865664 D01v01r03 Measurement 100 MHz to 6 GHz
- ☒ KDB 865664 D02v01r01 RF Exposure Reporting
- ☒ KDB 248227 D01v01r02 SAR Measurement Procedures for 802.11 a/b/g Transmitters
- ☒ KDB 616217 D04v01r01 SAR for laptop and tablets v01r01

### 5. TEST CONFIGURATION

During WLAN SAR testing EUT is configured with the WLAN continuous TX tool, and the transmission duty factor was monitored on the spectrum analyzer with zero-span setting

For WLAN SAR testing, WLAN engineering test software installed on the EUT can provide continuous transmitting RF signal.



## 6. DOSIMETRIC ASSESSMENT SETUP

These measurements were performed with the automated near-field scanning system DASY 5 from ATENNESSA. The system is based on a high precision robot (working range greater than 0.9 m), which positions the probes with a positional repeatability of better than  $\pm 0.02$  mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit. The SAR measurements were conducted with the E-field PROBE EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure described in [7] with accuracy of better than  $\pm 10\%$ . The spherical isotropy was evaluated with the procedure described in [8] and found to be better than  $\pm 0.25$  dB. The phantom used was the SAM Twin Phantom as described in FCC supplement C, IEE P1528 and CENELEC EN 62209.

The following table gives the recipes for tissue simulating liquids.

| Ingredients<br>(% by weight) | Frequency<br>(MHz) |       |       |      |       |       |       |      |      |      |
|------------------------------|--------------------|-------|-------|------|-------|-------|-------|------|------|------|
|                              | 450                |       | 835   |      | 915   |       | 1900  |      | 2450 |      |
| Tissue Type                  | Head               | Body  | Head  | Body | Head  | Body  | Head  | Body | Head | Body |
| Water                        | 38.56              | 51.16 | 41.45 | 52.4 | 41.05 | 56.0  | 54.9  | 40.4 | 62.7 | 73.2 |
| Salt (NaCl)                  | 3.95               | 1.49  | 1.45  | 1.4  | 1.35  | 0.76  | 0.18  | 0.5  | 0.5  | 0.04 |
| Sugar                        | 56.32              | 46.78 | 56.0  | 45.0 | 56.5  | 41.76 | 0.0   | 58.0 | 0.0  | 0.0  |
| HEC                          | 0.98               | 0.52  | 1.0   | 1.0  | 1.0   | 1.21  | 0.0   | 1.0  | 0.0  | 0.0  |
| Bactericide                  | 0.19               | 0.05  | 0.1   | 0.1  | 0.1   | 0.27  | 0.0   | 0.1  | 0.0  | 0.0  |
| Triton X-100                 | 0.0                | 0.0   | 0.0   | 0.0  | 0.0   | 0.0   | 0.0   | 0.0  | 36.8 | 0.0  |
| DGBE                         | 0.0                | 0.0   | 0.0   | 0.0  | 0.0   | 0.0   | 44.92 | 0.0  | 0.0  | 26.7 |
| Dielectric Constant          | 43.42              | 58.0  | 42.54 | 56.1 | 42.0  | 56.8  | 39.9  | 54.0 | 39.8 | 52.5 |
| Conductivity (S/m)           | 0.85               | 0.83  | 0.91  | 0.95 | 1.0   | 1.07  | 1.42  | 1.45 | 1.88 | 1.78 |


### Simulating Liquids for 5 GHz, Manufactured by SPEAG

| Ingredients        | (% by weight) |
|--------------------|---------------|
| Water              | 78            |
| Mineral oil        | 11            |
| Emulsifiers        | 9             |
| Additives and Salt | 2             |





## 6.1 MEASUREMENT SYSTEM DIAGRAM

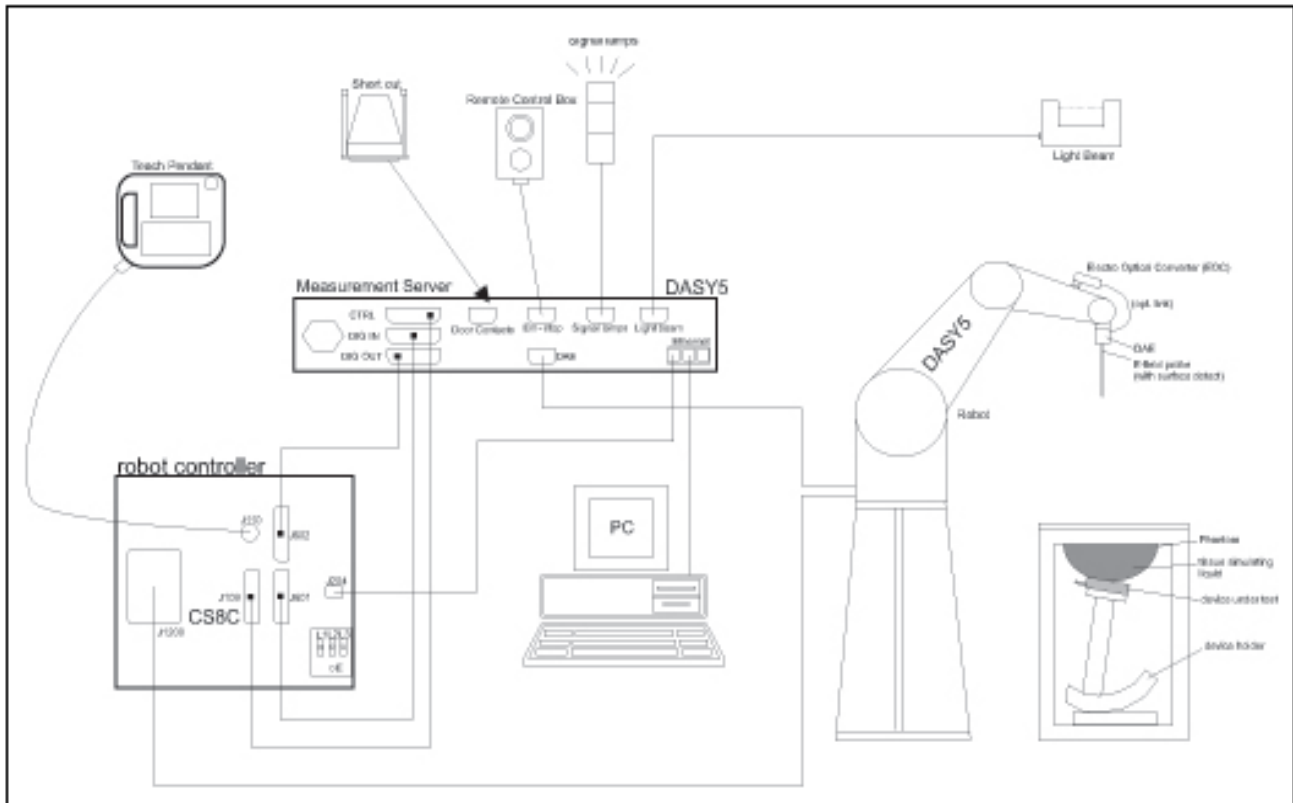

### The DASYS5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASYS5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing validating the proper functioning of the system.



## 6.2 SYSTEM COMPONENTS



The DASY5 measurement server is based on a PC/104 CPU board with a 400MHz intel ULV celeron, 128MB chip-disk and 128 MB RAM. The necessary circuits for communication with either the DAE4(or DAE3) electronic box as well as the 16-bit AD-converter system for optical detection and digital I/O interface are contained on the DASY5 I/O-board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.



The PC-operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with two expansion slots which are reserved for future applications. Please note that the expansion slots do not have a standardized pinout and therefore only the expansion cards provided by SPEAG can be inserted. Expansion cards from any other supplier could seriously damage the measurement server. Calibration: No calibration required.

### Data Acquisition Electronics (DAE)



The data acquisition electronics (DAE4) consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE4 box is 200MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

### EX3DV4 Isotropic E-Field Probe for Dosimetric Measurements



**Construction:** Symmetrical design with triangular core

Built-in shielding against static charges

PEEK enclosure material (resistant to organic solvents, e.g., DGBE)

**Calibration:** Basic Broad Band Calibration in air: 10-3000 MHz.

Conversion Factors (CF) for HSL 900 and HSL 1800  
CF-Calibration for other liquids and frequencies upon request.

**Frequency:** 10 MHz to > 6 GHz; Linearity:  $\pm 0.2$  dB (30 MHz to 3 GHz)

**Directivity:**  $\pm 0.3$  dB in HSL (rotation around probe axis)  
 $\pm 0.5$  dB in HSL (rotation normal to probe axis)

**Dynamic Range:** 10  $\mu$ W/g to > 100 mW/g; Linearity:  $\pm 0.2$  dB  
(noise: typically < 1  $\mu$ W/g)



**Dimensions:** Overall length: 337 mm (Tip: 9 mm)  
Tip diameter: 2.5 mm (Body: 10 mm)  
Distance from probe tip to dipole centers:  
1 mm

**Application:** High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.



Interior of probe

## SAM Twin Phantom

### Construction:

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-200X, CENELEC 50360 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.



**Shell Thickness:**  $2 \pm 0.2$  mm


**Filling Volume:** Approx. 25 liters

**Dimensions:** Height: 850mm; Length: 1000mm; Width: 750mm

## SAM Phantom (ELI4 v4.0)

### Description Construction:

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209 Part II and all known tissue simulating liquids. ELI4 has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is supported by software version DASY4/DASY5.5 and higher and is compatible with all SPEAG dosimetric probes and dipoles

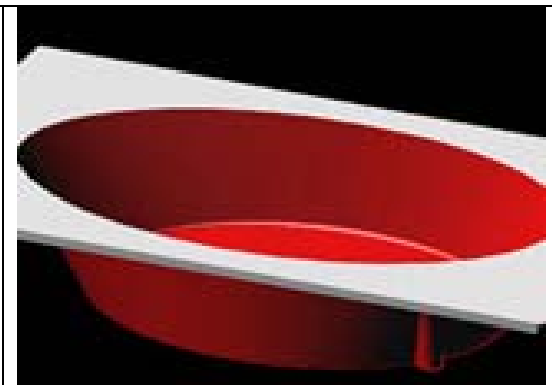

**Shell Thickness:**  $2.0 \pm 0.2$  mm (sagging: <1%)

**Filling Volume:** Approx. 25 liters

**Dimensions:** Major ellipse axis: 600 mm

**Minor axis:** 400 mm 500mm



## Device Holder for SAM Twin Phantom

**Construction:** In combination with the Twin SAM Phantom, the Mounting Device (made from POM) enables the rotation of the mounted transmitter in spherical coordinates, whereby the rotation point is the ear opening. The devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked at different phantom locations (left head, right head, and flat phantom).



## System Validation Kits for SAM Twin Phantom

**Construction:** Symmetrical dipole with 1/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor.

**Frequency:** 900, 1800, 2450, 5800 MHz

**ReTune loss:** > 20 dB at specified validation position

**Power capability:** > 100 W ( $f < 1\text{GHz}$ ); > 40 W ( $f > 1\text{GHz}$ )

**Dimensions:**

D835V2: dipole length: 161 mm; overall height: 340 mm

D1800V2: dipole length: 72.5 mm; overall height: 300 mm

D1900V2: dipole length: 67.7 mm; overall height: 300 mm

D2450V2: dipole length: 51.5 mm; overall height: 290 mm

D5GHzV2: dipole length: 20.6 mm; overall height: 300mm



## System Validation Kits for ELI4 phantom

**Construction:** Symmetrical dipole with 1/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor.

**Frequency:** 900, 1800, 2450, 5800 MHz

**ReTune loss:** > 20 dB at specified validation position

**Power capability:** > 100 W ( $f < 1\text{GHz}$ ); > 40 W ( $f > 1\text{GHz}$ )

**Dimensions:**

D835V2: dipole length: 161 mm; overall height: 340 mm

D1800V2: dipole length: 72.5 mm; overall height: 300 mm

D1900V2: dipole length: 67.7 mm; overall height: 300 mm

D2450V2: dipole length: 51.5 mm; overall height: 290 mm

D5GHzV2: dipole length: 20.6 mm; overall height: 300 mm





## 7. EVALUATION PROCEDURES

### DATA EVALUATION

The DASY 5 post processing software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

|                    |                           |                                  |
|--------------------|---------------------------|----------------------------------|
| Probe parameters:  | - Sensitivity             | $Norm_i, a_{i0}, a_{i1}, a_{i2}$ |
|                    | - Conversion factor       | $ConvF_i$                        |
|                    | - Diode compression point | $dcp_i$                          |
| Device parameters: | - Frequency               | $f$                              |
|                    | - Crest factor            | $cf$                             |
| Media parameters:  | - Conductivity            | $\sigma$                         |
|                    | - Density                 | $\rho$                           |

These parameters must be set correctly in the software. They can be found in the component documents or be imported into the software from the configuration files issued for the DASY 5 components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

|      |         |   |
|------|---------|---|
| with | $V_i$   | = Compensated signal of channel i (i = x, y, z)     |
|      | $U_i$   | = Input signal of channel i (i = x, y, z)           |
|      | $cf$    | = Crest factor of exciting field (DASY 5 parameter) |
|      | $dcp_i$ | = Diode compression point (DASY 5 parameter)        |

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

H-field probes:

$$H_i = \sqrt{V_i} \cdot \frac{a_{i10} + a_{i11}f + a_{i12}f^2}{f}$$

|      |          |   |
|------|----------|---|
| with | $V_i$    | = Compensated signal of channel i (i = x, y, z)                                       |
|      | $Norm_i$ | = Sensor sensitivity of channel i (i = x, y, z)<br>$\mu V/(V/m)^2$ for E0field Probes |
|      | $ConvF$  | = Sensitivity enhancement in solution   |
|      | $a_{ij}$ | = Sensor sensitivity factors for H-field probes                                       |
|      | $f$      | = Carrier frequency (GHz)   |
|      | $E_i$    | = Electric field strength of channel i in V/m   |
|      | $H_i$    | = Magnetic field strength of channel i in A/m   |

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$





The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with  $SAR$  = local specific absorption rate in mW/g

$E_{tot}$  = total field strength in V/m

$\sigma$  = conductivity in [mho/m] or [Siemens/m]

$\rho$  = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

The power flow density is calculated assuming the excitation field as a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{3770} \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with  $P_{pwe}$  = Equivalent power density of a plane wave in mW/cm<sup>2</sup>

$E_{tot}$  = total electric field strength in V/m

$H_{tot}$  = total magnetic field strength in A/m



## **SAR EVALUATION PROCEDURES**

The procedure for assessing the peak spatial-average SAR value consists of the following steps:

- **Power Reference Measurement**

The reference and drift jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

- **Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines implemented in DASY 5 software can find the maximum locations even in relatively coarse grids. The scan area is defined by an editable grid. This grid is anchored at the grid reference point of the selected section in the phantom. When the area scan's property sheet is brought-up, grid was at to 15 mm by 15 mm and can be edited by a user.

- **Zoom Scan**

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default zoom scan measures 5 x 5 x 7 points within a cube whose base faces are centered around the maximum found in a preceding area scan job within the same procedure. If the preceding Area Scan job indicates more than one maximum, the number of Zoom Scans has to be enlarged accordingly (The default number inserted is 1).

- **Power Drift measurement**

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same settings. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. In the properties of the Drift job, the user can specify a limit for the drift and have DASY 5 software stop the measurements if this limit is exceeded.

- **Z-Scan**

The Z Scan job measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. A user can anchor the grid to the current probe location. As with any other grids, the local Z-axis of the anchor location establishes the Z-axis of the grid.



## SPATIAL PEAK SAR EVALUATION

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE1529 standard. It can be conducted for 1 g and 10 g.

The DASY 5 system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maximum searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

### Extrapolation

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation.

Extrapolation routines require at least 10 measurement points in 3-D space. They are used in the Cube Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation. For a grid using 5x5x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1 g and 10 g cubes.

### Boundary effect

For measurements in the immediate vicinity of a phantom surface, the field coupling effects between the probe and the boundary influence the probe characteristics. Boundary effect errors of different dosimetric probe types have been analyzed by measurements and using a numerical probe model. As expected, both methods showed an enhanced sensitivity in the immediate vicinity of the boundary. The effect strongly depends on the probe dimensions and disappears with increasing distance from the boundary. The sensitivity can be approximately given as:

$$S \approx S_o + S_b \exp\left(-\frac{z}{a}\right) \cos\left(\pi \frac{z}{\lambda}\right)$$

Since the decay of the boundary effect dominates for small probes ( $a \ll \lambda$ ), the cos-term can be omitted. Factors  $S_b$  (parameter Alpha in the DASY 5 software) and  $a$  (parameter Delta in the DASY 5 software) are assessed during probe calibration and used for numerical compensation of the boundary effect. Several simulations and measurements have confirmed that the compensation is valid for different field and boundary configurations.

This simple compensation procedure can largely reduce the probe uncertainty near boundaries. It works well as long as:

- the boundary curvature is small
- the probe axis is angled less than 30° to the boundary normal
- the distance between probe and boundary is larger than 25% of the probe diameter
- the probe is symmetric (all sensors have the same offset from the probe tip)

Since all of these requirements are fulfilled in a DASY 5 system, the correction of the probe boundary effect in the vicinity of the phantom surface is performed in a fully automated manner via the measurement data extraction during post processing.





## 8. MEASUREMENT UNCERTAINTY

| UNCERTAINTY BUDGE ACCORDING TO IEEE 1528-2003 |                           |                          |            |                   |                           |                                    |
|---|---------------------------|--------------------------|------------|-------------------|---------------------------|------------------------------------|
| Error Description                             | Uncertainty Value $\pm\%$ | Probability distribution | Divisor    | C <sub>1</sub> 1g | Standard unc.(1g) $\pm\%$ | V <sub>1</sub> or V <sub>eff</sub> |
| <b>Measurement System</b>                     |                           |                          |            |                   |                           |                                    |
| Probe calibration                             | $\pm 5.5$                 | normal                   | 1          | 1                 | $\pm 5.5$                 | $\infty$                           |
| Axial isotropy of probe                       | $\pm 4.7$                 | rectangular              | $\sqrt{3}$ | 0.7               | $\pm 1.9$                 | $\infty$                           |
| Hemispherical Isotropy of probe               | $\pm 9.6$                 | rectangular              | $\sqrt{3}$ | 0.7               | $\pm 3.9$                 | $\infty$                           |
| Probe linearity                               | $\pm 4.7$                 | rectangular              | $\sqrt{3}$ | 1                 | $\pm 2.7$                 | $\infty$                           |
| Detection Limit                               | $\pm 1.0$                 | rectangular              | $\sqrt{3}$ | 1                 | $\pm 0.6$                 | $\infty$                           |
| Boundary effects                              | $\pm 1.0$                 | rectangular              | $\sqrt{3}$ | 1                 | $\pm 0.6$                 | $\infty$                           |
| Readout electronics                           | $\pm 0.3$                 | normal                   | 1          | 1                 | $\pm 0.3$                 | $\infty$                           |
| Response time                                 | $\pm 0.8$                 | rectangular              | $\sqrt{3}$ | 1                 | $\pm 0.5$                 | $\infty$                           |
| Integration time                              | $\pm 2.6$                 | rectangular              | $\sqrt{3}$ | 1                 | $\pm 1.5$                 | $\infty$                           |
| Probe positioning                             | $\pm 2.9$                 | rectangular              | $\sqrt{3}$ | 1                 | $\pm 1.7$                 | $\infty$                           |
| Probe positioner                              | $\pm 0.4$                 | rectangular              | $\sqrt{3}$ | 1                 | $\pm 0.2$                 | $\infty$                           |
| RF ambient Noise                              | $\pm 3.0$                 | rectangular              | $\sqrt{3}$ | 1                 | $\pm 1.7$                 | $\infty$                           |
| RF ambient Reflections                        | $\pm 3.0$                 | rectangular              | $\sqrt{3}$ | 1                 | $\pm 1.7$                 | $\infty$                           |
| Max.SAR Eval                                  | $\pm 1.0$                 | rectangular              | $\sqrt{3}$ | 1                 | $\pm 0.6$                 | $\infty$                           |
| <b>Test Sample Related</b>                    |                           |                          |            |                   |                           |                                    |
| Device positioning                            | $\pm 2.9$                 | normal                   | 1          | 1                 | $\pm 2.9$                 | 145                                |
| Device holder uncertainty                     | $\pm 3.6$                 | normal                   | 1          | 1                 | $\pm 3.6$                 | 5                                  |
| Power drift                                   | $\pm 5.0$                 | rectangular              | $\sqrt{3}$ | 1                 | $\pm 2.9$                 | $\infty$                           |
| <b>Phantom and Set up</b>                     |                           |                          |            |                   |                           |                                    |
| Phantom uncertainty                           | $\pm 4.0$                 | rectangular              | $\sqrt{3}$ | 1                 | $\pm 2.3$                 | $\infty$                           |
| Liquid conductivity(target)                   | $\pm 5.0$                 | rectangular              | $\sqrt{3}$ | 0.64              | $\pm 1.8$                 | $\infty$                           |
| Liquid conductivity(meas.)                    | $\pm 2.5$                 | rectangular              | 1          | 0.64              | $\pm 1.6$                 | $\infty$                           |
| Liquid permittivity(target)                   | $\pm 5.0$                 | rectangular              | $\sqrt{3}$ | 0.6               | $\pm 1.7$                 | $\infty$                           |
| Liquid permittivity(meas.)                    | $\pm 2.5$                 | rectangular              | 1          | 0.6               | $\pm 1.5$                 | $\infty$                           |
| <b>Combined Standard Uncertainty</b>          |                           |                          |            |                   | $\pm 10.7$                | 387                                |
| <b>Coverage Factor for 95%</b>                |                           | kp=2                     |            |                   |                           |                                    |
| <b>Expanded Standard Uncertainty</b>          |                           |                          |            |                   | $\pm 21.4$                |                                    |

Table: Worst-case uncertainty for DASY5

The budge is valid for the frequency range 300 MHz to 6G Hz and represents a worst-case analysis.



## 9. EXPOSURE LIMIT

(A). Limits for Occupational/Controlled Exposure (W/kg)

| Whole-Body | Partial-Body | Hands, Wrists, Feet and Ankles |
|------------|--------------|--------------------------------|
| 0.4        | 8.0          | 20.0                           |

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

| Whole-Body | Partial-Body | Hands, Wrists, Feet and Ankles |
|------------|--------------|--------------------------------|
| 0.08       | 1.6          | 4.0                            |

**Note:** **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 10 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 1 grams of tissue defined as a tissue volume in the shape of a cube.

**Population/Uncontrolled Environments** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

**Occupational/Controlled Environments** are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

**NOTE**  
**GENERAL POPULATION/UNCONTROLLED EXPOSURE**  
**PARTIAL BODY LIMIT**  
**1.6 W/kg**



## 10. MEASUREMENT RESULTS

### 10.1 TEST LIQUIDS CONFIRMATION

#### SIMULATED TISSUE LIQUID PARAMETER CONFIRMATION

The dielectric parameters were checked prior to assessment using the SPEAG DAK3.5 dielectric probe kit. The dielectric parameters measured are reported in each correspondent section.

#### IEEE SCC-34/SC-2 P1528 RECOMMENDED TISSUE DIELECTRIC PARAMETERS

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in P1528

| Target Frequency<br>(MHz) | Head         |                | Body         |                |
|---------------------------|--------------|----------------|--------------|----------------|
|                           | $\epsilon_r$ | $\sigma$ (S/m) | $\epsilon_r$ | $\sigma$ (S/m) |
| 150                       | 52.3         | 0.76           | 61.9         | 0.80           |
| 300                       | 45.3         | 0.87           | 58.2         | 0.92           |
| 450                       | 43.5         | 0.87           | 56.7         | 0.94           |
| 835                       | 41.5         | 0.90           | 55.2         | 0.97           |
| 900                       | 41.5         | 0.97           | 55.0         | 1.05           |
| 915                       | 41.5         | 0.98           | 55.0         | 1.06           |
| 1450                      | 40.5         | 1.20           | 54.0         | 1.30           |
| 1610                      | 40.3         | 1.29           | 53.8         | 1.40           |
| 1800-2000                 | 40.0         | 1.40           | 53.3         | 1.52           |
| 2450                      | 39.2         | 1.80           | 52.7         | 1.95           |
| 3000                      | 38.5         | 2.40           | 52.0         | 2.73           |
| 5800                      | 35.3         | 5.27           | 48.2         | 6.00           |

( $\epsilon_r$  = relative permittivity,  $\sigma$  = conductivity and  $\rho$  = 1000 kg/m<sup>3</sup>)



## 10.2 LIQUID MEASUREMENT RESULTS

The following table show the measuring results for simulating liquid:

| Liquid Type | Liquid Temp. (°C) | Parameters                | Target | Measured | Deviation (%) | Limited (%) | Measured Date |
|-------------|-------------------|---------------------------|--------|----------|---------------|-------------|---------------|
| Body2412    | 21.5              | Permitivity( $\epsilon$ ) | 52.75  | 51.14    | -3.05         | $\pm 5$     | 2014-4-22     |
|             |                   | Conductivity( $\sigma$ )  | 1.90   | 1.94     | 2.06          | $\pm 5$     |               |
| Body2437    | 21.5              | Permitivity( $\epsilon$ ) | 52.72  | 51.13    | -3.02         | $\pm 5$     |               |
|             |                   | Conductivity( $\sigma$ )  | 1.93   | 1.96     | 1.35          | $\pm 5$     |               |
| Body2462    | 21.5              | Permitivity( $\epsilon$ ) | 52.68  | 50.96    | -3.27         | $\pm 5$     |               |
|             |                   | Conductivity( $\sigma$ )  | 1.97   | 1.99     | 1.02          | $\pm 5$     |               |
| Body5180    | 21.5              | Permitivity( $\epsilon$ ) | 49.06  | 47.77    | -2.64         | $\pm 5$     | 2014-4-29     |
|             |                   | Conductivity( $\sigma$ )  | 5.33   | 5.29     | -0.72         | $\pm 5$     |               |
| Body5210    | 21.5              | Permitivity( $\epsilon$ ) | 49.02  | 47.33    | -3.44         | $\pm 5$     |               |
|             |                   | Conductivity( $\sigma$ )  | 5.37   | 5.31     | -1.07         | $\pm 5$     |               |
| Body5240    | 21.5              | Permitivity( $\epsilon$ ) | 48.98  | 47.18    | -3.67         | $\pm 5$     |               |
|             |                   | Conductivity( $\sigma$ )  | 5.40   | 5.46     | 1.06          | $\pm 5$     |               |
| Body5260    | 21.5              | Permitivity( $\epsilon$ ) | 48.95  | 47.37    | -3.24         | $\pm 5$     | 2014-4-30     |
|             |                   | Conductivity( $\sigma$ )  | 5.42   | 5.49     | 1.24          | $\pm 5$     |               |
| Body5290    | 21.5              | Permitivity( $\epsilon$ ) | 48.91  | 47.34    | -3.22         | $\pm 5$     |               |
|             |                   | Conductivity( $\sigma$ )  | 5.45   | 5.42     | -0.67         | $\pm 5$     |               |
| Body5320    | 21.5              | Permitivity( $\epsilon$ ) | 48.87  | 46.98    | -3.88         | $\pm 5$     |               |
|             |                   | Conductivity( $\sigma$ )  | 5.49   | 5.48     | -0.14         | $\pm 5$     |               |
| Body5520    | 21.5              | Permitivity( $\epsilon$ ) | 48.59  | 47.88    | -1.46         | $\pm 5$     | 2014-5-2      |
|             |                   | Conductivity( $\sigma$ )  | 5.70   | 5.80     | 1.76          | $\pm 5$     |               |
| Body5580    | 21.5              | Permitivity( $\epsilon$ ) | 48.51  | 47.28    | -2.53         | $\pm 5$     |               |
|             |                   | Conductivity( $\sigma$ )  | 5.77   | 5.77     | 0.11          | $\pm 5$     |               |
| Body5680    | 21.5              | Permitivity( $\epsilon$ ) | 48.37  | 47.23    | -2.34         | $\pm 5$     |               |
|             |                   | Conductivity( $\sigma$ )  | 5.87   | 5.91     | 0.63          | $\pm 5$     |               |
| Body5690    | 21.5              | Permitivity( $\epsilon$ ) | 48.35  | 47.09    | -2.62         | $\pm 5$     | 2014-5-3      |
|             |                   | Conductivity( $\sigma$ )  | 5.88   | 5.92     | 0.58          | $\pm 5$     |               |
| Body5745    | 21.5              | Permitivity( $\epsilon$ ) | 48.28  | 47.06    | -2.52         | $\pm 5$     |               |
|             |                   | Conductivity( $\sigma$ )  | 5.94   | 6.23     | 4.75          | $\pm 5$     |               |
| Body5775    | 21.5              | Permitivity( $\epsilon$ ) | 48.24  | 47.16    | -2.22         | $\pm 5$     |               |
|             |                   | Conductivity( $\sigma$ )  | 5.97   | 6.18     | 3.52          | $\pm 5$     |               |
| Body5785    | 21.5              | Permitivity( $\epsilon$ ) | 48.22  | 47.08    | -2.37         | $\pm 5$     |               |
|             |                   | Conductivity( $\sigma$ )  | 5.98   | 6.15     | 2.70          | $\pm 5$     |               |
| Body5825    | 21.5              | Permitivity( $\epsilon$ ) | 47.85  | 46.53    | -2.76         | $\pm 5$     |               |
|             |                   | Conductivity( $\sigma$ )  | 6.02   | 6.16     | 2.38          | $\pm 5$     |               |




## 10.3 SYSTEM PERFORMANCE CHECK

The system performance check is performed prior to any usage of the system in order to guarantee reproducible results. The system performance check verifies that the system operates within its specifications of  $\pm 10\%$ . The system performance check results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

### SYSTEM PERFORMANCE CHECK MEASUREMENT CONDITIONS

- The measurements were performed in the flat section of the SAM twin phantom filled with head and body simulating liquid of the following parameters.
- The DASY5 system with an E-field probe EX3DV4 SN: 3798 was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 15 mm (below 1 GHz) and 10 mm (above 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 10mm was aligned with the dipole.
- Special 7x7x7 fine cube was chosen for cube integration ( $dx=5$  mm,  $dy=5$  mm,  $dz=5$  mm).
- Distance between probe sensors and phantom surface was set to 2 mm.
- The dipole less than 3G input power was  $250\text{mW} \pm 3\%$ .
- The dipole above than 3G input power was  $100\text{mW} \pm 3\%$ .
- The results are normalized to 1 W input power.

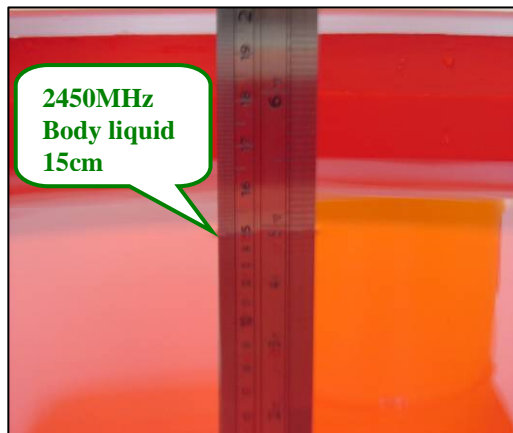

- Note: For SAR testing, less than 3G the liquid depth is 15cm shown above
- Note: For SAR testing, above than 3G the liquid depth is 10cm shown above



## SYSTEM PERFORMANCE CHECK RESULTS

| Liquid Type | Ambient Temp. (°C) | Liquid Temp. (°C) | Input Power (W) | Measured SAR <sub>1g</sub> (W/Kg) | 1W Target SAR <sub>1g</sub> (W/Kg) | 1W Normalized SAR <sub>1g</sub> (W/Kg) | Deviation (%) | Limited (%) | Date      |
|-------------|--------------------|-------------------|-----------------|-----------------------------------|------------------------------------|--|---------------|-------------|-----------|
| Body2450    | 22                 | 21.5              | 0.25            | 12.90                             | 49.20                              | 51.60                                  | 4.88          | ± 10        | 2014-4-23 |
| Body5200    | 22                 | 21.5              | 0.1             | 7.74                              | 74.60                              | 77.4                                   | 3.75          | ± 10        | 2014-4-29 |
| Body5300    | 22                 | 21.5              | 0.1             | 7.88                              | 76.00                              | 78.8                                   | 3.68          | ± 10        | 2014-4-30 |
| Body5500    | 22                 | 21.5              | 0.1             | 7.67                              | 79.10                              | 76.7                                   | -3.03         | ± 10        | 2014-5-2  |
| Body5600    | 22                 | 21.5              | 0.1             | 7.99                              | 77.80                              | 79.9                                   | 2.70          | ± 10        | 2014-5-2  |
| Body5800    | 22                 | 21.5              | 0.1             | 7.56                              | 75.00                              | 75.6                                   | 0.80          | ± 10        | 2014-5-3  |



## 10.4 EUT TUNE-UP PROCEDURES AND TEST MODE

Conducted output power(dBm):

### WLAN 2.4G Chain0

| Mode          | Channel | Frequency | Chain0 Average power(dBm) | Turn up tolerance (dBm) | Maximum Turn up power (dBm) |
|---------------|---------|-----------|---------------------------|-------------------------|-----------------------------|
| 802.11 b      | 1       | 2412 MHZ  | 14.30                     | 13.3 +1/-2              | 14.30                       |
|               | 6       | 2437 MHZ  | 14.30                     | 13.3 +1/-2              | 14.30                       |
|               | 11      | 2462 MHZ  | 14.30                     | 13.3 +1/-2              | 14.30                       |
| 802.11 g      | 1       | 2412 MHZ  | 14.28                     | 13.3 +1/-2              | 14.30                       |
|               | 6       | 2437 MHZ  | 14.28                     | 13.3 +1/-2              | 14.30                       |
|               | 11      | 2462 MHZ  | 14.28                     | 13.3 +1/-2              | 14.30                       |
| 802.11 n HT20 | 1       | 2412 MHZ  | 14.20                     | 13.3 +1/-2              | 14.30                       |
|               | 6       | 2437 MHZ  | 14.20                     | 13.3 +1/-2              | 14.30                       |
|               | 11      | 2462 MHZ  | 14.20                     | 13.3 +1/-2              | 14.30                       |

### WLAN 2.4G Chain1

| Mode         | Channel | Frequency | Chain1 Average power(dBm) | Turn up tolerance (dBm) | Maximum Turn up power (dBm) |
|--------------|---------|-----------|---------------------------|-------------------------|-----------------------------|
| 802.11 b     | 1       | 2412 MHZ  | 13.80                     | 12.8 +1/-2              | 13.80                       |
|              | 6       | 2437 MHZ  | 13.80                     | 12.8 +1/-2              | 13.80                       |
|              | 11      | 2462 MHZ  | 13.80                     | 12.8 +1/-2              | 13.80                       |
| 802.11 g     | 1       | 2412 MHZ  | 13.75                     | 12.8 +1/-2              | 13.80                       |
|              | 6       | 2437 MHZ  | 13.75                     | 12.8 +1/-2              | 13.80                       |
|              | 11      | 2462 MHZ  | 13.75                     | 12.8 +1/-2              | 13.80                       |
| 802.11 n 20M | 1       | 2412 MHZ  | 13.65                     | 12.8 +1/-2              | 13.80                       |
|              | 6       | 2437 MHZ  | 13.65                     | 12.8 +1/-2              | 13.80                       |
|              | 11      | 2462 MHZ  | 13.65                     | 12.8 +1/-2              | 13.80                       |

**WLAN Conducted output power(dBm):****Band 5.2G Chain0**

| Mode                 | Channel | Frequency | Chain0<br>Average<br>power(dBm) | Turn up<br>tolerance<br>(dBm) | Maximum<br>Turn up<br>power (dBm) |
|----------------------|---------|-----------|---------------------------------|-------------------------------|-----------------------------------|
| 802.11 a             | 36      | 5180 MHZ  | 12                              | 11 +1/-2                      | 12                                |
|                      | 40      | 5200 MHZ  | 12                              | 11 +1/-2                      | 12                                |
|                      | 44      | 5220 MHZ  | 12                              | 11 +1/-2                      | 12                                |
|                      | 48      | 5240 MHZ  | 12                              | 11 +1/-2                      | 12                                |
| 802.11 n<br>(HT20)   | 36      | 5180 MHZ  | 12                              | 11 +1/-2                      | 12                                |
|                      | 40      | 5200 MHZ  | 12                              | 11 +1/-2                      | 12                                |
|                      | 44      | 5220 MHZ  | 12                              | 11 +1/-2                      | 12                                |
|                      | 48      | 5240 MHZ  | 12                              | 11 +1/-2                      | 12                                |
| 802.11 n<br>(HT40)   | 38      | 5180 MHZ  | 12                              | 11 +1/-2                      | 12                                |
|                      | 46      | 5230 MHZ  | 12                              | 11 +1/-2                      | 12                                |
| 802.11 ac<br>(VHT80) | 42      | 5210 MHZ  | 12.50                           | 11.5 +1/-2                    | 12.50                             |

**Band 5.2G Chain1**

| Mode                 | Channel | Frequency | Chain1<br>Average<br>power(dBm) | Turn up<br>tolerance<br>(dBm) | Maximum<br>Turn up<br>power (dBm) |
|----------------------|---------|-----------|---------------------------------|-------------------------------|-----------------------------------|
| 802.11 a             | 36      | 5180 MHZ  | 12.20                           | 11.2 +1/-2                    | 12.20                             |
|                      | 40      | 5200 MHZ  | 12.20                           | 11.2 +1/-2                    | 12.20                             |
|                      | 44      | 5220 MHZ  | 12.20                           | 11.2 +1/-2                    | 12.20                             |
|                      | 48      | 5240 MHZ  | 12.20                           | 11.2 +1/-2                    | 12.20                             |
| 802.11 n<br>(HT20)   | 36      | 5180 MHZ  | 12.10                           | 11.2 +1/-2                    | 12.20                             |
|                      | 40      | 5200 MHZ  | 12.10                           | 11.2 +1/-2                    | 12.20                             |
|                      | 44      | 5220 MHZ  | 12.10                           | 11.2 +1/-2                    | 12.20                             |
|                      | 48      | 5240 MHZ  | 12.10                           | 11.2 +1/-2                    | 12.20                             |
| 802.11 n<br>(HT40)   | 38      | 5180 MHZ  | 12.10                           | 11.2 +1/-2                    | 12.20                             |
|                      | 46      | 5230 MHZ  | 12.10                           | 11.2 +1/-2                    | 12.20                             |
| 802.11 ac<br>(VHT80) | 42      | 5210 MHZ  | 13                              | 12 +1/-2                      | 13                                |



**Band 5.3G Chain0**

| Mode                 | Channel | Frequency | Chain0<br>Average<br>power(dBm) | Turn up<br>tolerance<br>(dBm) | Maximum<br>Turn up<br>power<br>(dBm) |
|----------------------|---------|-----------|---------------------------------|-------------------------------|--------------------------------------|
| 802.11 a             | 52      | 5260 MHZ  | 11.90                           | 10.9 +1/-2                    | 11.90                                |
|                      | 56      | 5280MHZ   | 11.90                           | 10.9 +1/-2                    | 11.90                                |
|                      | 60      | 5300 MHZ  | 11.90                           | 10.9 +1/-2                    | 11.90                                |
|                      | 64      | 5320 MHZ  | 11.90                           | 10.9 +1/-2                    | 11.90                                |
| 802.11 n<br>(HT20)   | 52      | 5260 MHZ  | 11.80                           | 10.9 +1/-2                    | 11.90                                |
|                      | 56      | 5280MHZ   | 11.80                           | 10.9 +1/-2                    | 11.90                                |
|                      | 60      | 5300 MHZ  | 11.80                           | 10.9 +1/-2                    | 11.90                                |
|                      | 64      | 5320 MHZ  | 11.80                           | 10.9 +1/-2                    | 11.90                                |
| 802.11 n<br>(HT40)   | 54      | 5270 MHZ  | 11.80                           | 10.9 +1/-2                    | 11.90                                |
|                      | 62      | 5310 MHZ  | 11.80                           | 10.9 +1/-2                    | 11.90                                |
| 802.11 ac<br>(VHT80) | 58      | 5290 MHZ  | 13.20                           | 12.2 +1/-2                    | 13.20                                |

**Band 5.3G Chain1**

| Mode                 | Channel | Frequency | Chain1<br>Average<br>power(dBm) | Turn up<br>tolerance<br>(dBm) | Maximum<br>Turn up<br>power<br>(dBm) |
|----------------------|---------|-----------|---------------------------------|-------------------------------|--------------------------------------|
| 802.11 a             | 52      | 5260 MHZ  | 14                              | 13 +1/-2                      | 14                                   |
|                      | 56      | 5280MHZ   | 14                              | 13 +1/-2                      | 14                                   |
|                      | 60      | 5300 MHZ  | 14                              | 13 +1/-2                      | 14                                   |
|                      | 64      | 5320 MHZ  | 14                              | 13 +1/-2                      | 14                                   |
| 802.11 n<br>(HT20)   | 52      | 5260 MHZ  | 13.9                            | 13 +1/-2                      | 14                                   |
|                      | 56      | 5280MHZ   | 13.9                            | 13 +1/-2                      | 14                                   |
|                      | 60      | 5300 MHZ  | 13.9                            | 13 +1/-2                      | 14                                   |
|                      | 64      | 5320 MHZ  | 13.9                            | 13 +1/-2                      | 14                                   |
| 802.11 n<br>(HT40)   | 54      | 5270 MHZ  | 13.9                            | 13 +1/-2                      | 14                                   |
|                      | 62      | 5310 MHZ  | 13.9                            | 13 +1/-2                      | 14                                   |
| 802.11 ac<br>(VHT80) | 58      | 5290 MHZ  | 13.8                            | 12.8 +1/-2                    | 13.8                                 |

**Band 5.5G Chain0**

| Mode                 | Channel | Frequency<br>MHZ | Chain0<br>Average<br>power(dBm) | Turn up<br>tolerance<br>(dBm) | Maximum<br>Turn up<br>power<br>(dBm) |
|----------------------|---------|------------------|---------------------------------|-------------------------------|--------------------------------------|
| 802.11 a             | 100     | 5500             | 13.5                            | 12.5 +1/-2                    | 13.5                                 |
|                      | 104     | 5520             | 13.5                            | 12.5 +1/-2                    | 13.5                                 |
|                      | 108     | 5540             | 13.5                            | 12.5 +1/-2                    | 13.5                                 |
|                      | 112     | 5560             | 13.5                            | 12.5 +1/-2                    | 13.5                                 |
|                      | 116     | 5580             | 13.5                            | 12.5 +1/-2                    | 13.5                                 |
|                      | 120     | 5600             | 13.5                            | 12.5 +1/-2                    | 13.5                                 |
|                      | 124     | 5620             | 13.5                            | 12.5 +1/-2                    | 13.5                                 |
|                      | 128     | 5640             | 13.5                            | 12.5 +1/-2                    | 13.5                                 |
|                      | 132     | 5660             | 13.5                            | 12.5 +1/-2                    | 13.5                                 |
|                      | 136     | 5680             | 13.5                            | 12.5 +1/-2                    | 13.5                                 |
|                      | 140     | 5700             | 13.5                            | 12.5 +1/-2                    | 13.5                                 |
| 802.11 n<br>(HT20)   | 100     | 5500             | 13.4                            | 12.5 +1/-2                    | 13.5                                 |
|                      | 104     | 5520             | 13.4                            | 12.5 +1/-2                    | 13.5                                 |
|                      | 108     | 5540             | 13.4                            | 12.5 +1/-2                    | 13.5                                 |
|                      | 112     | 5560             | 13.4                            | 12.5 +1/-2                    | 13.5                                 |
|                      | 116     | 5580             | 13.4                            | 12.5 +1/-2                    | 13.5                                 |
|                      | 120     | 5600             | 13.4                            | 12.5 +1/-2                    | 13.5                                 |
|                      | 124     | 5620             | 13.4                            | 12.5 +1/-2                    | 13.5                                 |
|                      | 128     | 5640             | 13.4                            | 12.5 +1/-2                    | 13.5                                 |
|                      | 132     | 5660             | 13.4                            | 12.5 +1/-2                    | 13.5                                 |
|                      | 136     | 5680             | 13.4                            | 12.5 +1/-2                    | 13.5                                 |
|                      | 140     | 5700             | 13.4                            | 12.5 +1/-2                    | 13.5                                 |
| 802.11 n<br>(HT40)   | 102     | 5510             | 13.4                            | 12.5 +1/-2                    | 13.5                                 |
|                      | 110     | 5550             | 13.4                            | 12.5 +1/-2                    | 13.5                                 |
|                      | 134     | 5670             | 13.4                            | 12.5 +1/-2                    | 13.5                                 |
| 802.11 ac<br>(VHT80) | 106     | 5530             | 11.5                            | 10.5+1/-2                     | 11.5                                 |
|                      | 122     | 5610             | 11.5                            | 10.5+1/-2                     | 11.5                                 |
|                      | 138     | 5690             | 11.5                            | 10.5+1/-2                     | 11.5                                 |

**Band 5.5G Chain1**

| Mode                 | Channel | Frequency<br>MHZ | Chain1<br>Average<br>power(dBm) | Turn up<br>tolerance<br>(dBm) | Maximum<br>Turn up<br>power<br>(dBm) |
|----------------------|---------|------------------|---------------------------------|-------------------------------|--------------------------------------|
| 802.11 a             | 100     | 5500             | 14                              | 13 +1/-2                      | 14                                   |
|                      | 104     | 5520             | 14                              | 13 +1/-2                      | 14                                   |
|                      | 108     | 5540             | 14                              | 13 +1/-2                      | 14                                   |
|                      | 112     | 5560             | 14                              | 13 +1/-2                      | 14                                   |
|                      | 116     | 5580             | 14                              | 13 +1/-2                      | 14                                   |
|                      | 120     | 5600             | 14                              | 13 +1/-2                      | 14                                   |
|                      | 124     | 5620             | 14                              | 13 +1/-2                      | 14                                   |
|                      | 128     | 5640             | 14                              | 13 +1/-2                      | 14                                   |
|                      | 132     | 5660             | 14                              | 13 +1/-2                      | 14                                   |
|                      | 136     | 5680             | 14                              | 13 +1/-2                      | 14                                   |
|                      | 140     | 5700             | 14                              | 13 +1/-2                      | 14                                   |
| 802.11 n<br>(HT20)   | 100     | 5500             | 13.9                            | 13 +1/-2                      | 14                                   |
|                      | 104     | 5520             | 13.9                            | 13 +1/-2                      | 14                                   |
|                      | 108     | 5540             | 13.9                            | 13 +1/-2                      | 14                                   |
|                      | 112     | 5560             | 13.9                            | 13 +1/-2                      | 14                                   |
|                      | 116     | 5580             | 13.9                            | 13 +1/-2                      | 14                                   |
|                      | 120     | 5600             | 13.9                            | 13 +1/-2                      | 14                                   |
|                      | 124     | 5620             | 13.9                            | 13 +1/-2                      | 14                                   |
|                      | 128     | 5640             | 13.9                            | 13 +1/-2                      | 14                                   |
|                      | 132     | 5660             | 13.9                            | 13 +1/-2                      | 14                                   |
|                      | 136     | 5680             | 13.9                            | 13 +1/-2                      | 14                                   |
|                      | 140     | 5700             | 13.9                            | 13 +1/-2                      | 14                                   |
| 802.11 n<br>(HT40)   | 102     | 5510             | 13.9                            | 13 +1/-2                      | 14                                   |
|                      | 110     | 5550             | 13.9                            | 13 +1/-2                      | 14                                   |
|                      | 134     | 5670             | 13.9                            | 13 +1/-2                      | 14                                   |
| 802.11 ac<br>(VHT80) | 106     | 5530             | 12                              | 11+1/-2                       | 12                                   |
|                      | 122     | 5610             | 12                              | 11+1/-2                       | 12                                   |
|                      | 138     | 5690             | 12                              | 11+1/-2                       | 12                                   |

**Band 5.8G Chain0**

| Mode                 | Channel | Frequency | Chain0<br>Average<br>power(dBm) | Turn up<br>tolerance<br>(dBm) | Maximum<br>Turn up<br>power<br>(dBm) |
|----------------------|---------|-----------|---------------------------------|-------------------------------|--------------------------------------|
| 802.11 a             | 149     | 5745      | 14                              | 13 +1/-2                      | 14                                   |
|                      | 153     | 5765      | 14                              | 13 +1/-2                      | 14                                   |
|                      | 157     | 5785      | 14                              | 13 +1/-2                      | 14                                   |
|                      | 161     | 5805      | 14                              | 13 +1/-2                      | 14                                   |
|                      | 165     | 5825      | 14                              | 13 +1/-2                      | 14                                   |
| 802.11 n<br>(HT20)   | 149     | 5745      | 13.9                            | 13 +1/-2                      | 14                                   |
|                      | 153     | 5765      | 13.9                            | 13 +1/-2                      | 14                                   |
|                      | 157     | 5785      | 13.9                            | 13 +1/-2                      | 14                                   |
|                      | 161     | 5805      | 13.9                            | 13 +1/-2                      | 14                                   |
|                      | 165     | 5825      | 13.9                            | 13 +1/-2                      | 14                                   |
| 802.11 n<br>(HT40)   | 151     | 5755      | 13.9                            | 13 +1/-2                      | 14                                   |
|                      | 159     | 5795      | 13.9                            | 13 +1/-2                      | 14                                   |
| 802.11 ac<br>(VHT80) | 155     | 5755      | 14                              | 13 +1/-2                      | 14                                   |

**Band 5.8G Chain1**

| Mode                 | Channel | Frequency | Chain1<br>Average<br>power(dBm) | Turn up<br>tolerance<br>(dBm) | Maximum<br>Turn up<br>power<br>(dBm) |
|----------------------|---------|-----------|---------------------------------|-------------------------------|--------------------------------------|
| 802.11 a             | 149     | 5745      | 14                              | 13 +1/-2                      | 14                                   |
|                      | 153     | 5765      | 14                              | 13 +1/-2                      | 14                                   |
|                      | 157     | 5785      | 14                              | 13 +1/-2                      | 14                                   |
|                      | 161     | 5805      | 14                              | 13 +1/-2                      | 14                                   |
|                      | 165     | 5825      | 14                              | 13 +1/-2                      | 14                                   |
| 802.11 n<br>(HT20)   | 149     | 5745      | 13.9                            | 13 +1/-2                      | 14                                   |
|                      | 153     | 5765      | 13.9                            | 13 +1/-2                      | 14                                   |
|                      | 157     | 5785      | 13.9                            | 13 +1/-2                      | 14                                   |
|                      | 161     | 5805      | 13.9                            | 13 +1/-2                      | 14                                   |
|                      | 165     | 5825      | 13.9                            | 13 +1/-2                      | 14                                   |
| 802.11 n<br>(HT40)   | 151     | 5755      | 13.9                            | 13 +1/-2                      | 14                                   |
|                      | 159     | 5795      | 13.9                            | 13 +1/-2                      | 14                                   |
| 802.11 ac<br>(VHT80) | 155     | 5755      | 14                              | 13 +1/-2                      | 14                                   |



## Bluetooth3.0 Conducted output power(dBm):

| Mode               | CH   | Frequency | Average power(dBm) | Turn up tolerance (dBm) | Maximum Turn up power (dBm) |
|--------------------|------|-----------|--------------------|-------------------------|-----------------------------|
| V3.0 + EDR, GFSK   | CH00 | 2402MHZ   | 5.1                | 4.2+1/-2                | 5.2                         |
|                    | CH39 | 2441MHZ   | 4.9                | 4.2+1/-2                | 5.2                         |
|                    | CH78 | 2480MHZ   | 4.9                | 4.2+1/-2                | 5.2                         |
| V3.0 + EDR, 8-DPSK | CH00 | 2402MHZ   | 5.2                | 4.2+1/-2                | 5.2                         |
|                    | CH39 | 2441MHZ   | 5.0                | 4.2+1/-2                | 5.2                         |
|                    | CH78 | 2480MHZ   | 4.8                | 4.2+1/-2                | 5.2                         |

## BLE4.0 Conducted output power(dBm):

| Mode | CH   | Frequency | Average power(dBm) | Turn up tolerance (dBm) | Maximum Turn up power (dBm) |
|------|------|-----------|--------------------|-------------------------|-----------------------------|
| GFSK | CH00 | 2402MHZ   | -2.17              | -2+1/-2                 | -1                          |
|      | CH19 | 2440MHZ   | -2.46              | -2+1/-2                 | -1                          |
|      | CH40 | 2480MHZ   | -2.89              | -2+1/-2                 | -1                          |

## 10.5 STANDALONE SAR TEST EXCLUSION

SAR evaluation for this device was performed with a separation distance of 5 mm. Observing the SAR evaluation exemption limit table (Table 1, see below) found in § 2.5.1 of IC Notice 2013-DDRS0911, it was determined that the SAR exemption limit for this device is 4 mW for 2.4 GHz transmission, and 1 mW for 5 GHz transmission.

No Wi-Fi mode qualified for test exemption as all power levels were above the stated thresholds. On the contrary, Bluetooth, with a frequency of 2402 MHz and a maximum output power of 3.32 mW (5.2 dBm, tune-up tolerance accounted for), is below the exemption threshold and therefore exempt from SAR evaluation for either the intended user or bystanders.

**Table 1: SAR evaluation- exemption limits for routine evaluation based on frequency and separation distance**

| Frequency (MHz) | Exemption Limits (mW)            |                                 |                                 |                                 |                                 |
|-----------------|----------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|
|                 | At separation distance of ≤ 5 mm | At separation distance of 10 mm | At separation distance of 15 mm | At separation distance of 20 mm | At separation distance of 25 mm |
| ≤ 300           | 71 mW                            | 101 mW                          | 132 mW                          | 162 mW                          | 193 mW                          |
| 450             | 52 mW                            | 70 mW                           | 88 mW                           | 106 mW                          | 123 mW                          |
| 835             | 17 mW                            | 30 mW                           | 42 mW                           | 55 mW                           | 67 mW                           |
| 1900            | 7 mW                             | 10 mW                           | 18 mW                           | 34 mW                           | 60 mW                           |
| 2450            | 4 mW                             | 7 mW                            | 15 mW                           | 30 mW                           | 52 mW                           |
| 3500            | 2 mW                             | 6 mW                            | 16 mW                           | 32 mW                           | 55 mW                           |
| 5800            | 1 mW                             | 6 mW                            | 16 mW                           | 27 mW                           | 41 mW                           |



| Frequency (MHz) | Exemption Limits (mW)           |                                 |                                 |                                 |  |
|-----------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|--|
|                 | At separation distance of 30 mm | At separation distance of 35 mm | At separation distance of 40 mm | At separation distance of 45 mm | At separation distance of $\geq 50$ mm |
| $\leq 300$      | 71 mW                           | 101 mW                          | 132 mW                          | 162 mW                          | 193 mW                                 |
| 450             | 52 mW                           | 70 mW                           | 88 mW                           | 106 mW                          | 123 mW                                 |
| 835             | 17 mW                           | 30 mW                           | 42 mW                           | 55 mW                           | 67 mW                                  |
| 1900            | 7 mW                            | 10 mW                           | 18 mW                           | 34 mW                           | 60 mW                                  |
| 2450            | 4 mW                            | 7 mW                            | 15 mW                           | 30 mW                           | 52 mW                                  |
| 3500            | 2 mW                            | 6 mW                            | 16 mW                           | 32 mW                           | 55 mW                                  |
| 5800            | 1 mW                            | 6 mW                            | 16 mW                           | 27 mW                           | 41 mW                                  |

According to KDB447498 D01: The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances*  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f_{\text{(GHz)}}}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR,<sup>24</sup> where

- $f_{\text{(GHz)}}$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation<sup>25</sup>
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below
- If the test separation distance (antenna-user) is  $< 5$  mm, 5 mm is used for excluded SAR calculation

|      | Wireless Interface               | Bluetooth |
|------|----------------------------------|-----------|
|      | Tune-up Maximum power (dBm)      | 5.2       |
|      | Tune-up Maximum rated power (mW) | 3.3       |
| Body | Antenna to user (mm)             | 5         |
|      | Frequency (GHz)                  | 2.402     |
|      | SAR exclusion threshold          | 0.9       |

Per KDB 447498 D01 exclusion thresholds is  $0.9 < 3$ , Bluetooth RF exposure evaluation is not required.



## 10.6 SAR TEST CONFIGURATIONS

### <Tablet>

This EUT was tested in three different positions. They are reverse side of tablet, Edge 2 and Edge 4. In these positions, the surface of EUT is touching with phantom 0cm.

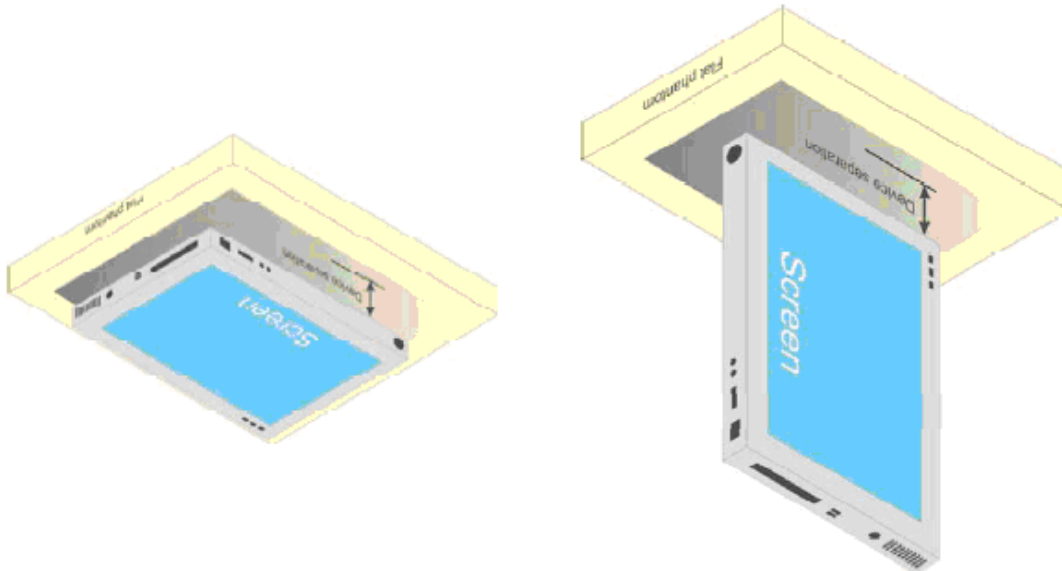


Fig Illustration for Lap-touching Position

### <Laptop>

According to KDB 616217 D04, SAR testing for laptop PC is required for bottom surface. This EUT was tested in the base of EUT directly against the flat phantom.


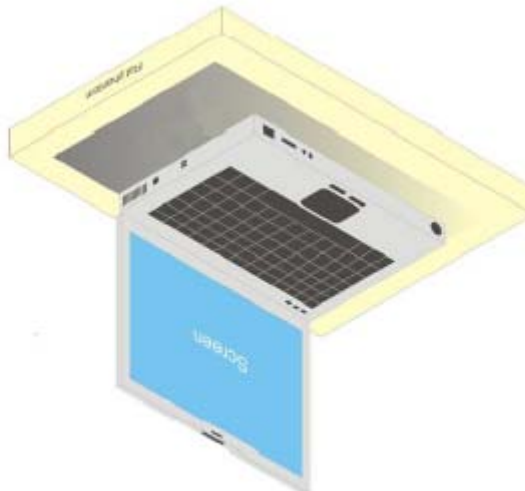


Fig Illustration for Laptop Setup




## 10.7 ANTENNA LOCATION

<Tablet>

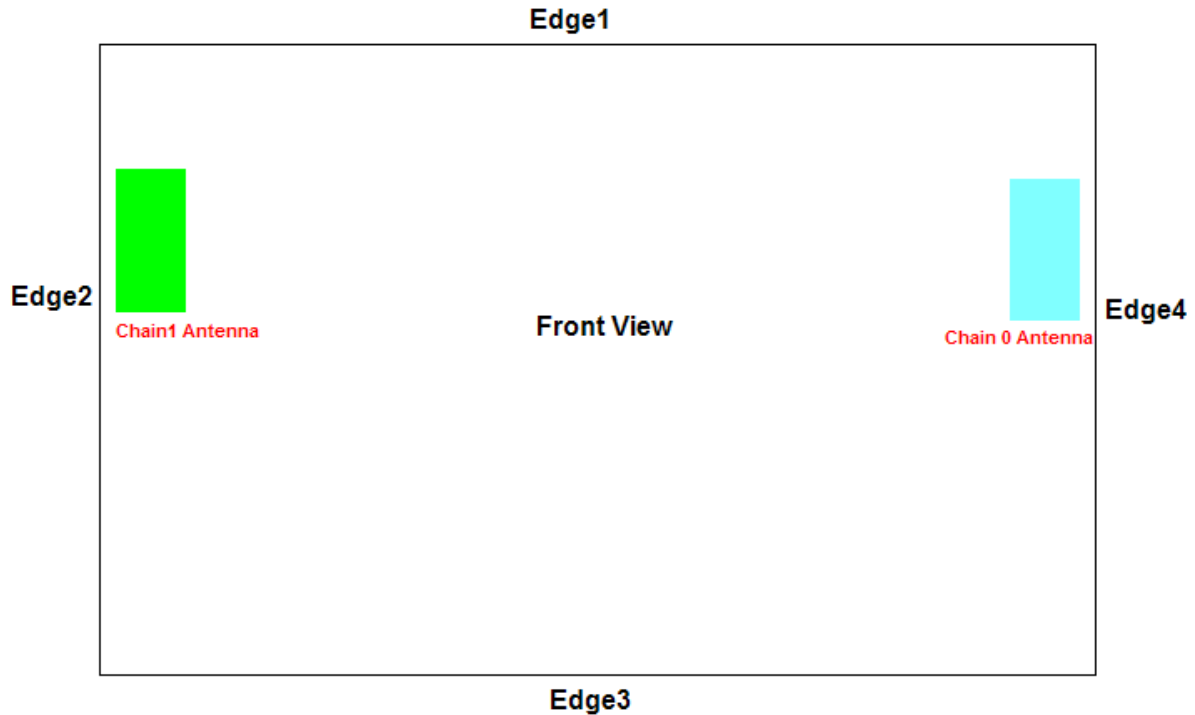

<Notebook>

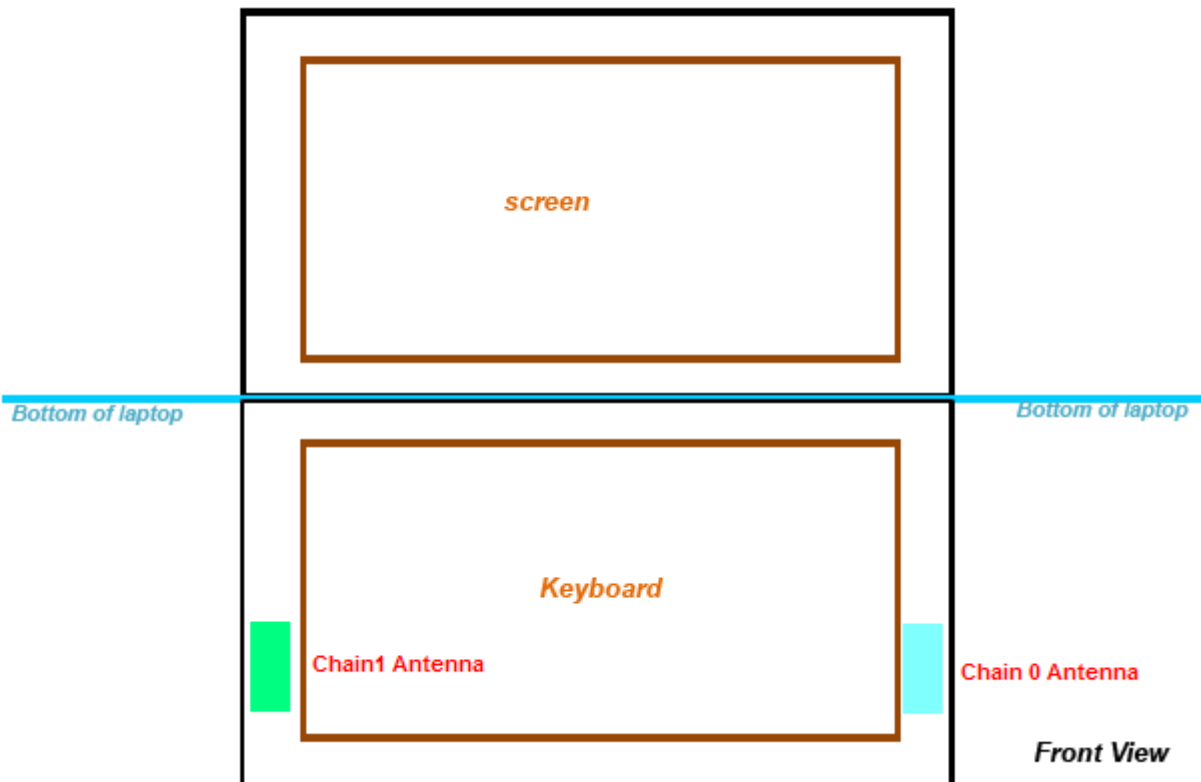





Device dimensions (H x W): 330 x 220 mm

| Antennas                 | Wireless Interface   |
|--------------------------|--|
| Bluetooth & WLAN Antenna | WLAN 2.4GHz<br>WLAN 5.2GHz<br>WLAN 5.3GHz<br>WLAN 5.5GHz<br>WLAN 5.8GHz<br>Bluetooth |
| Chain0                   | WLAN+ Bluetooth  |
| Chain1                   | WLAN   |

**Test Mode**

|             |                                   |
|-------------|-----------------------------------|
| IEEE 802.11 | Data transmission mode(802.11a;b) |
|-------------|-----------------------------------|

Note: The DUT does not support chain0 and chain1 WLAN simultaneous transmission



## 10.8 BODY TEST EXCLUSION THRESHOLDS

The following SAR test exclusion Thresholds based on KDB 447498 D01 General RF Exposure Guidance v05r02) 4.3.1)

| Exposure Position | Wireless Interface      | WLAN            | WLAN            | WLAN            | WLAN            |
|-------------------|-------------------------|-----------------|-----------------|-----------------|-----------------|
|                   |                         | 802.11 b Chain0 | 802.11 b Chain1 | 802.11 a Chain0 | 802.11 a Chain1 |
|                   | Maximum power           | 14.30           | 13.80           | 14              | 14              |
|                   | Maximum rated power(mW) | 26.92           | 23.99           | 25.12           | 25.12           |
|                   |                         |                 |                 |                 |                 |
| Rear view         | Antenna to user (mm)    | 5               | 5               | 5               | 5               |
|                   | SAR exclusion threshold | 9.58            | 9.58            | 6.23            | 6.23            |
|                   | SAR testing required?   | Yes             | Yes             | Yes             | Yes             |
| Edge1             | Antenna to user (mm)    | 55              | 55              | 55              | 55              |
|                   | SAR exclusion threshold | 146             | 146             | 112.28          | 112.28          |
|                   | SAR testing required?   | No              | No              | No              | No              |
| Edge2             | Antenna to user (mm)    | 315             | 5               | 315             | 5               |
|                   | SAR exclusion threshold | 2746            | 9.58            | 2712.28         | 6.23            |
|                   | SAR testing required?   | No              | Yes             | No              | Yes             |
| Edge3             | Antenna to user (mm)    | 126             | 126             | 126             | 126             |
|                   | SAR exclusion threshold | 856             | 856             | 822.28          | 822.28          |
|                   | SAR testing required?   | No              | No              | No              | No              |
| Edge4             | Antenna to user (mm)    | 5               | 315             | 5               | 315             |
|                   | SAR exclusion threshold | 9.58            | 2746            | 6.23            | 2712.28         |
|                   | SAR testing required?   | Yes             | No              | Yes             | No              |

### Note:

- Maximum power is the source-based time-average power and represents the maximum RF output power among production units
- Per KDB 447498 D01v05r02, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
- Per KDB 447498 D01v05r02, standalone SAR test exclusion threshold is applied; If the distance of the antenna to the user is < 5mm, 5mm is used to determine SAR exclusion threshold
- Per KDB 447498 D01v05r02, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:  

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$

$$f(\text{GHz}) \text{ is the RF channel transmit frequency in GHz}$$

Power and distance are rounded to the nearest mW and mm before calculation  
The result is rounded to one decimal place for comparison  
For < 50 mm distance, we just calculate mW of the exclusion threshold value (3.0) to do compare.  
This formula is  $[3.0] / [\sqrt{f(\text{GHz})}] \cdot [(\text{min. test separation distance, mm})] = \text{exclusion threshold of mW.}$
- Per KDB 447498 D01v05r02, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following  
a) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz  
b) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz
- When the minimum *test separation distance* is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.



## 10.9 SAR MEASUREMENT RESULTS

### Note:

- Per KDB 447498 D01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
- Per KDB 447498 D01, for each exposure position, if the highest output channel reported SAR  $\leq 0.8$ W/kg, other channels SAR testing is not necessary.
- Per KDB 447498 D01, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
  - $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz

### SAR Results for Test Records

| Band        | Mode           | Configure | Test Position | Dist. (mm) | Ch. | Chain | Freq. (MHZ) | max Power (dBm) | Tune-Up Limit (dBm) | Scaling Factor | Power Drift (dB) | SAR1g (mW/g) | Scaled SAR1g (mW/g) |
|-------------|----------------|-----------|---------------|------------|-----|-------|-------------|-----------------|---------------------|----------------|------------------|--------------|---------------------|
| WLAN 2.4Ghz | 802.11b        | Tablet    | Rear          | 0          | 1   | 0     | 2412        | 14.3            | 14.3                | 1              | 0.00             | 1.43         | 1.43                |
| WLAN 2.4Ghz | 802.11b        | Tablet    | Rear          | 0          | 6   | 0     | 2437        | 14.3            | 14.3                | 1              | 0.05             | 1.29         | 1.29                |
| WLAN 2.4Ghz | 802.11b        | Tablet    | Rear          | 0          | 11  | 0     | 2462        | 14.3            | 14.3                | 1              | 0.16             | 1.07         | 1.07                |
| WLAN 2.4Ghz | 802.11b        | Tablet    | Edge4         | 0          | 1   | 0     | 2412        | 14.3            | 14.3                | 1              | 0.18             | 0.108        | 0.108               |
| WLAN 2.4Ghz | 802.11b        | NB        | Bottom        | 0          | 1   | 0     | 2412        | 14.3            | 14.3                | 1              | 0.00             | 0.658        | 0.658               |
| WLAN 5.2Ghz | 802.11a        | Tablet    | Rear          | 0          | 36  | 0     | 5180        | 12              | 12                  | 1              | 0.00             | 1.17         | 1.17                |
| WLAN 5.2Ghz | 802.11a        | Tablet    | Rear          | 0          | 48  | 0     | 5240        | 12              | 12                  | 1              | 0.00             | 1.42         | 1.42                |
| WLAN 5.2Ghz | 802.11ac VHT80 | Tablet    | Rear          | 0          | 42  | 0     | 5210        | 12.5            | 12.5                | 1              | 0.00             | 1.42         | 1.42                |
| WLAN 5.2Ghz | 802.11a        | Tablet    | Edge4         | 0          | 48  | 0     | 5240        | 12              | 12                  | 1              | 0.13             | 0.603        | 0.603               |
| WLAN 5.2Ghz | 802.11a        | NB        | Bottom        | 0          | 48  | 0     | 5240        | 12              | 12                  | 1              | 0.00             | 0.542        | 0.542               |
| WLAN 5.3Ghz | 802.11a        | Tablet    | Rear          | 0          | 52  | 0     | 5260        | 11.9            | 11.9                | 1              | 0.00             | 1.39         | 1.39                |
| WLAN 5.3Ghz | 802.11a        | Tablet    | Rear          | 0          | 64  | 0     | 5320        | 11.9            | 11.9                | 1              | 0.10             | 1.26         | 1.26                |
| WLAN 5.3Ghz | 802.11ac VHT80 | Tablet    | Rear          | 0          | 58  | 0     | 5290        | 13.20           | 13.20               | 1              | 0.16             | 1.37         | 1.37                |
| WLAN 5.3Ghz | 802.11a        | Tablet    | Edge4         | 0          | 52  | 0     | 5260        | 11.9            | 11.9                | 1              | 0.08             | 0.692        | 0.692               |
| WLAN 5.3Ghz | 802.11a        | NB        | Bottom        | 0          | 52  | 0     | 5260        | 11.9            | 11.9                | 1              | 0.00             | 0.437        | 0.437               |
| WLAN 5.5Ghz | 802.11a        | Tablet    | Rear          | 0          | 104 | 0     | 5520        | 13              | 13                  | 1              | -0.07            | 1.38         | 1.38                |
| WLAN 5.5Ghz | 802.11a        | Tablet    | Rear          | 0          | 116 | 0     | 5580        | 13              | 13                  | 1              | 0.11             | 1.39         | 1.39                |
| WLAN 5.5Ghz | 802.11a        | Tablet    | Rear          | 0          | 136 | 0     | 5680        | 13              | 13                  | 1              | 0.00             | 1.29         | 1.29                |
| WLAN 5.5Ghz | 802.11ac VHT80 | Tablet    | Rear          | 0          | 138 | 0     | 5690        | 11.5            | 11.5                | 1              | 0.16             | 1.33         | 1.33                |
| WLAN 5.5Ghz | 802.11a        | Tablet    | Edge4         | 0          | 116 | 0     | 5580        | 13              | 13                  | 1              | 0.02             | 0.709        | 0.709               |
| WLAN 5.5Ghz | 802.11a        | NB        | Bottom        | 0          | 116 | 0     | 5580        | 13              | 13                  | 1              | 0.18             | 0.776        | 0.776               |
| WLAN 5.8Ghz | 802.11a        | Tablet    | Rear          | 0          | 149 | 0     | 5745        | 14              | 14                  | 1              | 0.02             | 1.44         | 1.44                |
| WLAN 5.8Ghz | 802.11a        | Tablet    | Rear          | 0          | 157 | 0     | 5785        | 14              | 14                  | 1              | 0.09             | 1.41         | 1.41                |
| WLAN 5.8Ghz | 802.11a        | Tablet    | Rear          | 0          | 165 | 0     | 5825        | 14              | 14                  | 1              | 0.00             | 1.42         | 1.42                |
| WLAN 5.8Ghz | 802.11ac VHT80 | Tablet    | Rear          | 0          | 155 | 0     | 5775        | 14              | 14                  | 1              | 0.09             | 1.41         | 1.41                |
| WLAN 5.8Ghz | 802.11a        | Tablet    | Edge4         | 0          | 149 | 0     | 5745        | 14              | 14                  | 1              | 0.09             | 0.724        | 0.724               |
| WLAN 5.8Ghz | 802.11a        | Tablet    | Rear          | 0          | 149 | 0     | 5745        | 14              | 14                  | 1              | 0.06             | 1.39         | 1.39                |
| WLAN 5.8Ghz | 802.11a        | NB        | Bottom        | 0          | 149 | 0     | 5745        | 14              | 14                  | 1              | 0.01             | 0.661        | 0.661               |



# Compliance Certification Services Inc.

Report No: C140425S02-SF

FCC ID: QDS-BRCM1076

Date of Issue : June 24, 2014

IC: 4324A-BRCM1076

| Band        | Mode           | Configure | Test Position | Dist. (mm) | Ch. | Chain | Freq. (MHZ) | max Power (dBm) | Tune-Up Limit (dBm) | Scaling Factor | Power Drift (dB) | SAR1g (mW/g) | Scaled SAR1g (mW/g) |
|-------------|----------------|-----------|---------------|------------|-----|-------|-------------|-----------------|---------------------|----------------|------------------|--------------|---------------------|
| WLAN 2.4Ghz | 802.11b        | Tablet    | Rear          | 0          | 1   | 1     | 2412        | 13.8            | 13.8                | 1              | 0.10             | 1.44         | 1.44                |
| WLAN 2.4Ghz | 802.11b        | Tablet    | Rear          | 0          | 6   | 1     | 2437        | 13.8            | 13.8                | 1              | 0.02             | 0.965        | 0.965               |
| WLAN 2.4Ghz | 802.11b        | Tablet    | Rear          | 0          | 11  | 1     | 2462        | 13.8            | 13.8                | 1              | 0.00             | 0.913        | 0.913               |
| WLAN 2.4Ghz | 802.11b        | Tablet    | Edge2         | 0          | 1   | 1     | 2462        | 13.8            | 13.8                | 1              | 0.12             | 0.297        | 0.297               |
| WLAN 2.4Ghz | 802.11b        | NB        | Bottom        | 0          | 1   | 1     | 2412        | 13.8            | 13.8                | 1              | 0.00             | 0.455        | 0.455               |
| WLAN 5.2Ghz | 802.11a        | Tablet    | Rear          | 0          | 36  | 1     | 5180        | 12.2            | 12.2                | 1              | 0.00             | 1.44         | 1.44                |
| WLAN 5.2Ghz | 802.11a        | Tablet    | Rear          | 0          | 48  | 1     | 5240        | 12.2            | 12.2                | 1              | 0.09             | 1.36         | 1.36                |
| WLAN 5.2Ghz | 802.11ac VHT80 | Tablet    | Rear          | 0          | 42  | 1     | 5210        | 13              | 13                  | 1              | 0.04             | 1.29         | 1.29                |
| WLAN 5.2Ghz | 802.11a        | Tablet    | Edge2         | 0          | 36  | 1     | 5180        | 12.2            | 12.2                | 1              | 0.12             | 1.09         | 1.09                |
| WLAN 5.2Ghz | 802.11a        | NB        | Bottom        | 0          | 36  | 1     | 5180        | 12.2            | 12.2                | 1              | 0.00             | 0.517        | 0.517               |
| WLAN 5.3Ghz | 802.11a        | Tablet    | Rear          | 0          | 52  | 1     | 5260        | 14              | 14                  | 1              | 0.00             | 1.42         | 1.42                |
| WLAN 5.3Ghz | 802.11a        | Tablet    | Rear          | 0          | 64  | 1     | 5320        | 14              | 14                  | 1              | 0.00             | 1.4          | 1.4                 |
| WLAN 5.3Ghz | 802.11ac VHT80 | Tablet    | Rear          | 0          | 58  | 1     | 5290        | 13.8            | 13.8                | 1              | 0.04             | 1.41         | 1.41                |
| WLAN 5.3Ghz | 802.11a        | Tablet    | Edge2         | 0          | 52  | 1     | 5260        | 14              | 14                  | 1              | 0.07             | 0.750        | 0.750               |
| WLAN 5.3Ghz | 802.11a        | NB        | Bottom        | 0          | 52  | 1     | 5260        | 14              | 14                  | 1              | 0.00             | 0.442        | 0.442               |
| WLAN 5.5Ghz | 802.11a        | Tablet    | Rear          | 0          | 104 | 1     | 5520        | 14              | 14                  | 1              | 0.14             | 1.35         | 1.35                |
| WLAN 5.5Ghz | 802.11a        | Tablet    | Rear          | 0          | 116 | 1     | 5580        | 14              | 14                  | 1              | 0.13             | 1.40         | 1.40                |
| WLAN 5.5Ghz | 802.11a        | Tablet    | Rear          | 0          | 136 | 1     | 5680        | 14              | 14                  | 1              | 0.16             | 1.41         | 1.41                |
| WLAN 5.5Ghz | 802.11ac VHT80 | Tablet    | Rear          | 0          | 138 | 1     | 5690        | 12              | 12                  | 1              | 0.01             | 1.32         | 1.32                |
| WLAN 5.5Ghz | 802.11a        | Tablet    | Edge4         | 0          | 136 | 1     | 5680        | 14              | 14                  | 1              | -0.07            | 0.632        | 0.632               |
| WLAN 5.5Ghz | 802.11a        | NB        | Bottom        | 0          | 136 | 1     | 5680        | 14              | 14                  | 1              | 0.00             | 0.705        | 0.705               |
| WLAN 5.8Ghz | 802.11a        | Tablet    | Rear          | 0          | 149 | 1     | 5745        | 14              | 14                  | 1              | 0.00             | 1.36         | 1.36                |
| WLAN 5.8Ghz | 802.11a        | Tablet    | Rear          | 0          | 157 | 1     | 5785        | 14              | 14                  | 1              | 0.00             | 1.38         | 1.38                |
| WLAN 5.8Ghz | 802.11a        | Tablet    | Rear          | 0          | 165 | 1     | 5825        | 14              | 14                  | 1              | -0.09            | 1.23         | 1.23                |
| WLAN 5.8Ghz | 802.11ac VHT80 | Tablet    | Rear          | 0          | 155 | 1     | 5775        | 14              | 14                  | 1              | 0.00             | 1.19         | 1.19                |
| WLAN 5.8Ghz | 802.11a        | Tablet    | Edge2         | 0          | 149 | 1     | 5745        | 14              | 14                  | 1              | -0.07            | 0.659        | 0.659               |
| WLAN 5.8Ghz | 802.11a        | NB        | Bottom        | 0          | 149 | 1     | 5745        | 14              | 14                  | 1              | 0.00             | 0.505        | 0.505               |



# Compliance Certification Services Inc.

Report No: C140425S02-SF

FCC ID: QDS-BRCM1076

Date of Issue : June 24, 2014

IC: 4324A-BRCM1076

| Band        | Mode    | Configure | Test Position | Dist. (mm) | Ch. | Chain | Freq. (MHZ) | max Power (dBm) | Tune-Up Limit (dBm) | Scaling Factor | Power Drift (dB) | SAR1g (mW/g) | Scaled SAR1g (mW/g) |
|-------------|---------|-----------|---------------|------------|-----|-------|-------------|-----------------|---------------------|----------------|------------------|--------------|---------------------|
| WLAN 2.4Ghz | 802.11b | Tablet    | Rear          | 0          | 1   | 0     | 2412        | 14.3            | 14.3                | 1              | 0.00             | 1.39         | 1.39                |
| WLAN 5.2Ghz | 802.11a | Tablet    | Rear          | 0          | 48  | 0     | 5240        | 12              | 12                  | 1              | 0.13             | 1.40         | 1.40                |
| WLAN 5.3Ghz | 802.11a | Tablet    | Rear          | 0          | 52  | 0     | 5260        | 11.9            | 11.9                | 1              | 0.00             | 1.37         | 1.37                |
| WLAN 5.5Ghz | 802.11a | Tablet    | Rear          | 0          | 116 | 0     | 5580        | 13              | 13                  | 1              | 0.13             | 1.35         | 1.35                |
| WLAN 5.8Ghz | 802.11a | Tablet    | Rear          | 0          | 149 | 0     | 5745        | 14              | 14                  | 1              | 0.06             | 1.39         | 1.39                |
| WLAN 2.4Ghz | 802.11b | Tablet    | Rear          | 0          | 1   | 1     | 2412        | 13.8            | 13.8                | 1              | -0.09            | 1.38         | 1.38                |
| WLAN 5.2Ghz | 802.11a | Tablet    | Rear          | 0          | 36  | 1     | 5180        | 12.2            | 12.2                | 1              | 0.00             | 1.39         | 1.39                |
| WLAN 5.3Ghz | 802.11a | Tablet    | Rear          | 0          | 52  | 1     | 5260        | 14              | 14                  | 1              | 0.03             | 1.4          | 1.4                 |
| WLAN 5.5Ghz | 802.11a | Tablet    | Rear          | 0          | 136 | 1     | 5680        | 14              | 14                  | 1              | 0.00             | 1.35         | 1.35                |
| WLAN 5.8Ghz | 802.11a | Tablet    | Rear          | 0          | 149 | 1     | 5745        | 14              | 14                  | 1              | 0.00             | 1.33         | 1.33                |



## 10.10 REPEATED SAR MEASUREMENT

| Band        | Mode    | Test Position | Chain | Dist. (mm) | Ch. | Original Measured SAR1g (mW/g) | 1st Repeated SAR1g (mW/g) | Ratio | Original Measured SAR1g (mW/g) | 2nd Repeated SAR1g (mW/g) | Ratio |
|-------------|---------|---------------|-------|------------|-----|--------------------------------|---------------------------|-------|--------------------------------|---------------------------|-------|
| WLAN 2.4Ghz | 802.11b | Rear          | 0     | 0          | 1   | 1.43                           | 1.39                      | 1.03  | 1.43                           | --                        | --    |
| WLAN 2.4Ghz | 802.11b | Rear          | 1     | 0          | 1   | 1.44                           | 1.38                      | 1.04  | 1.44                           | --                        | --    |
| WLAN 5.2Ghz | 802.11a | Rear          | 0     | 0          | 48  | 1.42                           | 1.40                      | 1.01  | 1.42                           | --                        | --    |
| WLAN 5.2Ghz | 802.11a | Rear          | 1     | 0          | 36  | 1.44                           | 1.39                      | 1.04  | 1.44                           | --                        | --    |
| WLAN 5.3Ghz | 802.11a | Rear          | 0     | 0          | 52  | 1.39                           | 1.37                      | 1.01  | 1.39                           | --                        | --    |
| WLAN 5.3Ghz | 802.11a | Rear          | 1     | 0          | 52  | 1.42                           | 1.41                      | 1.01  | 1.42                           | --                        | --    |
| WLAN 5.5Ghz | 802.11a | Rear          | 0     | 0          | 116 | 1.39                           | 1.35                      | 1.03  | 1.39                           | --                        | --    |
| WLAN 5.5Ghz | 802.11a | Rear          | 1     | 0          | 136 | 1.41                           | 1.35                      | 1.04  | 1.41                           | --                        | --    |
| WLAN 5.8Ghz | 802.11a | Rear          | 0     | 0          | 149 | 1.44                           | 1.39                      | 1.04  | 1.44                           | --                        | --    |
| WLAN 5.8Ghz | 802.11a | Rear          | 1     | 0          | 149 | 1.36                           | 1.33                      | 1.02  | 1.36                           | --                        | --    |

### Note:

1. Per KDB 865664 D01v01, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8\text{W/Kg}$
2. Per KDB 865664 D01v01, if the ratio of largest to smallest SAR for the original and first repeated measurement is  $\leq 1.2$  and the measured SAR  $< 1.45\text{W/Kg}$ , only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated measured SAR.



## 10.11 SAR HANDSETS MULTI XMITER ASSESSMENT

|                           | Position  | Applicable Combination         |
|---------------------------|-----------|--------------------------------|
| Simultaneous Transmission | Body-worn | WLAN Chain1 + Bluetooth Chain0 |

### Note:

- Chain0 2.4GHz WLAN and BT share the same antenna, and cannot transmit simultaneously. The DUT does not support chain0 and chain1 WLAN simultaneous transmission
- The reported SAR summation is calculated based on the same configuration and test position.
- For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05 based on the formula below.  

$$(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$$
for test separation distances  $\leq 50 \text{ mm}$ ; where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.  
0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is  $> 50 \text{ mm}$ .

### Bluetooth:

|                      | Max power | Head (5mm distance) |
|----------------------|-----------|---------------------|
| Estimated SAR (W/kg) | 5.2dBm    | 0.137 W/kg          |

- Per KDB 447498 D01v05, simultaneous transmission SAR is compliant if,
  - Scalar SAR summation  $< 1.6 \text{ W/kg}$ .
  - $\text{SPLSR} = (\text{SAR1} + \text{SAR2})^{1.5} / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where  $(x1, y1, z1)$  and  $(x2, y2, z2)$  are the coordinates of the extrapolated peak SAR locations in the zoom scan  
If  $\text{SPLSR} \leq 0.04$ , simultaneously transmission SAR is compliant
  - Simultaneously transmission SAR measurement, and the reported multi-band SAR  $< 1.6 \text{ W/kg}$

### Result of SUM $\Sigma$ SAR<sub>1g</sub> for Body worn

| SUM $\Sigma$ SAR <sub>1g</sub> Chain1 WLAN 2.4G + Chain0 Bluetooth |          |                            |           |                   |
|--|----------|----------------------------|-----------|-------------------|
| Position   | Distance | Stand alone SAR(1g) [W/kg] |           | SUM SAR(1g)[W/kg] |
|  | [mm]     | WLAN 2.4G                  | Bluetooth | WLAN + Bluetooth  |
| Rear   | 0        | 1.44                       | 0.137     | 1.577             |

| SUM $\Sigma$ SAR <sub>1g</sub> Chain1 WLAN 5G + Chain1 Bluetooth |          |                            |           |                   |
|--|----------|----------------------------|-----------|-------------------|
| Position   | Distance | Stand alone SAR(1g) [W/kg] |           | SUM SAR(1g)[W/kg] |
|  | [mm]     | WLAN 5G                    | Bluetooth | WLAN + Bluetooth  |
| Rear   | 0        | 1.44                       | 0.137     | 1.577             |

**11. EQUIPMENT LIST & CALIBRATION STATUS**

| Name of Equipment               | Manufacturer | Type/Model    | Serial Number   | Last Calibration | Calibration Due |
|---------------------------------|--------------|---------------|-----------------|------------------|-----------------|
| P C                             | HP           | Core(rm)3.16G | CZCO48171H      | N/A              | N/A             |
| Signal Generator                | Agilent      | 83732B        | US37101915      | 06/04/2013       | 06/03/2014      |
| S-Parameter Network Analyzer    | Agilent      | E5071B        | MY42301382      | 03/17/2014       | 03/16/2015      |
| Wireless Communication Test Set | R&S          | CMU200        | SN:109525       | 01/24/2014       | 01/23/2015      |
| Power Meter                     | Agilent      | E4416A        | GB41292714      | 3/18/2014        | 3/17/2015       |
| Peak & Average sensor           | Agilent      | E9327A        | us40441788      | 3/18/2014        | 3/17/2015       |
| E-field PROBE                   | SPEAG        | EX3DV4        | 3798            | 07/26/2013       | 07/25/2014      |
| DAE                             | SD000D04BJ   | DEA4          | 1245            | 07/25/2013       | 07/24/2014      |
| DIPOLE 2450MHZ ANTENNA          | SPEAG        | D2450V2       | 817             | 07/31/2013       | 07/30/2014      |
| DIPOLE 5GHZ ANTENNA             | SPEAG        | D5GHzV2       | 1095            | 05/31/2013       | 05/30/2014      |
| DUMMY PROBE                     | SPEAG        | DP_2          | SPDP2001AA      | N/A              | N/A             |
| SAM PHANTOM (ELI4 v4.0)         | SPEAG        | QDOVA001BB    | 1102            | N/A              | N/A             |
| Twin SAM Phantom                | SPEAG        | QD000P40CD    | 1609            | N/A              | N/A             |
| ROBOT                           | SPEAG        | TX60          | F10/5E6AA1/A101 | N/A              | N/A             |
| ROBOT KRC                       | SPEAG        | CS8C          | F10/5E6AA1/C101 | N/A              | N/A             |
| LIQUID CALIBRATION KIT          | ANTENNESSA   | 41/05 OCP9    | 00425167        | N/A              | N/A             |





## 12. FACILITIES

All measurement facilities used to collect the measurement data are located at

☒ No.10, Weiye Rd., Innovation Park, Eco & Tec. Development Part, Kunshan City, Jiangsu Province, China.

## 13. REFERENCES

- [1] Federal Communications Commission, \Report and order: Guidelines for evaluating the environ-mental effects of radiofrequency radiation", Tech. Rep. FCC 96-326, FCC, Washington, D.C. 20554, 1996.
- [2] David L. Means Kwok Chan, Robert F. Cleveland, \Evaluating compliance with FCC guidelines for human exposure to radiofrequency electromagnetic fields", Tech. Rep., Federal Communication Commision, O\_ce of Engineering & Technology, Washington, DC, 1997.
- [3] Thomas Schmid, Oliver Egger, and Niels Kuster, \Automated E-\_eld scanning system for dosimetric assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp. 105{113, Jan. 1996.
- [4] Niels Kuster, Ralph K.astle, and Thomas Schmid, \Dosimetric evaluation of mobile communications equipment with known precision", IEICE Transactions on Communications, vol. E80-B, no. 5, pp. 645{652, May 1997.
- [5] CENELEC, \Considerations for evaluating of human exposure to electromagnetic fields (EMFs) from mobile telecommunication equipment (MTE) in the frequency range 30MHz – 6GHz", Tech. Rep., CENELEC, European Committee for Electrotechnical Standardization, Brussels, 1997.
- [6] ANSI, ANSI/IEEE C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992.
- [7] Katja Pokovic, Thomas Schmid, and Niels Kuster, \Robust setup for precise calibration of E-\_eld probes in tissue simulating liquids at mobile communications frequencies", in ICECOM \_97, Dubrovnik, October 15{17, 1997, pp. 120{124.
- [8] Katja Pokovic, Thomas Schmid, and Niels Kuster, \E-\_eld probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23{25 June, 1996, pp. 172{175.
- [9] Volker Hombach, Klaus Meier, Michael Burkhardt, Eberhard K. uhn, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 900 MHz", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1865{1873, Oct. 1996.
- [10] Klaus Meier, Ralf Kastle, Volker Hombach, Roger Tay, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 1800 MHz", IEEE Transactions on Microwave Theory and Techniques, Oct. 1997, in press.
- [11] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [12] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Recepies in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992..Dosimetric Evaluation of Sample device, month 1998 9
- [13] NIS81 NAMAS, \The treatment of uncertainty in EMC measurement", Tech. Rep., NAMAS Executive, National Physical Laboratory, Teddington, Middlesex, England, 1994.
- [14] Barry N. Taylor and Christ E. Kuyatt, \Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994. Dosimetric Evaluation of Sample device, month 1998 10



## 14. ATTACHMENTS

| Exhibit | Content  |
|---------|--|
| 1       | System Performance Check Plots                 |
| 2       | Dipole calibration report D2450V2 SN: 817      |
| 3       | Dipole calibration report D5GHzV2 SN: 1095     |
| 4       | Probe calibration report EX3DV4 SN3798         |
| 5       | DAE calibration report DEA4 SD000D04BJ SN:1245 |
| 6       | SAR Test Plots                                 |



## **APPENDIX A: DUT AND SAR STEUP PHOTO**

## **APPENDIX B: PLOTS OF PERFORMANCE CHECK**

The plots are showing as followings.



Test Laboratory: Compliance Certification Services Inc.

Date: 4/23/2014

**System Performance Check-Body D2450****DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 869**

Communication System: CW; Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.969$  S/m;  $\epsilon_r = 51.052$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.08, 7.08, 7.08); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: ELI v4.0; Type: QDOVA002AA; Serial:1102
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=2.0mm****(EX-Probe)/Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 17.9 W/kg


**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=2.0mm****(EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.165 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 26.6 W/kg

**SAR(1 g) = 12.9 W/kg; SAR(10 g) = 5.96 W/kg**

Maximum value of SAR (measured) = 19.6 W/kg

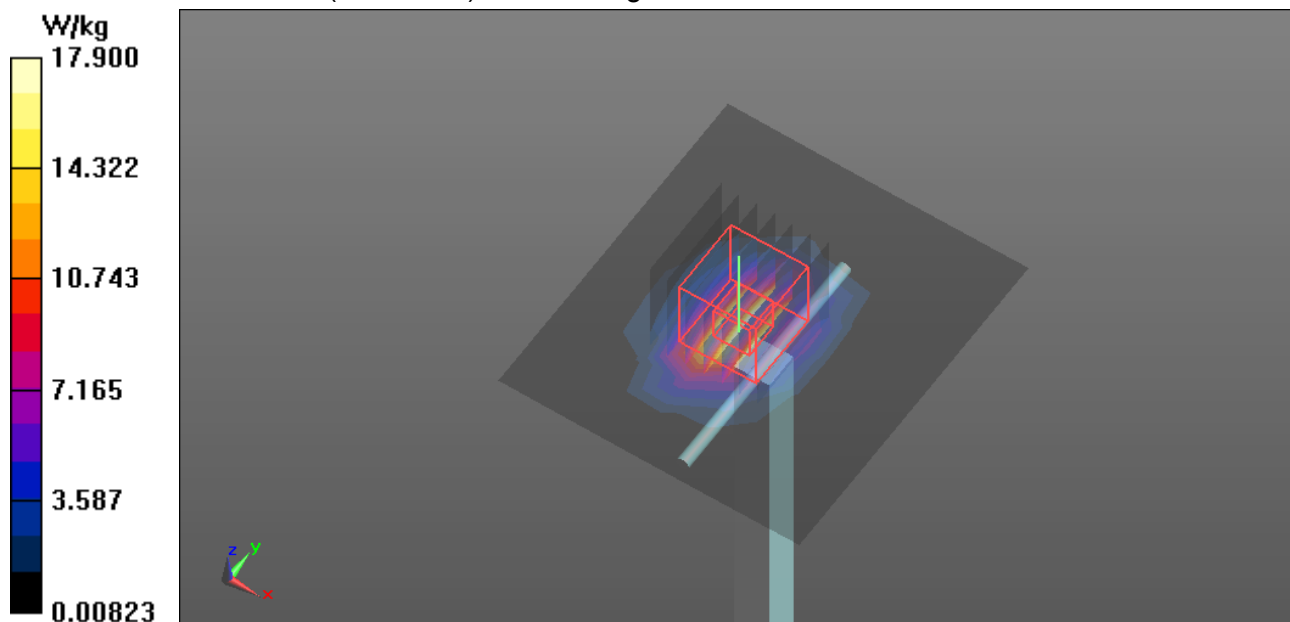



Test Laboratory: Compliance Certification Services Inc.

Date: 4/29/2014

**System Performance Check-D5200 Body****DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1095**

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz);

Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 5.27$  S/m;  $\epsilon_r = 47.473$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.38, 4.38, 4.38); Calibrated: 7/26/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: ELI v4.0; Type: QDOVA002AA; Serial: 1102
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

**System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5200 MHz/Area Scan (10x10x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 16.1 W/kg


**System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5200 MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (7x7x6)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4 mm

Reference Value = 58.884 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 32.6 W/kg

**SAR(1 g) = 7.74 W/kg; SAR(10 g) = 2.14 W/kg**

Maximum value of SAR (measured) = 16.8 W/kg

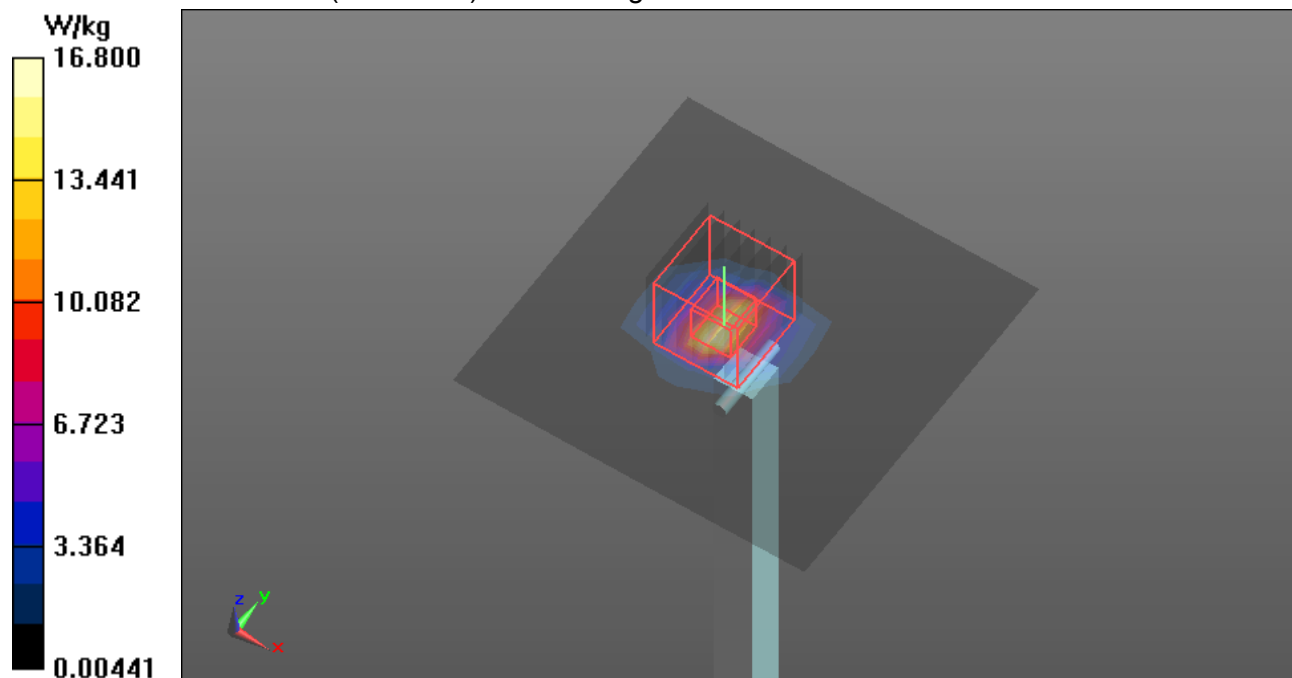



Test Laboratory: Compliance Certification Services Inc.

Date: 4/30/2014

**System Performance Check-D5300 Body****DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1095**

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz);

Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5300$  MHz;  $\sigma = 5.403$  S/m;  $\epsilon_r = 47.235$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.22, 4.22, 4.22); Calibrated: 7/26/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: ELI v4.0; Type: QDOVA002AA; Serial: 1102
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

**System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5300 MHz 2/Area Scan (10x10x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 17.3 W/kg



**System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5300 MHz 2/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (7x7x6)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 60.983 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 33.4 W/kg

**SAR(1 g) = 7.88 W/kg; SAR(10 g) = 2.22 W/kg**

Maximum value of SAR (measured) = 16.9 W/kg

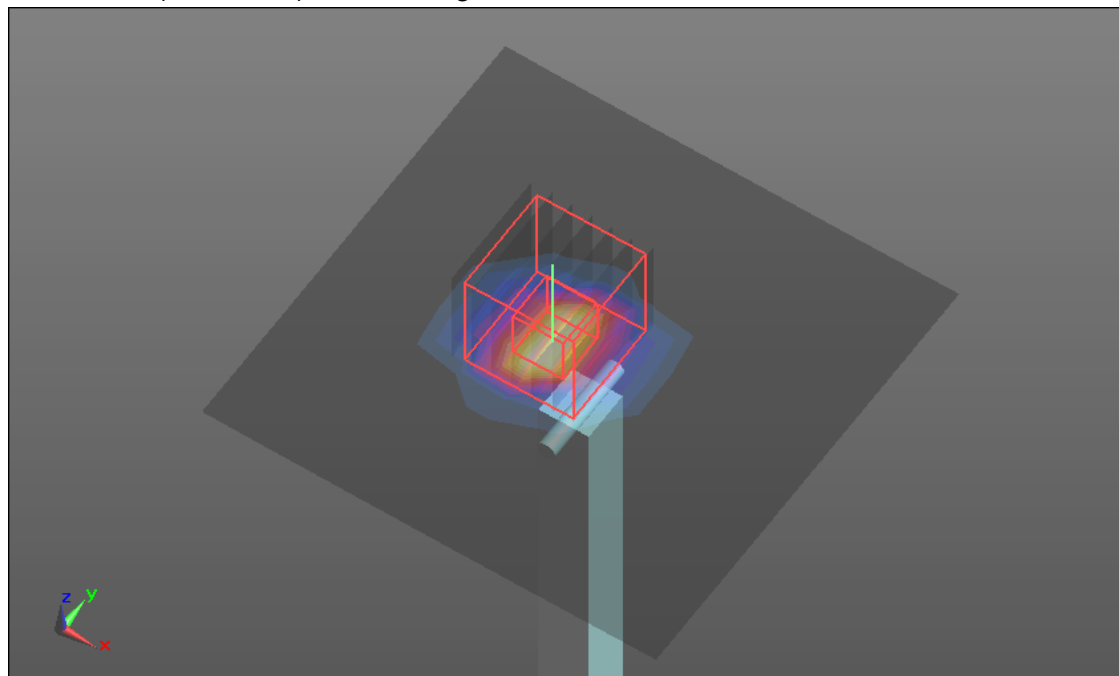



Test Laboratory: Compliance Certification Services Inc.

Date: 5/2/2014

**System Performance Check-D5500 Body****DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1095**

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz);

Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.826$  S/m;  $\epsilon_r = 47.811$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(3.93, 3.93, 3.93); Calibrated: 7/26/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: ELI v4.0; Type: QDOVA002AA; Serial: 1102
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

**System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5500 MHz 2/Area Scan (10x10x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 18.2 W/kg



**System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5500 MHz 2/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 61.263 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 33.8 W/kg

**SAR(1 g) = 7.67 W/kg; SAR(10 g) = 2.34 W/kg**

Maximum value of SAR (measured) = 18.6 W/kg

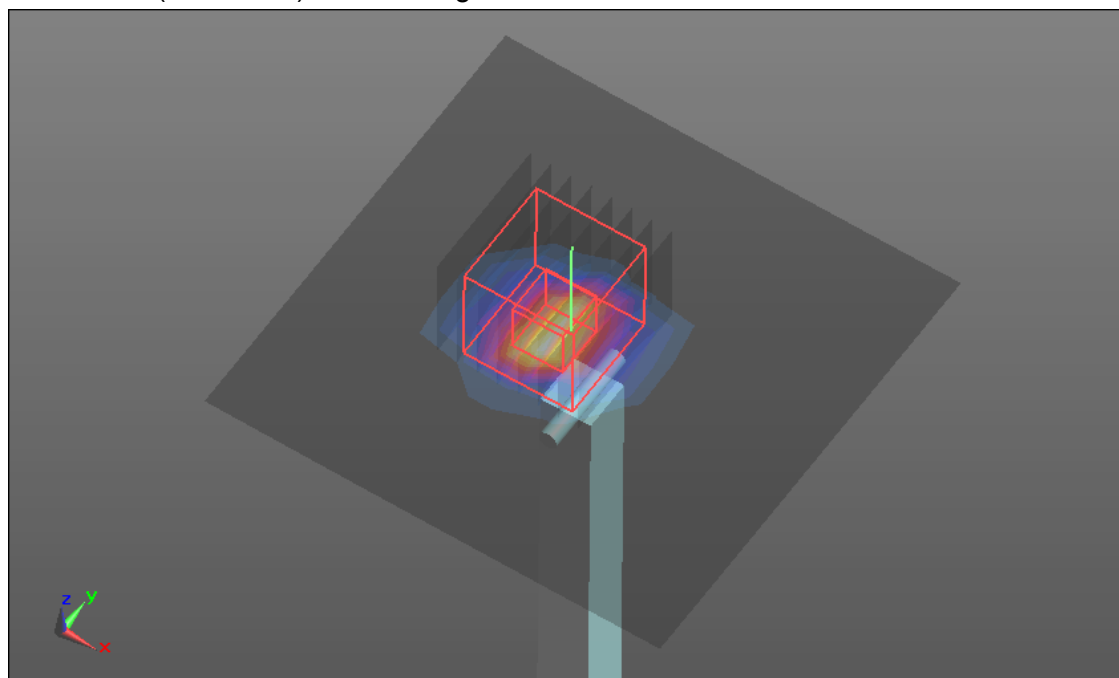



Test Laboratory: Compliance Certification Services Inc.

Date: 5/2/2014

**System Performance Check-D5600 Body****DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1095**

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz);

Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.918$  S/m;  $\epsilon_r = 47.261$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(3.92, 3.92, 3.92); Calibrated: 7/26/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: ELI v4.0; Type: QDOVA002AA; Serial: 1102
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

**System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5600 MHz/Area Scan (10x10x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 17.3 W/kg


**System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5600 MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 61.441 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 38.8 W/kg

**SAR(1 g) = 7.99 W/kg; SAR(10 g) = 2.11 W/kg**

Maximum value of SAR (measured) = 19.9 W/kg

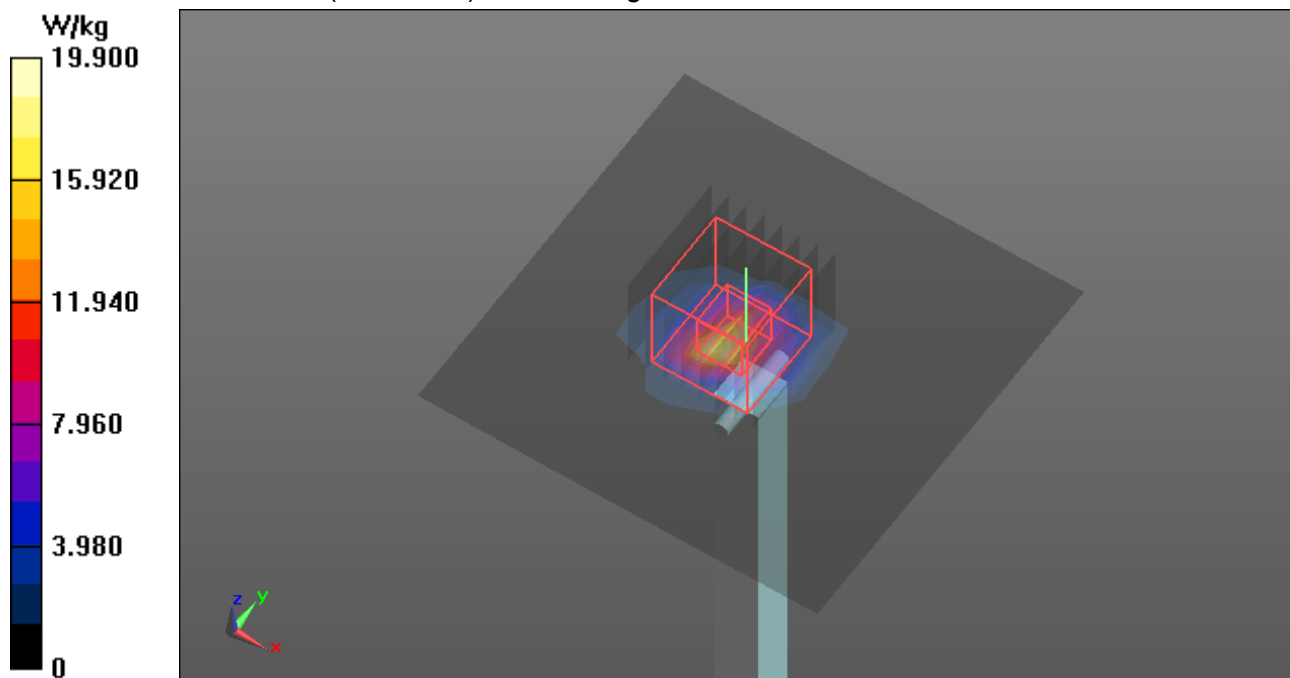





Test Laboratory: Compliance Certification Services Inc.

Date: 5/3/2014

**System Performance Check-D5800 Body****DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1095**

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz);

Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5800 \text{ MHz}$ ;  $\sigma = 6.108 \text{ S/m}$ ;  $\epsilon_r = 46.873$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.24, 4.24, 4.24); Calibrated: 7/26/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: ELI v4.0; Type: QDOVA002AA; Serial: 1102
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

**System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5800 MHz/Area Scan (10x10x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 13.1 W/kg


**System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5800 MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 52.668 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 36.3 W/kg

**SAR(1 g) = 7.56 W/kg; SAR(10 g) = 2.09 W/kg**

Maximum value of SAR (measured) = 18.7 W/kg

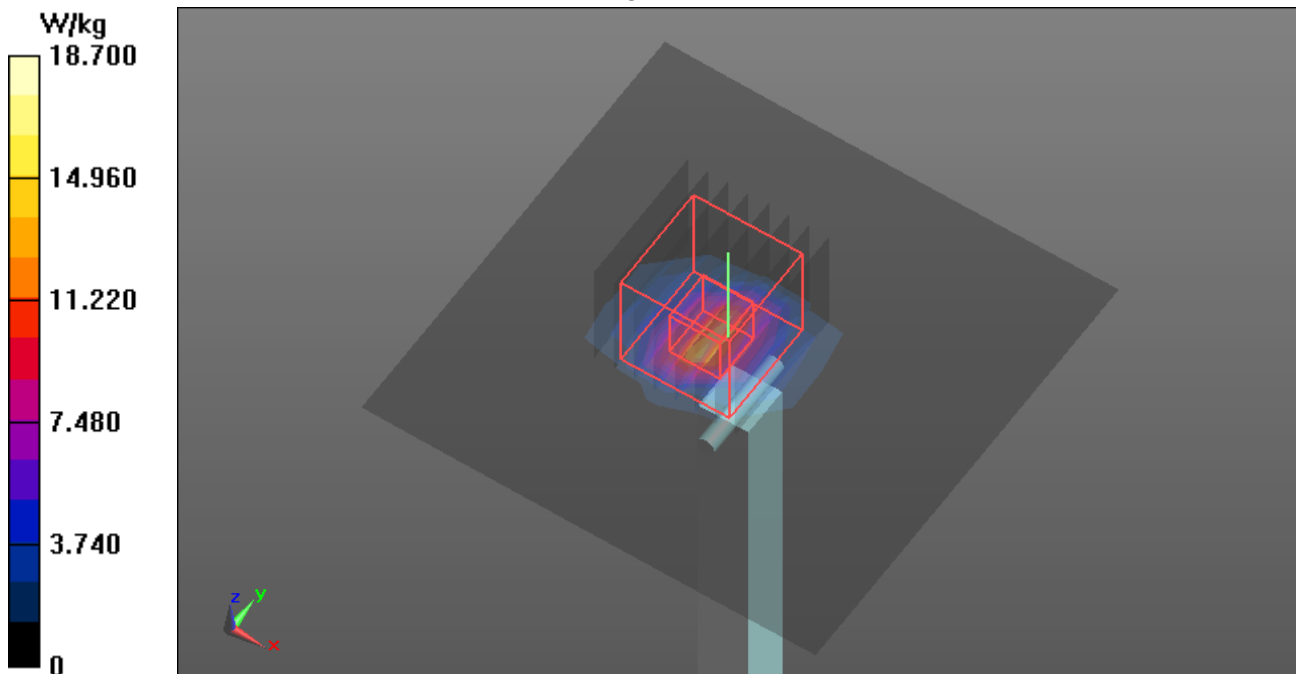



## **APPENDIX C: DASY CALIBRATION CERTIFICATE**

**The DASY Calibration Certificates are showing as followings .**



# Compliance Certification Services Inc.

Report No: C140425S02-SF

FCC ID: QDS-BRCM1076

Date of Issue : June 24, 2014

IC: 4324A-BRCM1076

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**Client **CCS-CN (Auden)**Certificate No: **D2450V2-817\_Jul13**

## CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 817**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **July 31, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^{\circ}\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&amp;TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A        | GB37480704         | 01-Nov-12 (No. 217-01640)         | Oct-13                 |
| Power sensor HP 8481A       | US37292783         | 01-Nov-12 (No. 217-01640)         | Oct-13                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 04-Apr-13 (No. 217-01736)         | Apr-14                 |
| Type-N mismatch combination | SN: 5047.3 / 06327 | 04-Apr-13 (No. 217-01739)         | Apr-14                 |
| Reference Probe ES3DV3      | SN: 3205           | 28-Dec-12 (No. ES3-3205_Dec12)    | Dec-13                 |
| DAE4                        | SN: 601            | 25-Apr-13 (No. DAE4-601_Apr13)    | Apr-14                 |
| Secondary Standards         | ID #               | Check Date (In house)             | Scheduled Check        |
| Power sensor HP 8481A       | MY41092317         | 18-Oct-02 (in house check Oct-11) | In house check: Oct-13 |
| RF generator R&S SMT-06     | 100005             | 04-Aug-99 (in house check Oct-11) | In house check: Oct-13 |
| Network Analyzer HP 8753E   | US37390585 S4206   | 18-Oct-01 (in house check Oct-12) | In house check: Oct-13 |

|                |                |                       |           |
|----------------|----------------|-----------------------|-----------|
|                | Name           | Function              | Signature |
| Calibrated by: | Israa El-Naouq | Laboratory Technician |           |
| Approved by:   | Katja Pokovic  | Technical Manager     |           |

Issued: July 31, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D2450V2-817\_Jul13

Page 1 of 8



**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

## Glossary:

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

## Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

## Additional Documentation:

- DASY4/5 System Handbook

## Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.





## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                        |             |
|------------------------------|------------------------|-------------|
| DASY Version                 | DASY5                  | V52.8.7     |
| Extrapolation                | Advanced Extrapolation |             |
| Phantom                      | Modular Flat Phantom   |             |
| Distance Dipole Center - TSL | 10 mm                  | with Spacer |
| Zoom Scan Resolution         | dx, dy, dz = 5 mm      |             |
| Frequency                    | 2450 MHz $\pm$ 1 MHz   |             |

## Head TSL parameters

The following parameters and calculations were applied.

|   | Temperature         | Permittivity   | Conductivity         |
|---|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 39.2           | 1.80 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 37.8 $\pm$ 6 % | 1.81 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL

|   |                    |                              |
|---|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
| SAR measured  | 250 mW input power | 13.3 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 52.6 W/kg $\pm$ 17.0 % (k=2) |

|   |                    |                              |
|---|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
| SAR measured  | 250 mW input power | 6.18 W/kg                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 24.5 W/kg $\pm$ 16.5 % (k=2) |

## Body TSL parameters

The following parameters and calculations were applied.

|   | Temperature         | Permittivity   | Conductivity         |
|---|---------------------|----------------|----------------------|
| Nominal Body TSL parameters             | 22.0 °C             | 52.7           | 1.95 mho/m           |
| Measured Body TSL parameters            | (22.0 $\pm$ 0.2) °C | 50.5 $\pm$ 6 % | 2.01 mho/m $\pm$ 6 % |
| Body TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Body TSL

|   |                    |                              |
|---|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                              |
| SAR measured  | 250 mW input power | 12.6 W/kg                    |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 49.2 W/kg $\pm$ 17.0 % (k=2) |

|   |                    |                              |
|---|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                              |
| SAR measured  | 250 mW input power | 5.87 W/kg                    |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 23.1 W/kg $\pm$ 16.5 % (k=2) |



## Appendix

### Antenna Parameters with Head TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 53.5 $\Omega$ + 2.9 j $\Omega$ |
| Return Loss                          | - 27.1 dB                      |

### Antenna Parameters with Body TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 49.7 $\Omega$ + 4.5 j $\Omega$ |
| Return Loss                          | - 27.0 dB                      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.159 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |                  |
|-----------------|------------------|
| Manufactured by | SPEAG            |
| Manufactured on | October 23, 2007 |



## DASY5 Validation Report for Head TSL

Date: 31.07.2013

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 817**

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.81$  S/m;  $\epsilon_r = 37.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

### DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.52, 4.52, 4.52); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.781 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 27.7 W/kg


**SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.18 W/kg**

Maximum value of SAR (measured) = 16.8 W/kg

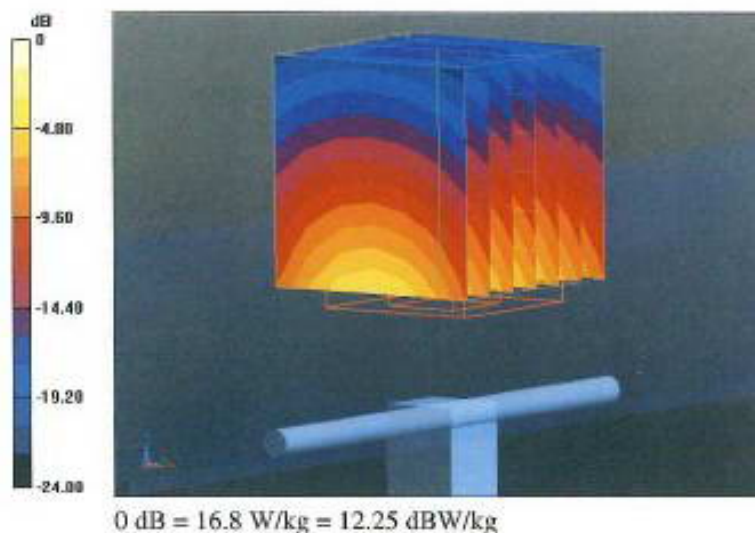



## Impedance Measurement Plot for Head TSL

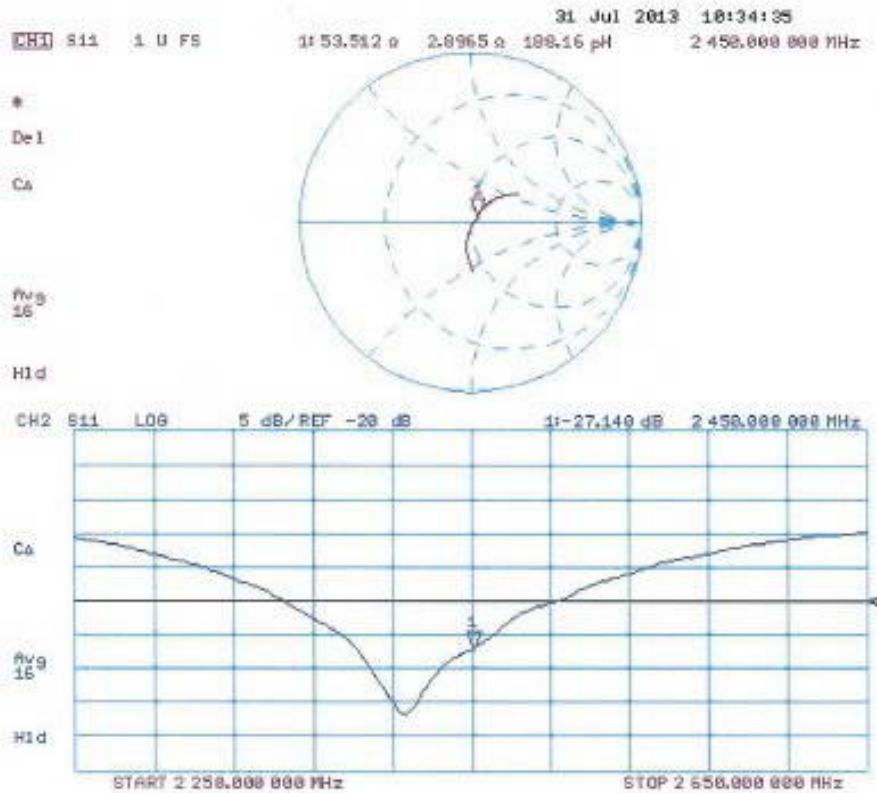





## DASY5 Validation Report for Body TSL

Date: 31.07.2013

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 817**

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2.01$  S/m;  $\epsilon_r = 50.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

### DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.42, 4.42, 4.42); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.151 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 26.3 W/kg

**SAR(1 g) = 12.6 W/kg; SAR(10 g) = 5.87 W/kg**


Maximum value of SAR (measured) = 16.7 W/kg

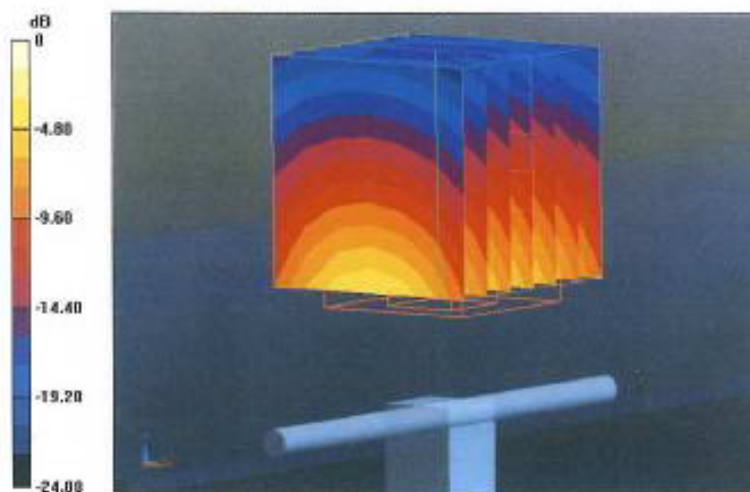

0 dB = 16.7 W/kg = 12.23 dBW/kg



## Impedance Measurement Plot for Body TSL

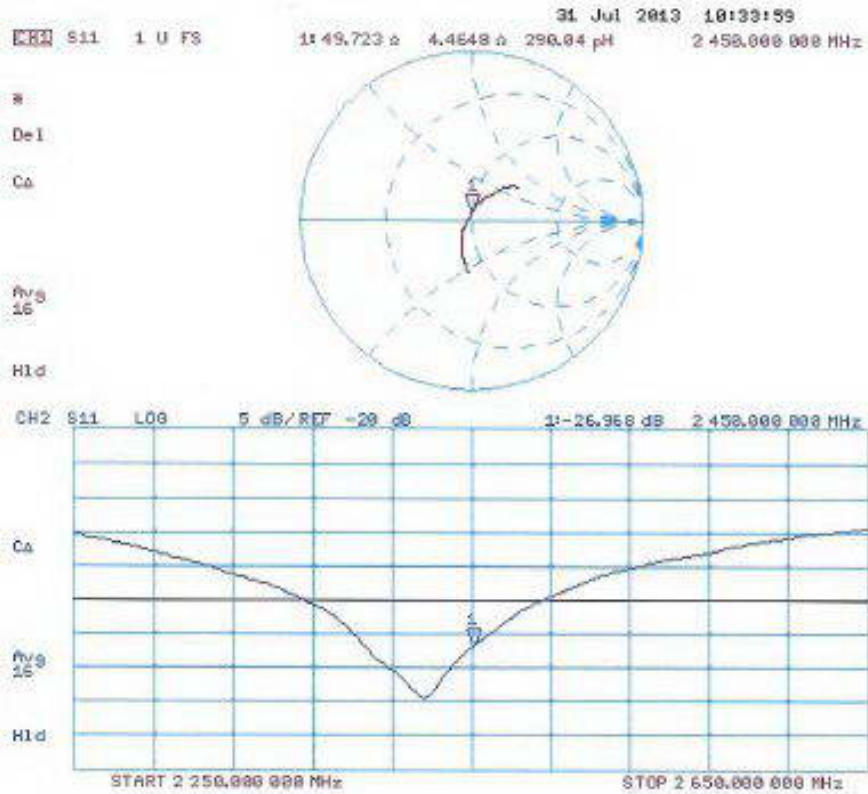



# Compliance Certification Services Inc.

Report No: C140425S02-SF

FCC ID: QDS-BRCM1076

Date of Issue : June 24, 2014

IC: 4324A-BRCM1076

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Client **CCS-CN (Auden)**

Certificate No: **D5GHzV2-1095\_May13**

## CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN: 1095**

Calibration procedure(s) **QA CAL-22.v2**  
**Calibration procedure for dipole validation kits between 3-6 GHz**

Calibration date: **May 31, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^{\circ}\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A        | GB37480704         | 01-Nov-12 (No. 217-01640)         | Oct-13                 |
| Power sensor HP 8481A       | US37292783         | 01-Nov-12 (No. 217-01640)         | Oct-13                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 04-Apr-13 (No. 217-01736)         | Apr-14                 |
| Type-N mismatch combination | SN: 5047.3 / 06327 | 04-Apr-13 (No. 217-01739)         | Apr-14                 |
| Reference Probe EX3DV4      | SN: 3503           | 28-Dec-12 (No. EX3-3503_Dec12)    | Dec-13                 |
| DAE4                        | SN: 601            | 25-Apr-13 (No. DAE4-601_Apr13)    | Apr-14                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| Power sensor HP 8481A       | MY41092317         | 18-Oct-02 (in house check Oct-11) | In house check: Oct-13 |
| RF generator R&S SMT-06     | 100005             | 04-Aug-99 (in house check Oct-11) | In house check: Oct-13 |
| Network Analyzer HP 8753E   | US37390585 S4206   | 18-Oct-01 (in house check Oct-12) | In house check: Oct-13 |

|                |                               |  |               |
|----------------|-------------------------------|--|---------------|
| Calibrated by: | Name<br><b>Jeton Kastrati</b> | Function<br><b>Laboratory Technician</b> | Signature<br> |
| Approved by:   | Name<br><b>Katja Pokovic</b>  | Function<br><b>Technical Manager</b>     | Signature<br> |

Issued: May 31, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D5GHzV2-1095\_May13

Page 1 of 16





**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

## Glossary:

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

## Calibration is Performed According to the Following Standards:

- IEC 62209-2, "Evaluation of Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices in the Frequency Range of 30 MHz to 6 GHz: Human models, Instrumentation, and Procedures"; Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for including accessories and multiple transmitters", March 2010
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

## Additional Documentation:

- DASY4/5 System Handbook

## Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |  |                                  |
|------------------------------|--|----------------------------------|
| DASY Version                 | DASY5  | V52.8.6                          |
| Extrapolation                | Advanced Extrapolation   |                                  |
| Phantom                      | Modular Flat Phantom V5.0  |                                  |
| Distance Dipole Center - TSL | 10 mm  | with Spacer                      |
| Zoom Scan Resolution         | dx, dy = 4.0 mm, dz = 1.4 mm   | Graded Ratio = 1.4 (Z direction) |
| Frequency                    | 5200 MHz $\pm$ 1 MHz<br>5300 MHz $\pm$ 1 MHz<br>5500 MHz $\pm$ 1 MHz<br>5600 MHz $\pm$ 1 MHz<br>5800 MHz $\pm$ 1 MHz |                                  |

## Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

|   | Temperature         | Permittivity   | Conductivity         |
|---|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 36.0           | 4.66 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 36.5 $\pm$ 6 % | 4.50 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL at 5200 MHz

|   |                    |                              |
|---|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
| SAR measured  | 100 mW input power | 7.94 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 79.6 W/kg $\pm$ 19.9 % (k=2) |

|   |                    |                              |
|---|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
| SAR measured  | 100 mW input power | 2.27 W/kg                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 22.7 W/kg $\pm$ 19.5 % (k=2) |



## Head TSL parameters at 5300 MHz

The following parameters and calculations were applied.

|   | Temperature     | Permittivity | Conductivity     |
|---|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.9         | 4.76 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 36.3 ± 6 %   | 4.60 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

## SAR result with Head TSL at 5300 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                            |
|---|--------------------|----------------------------|
| SAR measured  | 100 mW input power | 8.30 W/kg                  |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 83.1 W / kg ± 19.9 % (k=2) |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                          |
|---|--------------------|--------------------------|
| SAR measured  | 100 mW input power | 2.37 W/kg                |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 23.7 W/kg ± 19.5 % (k=2) |

## Head TSL parameters at 5500 MHz

The following parameters and calculations were applied.

|   | Temperature     | Permittivity | Conductivity     |
|---|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.6         | 4.96 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 36.1 ± 6 %   | 4.79 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

## SAR result with Head TSL at 5500 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                          |
|---|--------------------|--------------------------|
| SAR measured  | 100 mW input power | 8.42 W/kg                |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 84.3 W/kg ± 19.9 % (k=2) |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                          |
|---|--------------------|--------------------------|
| SAR measured  | 100 mW input power | 2.40 W/kg                |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 24.0 W/kg ± 19.5 % (k=2) |





## Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

|   | Temperature     | Permittivity | Conductivity     |
|---|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.5         | 5.07 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 36.0 ± 6 %   | 4.89 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

## SAR result with Head TSL at 5600 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                          |
|---|--------------------|--------------------------|
| SAR measured  | 100 mW input power | 8.24 W/kg                |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 82.5 W/kg ± 19.9 % (k=2) |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                          |
|---|--------------------|--------------------------|
| SAR measured  | 100 mW input power | 2.34 W/kg                |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 23.4 W/kg ± 19.5 % (k=2) |

## Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

|   | Temperature     | Permittivity | Conductivity     |
|---|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.3         | 5.27 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 35.7 ± 6 %   | 5.11 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

## SAR result with Head TSL at 5800 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                          |
|---|--------------------|--------------------------|
| SAR measured  | 100 mW input power | 7.86 W/kg                |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 78.7 W/kg ± 19.9 % (k=2) |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                          |
|---|--------------------|--------------------------|
| SAR measured  | 100 mW input power | 2.23 W/kg                |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 22.3 W/kg ± 19.5 % (k=2) |



## Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

|   | Temperature     | Permittivity | Conductivity     |
|---|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 49.0         | 5.30 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 49.6 ± 6 %   | 5.41 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

## SAR result with Body TSL at 5200 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                          |
|---|--------------------|--------------------------|
| SAR measured  | 100 mW input power | 7.44 W/kg                |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 74.6 W/kg ± 19.9 % (k=2) |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                          |
|---|--------------------|--------------------------|
| SAR measured  | 100 mW input power | 2.08 W/kg                |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 20.9 W/kg ± 19.5 % (k=2) |

## Body TSL parameters at 5300 MHz

The following parameters and calculations were applied.

|   | Temperature     | Permittivity | Conductivity     |
|---|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.9         | 5.42 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 49.4 ± 6 %   | 5.53 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

## SAR result with Body TSL at 5300 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                          |
|---|--------------------|--------------------------|
| SAR measured  | 100 mW input power | 7.58 W/kg                |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 76.0 W/kg ± 19.9 % (k=2) |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                          |
|---|--------------------|--------------------------|
| SAR measured  | 100 mW input power | 2.12 W/kg                |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 21.3 W/kg ± 19.5 % (k=2) |





## Body TSL parameters at 5500 MHz

The following parameters and calculations were applied.

|   | Temperature     | Permittivity | Conductivity     |
|---|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.6         | 5.65 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 49.1 ± 6 %   | 5.80 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

## SAR result with Body TSL at 5500 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                          |
|---|--------------------|--------------------------|
| SAR measured  | 100 mW input power | 7.89 W/kg                |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 79.1 W/kg ± 19.9 % (k=2) |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                          |
|---|--------------------|--------------------------|
| SAR measured  | 100 mW input power | 2.19 W/kg                |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 22.0 W/kg ± 19.5 % (k=2) |

## Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

|   | Temperature     | Permittivity | Conductivity     |
|---|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.5         | 5.77 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 49.0 ± 6 %   | 5.80 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

## SAR result with Body TSL at 5600 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                          |
|---|--------------------|--------------------------|
| SAR measured  | 100 mW input power | 7.76 W/kg                |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 77.8 W/kg ± 19.9 % (k=2) |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                          |
|---|--------------------|--------------------------|
| SAR measured  | 100 mW input power | 2.15 W/kg                |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 21.6 W/kg ± 19.5 % (k=2) |



## Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

|   | Temperature     | Permittivity | Conductivity     |
|---|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.2         | 6.00 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 48.6 ± 6 %   | 6.24 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

## SAR result with Body TSL at 5800 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                          |
|---|--------------------|--------------------------|
| SAR measured  | 100 mW input power | 7.47 W/kg                |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 75.0 W/kg ± 19.9 % (k=2) |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                          |
|---|--------------------|--------------------------|
| SAR measured  | 100 mW input power | 2.06 W/kg                |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 20.7 W/kg ± 19.5 % (k=2) |



## Appendix

### Antenna Parameters with Head TSL at 5200 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 50.2 $\Omega$ - 6.4 j $\Omega$ |
| Return Loss                          | - 23.9 dB                      |

### Antenna Parameters with Head TSL at 5300 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 50.2 $\Omega$ - 3.3 j $\Omega$ |
| Return Loss                          | - 29.6 dB                      |

### Antenna Parameters with Head TSL at 5500 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 53.2 $\Omega$ - 2.2 j $\Omega$ |
| Return Loss                          | - 28.5 dB                      |

### Antenna Parameters with Head TSL at 5600 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 56.0 $\Omega$ - 1.1 j $\Omega$ |
| Return Loss                          | - 24.8 dB                      |

### Antenna Parameters with Head TSL at 5800 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 55.4 $\Omega$ - 2.8 j $\Omega$ |
| Return Loss                          | - 24.8 dB                      |

### Antenna Parameters with Body TSL at 5200 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 50.7 $\Omega$ - 5.3 j $\Omega$ |
| Return Loss                          | - 25.5 dB                      |

### Antenna Parameters with Body TSL at 5300 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 50.8 $\Omega$ - 1.5 j $\Omega$ |
| Return Loss                          | - 35.5 dB                      |

### Antenna Parameters with Body TSL at 5500 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 53.8 $\Omega$ - 1.2 j $\Omega$ |
| Return Loss                          | - 28.4 dB                      |



## Antenna Parameters with Body TSL at 5600 MHz

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $56.2 \Omega + 1.1 j\Omega$ |
| Return Loss                          | - 24.5 dB                   |

## Antenna Parameters with Body TSL at 5800 MHz

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $55.6 \Omega + 0.3 j\Omega$ |
| Return Loss                          | - 25.5 dB                   |

## General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.208 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

## Additional EUT Data

|                 |                    |
|-----------------|--------------------|
| Manufactured by | SPEAG              |
| Manufactured on | September 24, 2010 |





## DASY5 Validation Report for Head TSL

Date: 30.05.2013

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1095**

Communication System: UID 0 - CW ; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.5$  S/m;  $\epsilon_r = 36.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5300$  MHz;  $\sigma = 4.6$  S/m;  $\epsilon_r = 36.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5500$  MHz;  $\sigma = 4.79$  S/m;  $\epsilon_r = 36.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5600$  MHz;  $\sigma = 4.89$  S/m;  $\epsilon_r = 36$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5800$  MHz;  $\sigma = 5.11$  S/m;  $\epsilon_r = 35.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

### DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.41, 5.41, 5.41); Calibrated: 28.12.2012, ConvF(5.1, 5.1, 5.1); Calibrated: 28.12.2012, ConvF(4.91, 4.91, 4.91); Calibrated: 28.12.2012, ConvF(4.76, 4.76, 4.76); Calibrated: 28.12.2012, ConvF(4.81, 4.81, 4.81); Calibrated: 28.12.2012;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.6(1115); SEMCAD X 14.6.9(7117)

### Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.153 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 29.3 W/kg

SAR(1 g) = 7.94 W/kg; SAR(10 g) = 2.27 W/kg

Maximum value of SAR (measured) = 18.3 W/kg

### Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.596 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 31.2 W/kg

SAR(1 g) = 8.3 W/kg; SAR(10 g) = 2.37 W/kg

Maximum value of SAR (measured) = 19.3 W/kg

### Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.084 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 33.1 W/kg


SAR(1 g) = 8.42 W/kg; SAR(10 g) = 2.4 W/kg

Maximum value of SAR (measured) = 20.0 W/kg




**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 64.341 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 32.9 W/kg  
SAR(1 g) = 8.24 W/kg; SAR(10 g) = 2.34 W/kg  
Maximum value of SAR (measured) = 19.9 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 61.473 V/m; Power Drift = 0.09 dB  
Peak SAR (extrapolated) = 32.8 W/kg  
SAR(1 g) = 7.86 W/kg; SAR(10 g) = 2.23 W/kg  
Maximum value of SAR (measured) = 19.2 W/kg

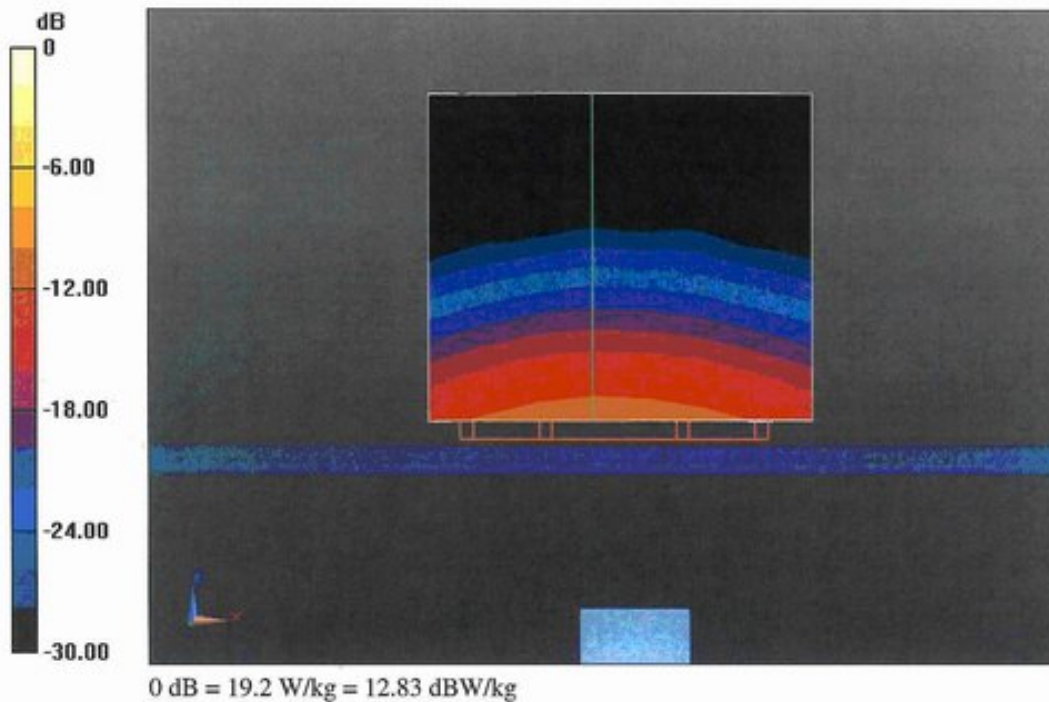



## Impedance Measurement Plot for Head TSL

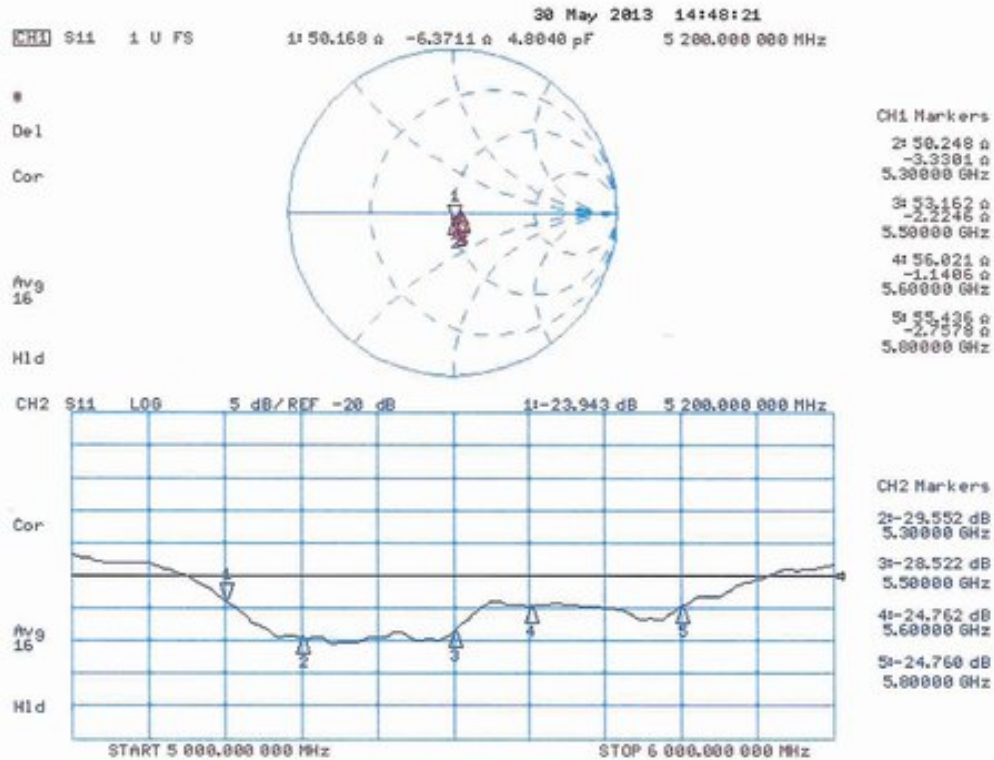





## DASY5 Validation Report for Body TSL

Date: 31.05.2013

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1095**

Communication System: UID 0 - CW ; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 5.41$  S/m;  $\epsilon_r = 49.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5300$  MHz;  $\sigma = 5.53$  S/m;  $\epsilon_r = 49.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.8$  S/m;  $\epsilon_r = 49.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.8$  S/m;  $\epsilon_r = 49$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5800$  MHz;  $\sigma = 6.24$  S/m;  $\epsilon_r = 48.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

### DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(4.91, 4.91, 4.91); Calibrated: 28.12.2012, ConvF(4.67, 4.67, 4.67); Calibrated: 28.12.2012, ConvF(4.43, 4.43, 4.43); Calibrated: 28.12.2012, ConvF(4.22, 4.22, 4.22); Calibrated: 28.12.2012, ConvF(4.38, 4.38, 4.38); Calibrated: 28.12.2012;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.6(1115); SEMCAD X 14.6.9(7117)

### Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 58.744 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 29.0 W/kg

SAR(1 g) = 7.44 W/kg; SAR(10 g) = 2.08 W/kg

Maximum value of SAR (measured) = 17.0 W/kg

### Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 58.871 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 30.4 W/kg

SAR(1 g) = 7.58 W/kg; SAR(10 g) = 2.12 W/kg

Maximum value of SAR (measured) = 17.5 W/kg

### Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 58.666 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 33.6 W/kg

SAR(1 g) = 7.89 W/kg; SAR(10 g) = 2.19 W/kg

Maximum value of SAR (measured) = 18.7 W/kg





**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 58.108 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 34.2 W/kg

SAR(1 g) = 7.76 W/kg; SAR(10 g) = 2.15 W/kg

Maximum value of SAR (measured) = 18.5 W/kg


**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 55.451 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 34.6 W/kg


SAR(1 g) = 7.47 W/kg; SAR(10 g) = 2.06 W/kg

Maximum value of SAR (measured) = 18.2 W/kg

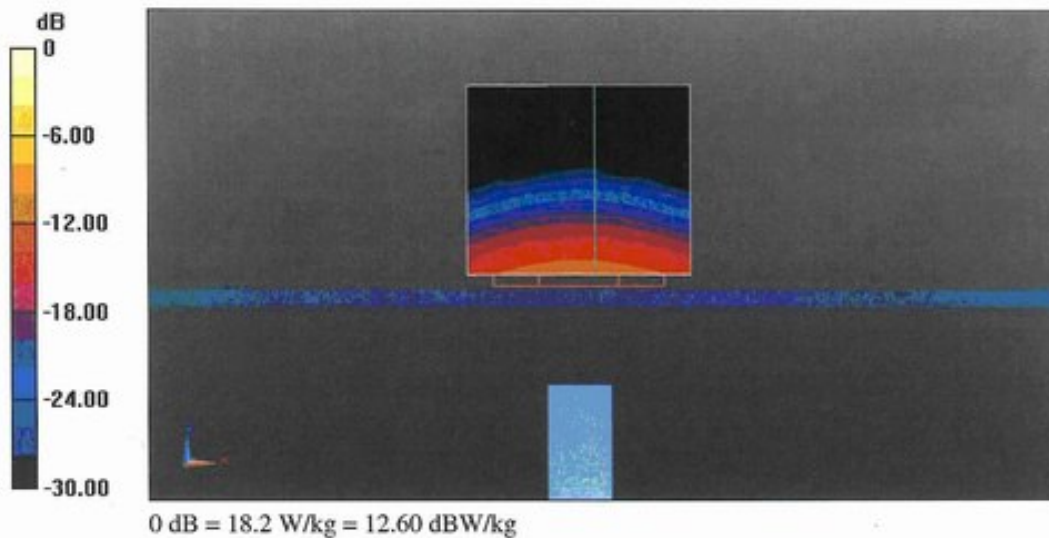



## Impedance Measurement Plot for Body TSL

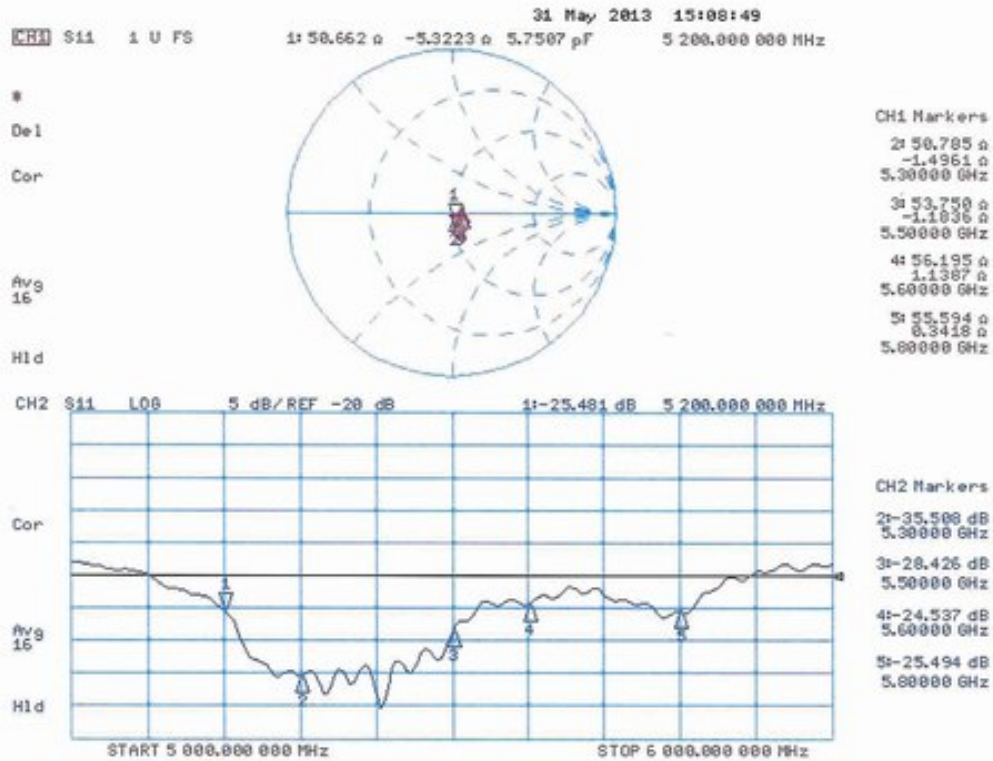



Schmid & Partner Engineering AG

**s p e a g**

Zeughausstrasse 43, 8004 Zurich, Switzerland  
Phone +41 44 245 9700, Fax +41 44 245 9779  
info@speag.com, <http://www.speag.com>

1245

## IMPORTANT NOTICE

### USAGE OF THE DAE 4

The DAE unit is a delicate, high precision instrument and requires careful treatment by the user. There are no serviceable parts inside the DAE. Special attention shall be given to the following points:

**Battery Exchange:** The battery cover of the DAE4 unit is closed using a screw, over tightening the screw may cause the threads inside the DAE to wear out.

**Shipping of the DAE:** Before shipping the DAE to SPEAG for calibration, remove the batteries and pack the DAE in an antistatic bag. This antistatic bag shall then be packed into a larger box or container which protects the DAE from impacts during transportation. The package shall be marked to indicate that a fragile instrument is inside.

**E-Stop Failures:** Touch detection may be malfunctioning due to broken magnets in the E-stop. Rough handling of the E-stop may lead to damage of these magnets. Touch and collision errors are often caused by dust and dirt accumulated in the E-stop. To prevent E-stop failure, the customer shall always mount the probe to the DAE carefully and keep the DAE unit in a non-dusty environment if not used for measurements.

**Repair:** Minor repairs are performed at no extra cost during the annual calibration. However, SPEAG reserves the right to charge for any repair especially if rough unprofessional handling caused the defect.

**DASY Configuration Files:** Since the exact values of the DAE input resistances, as measured during the calibration procedure of a DAE unit, are not used by the DASY software, a nominal value of 200 MOhm is given in the corresponding configuration file.

#### Important Note:

**Warranty and calibration is void if the DAE unit is disassembled partly or fully by the Customer.**

#### Important Note:

**Never attempt to grease or oil the E-stop assembly. Cleaning and readjusting of the E-stop assembly is allowed by certified SPEAG personnel only and is part of the annual calibration procedure.**

#### Important Note:

**To prevent damage of the DAE probe connector pins, use great care when installing the probe to the DAE. Carefully connect the probe with the connector notch oriented in the mating position. Avoid any rotational movement of the probe body versus the DAE while turning the locking nut of the connector. The same care shall be used when disconnecting the probe from the DAE.**

Schmid & Partner Engineering

TN\_BR040315AD DAE4.doc

11.12.2009





# Compliance Certification Services Inc.

Report No: C140425S02-SF

FCC ID: QDS-BRCM1076

Date of Issue : June 24, 2014

IC: 4324A-BRCM1076

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**C** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **CCS-CN (Auden)**

Certificate No: **DAE4-1245\_Jul13**

## CALIBRATION CERTIFICATE

Object **DAE4 - SD 000 D04 BM - SN: 1245**

Calibration procedure(s) **QA CAL-06.v26  
Calibration procedure for the data acquisition electronics (DAE)**

Calibration date: **July 25, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards             | ID #               | Cal Date (Certificate No.) | Scheduled Calibration  |
|-------------------------------|--------------------|----------------------------|------------------------|
| Keithley Multimeter Type 2001 | SN: 0610278        | 02-Oct-12 (No:12728)       | Oct-13                 |
| Secondary Standards           | ID #               | Check Date (in house)      | Scheduled Check        |
| Auto DAE Calibration Unit     | SE UWS 053 AA 1001 | 07-Jan-13 (in house check) | In house check: Jan-14 |
| Calibrator Box V2.1           | SE UMS 006 AA 1002 | 07-Jan-13 (in house check) | In house check: Jan-14 |

|                |                   |                          |           |
|----------------|-------------------|--------------------------|-----------|
| Calibrated by: | Name              | Function                 | Signature |
|                | Dominique Steffen | Technician               |           |
| Approved by:   | Name              | Function                 | Signature |
|                | Fin Bornhoft      | Deputy Technical Manager |           |

Issued: July 25, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: DAE4-1245\_Jul13

Page 1 of 5



**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

## Glossary

**DAE** data acquisition electronics  
**Connector angle** information used in DASY system to align probe sensor X to the robot coordinate system.

## Methods Applied and Interpretation of Parameters

- **DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- **Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - **DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
  - **Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
  - **Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
  - **AD Converter Values with Inputs shorted:** Values on the internal AD converter corresponding to zero input voltage
  - **Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
  - **Input Offset Current:** Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - **Input resistance:** Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - **Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
  - **Power consumption:** Typical value for information. Supply currents in various operating modes.



## DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1  $\mu$ V, full range = -100...+300 mV

Low Range: 1LSB = 61 nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Calibration Factors | X                         | Y                         | Z                         |
|---------------------|---------------------------|---------------------------|---------------------------|
| High Range          | 405.940 $\pm$ 0.02% (k=2) | 404.664 $\pm$ 0.02% (k=2) | 405.801 $\pm$ 0.02% (k=2) |
| Low Range           | 4.00386 $\pm$ 1.50% (k=2) | 3.96278 $\pm$ 1.50% (k=2) | 4.02487 $\pm$ 1.50% (k=2) |

## Connector Angle

|   |                  |
|---|------------------|
| Connector Angle to be used in DASY system | 30.5 ° $\pm$ 1 ° |
|---|------------------|





## Appendix

### 1. DC Voltage Linearity

| High Range |         | Reading ( $\mu$ V) | Difference ( $\mu$ V) | Error (%) |
|------------|---------|--------------------|-----------------------|-----------|
| Channel X  | + Input | 199992.97          | -4.47                 | -0.00     |
| Channel X  | + Input | 20001.91           | 0.89                  | 0.00      |
| Channel X  | - Input | -19999.11          | 1.66                  | -0.01     |
| Channel Y  | + Input | 199994.30          | -3.32                 | -0.00     |
| Channel Y  | + Input | 20001.64           | 0.75                  | 0.00      |
| Channel Y  | - Input | -20000.51          | 0.28                  | -0.00     |
| Channel Z  | + Input | 199995.90          | -1.30                 | -0.00     |
| Channel Z  | + Input | 20000.30           | -0.60                 | -0.00     |
| Channel Z  | - Input | -19999.90          | 0.89                  | -0.00     |

| Low Range |         | Reading ( $\mu$ V) | Difference ( $\mu$ V) | Error (%) |
|-----------|---------|--------------------|-----------------------|-----------|
| Channel X | + Input | 2001.51            | 0.38                  | 0.02      |
| Channel X | + Input | 201.72             | 0.21                  | 0.11      |
| Channel X | - Input | -198.76            | -0.28                 | 0.14      |
| Channel Y | + Input | 2000.72            | -0.41                 | -0.02     |
| Channel Y | + Input | 199.98             | -1.50                 | -0.74     |
| Channel Y | - Input | -198.85            | -0.28                 | 0.14      |
| Channel Z | + Input | 2000.21            | -0.84                 | -0.04     |
| Channel Z | + Input | 200.77             | -0.56                 | -0.28     |
| Channel Z | - Input | -199.95            | -1.29                 | 0.65      |

### 2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

|           | Common mode Input Voltage (mV) | High Range Average Reading ( $\mu$ V) | Low Range Average Reading ( $\mu$ V) |
|-----------|--------------------------------|---------------------------------------|--------------------------------------|
| Channel X | 200                            | -8.24                                 | -10.01                               |
|           | - 200                          | 10.27                                 | 8.63                                 |
| Channel Y | 200                            | -7.32                                 | -7.74                                |
|           | - 200                          | 6.53                                  | 6.34                                 |
| Channel Z | 200                            | -5.94                                 | -6.42                                |
|           | - 200                          | 5.13                                  | 4.65                                 |

### 3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

|           | Input Voltage (mV) | Channel X ( $\mu$ V) | Channel Y ( $\mu$ V) | Channel Z ( $\mu$ V) |
|-----------|--------------------|----------------------|----------------------|----------------------|
| Channel X | 200                | -                    | 4.16                 | -2.61                |
| Channel Y | 200                | 8.79                 | -                    | 3.99                 |
| Channel Z | 200                | 9.96                 | 7.22                 | -                    |



#### 4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

|           | High Range (LSB) | Low Range (LSB) |
|-----------|------------------|-----------------|
| Channel X | 15874            | 16183           |
| Channel Y | 16451            | 15694           |
| Channel Z | 15932            | 15717           |

#### 5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M $\Omega$ 

|           | Average ( $\mu$ V) | min. Offset ( $\mu$ V) | max. Offset ( $\mu$ V) | Std. Deviation ( $\mu$ V) |
|-----------|--------------------|------------------------|------------------------|---------------------------|
| Channel X | 0.94               | -0.24                  | 2.04                   | 0.48                      |
| Channel Y | -0.42              | -1.91                  | 0.54                   | 0.47                      |
| Channel Z | -0.83              | -2.62                  | 0.57                   | 0.60                      |

#### 6. Input Offset Current

Nominal input circuitry offset current on all channels: &lt;25fA

#### 7. Input Resistance (Typical values for information)

|           | Zeroing (kOhm) | Measuring (MOhm) |
|-----------|----------------|------------------|
| Channel X | 200            | 200              |
| Channel Y | 200            | 200              |
| Channel Z | 200            | 200              |

#### 8. Low Battery Alarm Voltage (Typical values for information)

| Typical values | Alarm Level (VDC) |
|----------------|-------------------|
| Supply (+ Vcc) | +7.9              |
| Supply (- Vcc) | -7.6              |

#### 9. Power Consumption (Typical values for information)

| Typical values | Switched off (mA) | Stand by (mA) | Transmitting (mA) |
|----------------|-------------------|---------------|-------------------|
| Supply (+ Vcc) | +0.01             | +6            | +14               |
| Supply (- Vcc) | -0.01             | -8            | -9                |



# Compliance Certification Services Inc.

Report No: C140425S02-SF

FCC ID: QDS-BRCM1076

Date of Issue : June 24, 2014

IC: 4324A-BRCM1076

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
S Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client CCS-CN (Auden)

Certificate No: EX3-3798\_Jul13

## CALIBRATION CERTIFICATE

Object EX3DV4 - SN:3798

Calibration procedure(s) QA CAL-01.v8, QA CAL-14.v3, QA CAL-23.v4, QA CAL-25.v4  
Calibration procedure for dosimetric E-field probes

Calibration date: July 26, 2013

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^{\circ}\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&amp;TE critical for calibration)

| Primary Standards          | ID              | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B         | GB41293874      | 04-Apr-13 (No. 217-01733)         | Apr-14                 |
| Power sensor E4412A        | MY41498087      | 04-Apr-13 (No. 217-01733)         | Apr-14                 |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 04-Apr-13 (No. 217-01737)         | Apr-14                 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 04-Apr-13 (No. 217-01735)         | Apr-14                 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 04-Apr-13 (No. 217-01738)         | Apr-14                 |
| Reference Probe ES3DV2     | SN: 3013        | 28-Dec-12 (No. ES3-3013_Dec12)    | Dec-13                 |
| DAE4                       | SN: 660         | 31-Jan-13 (No. DAE4-660_Jan13)    | Jan-14                 |
| Secondary Standards        | ID              | Check Date (in house)             | Scheduled Check        |
| RF generator HP 8648C      | US3642U01700    | 4-Aug-99 (in house check Apr-13)  | In house check: Apr-15 |
| Network Analyzer HP 8753E  | US37390585      | 18-Oct-01 (in house check Oct-12) | In house check: Oct-13 |

|                | Name          | Function              | Signature             |
|----------------|---------------|-----------------------|-----------------------|
| Calibrated by: | Dimce Iliev   | Laboratory Technician |                       |
| Approved by:   | Katja Pokovic | Technical Manager     |                       |
|                |               |                       | Issued: July 26, 2013 |

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: EX3-3798\_Jul13

Page 1 of 11





**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zauggstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

## Glossary:

|                          |   |
|--------------------------|---|
| TSL                      | tissue simulating liquid  |
| NORM <sub>x,y,z</sub>    | sensitivity in free space   |
| ConvF                    | sensitivity in TSL / NORM <sub>x,y,z</sub>  |
| DCP                      | diode compression point   |
| CF                       | crest factor (1/duty_cycle) of the RF signal  |
| A, B, C, D               | modulation dependent linearization parameters   |
| Polarization $\phi$      | $\phi$ rotation around probe axis   |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\vartheta = 0$ is normal to probe axis |

## Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

## Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.



EX3DV4 – SN:3798

July 26, 2013

## Probe EX3DV4

### SN:3798

Manufactured: April 5, 2011  
Calibrated: July 26, 2013

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)



EX3DV4- SN:3798

July 26, 2013

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3798

### Basic Calibration Parameters

|  | Sensor X | Sensor Y | Sensor Z | Unc (k=2)     |
|--|----------|----------|----------|---------------|
| Norm ( $\mu\text{V}/(\text{V/m})^2$ ) <sup>A</sup> | 0.54     | 0.51     | 0.59     | $\pm 10.1 \%$ |
| DCP (mV) <sup>B</sup>                              | 95.9     | 98.8     | 98.6     |               |

### Modulation Calibration Parameters

| UID | Communication System Name |   | A<br>dB | B<br>dB $\sqrt{\mu\text{V}}$ | C   | D<br>dB | VR<br>mV | Unc <sup>C</sup><br>(k=2) |
|-----|---------------------------|---|---------|------------------------------|-----|---------|----------|---------------------------|
| 0   | CW                        | X | 0.0     | 0.0                          | 1.0 | 0.00    | 164.4    | $\pm 3.0 \%$              |
|     |                           | Y | 0.0     | 0.0                          | 1.0 |         | 168.1    |                           |
|     |                           | Z | 0.0     | 0.0                          | 1.0 |         | 130.9    |                           |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>C</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.





EX3DV4- SN:3798

July 26, 2013

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3798

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>□</sup> | Relative Permittivity <sup>△</sup> | Conductivity (S/m) <sup>△</sup> | ConvF X | ConvF Y | ConvF Z | Alpha | Depth (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|-------|------------|-------------|
| 835                  | 41.5                               | 0.90                            | 9.16    | 9.16    | 9.16    | 0.35  | 0.94       | ± 12.0 %    |
| 900                  | 41.5                               | 0.97                            | 9.01    | 9.01    | 9.01    | 0.35  | 0.93       | ± 12.0 %    |
| 1810                 | 40.0                               | 1.40                            | 7.79    | 7.79    | 7.79    | 0.73  | 0.59       | ± 12.0 %    |
| 1900                 | 40.0                               | 1.40                            | 7.73    | 7.73    | 7.73    | 0.68  | 0.62       | ± 12.0 %    |
| 2000                 | 40.0                               | 1.40                            | 7.73    | 7.73    | 7.73    | 0.80  | 0.58       | ± 12.0 %    |
| 2450                 | 39.2                               | 1.80                            | 7.08    | 7.08    | 7.08    | 0.66  | 0.62       | ± 12.0 %    |
| 5200                 | 36.0                               | 4.66                            | 4.85    | 4.85    | 4.85    | 0.37  | 1.80       | ± 13.1 %    |
| 5300                 | 35.9                               | 4.76                            | 4.71    | 4.71    | 4.71    | 0.38  | 1.80       | ± 13.1 %    |
| 5500                 | 35.6                               | 4.96                            | 4.76    | 4.76    | 4.76    | 0.36  | 1.80       | ± 13.1 %    |
| 5600                 | 35.5                               | 5.07                            | 4.51    | 4.51    | 4.51    | 0.42  | 1.80       | ± 13.1 %    |
| 5800                 | 35.3                               | 5.27                            | 4.48    | 4.48    | 4.48    | 0.40  | 1.80       | ± 13.1 %    |

<sup>□</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>△</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.



EX3DV4- SN:3798

July 26, 2013

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3798

### Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) <sup>c</sup> | Relative Permittivity <sup>e</sup> | Conductivity (S/m) <sup>f</sup> | ConvF X | ConvF Y | ConvF Z | Alpha | Depth (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|-------|------------|-------------|
| 835                  | 55.2                               | 0.97                            | 9.27    | 9.27    | 9.27    | 0.49  | 0.84       | ± 12.0 %    |
| 900                  | 55.0                               | 1.05                            | 9.11    | 9.11    | 9.11    | 0.80  | 0.62       | ± 12.0 %    |
| 1810                 | 53.3                               | 1.52                            | 7.45    | 7.45    | 7.45    | 0.37  | 0.88       | ± 12.0 %    |
| 1900                 | 53.3                               | 1.52                            | 7.32    | 7.32    | 7.32    | 0.37  | 0.86       | ± 12.0 %    |
| 2000                 | 53.3                               | 1.52                            | 7.54    | 7.54    | 7.54    | 0.29  | 1.01       | ± 12.0 %    |
| 2450                 | 52.7                               | 1.95                            | 7.08    | 7.08    | 7.08    | 0.80  | 0.57       | ± 12.0 %    |
| 5200                 | 49.0                               | 5.30                            | 4.38    | 4.38    | 4.38    | 0.41  | 1.90       | ± 13.1 %    |
| 5300                 | 48.9                               | 5.42                            | 4.22    | 4.22    | 4.22    | 0.41  | 1.90       | ± 13.1 %    |
| 5500                 | 48.6                               | 5.65                            | 3.93    | 3.93    | 3.93    | 0.46  | 1.90       | ± 13.1 %    |
| 5600                 | 48.5                               | 5.77                            | 3.92    | 3.92    | 3.92    | 0.38  | 1.90       | ± 13.1 %    |
| 5800                 | 48.2                               | 6.00                            | 4.24    | 4.24    | 4.24    | 0.46  | 1.90       | ± 13.1 %    |

<sup>c</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.


<sup>e</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.



EX3DV4- SN:3798

July 26, 2013

## Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

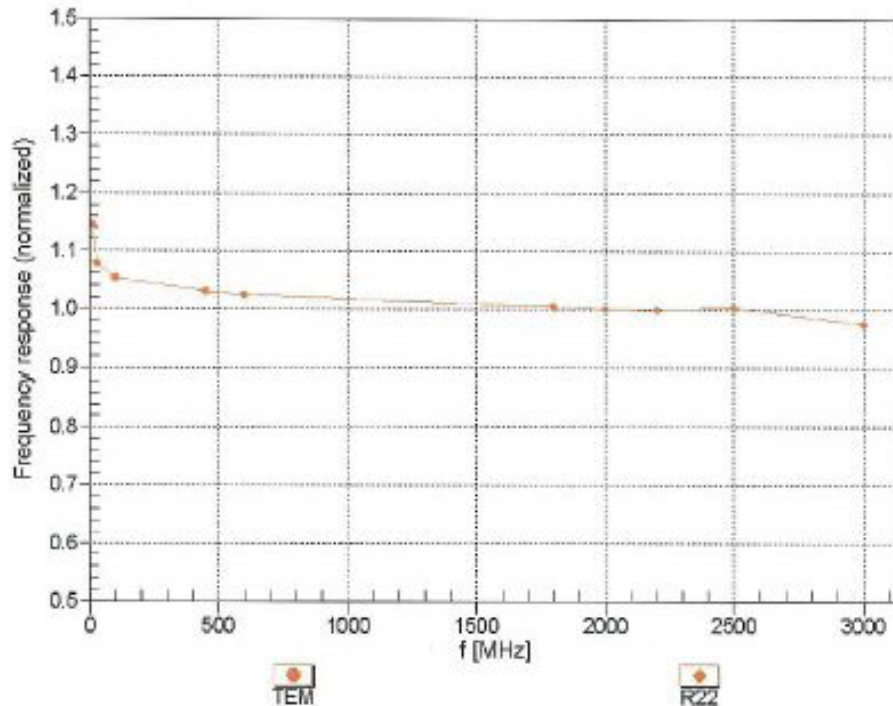

Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )




EX3DV4- SN:3798



July 26, 2013

## Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

f=600 MHz, TEM

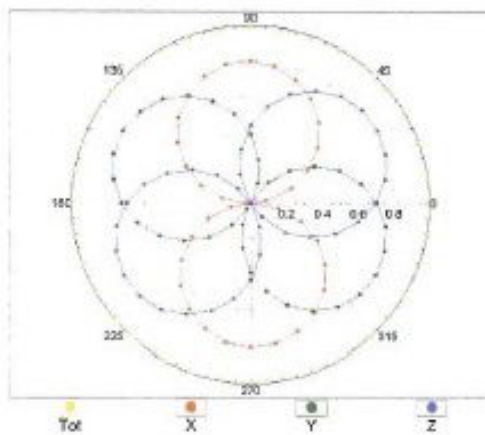

f=1800 MHz, R22

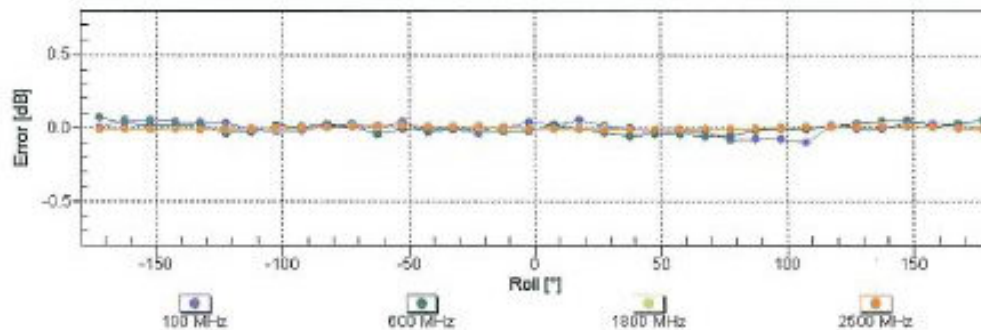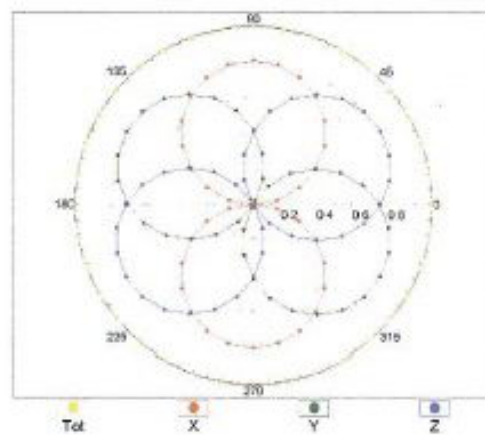



Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)



EX3DV4- SN:3798

July 26, 2013

## Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f = 900 \text{ MHz}$ )

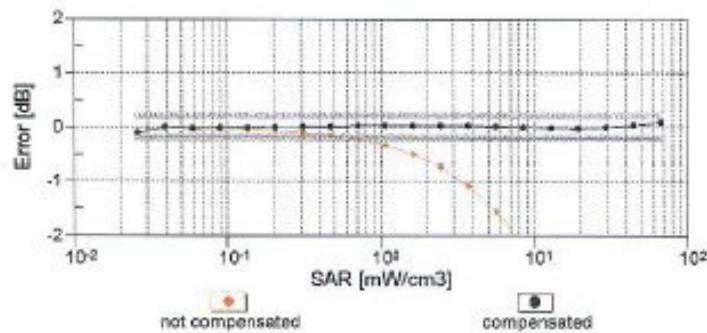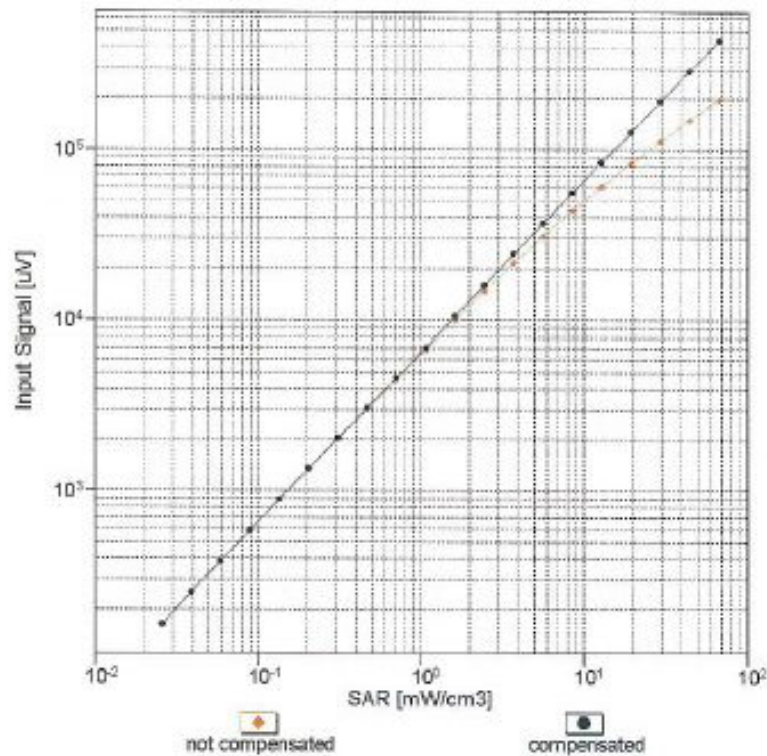

Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )






EX3DV4- SN:3798



July 26, 2013

## Conversion Factor Assessment

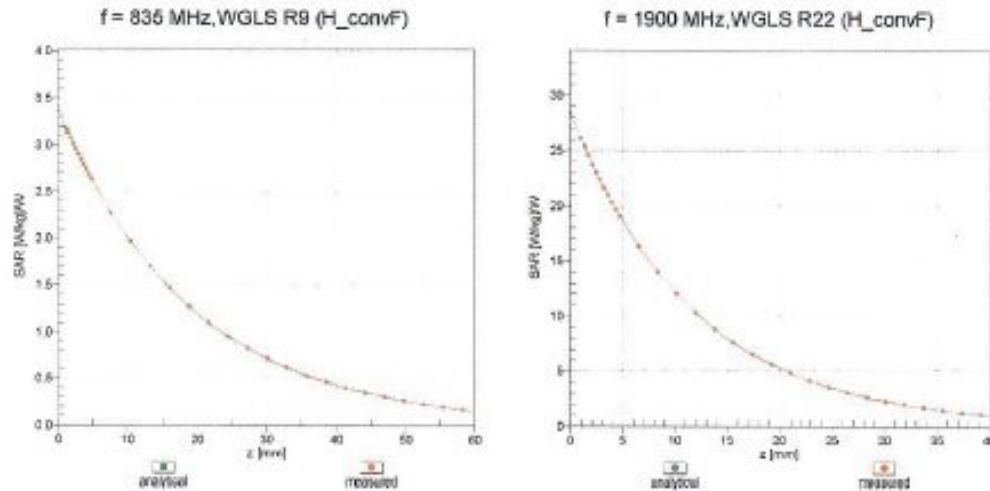

## Deviation from Isotropy in Liquid

Error ( $\phi$ ,  $\theta$ ), f = 900 MHz

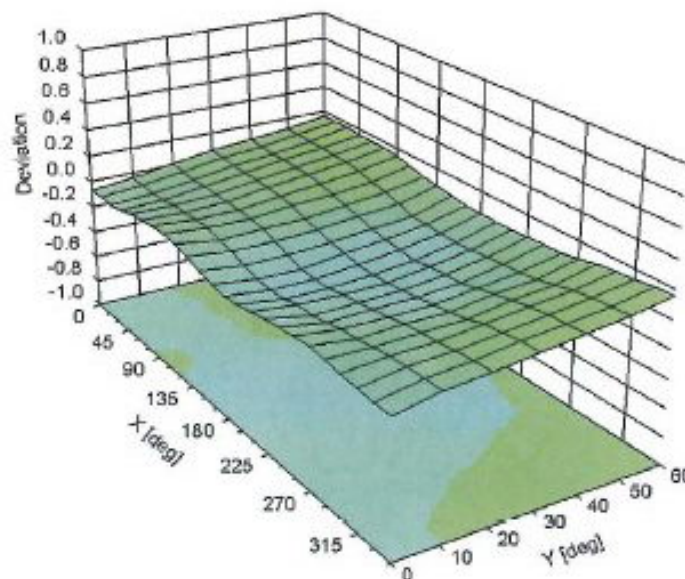





EX3DV4- SN:3798

July 26, 2013

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3798

### Other Probe Parameters

|   |            |
|---|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | -42.4      |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disabled   |
| Probe Overall Length                          | 337 mm     |
| Probe Body Diameter                           | 10 mm      |
| Tip Length                                    | 9 mm       |
| Tip Diameter                                  | 2.5 mm     |
| Probe Tip to Sensor X Calibration Point       | 1 mm       |
| Probe Tip to Sensor Y Calibration Point       | 1 mm       |
| Probe Tip to Sensor Z Calibration Point       | 1 mm       |
| Recommended Measurement Distance from Surface | 2 mm       |



## **APPENDIX D: PLOTS OF SAR TEST RESULT**

The plots are showing in the file named Appendix D Plots of SAR Test Result

## **APPENDIX E: OUTPUT POWER TEST RESULT**

The result are showing in the file named Appendix E output power test result



## **END REPORT**