

TEST REPORT

Reference No..... : WTX22X10216896W001
FCC ID : 2AIDW-ZZ-H-1-001
Applicant : Shenzhen Zero Zero Infinity Technology Co., Ltd
Address..... : 4F Qianhai Yidu Tower Building, Shenzhen
Manufacturer : The same as Applicant
Address..... : The same as Applicant
Product Name : HOVER CAMERA
Model No..... : ZZ-H-1-001
Standards : FCC Part 15.407
Date of Receipt sample : 2022-10-31
Date of Test..... : 2022-10-31 to 2023-03-03
Date of Issue : 2023-03-03
Test Report Form No. : WTX_Part 15_407W
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Jack Huang

Jack Huang

Approved by:

Silin Chen

Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 TEST STANDARDS.....	6
1.3 TEST METHODOLOGY	6
1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING.....	6
1.5 EUT OPERATING DURING TEST.....	7
1.6 TEST FACILITY	7
1.7 EUT SETUP AND TEST MODE	8
1.8 MEASUREMENT UNCERTAINTY	9
1.9 TEST EQUIPMENT LIST AND DETAILS	10
2. SUMMARY OF TEST RESULTS.....	12
3. ANTENNA REQUIREMENT	13
3.1 STANDARD APPLICABLE	13
3.2 EVALUATION INFORMATION	13
4. AUTOMATICALLY DISCONTINUE TRANSMISSION.....	14
4.1 STANDARD APPLICABLE	14
4.2 SUMMARY OF TEST RESULTS.....	14
5. POWER SPECTRAL DENSITY	15
5.1 STANDARD APPLICABLE	15
5.2 TEST PROCEDURE	15
5.3 SUMMARY OF TEST RESULTS/PLOTS.....	16
6. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH	17
6.1 STANDARD APPLICABLE	17
6.2 TEST PROCEDURE.....	17
6.3 SUMMARY OF TEST RESULTS/PLOTS.....	19
7. MAXIMUM CONDUCTED OUTPUT POWER	20
7.1 STANDARD APPLICABLE	20
7.2 TEST PROCEDURE	20
7.3 SUMMARY OF TEST RESULTS/PLOTS.....	21
8. RADIATED SPURIOUS EMISSIONS	22
8.1 STANDARD APPLICABLE	22
8.2 TEST PROCEDURE	22
8.3 TEST RECEIVER SETUP	24
8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	24
8.5 SUMMARY OF TEST RESULTS/PLOTS.....	24
9. FREQUENCY STABILITY	50
9.1 STANDARD APPLICABLE	50
9.2 TEST PROCEDURE	50
9.3 SUMMARY OF TEST RESULTS/PLOTS.....	50
10. CONDUCTED EMISSIONS	51
10.1 TEST PROCEDURE.....	51
10.2 BASIC TEST SETUP BLOCK DIAGRAM.....	51
10.3 TEST RECEIVER SETUP	51
10.4 SUMMARY OF TEST RESULTS/PLOTS	51
APPENDIX SUMMARY	54
APPENDIX A.....	55
APPENDIX B.....	66
APPENDIX C.....	87
APPENDIX D.....	98

APPENDIX PHOTOGRAPHS.....99

Report version

Version No.	Date of issue	Description
Rev.00	2023-03-03	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	HOVER CAMERA
Trade Name:	/
Model No.:	ZZ-H-1-001
Adding Model(s):	/
Rated Voltage:	DC 5V Battery DC 7.7V
Battery Capacity:	1050mAh
Power Adapter:	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n(HT20) , 802.11n-HT40, 802.11ac-VHT20,802.11ac-VHT40, 802.11ac-VHT80
Frequency Range:	5150-5250MHz, 5725-5850MHz
RF Output Power:	19.38dBm (Conducted)
Type of Modulation:	QPSK, 16QAM, 64QAM, 256QAM
Type of Antenna:	FPC Antenna
Antenna Gain:	2.77dBi
<i>Note: The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.407: General technical requirements.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

KDB789033 D02 v02r01: Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-Nii) Devices Part 15, Subparte.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Table for parameters of Test Software setting

Use “QRCT” and follow the instructions given by the manufacturer, you can start to test. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode	Test Frequency (MHz)												
	NCB: 20MHz												
	5180	5200	5240	5260	5300	5320	5500	5580	5700	5720	5745	5785	5825
802.11a 6Mbps	20	20	20	/	/	/	/	/	/	/	20	20	20
802.11n-HT20 MCS0	20	20	20	/	/	/	/	/	/	/	20	20	20
802.11ac-VHT20 MCS0	20	20	20	/	/	/	/	/	/	/	20	20	20
Mode	NCB: 40MHz												
	5190	5230	5270	5310	5510	5550	5670	5710	5755	5795			
802.11n-HT40 MCS0	20	20	/	/	/	/	/	/	20	20			
802.11ac-VHT40 MCS0	20	20	/	/	/	/	/	/	20	20			
Mode	NCB: 80MHz												
	5210		5290		5530		5610		5690		5775		
802.11ac-VH80 MCS0/Nss2	20		/		/		/		/		20		

1.5 EUT Operating during test

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Android were executed.

1.6 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz,5240MHz, 5745MHz, 5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz,5240MHz, 5745MHz, 5785MHz,5825MHz
TM3	802.11ac-VH20	5180MHz,5200MHz,5240MHz, 5745MHz, 5785MHz,5825MHz
TM4	802.11n-HT40	5190MHz,5230MHz, 5755MHz,5795MHz
TM5	802.11ac-VH40	5190MHz,5230MHz, 5755MHz,5795MHz
TM6	802.11ac-VH80	5210MHz, 5775 MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.20	Unshielded	Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	E445	EB12648265
Mobile phone	HUAWEI	VOG-AL00	/
Adapter	FUSHIGANG	AS1201A-0502000USU	/

1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.9 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2022-03-22	2023-03-21
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2022-03-22	2023-03-21
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2022-03-25	2023-03-24
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2022-03-22	2023-03-21
SMET-1313	Spectrum Analyzer	Agilent	N9020A	MY54320548	2022-03-22	2023-03-21
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2022-03-22	2023-03-21
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2022-03-22	2023-03-21
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2022-03-22	2023-03-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/
☒ Chamber A: Below 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1008	Amplifier	HP	8447F	2805A03475	2022-01-07	2023-01-06
					2022-12-30	2023-12-29
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
☒ Chamber A: Above 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21

SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2022-03-22	2023-03-21
SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2021-04-27	2023-04-26
SEMT-1216	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2022-03-25	2023-03-24
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2022-03-22	2023-03-21
☐ Chamber B:Below 1GHz						
SEMT-1068	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
SEMT-1067	Amplifier	Agilent	8447D	2944A10179	2022-03-22	2023-03-21
SEMT-1066	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2022-03-22	2023-03-21
☐ Chamber C:Below 1GHz						
SEMT-1319	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2022-01-07	2023-01-06
					2022-12-30	2023-12-29
SEMT-1343	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2023-05-27
SEMT-1333	Amplifier	HP	8447F	2944A03869	2022-03-22	2023-03-21
☒ Conducted Room 1#						
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2022-03-21	2023-03-20
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2022-03-25	2023-03-24
SEMT-1003	AC LISN	Schwarz beck	NSLK8126	8126-224	2022-03-22	2023-03-21
☐ Conducted Room 2#						
SEMT-1334	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2022-03-22	2023-03-21
SEMT-1336	LISN	Rohde & Schwarz	ENV 216	100097	2022-03-22	2023-03-21

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.405	Antenna Requirement	Compliant
15.407 (c)	Automatically Discontinue Transmission	Compliant
§15.207; §15.407(b)(6)	Conducted Emission	Compliant
§15.407(a)(1),(2)	Power Spectral Density	Compliant
§15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§15.407(b)(1),(2),(3),(4)	Undesirable emission	Compliant
§15.205; §15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§15.407(g)	Frequency Stability	Compliant
§15.407(h)	Dynamic Frequency Selection (DFS)	N/A

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information

This product has a FPC Antenna, fulfill the requirement of this section.

4. Automatically Discontinue Transmission

4.1 Standard Applicable

According to FCC Part 15.407(c), the device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

4.2 Summary of Test Results

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

5. Power Spectral Density

5.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11 \text{ dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

5.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25GHz, 5.25-5.35GHz, and 5.47-5.725GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85GHz, the rules specify a measurement bandwidth of 500kHz. Many spectrum analyzers do not have 500kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500kHz, "provided that the measured power is integrated over the full

reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1MHz, or 500kHz). If measurements are performed using a reduced resolution bandwidth ($< 1\text{MHz}$, or $< 500\text{kHz}$) and integrated over 1 MHz, or 500kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $\text{RBW} \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $\text{VBW} \geq 3 \text{ RBW}$.
- c) If measurement bandwidth of Maximum PSD is specified in 500kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 500\text{kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 1\text{MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100kHz for the sections 5.c) and 5.d) above, since $\text{RBW}=100\text{kHz}$ is available on nearly all spectrum analyzers.

5.3 Summary of Test Results/Plots

Please refer to Appendix A

6. Emission Bandwidth and Occupied Bandwidth

6.1 Standard Applicable

According to 15.407(a) and (e):

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85GHz band, the minimum 6dB bandwidth of U-NII devices shall be at least 500kHz.

6.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.

- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85GHz Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

- 1. Set center frequency to the nominal EUT channel center frequency.
- 2. Set span = 1.5 times to 5.0 times the OBW.
- 3. Set RBW = 1 % to 5 % of the OBW
- 4. Set VBW $\geq 3 \times$ RBW
- 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- 6. Use the 99 % power bandwidth function of the instrument (if available).
- 7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency.

Reference No.: WTX22X10216896W001

The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6.3 Summary of Test Results/Plots

Please refer to Appendix B

7. Maximum Conducted Output Power

7.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

7.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1MHz.
- (iii) Set VBW $\geq$ 3MHz.
- (iv) Number of points in sweep $\geq$ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that

narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq$ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

7.3 Summary of Test Results/Plots

Please refer to Appendix C

8. Radiated Spurious Emissions

8.1 Standard Applicable

According to §15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725GHz band: All emissions outside of the 5.47-5.725GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85GHz band:
 - (i) All emissions shall be limited to a level of -27dBm/MHz at 75MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6dBm/MHz at 5MHz above or below the band edge, and from 5MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

According to §15.407(b)(6), Unwanted emissions below 1GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section.

789033 D02 v02r01 General UNII Test Procedures New Rules v01

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E \cdot d)^2) / 30$$

where:

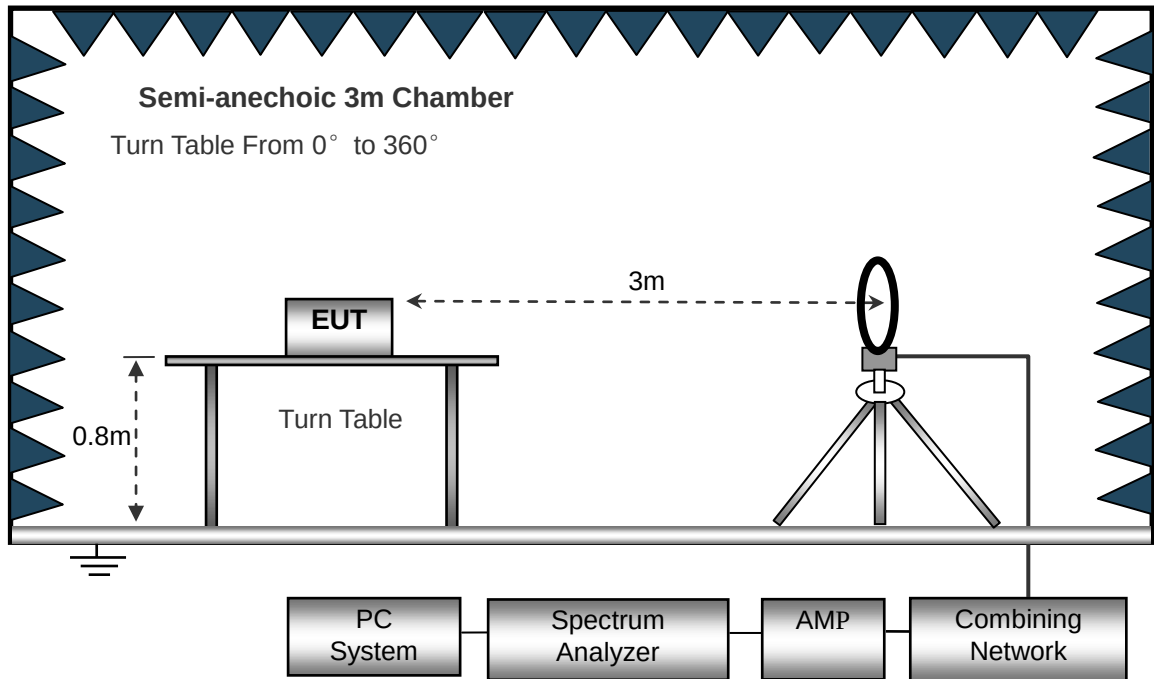
- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

8.2 Test Procedure

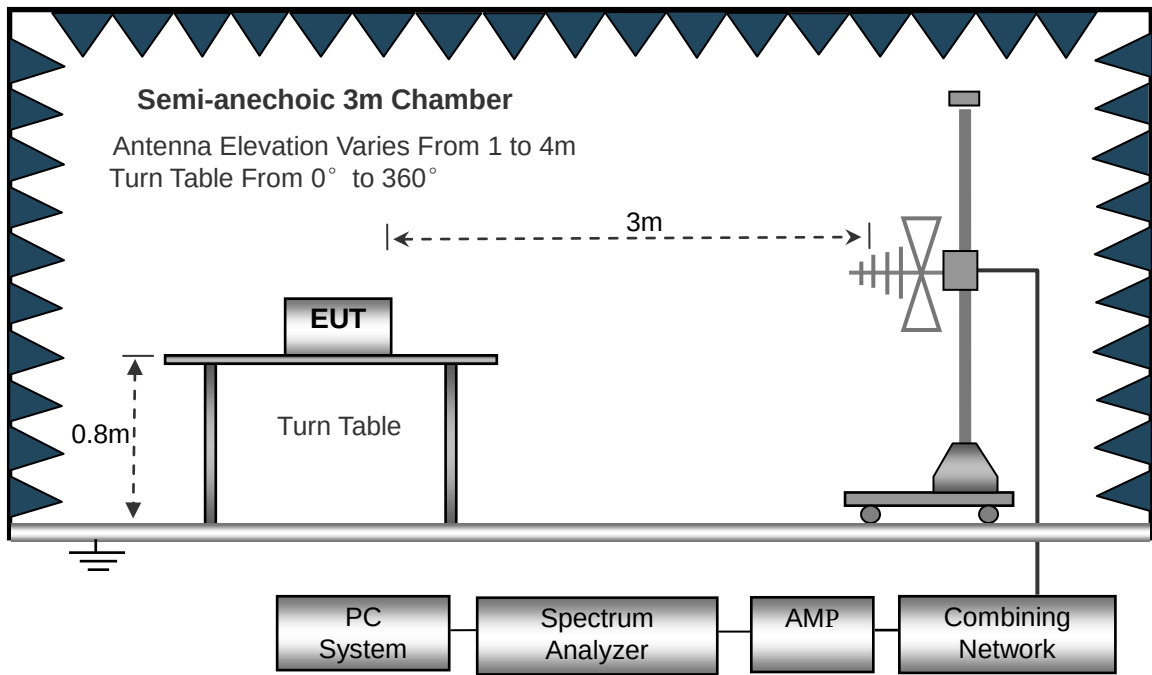
The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

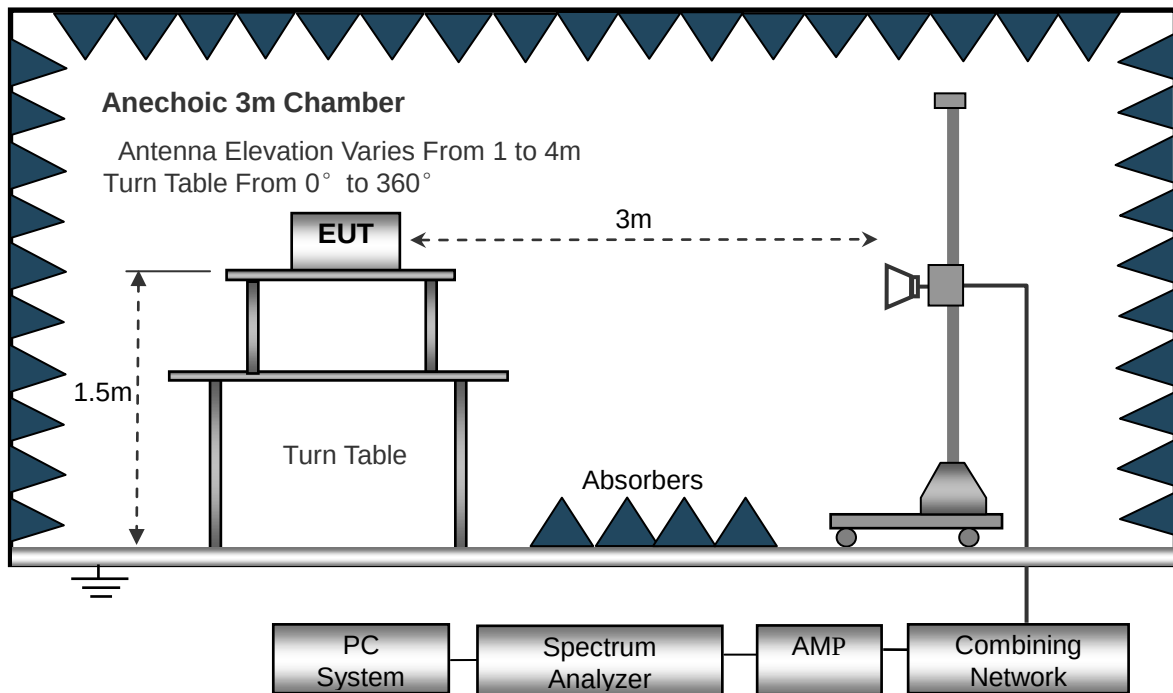
The test setup for emission measurement below 30MHz.



The test setup for emission measurement from 30MHz to 1GHz.



The test setup for emission measurement above 1GHz.



8.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

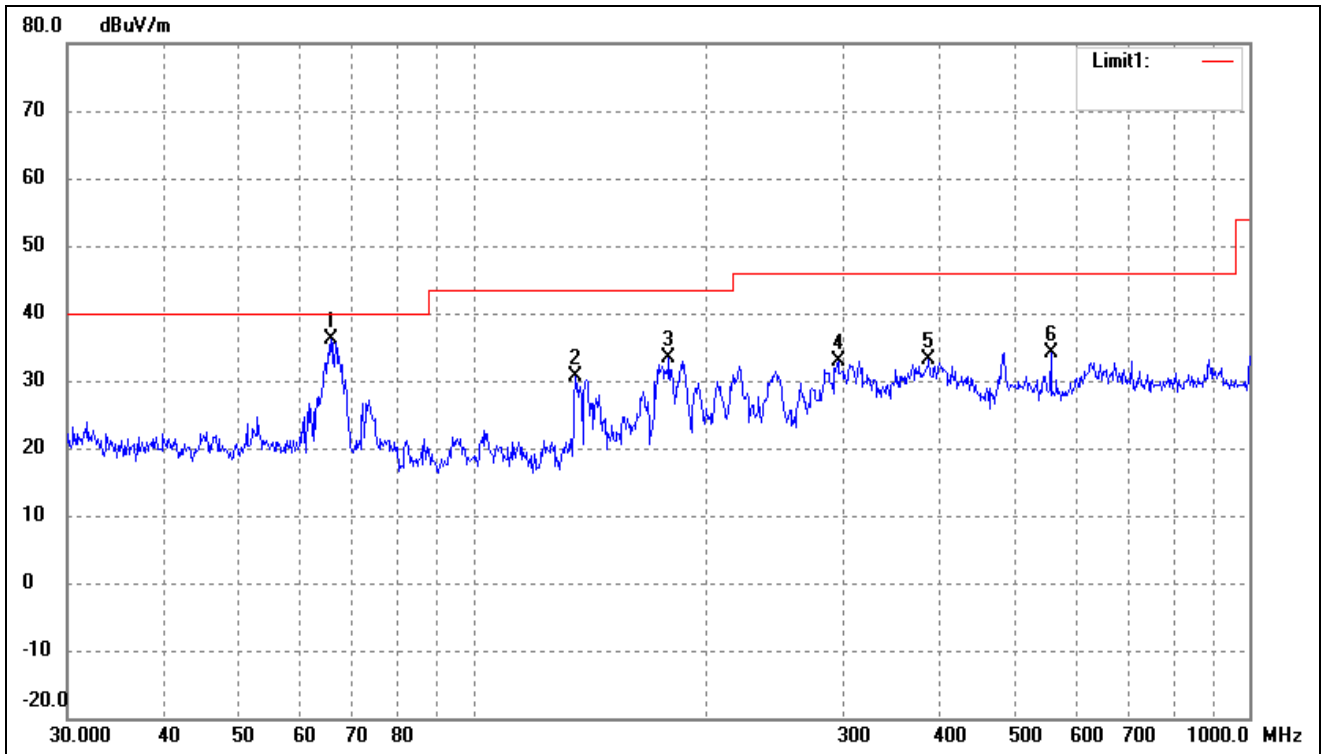
8.5 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

- Spurious Emission From 30MHz to 1GHz
- 5150-5250MHz

802.11a(Worst case)

Test Channel	5180MHz	Polarity:	Horizontal
--------------	---------	-----------	------------



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	65.5727	44.80	-8.77	36.03	40.00	-3.97	-	-	peak
2	135.5062	42.10	-11.41	30.69	43.50	-12.81	-	-	peak
3	178.7584	44.21	-10.90	33.31	43.50	-10.19	-	-	peak
4	295.1469	39.60	-6.75	32.85	46.00	-13.15	-	-	peak
5	386.6338	37.10	-3.97	33.13	46.00	-12.87	-	-	peak
6	554.8254	34.21	-0.14	34.07	46.00	-11.93	-	-	peak

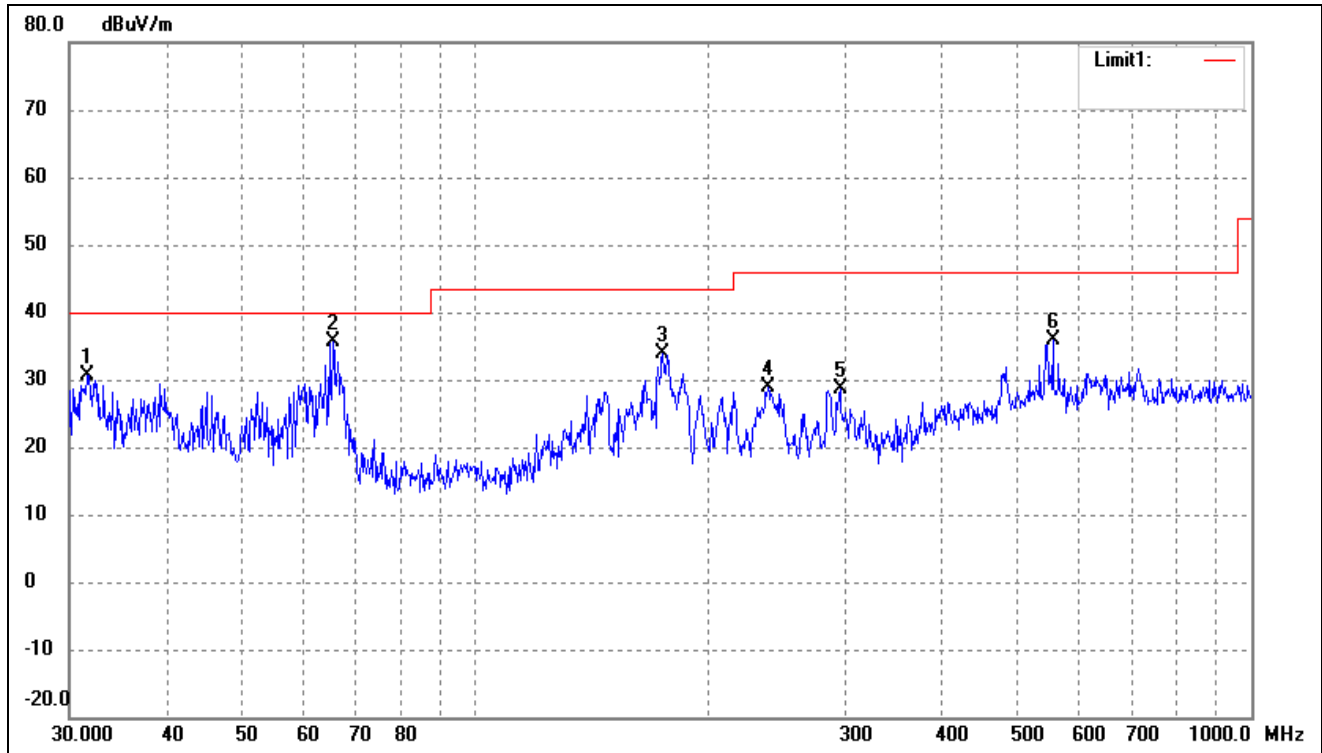
802.11a(Worst case)

Test Channel

5180MHz

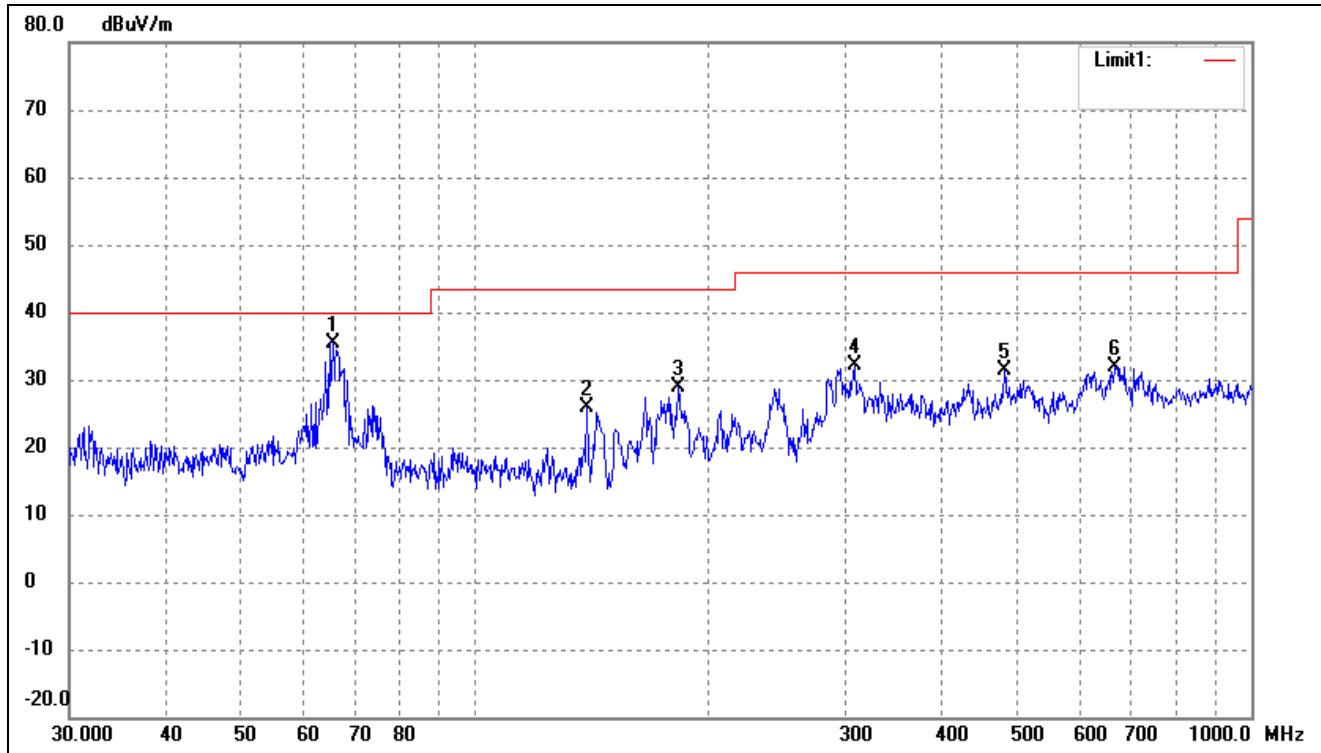
Polarity:

Vertical



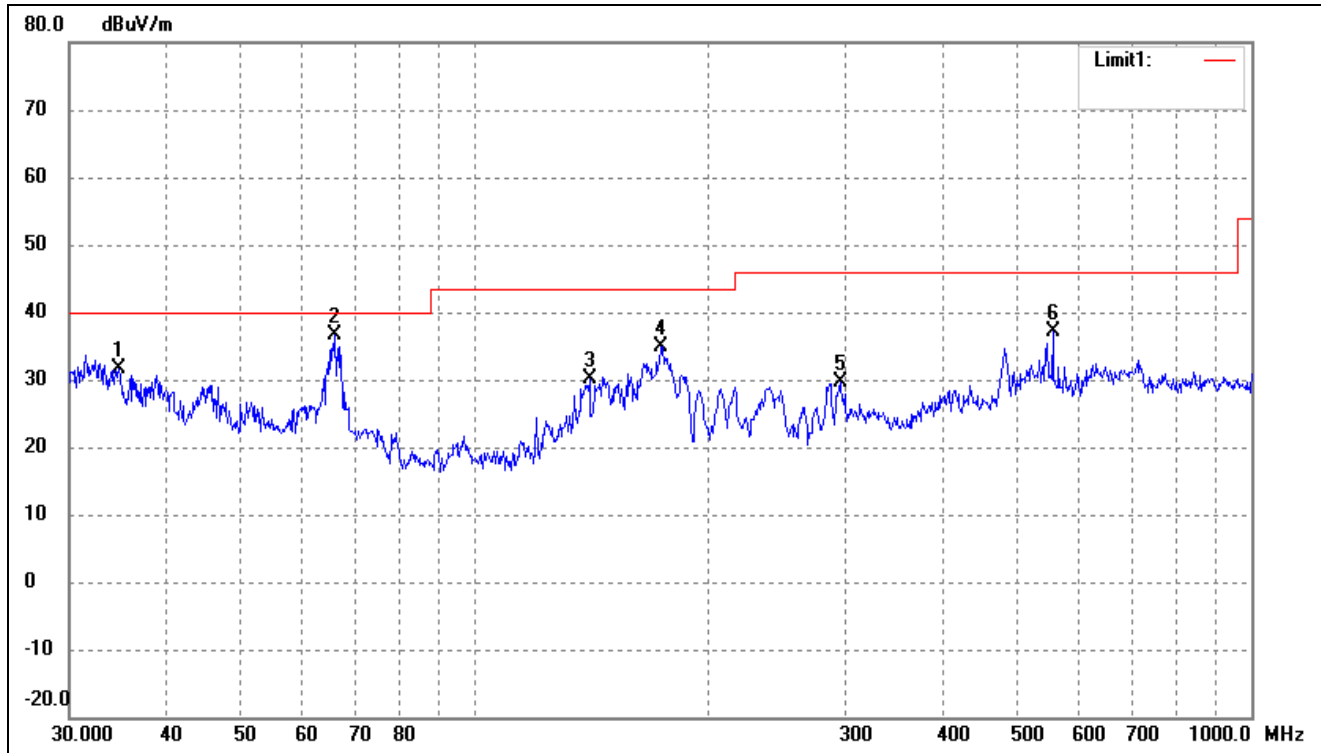
No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	31.6202	39.11	-8.38	30.73	40.00	-9.27	-	-	peak
2	65.5727	44.29	-8.77	35.52	40.00	-4.48	-	-	peak
3	174.4241	44.85	-11.08	33.77	43.50	-9.73	-	-	peak
4	238.3102	37.10	-8.25	28.85	46.00	-17.15	-	-	peak
5	295.1469	35.26	-6.75	28.51	46.00	-17.49	-	-	peak
6	554.8254	36.09	-0.14	35.95	46.00	-10.05	-	-	peak

802.11a(Worst case)			
Test Channel	5200MHz	Polarity:	Horizontal



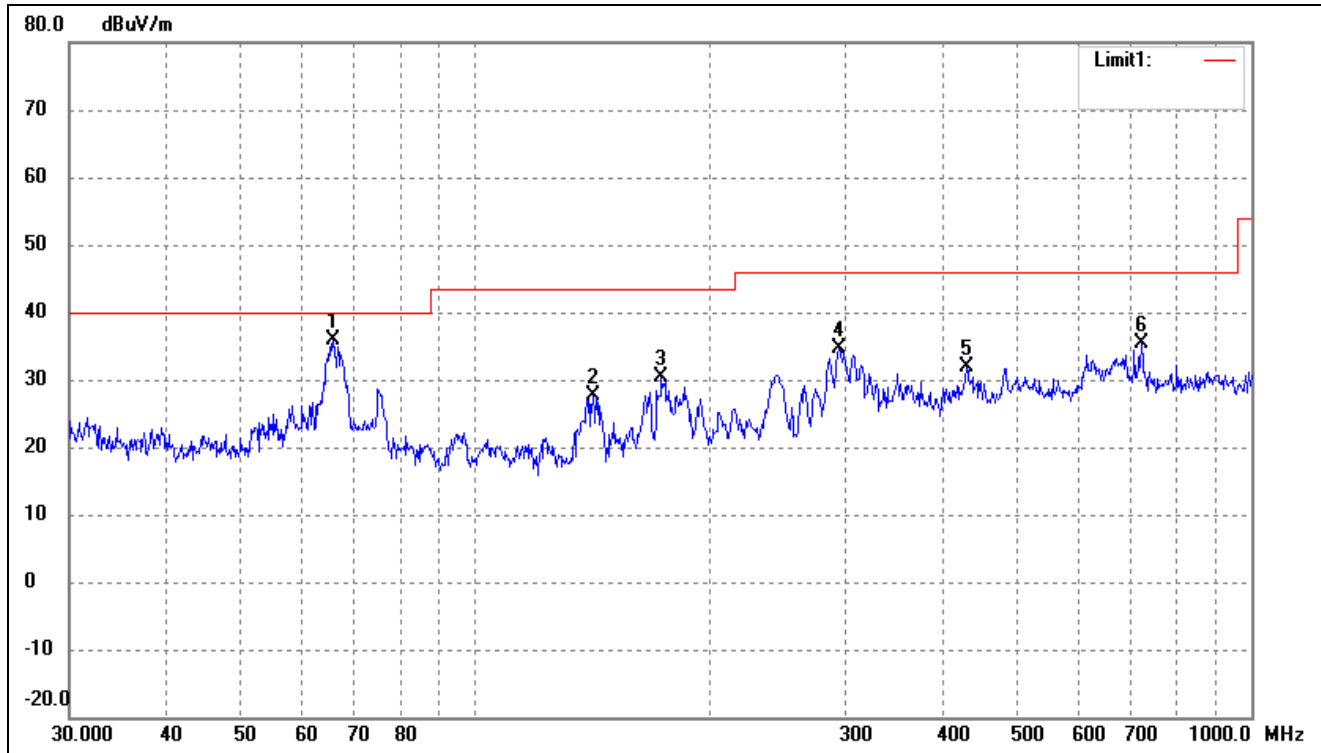
No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	65.5727	44.10	-8.77	35.33	40.00	-4.67	-	-	peak
2	139.3613	37.62	-11.73	25.89	43.50	-17.61	-	-	peak
3	182.5592	39.34	-10.52	28.82	43.50	-14.68	-	-	peak
4	307.8313	38.59	-6.37	32.22	46.00	-13.78	-	-	peak
5	480.5276	32.84	-1.58	31.26	46.00	-14.74	-	-	peak
6	665.8035	30.72	1.26	31.98	46.00	-14.02	-	-	peak

802.11a(Worst case)			
Test Channel	5200MHz	Polarity:	Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	34.7602	39.18	-7.61	31.57	40.00	-8.43	-	-	peak
2	66.0342	45.46	-8.85	36.61	40.00	-3.39	-	-	peak
3	140.3421	41.90	-11.79	30.11	43.50	-13.39	-	-	peak
4	173.8135	45.97	-11.11	34.86	43.50	-8.64	-	-	peak
5	295.1469	36.43	-6.75	29.68	46.00	-16.32	-	-	peak
6	554.8254	37.36	-0.14	37.22	46.00	-8.78	-	-	peak

802.11a(Worst case)			
Test Channel	5240MHz	Polarity:	Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	65.5727	44.55	-8.77	35.78	40.00	-4.22	-	-	peak
2	141.8262	39.39	-11.84	27.55	43.50	-15.95	-	-	peak
3	173.8135	41.44	-11.11	30.33	43.50	-13.17	-	-	peak
4	294.1137	41.46	-6.77	34.69	46.00	-11.31	-	-	peak
5	429.5228	34.67	-2.85	31.82	46.00	-14.18	-	-	peak
6	721.7259	33.56	1.77	35.33	46.00	-10.67	-	-	peak

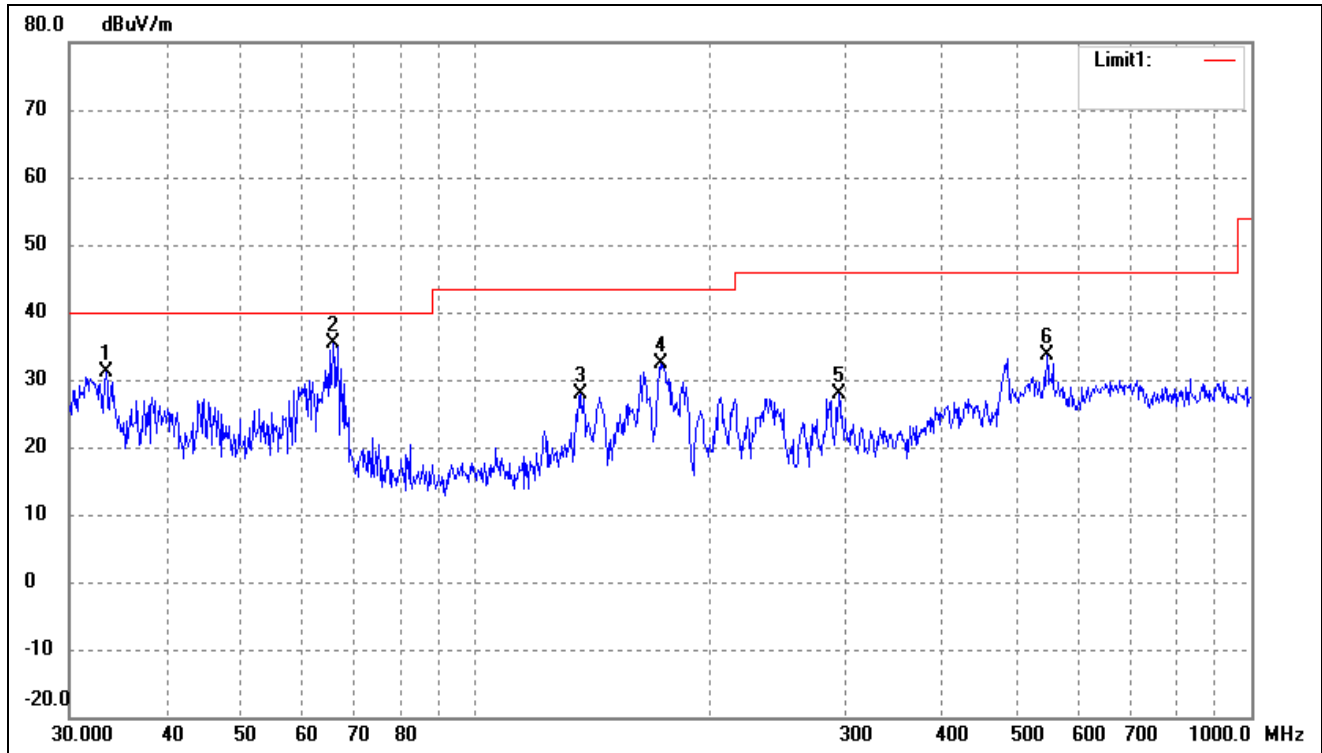
802.11a(Worst case)

Test Channel

5240MHz

Polarity:

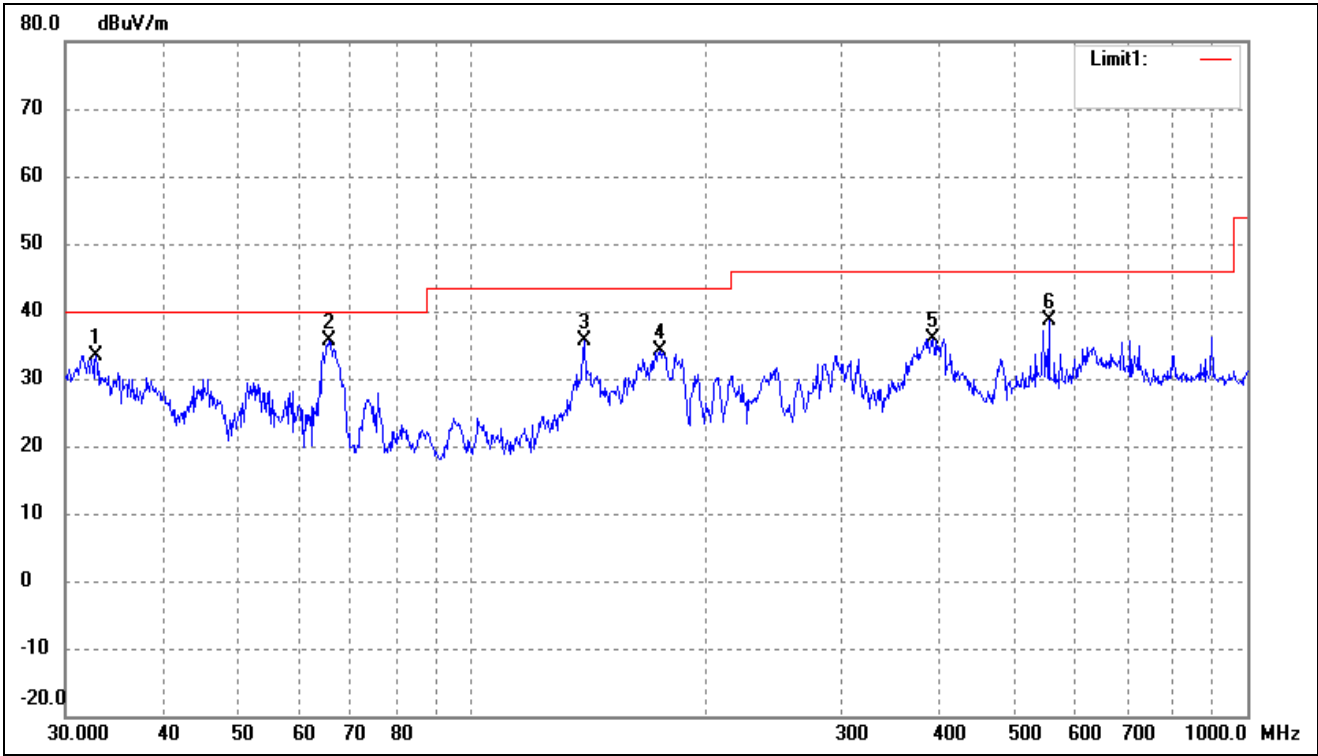
Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	33.4449	39.18	-7.94	31.24	40.00	-8.76	-	-	peak
2	65.5727	44.12	-8.77	35.35	40.00	-4.65	-	-	peak
3	136.4598	39.25	-11.48	27.77	43.50	-15.73	-	-	peak
4	173.8135	43.48	-11.11	32.37	43.50	-11.13	-	-	peak
5	294.1137	34.69	-6.77	27.92	46.00	-18.08	-	-	peak
6	545.1826	33.80	-0.29	33.51	46.00	-12.49	-	-	peak

➤ 5725-5850MHz

802.11a(Worst case)			
Test Channel	5745MHz	Polarity:	Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	32.8637	41.33	-8.07	33.26	40.00	-6.74	-	-	peak
2	65.5727	44.28	-8.77	35.51	40.00	-4.49	-	-	peak
3	139.8508	47.52	-11.78	35.74	43.50	-7.76	-	-	peak
4	175.0368	45.08	-11.06	34.02	43.50	-9.48	-	-	peak
5	393.4723	39.65	-3.76	35.89	46.00	-10.11	-	-	peak
6	554.8254	38.75	-0.14	38.61	46.00	-7.39	-	-	peak

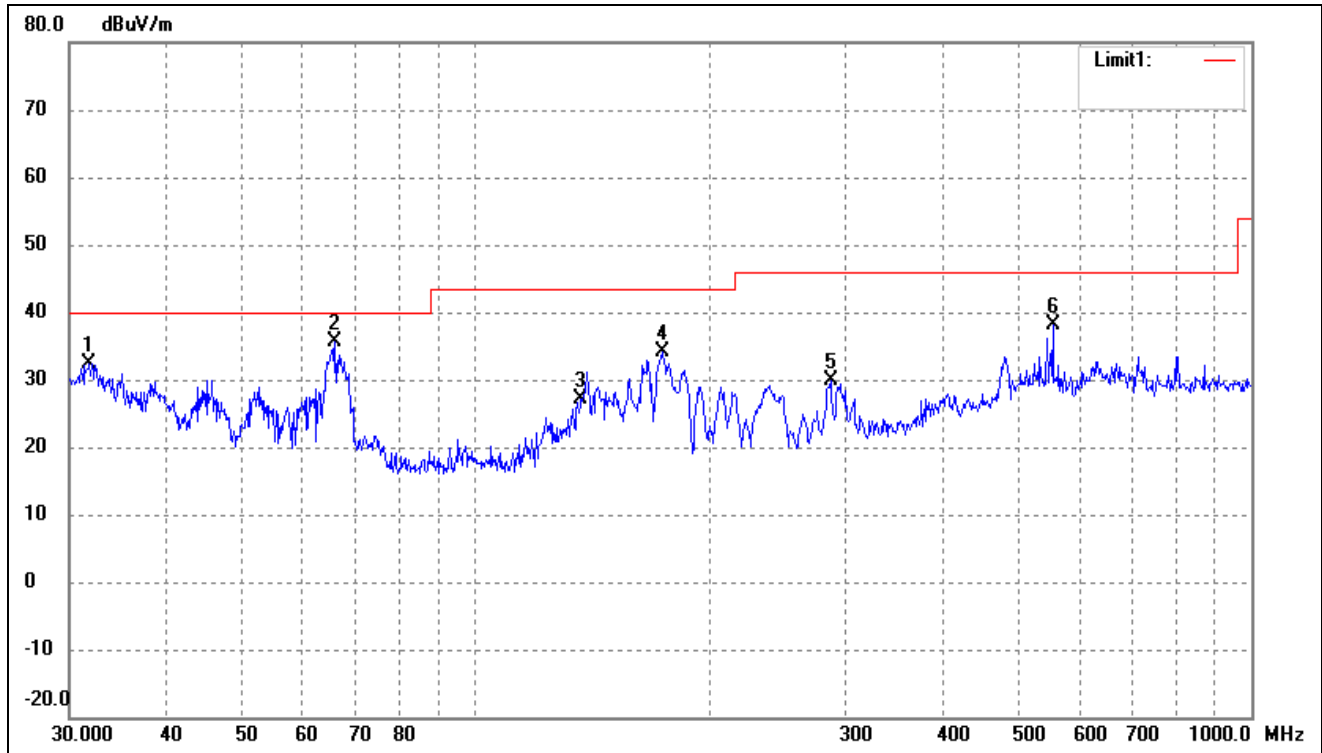
802.11a(Worst case)

Test Channel

5745MHz

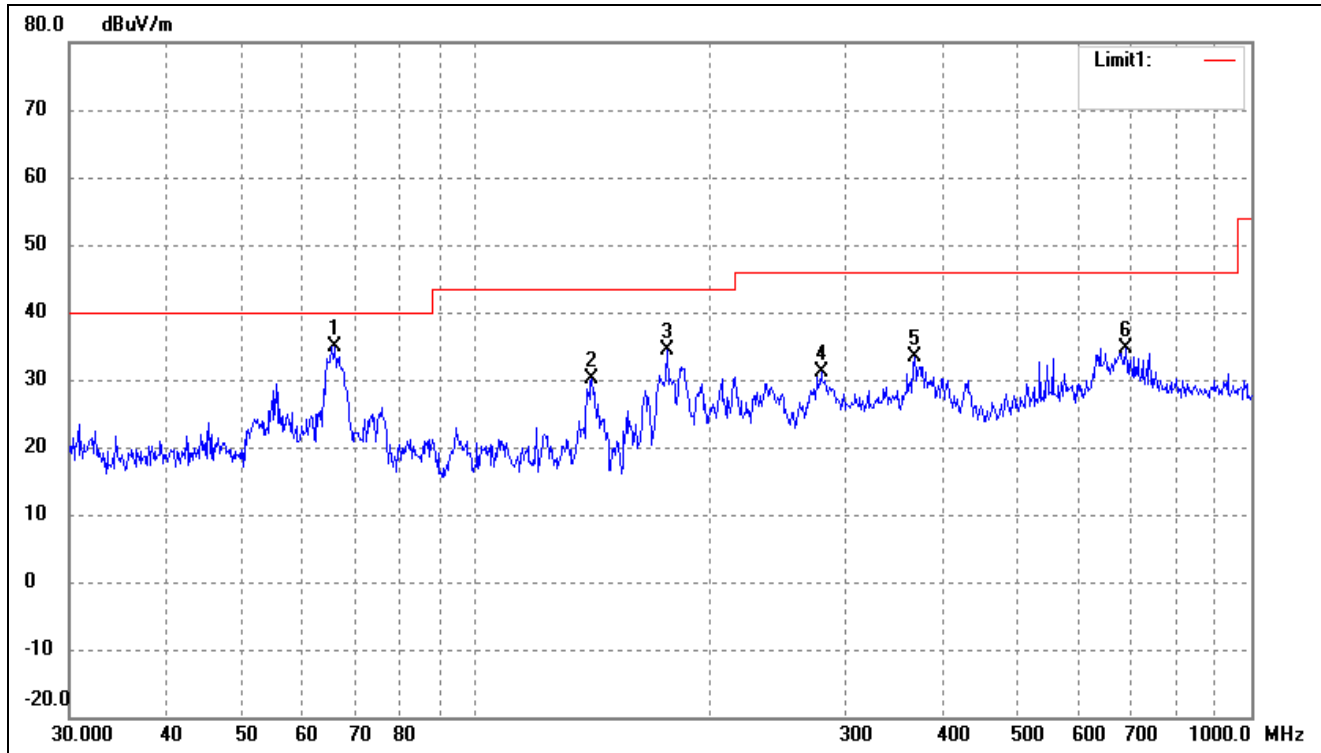
Polarity:

Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	31.8427	40.64	-8.32	32.32	40.00	-7.68	-	-	peak
2	66.0342	44.37	-8.85	35.52	40.00	-4.48	-	-	peak
3	136.9391	38.65	-11.52	27.13	43.50	-16.37	-	-	peak
4	174.4241	45.25	-11.08	34.17	43.50	-9.33	-	-	peak
5	286.9823	36.77	-6.95	29.82	46.00	-16.18	-	-	peak
6	554.8254	38.29	-0.14	38.15	46.00	-7.85	-	-	peak

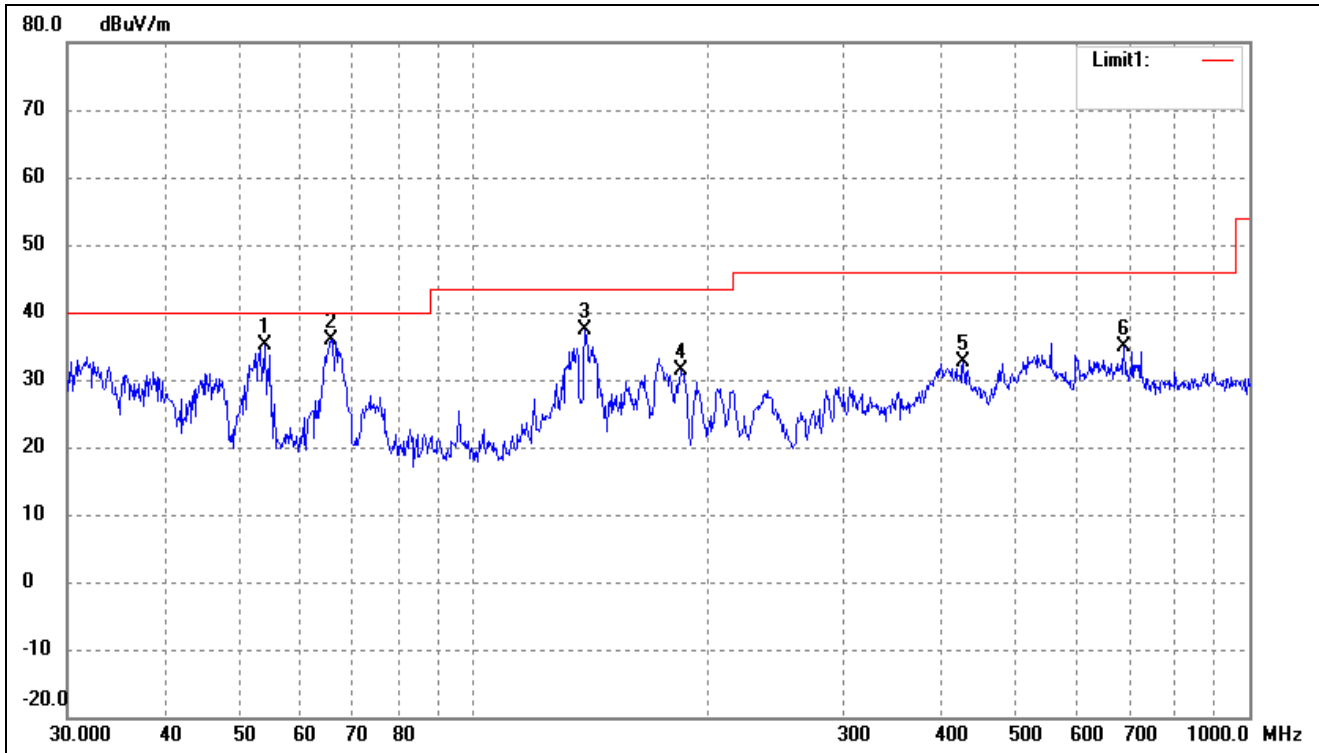
802.11a(Worst case)			
Test Channel	5785MHz	Polarity:	Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	66.0342	43.77	-8.85	34.92	40.00	-5.08	-	-	peak
2	141.3298	41.98	-11.83	30.15	43.50	-13.35	-	-	peak
3	176.8878	45.36	-10.97	34.39	43.50	-9.11	-	-	peak
4	279.0436	38.32	-7.16	31.16	46.00	-14.84	-	-	peak
5	368.1116	37.91	-4.52	33.39	46.00	-12.61	-	-	peak
6	689.5644	33.19	1.55	34.74	46.00	-11.26	-	-	peak

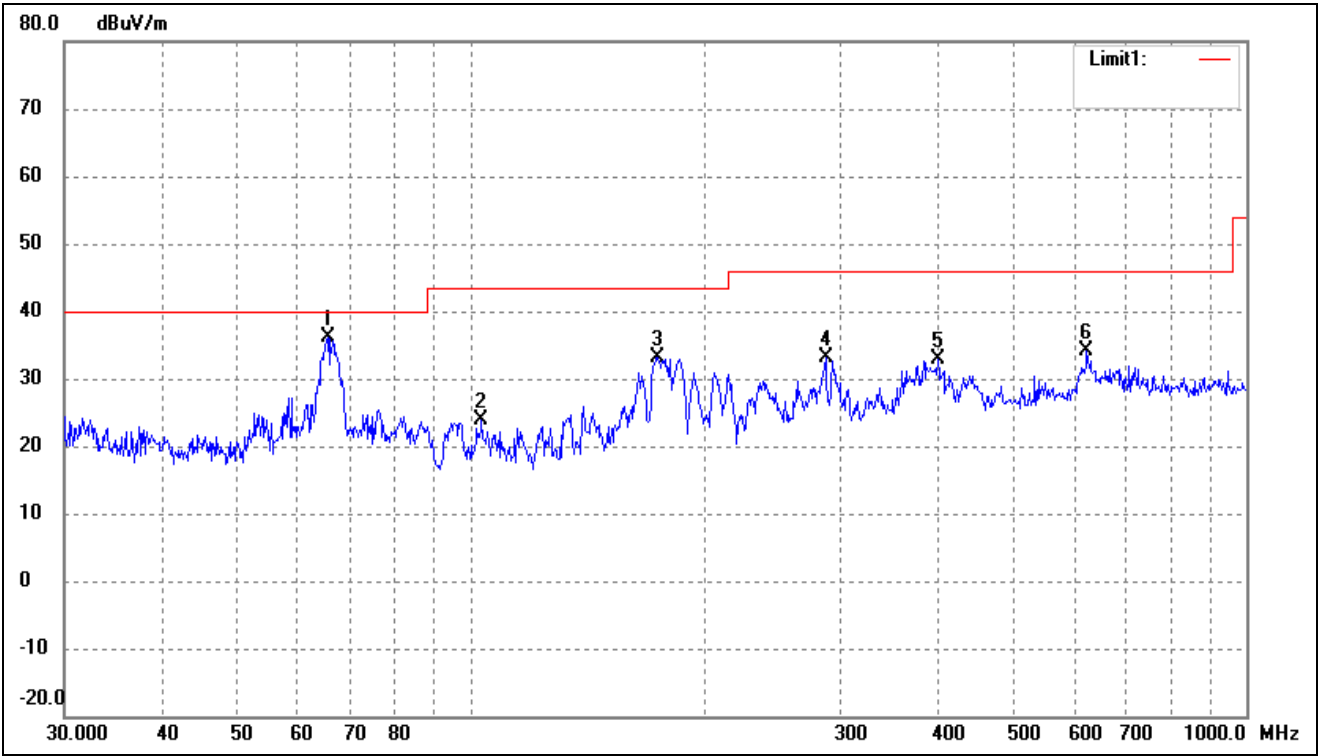
802.11a(Worst case)

Test Channel	5785MHz	Polarity:	Vertical
--------------	---------	-----------	----------



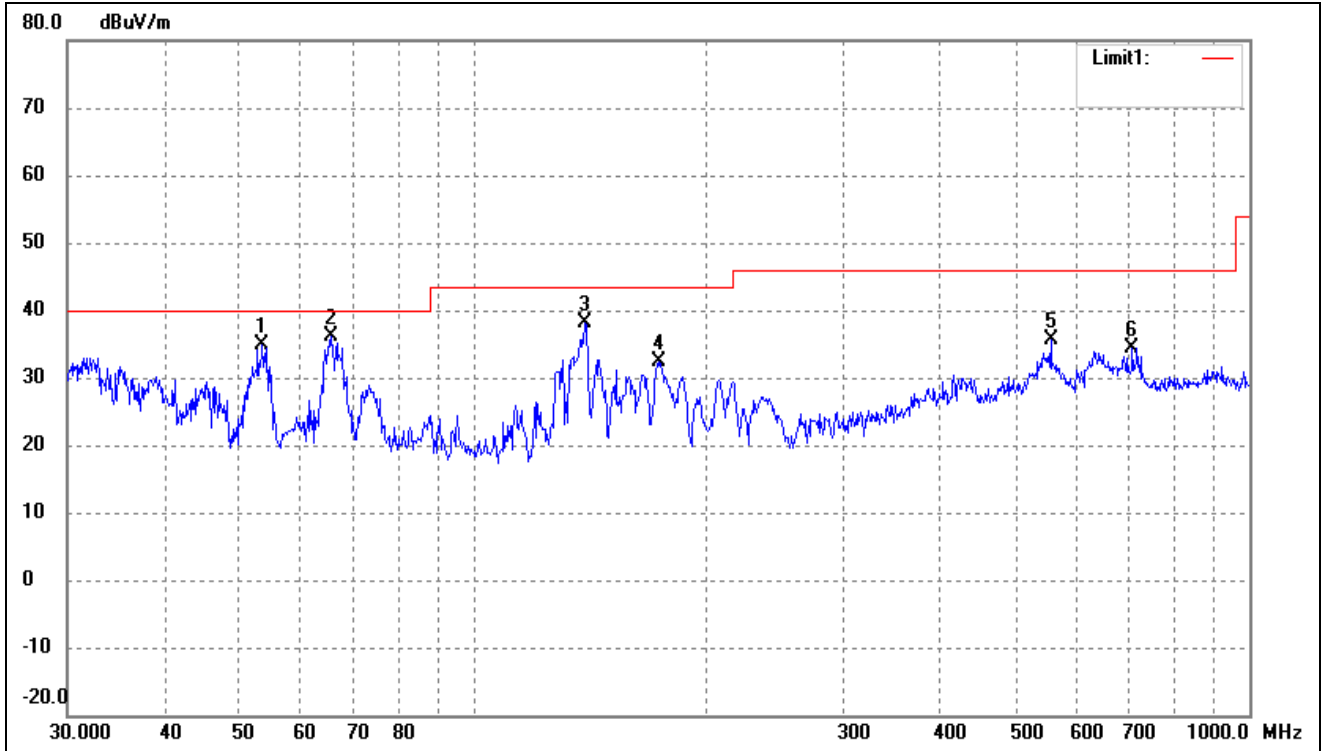
No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	53.8818	42.01	-6.89	35.12	40.00	-4.88	-	-	peak
2	65.5727	44.66	-8.77	35.89	40.00	-4.11	-	-	peak
3	139.3613	49.05	-11.73	37.32	43.50	-6.18	-	-	peak
4	185.1379	41.47	-10.20	31.27	43.50	-12.23	-	-	peak
5	428.0193	35.45	-2.88	32.57	46.00	-13.43	-	-	peak
6	689.5644	33.32	1.55	34.87	46.00	-11.13	-	-	peak

802.11a(Worst case)			
Test Channel	5825MHz	Polarity:	Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	65.5727	44.78	-8.77	36.01	40.00	-3.99	-	-	peak
2	103.4421	31.99	-8.22	23.77	43.50	-19.73	-	-	peak
3	174.4241	44.21	-11.08	33.13	43.50	-10.37	-	-	peak
4	286.9823	40.03	-6.95	33.08	46.00	-12.92	-	-	peak
5	400.4319	36.49	-3.55	32.94	46.00	-13.06	-	-	peak
6	622.8900	33.32	0.79	34.11	46.00	-11.89	-	-	peak

802.11a(Worst case)			
Test Channel	5825MHz	Polarity:	Vertical

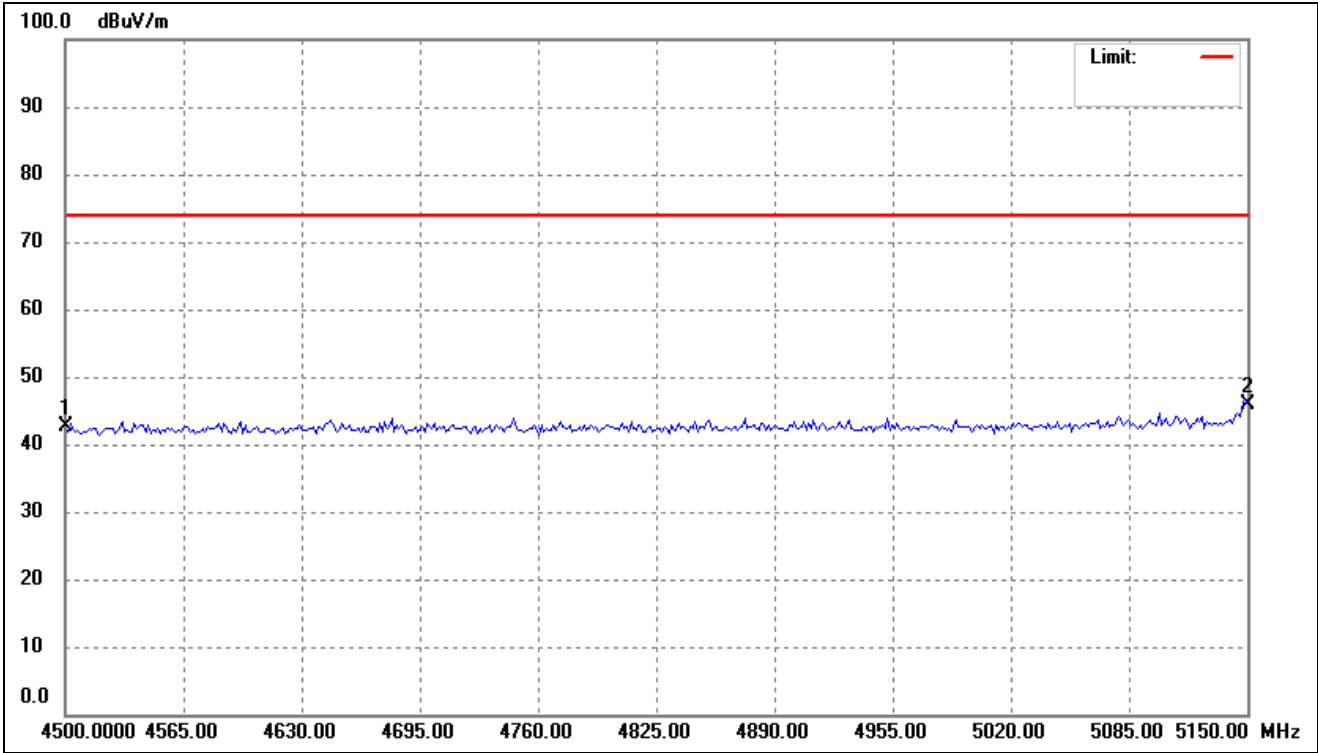


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	53.5052	41.70	-6.84	34.86	40.00	-5.14	-	-	peak
2	65.5727	44.78	-8.77	36.01	40.00	-3.99	-	-	peak
3	139.3613	49.94	-11.73	38.21	43.50	-5.29	-	-	peak
4	173.8135	43.56	-11.11	32.45	43.50	-11.05	-	-	peak
5	554.8254	35.88	-0.14	35.74	46.00	-10.26	-	-	peak
6	706.6999	32.62	1.70	34.32	46.00	-11.68	-	-	peak

Remark: '-'Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

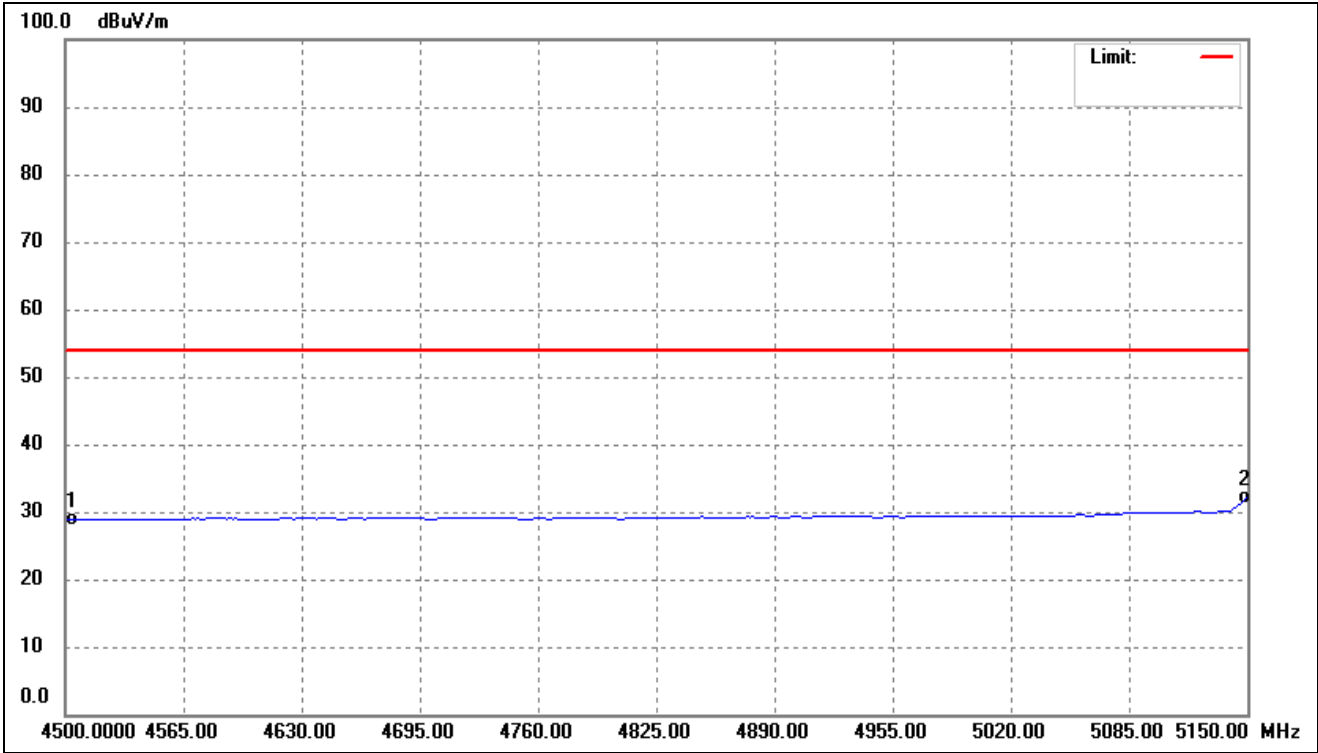
➤ Spurious Emission above 1GHz

802.11a- Restricted Bandedge			
Test Channel	band 4.50-5.15GHz	Polarity:	Horizontal (worst case)



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4500.000	57.23	-14.70	42.53	74.00	-31.47	-	-	peak
2	5150.000	59.63	-13.72	45.91	74.00	-28.09	-	-	peak

802.11a- Restricted Bandedge			
Test Channel	band 4.50-5.15GHz	Polarity:	Vertical (worst case)



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4500.000	43.53	-14.70	28.83	54.00	-25.17	-	-	AVG
2	5150.000	45.94	-13.72	32.22	54.00	-21.78	-	-	AVG

Note: The Restricted Bandedge was tested in Horizontal /Vertical and the worst case position data was reported.

Remark: '-'Means' the test Degree and Height is not recorded by the test software and only show the worst case in the test report.

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11a)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	56.34	7.11	63.45	74.00	-10.55	H	PK
15540	35.33	8.22	43.55	54.00	-10.45	H	AV
10360	56.88	7.11	63.99	74.00	-10.01	V	PK
15540	40.95	8.22	49.17	54.00	-4.83	V	AV
Middle Channel (5200MHz)							
10400	59.25	7.22	66.47	74.00	-7.53	H	PK
15600	33.20	8.67	41.87	54.00	-12.13	H	AV
10400	56.85	7.22	64.07	74.00	-9.93	V	PK
15600	38.14	8.67	46.81	54.00	-7.19	V	AV
High Channel (5240MHz)							
10480	57.01	7.69	64.70	74.00	-9.30	H	PK
15720	38.44	8.93	47.37	54.00	-6.63	H	AV
10480	58.74	7.69	66.43	74.00	-7.57	V	PK
15720	36.52	8.93	45.45	54.00	-8.55	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	53.60	9.45	63.05	74.00	-10.95	H	PK
17235	31.74	10.36	42.10	54.00	-11.90	H	AV
11490	54.50	9.45	63.95	74.00	-10.05	V	PK
17235	35.64	10.36	46.00	54.00	-8.00	V	AV
Middle Channel (5785MHz)							
11570	57.84	9.62	67.46	74.00	-6.54	H	PK
17355	35.28	10.67	45.95	54.00	-8.05	H	AV
11570	54.50	9.62	64.12	74.00	-9.88	V	PK
17355	37.42	10.67	48.09	54.00	-5.91	V	AV
High Channel (5825MHz)							
11650	53.97	9.84	63.81	74.00	-10.19	H	PK
17475	34.84	10.95	45.79	54.00	-8.21	H	AV
11650	56.30	9.84	66.14	74.00	-7.86	V	PK
17475	34.10	10.95	45.05	54.00	-8.95	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-37.66	-27
Highest	Above 5350	-43.30	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-47.38	-27
	5650 to 5700	-34.40	-27 to -17
	5700 to 5720	-24.35	-17 to 15.6
	5720 to 5725	-16.43	15.6 to 27
Highest	5850 to 5855	-15.22	27 to 15.6
	5855 to 5875	-25.01	15.6 to -17
	5875 to 5925	-36.94	-17 to -27
	Above 5925	-38.93	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11n HT20)
- Harmonics And Spurious Emissions

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5180MHz)							
10360	58.65	7.11	65.76	74.00	-8.24	H	PK
15540	39.62	8.22	47.84	54.00	-6.16	H	AV
10360	57.87	7.11	64.98	74.00	-9.02	V	PK
15540	38.59	8.22	46.81	54.00	-7.19	V	AV
Middle Channel (5200MHz)							
10400	55.65	7.22	62.87	74.00	-11.13	H	PK
15600	36.73	8.67	45.40	54.00	-8.60	H	AV
10400	57.65	7.22	64.87	74.00	-9.13	V	PK
15600	35.16	8.67	43.83	54.00	-10.17	V	AV
High Channel (5240MHz)							
10480	57.67	7.69	65.36	74.00	-8.64	H	PK
15720	33.01	8.93	41.94	54.00	-12.06	H	AV
10480	60.86	7.69	68.55	74.00	-5.45	V	PK
15720	37.46	8.93	46.39	54.00	-7.61	V	AV

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5745MHz)							
11490	54.66	9.45	64.11	74.00	-9.89	H	PK
17235	35.43	10.36	45.79	54.00	-8.21	H	AV
11490	55.70	9.45	65.15	74.00	-8.85	V	PK
17235	33.43	10.36	43.79	54.00	-10.21	V	AV
Middle Channel (5785MHz)							
11570	60.79	9.62	70.41	74.00	-3.59	H	PK
17355	38.28	10.67	48.95	54.00	-5.05	H	AV
11570	58.43	9.62	68.05	74.00	-5.95	V	PK
17355	39.56	10.67	50.23	54.00	-3.77	V	AV
High Channel (5825MHz)							
11650	56.66	9.84	66.50	74.00	-7.50	H	PK
17475	35.35	10.95	46.30	54.00	-7.70	H	AV
11650	60.44	9.84	70.28	74.00	-3.72	V	PK
17475	33.67	10.95	44.62	54.00	-9.38	V	AV

➤ Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-32.45	-27
Highest	Above 5350	-40.43	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-48.67	-27
	5650 to 5700	-33.44	-27 to -17
	5700 to 5720	-28.42	-17 to 15.6
	5720 to 5725	-16.87	15.6 to 27
Highest	5850 to 5855	-14.98	27 to 15.6
	5855 to 5875	-27.42	15.6 to -17
	5875 to 5925	-37.75	-17 to -27
	Above 5925	-40.69	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ac VHT20)
- Harmonics And Spurious Emissions

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5180MHz)							
10360	58.37	7.11	65.48	74.00	-8.52	H	PK
15540	39.26	8.22	47.48	54.00	-6.52	H	AV
10360	58.32	7.11	65.43	74.00	-8.57	V	PK
15540	38.60	8.22	46.82	54.00	-7.18	V	AV
Middle Channel (5200MHz)							
10400	55.47	7.22	62.69	74.00	-11.31	H	PK
15600	37.14	8.67	45.81	54.00	-8.19	H	AV
10400	57.73	7.22	64.95	74.00	-9.05	V	PK
15600	34.34	8.67	43.01	54.00	-10.99	V	AV
High Channel (5240MHz)							
10480	56.70	7.69	64.39	74.00	-9.61	H	PK
15720	33.92	8.93	42.85	54.00	-11.15	H	AV
10480	60.04	7.69	67.73	74.00	-6.27	V	PK
15720	36.49	8.93	45.42	54.00	-8.58	V	AV

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5745MHz)							
11490	55.62	9.45	65.07	74.00	-8.93	H	PK
17235	36.26	10.36	46.62	54.00	-7.38	H	AV
11490	56.40	9.45	65.85	74.00	-8.15	V	PK
17235	33.89	10.36	44.25	54.00	-9.75	V	AV
Middle Channel (5785MHz)							
11570	60.35	9.62	69.97	74.00	-4.03	H	PK
17355	38.67	10.67	49.34	54.00	-4.66	H	AV
11570	58.62	9.62	68.24	74.00	-5.76	V	PK
17355	38.63	10.67	49.30	54.00	-4.70	V	AV
High Channel (5825MHz)							
11650	55.70	9.84	65.54	74.00	-8.46	H	PK
17475	34.89	10.95	45.84	54.00	-8.16	H	AV
11650	60.50	9.84	70.34	74.00	-3.66	V	PK
17475	34.48	10.95	45.43	54.00	-8.57	V	AV

➤ Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-32.48	-27
Highest	Above 5350	-40.21	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-48.27	-27
	5650 to 5700	-33.24	-27 to -17
	5700 to 5720	-27.77	-17 to 15.6
	5720 to 5725	-16.17	15.6 to 27
Highest	5850 to 5855	-14.83	27 to 15.6
	5855 to 5875	-26.75	15.6 to -17
	5875 to 5925	-37.62	-17 to -27
	Above 5925	-40.70	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11n HT40)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	59.68	7.25	66.93	74.00	-7.07	H	PK
15570	37.69	8.33	46.02	54.00	-7.98	H	AV
10380	58.34	7.25	65.59	74.00	-8.41	V	PK
15570	37.70	8.33	46.03	54.00	-7.97	V	AV
High Channel (5230MHz)							
10460	58.24	7.54	65.78	74.00	-8.22	H	PK
15690	37.40	8.86	46.26	54.00	-7.74	H	AV
10460	58.51	7.54	66.05	74.00	-7.95	V	PK
15690	41.44	8.86	50.30	54.00	-3.70	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	56.23	9.65	65.88	74.00	-8.12	H	PK
17265	34.17	10.87	45.04	54.00	-8.96	H	AV
11510	54.22	9.65	63.87	74.00	-10.13	V	PK
17265	36.54	10.87	47.41	54.00	-6.59	V	AV
High Channel (5795MHz)							
11590	57.61	9.81	67.42	74.00	-6.58	H	PK
17385	34.77	10.89	45.66	54.00	-8.34	H	AV
11590	57.19	9.81	67.00	74.00	-7.00	V	PK
17385	36.62	10.89	47.51	54.00	-6.49	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-35.88	-27
Highest	Above 5350	-43.85	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-47.00	-27
	5650 to 5700	-33.98	-27 to -17
	5700 to 5720	-25.62	-17 to 15.6
	5720 to 5725	-15.25	15.6 to 27
Highest	5850 to 5855	-15.56	27 to 15.6
	5855 to 5875	-25.35	15.6 to -17
	5875 to 5925	-33.76	-17 to -27
	Above 5925	-37.15	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ac VHT40)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	59.78	7.25	67.03	74.00	-6.97	H	PK
15570	36.93	8.33	45.26	54.00	-8.74	H	AV
10380	59.18	7.25	66.43	74.00	-7.57	V	PK
15570	37.09	8.33	45.42	54.00	-8.58	V	AV
High Channel (5230MHz)							
10460	57.74	7.54	65.28	74.00	-8.72	H	PK
15690	38.25	8.86	47.11	54.00	-6.89	H	AV
10460	57.98	7.54	65.52	74.00	-8.48	V	PK
15690	40.97	8.86	49.83	54.00	-4.17	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	55.78	9.65	65.43	74.00	-8.57	H	PK
17265	34.06	10.87	44.93	54.00	-9.07	H	AV
11510	53.38	9.65	63.03	74.00	-10.97	V	PK
17265	36.76	10.87	47.63	54.00	-6.37	V	AV
High Channel (5795MHz)							
11590	58.51	9.81	68.32	74.00	-5.68	H	PK
17385	34.96	10.89	45.85	54.00	-8.15	H	AV
11590	56.81	9.81	66.62	74.00	-7.38	V	PK
17385	36.98	10.89	47.87	54.00	-6.13	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-37.30	-27
Highest	Above 5350	-44.64	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-46.48	-27
	5650 to 5700	-35.19	-27 to -17
	5700 to 5720	-25.57	-17 to 15.6
	5720 to 5725	-14.04	15.6 to 27
Highest	5850 to 5855	-15.46	27 to 15.6
	5855 to 5875	-26.50	15.6 to -17
	5875 to 5925	-32.87	-17 to -27
	Above 5925	-36.64	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ac VH80)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5210MHz							
10420	56.94	7.33	64.27	74.00	-9.73	H	PK
15630	37.09	8.75	45.84	54.00	-8.16	H	AV
10420	55.78	7.33	63.11	74.00	-10.89	V	PK
15630	34.31	8.75	43.06	54.00	-10.94	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5775MHz							
11550	55.11	9.54	64.65	74.00	-9.35	H	PK
17325	38.04	10.59	48.63	54.00	-5.37	H	AV
11550	55.95	9.54	65.49	74.00	-8.51	V	PK
17325	33.96	10.59	44.55	54.00	-9.45	V	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-38.73	-27
Highest	Above 5350	-35.29	-27

Note: the data just list the worst cases

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-44.65	-27
	5650 to 5700	-34.97	-27 to -17
	5700 to 5720	-24.38	-17 to 15.6
	5720 to 5725	-15.66	15.6 to 27
Highest	5850 to 5855	-16.76	27 to 15.6
	5855 to 5875	-25.04	15.6 to -17
	5875 to 5925	-37.18	-17 to -27
	Above 5925	-40.07	-27

Note: the data just list the worst cases

Note: Testing is carried out with frequency rang 9kHz to 40Ghz, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Frequency Stability

9.1 Standard Applicable

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

9.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

9.3 Summary of Test Results/Plots

Please refer to Appendix D

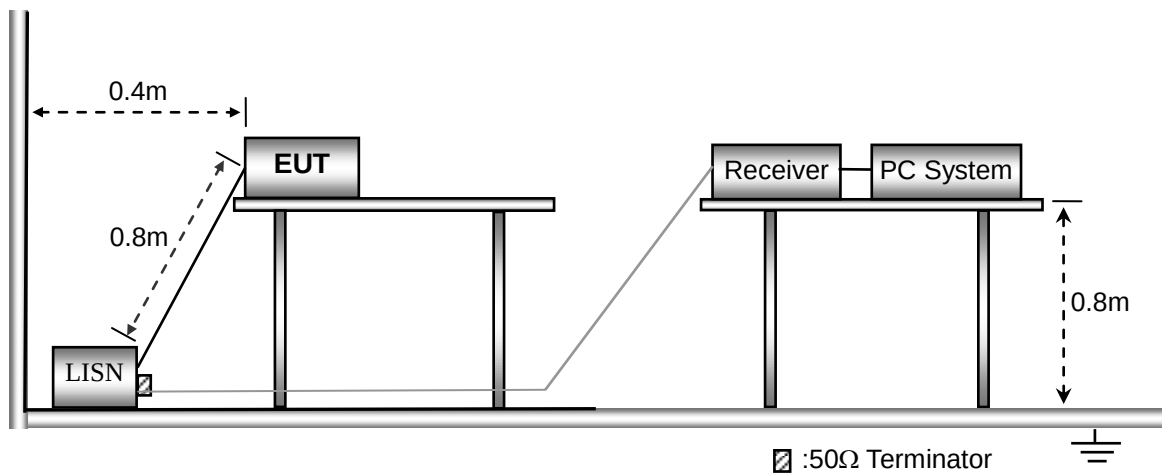
10. Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

10.2 Basic Test Setup Block Diagram



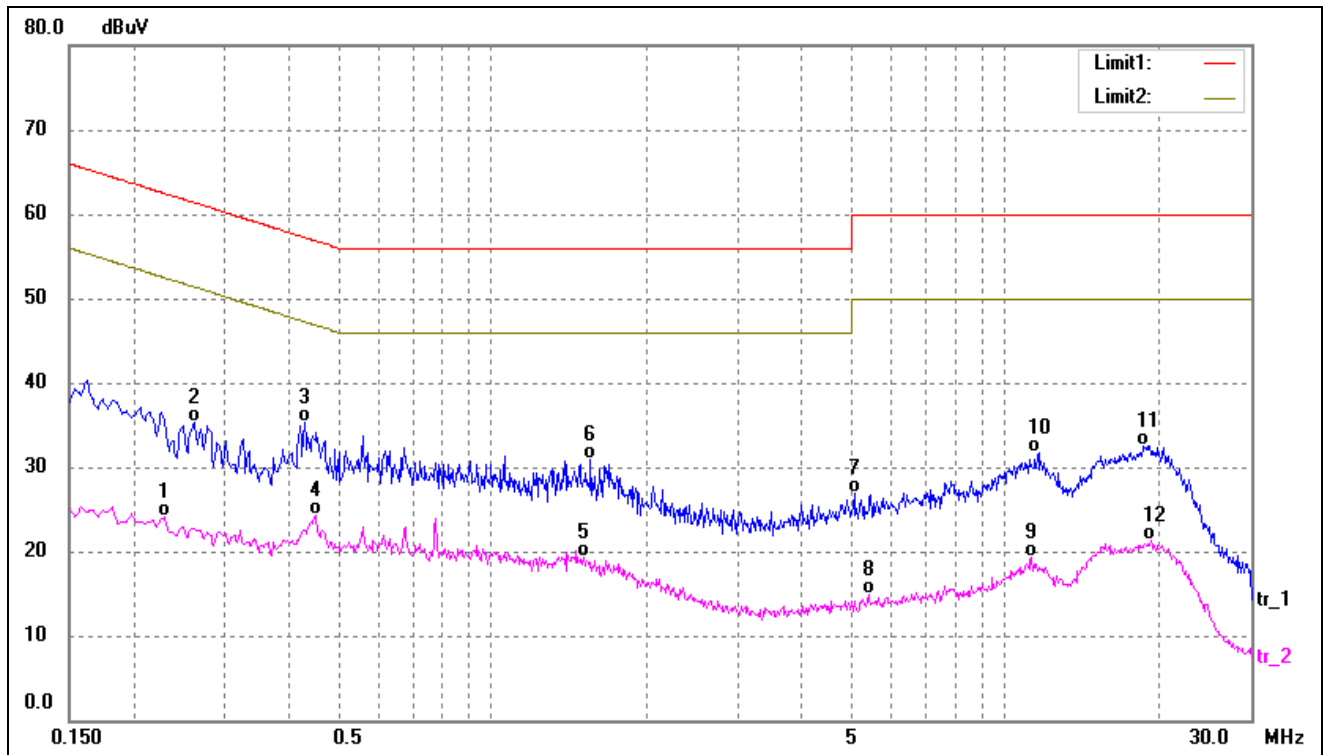
10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150kHz
Stop Frequency	30MHz
Sweep Speed	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth	9kHz
Quasi-Peak Adapter Mode	Normal

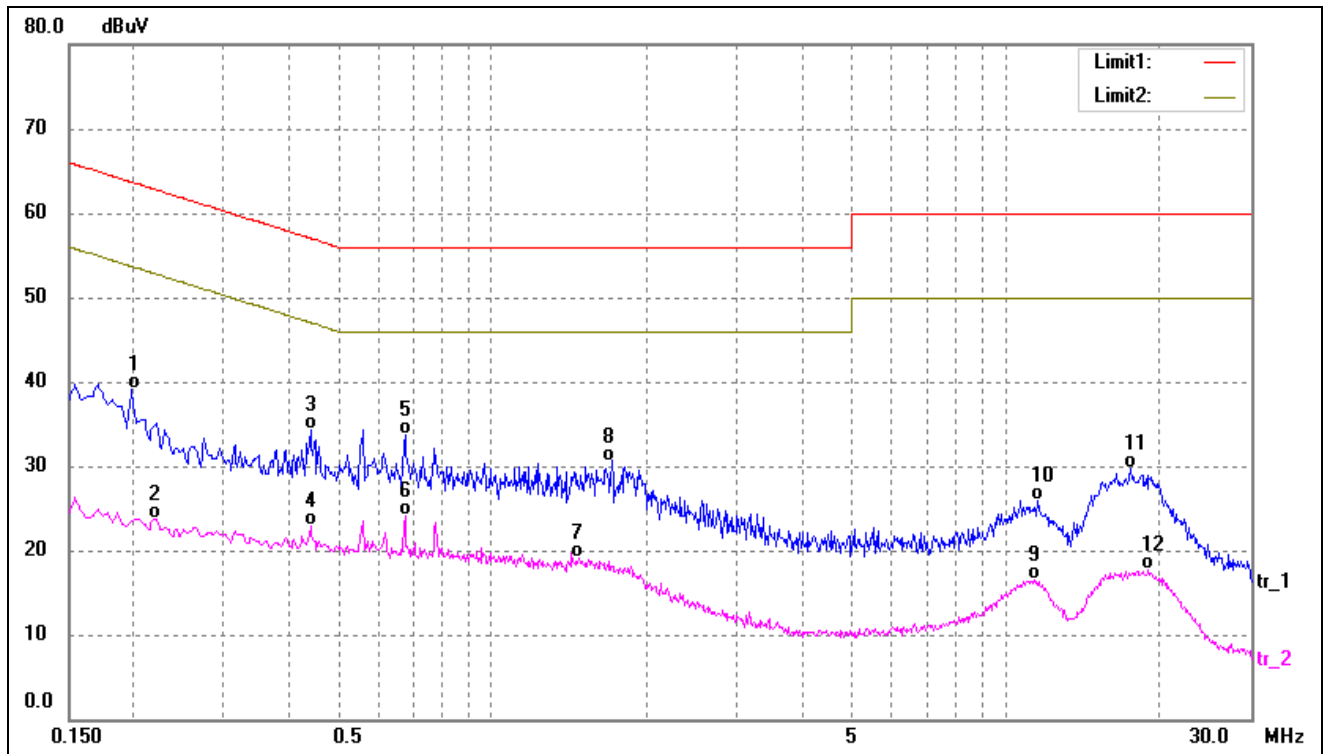
10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2300	13.75	10.28	24.03	52.45	-28.42	AVG
2	0.2620	24.95	10.26	35.21	61.36	-26.15	QP
3*	0.4300	25.06	10.23	35.29	57.25	-21.96	QP
4	0.4500	14.02	10.23	24.25	46.87	-22.62	AVG
5	1.5100	9.05	10.19	19.24	46.00	-26.76	AVG
6	1.5580	20.69	10.21	30.90	56.00	-25.10	QP
7	5.0700	16.61	10.33	26.94	60.00	-33.06	QP
8	5.4020	4.66	10.33	14.99	50.00	-35.01	AVG
9	11.2260	8.88	10.33	19.21	50.00	-30.79	AVG
10	11.5659	21.31	10.32	31.63	60.00	-28.37	QP
11	18.5340	22.19	10.33	32.52	60.00	-27.48	QP
12	19.1500	10.88	10.34	21.22	50.00	-28.78	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1980	28.71	10.30	39.01	63.69	-24.68	QP
2	0.2180	13.50	10.28	23.78	52.89	-29.11	AVG
3	0.4420	23.98	10.23	34.21	57.02	-22.81	QP
4	0.4420	12.59	10.23	22.82	47.02	-24.20	AVG
5	0.6780	23.48	10.20	33.68	56.00	-22.32	QP
6*	0.6780	13.96	10.20	24.16	46.00	-21.84	AVG
7	1.4740	8.86	10.19	19.05	46.00	-26.95	AVG
8	1.7140	20.38	10.22	30.60	56.00	-25.40	QP
9	11.3420	6.11	10.32	16.43	50.00	-33.57	AVG
10	11.5540	15.64	10.32	25.96	60.00	-34.04	QP
11	17.5300	19.48	10.31	29.79	60.00	-30.21	QP
12	18.9820	7.27	10.34	17.61	50.00	-32.39	AVG

APPENDIX SUMMARY

Project No.	WTX22X10216896W	Test Engineer	Timi Huang
Start date	2022/11/29	Finish date	2023/03/03
Temperature	23℃	Humidity	52%
RF specifications	U-NII		

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	Emission Bandwidth and Occupied Bandwidth	Compliant
C	Maximum Conducted Output Power	Compliant
D	Frequency Stability	Compliant

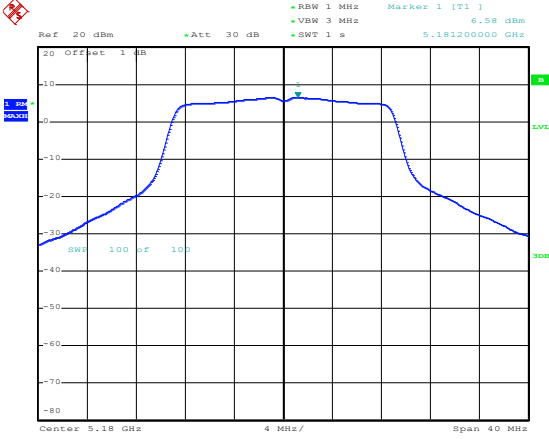
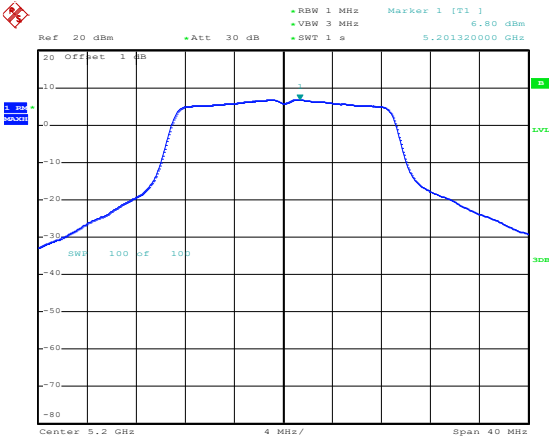
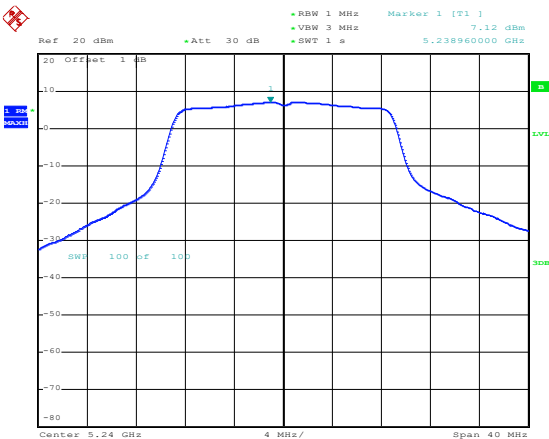
APPENDIX A

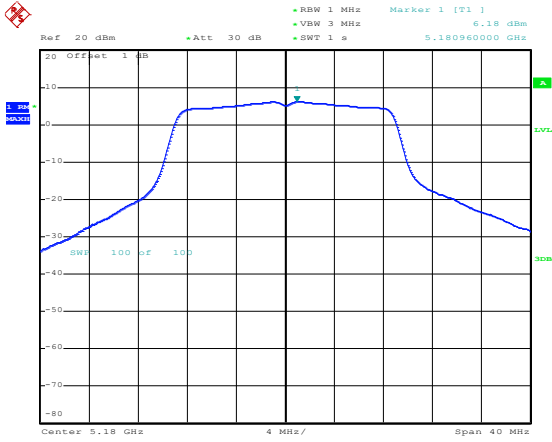
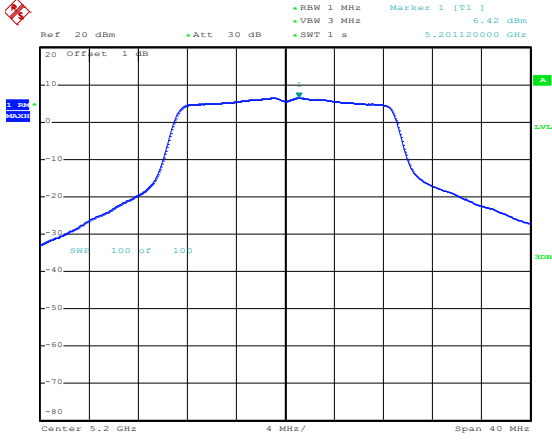
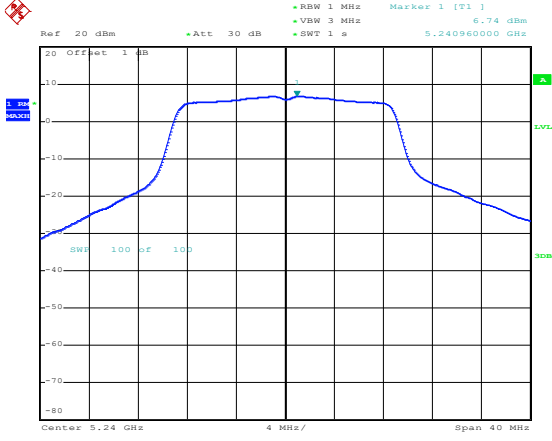
Power Spectral Density			
U-NII-1:5150-5250MHz			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5180	7.12	11
	5200	7.27	11
	5240	7.68	11
802.11n-HT20	5180	6.58	11
	5200	6.80	11
	5240	7.12	11
802.11ac-VHT20	5180	6.18	11
	5200	6.42	11
	5240	6.74	11
802.11n-HT40	5190	4.11	11
	5230	4.46	11
802.11ac-VHT40	5190	3.73	11
	5230	4.21	11
802.11ac-VHT80	5210	0.76	11

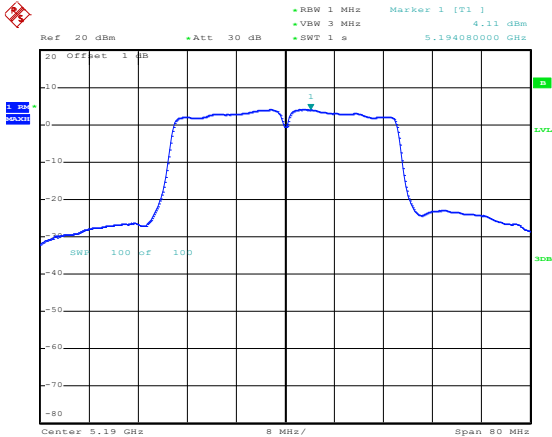
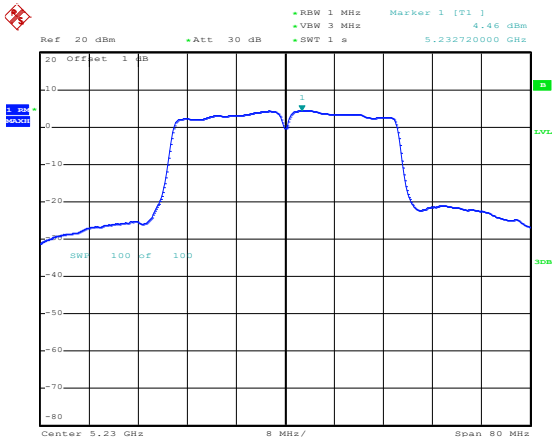
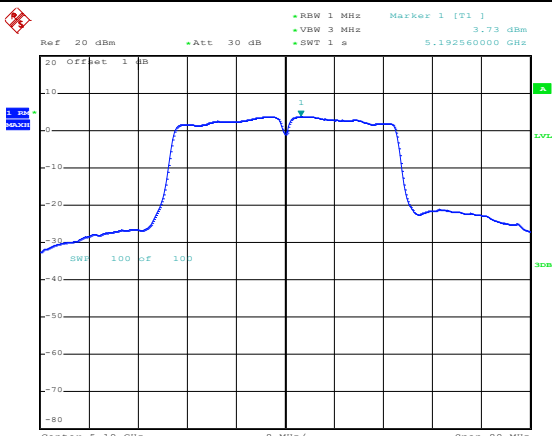
U-NII-3: 5725-5850MHz					
Operating mode	Test Channel	Power Spectral Density dBm/300kHz	Factor	Power Spectral Density* dBm/500kHz	Limit dBm/500kHz
802.11a	5745	1.86	2.22	4.08	30
	5785	2.13	2.22	4.35	30
	5825	2.30	2.22	4.52	30
802.11n-HT20	5745	1.39	2.22	3.61	30
	5785	1.50	2.22	3.72	30
	5825	1.68	2.22	3.90	30
802.11ac-VHT20	5745	1.94	2.22	4.16	30
	5785	1.62	2.22	3.84	30
	5825	1.45	2.22	3.67	30
802.11n HT40	5755	-1.36	2.22	0.86	30
	5795	-1.21	2.22	1.01	30
802.11ac VHT40	5755	-1.11	2.22	1.11	30
	5795	-1.48	2.22	0.74	30
802.11ac VH80	5775	-4.48	2.22	-2.26	30
*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22					

5150-5250MHz

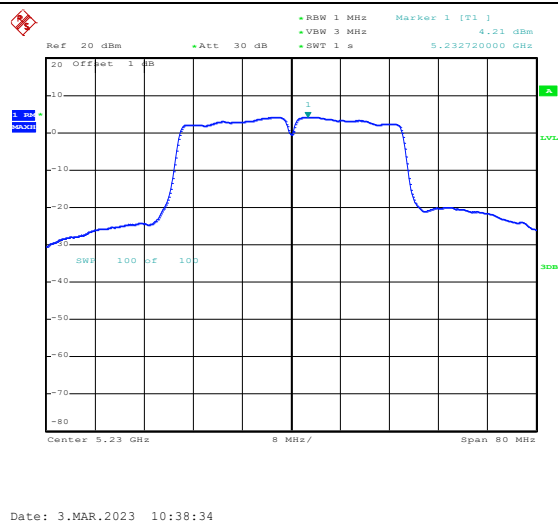
802.11a-Low	Ref: 20 dBm Att: 30 dB RBW 1 MHz Marker 1 [T1] 7.12 dBm VBW 3 MHz SWT 1 s 5.18100000 GHz 20 Offset 1 dB 1.00 dBm SWR 100 pf 100 Center 5.18 GHz 4 MHz/ Span 40 MHz Date: 11.JAN.2023 09:21:23
802.11a-Middle	Ref: 20 dBm Att: 30 dB RBW 1 MHz Marker 1 [T1] 7.27 dBm VBW 3 MHz SWT 1 s 5.199160000 GHz 20 Offset 1 dB 1.00 dBm SWR 100 pf 100 Center 5.2 GHz 4 MHz/ Span 40 MHz Date: 11.JAN.2023 09:25:17
802.11a-High	Ref: 20 dBm Att: 30 dB RBW 1 MHz Marker 1 [T1] 7.68 dBm VBW 3 MHz SWT 1 s 5.239000000 GHz 20 Offset 1 dB 1.00 dBm SWR 100 pf 100 Center 5.24 GHz 4 MHz/ Span 40 MHz Date: 11.JAN.2023 09:27:35

802.11n-HT20-Low	 Date: 11.JAN.2023 09:29:54
802.11n-HT20-Middle	 Date: 11.JAN.2023 09:32:51
802.11n-HT20-High	 Date: 11.JAN.2023 09:35:08

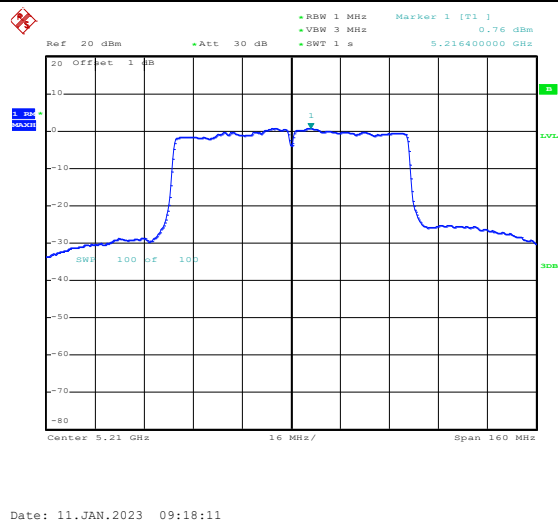
802.11ac-VHT20-Low	 Date: 3.MAR.2023 10:28:47
802.11ac-VHT20-Middle	 Date: 3.MAR.2023 10:26:23
802.11ac-VHT20-High	 Date: 3.MAR.2023 10:24:02

802.11n-HT40-Low	 Date: 11.JAN.2023 09:37:33
802.11n-HT40-High	 Date: 11.JAN.2023 09:40:38
802.11ac-VHT40-Low	 Date: 3.MAR.2023 10:31:17

802.11ac-VHT40-High

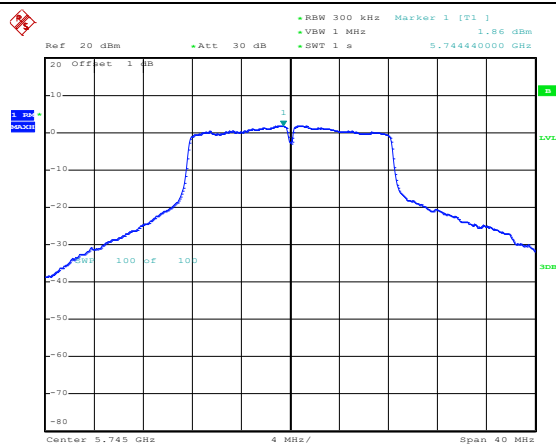


802.11ac-HT80-Low



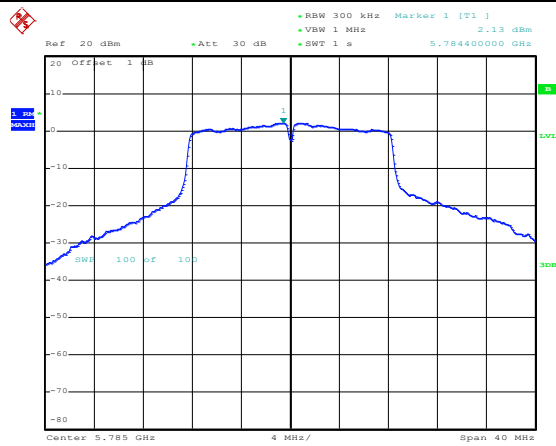
5725-5850MHz

802.11a-Low



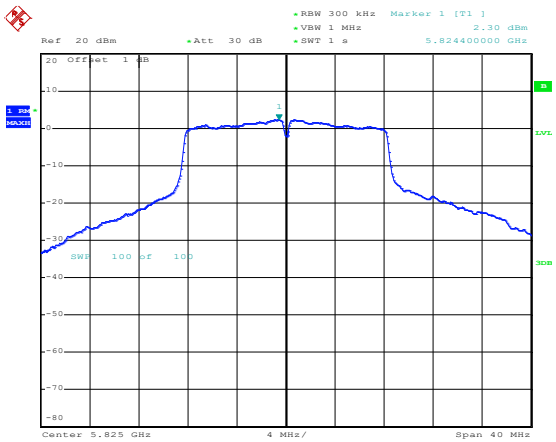
Date: 11.JAN.2023 09:47:25

802.11a-Middle

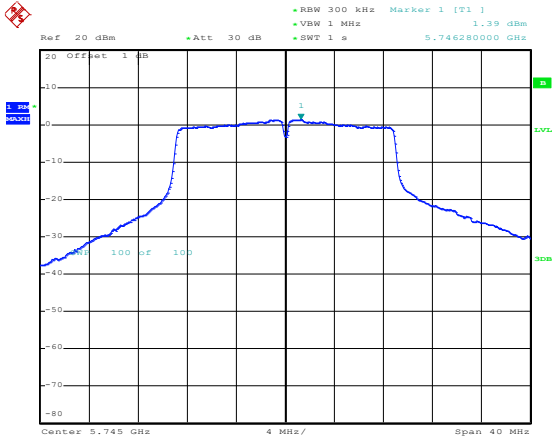
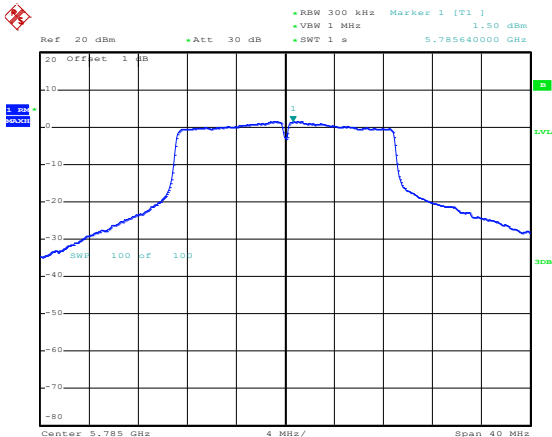
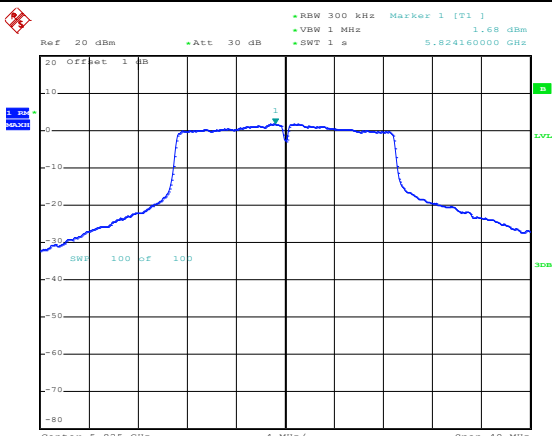


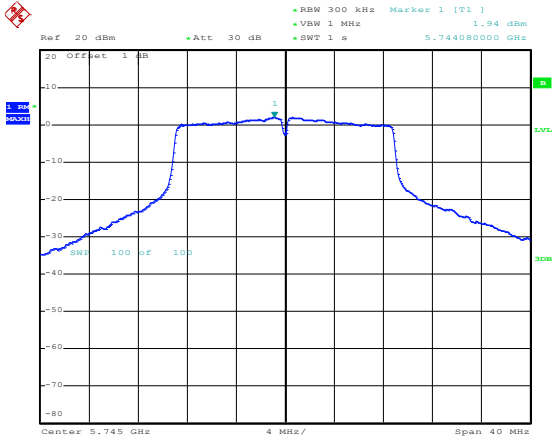
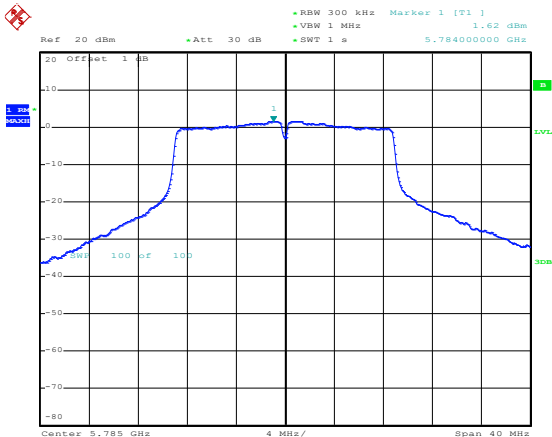
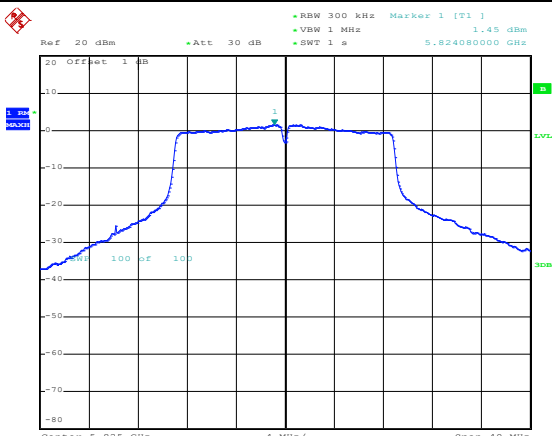
Date: 11.JAN.2023 09:49:42

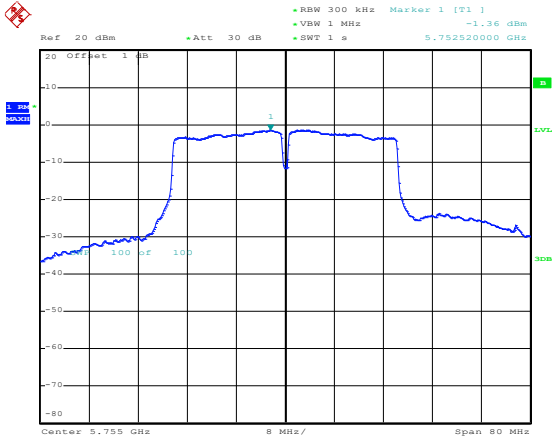
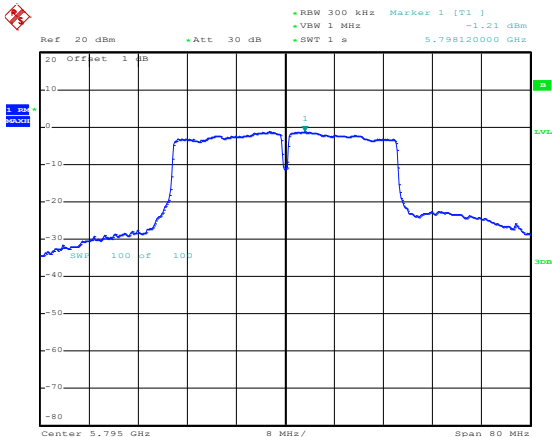
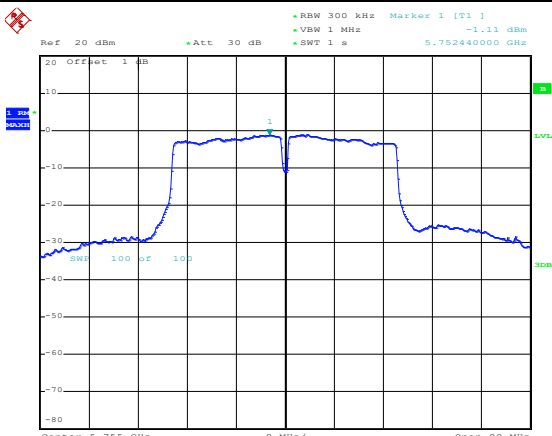
802.11a-High

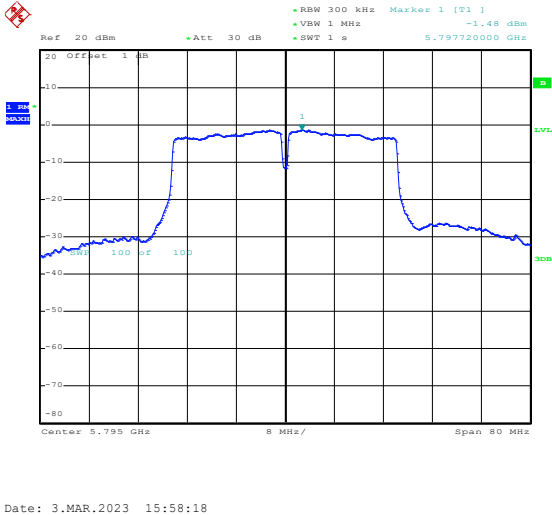
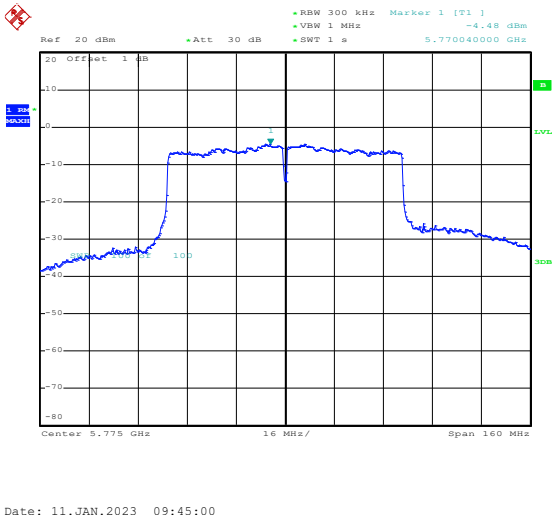


Date: 11.JAN.2023 09:52:00

802.11n-HT20-Low	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 1.39 dBm VSW 1 MHz SWT 1 s 5.746280000 GHz Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 11.JAN.2023 09:54:19
802.11n-HT20-Middle	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 1.50 dBm VSW 1 MHz SWT 1 s 5.785640000 GHz Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 11.JAN.2023 09:56:37
802.11n-HT20-High	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 1.68 dBm VSW 1 MHz SWT 1 s 5.824160000 GHz Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 11.JAN.2023 09:59:09

802.11ac-VHT20-Low	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 1.94 dBm VBW 1 MHz SWT 1 s 5.74400000 GHz Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 3.MAR.2023 15:46:26
802.11ac-VHT 20-Middle	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 1.62 dBm VBW 1 MHz SWT 1 s 5.78400000 GHz Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 3.MAR.2023 15:48:55
802.11ac-VHT 20-High	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 1.45 dBm VBW 1 MHz SWT 1 s 5.82400000 GHz Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 3.MAR.2023 15:51:38

802.11n-HT40-Low	 Date: 11.JAN.2023 10:01:34
802.11n-HT40-High	 Date: 11.JAN.2023 10:04:07
802.11ac-VHT40-Low	 Date: 3.MAR.2023 15:55:39

802.11ac-VHT40-High	 Ref: 20 dBm +Att: 30 dB +RBW: 300 kHz Marker 1 [T1] -1.48 dBm +VSW: 1 MHz +SWT: 1 s 5.79720000 GHz Center: 5.795 GHz 8 MHz/ Span: 80 MHz Date: 3.MAR.2023 15:58:18
802.11ac-HT80-Low	 Ref: 20 dBm +Att: 30 dB +RBW: 300 kHz Marker 1 [T1] -4.48 dBm +VSW: 1 MHz +SWT: 1 s 5.79040000 GHz Center: 5.775 GHz 16 MHz/ Span: 160 MHz Date: 11.JAN.2023 09:45:00

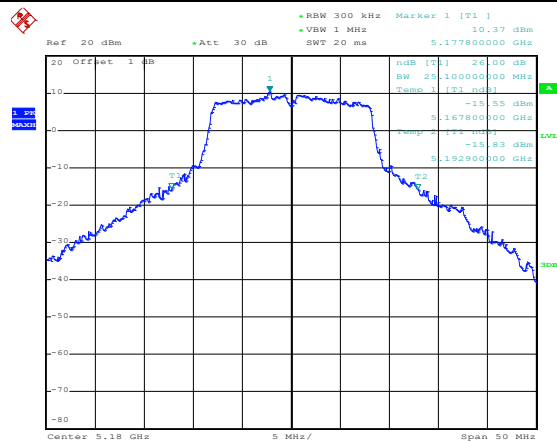

APPENDIX B

Emission Bandwidth and Occupied Bandwidth

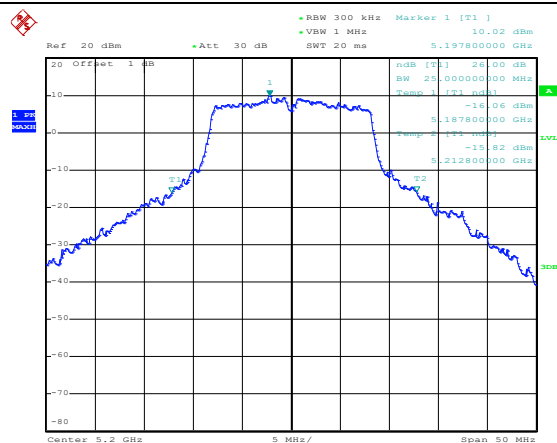

U-NII-1:5150-5250MHz				
Test Mode	Test Channel MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5180	25.10	17.10	Pass
	5200	25.00	17.10	Pass
	5240	24.80	17.00	Pass
802.11n-HT20	5180	26.60	18.20	Pass
	5200	26.30	18.20	Pass
	5240	25.50	18.20	Pass
802.11ac-HT20	5180	28.00	18.20	Pass
	5200	28.20	18.20	Pass
	5240	28.40	18.20	Pass
802.11n-HT40	5190	42.60	36.80	Pass
	5230	42.40	37.00	Pass
802.11ac-HT40	5190	42.40	36.80	Pass
	5230	42.60	37.00	Pass
802.11ac-HT80	5210	86.80	76.40	Pass

U-NII-3: 5725-5850MHz				
Test Mode	Test Channel MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5745	15.80	17.30	≥500
	5785	15.80	17.50	≥500
	5825	15.70	18.70	≥500
802.11n-HT20	5745	16.70	18.30	≥500
	5785	16.70	18.50	≥500
	5825	16.70	19.50	≥500
802.11ac-VHT20	5745	16.70	18.40	≥500
	5785	16.90	18.20	≥500
	5825	16.90	18.20	≥500
802.11n-HT40	5755	36.20	37.20	≥500
	5795	36.20	37.40	≥500
802.11ac-VHT40	5755	36.40	37.00	≥500
	5795	36.40	37.00	≥500
802.11ac VH80	5775	76.00	76.80	≥500

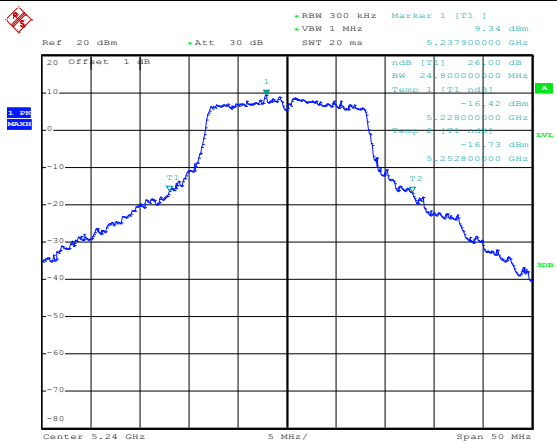

5150-5250MHz



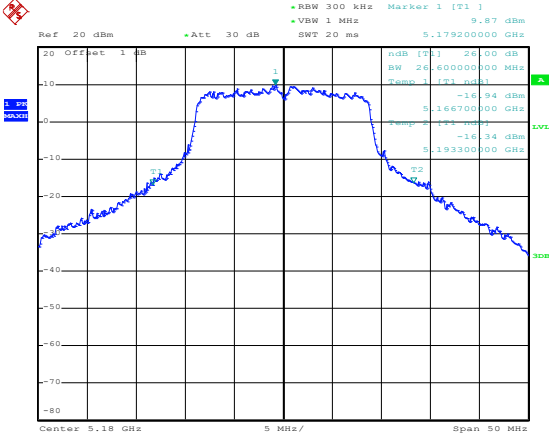
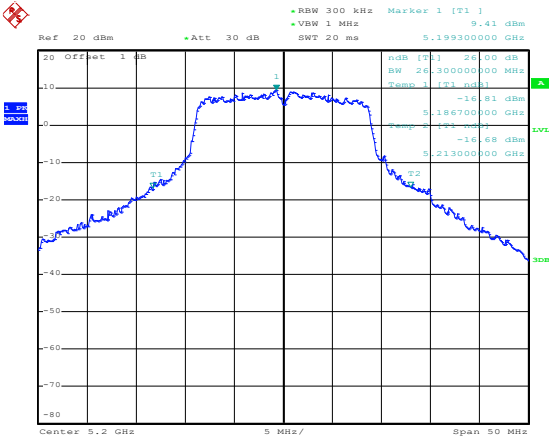
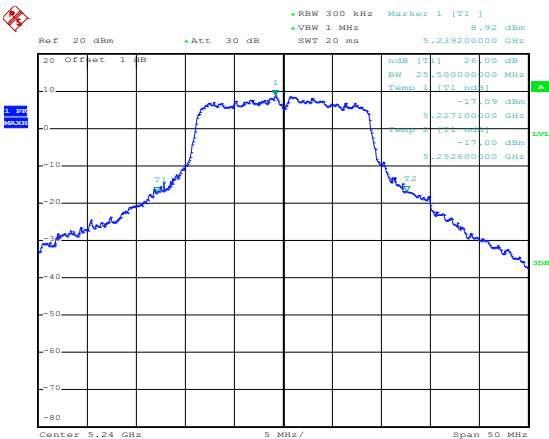
Date: 30.NOV.2022 17:50:34

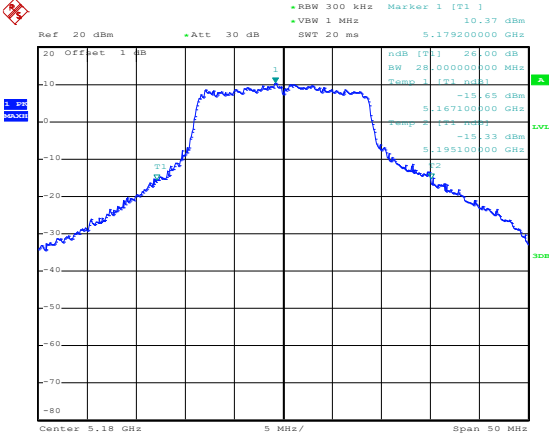
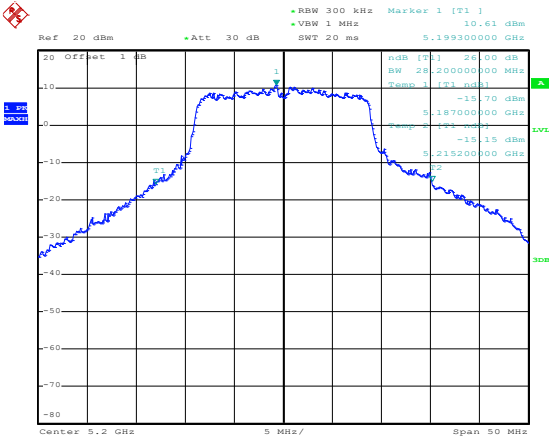
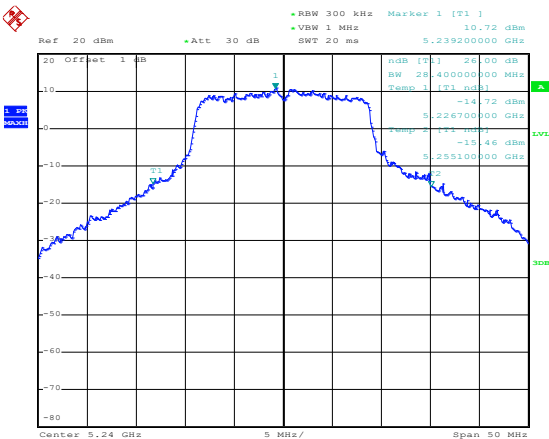


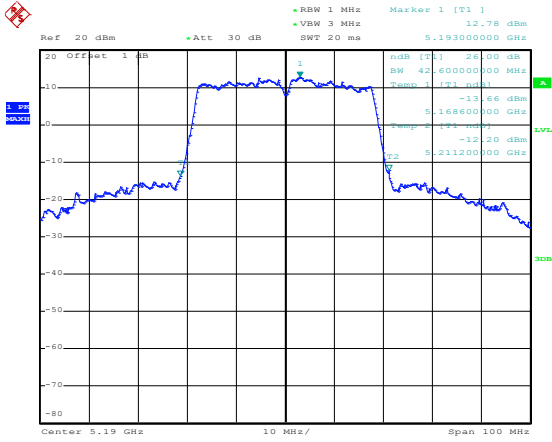
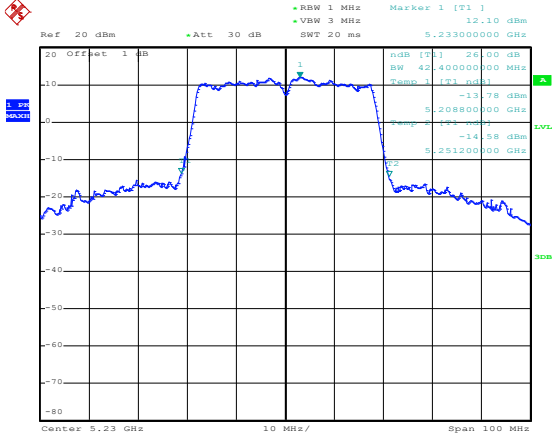
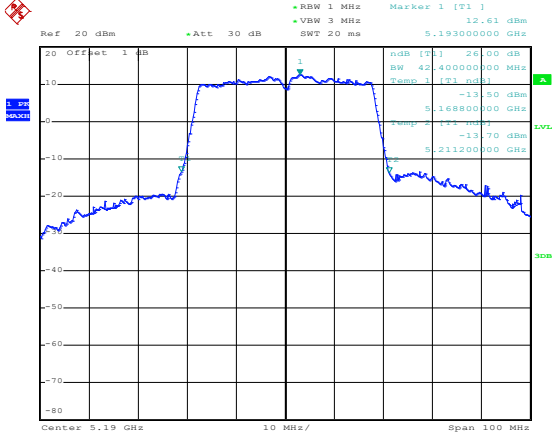
Date: 30.NOV.2022 17:51:06

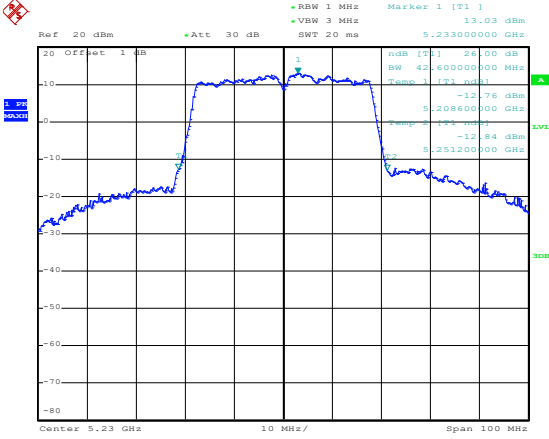
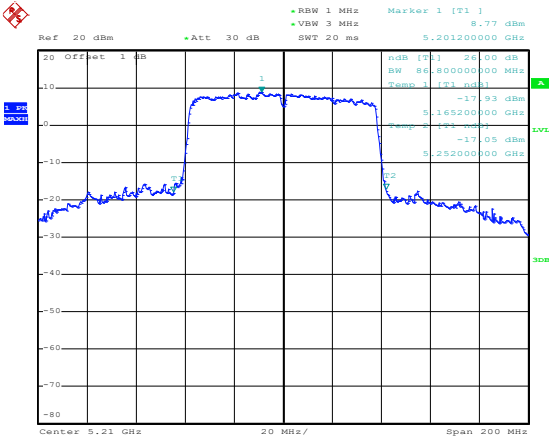


Date: 30.NOV.2022 17:51:37

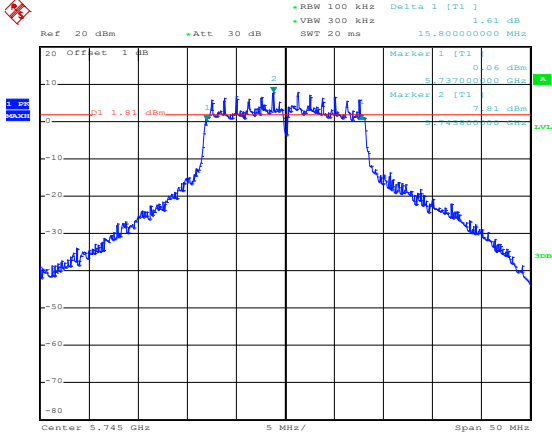
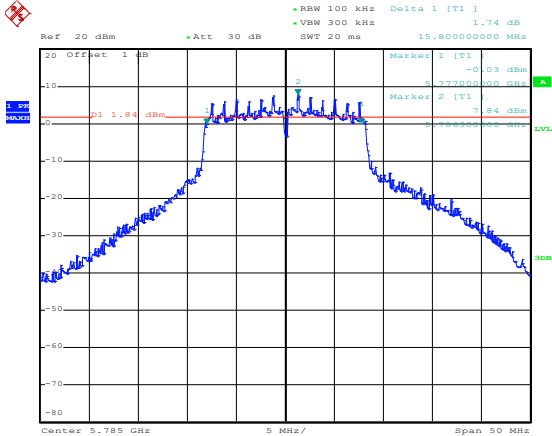
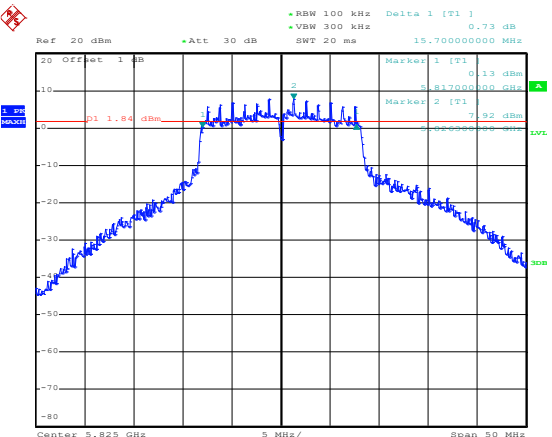
802.11n-HT20-Low	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 9.87 dBm VSW 1 MHz SW 20 ms 5.179200000 GHz ndB [T1] 26.00 dB BW 26.60000000 MHz Temp 1 [T1] ndB -16.94 dBm 5.166700000 GHz -16.34 dBm 5.193300000 GHz Center 5.18 GHz 5 MHz/ Span 50 MHz Date: 30.NOV.2022 17:52:15
802.11n-HT20-Middle	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 9.41 dBm VSW 1 MHz SW 20 ms 5.199300000 GHz ndB [T1] 26.00 dB BW 26.60000000 MHz Temp 1 [T1] ndB -16.81 dBm 5.186700000 GHz -16.68 dBm 5.213300000 GHz Center 5.2 GHz 5 MHz/ Span 50 MHz Date: 30.NOV.2022 17:52:47
802.11n-HT20-High	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 8.92 dBm VSW 1 MHz SW 20 ms 5.239200000 GHz ndB [T1] 26.00 dB BW 25.60000000 MHz Temp 1 [T1] ndB -17.09 dBm 5.227100000 GHz -17.00 dBm 5.252600000 GHz Center 5.24 GHz 5 MHz/ Span 50 MHz Date: 30.NOV.2022 17:53:23

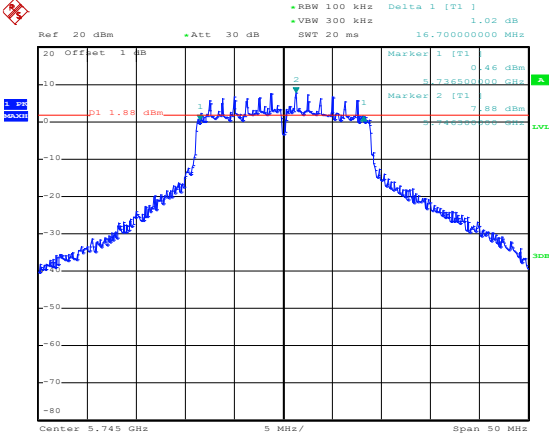
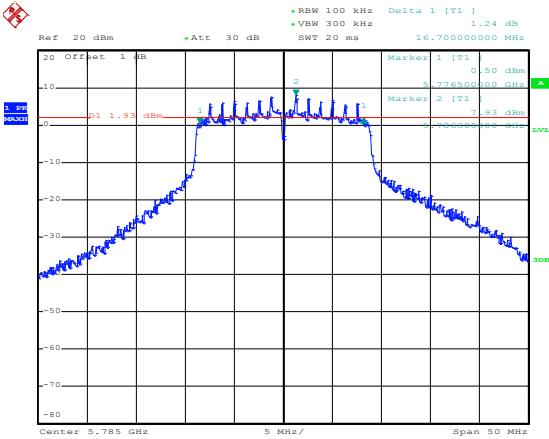
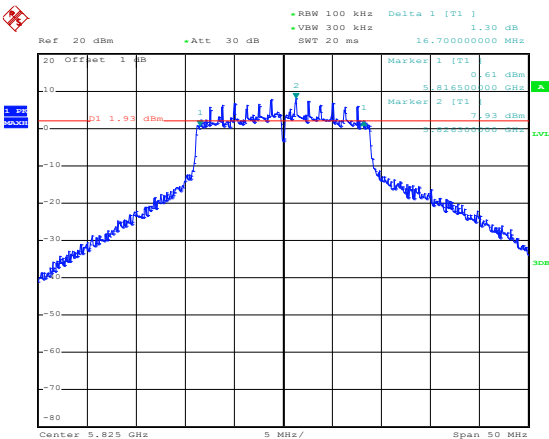
802.11ac-VHT20-Low	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 10.37 dBm VBW 1 MHz SWT 20 ms 5.179200000 GHz dB Offset 1 dB dB [T1] 26.00 dB BW 28.00000000 MHz Temp 1 [T1] dBm -15.65 dBm 5.167100000 GHz -15.33 dBm 5.195100000 GHz Center 5.18 GHz 5 MHz/ Span 50 MHz Date: 3.MAR.2023 09:17:14
802.11ac-VHT20-Middle	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 10.61 dBm VBW 1 MHz SWT 20 ms 5.199300000 GHz dB Offset 1 dB dB [T1] 26.00 dB BW 28.00000000 MHz Temp 1 [T1] dBm -15.70 dBm 5.187000000 GHz -15.15 dBm 5.215200000 GHz Center 5.2 GHz 5 MHz/ Span 50 MHz Date: 3.MAR.2023 09:18:05
802.11ac-VHT20-High	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 10.72 dBm VBW 1 MHz SWT 20 ms 5.239200000 GHz dB Offset 1 dB dB [T1] 26.00 dB BW 28.40000000 MHz Temp 1 [T1] dBm -14.72 dBm 5.226700000 GHz -15.46 dBm 5.255100000 GHz Center 5.24 GHz 5 MHz/ Span 50 MHz Date: 3.MAR.2023 09:18:38

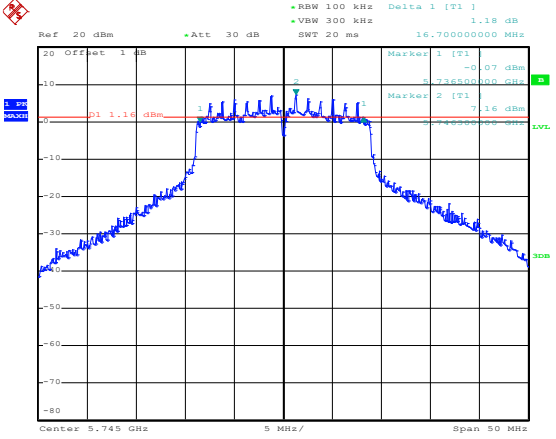
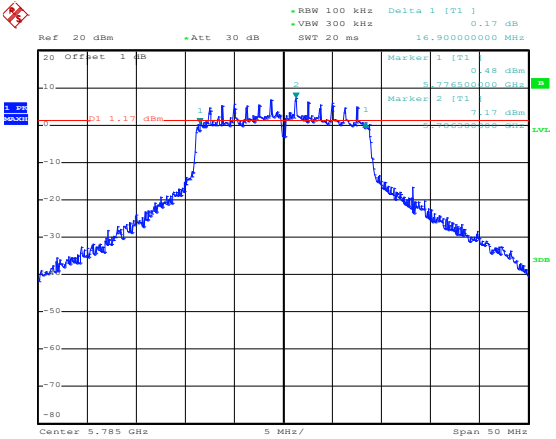
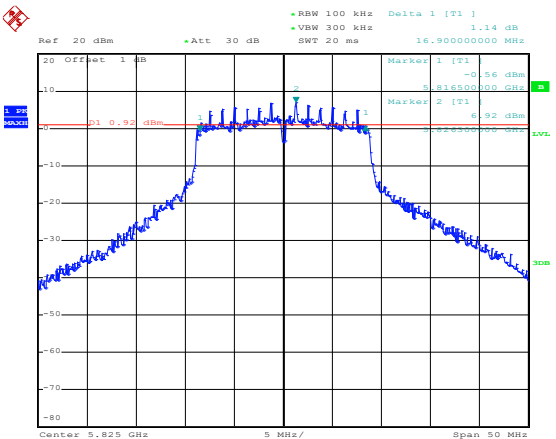
802.11n-HT40-Low	 Ref 20 dBm Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Marker 1 [T1] 12.78 dBm 5.193000000 GHz 1 -12.78 dBm 5.193000000 GHz 2 -13.66 dBm 5.168600000 GHz 3 -12.20 dBm 5.211200000 GHz Center 5.19 GHz 10 MHz/ Span 100 MHz Date: 30.NOV.2022 17:54:16
802.11n-HT40-High	 Ref 20 dBm Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Marker 1 [T1] 12.10 dBm 5.233000000 GHz 1 -12.10 dBm 5.233000000 GHz 2 -13.78 dBm 5.208800000 GHz 3 -14.38 dBm 5.251200000 GHz Center 5.23 GHz 10 MHz/ Span 100 MHz Date: 30.NOV.2022 17:54:49
802.11ac-VHT40-Low	 Ref 20 dBm Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Marker 1 [T1] 12.61 dBm 5.193000000 GHz 1 -12.61 dBm 5.193000000 GHz 2 -13.50 dBm 5.168800000 GHz 3 -13.70 dBm 5.211200000 GHz Center 5.19 GHz 10 MHz/ Span 100 MHz Date: 3.MAR.2023 09:51:46

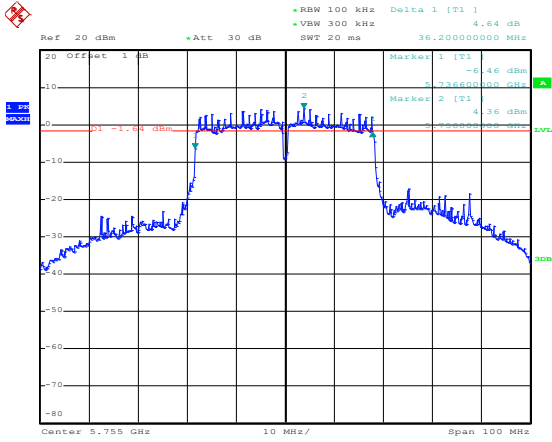
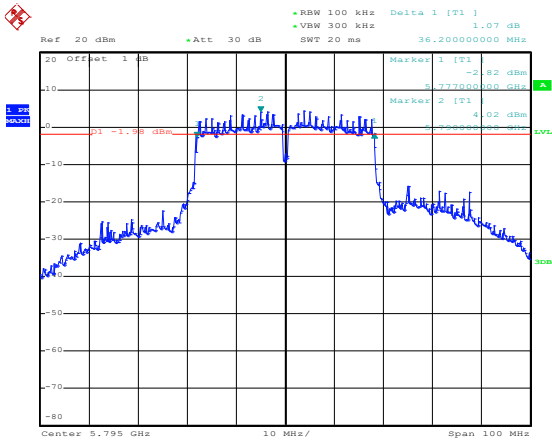
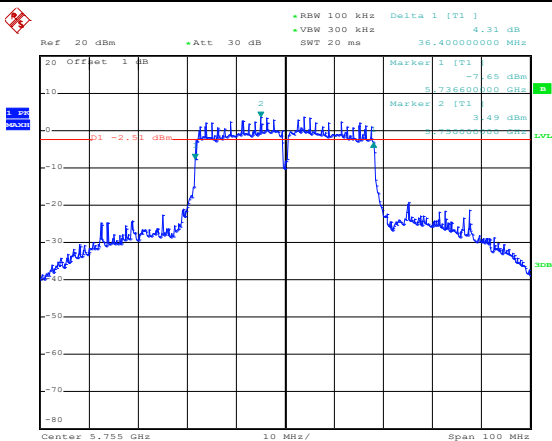
802.11ac-VHT40-High	 Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VSW: 3 MHz, SWT: 20 ms, Marker: 1 [T1], 13.03 dBm, 5.233000000 GHz 1: -12.76 dBm, 5.208600000 GHz, 2: -12.84 dBm, 5.251200000 GHz Center: 5.23 GHz, 10 MHz/, Span: 100 MHz Date: 3.MAR.2023 09:54:22
802.11ac-HT80-Low	 Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VSW: 3 MHz, SWT: 20 ms, Marker: 1 [T1], 8.77 dBm, 5.201200000 GHz 1: -17.93 dBm, 5.165200000 GHz, 2: -17.05 dBm, 5.252000000 GHz Center: 5.21 GHz, 20 MHz/, Span: 200 MHz Date: 30.NOV.2022 17:49:27

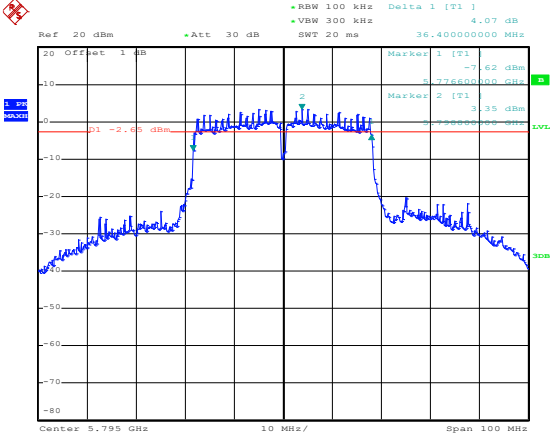
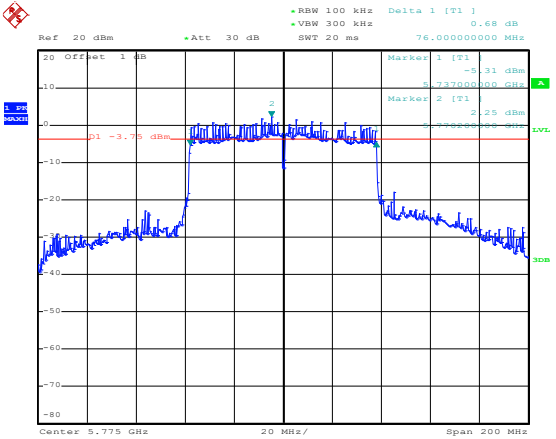
5725-5850MHz

802.11a-Low	 Ref: 20 dBm Att: 30 dB RBW 100 kHz Delta 1 [T1] 1.61 dB VSW 300 kHz SWT 20 ms 15.80000000 MHz Marker 1 [T1] 0.06 dBm Marker 2 [T1] -1.93 dBm Center 5.745 GHz 5 MHz/ Span 50 MHz Date: 30.NOV.2022 18:18:42
802.11a-Middle	 Ref: 20 dBm Att: 30 dB RBW 100 kHz Delta 1 [T1] 1.74 dB VSW 300 kHz SWT 20 ms 15.80000000 MHz Marker 1 [T1] -0.03 dBm Marker 2 [T1] -1.84 dBm Center 5.785 GHz 5 MHz/ Span 50 MHz Date: 30.NOV.2022 18:20:35
802.11a-High	 Ref: 20 dBm Att: 30 dB RBW 100 kHz Delta 1 [T1] 0.73 dB VSW 300 kHz SWT 20 ms 15.70000000 MHz Marker 1 [T1] 0.13 dBm Marker 2 [T1] -1.84 dBm Center 5.825 GHz 5 MHz/ Span 50 MHz Date: 30.NOV.2022 18:21:31

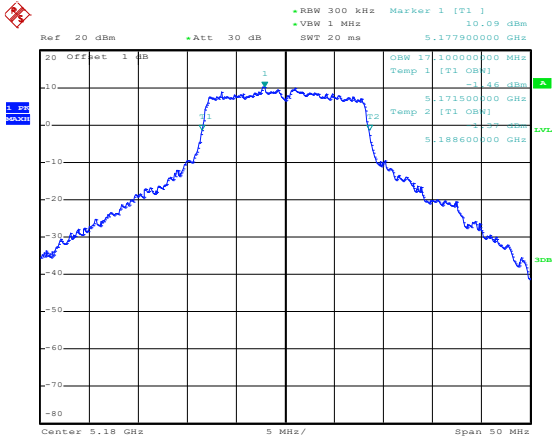
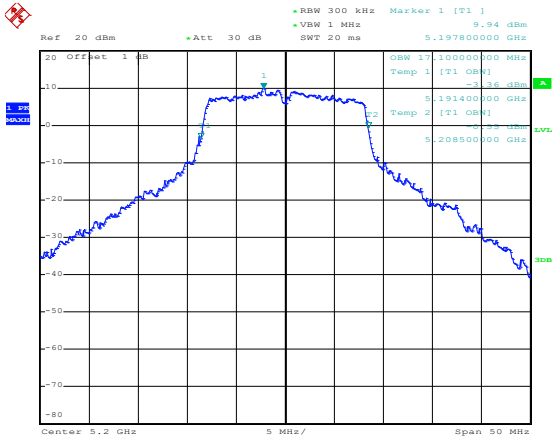
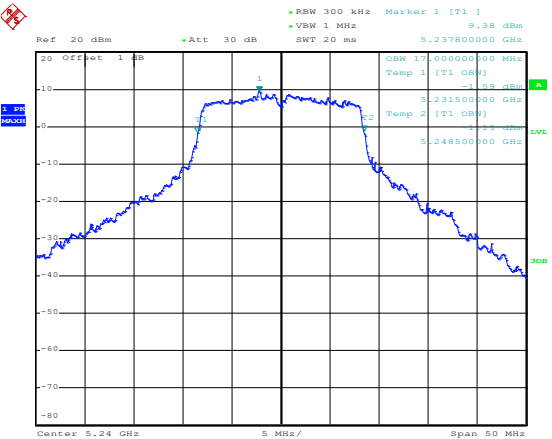
802.11n-HT20-Low	 Ref 20 dBm •Att 30 dB •RBW 100 kHz Delta 1 [T1] 1.02 dB •VBW 300 kHz SWT 20 ms 16.700000000 MHz Marker 1 [T1] 0.46 dBm Marker 2 [T1] 7.88 dBm Center 5.745 GHz 5 MHz/ Span 50 MHz Date: 30.NOV.2022 18:22:33
802.11n-HT20-Middle	 Ref 20 dBm •Att 30 dB •RBW 100 kHz Delta 1 [T1] 1.24 dB •VBW 300 kHz SWT 20 ms 16.700000000 MHz Marker 1 [T1] 0.50 dBm Marker 2 [T1] 7.93 dBm Center 5.785 GHz 5 MHz/ Span 50 MHz Date: 30.NOV.2022 18:23:53
802.11n-HT20-High	 Ref 20 dBm •Att 30 dB •RBW 100 kHz Delta 1 [T1] 1.30 dB •VBW 300 kHz SWT 20 ms 16.700000000 MHz Marker 1 [T1] 0.61 dBm Marker 2 [T1] 7.93 dBm Center 5.825 GHz 5 MHz/ Span 50 MHz Date: 30.NOV.2022 18:25:19

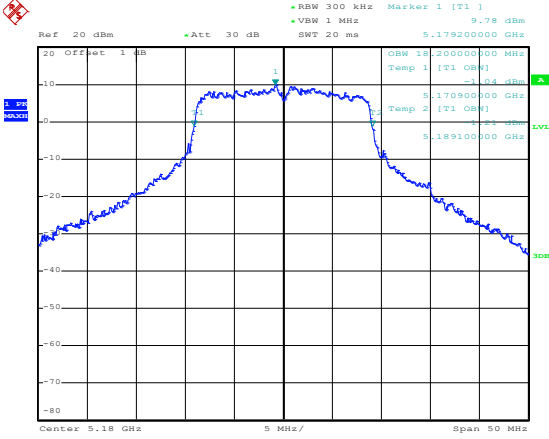
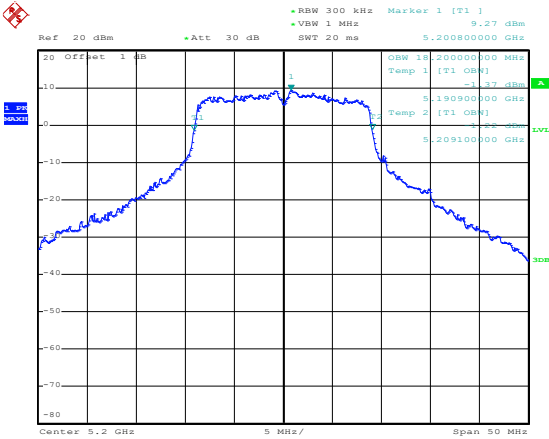
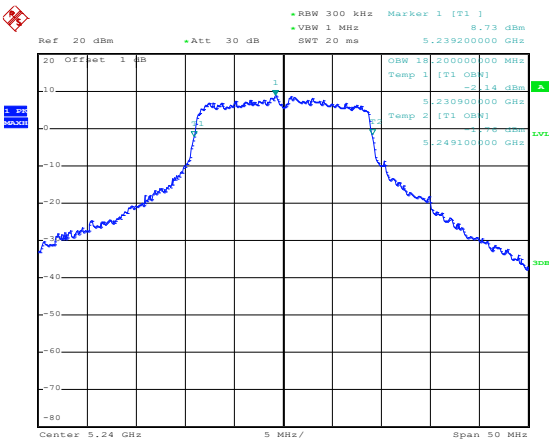
802.11ac-VHT20-Low	 Ref 20 dBm •Att 30 dB •RBW 100 kHz Delta 1 [T1] 1.18 dB •VBW 300 kHz SWT 20 ms 16.700000000 MHz Marker 1 [T1] -0.07 dBm Marker 2 [T1] 7.16 dBm Center 5.745 GHz 5 MHz/ Span 50 MHz Date: 3.MAR.2023 13:37:15
802.11ac-VHT20-Middle	 Ref 20 dBm •Att 30 dB •RBW 100 kHz Delta 1 [T1] 0.17 dB •VBW 300 kHz SWT 20 ms 16.900000000 MHz Marker 1 [T1] 0.48 dBm Marker 2 [T1] 7.17 dBm Center 5.785 GHz 5 MHz/ Span 50 MHz Date: 3.MAR.2023 13:33:42
802.11ac-VHT20-High	 Ref 20 dBm •Att 30 dB •RBW 100 kHz Delta 1 [T1] 1.14 dB •VBW 300 kHz SWT 20 ms 16.900000000 MHz Marker 1 [T1] -0.56 dBm Marker 2 [T1] 6.92 dBm Center 5.825 GHz 5 MHz/ Span 50 MHz Date: 3.MAR.2023 13:34:57

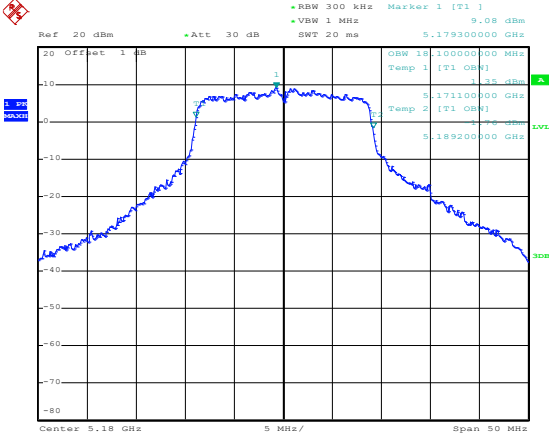
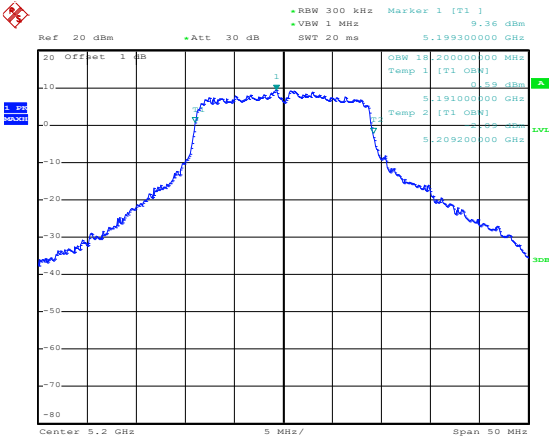
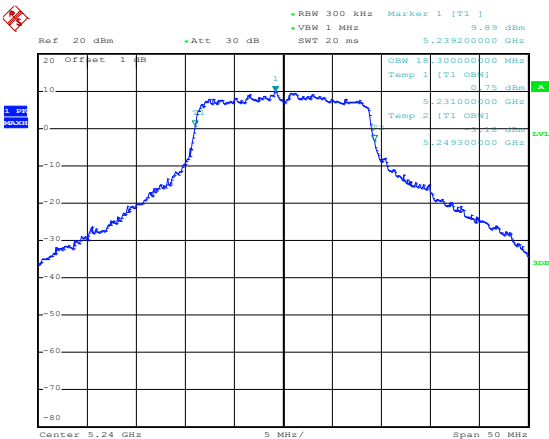
802.11n-HT40-Low	 Ref 20 dBm +Att 30 dB RBW 100 kHz Delta 1 [T1] 4.64 dB VSW 300 kHz SWT 20 ms 36.200000000 MHz Marker 1 [T1] -1.64 dBm 5.755000000 GHz Marker 2 [T1] 4.36 dBm 5.755000000 GHz Center 5.755 GHz 10 MHz/ Span 100 MHz Date: 30.NOV.2022 18:28:31
802.11n-HT40-High	 Ref 20 dBm +Att 30 dB RBW 100 kHz Delta 1 [T1] 1.07 dB VSW 300 kHz SWT 20 ms 36.200000000 MHz Marker 1 [T1] -2.82 dBm 5.755000000 GHz Marker 2 [T1] 4.02 dBm 5.755000000 GHz Center 5.755 GHz 10 MHz/ Span 100 MHz Date: 30.NOV.2022 18:29:30
802.11ac-VHT40-Low	 Ref 20 dBm +Att 30 dB RBW 100 kHz Delta 1 [T1] 4.31 dB VSW 300 kHz SWT 20 ms 36.400000000 MHz Marker 1 [T1] -7.65 dBm 5.755000000 GHz Marker 2 [T1] 3.49 dBm 5.755000000 GHz Center 5.755 GHz 10 MHz/ Span 100 MHz Date: 3.MAR.2023 13:30:32

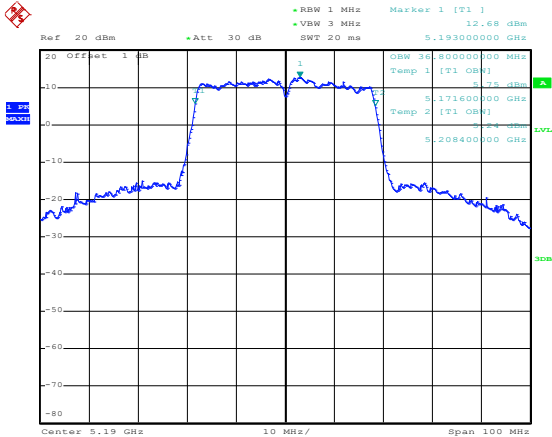
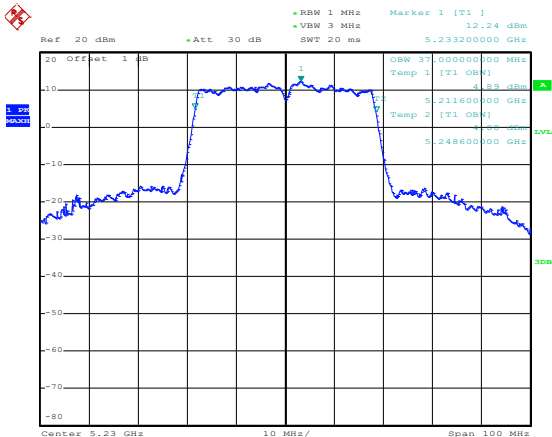
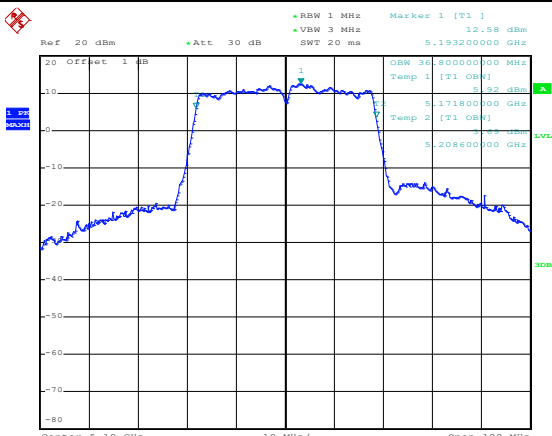
802.11ac-VHT40-High	 Ref 20 dBm +Att 30 dB RBW 100 kHz Delta 1 [T1] 4.07 dB VSW 300 kHz SWT 20 ms 36.400000000 MHz Marker 1 [T1] -7.62 dBm 5.795000000 GHz Marker 2 [T1] -2.65 dBm 5.795000000 GHz Center 5.795 GHz 10 MHz/ Span 100 MHz Date: 3.MAR.2023 13:29:31
802.11ac-HT80-Low	 Ref 20 dBm +Att 30 dB RBW 100 kHz Delta 1 [T1] 0.68 dB VSW 300 kHz SWT 20 ms 76.000000000 MHz Marker 1 [T1] -5.31 dBm 5.737000000 GHz Marker 2 [T1] -3.75 dBm 5.737000000 GHz Center 5.775 GHz 20 MHz/ Span 200 MHz Date: 30.NOV.2022 18:17:07

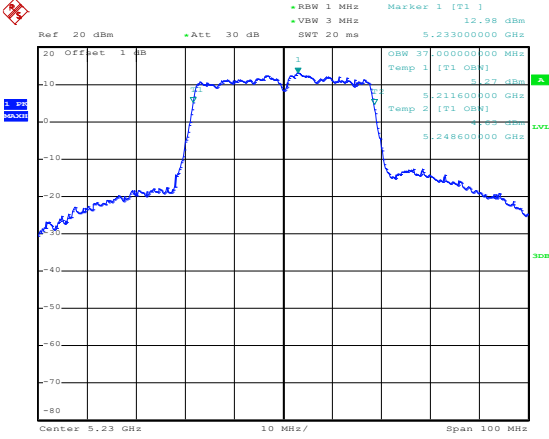
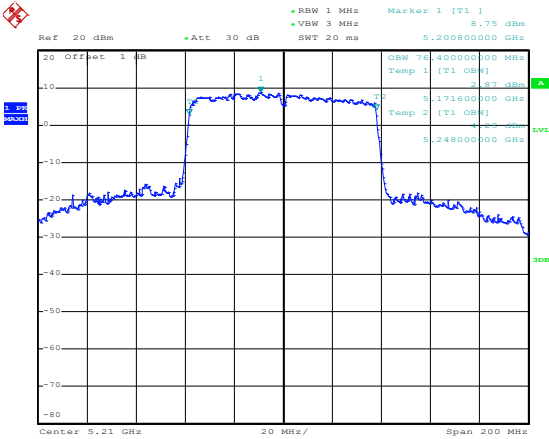
99% Bandwidth
5150-5250MHz

802.11a-Low	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 10.09 dBm VBW 1 MHz SWT 20 ms 5.177900000 GHz 20 Offset 1 dB 1 OSW 17.100000000 MHz Temp 1 [T1] 0dB -1.46 dBm 5.173500000 GHz Temp 2 [T1] 0dB -1.46 dBm 5.188600000 GHz Center 5.18 GHz 5 MHz/ Span 50 MHz Date: 30.NOV.2022 17:58:22
802.11a-Middle	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 9.94 dBm VBW 1 MHz SWT 20 ms 5.197800000 GHz 20 Offset 1 dB 1 OSW 17.100000000 MHz Temp 1 [T1] 0dB -1.46 dBm 5.191400000 GHz Temp 2 [T1] 0dB -1.46 dBm 5.208300000 GHz Center 5.2 GHz 5 MHz/ Span 50 MHz Date: 30.NOV.2022 17:58:53
802.11a-High	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 9.38 dBm VBW 1 MHz SWT 20 ms 5.237800000 GHz 20 Offset 1 dB 1 OSW 17.100000000 MHz Temp 1 [T1] 0dB -1.46 dBm 5.231500000 GHz Temp 2 [T1] 0dB -1.46 dBm 5.248500000 GHz Center 5.24 GHz 5 MHz/ Span 50 MHz Date: 30.NOV.2022 17:59:26

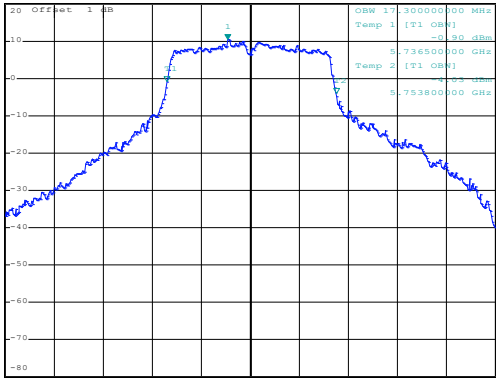
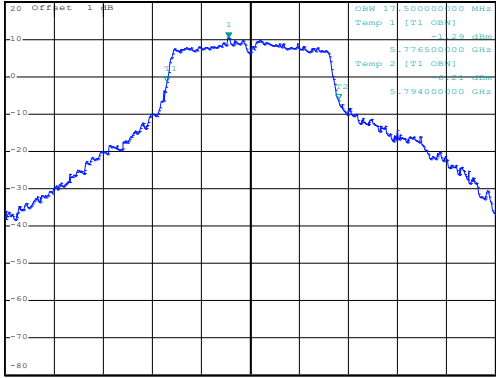
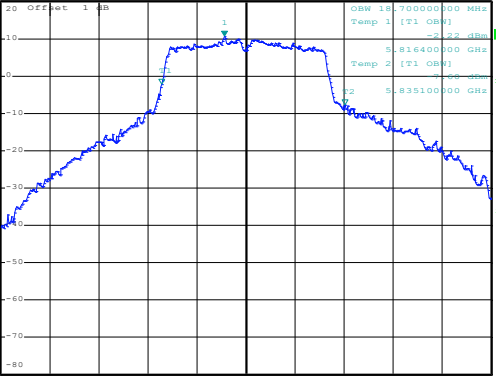
802.11n-HT20-Low	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 9.78 dBm VBW 1 MHz SWT 20 ms 5.179200000 GHz OSW 18.200000000 MHz Temp 1 [T1 OBW] -1.04 dBm 5.170900000 GHz Temp 2 [T1 OBW] -1.22 dBm 5.189100000 GHz Center 5.18 GHz 5 MHz/ Span 50 MHz Date: 30.NOV.2022 18:00:12
802.11n-HT20-Middle	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 9.27 dBm VBW 1 MHz SWT 20 ms 5.200800000 GHz OSW 18.200000000 MHz Temp 1 [T1 OBW] -1.47 dBm 5.190900000 GHz Temp 2 [T1 OBW] -1.68 dBm 5.209100000 GHz Center 5.2 GHz 5 MHz/ Span 50 MHz Date: 30.NOV.2022 18:00:46
802.11n-HT20-High	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 8.73 dBm VBW 1 MHz SWT 20 ms 5.239200000 GHz OSW 18.200000000 MHz Temp 1 [T1 OBW] -2.14 dBm 5.230900000 GHz Temp 2 [T1 OBW] -2.48 dBm 5.249100000 GHz Center 5.24 GHz 5 MHz/ Span 50 MHz Date: 30.NOV.2022 18:01:15

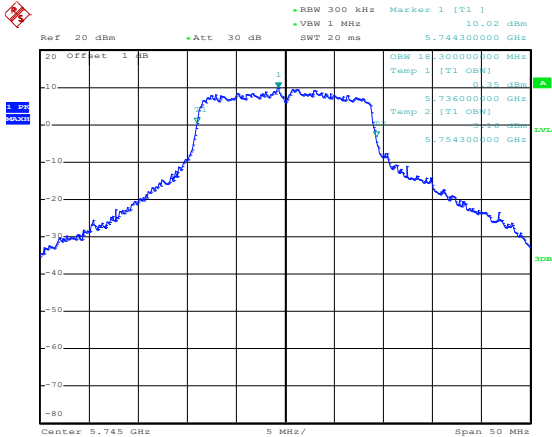
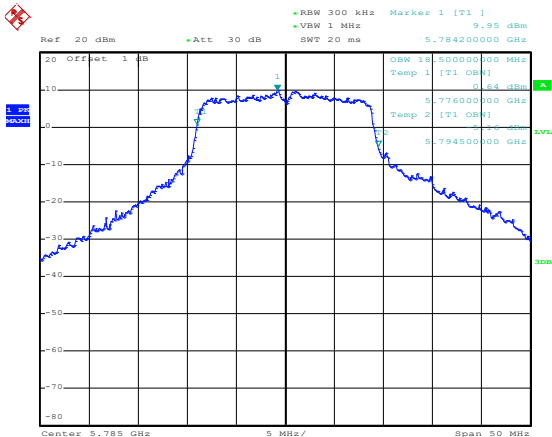
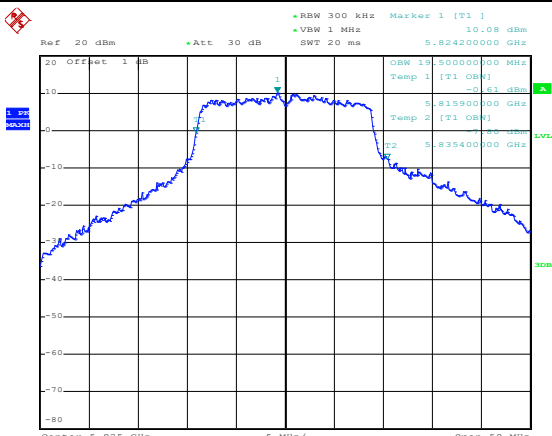
802.11ac-VHT20-Low	 Date: 3.MAR.2023 10:01:29
802.11ac-VHT20-Middle	 Date: 3.MAR.2023 10:01:59
802.11ac-VHT20-High	 Date: 3.MAR.2023 10:02:35

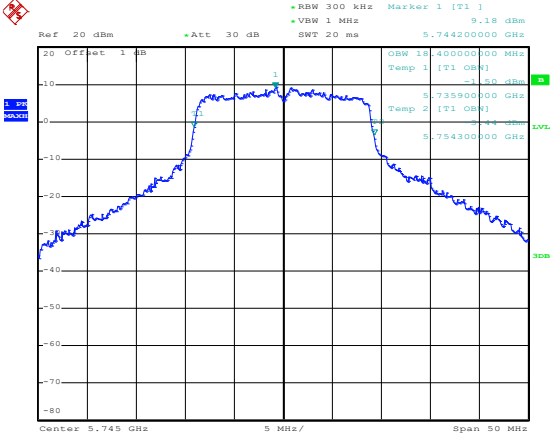
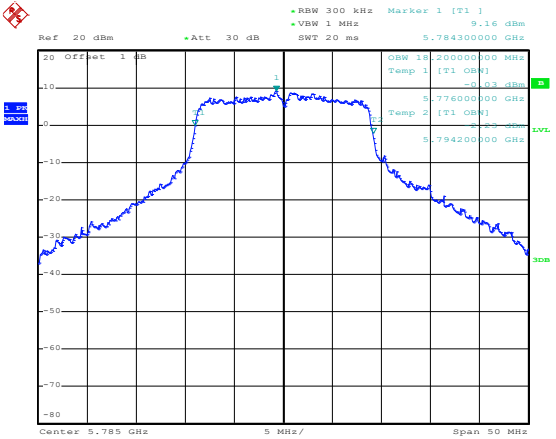
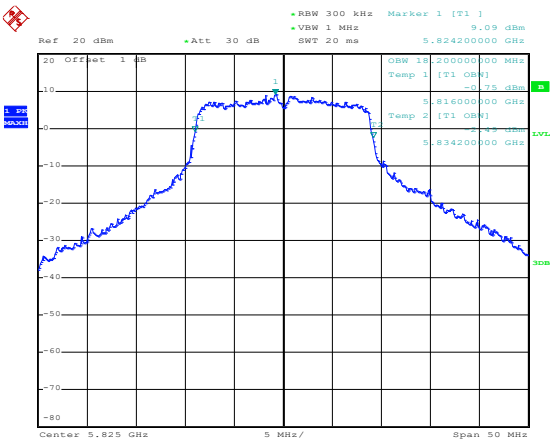
802.11n-HT40-Low	 Date: 30.NOV.2022 18:01:58
802.11n-HT40-High	 Date: 30.NOV.2022 18:02:28
802.11ac-VHT40-Low	 Date: 3.MAR.2023 10:03:25

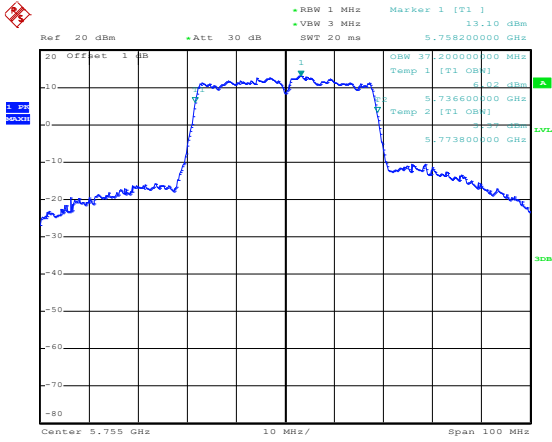
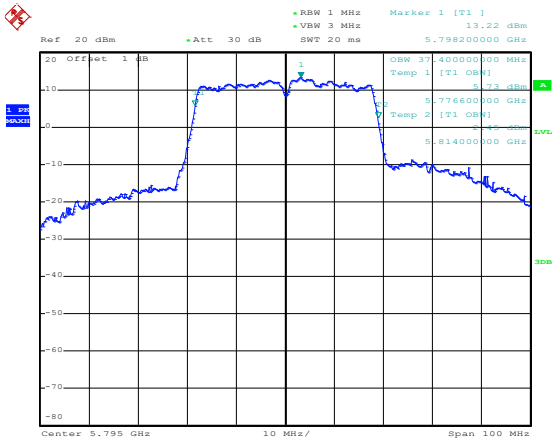
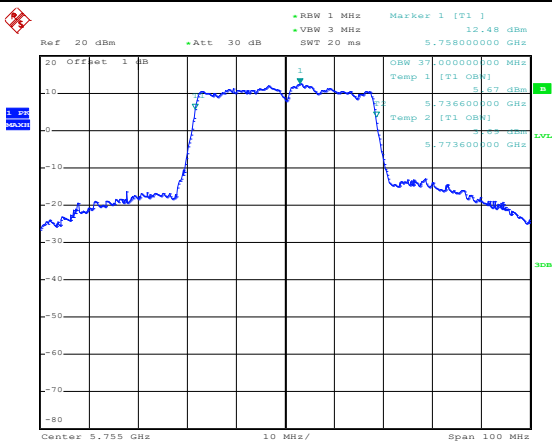
802.11ac-VHT40-High	 Ref 20 dBm Att 30 dB RBW 1 MHz VSW 3 MHz SWT 20 ms Marker 1 [T1] 12.98 dBm Center 5.23 GHz 10 MHz/ Span 100 MHz Date: 3.MAR.2023 10:04:05
802.11ac-HT80-Low	 Ref 20 dBm Att 30 dB RBW 1 MHz VSW 3 MHz SWT 20 ms Marker 1 [T1] 8.75 dBm Center 5.21 GHz 20 MHz/ Span 200 MHz Date: 30.NOV.2022 17:57:10

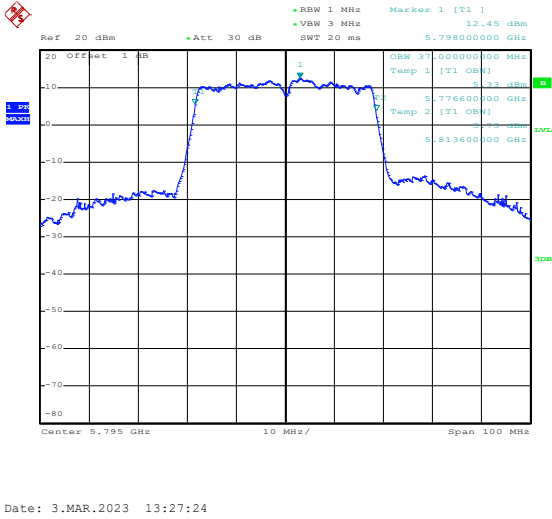
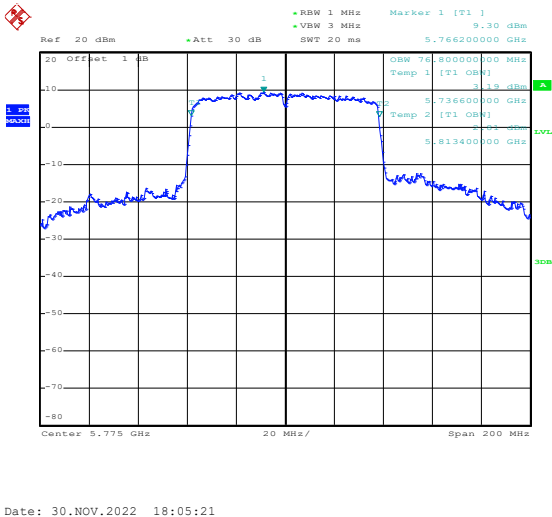
5725-5850MHz

802.11a-Low	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 10.43 dBm VSW 1 MHz SWT 20 ms 5.742700000 GHz OSW 17.300000000 MHz Temp 1 [T1] OSW] -10.43 dBm 5.736500000 GHz Temp 2 [T1] OSW] -10.43 dBm 5.753800000 GHz Center 5.745 GHz 5 MHz/ Span 50 MHz Date: 30.NOV.2022 18:06:17
802.11a-Middle	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 10.40 dBm VSW 1 MHz SWT 20 ms 5.782800000 GHz OSW 17.500000000 MHz Temp 1 [T1] OSW] -10.40 dBm 5.776500000 GHz Temp 2 [T1] OSW] -10.40 dBm 5.794000000 GHz Center 5.785 GHz 5 MHz/ Span 50 MHz Date: 30.NOV.2022 18:06:49
802.11a-High	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 10.68 dBm VSW 1 MHz SWT 20 ms 5.822800000 GHz OSW 18.700000000 MHz Temp 1 [T1] OSW] -10.68 dBm 5.816400000 GHz Temp 2 [T1] OSW] -10.68 dBm 5.835100000 GHz Center 5.825 GHz 5 MHz/ Span 50 MHz Date: 30.NOV.2022 18:07:38

802.11n-HT20-Low	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 10.02 dBm VSW 1 MHz SWT 20 ms 5.744300000 GHz OSW 10.00000000 MHz Temp 1 [T1] 0.35 dBm 5.736000000 GHz Temp 2 [T1] 0.35 dBm 5.754300000 GHz Center 5.745 GHz 5 MHz/ Span 50 MHz Date: 30.NOV.2022 18:08:15
802.11n-HT20-Middle	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 9.95 dBm VSW 1 MHz SWT 20 ms 5.784200000 GHz OSW 10.00000000 MHz Temp 1 [T1] 0.64 dBm 5.776000000 GHz Temp 2 [T1] 0.64 dBm 5.794200000 GHz Center 5.785 GHz 5 MHz/ Span 50 MHz Date: 30.NOV.2022 18:08:56
802.11n-HT20-High	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 10.08 dBm VSW 1 MHz SWT 20 ms 5.824200000 GHz OSW 10.00000000 MHz Temp 1 [T1] 0.61 dBm 5.815900000 GHz Temp 2 [T1] 0.61 dBm 5.835400000 GHz Center 5.825 GHz 5 MHz/ Span 50 MHz Date: 30.NOV.2022 18:09:26

802.11ac-VHT20-Low	 Date: 3.MAR.2023 13:24:58
802.11ac-VHT20-Middle	 Date: 3.MAR.2023 13:25:38
802.11ac-VHT20-High	 Date: 3.MAR.2023 13:26:04

802.11n-HT40-Low	 Ref 20 dBm +Att 30 dB SWT 20 ms Marker 1 [T1] 13.10 dBm 5.758200000 GHz OSW 37.200000000 MHz Temp 1 [T1] 13.10 dBm 5.736600000 GHz Temp 2 [T1] 13.10 dBm 5.773800000 GHz Center 5.755 GHz 10 MHz/ Span 100 MHz Date: 30.NOV.2022 18:10:17
802.11n-HT40-High	 Ref 20 dBm +Att 30 dB SWT 20 ms Marker 1 [T1] 13.22 dBm 5.758200000 GHz OSW 37.400000000 MHz Temp 1 [T1] 13.22 dBm 5.776600000 GHz Temp 2 [T1] 13.22 dBm 5.781400000 GHz Center 5.755 GHz 10 MHz/ Span 100 MHz Date: 30.NOV.2022 18:11:03
802.11ac-VHT40-Low	 Ref 20 dBm +Att 30 dB SWT 20 ms Marker 1 [T1] 12.48 dBm 5.758000000 GHz OSW 37.000000000 MHz Temp 1 [T1] 12.48 dBm 5.736600000 GHz Temp 2 [T1] 12.48 dBm 5.773600000 GHz Center 5.755 GHz 10 MHz/ Span 100 MHz Date: 3.MAR.2023 13:26:48

802.11ac-VHT40-High	 Ref: 20 dBm +Att: 30 dB RBW 1 MHz VSWR 3 MHz SWR 20 ms Marker 1 [T1] 12.45 dBm 5.795000000 GHz 20 Offset 1 dB 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 Center 5.795 GHz 10 MHz/ Span 100 MHz Date: 3.MAR.2023 13:27:24
802.11ac-HT80-Low	 Ref: 20 dBm +Att: 30 dB RBW 1 MHz VSWR 3 MHz SWR 20 ms Marker 1 [T1] 9.30 dBm 5.766200000 GHz 20 Offset 1 dB 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 Center 5.775 GHz 20 MHz/ Span 200 MHz Date: 30.NOV.2022 18:05:21

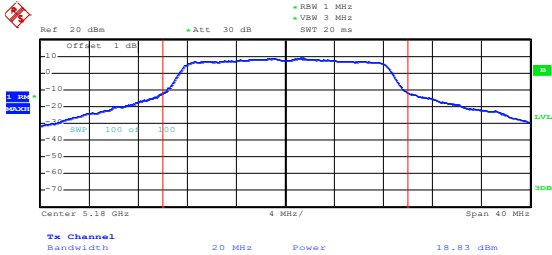
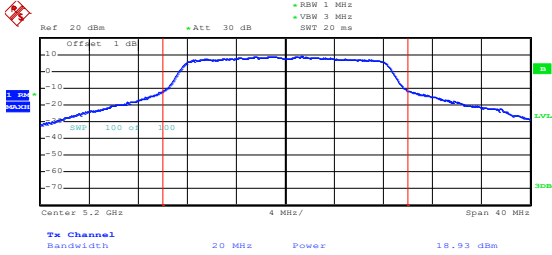
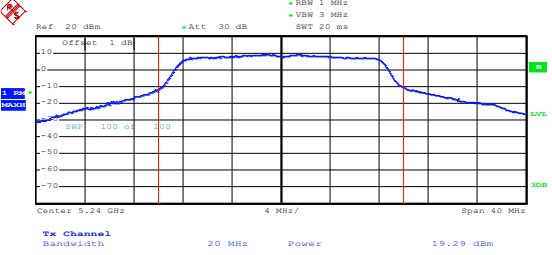
APPENDIX C

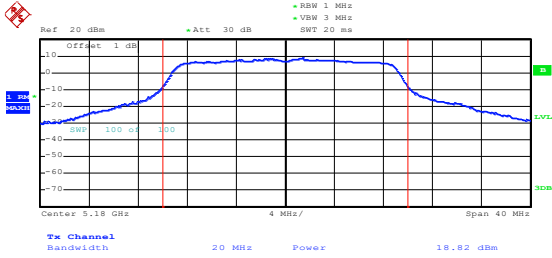
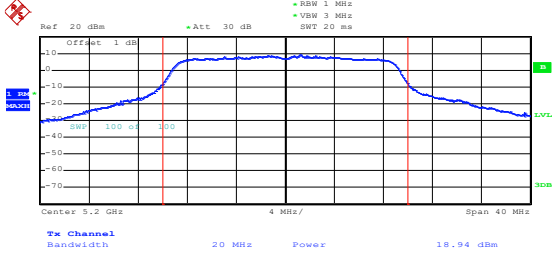
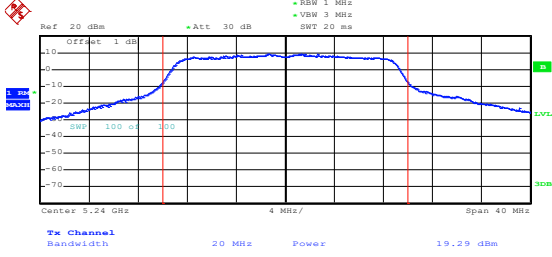
Maximum Conducted Output Power

U-NII-1:5150-5250MHz			
Test mode	Frequency MHz	Output Power dBm	Limit dBm
802.11a	5180	18.83	23.98
	5200	18.93	23.98
	5240	19.29	23.98
802.11n-HT20	5180	18.82	23.98
	5200	18.94	23.98
	5240	19.29	23.98
802.11ac-VHT20	5180	18.11	23.98
	5200	18.45	23.98
	5240	18.74	23.98
802.11n-HT40	5190	19.04	23.98
	5230	19.38	23.98
802.11ac-VHT40	5190	18.40	23.98
	5230	18.83	23.98
802.11ac VH80	5210	19.36	23.98

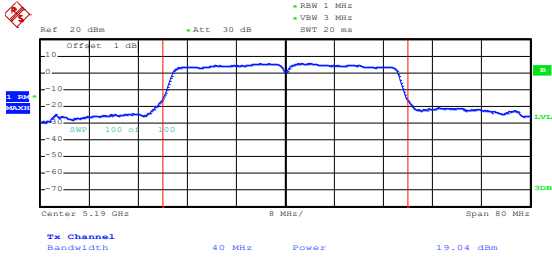
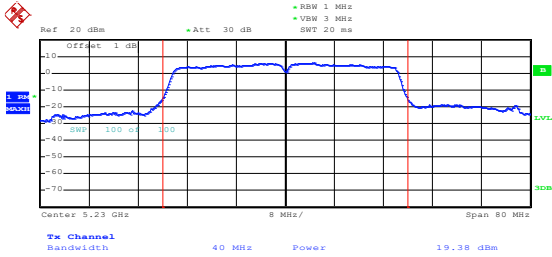
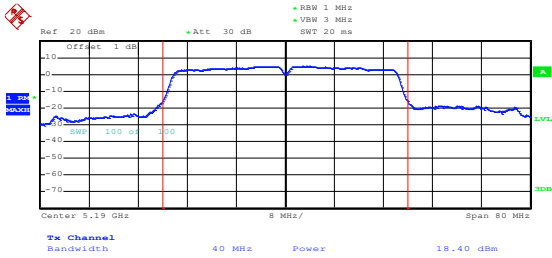
U-NII-3: 5725-5850MHz			
Test mode	Frequency MHz	Output Power dBm	Limit dBm
802.11a	5745	18.30	30.00
	5785	18.43	30.00
	5825	18.64	30.00
802.11n-HT20	5745	18.32	30.00
	5785	18.73	30.00
	5825	18.74	30.00
802.11ac-VHT20	5745	18.03	30.00
	5785	17.92	30.00
	5825	17.86	30.00
802.11n-HT40	5755	18.53	30.00
	5795	18.74	30.00
802.11ac-VHT40	5755	18.20	30.00
	5795	17.98	30.00
802.11ac VH80	5775	18.77	30.00

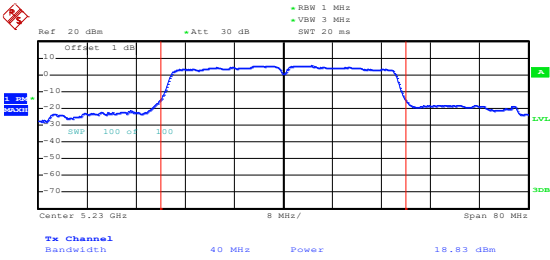
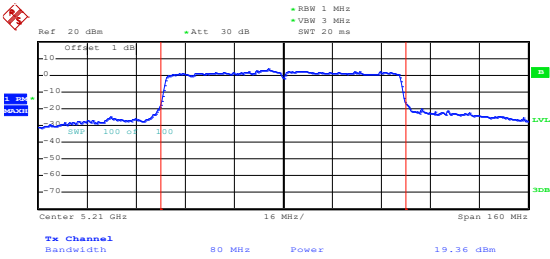
5150-5250MHz

802.11a-Low	 Date: 11.JAN.2023 08:31:41
802.11a-Middle	 Date: 11.JAN.2023 08:32:20
802.11a-High	 Date: 11.JAN.2023 08:32:51

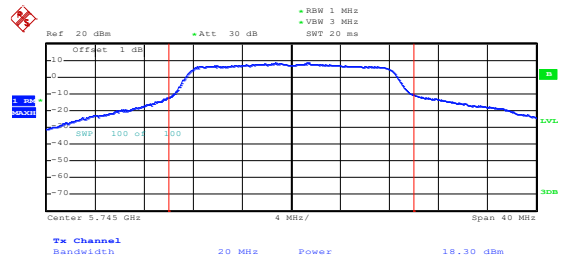

802.11n-HT20-Low	 Date: 11.JAN.2023 08:33:34
802.11n-HT20-Middle	 Date: 11.JAN.2023 08:33:58
802.11n-HT20-High	 Date: 11.JAN.2023 08:34:28

802.11ac-VHT20-Low	Date: 3.MAR.2023 10:17:57
802.11ac-VHT20-Middle	Date: 3.MAR.2023 10:18:42
802.11ac-VHT20-High	Date: 3.MAR.2023 10:19:04

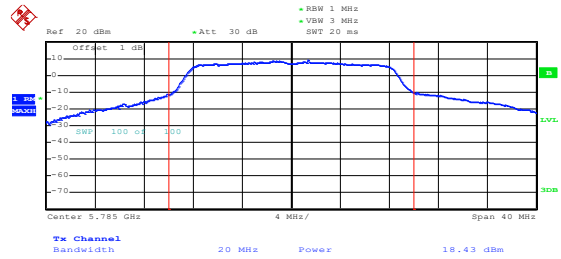

802.11n-HT40-Low	 Date: 11.JAN.2023 08:35:21
802.11n-HT40-High	 Date: 11.JAN.2023 08:35:46
802.11ac-VHT40-Low	 Date: 3.MAR.2023 10:17:04

802.11ac-VHT40-High	 Date: 3.MAR.2023 10:16:24
802.11ac-HT80-Low	 Date: 11.JAN.2023 08:30:10

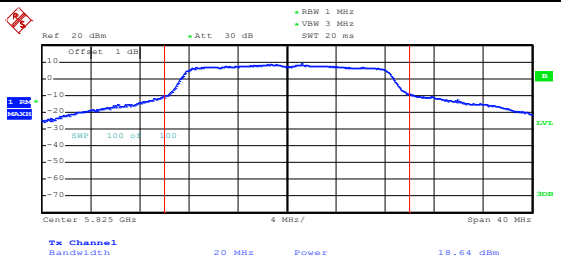

5725-5850MHz



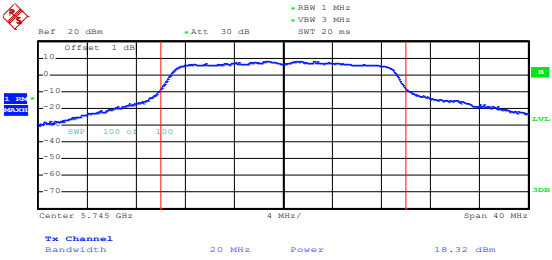
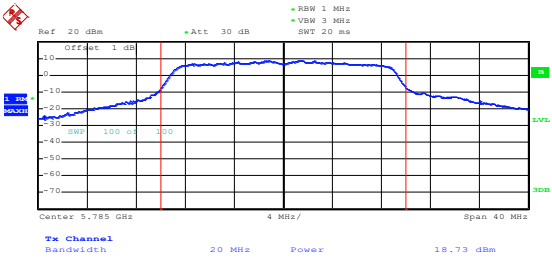
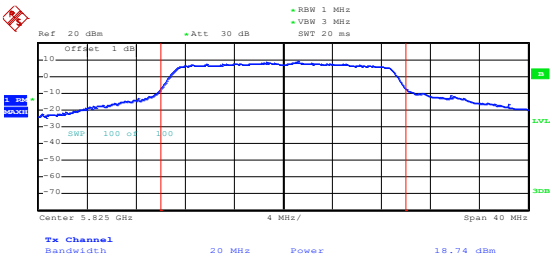
Date: 11.JAN.2023 08:42:46

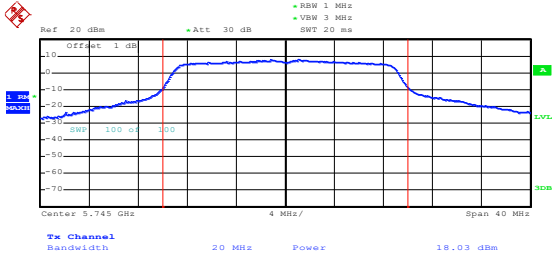
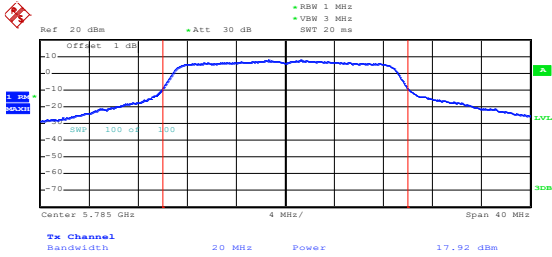
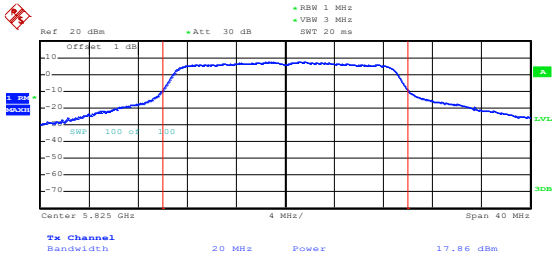


Date: 11.JAN.2023 08:43:11

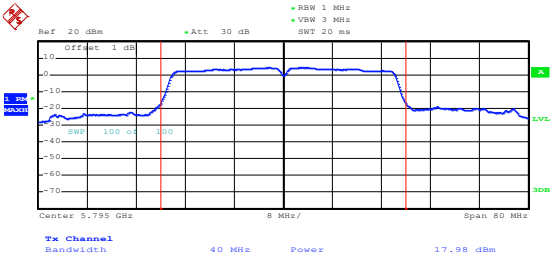
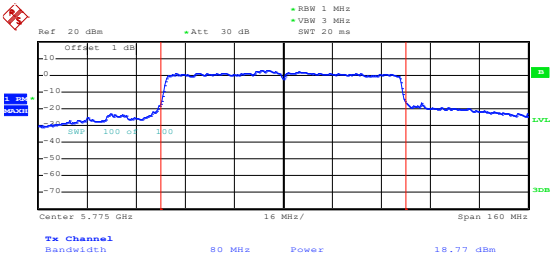


Date: 11.JAN.2023 08:43:35

802.11n-HT20-Low	 Date: 11.JAN.2023 08:40:24
802.11n-HT20-Middle	 Date: 11.JAN.2023 08:41:06
802.11n-HT20-High	 Date: 11.JAN.2023 08:41:38

802.11ac-VHT20-Low	 Date: 3.MAR.2023 13:21:44
802.11ac-VHT20-Middle	 Date: 3.MAR.2023 13:21:16
802.11ac-VHT20-High	 Date: 3.MAR.2023 13:20:48

802.11n-HT40-Low	Date: 11.JAN.2023 08:44:25
802.11n-HT40-High	Date: 11.JAN.2023 08:44:48
802.11ac-VHT40-Low	Date: 3.MAR.2023 13:20:00

802.11ac-VHT40-High	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.775 GHz Span: 80 MHz Power: 17.98 dBm Bandwidth: 40 MHz Date: 3.MAR.2023 13:19:24
802.11ac-HT80-Low	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.775 GHz Span: 160 MHz Power: 18.77 dBm Bandwidth: 80 MHz Date: 11.JAN.2023 08:39:25

APPENDIX D

Frequency Stability

U-NII-1:5150-5250MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	7.70	-30	3005	0.5724
100%		-20	3005	0.5724
100%		-10	3016	0.5744
100%		0	3030	0.5772
100%		+10	3025	0.5762
100%		+20	3014	0.5741
100%		+30	3006	0.5726
100%		+40	3005	0.5723
100%		+50	3012	0.5737
Low Battery power	8.47	+20	3015	0.5744
High Battery power	6.93	+20	3002	0.5718

U-NII-1:5725-5850MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	7.70	-30	3010	0.5230
100%		-20	3024	0.5255
100%		-10	3000	0.5212
100%		0	3017	0.5242
100%		+10	3023	0.5253
100%		+20	3007	0.5225
100%		+30	3013	0.5236
100%		+40	3012	0.5233
100%		+50	3013	0.5235
Low Battery power	8.47	+20	3010	0.5230
High Battery power	6.93	+20	3000	0.5213

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

***** END OF REPORT *****