

TEST REPORT

Report No.: BCTC2412413654-2E

Applicant: Ugreen Group Limited

Product Name: Magnetic Wireless Power Bank

Test Model: PB561

Tested Date: 2024-12-12 to 2024-12-19

Issued Date: 2024-12-19

Shenzhen BCTC Testing Co., Ltd.



FCC ID:2AQI5-PB561D

Product Name: Magnetic Wireless Power Bank

Trademark: **UGREEN**

Model/Type Reference: PB561

Prepared For: Ugreen Group Limited

Address: Ugreen Building, Longcheng Industrial Park, Longguanxi Road, Longhua, ShenZhen, China

Manufacturer: Ugreen Group Limited

Address: Ugreen Building, Longcheng Industrial Park, Longguanxi Road, Longhua, ShenZhen, China

Prepared By: Shenzhen BCTC Testing Co., Ltd.

Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Sample Received Date: 2024-12-12

Sample Tested Date: 2024-12-12 to 2024-12-19

Issue Date: 2024-12-19

Report No.: BCTC2412413654-2E

Test Standards: FCC CFR 47 part1, 1.1307(b), 1.1310
KDB 680106 D01 Wireless Power Transfer v04

Test Results: PASS

Tested by:



Kelsey Tan/ Project Handler

Approved by:



Zero Zhou/Reviewer


The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table Of Content

Test Report Declaration	Page
1. Version	4
2. Product Information	5
2.1 Product Information	5
2.2 Support Equipment	6
2.3 Test Mode	6
3. Test Facility And Test Instrument Used.....	7
3.1 Test Facility	7
3.2 Test Instrument Used.....	7
4. Method Of Measurement.....	8
4.1 Applicable Standard	8
4.2 Block Diagram Of Test Setup.....	8
4.3 Limit	9
4.4 Test procedure	9
4.5 Equipment Approval Considerations.....	10
4.6 E and H field Strength	11
5. Photographs Of Test Set-Up	14

(Note: N/A Means Not Applicable)

BCTC
BCTC
PPR
Report

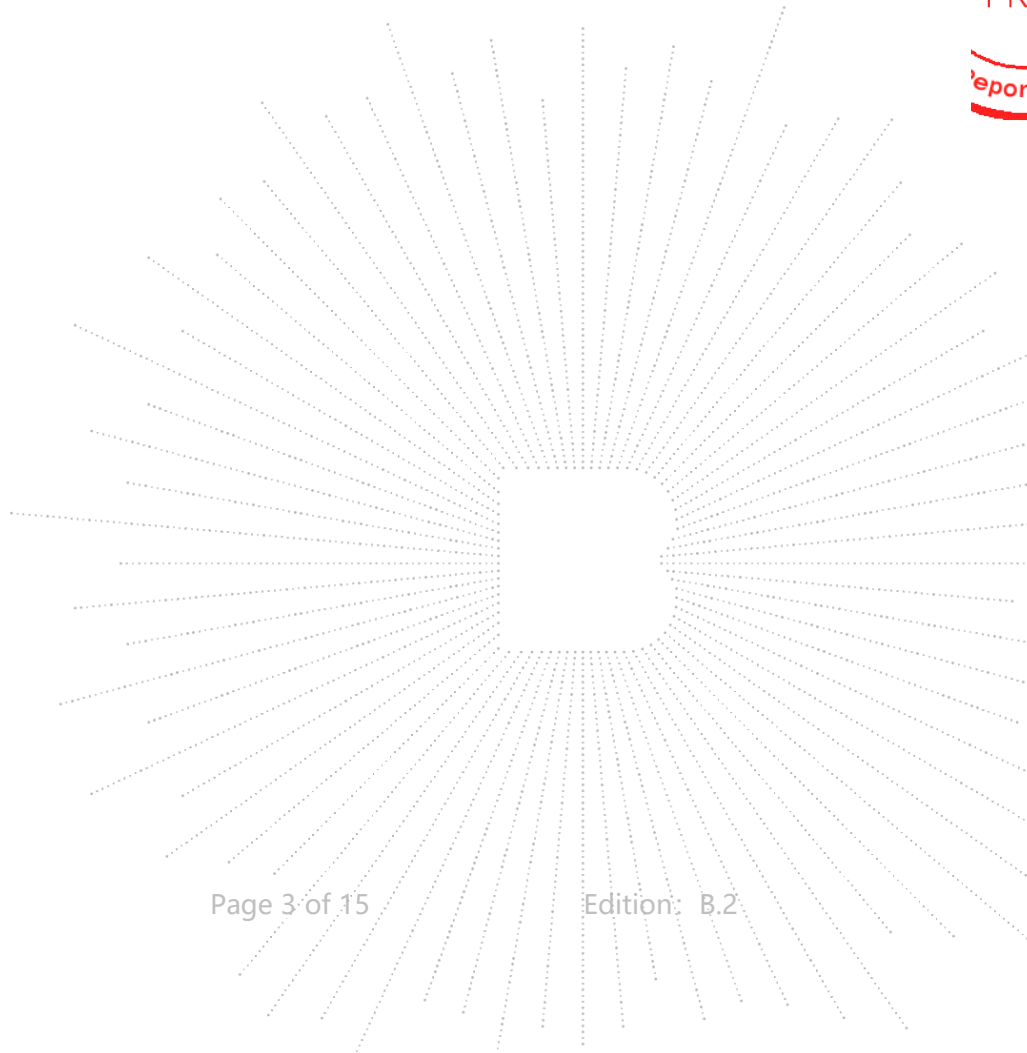

1. Version

Report No.	Issue Date	Description	Approved
BCTC2412413654-2E	2024-12-19	Original	Valid

TEST
TC
OVER
t See

2. Product Information

2.1 Product Information

Model/Type Reference: PB561

P/N code Differences: All the P/N code and test models are the same circuit and RF module, except for the appearance color and sales platform.

Hardware Version: A03

Software Version: ZX9100:V2.6

Operation Frequency: 112kHz-148.5kHz

Modulation: FSK

Antenna installation: loop coil antenna

Ratings: USB-C(IN) Input: 5V \leq 3A, 9V \leq 2.22A, 12V \leq 1.67A
USB-C(OUT) Output: 5V \leq 3A, 9V \leq 2.22A, 12V \leq 1.67A
Total Output: 5V \leq 1A+5W
Rated Capacity:6250mAh(TYP 5V 3A)
Polymer Lithium-ion Battery Rated Energy: 37Wh 3.7V
Battery Capacity: 10000mAh (Two Cells in Parallel)
Wireless Charging Output Power:15W Max

Battery manufacturer 1: Amprius (wuxi) Co., Ltd.

Battery manufacturer 2: Tianjin Juyuan New Energy Technology Co.,Ltd.

Remark:

- P/N code in the below table, for marketing purpose, will be marked on the marking plate.

25919	25919P	25919X	25919A	25919B	25919C	25919U	25919JP	25919ZD
35380	35380P	35380X	35380A	35380B	35380C	35380U	35380JP	35380ZD
35279	35279P	35279X	35279A	35279B	35279C	35279U	35279JP	35279ZD
45356	45356P	45356X	45356A	45356B	45356C	45356U	45356JP	45356ZD
45358	45358P	45358X	45358A	45358B	45358C	45358U	45358JP	45358ZD
45359	45359P	45359X	45359A	45359B	45359C	45359U	45359JP	45359ZD
45357	45357P	45357X	45357A	45357B	45357C	45357U	45357JP	45357ZD
55421	55421P	55421X	55421A	55421B	55421C	55421U	55421JP	55421ZD
35274	35274P	35274X	35274A	35274B	35274C	35274U	35274JP	35274ZD
35280	35280P	35280X	35280A	35280B	35280C	35280U	35280JP	35280ZD
45525	45525P	45525X	45525A	45525B	45525C	45525U	45525JP	45525ZD
45526	45526P	45526X	45526A	45526B	45526C	45526U	45526JP	45526ZD
25208	25208P	25208X	25208A	25208B	25208C	25208U	25208JP	25208ZD
25208LP	25208FY	25208WZ						

Battery manufacturer come from two different factories. The report shows the worst data(Battery manufacturer 1).

Battery manufacturer 1: Amprius (wuxi) Co., Ltd.

Battery manufacturer 2: Tianjin Juyuan New Energy Technology Co.,Ltd.

2.2 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	Magnetic Wireless Power Bank	UGREEN	PB561	N/A	EUT
E-2	Adapter	UGREEN	CD289	N/A	Auxiliary
E-3	Dummy load	N/A	DL01	N/A	Auxiliary

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

2.3 Test Mode

AC Mode	Mode 1	USB-C IN :(5V \pm 3A)+5W
	Mode 2	USB-C IN :(9V \pm 2.22A)+7.5W
DC Mode	Mode 3	Wireless charge 5W
	Mode 4	Wireless charge 7.5W
	Mode 5	Wireless charge 15W

Note: All test mode were tested and passed, only shows the worst case mode which were recorded in this report.

CO., LTD.

3. Test Facility And Test Instrument Used

3.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address:1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

A2LA certificate registration number is: CN1212

ISED Registered No.: 23583

ISED CAB identifier: CN0017

3.2 Test Instrument Used

EMF Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Electromagnet -ic radiation tester	Wavecontrol	SMP160	19SN0980	May 25, 2024	May 24, 2025
Electromagnet -ic field probe	Wavecontrol	WP400-3	20WP120082	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\


4. Method Of Measurement

4.1 Applicable Standard


According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to §1.1310 and §2.1093 RF exposure is calculated. According KDB680106 D01v04: RF Exposure Wireless Charging Apps v04.

4.2 Block Diagram Of Test Setup

A:

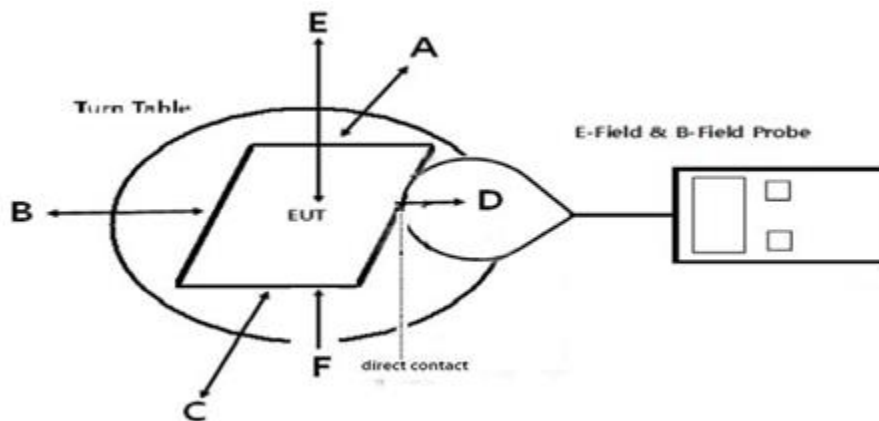

B:

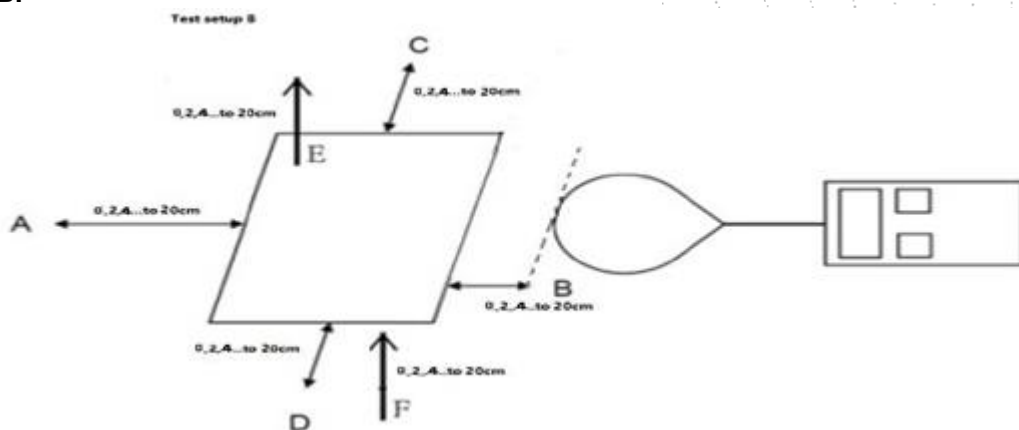

4.3 Limit

Limits for Occupational / Controlled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

Limits for General Population / Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180 / f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1	30

4.4 Test procedure

- The RF exposure test was performed in anechoic chamber.
- The measurement probe was placed at 0 cm surrounding the device for test setup A; and the measurement Probe was placed from 0 cm to 20 cm, in 2 cm maximum increment measured from the edge of the device For the test setup B.
- The highest emission level was recorded and compared with limit as soon as measurement of each
- The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E , F) were completed.
- The EUT was measured according to the dictates of KDB680106 D01v04.
- Remark: The EUT's test position A, B, C, D , E and F is valid for the E and H field measurements.

4.5 Equipment Approval Considerations

The EUT does comply with item 5(b) of KDB 680106 D01v04

1) Power transfer frequency is less than 1MHz

Yes, the device operate in the frequency range from 112-148.5kHz.

2) Output power from each primary coil is less than or equal to 15 watts.

Yes, the maximum output power of the primary coil is 15W.

3) A client device providing the maximum permitted load is placed in physical contact with the transmitter.

Yes, client device is placed directly in contact with the transmitter.

4) Only § 2.1091-Mobile exposure conditions apply

No, the EUT is portable condition assessment

5) The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit, per KDB 447498, Table 1.

Yes, Conform to

6) For systems with more than one radiating structure, the conditions specified in (5) must be met when the system is fully loaded (i.e., clients absorbing maximum power available), and with all the radiating structures operating at maximum power at the same time.

Yes, confirm.

4.6 E and H field Strength

We measured the H-Field Strength of 20cm, 22cm and 24cm, and recorded the test data of the worst 20cm.

Mobile: Test Mode 2 (the worst mode)

H-Field Strength at 20 cm surrounding the EUT and 20cm above the top surface of the EUT

Frequency Range (MHz)	Test Position A(uT)	Test Position B(uT)	Test Position C(uT)	Test Position D(uT)	Test Position E(uT)	Test Position Top(uT)
0.112-0.1485	0.0146	0.0072	0.0063	0.0081	0.0043	0.0065

Frequency Range (MHz)	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position Top(A/m)	50% Limits Test (A/m)	Limits Test (A/m)
0.112-0.1485	0.0117	0.0057	0.0052	0.0070	0.0036	0.0055	0.815	1.63

Note: A/m = uT ÷ 1.25

Transmitter Battery level: 100% battery

H-Filed Strength at (distance from 2cm to 20cm at 2cm iteration) surrounding the EUT (A/m)

Test distance (cm)	Test Position A(uT)	Test Position B(uT)	Test Position C(uT)	Test Position D(uT)	Test Position E(uT)	Test Position F(uT)
2	0.1394	0.1033	0.0926	0.1154	0.0564	0.0565
4	0.0543	0.0321	0.0334	0.0355	0.0224	0.0213
6	0.0245	0.0143	0.0154	0.0174	0.0113	0.0114
8	0.0191	0.0090	0.0094	0.0116	0.0069	0.0086
10	0.0180	0.0087	0.0090	0.0104	0.0069	0.0074
12	0.0186	0.0085	0.0084	0.0114	0.0066	0.0082
14	0.0183	0.0091	0.0084	0.0111	0.0068	0.0084
16	0.0182	0.0079	0.0091	0.0111	0.0058	0.0085
18	0.0180	0.0089	0.0082	0.0110	0.0057	0.0086
20	0.0184	0.0086	0.0089	0.0116	0.0056	0.0079

Test distance (cm)	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
2	0.1115	0.0826	0.0741	0.0923	0.0451	0.0452	1.63
4	0.0434	0.0257	0.0267	0.0284	0.0179	0.0170	1.63
6	0.0196	0.0114	0.0123	0.0139	0.0090	0.0091	1.63
8	0.0153	0.0072	0.0075	0.0093	0.0055	0.0069	1.63
10	0.0144	0.0070	0.0072	0.0083	0.0055	0.0059	1.63
12	0.0149	0.0068	0.0067	0.0091	0.0053	0.0066	1.63
14	0.0146	0.0073	0.0067	0.0089	0.0054	0.0067	1.63
16	0.0146	0.0063	0.0073	0.0089	0.0046	0.0068	1.63
18	0.0144	0.0071	0.0066	0.0088	0.0046	0.0069	1.63
20	0.0147	0.0069	0.0071	0.0093	0.0045	0.0063	1.63

Note: A/m=uT/1.25

Using Biot-Savart Law, the value of 2cm can be estimated through the test results of 4cm:

Distance: 2cm

Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
0.1447	0.0856	0.0891	0.0947	0.0543	0.0516	1.63

Agreement Ratio

Distance: 2cm

Transmitter Battery level: 100% battery						
Test Position	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)
Measure Value (A/m)	0.1115	0.0826	0.0741	0.0923	0.0451	0.0452
Valuation (A/m)	0.1447	0.0856	0.0891	0.0947	0.0543	0.0516
Agreement ratio	25.92	3.52	18.41	2.55	18.47	13.22
Limit	30%	30%	30%	30%	30%	30%
Test result	Pass	Pass	Pass	Pass	Pass	Pass

Using Biot-Savart Law, the value of 4cm can be estimated through the test results of 6cm:

Distance: 4cm

Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
0.0462	0.0269	0.0290	0.0328	0.0210	0.0212	1.63

Agreement Ratio

Distance: 4cm

Transmitter Battery level: 100% battery						
Test Position	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)
Measure Value (A/m)	0.0434	0.0257	0.0267	0.0284	0.0179	0.0170
Valuation(A/m)	0.0462	0.0269	0.0290	0.0328	0.0210	0.0212
Agreement ratio	6.25	4.64	8.18	14.38	15.83	21.76
Limit	30%	30%	30%	30%	30%	30%
Test result	Pass	Pass	Pass	Pass	Pass	Pass

As the model is sufficient, the value of 0cm can be estimated through the results of 2 cm


Using Biot-Savart Law, the value of 0cm can be estimated through the test results of 2cm:

Distance: 0cm

Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
0.8598	0.6372	0.5712	0.7119	0.1837	0.1840	1.63
Test result: Pass						

5. Photographs Of Test Set-Up

NOTE: Appendix-Test Photos

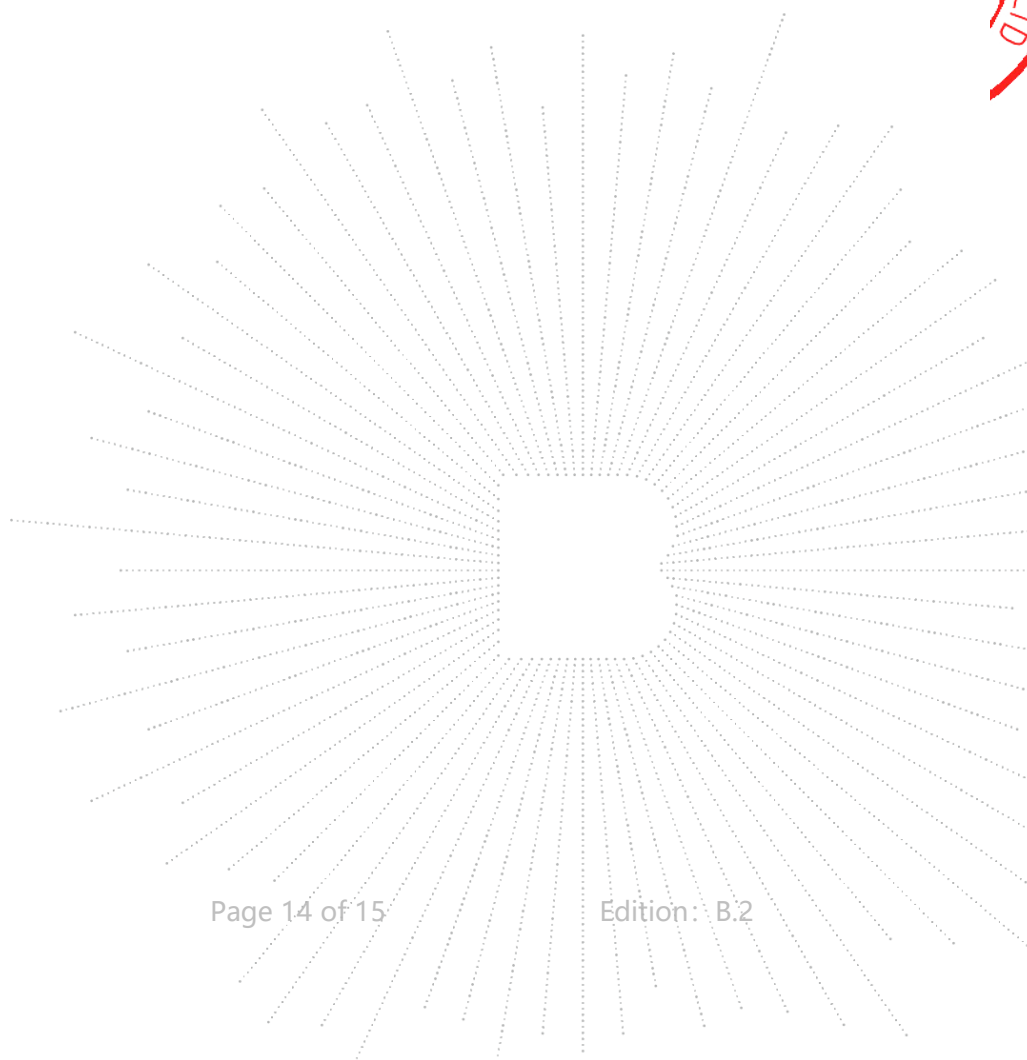

STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

Consultation E-mail: bctc@bctc-lab.com.cn

Complaint/Advice E-mail: advice@bctc-lab.com.cn

***** END *****