



TESTING LABORATORY
CERTIFICATE#4323.01



FCC PART 15B

TEST REPORT

For

Shanghai Sunmi Technology Co.,Ltd.

Room 605, Block 7, KIC Plaza, No.388 Song Hu Road, Yang Pu District, Shanghai 200433 China

FCC ID: 2AH25K2MINI

Report Type: Original Report	Product Type: Self-Checkout Kiosk
Test Engineer:	Cody Lu <i>Cody Lu</i>
Report Number:	RKSA200706003-00A
Report Date:	2020-08-05
Reviewed By:	Oscar Ye EMC Manager <i>Oscar Ye</i>
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION	5
EUT EXERCISE SOFTWARE	5
SPECIAL ACCESSORIES.....	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL I/O CABLE.....	5
BLOCK DIAGRAM OF RADIATED TEST SETUP.....	6
SUMMARY OF TEST RESULTS	7
FCC §15.107 – CONDUCTED EMISSIONS	8
APPLICABLE STANDARD	8
MEASUREMENT UNCERTAINTY.....	8
EUT SETUP	8
EMI TEST RECEIVER SETUP.....	9
TEST PROCEDURE	9
TEST EQUIPMENT LIST AND DETAILS.....	9
TEST DATA	10
FCC §15.109 - RADIATED EMISSIONS	12
APPLICABLE STANDARD	12
MEASUREMENT UNCERTAINTY	12
EUT SETUP	12
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE	13
TEST EQUIPMENT LIST AND DETAILS.....	14
CORRECTED AMPLITUDE & MARGIN CALCULATION	14
TEST DATA	15

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	Shanghai Sunmi Technology Co.,Ltd.
Test Model	F4501
Series Model	F4502
Product	Self-Checkout Kiosk
Rate Voltage	DC 24V from adapter
Highest Operation Frequency	5825MHz

Adapter Information:

Model: CYSE65-240250

Input: AC100-240 V, 50/60Hz, 1.7A

Output: DC24V, 2.5A

Note: The difference between tested model and series model was explained in the attached declaration letter.

**All measurement and test data in this report was gathered from production sample serial number: 20200706003. (Assigned by BACL, Kunshan). The EUT was received on 2020-07-06)*

Objective

This report is prepared on behalf of *Shanghai Sunmi Technology Co.,Ltd.* in accordance with Part 2-Subpart J, and Part 15-Subparts A and B of the Federal Communication Commission's rules.

The objective of the manufacturer is to determine the compliance of EUT with FCC Part 15, Class B device.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DTS Submittal with FCC ID: 2AH25K2MINI

FCC Part 15.247 DSS Submittal with FCC ID: 2AH25K2MINI

FCC Part 15.407 NII Submittal with FCC ID: 2AH25K2MINI

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

Test mode: Print & Data transmission

EUT Exercise Software

No software was used to test.

Special Accessories

No special accessory was used.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Shanghai Sunmi Technology Co.,Ltd.	Cash Box	/	/
TP-LINK	Router	EC26CA652860	1153145002998
DELL	Notebook1	015K3N	00190-098-766-241
HP	Notebook2	4441s	2CE3130VWY
BOLD	Earphone	/	/
Sandisk	USB flash disk	/	/
Sandisk	SD card	SDSQUNC-032G-ZN6MA	/
SAMSUNG	Mobile phone	SM-A7100	R28H20BW8PW


External I/O Cable

Cable Description	Length (m)	From/Port	To
RJ11 Cable	0.5	EUT	Cash Box
Power Cable1	1.0	EUT	Adapter
Power Cable2	1.0	Adapter	AC Source
Audio Cable4	1.0	EUT	Earphone
RJ45 Cable1	10	Notebook1	EUT
RJ45 Cable2	1.8	Notebook2	Router
Power Cable3	0.3	EUT	Serial port

Block Diagram of Radiated Test Setup

Test mode: Print & Data transmission

\

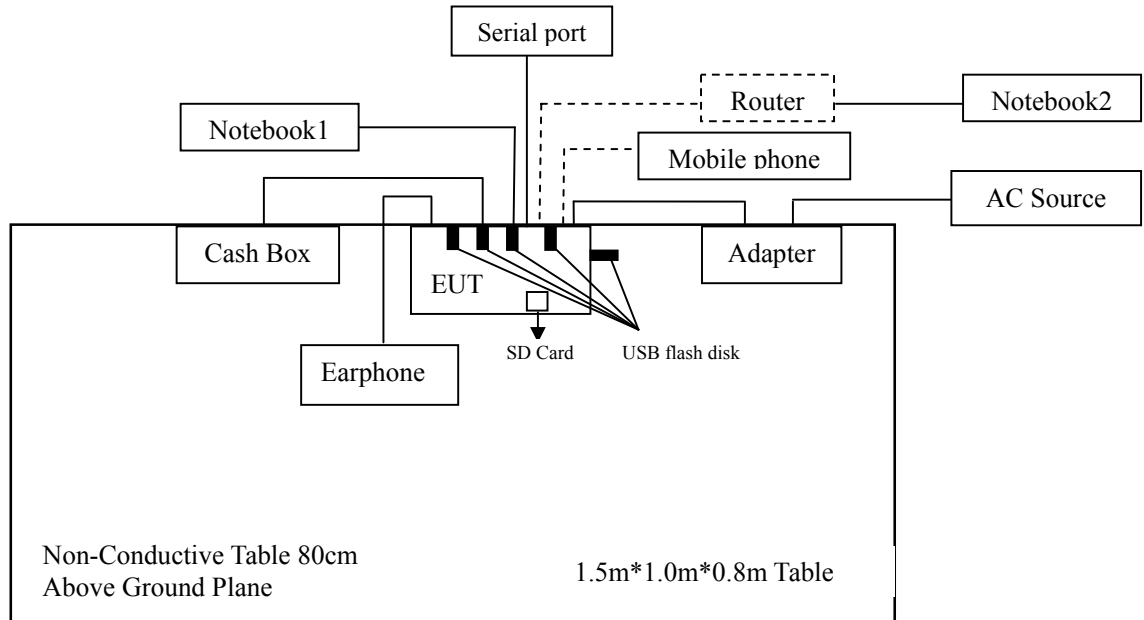

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	Conducted Emissions	Compliant
§15.109	Radiated Emissions	Compliant

FCC §15.107 – CONDUCTED EMISSIONS

Applicable Standard


According to FCC§15.107

Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements maybe receiver reading, attenuation of the connection between LISN and receiver, LISN voltage division factor, LISN VDF frequency interpolation and receiver related input quantities, etc.

Item		Measurement Uncertainty	U_{cispr}
AMN	150kHz~30MHz	3.19 dB	3.4 dB

EUT Setup

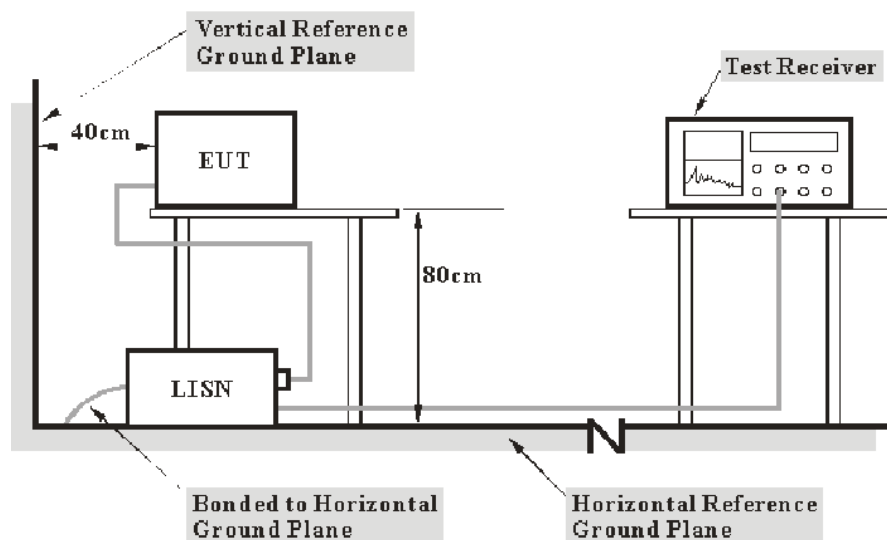

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.4-2014. The related limit was specified in FCC Part 15.107 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03 -101746-zn	2019-12-14	2020-12-13
Rohde & Schwarz	LISN	ENV216	3560655016	2019-11-30	2020-11-29
Audix	Test Software	e3	V9	--	--
MICRO-COAX	Coaxial Cable	Cable-6	006	2019-12-12	2020-12-11
Rohde & Schwarz	Pluse limiter	ESH3-Z2	100552	2020-03-01	2021-02-28

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Factor & Over Limit Calculation

The Corrected Factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7 dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:


$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

Test Data**Environmental Conditions**


Temperature:	23.5 °C
Relative Humidity:	51 %
ATM Pressure:	101.1 kPa

The testing was performed by Cody Lu on 2020-07-30.

Test mode: Print & Data transmission

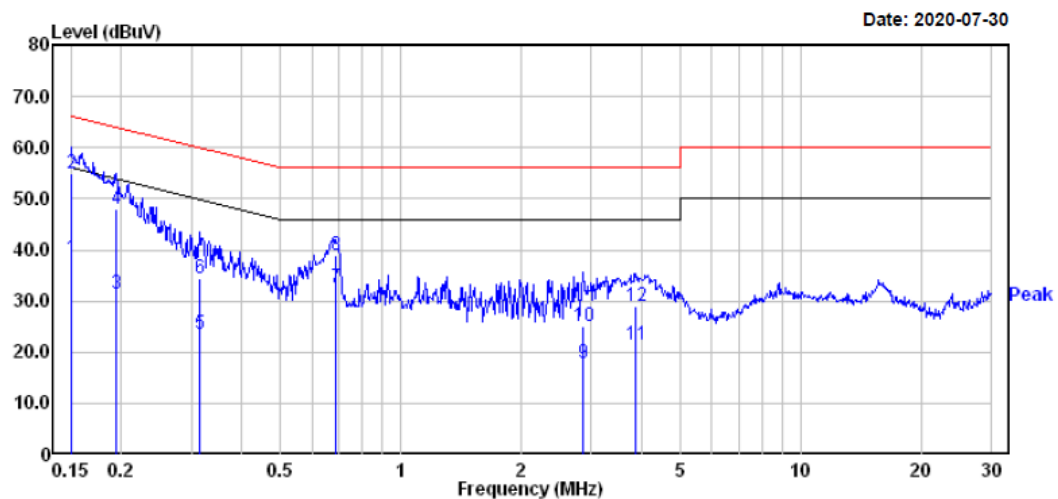Line:

	Read			Limit	Over	
	Freq	Level	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB	dBuV	dBuV	dB
1	0.150	18.60	19.82	38.42	56.00	-17.58 Average
2	0.150	35.00	19.82	54.82	66.00	-11.18 QP
3	0.194	11.70	19.82	31.52	53.84	-22.32 Average
4	0.194	28.30	19.82	48.12	63.84	-15.72 QP
5	0.313	3.80	19.82	23.62	49.88	-26.26 Average
6	0.313	14.60	19.82	34.42	59.88	-25.46 QP
7	0.686	12.90	19.75	32.65	46.00	-13.35 Average
8	0.686	19.10	19.75	38.85	56.00	-17.15 QP
9	2.854	-1.71	19.47	17.76	46.00	-28.24 Average
10	2.854	5.59	19.47	25.06	56.00	-30.94 QP
11	3.881	2.10	19.47	21.57	46.00	-24.43 Average
12	3.881	9.60	19.47	29.07	56.00	-26.93 QP

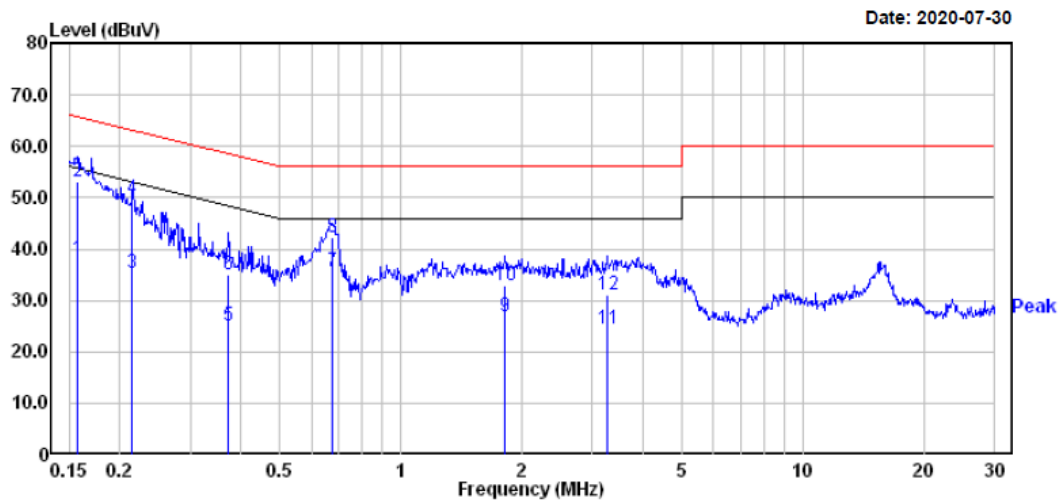Neutral:

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.157	18.20	19.82	38.02	55.60	-17.58	Average
2	0.157	33.20	19.82	53.02	65.60	-12.58	QP
3	0.215	15.60	19.82	35.42	53.01	-17.59	Average
4	0.215	30.00	19.82	49.82	63.01	-13.19	QP
5	0.373	5.39	19.78	25.17	48.43	-23.26	Average
6	0.373	15.19	19.78	34.97	58.43	-23.46	QP
7	0.675	15.90	19.75	35.65	46.00	-10.35	Average
8	0.675	22.60	19.75	42.35	56.00	-13.65	QP
9	1.819	6.99	19.84	26.83	46.00	-19.17	Average
10	1.819	12.99	19.84	32.83	56.00	-23.17	QP
11	3.258	5.00	19.46	24.46	46.00	-21.54	Average
12	3.258	11.60	19.46	31.06	56.00	-24.94	QP

Note:

1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

2) Over Limit (dB) = Read level (dBuV) + Factor (dB) - Limit (dBuV)

FCC §15.109 - RADIATED EMISSIONS

Applicable Standard

FCC §15.109


Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average) and system repeatability.


Item		Measurement Uncertainty	U_{cispr}
Radiated Emission	30MHz~1GHz	6.11dB	6.3 dB
	1GHz~6GHz	4.45dB	5.2 dB
	6 GHz ~18 GHz	5.23dB	5.5 dB

EUT Setup

Below 1GHz:

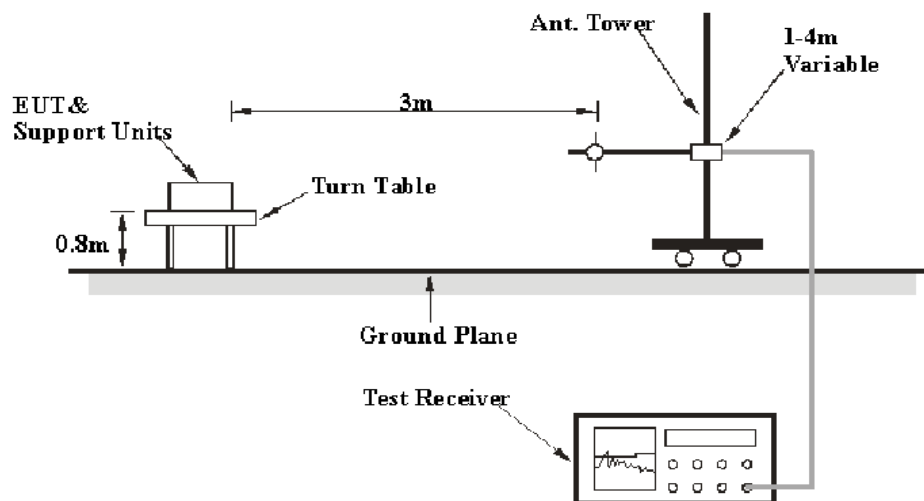

Above 1GHz:

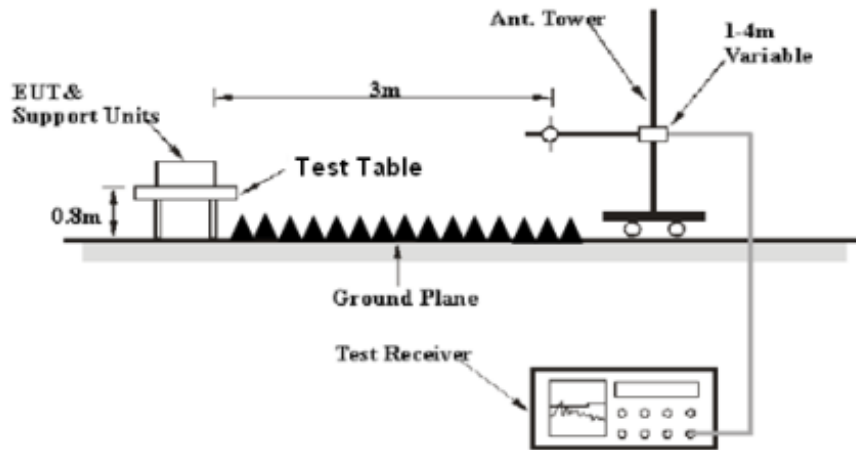

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC Part 15.109 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 30 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	120 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	Peak
	1MHz	3 MHz	1MHz	AVG

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz, Peak and average detection mode above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sonoma Instrument	Amplifier	310N	185700	2019-08-14	2020-08-13
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2019-12-14	2020-12-13
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2017-12-26	2020-12-25
Champrotek	Chamber 1#	3m-SAC 966	NA	2019-05-08	2022-05-07
Albatross	Chamber 2#	3m-SAC 966	NA	2019-05-08	2022-05-07
Rohde & Schwarz	Auto test Software	EMC32	100361	-	-
ETS	Horn Antenna	3115	6229	2020-01-10	2023-01-09
Rohde & Schwarz	EMI Receiver	ESU40	100207	2020-04-01	2021-03-31
A.H.Systems,inc	Amplifier	PAM-0118P	512	2020-02-20	2021-02-19
MICRO-COAX	Coaxial Cable	Cable-8	008	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-4	004	2019-12-12	2020-12-11
MICRO-COAX	Coaxial Cable	Cable-5	005	2019-12-12	2020-12-11

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data**Environmental Conditions**

Temperature:	24.7~25.3 °C
Relative Humidity:	50~51 %
ATM Pressure:	101.7~102.3 kPa

The testing was performed by Cody Lu from 2020-07-14 to 2020-07-23.


Test mode: Print & Data transmission

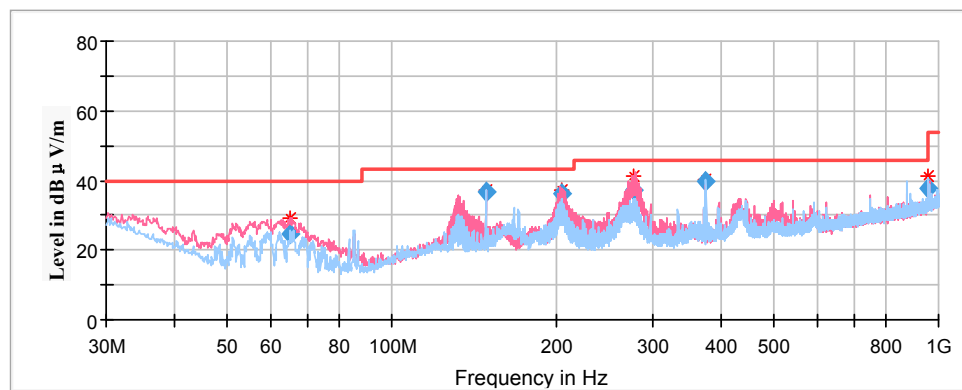1) 30MHz ~ 1GHz:

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
65.133050	24.86	40.00	15.14	100.0	V	331.0	-18.0
148.508350	36.74	43.50	6.76	200.0	H	282.0	-12.7
204.196500	36.07	43.50	7.43	100.0	V	0.0	-12.8
277.372450	37.40	46.00	8.60	100.0	V	127.0	-11.7
375.891450	39.89	46.00	6.11	200.0	H	0.0	-9.2
959.843500	37.70	46.00	8.30	100.0	H	325.0	1.4

1GHz-18GHz:


Full Spectrum

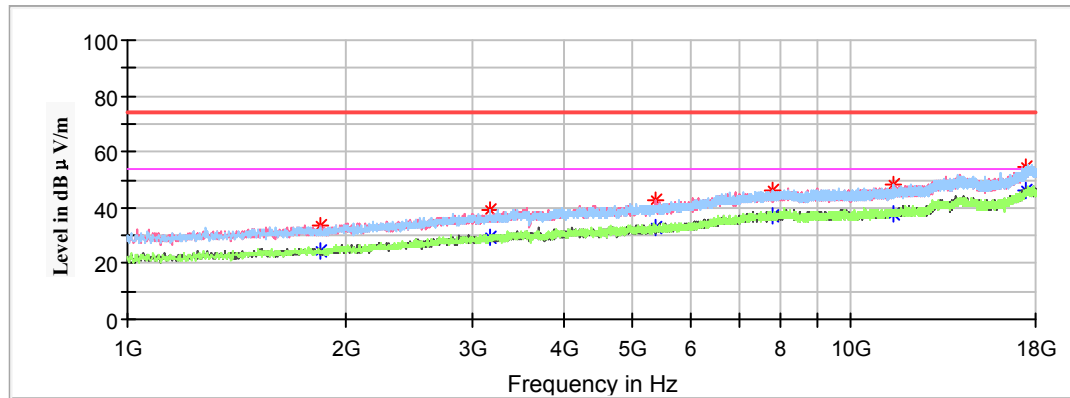

Frequency (MHz)	Max Peak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1853.40	---	24.67	54.00	29.33	100.0	V	328.0	-15.0
1853.40	33.75	---	74.00	40.25	100.0	V	328.0	-15.0
3167.50	---	29.33	54.00	24.67	200.0	H	43.0	-9.7
3167.50	38.89	---	74.00	35.11	200.0	H	43.0	-9.7
5358.80	---	32.88	54.00	21.12	200.0	V	91.0	-4.3
5358.80	42.47	---	74.00	31.53	200.0	V	91.0	-4.3
7774.50	---	37.00	54.00	17.00	100.0	V	94.0	1.5
7774.50	46.08	---	74.00	27.92	100.0	V	94.0	1.5
11436.30	---	38.09	54.00	15.91	100.0	H	119.0	2.8
11436.30	48.14	---	74.00	25.86	100.0	H	119.0	2.8
17422.00	---	46.12	54.00	7.88	100.0	H	358.0	8.6
17422.00	54.67	---	74.00	19.33	100.0	H	358.0	8.6


18GHz-30GHz:

Vertical

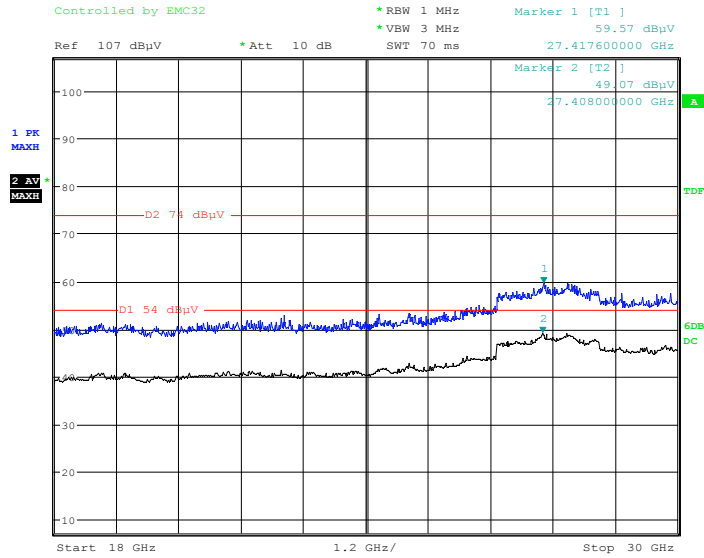

Date: 14.JUL.2020 21:52:14

Horizontal

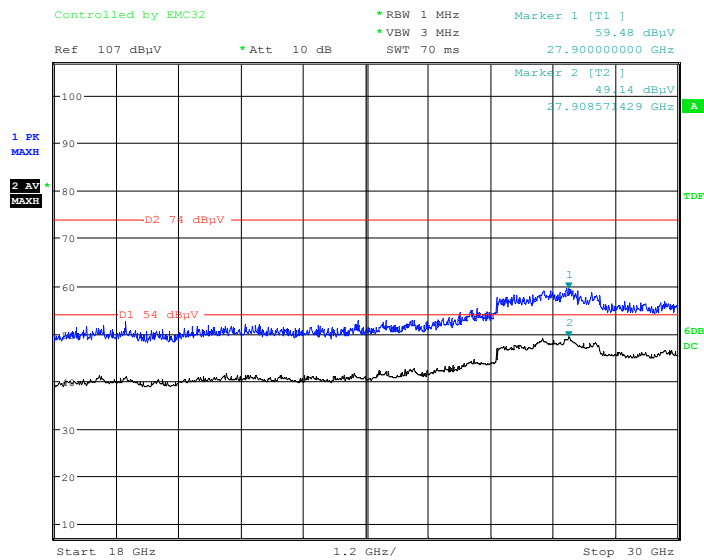

Date: 14.JUL.2020 22:10:59

Declarations

1: BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

2: Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

3: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

4: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

5: This report cannot be reproduced except in full, without prior written approval of the Company.

6: This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

*******END OF REPORT*******