

# FCC Test Report

**Report No.:** RWAQ202400265A

**Applicant:** Shenzhen VanTop Technology & Innovation Co., Ltd.

**Address:** 506, BLDG 4, Pingshan minQi Technology Park, No. 65 Lishan Road, Pingshan Community, Taoyuan Street, Nanshan District, Shenzhen, China

**Product Name:** REMOTE

**Product Model:** DR-ST130B

**Multiple Models:** DR-ATM11B

**Trade Mark:** N/A

**FCC ID:** 2AQ3A-ST130BR2423

**Standards:** FCC CFR Title 47 Part 15C (§15.249)

**Test Date:** 2024-04-01to 2024-04-09

**Test Result:** Complied

**Report Date:** 2024-04-17

**Reviewed by:**

*Abel chen*

Abel Chen  
Project Engineer

**Approved by:**

*Jacob Kong*

Jacob Kong  
Manager

**Prepared by:**

World Alliance Testing & Certification (Shenzhen) Co., Ltd

No. 1002, East Block, Laobing Building, Xingye Road 3012, Xixiang street, Bao'an District, Shenzhen, Guangdong, People's Republic of China



This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk “★”

## Announcement

1. This test report shall not be reproduced except in full, without the written approval of World Alliance Testing & Certification (Shenzhen) Co., Ltd
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.
5. The information marked “#” is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

## Revision History

Version No.	Issued Date	Description
00	2024-04-17	Original

# Contents

<b>1</b>	<b>General Information .....</b>	<b>4</b>
1.1	Client Information .....	4
1.2	Product Description of EUT .....	4
1.3	Antenna information .....	4
1.4	Related Submittal(s)/Grant(s).....	5
1.5	Measurement Uncertainty .....	5
1.6	Laboratory Location.....	5
1.7	Test Methodology .....	5
<b>2</b>	<b>Description of Measurement.....</b>	<b>6</b>
2.1	Test Configuration.....	6
2.2	Test Auxiliary Equipment .....	6
2.3	Test Setup.....	7
2.4	Test Procedure .....	8
2.5	Measurement Method.....	10
2.6	Measurement Equipment .....	10
<b>3</b>	<b>Test Results .....</b>	<b>11</b>
3.1	Test Summary.....	11
3.2	Limit .....	12
3.3	AC Line Conducted Emissions Test Data.....	13
3.4	Radiated emission Test Data.....	14
3.5	Bandwidth Test Data.....	26
<b>4</b>	<b>Test Setup Photo.....</b>	<b>27</b>
<b>5</b>	<b>E.U.T Photo .....</b>	<b>28</b>

# 1 General Information

## 1.1 Client Information

Applicant:	Shenzhen VanTop Technology & Innovation Co., Ltd.
Address:	506, BLDG 4, Pingshan minQi Technology Park, No. 65 Lishan Road, Pingshan Community, Taoyuan Street, Nanshan District, Shenzhen, China
Manufacturer:	Shenzhen VanTop Technology & Innovation Co., Ltd.
Address:	506, BLDG 4, Pingshan minQi Technology Park, No. 65 Lishan Road, Pingshan Community, Taoyuan Street, Nanshan District, Shenzhen, China

## 1.2 Product Description of EUT

The EUT is REMOTE that contains a 2.4G SRD radio, this report covers the full testing of the 2.4G SRD radio.

Test Model	DR-ST130B
Multiple Models	DR-ATM11B
Sample Serial Number	74-2 for RE test (assigned by WATC)
Sample Received Date	2024-3-28
Sample Status	Good Condition
Frequency Range	2420-2460MHz
Maximum E-field Strength:	100.19dBuV/m@3m
Modulation Technology	GFSK
Antenna Gain <sup>#</sup>	0dBi
Spatial Streams <sup>#</sup>	SI (1TX)
Power Supply	DC 4.5V from battery
Operating temperature <sup>#</sup>	0 deg.C to +40 deg.C
Adapter Information	N/A
Modification	Sample No Modification by the test lab

## 1.3 Antenna information

<p><b>15.203 requirement:</b></p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
<b>Device Antenna information:</b>	
<p>The antenna is an internal antenna which cannot replace by end-user. Please see product internal photos for details.</p>	

## 1.4 Related Submittal(s)/Grant(s)

No Related Submittal(s)/Grant(s)

## 1.5 Measurement Uncertainty

Parameter		Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
AC Power Lines Conducted Emissions		±3.14dB
Emissions, Radiated	Below 30MHz	±2.78dB
	Below 1GHz	±4.84dB
	Above 1GHz	±5.44dB
Bandwidth		0.34%
<p><b>Note 1:</b> The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.</p> <p><b>Note 2:</b> The Decision Rule is based on simple acceptance with ISO Guide 98-4:2012 Clause 8.2 (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)</p>		

## 1.6 Laboratory Location

World Alliance Testing & Certification (Shenzhen) Co., Ltd

No. 1002, East Block, Laobing Building, Xingye Road 3012, Xixiang street, Bao'an District, Shenzhen, Guangdong, People's Republic of China

Tel: +86-755-29691511, Email: [qa@watc.com.cn](mailto:qa@watc.com.cn)

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 463912, the FCC Designation No. : CN5040.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0160.

## 1.7 Test Methodology

FCC CFR 47 Part 2

FCC CFR 47 Part 15

ANSI C63.10-2013

## 2 Description of Measurement

### 2.1 Test Configuration

Operating channels:					
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2420	2	2440	3	2460
According to ANSI C63.10-2013 chapter 5.6.1 Table 11 requirement, select lowest/middle/highest frequency in the frequency range in which device operates for testing. The detailed frequency points are as follows:					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2420	2	2440	3	2460

Test Mode:			
Transmitting mode:	Keep the EUT in continuous transmitting with modulation		
Exercise software <sup>#</sup> :	Engineering mode, EUT was configured to test mode by manufacturer		
Mode	Power Level Setting <sup>#</sup>		
	Low Channel	Middle Channel	High Channel
SRD	Default	Default	Default
The exercise software and the maximum power setting that provided by manufacturer.			


Worst-Case Configuration:
For radiated emissions, EUT was investigated in three orthogonal orientation, the worst-case orientation was recorded in report
For radiated emission 9kHz-30MHz and above 18GHz were performed with the EUT transmits at the channel with highest output power as worst-case scenario.

### 2.2 Test Auxiliary Equipment

Manufacturer	Description	Model	Serial Number
/	/	/	/

## 2.3 Test Setup


**1) Conducted emission measurement:**

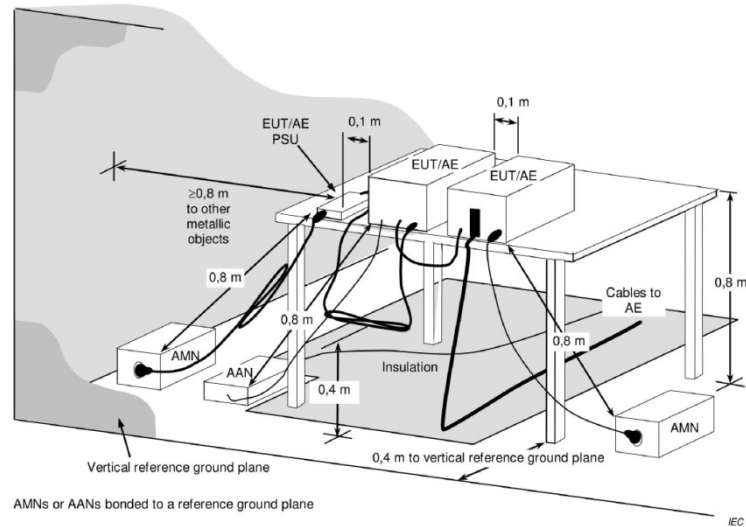


**Note:** The 0.8 m distance specified between EUT/AE/PSU and AMN/AAN, is applicable only to the EUT being measured. If the device is AE then it shall be >0.8 m.


**2) Radiated emission measurement:**

Below 30MHz (3m SAC)

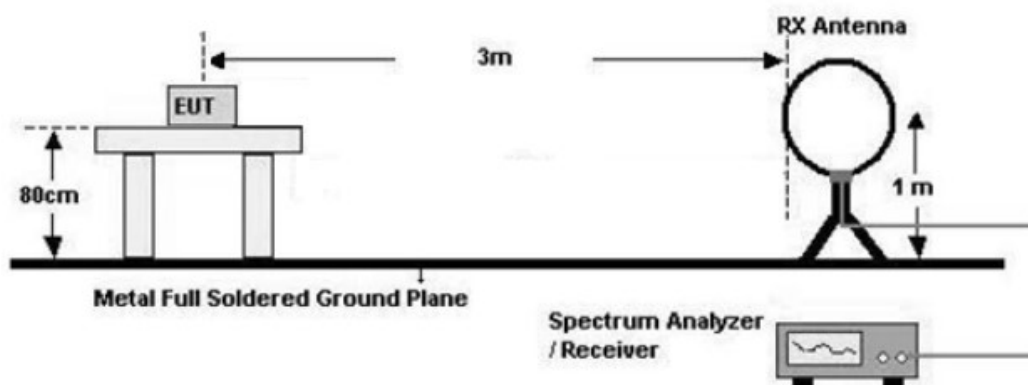

30MHz-1GHz (3m SAC)

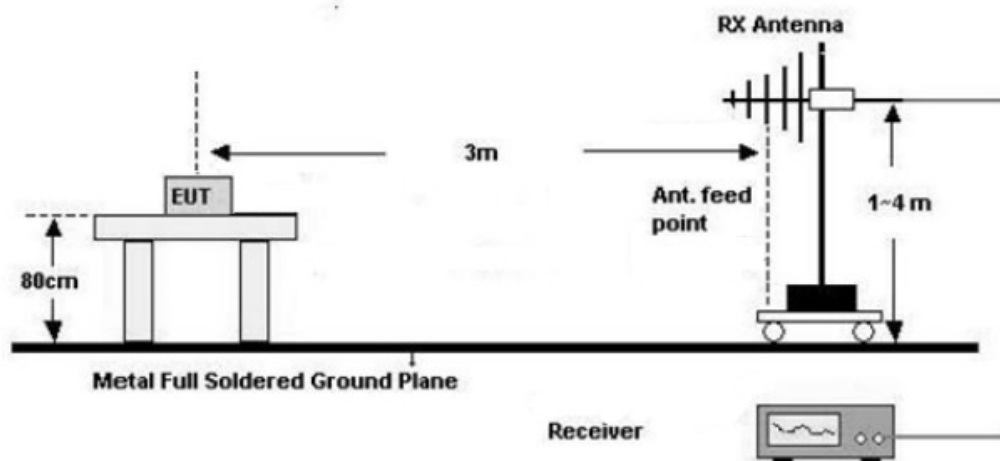

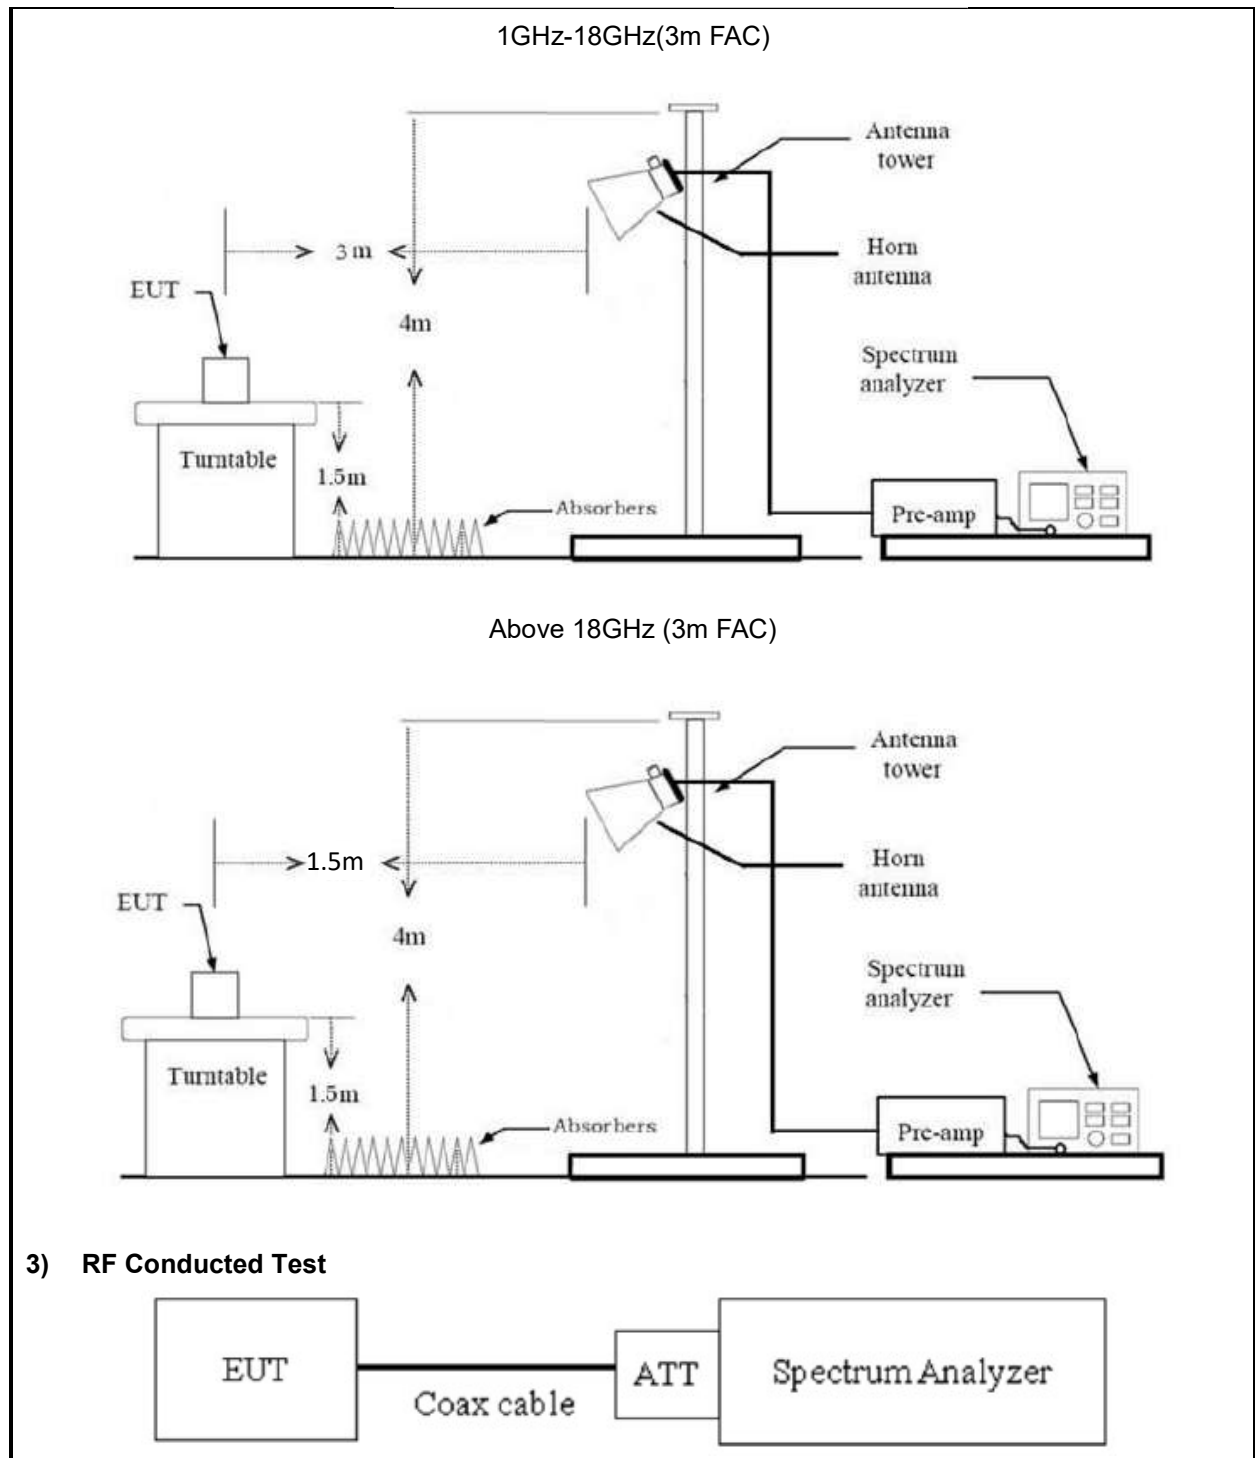

## 2.4 Test Procedure

### Conducted emission:

1. The E.U.T is placed on a non-conducting table 40cm from the vertical ground plane and 80cm above the horizontal ground plane (Please refer to the block diagram of the test setup and photographs).
2. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
3. Line conducted data is recorded for both Line and Neutral



### **Radiated Emission Procedure:**

#### **a) For below 30MHz**

1. All measurements were made at a test distance of 3 m. The measured data was extrapolated from the test distance (3m) to the specification distance (300 m from 9-490 kHz and 30 m from 490 kHz- 30 MHz) to clearly show the relative levels of fundamental and spurious emissions and demonstrate compliance with the requirement that the level of any spurious emissions be below the level of the intentionally transmitted signal. The extrapolation factor for the limits were  $40 \cdot \log(\text{test distance} / \text{specification distance})$ .
2. Loop antenna use, investigation was done on the three antenna orientations (parallel, perpendicular, ground-parallel)

#### **b) For 30MHz-1GHz:**

1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m.
2. EUT works in each mode of operation that needs to be tested. The highest signal levels relative to the limit shall be determined by rotating the EUT from  $0^\circ$  to  $360^\circ$  and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.

#### **c) For above 1GHz:**

1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m (1-18GHz) and 1.5 m (above 18GHz).
2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working. The highest signal levels relative to the limit shall be determined by rotating the EUT from  $0^\circ$  to  $360^\circ$  and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.
3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.
4. Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

### **Bandwidth Test:**

1. The antenna port of EUT was connected to the RF port of the Spectrum analyzer through Attenuator and RF cable.
2. The EUT is keeping in continuous transmission mode.
3. Test the bandwidth and record the result

## 2.5 Measurement Method

Description of Test	Measurement Method
AC Line Conducted Emissions	ANSI C63.10-2013 Section 6.2
20dB Emission Bandwidth	ANSI C63.10-2013 Section 6.9.2
Field strength of fundamental and Radiated emission	ANSI C63.10-2013 Section 6.3&6.4&6.5&6.6&7.6

## 2.6 Measurement Equipment

Manufacturer	Description	Model	Management No.	Calibration Date	Calibration Due Date
Radiated Emission Test					
R&S	EMI test receiver	ESR3	102758	2023/7/3	2024/7/2
ROHDE& SCHWARZ	SPECTRUM ANALYZER	FSV40-N	101608	2023/7/3	2024/7/2
SONOMA INSTRUMENT	Low frequency amplifier	310	186014	2023/7/12	2024/7/11
COM-POWER	preamplifier	PAM-118A	18040152	2023/8/21	2024/8/20
COM-POWER	Amplifier	PAM-840A	461306	2023/8/8	2024/8/7
BACL	Loop Antenna	1313-1A	4010611	2024/2/7	2027/2/6
SCHWARZBECK	Log - periodic wideband antenna	VULB 9163	9163-872	2023/7/7	2024/7/6
Astro Antenna Ltd	Horn antenna	AHA-118S	3015	2023/7/6	2024/7/5
Ducommun technologies	Horn Antenna	ARH-4223-02	1007726-03	2023/7/10	2024/7/9
Oulitong	Band Reject Filter	OBSF-2400-248 3.5-50N	OE02103119	2023/9/15	2024/9/14
N/A	Coaxial Cable	N/A	NO.9	2023/8/8	2024/8/7
N/A	Coaxial Cable	N/A	NO.10	2023/8/8	2024/8/7
N/A	Coaxial Cable	N/A	NO.11	2023/8/8	2024/8/7
Audix	Test Software	E3	191218 V9	/	/
RF Conducted Test					
ROHDE& SCHWARZ	SPECTRUM ANALYZER	FSU-26	200680/026	2023/7/12	2024/7/11
narda	6dB attenuator	603-06-1	N/A	2023/7/26	2024/7/25

Note: All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or International standards.

## 3 Test Results

### 3.1 Test Summary

FCC Rules	Description of Test	Result
FCC §15.203	Antenna Requirement	Compliance
FCC §15.207(a)	AC Line Conducted Emissions	N/A
FCC §15.215(c)	20dB Emission Bandwidth	Report only
FCC §15.205, §15.209, §15.249	Field strength of fundamental and Radiated emission	Compliance

## 3.2 Limit

Test items	Limit															
AC Line Conducted Emissions	See details §15.207 (a)															
Field strength of fundamental and Radiated emission	The field strength of fundamental and harmonic emissions measured at 3 m shall not exceed the limits as below:															
	<table><tr><th>Fundamental frequency</th><th>Field strength of fundamental (millivolts/meter)</th><th>Field strength of harmonics (microvolts/meter)</th></tr><tr><td>902–928 MHz</td><td>50</td><td>500</td></tr><tr><td>2400–2483.5 MHz</td><td>50</td><td>500</td></tr><tr><td>5725–5875 MHz</td><td>50</td><td>500</td></tr><tr><td>24.0–24.25 GHz</td><td>250</td><td>2500</td></tr></table>	Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)	902–928 MHz	50	500	2400–2483.5 MHz	50	500	5725–5875 MHz	50	500	24.0–24.25 GHz	250	2500
	Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)													
	902–928 MHz	50	500													
	2400–2483.5 MHz	50	500													
5725–5875 MHz	50	500														
24.0–24.25 GHz	250	2500														
The field strength shall be measured using an average detector, except for the fundamental emission in the frequency band 902-928 MHz, which is based on measurements using an International Special Committee on Radio Interference (CISPR) quasi-peak detector.																
Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.																
For frequencies above 1000 MHz, the field strength limits in above table are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.																

### 3.3 AC Line Conducted Emissions Test Data

*Not applicable, the device only powered by battery*

### 3.4 Radiated emission Test Data


9 kHz-30MHz:

<b>Test Date:</b>	2024-04-01	<b>Test By:</b>	Bard Huang
<b>Environment condition:</b>	Temperature: 24.2°C; Relative Humidity:65%; ATM Pressure: 100.4kPa		

For radiated emissions below 30MHz, there were no emissions found within 20dB of limit.

**30MHz-1GHz:**


<b>Test Date:</b>	2024-04-01	<b>Test By:</b>	Bard Huang
<b>Environment condition:</b>	Temperature: 24.2°C; Relative Humidity:65%; ATM Pressure: 100.4kPa		

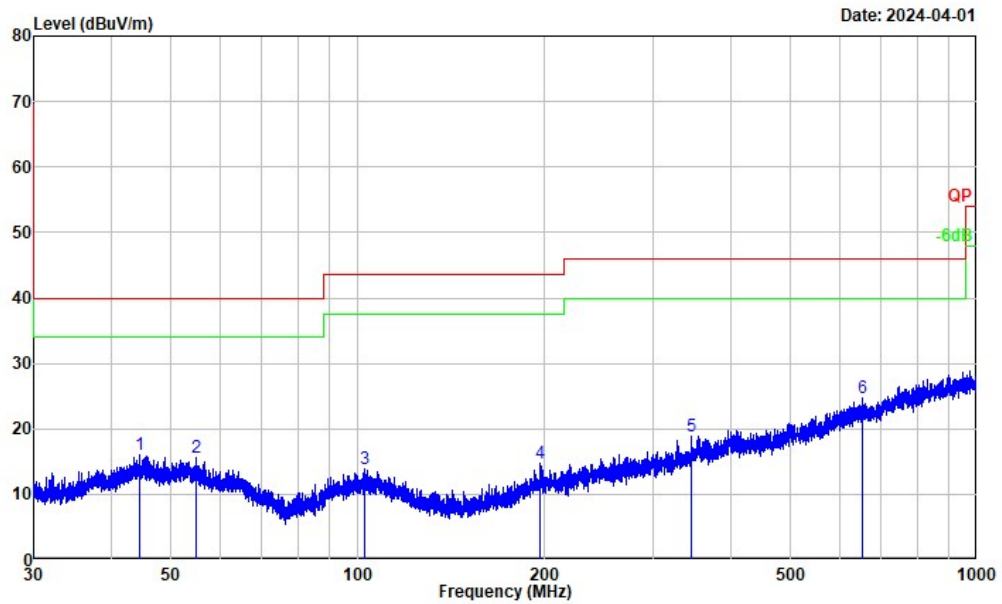

Project No. : RWAQ202400265  
 Test Mode : Transmitting  
 Test Voltage : Power by battery  
 Environment : 24.2°C/65%R.H./100.4kPa  
 Tested by : Bard Huang  
 Polarization : horizontal  
 Remark : 2420MHz

--No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Detector
<hr/>							
1	44.569	28.36	-12.24	16.12	40.00	-23.88	Peak
2	55.007	28.29	-12.70	15.59	40.00	-24.41	Peak
3	102.510	27.90	-14.07	13.83	43.50	-29.67	Peak
4	197.420	28.77	-13.92	14.85	43.50	-28.65	Peak
5	345.701	28.74	-9.79	18.95	46.00	-27.05	Peak
6	654.771	28.72	-4.03	24.69	46.00	-21.31	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain

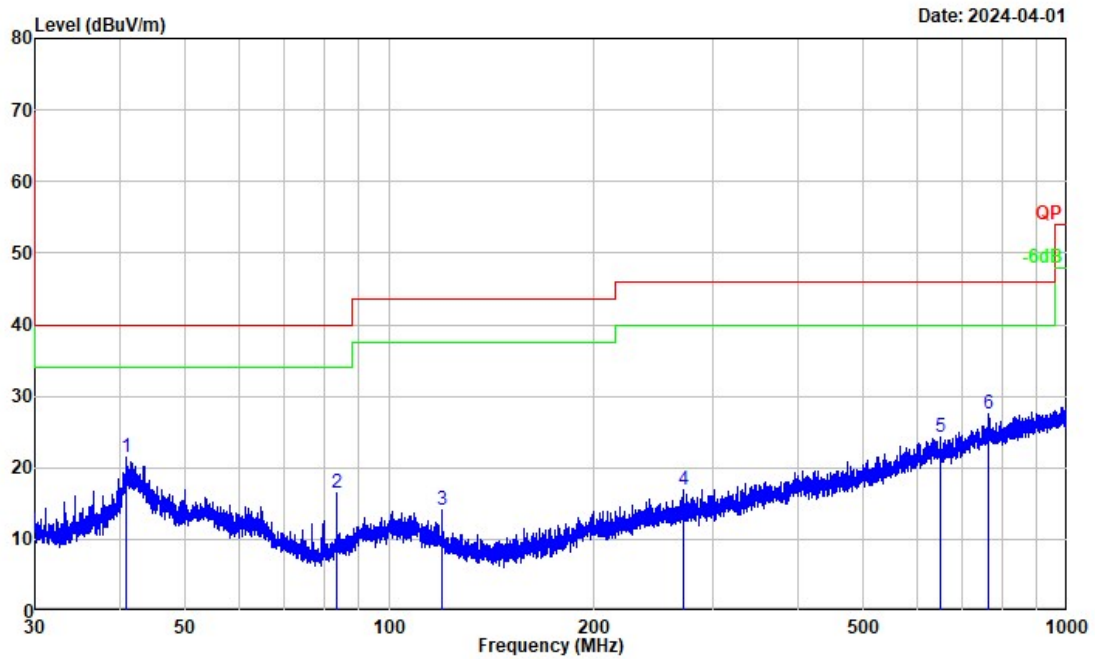


Project No. : RWAQ202400265  
 Test Mode : Transmitting  
 Test Voltage : Power by battery  
 Environment : 24.2°C/65%R.H./100.4kPa  
 Tested by : Bard Huang  
 Polarization : vertical  
 Remark : 2420MHz

--No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Detector
-----							
1	40.990	34.17	-12.81	21.36	40.00	-18.64	Peak
2	83.496	33.89	-17.45	16.44	40.00	-23.56	Peak
3	119.666	29.79	-15.78	14.01	43.50	-29.49	Peak
4	271.280	28.86	-12.00	16.86	46.00	-29.14	Peak
5	649.625	28.35	-4.11	24.24	46.00	-21.76	Peak
6	766.368	29.73	-2.25	27.48	46.00	-18.52	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain




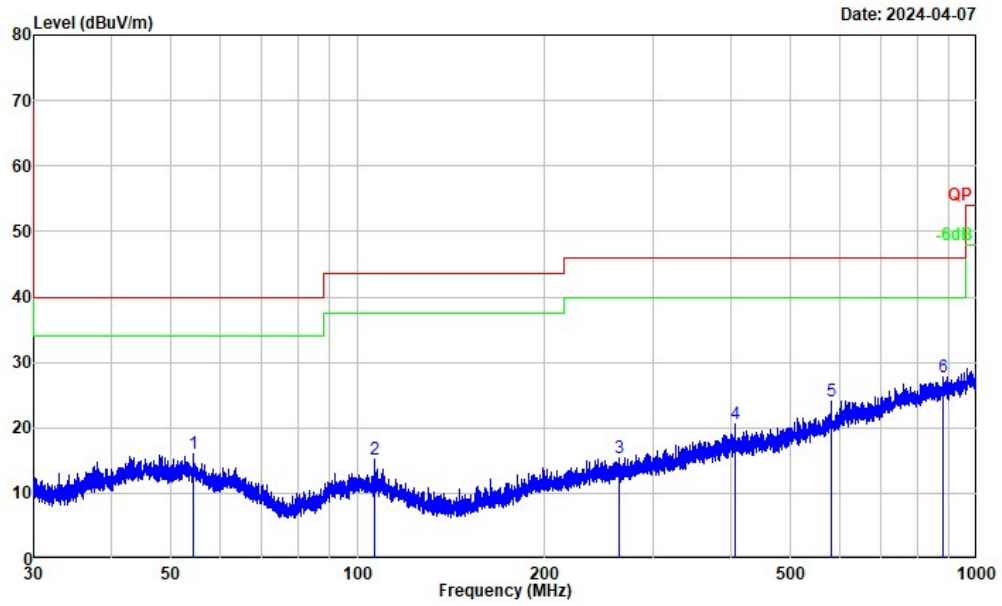

Project No. : RWAQ202400265  
Test Mode : Transmitting  
Test Voltage : Power by battery  
Environment : 24.2°C/65%R.H./100.4kPa  
Tested by : Bard Huang  
Polarization : horizontal  
Remark : 2440MHz

--No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Detector
1	54.265	28.50	-12.55	15.95	40.00	-24.05	Peak
2	106.776	29.13	-14.03	15.10	43.50	-28.40	Peak
3	264.934	27.53	-12.14	15.39	46.00	-30.61	Peak
4	407.469	29.06	-8.48	20.58	46.00	-25.42	Peak
5	582.192	29.66	-5.60	24.06	46.00	-21.94	Peak
6	882.553	28.61	-0.87	27.74	46.00	-18.26	Peak


Remarks: Factor = Antenna factor + Cable loss - Preamp gain

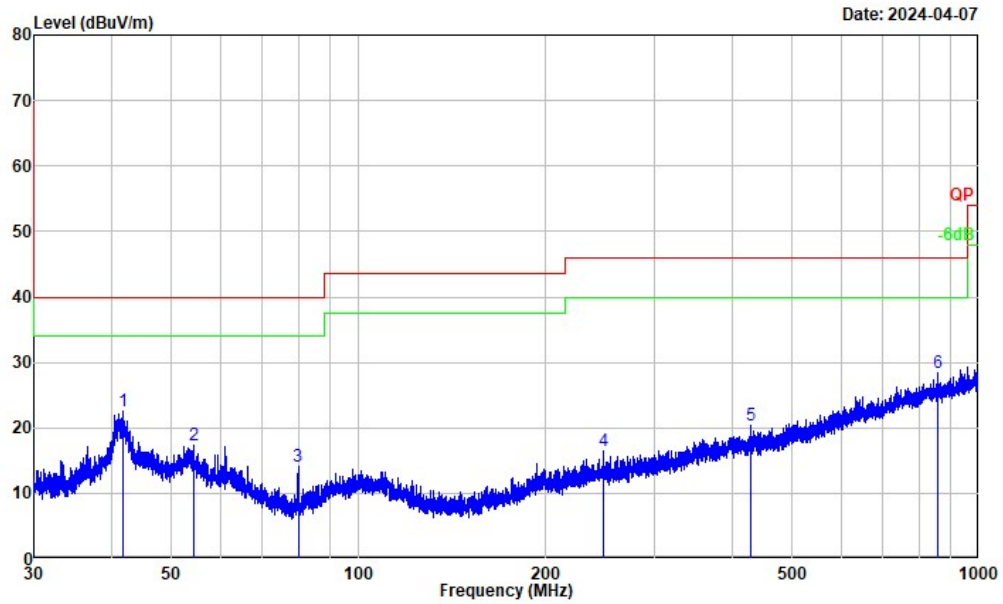

Project No. : RWAQ202400265  
 Test Mode : Transmitting  
 Test Voltage : Power by battery  
 Environment : 24.2°C/65%R.H./100.4kPa  
 Tested by : Bard Huang  
 Polarization : vertical  
 Remark : 2440MHz

--No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Detector
1	41.770	35.11	-12.58	22.53	40.00	-17.47	Peak
2	54.313	29.81	-12.56	17.25	40.00	-22.75	Peak
3	79.985	32.16	-18.08	14.08	40.00	-25.92	Peak
4	248.509	28.88	-12.45	16.43	46.00	-29.57	Peak
5	428.913	28.60	-8.30	20.30	46.00	-25.70	Peak
6	858.512	29.56	-1.19	28.37	46.00	-17.63	Peak


Remarks: Factor = Antenna factor + Cable loss - Preamp gain

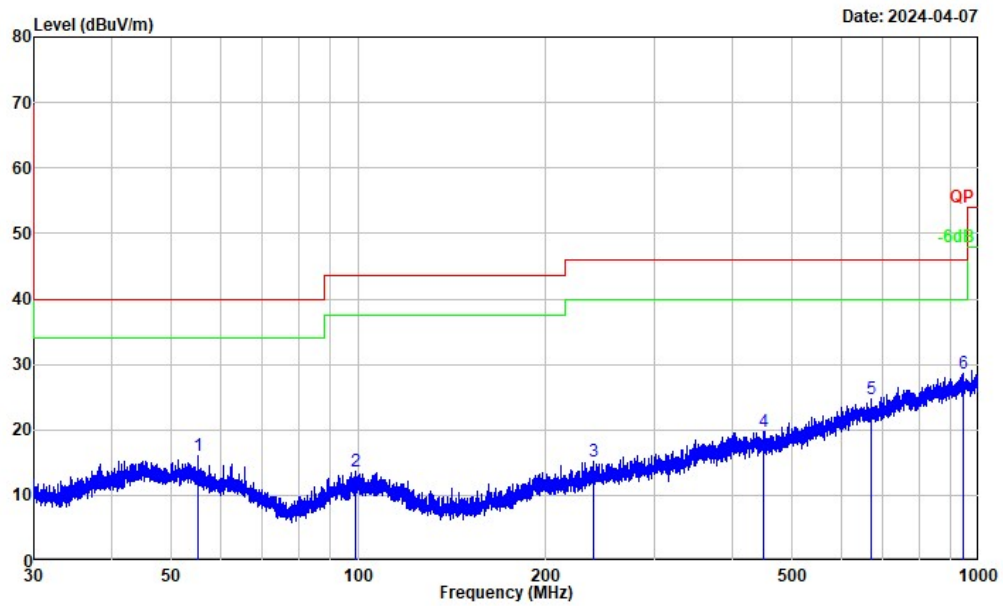

Project No. : RWAQ202400265  
Test Mode : Transmitting  
Test Voltage : Power by battery  
Environment : 24.2°C/65%R.H./100.4kPa  
Tested by : Bard Huang  
Polarization : horizontal  
Remark : 2460MHz

--No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Detector
1	55.273	28.78	-12.75	16.03	40.00	-23.97	Peak
2	98.934	28.14	-14.40	13.74	43.50	-29.76	Peak
3	239.314	27.80	-12.72	15.08	46.00	-30.92	Peak
4	450.892	27.98	-8.25	19.73	46.00	-26.27	Peak
5	671.338	28.73	-4.01	24.72	46.00	-21.28	Peak
6	943.777	28.64	0.07	28.71	46.00	-17.29	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain

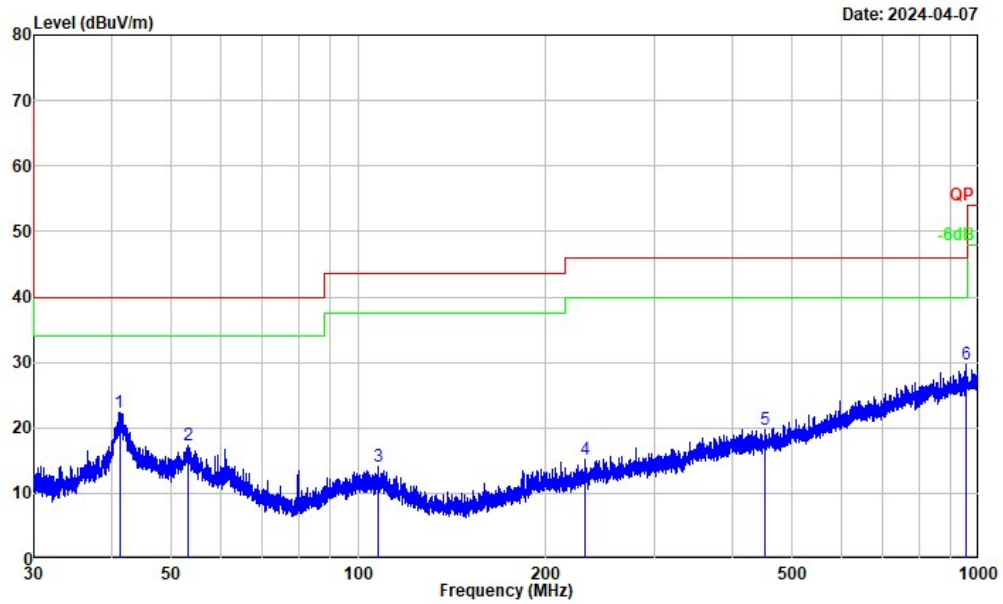

Project No. : RWAQ202400265  
Test Mode : Transmitting  
Test Voltage : Power by battery  
Environment : 24.2°C/65%R.H./100.4kPa  
Tested by : Bard Huang  
Polarization : vertical  
Remark : 2460MHz

--No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Detector
1	41.242	35.05	-12.74	22.31	40.00	-17.69	Peak
2	53.158	29.74	-12.32	17.42	40.00	-22.58	Peak
3	107.386	28.24	-14.04	14.20	43.50	-29.30	Peak
4	232.082	28.14	-12.95	15.19	46.00	-30.81	Peak
5	451.486	28.03	-8.25	19.78	46.00	-26.22	Peak
6	954.177	29.50	0.26	29.76	46.00	-16.24	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain

**Remark:**

*Result = Reading + Factor*

*Factor = Antenna factor + Cable loss – Amplifier gain*

*Over Limit = Result – Limit*

**Above 1GHz:**

<b>Test Date:</b>	2024-04-09	<b>Test By:</b>	Bard Huang
<b>Environment condition:</b>	Temperature: 23.6°C; Relative Humidity:62%; ATM Pressure: 100.9kPa		

Frequency (MHz)	Reading level (dBμV)	Polar	Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
Low Channel							
2420.000	101.79	horizontal	-1.78	100.01	114.00	-13.99	Peak
2420.000	93.37	vertical	-1.78	91.59	114.00	-22.41	Peak
2400.000	64.67	horizontal	-1.76	62.91	74.00	-11.09	Peak
2400.000	55.56	vertical	-1.76	53.80	74.00	-20.20	Peak
4840.000	56.46	horizontal	0.29	56.75	74.00	-17.25	Peak
7260.000	60.24	horizontal	3.17	63.41	74.00	-10.59	Peak
4840.000	54.95	vertical	0.29	55.24	74.00	-18.76	Peak
7260.000	57.31	vertical	3.17	60.48	74.00	-13.52	Peak
Middle Channel							
2440.000	101.60	horizontal	-1.78	99.82	114.00	-14.18	Peak
2440.000	94.23	vertical	-1.78	92.45	114.00	-21.55	Peak
4880.000	59.33	horizontal	0.44	59.77	74.00	-14.23	Peak
7320.000	54.80	horizontal	3.04	57.84	74.00	-16.16	Peak
4880.000	53.58	vertical	0.44	54.02	74.00	-19.98	Peak
7320.000	54.36	vertical	3.04	57.40	74.00	-16.60	Peak
High Channel							
2460.000	101.97	horizontal	-1.78	100.19	114.00	-13.81	Peak
2460.000	93.06	vertical	-1.78	91.28	114.00	-22.72	Peak
2483.500	63.05	horizontal	-1.75	61.30	74.00	-12.70	Peak
2483.500	54.84	vertical	-1.75	53.09	74.00	-20.91	Peak
4920.000	58.32	horizontal	0.66	58.98	74.00	-15.02	Peak
7380.000	54.13	horizontal	3.09	57.22	74.00	-16.78	Peak
4920.000	51.95	vertical	0.66	52.61	74.00	-21.39	Peak
7380.000	55.28	vertical	3.09	58.37	74.00	-15.63	Peak

Remark:

Corrected Amplitude= Reading level + corrected Factor

Corrected Factor = Antenna factor + Cable loss – Amplifier gain

Margin = Corrected Amplitude – Limit

The emission levels of other frequencies that were lower than the limit 20dB not show in test report.

For emissions in 18GHz-25GHz range, all emissions were investigated and in the noise floor level.

**Field strength of average:**

Frequency (MHz)	Peak level (dBμV/m)	Polar (H/V)	Duty Cycle Factor (dB)	Average Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
Low Channel							
2420	100.01	horizontal	-19.96	80.05	94	-13.95	Average
2420	91.59	vertical	-19.96	71.63	94	-22.37	Average
2400	62.91	horizontal	-19.96	42.95	54	-11.05	Average
2400	53.8	vertical	-19.96	33.84	54	-20.16	Average
4840	56.75	horizontal	-19.96	36.79	54	-17.21	Average
7260	63.41	horizontal	-19.96	43.45	54	-10.55	Average
4840	55.24	vertical	-19.96	35.28	54	-18.72	Average
7260	60.48	vertical	-19.96	40.52	54	-13.48	Average
Middle Channel							
2440	99.82	horizontal	-19.96	79.86	94	-14.14	Average
2440	92.45	vertical	-19.96	72.49	94	-21.51	Average
4880	59.77	horizontal	-19.96	39.81	54	-14.19	Average
7320	57.84	horizontal	-19.96	37.88	54	-16.12	Average
4880	54.02	vertical	-19.96	34.06	54	-19.94	Average
7320	57.4	vertical	-19.96	37.44	54	-16.56	Average
High Channel							
2460	100.19	horizontal	-19.96	80.23	94	-13.77	Average
2460	91.28	vertical	-19.96	71.32	94	-22.68	Average
2483.5	61.3	horizontal	-19.96	41.34	54	-12.66	Average
2483.5	53.09	vertical	-19.96	33.13	54	-20.87	Average
4920	58.98	horizontal	-19.96	39.02	54	-14.98	Average
7380	57.22	horizontal	-19.96	37.26	54	-16.74	Average
4920	52.61	vertical	-19.96	32.65	54	-21.35	Average
7380	58.37	vertical	-19.96	38.41	54	-15.59	Average



Remark:

Average Amplitude= Peak level + Duty Cycle Factor

Margin= Average Amplitude - Limit


Duty Cycle= Ton/Tp=0.810/8.059=10.05%

Duty Cycle Factor=20\*log(Duty Cycle)=-19.96

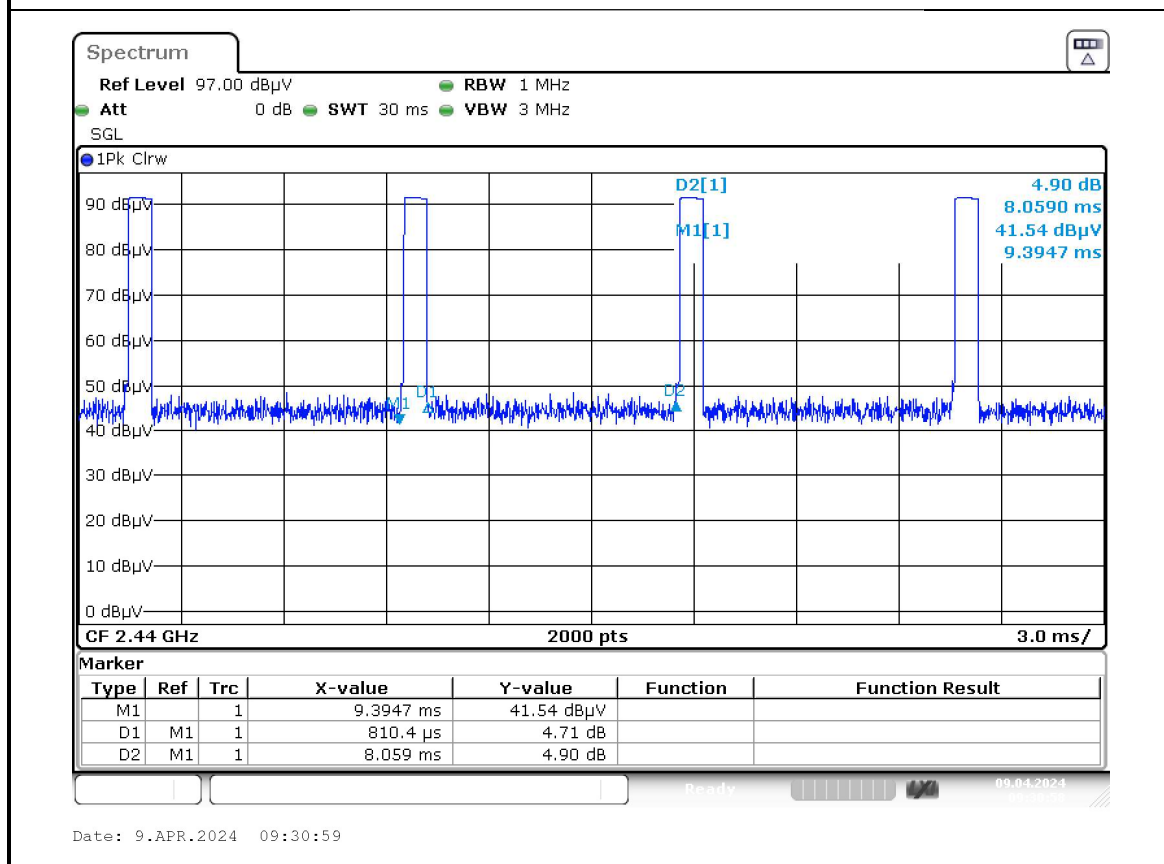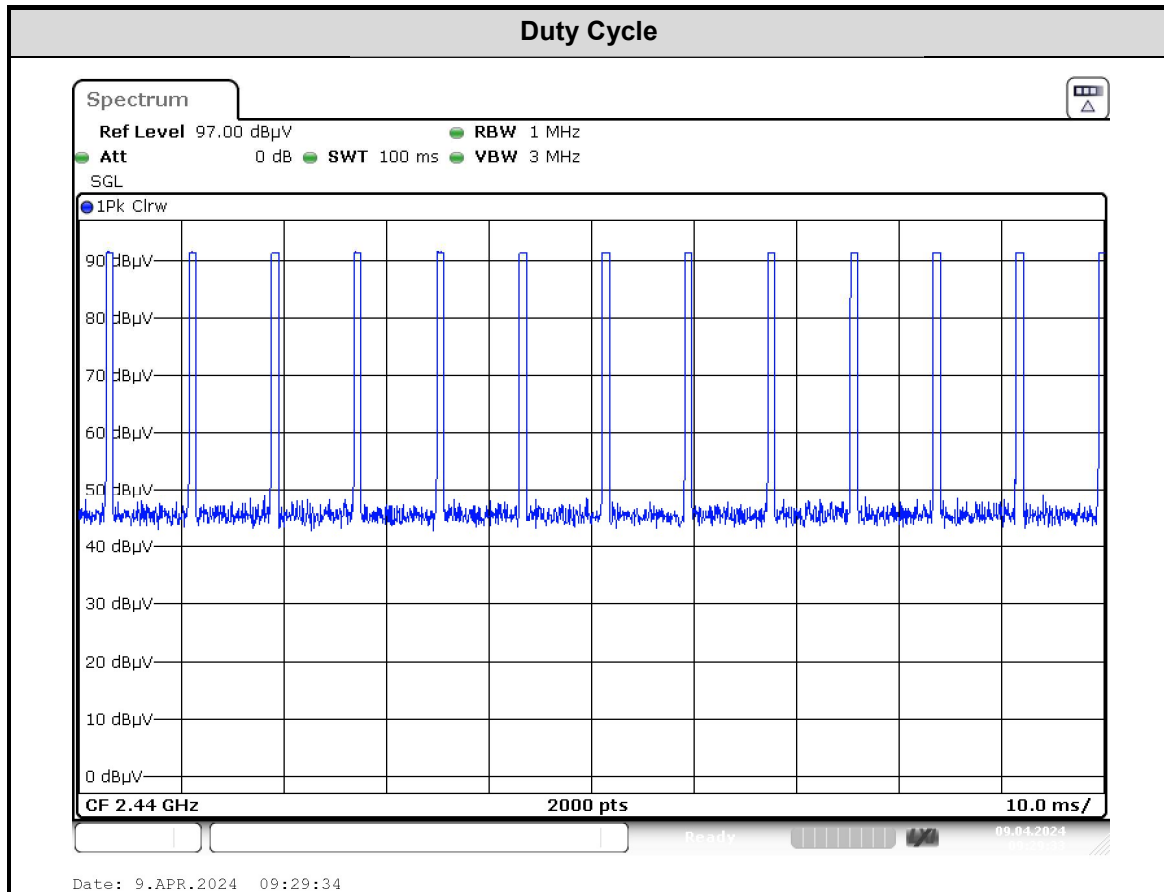




**Test plot for example as below:**

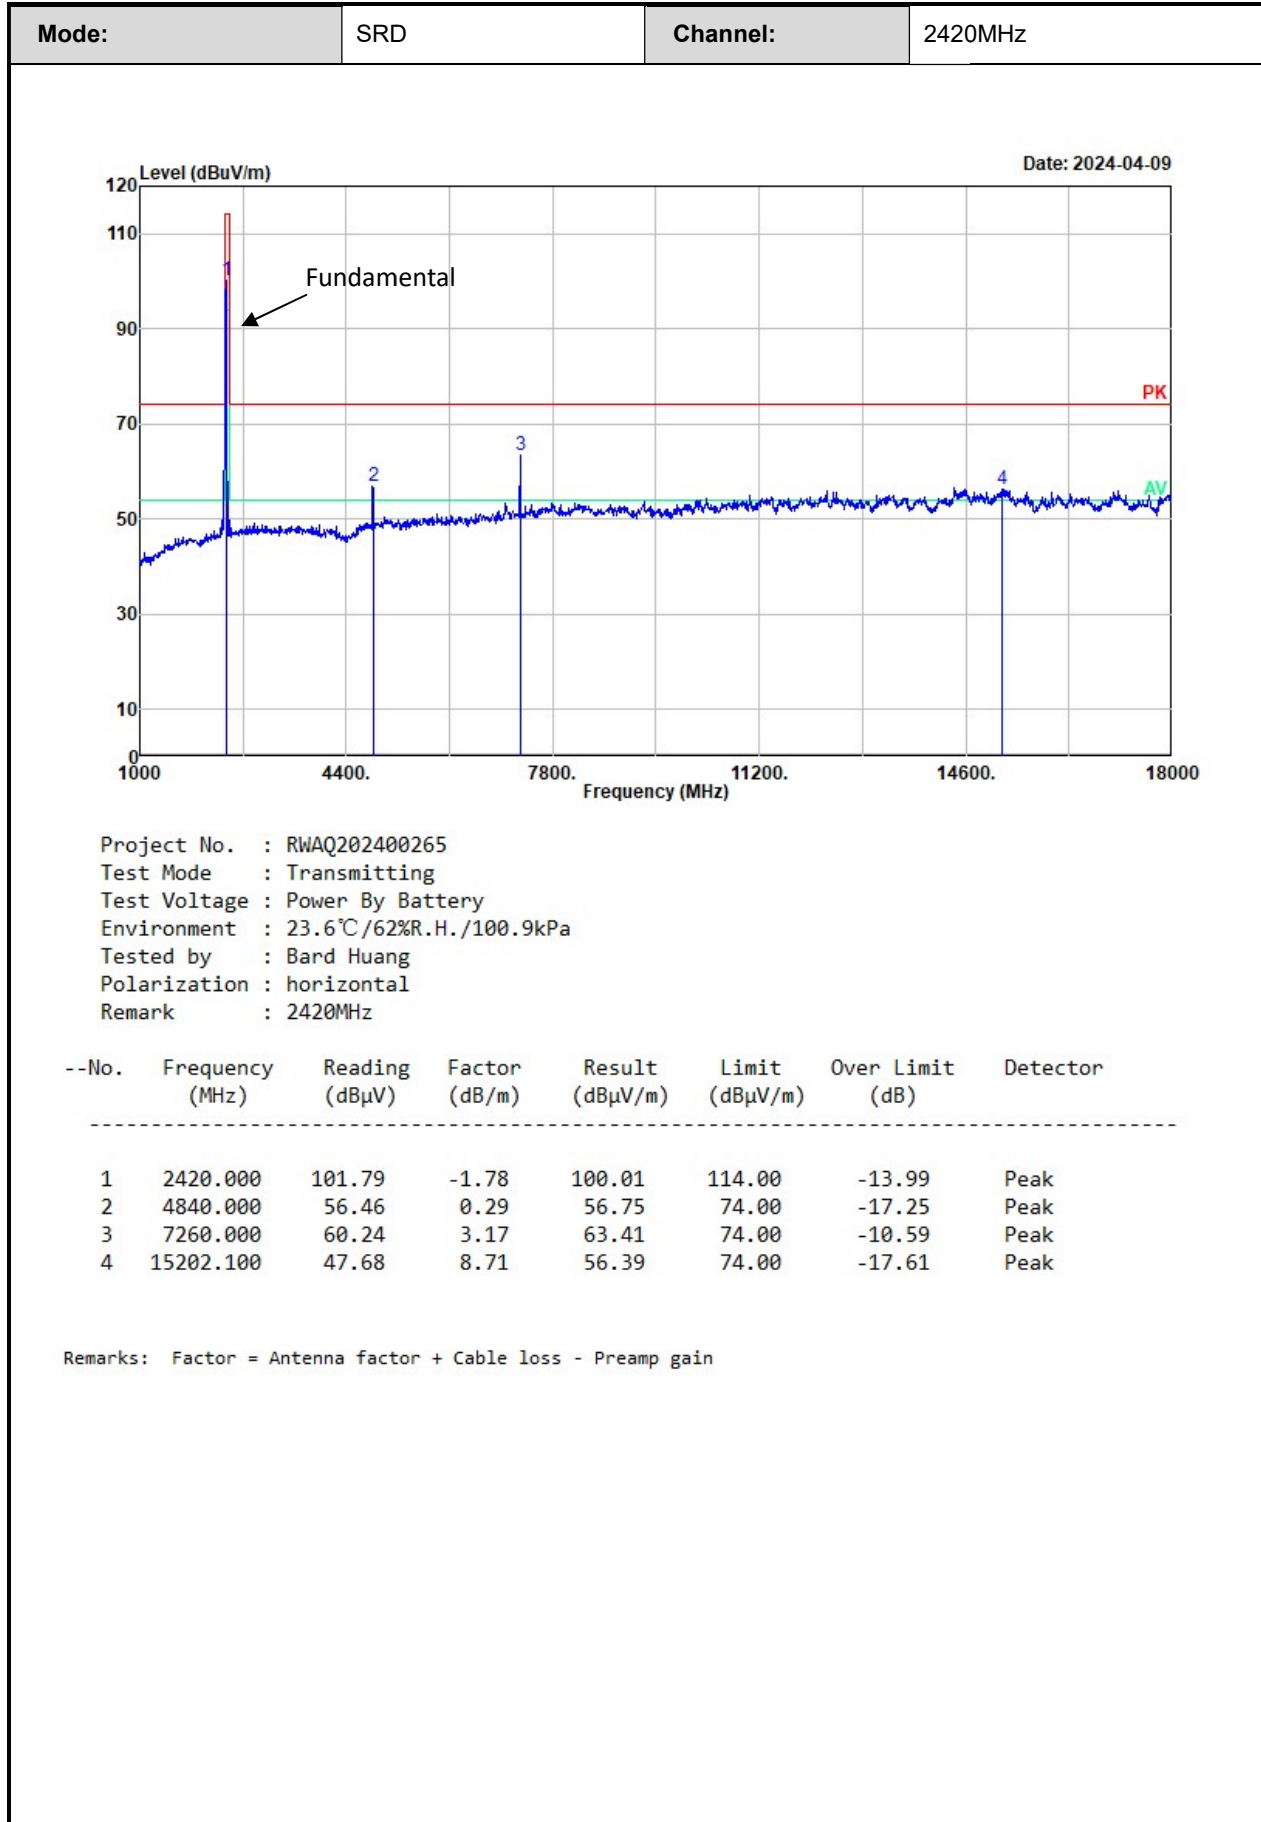



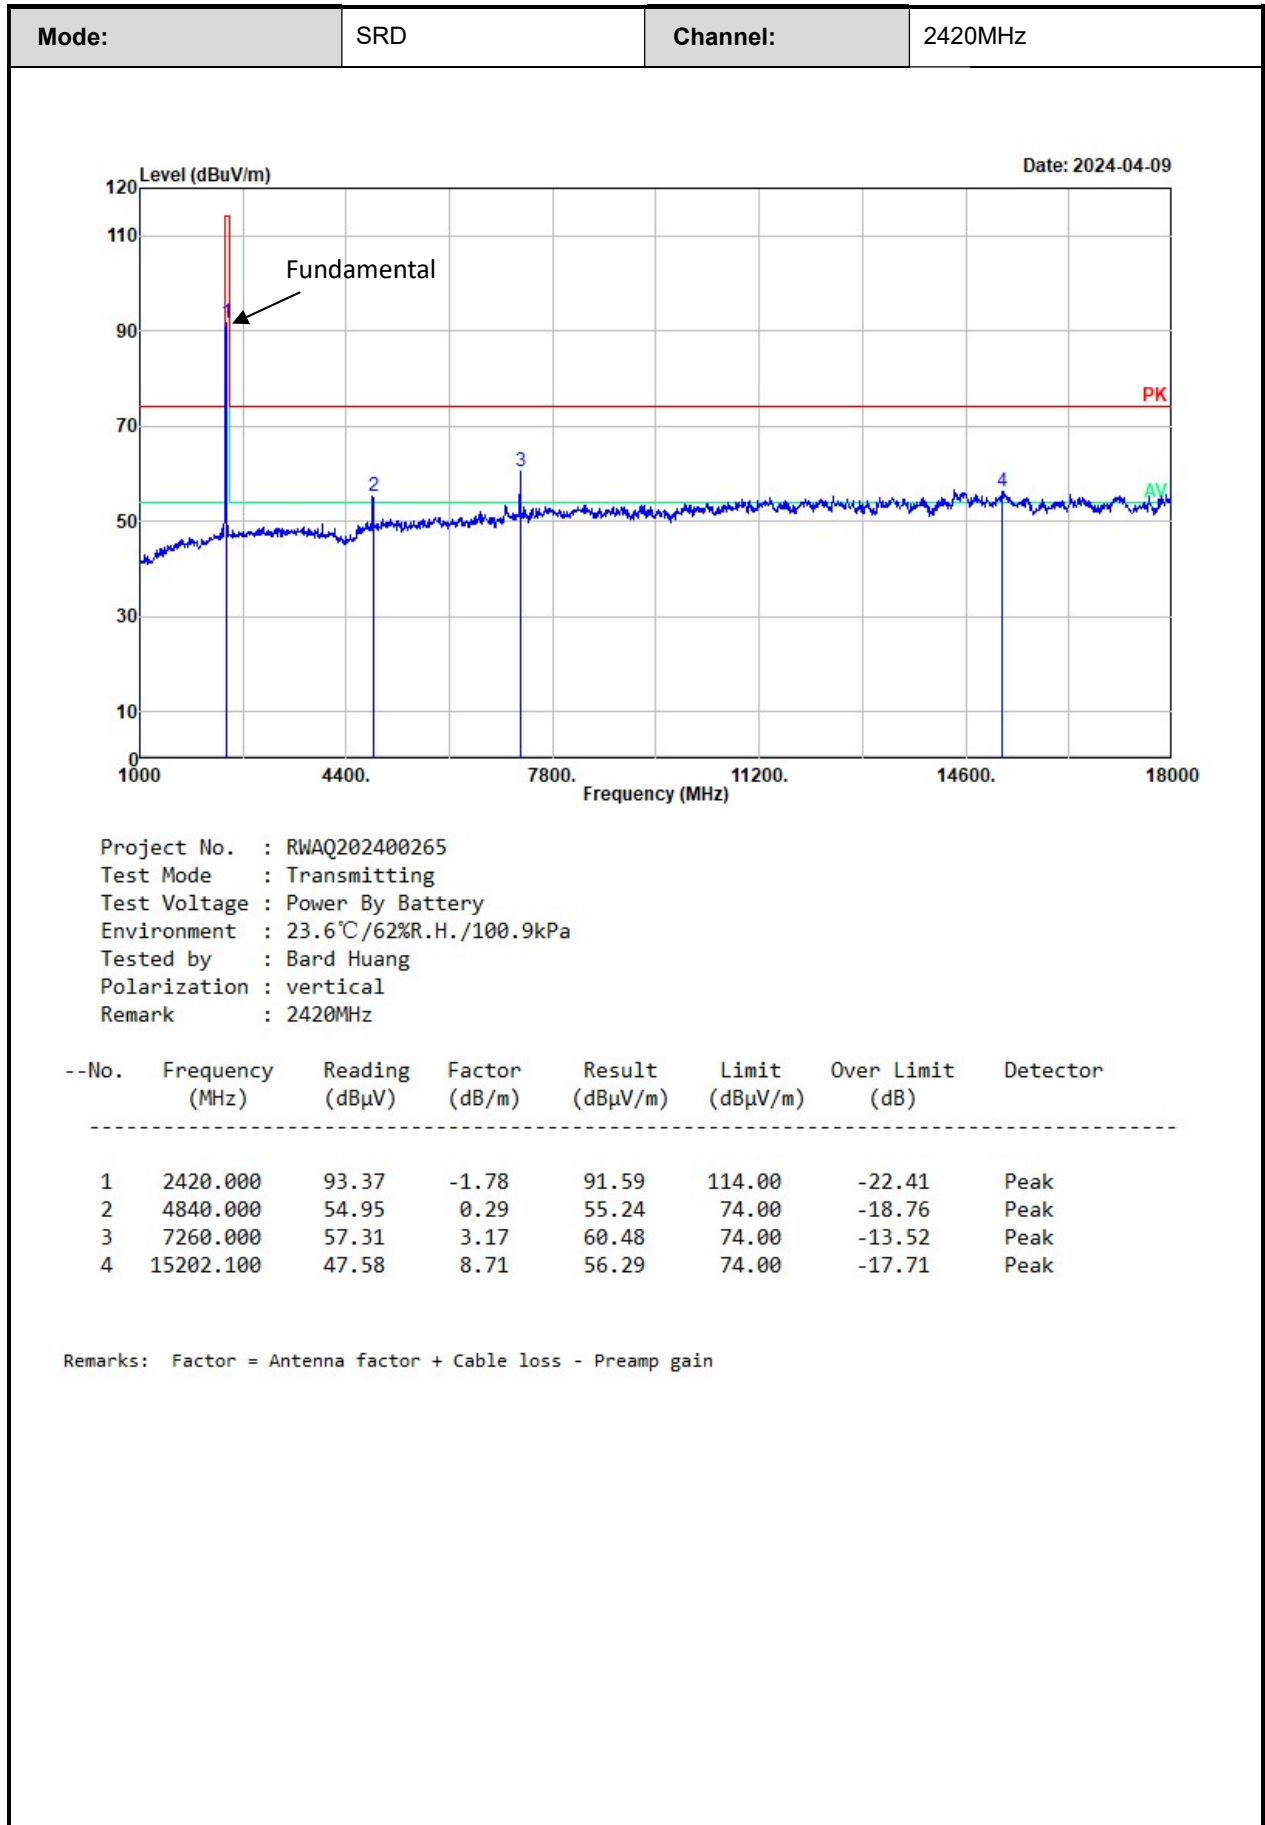


### 3.5 Bandwidth Test Data

Test Date:	2024-04-02	Test By:	Ryan Zhang
Environment condition:	Temperature: 23.3°C; Relative Humidity:60%; ATM Pressure: 101.3kPa		

Channel	20dB BW [MHz]
Low	3.862
Middle	3.554
High	2.885

### Test Plots:

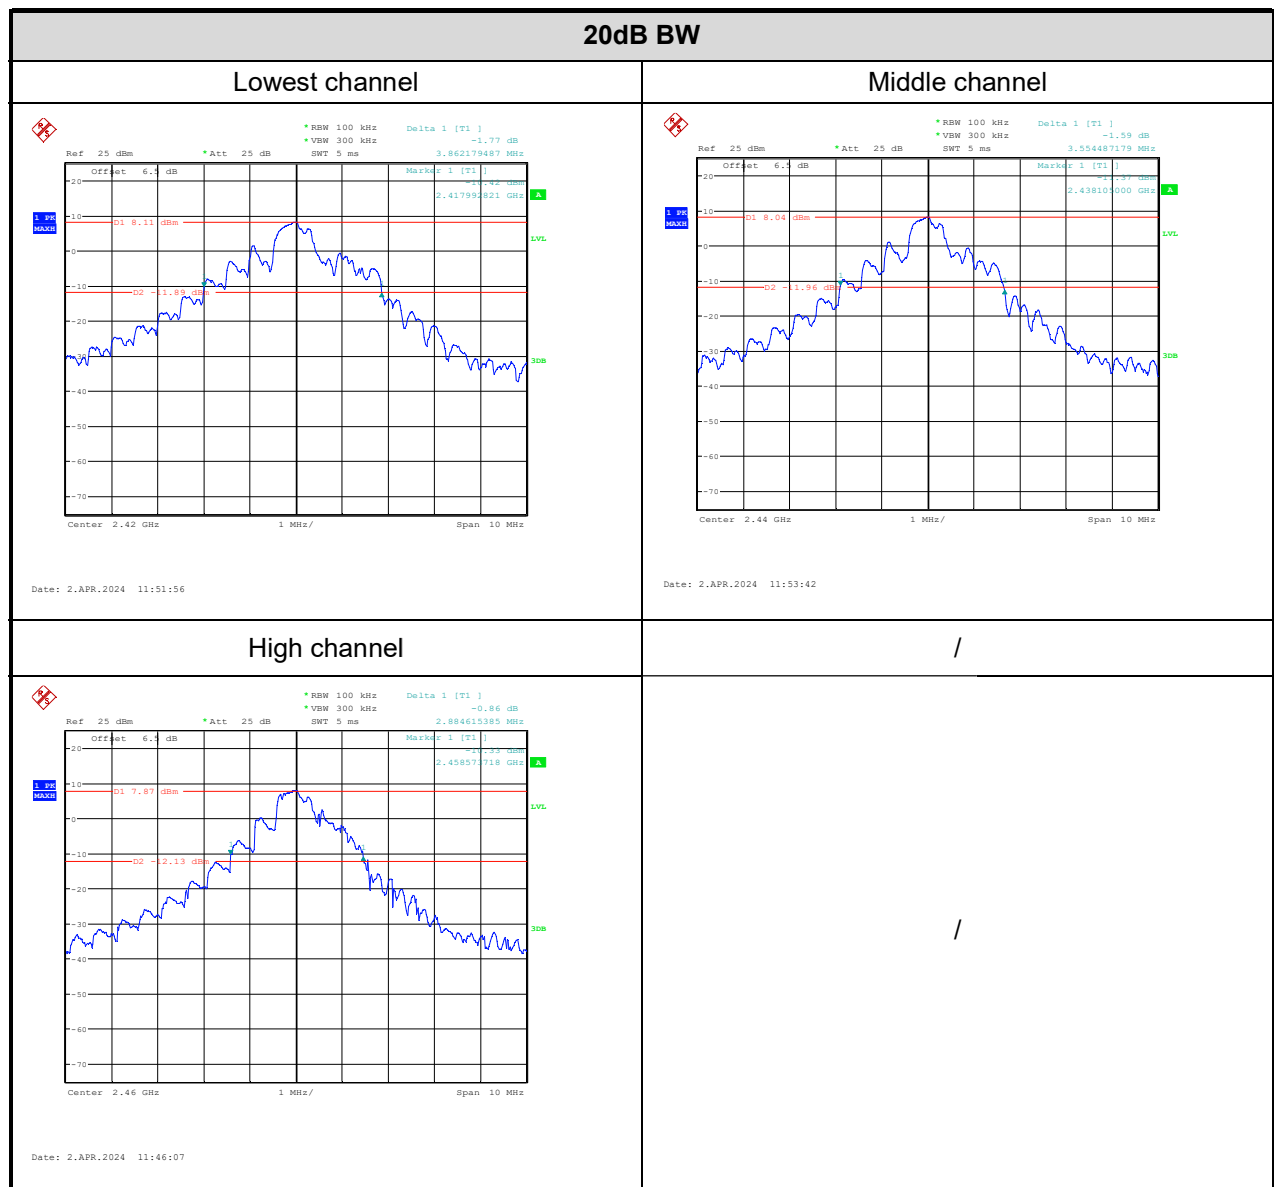

## 4 Test Setup Photo

Please refer to the attachment RWAQ202400265 Test Setup photo.

## 5 E.U.T Photo

Please refer to the attachment

1. RWAQ202400265 DR-ST130B External photo;
2. RWAQ202400265 DR-ST130B Internal photo;
3. RWAQ202400265 DR-ATM11B External photo;
4. RWAQ202400265 DR-ATM11B Internal photo.

**---End of Report---**