


3301PF Receiver theory

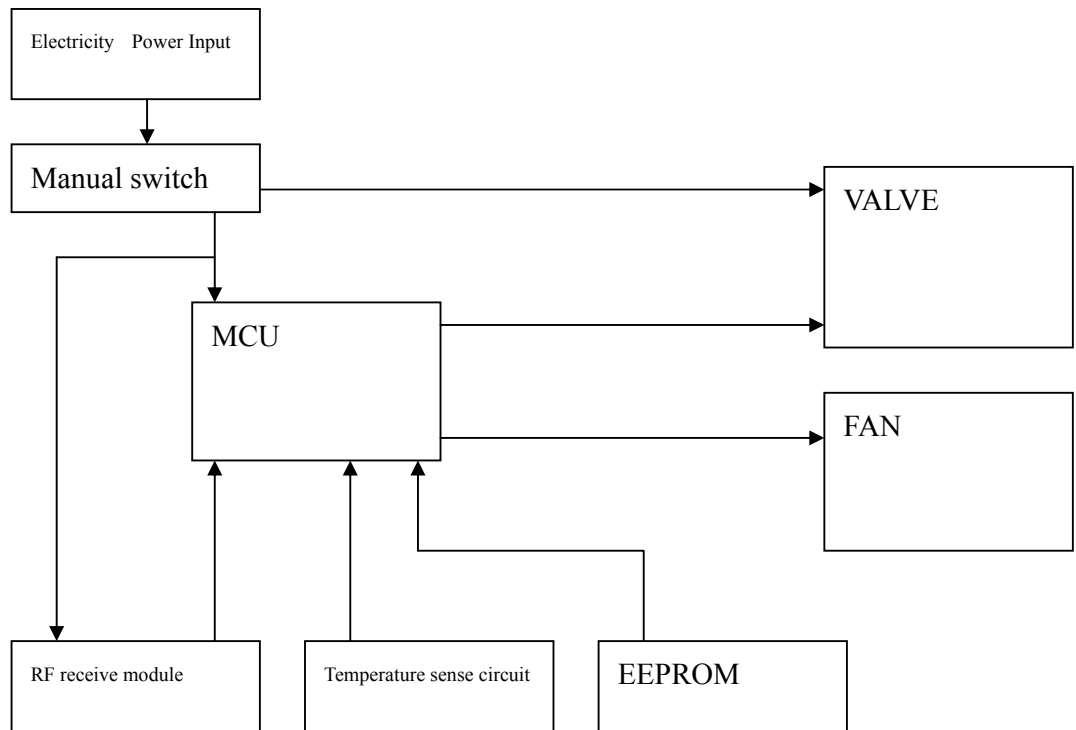

1. System supply by battery and MCU control this system
2. There are one switch for user select control by manual or remote
3. Receiver when control by remote it output status same as remote display.
4. There are two output one is dry contact another is fan speed control.
5. Temperature sensor sense the environment temperature when temperature too high receiver will cut off all output.