



Test Mode: 07; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

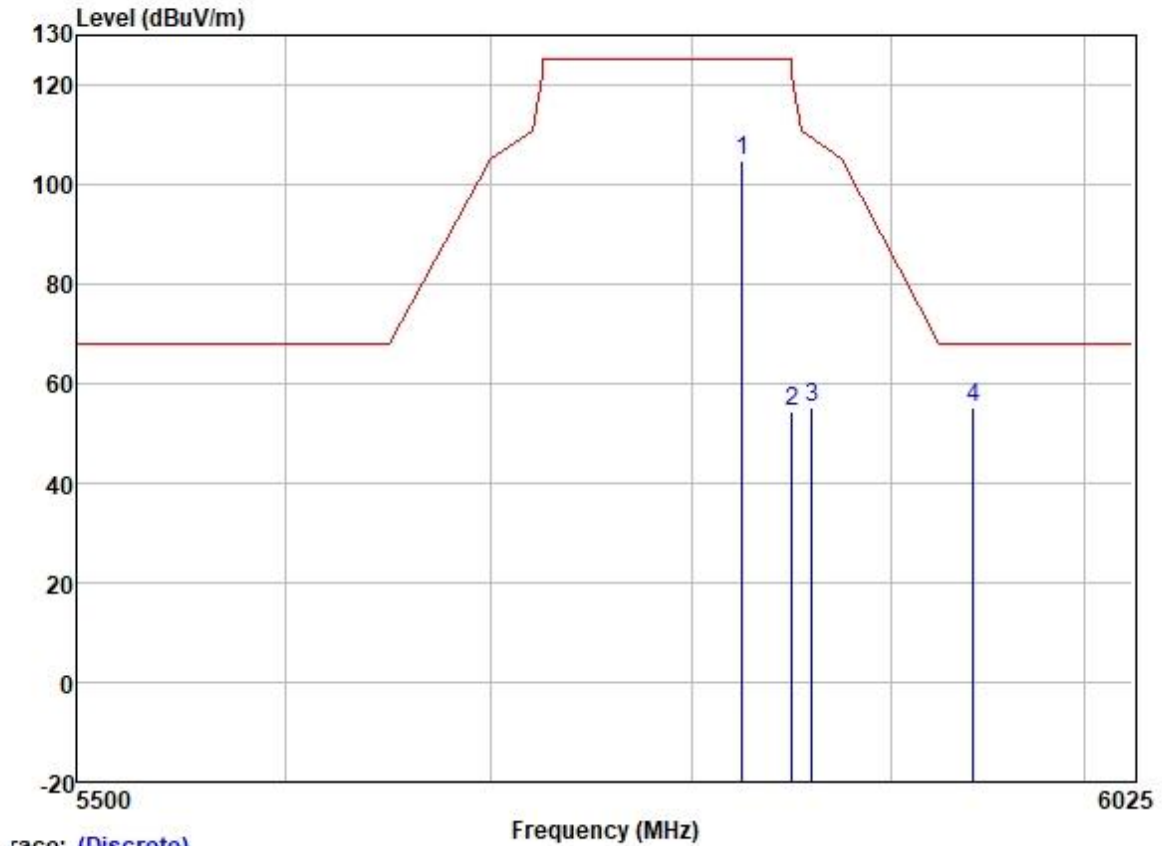

Trace: (Discrete)

		ReadAntenna	Cable	Preamp		Limit	Over			
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5825.000	103.41	32.23	6.04	36.90	104.78	125.20	-20.42	VERTICAL	Peak
2	5850.000	52.89	32.25	6.00	36.90	54.24	122.20	-67.96	VERTICAL	Peak
3	5860.000	53.96	32.27	5.96	36.90	55.29	109.40	-54.11	VERTICAL	Peak
4	5942.331	53.74	32.36	6.05	36.90	55.25	68.20	-12.95	VERTICAL	Peak


Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

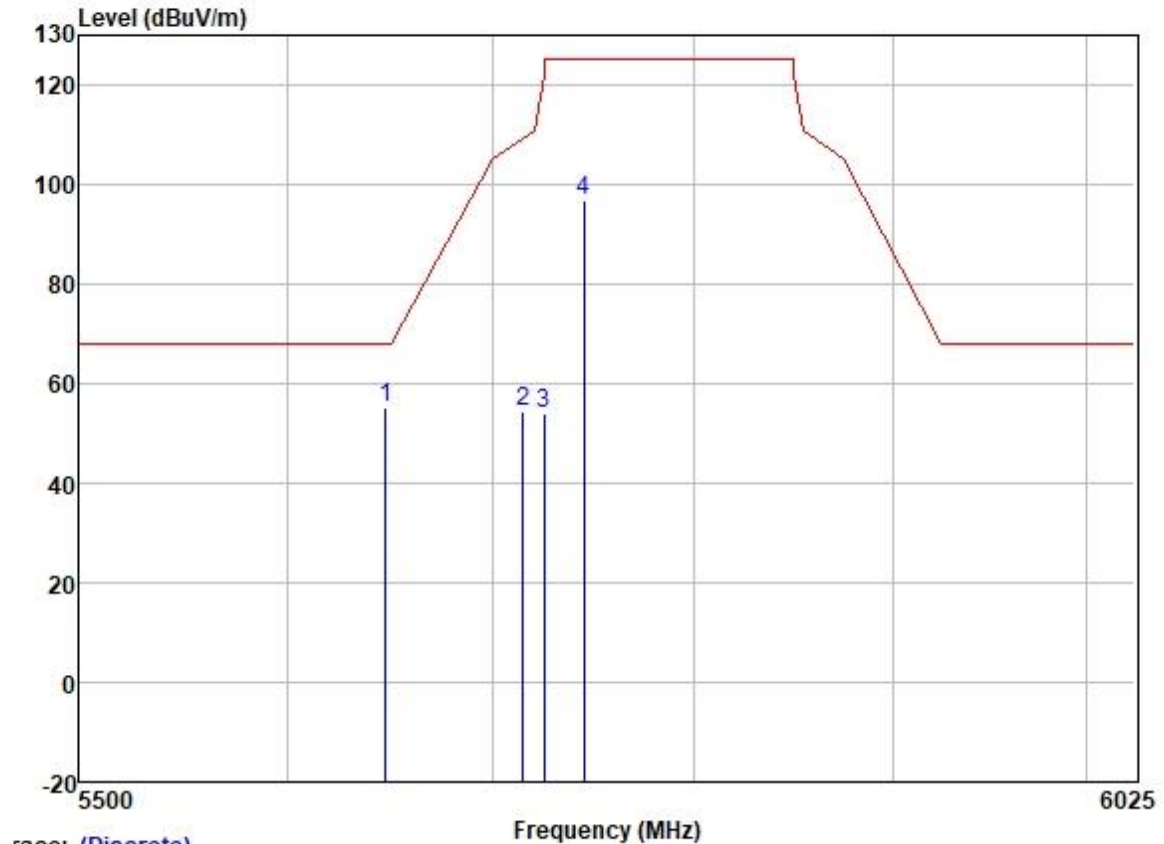

Trace: (Discrete)


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Limit Level	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5647.473	53.95	31.95	6.35	36.89	55.36	68.20	-12.84	HORIZONTAL Peak
2	5715.000	52.77	32.04	6.33	36.89	54.25	109.40	-55.15	HORIZONTAL Peak
3	5725.000	52.60	32.07	6.25	36.89	54.03	122.20	-68.17	HORIZONTAL Peak
4	5745.000	95.24	32.10	6.20	36.89	96.65	125.20	-28.55	HORIZONTAL Peak

Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

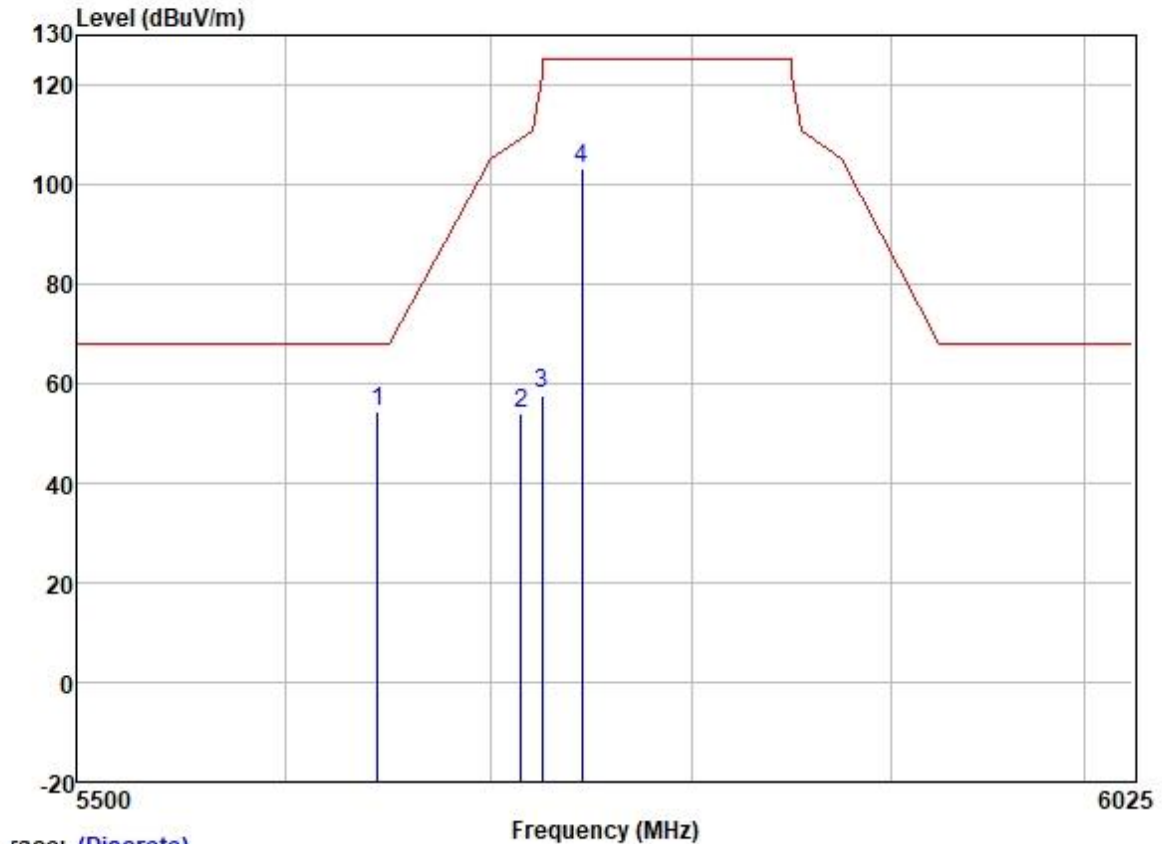

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5644.565	52.80	31.95	6.35	36.89	54.21	68.20	-13.99	VERTICAL	Peak
2	5715.000	52.58	32.04	6.33	36.89	54.06	109.40	-55.34	VERTICAL	Peak
3	5725.000	56.37	32.07	6.25	36.89	57.80	122.20	-64.40	VERTICAL	Peak
4	5745.000	101.74	32.10	6.20	36.89	103.15	125.20	-22.05	VERTICAL	Peak


Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

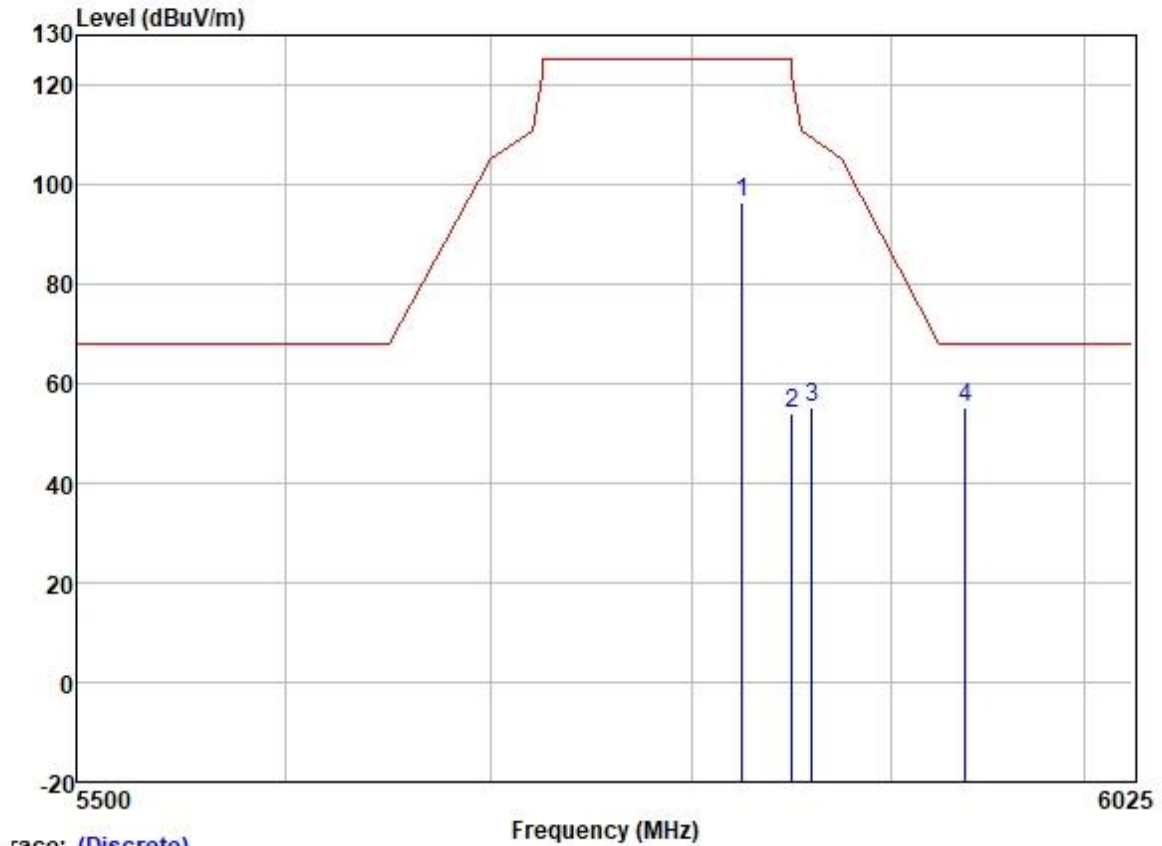

Trace: (Discrete)


	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5825.000	94.90	32.23	6.04	36.90	96.27	125.20	-28.93	HORIZONTAL	Peak
2	5850.000	52.47	32.25	6.00	36.90	53.82	122.20	-68.38	HORIZONTAL	Peak
3	5860.000	53.85	32.27	5.96	36.90	55.18	109.40	-54.22	HORIZONTAL	Peak
4	5938.250	53.88	32.34	6.00	36.90	55.32	68.20	-12.88	HORIZONTAL	Peak

Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

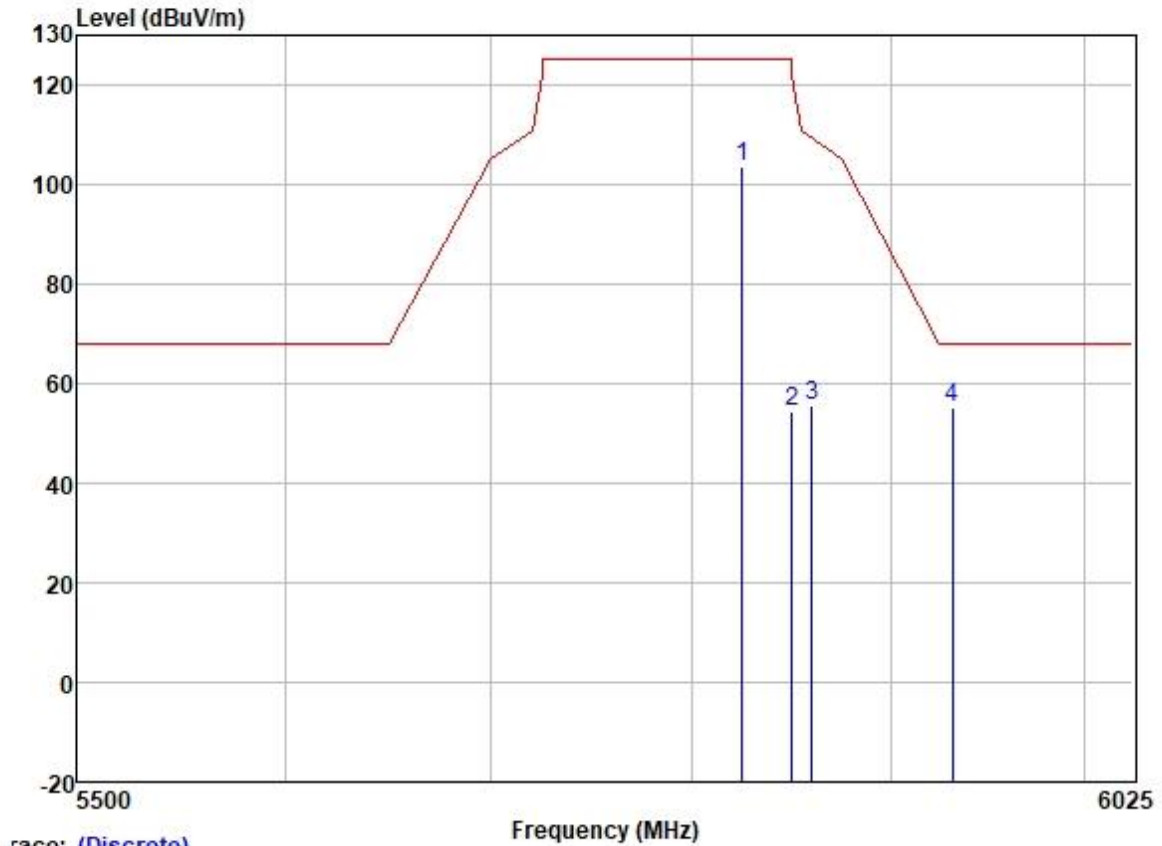


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	5825.000	102.24	32.23	6.04	36.90	103.61	125.20	-21.59	VERTICAL Peak
2	5850.000	53.19	32.25	6.00	36.90	54.54	122.20	-67.66	VERTICAL Peak
3	5860.000	54.13	32.27	5.96	36.90	55.46	109.40	-53.94	VERTICAL Peak
4	5931.508	53.83	32.34	6.00	36.90	55.27	68.20	-12.93	VERTICAL Peak

Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

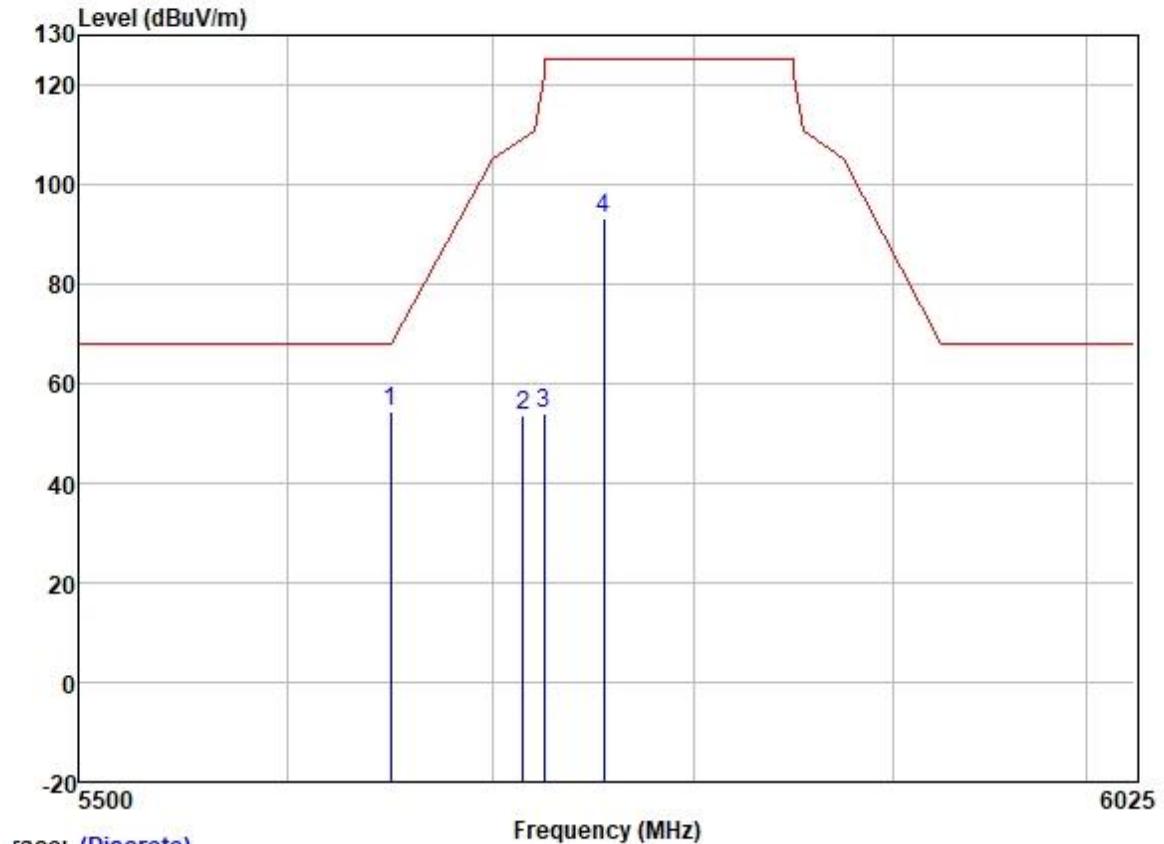


	ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5649.948	52.99	31.95	6.35	36.89	54.40	68.20	-13.80	HORIZONTAL Peak
2	5715.000	52.20	32.04	6.33	36.89	53.68	109.40	-55.72	HORIZONTAL Peak
3	5725.000	52.75	32.07	6.25	36.89	54.18	122.20	-68.02	HORIZONTAL Peak
4	5755.000	91.83	32.10	6.20	36.89	93.24	125.20	-31.96	HORIZONTAL Peak

Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

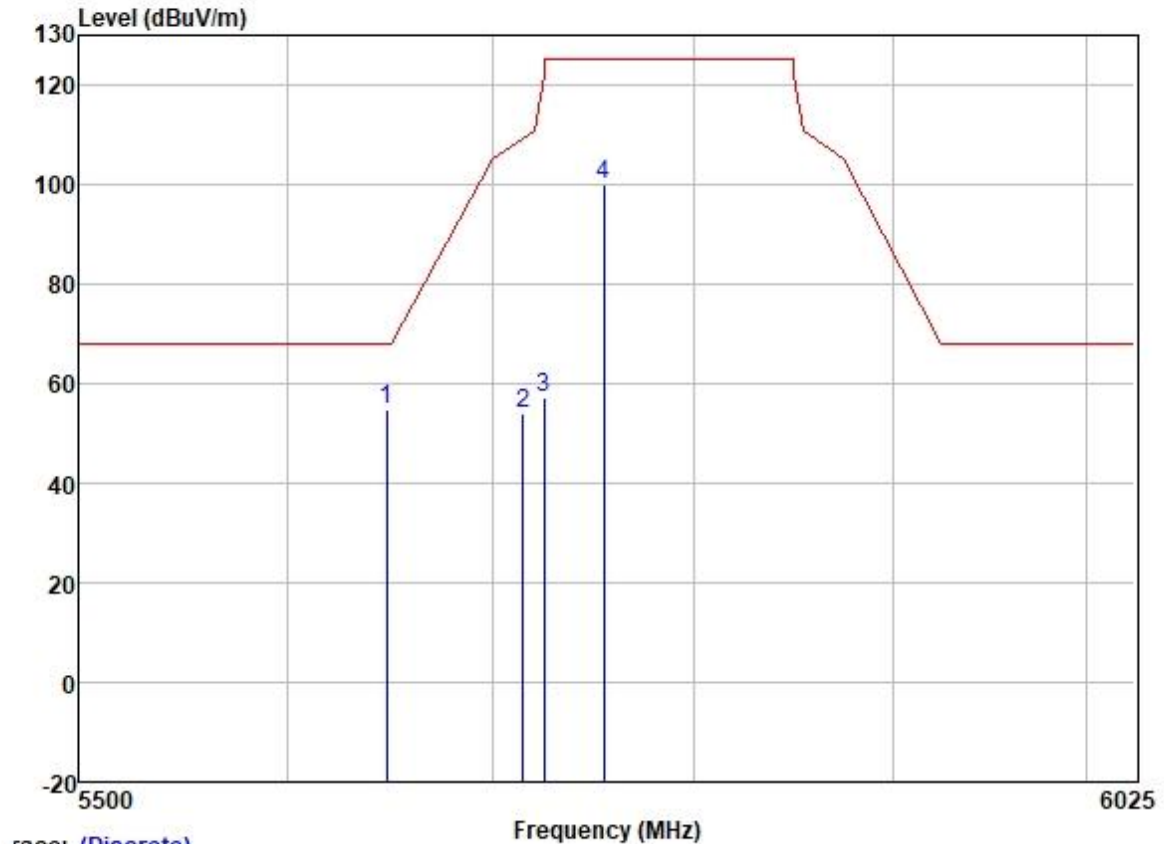

	ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5647.650	53.27	31.95	6.35	36.89	54.68	68.20	-13.52	VERTICAL Peak
2	5715.000	52.54	32.04	6.33	36.89	54.02	109.40	-55.38	VERTICAL Peak
3	5725.000	55.83	32.07	6.25	36.89	57.26	122.20	-64.94	VERTICAL Peak
4	5755.000	98.59	32.10	6.20	36.89	100.00	125.20	-25.20	VERTICAL Peak


Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

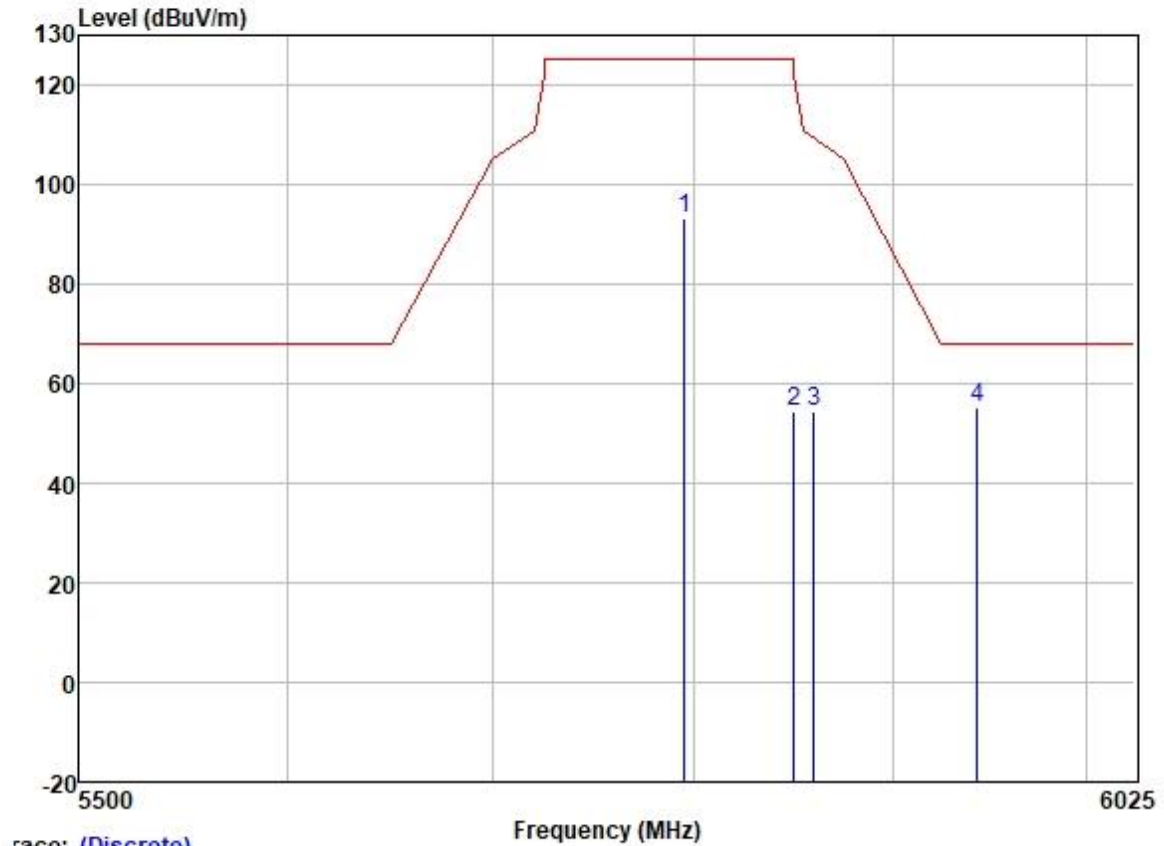

Trace: (Discrete)

		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5795.000	91.71	32.19	6.10	36.89	93.11	125.20	-32.09	HORIZONTAL	Peak
2	5850.000	53.23	32.25	6.00	36.90	54.58	122.20	-67.62	HORIZONTAL	Peak
3	5860.000	53.24	32.27	5.96	36.90	54.57	109.40	-54.83	HORIZONTAL	Peak
4	5943.576	53.80	32.36	6.05	36.90	55.31	68.20	-12.89	HORIZONTAL	Peak


Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

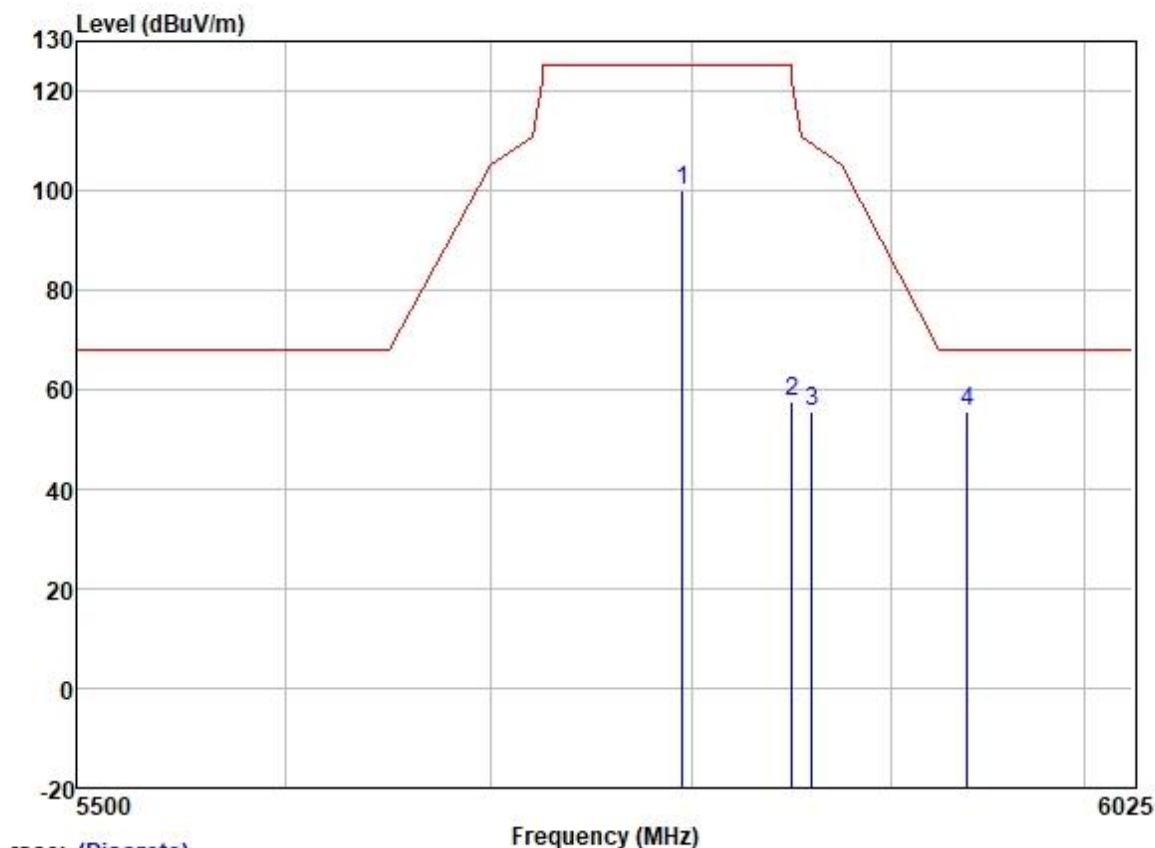

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5795.000	98.73	32.19	6.10	36.89	100.13	125.20	-25.07	VERTICAL	Peak
2	5850.000	56.44	32.25	6.00	36.90	57.79	122.20	-64.41	VERTICAL	Peak
3	5860.000	54.39	32.27	5.96	36.90	55.72	109.40	-53.68	VERTICAL	Peak
4	5939.103	54.07	32.34	6.00	36.90	55.51	68.20	-12.69	VERTICAL	Peak

Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

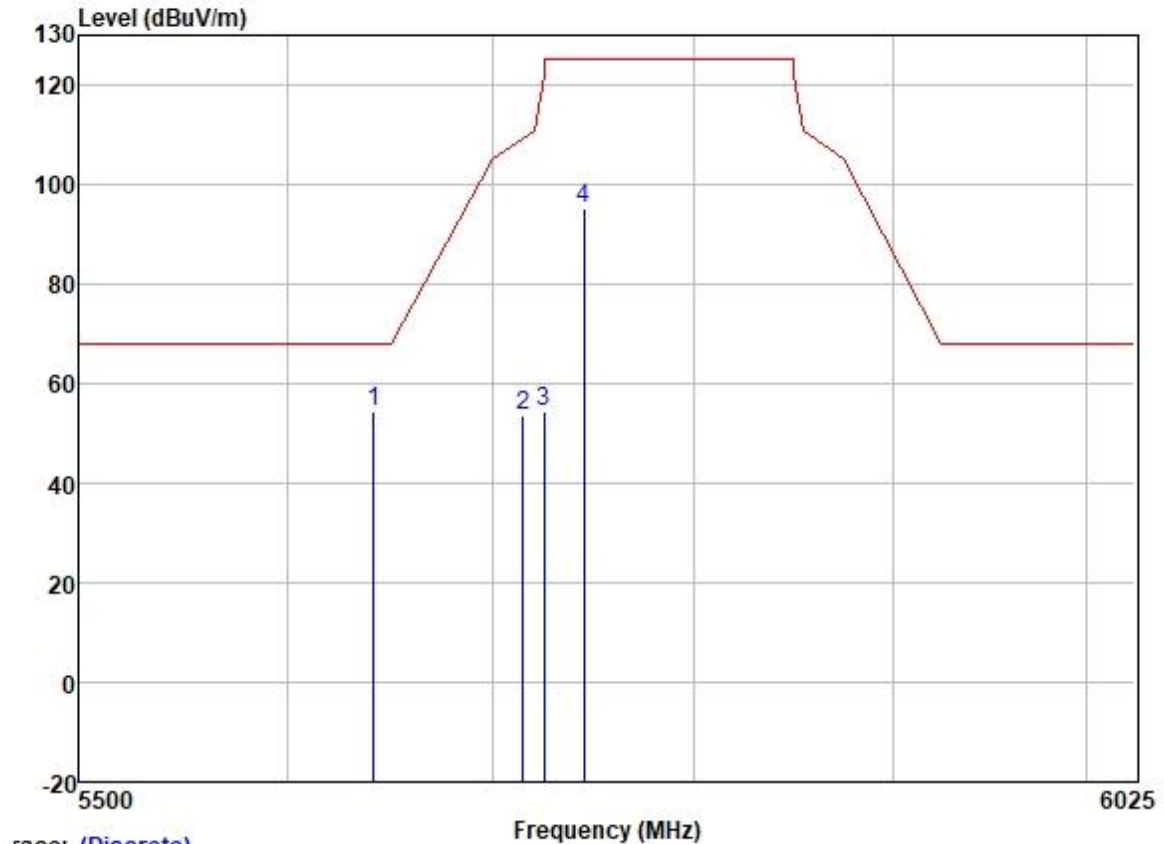


		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5641.521	53.12	31.95	6.35	36.89	54.53	68.20	-13.67	HORIZONTAL	Peak
2	5715.000	52.20	32.04	6.33	36.89	53.68	109.40	-55.72	HORIZONTAL	Peak
3	5725.000	52.92	32.07	6.25	36.89	54.35	122.20	-67.85	HORIZONTAL	Peak
4	5745.000	93.90	32.10	6.20	36.89	95.31	125.20	-29.89	HORIZONTAL	Peak

Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

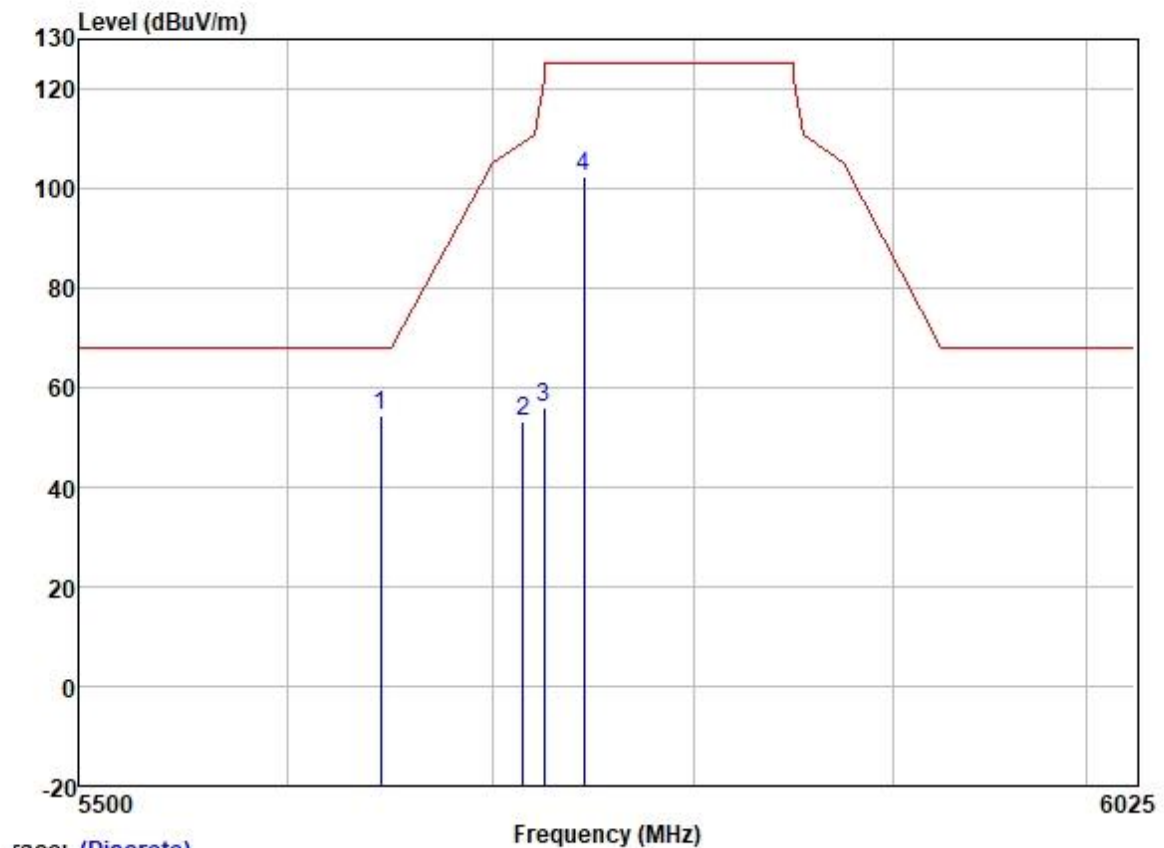


	ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5644.980	52.84	31.95	6.35	36.89	54.25	68.20	-13.95	VERTICAL Peak
2	5715.000	51.73	32.04	6.33	36.89	53.21	109.40	-56.19	VERTICAL Peak
3	5725.000	54.60	32.07	6.25	36.89	56.03	122.20	-66.17	VERTICAL Peak
4	5745.000	100.85	32.10	6.20	36.89	102.26	125.20	-22.94	VERTICAL Peak

Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

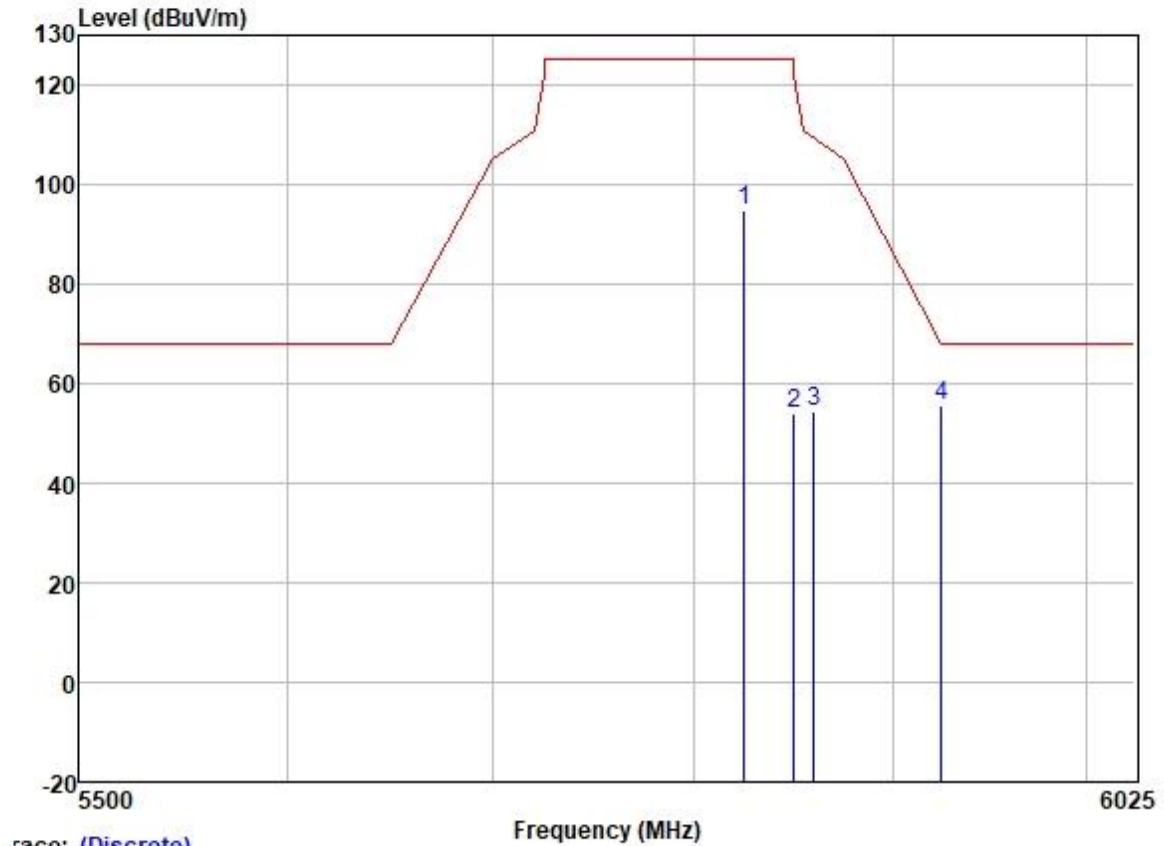

		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5825.000	93.61	32.23	6.04	36.90	94.98	125.20	-30.22	HORIZONTAL	Peak
2	5850.000	52.67	32.25	6.00	36.90	54.02	122.20	-68.18	HORIZONTAL	Peak
3	5860.000	52.98	32.27	5.96	36.90	54.31	109.40	-55.09	HORIZONTAL	Peak
4	5924.931	54.20	32.34	6.00	36.90	55.64	68.25	-12.61	HORIZONTAL	Peak


Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

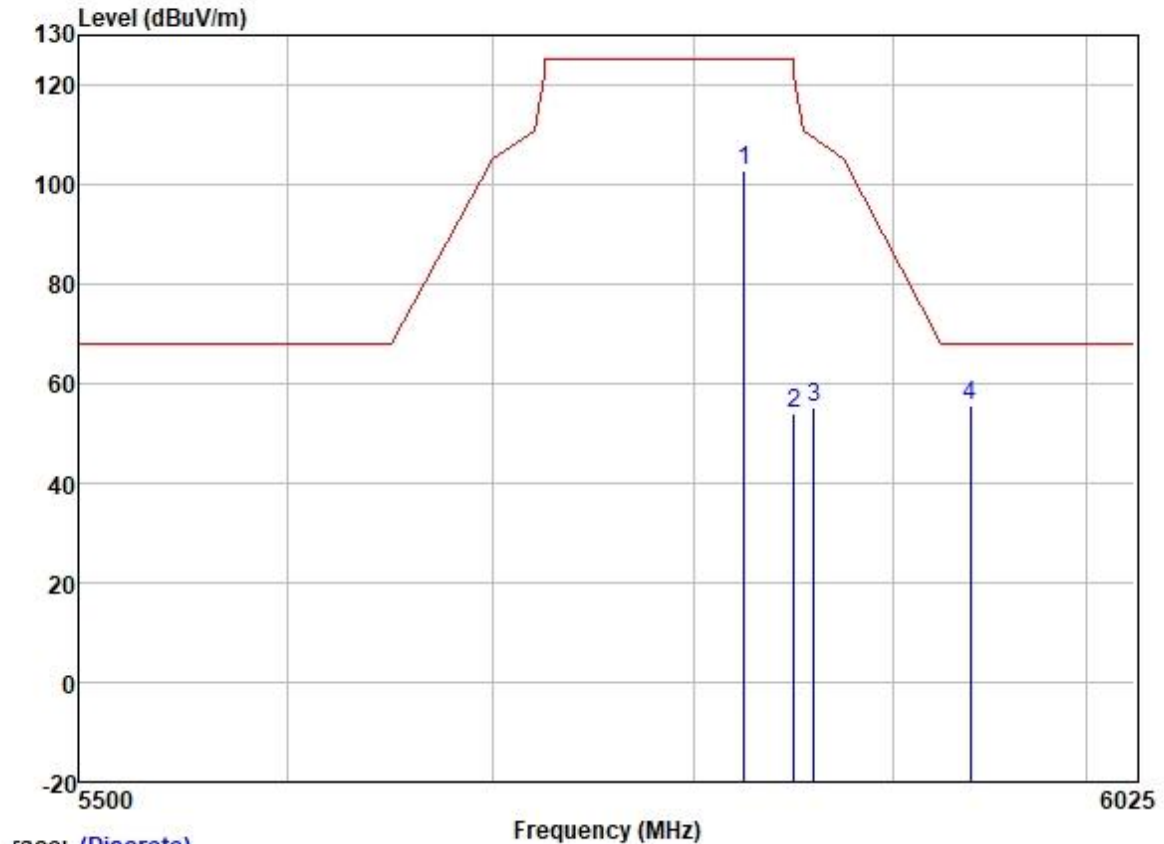

Trace: (Discrete)


		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5825.000	101.56	32.23	6.04	36.90	102.93	125.20	-22.27	VERTICAL	Peak
2	5850.000	52.84	32.25	6.00	36.90	54.19	122.20	-68.01	VERTICAL	Peak
3	5860.000	53.89	32.27	5.96	36.90	55.22	109.40	-54.18	VERTICAL	Peak
4	5939.976	54.03	32.34	6.00	36.90	55.47	68.20	-12.73	VERTICAL	Peak

Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

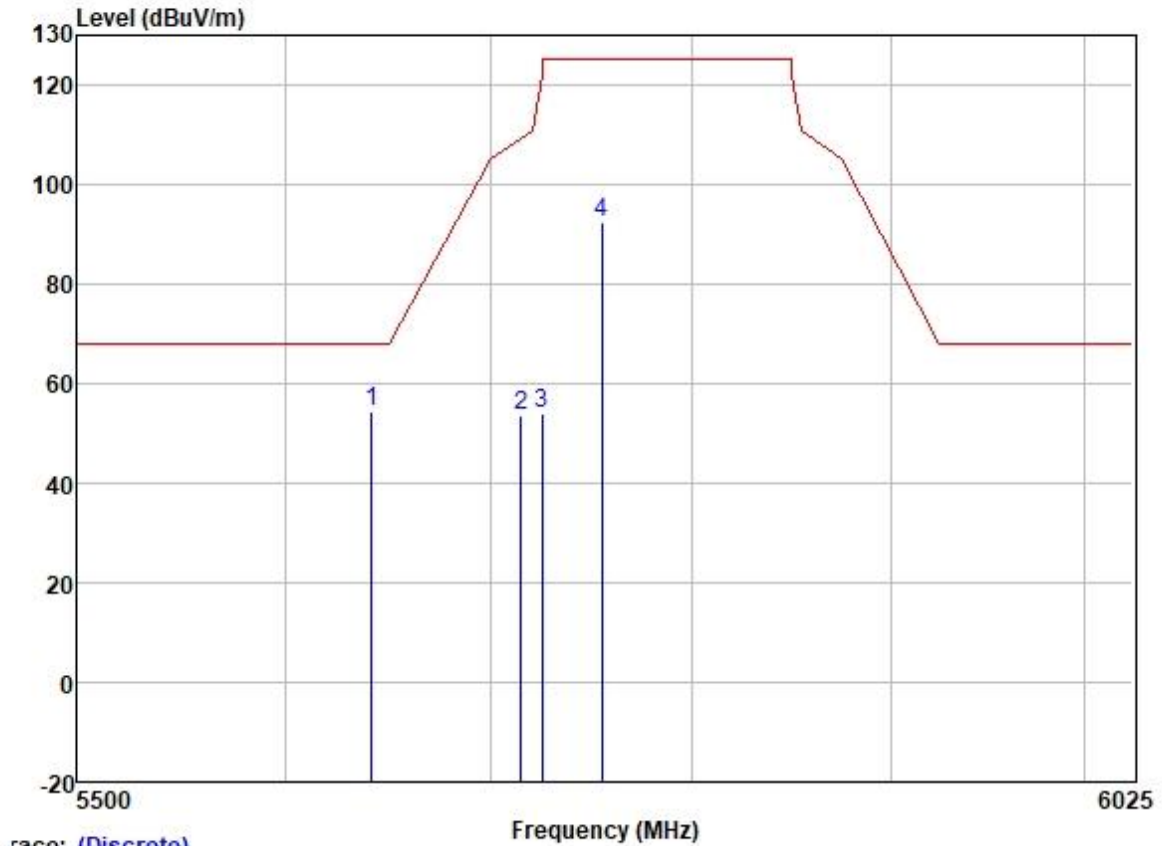

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5641.682	52.94	31.95	6.35	36.89	54.35	68.20	-13.85	HORIZONTAL	Peak
2	5715.000	52.12	32.04	6.33	36.89	53.60	109.40	-55.80	HORIZONTAL	Peak
3	5725.000	52.46	32.07	6.25	36.89	53.89	122.20	-68.31	HORIZONTAL	Peak
4	5755.000	90.96	32.10	6.20	36.89	92.37	125.20	-32.83	HORIZONTAL	Peak

Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

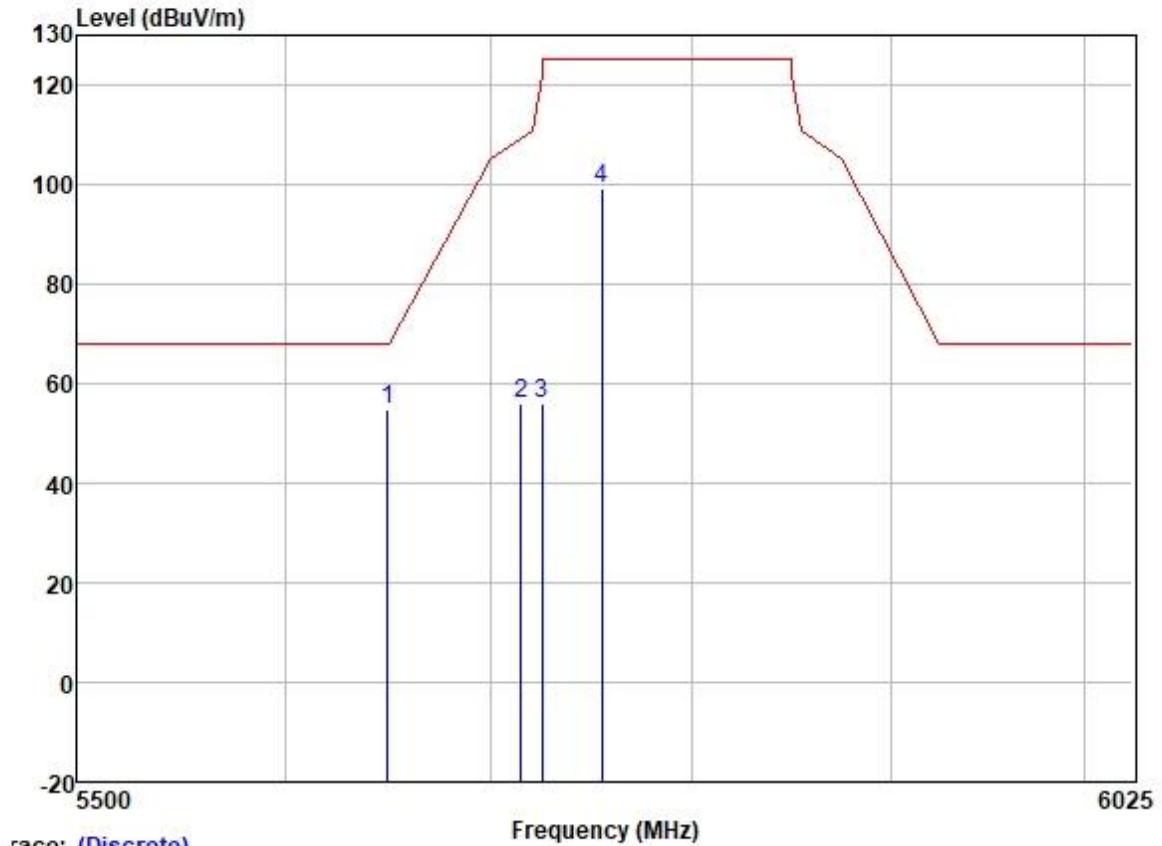

Trace: (Discrete)

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5649.335	53.46	31.95	6.35	36.89	54.87	68.20	-13.33	VERTICAL	Peak
2	5715.000	54.37	32.04	6.33	36.89	55.85	109.40	-53.55	VERTICAL	Peak
3	5725.000	54.57	32.07	6.25	36.89	56.00	122.20	-66.20	VERTICAL	Peak
4	5755.000	97.92	32.10	6.20	36.89	99.33	125.20	-25.87	VERTICAL	Peak


Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High



Trace: (Discrete)

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5795.000	90.70	32.19	6.10	36.89	92.10	125.20	-33.10	HORIZONTAL	Peak
2	5850.000	52.63	32.25	6.00	36.90	53.98	122.20	-68.22	HORIZONTAL	Peak
3	5860.000	52.98	32.27	5.96	36.90	54.31	109.40	-55.09	HORIZONTAL	Peak
4	5935.446	53.80	32.34	6.00	36.90	55.24	68.20	-12.96	HORIZONTAL	Peak


Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

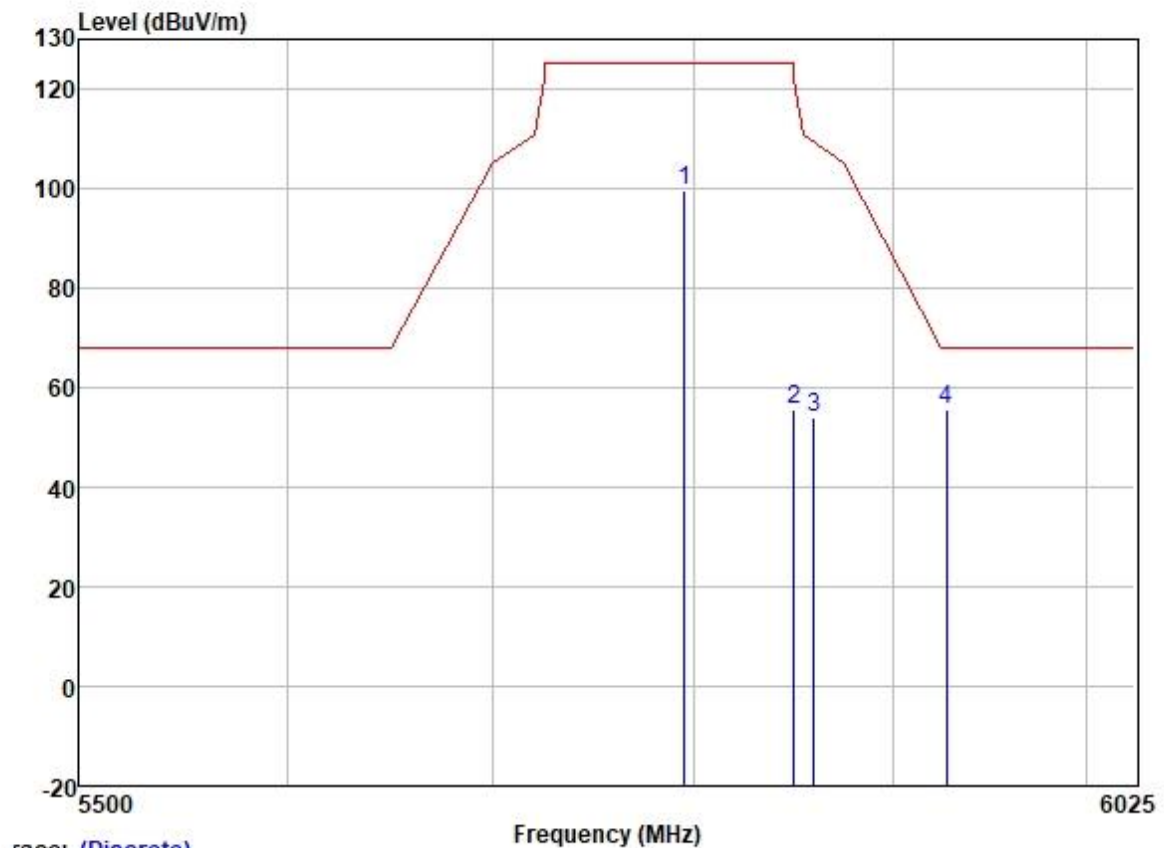

Trace: (Discrete)


		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5795.000	98.31	32.19	6.10	36.89	99.71	125.20	-25.49	VERTICAL	Peak
2	5850.000	54.25	32.25	6.00	36.90	55.60	122.20	-66.60	VERTICAL	Peak
3	5860.000	52.84	32.27	5.96	36.90	54.17	109.40	-55.23	VERTICAL	Peak
4	5927.530	54.05	32.34	6.00	36.90	55.49	68.20	-12.71	VERTICAL	Peak

Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

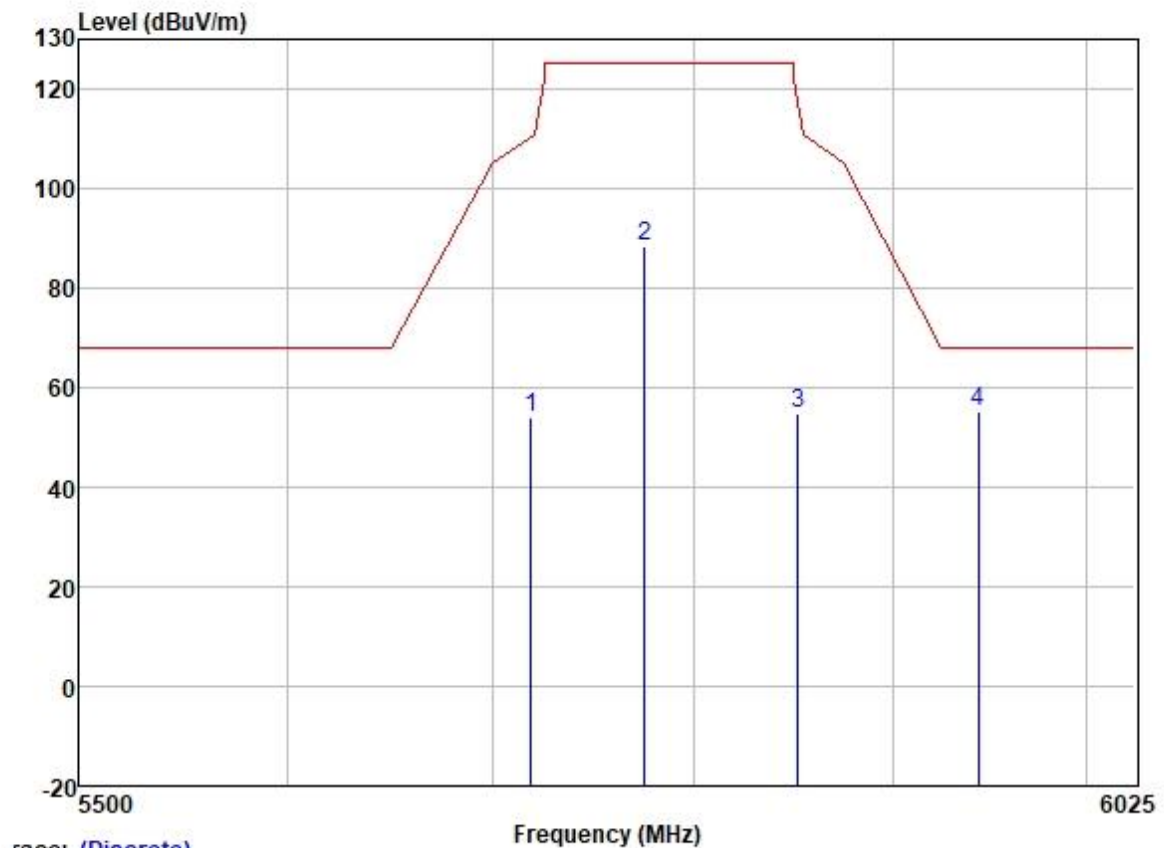

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5718.966	52.37	32.04	6.33	36.89	53.85	110.51	-56.66	HORIZONTAL	Peak
2	5775.000	87.12	32.16	6.10	36.89	88.49	125.20	-36.71	HORIZONTAL	Peak
3	5852.116	53.31	32.25	6.00	36.90	54.66	117.37	-62.71	HORIZONTAL	Peak
4	5944.061	53.83	32.36	6.05	36.90	55.34	68.20	-12.86	HORIZONTAL	Peak

Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

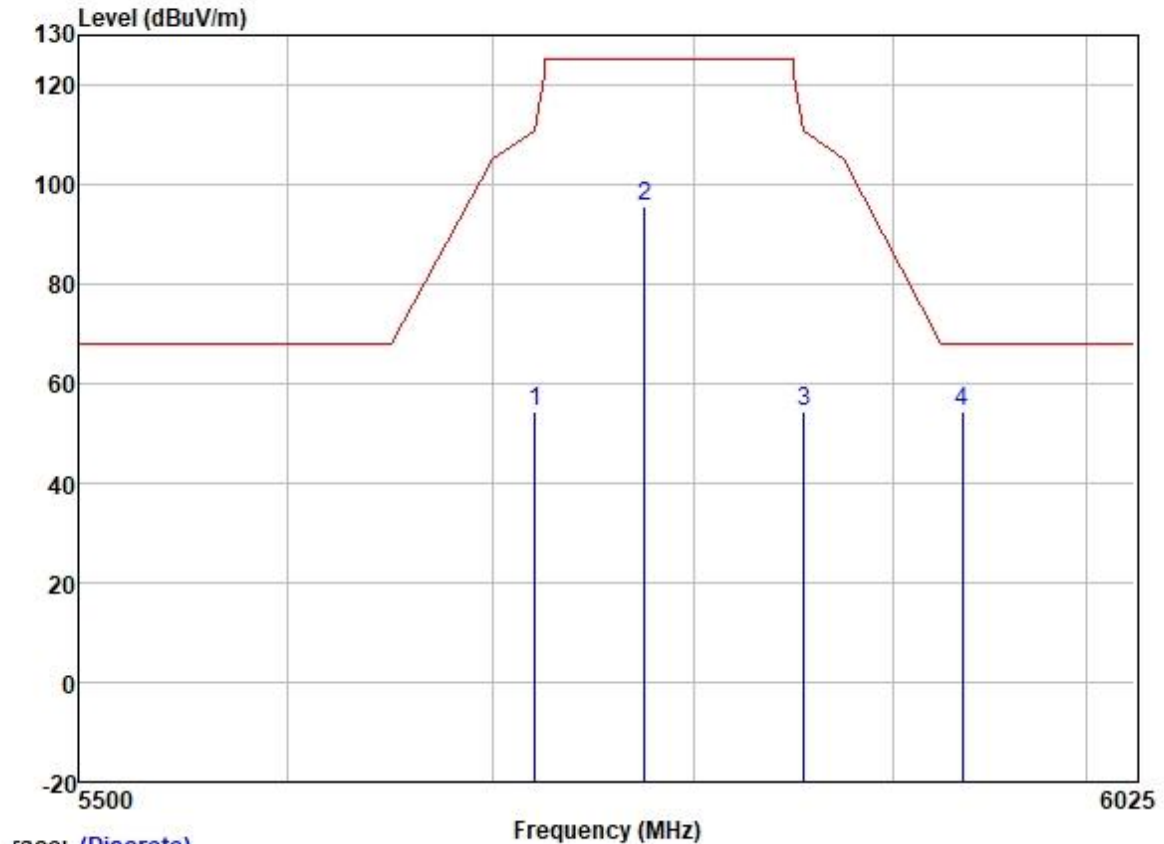

	ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5720.773	52.96	32.04	6.33	36.89	54.44	112.56	-58.12	VERTICAL Peak
2	5775.000	94.21	32.16	6.10	36.89	95.58	125.20	-29.62	VERTICAL Peak
3	5855.199	53.17	32.25	6.00	36.90	54.52	110.74	-56.22	VERTICAL Peak
4	5935.927	53.11	32.34	6.00	36.90	54.55	68.20	-13.65	VERTICAL Peak

7.10 Frequency Stability

Test Requirement 47 CFR Part 15, Subpart C 15.407 (g)
Test Method: ANSI C63.10 (2013) Section 6.8


7.10.1 E.U.T. Operation

Operating Environment:
Temperature: 23.2 °C Humidity: 43.6 % RH Atmospheric Pressure: 1003 mbar

7.10.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2A)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2C)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

7.10.3 Test Setup Diagram

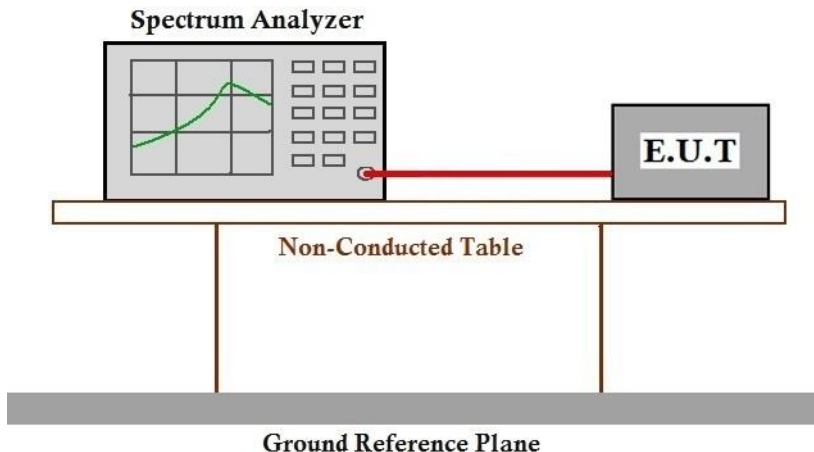

7.10.4 Measurement Procedure and Data

The applicant declares that the emissions are maintained within the band of operation under all conditions of normal operation as specified in the user's manual and meets Section 15.407(g) requirements.

7.11 Non-occupancy period

Test Requirement KDB 905462 D02 Section 5.1

Test Method: KDB 905462 D02 Section 7.8.3

Limit:

Test item	Limit	Applicability	
		Master Device or client with Radar Detection	Client without Radar Detection
Non-occupancy period	Minimum 30 minutes	Yes	Not required
Channel Availability Check Time	60 seconds	Yes	Not required
Channel Move Time	10 seconds See Note 1.	Yes	Yes
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.	Yes	Yes
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.	Yes	Not required

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

7.11.1 E.U.T. Operation

Operating Environment:

Temperature: 23.2 °C Humidity: 43.6 % RH Atmospheric Pressure: 1003 mbar



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou branch Testing Laboratory

No.198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

7.11.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	08	Normal operating_Keep the EUT communication with the companion device.

7.11.3 Test Setup Diagram

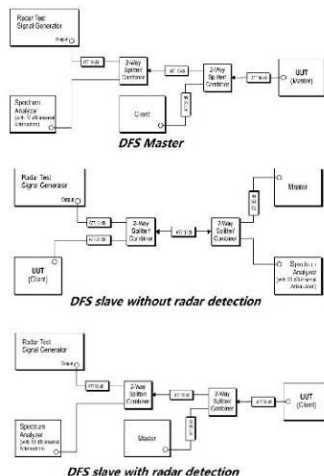

7.11.4 Measurement Procedure and Data

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

Please Refer to Appendix for Details

7.12 Channel Move Time

Test Requirement KDB 905462 D02 Section 5.1

Test Method: KDB 905462 D02 Section 7.8.3

Limit:

Test item	Limit	Applicability	
		Master Device or client with Radar Detection	Client without Radar Detection
Non-occupancy period	Minimum 30 minutes	Yes	Not required
Channel Availability Check Time	60 seconds	Yes	Not required
Channel Move Time	10 seconds See Note 1.	Yes	Yes
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.	Yes	Yes
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.	Yes	Not required

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

7.12.1 E.U.T. Operation


Operating Environment:

Temperature: 23.2 °C Humidity: 43.6 % RH Atmospheric Pressure: 1003 mbar

7.12.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	08	Normal operating_Keep the EUT communication with the companion device.

7.12.3 Test Setup Diagram

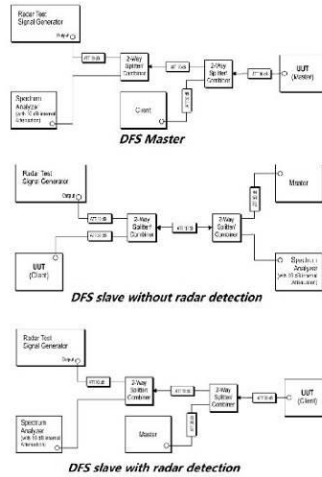

7.12.4 Measurement Procedure and Data

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.13 Channel Closing Transmission Time

Test Requirement KDB 905462 D02 Section 5.1

Test Method: KDB 905462 D02 Section 7.8.3

Limit:

Test item	Limit	Applicability	
		Master Device or client with Radar Detection	Client without Radar Detection
Non-occupancy period	Minimum 30 minutes	Yes	Not required
Channel Availability Check Time	60 seconds	Yes	Not required
Channel Move Time	10 seconds See Note 1.	Yes	Yes
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.	Yes	Yes
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.	Yes	Not required

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

7.13.1 E.U.T. Operation

Operating Environment:

Temperature: 23.2 °C Humidity: 43.6 % RH Atmospheric Pressure: 1003 mbar




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
SGS-CSTC Standards Technical Services Co., Ltd. No.198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.com.cn
Guangzhou branch Testing & Calibration EEC Laboratory 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

7.13.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	08	Normal operating_Keep the EUT communication with the companion device.

7.13.3 Test Setup Diagram

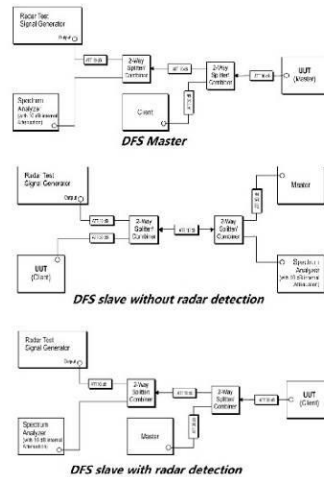

7.13.4 Measurement Procedure and Data

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

Please Refer to Appendix for Details

7.14 Radiated Emissions (above 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.407(b)

Test Method: KDB 789033 D02 II G

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.14.1 E.U.T. Operation

Operating Environment:

Temperature: 23.8 °C Humidity: 44.2 % RH Atmospheric Pressure: 1003 mbar

7.14.2 Test Mode Description


Pre-scan / Final test	Mode Code	Description
		TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	04	
		TX mode (U-NII-2A)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	05	
		TX mode (U-NII-2C)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	06	
		TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	07	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.14.3 Test Setup Diagram

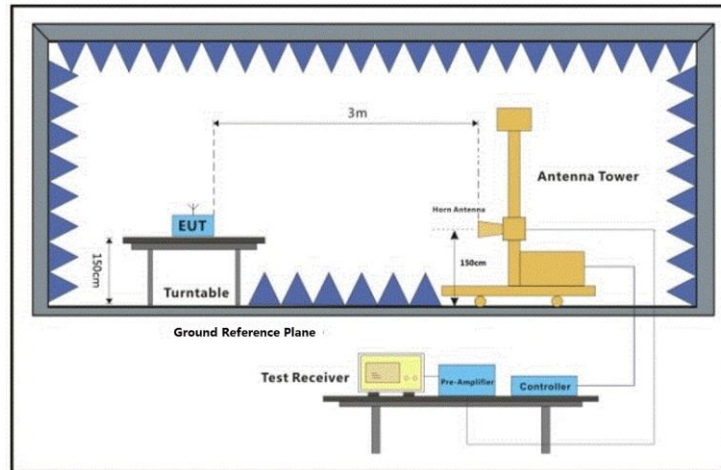

7.14.4 Measurement Procedure and Data

- a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:


1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 1GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
4. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

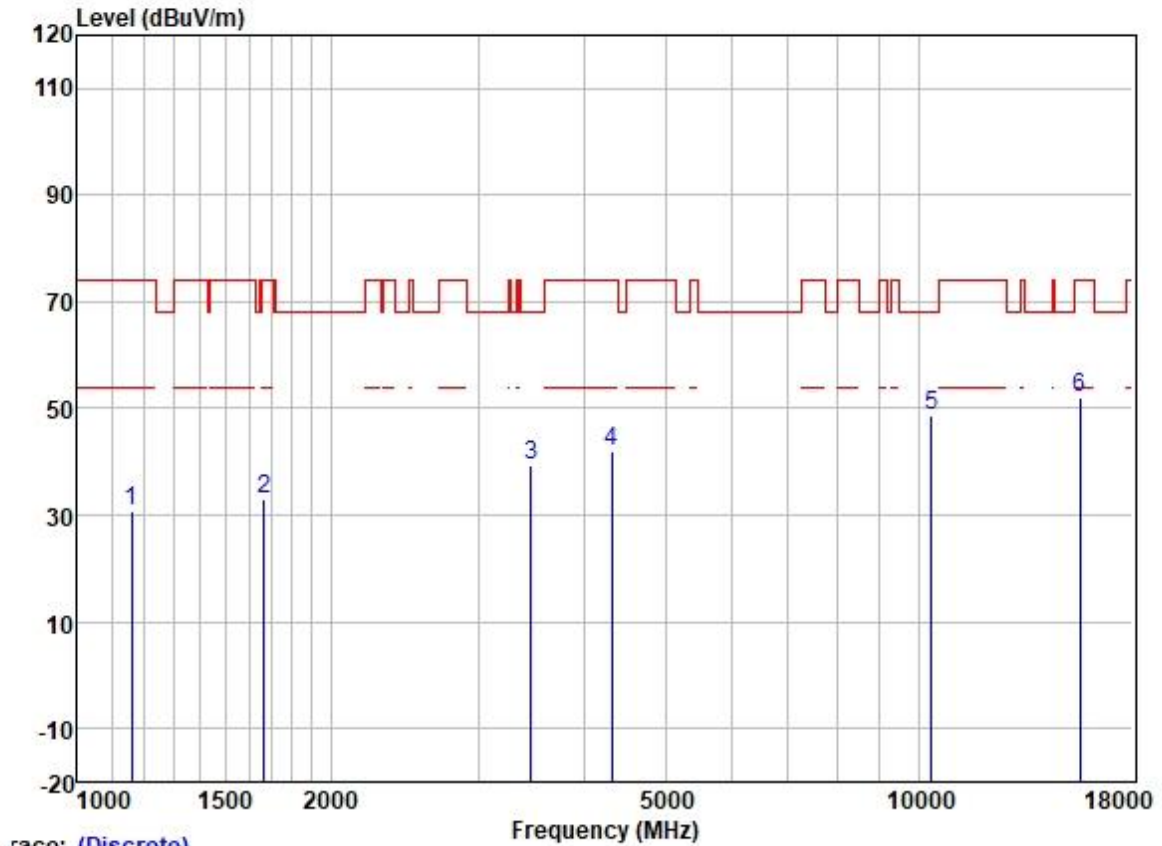

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1158.828	42.14	24.52	2.40	38.42	30.64	74.00	-43.36	HORIZONTAL Peak
2	1667.951	42.29	25.66	2.80	37.91	32.84	74.00	-41.16	HORIZONTAL Peak
3	3465.510	43.26	28.88	4.22	36.95	39.41	68.20	-28.79	HORIZONTAL Peak
4	4316.859	43.44	30.51	4.66	36.81	41.80	74.00	-32.20	HORIZONTAL Peak
5	10360.000	39.56	39.28	7.29	37.37	48.76	68.20	-19.44	HORIZONTAL Peak
6	15540.000	38.44	39.05	9.88	35.39	51.98	74.00	-22.02	HORIZONTAL Peak


Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

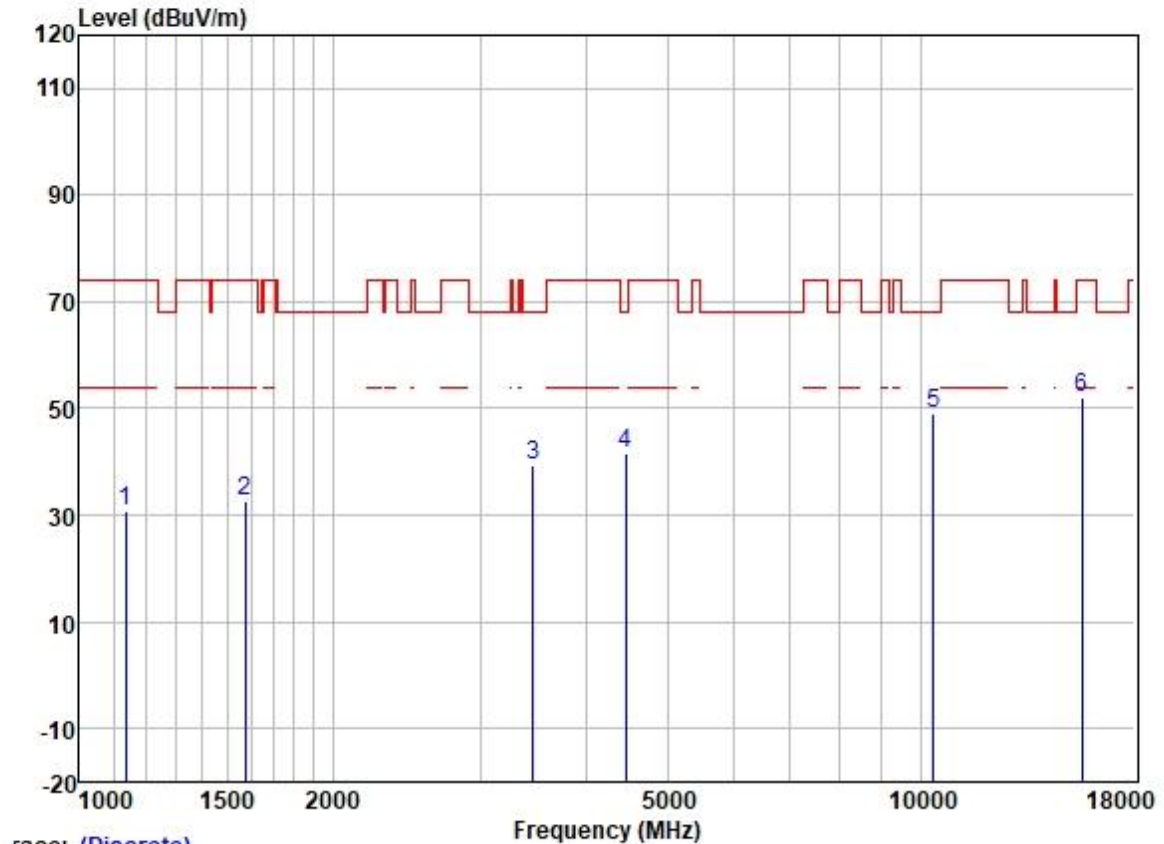

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1135.617	42.43	24.45	2.25	38.43	30.70	74.00	-43.30	VERTICAL Peak
2	1574.265	42.31	25.56	2.80	38.00	32.67	74.00	-41.33	VERTICAL Peak
3	3465.510	43.16	28.88	4.22	36.95	39.31	68.20	-28.89	VERTICAL Peak
4	4456.315	42.65	30.75	4.88	36.81	41.47	68.20	-26.73	VERTICAL Peak
5	10360.000	39.90	39.28	7.29	37.37	49.10	68.20	-19.10	VERTICAL Peak
6	15540.000	38.39	39.05	9.88	35.39	51.93	74.00	-22.07	VERTICAL Peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

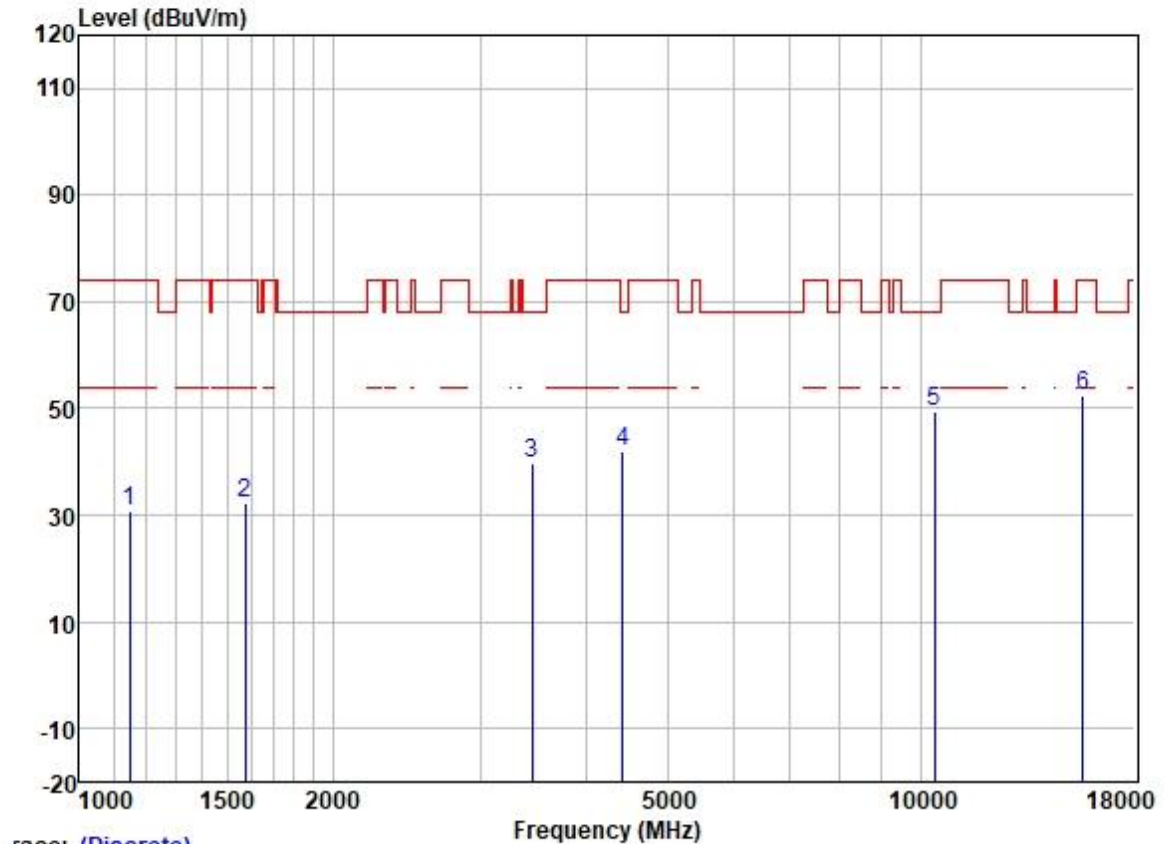

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1148.823	42.23	24.49	2.34	38.42	30.64	74.00	-43.36	HORIZONTAL Peak
2	1574.265	42.09	25.56	2.80	38.00	32.45	74.00	-41.55	HORIZONTAL Peak
3	3455.508	43.73	28.88	4.20	36.96	39.85	68.20	-28.35	HORIZONTAL Peak
4	4430.628	43.38	30.72	4.78	36.81	42.07	68.20	-26.13	HORIZONTAL Peak
5	10400.000	40.33	39.33	7.32	37.36	49.62	68.20	-18.58	HORIZONTAL Peak
6	15600.000	38.86	38.99	9.88	35.39	52.34	74.00	-21.66	HORIZONTAL Peak


Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

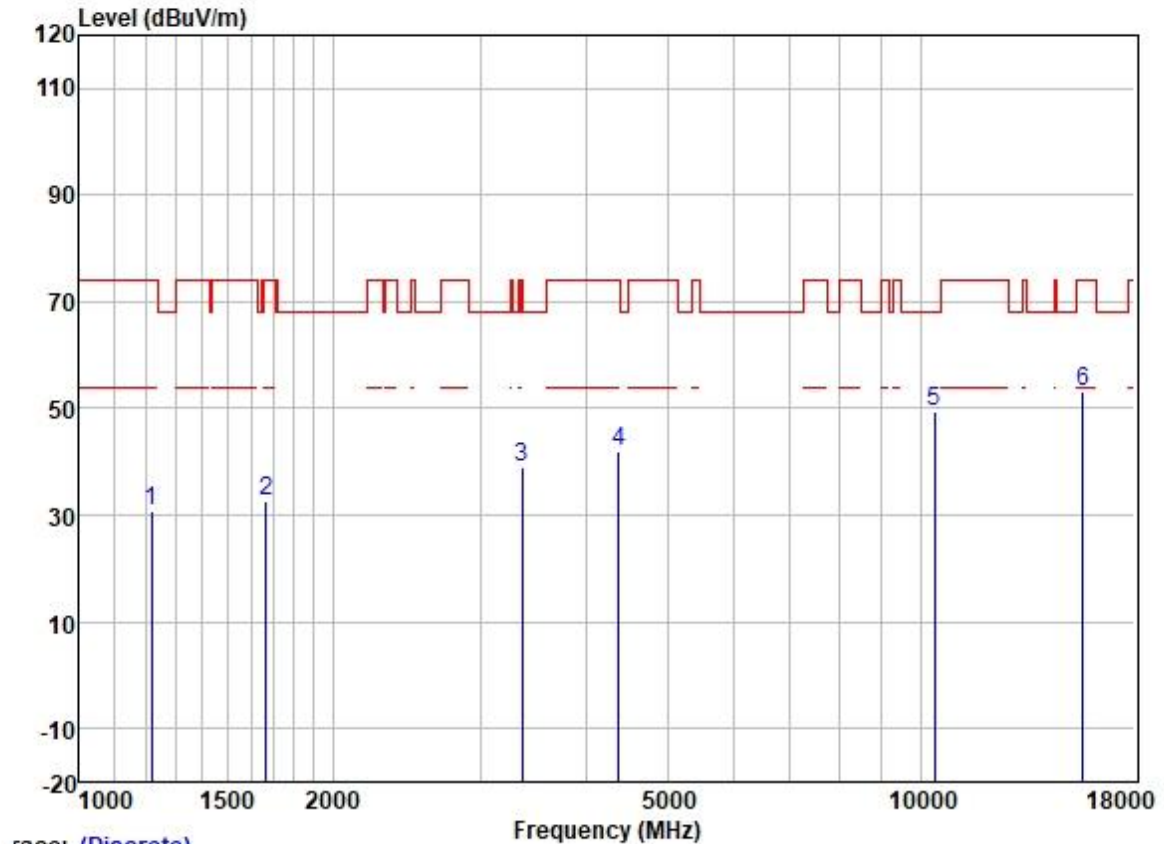

race: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1217.190	42.06	24.79	2.32	38.37	30.80	74.00	-43.20	VERTICAL	Peak
2	1667.951	42.22	25.66	2.80	37.91	32.77	74.00	-41.23	VERTICAL	Peak
3	3357.061	43.26	28.81	4.09	37.01	39.15	74.00	-34.85	VERTICAL	Peak
4	4379.699	43.38	30.64	4.69	36.81	41.90	74.00	-32.10	VERTICAL	Peak
5	10400.000	40.11	39.33	7.32	37.36	49.40	68.20	-18.80	VERTICAL	Peak
6	15600.000	39.52	38.99	9.88	35.39	53.00	74.00	-21.00	VERTICAL	Peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

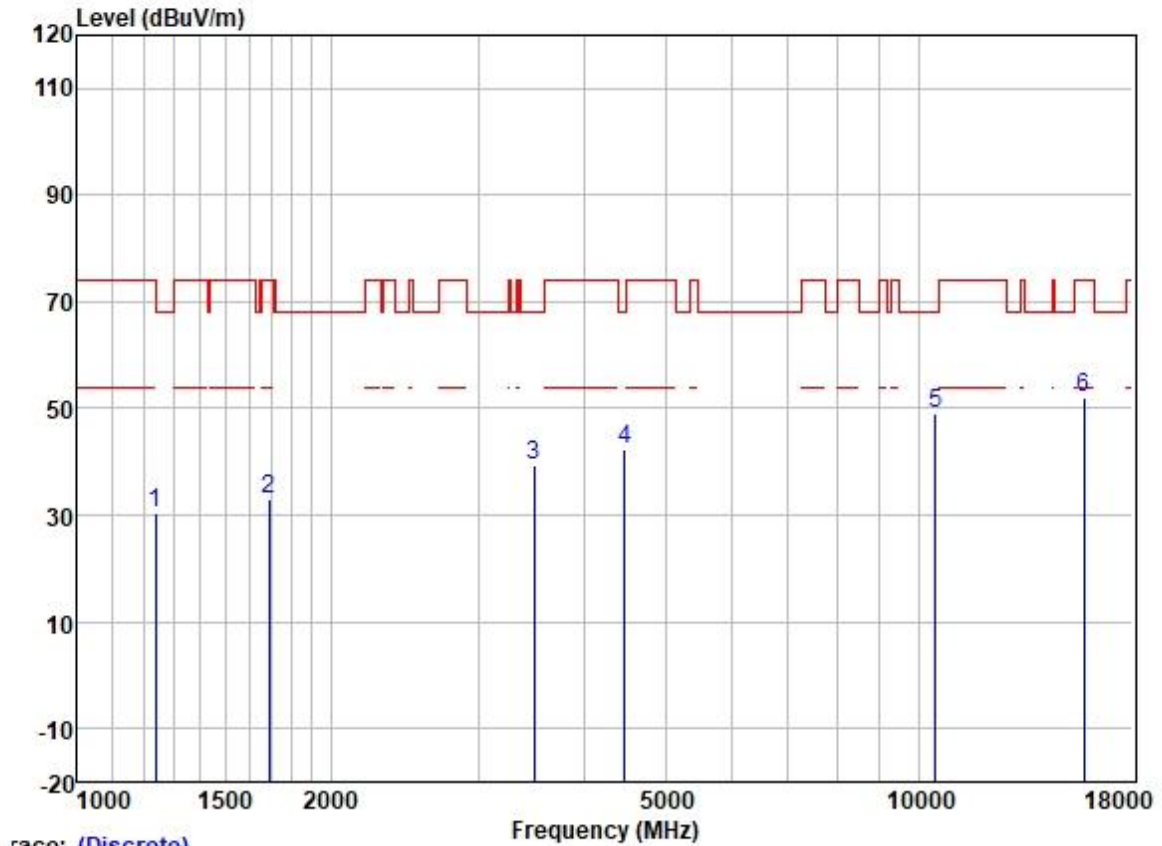

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1238.483	41.46	24.96	2.30	38.35	30.37	74.00	-43.63	HORIZONTAL	Peak
2	1692.231	42.29	25.70	2.80	37.89	32.90	74.00	-41.10	HORIZONTAL	Peak
3	3495.691	42.96	28.90	4.30	36.94	39.22	68.20	-28.98	HORIZONTAL	Peak
4	4469.214	43.51	30.77	4.93	36.81	42.40	68.20	-25.80	HORIZONTAL	Peak
5	10480.000	39.56	39.46	7.40	37.36	49.06	68.20	-19.14	HORIZONTAL	Peak
6	15720.000	38.95	38.78	9.87	35.39	52.21	74.00	-21.79	HORIZONTAL	Peak


Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

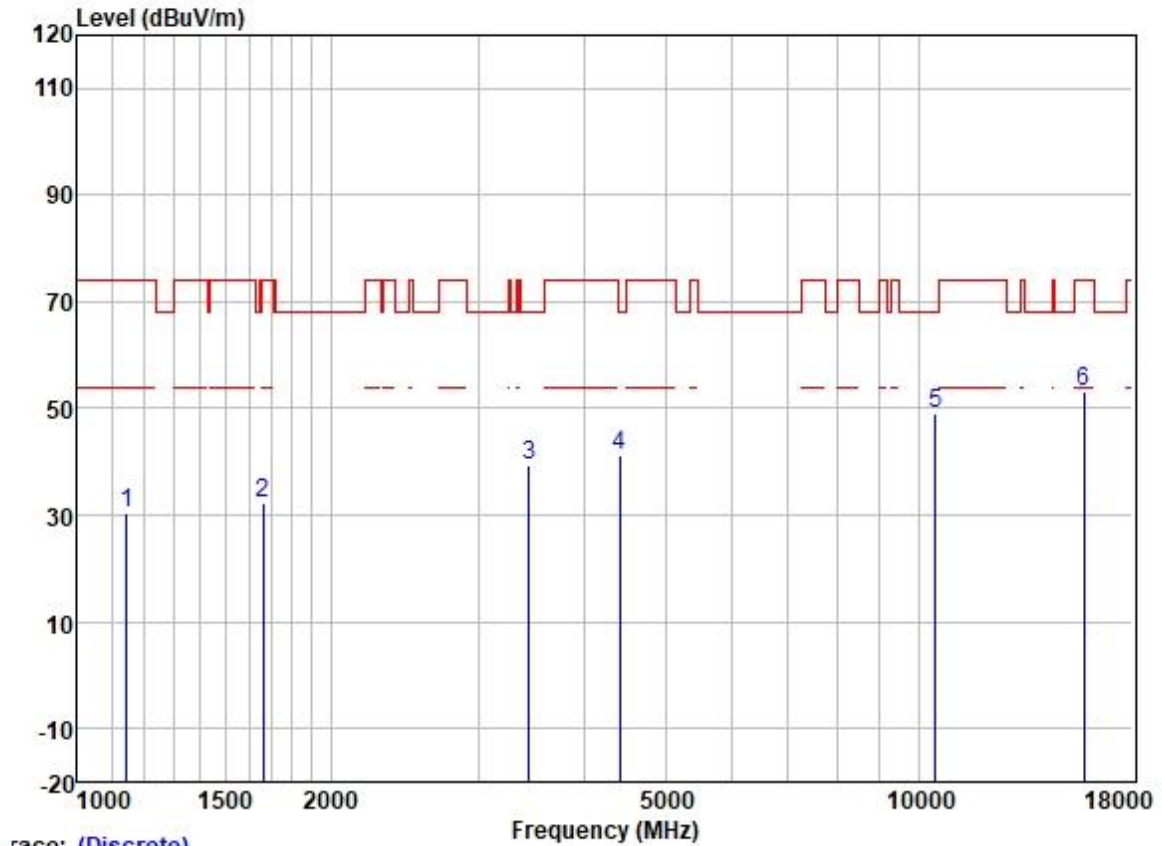

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1145.507	42.20	24.48	2.32	38.42	30.58	74.00	-43.42	VERTICAL Peak
2	1663.137	41.71	25.65	2.80	37.91	32.25	74.00	-41.75	VERTICAL Peak
3	3445.535	43.24	28.87	4.18	36.96	39.33	68.20	-28.87	VERTICAL Peak
4	4417.841	42.69	30.70	4.74	36.81	41.32	68.20	-26.88	VERTICAL Peak
5	10480.000	39.56	39.46	7.40	37.36	49.06	68.20	-19.14	VERTICAL Peak
6	15720.000	39.93	38.78	9.87	35.39	53.19	74.00	-20.81	VERTICAL Peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

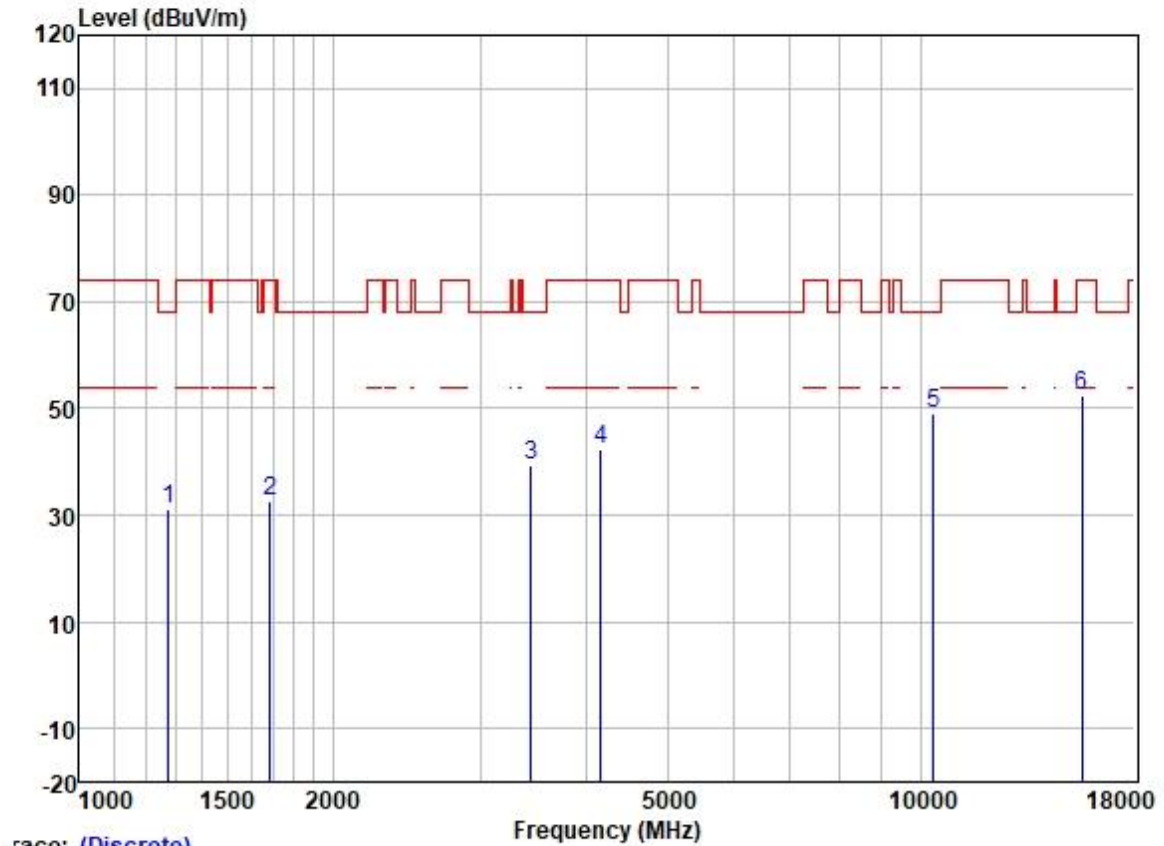

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1274.802	41.96	25.12	2.48	38.33	31.23	68.20	-36.97	HORIZONTAL	Peak
2	1687.347	41.99	25.69	2.80	37.91	32.57	74.00	-41.43	HORIZONTAL	Peak
3	3445.535	43.35	28.87	4.18	36.96	39.44	68.20	-28.76	HORIZONTAL	Peak
4	4169.698	44.51	30.09	4.60	36.80	42.40	74.00	-31.60	HORIZONTAL	Peak
5	10360.000	39.74	39.28	7.29	37.37	48.94	68.20	-19.26	HORIZONTAL	Peak
6	15540.000	38.74	39.05	9.88	35.39	52.28	74.00	-21.72	HORIZONTAL	Peak


Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

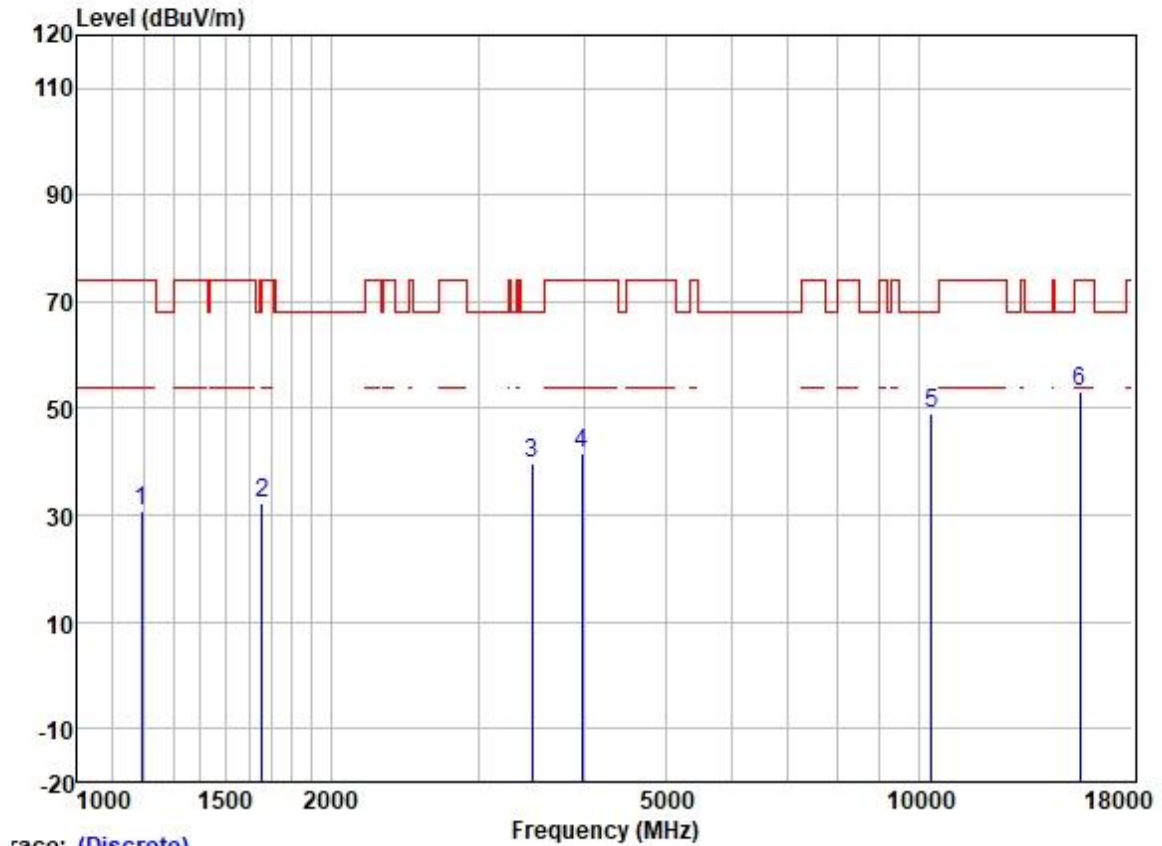

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1192.811	42.02	24.65	2.36	38.39	30.64	74.00	-43.36	VERTICAL Peak
2	1658.337	41.63	25.65	2.80	37.93	32.15	68.20	-36.05	VERTICAL Peak
3	3475.541	43.45	28.89	4.25	36.95	39.64	68.20	-28.56	VERTICAL Peak
4	3981.257	43.92	29.78	4.60	36.81	41.49	74.00	-32.51	VERTICAL Peak
5	10360.000	39.93	39.28	7.29	37.37	49.13	68.20	-19.07	VERTICAL Peak
6	15540.000	39.53	39.05	9.88	35.39	53.07	74.00	-20.93	VERTICAL Peak


Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

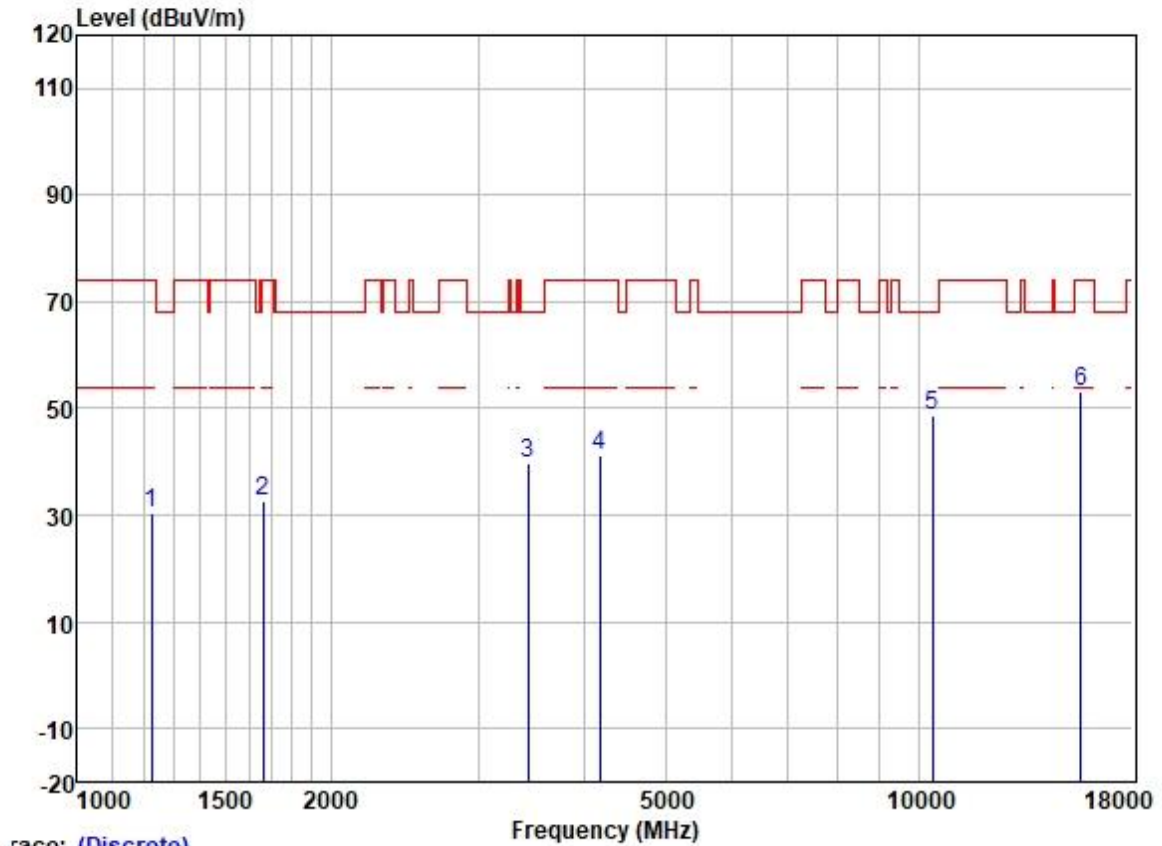

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1224.247	41.72	24.85	2.31	38.37	30.51	74.00	-43.49	HORIZONTAL	Peak
2	1663.137	42.22	25.65	2.80	37.91	32.76	74.00	-41.24	HORIZONTAL	Peak
3	3435.590	43.73	28.87	4.16	36.97	39.79	68.20	-28.41	HORIZONTAL	Peak
4	4181.768	43.40	30.12	4.60	36.80	41.32	74.00	-32.68	HORIZONTAL	Peak
5	10400.000	39.46	39.33	7.32	37.36	48.75	68.20	-19.45	HORIZONTAL	Peak
6	15600.000	39.61	38.99	9.88	35.39	53.09	74.00	-20.91	HORIZONTAL	Peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

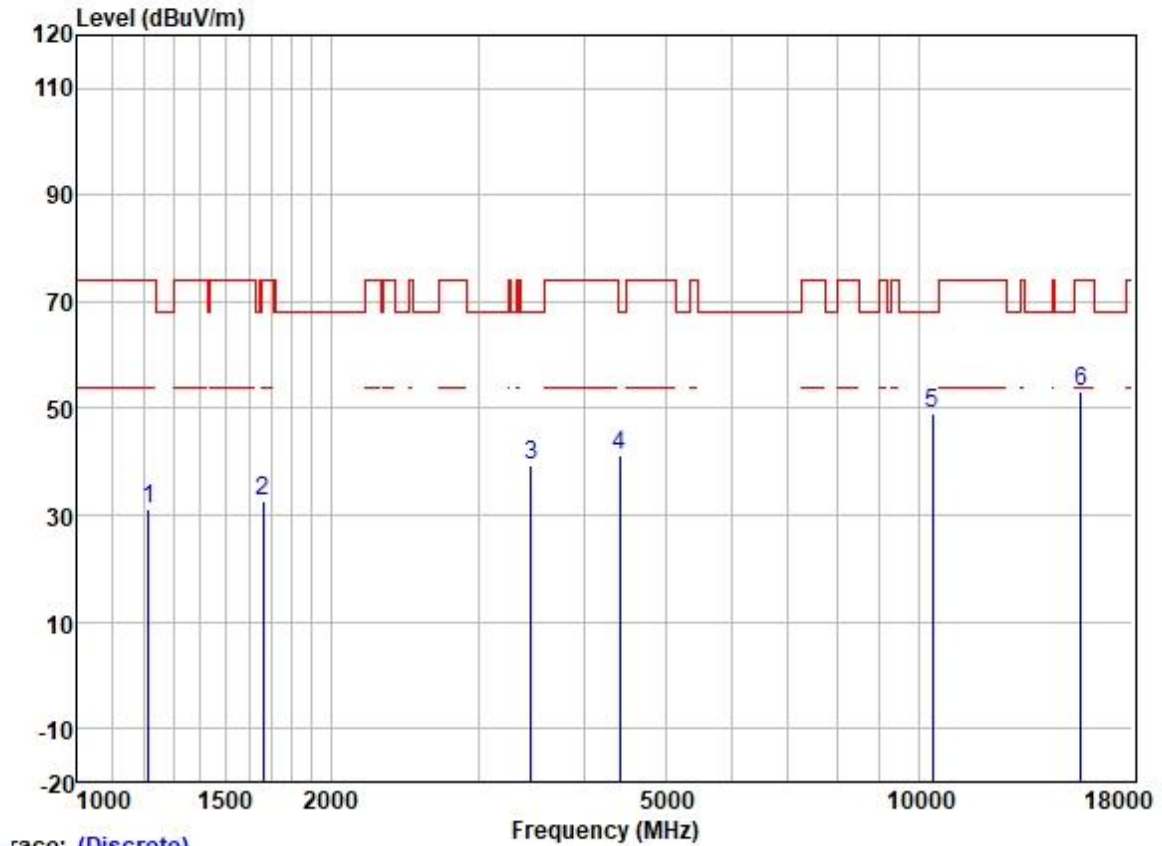

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1213.677	42.34	24.77	2.32	38.37	31.06	74.00	-42.94	VERTICAL Peak
2	1663.137	42.11	25.65	2.80	37.91	32.65	74.00	-41.35	VERTICAL Peak
3	3465.510	43.19	28.88	4.22	36.95	39.34	68.20	-28.86	VERTICAL Peak
4	4417.841	42.74	30.70	4.74	36.81	41.37	68.20	-26.83	VERTICAL Peak
5	10400.000	39.94	39.33	7.32	37.36	49.23	68.20	-18.97	VERTICAL Peak
6	15600.000	39.62	38.99	9.88	35.39	53.10	74.00	-20.90	VERTICAL Peak


Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

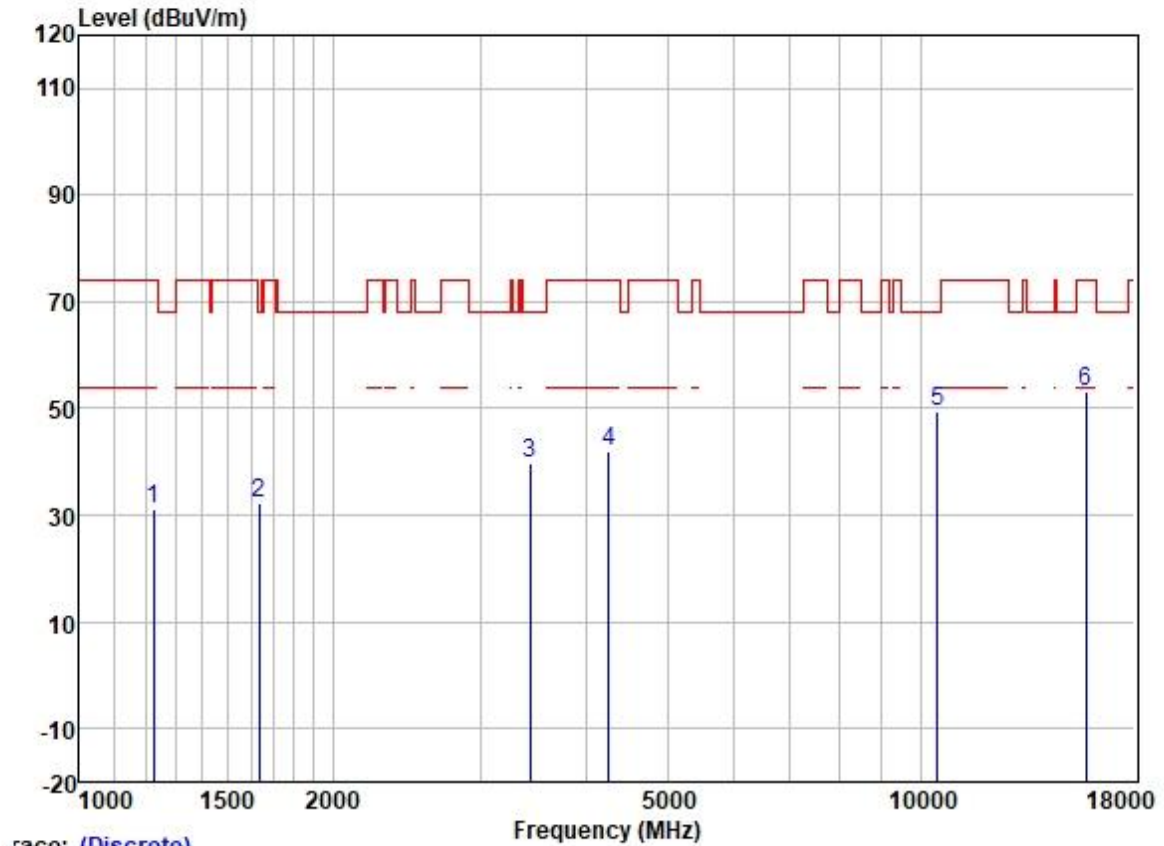

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1224.247	42.35	24.85	2.31	38.37	31.14	74.00	-42.86	HORIZONTAL Peak
2	1634.543	41.62	25.62	2.80	37.95	32.09	68.20	-36.11	HORIZONTAL Peak
3	3435.590	43.50	28.87	4.16	36.97	39.56	68.20	-28.64	HORIZONTAL Peak
4	4254.921	43.69	30.34	4.62	36.81	41.84	74.00	-32.16	HORIZONTAL Peak
5	10480.000	39.77	39.46	7.40	37.36	49.27	68.20	-18.93	HORIZONTAL Peak
6	15720.000	39.76	38.78	9.87	35.39	53.02	74.00	-20.98	HORIZONTAL Peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

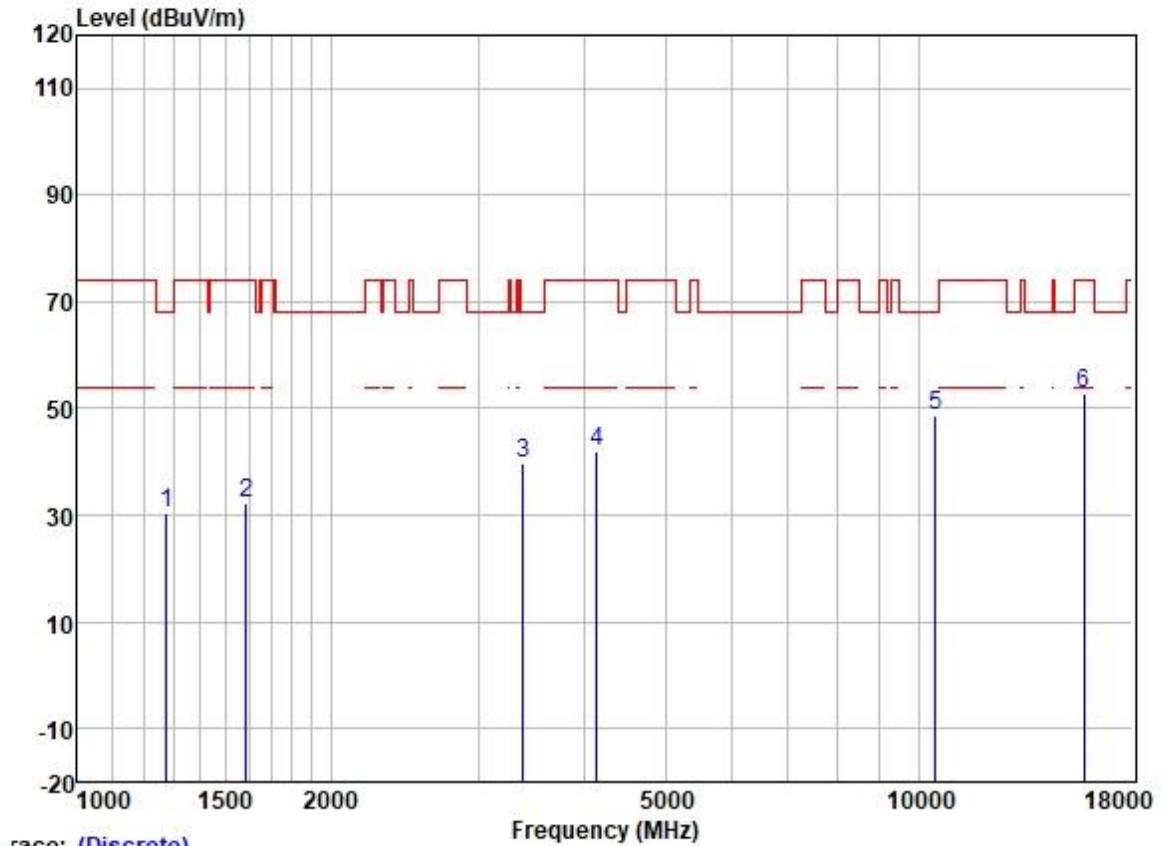

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1274.802	41.31	25.12	2.48	38.33	30.58	68.20	-37.62	VERTICAL Peak
2	1587.975	41.86	25.57	2.80	37.98	32.25	74.00	-41.75	VERTICAL Peak
3	3386.297	43.68	28.83	4.10	36.99	39.62	68.20	-28.58	VERTICAL Peak
4	4145.664	43.96	30.03	4.60	36.80	41.79	74.00	-32.21	VERTICAL Peak
5	10480.000	39.16	39.46	7.40	37.36	48.66	68.20	-19.54	VERTICAL Peak
6	15720.000	39.49	38.78	9.87	35.39	52.75	74.00	-21.25	VERTICAL Peak


Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

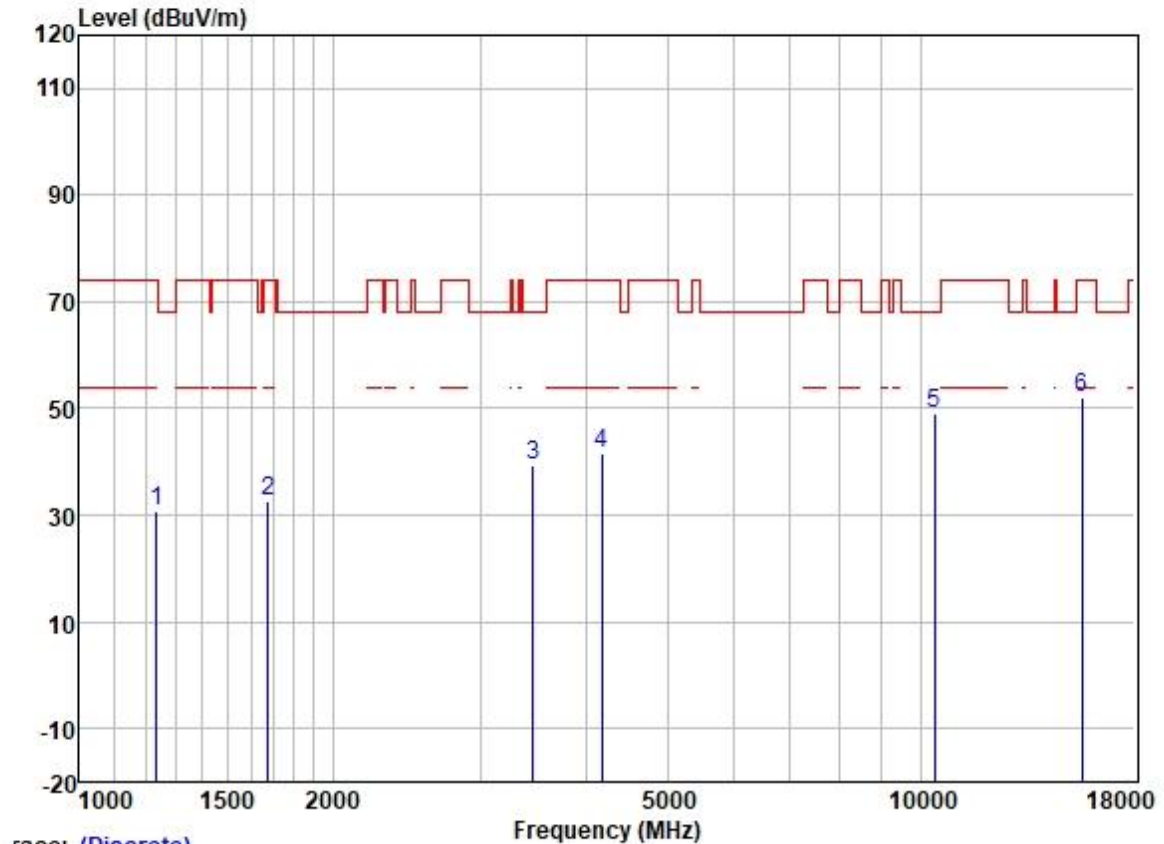

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1234.909	42.03	24.93	2.30	38.37	30.89	74.00	-43.11	HORIZONTAL Peak
2	1677.621	41.99	25.68	2.80	37.91	32.56	74.00	-41.44	HORIZONTAL Peak
3	3465.510	43.24	28.88	4.22	36.95	39.39	68.20	-28.81	HORIZONTAL Peak
4	4181.768	43.60	30.12	4.60	36.80	41.52	74.00	-32.48	HORIZONTAL Peak
5	10380.000	39.74	39.33	7.32	37.37	49.02	68.20	-19.18	HORIZONTAL Peak
6	15570.000	38.72	38.99	9.88	35.39	52.20	74.00	-21.80	HORIZONTAL Peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

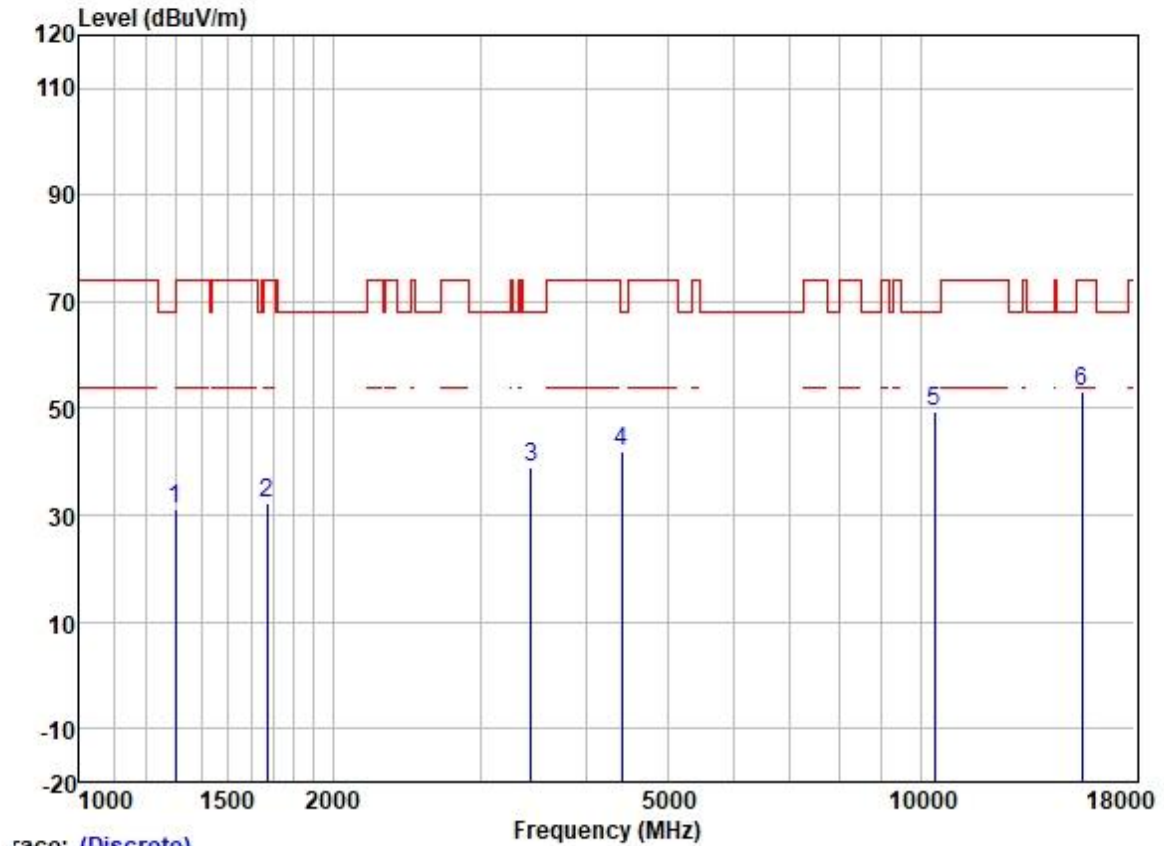


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1300.858	41.63	25.20	2.60	38.31	31.12	74.00	-42.88	VERTICAL Peak
2	1672.779	41.60	25.67	2.80	37.91	32.16	74.00	-41.84	VERTICAL Peak
3	3445.535	43.04	28.87	4.18	36.96	39.13	68.20	-29.07	VERTICAL Peak
4	4417.841	43.30	30.70	4.74	36.81	41.93	68.20	-26.27	VERTICAL Peak
5	10380.000	40.08	39.33	7.32	37.37	49.36	68.20	-18.84	VERTICAL Peak
6	15570.000	39.58	38.99	9.88	35.39	53.06	74.00	-20.94	VERTICAL Peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

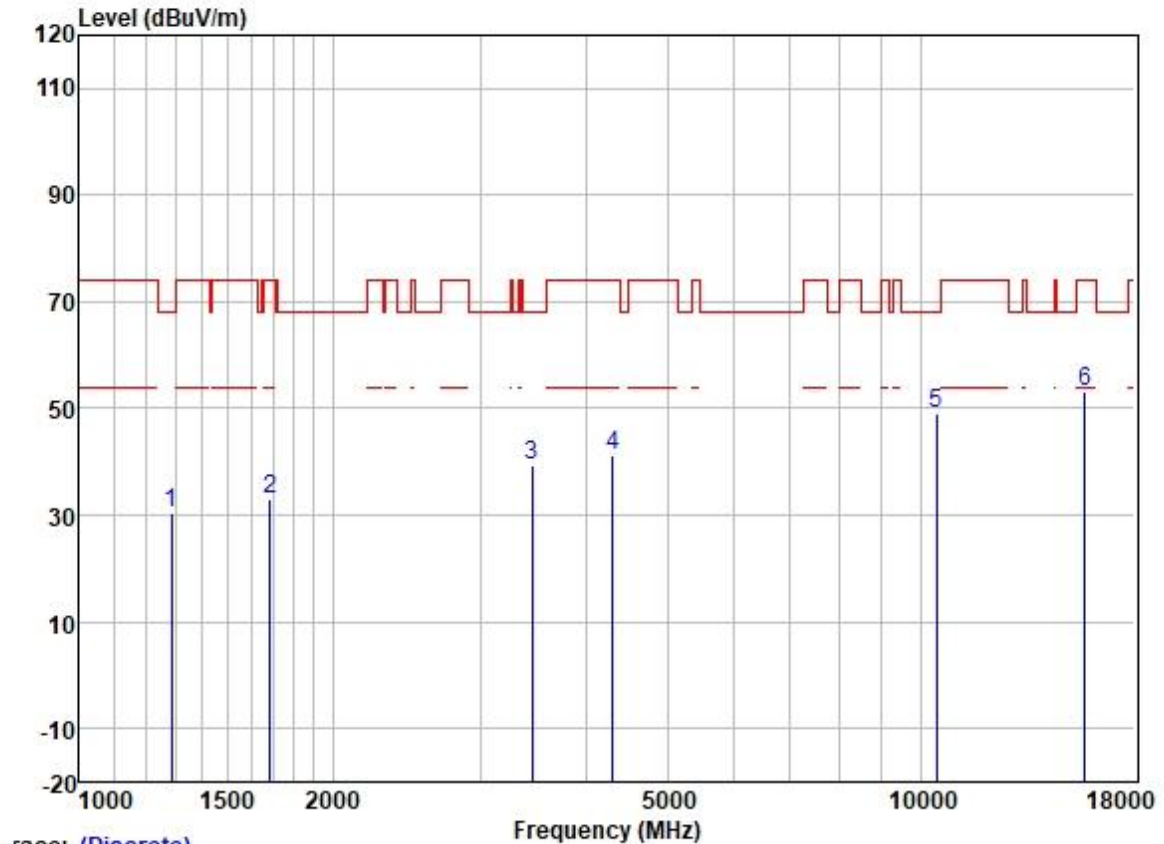


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1285.904	41.03	25.16	2.53	38.33	30.39	68.20	-37.81	HORIZONTAL Peak
2	1687.347	42.61	25.69	2.80	37.91	33.19	74.00	-40.81	HORIZONTAL Peak
3	3455.508	43.07	28.88	4.20	36.96	39.19	68.20	-29.01	HORIZONTAL Peak
4	4304.400	43.03	30.48	4.65	36.81	41.35	74.00	-32.65	HORIZONTAL Peak
5	10460.000	39.59	39.42	7.37	37.36	49.02	68.20	-19.18	HORIZONTAL Peak
6	15690.000	39.69	38.86	9.87	35.39	53.03	74.00	-20.97	HORIZONTAL Peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

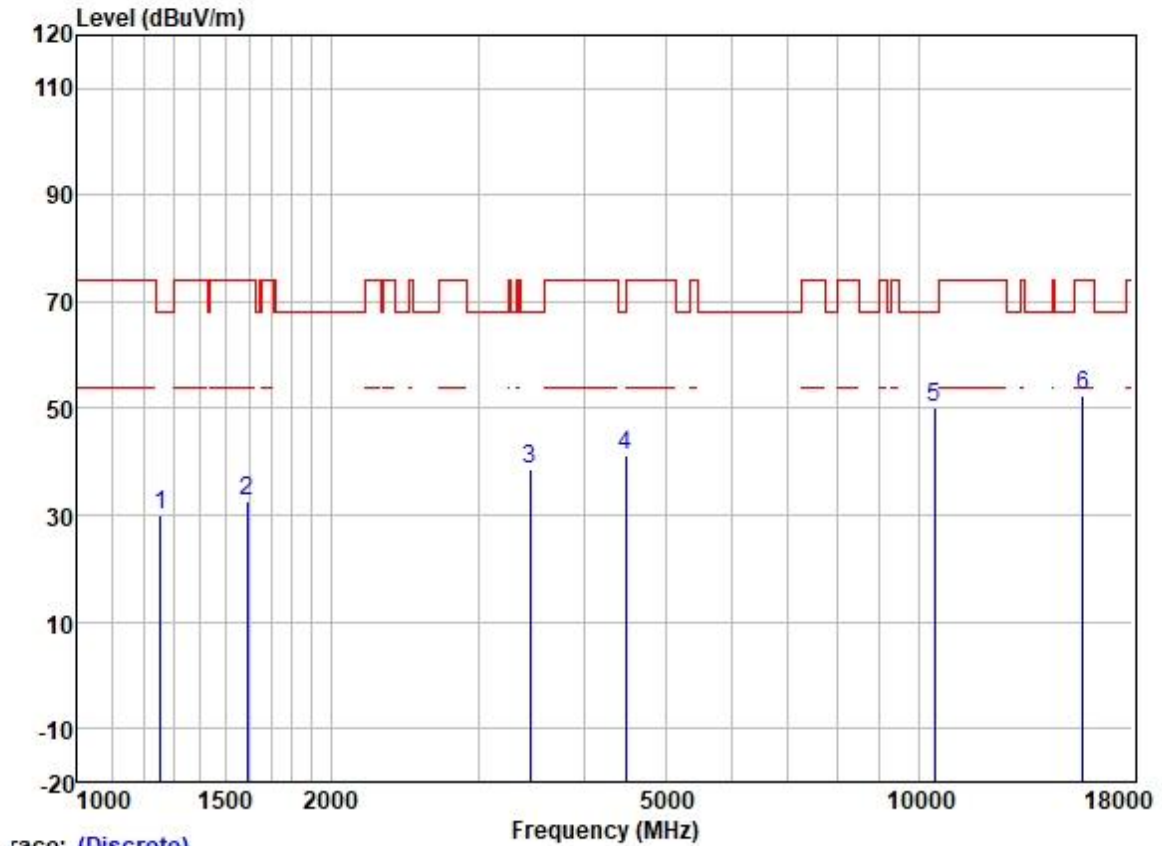

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1256.512	41.11	25.05	2.38	38.35	30.19	68.20	-38.01 VERTICAL	Peak
2	1592.571	42.42	25.57	2.80	37.98	32.81	74.00	-41.19 VERTICAL	Peak
3	3455.508	42.62	28.88	4.20	36.96	38.74	68.20	-29.46 VERTICAL	Peak
4	4482.150	42.45	30.78	4.99	36.81	41.41	68.20	-26.79 VERTICAL	Peak
5	10460.000	40.74	39.42	7.37	37.36	50.17	68.20	-18.03 VERTICAL	Peak
6	15690.000	38.91	38.86	9.87	35.39	52.25	74.00	-21.75 VERTICAL	Peak


Test Mode: 04; Polarity: Horizontal; Modulation: 802.11ac; Bandwidth: 20MHz; Channel: Low

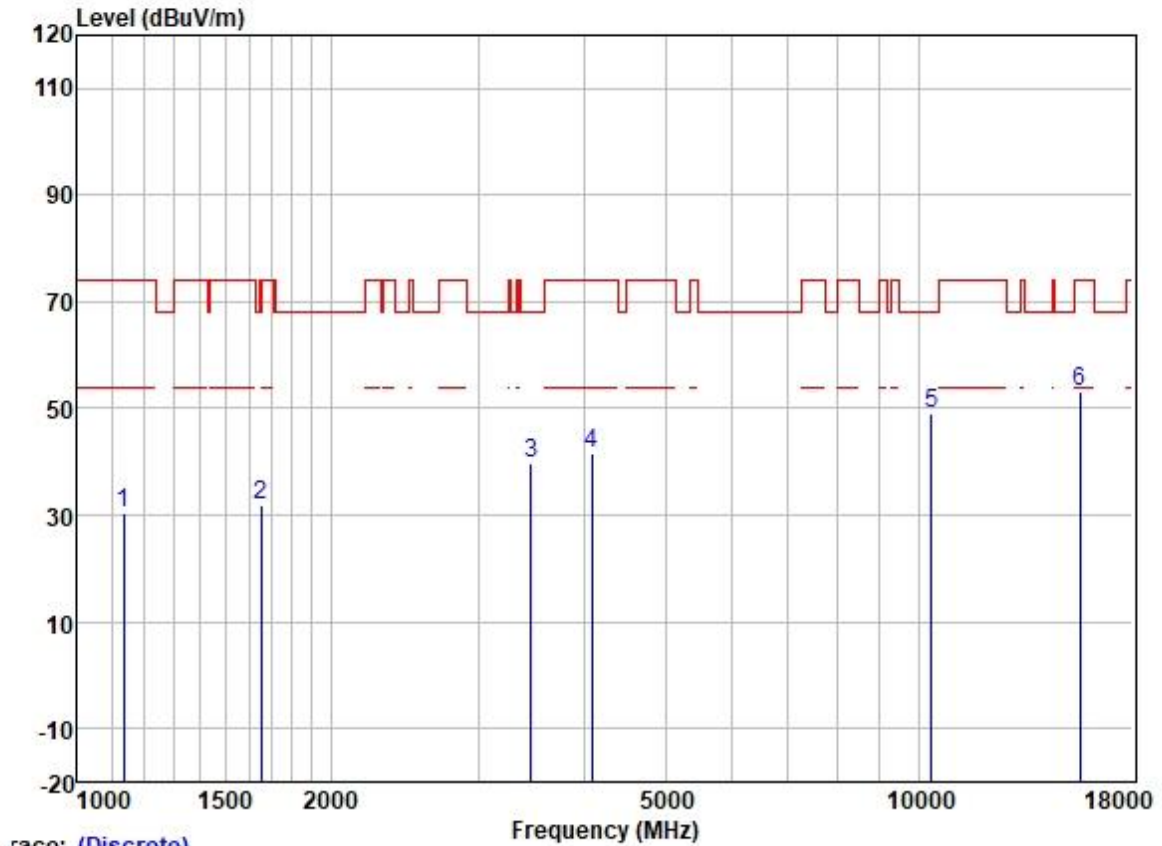

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1135.617	42.05	24.45	2.25	38.43	30.32	74.00	-43.68	HORIZONTAL Peak
2	1653.550	41.56	25.64	2.80	37.93	32.07	68.20	-36.13	HORIZONTAL Peak
3	3465.510	43.63	28.88	4.22	36.95	39.78	68.20	-28.42	HORIZONTAL Peak
4	4086.182	43.71	29.92	4.60	36.80	41.43	74.00	-32.57	HORIZONTAL Peak
5	10360.000	40.04	39.28	7.29	37.37	49.24	68.20	-18.96	HORIZONTAL Peak
6	15540.000	39.49	39.05	9.88	35.39	53.03	74.00	-20.97	HORIZONTAL Peak


Test Mode: 04; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

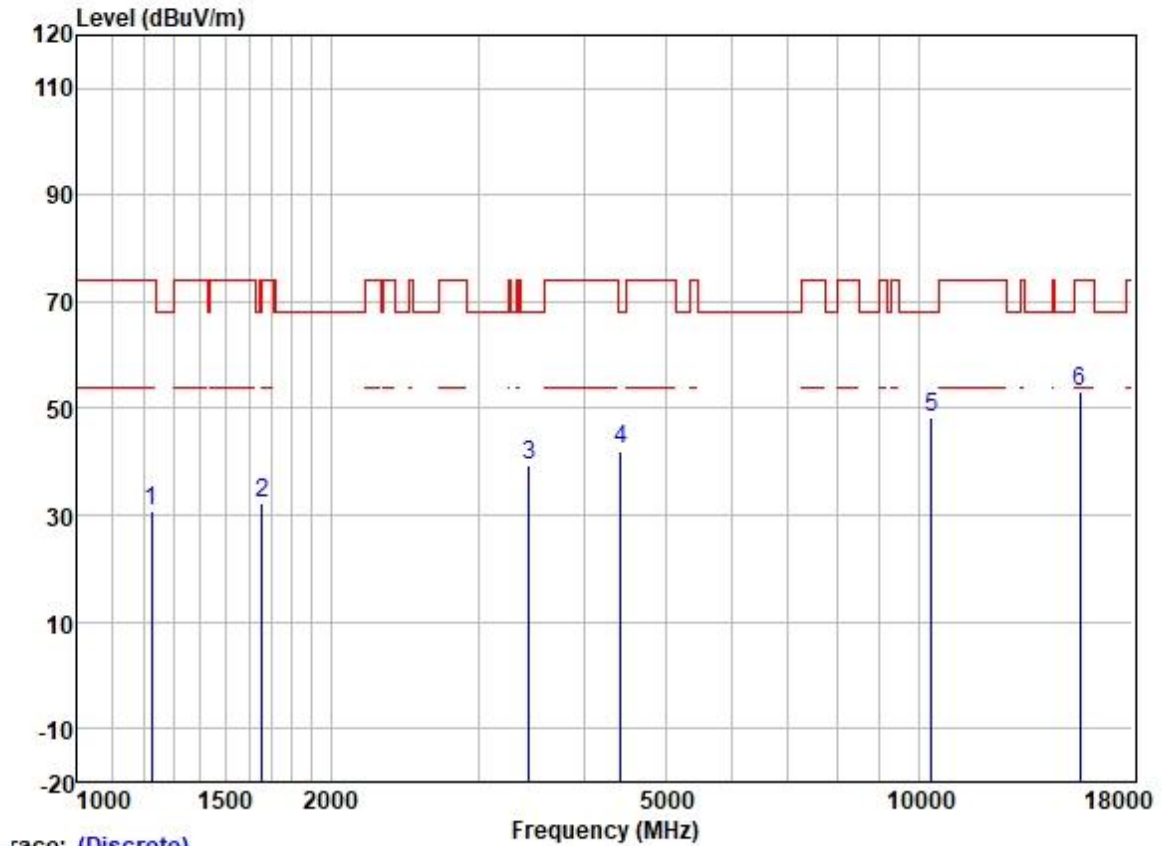

Trace: (Discrete)

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1224.247	41.80	24.85	2.31	38.37	30.59	74.00	-43.41	VERTICAL	Peak
2	1658.337	41.83	25.65	2.80	37.93	32.35	68.20	-35.85	VERTICAL	Peak
3	3445.535	43.11	28.87	4.18	36.96	39.20	68.20	-29.00	VERTICAL	Peak
4	4430.628	43.47	30.72	4.78	36.81	42.16	68.20	-26.04	VERTICAL	Peak
5	10360.000	39.19	39.28	7.29	37.37	48.39	68.20	-19.81	VERTICAL	Peak
6	15540.000	39.45	39.05	9.88	35.39	52.99	74.00	-21.01	VERTICAL	Peak


Test Mode: 04; Polarity: Horizontal; Modulation: 802.11ac; Bandwidth: 20MHz; Channel: middle

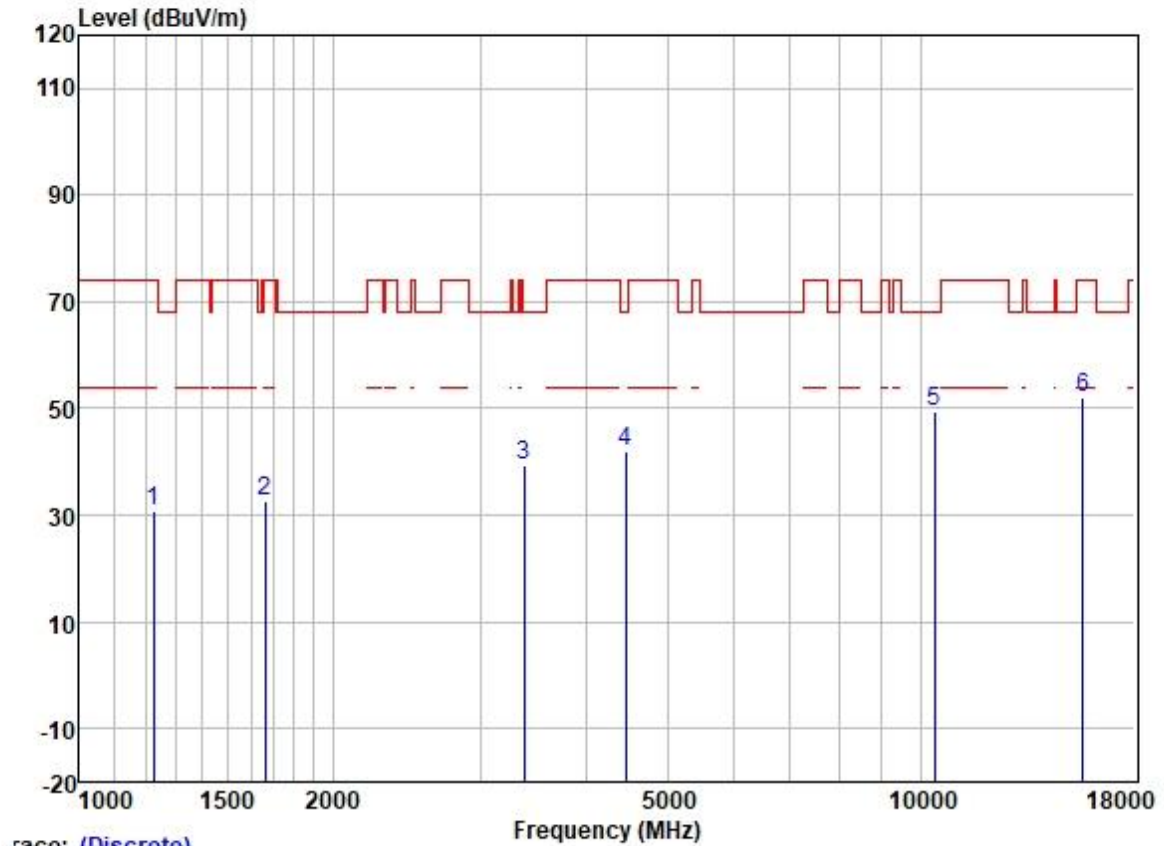

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1224.247	42.06	24.85	2.31	38.37	30.85	74.00	-43.15	HORIZONTAL Peak
2	1663.137	42.11	25.65	2.80	37.91	32.65	74.00	-41.35	HORIZONTAL Peak
3	3376.523	43.46	28.83	4.09	36.99	39.39	68.20	-28.81	HORIZONTAL Peak
4	4456.315	43.10	30.75	4.88	36.81	41.92	68.20	-26.28	HORIZONTAL Peak
5	10400.000	40.32	39.33	7.32	37.36	49.61	68.20	-18.59	HORIZONTAL Peak
6	15600.000	38.47	38.99	9.88	35.39	51.95	74.00	-22.05	HORIZONTAL Peak


Test Mode: 04; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 20MHz; Channel: middle

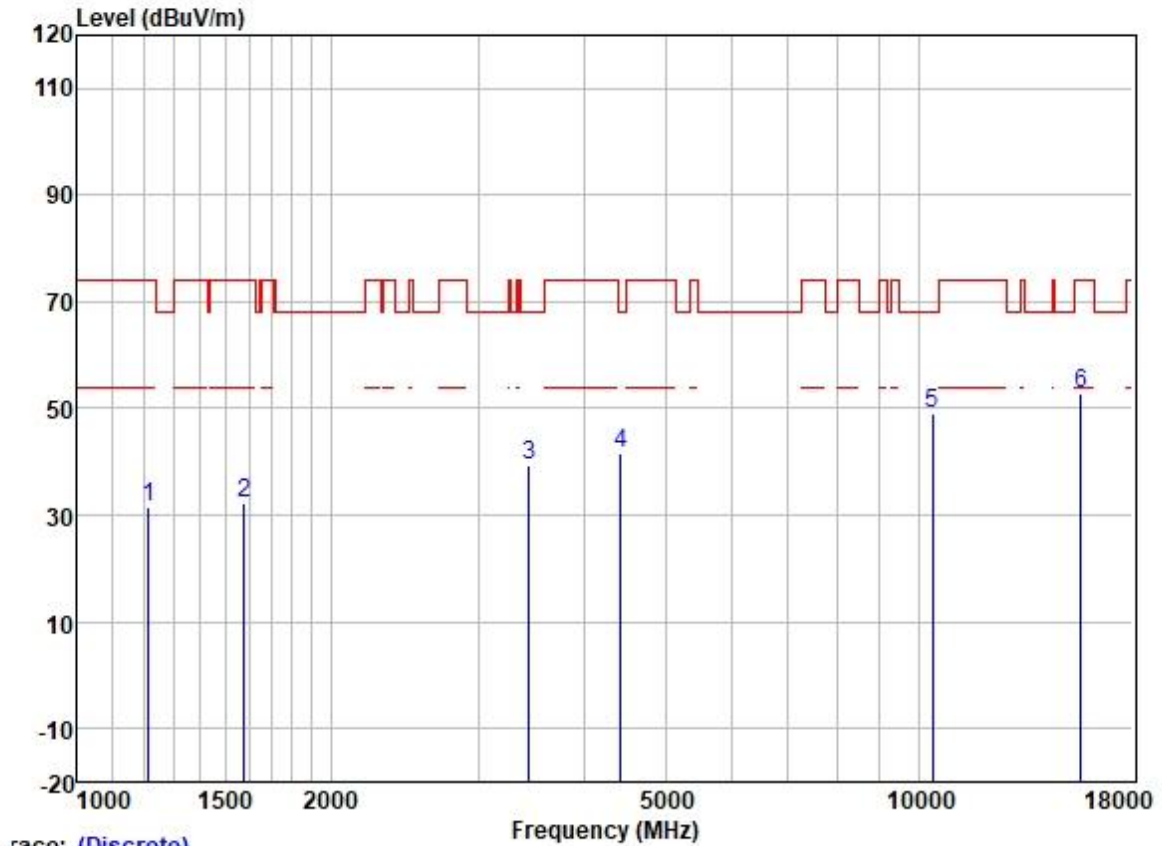

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1213.677	42.69	24.77	2.32	38.37	31.41	74.00	-42.59	VERTICAL Peak
2	1578.822	41.76	25.56	2.80	38.00	32.12	74.00	-41.88	VERTICAL Peak
3	3445.535	43.10	28.87	4.18	36.96	39.19	68.20	-29.01	VERTICAL Peak
4	4430.628	42.81	30.72	4.78	36.81	41.50	68.20	-26.70	VERTICAL Peak
5	10400.000	39.73	39.33	7.32	37.36	49.02	68.20	-19.18	VERTICAL Peak
6	15600.000	39.45	38.99	9.88	35.39	52.93	74.00	-21.07	VERTICAL Peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

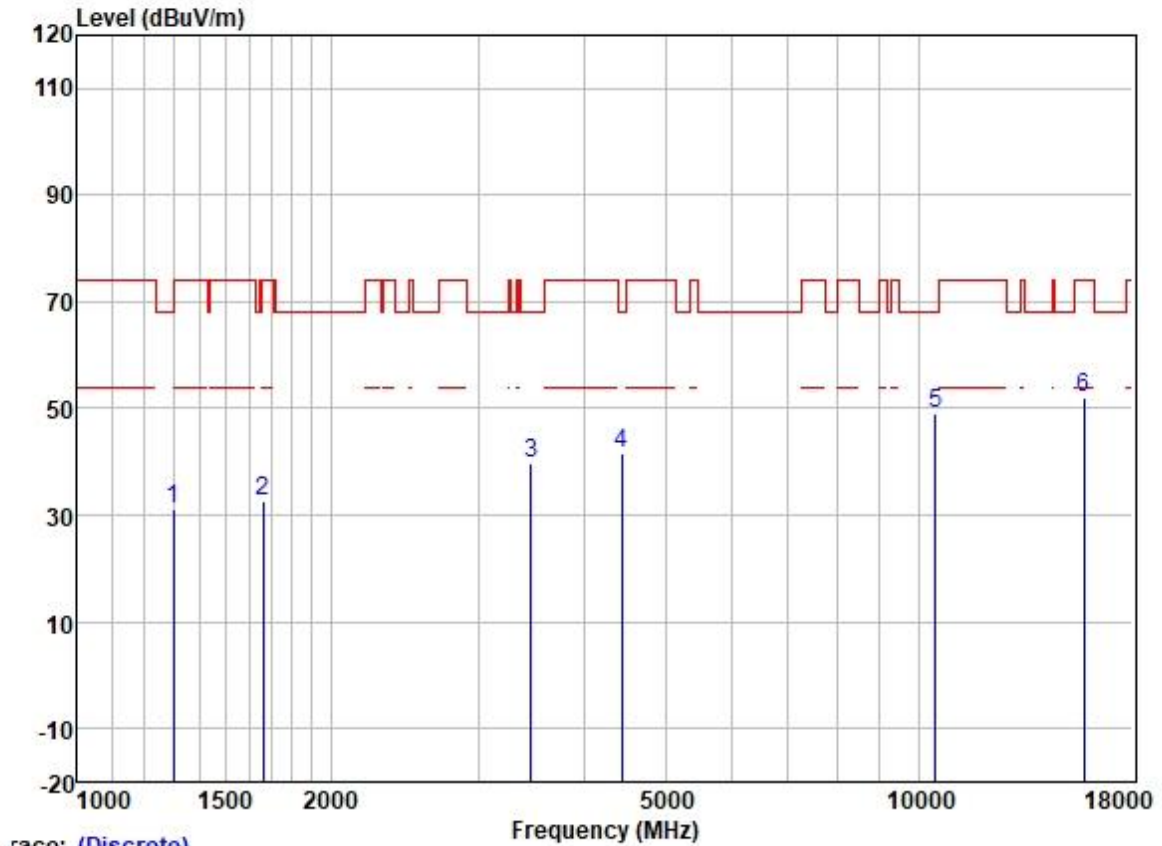

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1300.858	41.55	25.20	2.60	38.31	31.04	74.00	-42.96	HORIZONTAL	Peak
2	1663.137	42.20	25.65	2.80	37.91	32.74	74.00	-41.26	HORIZONTAL	Peak
3	3465.510	43.53	28.88	4.22	36.95	39.68	68.20	-28.52	HORIZONTAL	Peak
4	4443.453	43.03	30.73	4.83	36.81	41.78	68.20	-26.42	HORIZONTAL	Peak
5	10480.000	39.70	39.46	7.40	37.36	49.20	68.20	-19.00	HORIZONTAL	Peak
6	15720.000	38.74	38.78	9.87	35.39	52.00	74.00	-22.00	HORIZONTAL	Peak


Test Mode: 04; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

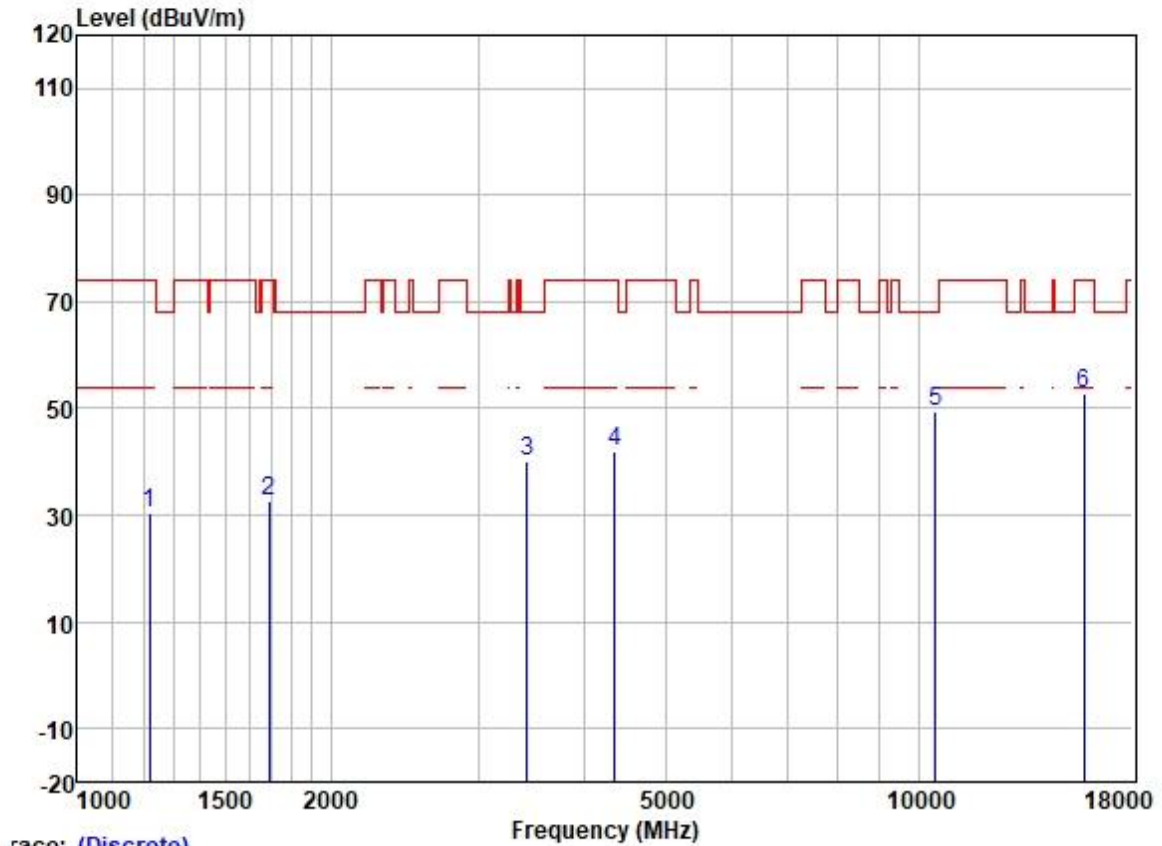

race: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1217.190	41.51	24.79	2.32	38.37	30.25	74.00	-43.75	VERTICAL	Peak
2	1692.231	42.20	25.70	2.80	37.89	32.81	74.00	-41.19	VERTICAL	Peak
3	3425.675	44.00	28.86	4.15	36.97	40.04	68.20	-28.16	VERTICAL	Peak
4	4354.454	43.36	30.59	4.68	36.81	41.82	74.00	-32.18	VERTICAL	Peak
5	10480.000	39.85	39.46	7.40	37.36	49.35	68.20	-18.85	VERTICAL	Peak
6	15720.000	39.44	38.78	9.87	35.39	52.70	74.00	-21.30	VERTICAL	Peak


Test Mode: 04; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

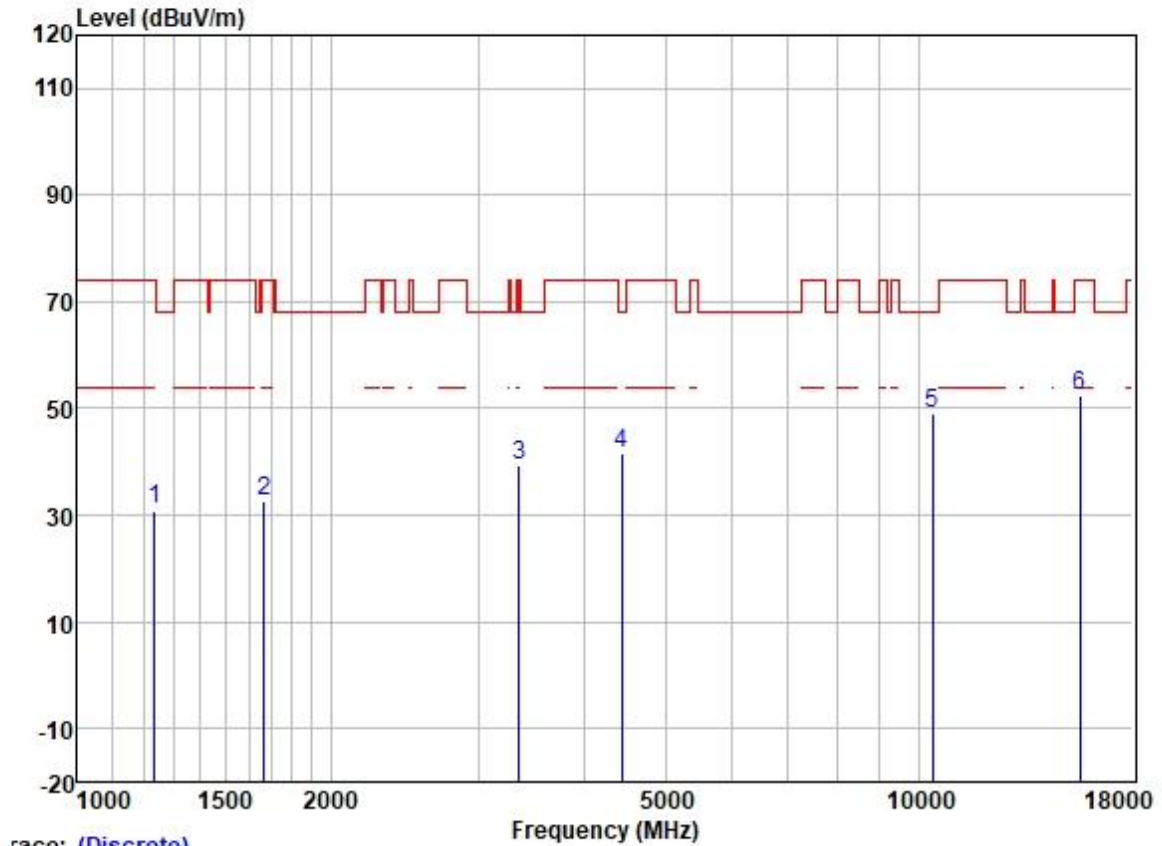

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1234.909	42.10	24.93	2.30	38.37	30.96	74.00	-43.04	HORIZONTAL Peak
2	1667.951	42.11	25.66	2.80	37.91	32.66	74.00	-41.34	HORIZONTAL Peak
3	3347.371	43.31	28.80	4.08	37.01	39.18	74.00	-34.82	HORIZONTAL Peak
4	4443.453	42.79	30.73	4.83	36.81	41.54	68.20	-26.66	HORIZONTAL Peak
5	10380.000	39.91	39.33	7.32	37.37	49.19	68.20	-19.01	HORIZONTAL Peak
6	15570.000	39.11	38.99	9.88	35.39	52.59	74.00	-21.41	HORIZONTAL Peak


Test Mode: 04; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

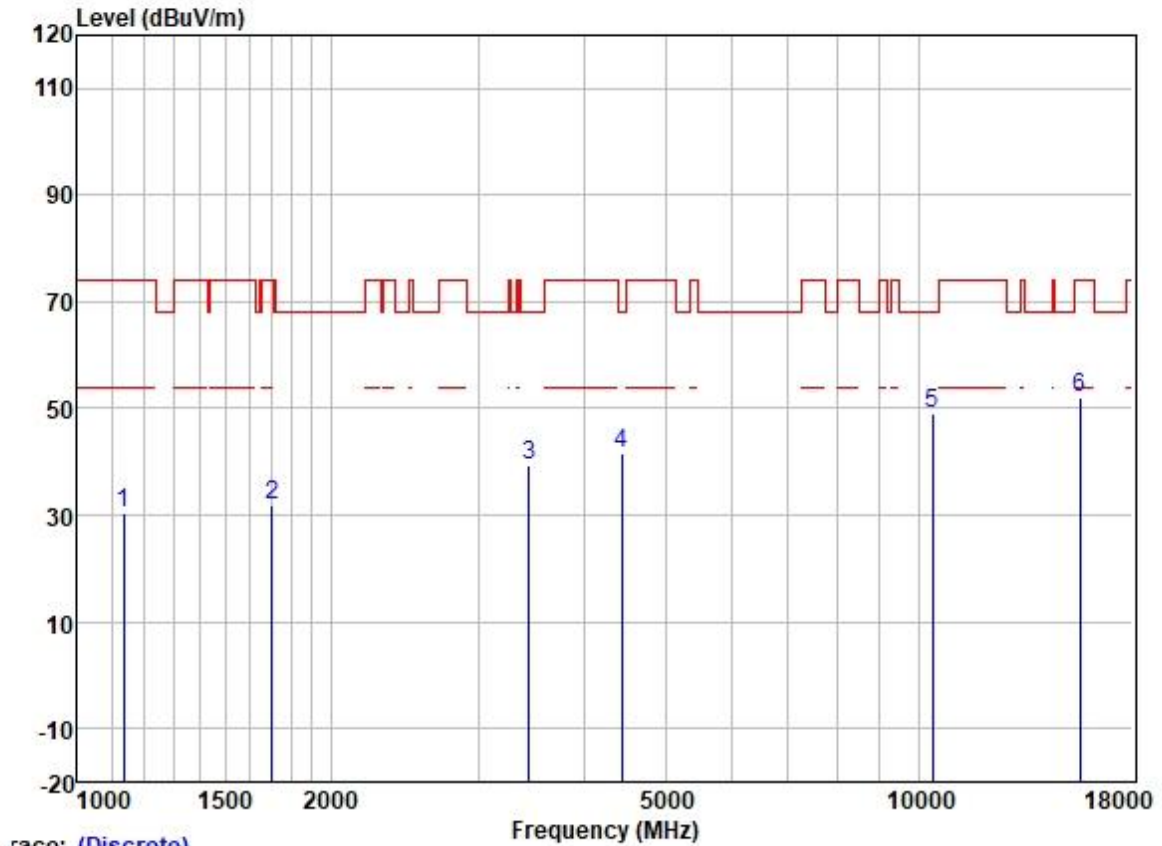

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1135.617	42.13	24.45	2.25	38.43	30.40	74.00	-43.60	VERTICAL Peak
2	1702.042	41.33	25.72	2.80	37.89	31.96	74.00	-42.04	VERTICAL Peak
3	3445.535	43.14	28.87	4.18	36.96	39.23	68.20	-28.97	VERTICAL Peak
4	4443.453	42.69	30.73	4.83	36.81	41.44	68.20	-26.76	VERTICAL Peak
5	10380.000	39.81	39.33	7.32	37.37	49.09	68.20	-19.11	VERTICAL Peak
6	15570.000	38.46	38.99	9.88	35.39	51.94	74.00	-22.06	VERTICAL Peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

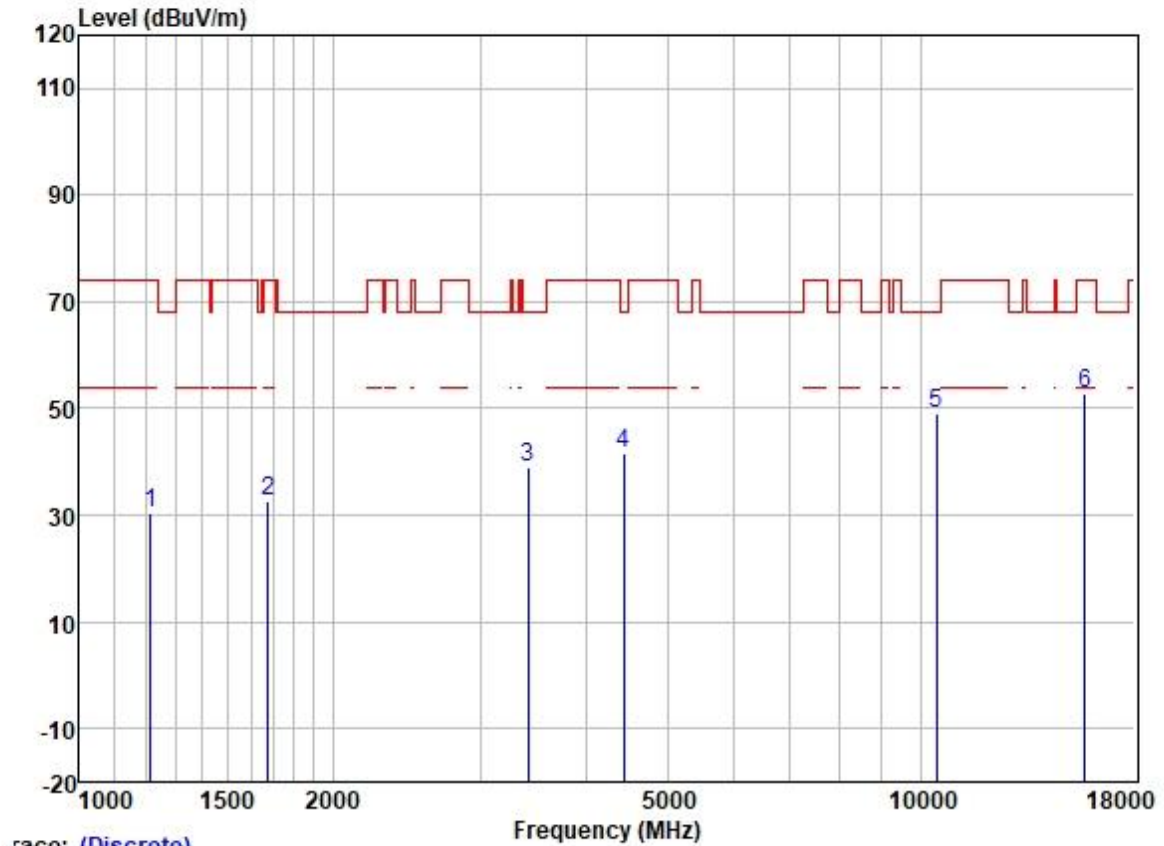

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1213.677	41.76	24.77	2.32	38.37	30.48	74.00	-43.52	HORIZONTAL Peak
2	1677.621	42.25	25.68	2.80	37.91	32.82	74.00	-41.18	HORIZONTAL Peak
3	3415.787	43.07	28.85	4.13	36.97	39.08	68.20	-29.12	HORIZONTAL Peak
4	4443.453	42.99	30.73	4.83	36.81	41.74	68.20	-26.46	HORIZONTAL Peak
5	10460.000	39.47	39.42	7.37	37.36	48.90	68.20	-19.30	HORIZONTAL Peak
6	15690.000	39.43	38.86	9.87	35.39	52.77	74.00	-21.23	HORIZONTAL Peak


Test Mode: 04; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

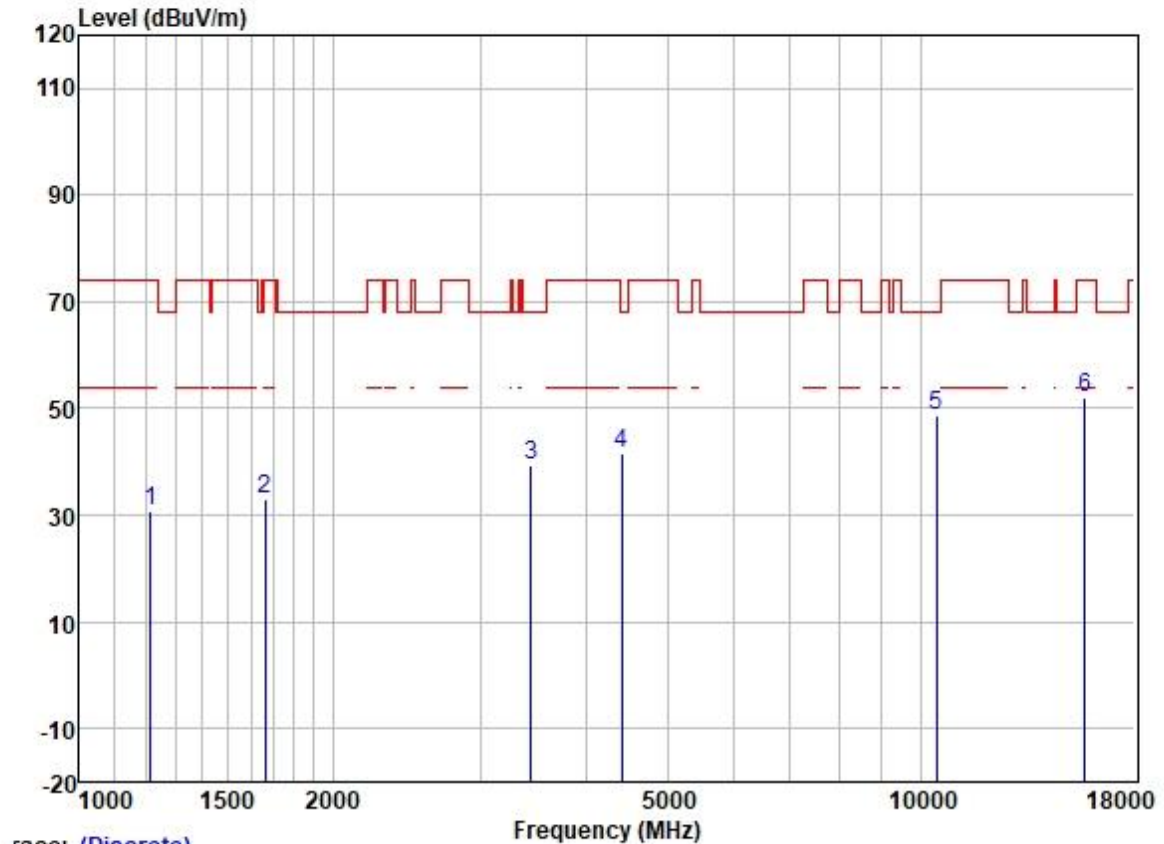

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1213.677	41.93	24.77	2.32	38.37	30.65	74.00	-43.35	VERTICAL Peak
2	1663.137	42.35	25.65	2.80	37.91	32.89	74.00	-41.11	VERTICAL Peak
3	3445.535	43.31	28.87	4.18	36.96	39.40	68.20	-28.80	VERTICAL Peak
4	4417.841	42.80	30.70	4.74	36.81	41.43	68.20	-26.77	VERTICAL Peak
5	10460.000	39.39	39.42	7.37	37.36	48.82	68.20	-19.38	VERTICAL Peak
6	15690.000	38.75	38.86	9.87	35.39	52.09	74.00	-21.91	VERTICAL Peak


Test Mode: 04; Polarity: Horizontal; Modulation: 802.11ac; Bandwidth: 80MHz; Channel: middle

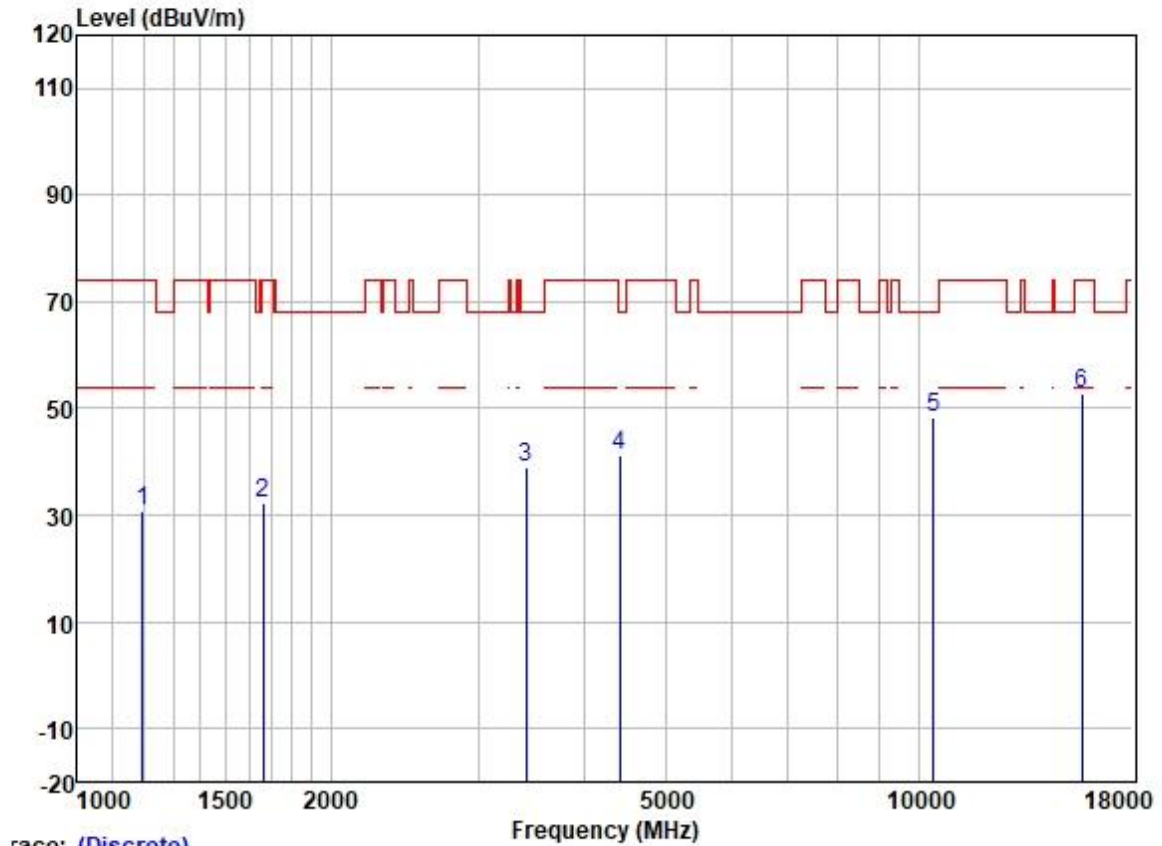

Trace: (Discrete)

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1196.264	42.27	24.67	2.35	38.39	30.90	74.00	-43.10	HORIZONTAL	Peak
2	1663.137	41.63	25.65	2.80	37.91	32.17	74.00	-41.83	HORIZONTAL	Peak
3	3415.787	42.87	28.85	4.13	36.97	38.88	68.20	-29.32	HORIZONTAL	Peak
4	4417.841	42.76	30.70	4.74	36.81	41.39	68.20	-26.81	HORIZONTAL	Peak
5	10420.000	39.03	39.38	7.35	37.36	48.40	68.20	-19.80	HORIZONTAL	Peak
6	15630.000	39.26	38.92	9.87	35.39	52.66	74.00	-21.34	HORIZONTAL	Peak


Test Mode: 04; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

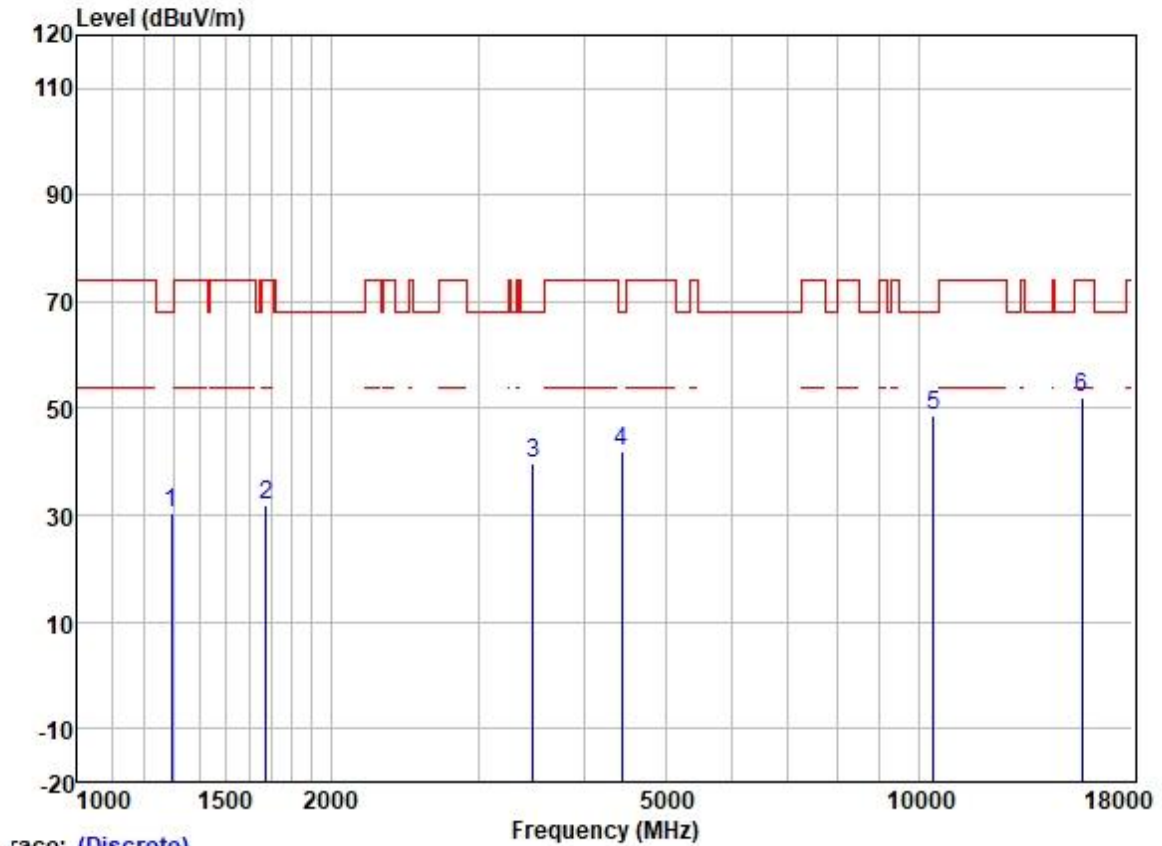

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1293.359	41.00	25.18	2.57	38.31	30.44	68.20	-37.76	VERTICAL	Peak
2	1677.621	41.37	25.68	2.80	37.91	31.94	74.00	-42.06	VERTICAL	Peak
3	3485.601	43.53	28.89	4.27	36.95	39.74	68.20	-28.46	VERTICAL	Peak
4	4443.453	43.09	30.73	4.83	36.81	41.84	68.20	-26.36	VERTICAL	Peak
5	10420.000	39.42	39.38	7.35	37.36	48.79	68.20	-19.41	VERTICAL	Peak
6	15630.000	38.64	38.92	9.87	35.39	52.04	74.00	-21.96	VERTICAL	Peak


Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

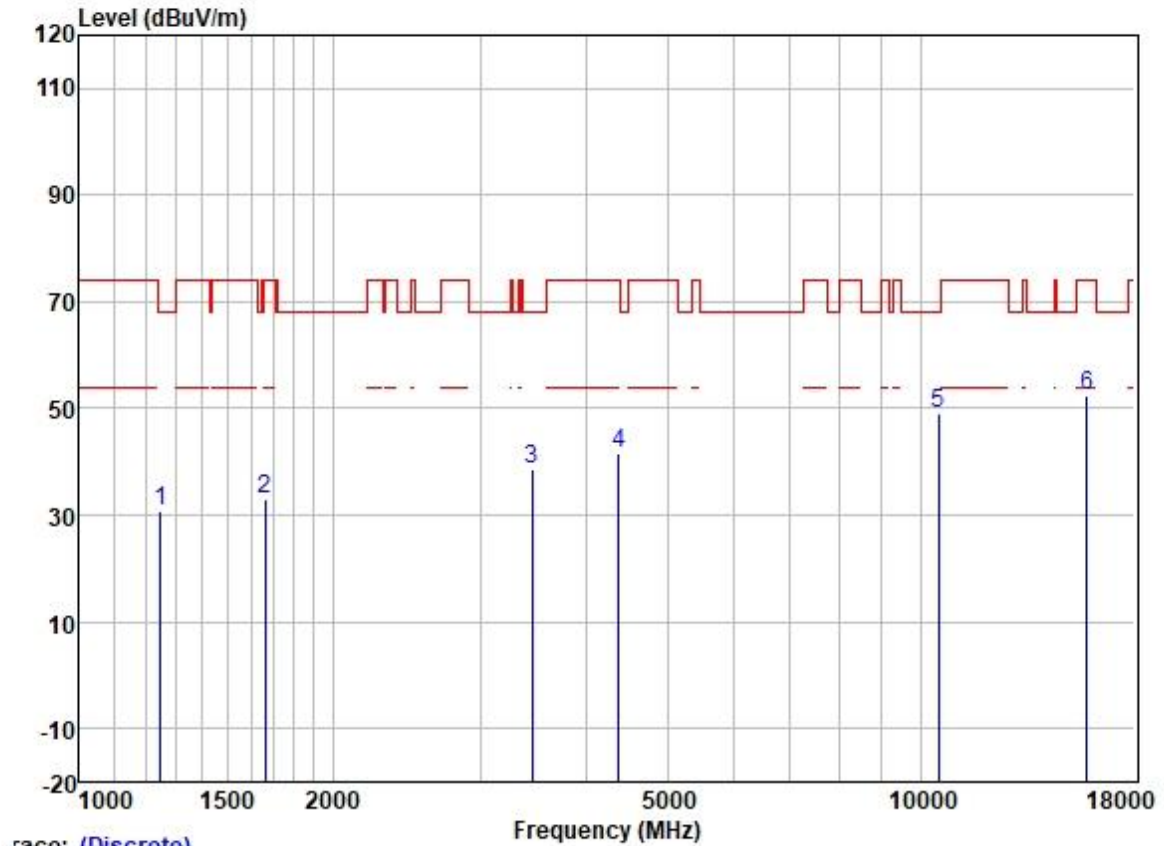

race: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1249.269	41.75	25.02	2.34	38.35	30.76	68.20	-37.44	HORIZONTAL	Peak
2	1663.137	42.29	25.65	2.80	37.91	32.83	74.00	-41.17	HORIZONTAL	Peak
3	3455.508	42.65	28.88	4.20	36.96	38.77	68.20	-29.43	HORIZONTAL	Peak
4	4379.699	42.90	30.64	4.69	36.81	41.42	74.00	-32.58	HORIZONTAL	Peak
5	10520.000	39.43	39.50	7.42	37.35	49.00	68.20	-19.20	HORIZONTAL	Peak
6	15780.000	39.08	38.70	9.86	35.39	52.25	74.00	-21.75	HORIZONTAL	Peak

Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

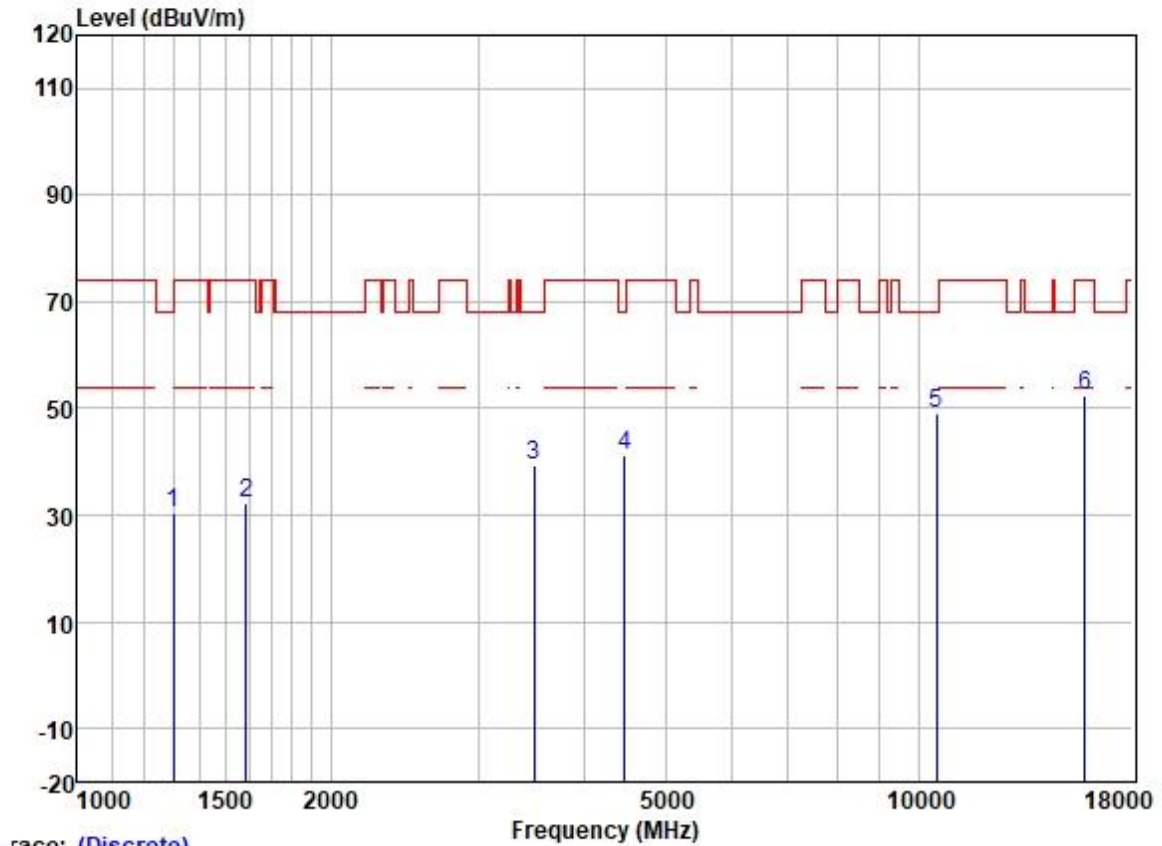

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1300.858	40.75	25.20	2.60	38.31	30.24	74.00	-43.76	VERTICAL Peak
2	1587.975	41.82	25.57	2.80	37.98	32.21	74.00	-41.79	VERTICAL Peak
3	3495.691	42.99	28.90	4.30	36.94	39.25	68.20	-28.95	VERTICAL Peak
4	4469.214	42.35	30.77	4.93	36.81	41.24	68.20	-26.96	VERTICAL Peak
5	10520.000	39.59	39.50	7.42	37.35	49.16	68.20	-19.04	VERTICAL Peak
6	15780.000	39.09	38.70	9.86	35.39	52.26	74.00	-21.74	VERTICAL Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

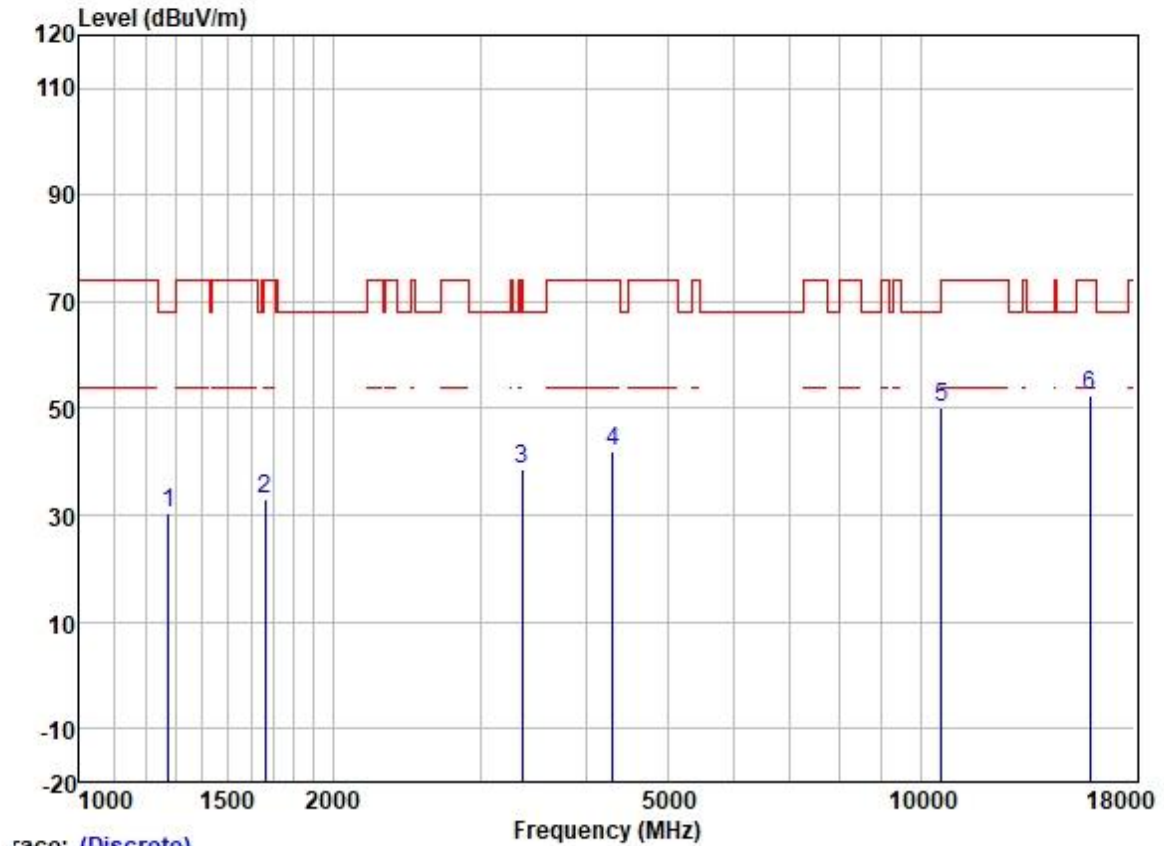

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1274.802	41.20	25.12	2.48	38.33	30.47	68.20	-37.73	HORIZONTAL	Peak
2	1663.137	42.33	25.65	2.80	37.91	32.87	74.00	-41.13	HORIZONTAL	Peak
3	3357.061	42.81	28.81	4.09	37.01	38.70	74.00	-35.30	HORIZONTAL	Peak
4	4304.400	43.56	30.48	4.65	36.81	41.88	74.00	-32.12	HORIZONTAL	Peak
5	10600.000	40.43	39.59	7.46	37.34	50.14	68.20	-18.06	HORIZONTAL	Peak
6	15900.000	39.45	38.44	9.86	35.40	52.35	74.00	-21.65	HORIZONTAL	Peak


Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

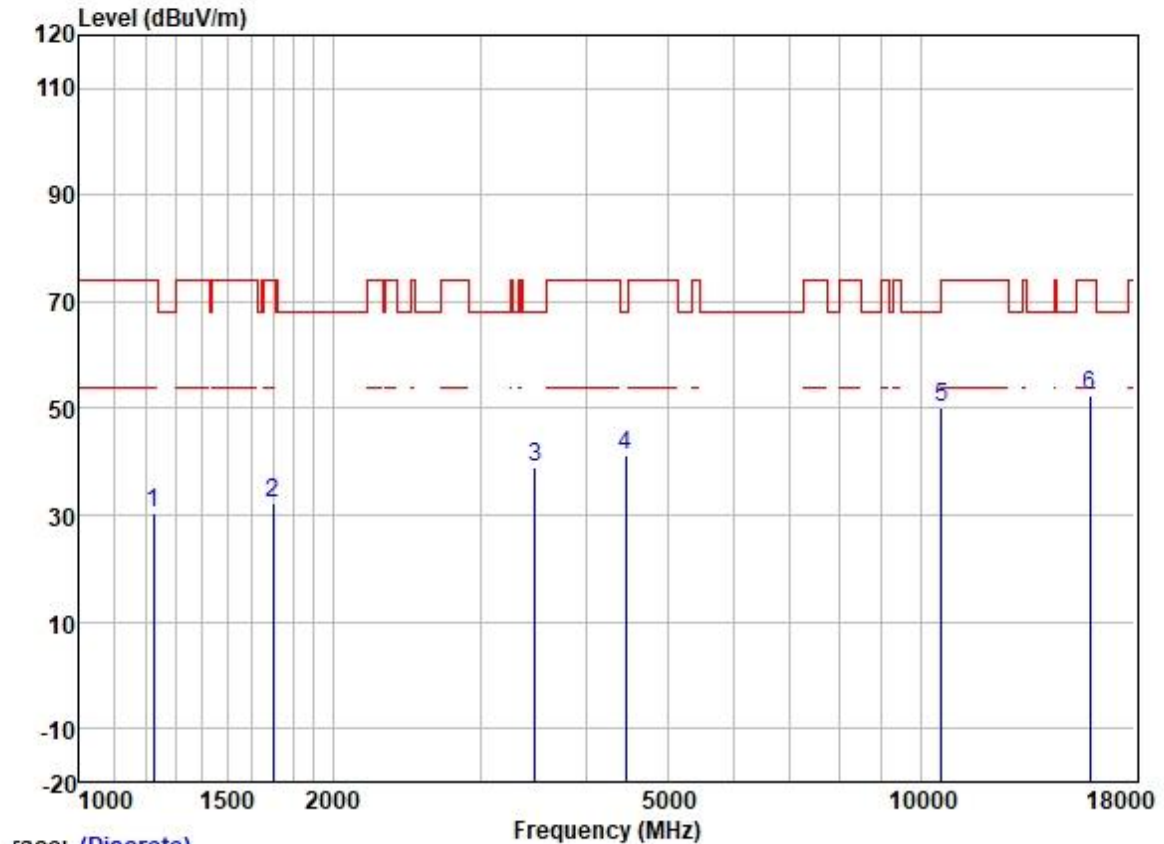

race: (Discrete)


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1224.247	41.78	24.85	2.31	38.37	30.57	74.00	-43.43	VERTICAL	Peak
2	1697.129	41.55	25.71	2.80	37.89	32.17	74.00	-41.83	VERTICAL	Peak
3	3485.601	42.96	28.89	4.27	36.95	39.17	68.20	-29.03	VERTICAL	Peak
4	4456.315	42.45	30.75	4.88	36.81	41.27	68.20	-26.93	VERTICAL	Peak
5	10600.000	40.34	39.59	7.46	37.34	50.05	68.20	-18.15	VERTICAL	Peak
6	15900.000	39.67	38.44	9.86	35.40	52.57	74.00	-21.43	VERTICAL	Peak

Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

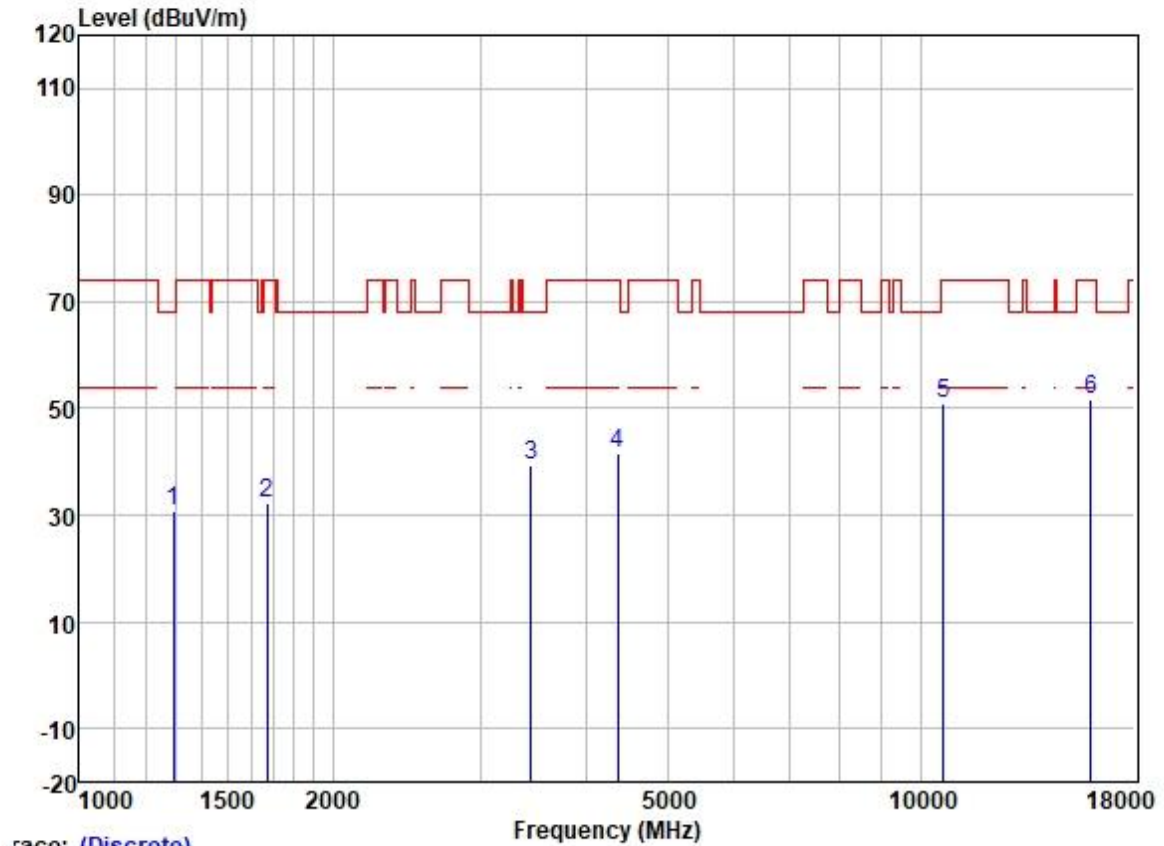

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1293.359	41.33	25.18	2.57	38.31	30.77	68.20	-37.43	HORIZONTAL Peak
2	1672.779	41.56	25.67	2.80	37.91	32.12	74.00	-41.88	HORIZONTAL Peak
3	3445.535	43.11	28.87	4.18	36.96	39.20	68.20	-29.00	HORIZONTAL Peak
4	4367.058	43.27	30.62	4.68	36.81	41.76	74.00	-32.24	HORIZONTAL Peak
5	10640.000	41.02	39.63	7.48	37.33	50.80	74.00	-23.20	HORIZONTAL Peak
6	15960.000	38.87	38.37	9.85	35.40	51.69	74.00	-22.31	HORIZONTAL Peak


Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

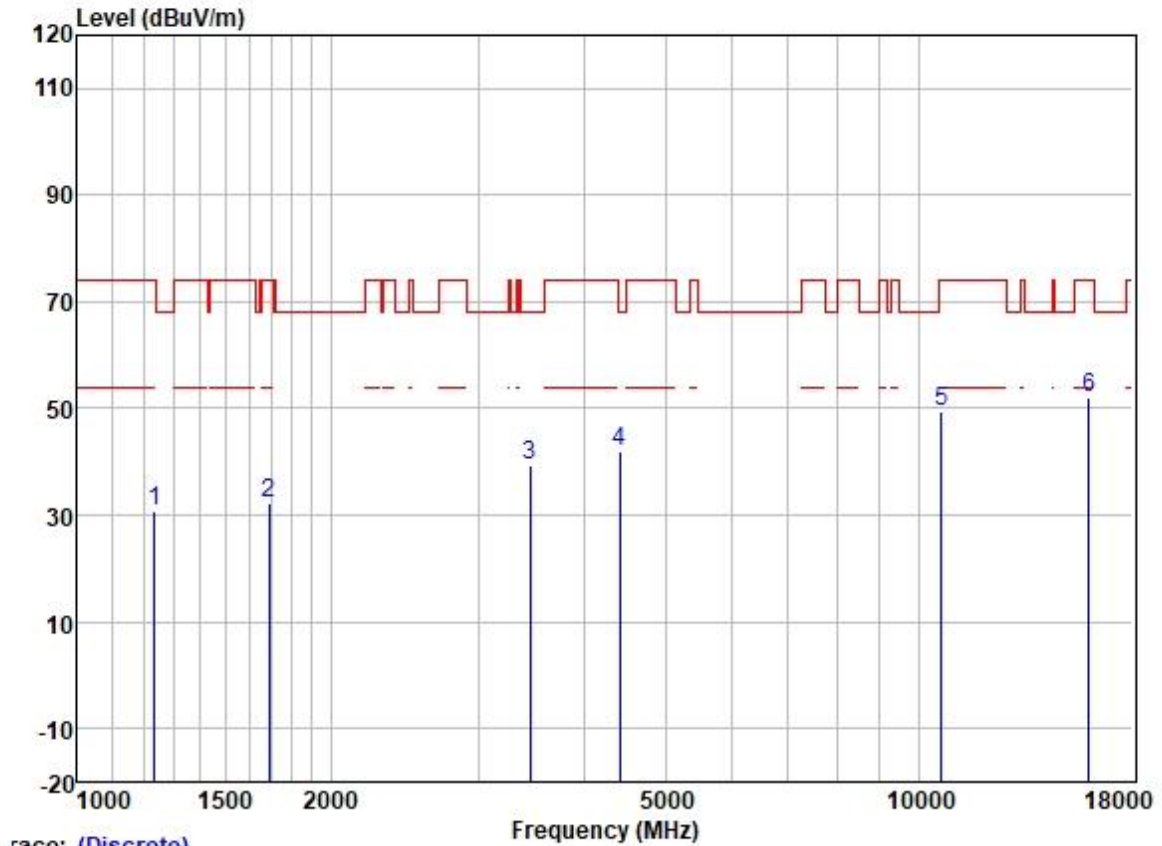

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1234.909	41.86	24.93	2.30	38.37	30.72	74.00	-43.28	VERTICAL Peak
2	1692.231	41.67	25.70	2.80	37.89	32.28	74.00	-41.72	VERTICAL Peak
3	3455.508	43.11	28.88	4.20	36.96	39.23	68.20	-28.97	VERTICAL Peak
4	4417.841	43.17	30.70	4.74	36.81	41.80	68.20	-26.40	VERTICAL Peak
5	10640.000	39.73	39.63	7.48	37.33	49.51	74.00	-24.49	VERTICAL Peak
6	15960.000	39.24	38.37	9.85	35.40	52.06	74.00	-21.94	VERTICAL Peak

Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

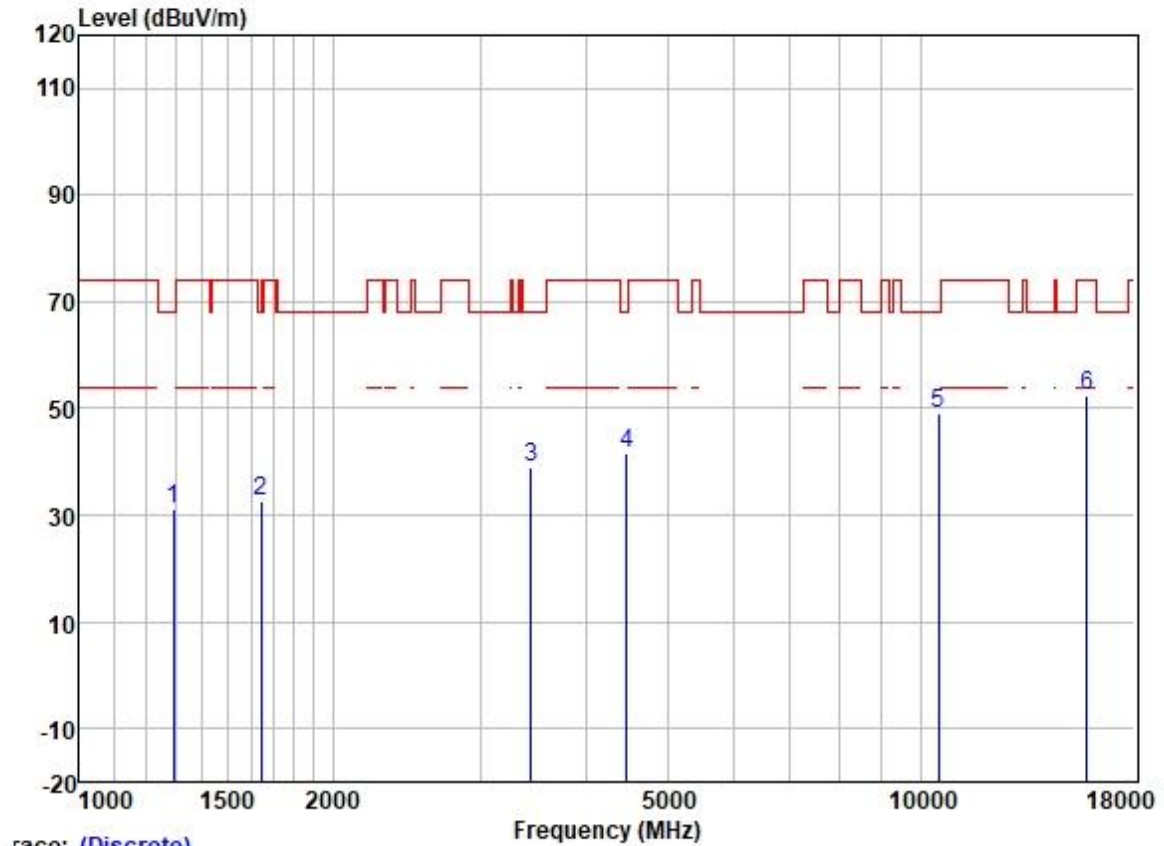


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1293.359	41.80	25.18	2.57	38.31	31.24	68.20	-36.96	HORIZONTAL Peak
2	1644.019	42.07	25.63	2.80	37.93	32.57	68.20	-35.63	HORIZONTAL Peak
3	3445.535	42.84	28.87	4.18	36.96	38.93	68.20	-29.27	HORIZONTAL Peak
4	4469.214	42.60	30.77	4.93	36.81	41.49	68.20	-26.71	HORIZONTAL Peak
5	10520.000	39.34	39.50	7.42	37.35	48.91	68.20	-19.29	HORIZONTAL Peak
6	15780.000	39.15	38.70	9.86	35.39	52.32	74.00	-21.68	HORIZONTAL Peak

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

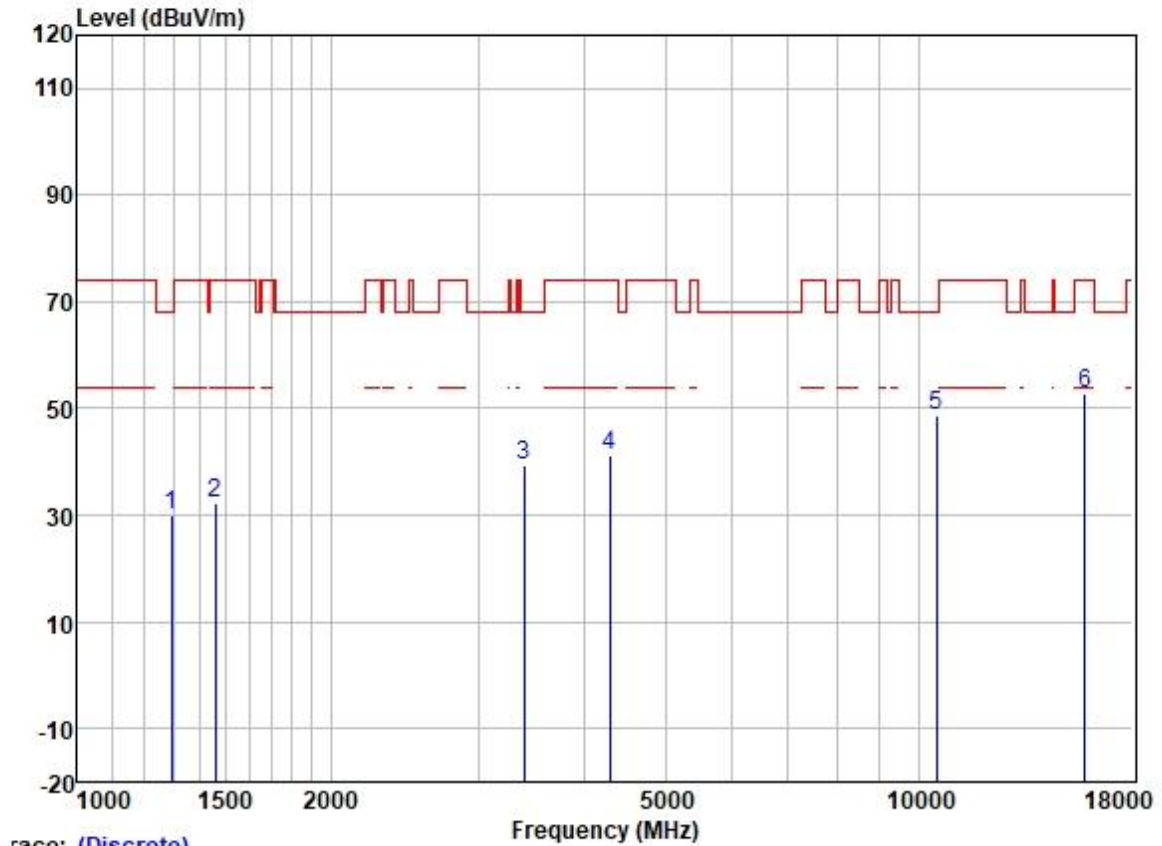


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1293.359	40.57	25.18	2.57	38.31	30.01	68.20	-38.19	VERTICAL Peak
2	1460.295	42.41	25.46	2.73	38.17	32.43	74.00	-41.57	VERTICAL Peak
3	3396.098	43.38	28.84	4.10	36.98	39.34	68.20	-28.86	VERTICAL Peak
4	4291.977	43.05	30.45	4.64	36.81	41.33	74.00	-32.67	VERTICAL Peak
5	10520.000	39.30	39.50	7.42	37.35	48.87	68.20	-19.33	VERTICAL Peak
6	15780.000	39.54	38.70	9.86	35.39	52.71	74.00	-21.29	VERTICAL Peak

Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

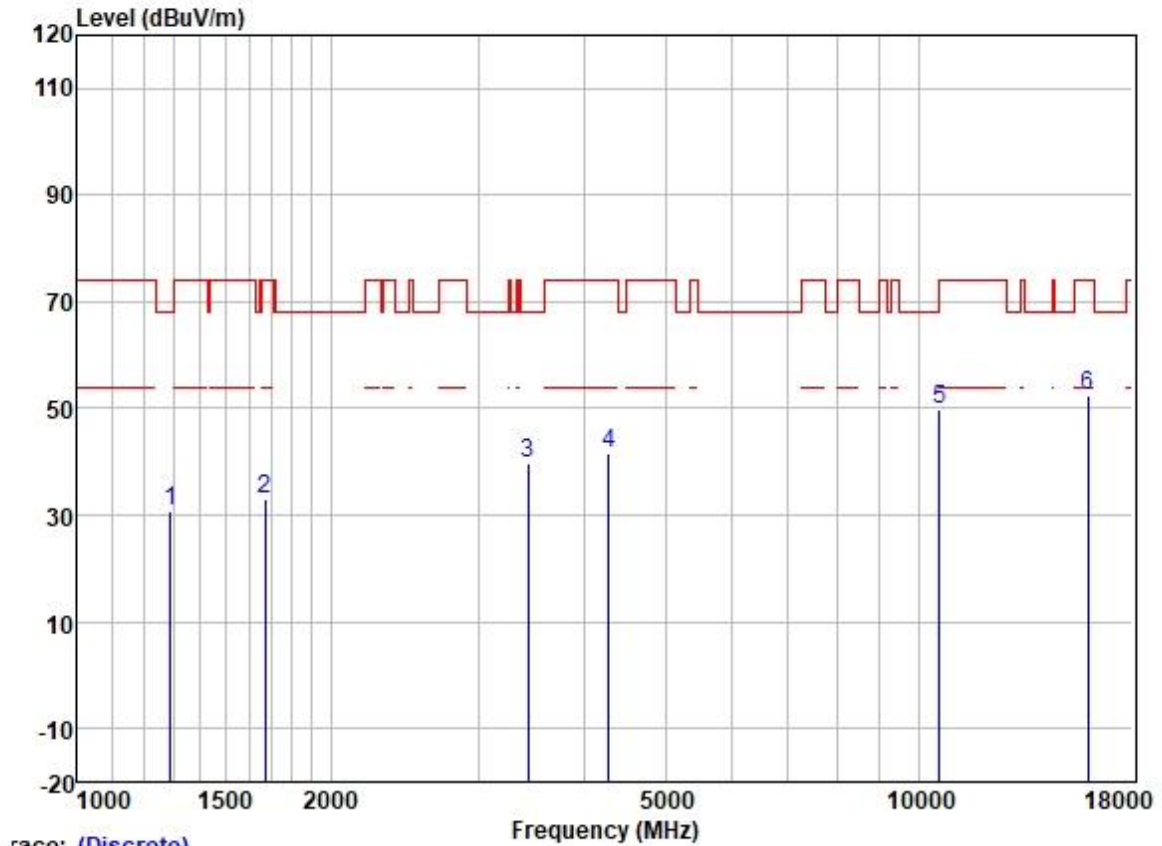


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1289.627	41.30	25.17	2.55	38.31	30.71	68.20	-37.49	HORIZONTAL Peak
2	1672.779	42.32	25.67	2.80	37.91	32.88	74.00	-41.12	HORIZONTAL Peak
3	3435.590	43.83	28.87	4.16	36.97	39.89	68.20	-28.31	HORIZONTAL Peak
4	4279.589	43.39	30.42	4.63	36.81	41.63	74.00	-32.37	HORIZONTAL Peak
5	10600.000	40.16	39.59	7.46	37.34	49.87	68.20	-18.33	HORIZONTAL Peak
6	15900.000	39.42	38.44	9.86	35.40	52.32	74.00	-21.68	HORIZONTAL Peak

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

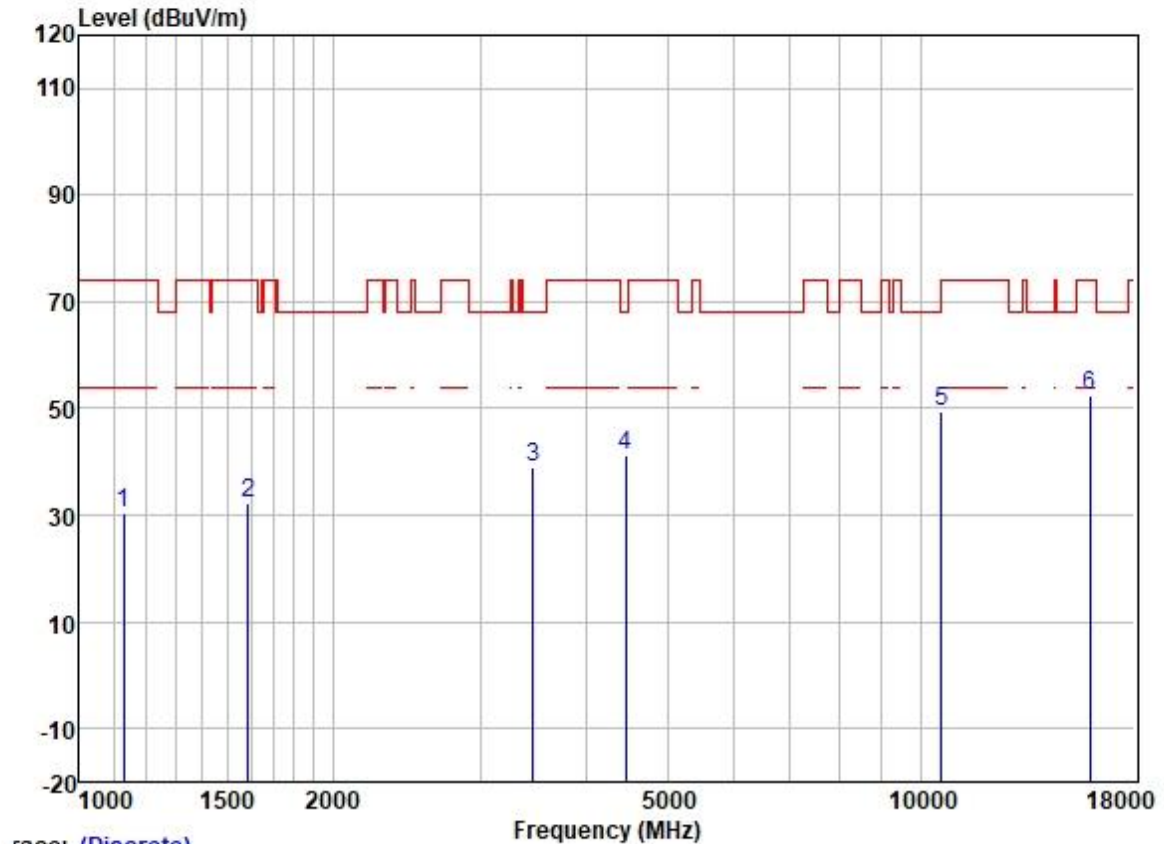


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1129.072	42.31	24.43	2.20	38.43	30.51	74.00	-43.49	VERTICAL	Peak
2	1587.975	41.70	25.57	2.80	37.98	32.09	74.00	-41.91	VERTICAL	Peak
3	3465.510	42.93	28.88	4.22	36.95	39.08	68.20	-29.12	VERTICAL	Peak
4	4456.315	42.55	30.75	4.88	36.81	41.37	68.20	-26.83	VERTICAL	Peak
5	10600.000	39.90	39.59	7.46	37.34	49.61	68.20	-18.59	VERTICAL	Peak
6	15900.000	39.71	38.44	9.86	35.40	52.61	74.00	-21.39	VERTICAL	Peak

Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

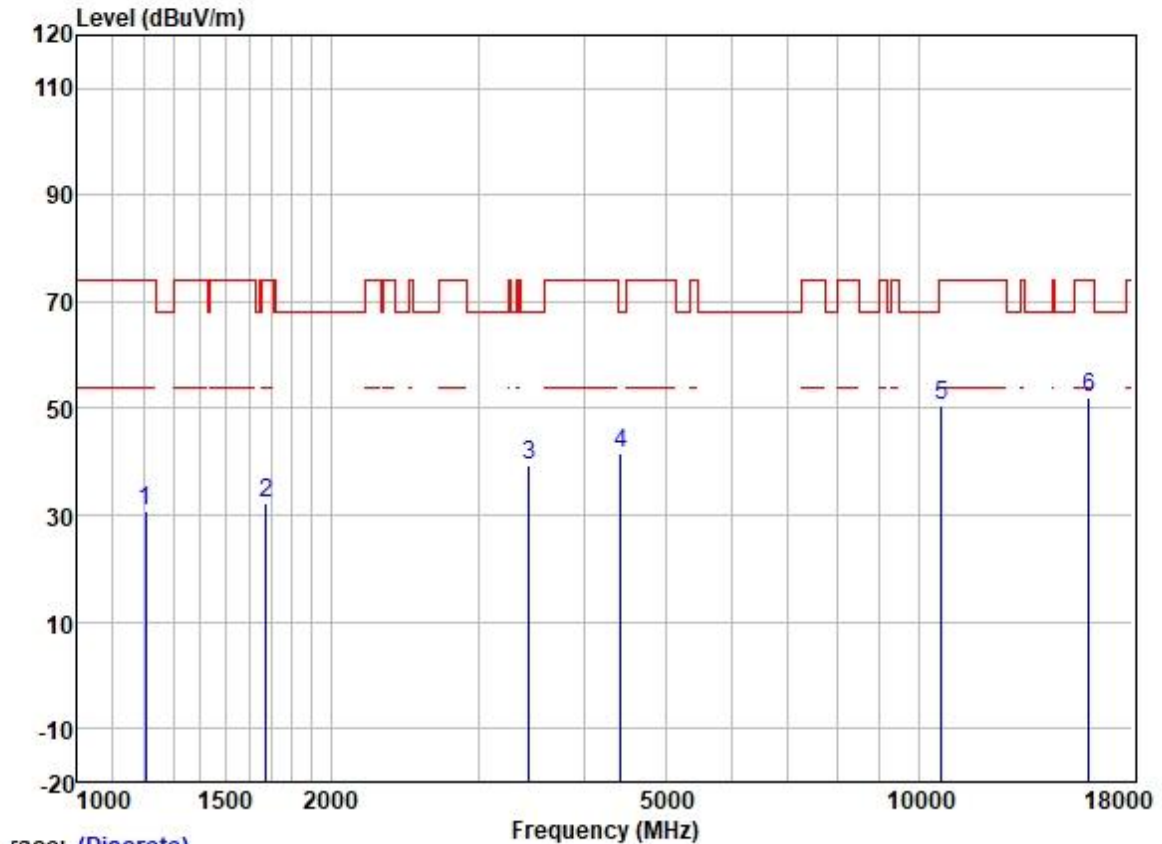

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1206.682	42.16	24.72	2.33	38.39	30.82	74.00	-43.18	HORIZONTAL	Peak
2	1677.621	41.82	25.68	2.80	37.91	32.39	74.00	-41.61	HORIZONTAL	Peak
3	3445.535	43.35	28.87	4.18	36.96	39.44	68.20	-28.76	HORIZONTAL	Peak
4	4430.628	42.80	30.72	4.78	36.81	41.49	68.20	-26.71	HORIZONTAL	Peak
5	10640.000	40.67	39.63	7.48	37.33	50.45	74.00	-23.55	HORIZONTAL	Peak
6	15960.000	39.30	38.37	9.85	35.40	52.12	74.00	-21.88	HORIZONTAL	Peak


Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

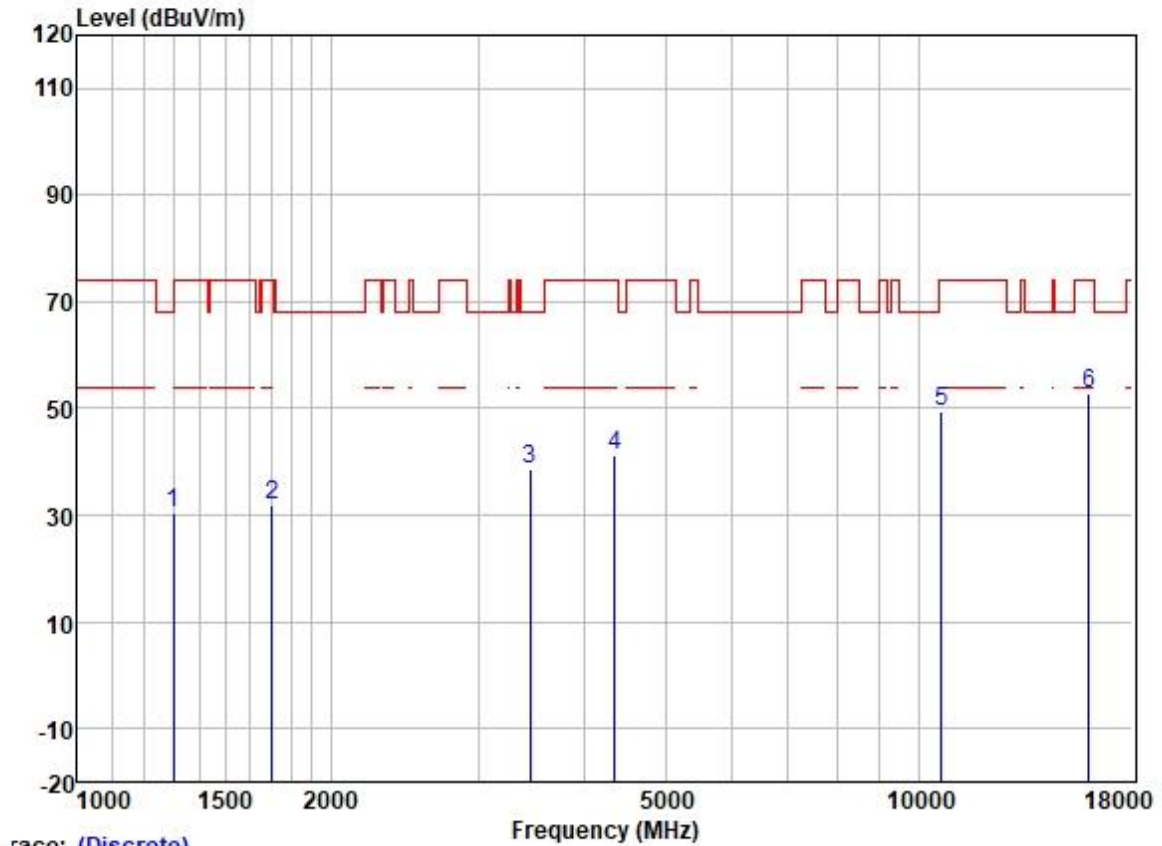

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1300.858	40.95	25.20	2.60	38.31	30.44	74.00	-43.56	VERTICAL Peak
2	1702.042	41.41	25.72	2.80	37.89	32.04	74.00	-41.96	VERTICAL Peak
3	3455.508	42.61	28.88	4.20	36.96	38.73	68.20	-29.47	VERTICAL Peak
4	4354.454	42.65	30.59	4.68	36.81	41.11	74.00	-32.89	VERTICAL Peak
5	10640.000	39.73	39.63	7.48	37.33	49.51	74.00	-24.49	VERTICAL Peak
6	15960.000	39.83	38.37	9.85	35.40	52.65	74.00	-21.35	VERTICAL Peak

Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

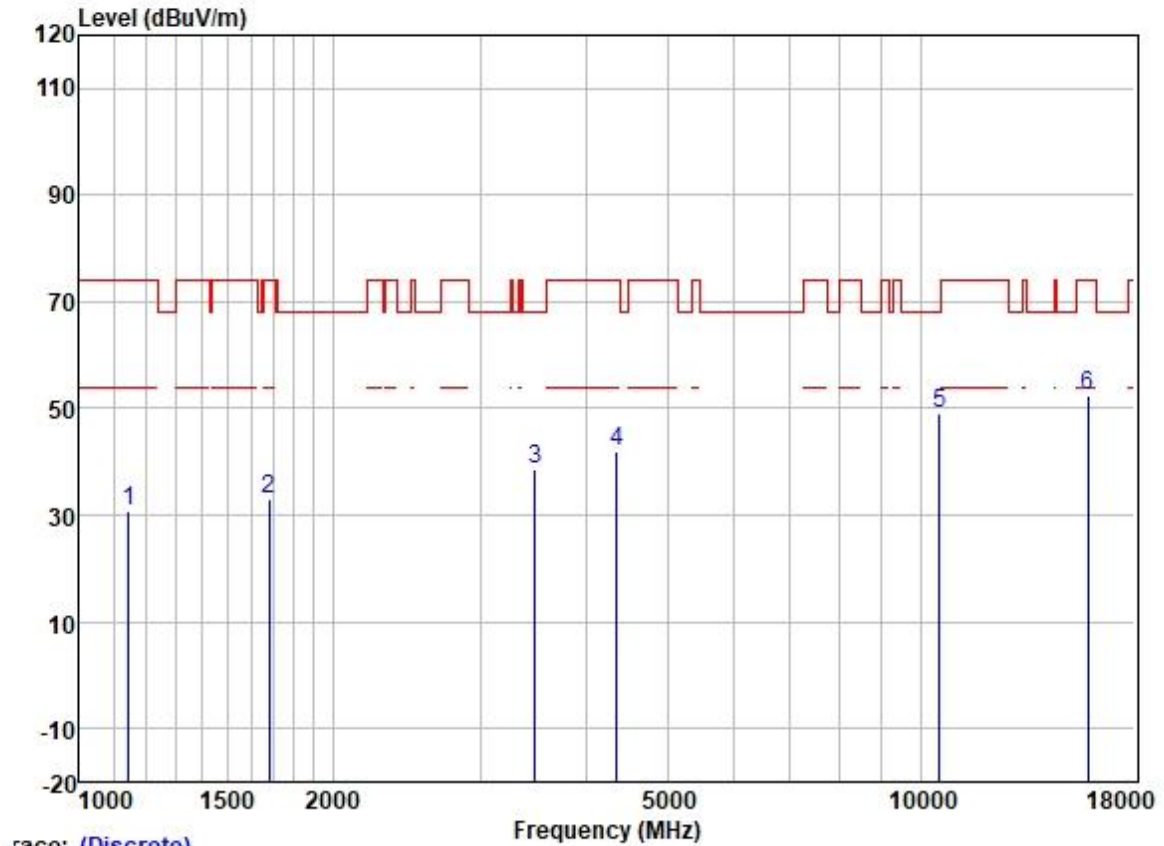


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1145.507	42.27	24.48	2.32	38.42	30.65	74.00	-43.35	HORIZONTAL Peak
2	1682.477	42.35	25.68	2.80	37.91	32.92	74.00	-41.08	HORIZONTAL Peak
3	3485.601	42.52	28.89	4.27	36.95	38.73	68.20	-29.47	HORIZONTAL Peak
4	4354.454	43.33	30.59	4.68	36.81	41.79	74.00	-32.21	HORIZONTAL Peak
5	10540.000	39.43	39.53	7.43	37.35	49.04	68.20	-19.16	HORIZONTAL Peak
6	15810.000	39.43	38.61	9.86	35.39	52.51	74.00	-21.49	HORIZONTAL Peak

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

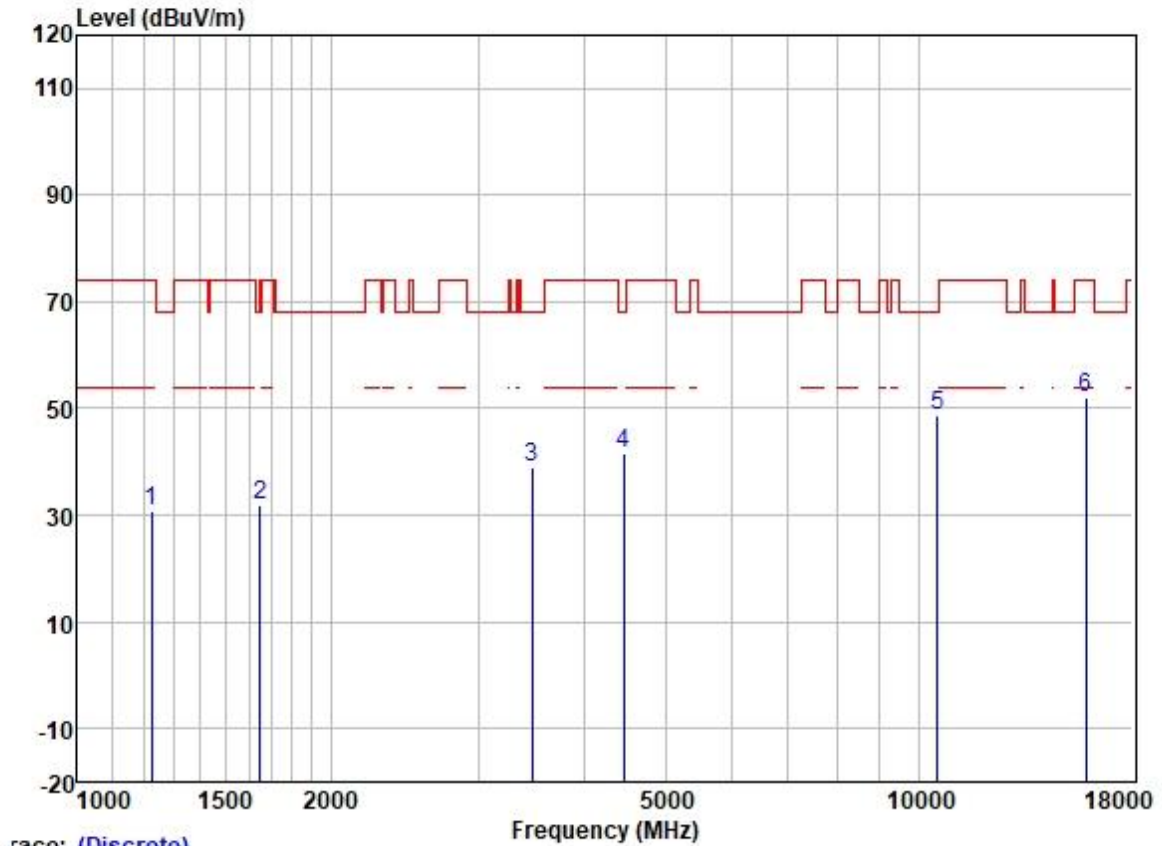

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1224.247	41.85	24.85	2.31	38.37	30.64	74.00	-43.36	VERTICAL Peak
2	1648.778	41.35	25.63	2.80	37.93	31.85	68.20	-36.35	VERTICAL Peak
3	3475.541	42.78	28.89	4.25	36.95	38.97	68.20	-29.23	VERTICAL Peak
4	4456.315	42.67	30.75	4.88	36.81	41.49	68.20	-26.71	VERTICAL Peak
5	10540.000	38.98	39.53	7.43	37.35	48.59	68.20	-19.61	VERTICAL Peak
6	15810.000	39.14	38.61	9.86	35.39	52.22	74.00	-21.78	VERTICAL Peak


Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

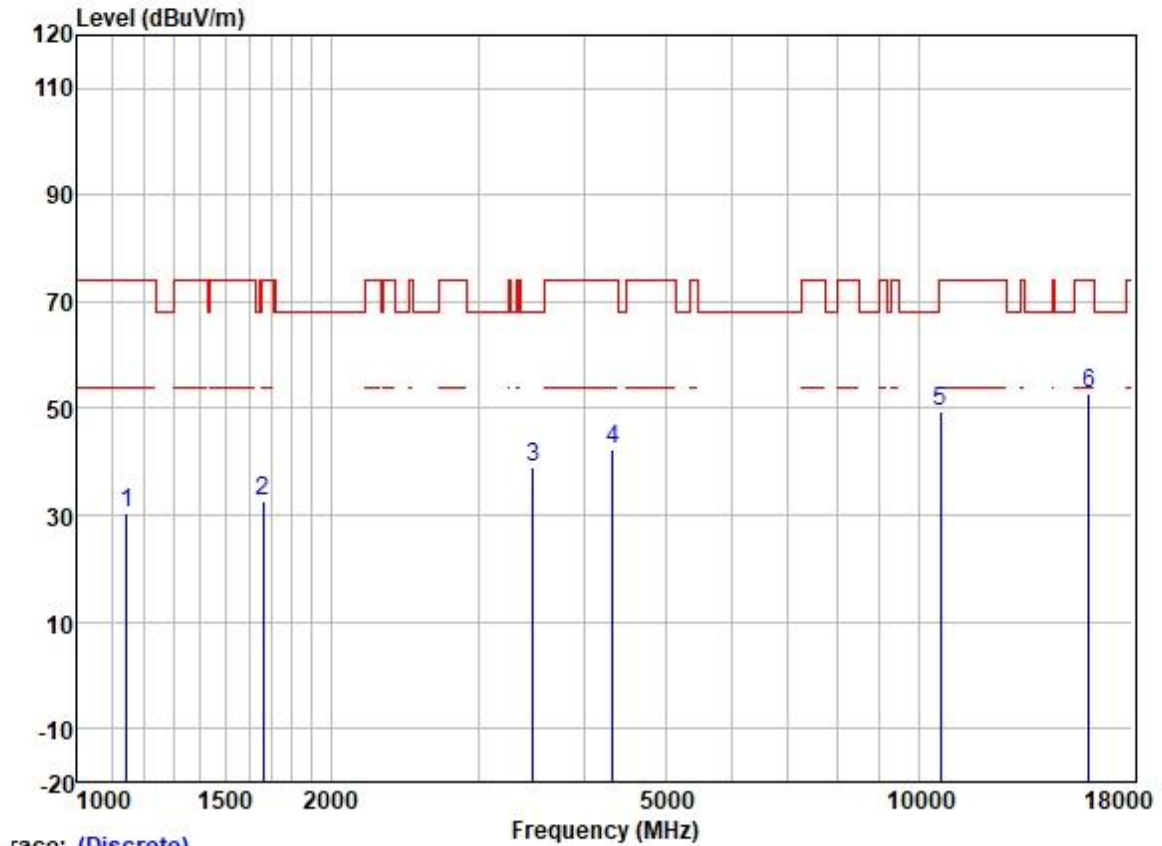

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1145.507	42.05	24.48	2.32	38.42	30.43	74.00	-43.57	HORIZONTAL	Peak
2	1663.137	41.97	25.65	2.80	37.91	32.51	74.00	-41.49	HORIZONTAL	Peak
3	3485.601	42.60	28.89	4.27	36.95	38.81	68.20	-29.39	HORIZONTAL	Peak
4	4329.354	44.07	30.54	4.67	36.81	42.47	74.00	-31.53	HORIZONTAL	Peak
5	10620.000	39.86	39.59	7.46	37.34	49.57	74.00	-24.43	HORIZONTAL	Peak
6	15930.000	39.85	38.37	9.85	35.40	52.67	74.00	-21.33	HORIZONTAL	Peak


Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

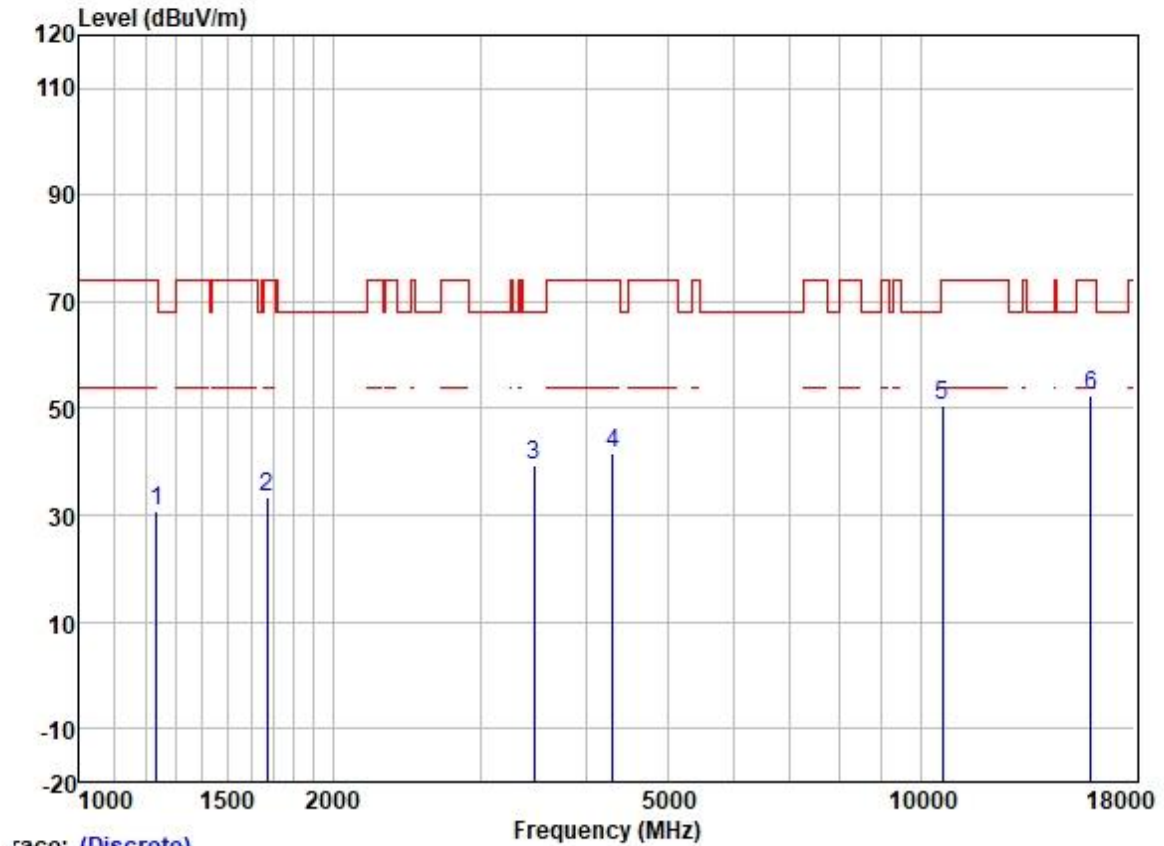

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1234.909	41.89	24.93	2.30	38.37	30.75	74.00	-43.25	VERTICAL Peak
2	1672.779	42.77	25.67	2.80	37.91	33.33	74.00	-40.67	VERTICAL Peak
3	3475.541	43.17	28.89	4.25	36.95	39.36	68.20	-28.84	VERTICAL Peak
4	4304.400	43.46	30.48	4.65	36.81	41.78	74.00	-32.22	VERTICAL Peak
5	10620.000	40.90	39.59	7.46	37.34	50.61	74.00	-23.39	VERTICAL Peak
6	15930.000	39.44	38.37	9.85	35.40	52.26	74.00	-21.74	VERTICAL Peak

Test Mode: 05; Polarity: Horizontal; Modulation: 802.11ac; Bandwidth: 20MHz; Channel: Low

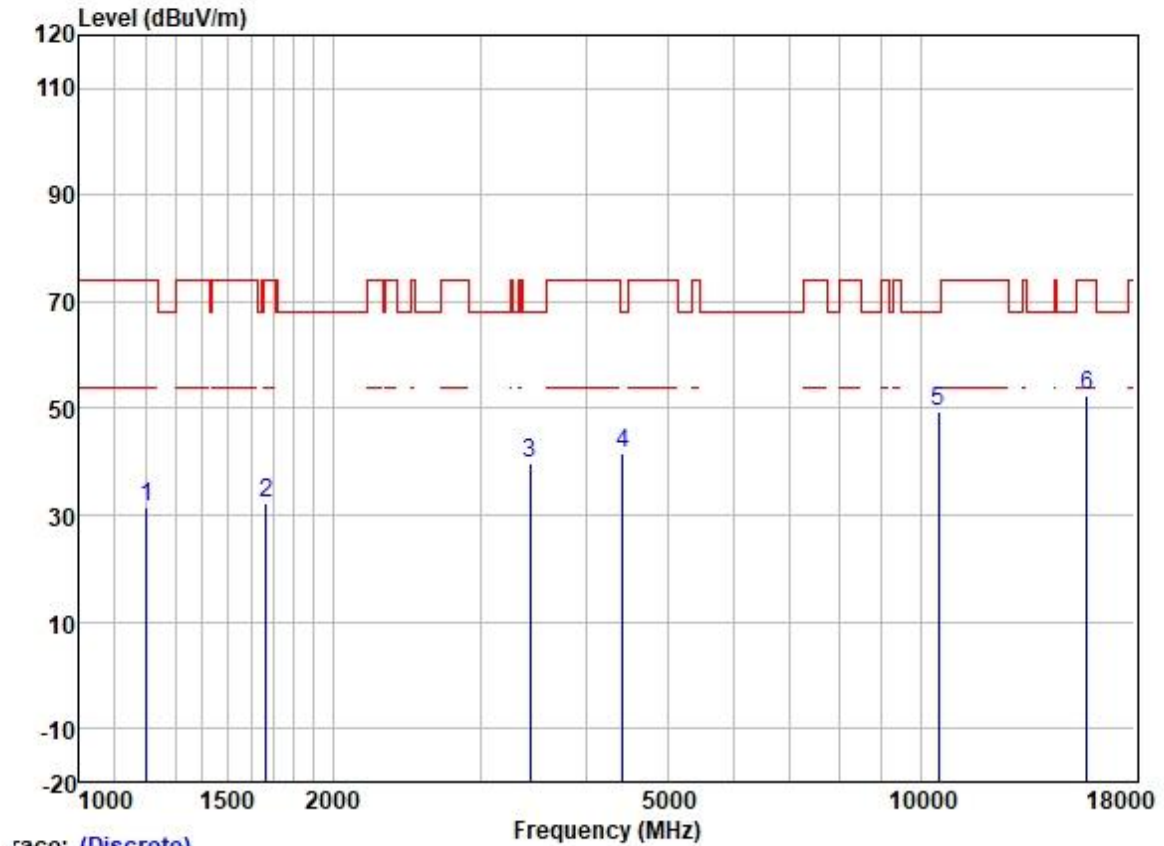

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1203.199	42.83	24.70	2.34	38.39	31.48	74.00	-42.52	HORIZONTAL	Peak
2	1667.951	41.90	25.66	2.80	37.91	32.45	74.00	-41.55	HORIZONTAL	Peak
3	3435.590	43.60	28.87	4.16	36.97	39.66	68.20	-28.54	HORIZONTAL	Peak
4	4430.628	42.98	30.72	4.78	36.81	41.67	68.20	-26.53	HORIZONTAL	Peak
5	10520.000	39.83	39.50	7.42	37.35	49.40	68.20	-18.80	HORIZONTAL	Peak
6	15780.000	39.31	38.70	9.86	35.39	52.48	74.00	-21.52	HORIZONTAL	Peak


Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

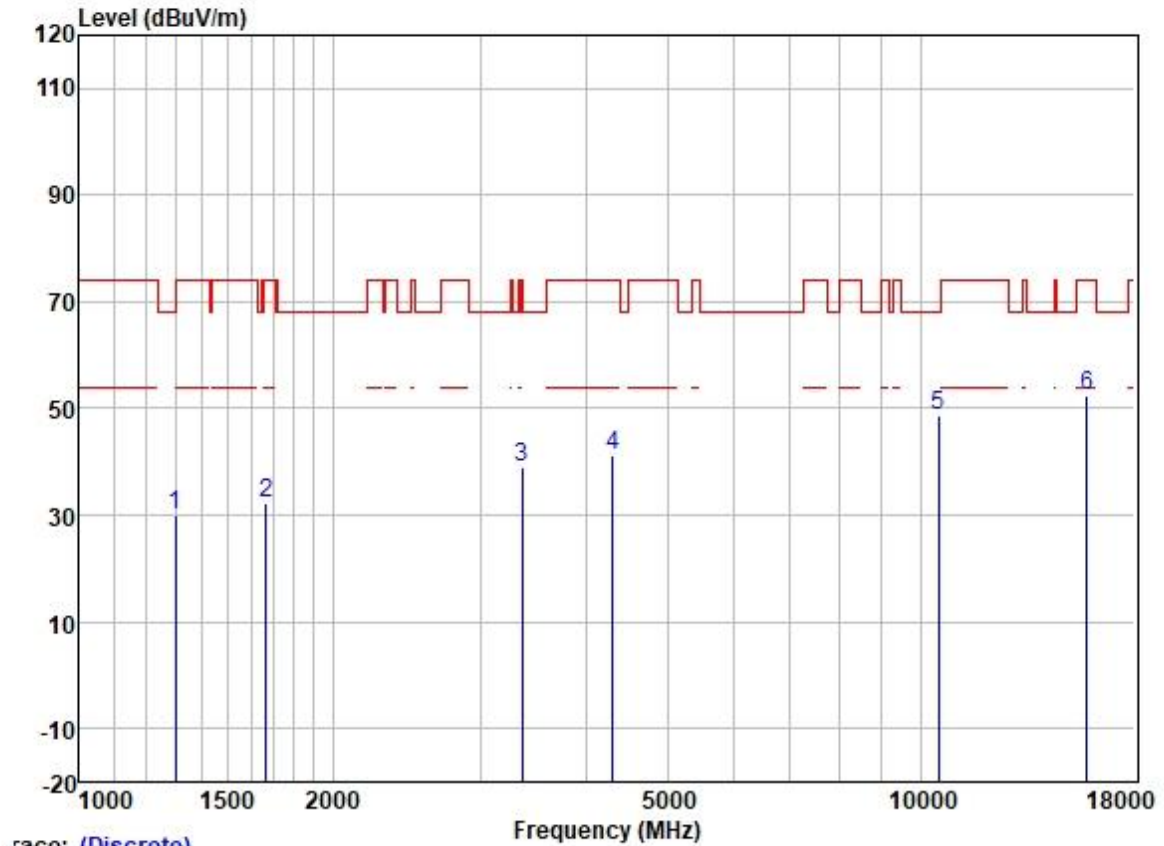

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1300.858	40.59	25.20	2.60	38.31	30.08	74.00	-43.92	VERTICAL Peak
2	1667.951	41.85	25.66	2.80	37.91	32.40	74.00	-41.60	VERTICAL Peak
3	3357.061	43.11	28.81	4.09	37.01	39.00	74.00	-35.00	VERTICAL Peak
4	4304.400	43.04	30.48	4.65	36.81	41.36	74.00	-32.64	VERTICAL Peak
5	10520.000	39.25	39.50	7.42	37.35	48.82	68.20	-19.38	VERTICAL Peak
6	15780.000	39.11	38.70	9.86	35.39	52.28	74.00	-21.72	VERTICAL Peak

Test Mode: 05; Polarity: Horizontal; Modulation: 802.11ac; Bandwidth: 20MHz; Channel: middle

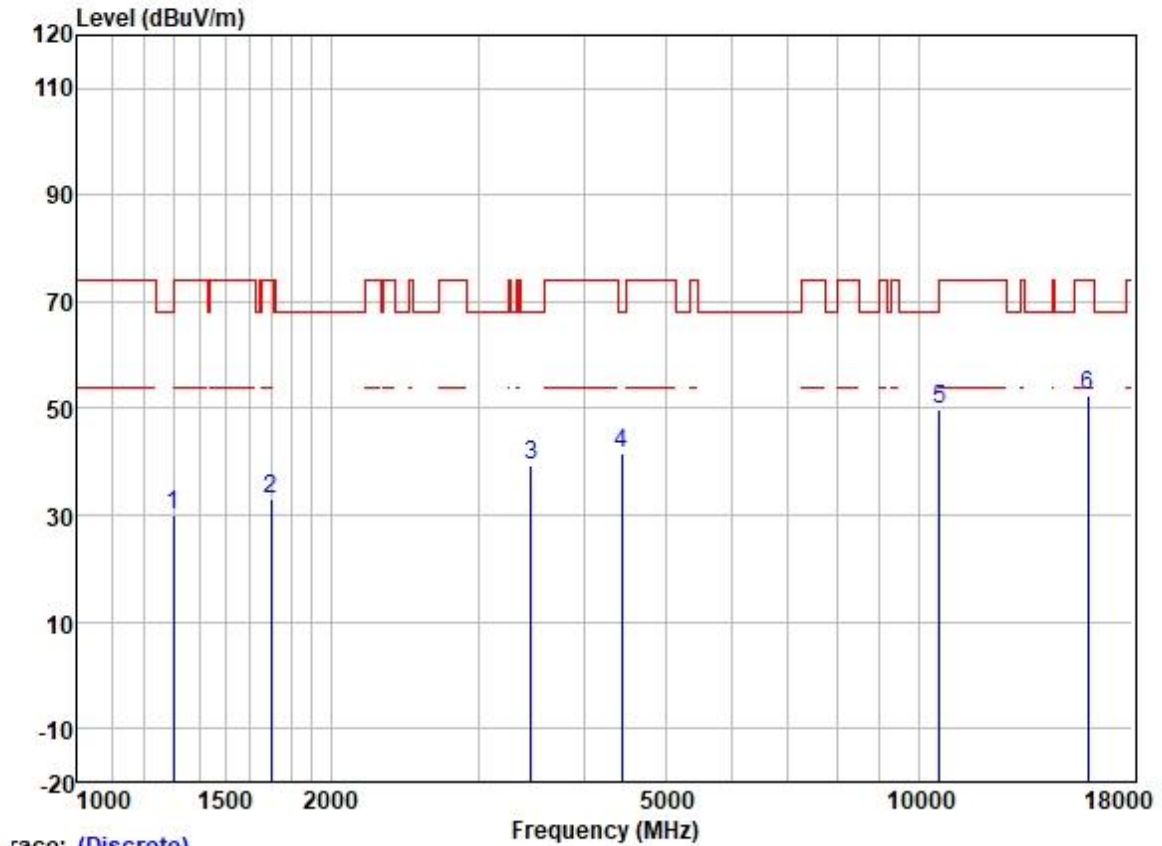


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1300.858	40.71	25.20	2.60	38.31	30.20	74.00	-43.80	HORIZONTAL Peak
2	1697.129	42.47	25.71	2.80	37.89	33.09	74.00	-40.91	HORIZONTAL Peak
3	3465.510	43.22	28.88	4.22	36.95	39.37	68.20	-28.83	HORIZONTAL Peak
4	4443.453	42.76	30.73	4.83	36.81	41.51	68.20	-26.69	HORIZONTAL Peak
5	10600.000	40.28	39.59	7.46	37.34	49.99	68.20	-18.21	HORIZONTAL Peak
6	15900.000	39.67	38.44	9.86	35.40	52.57	74.00	-21.43	HORIZONTAL Peak

Test Mode: 05; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 20MHz; Channel: middle

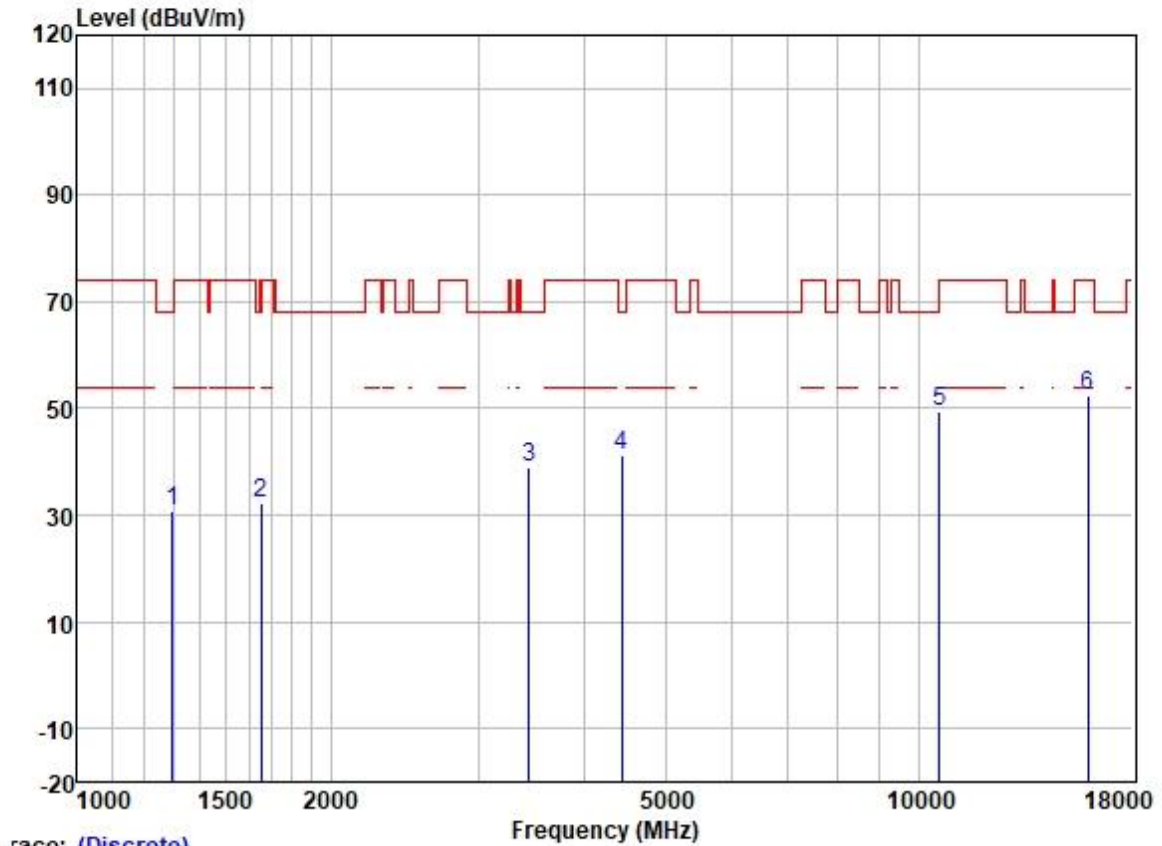


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1297.103	41.19	25.19	2.58	38.31	30.65	68.20	-37.55	VERTICAL Peak
2	1653.550	41.57	25.64	2.80	37.93	32.08	68.20	-36.12	VERTICAL Peak
3	3445.535	42.96	28.87	4.18	36.96	39.05	68.20	-29.15	VERTICAL Peak
4	4443.453	42.43	30.73	4.83	36.81	41.18	68.20	-27.02	VERTICAL Peak
5	10600.000	39.68	39.59	7.46	37.34	49.39	68.20	-18.81	VERTICAL Peak
6	15900.000	39.37	38.44	9.86	35.40	52.27	74.00	-21.73	VERTICAL Peak

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

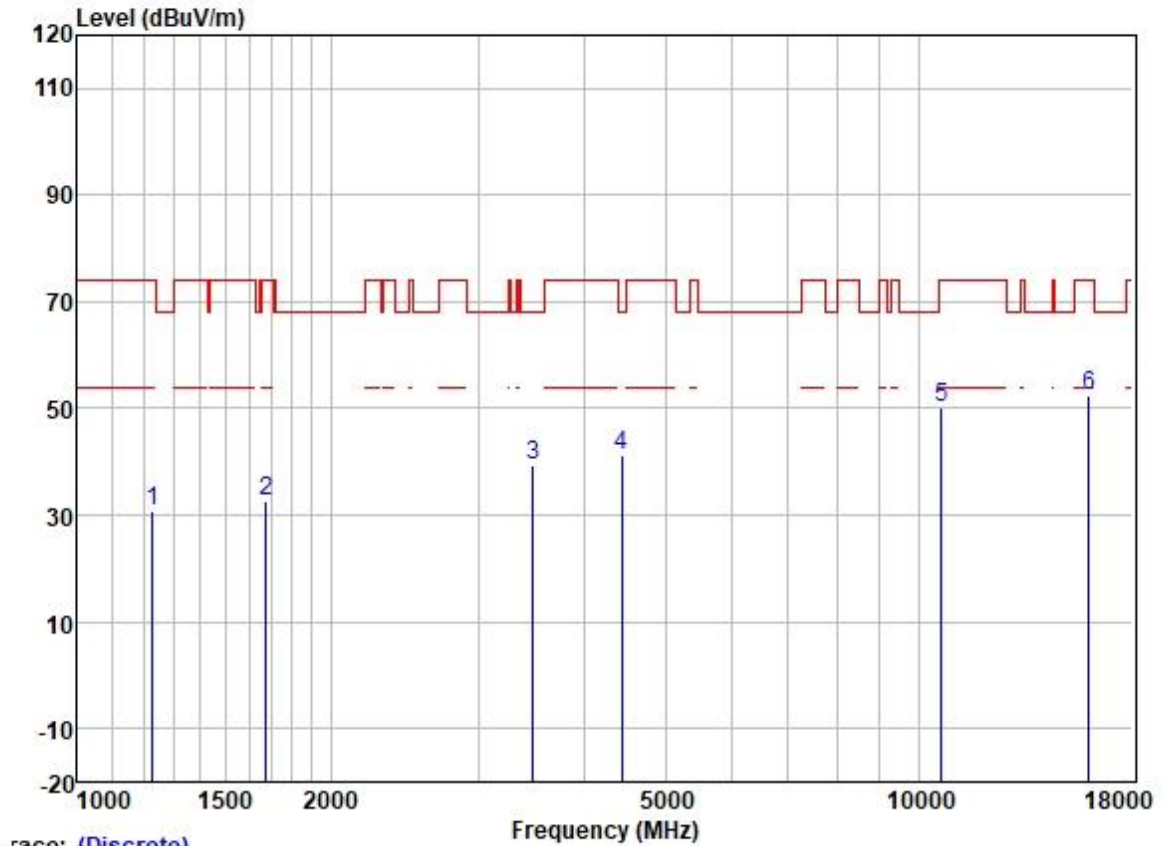


	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Remark
1	1227.791	41.94	24.88	2.31	38.37	30.76	74.00	-43.24	HORIZONTAL Peak
2	1677.621	42.03	25.68	2.80	37.91	32.60	74.00	-41.40	HORIZONTAL Peak
3	3485.601	43.09	28.89	4.27	36.95	39.30	68.20	-28.90	HORIZONTAL Peak
4	4443.453	42.59	30.73	4.83	36.81	41.34	68.20	-26.86	HORIZONTAL Peak
5	10640.000	40.46	39.63	7.48	37.33	50.24	74.00	-23.76	HORIZONTAL Peak
6	15960.000	39.46	38.37	9.85	35.40	52.28	74.00	-21.72	HORIZONTAL Peak

Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

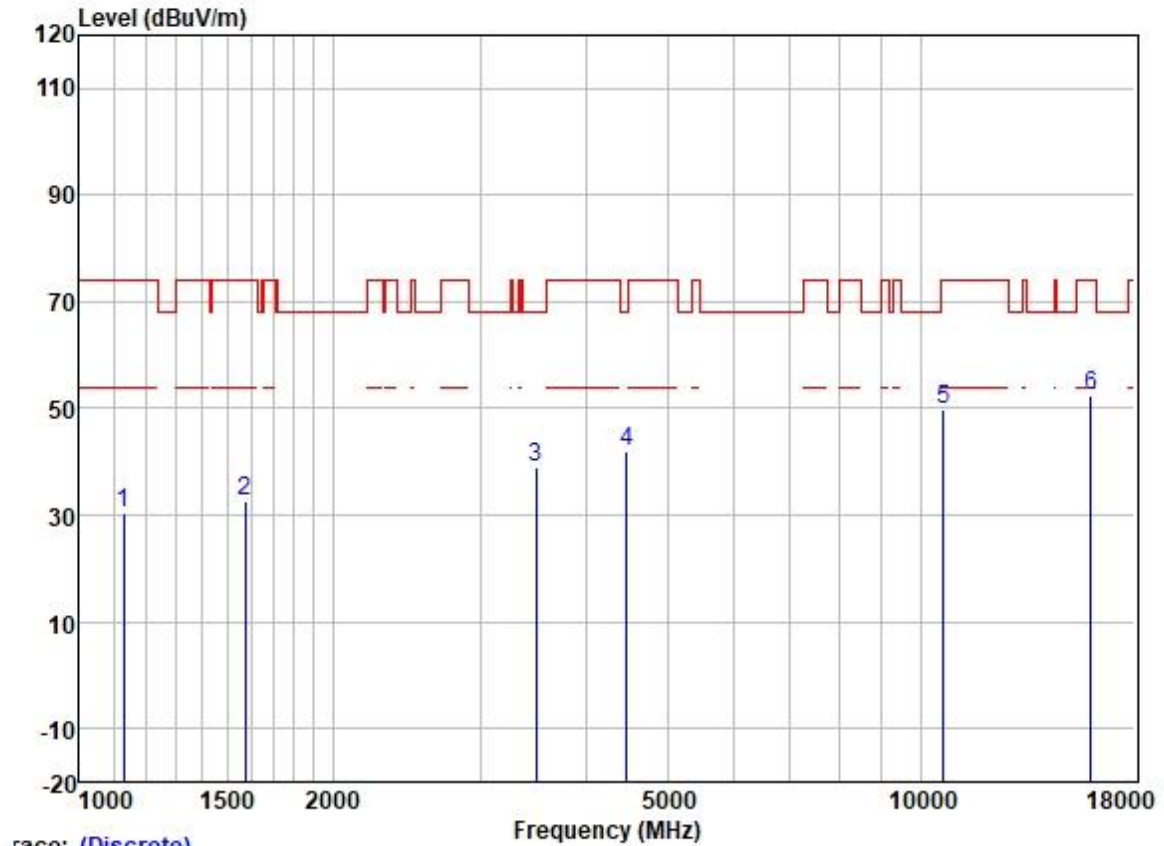


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1129.072	42.30	24.43	2.20	38.43	30.50	74.00	-43.50	VERTICAL	Peak
2	1574.265	42.10	25.56	2.80	38.00	32.46	74.00	-41.54	VERTICAL	Peak
3	3495.691	42.65	28.90	4.30	36.94	38.91	68.20	-29.29	VERTICAL	Peak
4	4469.214	43.20	30.77	4.93	36.81	42.09	68.20	-26.11	VERTICAL	Peak
5	10640.000	40.07	39.63	7.48	37.33	49.85	74.00	-24.15	VERTICAL	Peak
6	15960.000	39.65	38.37	9.85	35.40	52.47	74.00	-21.53	VERTICAL	Peak

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

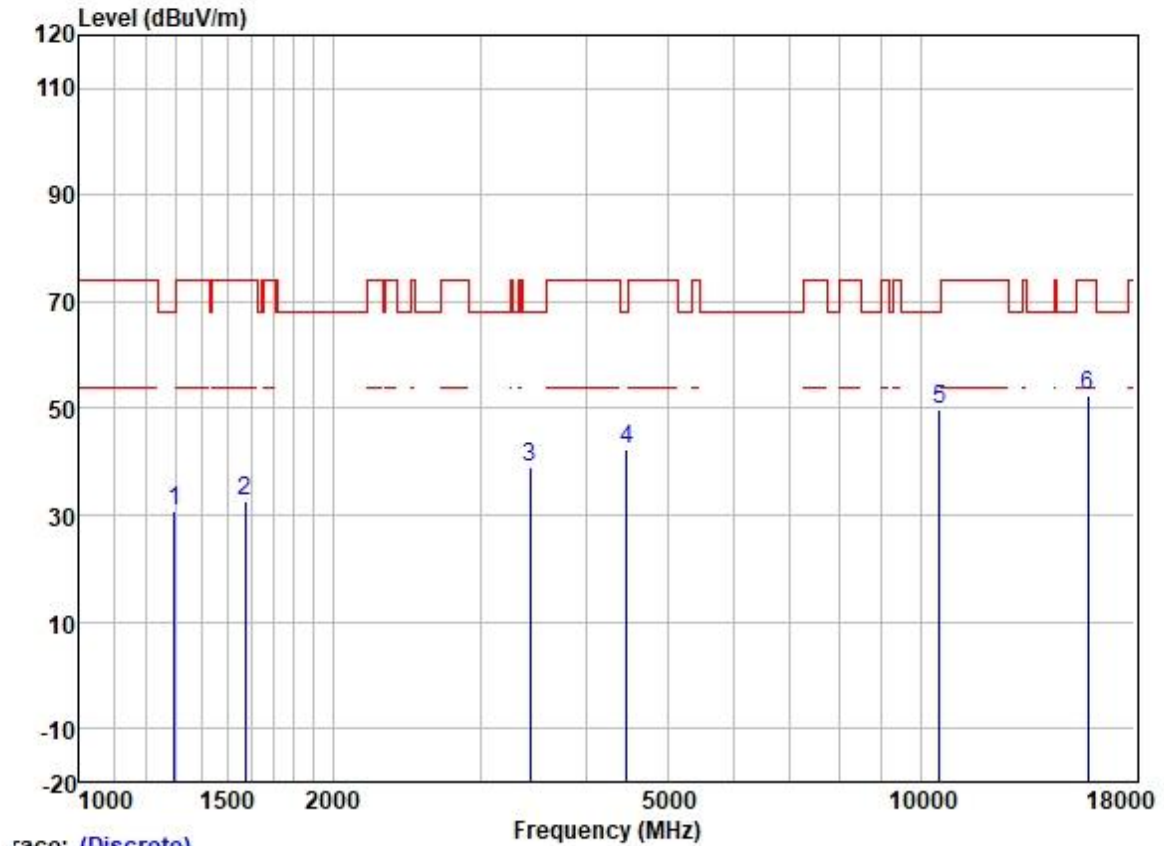

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1297.103	41.45	25.19	2.58	38.31	30.91	68.20	-37.29	HORIZONTAL Peak
2	1574.265	42.25	25.56	2.80	38.00	32.61	74.00	-41.39	HORIZONTAL Peak
3	3435.590	42.88	28.87	4.16	36.97	38.94	68.20	-29.26	HORIZONTAL Peak
4	4469.214	43.28	30.77	4.93	36.81	42.17	68.20	-26.03	HORIZONTAL Peak
5	10540.000	40.16	39.53	7.43	37.35	49.77	68.20	-18.43	HORIZONTAL Peak
6	15810.000	39.20	38.61	9.86	35.39	52.28	74.00	-21.72	HORIZONTAL Peak


Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

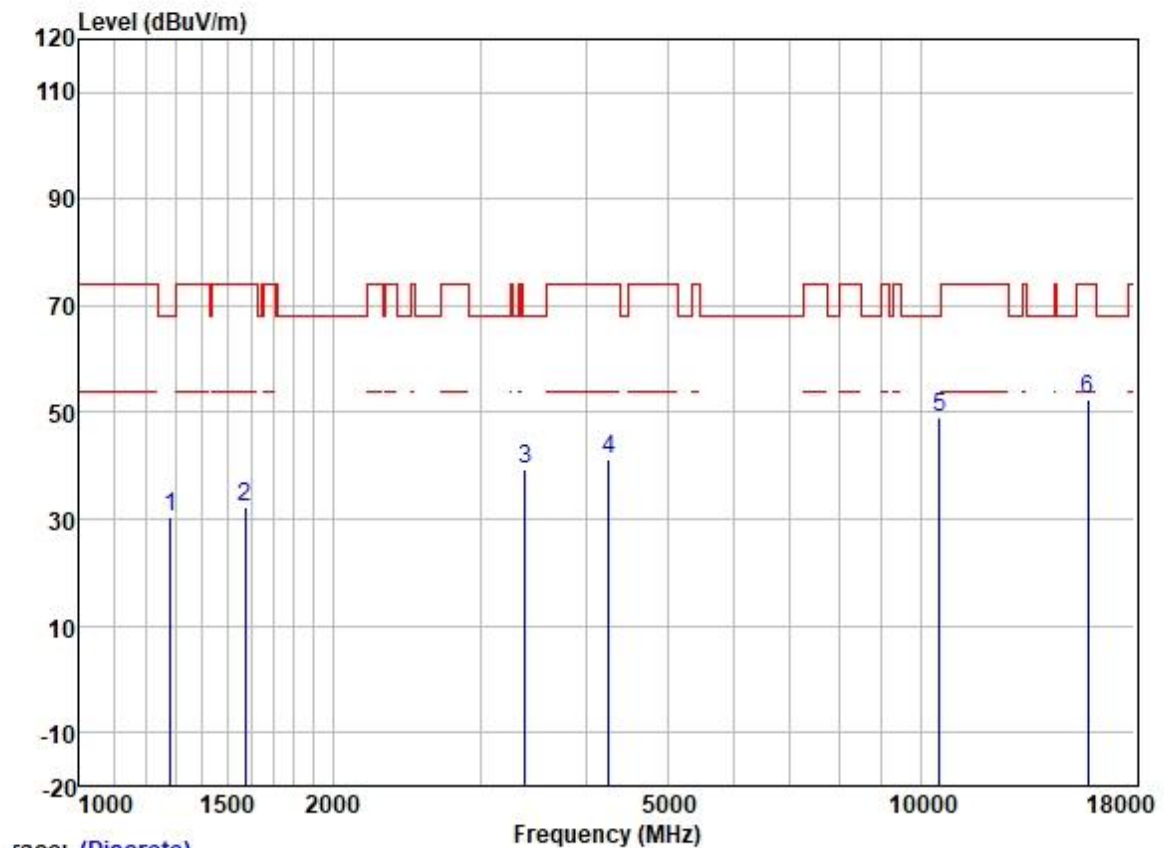

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1282.193	41.00	25.15	2.52	38.33	30.34	68.20	-37.86	VERTICAL	Peak
2	1574.265	41.78	25.56	2.80	38.00	32.14	74.00	-41.86	VERTICAL	Peak
3	3386.297	43.35	28.83	4.10	36.99	39.29	68.20	-28.91	VERTICAL	Peak
4	4254.921	43.19	30.34	4.62	36.81	41.34	74.00	-32.66	VERTICAL	Peak
5	10540.000	39.30	39.53	7.43	37.35	48.91	68.20	-19.29	VERTICAL	Peak
6	15810.000	39.20	38.61	9.86	35.39	52.28	74.00	-21.72	VERTICAL	Peak

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

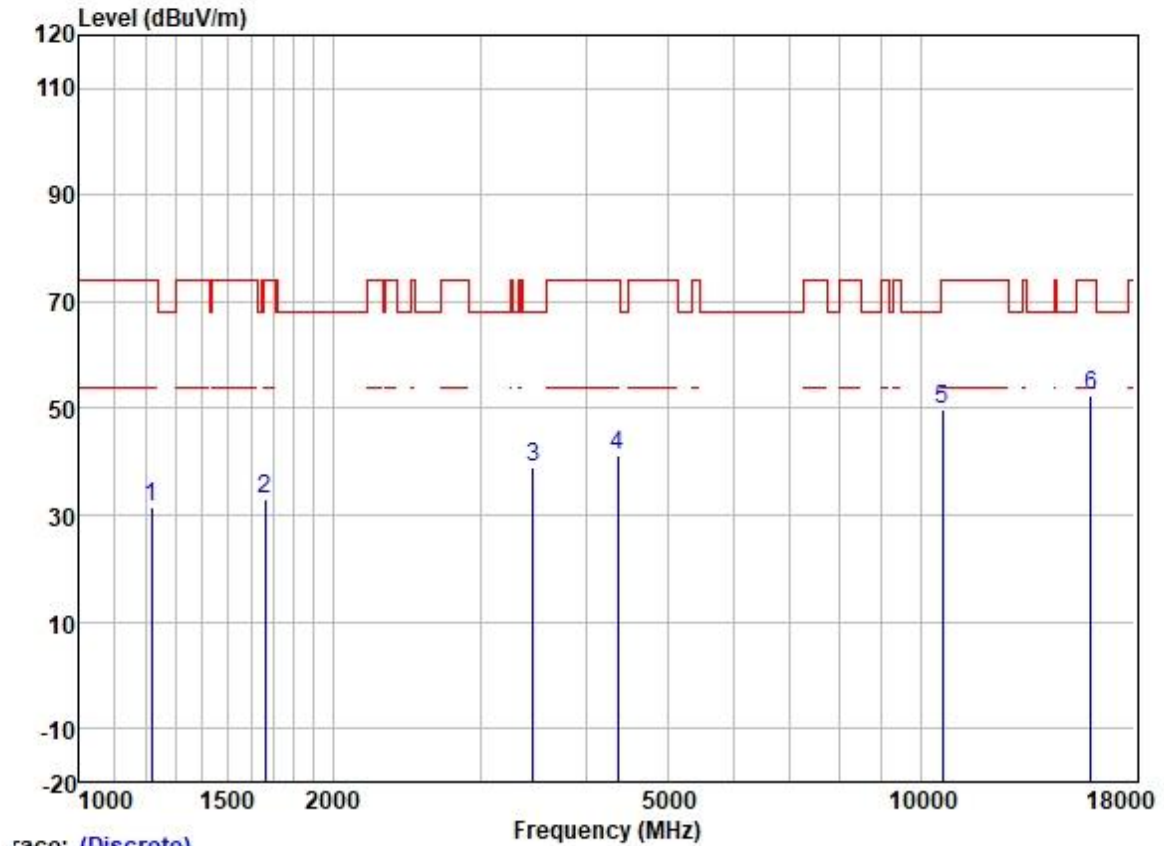

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1217.190	42.75	24.79	2.32	38.37	31.49	74.00	-42.51	HORIZONTAL	Peak
2	1663.137	42.57	25.65	2.80	37.91	33.11	74.00	-40.89	HORIZONTAL	Peak
3	3465.510	42.69	28.88	4.22	36.95	38.84	68.20	-29.36	HORIZONTAL	Peak
4	4367.058	42.90	30.62	4.68	36.81	41.39	74.00	-32.61	HORIZONTAL	Peak
5	10620.000	40.20	39.59	7.46	37.34	49.91	74.00	-24.09	HORIZONTAL	Peak
6	15930.000	39.77	38.37	9.85	35.40	52.59	74.00	-21.41	HORIZONTAL	Peak

Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

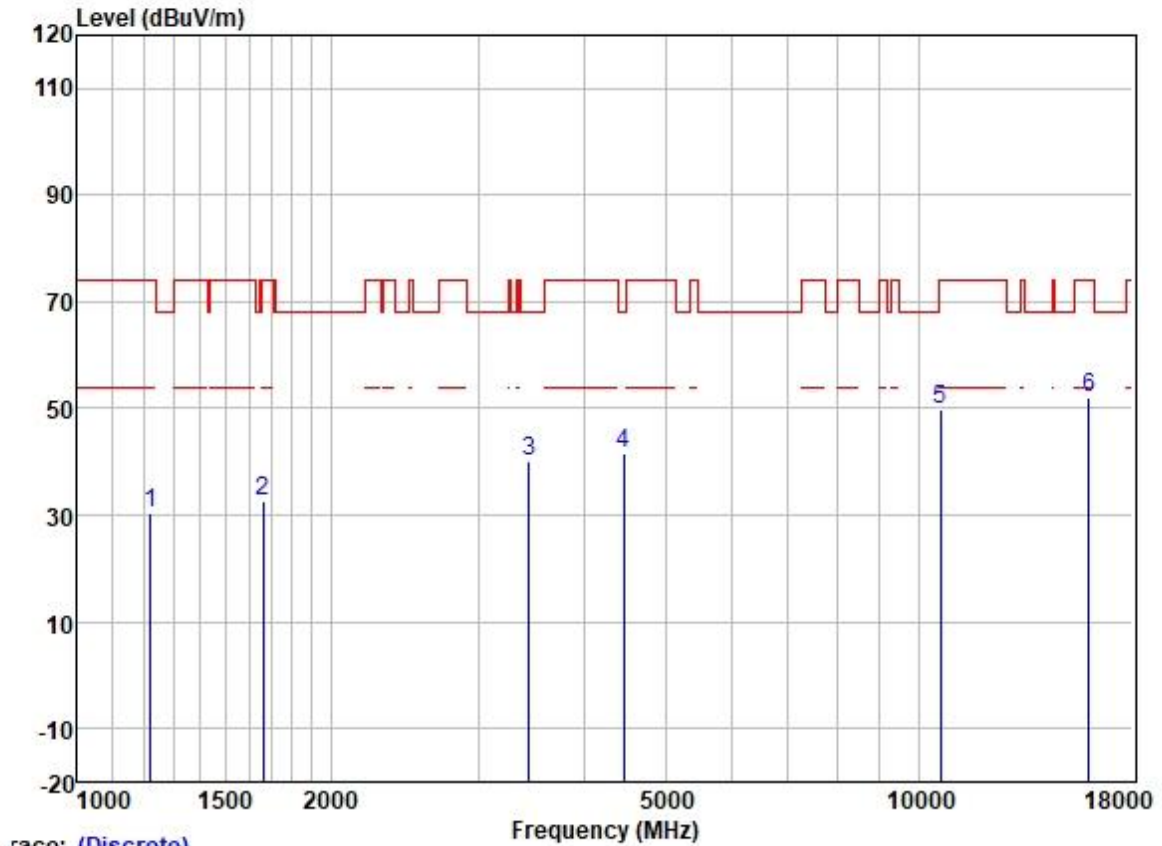

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1220.714	41.63	24.82	2.32	38.37	30.40	74.00	-43.60	VERTICAL Peak
2	1663.137	41.97	25.65	2.80	37.91	32.51	74.00	-41.49	VERTICAL Peak
3	3445.535	43.99	28.87	4.18	36.96	40.08	68.20	-28.12	VERTICAL Peak
4	4456.315	42.63	30.75	4.88	36.81	41.45	68.20	-26.75	VERTICAL Peak
5	10620.000	39.92	39.59	7.46	37.34	49.63	74.00	-24.37	VERTICAL Peak
6	15930.000	39.30	38.37	9.85	35.40	52.12	74.00	-21.88	VERTICAL Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 05; Polarity: Horizontal; Modulation: 802.11ac; Bandwidth: 80MHz; Channel: middle

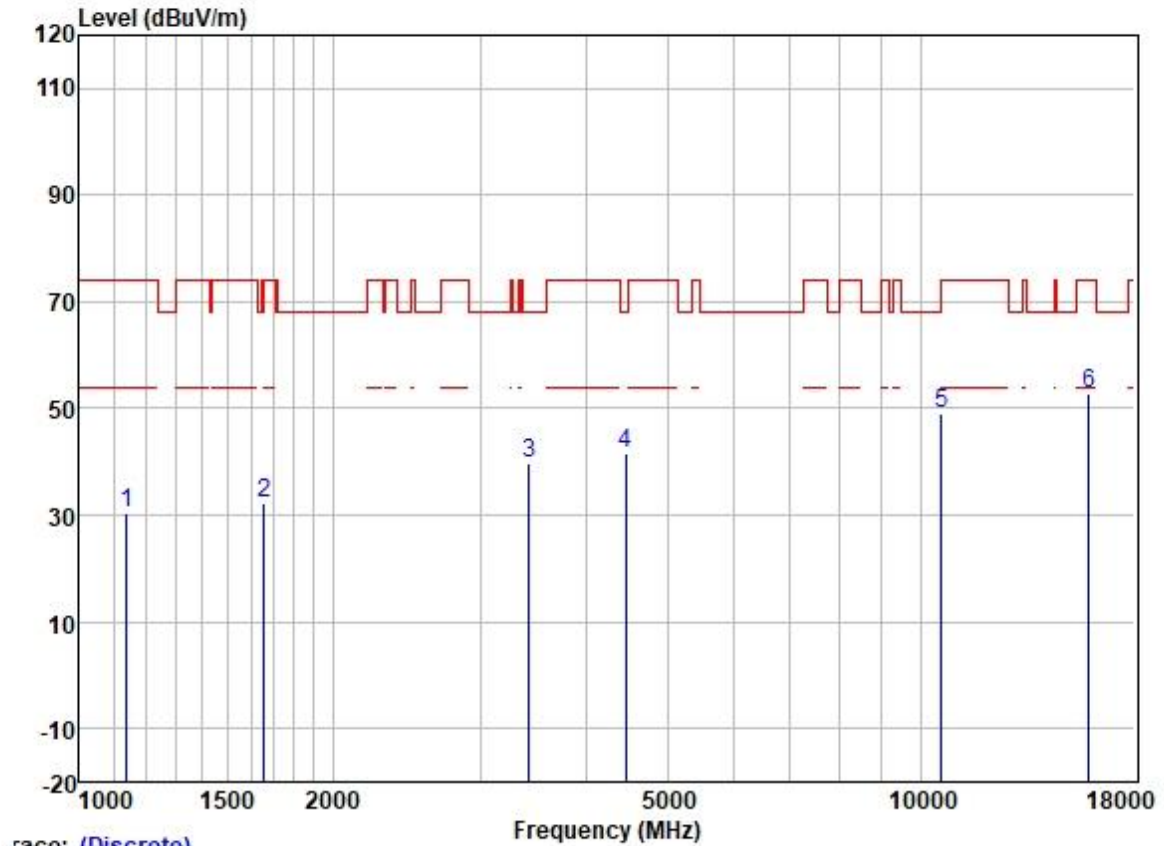


	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1138.904	41.92	24.46	2.27	38.42	30.23	74.00	-43.77	HORIZONTAL Peak
2	1658.337	41.78	25.65	2.80	37.93	32.30	68.20	-35.90	HORIZONTAL Peak
3	3425.675	43.65	28.86	4.15	36.97	39.69	68.20	-28.51	HORIZONTAL Peak
4	4456.315	42.62	30.75	4.88	36.81	41.44	68.20	-26.76	HORIZONTAL Peak
5	10580.000	39.55	39.56	7.45	37.34	49.22	68.20	-18.98	HORIZONTAL Peak
6	15870.000	39.67	38.52	9.86	35.40	52.65	74.00	-21.35	HORIZONTAL Peak

Test Mode: 05; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 80MHz; Channel: middle

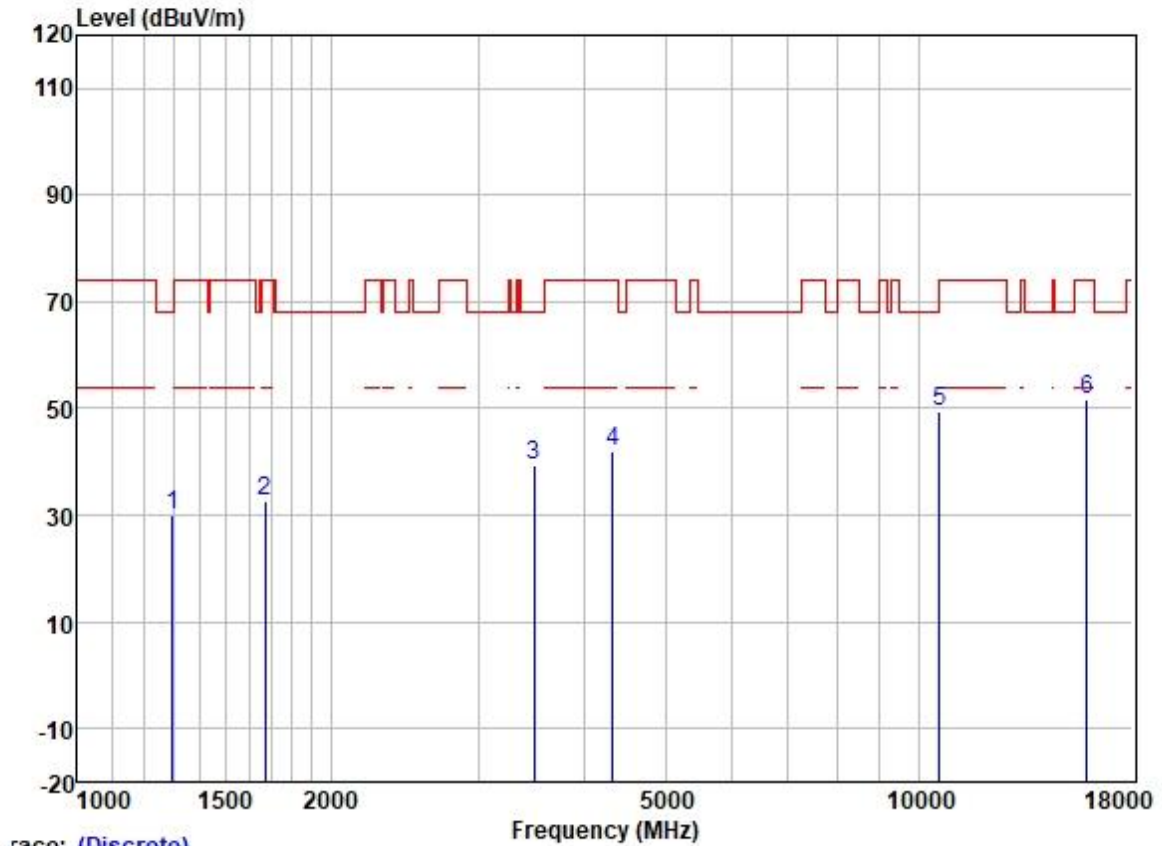


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1297.103	40.61	25.19	2.58	38.31	30.07	68.20	-38.13	VERTICAL	Peak
2	1672.779	41.95	25.67	2.80	37.91	32.51	74.00	-41.49	VERTICAL	Peak
3	3495.691	43.28	28.90	4.30	36.94	39.54	68.20	-28.66	VERTICAL	Peak
4	4329.354	43.53	30.54	4.67	36.81	41.93	74.00	-32.07	VERTICAL	Peak
5	10580.000	39.59	39.56	7.45	37.34	49.26	68.20	-18.94	VERTICAL	Peak
6	15870.000	38.83	38.52	9.86	35.40	51.81	74.00	-22.19	VERTICAL	Peak

Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

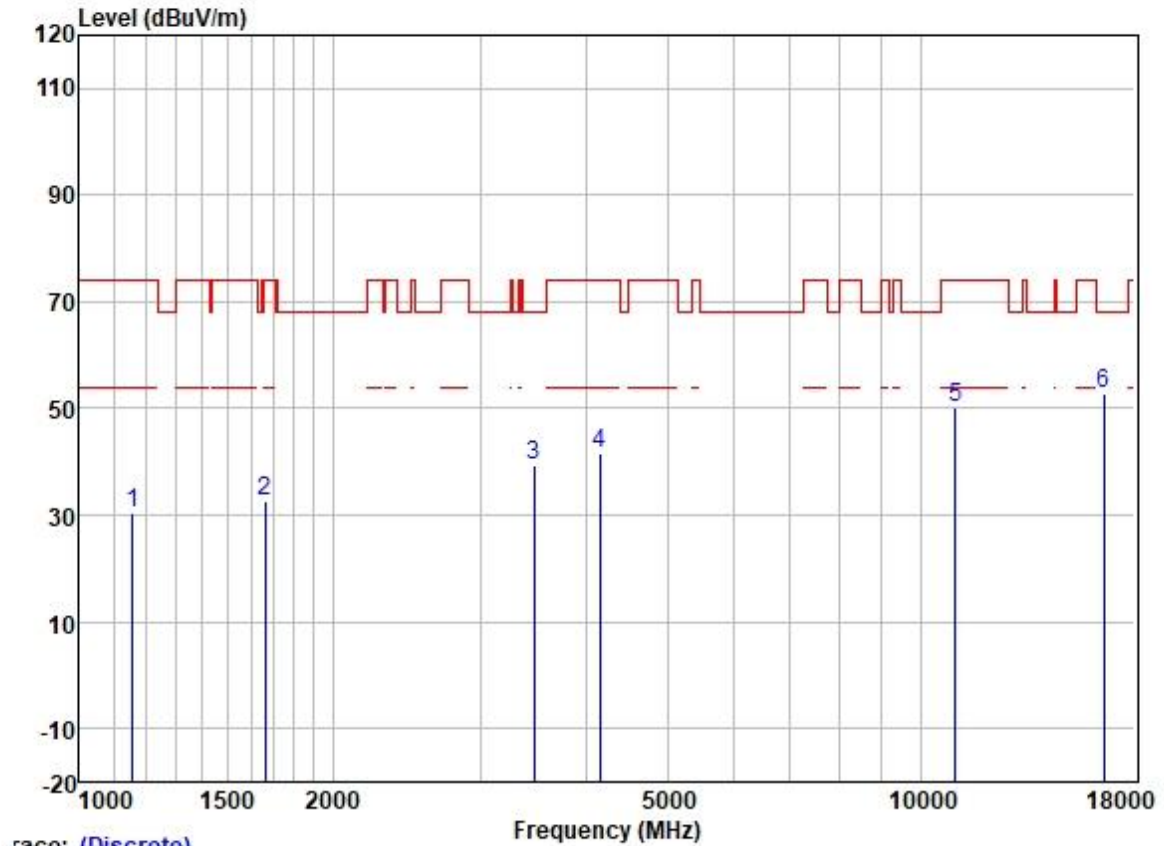

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1155.483	41.99	24.51	2.38	38.42	30.46	74.00	-43.54	HORIZONTAL	Peak
2	1663.137	42.01	25.65	2.80	37.91	32.55	74.00	-41.45	HORIZONTAL	Peak
3	3475.541	43.01	28.89	4.25	36.95	39.20	68.20	-29.00	HORIZONTAL	Peak
4	4157.664	43.84	30.06	4.60	36.80	41.70	74.00	-32.30	HORIZONTAL	Peak
5	11000.000	39.74	40.10	7.71	37.25	50.30	74.00	-23.70	HORIZONTAL	Peak
6	16500.000	39.08	39.60	9.44	35.38	52.74	68.20	-15.46	HORIZONTAL	Peak

Test Mode: 06; Polarity: Vertical; Modulation: 802.11a; Bandwidth: 20MHz; Channel: Low

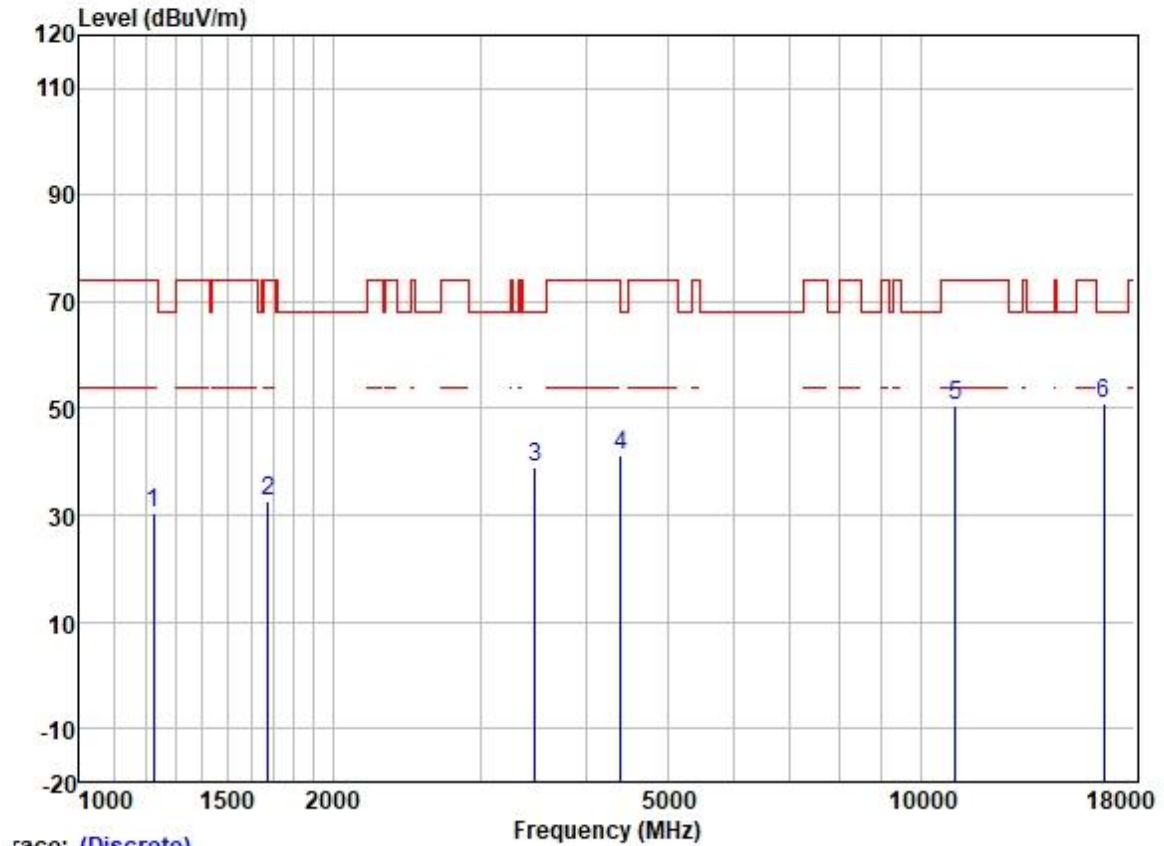

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1224.247	41.74	24.85	2.31	38.37	30.53	74.00	-43.47	VERTICAL	Peak
2	1677.621	41.98	25.68	2.80	37.91	32.55	74.00	-41.45	VERTICAL	Peak
3	3485.601	42.81	28.89	4.27	36.95	39.02	68.20	-29.18	VERTICAL	Peak
4	4405.090	42.83	30.68	4.70	36.81	41.40	68.20	-26.80	VERTICAL	Peak
5	11000.000	39.87	40.10	7.71	37.25	50.43	74.00	-23.57	VERTICAL	Peak
6	16500.000	37.17	39.60	9.44	35.38	50.83	68.20	-17.37	VERTICAL	Peak