

Page 49 of 119

Donalus dela	Madulatian	DD -!	RB	Torget MDD	Channel	Channel	Channe
Bandwidth	Modulation	RB size	offset	Target MPR	133147	133297	133447
	© .		0	0	22.77	23.02	23.68
	C	9 1	12	0	23.03	22.94	23.99
	9		24	0	22.97	23.14	23.77
	QPSK		0	1	21.76	21.93	22.75
	· ·	12	6	15	21.76	21.94	22.67
	- CO	8	13	1	21.81	21.94	22.90
F8411-		25	0	1 ®	21.76	21.92	22.69
5MHz	©		0	21	21.84	22.10	22.13
	a.C	1	12	1	21.80	21.71	22.71
		-,0	24	® 1	21.93	22.02	22.51
	16QAM		0	2	20.93	20.79	21.64
	- C	12	6	2	20.93	20.97	21.74
	0		13	2	20.72	21.17	21.70
		25	0	2	21.04	20.97	21.98
Dan deside	Ma dedation	DD -:	RB	Towns (MDD	Channel	Channel	Channe
Bandwidth	Modulation	RB size	offset	Target MPR	133172	133297	133422
			0	0	22.97	22.98	23.30
	©	1	24	0	22.99	23.14	23.70
	a.C	®	49	0	23.07	23.20	23.83
	QPSK		0	⊚ 1	21.98	22.08	22.74
		25	12	-G 1	21.89	21.99	22.74
	- 0	0	25	1	21.88	22.15	22.98
40111-	0	50	0	1	21.89	22.02	22.82
10MHz			0	1 😞	21.96	21.94	22.78
	0	1	24	1, 0	22.25	22.07	22.99
	-C	@	49	1	21.87	22.05	22.86
	16QAM	<i></i> C	0	2	20.86	21.08	21.62
		25	12	2	20.86	21.18	21.71
	©	@	25	2	20.96	21.26	21.95
		50	0	2	20.97	21.12	21.90

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 50 of 119

D 1 1141	Mar Libertan	DD -: -	RB	Tarrest MDD	Channel	Channel	Channe		
Bandwidth	Modulation	RB size	offset	Target MPR	133197	133297	133397		
	· ·		0	0	22.65	22.74	22.99		
	C	9 1	38	0	22.75	22.81	23.37		
	9 . 6		74	0	22.85	23.03	23.81		
	QPSK		0	1	21.65	21.91	22.14		
	0	38	18	15	22.38	21.68	22.47		
	- c.O	8	37	1	22.05	21.30	22.84		
455511		75	0	1 ®	21.80	21.98	22.46		
15MHz	©		0	-1	21.75	21.72	22.39		
	a.C	1	38	1	21.82	21.87	22.55		
		-,0	74	® 1	21.97	22.13	22.84		
	16QAM		0	2	21.74	21.46	22.22		
	-0	38	18	2	22.38	21.69	22.47		
	So You		37	。 2	21.96	21.56	22.84		
		75	0	2	20.96	21.01	21.44		
Bandwidth	Madulation	DD oine	RB	Torrect MDD	Channel	Channel	Channe		
banawiatn	Modulation	RB size	offset	Target MPR	133222	133322	133372		
		0	0	0	22.77	22.79	22.90		
	©	1	49	0	23.24	23.50	23.85		
	a.C	®	99	0	23.21	23.62	23.75		
	QPSK		0	_© 1	21.70	22.15	22.20		
		50	25	-G 1	21.81	22.08	22.21		
	- C	®	®	®	50	1	22.02	22.38	22.63
2011-		100	0	1	21.76	22.34	22.35		
20MHz			0	1 💿	21.58	21.92	22.41		
	0	1	49	1,0	22.16	22.85	23.07		
	-C	8	99	1	22.07	22.60	23.54		
	16QAM	r.C	0	2	20.90	21.23	21.30		
		50	25	2	20.90	21.23	21.17		
	0	8	50	2	20.96	21.56	21.74		
		100	0	2	20.84	21.31	21.44		

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 51 of 119

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3.3-1 of the 3GPP TS36.101.

Table 6.2.3.3-1 Maximum Power Reduction (MPR) for Power class3

Modulation	- 6	Maximum P	ower Reduct	ion (MPR) for	Power[RB]	8	MPR(dB)
Modulation	1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz	WPK(UB)
QPSK	>5	>4	>8	>12	>16	>18	≤1
16QAM	_ ≤5	≤4	≤8	≤12	≤16 ⊚	≤18	≤1
16QAM	>5	>4	>8	>12	>16	>18	≤2

The allowed A-MPR values specified below in Table 6.2.4.3-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".3

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter exphorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 52 of 119

Table 6.2.4.3-1: Additional Maximum Power Reduction (A-MPR) / Spectrum Emission requirements

Network Signaling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N _{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.2-1	1.4,3,5,10,15,20	Table 5.4.2-1	N/A
®			3	>5	≤ 1
	@	2.4.40.22	5	>6	≤ 1
NS_03	6.6.2.2.3.1	2,4,10, 23,	10	>6	≤ 1
	7.0	25,35,36	15	>8	≤1
		7.0	20	>10	≤ 1
NC 04	000000	44	5	>6	≤1
NS_04	6.6.2.2.3.2	41	10, 15, 20	Table 6	.2.4.3-4
NS_05	6.6.3.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.4.2-1	N/A
NS_07	6.6.2.2.3.3 6.6.3.3.3.2	13	10	Table 6.2.4.3-2	Table 6.2.4.3-2
NS_08	6.6.3.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.3.4	21	10, 15	> 40	≤ 1
	0.0.0.0.0			> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4.3-3	Table 6.2.4.3-3
NS_11	6.6.2.2.1 6.6.3.3.13	231	1.4, 3, 5, 10,15,20	Table 6.2.4.3-5	Table 6.2.4.3-5
NS_12	6.6.3.3.5	26	1.4, 3, 5	Table 6.2.4.3-6	Table 6.2.4.3-6
NS_13	6.6.3.3.6	26	5	Table 6.2.4.3-7	Table 6.2.4.3-7
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4.3-8	Table 6.2.4.3-8
NC 15	66330	26	1 1 2 5 10 15	Table 6.2.4.3-9	Table 6.2.4.3-9,
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4.3-10	Table 6.2.4.3-10
NS_16	6.6.3.3.9	27	3, 5, 10	Table 6.2.4.3-11, Table 6.	Table 6.2.4.3-12, 2.4.3-13
NO 47	6.6.3.3.10	28	5, 10	Table 5.4.2-1	N/A
NS_17	6.6.3.3.11	28	5	≥2	≤ 1
NS_18	6		10, 15, 20	≥ 1	≤ 4
NS_19			10, 15, 20	Table 6.2.4.3-15	Table 6.2.4.3-15
NS_20	0		5, 10, 15, 20	Table 6.2.4.3-14	
	8		20	(6)	
					NV T

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 53 of 119

13. TEST RESULTS

13.1. SAR Test Results Summary

13.1.1. Test position and configuration

Face up SAR was performed with the device configured in the positions and Body SAR was performed with the device configured with all accessories close to the Flat Phantom.

13.1.2. Operation Mode

- 1. Per KDB 447498 D01 v06 ,for each exposure position, if the highest 1-g SAR is ≤ 0.8 W/kg, testing for low and high channel is optional.
- 2. Per KDB 865664 D01 v01r04,for each frequency band, if the measured SAR is ≥0.8W/kg, testing for repeated SAR measurement is required, that the highest measured SAR is only to be tested. When the SAR results are near the limit, the following procedures are required for each device to verify these types of SAR measurement related variation concerns by repeating the highest measured SAR configuration in each frequency band.
 - (1) When the original highest measured SAR is ≥0.8W/kg, repeat that measurement once.
 - (2) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is >1.20 or when the original or repeated measurement is ≥1.45 W/kg.
 - (3) Perform a third repeated measurement only if the original, first and second repeated measurement is ≥1.5 W/kg and ratio of largest to smallest SAR for the original, first and second measurement is ≥ 1.20.
- 3. Maximum Scaling SAR in order to calculate the Maximum SAR values to test under the standard Peak Power, Calculation method is as follows:

 Maximum Scaling SAR =tested SAR (Max.) ×[maximum turn-up power (mw)/ maximum measurement output power(mw)]
- 4. Proximity sensor, just for avoiding the wrong operation in the phone screen when call, and has no influence on output power or SAR result
- 5. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1RB allocation using the RB offset and required test channel combination with highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
- 6. Per KDB 941125 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
- 7. Per KDB 941125 D05v02r05. For QPSK with 100% RB allocation. SAR is not required when the highest maximum output power for 100% RB allocation is less than the highest maximum output power in 50% and 1RB allocation and the highest reported SAR is >1.45 W/kg, the remaining required test channels must also be tested.
- Per KDB 941125 D05v02r05. 16QAM output power for each RB allocation configuration is not 1/2 dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤1.45W/kg, Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
- 9. Per KDB 941125 D05v02r05. Smaller bandwidth output power for each RB allocation configuration is >not 1/2 dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤1.45W/kg. Per KDB 941125 D05v02r05, smaller bandwidth SAR testing is not required.
- 10. When testing antennas with the default battery: the same test measurement with head part.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 54 of 119

11. The EUT only contains the Testing antenna, Standard battery and default body-worn accessory specified by customer. The earphone is only for testing

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written application of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



Page 55 of 119

13.1.3. Test Result

SAR MEAS	SAR MEASUREMENT													
Depth of Liqu	uid (cm):>15			Relative H	lumidity (%): 54.3								
Product: PO	C Radio													
Test Mode: \	Test Mode: WCDMA Band II with QPSK modulation													
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/kg)	Limit (W/kg)					
Body back	RMC 12.2kbps	9400	1880	0.12	0.284	23.00	22.93	0.289	1.6					
Face up	ace up RMC 12.2kbps 9400 1880 -0.06 0.086 23.00 22.93 0.087 1.6													

Note:

[•] When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.

SAR MEAS	UREMENT												
Depth of Liq	uid (cm):>15			Relative H	lumidity (%)	: 56.3							
Product: PO	C Radio												
Test Mode: \	Fest Mode: WCDMA Band IV with QPSK modulation												
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/kg)	Limit (W/kg)				
Body back	RMC 12.2kbps	8662	1732.4	-0.09	0.260	21.80	20.68	0.336	1.6				
Face up	RMC 12.2kbps	8662	1732.4	-0.02	0.034	21.80	20.68	0.044	1.6				

Note:

[•] When the 1-g Reported SAR is \leq 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.

SAR MEAS	UREMENT												
Depth of Liq	uid (cm):>15			Relative F	lumidity (%): 54.3							
Product: PO	duct: POC Radio												
Test Mode: \	est Mode: WCDMA Band V with QPSK modulation												
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/kg)	Limit (W/kg)				
Body back	RMC 12.2kbps	4183	836.4	-0.09	0.097	23.40	23.19	0.102	1.6				
Face up	RMC 12.2kbps	4183	836.4	0.12	0.017	23.40	23.19	0.018	1.6				

Note

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exhorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

[•] When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.



Page 56 of 119

SAR I	MEASUR	EMENT										
Depth	of Liquic	d (cm):>15			Relative	Humidity	(%): 54.3	3				
Produ	ct: POC	Radio										
Test N	/lode: LT	E Band 2										
		Position	Test I	Test Mode		_	Power	SAR	_ Max.	Meas.	Scaled	
BM MHz	MOD		UL RB Allocatio n	UL RB START	Ch.	Freq. (MHz)	Drift (<±5%)	(1g) (W/kg)	Tune up Power (dBm)	output Power (dBm)	SAR (W/kg)	Limit (W/kg)
20	QPSK	Body back	1	0	18900	1880	-0.17	0.465	23.20	22.86	0.503	1.6
Face up 1 0 18900 1880 0.19 0.204 23.20 22.86 0.221 1.6												

Note:

[•] When the 1-g Reported SAR is \leq 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.

SAR	IEASUR	EMENT										
Depth	of Liquic	l (cm):>15			Relative I	Humidity (%	%): 56.3					
Produ	Product: POC Radio											
Test N	lode: LT	E Band 4										
BM MOD Position Test Mode Freq. Power						SAR	Max. Tuneu	Meas.	Scaled	Limit		
MHz	MOD	Position	UL RB Allocation	UL RB START	Ch.	(MHz)	Drift (<±5%)	(1g) (W/kg)	p Power (dBm)	Power (dBm)	SAR (W/kg)	(W/kg)
20	QPSK	Body back	1	0	20175	1732.5	0.06	0.682	23.00	22.94	0.691	1.6
20	QFSK	Face up	1	0	20175	1732.5	0.08	0.190	23.00	22.94	0.193	1.6

Note:

[•] When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.

SAR I	MEASUR	REMENT										
Depth	of Liquic	d (cm):>15			Relative I	Humidity (%	%): 54.3					
Produ	ct: POC	Radio										
Test N	/lode: LT	E Band 5										
BM MOD Position III PR Ch Freq. Power (1g) Max. Meas. Scaled Limit												
MHz	MOD	Position	UL RB Allocati on	UL RB START	Ch.	(MHz)	Drift (<±5%)	(W/kg)	Power (dBm)	Power (dBm)	SAR (W/kg)	(W/kg)
		Body back	1	0	20450	829	-1.04	0.966	23.90	23.13	1.153	1.6
10	QPSK	Body back	1	0	20525	836.5	1.02	0.936	23.90	23.88	0.940	1.6
10	QF3N	Body back	1	0	20600	844	0.09	0.963	24.80	24.41	1.053	1.6
		Face up	1	0	20525	836.5	-1.05	0.427	23.90	23.88	0.429	1.6

Note:

• When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exhorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 57 of 119

Inspection

SARI	MEASUR	EMENT										
Depth	of Liquic	d (cm):>15			Relative I	Humidity (9	%): 57.1					
Produ	ct: POC	Radio										
Test N	Test Mode: LTE Band 12											
ВМ	MOD	Position	ode	Ch.	Freq.	eq. Power	SAR	Max. Tuneup	Meas. output	Scaled SAR	Limit	
MHz	WIOD	Position	UL RB Allocation	UL RB START	CII.	(MHz)	(<±5%)	(1g) (W/kg)	Power (dBm)	Power (dBm)	(W/kg)	(W/kg)
10	QPSK	Body back	1	0	23095	707.5	0.08	0.467	25.00	24.31	0.547	1.6
10	QF3K	Face up	1	0	23095	707.5	-0.16	0.228	25.00	24.31	0.267	1.6

Note:

When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.

SAR I	MEASUR	EMENT										
Depth	of Liquic	l (cm):>15			Relative	Humidity (%): 57.1					
Produ	ct: POC	Radio										
Test N	/lode: LT	E Band 13										
вм	MOD	Position -	Test Mode		Ch.	Freq.	Power Drift	SAR	Max. Tuneup	Meas. output	Scaled SAR	Limit
MHz	WOD	Position	UL RB Allocation	UL RB START	CII.	(MHz)	(<±5%)	(1g) (W/kg)	Power (dBm)	Power (dBm)	(W/kg)	(W/kg)
10	QPSK	Body back	1	0	23230	782	-0.14	0.896	23.70	23.22	1.001	1.6
10	WESK	Face up	1	0	23230	782	018	0.488	23.70	23.22	0.545	1.6

[•] When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.

SAR MEASUREMENT												
Depth	of Liquic	l (cm):>15	Relative	Relative Humidity (%): 57.1								
Produ	Product: POC Radio											
Test Mode: LTE Band 14												
вм	MOD	Position	Test Mo	ode	OI:	Ch. Freq. (MHz)	Freq. Power		Max. Tuneup	Meas. output	Scaled SAR	Limit
MHz	WIOD	Position	UL RB Allocation	UL RB START	Cn.		Drift (<±5%)	(1g) (W/kg)	Power (dBm)	Power (dBm)	(W/kg)	(W/kg)
10	QPSK	Body back	1	0	23330	793	0.20	0.848	25.30	25.04	0.900	1.6
10		Face up	1	0	23330	793	0.16	0.462	25.30	25.04	0.491	1.6

When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written. he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15d Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 58 of 119

/Inspection The test results

he test report.

SAI	SAR MEASUREMENT											
Depth of Liquid (cm):>15					Relative	Relative Humidity (%): 56.3						
Pro	Product: LTE smartphone											
Tes	Test Mode: LTE Band 66											
BW	MOD	D Position	Test Mo	ode	Ch	Ch. Freq. (MHz)	Power Drift	SAR (1g)	Max. Tuneup	Meas. output Power	Scaled SAR	Limit
MHz	2 WOD	Position	UL RB Allocation	UL RB START	CII.		(<±5%)	(W/kg)	Power (dBm)	(dBm)	(W/Kg)	(W/kg)
20	QPSK	Body back	1	0	132422	1755	-0.07	0.171	24.50	23.69	0.206	1.6
20	wrsk •	Face up	1	0	132422	1755	-0.05	0.077	24.50	23.69	0.093	1.6

Note:

• When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.

SAR	MEASUF	REMENT										
Depth of Liquid (cm):>15					Relative	Relative Humidity (%): 57.1						
Product: LTE smartphone												
Test Mode: LTE Band 71												
BW			Test M	ode			Power	SAR (1g)	Max. Tuneup	Meas. output	Scaled	Limit
MHz	MOD	Position	UL RB Allocation	UL RB START	- Ch. Freq (MHz	(MHz) Drift (<±5%)	(W/kg)	Power (dBm)	Power (dBm)	SAR (W/Kg)	(W/kg)	
20	QPSK	Body back	1	0	133322	683	-0.16	0.166	24.00	22.79	0.219	1.6
20		Face up	1	0	133322	683	0.09	0.117	24.00	22.79	0.155	1.6

Note:

Repeated SAR

• When the 1-g Reported SAR is \leq 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.

Product: PO	C Radio										
Test Mode:	Test Mode: LTE Band 5& LTE Band 13& LTE Band 14										
Position	Mode		Ch.	Fr.	Power Drift	Once SAR	Power Drift	Twice SAR	Power Drift	Third SAR	Limit
Position	UL RB Allocation	UL RB START	CII.	(MHz)	(<±5%)	(1g) (W/kg)	(<±5%)	(1g) (W/kg)	(<±5%)	(1g) (W/kg)	W/kg
Body back	1	0	20450	829	0.11	0.961	8	_			1.6
Body back	1	0	23230	782	-0.17	0.901	- C	-			1.6
Body back	1	0	23330	793	-0.15	0.929	/			-	1.6

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the spedical Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the inference of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 59 of 119

APPENDIX A. SAR SYSTEM CHECK DATA

Test Laboratory: AGC Lab Date: Sep. 02, 2021

System Check Head 750 MHz

DUT: Dipole 750 MHz Type: SID 750

Communication System CW; Communication System Band: D750 (750.0 MHz); Duty Cycle: 1:1; Conv.F=5.18 Frequency: 750 MHz; Medium parameters used: f = 750 MHz; $\sigma = 0.91$ mho/m; $\epsilon r = 42.65$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section; Input Power=18dBm

Ambient temperature (°C):22.0, Liquid temperature (°C): 21.8

SATIMO Configuration:


Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327

• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4_02_35

Configuration/System Check 750MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/System Check 750MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

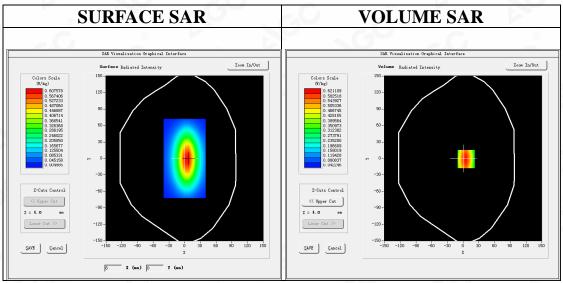



Maximum location: X=6.00, Y=-1.00 SAR Peak: 0.89 W/kg

SAR 10g (W/Kg)	0.358154		
SAR 1g (W/Kg)	0.566803		

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the condicated restrouting portion of Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



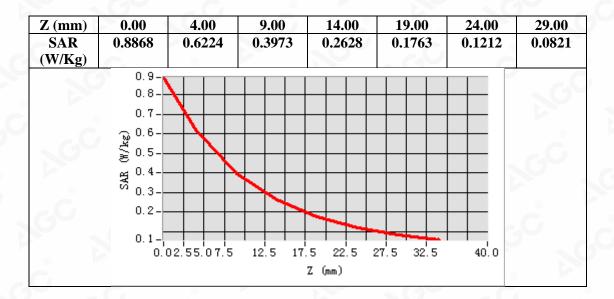

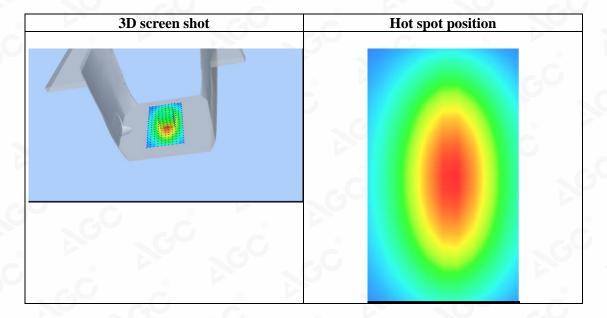

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Date: Sep. 03, 2021

Page 61 of 119

Test Laboratory: AGC Lab System Check Head 835 MHz

DUT: Dipole 835 MHz Type: SID 835

Communication System CW; Communication System Band: D835 (835.0 MHz); Duty Cycle: 1:1; Conv.F=5.24 Frequency: 835 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.89$ mho/m; $\epsilon r = 41.62$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section; Input Power=18dBm

Ambient temperature ($^{\circ}$ C):21.6, Liquid temperature ($^{\circ}$ C): 21.3

SATIMO Configuration:


Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327

• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35


Configuration/System Check 835MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/System Check 835MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

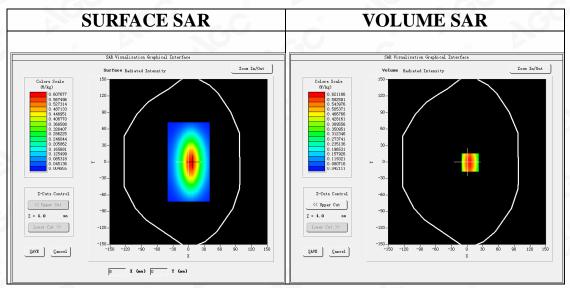


Maximum location: X=6.00, Y=-1.00 SAR Peak: 0.89 W/kg


SAR 10g (W/Kg)	0.387524
SAR 1g (W/Kg)	0.606385

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Residual Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exporization of AGE, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.





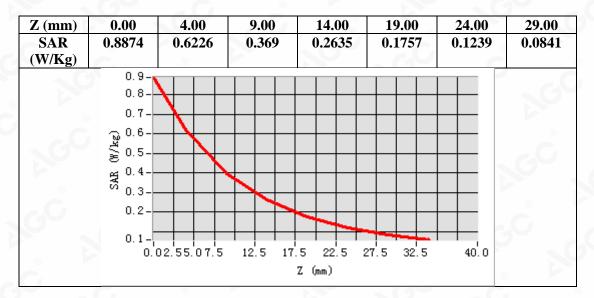

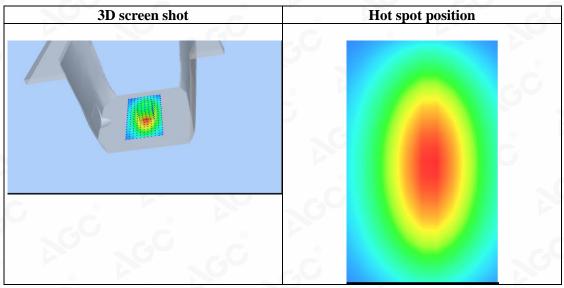

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Date: Sep. 04, 2021

Page 63 of 119

The test results

he test report.

Test Laboratory: AGC Lab System Check Head 1750MHz

DUT: Dipole 1800 MHz; Type: SID 1800

Communication System: CW; Communication System Band: D1700 (1750.0 MHz); Duty Cycle:1:1; Conv.F=4.56 Frequency: 1750 MHz; Medium parameters used: f = 1750 MHz; $\sigma = 1.38 \text{ mho/m}$; $\epsilon = 39.87$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section; Input Power=18dBm

Ambient temperature ($^{\circ}$ C): 21.5, Liquid temperature ($^{\circ}$ C): 21.3

SATIMO Configuration:


Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327

Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35


Configuration/System Check 1750MHz Head/Area Scan: Measurement grid: dx=8mm,dy=8mm Configuration/System Check 1750MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

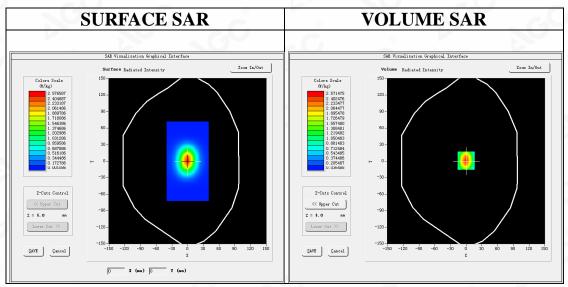


Maximum location: X=0.00, Y=1.00 SAR Peak: 4.12 W/kg


SAR 10g (W/Kg)	1.223584
SAR 1g (W/Kg)	2.418542

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Fast Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day's after the issuence Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.





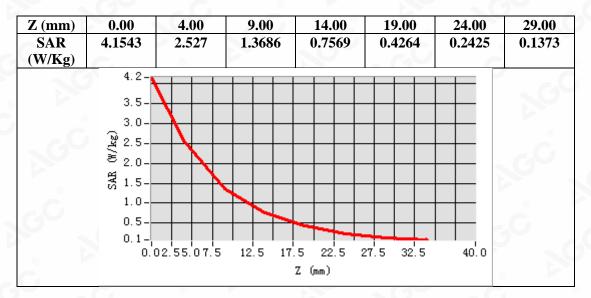

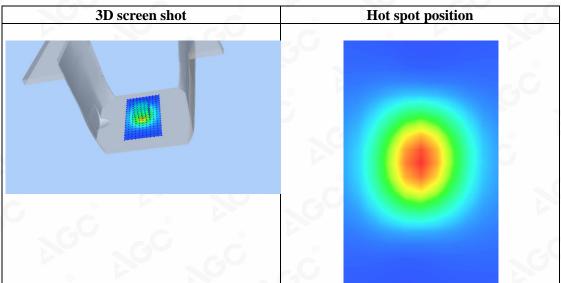

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Date: Sep. 05, 2021

Page 65 of 119

The test results

he test report.

Test Laboratory: AGC Lab System Check Head 1900MHz

DUT: Dipole 1900 MHz; Type: SID 1900

Communication System: CW; Communication System Band: D1900 (1900.0 MHz); Duty Cycle:1:1; Conv.F=4.48 Frequency: 1900 MHz; Medium parameters used: f = 1800 MHz; $\sigma = 1.39$ mho/m; $\epsilon r = 39.52$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section; Input Power=18dBm

Ambient temperature ($^{\circ}$ C):21.8, Liquid temperature ($^{\circ}$ C): 21.6

SATIMO Configuration:


Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327

Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35

Configuration/System Check 1900MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/System Check 1900MHz Head/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm

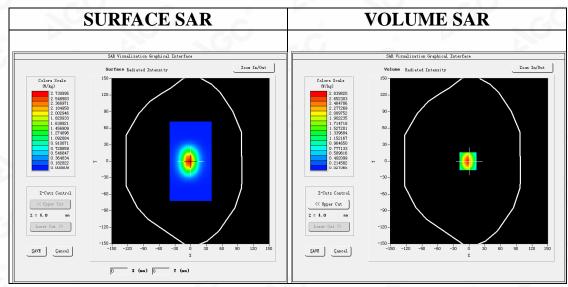



Maximum location: X=-2.00, Y=0.00 SAR Peak: 4.71 W/kg

SAR 10g (W/Kg)	1.299532
SAR 1g (W/Kg)	2.672471

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Fast Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day's after the issuence Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



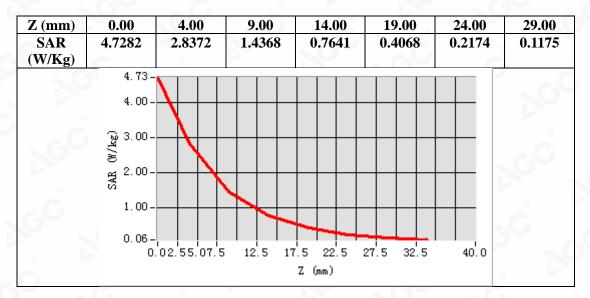

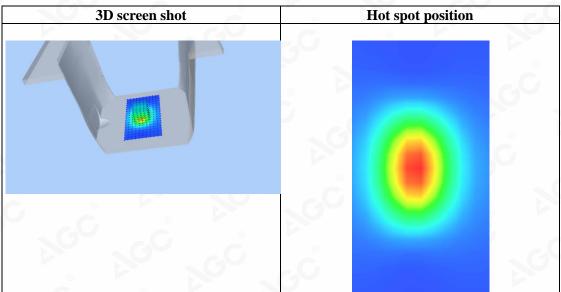

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 67 of 119

APPENDIX B. SAR MEASUREMENT DATA

Test Laboratory: AGC Lab Date: Sep. 05, 2021

WCDMA Band II Mid- Body-Back (RMC 12.2kbps)

DUT: POC Radio; Type: IP-398

Communication System: UMTS; Communication System Band: Band II UTRA/FDD ;Duty Cycle:1:1; Conv.F=4.48; Frequency: 1880 MHz; Medium parameters used: f = 1800 MHz; $\sigma = 1.37$ mho/m; $\epsilon r = 39.86$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$ C): 21.8, Liquid temperature ($^{\circ}$ C): 21.6

SATIMO Configuration:

Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ WCDMA band II Mid-Body-Back/Area Scan: Measurement grid: dx=10mm, dy=10mm Configuration/ WCDMA band II Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body Back
Band	WCDMA band II
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

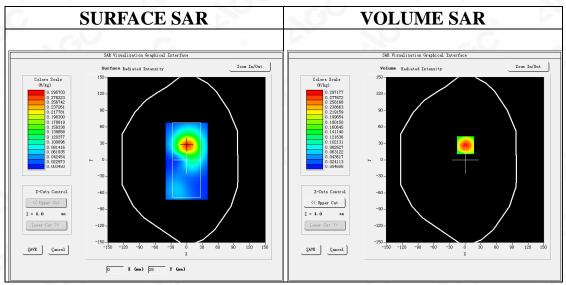



Maximum location: X=1.00, Y=27.00 SAR Peak: 0.46 W/kg

	0
SAR 10g (W/Kg)	0.155772
SAR 1g (W/Kg)	0.284218

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Restroy/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exprization of AGC The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



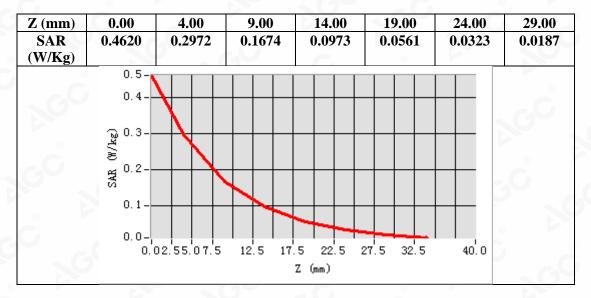

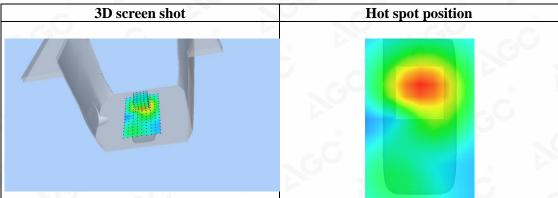

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written application of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 69 of 119

Test Laboratory: AGC Lab Date: Sep. 05, 2021

WCDMA Band II Mid-Face up (RMC 12.2kbps)

DUT: POC Radio; Type: IP-398

Communication System: UMTS; Communication System Band: Band II UTRA/FDD ;Duty Cycle:1:1; Conv.F=4.48; Frequency: 1880 MHz; Medium parameters used: f = 1800 MHz; $\sigma = 1.37 \text{ mho/m}$; $\epsilon r = 39.86$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature (°C): 21.8, Liquid temperature (°C): 21.6

SATIMO Configuration:

Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ WCDMA band II Mid-Face up/Area Scan: Measurement grid: dx=10mm, dy=10mm Configuration/ WCDMA band II Mid-Face up/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;


Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Face up
Band	WCDMA band II
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

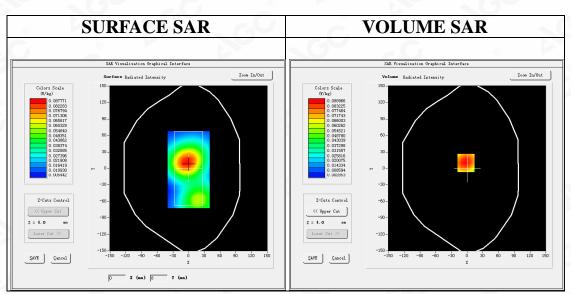


Maximum location: X=-2.00, Y=10.00 SAR Peak: 0.13 W/kg


		0
	SAR 10g (W/Kg)	0.051340
4	SAR 1g (W/Kg)	0.086175

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated restrou/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.





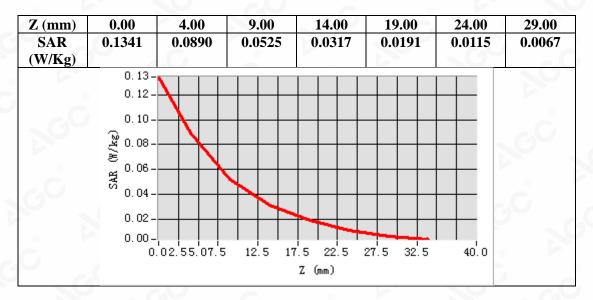

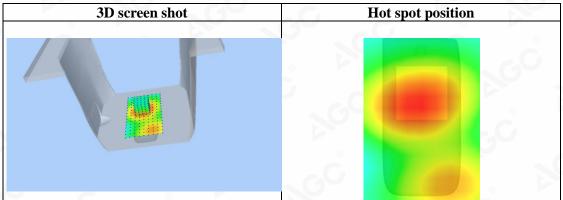

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 71 of 119

Test Laboratory: AGC Lab Date: Sep. 05, 2021

WCDMA Band IV Mid- Body-Back (RMC 12.2kbps)

DUT: POC Radio; Type: IP-398

Communication System: UMTS; Communication System Band: Band IV UTRA/FDD ;Duty Cycle:1:1; Conv.F=4.48; Frequency: 1732.4 MHz; Medium parameters used: f = 1750 MHz; $\sigma = 1.36 \text{ mho/m}$; $\epsilon = 40.52$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature (°C): 21.8, Liquid temperature (°C): 21.6

SATIMO Configuration:

Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ WCDMA Band IV Mid-Body-Back/Area Scan: Measurement grid: dx=10mm, dy=10mm Configuration/ WCDMA Band IV Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;


Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body Back
Band	WCDMA Band IV
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

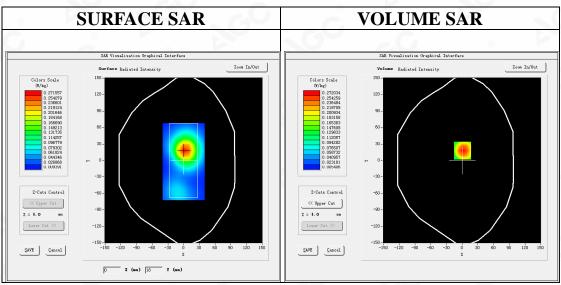


Maximum location: X=1.00, Y=18.00 SAR Peak: 0.42 W/kg


8	SAR 10g (W/Kg)	0.147117
1	SAR 1g (W/Kg)	0.260490

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pestud/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.





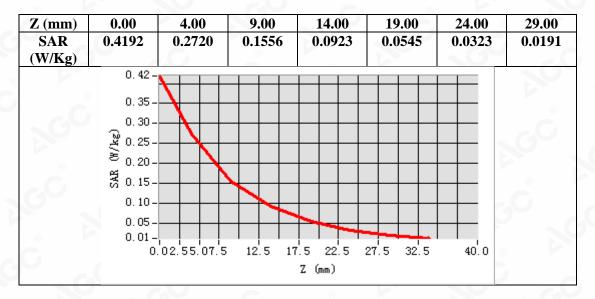

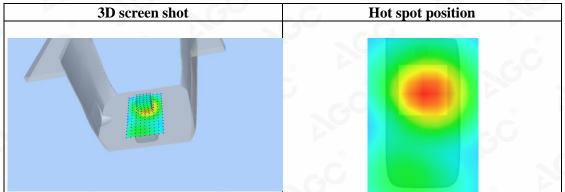

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Date: Sep. 05, 2021

Page 73 of 119

Test Laboratory: AGC Lab

WCDMA Band IV Mid-Face up (RMC 12.2kbps)

DUT: POC Radio; Type: IP-398

Communication System: UMTS; Communication System Band: Band IV UTRA/FDD ;Duty Cycle:1:1; Conv.F=4.48; Frequency: 1732.4 MHz; Medium parameters used: f = 1750 MHz; $\sigma = 1.36 \text{ mho/m}$; $\epsilon r = 40.52$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature (°C): 21.8, Liquid temperature (°C): 21.6

SATIMO Configuration:

Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ WCDMA Band IV Mid-Face up/Area Scan: Measurement grid: dx=10mm, dy=10mm Configuration/ WCDMA Band IV Mid-Face up/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;


Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Face up
Band	WCDMA Band IV
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

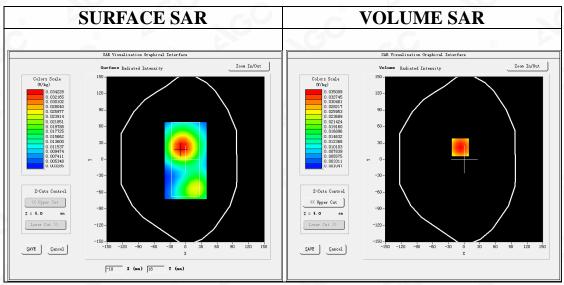


Maximum location: X=-7.00, Y=22.00 SAR Peak: 0.05 W/kg


		0
(8)	SAR 10g (W/Kg)	0.020482
	SAR 1g (W/Kg)	0.033824

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated restrou/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.





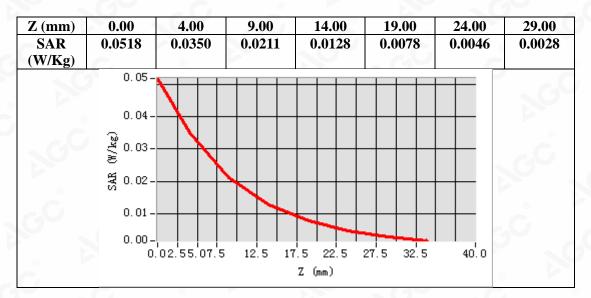

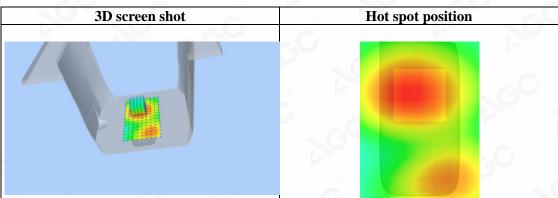

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written application of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



Page 75 of 119

Test Laboratory: AGC Lab Date: Sep. 03, 2021

WCDMA Band V Mid-Body-Back (RMC)

DUT: POC Radio; Type: IP-398

Communication System: UMTS; Communication System Band: BAND V UTRA/FDD; Duty Cycle:1: 1; Conv.F=5.24; Frequency: 836.4 MHz; Medium parameters used: f = 835MHz; $\sigma = 0.91$ mho/m; $\epsilon r = 41.34$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$ C): 21.6, Liquid temperature ($^{\circ}$ C): 21.3

SATIMO Configuration:

Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4_02_35

Configuration/ WCDMA Band V Mid-Body-Back/Area Scan: Measurement grid: dx=10mm, dy=10mm Configuration/ WCDMA Band V Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;


Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body Back
Band	WCDMA Band V
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

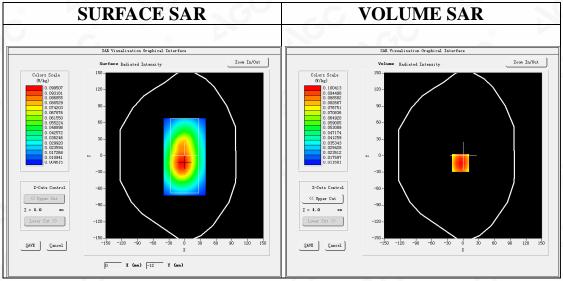


Maximum location: X=-5.00, Y=-13.00 SAR Peak: 0.13 W/kg


SAR 10g (W/Kg)	0.068309
SAR 1g (W/Kg)	0.097076

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated restrou/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.





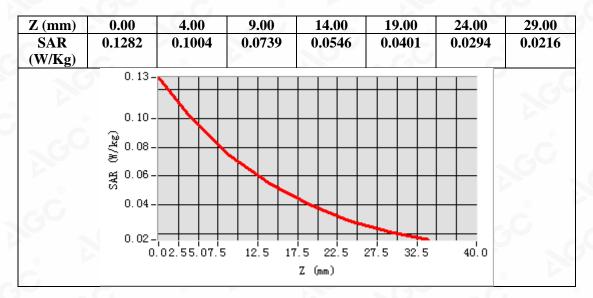

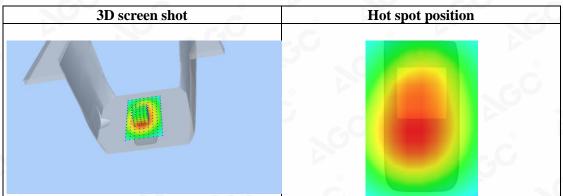

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written application of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 77 of 119

Test Laboratory: AGC Lab Date: Sep. 03, 2021

WCDMA Band V Mid- Face up (RMC) DUT: POC Radio; Type: IP-398

Communication System: UMTS; Communication System Band: BAND V UTRA/FDD; Duty Cycle:1: 1; Conv.F=5.24; Frequency: 836.4 MHz; Medium parameters used: f = 835MHz; $\sigma = 0.91$ mho/m; $\epsilon r = 41.34$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$ C): 21.6, Liquid temperature ($^{\circ}$ C): 21.3

SATIMO Configuration:

Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4_02_35

Configuration/ WCDMA Band V Mid-Face up/Area Scan: Measurement grid: dx=10mm, dy=10mm Configuration/ WCDMA Band V Mid-Face up/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Face up
Band	WCDMA Band V
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

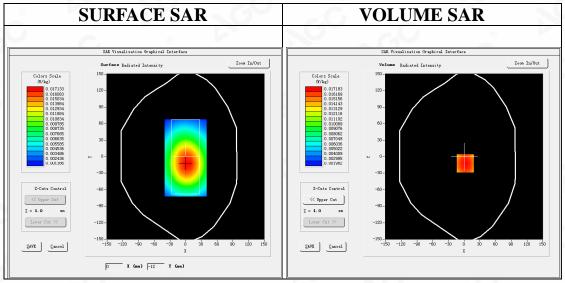


Maximum location: X=2.00, Y=-12.00 SAR Peak: 0.02 W/kg


SAR 10g (W/Kg)	0.011751
SAR 1g (W/Kg)	0.016523

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated restrou/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.





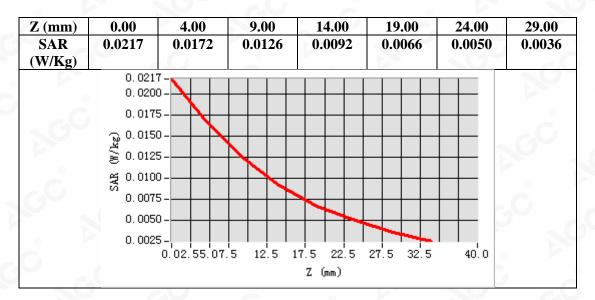

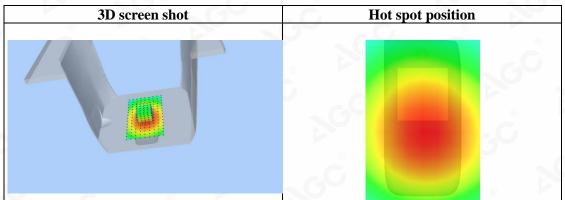

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written application of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Date: Sep. 05, 2021

Page 79 of 119

Test Laboratory: AGC Lab

LTE Band 2 Mid-Body-Back (1 RB#0) DUT: POC Radio; Type: IP-398

Communication System: LTE; Communication System Band: LTE Band 2; Duty Cycle:1:1; Conv.F=4.48; Frequency:1880MHz; Medium parameters used: f = 1800 MHz; $\sigma = 1.37 \text{ mho/m}$; $\epsilon r = 39.86$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature (°C): 21.8, Liquid temperature (°C): 21.6

SATIMO Configuration:

Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 2 Mid-Body-Back/Area Scan: Measurement grid: dx=10mm, dy=10mm Configuration/ LTE Band 2 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE Band 2
Channels	Middle
Signal	OFDM (Crest factor: 1.0)
Signal	OFDM (Crest factor: 1.0)

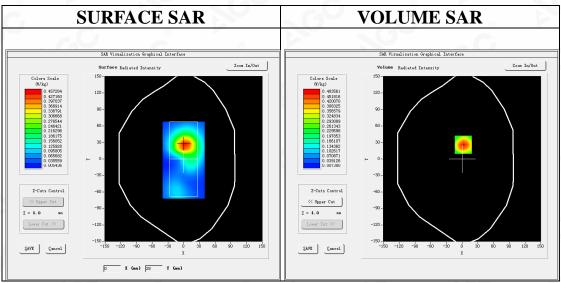



Maximum location: X=2.00, Y=26.00 SAR Peak: 0.77 W/kg

SAR 10g (W/Kg)	0.250202
SAR 1g (W/Kg)	0.464665

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Restroy/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exprization of AGC The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



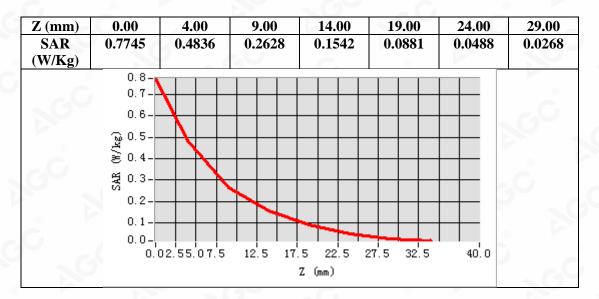

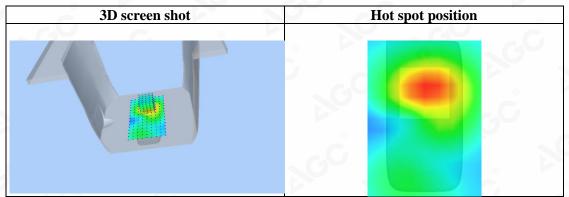

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written application of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 81 of 119

Test Laboratory: AGC Lab Date: Sep. 05, 2021

LTE Band 2 Mid-Face up (1 RB#0) DUT: POC Radio; Type: IP-398

Communication System: LTE; Communication System Band: LTE Band 2; Duty Cycle:1:1; Conv.F=4.48; Frequency:1880MHz; Medium parameters used: f = 1800 MHz; $\sigma = 1.37$ mho/m; $\epsilon r = 39.86$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature (°C): 21.8, Liquid temperature (°C): 21.6

SATIMO Configuration:

Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 2 Mid-Face up/Area Scan: Measurement grid: dx=10mm, dy=10mm Configuration/ LTE Band 2 Mid-Face up/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

surf_sam_plan.txt, h= 5.00 mm
5x5x7,dx=8mm dy=8mm dz=5mm
Validation plane
Face up
LTE Band 2
Middle
OFDM (Crest factor: 1.0)

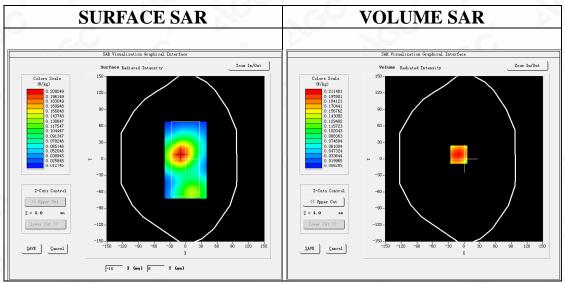



Maximum location: X=-10.00, Y=8.00 SAR Peak: 0.32 W/kg

SAR 10g (W/Kg)	0.120740
SAR 1g (W/Kg)	0.204276

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Restroy/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exprization of AGC The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



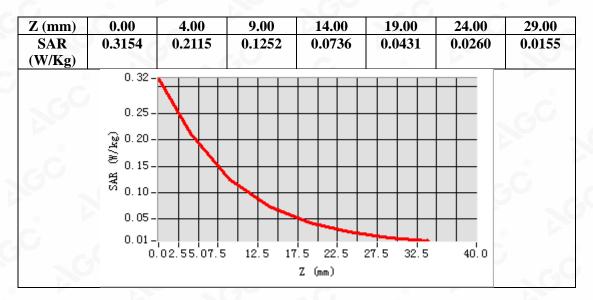

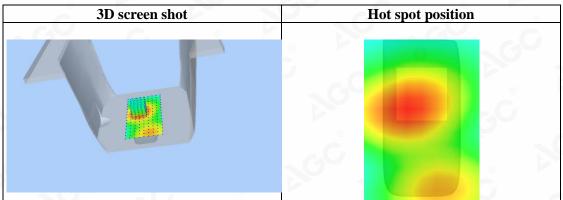

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Date: Sep. 04, 2021

Page 83 of 119

Test Laboratory: AGC Lab

LTE Band 4 Mid-Body-Back (1 RB#0) DUT: POC Radio; Type: IP-398

Communication System: LTE; Communication System Band: LTE Band 4; Duty Cycle:1:1; Conv.F=4.48; Frequency:1732.5 MHz; Medium parameters used: f = 1800 MHz; $\sigma = 1.36 \text{ mho/m}$; $\epsilon = 40.52$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$ C): 21.5, Liquid temperature ($^{\circ}$ C): 21.3

SATIMO Configuration:

Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 4 Mid-Body-Back/Area Scan: Measurement grid: dx=10mm, dy=10mm Configuration/ LTE Band 4 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE Band 4
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

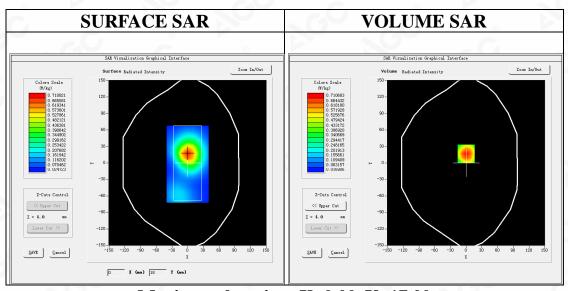



Maximum location: X=0.00, Y=17.00 SAR Peak: 1.09 W/kg

SAR 10g (W/Kg)	0.385003
SAR 1g (W/Kg)	0.681648

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Restrog/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



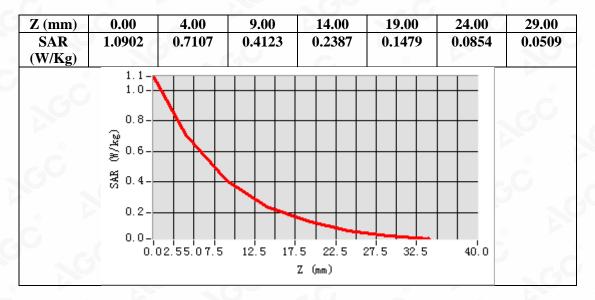

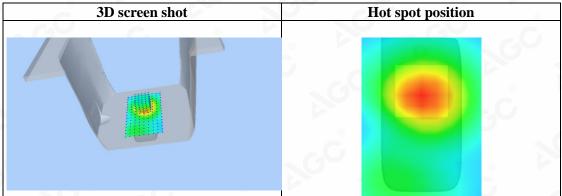

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written application of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



Date: Sep. 04, 2021

Page 85 of 119

Test Laboratory: AGC Lab

LTE Band 4 Mid-Face up (1 RB#0) DUT: POC Radio; Type: IP-398

Communication System: LTE; Communication System Band: LTE Band 4; Duty Cycle:1:1; Conv.F=4.48; Frequency:1732.5 MHz; Medium parameters used: f = 1800 MHz; $\sigma = 1.36 \text{ mho/m}$; $\epsilon r = 40.52$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$ C): 21.5, Liquid temperature ($^{\circ}$ C): 21.3

SATIMO Configuration:

Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 4 Mid-Face up/Area Scan: Measurement grid: dx=10mm, dy=10mm Configuration/ LTE Band 4 Mid-Face up/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Face up
Band	LTE Band 4
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

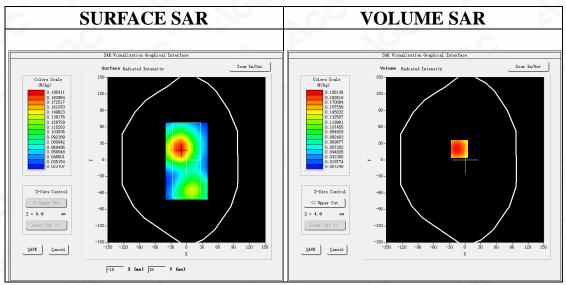



Maximum location: X=-11.00, Y=20.00 SAR Peak: 0.30 W/kg

SAR 10g (W/Kg)	0.114829
SAR 1g (W/Kg)	0.190322

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



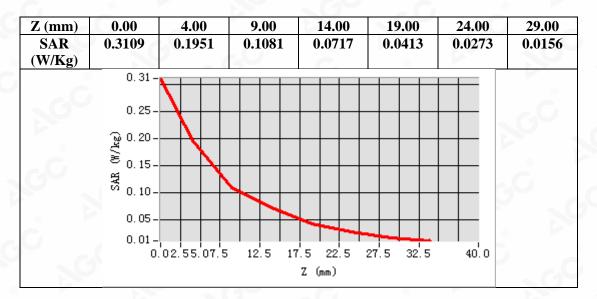

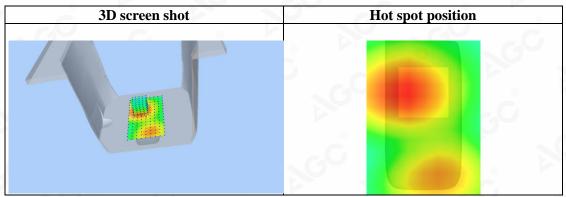



Page 87 of 119

Test Laboratory: AGC Lab Date: Sep. 03, 2021

LTE Band 5 Low-Body-Back (1 RB#0) DUT: POC Radio; Type: IP-398

Communication System: LTE; Communication System Band: LTE Band 5; Duty Cycle:1:1; Conv.F=5.24 Frequency:829 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.85$ mho/m; $\epsilon r = 41.87$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature (°C): 21.6, Liquid temperature (°C): 21.3

SATIMO Configuration:

Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 5 Low-Body-Back/Area Scan: Measurement grid: dx=10mm, dy=10mm Configuration/ LTE Band 5 Low-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;


	5 11 1 500
Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE Band 5
Channels	Low
Signal	OFDM (Crest factor: 1.0)
Channels	Low

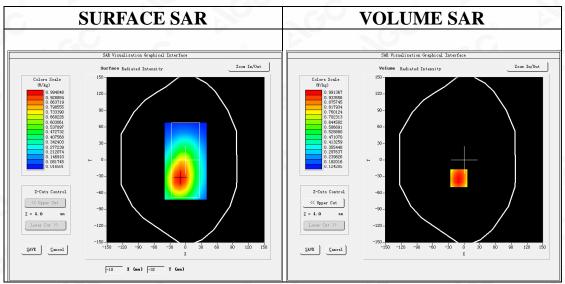


Maximum location: X=-10.00, Y=-33.00 SAR Peak: 1.30 W/kg

SAR 10g (W/Kg)	0.677562
SAR 1g (W/Kg)	0.966301



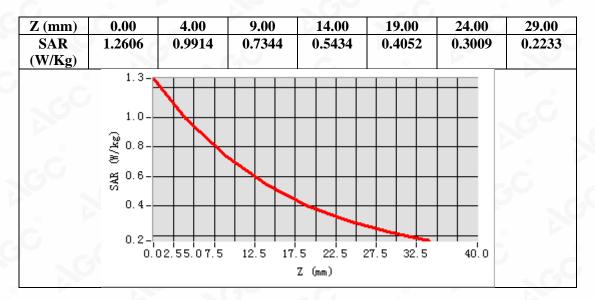

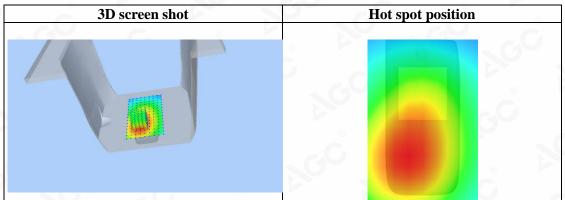



Page 89 of 119

Test Laboratory: AGC Lab Date: Sep. 03, 2021

LTE Band 5 Mid-Face up (1 RB#0) DUT: POC Radio; Type: IP-398

Communication System: LTE; Communication System Band: LTE Band 5; Duty Cycle:1:1; Conv.F=5.24 Frequency:836.5 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.92$ mho/m; $\epsilon r = 41.07$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$ C): 21.6, Liquid temperature ($^{\circ}$ C): 21.3

SATIMO Configuration:

Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 5 Mid-Face up/Area Scan: Measurement grid: dx=10mm, dy=10mm Configuration/ LTE Band 5 Mid-Face up/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;


Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Face up
Band	LTE Band 5
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

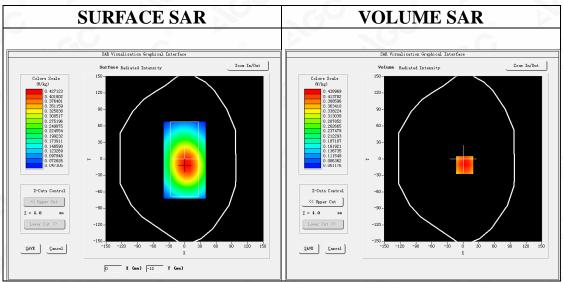


Maximum location: X=3.00, Y=-11.00 SAR Peak: 0.58 W/kg

SAR 10g (W/Kg)	0.302170
SAR 1g (W/Kg)	0.426580



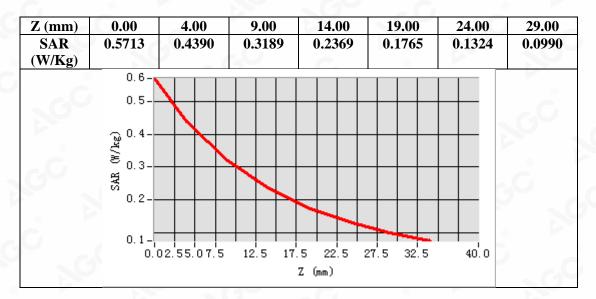

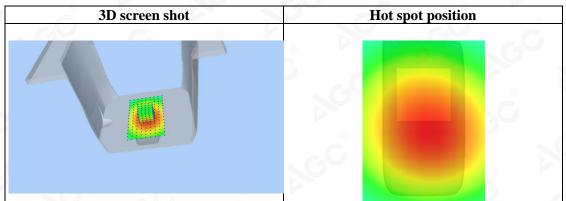



Page 91 of 119

Test Laboratory: AGC Lab Date: Sep. 02, 2021

LTE Band 12 Mid-Body-Back (1 RB#0) DUT: POC Radio; Type: IP-398

Communication System: LTE; Communication System Band: LTE Band 12; Duty Cycle:1:1; Conv.F=5.18; Frequency: 707.5 MHz; Medium parameters used: f = 750 MHz; $\sigma = \delta A$ mho/m; $\epsilon r = \epsilon rA$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature (°C): 22.0, Liquid temperature (°C): 21.8

SATIMO Configuration:

Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 12 Mid-Body-Back/Area Scan: Measurement grid: dx=10mm, dy=10mm Configuration/ LTE Band 12 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE Band 12
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

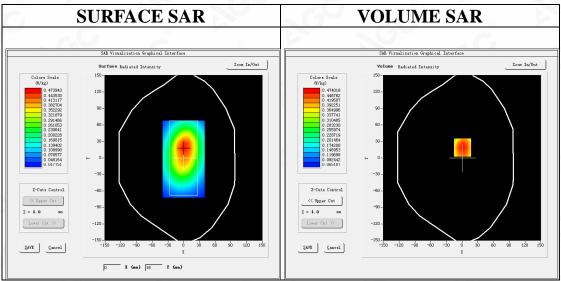



Maximum location: X=1.00, Y=19.00 SAR Peak: 0.62 W/kg

SAR 10g (W/Kg)	0.329227
SAR 1g (W/Kg)	0.467485

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



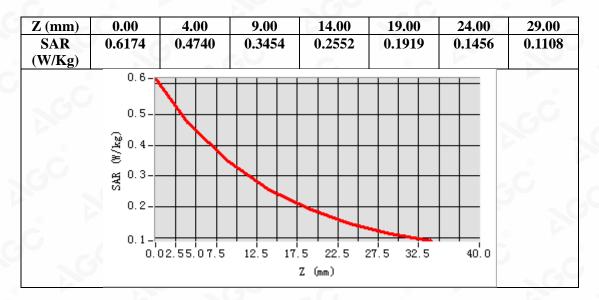

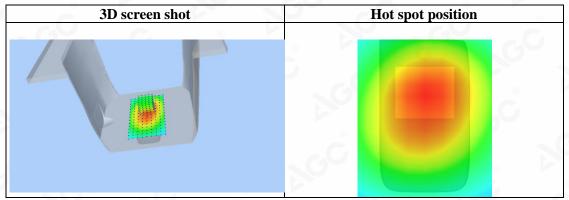

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Date: Sep. 02, 2021

Page 93 of 119

Test Laboratory: AGC Lab

LTE Band 12 Mid-Face up (1 RB#0) DUT: POC Radio; Type: IP-398

Communication System: LTE; Communication System Band: LTE Band 12; Duty Cycle:1:1; Conv.F=5.18; Frequency: 707.5 MHz; Medium parameters used: f = 750 MHz; $\sigma = \delta A$ mho/m; $\epsilon r = \epsilon rA$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature (°C): 22.0, Liquid temperature (°C): 21.8

SATIMO Configuration:

Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 12 Mid-Face up/Area Scan: Measurement grid: dx=10mm, dy=10mm Configuration/ LTE Band 12 Mid-Face up/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Face up
Band	LTE Band 12
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

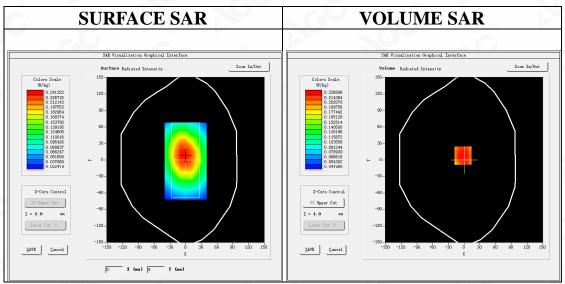



Maximum location: X=-2.00, Y=8.00 SAR Peak: 0.30 W/kg

8	
SAR 10g (W/Kg)	0.166873
SAR 1g (W/Kg)	0.227829

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the coefficient estimated approver, or having been altered without authorization, or having not been stamped by the coefficient estimated approver, or having been altered without authorization, or having not been stamped by the coefficient estimated approver, or having been altered without authorization, or having not been stamped by the coefficient estimated in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



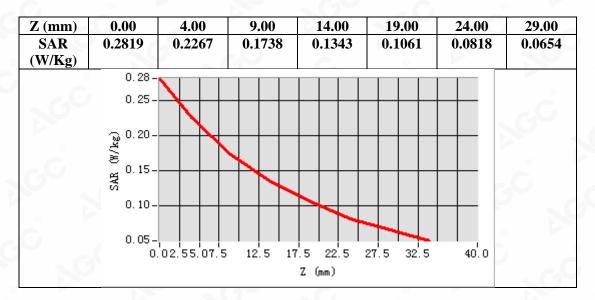

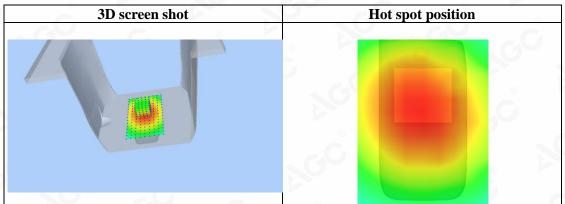



Page 95 of 119

Test Laboratory: AGC Lab Date: Sep. 02, 2021

LTE Band 13 Mid-Body-Back (1 RB#0) DUT: POC Radio; Type: IP-398

Communication System: LTE; Communication System Band: LTE Band 13; Duty Cycle:1:1; Conv.F=5.18; Frequency: 782 MHz; Medium parameters used: f = 750 MHz; $\sigma = 0.93$ mho/m; $\epsilon = 42.14$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 22.0, Liquid temperature ($^{\circ}$): 21.8

SATIMO Configuration:

Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 13 Mid-Body-Back/Area Scan: Measurement grid: dx=10mm, dy=10mm Configuration/ LTE Band 13 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;


Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE Band 13
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

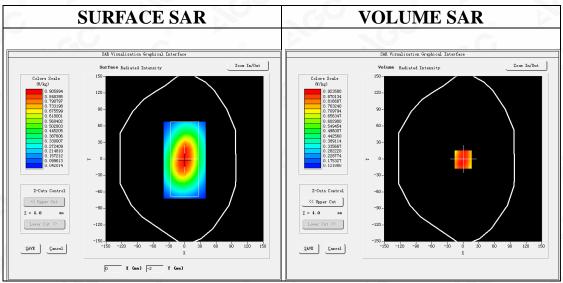


Maximum location: X=0.00, Y=-1.00 SAR Peak: 1.20 W/kg

SAR 10g (W/Kg)	0.642585
SAR 1g (W/Kg)	0.895688



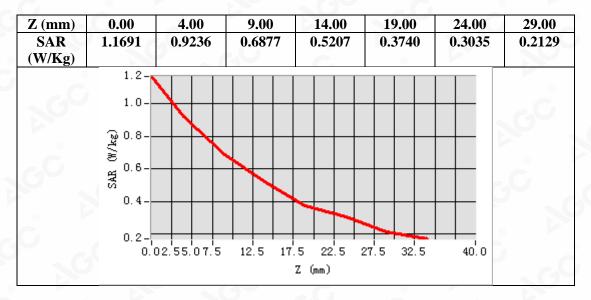

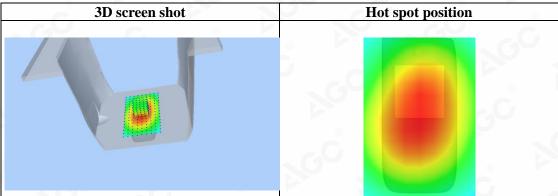

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Date: Sep. 02, 2021

Page 97 of 119

Test Laboratory: AGC Lab

LTE Band 13 Mid-Face up (1 RB#0) DUT: POC Radio; Type: IP-398

Communication System: LTE; Communication System Band: LTE Band 13; Duty Cycle:1:1; Conv.F=5.18; Frequency: 782 MHz; Medium parameters used: f = 750 MHz; $\sigma = 0.93$ mho/m; $\epsilon = 42.14$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 22.0, Liquid temperature ($^{\circ}$): 21.8

SATIMO Configuration:

Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 13 Mid-Face up/Area Scan: Measurement grid: dx=10mm, dy=10mm Configuration/ LTE Band 13 Mid-Face up/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;


Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Face up
Band	LTE Band 13
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

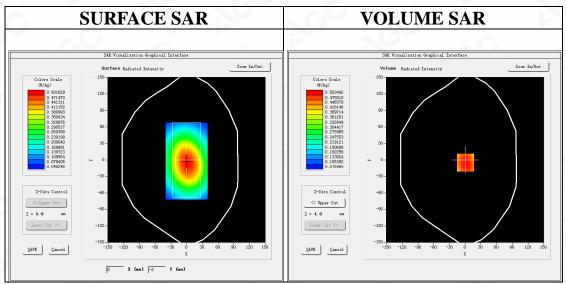


Maximum location: X=1.00, Y=-5.00 SAR Peak: 0.64 W/kg

SAR 10g (W/Kg)	0.356050
SAR 1g (W/Kg)	0.487836



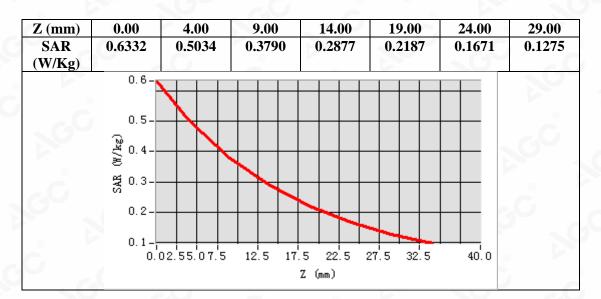

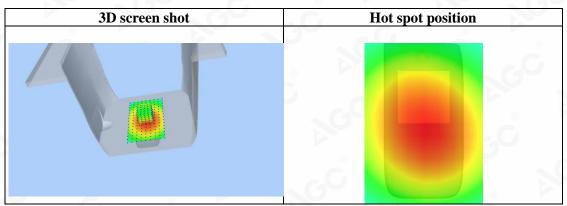



Page 99 of 119

Test Laboratory: AGC Lab Date: Sep. 02, 2021

LTE Band 14 Mid-Body-Back (1 RB#0) DUT: POC Radio; Type: IP-398

Communication System: LTE; Communication System Band: LTE Band 14; Duty Cycle:1:1; Conv.F=5.18; Frequency: 793 MHz; Medium parameters used: f = 750 MHz; $\sigma = 0.91$ mho/m; $\epsilon = 42.65$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature (°C): 22.0, Liquid temperature (°C): 21.8

SATIMO Configuration:

Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 14 Mid-Body-Back/Area Scan: Measurement grid: dx=10mm, dy=10mm Configuration/ LTE Band 14 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;


Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE Band 14
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

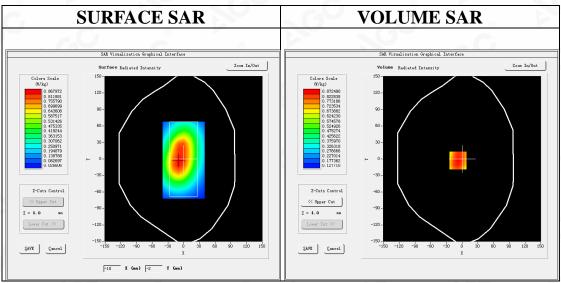


Maximum location: X=-8.00, Y=-3.00 SAR Peak: 1.11 W/kg

SAR 10g (W/Kg)	0.611398
SAR 1g (W/Kg)	0.848096



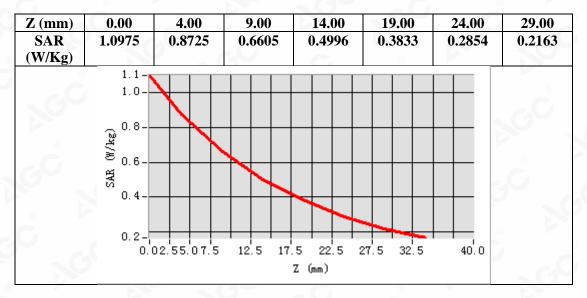

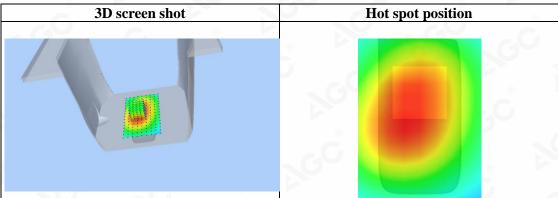

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Date: Sep. 02, 2021

Page 101 of 119

Test Laboratory: AGC Lab

LTE Band 14 Mid-Face up (1 RB#0) DUT: POC Radio; Type: IP-398

Communication System: LTE; Communication System Band: LTE Band 14; Duty Cycle:1:1; Conv.F=5.18; Frequency: 793 MHz; Medium parameters used: f = 750 MHz; $\sigma = 0.91$ mho/m; $\epsilon = 42.65$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 22.0, Liquid temperature ($^{\circ}$): 21.8

SATIMO Configuration:

Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 14 Mid-Face up/Area Scan: Measurement grid: dx=10mm, dy=10mm Configuration/ LTE Band 14 Mid-Face up/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Face up
Band	LTE Band 14
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

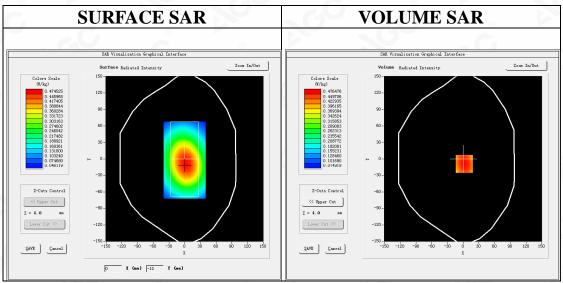



Maximum location: X=2.00, Y=-9.00 SAR Peak: 0.60 W/kg

SAR 10g (W/Kg)	0.337264
SAR 1g (W/Kg)	0.462067





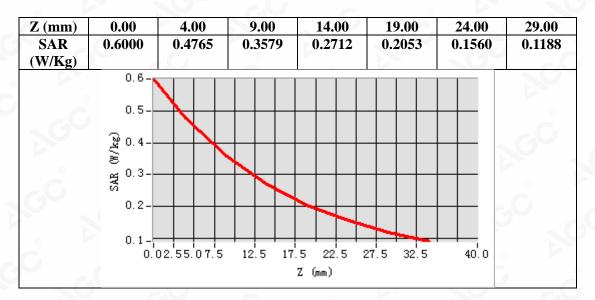

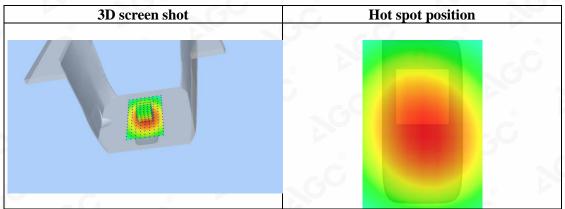



Page 103 of 119

Test Laboratory: AGC Lab Date: Sep. 04, 2021

LTE Band 66 Mid-Body-Back (1 RB#0) DUT: POC Radio; Type: IP-398

Communication System: LTE; Communication System Band: LTE Band 66; Duty Cycle:1:1; Conv.F=4.48; Frequency:1755 MHz; Medium parameters used: f = 1800 MHz; $\sigma = 1.40 \text{ mho/m}$; $\epsilon r = 39.46$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature ($^{\circ}$ C): 21.5, Liquid temperature ($^{\circ}$ C): 21.3

SATIMO Configuration:

Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 66 Mid-Body-Back/Area Scan: Measurement grid: dx=10mm, dy=10mm Configuration/ LTE Band 66 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE Band 66
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

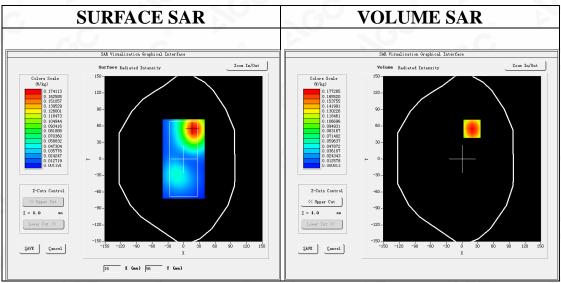



Maximum location: X=19.00, Y=55.00 SAR Peak: 0.27 W/kg

SAR 10g (W/Kg)	0.099175
SAR 1g (W/Kg)	0.170869

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



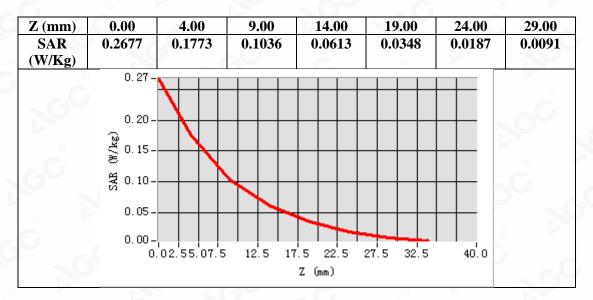

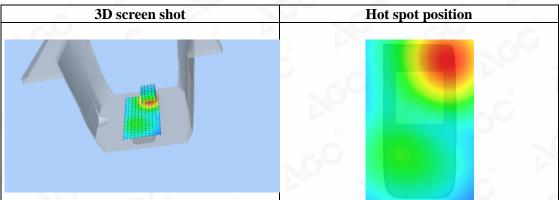



Date: Sep. 04, 2021

Page 105 of 119

Test Laboratory: AGC Lab

LTE Band 66 Mid-Face up (1 RB#0) DUT: POC Radio; Type: IP-398

Communication System: LTE; Communication System Band: LTE Band 66; Duty Cycle:1:1; Conv.F=4.48; Frequency:1755 MHz; Medium parameters used: f = 1800 MHz; $\sigma = 1.40 \text{ mho/m}$; $\epsilon r = 39.46$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature ($^{\circ}$ C): 21.5, Liquid temperature ($^{\circ}$ C): 21.3

SATIMO Configuration:

Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 66 Mid-Face up/Area Scan: Measurement grid: dx=10mm, dy=10mm Configuration/ LTE Band 66 Mid-Face up/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Face up
Band	LTE Band 66
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

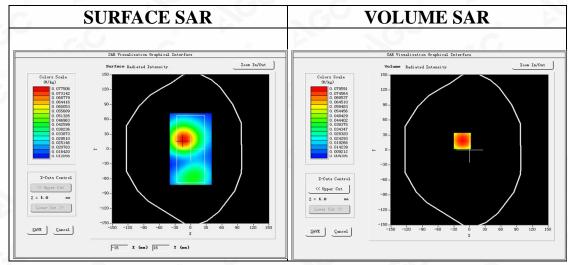



Maximum location: X=-14.00, Y=18.00 SAR Peak: 0.31 W/kg

SAR 10g (W/Kg)	0.047758
SAR 1g (W/Kg)	0.077101





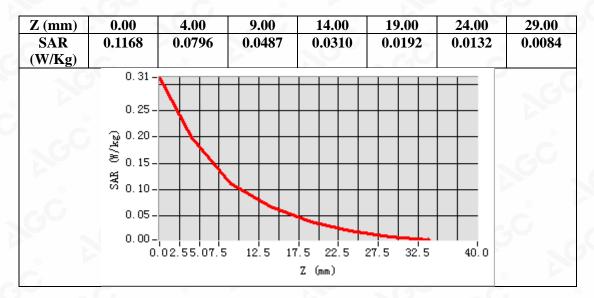

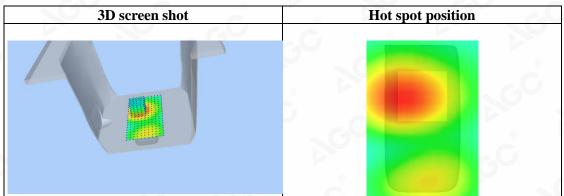

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.