

# Nextivity, Inc.

## TEST REPORT FOR

**Provider Specific Consumer Signal Booster  
Model: Cel-Fi P34-2/4/5/12**

**Tested To The Following Standards:**

**FCC PART 24E**

**Report No.: 95128-31**

**Date of issue: April 29, 2014**



This test report bears the accreditation symbol indicating that the testing performed herein meets the test and reporting requirements of ISO/IEC 17025 under the applicable scope of EMC testing for CKC Laboratories, Inc.

We strive to create long-term, trust based relationships by providing sound, adaptive, customer first testing services. We embrace each of our customers' unique EMC challenges, not as an interruption to set processes, but rather as the reason we are in business.

## TABLE OF CONTENTS

Administrative Information .....	3
Test Report Information .....	3
Report Authorization .....	3
Test Facility Information .....	4
Software Versions .....	4
Site Registration & Accreditation Information .....	4
Summary of Results .....	5
Conditions During Testing.....	5
Equipment Under Test.....	6
Peripheral Devices .....	6
FCC Part(s) 2 / 24E .....	7
2.1047 Modulation Characteristics.....	7
2.1049(l) Occupied Bandwidth .....	8
2.1051 / 24.238(a) Spurious Emissions at Antenna Terminals .....	12
2.1053 / 24.238(a) Field Strength of Spurious Radiation .....	18
2.1055(a)(d) / 24.235 Frequency Stability .....	23
Supplemental Information .....	26
Measurement Uncertainty .....	26
Emissions Test Details.....	26

## ADMINISTRATIVE INFORMATION

### Test Report Information

**REPORT PREPARED FOR:**

Nextivity, Inc.  
12230 World Trade Dr.  
San Diego, CA 92128

Representative: Michiel Lotter  
Customer Reference Number: 001831

**DATE OF EQUIPMENT RECEIPT:**

**DATE(S) OF TESTING:**

**REPORT PREPARED BY:**

Dianne Dudley  
CKC Laboratories, Inc.  
5046 Sierra Pines Drive  
Mariposa, CA 95338

Project Number: 95128

December 13, 2013

December 13, 2013 -April 22, 2014

### Report Authorization

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the sample equipment tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.



**Steve Behm**  
*Director of Quality Assurance & Engineering Services*  
**CKC Laboratories, Inc.**

## Test Facility Information



Our laboratories are configured to effectively test a wide variety of product types. CKC utilizes first class test equipment, anechoic chambers, data acquisition and information services to create accurate, repeatable and affordable test results.

TEST LOCATION(S):  
CKC Laboratories, Inc.  
110 Olinda Place  
Brea, CA 92823

## Software Versions

CKC Laboratories Proprietary Software	Version
EMITest Emissions	5.00.14

## Site Registration & Accreditation Information

Location	CB #	TAIWAN	CANADA	FCC	JAPAN
Brea A	US0060	SL2-IN-E-1146R	3082D-1	90473	A-0147

## SUMMARY OF RESULTS

### Standard / Specification: FCC Part(s) 2 / 24E

Test Procedure/Method	Description	Results
2.1046	RF Power Output	NA <sup>1</sup>
2.1047	Modulation Characteristics	NA <sup>2</sup>
2.1049 (I)	Occupied Bandwidth	Pass
2.1051 / 24.238(a)	Spurious Emissions at Antenna Terminals	Pass
2.1053 / 24.238(a)	Field Strength of Spurious Radiation	Pass
2.1055(a)(d) / 24.235	Frequency Stability	Pass

NA<sup>1</sup> = A different standard applies; see applicable test report.

NA<sup>2</sup> = Not applicable. See the section in the report for the reason.

## Conditions During Testing

This list is a summary of the conditions noted for or modifications made to the equipment during testing.

Summary of Conditions
None

## EQUIPMENT UNDER TEST (EUT)

### EQUIPMENT UNDER TEST

#### Provider Specific Consumer Signal Booster

Manuf: Nextivity, Inc.  
Model: Cel-Fi P34-2/4/5/12CU  
Serial: 171341000018

#### Provider Specific Consumer Signal Booster

Manuf: Nextivity, Inc.  
Model: Cel-Fi P34-2/4/5/12NU  
Serial: 170931000035

Note: The base model number for the system is Cel-Fi P34-2/4/5/12. The individual systems tested were: Cel-Fi P34-2/4/5/12NU and Cel-Fi P34-2/4/5/12CU.

### PERIPHERAL DEVICES

The EUT was tested with the following peripheral device(s):

#### Power Supply (2)

Manuf: ITE Power Supply  
Model: PW173  
Serial: NA

#### Power Supply (2)

Manuf: Autec Power Systems  
Model: SA07-24US12R  
Serial: NA

#### Signal Generator

Manuf: Agilent  
Model: E4433B  
Serial: US40052164

#### Signal Generator

Manuf: Agilent  
Model: E4438C  
Serial: MY42082260

#### Splitter

Manuf: Anaren  
Model: 44000  
Serial: 0583

## **FCC PART(S) 2 / 24E**

This report contains EMC emissions test results under United States Federal Communications Commission (FCC) requirements for 47 CFR Part 2: Frequency Allocations and Radio Treaty Matters, General Rules and Regulations and Licensed Device falling under Part 24: Personal Communications Services.

### **2.1047 Modulation Characteristics**

Not applicable because the EUT does not employ modulation characteristics.

## 2.1049(I) Occupied Bandwidth

### Test Conditions / Setup

Test Location: CKC Laboratories, Inc. • 110 North Olinda Place • Brea, CA 92823 • 714-993-6112

**Customer:** Nextivity, Inc.

**Specification:** Occupied Bandwidth

**Work Order #:** 95395

Date: 12/13/2013

**Test Type:** Conducted Emissions

**Equipment:** Provider Specific Consumer Signal  
Booster

**Manufacturer:** Nextivity, Inc.

Tested By: E. Wong

**Model:** Cel-Fi P34-2/4/5/12

110V 60Hz

**S/N:** 171341000018 and 170931000035

#### Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02672	Spectrum Analyzer	E4446A	9/4/2012	9/4/2014
T2	AN03430	Attenuator	75A-10-12	9/5/2013	9/5/2015
T3	ANP06543	Cable	32022-29094K- 29094K-24TC	11/20/2013	11/20/2015

#### Equipment Under Test:

Function	Manufacturer	Model #	S/N
Provider Specific Consumer Signal Booster	Nextivity, Inc.	Cel-Fi P34-2/4/5/12CU	171341000018
Provider Specific Consumer Signal Booster	Nextivity, Inc.	Cel-Fi P34-2/4/5/12NU	170931000035

#### Support Devices:

Function	Manufacturer	Model #	S/N
Signal Generator	Agilent	E4438C	MY49071314
Signal Generator	Agilent	E4438B	MY40052164
Power Supply	Autec Power Systems	SA07-24US12R	NA
Power Supply	Autec Power Systems	SA07-24US12R	NA

#### Test Conditions / Notes:

The EUT is provider specific signal booster pair consisted of a Network unit (NU) and a Coverage unit (CU) using proprietary 5.8 GHz Wireless interface. The EUT is manufacturer configurable to operate in relay bandwidth of 5 MHz, 10MHz, 15 MHz and 20 MHz within the CMRS band by setting the bandwidth and center frequency of programmable Spectrum Block Filter, Gain and other operational parameter based on received public land mobile network (PLMN) ID. For testing purposes, only spectrum block filter of 5 MHz will be evaluated. The two EUT are placed on the test bench, connected via coax cable, combiner and 50 dB attenuators. The unit not under evaluation is placed in shielded enclosure to improve RF isolation. UNII Tx /RX port of NU is connected to UNII TX/RX port of CU. Evaluation are conducted at Donor port band 2 and Server port band 2

Signal : 4.1 MHz AWGN.


UL= 1850-1910MHz

DL= 1930-1990MHz


Test environment conditions: 24°C, 21% Humidity, 100kPa




## Test Data

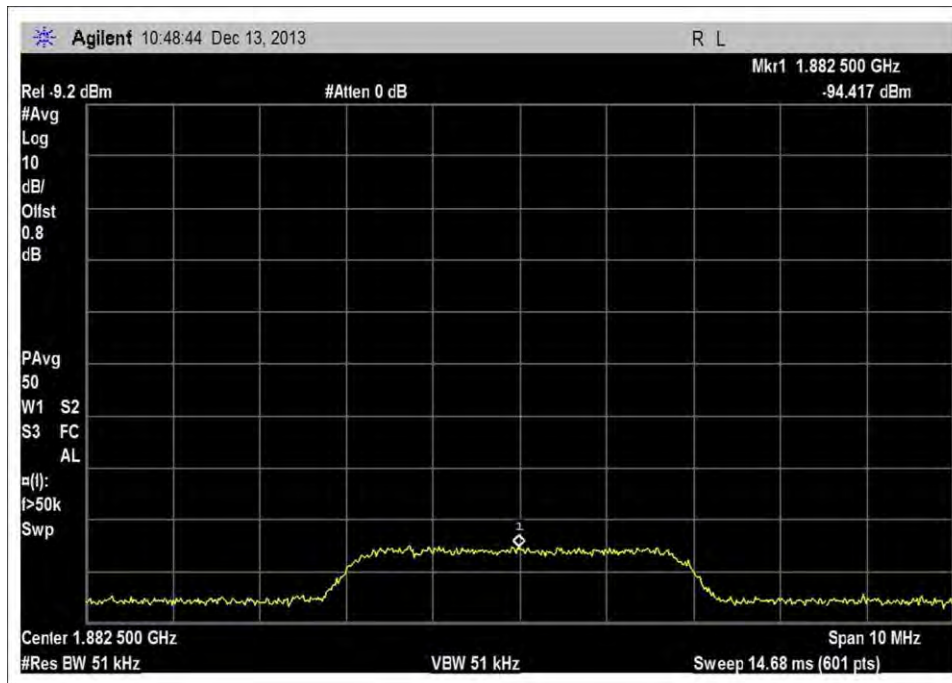


UL\_1850-1915MHz\_Input

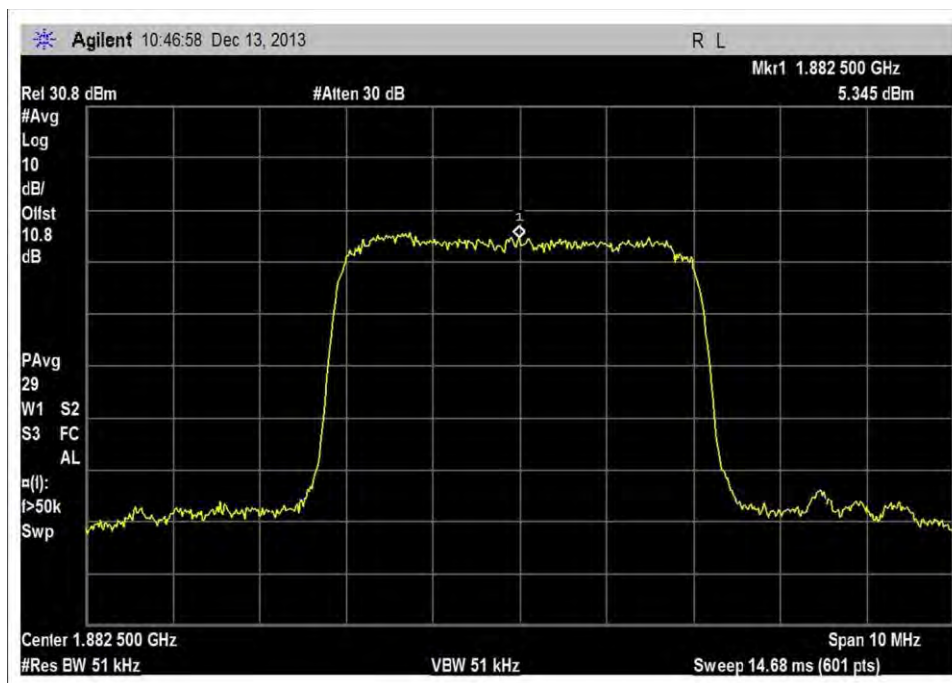

UL\_1850-1915MHz\_Output

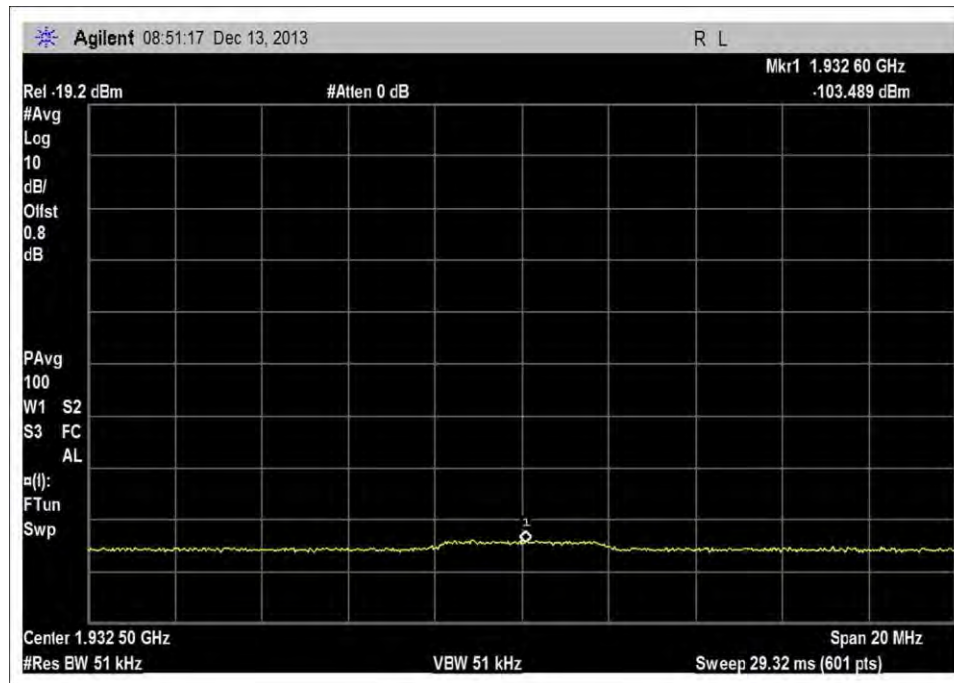


DL\_1930-1995MHz\_Input

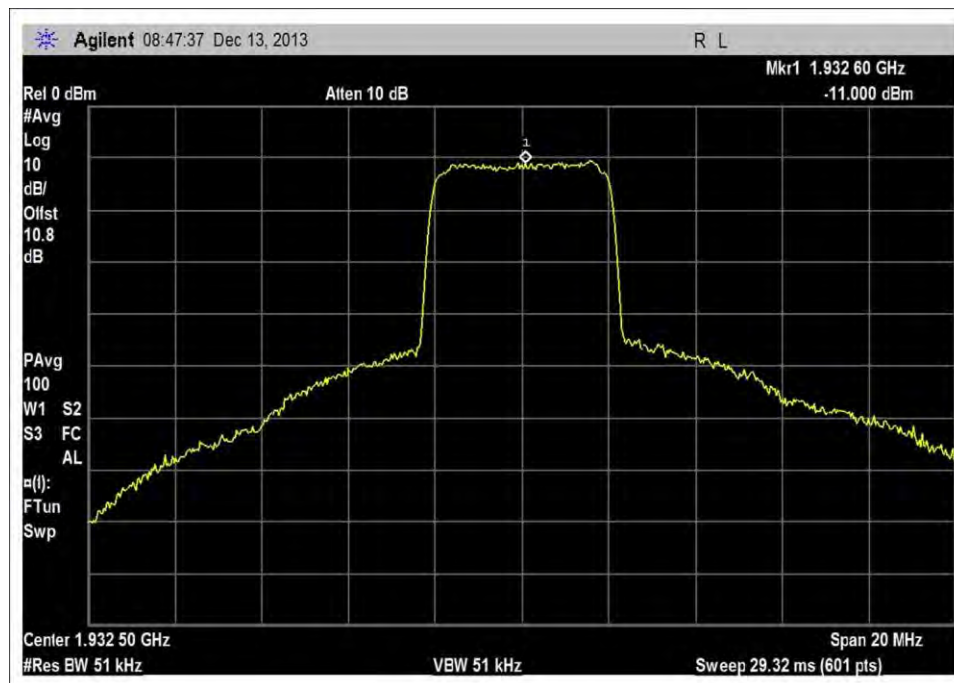

DL\_1930-1995MHz\_Output

## Test Setup Photo

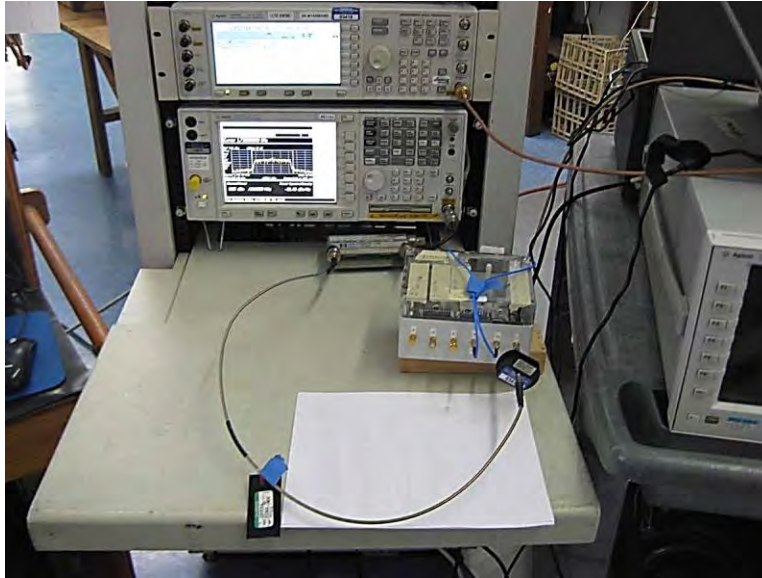

## 2.1051 / 24.238(a) Spurious Emissions at Antenna Terminals

### Test Conditions / Setup

Test Location: CKC Laboratories, Inc. • 110 North Olinda Place • Brea, CA 92823 • 714-993-6112

**Customer:** Nextivity, Inc.

**Specification:** 47 CFR § 24.238 Spurious Emissions

**Work Order #:** 95128

Date: 12/20/2013

**Test Type:** Conducted Emissions

Time: 09:57:38

**Equipment:** Provider Specific Consumer Signal  
Booster

Sequence#: 5

**Manufacturer:** Nextivity, Inc.

Tested By: E. Wong

**Model:** Cel-Fi P34-2/4/5/12

110V 60Hz

**S/N:** 171341000018 / 170931000035

#### Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02672	Spectrum Analyzer	E4446A	9/4/2012	9/4/2014
	AN03430	Attenuator	75A-10-12	9/5/2013	9/5/2015
	AN02946	Cable	32022-2-2909K-36TC	7/31/2013	7/31/2015
	ANdBm	Unit Conversion		1/30/2012	1/30/2014

#### Equipment Under Test (\* = EUT):

Function	Manufacturer	Model #	S/N
Provider Specific Consumer Signal Booster	Nextivity, Inc.	Cel-Fi P34-2/4/5/12CU	171341000018
Provider Specific Consumer Signal Booster	Nextivity, Inc.	Cel-Fi P34-2/4/5/12NU	170931000035

#### Support Devices:

Function	Manufacturer	Model #	S/N
Power Supply	ITE Power Supply	PW173	NA
Power Supply	ITE Power Supply	PW173	NA
Signal Generator	Agilent	E4433B	US40052164
Signal Generator	Agilent	E4438C	MY42082260

***Test Conditions / Notes:***

The EUT is provider specific signal booster pair consisted of a Network unit (NU) and a Coverage unit (CU) using proprietary 5.8 GHz Wireless interface.

The EUT is manufacturer configurable to operate in relay bandwidth of 5 MHz, 10MHz, 15 MHz and 20 MHz within the CMRS band by setting the Spectrum Block Filter , Gain and other operational parameter based on received public land mobile network (PLMN) ID. For testing purposes, only spectrum block filter of 5 MHz will be evaluated.

The two EUT are placed on the test bench, connected via coax cable, combiner and 50 dB attenuators. The unit not under evaluation is placed in shielded enclosure to improve RF isolation.

UNII Tx /RX port of NU is connected to UNII TX/RX port of CU.

Evaluation are conducted at Donor port band 2, Server port band 2

Signal: 10 MHz LTE, 4.1 MHz AWGN, 5MHz WCDMA, 5 MHz WCDMATM1

UL= 1850-1915 MHz

DL= 1930-1990 MHz

Frequency range of measurement = 9 kHz- 22 GHz.


9 kHz -150kHz; RBW=200Hz, VBW=200 Hz; 150 kHz-30 MHz; RBW=9 kHz, VBW=9 kHz; 30 MHz-1000 MHz; RBW=120 kHz, VBW=120 kHz, 1000 MHz-22000MHz; RBW=1 MHz, VBW=1 MHz.

Test environment conditions: 17°C, 24% Relative Humidity, 100kPa


**No spurious emissions detected for DL or UL.**

Extra 9kHz-30MHz plot for UL as the spectrum analyzer used for UL was a different analyzer used to DL measurement.

## Test Data

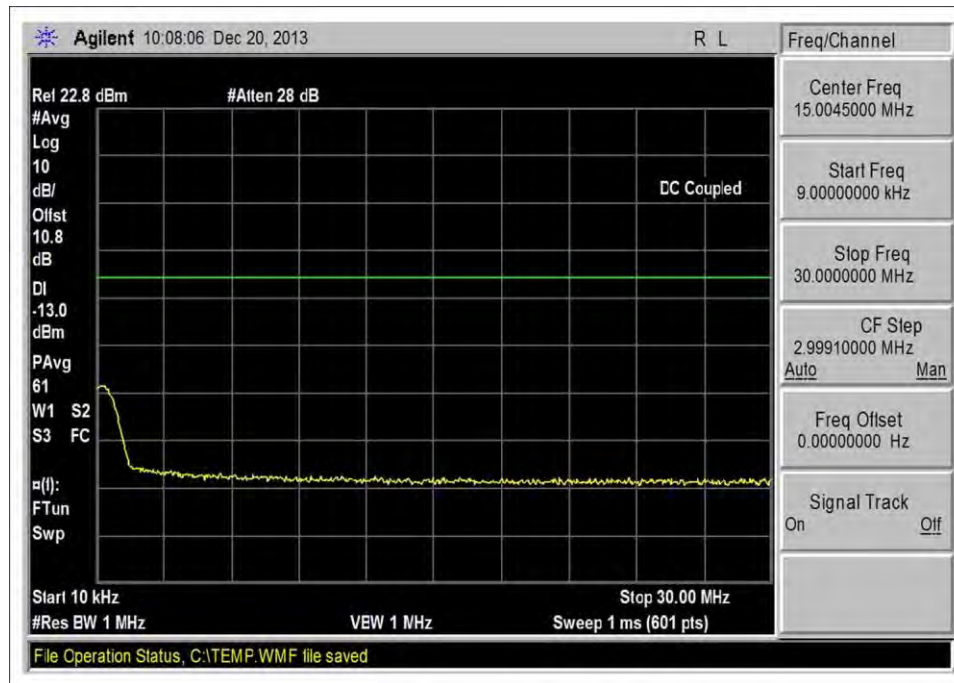


UL\_1850-1915MHz\_M\_5WCDMATM1\_1

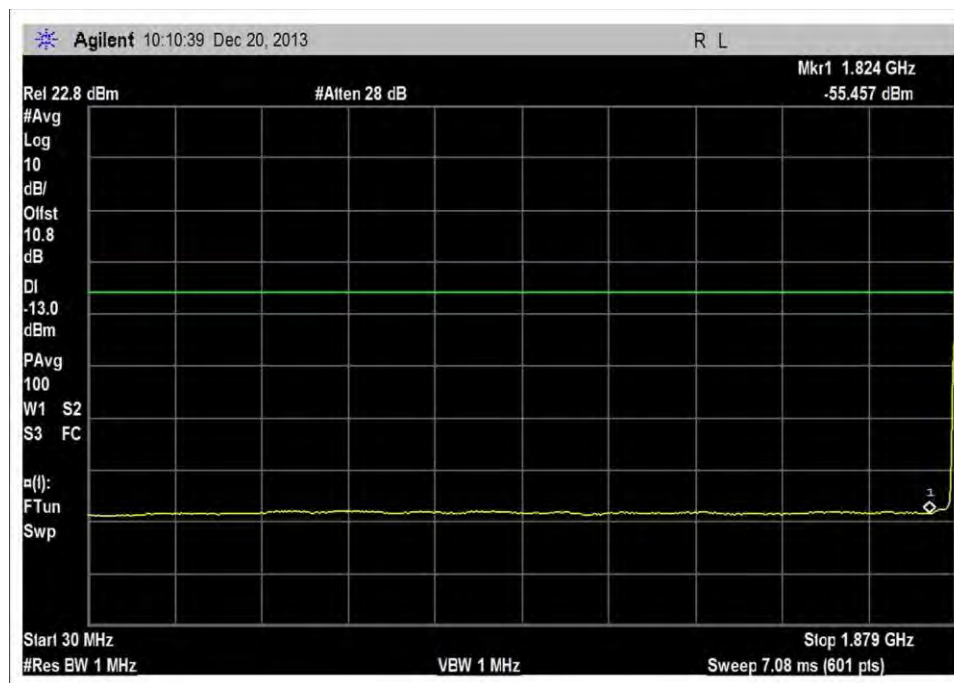


UL\_1850-1915MHz\_M\_5WCDMATM1\_2




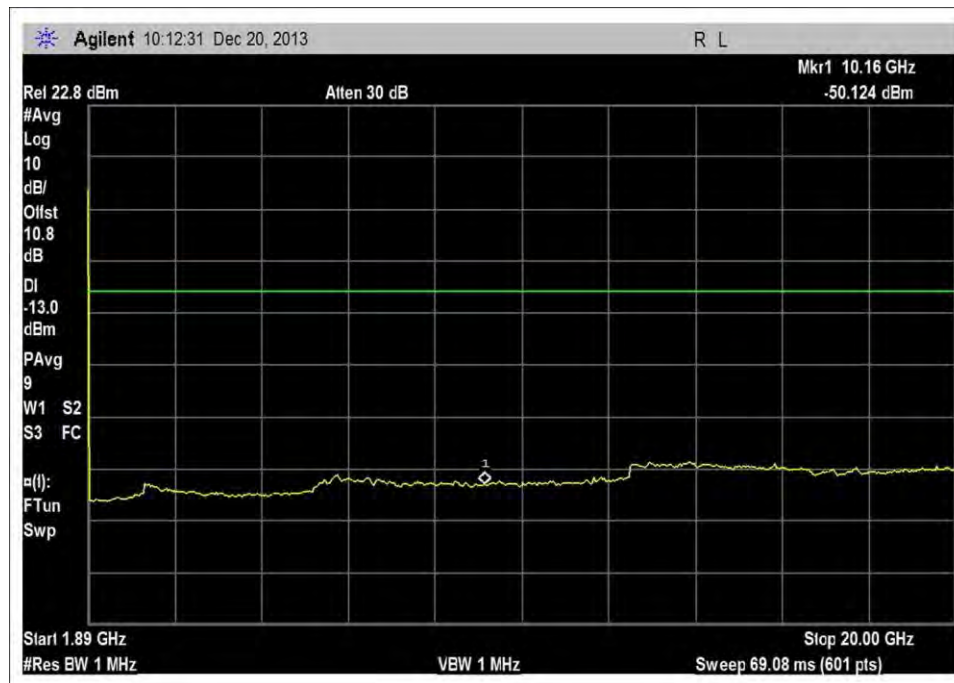

UL\_1850-1915MHz\_M\_5WCDMATM1\_3

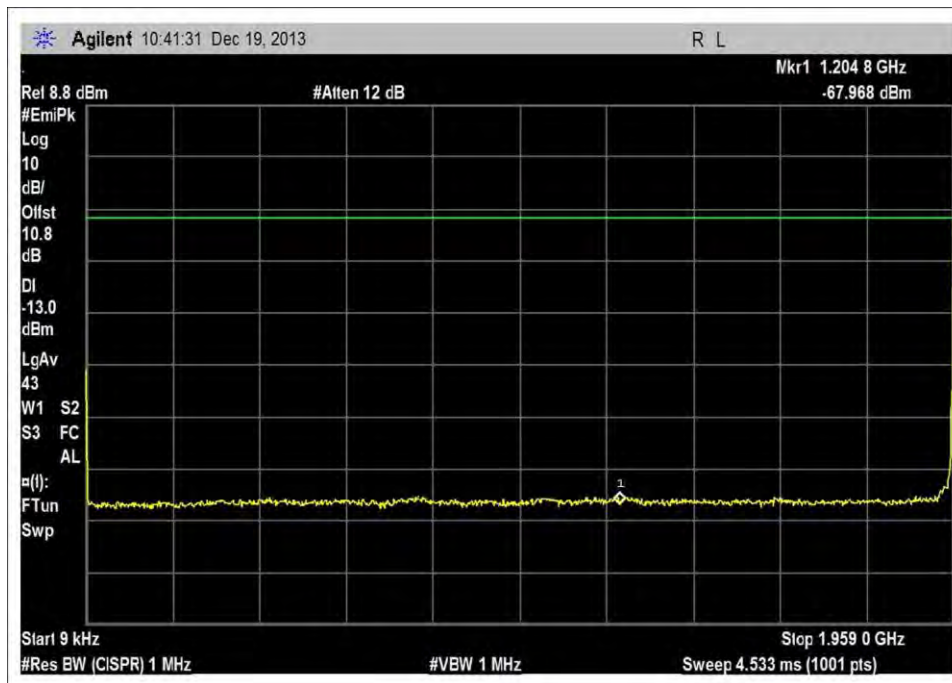


DL\_1930-1995MHz\_M\_4.1AWGN\_1

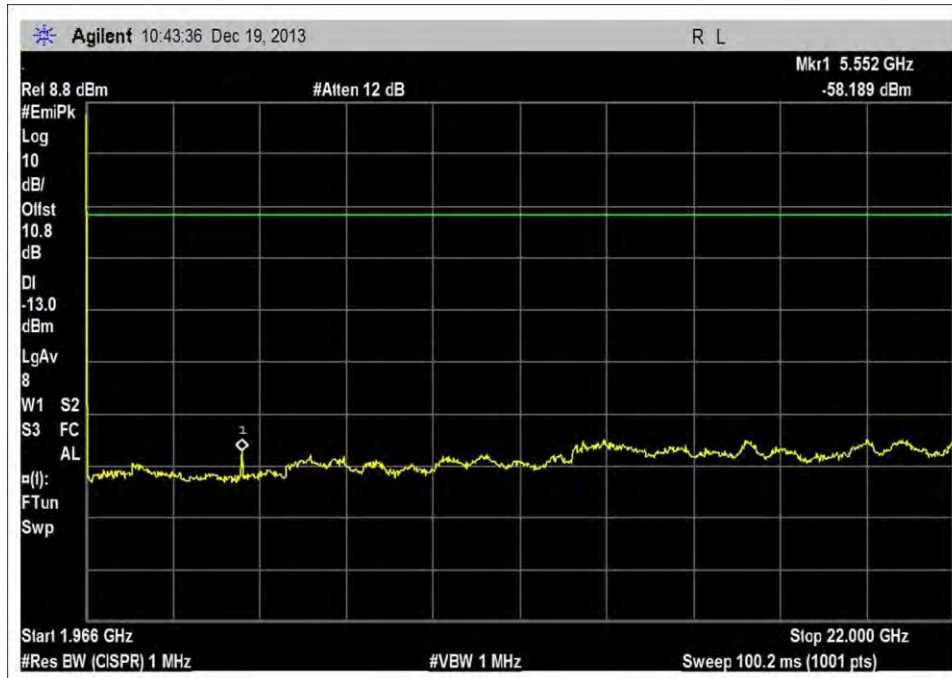

DL\_1930-1995MHz\_M\_4.1AWGN\_2



## Test Setup Photo

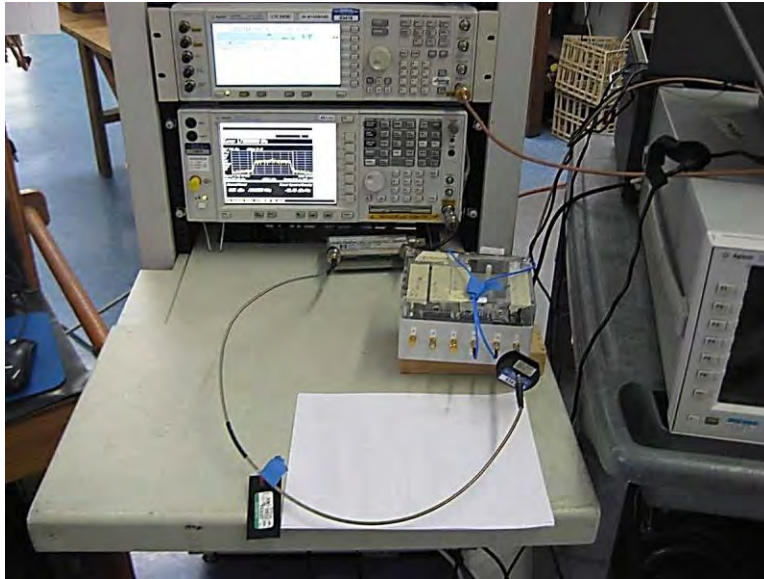

## 2.1053 / 24.238(a) Field Strength of Spurious Radiation

### Test Data

Test Location: CKC Laboratories, Inc. • 110 North Olinda Place • Brea, CA 92823 • 714-993-6112

**Customer:** Nextivity, Inc.

**Specification:** 47 CFR § 24.238 Spurious Emissions

**Work Order #:** 95128

Date: 3/6/2014

**Test Type:** Radiated Scan

Time: 15:01:37

**Equipment:** Provider Specific Consumer Signal  
Booster

Sequence#: 6

**Manufacturer:** Nextivity, Inc.

Tested By: E. Wong

**Model:** Cel-Fi P34-2/4/5/12

**S/N:** 171341000018 / 170931000035

#### Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02869	Spectrum Analyzer	E4440A	2/6/2013	2/6/2015
	AN01995	Biconilog Antenna	CBL6111C	5/16/2012	5/16/2014
	ANP05198	Cable-Amplitude 15 to 45degC (dB)	8268	12/11/2012	12/11/2014
	ANP05050	Cable	RG223/U	1/21/2013	1/21/2015
	AN00309	Preamp	8447D	3/29/2012	3/29/2014
	AN00314	Loop Antenna	6502	6/29/2012	6/29/2014
T2	AN00786	Preamp	83017A	6/20/2012	6/20/2014
T3	AN00849	Horn Antenna	3115	4/13/2012	4/13/2014
T4	AN02946	Cable	32022-2-2909K-36TC	7/31/2013	7/31/2015
T5	ANP05988	Cable	LDF1-50	3/12/2012	3/12/2014
T6	AN03385	High Pass Filter	11SH10-3000/T10000-O/O	6/5/2013	6/5/2015
	AN01413	Horn Antenna-ANSI C63.5 (dB/m)	84125-80008	11/9/2012	11/9/2014
	AN02749	High Pass Filter	9SH10-1000/T10000-O/O	9/25/2013	9/25/2015

#### Equipment Under Test (\* = EUT):

Function	Manufacturer	Model #	S/N
Provider Specific Consumer Signal Booster	Nextivity, Inc.	Cel-Fi P34-2/4/5/12CU	171341000018
Provider Specific Consumer Signal Booster	Nextivity, Inc.	Cel-Fi P34-2/4/5/12NU	170931000035

**Support Devices:**

Function	Manufacturer	Model #	S/N
Power Supply	ITE Power Supply	PW173	NA
Power Supply	ITE Power Supply	PW173	NA
Signal Generator	Agilent	E4433B	US40052164
Signal Generator	Agilent	E4438C	MY42082260

**Test Conditions / Notes:**

The EUT is provider specific signal booster pair consisted of a Network unit (NU) and a Coverage unit (CU) using proprietary 5.8 GHz Wireless interface.

The EUT is manufacturer configurable to operate in relay bandwidth of 5 MHz, 10MHz, 15 MHz and 20 MHz within the CMRS band by setting the Spectrum Block Filter , Gain and other operational parameter based on received public land mobile network (PLMN) ID. For testing purposes, only spectrum block filter of 5 MHz and 10MHz will be evaluated.

The EUT under evaluation is placed on the Styrofoam platform. RF signal is fed into the unit not under evaluation which is placed in shielded enclosure to improve RF isolation. A support laptop is connected to the EUT via USB service port for configuration and monitoring purposes.

Evaluation performed: Donor port band 2, Server port; band 2/12

Signal : 10 MHz LTE, 5 MHz WCDMATM1

UL= 1850-1915 MHz,

DL= 1930-1990 MHz,

Setting in accordance with achievable system gain at the available isolation, with output power at the rated output power.

UL ( EUT = NU)

TX Freq = 1880MHz, 5 MHz WCDMATM1, gain = 65dB, output power = +22dBm

DL ( EUT = CU)

TX freq = 1960MHz, 5 MHz WCDMATM1, gain = 57dB output power = +10dBm

( Output power = monitored Cellrx power level + monitored Gain)

Frequency range of measurement = 9 kHz- 22 GHz.

9kHz -150kHz; RBW=200 Hz, VBW=200Hz; 150kHz-30MHz; RBW=9kHz, VBW=9kHz; 30 MHz-1000MHz; RBW=120kHz, VBW=120 kHz, 1000 MHz-22000 MHz; RBW=1 MHz, VBW=1MHz.

Test environment conditions: 17°C, 24% Relative Humidity, 100kPa

Testing is performed in accordance with Provider Specific Booster test procedure 935210 D04 Provider Specific Booster Measurement DR06-41704, dated 030614.

Ext Attn: 0 dB


**Measurement Data:**

Reading listed by margin.


Test Distance: 3 Meters

#	Freq MHz	Rdng dBμV	T1 T5 dB	T2 T6 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	3759.900M	54.8	+0.0 +5.2	-38.1 +0.4	+32.1	+0.8	+0.0	55.2	82.2 UL-1880MHz	-27.0	Vert
2	3760.000M	49.1	+0.0 +5.2	-38.1 +0.4	+32.1	+0.8	+0.0	49.5	82.2 UL-1880MHz	-32.7	Horiz
3	5640.000M	39.0	+0.0 +6.5	-37.3 +0.2	+33.8	+1.2	+0.0	43.4	82.2 UL-1880MHz	-38.8	Horiz
4	5639.000M	38.4	+0.0 +6.5	-37.3 +0.2	+33.8	+1.2	+0.0	42.8	82.2 UL-1880MHz	-39.4	Vert
5	5880.000M	29.3	+0.0 +6.7	-37.3 +0.0	+33.4	+1.2	+0.0	33.3	82.2 DL-1960MHz	-48.9	Vert

Date: 3/6/2014 Time: 15:01:37 Nextivity, Inc. WO#: 95128  
47 CFR §24.238 Spurious Emissions Test Distance: 3 Meters Sequence#: 6 Ext ATTN: 0 dB

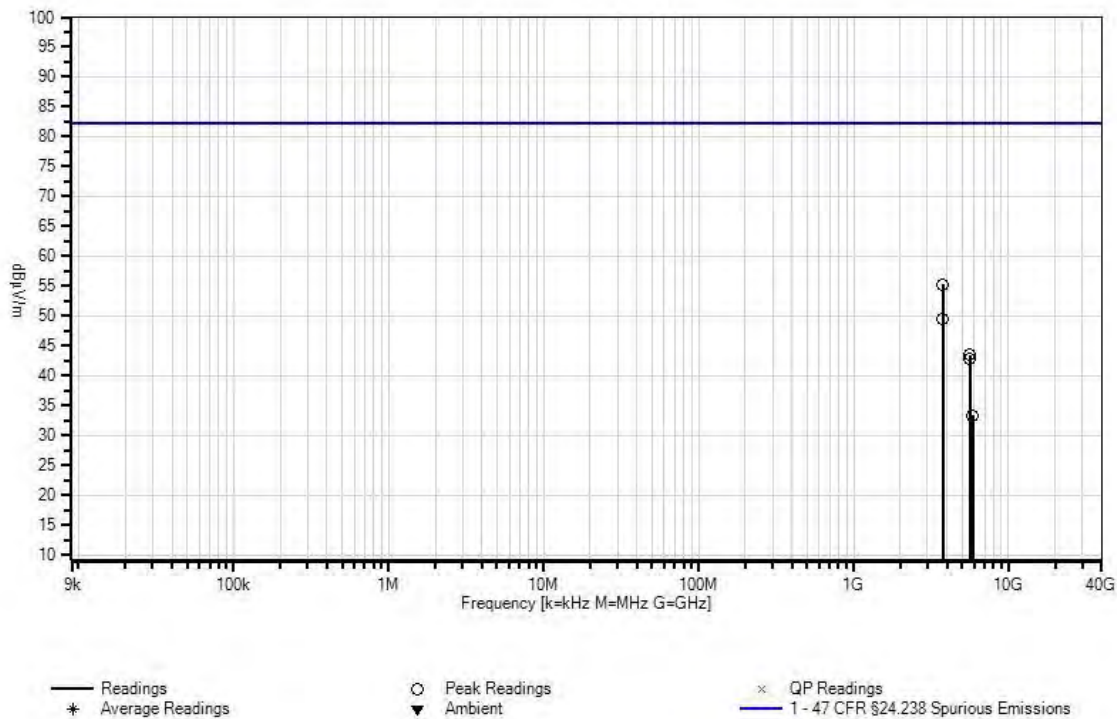

## Test Setup Photos

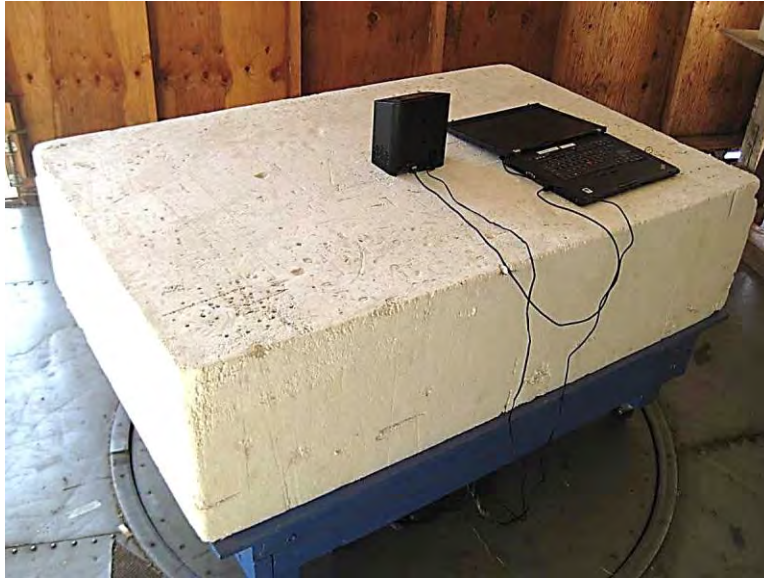

Coverage Unit



Coverage Unit





Network Unit



Network Unit

## 2.1055 (a)(d)/ 24.235 Frequency Stability

### Test Conditions / Setup

Test Location: CKC Laboratories, Inc. • 110 North Olinda Place • Brea, CA 92823 • 714-993-6112

**Customer:** Nextivity, Inc.

**Specification:** FCC 24.235

**Work Order #:** 95128

Date: 4/19/2014

**Test Type:** Frequency Stability

**Equipment:** Provider Specific Consumer Signal  
Booster

**Manufacturer:** Nextivity, Inc.

Tested By: S. Yamamoto

**Model:** Cel-Fi P34-2/4/5/12

110V 60Hz

**S/N:** 171341000018 and 170931000035

#### Test Equipment:

Asset #	Description	Model	Calibration Date	Cal Due Date
02869	Spectrum Analyzer	E4440A	2/6/2013	2/6/2015
03431	Attenuator	89-20-21	9/5/2013	9/5/2015
P06544	Cable	32026-29094K-29094K-36TC	11/20/2013	11/20/2015
01878	Temperature Chamber	S 1.2 Mini-Max	4/2/2013	4/2/2015
02946	Cable	32022-2-2909K-36TC	7/31/2013	7/31/2015
P05947	Thermometer	51	3/18/2014	3/18/2016
P06543	Cable	32022-29094K-29094K-26TC	11/20/2013	11/20/2015

#### Equipment Under Test:

Function	Manufacturer	Model #	S/N
Provider Specific Consumer Signal Booster	Nextivity, Inc.	Cel-Fi P34-2/4/5/12CU	171341000018
Provider Specific Consumer Signal Booster	Nextivity, Inc.	Cel-Fi P34-2/4/5/12NU	170931000035

#### Support Devices:

Function	Manufacturer	Model #	S/N
Signal Generator	Agilent	E4438C	MY49071314
Signal Generator	Agilent	E4438B	MY40052164
Splitter	Anaren	44000	0583
Power Supply	Autec Power Systems	SA07-24US12R	NA
Power Supply	Autec Power Systems	SA07-24US12R	NA

#### Test Conditions / Notes:

The EUT is provider specific signal booster pair consisted of a Network unit (NU) and a Coverage unit (CU) using proprietary 5.8 GHz Wireless interface. The EUT is manufacturer configurable to operate in relay bandwidth of 5 MHz, 10MHz, 15 MHz and 20 MHz within the CMRS band by setting the bandwidth and center frequency of programmable Spectrum Block Filter, Gain and other operational parameter based on received public land mobile network (PLMN) ID. For testing purposes, only spectrum block filter of 5 MHz will be evaluated.

UL=1850-1910MHz, DL=1930-1990MHz

Testing is performed in accordance with Provider Specific Booster test procedure 935210 D04 Provider Specific Booster Measurement DR06-41704, dated 030614. With the following deviation:

Due to the narrowband rejection circuit, a 4.1MHz AWGN or a WCDMA signal was used instead of CW. Frequency deviation in MHz was measured at each temperature and voltage extreme and compared again the maximum allowed deviation to ensure the fundamental emission stays within the authorized frequency block.

## Test Data

### Frequency Stability


Customer: Nextivity, Inc.  
WO#: 95128  
Date: 19-Apr-14  
Test Engineer: S. Yamamoto

Operating Voltage: 110 VAC

Temp (C)	Voltage	UL, Band 2, Low channel data		UL, Band 2, High channel data	
20	93.5	1850.23	1854.57	1905.533	1909.654
20	110	1850.23	1854.57	1905.53	1909.657
20	126.5	1850.23	1854.57	1905.527	1909.651
-30	110	1850.229659	1854.569659	1905.52988	1909.65688
-20	110	1850.229532	1854.569532	1905.529572	1909.656572
-10	110	1850.229656	1854.569656	1905.529667	1909.656667
0	110	1850.229485	1854.569485	1905.529571	1909.656571
10	110	1850.229671	1854.569671	1905.529665	1909.656665
20	110	1850.229701	1854.569701	1905.529757	1909.656757
30	110	1850.230309	1854.570309	1905.530405	1909.657405
40	110	1850.23008	1854.57008	1905.530181	1909.657181
50	110	1850.229601	1854.569601	1905.529655	1909.656655
		Lower Limit	Upper Limit	Lower Limit	Upper Limit
		1850	1854.9	1905.1	1910
		PASS	PASS	PASS	PASS
Temp (C)	Voltage	DL, Band 2, Low channel data		DL, Band 2, High channel data	
20	93.5	1930.402	1934.461	1985.555	1989.5689
20	110	1930.4151	1934.459	1985.5557	1989.568
20	126.5	1930.399	1934.462	1985.5509	1989.5731
-30	110	1930.415367	1934.459267	1985.555758	1989.568058
-20	110	1930.41499	1934.45889	1985.55555	1989.56785
-10	110	1930.415079	1934.458979	1985.55565	1989.56795
0	110	1930.414855	1934.458755	1985.555452	1989.567752
10	110	1930.414897	1934.458797	1985.555497	1989.567797
20	110	1930.415083	1934.458983	1985.555664	1989.567964
30	110	1930.415493	1934.459393	1985.556065	1989.568365
40	110	1930.415477	1934.459377	1985.556035	1989.568335
50	110	1930.415057	1934.458957	1985.555621	1989.567921
		Lower Limit	Upper Limit	Lower Limit	Upper Limit
		1930	1934.9	1985.1	1990
		PASS	PASS	PASS	PASS



**Test Setup Photo (s)**

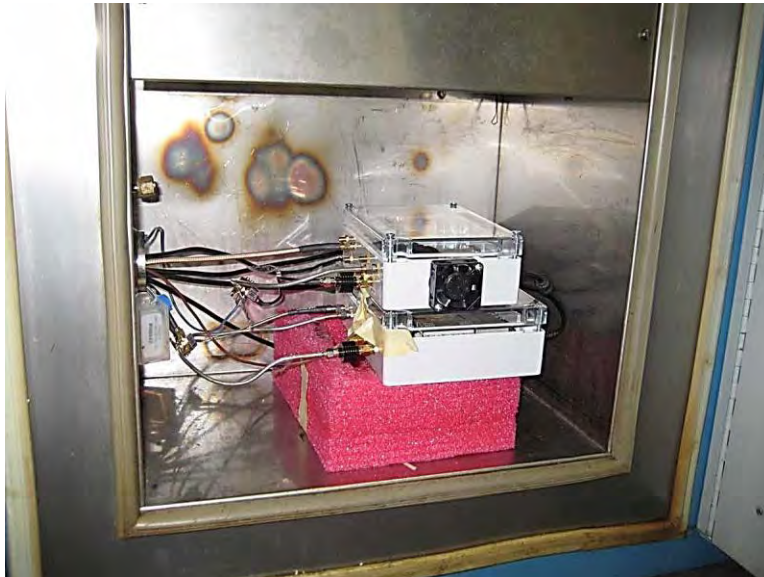

## SUPPLEMENTAL INFORMATION

### Measurement Uncertainty

Uncertainty Value	Parameter
4.73 dB	Radiated Emissions
3.34 dB	Mains Conducted Emissions
3.30 dB	Disturbance Power

The reported measurement uncertainties are calculated based on the worst case of all laboratory environments from CKC Laboratories, Inc. test sites. Only those parameters which require estimation of measurement uncertainty are reported. The reported worst case measurement uncertainty is less than the maximum values derived in CISPR 16-4-2. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ . Compliance is deemed to occur provided measurements are below the specified limits.

### Emissions Test Details

#### TESTING PARAMETERS

Unless otherwise indicated, the following configuration parameters are used for equipment setup: The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

#### CORRECTION FACTORS

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in dB $\mu$ V/m, the spectrum analyzer reading in dB $\mu$ V was corrected by using the following formula. This reading was then compared to the applicable specification limit.

SAMPLE CALCULATIONS		
	Meter reading	(dBμV)
+	Antenna Factor	(dB)
+	Cable Loss	(dB)
-	Distance Correction	(dB)
-	Preamplifier Gain	(dB)
=	Corrected Reading	(dBμV/m)

#### TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. Unless otherwise specified, the following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used.

MEASURING EQUIPMENT BANDWIDTH SETTINGS PER FREQUENCY RANGE			
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	9 kHz	150 kHz	200 Hz
RADIATED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz
RADIATED EMISSIONS	1000 MHz	>1 GHz	1 MHz

#### SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "positive peak" detector mode. Whenever a "quasi-peak" or "average" reading was recorded, the measurement was annotated with a "QP" or an "Ave" on the appropriate rows of the data sheets. In cases where quasi-peak or average limits were employed and data exists for multiple measurement types for the same frequency then the peak measurement was retained in the report for reference, however the numbering for the affected row was removed and an arrow or carrot ("^") was placed in the far left-hand column indicating that the row above takes precedence for comparison to the limit. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

##### Peak

In this mode, the spectrum analyzer or receiver recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature called "peak hold," the measurement device had the ability to measure intermittent or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

##### Quasi-Peak

Quasi-peak measurements were taken using the quasi-peak detector when the true peak values exceeded or were within 2 dB of a quasi-peak specification limit. Additional QP measurements may have been taken at the discretion of the operator.

##### Average

Average measurements were taken using the average detector when the true peak values exceeded or were within 2 dB of an average specification limit. Additional average measurements may have been taken at the discretion of the operator. If the specification or test procedure requires trace averaging, then the averaging was performed using 100 samples or as required by the specification. All other average measurements are performed using video bandwidth averaging. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point the measuring device is set into the linear mode and the scan time is reduced.