

# SAR TEST REPORT

Test item : Notebook Computer  
Model No. : LG14Z95, 14Z950, 14ZB950, 14ZD950, 14ZV950  
Order No. : DTNC1503-01166  
Date of receipt : 2015-03-17  
Test duration : 2015-04-09 ~ 2015-04-14  
Date of issue : 2015-06-18  
Use of report : FCC Original Grant


Applicant : LG Electronics USA, Inc.  
1000 Sylvan Avenue, Englewood Cliffs, New Jersey 07632

Test laboratory : DT&C Co., Ltd.  
42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 449-935

Test rule part : CFR §2.1093  
Test environment : See appended test report  
Test result : ☒ Pass ☐ Fail

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DT&C Co., Ltd.

Tested by:



Engineer  
ChangWon, Lee

Witnessed by:

Engineer  
N/A

Reviewed by:



Technical Director  
Harvey Sung

---

## Table of Contents

---

|                                                             |           |
|-------------------------------------------------------------|-----------|
| <b>1. DESCRIPTION OF DEVICE</b>                             | <b>5</b>  |
| 1.1 Guidance Applied                                        | 6         |
| 1.2 Device Overview                                         | 6         |
| 1.3 Nominal and Maximum Output Power Specifications         | 6         |
| 1.4 DUT Antenna Locations                                   | 8         |
| 1.5 SAR Test Exclusions Applied                             | 9         |
| 1.6 Power Reduction for SAR                                 | 9         |
| 1.7 Device Serial Numbers                                   | 9         |
| <b>2. INTROCUCTION</b>                                      | <b>10</b> |
| <b>3. DESCRIPTION OF TEST EQUIPMENT</b>                     | <b>11</b> |
| 3.1 SAR MEASUREMENT SETUP                                   | 11        |
| 3.2 EX3DV4 Probe Specification                              | 12        |
| 3.3 Probe Calibration Process                               | 13        |
| 3.3.1E-Probe Calibration                                    | 13        |
| 3.4 Data Extrapolation                                      | 14        |
| 3.5 ELI PHANTOM                                             | 15        |
| 3.6 Device Holder for Transmitters                          | 15        |
| 3.7 Muscle Simulation Mixture Characterization              | 16        |
| 3.8 SAR TEST EQUIPMENT                                      | 17        |
| <b>4. TEST SYSTEM SPECIFICATIONS</b>                        | <b>18</b> |
| <b>5. SAR MEASUREMENT PROCEDURE</b>                         | <b>19</b> |
| 5.1 Measurement Procedure                                   | 19        |
| <b>6. RF EXPOSURE LIMITS</b>                                | <b>20</b> |
| <b>7. FCC MEASUREMENT PROCEDURES</b>                        | <b>21</b> |
| 7.1 Measured and Reported SAR                               | 21        |
| 7.2 SAR Testing with 802.11 Transmitters                    | 21        |
| 7.2.1 General Device Setup                                  | 21        |
| 7.2.2 U-NII and U-NII-2A                                    | 21        |
| 7.2.3 U-NII-2C and U-NII-3                                  | 21        |
| 7.2.4 Initial Test Position Procedure                       | 22        |
| 7.2.5 2.4 GHz SAR Test Requirements                         | 22        |
| 7.2.6 OFDM Transmission Mode and SAR Test Channel Selection | 22        |
| 7.2.7 Initial Test Configuration Procedure                  | 22        |
| 7.2.8 Subsequent Test Configuration Procedures              | 23        |
| 7.2.9 Simultaneous Transmission of MIMO Chains              | 23        |
| <b>8. RF CONDUCTED POWERS</b>                               | <b>24</b> |
| 8.1 WLAN Conducted Powers                                   | 24        |
| 8.2 Bluetooth Conducted Powers                              | 32        |
| <b>9. SYSTEM VERIFICATION</b>                               | <b>33</b> |
| 9.1 Tissue Verification                                     | 33        |
| 9.2 Test System Verification                                | 35        |
| <b>10. SAR TEST RESULTS</b>                                 | <b>36</b> |
| 10.1 Body SAR Results                                       | 36        |
| 10.2 SAR Test Notes                                         | 38        |
| <b>11. FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS</b>      | <b>39</b> |
| 11.1 Introduction                                           | 39        |

|                                                        |           |
|--------------------------------------------------------|-----------|
| 11.2 Simultaneous Transmission Procedures .....        | 39        |
| 11.3 Simultaneous Transmission Capabilities .....      | 39        |
| 11.4 Body Simultaneous Transmission Analysis .....     | 40        |
| <b>12. SAR MEASUREMENT VARIABILITY .....</b>           | <b>41</b> |
| 12.1 Measurement Variability .....                     | 41        |
| 12.2 Measurement Uncertainty .....                     | 41        |
| <b>13. IEEE P1528 –MEASUREMENT UNCERTAINTIES .....</b> | <b>42</b> |
| <b>14. CONCLUSION.....</b>                             | <b>48</b> |
| <b>15. REFERENCES .....</b>                            | <b>49</b> |
| <b>Attachment 1. – Probe Calibration Data .....</b>    | <b>51</b> |
| <b>Attachment 2. – Dipole Calibration Data .....</b>   | <b>63</b> |
| <b>Attachment 3. – SAR SYSTEM VALIDATION .....</b>     | <b>92</b> |

## Test Report Version

| Test Report No.    | Date          | Description                      |
|--------------------|---------------|----------------------------------|
| DRRFCC1505-0042    | May. 15, 2015 | Final version for approval       |
| DRRFCC1505-0042(1) | Jun. 18, 2015 | Changed for KDB 248227 D01v02r01 |
|                    |               |                                  |
|                    |               |                                  |
|                    |               |                                  |
|                    |               |                                  |
|                    |               |                                  |
|                    |               |                                  |
|                    |               |                                  |

# 1. DESCRIPTION OF DEVICE

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

## General Information:

|                                           |                                                                                                                                                                                                                                                                                                                                           |                                       |                  |                      |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|------------------|----------------------|
| EUT type                                  | Notebook Computer                                                                                                                                                                                                                                                                                                                         |                                       |                  |                      |
| FCC ID                                    | BEJNT-LG14Z95                                                                                                                                                                                                                                                                                                                             |                                       |                  |                      |
| Equipment model name                      | LG14Z95                                                                                                                                                                                                                                                                                                                                   |                                       |                  |                      |
| Equipment add model name                  | 14Z950, 14ZB950, 14ZD950, 14ZV950<br>5 models are same mechanical, electrical and functional.<br>The only difference is the model name, which are changed for marketing purpose.                                                                                                                                                          |                                       |                  |                      |
| Equipment serial no.                      | Identical prototype                                                                                                                                                                                                                                                                                                                       |                                       |                  |                      |
| Mode(s) of Operation                      | 2.4 GHz W-LAN(802.11b/g/n HT20/n HT40), 5 G W-LAN (802.11a/n HT20/n HT40/ac VHT20/ac VHT40/ac VHT80)                                                                                                                                                                                                                                      |                                       |                  |                      |
| TX Frequency Range                        | <b>Band</b>                                                                                                                                                                                                                                                                                                                               | <b>Mode</b>                           | <b>Bandwidth</b> | <b>Frequency</b>     |
|                                           | DTS                                                                                                                                                                                                                                                                                                                                       | 802.11b/g/n                           | HT20             | 2412 ~ 2462 MHz      |
|                                           |                                                                                                                                                                                                                                                                                                                                           | 802.11n                               | HT40             | 2422 ~ 2452 MHz      |
|                                           | U-NII-1                                                                                                                                                                                                                                                                                                                                   | 802.11a/n                             | HT20             | 5180 ~ 5240 MHz      |
|                                           |                                                                                                                                                                                                                                                                                                                                           | 802.11n                               | HT40             | 5190 ~ 5230 MHz      |
|                                           |                                                                                                                                                                                                                                                                                                                                           | 802.11ac                              | VHT 80           | 5210 MHz             |
|                                           |                                                                                                                                                                                                                                                                                                                                           | 802.11a/n                             | HT20             | 5260 ~ 5320 MHz      |
|                                           | U-NII-2A                                                                                                                                                                                                                                                                                                                                  | 802.11n                               | HT40             | 5270 ~ 5310 MHz      |
|                                           |                                                                                                                                                                                                                                                                                                                                           | 802.11ac                              | VHT 80           | 5290 MHz             |
|                                           |                                                                                                                                                                                                                                                                                                                                           | 802.11a/n                             | HT20             | 5500 ~ 5700 MHz      |
|                                           |                                                                                                                                                                                                                                                                                                                                           | 802.11n                               | HT40             | 5510 ~ 5670 MHz      |
|                                           | U-NII-2C                                                                                                                                                                                                                                                                                                                                  | 802.11ac                              | VHT 20           | 5720 MHz             |
|                                           |                                                                                                                                                                                                                                                                                                                                           | 802.11ac                              | VHT 40           | 5710 MHz             |
|                                           |                                                                                                                                                                                                                                                                                                                                           | 802.11ac                              | VHT 80           | 5530, 5690 MHz       |
|                                           |                                                                                                                                                                                                                                                                                                                                           | 802.11a/n                             | HT20             | 5745 ~ 5825 MHz      |
|                                           | U-NII-3                                                                                                                                                                                                                                                                                                                                   | 802.11n                               | HT40             | 5755 ~ 5795 MHz      |
|                                           |                                                                                                                                                                                                                                                                                                                                           | 802.11ac                              | VHT 80           | 5775 MHz             |
| RX Frequency Range                        | DTS                                                                                                                                                                                                                                                                                                                                       | 802.11b/g/n                           | HT20             | 2412 ~ 2462 MHz      |
|                                           |                                                                                                                                                                                                                                                                                                                                           | 802.11n                               | HT40             | 2422 ~ 2452 MHz      |
|                                           | U-NII-1                                                                                                                                                                                                                                                                                                                                   | 802.11a/n                             | HT20             | 5180 ~ 5240 MHz      |
|                                           |                                                                                                                                                                                                                                                                                                                                           | 802.11n                               | HT40             | 5190 ~ 5230 MHz      |
|                                           |                                                                                                                                                                                                                                                                                                                                           | 802.11ac                              | VHT 80           | 5210 MHz             |
|                                           | U-NII-2A                                                                                                                                                                                                                                                                                                                                  | 802.11a/n                             | HT20             | 5260 ~ 5320 MHz      |
|                                           |                                                                                                                                                                                                                                                                                                                                           | 802.11n                               | HT40             | 5270 ~ 5310 MHz      |
|                                           |                                                                                                                                                                                                                                                                                                                                           | 802.11ac                              | VHT 80           | 5290 MHz             |
|                                           | U-NII-2C                                                                                                                                                                                                                                                                                                                                  | 802.11a/n                             | HT20             | 5500 ~ 5700 MHz      |
|                                           |                                                                                                                                                                                                                                                                                                                                           | 802.11n                               | HT40             | 5510 ~ 5670 MHz      |
|                                           |                                                                                                                                                                                                                                                                                                                                           | 802.11ac                              | VHT 20           | 5720 MHz             |
|                                           |                                                                                                                                                                                                                                                                                                                                           | 802.11ac                              | VHT 40           | 5710 MHz             |
|                                           |                                                                                                                                                                                                                                                                                                                                           | 802.11ac                              | VHT 80           | 5530, 5690 MHz       |
|                                           | U-NII-3                                                                                                                                                                                                                                                                                                                                   | 802.11a/n                             | HT20             | 5745 ~ 5825 MHz      |
|                                           |                                                                                                                                                                                                                                                                                                                                           | 802.11n                               | HT40             | 5755 ~ 5795 MHz      |
|                                           |                                                                                                                                                                                                                                                                                                                                           | 802.11ac                              | VHT 80           | 5775 MHz             |
| <b>Band</b>                               | <b>Mode</b>                                                                                                                                                                                                                                                                                                                               | <b>Measured Conducted Power [dBm]</b> | <b>Ch</b>        | <b>Reported SAR</b>  |
|                                           |                                                                                                                                                                                                                                                                                                                                           |                                       |                  | <b>1g SAR (W/kg)</b> |
|                                           |                                                                                                                                                                                                                                                                                                                                           |                                       |                  | <b>SISO</b>          |
|                                           |                                                                                                                                                                                                                                                                                                                                           |                                       |                  | <b>Body</b>          |
| DTS                                       | 2.4 GHz W-LAN                                                                                                                                                                                                                                                                                                                             | 11.49                                 | 11               | 0.12                 |
| U-NII-2A                                  | 5.3 GHz W-LAN                                                                                                                                                                                                                                                                                                                             | 12.77                                 | 52               | 0.43                 |
| U-NII-2C                                  | 5.6 GHz W-LAN                                                                                                                                                                                                                                                                                                                             | 13.35                                 | 116              | 0.44                 |
| U-NII-3                                   | 5.8 GHz W-LAN                                                                                                                                                                                                                                                                                                                             | 13.27                                 | 149              | 0.44                 |
| DSS/DTS                                   | Bluetooth                                                                                                                                                                                                                                                                                                                                 | 2.92                                  | N/A              | 0.08 <sup>Note</sup> |
| Simultaneous SAR per KDB 690783 D01v01r03 |                                                                                                                                                                                                                                                                                                                                           |                                       | N/A              | 0.53                 |
| FCC Equipment Class                       | Part 15 Spread Spectrum Transmitter(DSS)<br>Digital Transmission System(DTS)<br>Unlicensed National Information Infrastructure (UNII)                                                                                                                                                                                                     |                                       |                  |                      |
| Date(s) of Tests                          | 2015-04-09 ~ 2015-04-14                                                                                                                                                                                                                                                                                                                   |                                       |                  |                      |
| Antenna Type                              | Internal Type Antenna                                                                                                                                                                                                                                                                                                                     |                                       |                  |                      |
| Note                                      | Bluetooth SAR was estimated.                                                                                                                                                                                                                                                                                                              |                                       |                  |                      |
| Functions                                 | <ul style="list-style-type: none"> <li>BT(2.4GHz) / W-LAN(2.4GHz 802.11b/g/n(HT20)/n(HT40)), W-LAN(5GHz 802.11a/n(HT20)/n(HT40)/ac(VHT20)/ac(VHT40)/ac(VHT80)) supported</li> <li>No simultaneous transmission between W-LAN(2.4GHz) &amp; W-LAN(5GHz).</li> <li>Simultaneous transmission between BT Ant.1 &amp; W-LAN Ant.2.</li> </ul> |                                       |                  |                      |

## 1.1 Guidance Applied

- IEEE 1528-2003
- FCC KDB Publication 248227 D01v02r01 (802.11 Wi-Fi SAR)
- FCC KDB Publication 447498 D01v05r02 (General SAR Guidance)
- FCC KDB Publication 616217 D04 SAR for laptop and tablets v01r01
- FCC KDB Publication 690783 D01 SAR Listings on Grants v01r03
- FCC KDB Publication 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- FCC KDB Publication 865664 D02 RF Exposure Reporting v01r01

## 1.2 Device Overview

| Band     | Mode         | Operating Modes | Tx Frequency    |
|----------|--------------|-----------------|-----------------|
| DTS      | 2.4 GHz WLAN | Data            | 2412 ~ 2462 MHz |
| U-NII-1  | 5.2 GHz WLAN | Data            | 5180 ~ 5240 MHz |
| U-NII-2A | 5.3 GHz WLAN | Data            | 5260 ~ 5320 MHz |
| U-NII-2C | 5.6 GHz WLAN | Data            | 5500 ~ 5700 MHz |
| U-NII-3  | 5.8 GHz WLAN | Data            | 5745 ~ 5825 MHz |
| DSS/DTS  | Bluetooth    | Data            | 2402 ~ 2480 MHz |

## 1.3 Nominal and Maximum Output Power Specifications


This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v05r02.

| Band & Mode |                             |         | Modulated Average[dBm] |        |         |        |        |         |        |        |         |
|-------------|-----------------------------|---------|------------------------|--------|---------|--------|--------|---------|--------|--------|---------|
|             |                             |         | Ant. 1                 |        |         | Ant. 2 |        |         | MIMO   |        |         |
|             |                             |         | Ch Low                 | Ch Mid | Ch High | Ch Low | Ch Mid | Ch High | Ch Low | Ch Mid | Ch High |
| DTS         | IEEE 802.11b (2.4 GHz)      | Maximum | 12.5                   | 13.0   | 14.0    | 11.5   | 11.5   | 11.5    | -      | -      | -       |
|             |                             | Nominal | 11.5                   | 12.0   | 13.0    | 10.5   | 10.5   | 10.5    | -      | -      | -       |
|             | IEEE 802.11g (2.4 GHz)      | Maximum | 11.0                   | 14.0   | 11.0    | 9.0    | 13.0   | 11.5    | -      | -      | -       |
|             |                             | Nominal | 10.0                   | 13.0   | 10.0    | 8.0    | 12.0   | 10.5    | -      | -      | -       |
|             | IEEE 802.11n HT20 (2.4 GHz) | Maximum | 10.5                   | 14.0   | 10.5    | 9.0    | 13.0   | 11.0    | 8.5    | 12.0   | 9.0     |
|             |                             | Nominal | 9.5                    | 13.0   | 9.5     | 8.0    | 12.0   | 10.0    | 7.5    | 11.0   | 8.0     |
|             | IEEE 802.11n HT40 (2.4 GHz) | Maximum | 9.0                    | 14.5   | 11.0    | 7.0    | 11.0   | 9.5     | 7.0    | 10.5   | 10.0    |
|             |                             | Nominal | 8.0                    | 13.5   | 10.0    | 6.0    | 10.0   | 8.5     | 6.0    | 9.5    | 9.0     |

| Band & Mode |                               |         | Modulated Average[dBm] |          |          |         |        |          |          |         |        |          |          |         |
|-------------|-------------------------------|---------|------------------------|----------|----------|---------|--------|----------|----------|---------|--------|----------|----------|---------|
|             |                               |         | Ant. 1                 |          |          |         | Ant. 2 |          |          |         | MIMO   |          |          |         |
|             |                               |         | Ch Low                 | Ch Mid-1 | Ch Mid-2 | Ch High | Ch Low | Ch Mid-1 | Ch Mid-2 | Ch High | Ch Low | Ch Mid-1 | Ch Mid-2 | Ch High |
|             |                               |         | Ch Mid                 |          |          |         | Ch Mid |          |          |         | Ch Mid |          |          |         |
| U-NII-1     | IEEE 802.11a (5.2 GHz)        | Maximum | 9.0                    | 11.5     | 12.0     | 12.5    | 8.5    | 11.0     | 11.0     | 11.5    | -      | -        | -        | -       |
|             |                               | Nominal | 8.0                    | 10.5     | 11.0     | 11.5    | 7.5    | 10.0     | 10.0     | 10.5    | -      | -        | -        | -       |
| U-NII-2A    | IEEE 802.11a (5.3 GHz)        | Maximum | 13.5                   | 13.5     | 13.0     | 11.0    | 12.0   | 12.0     | 12.0     | 10.0    | -      | -        | -        | -       |
|             |                               | Nominal | 12.5                   | 12.5     | 12.0     | 10.0    | 11.0   | 11.0     | 11.0     | 9.0     | -      | -        | -        | -       |
| U-NII-2C    | IEEE 802.11a (5.6 GHz)        | Maximum | 10.0                   | 13.0     | 12.0     | 9.5     | 10.0   | 13.0     | 12.0     | 9.5     | -      | -        | -        | -       |
|             |                               | Nominal | 9.0                    | 12.0     | 11.0     | 8.5     | 9.0    | 12.0     | 11.0     | 8.5     | -      | -        | -        | -       |
| U-NII-3     | IEEE 802.11a (5.8 GHz)        | Maximum | 12.5                   | 11.5     |          | 12.0    | 13.0   | 12.0     |          | 13.0    | -      | -        | -        | -       |
|             |                               | Nominal | 11.5                   | 10.5     |          | 11.0    | 12.0   | 11.0     |          | 12.0    | -      | -        | -        | -       |
| U-NII-1     | IEEE 802.11n HT20 (5.2 GHz)   | Maximum | 10.0                   | 12.0     | 12.0     | 12.5    | 10.5   | 12.5     | 12.5     | 13.0    | 10.0   | 10.0     | 10.0     | 10.5    |
|             |                               | Nominal | 9.0                    | 11.0     | 11.0     | 11.5    | 9.5    | 11.5     | 11.5     | 12.0    | 9.0    | 9.0      | 9.0      | 9.5     |
| U-NII-2A    | IEEE 802.11n HT20 (5.3 GHz)   | Maximum | 13.0                   | 13.0     | 13.0     | 10.5    | 13.0   | 13.0     | 12.5     | 11.5    | 11.5   | 11.5     | 11.0     | 10.5    |
|             |                               | Nominal | 12.0                   | 12.0     | 12.0     | 9.5     | 12.0   | 12.0     | 11.5     | 10.5    | 10.5   | 10.5     | 10.0     | 9.5     |
| U-NII-2C    | IEEE 802.11n HT20 (5.6 GHz)   | Maximum | 9.5                    | 13.0     | 13.0     | 10.0    | 10.0   | 13.5     | 13.5     | 10.0    | 7.0    | 10.5     | 10.0     | 9.0     |
|             |                               | Nominal | 8.5                    | 12.0     | 12.0     | 9.0     | 9.0    | 12.5     | 12.5     | 9.0     | 6.0    | 9.5      | 9.0      | 8.0     |
| U-NII-3     | IEEE 802.11n HT20 (5.8 GHz)   | Maximum | 12.5                   | 12.5     |          | 12.5    | 13.5   | 13.0     |          | 13.0    | 11.5   | 11.0     |          | 10.5    |
|             |                               | Nominal | 11.5                   | 11.5     |          | 11.5    | 12.5   | 12.0     |          | 12.0    | 10.5   | 10.0     |          | 9.5     |
| U-NII-1     | IEEE 802.11n HT40 (5.2 GHz)   | Maximum | 7.5                    | -        | -        | 12.0    | 8.0    | -        | -        | 12.0    | 6.0    | -        | -        | 10.5    |
|             |                               | Nominal | 6.5                    | -        |          | 11.0    | 7.0    | -        | -        | 11.0    | 5.0    | -        | -        | 9.5     |
| U-NII-2A    | IEEE 802.11n HT40 (5.3 GHz)   | Maximum | 9.0                    | -        | -        | 10.5    | 9.0    | -        | -        | 10.5    | 7.5    | -        | -        | 8.0     |
|             |                               | Nominal | 8.0                    | -        | -        | 9.5     | 8.0    | -        | -        | 9.5     | 6.5    | -        | -        | 7.0     |
| U-NII-2C    | IEEE 802.11n HT40 (5.6 GHz)   | Maximum | 7.5                    | 12.5     | 12.5     | 12.5    | 8.0    | 13.0     | 12.5     | 12.0    | 5.0    | 10.0     | 9.5      | 9.5     |
|             |                               | Nominal | 6.5                    | 11.5     | 11.5     | 11.5    | 7.0    | 12.0     | 11.5     | 11.0    | 4.0    | 9.0      | 8.5      | 8.5     |
| U-NII-3     | IEEE 802.11n HT40 (5.8 GHz)   | Maximum | 12.5                   | -        | -        | 12.5    | 13.0   | -        | -        | 12.5    | 11.0   | -        | -        | 11.0    |
|             |                               | Nominal | 11.5                   | -        | -        | 11.5    | 12.0   | -        | -        | 11.5    | 10.0   | -        | -        | 10.0    |
| U-NII-2C    | IEEE 802.11ac VHT20 (5.6 GHz) | Maximum | -                      | 13.0     |          | -       | -      | 13.5     |          | -       | -      | 10.5     |          | -       |
|             |                               | Nominal | -                      | 12.0     |          | -       | -      | 12.5     |          | -       | -      | 9.5      |          | -       |
| U-NII-2C    | IEEE 802.11ac VHT40 (5.6 GHz) | Maximum | -                      | 12.5     |          | -       | -      | 13.0     |          | -       | -      | 11.0     |          | -       |
|             |                               | Nominal | -                      | 11.5     |          | -       | -      | 12.0     |          | -       | -      | 10.0     |          | -       |
| U-NII-1     | IEEE 802.11ac VHT80 (5.2 GHz) | Maximum | -                      | 8.5      |          | -       | -      | 7.0      |          | -       | -      | 6.5      |          | -       |
|             |                               | Nominal | -                      | 7.5      |          | -       | -      | 6.0      |          | -       | -      | 5.5      |          | -       |
| U-NII-2A    | IEEE 802.11ac VHT80 (5.3 GHz) | Maximum | -                      | 7.5      |          | -       | -      | 9.5      |          | -       | -      | 8.0      |          | -       |
|             |                               | Nominal | -                      | 6.5      |          | -       | -      | 8.5      |          | -       | -      | 7.0      |          | -       |
| U-NII-2C    | IEEE 802.11ac VHT80 (5.6 GHz) | Maximum | 5.5                    | -        | -        | 11.0    | 6.0    | -        | -        | 12.5    | 5.0    | -        | -        | 10.5    |
|             |                               | Nominal | 4.5                    | -        | -        | 10.0    | 5.0    | -        | -        | 11.5    | 4.0    | -        | -        | 9.5     |
| U-NII-3     | IEEE 802.11ac VHT80 (5.8 GHz) | Maximum | -                      | 11.0     |          | -       | -      | 12.0     |          | -       | -      | 12.0     |          | -       |
|             |                               | Nominal | -                      | 10.0     |          | -       | -      | 11.0     |          | -       | -      | 11.0     |          | -       |

| Band & Mode |                  |         | Modulated Average [dBm] |  |
|-------------|------------------|---------|-------------------------|--|
| DSS/DTS     | Bluetooth 1 Mbps | Maximum | 3.0                     |  |
|             |                  | Nominal | 2.0                     |  |
|             | Bluetooth 2 Mbps | Maximum | 0.0                     |  |
|             |                  | Nominal | -1.0                    |  |
|             | Bluetooth 3 Mbps | Maximum | -1.0                    |  |
|             |                  | Nominal | -2.0                    |  |
|             | Bluetooth LE     | Maximum | 0.5                     |  |
|             |                  | Nominal | -0.5                    |  |

## 1.4 DUT Antenna Locations

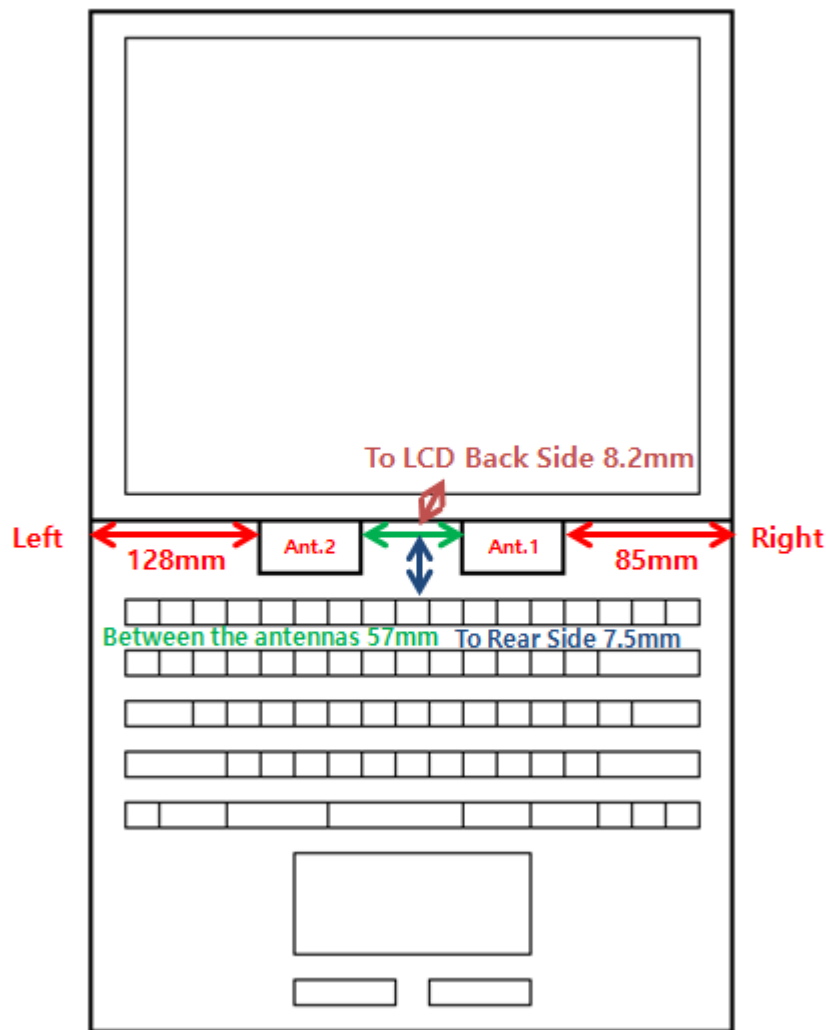

Note: Exact antenna dimensions and separation distances are shown in the “Antenna Location\_BEJNT-LG14Z95” in the FCC Filing.

| Mode             | Body Sides for SAR Testing |        |       |      |       |      |
|------------------|----------------------------|--------|-------|------|-------|------|
|                  | Top                        | Bottom | Front | Rear | Right | Left |
| 2.4G W-LAN_Ant.1 | X                          | X      | X     | O    | X     | X    |
| 2.4G W-LAN_Ant.2 | X                          | X      | X     | O    | X     | X    |
| 2.4G W-LAN_MIMO  | X                          | X      | X     | O    | X     | X    |
| 5G W-LAN_Ant.1   | X                          | X      | X     | O    | X     | X    |
| 5G W-LAN_Ant.2   | X                          | X      | X     | O    | X     | X    |
| 5G W-LAN_MIMO    | X                          | X      | X     | O    | X     | X    |

Note: The rear with touch configuration was only tested since only the rear is touched to human body in normal operation condition of this device.

## 1.5 SAR Test Exclusions Applied

### (A) WIFI

Per FCC KDB 447498 D01v05r02, the 1g SAR exclusion threshold for distances < 50 mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 3.0$$

Table 1. SAR exclusion threshold for distances < 50 mm

| Band     | Mode          | Equation                  | Result | SAR exclusion threshold | Required SAR |
|----------|---------------|---------------------------|--------|-------------------------|--------------|
| DSS      | Bluetooth     | $[(2/5)^* \sqrt{2.480}]$  | 0.6    | 3.0                     | X            |
| DTS      | Bluetooth LE  | $[(1/5)^* \sqrt{2.480}]$  | 0.4    | 3.0                     | X            |
| DTS      | 2.4 GHz W-LAN | $[(28/5)^* \sqrt{2.437}]$ | 8.8    | 3.0                     | O            |
| U-NII-1  | 5.2 GHz W-LAN | $[(20/5)^* \sqrt{5.240}]$ | 9.1    | 3.0                     | O            |
| U-NII-2A | 5.3 GHz W-LAN | $[(22/5)^* \sqrt{5.280}]$ | 10.3   | 3.0                     | O            |
| U-NII-2C | 5.6 GHz W-LAN | $[(22/5)^* \sqrt{5.720}]$ | 10.7   | 3.0                     | O            |
| U-NII-3  | 5.8 GHz W-LAN | $[(22/5)^* \sqrt{5.745}]$ | 10.7   | 3.0                     | O            |

Per KDB Publication 447498 D01v05r02, the maximum power of the channel was rounded to the nearest mW before calculation.

## 1.6 Power Reduction for SAR

There is no power reduction used for any band/mode implemented in this device for SAR purposes.

## 1.7 Device Serial Numbers

| Band & Mode  | Body Serial Number |
|--------------|--------------------|
| 2.4 GHz WLAN | FCC #1             |
| 5 GHz WLAN   | FCC #1             |

## 2. INTROCUCTION

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95\*.1-2005 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. The measurement procedure described in IEEE/ANSI C95.3-1992 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86 NCRP, 1986, Bethesda, MD 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

### SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density ( $\rho$ ) It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. 2.1)

$$SAR = \frac{d}{dt} \left( \frac{dU}{dm} \right) = \frac{d}{dt} \left( \frac{dU}{\rho dv} \right)$$

Fig. 2.1 SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- $\sigma$  = conductivity of the tissue-simulating material (S/m)
- $\rho$  = mass density of the tissue-simulating material ( $\text{kg/m}^3$ )
- E = Total RMS electric field strength (V/m)


NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.

### 3. DESCRIPTION OF TEST EQUIPMENT

#### 3.1 SAR MEASUREMENT SETUP

Measurements are performed using the DASY5 automated dosimetric assessment system. The DASY5 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, desktop computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 3.1).

A cell controller system contains the power supply, robot controller teach pendant (Joystick), and a remote control used to drive the robot motors. The PC consists of the Intel Core i7-2600 3.40 GHz desktop computer with Windows NT system and SAR Measurement Software DASY5, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

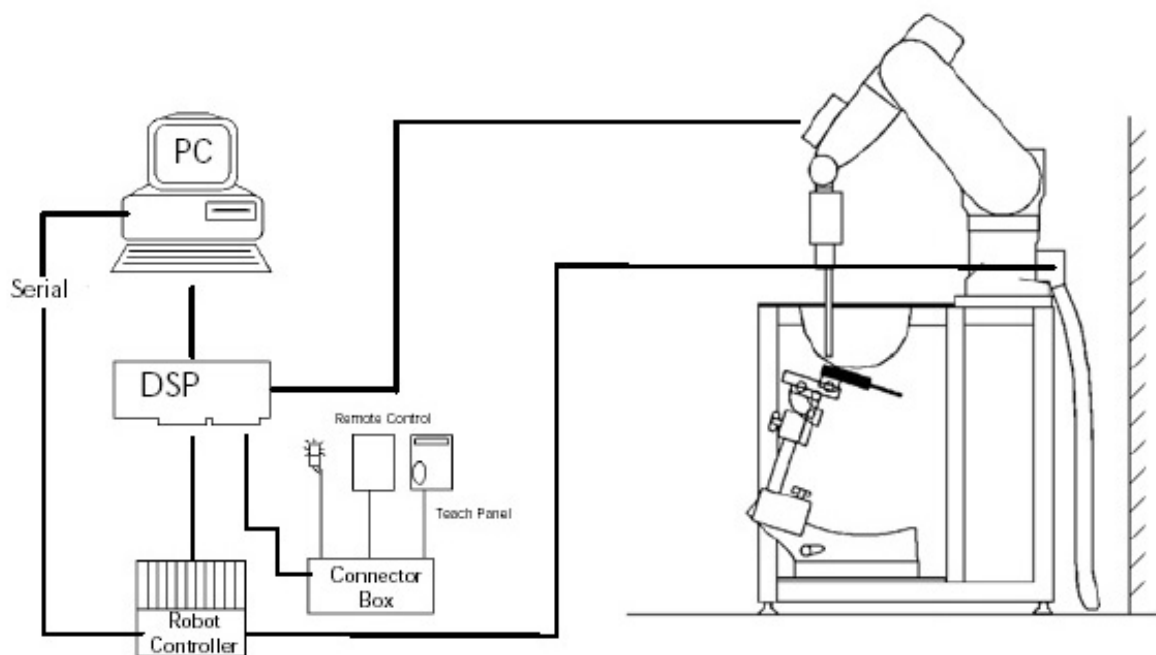

**Figure 3.1 SAR Measurement System Setup**

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail.

### 3.2 EX3DV4 Probe Specification

|                                                 |                                                                                                                                           |              |
|-------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| <b>Calibration</b>                              | In air from 10 MHz to 6 GHz                                                                                                               |              |
|                                                 | In brain and muscle simulating tissue at Frequencies of<br>2450 MHz, 2600 MHz, 3500 MHz, 5200 MHz, 5300 MHz, 5500 MHz, 5600 MHz, 5800 MHz |              |
| <b>Frequency</b>                                | 10 MHz to 6 GHz                                                                                                                           |              |
| <b>Linearity</b>                                | $\pm 0.2$ dB(30 MHz to 6 GHz)                                                                                                             |              |
| <b>Dynamic</b>                                  | 10 $\mu$ W/g to > 100 mW/g                                                                                                                |              |
| <b>Range</b>                                    | Linearity :                                                                                                                               | $\pm 0.2$ dB |
| <b>Dimensions</b>                               | Overall length :                                                                                                                          | 337 mm       |
| <b>Tip length</b>                               | 20 mm                                                                                                                                     |              |
| <b>Body diameter</b>                            | 12 mm                                                                                                                                     |              |
| <b>Tip diameter</b>                             | 2.5 mm                                                                                                                                    |              |
| <b>Distance from probe tip to sensor center</b> | 1.0 mm                                                                                                                                    |              |
| <b>Application</b>                              | SAR Dosimetry Testing                                                                                                                     |              |
|                                                 | Compliance tests of mobile phones                                                                                                         |              |




Figure 3.2 Triangular Probe Configurations



Figure 3.3 Probe Thick-Film Technique



DAE System

The SAR measurements were conducted with the dosimetric probe EX3DV4, designed in the classical triangular configuration(see Fig. 3.2) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multitier line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface. the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY5 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped at reaching the maximum.

### 3.3 Probe Calibration Process

#### 3.3.1E-Probe Calibration

##### Dosimetric Assessment Procedure

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than +/- 10%. The spherical isotropy was evaluated with the procedure and found to be better than +/-0.25dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe is tested.

##### Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a waveguide above 1GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity at the proper orientation with the field. The probe is then rotated 360 degrees.

##### Temperature Assessment \*

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium, correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent the remits or based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

where:

$\Delta t$  = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

$\Delta T$  = temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

where:

$\sigma$  = simulated tissue conductivity,

$\rho$  = Tissue density (1.25 g/cm<sup>3</sup> for brain tissue)

SAR is proportional to  $\Delta T / \Delta t$ , the initial rate of tissue heating, before thermal diffusion takes place. Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E- field;

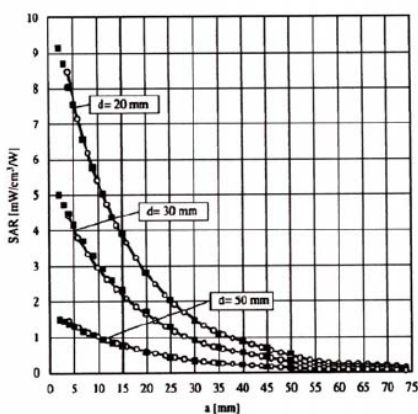


Figure 3.4E-Field and Temperature Measurements at 900MHz

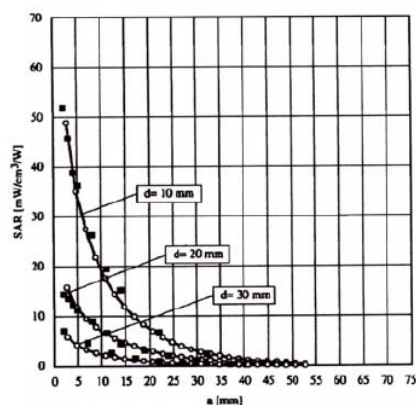


Figure 3.5 E-Field and Temperature Measurements at 1800MHz

### 3.4 Data Extrapolation

The DASY5 software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given like below;

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with  $V_i$  = compensated signal of channel i (i=x,y,z)  
 $U_i$  = input signal of channel i (i=x,y,z)  
 $cf$  = crest factor of exciting field (DASY parameter)  
 $dcp_i$  = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

with  $V_i$  = compensated signal of channel i (i = x,y,z)  
 $Norm_i$  = sensor sensitivity of channel i (i = x,y,z)  
 $\mu V/(V/m)^2$  for E-field probes  
 $ConvF$  = sensitivity of enhancement in solution  
 $E_i$  = electric field strength of channel i in V/m

The RSS value of the field components gives the total field strength (Hermetian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with  $SAR$  = local specific absorption rate in W/g  
 $E_{tot}$  = total field strength in V/m  
 $\sigma$  = conductivity in [mho/m] or [Siemens/m]  
 $\rho$  = equivalent tissue density in g/cm<sup>3</sup>

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{free} = \frac{E_{tot}^2}{3770}$$

with  $P_{pave}$  = equivalent power density of a plane wave in W/cm<sup>2</sup>  
 $E_{tot}$  = total electric field strength in V/m

### 3.5 ELI PHANTOM

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (see Fig. 3.6)



Figure 3.6 ELI Phantom

#### ELI Phantom Specification:

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Construction</b>    | ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure. ELI V6.0, released in August 2014, has the same shell geometry as ELI4 but offers increased long term stability. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot. The liquid depth is maintained at a minimum depth of 15cm to minimize reflections from the upper surface. |
| <b>Shell Thickness</b> | 2.0 ± 0.2 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Filling Volume</b>  | Approx. 30 liters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Dimensions</b>      | Major axis: 600 mm<br>Minor axis: 400 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

### 3.6 Device Holder for Transmitters

In combination with the Twin SAM V5.0/V5.0c or ELI Phantoms, the Mounting Device (Body-Worn) enables testing of transmitter devices according to IEC 62209-2 specifications. The device holder can be locked for positioning at flat phantom section.

Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produce infinite number of configurations. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.



Figure 3.7 Mounting Device

### 3.7 Muscle Simulation Mixture Characterization

The muscle mixtures consist of a viscous gel using hydrox-ethylcellulose (HEC) gelling agent and saline solution (see Table 3.1). Preservation with a bactericide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The mixture characterizations used for the muscle tissue simulating liquids are according to the data by C. Gabriel and G. Hartsgrove.



**Figure 3.8 Simulated Tissues**

**Table3.1 Composition of the Tissue Equivalent Matter**

| Ingredients<br>(% by weight)   | Frequency (MHz) |       |       |             |
|--------------------------------|-----------------|-------|-------|-------------|
|                                | 835             | 1900  | 2450  | 5200 ~ 5800 |
| Tissue Type                    | Body            | Body  | Body  | Body        |
| Water                          | 50.75           | 70.23 | 73.40 | 80.00       |
| Salt (NaCl)                    | 0.940           | 0.290 | 0.060 | -           |
| Sugar                          | 48.21           | -     | -     | -           |
| HEC                            | -               | -     | -     | -           |
| Bactericide                    | 0.100           | -     | -     | -           |
| Triton X-100                   | -               | -     | -     | -           |
| DGBE                           | -               | 29.48 | 26.54 | -           |
| Diethylene glycol hexyl ether  | -               | -     | -     | -           |
| Polysorbate (Tween) 80         | -               | -     | -     | 20.00       |
| Target for Dielectric Constant | 55.2            | 53.3  | 52.7  | -           |
| Target for Conductivity (S/m)  | 0.97            | 1.52  | 1.95  | -           |

|                           |                                                                    |        |                        |
|---------------------------|--------------------------------------------------------------------|--------|------------------------|
| Salt:                     | 99 % Pure Sodium Chloride                                          | Sugar: | 98 % Pure Sucrose      |
| Water:                    | De-ionized, 16M resistivity                                        | HEC:   | Hydroxyethyl Cellulose |
| DGBE:                     | 99 % Di(ethylene glycol) butyl ether,[2-(2-butoxyethoxy) ethanol]  |        |                        |
| Triton X-100(ultra pure): | Polyethylene glycol mono[4-(1,1,3,3-tetramethylbutyl)phenyl] ether |        |                        |

### 3.8 SAR TEST EQUIPMENT

Table 3.2 Test Equipment Calibration

|                                     | Type                                                  | Manufacturer     | Model      | Cal.Date   | Next.Cal.Date | S/N             |
|-------------------------------------|-------------------------------------------------------|------------------|------------|------------|---------------|-----------------|
| <input checked="" type="checkbox"/> | SEMITEC Engineering                                   | SEMITEC          | N/A        | N/A        | N/A           | Shield Room     |
| <input checked="" type="checkbox"/> | Robot                                                 | SCHMID           | TX60L      | N/A        | N/A           | F14/5VR2A1/A/01 |
| <input checked="" type="checkbox"/> | Robot Controller                                      | SCHMID           | C58C       | N/A        | N/A           | F14/5VR2A1/C/01 |
| <input checked="" type="checkbox"/> | Joystick                                              | SCHMID           | N/A        | N/A        | N/A           | D21142605A      |
| <input checked="" type="checkbox"/> | Intel Core i7-2600 3.40 GHz<br>Windows 7 Professional | N/A              | N/A        | N/A        | N/A           | N/A             |
| <input checked="" type="checkbox"/> | Probe Alignment Unit LB                               | N/A              | N/A        | N/A        | N/A           | SE UKS 030 AA   |
| <input type="checkbox"/>            | Mounting Device                                       | SCHMID           | SD000H01HA | N/A        | N/A           | N/A             |
| <input checked="" type="checkbox"/> | Laptop Holder                                         | SCHMID           | SMLH1001CD | N/A        | N/A           | N/A             |
| <input type="checkbox"/>            | Twin SAM Phantom                                      | SCHMID           | QD000P40CD | N/A        | N/A           | 1786            |
| <input checked="" type="checkbox"/> | 2mm Oval Phantom                                      | SCHMID           | QDOVA002AA | N/A        | N/A           | 2008            |
| <input checked="" type="checkbox"/> | Data Acquisition Electronics                          | SCHMID           | DAE4V1     | 2014-07-22 | 2015-07-22    | 1394            |
| <input checked="" type="checkbox"/> | Dosimetric E-Field Probe                              | SCHMID           | EX3DV4     | 2014-11-05 | 2015-11-05    | 7337            |
| <input type="checkbox"/>            | Dummy Probe                                           | N/A              | N/A        | N/A        | N/A           | N/A             |
| <input checked="" type="checkbox"/> | 2450MHz SAR Dipole                                    | SCHMID           | D2450V2    | 2014-11-19 | 2016-11-19    | 920             |
| <input checked="" type="checkbox"/> | 5GHz SAR Dipole                                       | SCHMID           | D5GHzV2    | 2015-03-05 | 2017-03-05    | 1212            |
| <input checked="" type="checkbox"/> | Network Analyzer                                      | Agilent          | E5071C     | 2014-10-21 | 2015-10-21    | MY46106970      |
| <input checked="" type="checkbox"/> | Signal Generator                                      | Agilent          | E4438C     | 2014-09-12 | 2015-09-12    | US41461520      |
| <input checked="" type="checkbox"/> | Amplifier                                             | EMPOWER          | BBS3Q7ELU  | 2014-09-12 | 2015-09-12    | 1020            |
| <input checked="" type="checkbox"/> | High Power RF Amplifier                               | EMPOWER          | BBS3Q8CCJ  | 2014-10-20 | 2015-10-20    | 1005            |
| <input checked="" type="checkbox"/> | Power Meter                                           | HP               | EPM-442A   | 2015-02-26 | 2016-02-26    | GB37170267      |
| <input checked="" type="checkbox"/> | Power Meter                                           | Anritsu          | ML2495A    | 2014-10-21 | 2015-10-21    | 1338004         |
| <input checked="" type="checkbox"/> | Wide Bandwidth Power Sensor                           | Anritsu          | MA2411B    | 2014-10-21 | 2015-10-21    | 1306053         |
| <input checked="" type="checkbox"/> | Power Sensor                                          | HP               | 8481A      | 2015-02-26 | 2016-02-26    | 3318A96566      |
| <input checked="" type="checkbox"/> | Power Sensor                                          | HP               | 8481A      | 2015-02-06 | 2016-02-06    | 2702A65976      |
| <input type="checkbox"/>            | Dual Directional Coupler                              | Agilent          | 778D-012   | 2015-01-06 | 2016-01-06    | 50228           |
| <input checked="" type="checkbox"/> | Directional Coupler                                   | HP               | 773D       | 2014-06-27 | 2015-06-27    | 2389A00640      |
| <input type="checkbox"/>            | Low Pass Filter 1.5GHz                                | Micro LAB        | LA-15N     | 2014-09-11 | 2015-09-11    | N/A             |
| <input checked="" type="checkbox"/> | Low Pass Filter 3.0GHz                                | Micro LAB        | LA-30N     | 2014-09-11 | 2015-09-11    | N/A             |
| <input checked="" type="checkbox"/> | Low Pass Filter 6.0GHz                                | Micro LAB        | LA-60N     | 2015-02-25 | 2016-02-25    | 03942           |
| <input checked="" type="checkbox"/> | Attenuators(3 dB)                                     | Agilent          | 8491B      | 2014-06-27 | 2015-06-27    | MY39260700      |
| <input checked="" type="checkbox"/> | Attenuators(10 dB)                                    | WEINSCHTEL       | 23-10-34   | 2015-01-06 | 2016-01-06    | BP4387          |
| <input type="checkbox"/>            | Step Attenuator                                       | HP               | 8494A      | 2014-09-11 | 2015-09-11    | 3308A33341      |
| <input checked="" type="checkbox"/> | Dielectric Probe kit                                  | SCHMID           | DAK-3.5    | 2014-12-09 | 2015-12-09    | 1092            |
| <input type="checkbox"/>            | 8960 Series 10<br>Wireless Comms. Test Set            | Agilent          | E5515C     | 2014-09-12 | 2015-09-12    | GB41321164      |
| <input type="checkbox"/>            | Wideband Radio<br>Communication Tester                | Rohde<br>Schwarz | CMW500     | 2014-09-18 | 2015-09-18    | 101414          |
| <input type="checkbox"/>            | Power Splitter                                        | Anritsu          | K241B      | 2014-10-21 | 2015-10-21    | 1701102         |
| <input type="checkbox"/>            | Bluetooth Tester                                      | TESCOM           | TC-3000B   | 2014-06-26 | 2015-06-26    | 3000B640046     |

**NOTE:** The E-field probe was calibrated by SPEAG, by temperature measurement procedure. Dipole Verification measurement is performed by DT&C before each test. The brain and muscle simulating material are calibrated by DT&C using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain-equivalent material. Each equipment item was used solely within its respective calibration period.

## 4. TEST SYSTEM SPECIFICATIONS

### Automated TEST SYSTEM SPECIFICATIONS:

#### Positioner

|               |                                             |
|---------------|---------------------------------------------|
| Robot         | Stäubli Unimation Corp. Robot Model: TX90XL |
| Repeatability | 0.02 mm                                     |
| No. of axis   | 6                                           |

#### Data Acquisition Electronic (DAE) System

##### Cell Controller

|                  |                        |
|------------------|------------------------|
| Processor        | Intel Core i7-2600     |
| Clock Speed      | 3.40 GHz               |
| Operating System | Windows 7 Professional |
| Data Card        | DASY5 PC-Board         |

##### Data Converter

|                  |                                                                                    |
|------------------|------------------------------------------------------------------------------------|
| Features         | Signal, multiplexer, A/D converter. & control logic                                |
| Software         | DASY5                                                                              |
| Connecting Lines | Optical downlink for data and status info<br>Optical uplink for commands and clock |

##### PC Interface Card

|          |                                                                                                                                                                                      |
|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Function | 24 bit (64 MHz) DSP for real time processing<br>Link to DAE 4<br>16 bit A/D converter for surface detection system<br>serial link to robot<br>direct emergency stop output for robot |
|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

##### E-Field Probes

|              |                                              |
|--------------|----------------------------------------------|
| Model        | EX3DV4 S/N: 7337                             |
| Construction | Triangular core fiber optic detection system |
| Frequency    | 10 MHz to 6 GHz                              |
| Linearity    | $\pm 0.2$ dB (30 MHz to 6 GHz)               |

##### Phantom

|                |                  |
|----------------|------------------|
| Phantom        | 2mm Oval Phantom |
| Shell Material | Composite        |
| Thickness      | $2.0 \pm 0.2$ mm |




Figure 4.1 DASY5 Test System

## 5. SAR MEASUREMENT PROCEDURE

### 5.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r03 and IEEE 1528-2013:



**Figure 5.1**  
Sample SAR Area Scan

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r03 (See Table 5-1) and IEEE1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r03 (See Table 5-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
  - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 3-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
  - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x,y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
  - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.

| Frequency    | Maximum Area Scan Resolution (mm)<br>( $\Delta x_{area}$ , $\Delta y_{area}$ ) | Maximum Zoom Scan Resolution (mm)<br>( $\Delta x_{zoom}$ , $\Delta y_{zoom}$ ) | Maximum Zoom Scan Spatial Resolution (mm) |                        |                                   | Minimum Zoom Scan Volume (mm)<br>(x,y,z) |
|--------------|--------------------------------------------------------------------------------|--------------------------------------------------------------------------------|-------------------------------------------|------------------------|-----------------------------------|------------------------------------------|
|              |                                                                                |                                                                                | Uniform Grid                              | Graded Grid            |                                   |                                          |
|              |                                                                                |                                                                                | $\Delta z_{zoom}(n)$                      | $\Delta z_{zoom}(1)^*$ | $\Delta z_{zoom}(n>1)^*$          |                                          |
| $\leq 2$ GHz | $\leq 15$                                                                      | $\leq 8$                                                                       | $\leq 5$                                  | $\leq 4$               | $\leq 1.5^* \Delta z_{zoom}(n-1)$ | $\geq 30$                                |
| 2-3 GHz      | $\leq 12$                                                                      | $\leq 5$                                                                       | $\leq 5$                                  | $\leq 4$               | $\leq 1.5^* \Delta z_{zoom}(n-1)$ | $\geq 30$                                |
| 3-4 GHz      | $\leq 12$                                                                      | $\leq 5$                                                                       | $\leq 4$                                  | $\leq 3$               | $\leq 1.5^* \Delta z_{zoom}(n-1)$ | $\geq 28$                                |
| 4-5 GHz      | $\leq 10$                                                                      | $\leq 4$                                                                       | $\leq 3$                                  | $\leq 2.5$             | $\leq 1.5^* \Delta z_{zoom}(n-1)$ | $\geq 25$                                |
| 5-6 GHz      | $\leq 10$                                                                      | $\leq 4$                                                                       | $\leq 2$                                  | $\leq 2$               | $\leq 1.5^* \Delta z_{zoom}(n-1)$ | $\geq 22$                                |

**Table 5.1 Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r03\***

\*Also compliant to IEEE 1528-2013 Table 6

## 6. RF EXPOSURE LIMITS

### Uncontrolled Environment:

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### Controlled Environment:

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 6.1.SAR Human Exposure Specified in ANSI/IEEE C95.1-2005**

|                                                        | HUMAN EXPOSURE LIMITS                       |                                           |
|--------------------------------------------------------|---------------------------------------------|-------------------------------------------|
|                                                        | General Public Exposure<br>(W/kg) or (mW/g) | Occupational Exposure<br>(W/kg) or (mW/g) |
| SPATIAL PEAK SAR *<br>(Brain)                          | 1.60                                        | 8.00                                      |
| SPATIAL AVERAGE SAR **<br>(Whole Body)                 | 0.08                                        | 0.40                                      |
| SPATIAL PEAK SAR ***<br>(Hands / Feet / Ankle / Wrist) | 4.00                                        | 20.0                                      |

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e.as a result of employment or occupation).

## 7. FCC MEASUREMENT PROCEDURES

---

### 7.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v05r02, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. The highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

### 7.2 SAR Testing with 802.11 Transmitters

Normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g/n/ac transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227D01v02r01 for more details.

#### 7.2.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96 % is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

#### 7.2.2 U-NII and U-NII-2A

For device that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands. SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is  $> 1.2$  W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is  $> 1.2$  W/kg.

#### 7.2.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements.

When Terminal Doppler Weather Rader (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless band gap channels are permanently disabled, SAR must be considered for these channels. When band gap channels are disabled, each band is tested independently according to the normally required OFDM SAR measurements and probe calibration frequency points requirements.

## 7.2.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4$  W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is  $\leq 0.8$  W/kg or all test position are measured.

## 7.2.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is  $> 0.8$  W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power is  $> 1.2$  W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

## 7.2.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n is used for SAR measurement. When the maximum output power were the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

## 7.2.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

### 7.2.8 Subsequent Test Configuration Procedures

For OFDM configurations, in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure, when applicable. When the highest reported SAR for the initial test configuration, adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power is  $\leq 1.2$  W/kg, no additional SAR testing for the subsequent test configurations is required.

### 7.2.9 Simultaneous Transmission of MIMO Chains

The simultaneous transmission conditions for MIMO must be considered separately for each standalone and aggregated frequency band according to the 802.11 transmission mode configurations and exposure conditions to determine SAR compliance. The aggregate maximum output power of all simultaneous transmitting antennas in all transmission chains may be used to determine SAR test exclusion for each frequency band and transmission mode configuration. The most conservative SAR test separation distance among the antennas must be used to apply the standalone SAR test exclusion provisions in KDB Publication 447498. When this power-based standalone SAR test exclusion does not apply, the sum of 1-g SAR provision in KDB Publication 447498 should be used to determine simultaneous transmission SAR test exclusion.

## 8. RF CONDUCTED POWERS

### 8.1 WLAN Conducted Powers

| Mode    | Freq.<br>(MHz) | Channel | 802.11b (2.4 GHz) Conducted Power (dBm) Ant 1 |       |       |       |
|---------|----------------|---------|-----------------------------------------------|-------|-------|-------|
|         |                |         | Data Rate (Mbps)                              |       |       |       |
|         |                |         | 1                                             | 2     | 5.5   | 11    |
| 802.11b | 2412           | 1       | 12.25                                         | 12.21 | 12.10 | 12.19 |
|         | 2437           | 6       | 12.97                                         | 12.89 | 12.79 | 12.95 |
|         | 2462           | 11      | <u>13.57</u>                                  | 13.44 | 13.41 | 13.56 |

Table 8.1 IEEE 802.11b Average RF Power Ant 1

| Mode    | Freq.<br>(MHz) | Channel | 802.11b (2.4 GHz) Conducted Power (dBm) Ant 2 |       |       |       |
|---------|----------------|---------|-----------------------------------------------|-------|-------|-------|
|         |                |         | Data Rate (Mbps)                              |       |       |       |
|         |                |         | 1                                             | 2     | 5.5   | 11    |
| 802.11b | 2412           | 1       | 11.20                                         | 11.04 | 10.92 | 11.15 |
|         | 2437           | 6       | 11.24                                         | 11.06 | 11.13 | 11.21 |
|         | 2462           | 11      | <u>11.49</u>                                  | 11.35 | 11.42 | 11.35 |

Table 8.2 IEEE 802.11b Average RF Power Ant 2

| Mode    | Freq.<br>(MHz) | Channel | 802.11g (2.4 GHz) Conducted Power (dBm) Ant 1 |       |       |       |       |       |       |       |
|---------|----------------|---------|-----------------------------------------------|-------|-------|-------|-------|-------|-------|-------|
|         |                |         | Data Rate (Mbps)                              |       |       |       |       |       |       |       |
|         |                |         | 6                                             | 9     | 12    | 18    | 24    | 36    | 48    | 54    |
| 802.11g | 2412           | 1       | 10.85                                         | 10.69 | 10.72 | 10.75 | 10.70 | 10.78 | 10.71 | 10.57 |
|         | 2437           | 6       | 13.86                                         | 13.69 | 13.80 | 13.68 | 13.73 | 13.74 | 13.82 | 13.79 |
|         | 2462           | 11      | 10.81                                         | 10.75 | 10.76 | 10.65 | 10.63 | 10.56 | 10.70 | 10.77 |

Table 8.3 IEEE 802.11g Average RF Power Ant 1

| Mode    | Freq.<br>(MHz) | Channel | 802.11g (2.4 GHz) Conducted Power (dBm) Ant 2 |       |       |       |       |       |       |       |
|---------|----------------|---------|-----------------------------------------------|-------|-------|-------|-------|-------|-------|-------|
|         |                |         | Data Rate (Mbps)                              |       |       |       |       |       |       |       |
|         |                |         | 6                                             | 9     | 12    | 18    | 24    | 36    | 48    | 54    |
| 802.11g | 2412           | 1       | 8.94                                          | 8.90  | 8.69  | 8.80  | 8.66  | 8.87  | 8.89  | 8.92  |
|         | 2437           | 6       | 12.57                                         | 12.46 | 12.43 | 12.48 | 12.52 | 12.51 | 12.45 | 12.38 |
|         | 2462           | 11      | 11.32                                         | 11.24 | 11.28 | 11.13 | 11.27 | 11.16 | 11.20 | 11.31 |

Table 8.4 IEEE 802.11g Average RF Power Ant 2

| Mode               | Freq.<br>(MHz) | Channel | 802.11n HT20 (2.4 GHz) Conducted Power (dBm) Ant 1 |       |       |       |       |       |       |       |
|--------------------|----------------|---------|----------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|
|                    |                |         | Data Rate (Mbps)                                   |       |       |       |       |       |       |       |
|                    |                |         | 6.5                                                | 13    | 19.5  | 26    | 39    | 52    | 58.5  | 65    |
| 802.11n<br>(HT-20) | 2412           | 1       | 10.16                                              | 10.09 | 10.14 | 9.92  | 10.02 | 10.07 | 10.08 | 10.11 |
|                    | 2437           | 6       | 13.82                                              | 13.68 | 13.78 | 13.57 | 13.70 | 13.63 | 13.69 | 13.75 |
|                    | 2462           | 11      | 10.34                                              | 10.31 | 10.22 | 10.30 | 10.15 | 10.32 | 10.29 | 10.25 |

Table 8.5 IEEE 802.11n HT20 Average RF Power Ant 1

| Mode               | Freq.<br>(MHz) | Channel | 802.11n HT20 (2.4 GHz) Conducted Power (dBm) Ant 2 |       |       |       |       |       |       |       |
|--------------------|----------------|---------|----------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|
|                    |                |         | Data Rate (Mbps)                                   |       |       |       |       |       |       |       |
|                    |                |         | 6.5                                                | 13    | 19.5  | 26    | 39    | 52    | 58.5  | 65    |
| 802.11n<br>(HT-20) | 2412           | 1       | 8.92                                               | 8.77  | 8.85  | 8.78  | 8.76  | 8.80  | 8.89  | 8.90  |
|                    | 2437           | 6       | 12.65                                              | 12.52 | 12.59 | 12.53 | 12.34 | 12.51 | 12.60 | 12.63 |
|                    | 2462           | 11      | 10.67                                              | 10.55 | 10.53 | 10.50 | 10.48 | 10.51 | 10.53 | 10.61 |

Table 8.6 IEEE 802.11n HT20 Average RF Power Ant 2

| Mode               | Freq.<br>(MHz) | Channel | 802.11n HT20 (2.4 GHz) Conducted Power (dBm) MIMO |       |       |       |       |       |       |       |
|--------------------|----------------|---------|---------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|
|                    |                |         | Data Rate (Mbps)                                  |       |       |       |       |       |       |       |
|                    |                |         | 13                                                | 26    | 39    | 52    | 78    | 104   | 117   | 130   |
| 802.11n<br>(HT-20) | 2412           | 1       | 8.26                                              | 8.21  | 8.11  | 8.04  | 8.06  | 8.16  | 8.11  | 8.21  |
|                    | 2437           | 6       | 11.62                                             | 11.53 | 11.42 | 11.48 | 11.43 | 11.53 | 11.43 | 11.56 |
|                    | 2462           | 11      | 8.81                                              | 8.71  | 8.71  | 8.65  | 8.75  | 8.71  | 8.77  | 8.72  |

Table 8.7 IEEE 802.11n HT20 Average RF Power MIMO

| Mode               | Freq.<br>(MHz) | Channel | 802.11n HT40 (2.4 GHz) Conducted Power (dBm) Ant 1 |       |       |       |       |       |       |       |
|--------------------|----------------|---------|----------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|
|                    |                |         | Data Rate (Mbps)                                   |       |       |       |       |       |       |       |
|                    |                |         | 13.5                                               | 27    | 40.5  | 54    | 81    | 108   | 121.5 | 135   |
| 802.11n<br>(HT-40) | 2422           | 3       | 8.95                                               | 8.82  | 8.79  | 8.89  | 8.73  | 8.70  | 8.91  | 8.80  |
|                    | 2437           | 6       | 14.32                                              | 14.28 | 14.07 | 14.18 | 14.04 | 14.26 | 14.27 | 14.23 |
|                    | 2452           | 9       | 10.64                                              | 10.53 | 10.50 | 10.55 | 10.57 | 10.59 | 10.52 | 10.45 |

Table 8.8 IEEE 802.11n HT40 Average RF Power Ant 1

| Mode               | Freq.<br>(MHz) | Channel | 802.11n HT40 (2.4 GHz) Conducted Power (dBm) Ant 2 |       |       |       |       |       |       |       |
|--------------------|----------------|---------|----------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|
|                    |                |         | Data Rate (Mbps)                                   |       |       |       |       |       |       |       |
|                    |                |         | 13.5                                               | 27    | 40.5  | 54    | 81    | 108   | 121.5 | 135   |
| 802.11n<br>(HT-40) | 2422           | 3       | 7.00                                               | 6.87  | 6.89  | 6.84  | 6.91  | 6.88  | 6.92  | 6.72  |
|                    | 2437           | 6       | 10.84                                              | 10.82 | 10.70 | 10.72 | 10.60 | 10.81 | 10.69 | 10.71 |
|                    | 2452           | 9       | 9.18                                               | 9.11  | 9.01  | 9.13  | 9.11  | 9.15  | 8.99  | 8.92  |

Table 8.9 IEEE 802.11n HT40 Average RF Power Ant 2

| Mode               | Freq.<br>(MHz) | Channel | 802.11n HT40 (2.4 GHz) Conducted Power (dBm) MIMO |      |       |       |       |      |       |       |
|--------------------|----------------|---------|---------------------------------------------------|------|-------|-------|-------|------|-------|-------|
|                    |                |         | Data Rate (Mbps)                                  |      |       |       |       |      |       |       |
|                    |                |         | 27                                                | 54   | 81    | 108   | 162   | 216  | 243   | 270   |
| 802.11n<br>(HT-40) | 2422           | 3       | 6.54                                              | 6.42 | 6.44  | 6.29  | 6.38  | 6.45 | 6.49  | 6.34  |
|                    | 2437           | 6       | 10.12                                             | 9.96 | 10.00 | 10.07 | 10.00 | 9.95 | 10.00 | 10.02 |
|                    | 2452           | 9       | 9.88                                              | 9.76 | 9.73  | 9.77  | 9.76  | 9.71 | 9.82  | 9.80  |

Table 8.10 IEEE 802.11n HT40 Average RF Power MIMO

| Mode    | Freq.<br>(MHz) | Channel | 802.11a (5 GHz) Conducted Power (dBm) Ant 1 |       |       |       |       |       |       |       |
|---------|----------------|---------|---------------------------------------------|-------|-------|-------|-------|-------|-------|-------|
|         |                |         | Data Rate (Mbps)                            |       |       |       |       |       |       |       |
|         |                |         | 6                                           | 9     | 12    | 18    | 24    | 36    | 48    | 54    |
| 802.11a | 5180           | 36      | 8.72                                        | 8.51  | 8.53  | 8.43  | 8.58  | 8.56  | 8.69  | 8.46  |
|         | 5200           | 40      | 11.43                                       | 11.17 | 11.28 | 11.29 | 11.39 | 11.24 | 11.38 | 11.31 |
|         | 5220           | 44      | 11.85                                       | 11.81 | 11.77 | 11.75 | 11.83 | 11.69 | 11.74 | 11.71 |
|         | 5240           | 48      | 12.19                                       | 12.06 | 12.02 | 12.07 | 12.08 | 11.95 | 12.07 | 12.03 |
|         | 5260           | 52      | <u>13.44</u>                                | 13.28 | 13.26 | 13.40 | 13.36 | 13.19 | 13.32 | 13.29 |
|         | 5280           | 56      | 13.11                                       | 13.08 | 13.02 | 12.98 | 12.95 | 13.05 | 13.01 | 12.95 |
|         | 5300           | 60      | 12.83                                       | 12.68 | 12.67 | 12.63 | 12.70 | 12.69 | 12.55 | 12.70 |
|         | 5320           | 64      | 10.80                                       | 10.67 | 10.68 | 10.63 | 10.74 | 10.76 | 10.73 | 10.62 |
|         | 5500           | 100     | 9.92                                        | 9.74  | 9.67  | 9.86  | 9.87  | 9.81  | 9.88  | 9.76  |
|         | 5580           | 116     | <u>12.81</u>                                | 12.65 | 12.72 | 12.74 | 12.79 | 12.73 | 12.76 | 12.57 |
|         | 5660           | 132     | 11.66                                       | 11.58 | 11.55 | 11.45 | 11.57 | 11.61 | 11.51 | 11.42 |
|         | 5720           | 144     | 9.45                                        | 9.31  | 9.28  | 9.22  | 9.35  | 9.41  | 9.36  | 9.33  |
|         | 5745           | 149     | <u>12.12</u>                                | 12.03 | 11.94 | 11.96 | 11.96 | 12.06 | 12.04 | 11.98 |
|         | 5785           | 157     | 11.46                                       | 11.27 | 11.44 | 11.37 | 11.34 | 11.41 | 11.32 | 11.42 |
|         | 5825           | 165     | 11.55                                       | 11.37 | 11.35 | 11.39 | 11.41 | 11.53 | 11.29 | 11.44 |

Table 8.11 IEEE 802.11a Average RF Power Ant 1

| Mode    | Freq.<br>(MHz) | Channel | 802.11a (5 GHz) Conducted Power (dBm) Ant 2 |       |       |       |       |       |       |       |
|---------|----------------|---------|---------------------------------------------|-------|-------|-------|-------|-------|-------|-------|
|         |                |         | Data Rate (Mbps)                            |       |       |       |       |       |       |       |
|         |                |         | 6                                           | 9     | 12    | 18    | 24    | 36    | 48    | 54    |
| 802.11a | 5180           | 36      | 8.16                                        | 8.02  | 8.01  | 7.92  | 8.00  | 8.11  | 8.12  | 8.06  |
|         | 5200           | 40      | 10.52                                       | 10.43 | 10.40 | 10.37 | 10.35 | 10.45 | 10.47 | 10.38 |
|         | 5220           | 44      | 10.66                                       | 10.58 | 10.51 | 10.61 | 10.55 | 10.63 | 10.48 | 10.44 |
|         | 5240           | 48      | 11.33                                       | 11.14 | 11.09 | 11.12 | 11.27 | 11.25 | 11.26 | 11.07 |
|         | 5260           | 52      | 11.68                                       | 11.50 | 11.43 | 11.46 | 11.61 | 11.54 | 11.60 | 11.55 |
|         | 5280           | 56      | 11.52                                       | 11.44 | 11.35 | 11.38 | 11.41 | 11.49 | 11.37 | 11.38 |
|         | 5300           | 60      | 11.67                                       | 11.38 | 11.53 | 11.51 | 11.64 | 11.41 | 11.53 | 11.65 |
|         | 5320           | 64      | 9.57                                        | 9.43  | 9.53  | 9.38  | 9.52  | 9.44  | 9.31  | 9.42  |
|         | 5500           | 100     | 9.62                                        | 9.50  | 9.51  | 9.38  | 9.50  | 9.46  | 9.49  | 9.58  |
|         | 5580           | 116     | 12.67                                       | 12.63 | 12.59 | 12.42 | 12.55 | 12.52 | 12.51 | 12.49 |
|         | 5660           | 132     | 11.54                                       | 11.38 | 11.41 | 11.45 | 11.51 | 11.36 | 11.39 | 11.42 |
|         | 5720           | 144     | 9.28                                        | 9.25  | 9.22  | 9.26  | 9.18  | 9.11  | 9.15  | 9.14  |
|         | 5745           | 149     | 12.65                                       | 12.48 | 12.59 | 12.61 | 12.58 | 12.47 | 12.52 | 12.53 |
|         | 5785           | 157     | 11.88                                       | 11.82 | 11.83 | 11.77 | 11.84 | 11.72 | 11.70 | 11.63 |
|         | 5825           | 165     | 12.55                                       | 12.48 | 12.53 | 12.47 | 12.50 | 12.31 | 12.39 | 12.46 |

Table 8.12 IEEE 802.11a Average RF Power Ant 2

| Mode               | Freq.<br>(MHz) | Channel | 802.11n HT20 (5 GHz) Conducted Power (dBm) Ant 1 |       |       |       |       |       |       |       |
|--------------------|----------------|---------|--------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|
|                    |                |         | Data Rate (Mbps)                                 |       |       |       |       |       |       |       |
|                    |                |         | 6.5                                              | 13    | 19.5  | 26    | 39    | 52    | 58.5  | 65    |
| 802.11n<br>(HT-20) | 5180           | 36      | 9.92                                             | 9.75  | 9.81  | 9.68  | 9.74  | 9.86  | 9.76  | 9.78  |
|                    | 5200           | 40      | 11.78                                            | 11.72 | 11.70 | 11.53 | 11.55 | 11.71 | 11.66 | 11.62 |
|                    | 5220           | 44      | 11.71                                            | 11.66 | 11.61 | 11.52 | 11.63 | 11.58 | 11.55 | 11.54 |
|                    | 5240           | 48      | 12.20                                            | 12.13 | 12.07 | 12.06 | 11.96 | 12.17 | 12.03 | 12.08 |
|                    | 5260           | 52      | 12.81                                            | 12.53 | 12.75 | 12.77 | 12.56 | 12.76 | 12.72 | 12.67 |
|                    | 5280           | 56      | 12.75                                            | 12.71 | 12.66 | 12.62 | 12.73 | 12.58 | 12.64 | 12.53 |
|                    | 5300           | 60      | 12.68                                            | 12.61 | 12.63 | 12.57 | 12.54 | 12.56 | 12.49 | 12.59 |
|                    | 5320           | 64      | 10.42                                            | 10.37 | 10.40 | 10.34 | 10.38 | 10.30 | 10.24 | 10.23 |
|                    | 5500           | 100     | 9.41                                             | 9.39  | 9.27  | 9.28  | 9.30  | 9.13  | 9.34  | 9.23  |
|                    | 5580           | 116     | 12.67                                            | 12.53 | 12.51 | 12.61 | 12.59 | 12.60 | 12.53 | 12.65 |
|                    | 5660           | 132     | 12.44                                            | 12.22 | 12.28 | 12.31 | 12.39 | 12.41 | 12.33 | 12.37 |
|                    | 5720           | 144     | 9.78                                             | 9.66  | 9.71  | 9.69  | 9.73  | 9.59  | 9.74  | 9.63  |
|                    | 5745           | 149     | 12.05                                            | 11.74 | 11.91 | 11.92 | 11.99 | 11.96 | 12.01 | 11.93 |
|                    | 5785           | 157     | 12.01                                            | 11.87 | 11.92 | 11.83 | 11.96 | 11.94 | 11.85 | 11.97 |
|                    | 5825           | 165     | 12.04                                            | 11.95 | 11.85 | 11.88 | 12.02 | 11.96 | 11.87 | 11.88 |

Table 8.13 IEEE 802.11n HT20 Average RF Power Ant 1

| Mode               | Freq.<br>(MHz) | Channel | 802.11n HT20 (5 GHz) Conducted Power (dBm) Ant 2 |       |       |       |       |       |       |       |
|--------------------|----------------|---------|--------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|
|                    |                |         | Data Rate (Mbps)                                 |       |       |       |       |       |       |       |
|                    |                |         | 6.5                                              | 13    | 19.5  | 26    | 39    | 52    | 58.5  | 65    |
| 802.11n<br>(HT-20) | 5180           | 36      | 10.06                                            | 9.92  | 9.83  | 9.93  | 9.97  | 9.81  | 9.94  | 9.87  |
|                    | 5200           | 40      | 12.43                                            | 12.31 | 12.27 | 12.37 | 12.35 | 12.29 | 12.34 | 12.25 |
|                    | 5220           | 44      | 12.08                                            | 11.85 | 11.96 | 11.92 | 11.89 | 12.02 | 11.79 | 11.88 |
|                    | 5240           | 48      | 12.90                                            | 12.86 | 12.78 | 12.85 | 12.76 | 12.86 | 12.71 | 12.89 |
|                    | 5260           | 52      | <u>12.77</u>                                     | 12.61 | 12.63 | 12.75 | 12.51 | 12.66 | 12.59 | 12.72 |
|                    | 5280           | 56      | 12.65                                            | 12.55 | 12.41 | 12.38 | 12.46 | 12.49 | 12.57 | 12.59 |
|                    | 5300           | 60      | 12.47                                            | 12.37 | 12.21 | 12.33 | 12.34 | 12.39 | 12.45 | 12.35 |
|                    | 5320           | 64      | 11.08                                            | 10.93 | 10.95 | 10.96 | 10.92 | 10.95 | 10.94 | 10.84 |
|                    | 5500           | 100     | 9.59                                             | 9.46  | 9.43  | 9.51  | 9.44  | 9.53  | 9.37  | 9.34  |
|                    | 5580           | 116     | <u>13.35</u>                                     | 13.17 | 13.20 | 13.19 | 13.22 | 13.30 | 13.31 | 13.21 |
|                    | 5660           | 132     | 13.13                                            | 13.05 | 13.01 | 12.95 | 12.89 | 12.99 | 12.94 | 13.04 |
|                    | 5720           | 144     | 9.65                                             | 9.58  | 9.61  | 9.48  | 9.55  | 9.47  | 9.44  | 9.47  |
|                    | 5745           | 149     | <u>13.27</u>                                     | 13.03 | 13.09 | 13.21 | 13.11 | 13.13 | 13.10 | 13.16 |
|                    | 5785           | 157     | 12.92                                            | 12.67 | 12.74 | 12.85 | 12.80 | 12.76 | 12.86 | 12.84 |
|                    | 5825           | 165     | 12.81                                            | 12.65 | 12.57 | 12.78 | 12.67 | 12.69 | 12.74 | 12.68 |

Table 8.14 IEEE 802.11n HT20 Average RF Power Ant 2

| Mode               | Freq.<br>(MHz) | Channel | 802.11n HT20 (5 GHz) Conducted Power (dBm) MIMO |       |       |       |       |       |       |       |
|--------------------|----------------|---------|-------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|
|                    |                |         | Data Rate (Mbps)                                |       |       |       |       |       |       |       |
|                    |                |         | 13                                              | 26    | 39    | 52    | 78    | 104   | 117   | 130   |
| 802.11n<br>(HT-20) | 5180           | 36      | 9.80                                            | 9.68  | 9.71  | 9.69  | 9.65  | 9.81  | 9.59  | 9.75  |
|                    | 5200           | 40      | 9.81                                            | 9.66  | 9.73  | 9.71  | 9.74  | 9.66  | 9.73  | 9.66  |
|                    | 5220           | 44      | 9.73                                            | 9.68  | 9.57  | 9.43  | 9.54  | 9.56  | 9.60  | 9.57  |
|                    | 5240           | 48      | 10.11                                           | 10.03 | 9.97  | 9.96  | 9.95  | 9.99  | 10.02 | 9.91  |
|                    | 5260           | 52      | 11.35                                           | 11.25 | 11.19 | 11.15 | 11.23 | 11.27 | 11.23 | 11.25 |
|                    | 5280           | 56      | 11.24                                           | 11.11 | 11.05 | 11.14 | 11.03 | 11.09 | 11.00 | 11.08 |
|                    | 5300           | 60      | 10.72                                           | 10.63 | 10.60 | 10.54 | 10.66 | 10.52 | 10.65 | 10.61 |
|                    | 5320           | 64      | 10.14                                           | 10.00 | 9.99  | 10.00 | 10.06 | 9.99  | 10.02 | 10.05 |
|                    | 5500           | 100     | 6.75                                            | 6.61  | 6.66  | 6.66  | 6.65  | 6.59  | 6.61  | 6.65  |
|                    | 5580           | 116     | 10.38                                           | 10.16 | 10.26 | 10.25 | 10.31 | 10.24 | 10.25 | 10.33 |
|                    | 5660           | 132     | 9.84                                            | 9.77  | 9.70  | 9.67  | 9.68  | 9.65  | 9.69  | 9.66  |
|                    | 5720           | 144     | 8.56                                            | 8.46  | 8.44  | 8.39  | 8.50  | 8.37  | 8.53  | 8.40  |
|                    | 5745           | 149     | 11.15                                           | 11.06 | 11.01 | 10.99 | 11.07 | 11.06 | 11.01 | 11.06 |
|                    | 5785           | 157     | 10.52                                           | 10.48 | 10.40 | 10.34 | 10.46 | 10.29 | 10.43 | 10.46 |
|                    | 5825           | 165     | 10.34                                           | 10.25 | 10.22 | 10.20 | 10.27 | 10.22 | 10.23 | 10.18 |

Table 8.15 IEEE 802.11n HT20 Average RF Power MIMO

| Mode               | Freq.<br>(MHz) | Channel | 802.11n HT40 (5 GHz) Conducted Power (dBm) Ant 1 |       |       |       |       |       |       |       |
|--------------------|----------------|---------|--------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|
|                    |                |         | Data Rate (Mbps)                                 |       |       |       |       |       |       |       |
|                    |                |         | 13.5                                             | 27    | 40.5  | 54    | 81    | 108   | 121.5 | 135   |
| 802.11n<br>(HT-40) | 5190           | 38      | 7.08                                             | 6.99  | 6.89  | 6.92  | 7.06  | 7.00  | 6.91  | 6.88  |
|                    | 5230           | 46      | 11.84                                            | 11.65 | 11.68 | 11.72 | 11.70 | 11.63 | 11.78 | 11.67 |
|                    | 5270           | 54      | 8.67                                             | 8.49  | 8.50  | 8.58  | 8.55  | 8.41  | 8.60  | 8.61  |
|                    | 5310           | 62      | 10.09                                            | 10.07 | 10.03 | 9.90  | 9.85  | 9.96  | 10.06 | 10.02 |
|                    | 5510           | 102     | 7.05                                             | 6.91  | 6.98  | 6.87  | 6.80  | 6.89  | 7.02  | 6.91  |
|                    | 5550           | 110     | 12.26                                            | 12.02 | 12.23 | 12.24 | 12.12 | 12.11 | 12.14 | 12.21 |
|                    | 5670           | 134     | 12.34                                            | 12.20 | 12.29 | 12.18 | 12.32 | 12.17 | 12.22 | 12.30 |
|                    | 5710           | 142     | 12.15                                            | 12.11 | 12.05 | 12.01 | 11.98 | 11.96 | 12.08 | 12.12 |
|                    | 5755           | 151     | 12.07                                            | 11.95 | 11.93 | 11.90 | 11.96 | 11.89 | 11.79 | 11.91 |
|                    | 5795           | 159     | 12.05                                            | 12.01 | 11.93 | 11.86 | 11.97 | 11.89 | 11.98 | 11.88 |

Table 8.16 IEEE 802.11n HT20 Average RF Power Ant 1

| Mode               | Freq.<br>(MHz) | Channel | 802.11n HT40 (5 GHz) Conducted Power (dBm) Ant 2 |       |       |       |       |       |       |       |
|--------------------|----------------|---------|--------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|
|                    |                |         | Data Rate (Mbps)                                 |       |       |       |       |       |       |       |
|                    |                |         | 13.5                                             | 27    | 40.5  | 54    | 81    | 108   | 121.5 | 135   |
| 802.11n<br>(HT-40) | 5190           | 38      | 7.99                                             | 7.95  | 7.74  | 7.94  | 7.90  | 7.85  | 7.71  | 7.93  |
|                    | 5230           | 46      | 11.94                                            | 11.83 | 11.80 | 11.82 | 11.75 | 11.85 | 11.89 | 11.92 |
|                    | 5270           | 54      | 8.71                                             | 8.63  | 8.67  | 8.59  | 8.53  | 8.52  | 8.66  | 8.69  |
|                    | 5310           | 62      | 10.23                                            | 10.10 | 10.12 | 9.95  | 10.21 | 10.05 | 10.21 | 10.09 |
|                    | 5510           | 102     | 7.82                                             | 7.76  | 7.74  | 7.75  | 7.68  | 7.80  | 7.68  | 7.66  |
|                    | 5550           | 110     | 12.95                                            | 12.80 | 12.82 | 12.91 | 12.83 | 12.81 | 12.79 | 12.87 |
|                    | 5670           | 134     | 12.18                                            | 12.05 | 12.12 | 12.13 | 12.14 | 12.06 | 11.87 | 12.04 |
|                    | 5710           | 142     | 11.95                                            | 11.88 | 11.77 | 11.81 | 11.85 | 11.91 | 11.79 | 11.82 |
|                    | 5755           | 151     | 12.51                                            | 12.33 | 12.46 | 12.44 | 12.35 | 12.47 | 12.37 | 12.42 |
|                    | 5795           | 159     | 12.10                                            | 11.95 | 12.08 | 12.02 | 11.93 | 11.93 | 12.01 | 11.91 |

Table 8.17 IEEE 802.11n HT20 Average RF Power Ant 2

| Mode               | Freq.<br>(MHz) | Channel | 802.11n HT40 (5 GHz) Conducted Power (dBm) MIMO |       |       |       |       |       |       |       |
|--------------------|----------------|---------|-------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|
|                    |                |         | Data Rate (Mbps)                                |       |       |       |       |       |       |       |
|                    |                |         | 27                                              | 54    | 81    | 108   | 162   | 216   | 243   | 270   |
| 802.11n<br>(HT-40) | 5190           | 38      | 5.61                                            | 5.47  | 5.57  | 5.47  | 5.48  | 5.48  | 5.57  | 5.50  |
|                    | 5230           | 46      | 10.01                                           | 9.85  | 9.90  | 9.82  | 9.85  | 9.79  | 9.92  | 9.96  |
|                    | 5270           | 54      | 7.38                                            | 7.36  | 7.30  | 7.27  | 7.30  | 7.27  | 7.18  | 7.27  |
|                    | 5310           | 62      | 7.56                                            | 7.46  | 7.48  | 7.46  | 7.46  | 7.46  | 7.41  | 7.44  |
|                    | 5510           | 102     | 4.96                                            | 4.83  | 4.82  | 4.87  | 4.82  | 4.83  | 4.75  | 4.78  |
|                    | 5550           | 110     | 9.97                                            | 9.86  | 9.86  | 9.90  | 9.86  | 9.85  | 9.88  | 9.85  |
|                    | 5670           | 134     | 9.31                                            | 9.15  | 9.07  | 9.23  | 9.20  | 9.21  | 9.14  | 9.25  |
|                    | 5710           | 142     | 9.05                                            | 8.95  | 8.94  | 8.95  | 9.02  | 8.90  | 8.91  | 8.87  |
|                    | 5755           | 151     | 11.00                                           | 10.86 | 10.89 | 10.90 | 10.88 | 10.86 | 10.82 | 10.95 |
|                    | 5795           | 159     | 10.86                                           | 10.79 | 10.77 | 10.78 | 10.82 | 10.70 | 10.74 | 10.74 |

Table 8.18 IEEE 802.11n HT20 Average RF Power MIMO

| Mode                 | Freq.<br>(MHz) | Channel | 802.11ac VHT20 (5 GHz) Conducted Power (dBm) Ant 1 |       |       |       |       |       |       |       |
|----------------------|----------------|---------|----------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|
|                      |                |         | Data Rate (Mbps)                                   |       |       |       |       |       |       |       |
|                      |                |         | 6.5                                                | 13    | 19.5  | 26    | 39    | 52    | 58.5  | 65    |
| 802.11ac<br>(VHT-20) | 5720           | 144     | 12.76                                              | 12.65 | 12.61 | 12.59 | 12.71 | 12.73 | 12.67 | 12.69 |

Table 8.19 IEEE 802.11ac VHT20 Average RF Power Ant 1

| Mode                 | Freq.<br>(MHz) | Channel | 802.11ac VHT20 (5 GHz) Conducted Power (dBm) Ant 2 |       |       |       |       |       |       |       |
|----------------------|----------------|---------|----------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|
|                      |                |         | Data Rate (Mbps)                                   |       |       |       |       |       |       |       |
|                      |                |         | 6.5                                                | 13    | 19.5  | 26    | 39    | 52    | 58.5  | 65    |
| 802.11ac<br>(VHT-20) | 5720           | 144     | 13.28                                              | 13.22 | 13.15 | 13.11 | 13.24 | 13.25 | 13.21 | 13.19 |

Table 8.20 IEEE 802.11ac VHT20 Average RF Power Ant 2

| Mode                 | Freq.<br>(MHz) | Channel | 802.11ac VHT20 (5 GHz) Conducted Power (dBm) MIMO |       |       |       |       |       |       |       |       |
|----------------------|----------------|---------|---------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|
|                      |                |         | Data Rate (Mbps)                                  |       |       |       |       |       |       |       |       |
|                      |                |         | 13                                                | 26    | 39    | 52    | 78    | 104   | 117   | 130   | 156   |
| 802.11ac<br>(VHT-20) | 5720           | 144     | 10.20                                             | 10.15 | 10.08 | 10.14 | 10.10 | 10.16 | 10.14 | 10.14 | 10.07 |

Table 8.21 IEEE 802.11ac VHT20 Average RF Power MIMO

| Mode                 | Freq.<br>(MHz) | Channel | 802.11ac VHT40 (5 GHz) Conducted Power (dBm) Ant 1 |       |       |       |       |       |       |       |
|----------------------|----------------|---------|----------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|
|                      |                |         | Data Rate (Mbps)                                   |       |       |       |       |       |       |       |
|                      |                |         | 13.5                                               | 27    | 40.5  | 54    | 81    | 108   | 121.5 | 135   |
| 802.11ac<br>(VHT-40) | 5710           | 142     | 12.13                                              | 12.05 | 12.01 | 12.11 | 11.98 | 11.96 | 12.03 | 12.09 |

Table 8.22 IEEE 802.11ac VHT40 Average RF Power Ant 1

| Mode                 | Freq.<br>(MHz) | Channel | 802.11ac VHT40 (5 GHz) Conducted Power (dBm) Ant 2 |       |       |       |       |       |       |       |
|----------------------|----------------|---------|----------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|
|                      |                |         | Data Rate (Mbps)                                   |       |       |       |       |       |       |       |
|                      |                |         | 13.5                                               | 27    | 40.5  | 54    | 81    | 108   | 121.5 | 135   |
| 802.11ac<br>(VHT-40) | 5710           | 142     | 12.81                                              | 12.77 | 12.69 | 12.71 | 12.75 | 12.73 | 12.68 | 12.74 |

Table 8.23 IEEE 802.11ac VHT40 Average RF Power Ant 2

| Mode                 | Freq.<br>(MHz) | Channel | 802.11ac VHT40 (5 GHz) Conducted Power (dBm) MIMO |       |       |       |       |       |       |       |       |       |
|----------------------|----------------|---------|---------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                      |                |         | Data Rate (Mbps)                                  |       |       |       |       |       |       |       |       |       |
|                      |                |         | 27                                                | 54    | 81    | 108   | 162   | 216   | 243   | 270   | 324   | 360   |
| 802.11ac<br>(VHT-40) | 5710           | 142     | 10.57                                             | 10.51 | 10.54 | 10.51 | 10.45 | 10.46 | 10.46 | 10.55 | 10.50 | 10.47 |

Table 8.24 IEEE 802.11ac VHT40 Average RF Power MIMO

| Mode                 | Freq.<br>(MHz) | Channel | 802.11ac VHT80 (5 GHz) Conducted Power (dBm) Ant 1 |       |       |       |       |       |        |       |
|----------------------|----------------|---------|----------------------------------------------------|-------|-------|-------|-------|-------|--------|-------|
|                      |                |         | Data Rate (Mbps)                                   |       |       |       |       |       |        |       |
|                      |                |         | 29.25                                              | 58.5  | 87.75 | 117   | 175.5 | 234   | 263.25 | 292.5 |
| 802.11ac<br>(VHT-80) | 5210           | 42      | 8.35                                               | 8.21  | 8.26  | 8.19  | 8.17  | 8.28  | 8.31   | 8.30  |
|                      | 5290           | 58      | 7.09                                               | 7.02  | 6.90  | 6.92  | 6.93  | 7.01  | 6.93   | 7.07  |
|                      | 5530           | 106     | 5.32                                               | 5.13  | 5.16  | 5.26  | 5.20  | 5.18  | 5.15   | 5.29  |
|                      | 5690           | 138     | 10.97                                              | 10.95 | 10.85 | 10.89 | 10.92 | 10.91 | 10.87  | 10.85 |
|                      | 5775           | 155     | 10.56                                              | 10.38 | 10.39 | 10.49 | 10.47 | 10.30 | 10.50  | 10.44 |

Table 8.25 IEEE 802.11ac VHT80 Average RF Power Ant 1

| Mode                 | Freq.<br>(MHz) | Channel | 802.11ac VHT80 (5 GHz) Conducted Power (dBm) Ant 2 |       |       |       |       |       |        |       |
|----------------------|----------------|---------|----------------------------------------------------|-------|-------|-------|-------|-------|--------|-------|
|                      |                |         | Data Rate (Mbps)                                   |       |       |       |       |       |        |       |
|                      |                |         | 29.25                                              | 58.5  | 87.75 | 117   | 175.5 | 234   | 263.25 | 292.5 |
| 802.11ac<br>(VHT-80) | 5210           | 42      | 6.92                                               | 6.90  | 6.66  | 6.81  | 6.74  | 6.78  | 6.76   | 6.89  |
|                      | 5290           | 58      | 9.05                                               | 8.91  | 8.92  | 8.97  | 9.03  | 8.93  | 8.91   | 8.79  |
|                      | 5530           | 106     | 5.67                                               | 5.55  | 5.51  | 5.54  | 5.50  | 5.43  | 5.52   | 5.63  |
|                      | 5690           | 138     | 12.17                                              | 12.05 | 12.01 | 12.11 | 12.15 | 12.13 | 12.14  | 12.09 |
|                      | 5775           | 155     | 11.24                                              | 11.20 | 11.09 | 11.18 | 11.02 | 11.15 | 11.11  | 11.08 |

Table 8.26 IEEE 802.11ac VHT80 Average RF Power Ant 2

| Mode                 | Freq.<br>(MHz) | Channel | 802.11ac VHT80 (5 GHz) Conducted Power (dBm) MIMO |       |       |       |       |       |       |       |       |       |
|----------------------|----------------|---------|---------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                      |                |         | Data Rate (Mbps)                                  |       |       |       |       |       |       |       |       |       |
|                      |                |         | 58.5                                              | 117   | 175.5 | 234   | 351   | 468   | 526.5 | 585   | 702   | 780   |
| 802.11ac<br>(VHT-80) | 5210           | 42      | 6.20                                              | 6.10  | 6.05  | 6.05  | 6.10  | 6.07  | 6.05  | 6.08  | 6.13  | 5.95  |
|                      | 5290           | 58      | 7.89                                              | 7.82  | 7.79  | 7.79  | 7.74  | 7.72  | 7.71  | 7.78  | 7.84  | 7.74  |
|                      | 5530           | 106     | 4.75                                              | 4.64  | 4.52  | 4.55  | 4.67  | 4.65  | 4.63  | 4.67  | 4.71  | 4.63  |
|                      | 5690           | 138     | 10.35                                             | 10.26 | 10.30 | 10.26 | 10.22 | 10.18 | 10.16 | 10.15 | 10.20 | 10.18 |
|                      | 5775           | 155     | 11.58                                             | 11.40 | 11.45 | 11.47 | 11.40 | 11.43 | 11.45 | 11.51 | 11.52 | 11.42 |

Table 8.27 IEEE 802.11ac VHT80 Average RF Power MIMO

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v02r01 and October 2012 / April 2013 FCC/TCB Meeting Notes:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- Output Power and SAR is not required for 802.11 g/n HT20 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjust SAR is  $\leq 1.2$  W/kg.
- The underlined data rate and channel above were tested for SAR.

The average output powers of this device were tested by below configuration.




Figure 8.1 Power Measurement Setup

## 8.2 Bluetooth Conducted Powers

| Channel | Frequency | Frame AVG Output Power (1Mbps) |      | Frame AVG Output Power (2Mbps) |      | Frame AVG Output Power (3Mbps) |      |
|---------|-----------|--------------------------------|------|--------------------------------|------|--------------------------------|------|
|         | (MHz)     | (dBm)                          | (mW) | (dBm)                          | (mW) | (dBm)                          | (mW) |
| Low     | 2402      | 2.86                           | 1.93 | -0.61                          | 0.87 | -1.81                          | 0.66 |
| Mid     | 2441      | 2.92                           | 1.96 | -0.41                          | 0.91 | -1.55                          | 0.70 |
| High    | 2480      | 2.81                           | 1.91 | -0.41                          | 0.91 | -1.49                          | 0.71 |

Table 8.28 Bluetooth Frame Average RF Power

| Channel | Frequency | Frame AVG Output Power (LE) |      |
|---------|-----------|-----------------------------|------|
|         | (MHz)     | (dBm)                       | (mW) |
| Low     | 2402      | 0.09                        | 1.02 |
| Mid     | 2440      | 0.49                        | 1.12 |
| High    | 2480      | 0.45                        | 1.11 |

Table 8.29 Bluetooth LE Frame Average RF Power

### ● Bluetooth Conducted Powers procedures

#### 1. Bluetooth (BDR, EDR)

1) Enter DUT mode in EUT and operate it.

When it operating, The EUT is transmitting at maximum power level and duty cycle fixed.

2) Instruments and EUT were connected like Figure 10.4(A).

3) The maximum output powers of BDR(1 Mbps), EDR(2, 3 Mbps) and each frequency were set by a Bluetooth Tester.

4) Power levels were measured by a Power Meter.

#### 2. Bluetooth (LE)

1) Enter LE mode in EUT and operate it.

When it operating, The EUT is transmitting at maximum power level and duty cycle fixed.

2) Instruments and EUT were connected like Figure 10.4(B).

3) The average conducted output powers of LE and each frequency can measurement according to setting program in EUT.

4) Power levels were measured by a Power Meter.

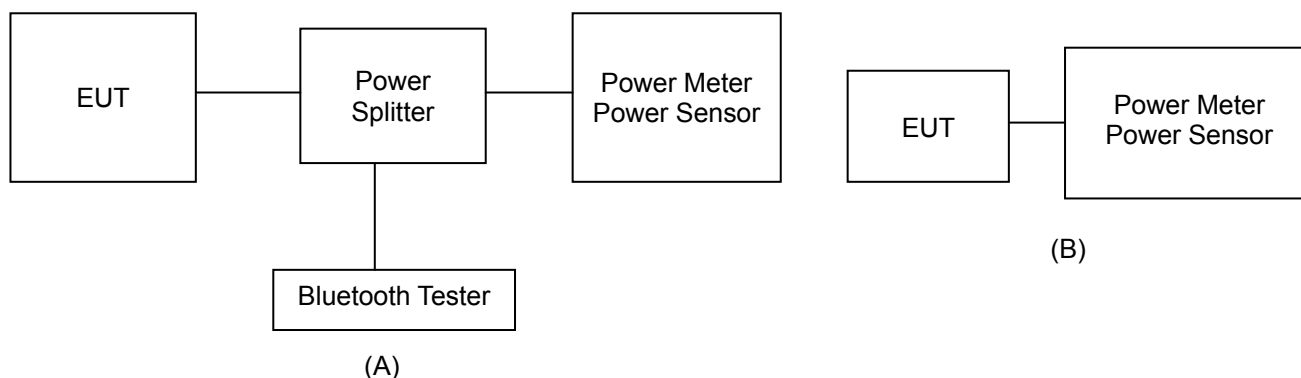


Figure 8.2 Average Power Measurement Setup

The average conducted output powers of Bluetooth were measured using above test setup and a wideband gated RF power meter when the EUT is transmitting at its maximum power level.

## 9. SYSTEM VERIFICATION

### 9.1 Tissue Verification

| MEASURED TISSUE PARAMETERS |                |                   |                  |                          |                                          |                                     |                                            |                                       |                 |                        |
|----------------------------|----------------|-------------------|------------------|--------------------------|------------------------------------------|-------------------------------------|--------------------------------------------|---------------------------------------|-----------------|------------------------|
| Date(s)                    | Tissue Type    | Ambient Temp.[°C] | Liquid Temp.[°C] | Measured Frequency [MHz] | Target Dielectric Constant, $\epsilon_r$ | Target Conductivity, $\sigma$ (S/m) | Measured Dielectric Constant, $\epsilon_r$ | Measured Conductivity, $\sigma$ (S/m) | ErDeviation [%] | $\sigma$ Deviation [%] |
| Apr. 09. 2015              | 2450 Body      | 21.4              | 21.8             | 2412                     | 52.751                                   | 1.914                               | 51.445                                     | 1.899                                 | -2.48           | -0.78                  |
|                            |                |                   |                  | 2422                     | 52.737                                   | 1.923                               | 51.427                                     | 1.911                                 | -2.48           | -0.62                  |
|                            |                |                   |                  | 2437                     | 52.717                                   | 1.938                               | 51.400                                     | 1.928                                 | -2.50           | -0.52                  |
|                            |                |                   |                  | 2450                     | 52.700                                   | 1.950                               | 51.374                                     | 1.944                                 | -2.52           | -0.31                  |
|                            |                |                   |                  | 2452                     | 52.697                                   | 1.953                               | 51.371                                     | 1.946                                 | -2.52           | -0.36                  |
| Apr. 11. 2015              | 5260~5320 Body | 21.3              | 21.7             | 2462                     | 52.685                                   | 1.967                               | 51.351                                     | 1.957                                 | -2.53           | -0.51                  |
|                            |                |                   |                  | 5260                     | 48.930                                   | 5.369                               | 49.454                                     | 5.190                                 | 1.07            | -3.33                  |
|                            |                |                   |                  | 5270                     | 48.920                                   | 5.381                               | 49.419                                     | 5.202                                 | 1.02            | -3.33                  |
|                            |                |                   |                  | 5290                     | 48.890                                   | 5.404                               | 49.361                                     | 5.225                                 | 0.96            | -3.31                  |
|                            |                |                   |                  | 5300                     | 48.880                                   | 5.416                               | 49.326                                     | 5.239                                 | 0.91            | -3.27                  |
| Apr. 12. 2015              | 5500~5825 Body | 21.5              | 21.9             | 5310                     | 48.860                                   | 5.428                               | 49.296                                     | 5.258                                 | 0.89            | -3.13                  |
|                            |                |                   |                  | 5320                     | 48.850                                   | 5.439                               | 49.283                                     | 5.280                                 | 0.89            | -2.92                  |
|                            |                |                   |                  | 5500                     | 48.610                                   | 5.650                               | 48.534                                     | 5.635                                 | -0.16           | -0.27                  |
|                            |                |                   |                  | 5510                     | 48.590                                   | 5.661                               | 48.521                                     | 5.646                                 | -0.14           | -0.26                  |
|                            |                |                   |                  | 5530                     | 48.570                                   | 5.685                               | 48.471                                     | 5.673                                 | -0.20           | -0.21                  |
|                            |                |                   |                  | 5550                     | 48.540                                   | 5.708                               | 48.444                                     | 5.702                                 | -0.20           | -0.11                  |
|                            |                |                   |                  | 5580                     | 48.500                                   | 5.743                               | 48.386                                     | 5.742                                 | -0.24           | -0.02                  |
|                            |                |                   |                  | 5600                     | 48.470                                   | 5.766                               | 48.345                                     | 5.772                                 | -0.26           | 0.10                   |
|                            |                |                   |                  | 5670                     | 48.380                                   | 5.848                               | 48.233                                     | 5.857                                 | -0.30           | 0.15                   |
|                            |                |                   |                  | 5700                     | 48.340                                   | 5.883                               | 48.168                                     | 5.909                                 | -0.36           | 0.44                   |
|                            |                |                   |                  | 5745                     | 48.270                                   | 5.936                               | 48.182                                     | 5.936                                 | -0.18           | 0.00                   |
|                            |                |                   |                  | 5755                     | 48.260                                   | 5.947                               | 48.164                                     | 5.952                                 | -0.20           | 0.08                   |
|                            |                |                   |                  | 5775                     | 48.230                                   | 5.971                               | 48.135                                     | 5.976                                 | -0.20           | 0.08                   |
| Apr. 13. 2015              | 5260~5320 Body | 21.2              | 21.6             | 5785                     | 48.220                                   | 5.982                               | 48.112                                     | 5.988                                 | -0.22           | 0.10                   |
|                            |                |                   |                  | 5795                     | 48.210                                   | 5.994                               | 48.087                                     | 6.002                                 | -0.26           | 0.13                   |
|                            |                |                   |                  | 5800                     | 48.200                                   | 6.000                               | 48.075                                     | 6.010                                 | -0.26           | 0.17                   |
|                            |                |                   |                  | 5825                     | 48.170                                   | 6.029                               | 48.040                                     | 6.051                                 | -0.27           | 0.36                   |
|                            |                |                   |                  | 5260                     | 48.930                                   | 5.369                               | 47.684                                     | 5.294                                 | -2.55           | -1.40                  |
|                            |                |                   |                  | 5270                     | 48.920                                   | 5.381                               | 47.659                                     | 5.309                                 | -2.58           | -1.34                  |
|                            |                |                   |                  | 5290                     | 48.890                                   | 5.404                               | 47.629                                     | 5.334                                 | -2.58           | -1.30                  |
|                            |                |                   |                  | 5300                     | 48.880                                   | 5.416                               | 47.601                                     | 5.346                                 | -2.62           | -1.29                  |
|                            |                |                   |                  | 5310                     | 48.860                                   | 5.428                               | 47.569                                     | 5.362                                 | -2.64           | -1.22                  |
|                            |                |                   |                  | 5320                     | 48.850                                   | 5.439                               | 47.554                                     | 5.378                                 | -2.65           | -1.12                  |

| MEASURED TISSUE PARAMETERS |                |                   |                  |                          |                                          |                                     |                                            |                                       |                 |                        |
|----------------------------|----------------|-------------------|------------------|--------------------------|------------------------------------------|-------------------------------------|--------------------------------------------|---------------------------------------|-----------------|------------------------|
| Date(s)                    | Tissue Type    | Ambient Temp.[°C] | Liquid Temp.[°C] | Measured Frequency [MHz] | Target Dielectric Constant, $\epsilon_r$ | Target Conductivity, $\sigma$ (S/m) | Measured Dielectric Constant, $\epsilon_r$ | Measured Conductivity, $\sigma$ (S/m) | ErDeviation [%] | $\sigma$ Deviation [%] |
| Apr. 14. 2015              | 5500~5800 Body | 21.7              | 22.1             | 5180                     | 49.040                                   | 5.276                               | 49.456                                     | 5.195                                 | 0.85            | -1.54                  |
|                            |                |                   |                  | 5190                     | 49.030                                   | 5.288                               | 49.433                                     | 5.206                                 | 0.82            | -1.55                  |
|                            |                |                   |                  | 5200                     | 49.010                                   | 5.299                               | 49.405                                     | 5.220                                 | 0.81            | -1.49                  |
|                            |                |                   |                  | 5210                     | 49.000                                   | 5.311                               | 49.383                                     | 5.237                                 | 0.78            | -1.39                  |
|                            |                |                   |                  | 5230                     | 48.970                                   | 5.334                               | 49.355                                     | 5.265                                 | 0.79            | -1.29                  |
|                            |                |                   |                  | 5240                     | 48.960                                   | 5.346                               | 49.337                                     | 5.276                                 | 0.77            | -1.31                  |
|                            |                |                   |                  | 5500                     | 48.610                                   | 5.650                               | 48.839                                     | 5.628                                 | 0.47            | -0.39                  |
|                            |                |                   |                  | 5510                     | 48.590                                   | 5.661                               | 48.827                                     | 5.639                                 | 0.49            | -0.39                  |
|                            |                |                   |                  | 5530                     | 48.570                                   | 5.685                               | 48.779                                     | 5.666                                 | 0.43            | -0.33                  |
|                            |                |                   |                  | 5550                     | 48.540                                   | 5.708                               | 48.750                                     | 5.696                                 | 0.43            | -0.21                  |
|                            |                |                   |                  | 5580                     | 48.500                                   | 5.743                               | 48.693                                     | 5.735                                 | 0.40            | -0.14                  |
|                            |                |                   |                  | 5600                     | 48.470                                   | 5.766                               | 48.654                                     | 5.766                                 | 0.38            | 0.00                   |
|                            |                |                   |                  | 5670                     | 48.380                                   | 5.848                               | 48.542                                     | 5.860                                 | 0.33            | 0.21                   |
|                            |                |                   |                  | 5700                     | 48.340                                   | 5.883                               | 48.478                                     | 5.904                                 | 0.29            | 0.36                   |
|                            |                |                   |                  | 5745                     | 48.270                                   | 5.936                               | 48.349                                     | 5.938                                 | 0.16            | 0.03                   |
|                            |                |                   |                  | 5755                     | 48.260                                   | 5.947                               | 48.330                                     | 5.954                                 | 0.15            | 0.12                   |
|                            |                |                   |                  | 5775                     | 48.230                                   | 5.971                               | 48.302                                     | 5.978                                 | 0.15            | 0.12                   |
|                            |                |                   |                  | 5785                     | 48.220                                   | 5.982                               | 48.278                                     | 5.991                                 | 0.12            | 0.15                   |
|                            |                |                   |                  | 5795                     | 48.210                                   | 5.994                               | 48.254                                     | 6.006                                 | 0.09            | 0.20                   |
|                            |                |                   |                  | 5800                     | 48.200                                   | 6.000                               | 48.243                                     | 6.014                                 | 0.09            | 0.23                   |
|                            |                |                   |                  | 5825                     | 48.170                                   | 6.029                               | 48.210                                     | 6.055                                 | 0.08            | 0.43                   |

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB 865664 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

### Measurement Procedure for Tissue verification:

- 1) The network analyzer and probe system was configured and calibrated.
- 2) The probe was immersed in the sample which was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity, for example from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\epsilon_r\epsilon_0}{[\ln(b/a)]^2} \int_a^b \int_a^b \int_0^\pi \cos\phi' \frac{\exp[-j\omega r(\mu_0\epsilon_r\epsilon_0)^{1/2}]}{r} d\phi' d\rho' d\rho$$

where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively,  $r^2 = \rho^2 + \rho'^2 - 2\rho\rho'\cos\phi'$ ,  $\omega$  is the angular frequency, and  $j = \sqrt{-1}$ .

## 9.2 Test System Verification

Prior to assessment, the system is verified to the  $\pm 10\%$  of the specifications at 2450 MHz and 5GHz by using the SAR Dipole kit(s). (Graphic Plots Attached)


**Table 11.1 System Verification Results**

| SYSTEM DIPOLE VERIFICATION TARGET & MEASURED |             |                  |               |             |                   |                  |           |                  |                                     |                                   |                                         |               |
|----------------------------------------------|-------------|------------------|---------------|-------------|-------------------|------------------|-----------|------------------|-------------------------------------|-----------------------------------|-----------------------------------------|---------------|
| SAR System #                                 | Freq. [MHz] | SAR Dipole kits  | Date(s)       | Tissue Type | Ambient Temp.[°C] | Liquid Temp.[°C] | Probe S/N | Input Power (mW) | 1 W Target SAR <sub>1g</sub> (W/kg) | Measured SAR <sub>1g</sub> (W/kg) | 1 W Normalized SAR <sub>1g</sub> (W/kg) | Deviation [%] |
| B                                            | 2450        | D2450V2, SN: 920 | Apr. 09. 2015 | Body        | 21.4              | 21.8             | 7337      | 250              | 51.4                                | 12.30                             | 49.2                                    | -4.28         |
| B                                            | 5300        | D5GV2, SN: 1212  | Apr. 11. 2015 | Body        | 21.3              | 21.7             | 7337      | 100              | 73.4                                | 7.23                              | 72.3                                    | -1.50         |
| B                                            | 5500        | D5GV2, SN: 1212  | Apr. 12. 2015 | Body        | 21.5              | 21.9             | 7337      | 100              | 79.5                                | 7.84                              | 78.4                                    | -1.38         |
| B                                            | 5600        | D5GV2, SN: 1212  | Apr. 12. 2015 | Body        | 21.5              | 21.9             | 7337      | 100              | 77.4                                | 7.86                              | 78.6                                    | 1.55          |
| B                                            | 5800        | D5GV2, SN: 1212  | Apr. 12. 2015 | Body        | 21.5              | 21.9             | 7337      | 100              | 75.6                                | 7.42                              | 74.2                                    | -1.85         |
| B                                            | 5300        | D5GV2, SN: 1212  | Apr. 13. 2015 | Body        | 21.2              | 21.6             | 7337      | 100              | 73.4                                | 7.35                              | 73.5                                    | 0.14          |
| B                                            | 5500        | D5GV2, SN: 1212  | Apr. 14. 2015 | Body        | 21.7              | 22.1             | 7337      | 100              | 79.5                                | 7.79                              | 77.9                                    | -2.01         |
| B                                            | 5600        | D5GV2, SN: 1212  | Apr. 14. 2015 | Body        | 21.7              | 22.1             | 7337      | 100              | 77.4                                | 7.65                              | 76.5                                    | -1.16         |
| B                                            | 5800        | D5GV2, SN: 1212  | Apr. 14. 2015 | Body        | 21.7              | 22.1             | 7337      | 100              | 75.6                                | 7.59                              | 75.9                                    | 0.40          |

Note1 : System Verification was measured with input 250 mW(2450 MHz), 100 mW(5200-5800 MHz) and normalized to 1W.

Note2 : To confirm the proper SAR liquid depth, the z-axis plots from the system verifications were included since the system verifications were performed using the same liquid, probe and DAE as the SAR tests in the same time period.

Note3: Full system validation status and results can be found in Attachment 3.

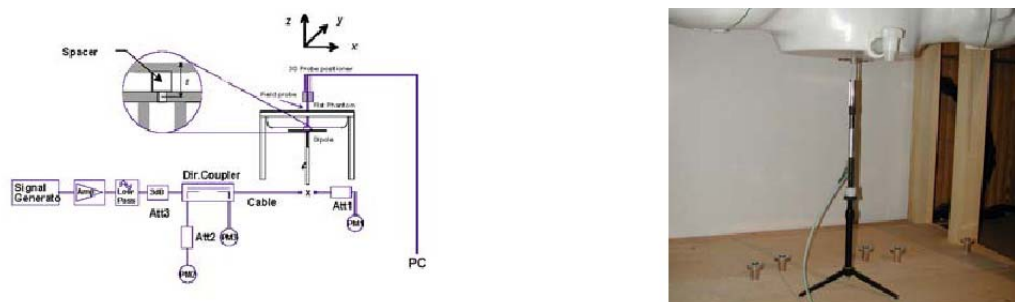

**Figure 9.1 Dipole Verification Test Setup Diagram & Photo**

## 10. SAR TEST RESULTS

### 10.1 Body SAR Results

Table 10.1 DTS Body SAR

#### MEASUREMENT RESULTS

| FREQUENCY                                                                                                 |    | Mode/<br>Antenna | Service | Maximum<br>Allowed<br>Power<br>[dBm] | Conducted<br>Power<br>[dBm] | Drift Power<br>[dB] | Phantom<br>Position | Device<br>Serial<br>Number | Data<br>Rate<br>[Mbps] | Duty<br>Cycle                                   | 1g<br>SAR<br>(W/kg) | Scaling<br>Factor<br>(Power) | Scaling<br>Factor<br>(Duty<br>Cycle) | 1g<br>Scaled<br>SAR<br>(W/kg) | Plots<br># |
|-----------------------------------------------------------------------------------------------------------|----|------------------|---------|--------------------------------------|-----------------------------|---------------------|---------------------|----------------------------|------------------------|-------------------------------------------------|---------------------|------------------------------|--------------------------------------|-------------------------------|------------|
| MHz                                                                                                       | Ch |                  |         |                                      |                             |                     |                     |                            |                        |                                                 |                     |                              |                                      |                               |            |
| 2462                                                                                                      | 11 | 802.11b<br>Ant.1 | DSSS    | 14.00                                | 13.57                       | 0.000               | 0 mm<br>[Rear]      | FCC<br>#1                  | 1                      | 98.8                                            | 0.069               | 1.104                        | 1.012                                | 0.077                         | A1         |
| 2462                                                                                                      | 11 | 802.11b<br>Ant.2 | DSSS    | 11.50                                | 11.49                       | 0.000               | 0 mm<br>[Rear]      | FCC<br>#1                  | 1                      | 98.8                                            | 0.114               | 1.002                        | 1.012                                | 0.116                         | A2         |
| ANSI / IEEE C95.1-2005- SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population Exposure |    |                  |         |                                      |                             |                     |                     |                            |                        | Body<br>1.6 W/kg (mW/g)<br>averaged over 1 gram |                     |                              |                                      |                               |            |

Note(s):

1. The rear with touch configuration was only tested since only the rear is touched to human body in normal operation condition of this device.
2. Highest reported SAR is  $\leq 0.4$  W/kg. Therefore, further SAR measurements within this exposure condition are not required.
3. Highest reported SAR is  $> 0.4$  W/kg. Due to the highest reported SAR for this test position, other test position is Head exposure condition were evaluated until a SAR  $\leq 0.8$  W/kg was reported.
4. Test for a second channel is required when the reported SAR for this test position was  $> 0.8$  W/kg.
5. MIMO SAR was not performed since maximum allowed MIMO powers (SUM power of each antenna's) are equal or less than SISO power's.

#### Adjusted SAR results for OFDM SAR

| FREQUENCY                                                                                                 |    | Mode/ Antenna | Service | Maximum<br>Allowed<br>Power<br>[dBm] | 1g<br>Scaled<br>SAR<br>(W/kg) | FREQUENCY<br>[MHz] | Mode            | Service | Maximum<br>Allowed<br>Power<br>[dBm] | Ratio of<br>OFDM to<br>DSSS                     | 1g<br>Adjusted<br>SAR<br>(W/kg) | Determine OFDM<br>SAR |
|-----------------------------------------------------------------------------------------------------------|----|---------------|---------|--------------------------------------|-------------------------------|--------------------|-----------------|---------|--------------------------------------|-------------------------------------------------|---------------------------------|-----------------------|
| MHz                                                                                                       | Ch |               |         |                                      |                               |                    |                 |         |                                      |                                                 |                                 |                       |
| 2462                                                                                                      | 11 | 802.11b Ant.1 | DSSS    | 14.00                                | 0.077                         | 2437               | 802.11g         | OFDM    | 14.00                                | 1.000                                           | 0.077                           | X                     |
| 2462                                                                                                      | 11 | 802.11b Ant.2 | DSSS    | 11.50                                | 0.116                         | 2437               | 802.11g         | OFDM    | 13.00                                | 1.413                                           | 0.164                           | X                     |
| 2462                                                                                                      | 11 | 802.11b Ant.1 | DSSS    | 14.00                                | 0.077                         | 2437               | 802.11n<br>HT20 | OFDM    | 14.00                                | 1.000                                           | 0.077                           | X                     |
| 2462                                                                                                      | 11 | 802.11b Ant.2 | DSSS    | 11.50                                | 0.116                         | 2437               | 802.11n<br>HT20 | OFDM    | 13.00                                | 1.413                                           | 0.164                           | X                     |
| 2462                                                                                                      | 11 | 802.11b Ant.1 | DSSS    | 14.00                                | 0.077                         | 2437               | 802.11n<br>HT40 | OFDM    | 14.50                                | 1.122                                           | 0.086                           | X                     |
| 2462                                                                                                      | 11 | 802.11b Ant.2 | DSSS    | 11.50                                | 0.116                         | 2437               | 802.11n<br>HT40 | OFDM    | 11.00                                | 0.891                                           | 0.103                           | X                     |
| ANSI / IEEE C95.1-2005- SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population Exposure |    |               |         |                                      |                               |                    |                 |         |                                      | Body<br>1.6 W/kg (mW/g)<br>averaged over 1 gram |                                 |                       |

Table 10.2 UNII Body SAR

## MEASUREMENT RESULTS

| FREQUENCY                                                                                                 |     | Mode/ Antenna      | Service | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Drift Power [dB] | Phantom Position | Device Serial Number | Data Rate [Mbps] | Duty Cycle                                      | 1g SAR (W/kg) | Scaling Factor (Power) | Scaling Factor (Duty Cycle) | 1g Scaled SAR (W/kg) | Plots # |
|-----------------------------------------------------------------------------------------------------------|-----|--------------------|---------|-----------------------------|-----------------------|------------------|------------------|----------------------|------------------|-------------------------------------------------|---------------|------------------------|-----------------------------|----------------------|---------|
| MHz                                                                                                       | Ch  |                    |         |                             |                       |                  |                  |                      |                  |                                                 |               |                        |                             |                      |         |
| 5260                                                                                                      | 52  | 802.11a Ant.1      | OFDM    | 13.50                       | 13.44                 | 0.000            | 0 mm [Rear]      | FCC #1               | 6                | 98.7                                            | 0.322         | 1.104                  | 1.013                       | 0.331                | A3      |
| 5580                                                                                                      | 116 | 802.11a Ant.1      | OFDM    | 13.00                       | 12.81                 | 0.000            | 0 mm [Rear]      | FCC #1               | 6                | 98.7                                            | 0.200         | 1.045                  | 1.013                       | 0.212                | A4      |
| 5745                                                                                                      | 149 | 802.11a Ant.1      | OFDM    | 12.50                       | 12.12                 | 0.000            | 0 mm [Rear]      | FCC #1               | 6                | 98.7                                            | 0.243         | 1.091                  | 1.013                       | 0.269                | A5      |
| 5260                                                                                                      | 52  | 802.11n HT20 Ant.2 | OFDM    | 13.00                       | 12.77                 | -0.090           | 0 mm [Rear]      | FCC #1               | 6.5              | 98.6                                            | 0.400         | 1.054                  | 1.014                       | 0.428                | A6      |
| 5580                                                                                                      | 116 | 802.11n HT20 Ant.2 | OFDM    | 13.50                       | 13.35                 | 0.000            | 0 mm [Rear]      | FCC #1               | 6.5              | 98.6                                            | 0.417         | 1.035                  | 1.014                       | 0.438                | A7      |
| 5745                                                                                                      | 149 | 802.11n HT20 Ant.2 | OFDM    | 13.50                       | 13.27                 | 0.000            | 0 mm [Rear]      | FCC #1               | 6.5              | 98.6                                            | 0.413         | 1.054                  | 1.014                       | 0.441                | A8      |
| ANSI / IEEE C95.1-2005- SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population Exposure |     |                    |         |                             |                       |                  |                  |                      |                  | Body<br>1.6 W/kg (mW/g)<br>averaged over 1 gram |               |                        |                             |                      |         |

Note(s):

1. The rear with touch configuration was only tested since only the rear is touched to human body in normal operation condition of this device.
2. Highest reported SAR is  $\leq 0.4$  W/kg. Therefore, further SAR measurements within this exposure condition are not required.
3. Highest reported SAR is  $> 0.4$  W/kg. Due to the highest reported SAR for this test position, other test position is Head exposure condition were evaluated until a SAR  $\leq 0.8$  W/kg was reported.
4. Test for a second channel is required when the reported SAR for this test position was  $> 0.8$  W/kg.
5. MIMO SAR was not performed since maximum allowed MIMO powers (SUM power of each antenna's) are equal or less than SISO power's.

## Adjusted SAR results for UNII-1 and UNII-2A SAR

| FREQUENCY                                                                                                 |    | Mode/ Antenna      | Service | Maximum Allowed Power [dBm] | 1g Scaled SAR (W/kg) | FREQUENCY [MHz] | Mode                                            | Service | Maximum Allowed Power [dBm] | Adjusted Factor | 1g Adjusted SAR (W/kg) | SAR for the band with lower maximum output power |
|-----------------------------------------------------------------------------------------------------------|----|--------------------|---------|-----------------------------|----------------------|-----------------|-------------------------------------------------|---------|-----------------------------|-----------------|------------------------|--------------------------------------------------|
| MHz                                                                                                       | Ch |                    |         |                             |                      |                 |                                                 |         |                             |                 |                        |                                                  |
| 5260                                                                                                      | 52 | 802.11a Ant.1      | OFDM    | 13.50                       | 0.331                | 5240            | 802.11a                                         | OFDM    | 12.50                       | 0.794           | 0.263                  | X                                                |
| 5260                                                                                                      | 52 | 802.11n HT20 Ant.2 | OFDM    | 13.00                       | 0.428                | 5240            | 802.11n HT20                                    | OFDM    | 13.00                       | 1.000           | 0.428                  | X                                                |
| ANSI / IEEE C95.1-2005- SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population Exposure |    |                    |         |                             |                      |                 | Body<br>1.6 W/kg (mW/g)<br>averaged over 1 gram |         |                             |                 |                        |                                                  |

Note(s):

1. U-NII-1 and U-NII-2A Bands: When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

## 10.2 SAR Test Notes

### General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2003, and FCC KDB Publication 447498 D01v05r02.
2. Batteries are fully charged at the beginning of the SAR measurements. A standard battery was used for all SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v05r02.
6. The front with touch configuration was only tested since the front is touched to human body in normal operation condition of this device.
7. Per FCC KDB 865664 D01v01r03, variability SAR tests were performed when the measured SAR results for a frequency band were greater than 0.8 W/kg.

### WLAN Notes:

1. The initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4$  W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r01 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output and the adjusted SAR is  $\leq 1.2$  W/kg.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r01 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg.
4. When the maximum reported 1g averaged SAR  $\leq 0.8$  W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was  $\leq 1.20$  W/kg or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor to determine compliance.
6. MIMO SAR was not performed since maximum allowed MIMO powers (SUM power of each antenna's) are equal or less than SISO power's.

## 11. FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

### 11.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v05r02 are applicable to handsets with built-in unlicensed transmitters such as 802.11b/g/n and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

### 11.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v05r02 IV.C.1.iii and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is  $\leq 1.6$  W/kg. When standalone SAR is not required to be measured, per FCC KDB 447498 D01v05r02 4.3.2 2), the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5} * \frac{(\text{Max Power of channel, mW})}{\text{Min. Separation Distance, mm}}$$

Table 11.1 Estimated SAR

| Mode      | Frequency | Maximum Allowed Power |      | Separation Distance (Body) | Estimated SAR (Body) |
|-----------|-----------|-----------------------|------|----------------------------|----------------------|
|           | [MHz]     | [dBm]                 | [mW] | [mm]                       | [W/kg]               |
| Bluetooth | 2480      | 3.00                  | 2    | 5                          | 0.084                |

Note : Held-to ear configurations are not applicable to Bluetooth operations and therefore were not considered for simultaneous transmission. Per KDB Publication 447498 D01v05, the maximum power of the channel was rounded to the nearest mW before calculation.

### 11.3 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v05r02, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the DUT are shown in Figure 11.1 and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.



Figure 11.1 Simultaneous Transmission Paths

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v05r02.

Table 11.2 Simultaneous Transmission Scenarios

| No.                                                                                                                                                                                                                                               | Capable Transmit Configuration        | Body | Note                                                                                                                                                         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1                                                                                                                                                                                                                                                 | W-LAN 2.4 GHz Ant.2 + Bluetooth Ant.1 | Yes  | Bluetooth transmitter does simultaneous transmit with the W-LAN transmitter. When the BT is turn on, it transmits on Ant.1 and the W-LAN transmits on Ant.2. |
| 2                                                                                                                                                                                                                                                 | W-LAN 5 GHz Ant.2 + Bluetooth Ant.1   | Yes  |                                                                                                                                                              |
| Notes:<br>1. This device supports only simultaneous transmission between BT Ant.1 & W-LAN Ant.2.<br>2. This device supports 2x2 MIMO Tx for W-LAN 802.11n/ac. Each W-LAN antenna can transmit independently or together when operating with MIMO. |                                       |      |                                                                                                                                                              |

## 11.4 Body Simultaneous Transmission Analysis

Table 11.3 Simultaneous Transmission Scenario with Bluetooth

| Configuration | Mode          | W-LAN Ant.2<br>SAR<br>(W/kg) | Bluetooth Ant.1<br>SAR<br>(W/kg) | ΣSAR<br>(W/kg) |
|---------------|---------------|------------------------------|----------------------------------|----------------|
| Rear Side     | W-LAN 2.4 GHz | 0.116                        | 0.084                            | 0.200          |
| Rear Side     | W-LAN 5.3 GHz | 0.428                        | 0.084                            | 0.512          |
| Rear Side     | W-LAN 5.6 GHz | 0.438                        | 0.084                            | 0.522          |
| Rear Side     | W-LAN 5.8 GHz | 0.441                        | 0.084                            | <b>0.525</b>   |

Note: Bluetooth SAR was not required to be measured per FCC KDB 447498 D01v05r02. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

## 12. SAR MEASUREMENT VARIABILITY

---

### 12.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r03, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

*SAR Measurement Variability was assessed using the following procedures for each frequency band:*

1. When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.
2. A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).
3. A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .
4. Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg

### 12.2 Measurement Uncertainty

The measured SAR was  $< 1.5$  W/kg for all frequency bands. Therefore, per KDB Publication 865664D01v01r03, the standard measurement uncertainty analysis per IEEE 1528-2003 was not required.

### 13. IEEE P1528 –MEASUREMENT UNCERTAINTIES

#### 2450 MHz Body

| Error Description                    | Uncertainty value $\pm\%$ | Probability Distribution | Divisor    | (Ci) 1g | Standard (1g)                   | vi 2 or Veff |
|--------------------------------------|---------------------------|--------------------------|------------|---------|---------------------------------|--------------|
| <b>Measurement System</b>            |                           |                          |            |         |                                 |              |
| Probe calibration                    | $\pm 6.0$                 | Normal                   | 1          | 1       | $\pm 6.0 \%$                    | $\infty$     |
| Axial isotropy                       | $\pm 4.7$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 2.714 \%$                  | $\infty$     |
| Hemispherical isotropy               | $\pm 9.6$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 5.543 \%$                  | $\infty$     |
| Boundary Effects                     | $\pm 0.8$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 0.462 \%$                  | $\infty$     |
| Probe Linearity                      | $\pm 4.7$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 2.714 \%$                  | $\infty$     |
| Detection limits                     | $\pm 0.25$                | Rectangular              | $\sqrt{3}$ | 1       | $\pm 0.144 \%$                  | $\infty$     |
| Readout Electronics                  | $\pm 1.0$                 | Normal                   | 1          | 1       | $\pm 1.0 \%$                    | $\infty$     |
| Response time                        | $\pm 0.8$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 0.462 \%$                  | $\infty$     |
| Integration time                     | $\pm 2.6$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 1.501 \%$                  | $\infty$     |
| RF Ambient Conditions                | $\pm 3.0$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 1.732 \%$                  | $\infty$     |
| Probe Positioner                     | $\pm 0.4$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 0.231 \%$                  | $\infty$     |
| Probe Positioning                    | $\pm 2.9$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 1.674 \%$                  | $\infty$     |
| Algorithms for Max. SAR Eval.        | $\pm 1.0$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 0.577 \%$                  | $\infty$     |
| <b>Test Sample Related</b>           |                           |                          |            |         |                                 |              |
| Device Positioning                   | $\pm 2.9$                 | Normal                   | 1          | 1       | $\pm 2.9 \%$                    | 145          |
| Device Holder                        | $\pm 3.6$                 | Normal                   | 1          | 1       | $\pm 3.6 \%$                    | 5            |
| Power Drift                          | $\pm 5.0$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 2.887 \%$                  | $\infty$     |
| <b>Physical Parameters</b>           |                           |                          |            |         |                                 |              |
| Phantom Shell                        | $\pm 4.0$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 2.31 \%$                   | $\infty$     |
| Liquid conductivity (Target)         | $\pm 5.0$                 | Rectangular              | $\sqrt{3}$ | 0.64    | $\pm 2.887 \%$                  | $\infty$     |
| Liquid conductivity (Meas.)          | $\pm 4.0$                 | Normal                   | 1          | 0.64    | $\pm 4.0 \%$                    | $\infty$     |
| Liquid permittivity (Target)         | $\pm 5.0$                 | Rectangular              | $\sqrt{3}$ | 0.6     | $\pm 2.887 \%$                  | $\infty$     |
| Liquid permittivity (Meas.)          | $\pm 4.2$                 | Normal                   | 1          | 0.6     | $\pm 4.2 \%$                    | $\infty$     |
| <b>Combined Standard Uncertainty</b> |                           | RSS                      |            |         | <b><math>\pm 12.1 \%</math></b> | 330          |
| <b>Expanded Uncertainty (k=2)</b>    |                           |                          |            |         | <b><math>\pm 24.2 \%</math></b> |              |

The above measurement uncertainties are according to IEEE P1528 (2003)

**5200 MHz Body**

| Error Description                    | Uncertainty value $\pm\%$ | Probability Distribution | Divisor    | (Ci) 1g | Standard (1g)                   | vi 2 or Veff |
|--------------------------------------|---------------------------|--------------------------|------------|---------|---------------------------------|--------------|
| <b>Measurement System</b>            |                           |                          |            |         |                                 |              |
| Probe calibration                    | $\pm 6.55$                | Normal                   | 1          | 1       | $\pm 6.55 \%$                   | $\infty$     |
| Axial isotropy                       | $\pm 4.7$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 2.714 \%$                  | $\infty$     |
| Hemispherical isotropy               | $\pm 9.6$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 5.543 \%$                  | $\infty$     |
| Boundary Effects                     | $\pm 0.8$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 0.462 \%$                  | $\infty$     |
| Probe Linearity                      | $\pm 4.7$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 2.714 \%$                  | $\infty$     |
| Detection limits                     | $\pm 0.25$                | Rectangular              | $\sqrt{3}$ | 1       | $\pm 0.144 \%$                  | $\infty$     |
| Readout Electronics                  | $\pm 1.0$                 | Normal                   | 1          | 1       | $\pm 1.0 \%$                    | $\infty$     |
| Response time                        | $\pm 0.8$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 0.462 \%$                  | $\infty$     |
| Integration time                     | $\pm 2.6$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 1.501 \%$                  | $\infty$     |
| RF Ambient Conditions                | $\pm 3.0$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 1.732 \%$                  | $\infty$     |
| Probe Positioner                     | $\pm 0.4$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 0.231 \%$                  | $\infty$     |
| Probe Positioning                    | $\pm 2.9$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 1.674 \%$                  | $\infty$     |
| Algorithms for Max. SAR Eval.        | $\pm 1.0$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 0.577 \%$                  | $\infty$     |
| <b>Test Sample Related</b>           |                           |                          |            |         |                                 |              |
| Device Positioning                   | $\pm 2.9$                 | Normal                   | 1          | 1       | $\pm 2.9 \%$                    | 145          |
| Device Holder                        | $\pm 3.6$                 | Normal                   | 1          | 1       | $\pm 3.6 \%$                    | 5            |
| Power Drift                          | $\pm 5.0$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 2.887 \%$                  | $\infty$     |
| <b>Physical Parameters</b>           |                           |                          |            |         |                                 |              |
| Phantom Shell                        | $\pm 4.0$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 2.31 \%$                   | $\infty$     |
| Liquid conductivity (Target)         | $\pm 5.0$                 | Rectangular              | $\sqrt{3}$ | 0.64    | $\pm 2.887 \%$                  | $\infty$     |
| Liquid conductivity (Meas.)          | $\pm 4.3$                 | Normal                   | 1          | 0.64    | $\pm 4.3 \%$                    | $\infty$     |
| Liquid permittivity (Target)         | $\pm 5.0$                 | Rectangular              | $\sqrt{3}$ | 0.6     | $\pm 2.887 \%$                  | $\infty$     |
| Liquid permittivity (Meas.)          | $\pm 3.8$                 | Normal                   | 1          | 0.6     | $\pm 3.8 \%$                    | $\infty$     |
| <b>Combined Standard Uncertainty</b> |                           | RSS                      |            |         | <b><math>\pm 12.3 \%</math></b> | 330          |
| <b>Expanded Uncertainty (k=2)</b>    |                           |                          |            |         | <b><math>\pm 24.6 \%</math></b> |              |

The above measurement uncertainties are according to IEEE P1528 (2003)

**5300 MHz Body**

| Error Description                    | Uncertainty value $\pm\%$ | Probability Distribution | Divisor    | (Ci) 1g | Standard (1g)                   | vi 2 or Veff |
|--------------------------------------|---------------------------|--------------------------|------------|---------|---------------------------------|--------------|
| <b>Measurement System</b>            |                           |                          |            |         |                                 |              |
| Probe calibration                    | $\pm 6.55$                | Normal                   | 1          | 1       | $\pm 6.55 \%$                   | $\infty$     |
| Axial isotropy                       | $\pm 4.7$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 2.714 \%$                  | $\infty$     |
| Hemispherical isotropy               | $\pm 9.6$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 5.543 \%$                  | $\infty$     |
| Boundary Effects                     | $\pm 0.8$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 0.462 \%$                  | $\infty$     |
| Probe Linearity                      | $\pm 4.7$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 2.714 \%$                  | $\infty$     |
| Detection limits                     | $\pm 0.25$                | Rectangular              | $\sqrt{3}$ | 1       | $\pm 0.144 \%$                  | $\infty$     |
| Readout Electronics                  | $\pm 1.0$                 | Normal                   | 1          | 1       | $\pm 1.0 \%$                    | $\infty$     |
| Response time                        | $\pm 0.8$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 0.462 \%$                  | $\infty$     |
| Integration time                     | $\pm 2.6$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 1.501 \%$                  | $\infty$     |
| RF Ambient Conditions                | $\pm 3.0$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 1.732 \%$                  | $\infty$     |
| Probe Positioner                     | $\pm 0.4$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 0.231 \%$                  | $\infty$     |
| Probe Positioning                    | $\pm 2.9$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 1.674 \%$                  | $\infty$     |
| Algorithms for Max. SAR Eval.        | $\pm 1.0$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 0.577 \%$                  | $\infty$     |
| <b>Test Sample Related</b>           |                           |                          |            |         |                                 |              |
| Device Positioning                   | $\pm 2.9$                 | Normal                   | 1          | 1       | $\pm 2.9 \%$                    | 145          |
| Device Holder                        | $\pm 3.6$                 | Normal                   | 1          | 1       | $\pm 3.6 \%$                    | 5            |
| Power Drift                          | $\pm 5.0$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 2.887 \%$                  | $\infty$     |
| <b>Physical Parameters</b>           |                           |                          |            |         |                                 |              |
| Phantom Shell                        | $\pm 4.0$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 2.31 \%$                   | $\infty$     |
| Liquid conductivity (Target)         | $\pm 5.0$                 | Rectangular              | $\sqrt{3}$ | 0.64    | $\pm 2.887 \%$                  | $\infty$     |
| Liquid conductivity (Meas.)          | $\pm 4.4$                 | Normal                   | 1          | 0.64    | $\pm 4.4 \%$                    | $\infty$     |
| Liquid permittivity (Target)         | $\pm 5.0$                 | Rectangular              | $\sqrt{3}$ | 0.6     | $\pm 2.887 \%$                  | $\infty$     |
| Liquid permittivity (Meas.)          | $\pm 4.8$                 | Normal                   | 1          | 0.6     | $\pm 4.8 \%$                    | $\infty$     |
| <b>Combined Standard Uncertainty</b> |                           | RSS                      |            |         | <b><math>\pm 12.5 \%</math></b> | 330          |
| <b>Expanded Uncertainty (k=2)</b>    |                           |                          |            |         | <b><math>\pm 25.0 \%</math></b> |              |

The above measurement uncertainties are according to IEEE P1528 (2003)

**5500 MHz Body**

| Error Description                    | Uncertainty value $\pm\%$ | Probability Distribution | Divisor    | (Ci) 1g | Standard (1g)                   | vi 2 or Veff |
|--------------------------------------|---------------------------|--------------------------|------------|---------|---------------------------------|--------------|
| <b>Measurement System</b>            |                           |                          |            |         |                                 |              |
| Probe calibration                    | $\pm 6.55$                | Normal                   | 1          | 1       | $\pm 6.55 \%$                   | $\infty$     |
| Axial isotropy                       | $\pm 4.7$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 2.714 \%$                  | $\infty$     |
| Hemispherical isotropy               | $\pm 9.6$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 5.543 \%$                  | $\infty$     |
| Boundary Effects                     | $\pm 0.8$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 0.462 \%$                  | $\infty$     |
| Probe Linearity                      | $\pm 4.7$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 2.714 \%$                  | $\infty$     |
| Detection limits                     | $\pm 0.25$                | Rectangular              | $\sqrt{3}$ | 1       | $\pm 0.144 \%$                  | $\infty$     |
| Readout Electronics                  | $\pm 1.0$                 | Normal                   | 1          | 1       | $\pm 1.0 \%$                    | $\infty$     |
| Response time                        | $\pm 0.8$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 0.462 \%$                  | $\infty$     |
| Integration time                     | $\pm 2.6$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 1.501 \%$                  | $\infty$     |
| RF Ambient Conditions                | $\pm 3.0$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 1.732 \%$                  | $\infty$     |
| Probe Positioner                     | $\pm 0.4$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 0.231 \%$                  | $\infty$     |
| Probe Positioning                    | $\pm 2.9$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 1.674 \%$                  | $\infty$     |
| Algorithms for Max. SAR Eval.        | $\pm 1.0$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 0.577 \%$                  | $\infty$     |
| <b>Test Sample Related</b>           |                           |                          |            |         |                                 |              |
| Device Positioning                   | $\pm 2.9$                 | Normal                   | 1          | 1       | $\pm 2.9 \%$                    | 145          |
| Device Holder                        | $\pm 3.6$                 | Normal                   | 1          | 1       | $\pm 3.6 \%$                    | 5            |
| Power Drift                          | $\pm 5.0$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 2.887 \%$                  | $\infty$     |
| <b>Physical Parameters</b>           |                           |                          |            |         |                                 |              |
| Phantom Shell                        | $\pm 4.0$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 2.31 \%$                   | $\infty$     |
| Liquid conductivity (Target)         | $\pm 5.0$                 | Rectangular              | $\sqrt{3}$ | 0.64    | $\pm 2.887 \%$                  | $\infty$     |
| Liquid conductivity (Meas.)          | $\pm 3.9$                 | Normal                   | 1          | 0.64    | $\pm 3.9 \%$                    | $\infty$     |
| Liquid permittivity (Target)         | $\pm 5.0$                 | Rectangular              | $\sqrt{3}$ | 0.6     | $\pm 2.887 \%$                  | $\infty$     |
| Liquid permittivity (Meas.)          | $\pm 4.2$                 | Normal                   | 1          | 0.6     | $\pm 4.2 \%$                    | $\infty$     |
| <b>Combined Standard Uncertainty</b> |                           | RSS                      |            |         | <b><math>\pm 12.3 \%</math></b> | 330          |
| <b>Expanded Uncertainty (k=2)</b>    |                           |                          |            |         | <b><math>\pm 24.6 \%</math></b> |              |

The above measurement uncertainties are according to IEEE P1528 (2003)

**5600 MHz Body**

| Error Description                    | Uncertainty value $\pm\%$ | Probability Distribution | Divisor    | (Ci) 1g | Standard (1g)                   | vi 2 or Veff |
|--------------------------------------|---------------------------|--------------------------|------------|---------|---------------------------------|--------------|
| <b>Measurement System</b>            |                           |                          |            |         |                                 |              |
| Probe calibration                    | $\pm 6.55$                | Normal                   | 1          | 1       | $\pm 6.55 \%$                   | $\infty$     |
| Axial isotropy                       | $\pm 4.7$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 2.714 \%$                  | $\infty$     |
| Hemispherical isotropy               | $\pm 9.6$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 5.543 \%$                  | $\infty$     |
| Boundary Effects                     | $\pm 0.8$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 0.462 \%$                  | $\infty$     |
| Probe Linearity                      | $\pm 4.7$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 2.714 \%$                  | $\infty$     |
| Detection limits                     | $\pm 0.25$                | Rectangular              | $\sqrt{3}$ | 1       | $\pm 0.144 \%$                  | $\infty$     |
| Readout Electronics                  | $\pm 1.0$                 | Normal                   | 1          | 1       | $\pm 1.0 \%$                    | $\infty$     |
| Response time                        | $\pm 0.8$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 0.462 \%$                  | $\infty$     |
| Integration time                     | $\pm 2.6$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 1.501 \%$                  | $\infty$     |
| RF Ambient Conditions                | $\pm 3.0$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 1.732 \%$                  | $\infty$     |
| Probe Positioner                     | $\pm 0.4$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 0.231 \%$                  | $\infty$     |
| Probe Positioning                    | $\pm 2.9$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 1.674 \%$                  | $\infty$     |
| Algorithms for Max. SAR Eval.        | $\pm 1.0$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 0.577 \%$                  | $\infty$     |
| <b>Test Sample Related</b>           |                           |                          |            |         |                                 |              |
| Device Positioning                   | $\pm 2.9$                 | Normal                   | 1          | 1       | $\pm 2.9 \%$                    | 145          |
| Device Holder                        | $\pm 3.6$                 | Normal                   | 1          | 1       | $\pm 3.6 \%$                    | 5            |
| Power Drift                          | $\pm 5.0$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 2.887 \%$                  | $\infty$     |
| <b>Physical Parameters</b>           |                           |                          |            |         |                                 |              |
| Phantom Shell                        | $\pm 4.0$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 2.31 \%$                   | $\infty$     |
| Liquid conductivity (Target)         | $\pm 5.0$                 | Rectangular              | $\sqrt{3}$ | 0.64    | $\pm 2.887 \%$                  | $\infty$     |
| Liquid conductivity (Meas.)          | $\pm 4.1$                 | Normal                   | 1          | 0.64    | $\pm 4.1 \%$                    | $\infty$     |
| Liquid permittivity (Target)         | $\pm 5.0$                 | Rectangular              | $\sqrt{3}$ | 0.6     | $\pm 2.887 \%$                  | $\infty$     |
| Liquid permittivity (Meas.)          | $\pm 4.3$                 | Normal                   | 1          | 0.6     | $\pm 4.3 \%$                    | $\infty$     |
| <b>Combined Standard Uncertainty</b> |                           | RSS                      |            |         | <b><math>\pm 12.4 \%</math></b> | 330          |
| <b>Expanded Uncertainty (k=2)</b>    |                           |                          |            |         | <b><math>\pm 24.8 \%</math></b> |              |

The above measurement uncertainties are according to IEEE P1528 (2003)

**5800 MHz Body**

| Error Description                    | Uncertainty value $\pm\%$ | Probability Distribution | Divisor    | (Ci) 1g | Standard (1g)                   | vi 2 or Veff |
|--------------------------------------|---------------------------|--------------------------|------------|---------|---------------------------------|--------------|
| <b>Measurement System</b>            |                           |                          |            |         |                                 |              |
| Probe calibration                    | $\pm 6.55$                | Normal                   | 1          | 1       | $\pm 6.55 \%$                   | $\infty$     |
| Axial isotropy                       | $\pm 4.7$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 2.714 \%$                  | $\infty$     |
| Hemispherical isotropy               | $\pm 9.6$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 5.543 \%$                  | $\infty$     |
| Boundary Effects                     | $\pm 0.8$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 0.462 \%$                  | $\infty$     |
| Probe Linearity                      | $\pm 4.7$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 2.714 \%$                  | $\infty$     |
| Detection limits                     | $\pm 0.25$                | Rectangular              | $\sqrt{3}$ | 1       | $\pm 0.144 \%$                  | $\infty$     |
| Readout Electronics                  | $\pm 1.0$                 | Normal                   | 1          | 1       | $\pm 1.0 \%$                    | $\infty$     |
| Response time                        | $\pm 0.8$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 0.462 \%$                  | $\infty$     |
| Integration time                     | $\pm 2.6$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 1.501 \%$                  | $\infty$     |
| RF Ambient Conditions                | $\pm 3.0$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 1.732 \%$                  | $\infty$     |
| Probe Positioner                     | $\pm 0.4$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 0.231 \%$                  | $\infty$     |
| Probe Positioning                    | $\pm 2.9$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 1.674 \%$                  | $\infty$     |
| Algorithms for Max. SAR Eval.        | $\pm 1.0$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 0.577 \%$                  | $\infty$     |
| <b>Test Sample Related</b>           |                           |                          |            |         |                                 |              |
| Device Positioning                   | $\pm 2.9$                 | Normal                   | 1          | 1       | $\pm 2.9 \%$                    | 145          |
| Device Holder                        | $\pm 3.6$                 | Normal                   | 1          | 1       | $\pm 3.6 \%$                    | 5            |
| Power Drift                          | $\pm 5.0$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 2.887 \%$                  | $\infty$     |
| <b>Physical Parameters</b>           |                           |                          |            |         |                                 |              |
| Phantom Shell                        | $\pm 4.0$                 | Rectangular              | $\sqrt{3}$ | 1       | $\pm 2.31 \%$                   | $\infty$     |
| Liquid conductivity (Target)         | $\pm 5.0$                 | Rectangular              | $\sqrt{3}$ | 0.64    | $\pm 2.887 \%$                  | $\infty$     |
| Liquid conductivity (Meas.)          | $\pm 4.2$                 | Normal                   | 1          | 0.64    | $\pm 4.2 \%$                    | $\infty$     |
| Liquid permittivity (Target)         | $\pm 5.0$                 | Rectangular              | $\sqrt{3}$ | 0.6     | $\pm 2.887 \%$                  | $\infty$     |
| Liquid permittivity (Meas.)          | $\pm 4.5$                 | Normal                   | 1          | 0.6     | $\pm 4.5 \%$                    | $\infty$     |
| <b>Combined Standard Uncertainty</b> |                           | RSS                      |            |         | <b><math>\pm 12.4 \%</math></b> | 330          |
| <b>Expanded Uncertainty (k=2)</b>    |                           |                          |            |         | <b><math>\pm 24.8 \%</math></b> |              |

The above measurement uncertainties are according to IEEE P1528 (2003)

---

## 14. CONCLUSION

---

### Measurement Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under the worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role impossible biological effect are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease).

Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

## 15. REFERENCES

---

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antenna as above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bio electromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computer mathematic, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Pre standard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3 GHz), Feb. 2005.

- [21] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radio communication Apparatus (All Frequency Bands) Issue 4, March 2010.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225,D01-D07
- [24] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227 D01v02r01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474D02-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] 615223 D01 802 16e WiMax SAR Guidance v01, Nov. 13, 2009
- [30] Anexo à Resolução No. 533, de 10 de Setembro de 2009.

## Attachment 1. – Probe Calibration Data

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **DT&C (Dymstec)**

Certificate No: **EX3-7337\_Nov14**

## CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:7337**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6  
Calibration procedure for dosimetric E-field probes**

Calibration date: **November 5, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID              | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B         | GB41293874      | 03-Apr-14 (No. 217-01911)         | Apr-15                 |
| Power sensor E4412A        | MY41498067      | 03-Apr-14 (No. 217-01911)         | Apr-15                 |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 03-Apr-14 (No. 217-01915)         | Apr-15                 |
| Reference 20 dB Attenuator | SN: S5277 (20a) | 03-Apr-14 (No. 217-01919)         | Apr-15                 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 03-Apr-14 (No. 217-01920)         | Apr-15                 |
| Reference Probe ES3DV2     | SN: 3013        | 30-Dec-13 (No. ES3-3013_Dec13)    | Dec-14                 |
| DAE4                       | SN: 660         | 13-Dec-13 (No. DAE4-660_Dec13)    | Dec-14                 |
| Secondary Standards        | ID              | Check Date (in house)             | Scheduled Check        |
| RF generator HP 8648C      | US3642U01700    | 4-Aug-99 (in house check Apr-13)  | In house check: Apr-16 |
| Network Analyzer HP 8753E  | US37390585      | 18-Oct-01 (in house check Oct-14) | In house check: Oct-15 |

|                                                                                                                 | Name           | Function              | Signature |
|-----------------------------------------------------------------------------------------------------------------|----------------|-----------------------|-----------|
| Calibrated by:                                                                                                  | Jeton Kastrati | Laboratory Technician |           |
| Approved by:                                                                                                    | Katja Pokovic  | Technical Manager     |           |
| Issued: November 10, 2014                                                                                       |                |                       |           |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. |                |                       |           |

Certificate No: EX3-7337\_Nov14

Page 1 of 11

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: SCS 108

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

#### Glossary:

|                       |                                                                                                                                                   |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                   | tissue simulating liquid                                                                                                                          |
| NORM <sub>x,y,z</sub> | sensitivity in free space                                                                                                                         |
| ConvF                 | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                        |
| DCP                   | diode compression point                                                                                                                           |
| CF                    | crest factor (1/duty_cycle) of the RF signal                                                                                                      |
| A, B, C, D            | modulation dependent linearization parameters                                                                                                     |
| Polarization $\phi$   | $\phi$ rotation around probe axis                                                                                                                 |
| Polarization $\theta$ | $\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\theta = 0$ is normal to probe axis |
| Connector Angle       | information used in DASY system to align probe sensor X to the robot coordinate system                                                            |

#### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

#### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>: Assessed for E-field polarization  $\theta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM( $f$ )<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

Certificate No: EX3-7337\_Nov14

Page 2 of 11

EX3DV4 – SN:7337

November 5, 2014

# Probe EX3DV4

## SN:7337

Manufactured: July 23, 2014  
Calibrated: November 5, 2014

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

EX3DV4- SN:7337

November 5, 2014

**DASY/EASY - Parameters of Probe: EX3DV4 - SN:7337****Basic Calibration Parameters**

|                                                           | Sensor X | Sensor Y | Sensor Z | Unc (k=2)     |
|-----------------------------------------------------------|----------|----------|----------|---------------|
| Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 0.49     | 0.54     | 0.56     | $\pm 10.1 \%$ |
| DCP (mV) <sup>B</sup>                                     | 95.5     | 96.9     | 98.6     |               |

**Modulation Calibration Parameters**

| UID | Communication System Name |   | A<br>dB | B<br>dB $\sqrt{\mu\text{V}}$ | C   | D<br>dB | VR<br>mV | Unc <sup>C</sup><br>(k=2) |
|-----|---------------------------|---|---------|------------------------------|-----|---------|----------|---------------------------|
| 0   | CW                        | X | 0.0     | 0.0                          | 1.0 | 0.00    | 119.3    | $\pm 2.7 \%$              |
|     |                           | Y | 0.0     | 0.0                          | 1.0 |         | 128.0    |                           |
|     |                           | Z | 0.0     | 0.0                          | 1.0 |         | 128.6    |                           |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter; uncertainty not required.

<sup>C</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4- SN:7337

November 5, 2014

**DASY/EASY - Parameters of Probe: EX3DV4 - SN:7337****Calibration Parameter Determined in Head Tissue Simulating Media**

| f (MHz) <sup>c</sup> | Relative Permittivity <sup>f</sup> | Conductivity (S/m) <sup>f</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>g</sup> | Depth <sup>g</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 2450                 | 39.2                               | 1.80                            | 7.40    | 7.40    | 7.40    | 0.46               | 0.72                    | ± 12.0 %    |
| 2600                 | 39.0                               | 1.96                            | 7.22    | 7.22    | 7.22    | 0.32               | 0.92                    | ± 12.0 %    |
| 3500                 | 37.9                               | 2.91                            | 7.38    | 7.38    | 7.38    | 0.53               | 0.84                    | ± 13.1 %    |
| 5200                 | 36.0                               | 4.66                            | 5.24    | 5.24    | 5.24    | 0.35               | 1.80                    | ± 13.1 %    |
| 5300                 | 35.9                               | 4.76                            | 5.03    | 5.03    | 5.03    | 0.35               | 1.80                    | ± 13.1 %    |
| 5500                 | 35.6                               | 4.96                            | 4.88    | 4.88    | 4.88    | 0.40               | 1.80                    | ± 13.1 %    |
| 5600                 | 35.5                               | 5.07                            | 4.60    | 4.60    | 4.60    | 0.40               | 1.80                    | ± 13.1 %    |
| 5800                 | 35.3                               | 5.27                            | 4.69    | 4.69    | 4.69    | 0.40               | 1.80                    | ± 13.1 %    |

<sup>c</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 126, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>f</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>g</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:7337

November 5, 2014

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:7337

### Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) <sup>c</sup> | Relative Permittivity <sup>e</sup> | Conductivity (S/m) <sup>e</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>g</sup> | Depth <sup>g</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 2450                 | 52.7                               | 1.95                            | 7.40    | 7.40    | 7.40    | 0.75               | 0.59                    | ± 12.0 %    |
| 2600                 | 52.5                               | 2.16                            | 7.31    | 7.31    | 7.31    | 0.80               | 0.50                    | ± 12.0 %    |
| 3500                 | 51.3                               | 3.31                            | 6.96    | 6.96    | 6.96    | 0.89               | 0.66                    | ± 13.1 %    |
| 5200                 | 49.0                               | 5.30                            | 4.52    | 4.52    | 4.52    | 0.45               | 1.90                    | ± 13.1 %    |
| 5300                 | 48.9                               | 5.42                            | 4.35    | 4.35    | 4.35    | 0.45               | 1.90                    | ± 13.1 %    |
| 5500                 | 48.6                               | 5.65                            | 4.07    | 4.07    | 4.07    | 0.45               | 1.90                    | ± 13.1 %    |
| 5600                 | 48.5                               | 5.77                            | 3.83    | 3.83    | 3.83    | 0.50               | 1.90                    | ± 13.1 %    |
| 5800                 | 48.2                               | 6.00                            | 4.07    | 4.07    | 4.07    | 0.50               | 1.90                    | ± 13.1 %    |

<sup>c</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>e</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.


<sup>g</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4-SN:7337

November 5, 2014

### Frequency Response of E-Field



(TEM-Cell: ifi110 EXX, Waveguide: R22)

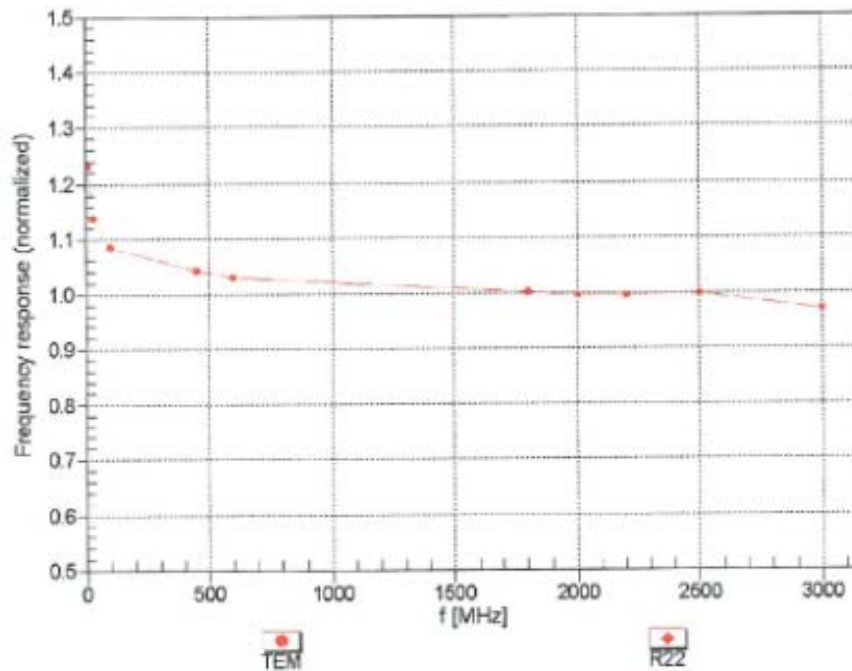

Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

EX3DV4- SN:7337


November 5, 2014

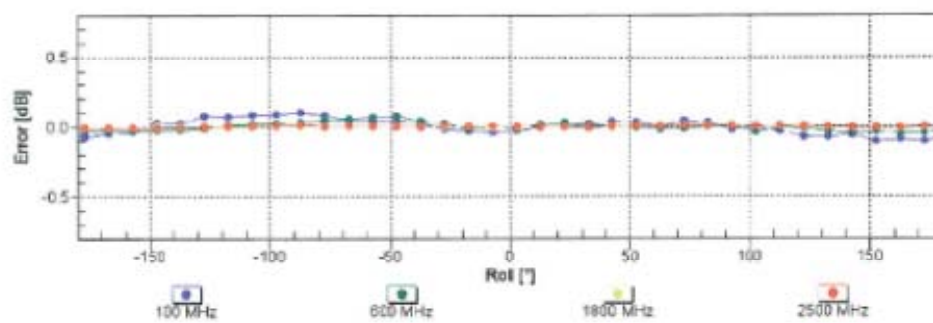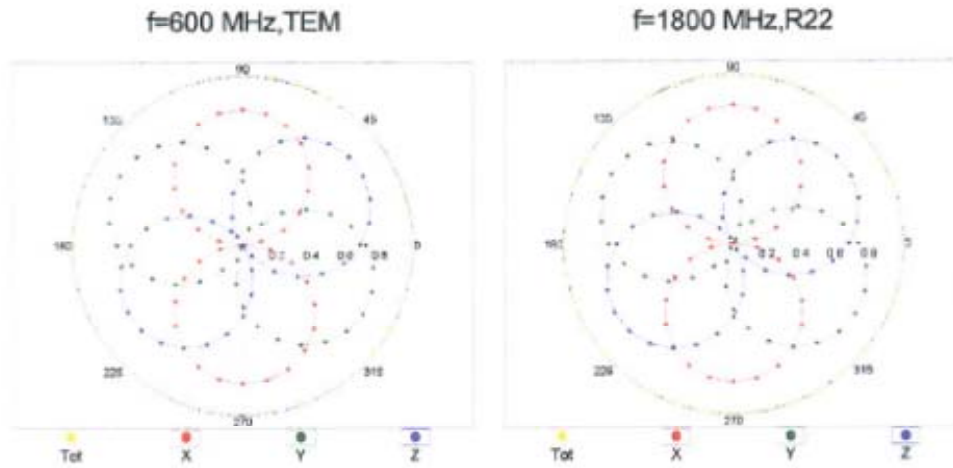Receiving Pattern ( $\phi$ ),  $\theta = 0^\circ$ Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

EX3DV4- SN:7337

November 5, 2014


### Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f_{\text{eval}} = 1900 \text{ MHz}$ )

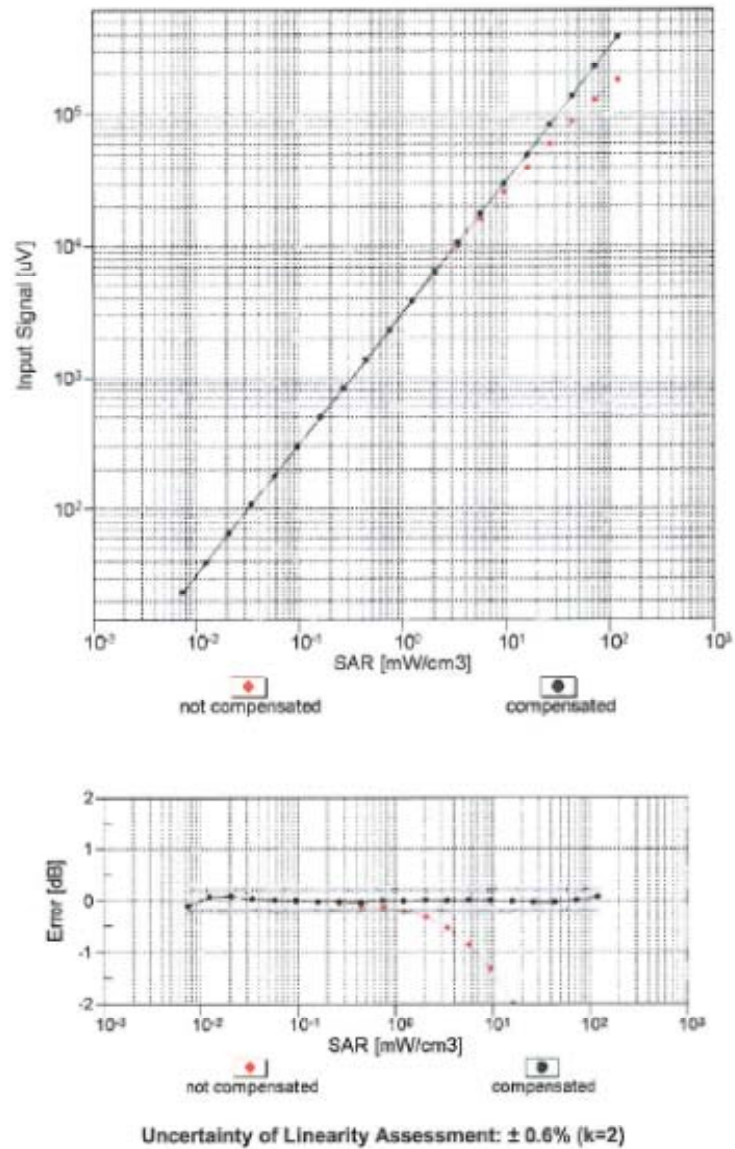


EX3DV4- SN:7337

November 5, 2014

## Conversion Factor Assessment

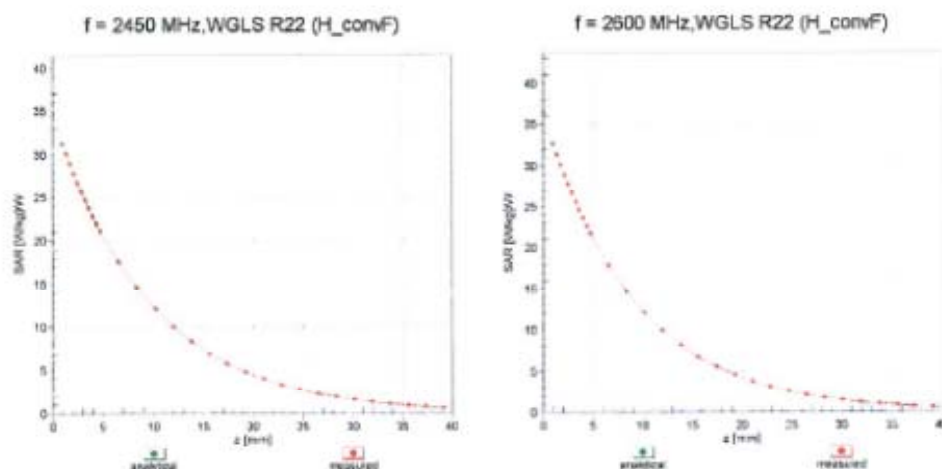

## Deviation from Isotropy in Liquid

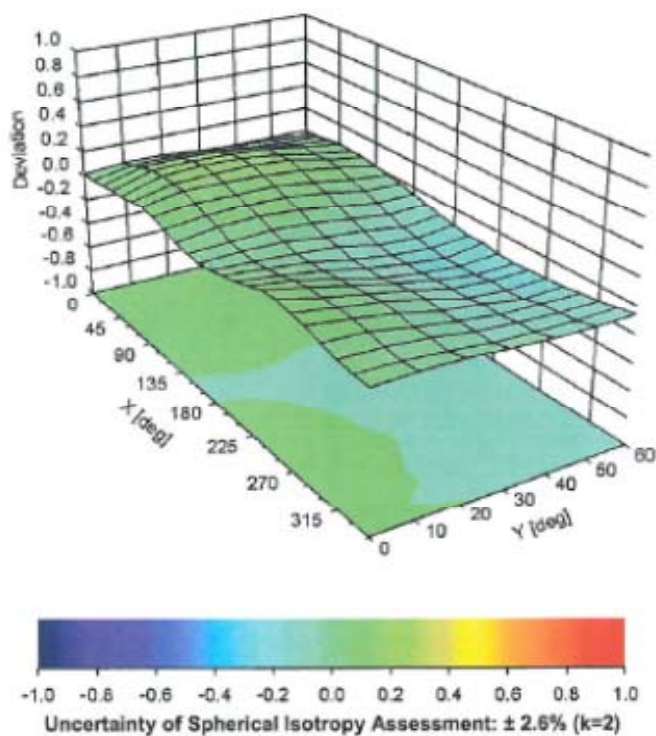Error ( $\phi$ ,  $\theta$ ),  $f = 900 \text{ MHz}$ 

EX3DV4- SN:7337

November 5, 2014

**DASY/EASY - Parameters of Probe: EX3DV4 - SN:7337****Other Probe Parameters**

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | -107.3     |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disabled   |
| Probe Overall Length                          | 337 mm     |
| Probe Body Diameter                           | 10 mm      |
| Tip Length                                    | 9 mm       |
| Tip Diameter                                  | 2.5 mm     |
| Probe Tip to Sensor X Calibration Point       | 1 mm       |
| Probe Tip to Sensor Y Calibration Point       | 1 mm       |
| Probe Tip to Sensor Z Calibration Point       | 1 mm       |
| Recommended Measurement Distance from Surface | 1.4 mm     |