

RADIO TEST REPORT

Test Report No. 15106908H-B-R1

Customer	Audio-Technica Corporation
Description of EUT	HANDHELD TRANSMITTER
Model Number of EUT	ATW-T220cS
FCC ID	JFZT220CS
Test Regulation	FCC Part 74
Test Result	Complied
Issue Date	June 28, 2024
Remarks	-

Representative test engineerShousei Hamaguchi
Engineer**Approved by**Satofumi Matsuyama
Engineer

CERTIFICATE 5107.02

- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.
- ☒ There is no testing item of "Non-accreditation".

Report Cover Page - Form-ULID-003532 (DCS:13-EM-F0429) Issue# 23.0

ANNOUNCEMENT

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested. (Laboratory was not involved in sampling.)
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided from the customer for this report is identified in SECTION 1.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

REVISION HISTORY

Original Test Report No. 15106908H-B-R1

This report is a revised version of 15106908H-B. 15106908H-B is replaced with this report .

Revision	Test Report No.	Date	Page Revised Contents
- (Original)	15106908H-B	May 31, 2024	-
1	15106908H-B-R1	June 28, 2024	SECTION 4 *The details of Operating mode(s)). -Deleted the below sentence in the table. *The isolator of RF filter circuit is consisted of passive component. It does not contain non-linear component. Therefore the test was performed on lowest, near middle and highest frequency that was chosen from available frequency band. SECTION 7 -Corrected the sentence of frequency stability. [Frequency stability] The power supply set to 100 % nominal setting, raise EUT operating temperature to 50 deg. C. Record the frequency of the EUT. Repeat measurements at each 10 deg. C decrement to -30 deg. C. EUT power supply was varied between 85 % and 115 % of nominal and the frequency of the EUT was recorded when temperature is 20 deg. C. The additional test was performed at battery end point voltage. → [Frequency stability] The power supply set to 100 % nominal setting, raise to the maximum operating temperature of the EUT. Record the frequency of the EUT. Repeat measurements at each 10 deg. C decrement up to minimum operating temperature of EUT. EUT power supply was 100 % of nominal and the frequency of the EUT was recorded when temperature is 20 deg. C. The additional test was performed at battery end point voltage. APPENDIX 1 Modulation Characteristics Replaced the test data and graph. Spurious emissions at antenna terminals -Corrected the text below the table Limit = mean output power in dBm – (43 + 10lg10(mean output power in W)) dB = -13 dB → Limit = mean output power in dBm – (43 + 10log10(mean output power in W)) dB = -13 dBm Field strength of spurious radiation -Added Field strength of spurious radiation (Plot data, Worst case).

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	ICES	Interference-Causing Equipment Standard
AC	Alternating Current	IEC	International Electrotechnical Commission
AFH	Adaptive Frequency Hopping	IEEE	Institute of Electrical and Electronics Engineers
AM	Amplitude Modulation	IF	Intermediate Frequency
Amp, AMP	Amplifier	ILAC	International Laboratory Accreditation Conference
ANSI	American National Standards Institute	ISED	Innovation, Science and Economic Development Canada
Ant, ANT	Antenna	ISO	International Organization for Standardization
AP	Access Point	JAB	Japan Accreditation Board
ASK	Amplitude Shift Keying	LAN	Local Area Network
Atten., ATT	Attenuator	LIMS	Laboratory Information Management System
AV	Average	MCS	Modulation and Coding Scheme
BPSK	Binary Phase-Shift Keying	MRA	Mutual Recognition Arrangement
BR	Bluetooth Basic Rate	N/A	Not Applicable
BT	Bluetooth	NIST	National Institute of Standards and Technology
BT LE	Bluetooth Low Energy	NS	No signal detect.
BW	BandWidth	NSA	Normalized Site Attenuation
Cal Int	Calibration Interval	NVLAP	National Voluntary Laboratory Accreditation Program
CCK	Complementary Code Keying	OBW	Occupied Band Width
Ch., CH	Channel	OFDM	Orthogonal Frequency Division Multiplexing
CISPR	Comite International Special des Perturbations Radioelectriques	P/M	Power meter
CW	Continuous Wave	PCB	Printed Circuit Board
DBPSK	Differential BPSK	PER	Packet Error Rate
DC	Direct Current	PHY	Physical Layer
D-factor	Distance factor	PK	Peak
DFS	Dynamic Frequency Selection	PN	Pseudo random Noise
DQPSK	Differential QPSK	PRBS	Pseudo-Random Bit Sequence
DSSS	Direct Sequence Spread Spectrum	PSD	Power Spectral Density
EDR	Enhanced Data Rate	QAM	Quadrature Amplitude Modulation
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	QP	Quasi-Peak
EMC	ElectroMagnetic Compatibility	QPSK	Quadri-Phase Shift Keying
EMI	ElectroMagnetic Interference	RBW	Resolution Band Width
EN	European Norm	RDS	Radio Data System
ERP, e.r.p.	Effective Radiated Power	RE	Radio Equipment
EU	European Union	RF	Radio Frequency
EUT	Equipment Under Test	RMS	Root Mean Square
Fac.	Factor	RSS	Radio Standards Specifications
FCC	Federal Communications Commission	Rx	Receiving
FHSS	Frequency Hopping Spread Spectrum	SA, S/A	Spectrum Analyzer
FM	Frequency Modulation	SG	Signal Generator
Freq.	Frequency	SVSWR	Site-Voltage Standing Wave Ratio
FSK	Frequency Shift Keying	TR	Test Receiver
GFSK	Gaussian Frequency-Shift Keying	Tx	Transmitting
GNSS	Global Navigation Satellite System	VBW	Video BandWidth
GPS	Global Positioning System	Vert.	Vertical
Hori.	Horizontal	WLAN	Wireless LAN

CONTENTS	PAGE
SECTION 1: Customer Information	5
SECTION 2: Equipment Under Test (EUT).....	5
SECTION 3: Test specification, procedures & results	6
SECTION 4: Operation of EUT during testing	9
SECTION 5: Field strength of spurious radiation	11
SECTION 6: Modulation Characteristics	13
SECTION 7: Antenna Terminal Tests.....	14
SECTION 8: Necessary bandwidth.....	15
APPENDIX 1: Test data	16
RF Output Power	16
Modulation Characteristics.....	17
Occupied Bandwidth	20
Spurious emissions at antenna terminals	23
Necessary bandwidth.....	38
Field strength of spurious radiation.....	40
Frequency stability	44
APPENDIX 2: Test instruments	47
APPENDIX 3: Photographs of test setup.....	49
Field strength of spurious radiation.....	49
Worst Case Position	50
Antenna terminals Conducted.....	51

SECTION 1: Customer Information

Company Name	Audio-Technica Corporation
Address	2-46-1 Nishi-naruse, Machida, Tokyo 194-8666, Japan
Telephone Number	+81-42-739-9121
Contact Person	Hirohisa Yamamoto

The information provided from the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer Information
- SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
- SECTION 4: Operation of EUT during testing

* The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

SECTION 2: Equipment Under Test (EUT)

2.1 Identification of EUT

Description	HANDHELD TRANSMITTER
Model Number	ATW-T220cS
Serial Number	Refer to SECTION 4.2
Condition	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	No Modification by the test lab
Receipt Date	April 1, 2024
Test Date	April 10 to 18, 2024

2.2 Product Description

General Specification

Rating	DC 3.0 V (Battery (2 x Alkaline AA Batteries))
Operating temperature	5 deg. C to 45 deg. C

Radio Specification

Radio type	Transmitter
Modulation type	FM
Necessary bandwidth	110 kHz = 2M + 2D where M: Maximum modulation frequency = 15 kHz D: Peak deviation = 40 kHz
Declared Channel Bandwidth (B)	200 kHz
Frequency of operation	508.125 MHz to 526.825 MHz
RF power	10 mW, 30 mW
Antenna gain	0 dBi max

Supplied Voltage Information

This EUT provides the stable voltage constantly to RF Module regardless of input voltage.

Antenna Information

The antenna is not removable from the EUT.

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification	FCC Part 74 The latest version on the first day of the testing period
Title	FCC 47CFR Part74 EXPERIMENTAL RADIO, AUXILIARY, SPECIAL BROADCAST AND OTHER PROGRAM DISTRIBUTIONAL SERVICES

3.2 Procedures and results

Item	Test Specification & Procedure	Worst margin	Results	Remarks
RF power output	FCC: Section 2.1046 FCC: Section 74.861 (e) (1)	See data.	Complied	Conducted
Modulation Characteristics	FCC: Section 2.1047 FCC: Section 74.861 (e) (3)	See data.	Complied	Conducted
Occupied Bandwidth	FCC: Section 2.1049 FCC: Section 74.861 (e) (5)	See data.	Complied	Conducted
Spurious emissions at antenna terminals	FCC: Section 2.1051 FCC: Section 74.861 (e) (6)	See data.	Complied	Conducted
Necessary bandwidth	FCC: Section 74.861 (e) (7) EN 300 422-1 V 1.4.2 Clause 8.3	See data.	Complied	Conducted
Field strength of spurious radiation	FCC: Section 2.1053 FCC: Section 74.861 (e) (7) EN 300 422-1 V 1.4.2 Clause 8.4	8.1 dB 4668.98 MHz, Horizontal	Complied	Radiated
Frequency stability	FCC: Section 2.1055 FCC: Section 74.861 (e) (4)	See data.	Complied	Conducted
Note: UL Japan, Inc.'s EMI Work Procedures: Work Instructions-ULID-003591 and Work Instructions-ULID-003593. * In case any questions arise about test procedure, KDB 206256 D01 Wireless Microphones v02r01 and ANSI C63.26: 2015 are also referred.				

3.3 Addition to standard

No addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

Measurement uncertainty is not taken into account when stating conformity with a specified requirement.
Note: When margins obtained from test results are less than the measurement uncertainty, the test results may exceed the limit.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k = 2$.

Field strength of spurious radiation (EUT height: 1.5 m) (Measurement Distance 3 m)	Unit	Calculated Uncertainty (+/-)
25 MHz to 200 MHz	dB	6.0
200 MHz to 1000 MHz	dB	3.9
1 GHz to 12.75 GHz	dB	4.7

Antenna Terminal Conducted tests

Item	Unit	Calculated Uncertainty (+/-)
Antenna terminated conducted emission / Power density / Burst power	dB	3.47
Adjacent channel power (ACP)	dB	2.28
Bandwidth (OBW)	%	0.96
Time readout (time span upto 100 msec)	%	0.11
Time readout (time span upto 1000 msec)	%	0.11
Time readout (time span upto 60 sec)	%	0.02
Power measurement (Power meter < 8 GHz)	dB	1.46
Power measurement (Call box < 6 GHz)	dB	1.69
Frequency readout (Frequency counter)	ppm	0.67
Frequency readout (Spectrum analyzer frequency readout function)	ppm	2.13
Temperature (constant temperature bath)	deg.C	0.69
Humidity (constant temperature bath)	%RH	2.98
Modulation characteristics	%	6.93
Frequency for mobile	ppm	0.08
Contention-based protocol	dB	2.26

3.5 Test Location

UL Japan, Inc. Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 Japan

Telephone: +81-596-24-8999

*A2LA Certificate Number: 5107.02 / FCC Test Firm Registration Number: 884919

ISED Lab Company Number: 2973C / CAB identifier: JP0002

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.5 measurement room	6.4 x 6.4 x 3.0	6.4 x 6.4	-	-
No.6 shielded room	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.10 shielded room	3.8 x 2.8 x 2.8	3.8 x 2.8	-	-
No.11 measurement room	4.0 x 3.4 x 2.5	N/A	-	-
No.12 measurement room	2.6 x 3.4 x 2.5	N/A	-	-
Large Chamber	16.9 x 22.1 x 10.17	16.9 x 22.1	-	10 m
Small Chamber	5.3 x 6.69 x 3.59	5.3 x 6.69	-	-

3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

SECTION 4: Operation of EUT during testing

4.1 Operating Mode(s)

Mode	Remarks*
Transmitting (Tx)	-
*Transmitting duty was 100 % on all tests.	
*Power of the EUT was set by the software as follows;	
Power Setting: 10mW, 30mW Software: Ver1.0 (Date: 2024.04 01, Storage location: EUT memory)	
*This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting.	

*The details of Operating mode(s)


Test Item	Tested frequency	Power setting	Modulation	Remarks
RF power output	508.125 MHz (Low) 518.775 MHz (Mid) 526.825 MHz (High)	10 mW, 30 mW	None (No modulation)	-
Modulation Characteristics	518.775 MHz (Mid) *1)	10 mW, 30 mW	See data.	-
Occupied Bandwidth	508.125 MHz (Low) 518.775 MHz (Mid) 526.825 MHz (High)	10 mW, 30 mW	1 dBV, 2.5 kHz tone *3)	-
Spurious emissions at antenna terminals	508.125 MHz (Low) 518.775 MHz (Mid) 526.825 MHz (High)	10 mW, 30 mW	1 dBV, 2.5 kHz tone *3)	-
Necessary bandwidth	508.125 MHz (Low) 518.775 MHz (Mid) 526.825 MHz (High)	10 mW, 30 mW	See SECTION 8.	-
Field strength of spurious radiation	508.125 MHz (Low) 518.775 MHz (Mid) 526.825 MHz (High)	30 mW *2)	None (No modulation)	-
Frequency stability	508.125 MHz (Low) 518.775 MHz (Mid) 526.825 MHz (High)	30 mW *2)	None (No modulation)	-

*1) There is no difference in frequency generating method on each frequency. Therefore the test was performed on Mid channel as a representative.

*2) After the comparison between 10 mW and 30 mW as pre-check, test was performed with worst case 30 mW setting.

*3) When modulated by a 2.5 kHz tone at an input level 16 dB greater than that necessary to produce 50 percent modulation.

4.2 Configuration and peripherals



* Setup was taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial Number	Manufacturer	Remark
A	HANDHELD TRANSMITTER	ATW-T220cS	No.9	Audio-Technica Corporation	EUT

SECTION 5: Field strength of spurious radiation

Test Procedure


- 1) EUT was placed on a platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization.
The Radiated Electric Field Strength has been measured in semi anechoic chamber at a distance of 3 m.
The measuring antenna height was varied between 1 to 4 m and the turn table was rotated a full revolution in order to obtain the maximum value of the electric field strength.
The measurements were performed for both vertical and horizontal antenna polarization.
- 2) Exchanged the EUT to the Substitution Antenna, the measurement was set for the same height 1.5 m as the EUT. The frequency below 1 GHz of the Substitution Antenna was used the Half wave dipole Antenna, which was tuned the measured frequency in 1).
The frequency above 1 GHz of the Substitution Antenna was used Horn Antenna.
The Substitution Antenna was connected to the Signal Generator, and the polarized electromagnetic radiation of the Substitution Antenna was matched with the one of the measuring Antenna, which was set with the Signal Generator to the measured frequency in 1).
Then, we set with the Output power (CW) of the Signal Generator where the measuring electromagnetic field strength is equal to the measured value in 1) by means of varying the measuring antenna height between 1 to 4 m to obtain maximum receiving level.
Its Output power of Signal Generator was recorded.
- 3) Effective radiated power was calculated by subtracting the cable loss and the attenuator loss connected between the Signal Generator and the Substitution Antenna from the Output power of the Signal Generator recorded in 2).
For the usage of the Antenna (Horn Antenna) except for the Half wave dipole Antenna (2.15dBi) for the Substitution Antenna, the Effective radiated power was calculated by compensating the finite difference in the Antenna gain of the Half wave dipole Antenna, and Substitution Antenna.

Frequency	25 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn


Frequency	25 MHz to 30 MHz	30 MHz to 1 GHz	Above 1 GHz
Instrument used	Spectrum Analyzer		
Detector	RMS Average		
IF Bandwidth	RBW: 10 kHz VBW: 30 kHz	RBW: 100 kHz VBW: 300 kHz	RBW: 1 MHz VBW: 3 MHz
Test Distance	3 m		

Figure 2: Test Setup

[25 MHz to 1 GHz]

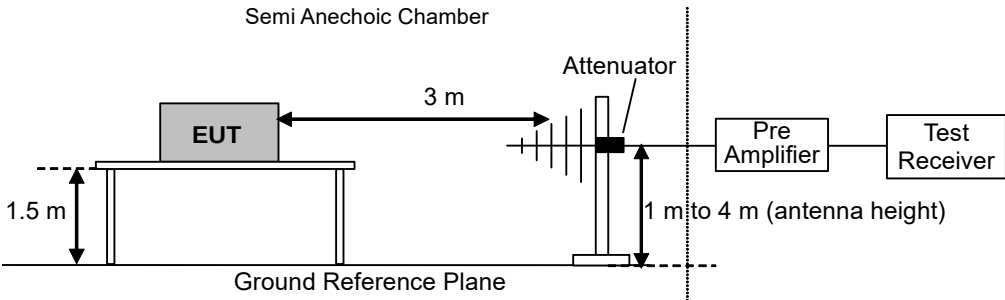

[Above 1 GHz]

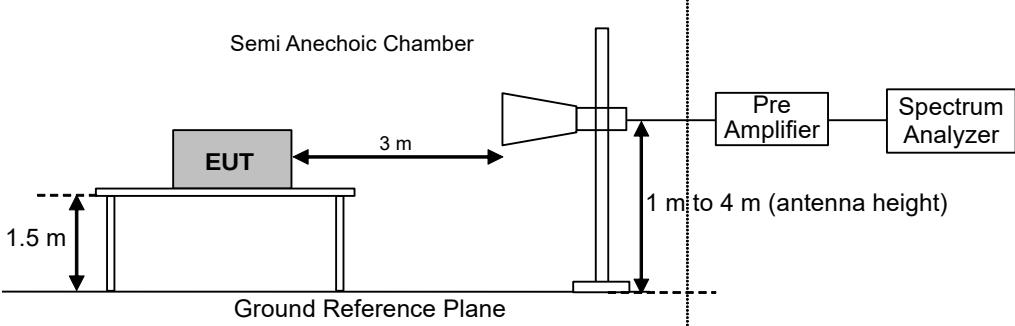

The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range : 25 MHz to 6 GHz
Test data : APPENDIX
Test result : Pass

SECTION 6: Modulation Characteristics

Deviation versus Audio input level and Audio Frequency

Test Procedure

The frequency deviations were measured when input level and frequency were varied.
It was measured with Spectrum analyzer and signal generator.

Audio input level	-80 dBV to 10 dBV, 5 dB step
Audio frequency	40 Hz, 100 Hz, 300 Hz, 500 Hz, 700 Hz, 1 kHz, 2.5kHz, 3 kHz, 5 kHz, 7 kHz, 10 kHz, 18 kHz

Audio Frequency Response

Test Procedure

The audio input level was measured when frequency deviation indicates 50% modulation which
measured with Test receiver and Audio Analyzer.

Audio frequency	40 Hz, 100 Hz, 300 Hz, 500 Hz, 700 Hz, 1 kHz, 2.5kHz, 3 kHz, 5 kHz, 7 kHz, 10 kHz, 18 kHz
-----------------	--

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Test data : APPENDIX
Test result : Pass

SECTION 7: Antenna Terminal Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument used
RF power output	-	-	-	Auto	Average	-	Power Meter (Sensor: 50 MHz BW)
Occupied Bandwidth	Enough width to display emission skirts	1 to 5% of Occupied bandwidth	Three times of RBW	Auto	Peak *1)	Max Hold *1)	Spectrum Analyzer
Spurious emissions at antenna terminals *2)	9 kHz to 150 kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150 kHz to 30 MHz	10 kHz	30 kHz				
	30 MHz to 1 GHz	100 kHz	300 kHz				
	Above 1 GHz	1 MHz	3 MHz				
Side band spectrum measurement	550 kHz	3 kHz	10 kHz				
Frequency stability	-	-	-	-	-	-	Frequency Counter
*1) The measurement was performed with Peak and Max Hold since the modulation method was FM. *2) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents. Then, wide-band noise near the limit was checked separately, however the noise was low enough as shown in the chart. (9 kHz - 150 kHz: RBW = 200 Hz, 150 kHz - 30 MHz: RBW = 9.1 kHz).							

[Frequency stability]

The power supply set to 100 % nominal setting, raise to the maximum operating temperature of the EUT.

Record the frequency of the EUT.

Repeat measurements at each 10 deg. C decrement up to minimum operating temperature of EUT.

EUT power at 100 % of nominal and the frequency of the EUT was recorded when temperature is 20 deg. C.
The additional test was performed at battery end point voltage.

The test results and limit are rounded off to two decimals place, so some differences might be observed.

Test data : APPENDIX
Test result : Pass

SECTION 8: Necessary bandwidth

The tests were made with below setting connected to the antenna port.

[For Analog Modulation Device]

In accordance with section 8.3 of ETSI EN 300 422-1, a weighted noise source through a weighting filter based on ITU-R Recommendation BS.559-2 was applied to the audio input of transmitter. The transmitter RF output spectrums were measured at each channel using a receiving antenna and a spectrum analyzer with settings specified in the section 8.3.1 of ETSI EN 300 422-1. The input level of both white noise and filter to EUT was 2 dBV according to the following result.

	lim-8dB	lim	lim+12dB	Difference of Demodulation level lim-8dB and lim+12dB	White noise +Filter input level
EUT input level	-18 dBV	-10 dBV	2 dBV		2 dBV
Demodulation level	2.9 dBV	-	10.4 dBV	7.5 dB < 10 dB	
"lim" means "audio limiting threshold" declared by manufacturer.					

Test data : APPENDIX
Test result : Pass

APPENDIX 1: Test data

RF Output Power

Test place	Ise EMC Lab. No.6 Measurement Room
Date	April 12, 2024
Temperature / Humidity	24 deg. C / 49 % RH
Engineer	Shousei Hamaguchi
Mode	Tx

Power Setting	Channel	Freq. [MHz]	Reading Average [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Ant Gain [dB]	Result [Conducted]		Limit [Conducted] [mW]	Margin [dB]	Remarks
							[dBm]	[mW]			
10 mW	Low	508.125	-10.52	0.39	19.88	0.00	9.75	9.44	250	14.23	
	Mid	518.775	-10.61	0.40	19.88	0.00	9.67	9.27	250	14.31	
	High	526.825	-10.79	0.40	19.88	0.00	9.49	8.89	250	14.49	
30 mW	Low	508.125	-5.79	0.39	19.88	0.00	14.48	28.05	250	9.50	
	Mid	518.775	-5.79	0.40	19.88	0.00	14.49	28.12	250	9.49	
	High	526.825	-5.90	0.40	19.88	0.00	14.38	27.42	250	9.60	


Calculation formula: Result = Reading + Cable Loss + Atten. Loss

Modulation Characteristics

[Deviation versus Audio input level and Audio Frequency]

Test place Ise EMC Lab. No.6 Measurement Room
Date April 10, 2024
Temperature / Humidity 23 deg. C / 47 % RH
Engineer Shousei Hamaguchi
Mode Tx 518.775 MHz, 10 mW


AF Level [dBV]	AF Frequency [Hz] / Peak Deviation [kHz]												Limit [kHz]
	40	100	300	500	700	1000	2500	3000	5000	7000	10000	18000	
-80	1.477	1.677	1.757	1.796	1.836	1.916	1.956	2.036	2.116	2.116	2.076	1.757	75
-75	1.637	1.876	2.036	2.076	2.156	2.116	2.275	2.355	2.515	2.635	2.635	2.196	75
-70	1.836	2.236	2.395	2.395	2.435	2.475	2.635	2.755	3.074	3.353	3.393	2.794	75
-65	2.275	2.635	2.755	2.794	2.794	2.874	3.194	3.234	3.753	4.152	4.511	3.832	75
-60	2.715	3.234	3.313	3.313	3.353	3.393	3.753	3.992	4.671	5.349	5.988	5.469	75
-55	3.353	3.952	4.032	4.072	4.112	4.152	4.671	4.910	5.908	6.866	7.824	7.745	75
-50	4.112	4.910	5.030	5.030	5.110	5.110	5.828	6.387	7.545	8.862	10.299	10.739	75
-45	5.190	6.228	6.267	6.347	6.347	6.467	7.425	7.824	9.701	11.497	13.573	14.651	75
-40	6.707	7.984	8.024	8.104	8.144	8.263	9.581	10.100	12.735	15.050	17.804	19.601	75
-35	8.782	10.539	10.619	10.579	10.699	10.818	12.535	13.373	16.766	19.920	23.513	26.227	75
-30	11.417	13.812	13.693	13.693	13.892	14.132	16.327	17.365	21.916	26.148	30.978	34.451	75
-25	14.731	17.924	17.804	17.924	18.004	18.323	21.397	22.754	28.782	34.251	37.605	39.082	75
-20	19.202	23.513	23.393	23.393	23.593	24.032	28.223	29.940	36.567	37.525	39.641	40.878	75
-15	26.866	32.455	32.016	31.936	32.016	32.455	36.447	36.766	37.525	38.882	40.878	41.716	75
-10	32.415	39.201	37.844	37.405	37.086	37.086	37.205	37.325	37.844	40.239	41.637	42.275	75
-5	34.132	39.641	38.363	37.605	37.405	37.325	37.325	37.405	38.044	40.359	41.637	42.355	75
0	35.409	40.160	38.683	37.844	37.525	37.325	37.205	37.325	38.044	40.479	41.716	42.355	75
5	36.447	42.156	39.401	38.363	37.844	37.605	37.405	37.405	38.243	40.559	41.716	42.355	75
10	42.036	45.309	39.960	38.483	37.924	37.724	36.886	37.006	38.243	40.878	42.036	42.475	75

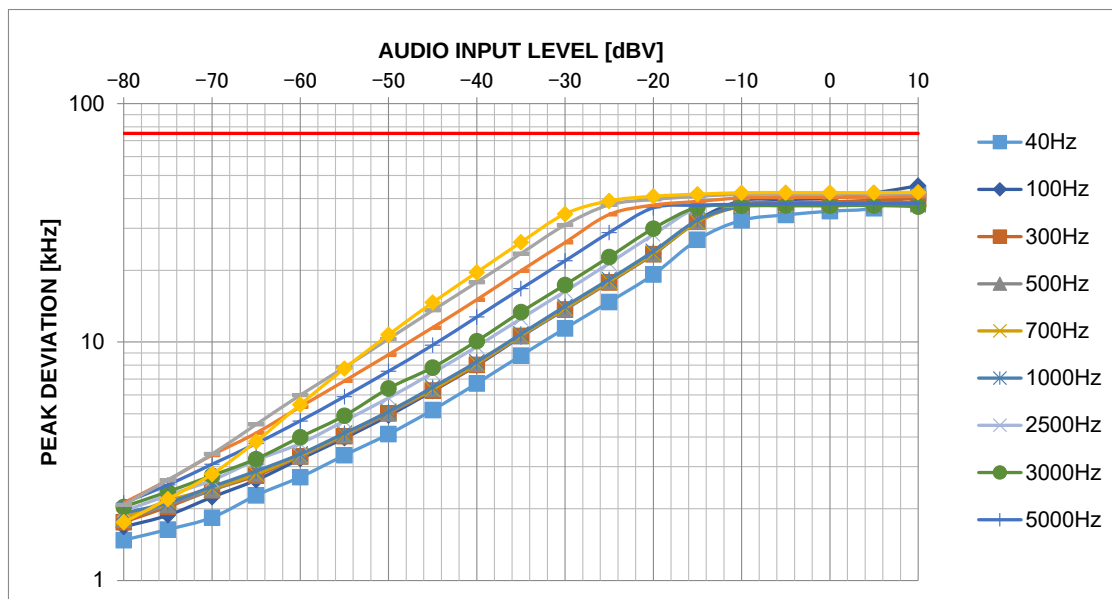

Modulation Characteristics [Deviation versus Audio input level and Audio Frequency]

Test place Ise EMC Lab. No.6 Measurement Room
Date April 10, 2024
Temperature / Humidity 23 deg. C / 47 % RH
Engineer Shousei Hamaguchi
Mode Tx 518.775 MHz, 30 mW

AF Level [dBV]	AF Frequency [Hz] / Peak Deviation [kHz]												Limit [kHz]
	40	100	300	500	700	1000	2500	3000	5000	7000	10000	18000	
-80	1.517	1.637	1.796	1.876	1.916	1.876	1.996	2.076	2.156	2.156	2.076	1.836	75
-75	1.677	1.956	2.116	2.076	2.116	2.156	2.275	2.395	2.635	2.635	2.715	2.156	75
-70	1.956	2.236	2.355	2.395	2.435	2.435	2.675	2.715	3.034	3.313	3.433	2.794	75
-65	2.156	2.675	2.794	2.794	2.834	2.834	3.114	3.273	3.753	4.232	4.511	3.832	75
-60	2.715	3.273	3.313	3.353	3.393	3.393	3.792	3.952	4.671	5.389	5.988	5.509	75
-55	3.313	3.952	4.112	4.072	4.112	4.152	4.631	4.910	5.908	6.906	7.864	7.784	75
-50	4.152	4.990	4.990	5.070	5.070	5.110	5.828	6.188	7.545	8.822	10.259	10.739	75
-45	5.230	6.267	6.267	6.307	6.347	6.467	7.465	7.864	9.701	11.457	13.493	14.651	75
-40	6.667	7.984	8.024	8.024	8.104	8.263	9.501	10.060	12.655	15.050	17.804	19.601	75
-35	8.822	10.619	10.619	10.619	10.619	10.778	12.535	13.253	16.647	19.800	23.513	26.148	75
-30	11.377	13.812	13.693	13.693	13.812	14.012	16.327	17.285	21.717	26.028	30.858	34.371	75
-25	14.651	17.924	17.804	17.924	17.924	18.243	21.397	22.635	28.543	34.251	37.605	39.002	75
-20	19.281	23.593	23.393	23.393	23.593	23.912	28.024	29.940	36.447	37.525	39.641	40.878	75
-15	26.866	32.455	32.016	32.016	32.016	32.335	36.447	36.766	37.405	38.882	40.878	41.716	75
-10	32.575	39.201	37.924	37.285	37.205	37.006	37.205	37.285	37.924	40.239	41.637	42.275	75
-5	34.251	39.720	38.483	37.724	37.405	37.285	37.086	37.285	38.044	40.359	41.637	42.355	75
0	35.409	40.160	38.683	37.844	37.525	37.285	37.205	37.405	38.164	40.479	41.716	42.355	75
5	36.687	42.475	39.521	38.363	37.844	37.724	37.525	37.525	38.164	40.559	41.716	42.355	75
10	41.956	45.309	39.840	38.363	37.924	37.605	36.766	37.006	38.243	40.878	42.036	42.475	75

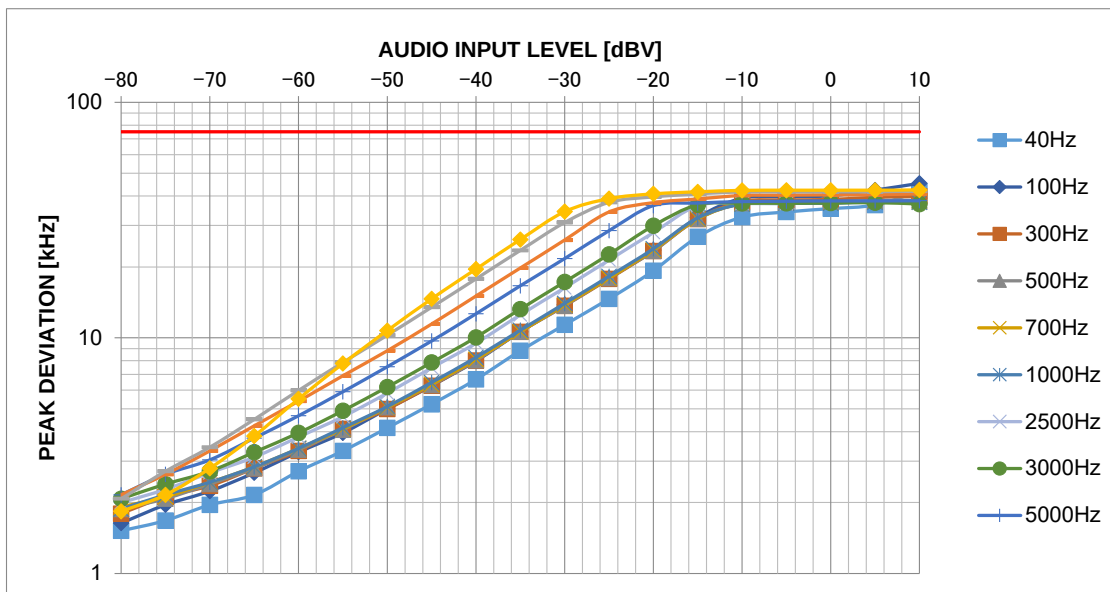


Modulation Characteristics
[Audio Frequency Response]

Test place Ise EMC Lab. No.6 Measurement Room
Date April 10, 2024
Temperature / Humidity 23 deg. C / 47 % RH
Engineer Shousei Hamaguchi
Mode Tx 518.775 MHz

[Power Setting: High]


AF Frequency [Hz]	AF Level [mV]	AF Response [dB]
40	15.51	-4.38
70	10.56	-1.04
100	10.18	-0.72
300	10.04	-0.60
500	10.02	-0.58
700	9.84	-0.43
1000	9.37	0.00
2000	7.63	1.78
3000	5.94	3.96
5000	3.68	8.12
7000	2.54	11.34
10000	1.87	14.00
15000	1.72	14.72
18000	1.88	13.95

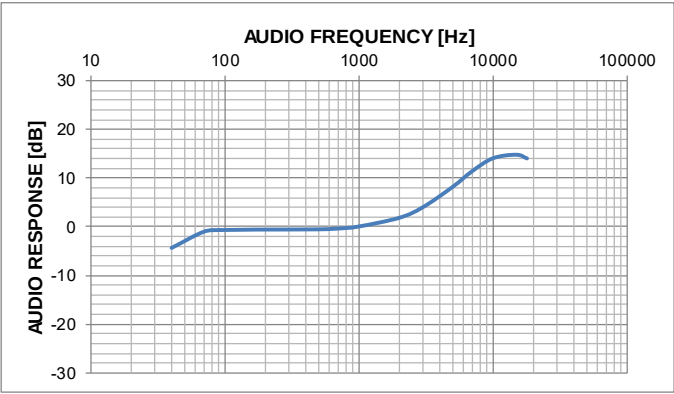

Calculation formula:
$$\text{AF Response} = 20 * \log(\text{AF Level of 1kHz} / \text{AF level})$$

[Power Setting: Low]

AF Frequency [Hz]	AF Level [mV]	AF Response [dB]
40	15.48	-4.36
70	10.56	-1.04
100	10.18	-0.72
300	10.04	-0.60
500	10.02	-0.58
700	9.84	-0.43
1000	9.37	0.00
2000	7.59	1.83
3000	5.93	3.97
5000	3.68	8.12
7000	2.54	11.34
10000	1.87	14.00
15000	1.71	14.77
18000	1.88	13.95

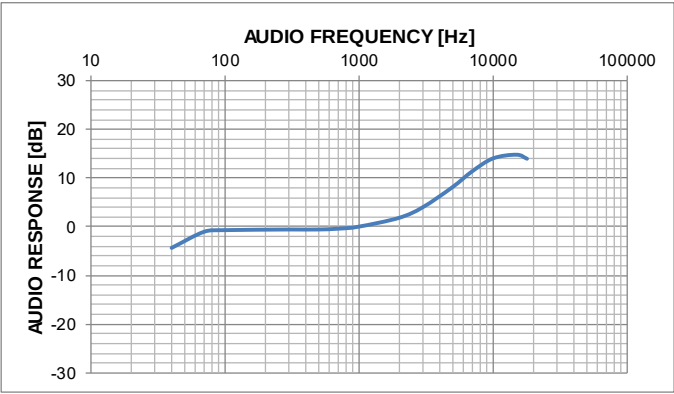

Calculation formula:
$$\text{AF Response} = 20 * \log(\text{AF Level of 1kHz} / \text{AF level})$$


Occupied Bandwidth

Test place	Ise EMC Lab. No.6 Measurement Room
Date	April 11, 2024
Temperature/ Humidity	21 deg. C / 48 % RH
Engineer	Shousei Hamaguchi
Mode	Tx

Power Setting	Channel	Freq. [MHz]	99% Occupied Bandwidth [kHz]	Limit [kHz]	Margin [kHz]
10 mW	Low	508.125	87.8910	200	112.1090
	Mid	518.775	81.7892	200	118.2108
	High	526.825	76.8406	200	123.1594
30 mW	Low	508.125	87.8323	200	112.1677
	Mid	539.000	81.7478	200	118.2522
	High	526.825	76.8260	200	123.1740

Occupied Bandwidth


Test place	Ise EMC Lab. No.6 Measurement Room
Date	April 11, 2024
Temperature/ Humidity	21 deg. C / 48 % RH
Engineer	Shousei Hamaguchi
Mode	Tx

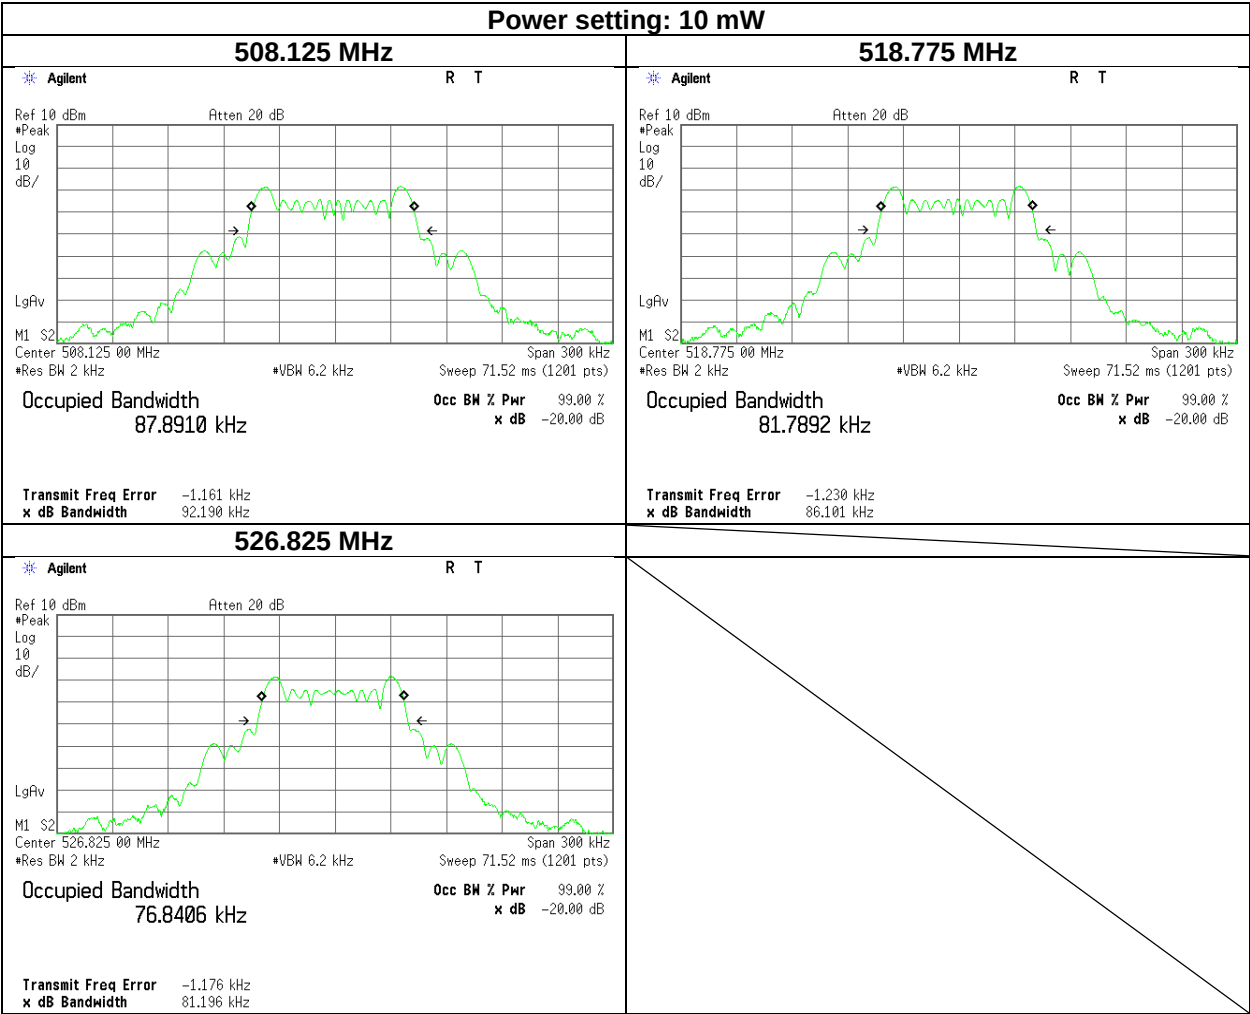

Occupied Bandwidth

Test place
Date
Temperature/ Humidity
Engineer
Mode

Ise EMC Lab. No.6 Measurement Room
April 11, 2024
21 deg. C / 48 % RH
Shousei Hamaguchi
Tx

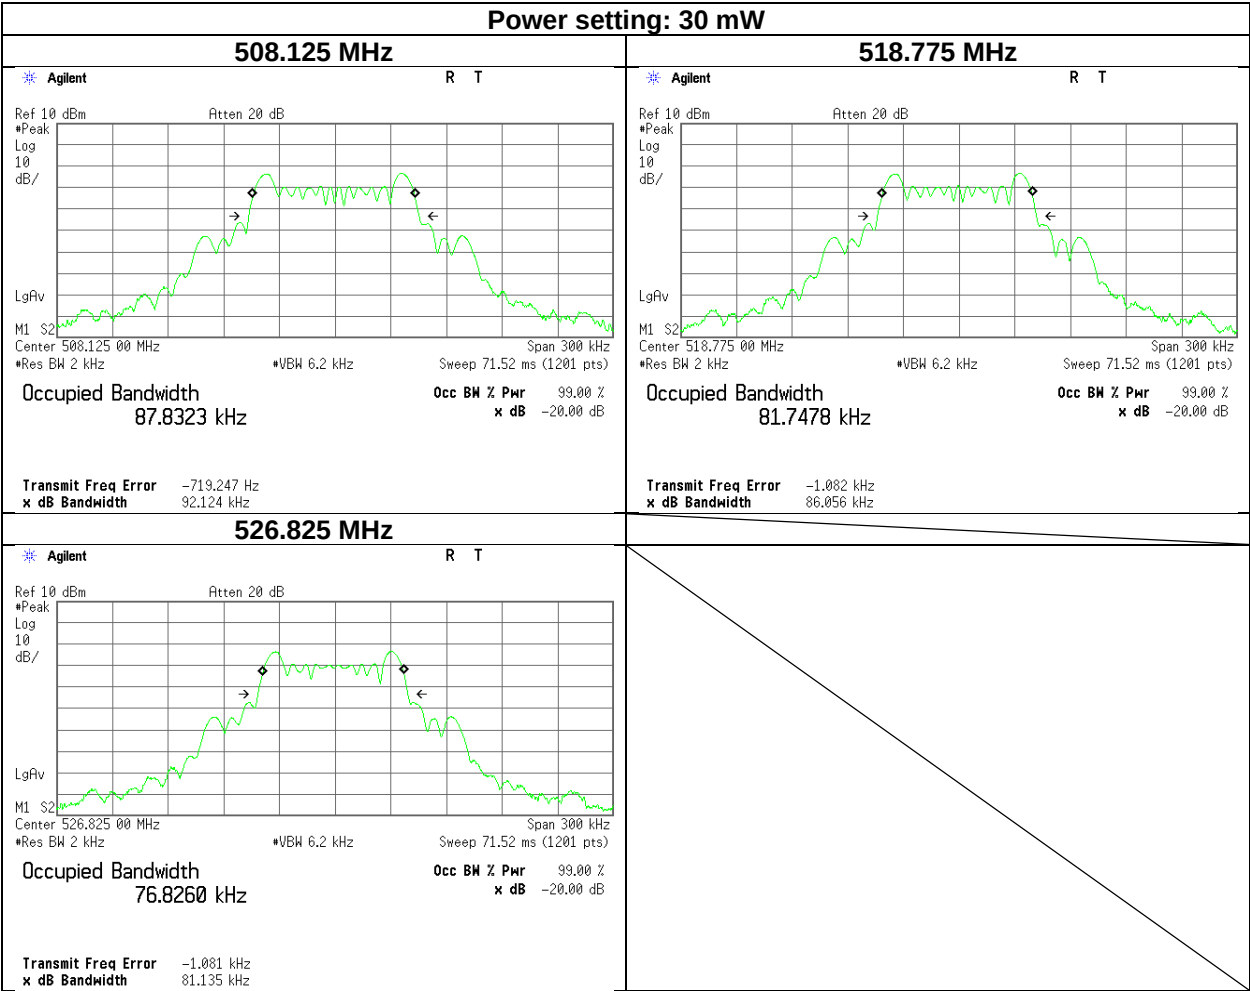

Spurious emissions at antenna terminals

Test place Ise EMC Lab. No.6 Measurement Room
Date April 11, 2024
Temperature/ Humidity 21 deg. C / 48 % RH
Engineer Shousei Hamaguchi
Mode Tx

Power Setting	Channel	Tested Freq. [MHz]	Reading		Cable Loss [dB]	Atten. Loss [dB]	Result [dBm]	Limit [dBm]	Margin [dB]
			Freq. [MHz]	Level [dBm]					
10 mW	Low	508.125	0.129749	-96.85	0.03	19.86	-76.96	-13	63.96
			0.303	-89.77	0.04	19.86	-69.87	-13	56.87
			129.63	-82.04	0.20	19.87	-61.97	-13	48.97
			451.875	-81.23	0.37	19.88	-60.98	-13	47.98
			630.5	-81.75	0.44	19.88	-61.43	-13	48.43
			2600.25	-70.91	1.00	20.00	-49.91	-13	36.91
			5081.25	-66.53	1.39	20.04	-45.10	-13	32.10
			8129.5	-65.97	2.77	20.03	-43.17	-13	30.17
	Mid	518.775	0.129766	-97.32	0.03	19.86	-77.43	-13	64.43
			0.15	-89.72	0.03	19.86	-69.83	-13	56.83
			284.61	-82.41	0.30	19.88	-62.23	-13	49.23
			454.5	-81.44	0.37	19.88	-61.19	-13	48.19
			615.05	-82.24	0.44	19.88	-61.92	-13	48.92
			2941	-70.23	1.04	20.01	-49.18	-13	36.18
			5187.75	-66.46	1.44	20.04	-44.98	-13	31.98
			7782	-65.61	2.49	20.03	-43.09	-13	30.09
	High	526.825	0.129714	-97.56	0.03	19.86	-77.67	-13	64.67
			0.15	-90.21	0.03	19.86	-70.32	-13	57.32
			142.39	-82.04	0.21	19.87	-61.96	-13	48.96
			437.475	-82.74	0.37	19.88	-62.49	-13	49.49
			604.1	-81.84	0.43	19.88	-61.53	-13	48.53
			2981.75	-70.43	1.05	20.01	-49.37	-13	36.37
			4741.5	-65.97	1.30	20.04	-44.63	-13	31.63
			7903	-64.31	2.63	20.03	-41.65	-13	28.65
30 mW	Low	508.125	0.129784	-96.11	0.03	19.86	-76.22	-13	63.22
			0.34	-90.94	0.04	19.86	-71.04	-13	58.04
			144.01	-81.93	0.21	19.87	-61.85	-13	48.85
			435.75	-81.65	0.37	19.88	-61.40	-13	48.40
			619.4	-81.69	0.44	19.88	-61.37	-13	48.37
			2955.5	-71.04	1.05	20.01	-49.98	-13	36.98
			5081.625	-64.63	1.39	20.04	-43.20	-13	30.20
			7114	-61.27	2.09	20.02	-39.16	-13	26.16
	Mid	518.775	0.129731	-96.73	0.03	19.86	-76.84	-13	63.84
			0.225	-91.08	0.03	19.86	-71.19	-13	58.19
			294.74	-82.35	0.31	19.88	-62.16	-13	49.16
			474.225	-80.88	0.38	19.88	-60.62	-13	47.62
			743	-82.23	0.47	19.88	-61.88	-13	48.88
			2970.25	-70.45	1.05	20.01	-49.39	-13	36.39
			5187.375	-63.32	1.44	20.04	-41.84	-13	28.84
			7262	-63.53	2.12	20.02	-41.39	-13	28.39
	High	526.825	0.129731	-96.14	0.03	19.86	-76.25	-13	63.25
			0.15	-89.11	0.03	19.86	-69.22	-13	56.22
			151.33	-82.75	0.22	19.87	-62.66	-13	49.66
			514.0875	-80.60	0.40	19.88	-60.32	-13	47.32
			615.9	-81.30	0.44	19.88	-60.98	-13	47.98
			2917.5	-70.57	1.04	20.01	-49.52	-13	36.52
			5268.75	-65.56	1.48	20.04	-44.04	-13	31.04
			7375	-65.45	2.14	20.02	-43.29	-13	30.29


Calculation formula:

Result = Reading + Cable Loss + Attenuator Loss

Limit = mean output power in dBm - (43 + 10log10(mean output power in W)) dB = -13 dBm


Spurious emissions at antenna terminals

Test place Ise EMC Lab. No.6 Measurement Room
Date April 11, 2024
Temperature/ Humidity 21 deg. C / 48 % RH
Engineer Shousei Hamaguchi
Mode Tx 508.125 MHz, 10 mW

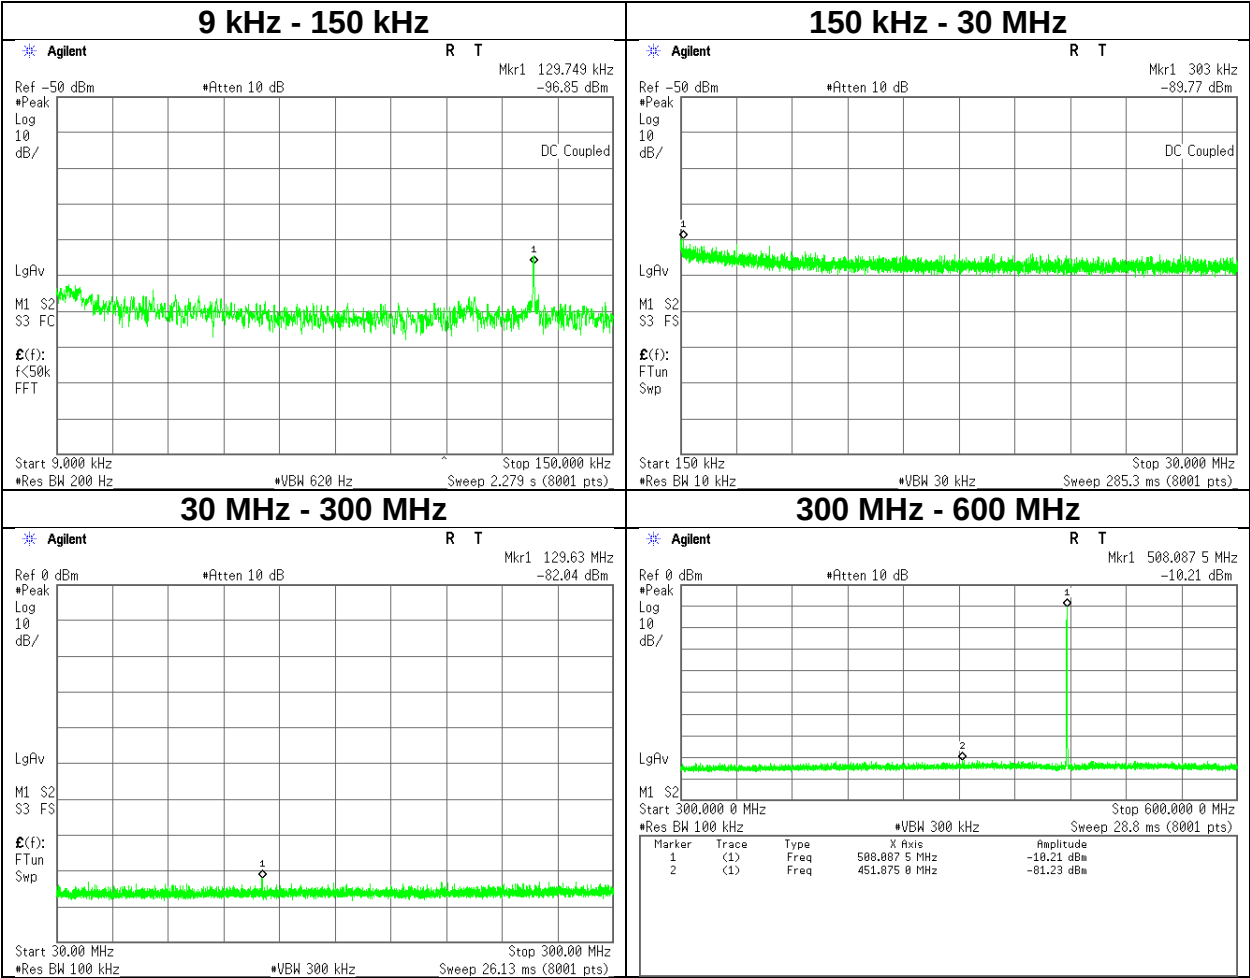


Spurious emissions at antenna terminals

Test place	Ise EMC Lab. No.6 Measurement Room
Date	April 11, 2024
Temperature/ Humidity	21 deg. C / 48 % RH
Engineer	Shousei Hamaguchi
Mode	Tx 508.125 MHz, 10 mW

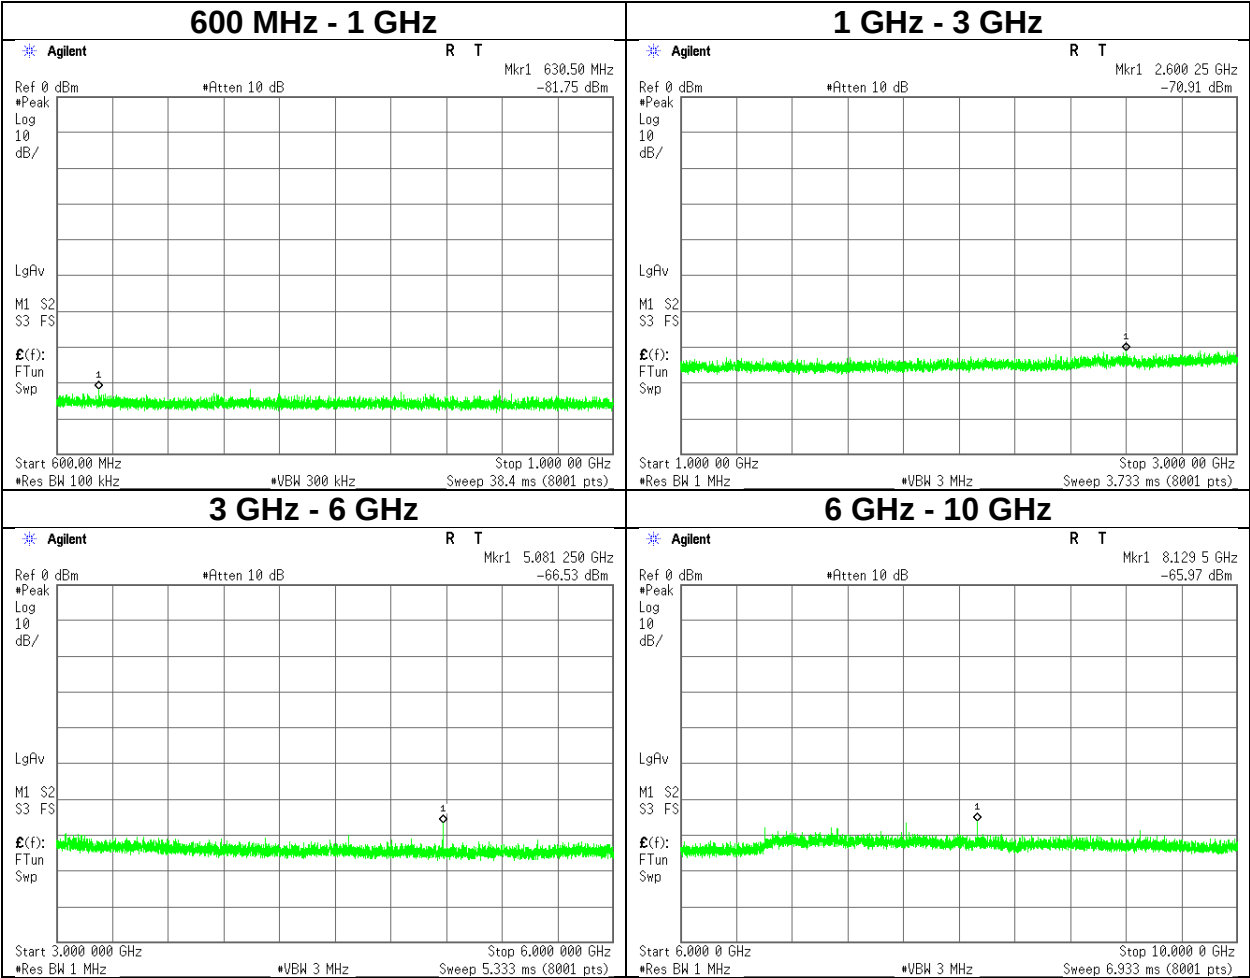


Spurious emissions at antenna terminals

Test place Ise EMC Lab. No.6 Measurement Room
Date April 11, 2024
Temperature/ Humidity 21 deg. C / 48 % RH
Engineer Shousei Hamaguchi
Mode Tx 518.775 MHz, 10 mW

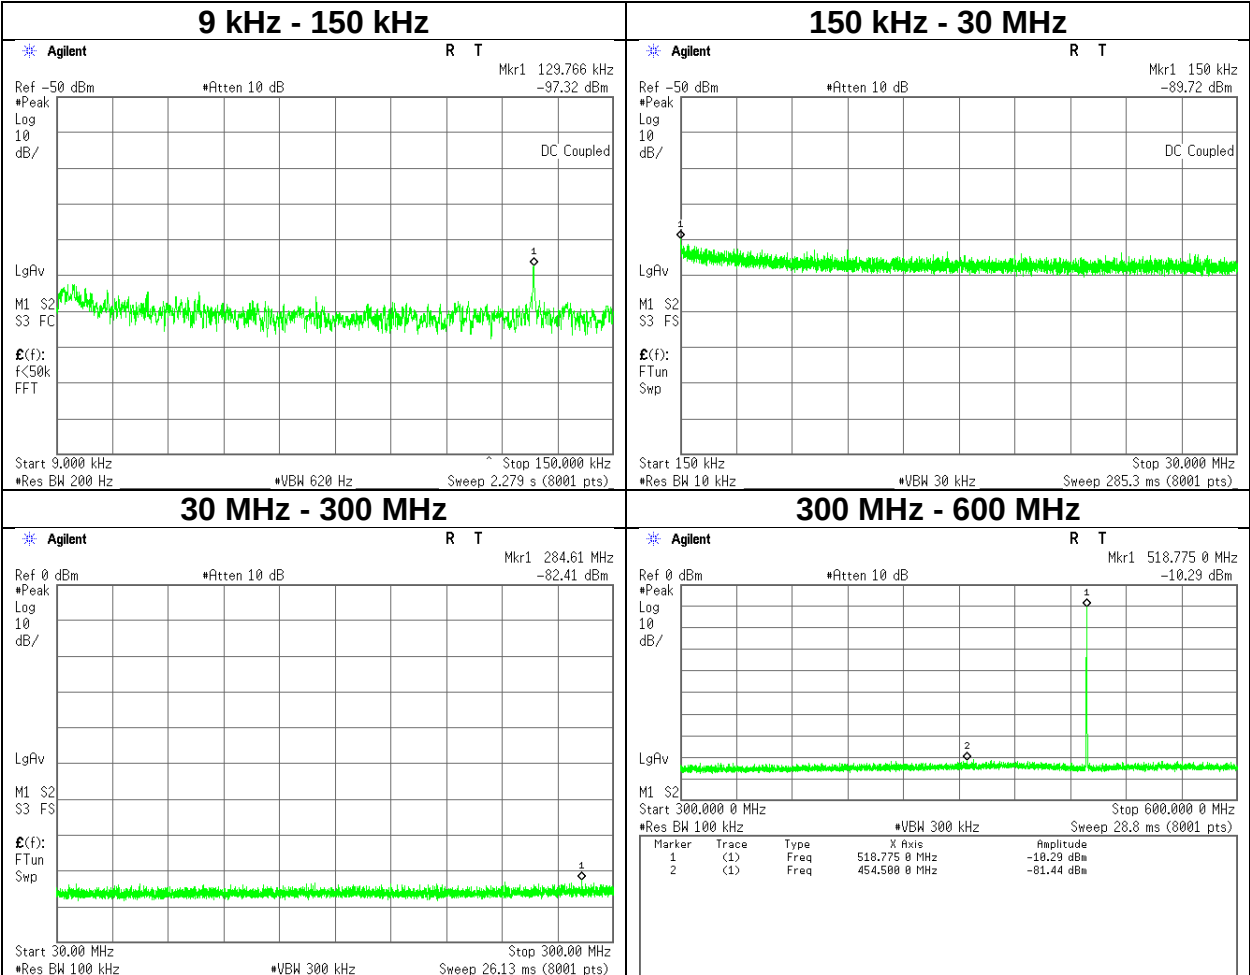

Spurious emissions at antenna terminals


Test place Ise EMC Lab. No.6 Measurement Room
Date April 11, 2024
Temperature/ Humidity 21 deg. C / 48 % RH
Engineer Shousei Hamaguchi
Mode Tx 518.775 MHz, 10 mW

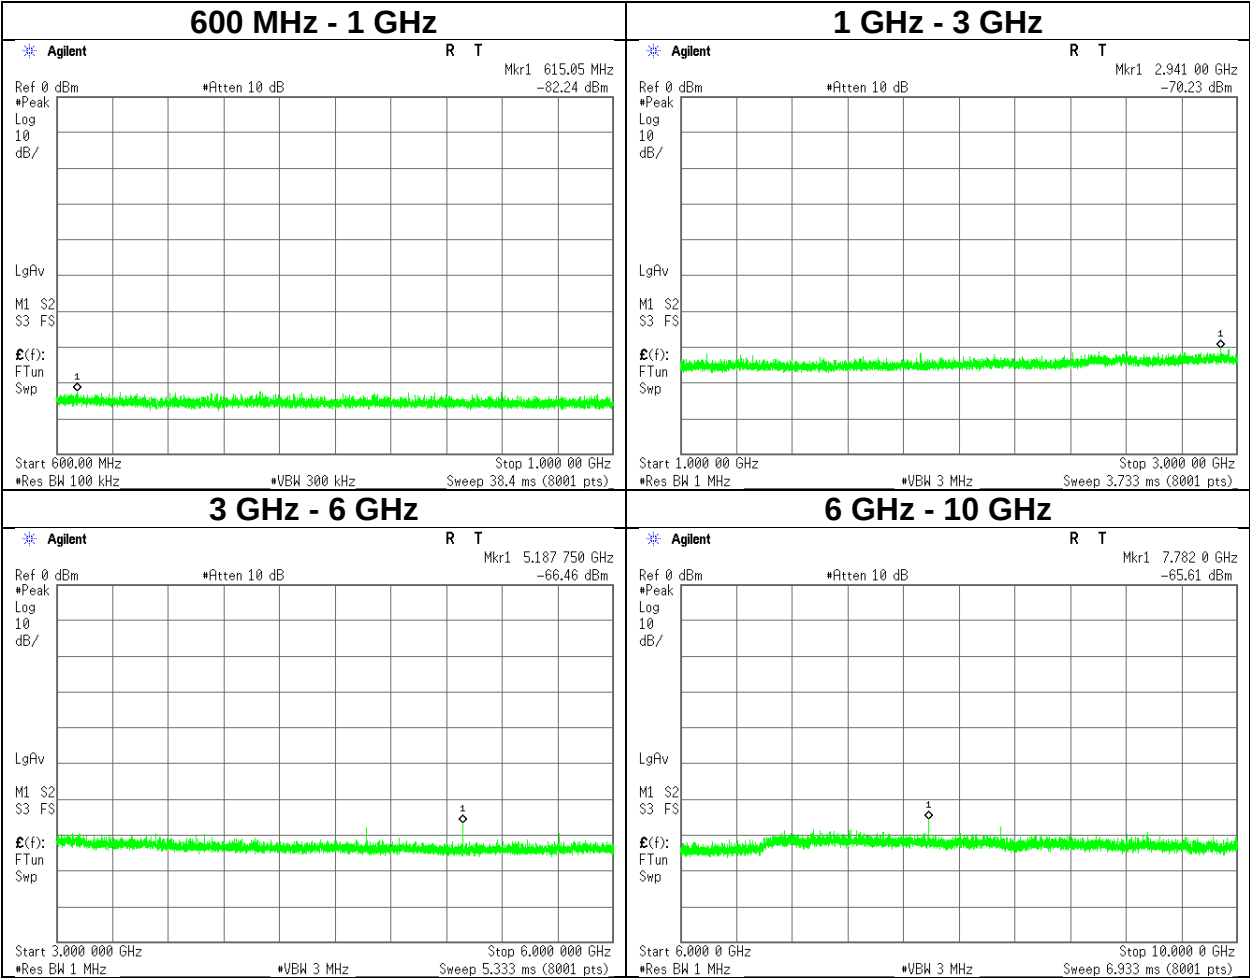

Spurious emissions at antenna terminals


Test place
Date
Temperature/ Humidity
Engineer
Mode

Ise EMC Lab. No.6 Measurement Room
April 11, 2024
21 deg. C / 48 % RH
Shousei Hamaguchi
Tx 526.825 MHz, 10 mW

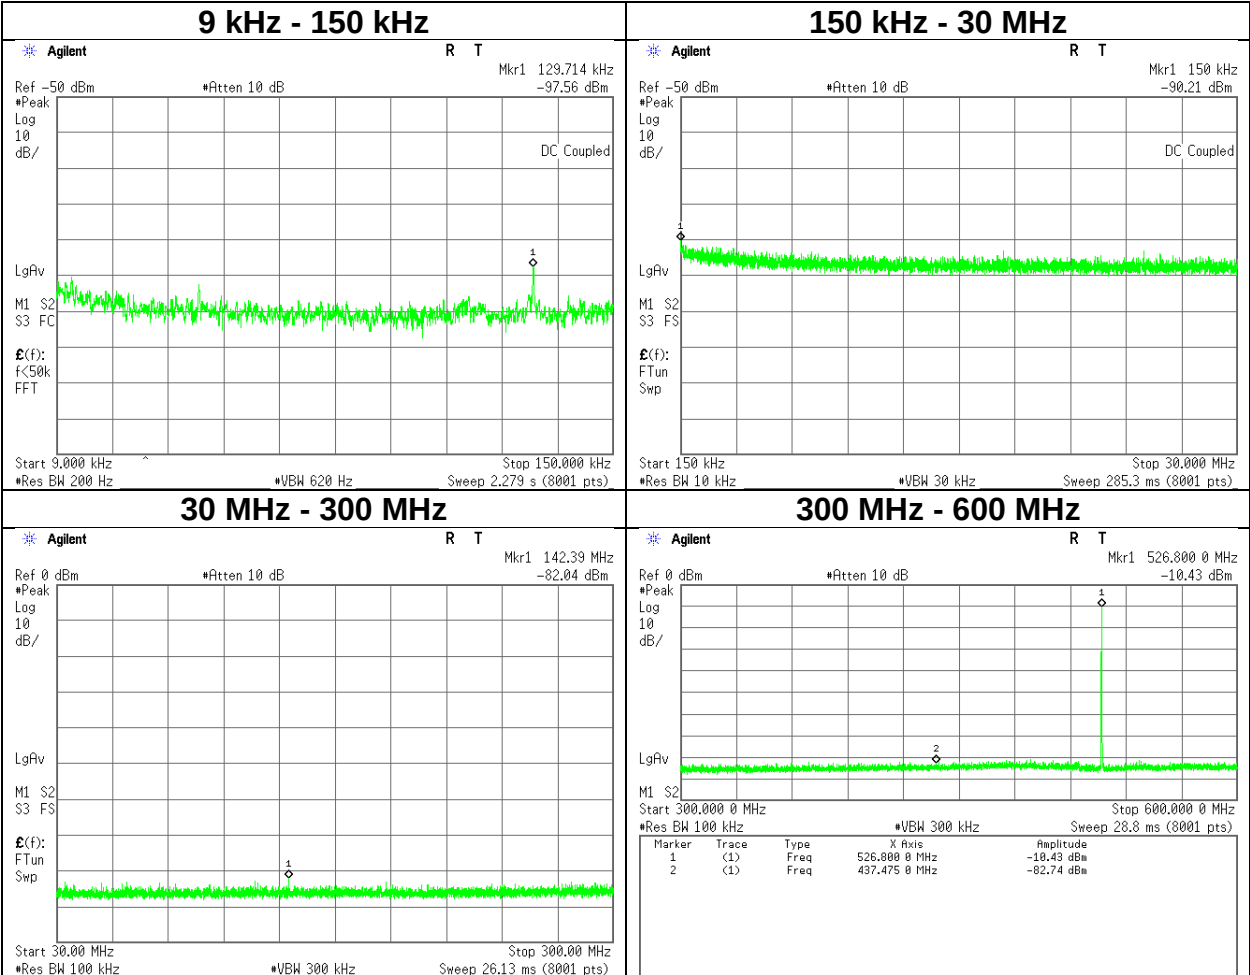


Spurious emissions at antenna terminals

Test place Ise EMC Lab. No.6 Measurement Room
Date April 11, 2024
Temperature/ Humidity 21 deg. C / 48 % RH
Engineer Shousei Hamaguchi
Mode Tx 526.825 MHz, 10 mW

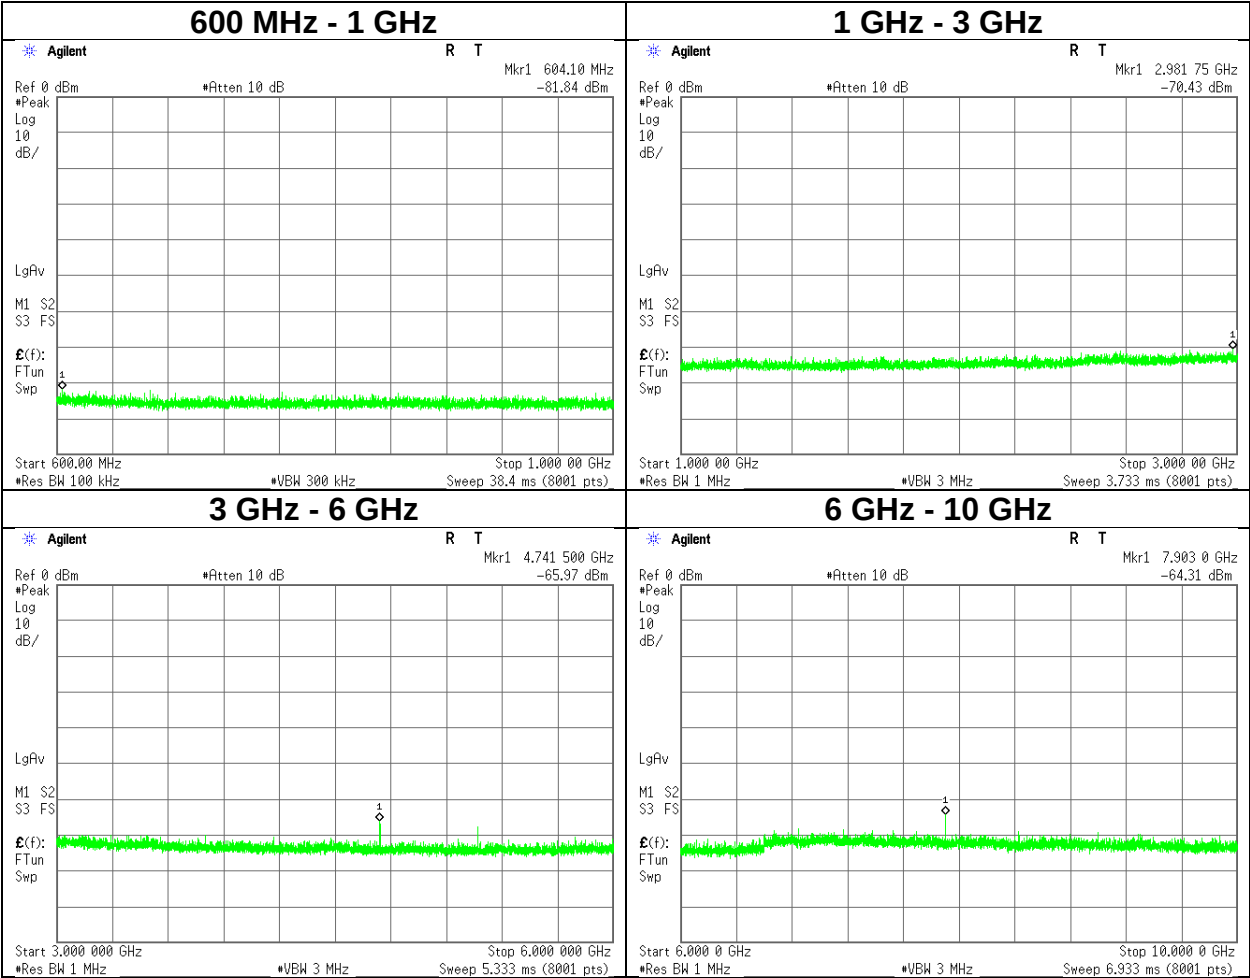


Spurious emissions at antenna terminals

Test place Ise EMC Lab. No.6 Measurement Room
Date April 11, 2024
Temperature/ Humidity 21 deg. C / 48 % RH
Engineer Shousei Hamaguchi
Mode Tx 508.125 MHz, 30 mW

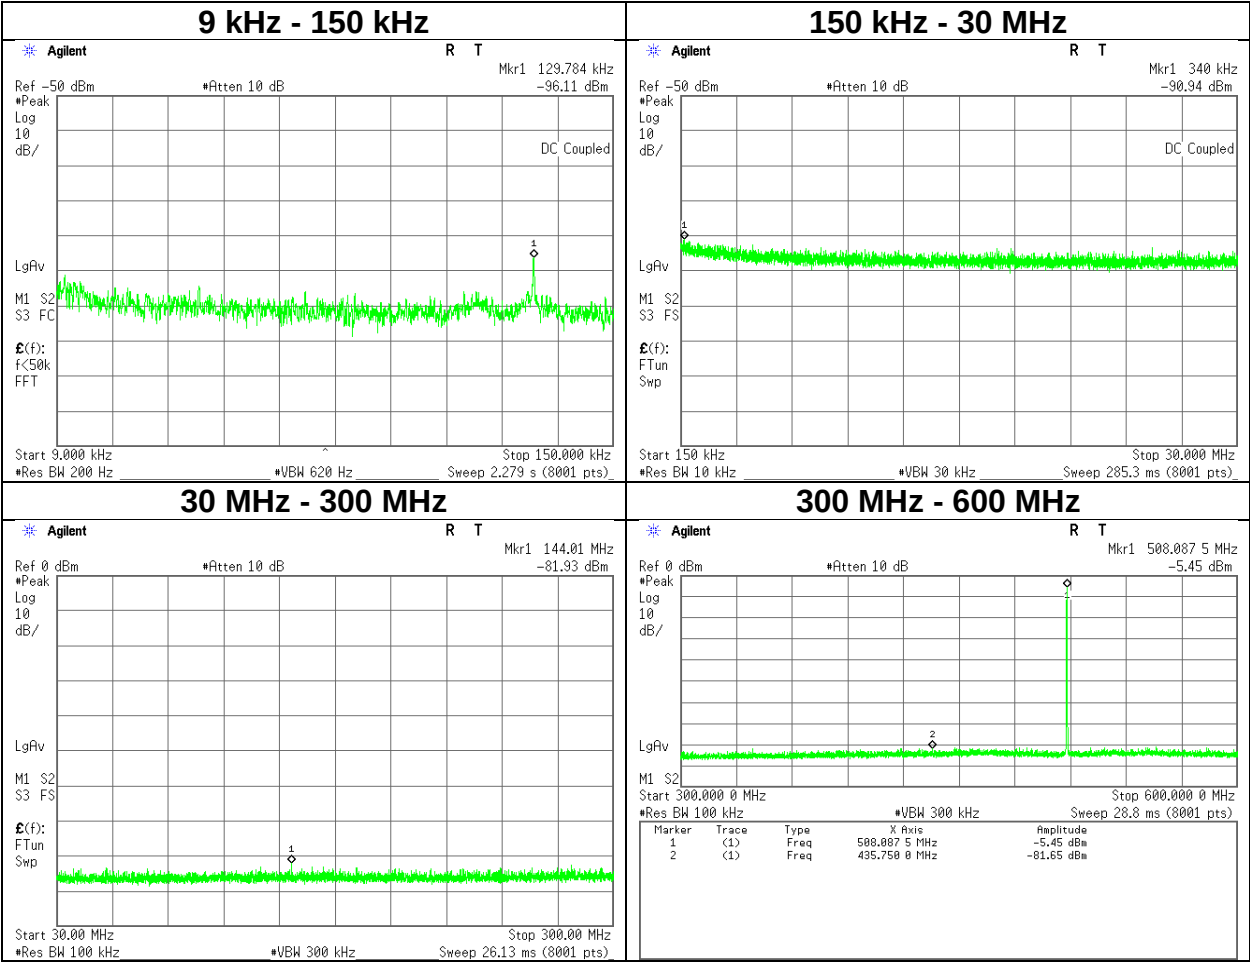

Spurious emissions at antenna terminals


Test place	Ise EMC Lab. No.6 Measurement Room
Date	April 11, 2024
Temperature/ Humidity	21 deg. C / 48 % RH
Engineer	Shousei Hamaguchi
Mode	Tx 508.125 MHz, 30 mW

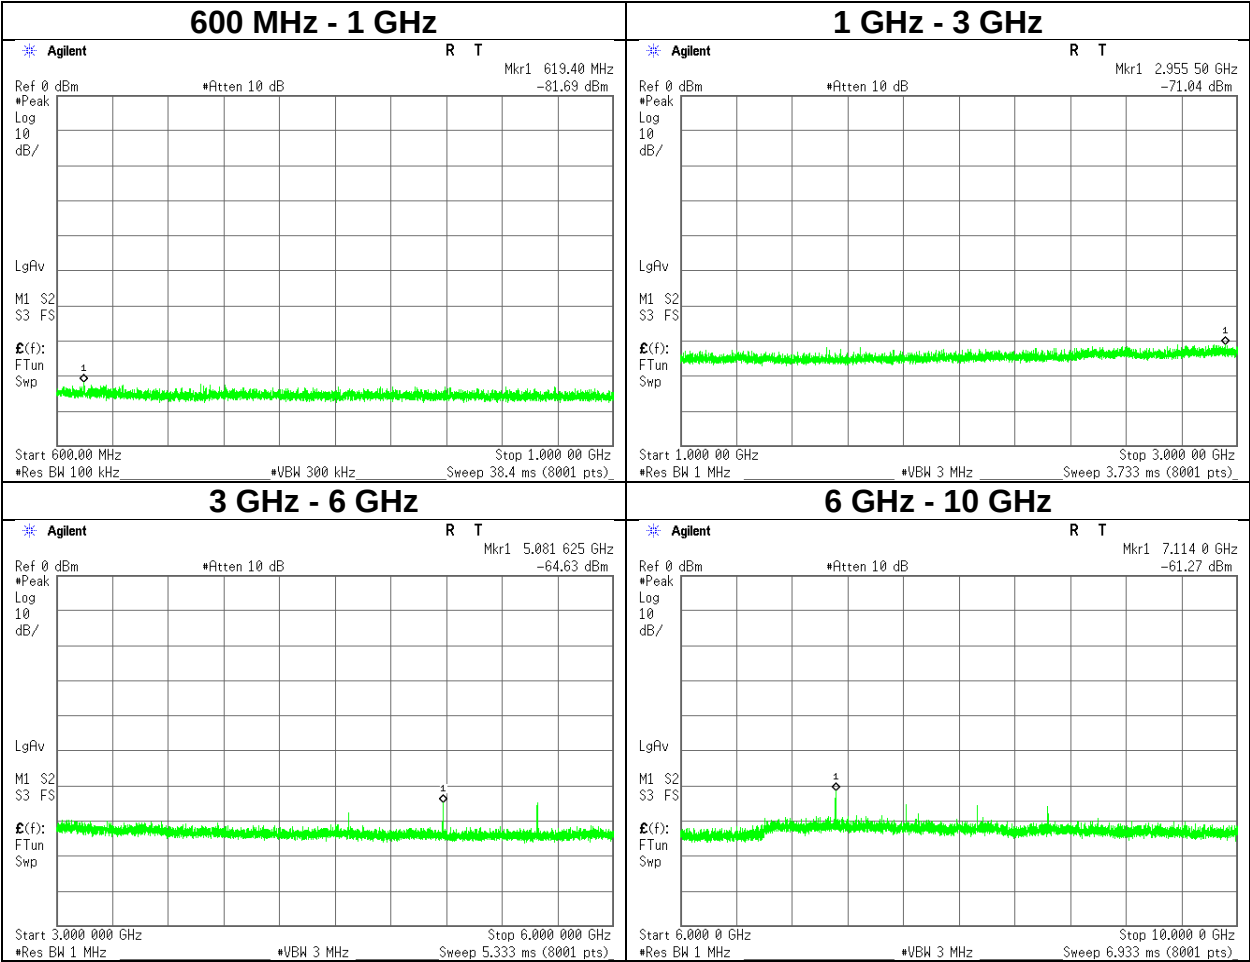

Spurious emissions at antenna terminals


Test place
Date
Temperature/ Humidity
Engineer
Mode

Ise EMC Lab. No.6 Measurement Room
April 11, 2024
21 deg. C / 48 % RH
Shousei Hamaguchi
Tx 518.775 MHz, 30 mW

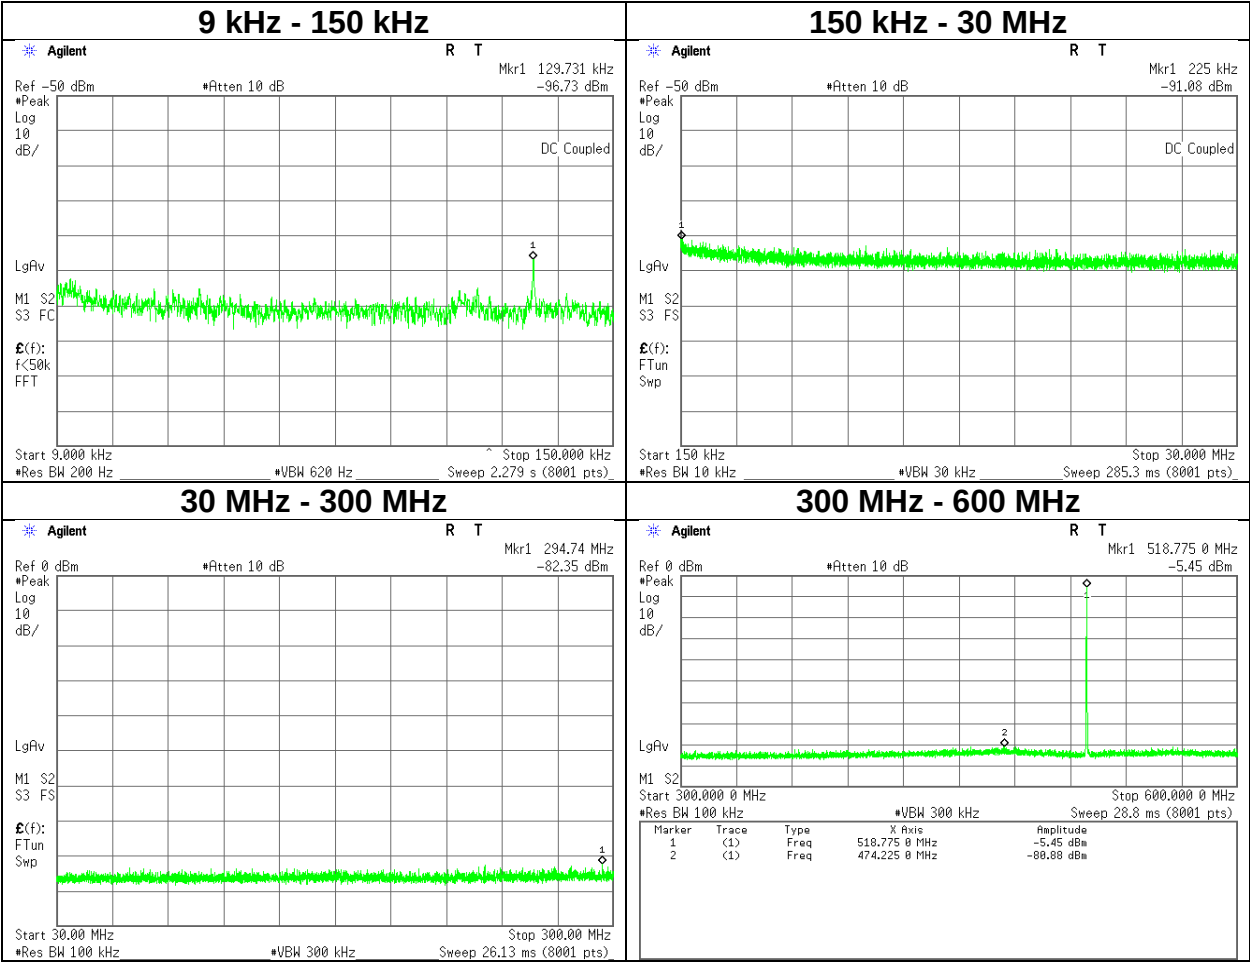


Spurious emissions at antenna terminals

Test place Ise EMC Lab. No.6 Measurement Room
Date April 11, 2024
Temperature/ Humidity 21 deg. C / 48 % RH
Engineer Shousei Hamaguchi
Mode Tx 518.775 MHz, 30 mW

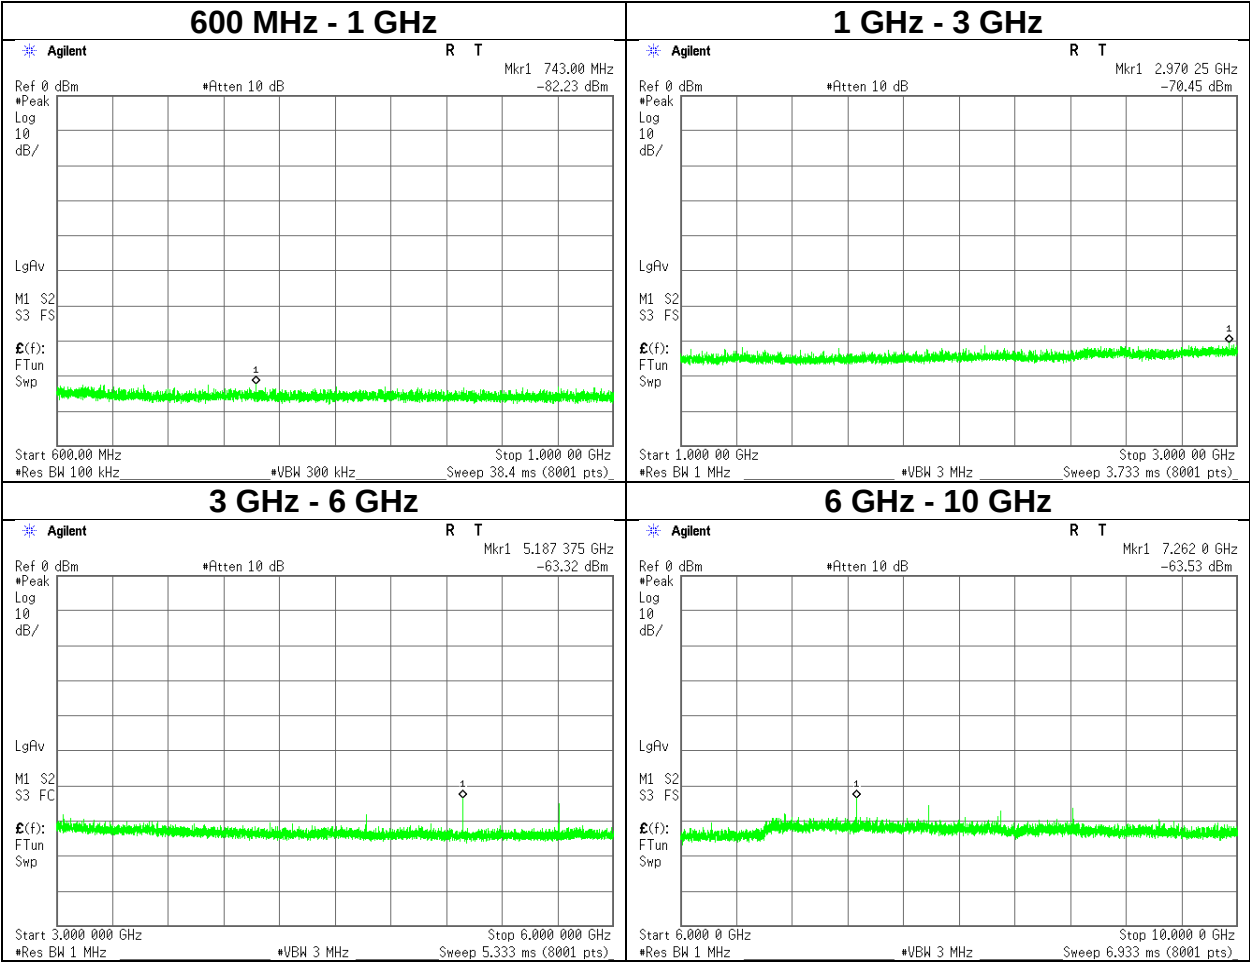


Spurious emissions at antenna terminals

Test place Ise EMC Lab. No.6 Measurement Room
Date April 11, 2024
Temperature/ Humidity 21 deg. C / 48 % RH
Engineer Shousei Hamaguchi
Mode Tx 526.825 MHz, 30 mW

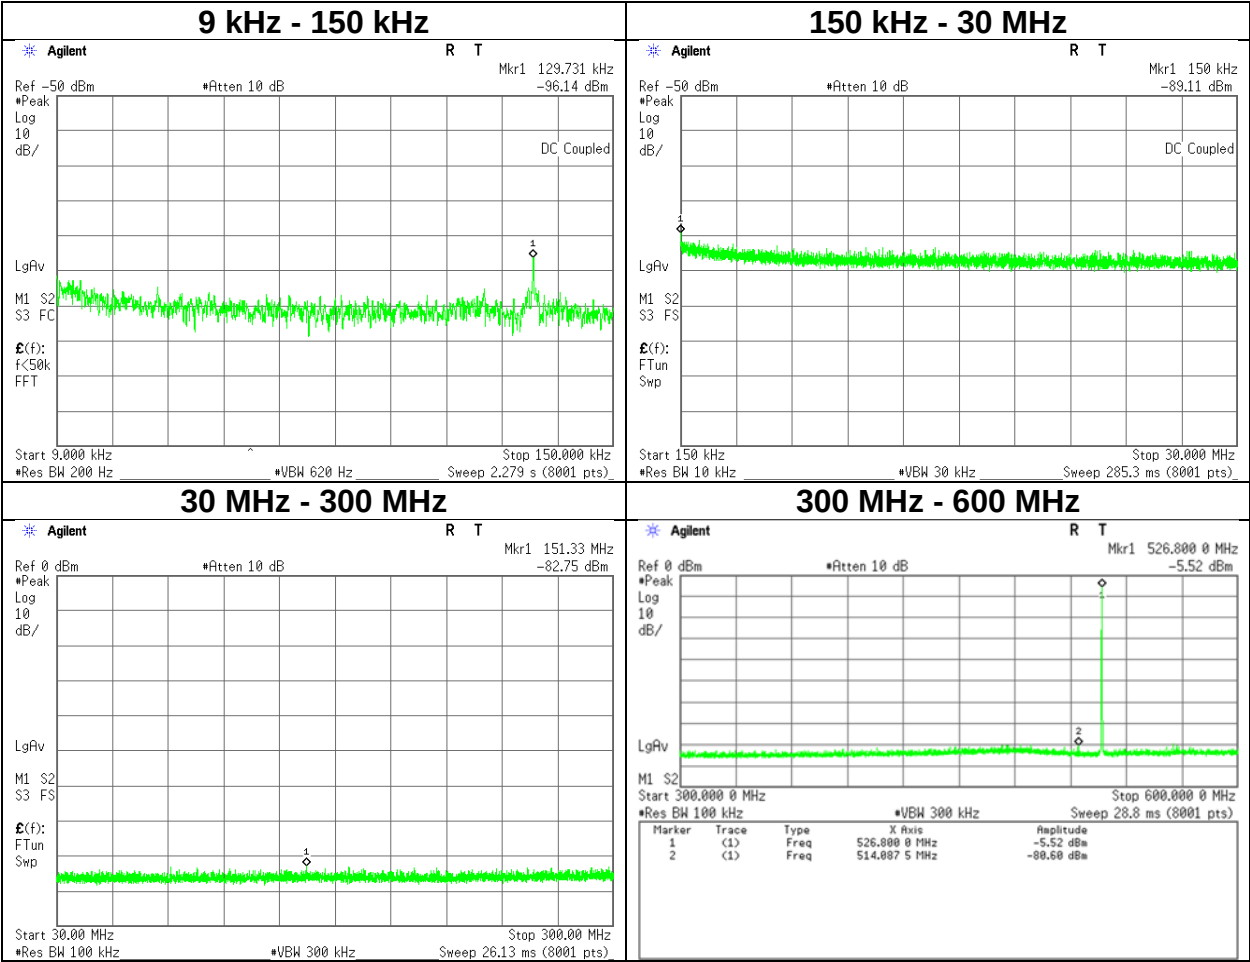


Spurious emissions at antenna terminals

Test place Ise EMC Lab. No.6 Measurement Room
Date April 11, 2024
Temperature/ Humidity 21 deg. C / 48 % RH
Engineer Shousei Hamaguchi
Mode Tx 526.825 MHz, 30 mW

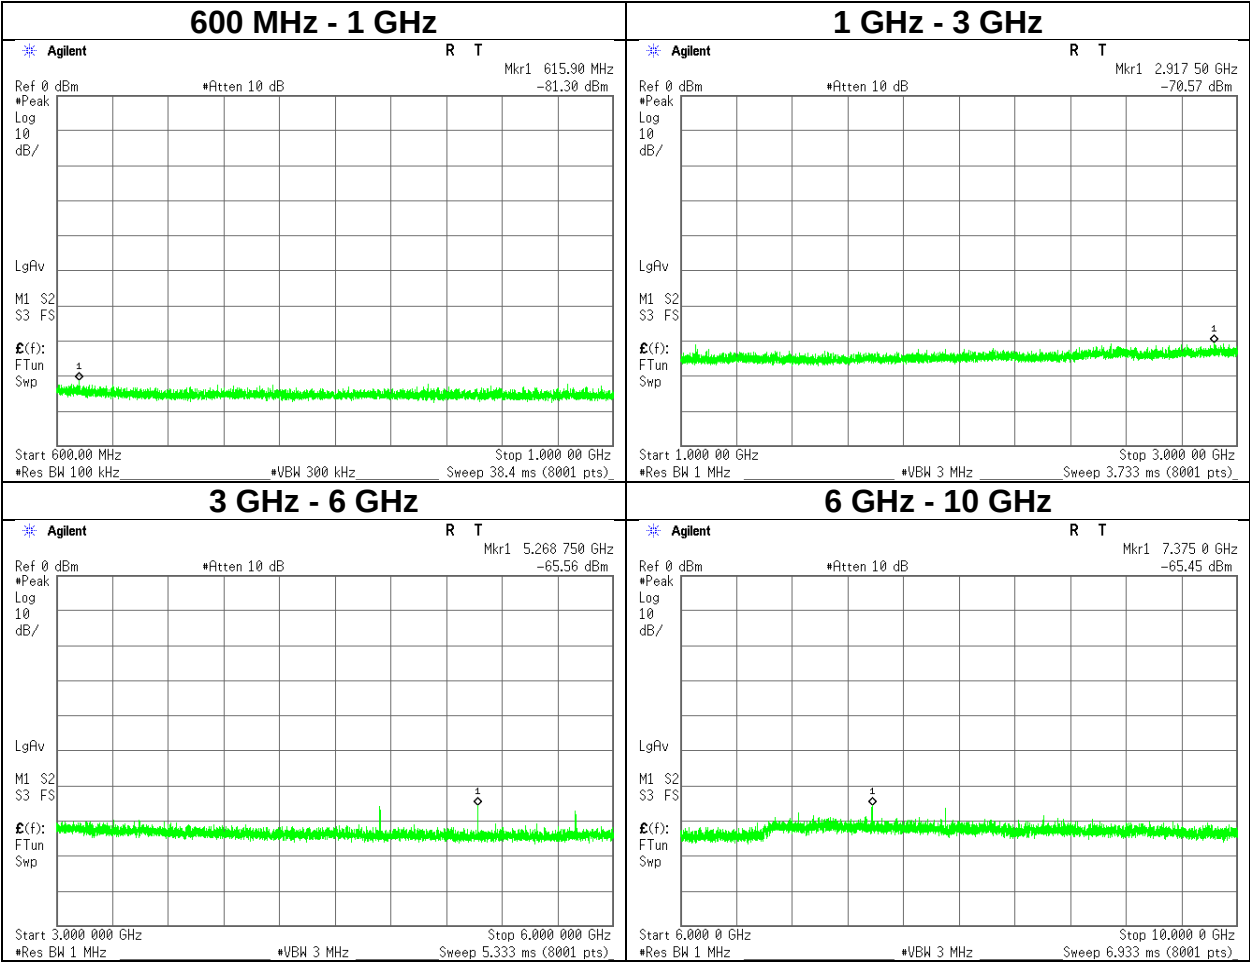

Spurious emissions at antenna terminals
[Side band spectrum measurement]

Test place Ise EMC Lab. No.6 Measurement Room
Date April 11, 2024
Temperature/ Humidity 21 deg. C / 48 % RH
Engineer Shousei Hamaguchi
Mode Tx

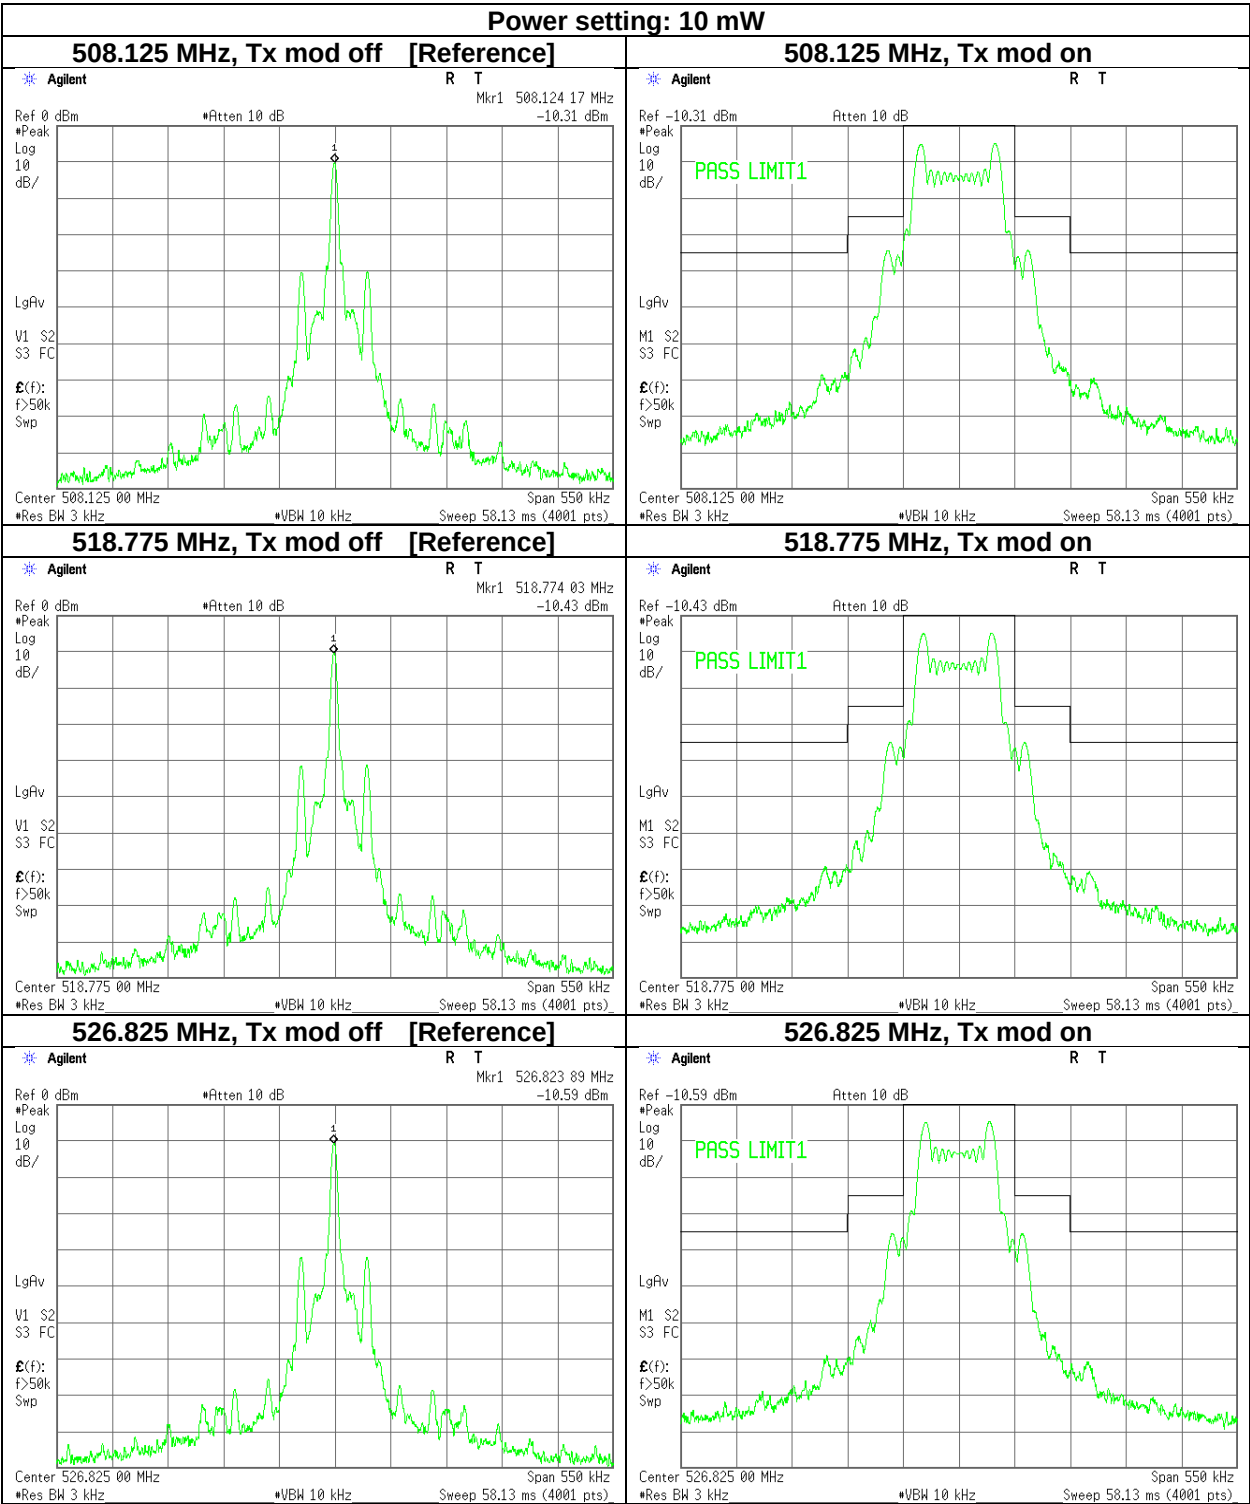


Spurious emissions at antenna terminals

[Side band spectrum measurement]


Test place
Date
Temperature/ Humidity
Engineer
Mode

Ise EMC Lab. No.6 Measurement Room
April 11, 2024
21 deg. C / 48 % RH
Shousei Hamaguchi
Tx

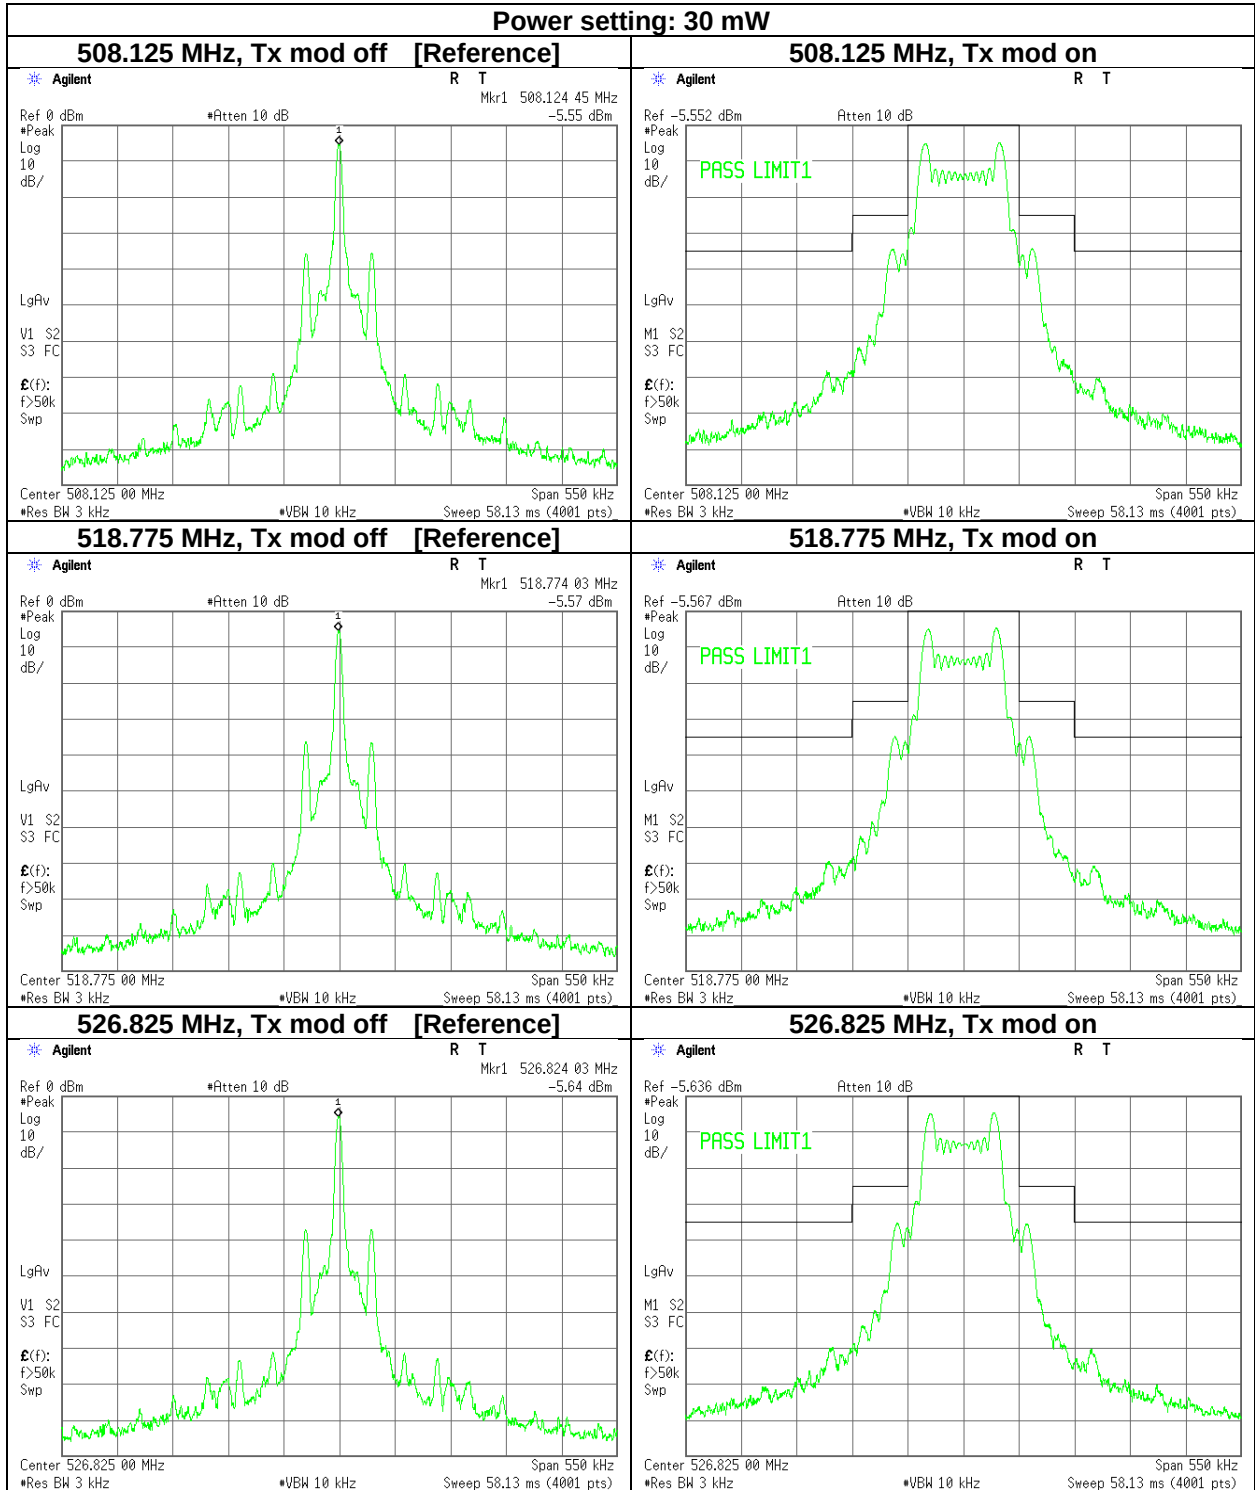


Necessary bandwidth

Test place	Ise EMC Lab. No.6 Measurement Room
Date	April 12, 2024
Temperature/ Humidity	24 deg. C / 49 % RH
Engineer	Shousei Hamaguchi
Mode	Tx

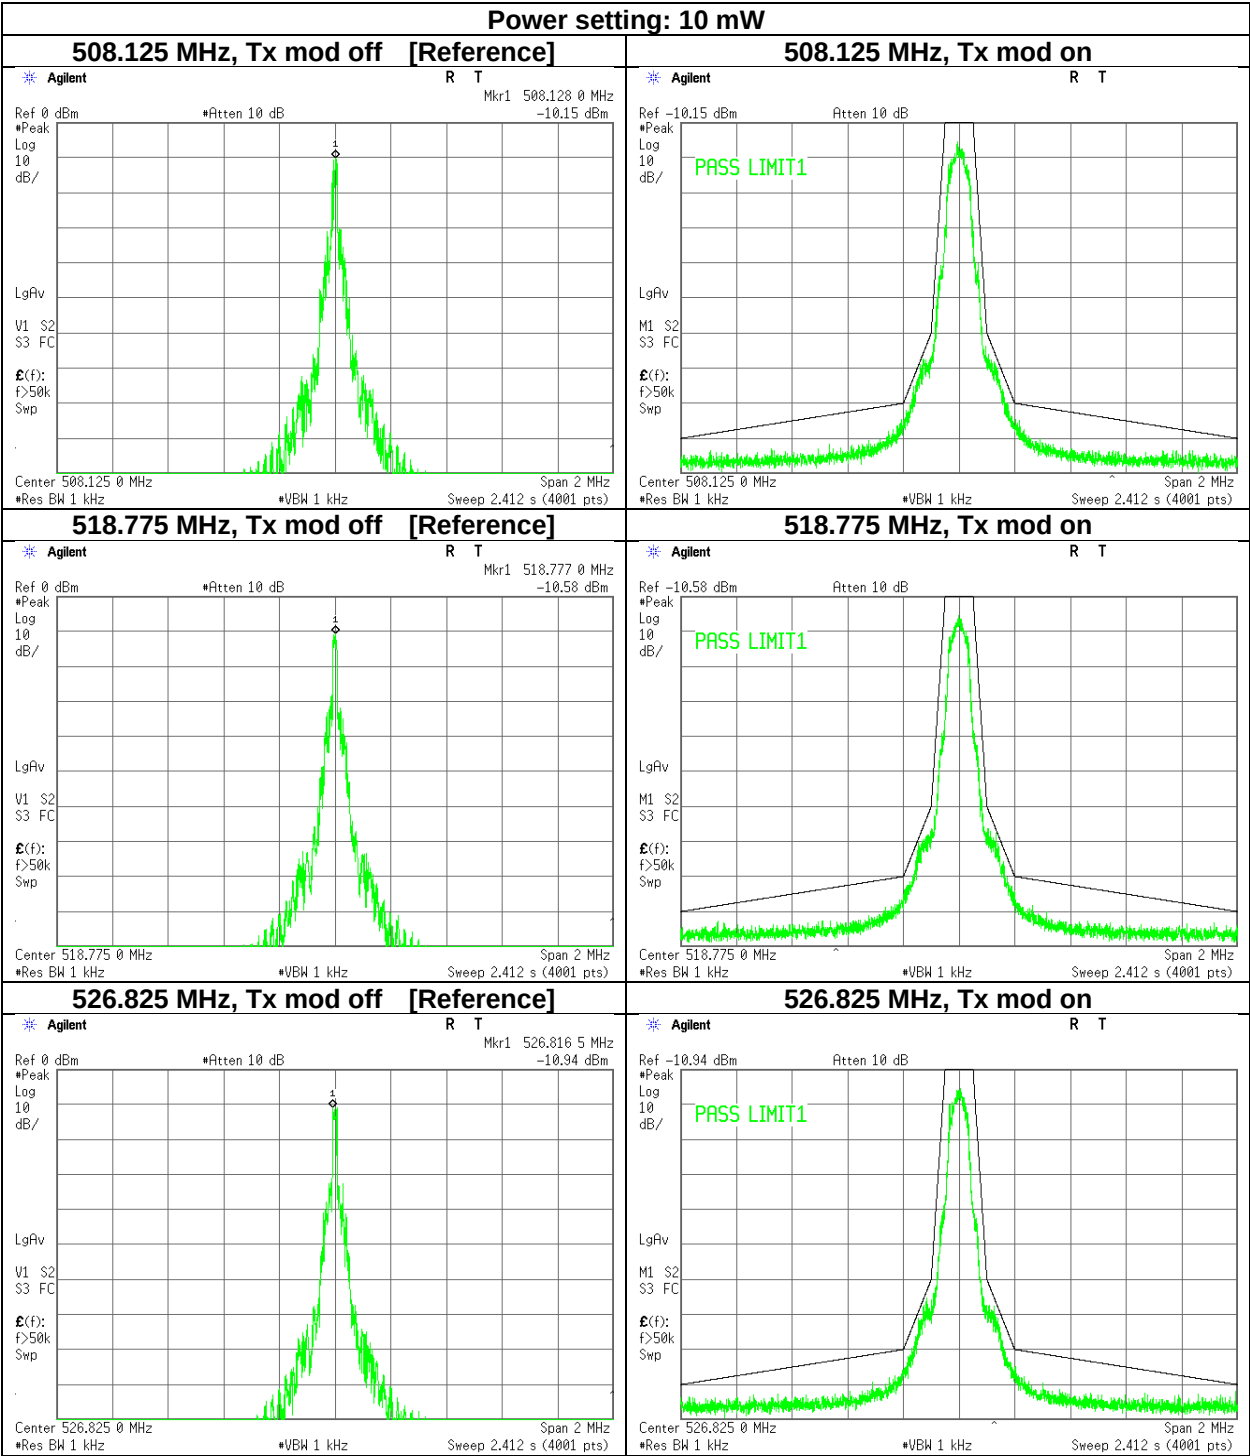

Necessary bandwidth

Test place	Ise EMC Lab. No.6 Measurement Room
Date	April 12, 2024
Temperature/ Humidity	24 deg. C / 49 % RH
Engineer	Shousei Hamaguchi
Mode	Tx

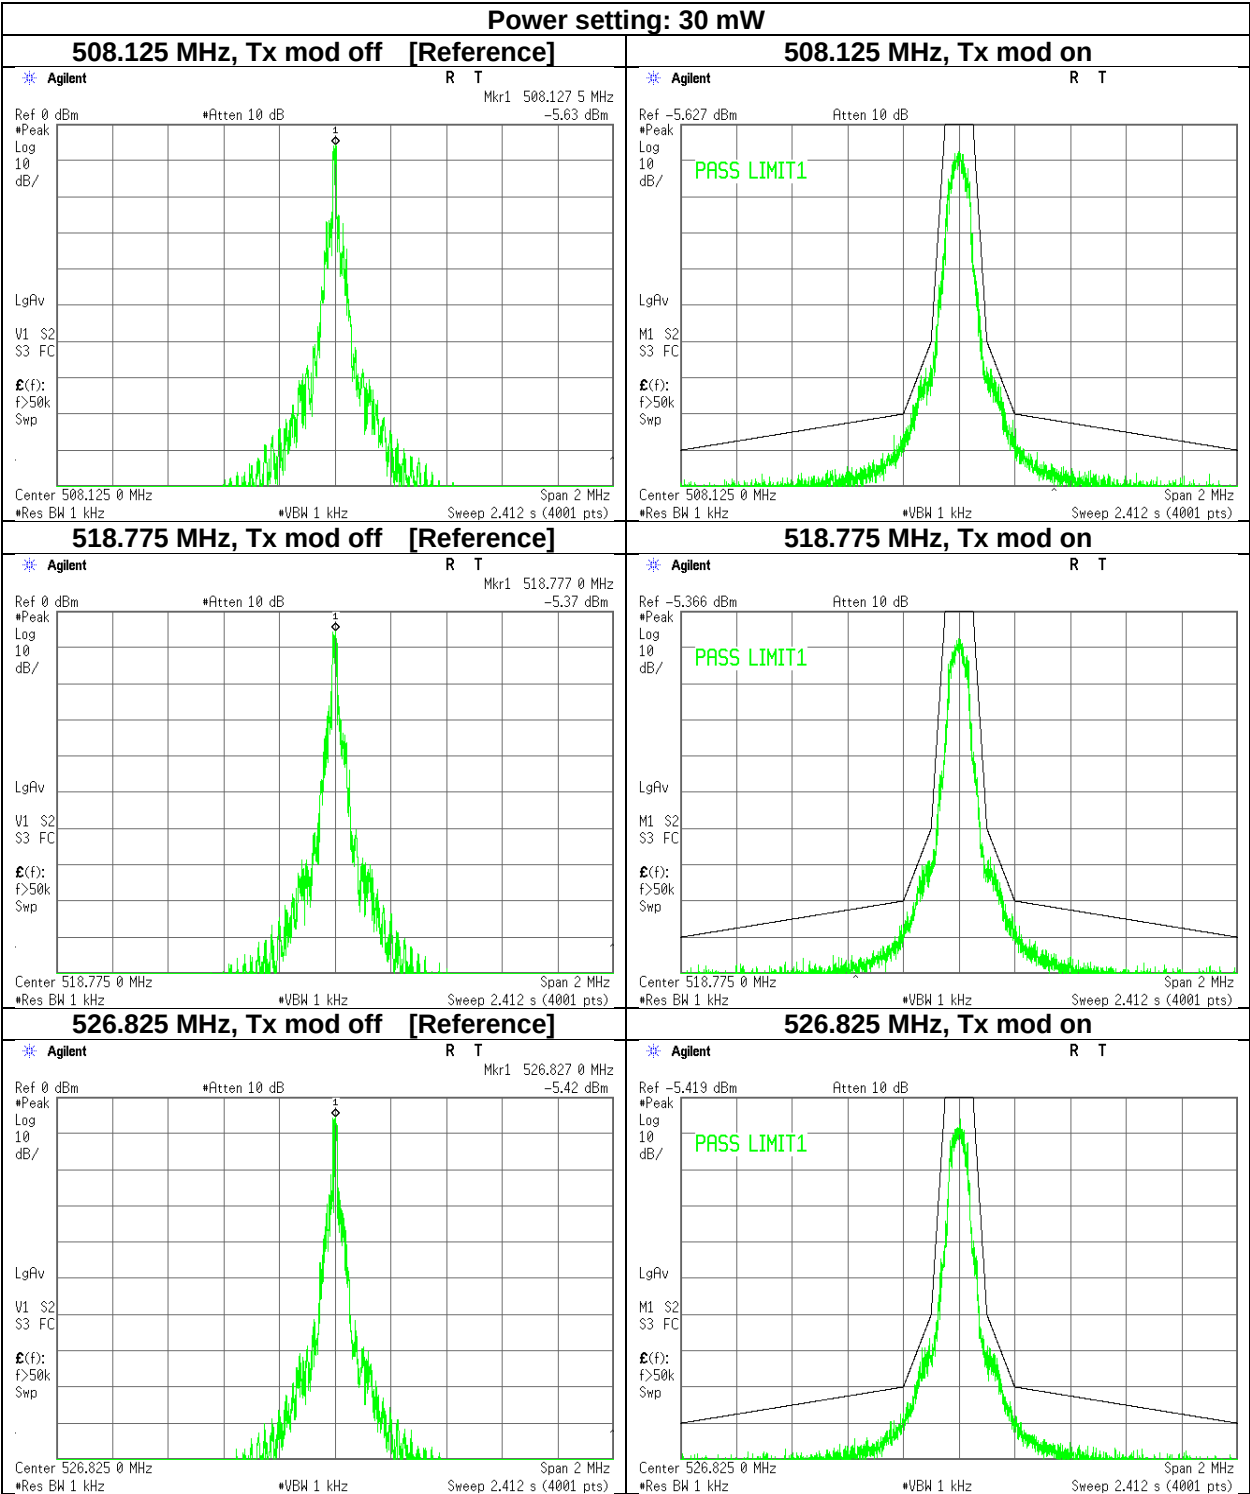

Field strength of spurious radiation

Test place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer

Mode

Ise EMC Lab.
No.2
April 16, 2024
20 deg. C / 43 % RH
Shousei Hamaguchi
(Below 1 GHz)
Tx 508.125 MHz, 30mW

No.2
April 17, 2024
20 deg. C / 60 % RH
Kiyoshiro Okazaki
(Above 1 GHz)

No.2
April 18, 2024
21 deg. C / 40 % RH
Takafumi Noguchi
(Above 1 GHz)

Frequency	Rx SATR		Tx SG		Tx Cable Loss	Tx Ant. Gain	Result		Limit	Margin		Horizontal		Vertical		Remarks
	Reading [dBuV]		Reading [dBm]				(ERP) [dBm]	(ERP) [dBm]		[dB]	Rx Ant. Height	Turn Table	Rx Ant. Height	Turn Table		
	[MHz]	Hori.	Vert.	Hori.											Vert.	
3048.75	59.2	59.1	-45.1	-46.1	4.8	11.3	-40.8	-41.8	-30.0	10.8	11.8	100	107	112	252	
3556.88	53.4	54.0	-49.7	-49.5	5.2	12.3	-44.7	-44.5	-30.0	14.7	14.5	140	25	130	331	
4065.00	47.5	51.3	-53.6	-50.3	5.6	12.6	-48.7	-45.4	-30.0	18.7	15.4	119	333	111	30	
4573.13	56.5	51.6	-43.2	-47.8	6.0	12.6	-38.7	-43.3	-30.0	8.7	13.3	115	6	105	324	
5081.25	54.1	54.5	-43.1	-42.3	6.3	12.5	-39.0	-38.2	-30.0	9.0	8.2	167	101	101	316	

Calculation Result = SG Reading - Tx Cable Loss + Tx Antenna Gain - 2.15
Rx-ANTENNA : Biconical Antenna(25 MHz - 200 MHz), Logperiodic Antenna(200 MHz - 1000 MHz), Horn Antenna(1 GHz - the tenth harmonic)
Tx-ANTENNA : 120 MHz tuned Dipole Antenna(30 MHz - 120 MHz), Dipole Antenna(120 MHz - 1000 MHz), Horn Antenna(1 GHz - the tenth harmonic)
Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).
NS : No signal detect.

Detector: 25 MHz to 30 MHz: Spectrum Analyzer RMS Average (RBW: 10 kHz / VBW: 30 kHz)
30 MHz to 1 GHz: Spectrum Analyzer RMS Average (RBW: 100 kHz / VBW: 300 kHz),
Above 1 GHz: Spectrum Analyzer RMS Average (RBW: 1 MHz / VBW: 3 MHz)
*Emissions were investigated up to the 10th harmonic of the fundamental.

Field strength of spurious radiation

Test place	Ise EMC Lab.	No.2	No.2
Semi Anechoic Chamber	No.2	No.2	No.2
Date	April 16, 2024	April 17, 2024	April 18, 2024
Temperature / Humidity	20 deg. C / 43 % RH	20 deg. C / 60 % RH	21 deg. C / 40 % RH
Engineer	Shousei Hamaguchi (Below 1 GHz)	Kiyoshiro Okazaki (Above 1 GHz)	Takafumi Noguchi (Above 1 GHz)
Mode	Tx 518.775 MHz, 30mW		

Frequency	Rx SA/TR		Tx SG		Tx	Tx	Result		Limit	Margin		Horizontal		Vertical		Remarks
	Reading		Reading		Cable Loss	Ant. Gain	(ERP)	(ERP)				Rx Ant.	Turn	Rx Ant.	Turn	
	[dBuV]	[dBm]	[dB]	[dBi]						[dBm]	[dBm]	Height	Table	Height	Table	
[MHz]	Hori.	Vert.	Hori.	Vert.	[dB]	[dBi]	Hori.	Vert.		Hori.	Vert.	[cm]	[deg.]	[cm]	[deg.]	
3631.43	51.6	51.3	-51.6	-52.6	5.3	12.3	-46.7	-47.7	-30.0	16.7	17.7	102	28	148	304	
4150.20	50.7	51.9	-50.6	-50.2	5.6	12.7	-45.7	-45.3	-30.0	15.7	15.3	169	35	118	3	
4668.98	57.3	51.1	-42.5	-49.4	6.0	12.5	-38.1	-45.0	-30.0	8.1	15.0	102	22	108	324	
5187.75	53.3	49.4	-44.7	-49.4	6.3	12.8	-40.4	-45.1	-30.0	10.4	15.1	136	5	208	41	

Calculation Result = SG Reading - Tx Cable Loss + Tx Antenna Gain - 2.15

Rx-ANTENNA : Biconical Antenna(25 MHz - 200 MHz), Logperiodic Antenna(200 MHz - 1000 MHz), Horn Antenna(1 GHz - the tenth harmonic)

Tx-ANTENNA : 120 MHz tuned Dipole Antenna(30 MHz - 120 MHz), Dipole Antenna(120 MHz - 1000 MHz), Horn Antenna(1 GHz - the tenth harmonic)

Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

NS : No signal detect.

Detector: 25 MHz to 30 MHz: Spectrum Analyzer RMS Average (RBW: 10 kHz / VBW: 30 kHz)
30 MHz to 1 GHz: Spectrum Analyzer RMS Average (RBW: 100 kHz / VBW: 300 kHz),
Above 1 GHz: Spectrum Analyzer RMS Average (RBW: 1 MHz / VBW: 3 MHz)

*Emissions were investigated up to the 10th harmonic of the fundamental.

Field strength of spurious radiation

Test place	Ise EMC Lab.	No.2	No.2
Semi Anechoic Chamber	No.2	No.2	No.2
Date	April 16, 2024	April 17, 2024	April 18, 2024
Temperature / Humidity	20 deg. C / 43 % RH	20 deg. C / 60 % RH	21 deg. C / 40 % RH
Engineer	Shousei Hamaguchi (Below 1 GHz)	Kiyoshiro Okazaki (Above 1 GHz)	Takafumi Noguchi (Above 1 GHz)
Mode	Tx 526.825 MHz, 30mW		

Frequency	Rx SA/TR		Tx SG		Tx	Tx	Result		Limit	Margin		Horizontal		Vertical		Remarks
	Reading [dBuV]		Reading [dBm]		Cable Loss [dB]	Ant. Gain [dBi]	(ERP) [dBm]	Rx Ant. Height [cm]				Turn Table [deg.]	Rx Ant. Height [cm]	Turn Table [deg.]		
	[MHz]	Hori.	Vert.	Hori.						Vert.	Hori.				Vert.	
3160.95	50.6	50.7	-52.0	-51.0	4.9	11.4	-47.6	-46.6	-30.0	17.6	16.6	133	32	110	221	
3687.78	48.3	49.7	-54.4	-53.7	5.3	12.3	-49.6	-48.9	-30.0	19.6	18.9	121	24	112	324	
4214.60	53.9	53.9	-46.8	-47.2	5.7	12.7	-41.9	-42.3	-30.0	11.9	12.3	122	335	143	29	
4741.43	52.5	NS	-47.3	-	6.1	12.5	-43.0	-	-30.0	13.0	-	101	16	-	-	
5268.25	55.4	47.0	-43.2	-49.7	6.4	13.2	-38.5	-45.0	-30.0	8.5	15.0	119	6	166	56	

Calculation Result = SG Reading - Tx Cable Loss + Tx Antenna Gain - 2.15

Rx-ANTENNA : Biconical Antenna(25 MHz - 200 MHz), Logperiodic Antenna(200 MHz - 1000 MHz), Horn Antenna(1 GHz - the tenth harmonic)

Tx-ANTENNA : 120 MHz tuned Dipole Antenna(30 MHz - 120 MHz), Dipole Antenna(120 MHz - 1000 MHz), Horn Antenna(1 GHz - the tenth harmonic)

Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).


NS : No signal detect.

Detector: 25 MHz to 30 MHz: Spectrum Analyzer RMS Average (RBW: 10 kHz / VBW: 30 kHz)
30 MHz to 1 GHz: Spectrum Analyzer RMS Average (RBW: 100 kHz / VBW: 300 kHz),
Above 1 GHz: Spectrum Analyzer RMS Average (RBW: 1 MHz / VBW: 3 MHz)

*Emissions were investigated up to the 10th harmonic of the fundamental.

Field strength of spurious radiation
(Plot data, Worst case)

Test place	Ise EMC Lab.	No.2	No.2
Semi Anechoic Chamber	No.2	April 17, 2024	April 18, 2024
Date	April 16, 2024	20 deg. C / 60 % RH	21 deg. C / 40 % RH
Temperature / Humidity	20 deg. C / 43 % RH	Kiyoshiro Okazaki	Takafumi Noguchi
Engineer	Shousei Hamaguchi	(Above 1 GHz)	(Above 1 GHz)
Mode	(Below 1 GHz)		
	Tx 518.775 MHz, 30mW		

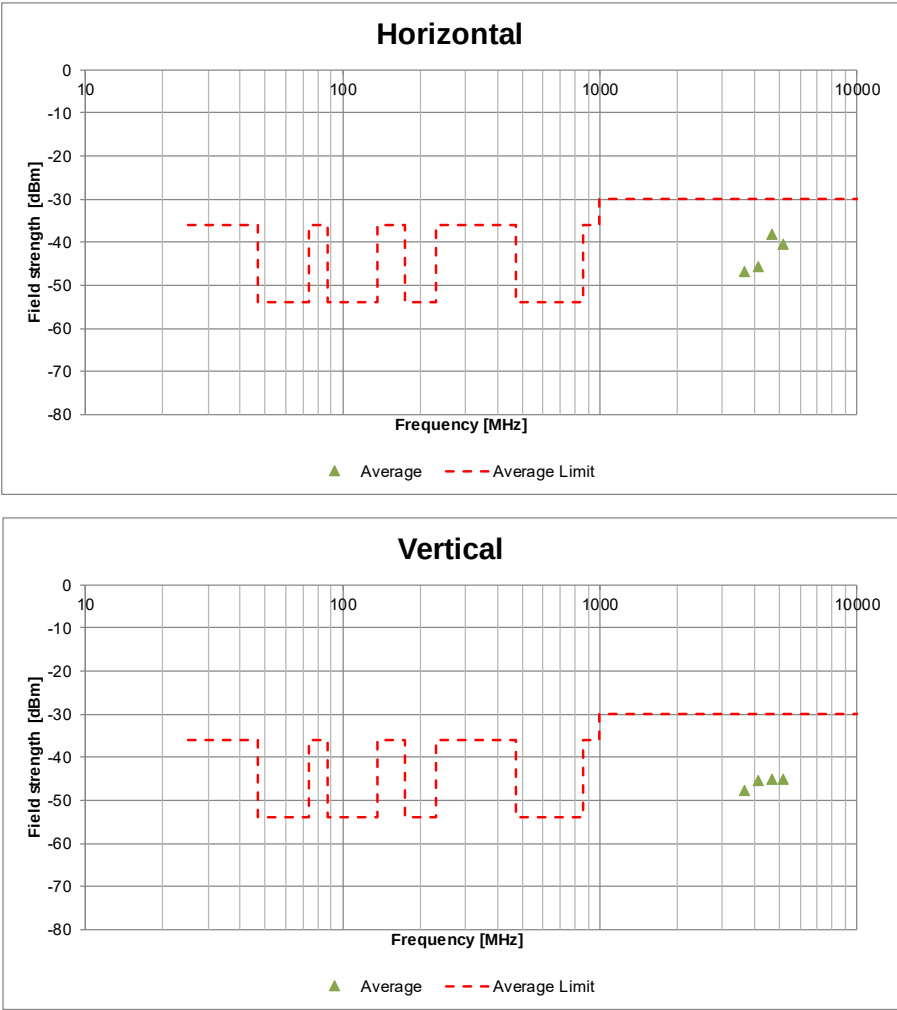

*These plots data contains sufficient number to show the trend of characteristic features for EUT.

Frequency stability

Test place Ise EMC Lab. No.6 Measurement Room
Date April 12, 2024
Temperature / Humidity 24 deg. C / 49 % RH
Engineer Shousei Hamaguchi
Mode Tx 508.125 MHz, 30mW

Varying Temperature

Test condition		Tested frequency [MHz]	Measured frequency [MHz]	Frequency error [MHz]	Result [%]	Limit
Temp. [deg. C]	Voltage [V]					
45	3.00	508.125	508.121957	-0.003043	-0.00060	0.005
35	3.00	508.125	508.122793	-0.002207	-0.00043	0.005
25	3.00	508.125	508.123995	-0.001005	-0.00020	0.005
15	3.00	508.125	508.125112	0.000112	0.00002	0.005
5	3.00	508.125	508.125844	0.000844	0.00017	0.005

Calculation formula: Frequency error = Measured frequency - Tested frequency
Result [%] = Frequency error / Tested frequency * 100

Varying Supply Voltage

Test condition		Tested frequency [MHz]	Measured frequency [MHz]	Frequency error [MHz]	Result [%]	Limit	Remarks
Temp. [deg. C]	Voltage [V]						
20	3.00	508.125	508.124559	-0.000442	-0.00009	0.005	Battery Power
20	2.40	508.125	508.124567	-0.000433	-0.00009	0.005	Battery End Point

Calculation formula: Frequency error = Measured frequency - Tested frequency
Result [%] = Frequency error / Tested frequency * 100

Frequency stability

Test place Ise EMC Lab. No.6 Measurement Room
Date April 12, 2024
Temperature / Humidity 24 deg. C / 49 % RH
Engineer Shousei Hamaguchi
Mode Tx 518.775 MHz, 30mW

Varying Temperature

Test condition		Tested frequency	Measured frequency	Frequency error	Result	Limit
Temp. [deg. C]	Voltage [V]	[MHz]	[MHz]	[MHz]	[%]	[+/- %]
45	3.00	518.775	518.771764	-0.003236	-0.00062	0.005
35	3.00	518.775	518.772784	-0.002216	-0.00043	0.005
25	3.00	518.775	518.773933	-0.001067	-0.00021	0.005
15	3.00	518.775	518.775068	0.000068	0.00001	0.005
5	3.00	518.775	518.775875	0.000875	0.00017	0.005

Calculation formula: Frequency error = Measured frequency - Tested frequency
Result [%] = Frequency error / Tested frequency * 100

Varying Supply Voltage

Test condition		Tested frequency	Measured frequency	Frequency error	Result	Limit	Remarks
Temp. [deg. C]	Voltage [V]	[MHz]	[MHz]	[MHz]	[%]	[+/- %]	
20	3.00	518.775	518.774541	-0.000459	-0.00009	0.005	Battery Power
20	2.40	518.775	518.774601	-0.000399	-0.00008	0.005	Battery End Point

Calculation formula: Frequency error = Measured frequency - Tested frequency
Result [%] = Frequency error / Tested frequency * 100

Frequency stability

Test place Ise EMC Lab. No.6 Measurement Room
Date April 12, 2024
Temperature / Humidity 24 deg. C / 49 % RH
Engineer Shousei Hamaguchi
Mode Tx 526.825 MHz, 30mW

Varying Temperature

Test condition		Tested frequency [MHz]	Measured frequency [MHz]	Frequency error [MHz]	Result [%]	Limit
Temp. [deg. C]	Voltage [V]					
45	3.00	526.825	526.821692	-0.003308	-0.00063	0.005
35	3.00	526.825	526.822912	-0.002088	-0.00040	0.005
25	3.00	526.825	526.823902	-0.001098	-0.00021	0.005
15	3.00	526.825	526.824548	-0.000452	-0.00009	0.005
5	3.00	526.825	526.825905	0.000905	0.00017	0.005

Calculation formula: Frequency error = Measured frequency - Tested frequency
Result [%] = Frequency error / Tested frequency * 100

Varying Supply Voltage

Test condition		Tested frequency [MHz]	Measured frequency [MHz]	Frequency error [MHz]	Result [%]	Limit	Remarks
Temp. [deg. C]	Voltage [V]						
20	3.00	526.825	526.824524	-0.000476	-0.00009	0.005	Battery Power
20	2.40	526.825	526.824700	-0.000300	-0.00006	0.005	Battery End Point

Calculation formula: Frequency error = Measured frequency - Tested frequency
Result [%] = Frequency error / Tested frequency * 100

APPENDIX 2: Test instruments

Test Equipment

Test Item	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	141265	Logperiodic Antenna (200-1000MHz)	Schwarzbeck Mess-Elektronik OHG	VUSLP9111B	9111B-190	07/11/2023	12
RE	141279	Microwave Cable	Junkosha	MMX221-00500DMSDMS	1502S303	03/04/2024	12
RE	141317	Coaxial Cable	UL Japan	-	-	09/12/2023	12
RE	141369	Band Pass Filter	M-City	BPF0950-01	UL0002	02/09/2024	12
RE	141427	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	VHA9103B+ BBA9106	08031	07/11/2023	12
RE	141512	Horn Antenna 1-18GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	254	10/17/2023	12
RE	141514	Horn Antenna 1-18GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	01611	06/22/2023	12
RE	141542	Digital Tester	Fluke Corporation	FLUKE 26-3	78030611	08/01/2023	12
RE	141579	Pre Amplifier	Keysight Technologies Inc	8449B	3008A02142	02/17/2024	12
RE	141594	Pre Amplifier	Keysight Technologies Inc	8447D	2944A10150	02/17/2024	12
RE	141892	Signal Generator	Keysight Technologies Inc	E8257D	US49280311	11/24/2023	12
RE	141903	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY46186390	01/26/2024	12
RE	142004	AC2_Semi Anechoic Chamber (NSA)	TDK	Semi Anechoic Chamber 3m	DA-06902	12/12/2023	24
RE	142228	Measure, Tape, Steel	KOMELON	KMC-36	-	-	-
RE	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
RE	214065	Microwave cable	Huber+Suhner	SF-126E/11PC35/11PC35/10000	550489/126E	01/22/2024	12
RE	220646	Attenuator	Huber+Suhner	6806 N-50-1	-	03/12/2024	12
RE	240023	Microwave Cable	Huber+Suhner	SF126E/11PC35/11PC35/1000MM,5000MM	537060/126E / 537075/126E	09/08/2023	12
RE	242978	High Pass Filter 1-13 GHz	Pasternak	PE87FL1018	D.C. 2215	02/02/2024	12
RE	244707	Thermo-Hygrometer	HIOKI E.E. CORPORATION	LR5001	231202102	01/25/2024	12
AT	141171	Attenuator (20dB) _DC-1GHz_N	Weinschel Corp	MODEL 1	BG0143	12/06/2023	12
AT	141174	Attenuator (20dB) (above1GHz)	HIROSE ELECTRIC CO.,LTD.	AT-120	901247	01/15/2024	12
AT	141414	Microwave Cable	Junkosha	MWX221	1207S407	08/01/2023	12
AT	141429	Temperature and Humidity Chamber	Espec	PL-2KP	14015723	08/09/2023	12
AT	141498	Microwave Counter	ADVANTEST	R5373	120100309	07/24/2023	12
AT	141558	Digital Tester (TRUE RMS MULTIMETER)	Fluke Corporation	115	17930030	05/29/2023	12
AT	141810	Power Meter	Anritsu Corporation	ML2495A	824014	12/12/2023	12
AT	141832	Power sensor	Anritsu Corporation	MA2411B	738174	12/12/2023	12
AT	141901	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY48250080	01/26/2024	12
AT	142764	Radiocommunication Service Monitor	Rohde & Schwarz	CMS54	829000/009	10/06/2023	12
AT	184490	Microwave Cable	Murata Manufacturing Company, Ltd.	MXHS83QE3000	-	09/12/2023	12
AT	244712	Thermo-Hygrometer	HIOKI E.E. CORPORATION	LR5001	231202106	01/25/2024	12
AT	89845	Audio Analyzer	AUDIO PRECISION	APx525	APX2-27079	10/17/2023	12

*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item:

RE: Field strength of spurious radiation

AT: Antenna Terminal Conducted