

FCC RF Test Report

APPLICANT : FoxInsights GmbH
EQUIPMENT : FoxRadar
BRAND NAME : FoxInsights
MODEL NAME : FoxRadar-V1
FCC ID : 2BKML-FOXRADAR
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Oct. 20, 2024

This product installed a RF module (Brand Name: WROOM, Model Name: ESP-WROOM-32D, FCC ID: 2AC7Z-ESPWROOM32D) during the test, only the RSE worst mode and Co-location mode were verified in this report, all the other test results are leveraged from module RF report.

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 EUT Operation Test Setup	8
3 TEST RESULT	9
3.1 Radiated Band Edges and Spurious Emission Measurement	9
3.2 Antenna Requirements	13
4 LIST OF MEASURING EQUIPMENT	14
5 MEASUREMENT UNCERTAINTY	15
APPENDIX A. RADIATED SPURIOUS EMISSION	
APPENDIX B. DUTY CYCLE PLOTS	
APPENDIX C. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR492504C	Rev. 01	Initial issue of report	Nov. 20, 2024

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
-	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	1
-	-	99% Bandwidth	-	Report Only	1
-	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	1
-	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	1
-	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	1
		Conducted Spurious Emission		Pass	1
3.1	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.34 dB at 9549.00 MHz
-	15.207	AC Conducted Emission	15.207(a)	Not Applicable	EUT not connect to AC Mains
3.2	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Remark 1:

Verify the maximum conducted power of the host is lower than and very close to the module, all the conducted test results were leveraged from module RF report which can refer to Report No. RXA1710-0352RF01R1.

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

FoxInsights GmbH
Ridlerstr. 57 80339 Munich Germany

1.2 Manufacturer

FoxInsights GmbH
Ridlerstr. 57 80339 Munich Germany

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	FoxRadar
Brand Name	FoxInsights
Model Name	FoxRadar-V1
FCC ID	2BKML-FOXRADAR
SN Code	Radiation: ONP417602655
HW Version	1.0
SW Version	1.0.0
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Antenna Type / Gain	PCB Antenna type with gain 3.7 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH05-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH05-KS	AUDIX	E3	210616

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-


2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11n HT40	MCS0

Co-location mode
802.11n HT40 Tx CH09 + Bluetooth LE 1Mbps Ch00 + PCS1900

2.3 Connection Diagram of Test System

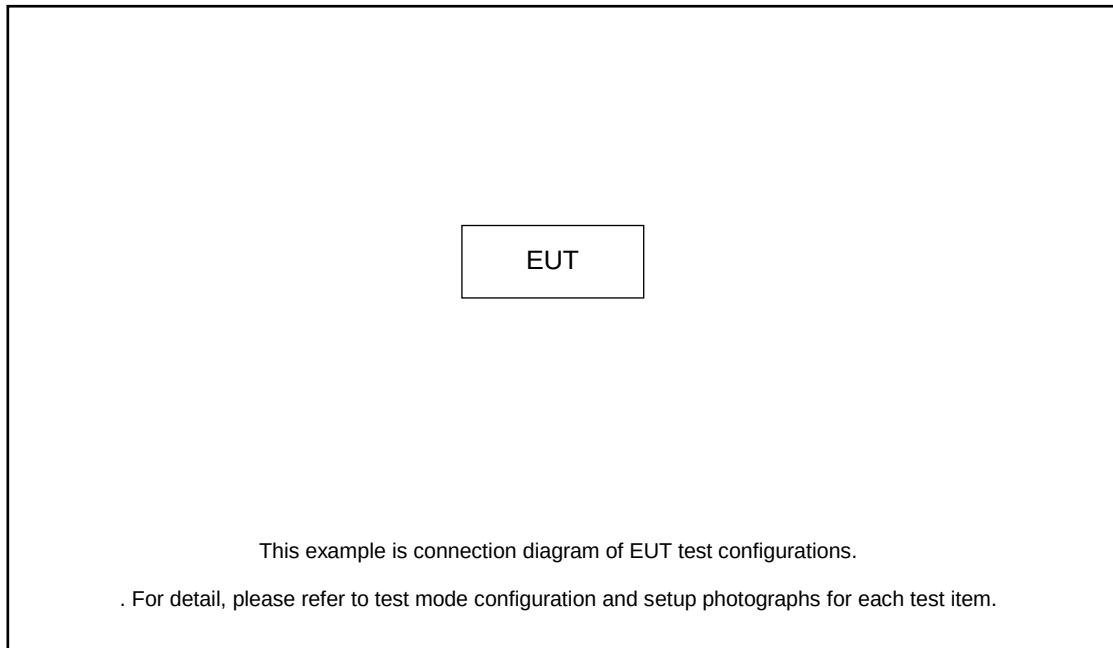

2.4 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

3 Test Result

3.1 Radiated Band Edges and Spurious Emission Measurement

3.1.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.1.4 Test Setup


For radiated emissions below 30MHz

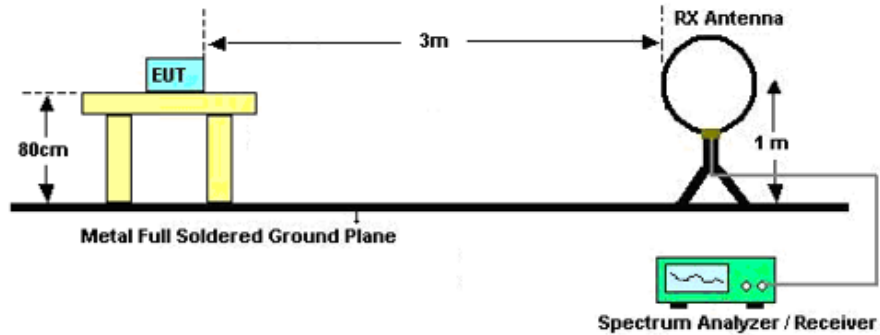

For radiated emissions from 30MHz to 1GHz

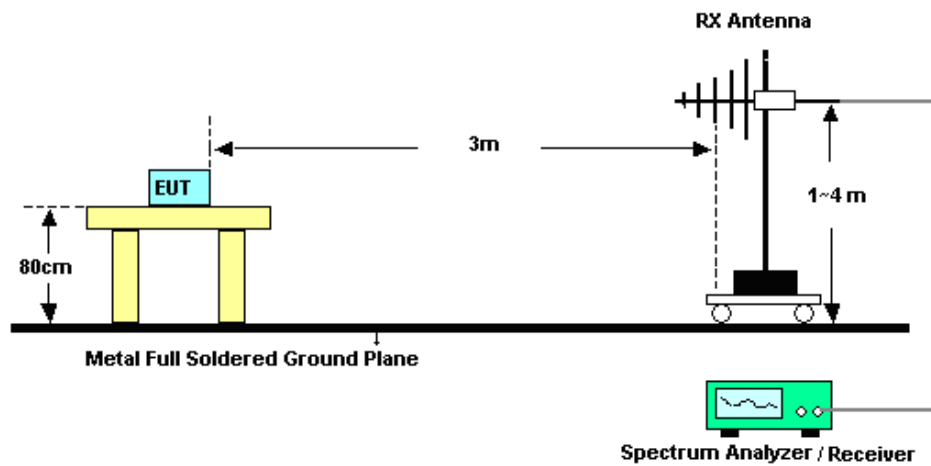

For radiated emissions above 1GHz

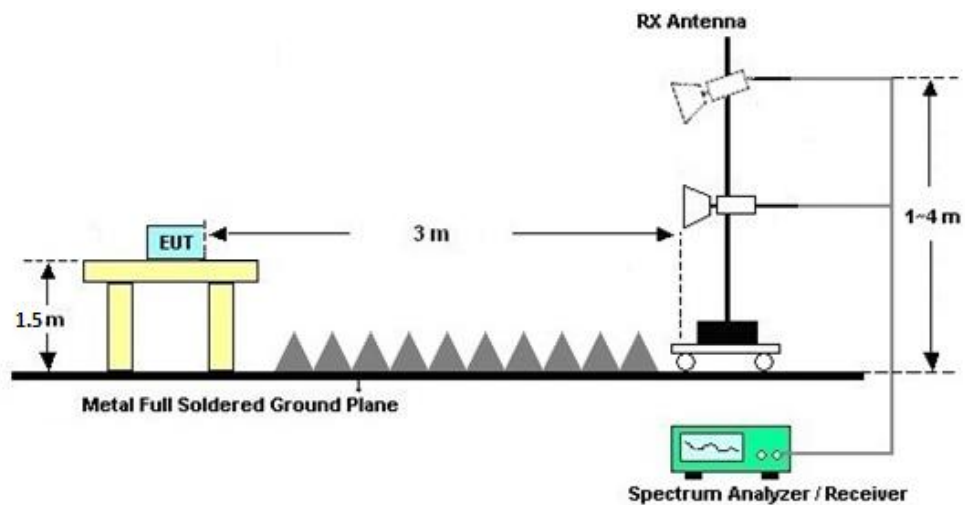

**3.1.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.1.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A.

3.1.7 Duty Cycle

Please refer to Appendix B.

3.1.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix A.



3.2 Antenna Requirements

3.2.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.2.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.2.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz;Max 30dBm	Jul. 04, 2024	Oct. 20, 2024	Jul. 03, 2025	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44G,MAX 30dB	Oct. 10, 2024	Oct. 20, 2024	Oct. 09, 2025	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Oct. 20, 2024	Sep. 07, 2025	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	Apr. 18, 2024	Oct. 20, 2024	Apr. 17, 2025	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218642	1GHz~18GHz	Apr. 11, 2024	Oct. 20, 2024	Apr. 10, 2025	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 06, 2024	Oct. 20, 2024	Jan. 05, 2025	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	381512	9KHz~1GHz	Jan. 02, 2024	Oct. 20, 2024	Jan. 01, 2025	Radiation (03CH05-KS)
Amplifier	EM	EM18G40GA	060852	18~40GHz	Jan. 02, 2024	Oct. 20, 2024	Jan. 01, 2025	Radiation (03CH05-KS)
high gain Amplifier	EM	EM01G18GA	060843	1Ghz~18Ghz	Jan. 03, 2024	Oct. 20, 2024	Jan. 02, 2025	Radiation (03CH05-KS)
Amplifier	EM	EM01G18GA	060833	1Ghz~18Ghz	Jan. 03, 2024	Oct. 20, 2024	Jan. 02, 2025	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Oct. 20, 2024	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Oct. 20, 2024	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Oct. 20, 2024	NCR	Radiation (03CH05-KS)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.02dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.22dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.34dB
---	--------

----- THE END -----



Appendix A. Radiated Spurious Emission Test Data

Test Engineer :	Jake	Relative Humidity :	41 ~ 42 %
		Temperature :	22 ~ 23 °C





Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	802.11n HT40	09	2452	MCS0	-	-

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11n HT40	09	2483.50	48.58	54.00	-5.42	H	AVERAGE	Pass	Band Edge
1	802.11n HT40	09	4904.00	42.92	74.00	-31.08	V	PEAK	Pass	Harmonic

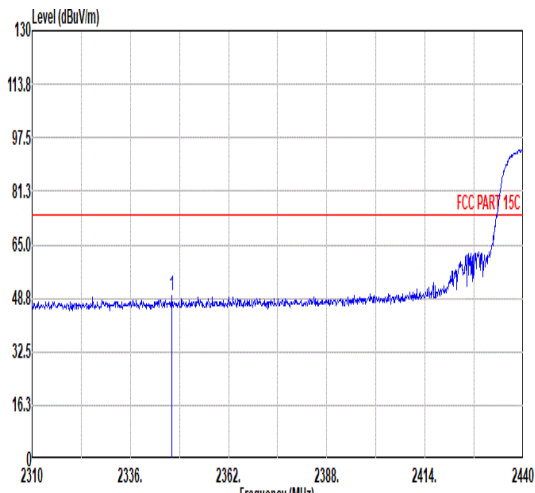
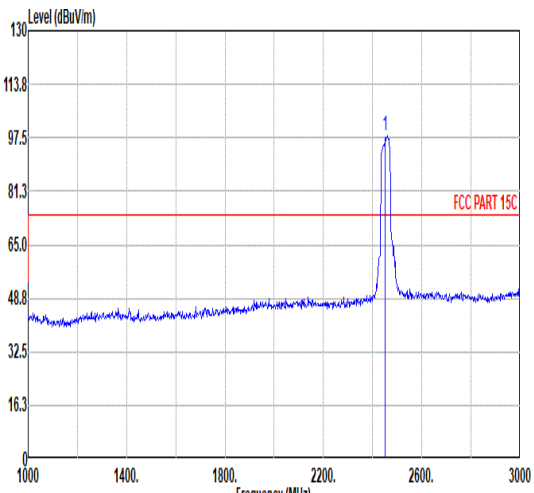
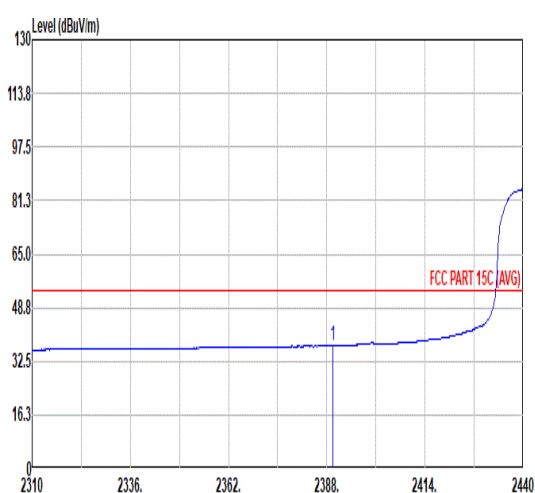
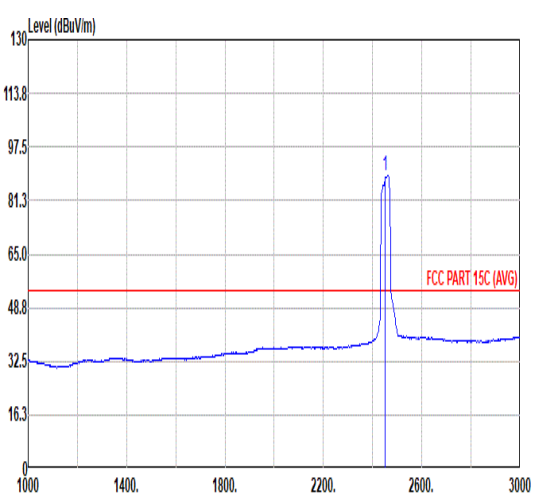


Mode	1																																																						
	Band Edge - L																																																						
	2400-2483.5_802.11n HT40_CH09_Full RU_2452MHz																																																						
Pol.	Horizontal						Fundamental																																																
Peak																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2347.05</td><td>49.36</td><td>74.00</td><td>-24.64</td><td>41.62</td><td>31.77</td><td>7.04</td><td>37.07</td><td>6.00</td><td>308</td><td>154</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2347.05	49.36	74.00	-24.64	41.62	31.77	7.04	37.07	6.00	308	154
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2347.05	49.36	74.00	-24.64	41.62	31.77	7.04	37.07	6.00	308	154	PEAK																																											
Fundamental																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2452.00</td><td>98.35</td><td>-----</td><td>-----</td><td>89.61</td><td>32.42</td><td>7.22</td><td>36.90</td><td>6.00</td><td>308</td><td>154</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	98.35	-----	-----	89.61	32.42	7.22	36.90	6.00	308	154
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2452.00	98.35	-----	-----	89.61	32.42	7.22	36.90	6.00	308	154	PEAK																																											
Avg																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2309.69</td><td>37.22</td><td>54.00</td><td>-16.78</td><td>28.96</td><td>32.20</td><td>7.11</td><td>37.05</td><td>6.00</td><td>308</td><td>154</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2309.69	37.22	54.00	-16.78	28.96	32.20	7.11	37.05	6.00	308	154
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2309.69	37.22	54.00	-16.78	28.96	32.20	7.11	37.05	6.00	308	154	AVERAGE																																											
Fundamental																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2452.00</td><td>88.96</td><td>-----</td><td>-----</td><td>80.22</td><td>32.42</td><td>7.22</td><td>36.90</td><td>6.00</td><td>308</td><td>154</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	88.96	-----	-----	80.22	32.42	7.22	36.90	6.00	308	154
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2452.00	88.96	-----	-----	80.22	32.42	7.22	36.90	6.00	308	154	AVERAGE																																											



Mode	1																																													
	Band Edge - R																																													
	2400-2483.5_802.11n HT40_CH09_Full RU_2452MHz																																													
Pol.	Horizontal	Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.48</td><td>64.85</td><td>74.00</td><td>-9.15</td><td>55.96</td><td>32.47</td><td>7.26</td><td>36.84</td><td>6.00</td><td>308</td><td>154</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.48	64.85	74.00	-9.15	55.96	32.47	7.26	36.84	6.00	308	154	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2483.48	64.85	74.00	-9.15	55.96	32.47	7.26	36.84	6.00	308	154	PEAK																																		
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>48.58</td><td>54.00</td><td>-5.42</td><td>39.70</td><td>32.47</td><td>7.26</td><td>36.85</td><td>6.00</td><td>308</td><td>154</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	48.58	54.00	-5.42	39.70	32.47	7.26	36.85	6.00	308	154	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2483.50	48.58	54.00	-5.42	39.70	32.47	7.26	36.85	6.00	308	154	AVERAGE																																		

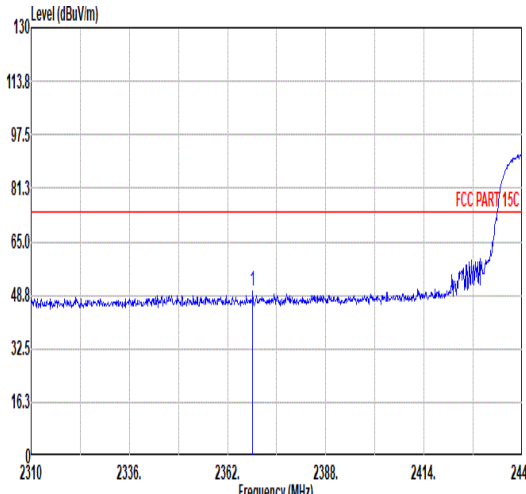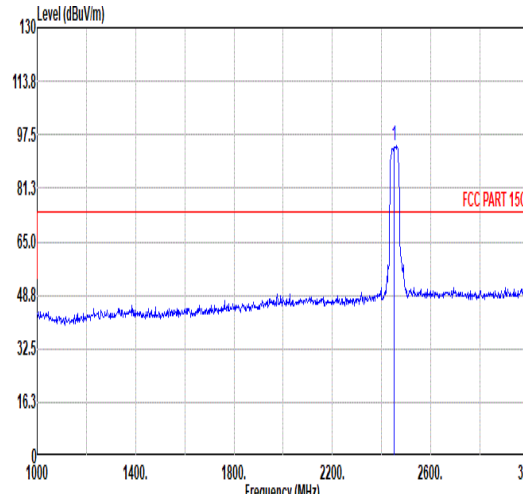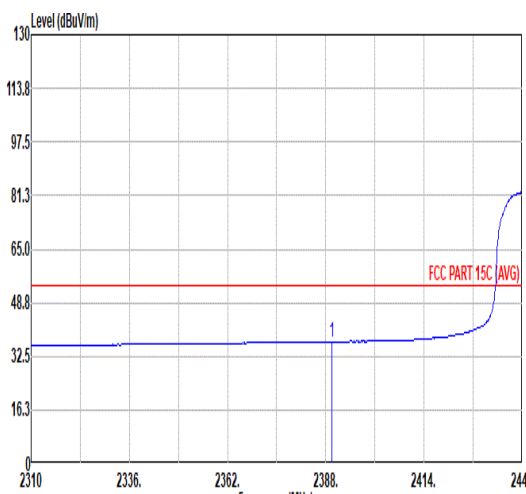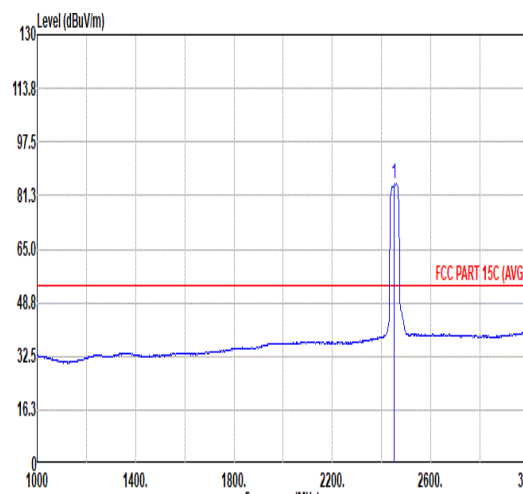


		1																																																																																																								
Mode		Band Edge - L																																																																																																								
		2400-2483.5_802.11n HT40_CH09_Full RU_2452MHz																																																																																																								
Pol.		Vertical					Fundamental																																																																																																			
Peak																																																																																																										
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2368.63</td><td>49.94</td><td>74.00</td><td>-24.06</td><td>41.94</td><td>31.99</td><td>7.07</td><td>37.06</td><td>6.00</td><td>296</td><td>9 PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2368.63	49.94	74.00	-24.06	41.94	31.99	7.07	37.06	6.00	296	9 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>94.20</td><td>-----</td><td>-----</td><td>85.46</td><td>32.42</td><td>7.22</td><td>36.90</td><td>6.00</td><td>296</td><td>9 PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	94.20	-----	-----	85.46	32.42	7.22	36.90	6.00	296
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	2368.63	49.94	74.00	-24.06	41.94	31.99	7.07	37.06	6.00	296	9 PEAK																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	2452.00	94.20	-----	-----	85.46	32.42	7.22	36.90	6.00	296	9 PEAK																																																																																															
Avg																																																																																																										
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2368.63</td><td>36.95</td><td>54.00</td><td>-17.05</td><td>28.69</td><td>32.20</td><td>7.11</td><td>37.05</td><td>6.00</td><td>296</td><td>9 AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2368.63	36.95	54.00	-17.05	28.69	32.20	7.11	37.05	6.00	296	9 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>84.67</td><td>-----</td><td>-----</td><td>75.93</td><td>32.42</td><td>7.22</td><td>36.90</td><td>6.00</td><td>296</td><td>9 AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	84.67	-----	-----	75.93	32.42	7.22	36.90	6.00	296
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	2368.63	36.95	54.00	-17.05	28.69	32.20	7.11	37.05	6.00	296	9 AVERAGE																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	2452.00	84.67	-----	-----	75.93	32.42	7.22	36.90	6.00	296	9 AVERAGE																																																																																															





Mode	1																																												
	Band Edge - R																																												
	2400-2483.5_802.11n HT40_CH09_Full RU_2452MHz																																												
Pol.	Vertical	Fundamental																																											
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.60</td><td>59.88</td><td>74.00</td><td>-14.12</td><td>50.99</td><td>32.47</td><td>7.26</td><td>36.84</td><td>6.00</td><td>296</td><td>9 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.60	59.88	74.00	-14.12	50.99	32.47	7.26	36.84	6.00	296	9 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																			
1	2485.60	59.88	74.00	-14.12	50.99	32.47	7.26	36.84	6.00	296	9 PEAK																																		
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>44.03</td><td>54.00</td><td>-9.97</td><td>35.15</td><td>32.47</td><td>7.26</td><td>36.85</td><td>6.00</td><td>296</td><td>9 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	44.03	54.00	-9.97	35.15	32.47	7.26	36.85	6.00	296	9 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																			
1	2483.50	44.03	54.00	-9.97	35.15	32.47	7.26	36.85	6.00	296	9 AVERAGE																																		



Mode	1																																																																	
	Harmonic																																																																	
	2400-2483.5_802.11n HT40_CH09_Full RU_2452MHz																																																																	
Pol.	Horizontal																																																																	
Peak Avg																																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th colspan="2">Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4904.00</td><td>41.73</td><td>74.00</td><td>-32.27</td><td>62.78</td><td>34.17</td><td>10.33</td><td>65.55</td><td>0.00</td><td>-- -- PEAK</td></tr><tr><td>2</td><td>7356.00</td><td>42.73</td><td>74.00</td><td>-31.27</td><td>60.61</td><td>35.00</td><td>12.73</td><td>66.41</td><td>0.00</td><td>-- -- PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4904.00	41.73	74.00	-32.27	62.78	34.17	10.33	65.55	0.00	-- -- PEAK	2	7356.00	42.73	74.00	-31.27	60.61	35.00	12.73	66.41	0.00	-- -- PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	4904.00	41.73	74.00	-32.27	62.78	34.17	10.33	65.55	0.00	-- -- PEAK																																																								
2	7356.00	42.73	74.00	-31.27	60.61	35.00	12.73	66.41	0.00	-- -- PEAK																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th colspan="2">Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4904.00</td><td>42.92</td><td>74.00</td><td>-31.08</td><td>63.97</td><td>34.17</td><td>10.33</td><td>65.55</td><td>0.00</td><td>-- -- PEAK</td></tr><tr><td>2</td><td>7356.00</td><td>42.78</td><td>74.00</td><td>-31.22</td><td>60.66</td><td>35.80</td><td>12.73</td><td>66.41</td><td>0.00</td><td>-- -- PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4904.00	42.92	74.00	-31.08	63.97	34.17	10.33	65.55	0.00	-- -- PEAK	2	7356.00	42.78	74.00	-31.22	60.66	35.80	12.73	66.41	0.00	-- -- PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	4904.00	42.92	74.00	-31.08	63.97	34.17	10.33	65.55	0.00	-- -- PEAK																																																								
2	7356.00	42.78	74.00	-31.22	60.66	35.80	12.73	66.41	0.00	-- -- PEAK																																																								

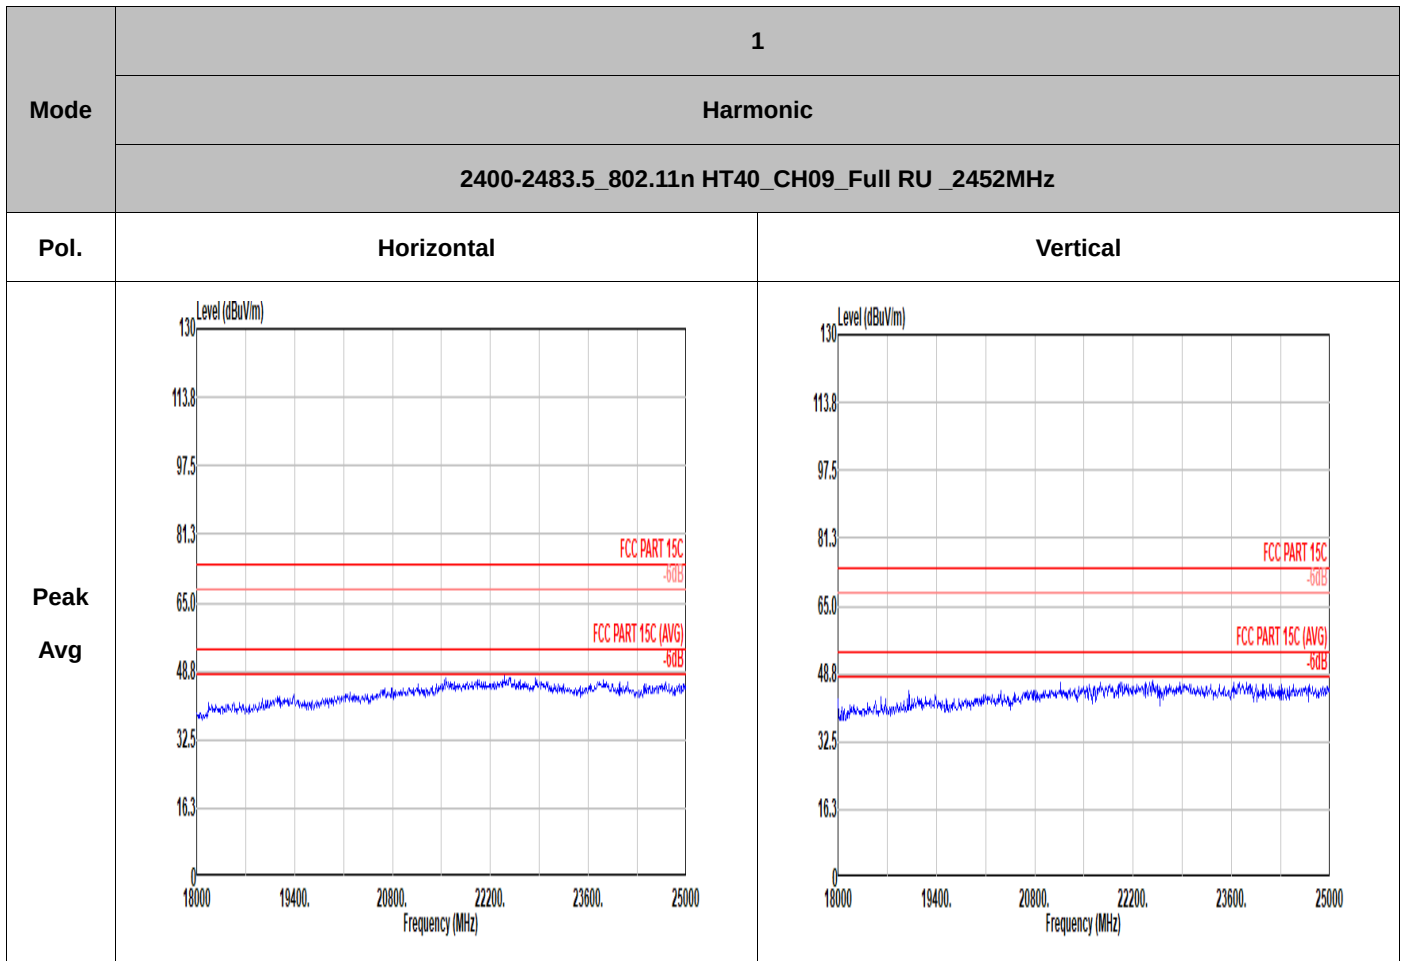

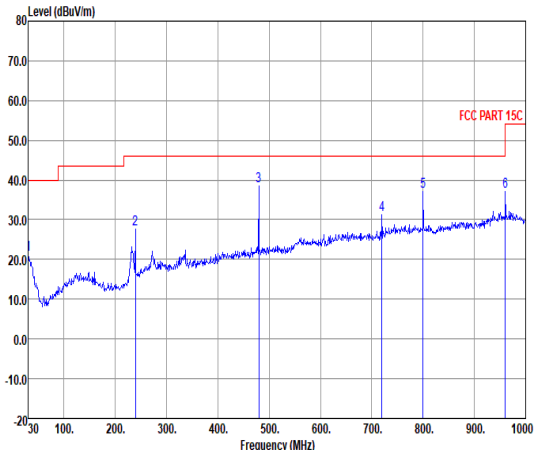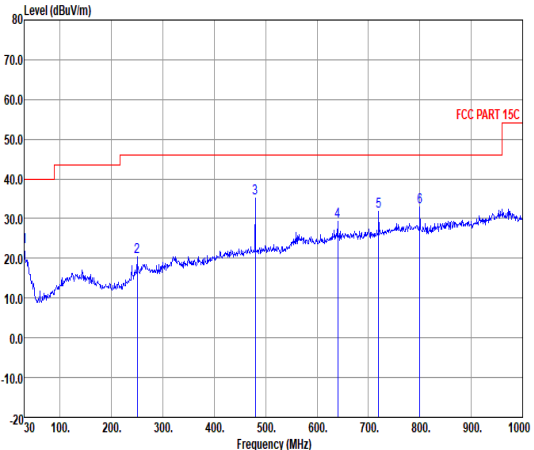

Mode	1																																																																																																											
	Harmonic																																																																																																											
	2400-2483.5_802.11n HT40_CH09_Full RU_2452MHz																																																																																																											
Pol.	Horizontal						Vertical																																																																																																					
Peak																																																																																																												
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>30.00</td><td>21.15</td><td>40.00</td><td>-18.85</td><td>28.89</td><td>24.57</td><td>0.71</td><td>33.02</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>239.52</td><td>27.51</td><td>46.00</td><td>-18.49</td><td>40.15</td><td>17.78</td><td>2.36</td><td>32.78</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>480.08</td><td>38.53</td><td>46.00</td><td>-7.47</td><td>44.99</td><td>23.17</td><td>3.35</td><td>32.98</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>719.67</td><td>31.33</td><td>46.00</td><td>-14.67</td><td>34.73</td><td>25.47</td><td>4.10</td><td>32.97</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>800.18</td><td>37.01</td><td>46.00</td><td>-8.99</td><td>39.17</td><td>26.26</td><td>4.32</td><td>32.74</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>960.23</td><td>37.00</td><td>54.00</td><td>-17.00</td><td>36.25</td><td>27.51</td><td>4.74</td><td>31.50</td><td>0.00</td><td>---</td><td>Peak</td></tr></table>													Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	30.00	21.15	40.00	-18.85	28.89	24.57	0.71	33.02	0.00	---	Peak	2	239.52	27.51	46.00	-18.49	40.15	17.78	2.36	32.78	0.00	---	Peak	3	480.08	38.53	46.00	-7.47	44.99	23.17	3.35	32.98	0.00	---	Peak	4	719.67	31.33	46.00	-14.67	34.73	25.47	4.10	32.97	0.00	---	Peak	5	800.18	37.01	46.00	-8.99	39.17	26.26	4.32	32.74	0.00	---	Peak	6	960.23	37.00	54.00	-17.00	36.25	27.51	4.74	31.50	0.00	---	Peak
		Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																	
	1	30.00	21.15	40.00	-18.85	28.89	24.57	0.71	33.02	0.00	---	Peak																																																																																																
	2	239.52	27.51	46.00	-18.49	40.15	17.78	2.36	32.78	0.00	---	Peak																																																																																																
	3	480.08	38.53	46.00	-7.47	44.99	23.17	3.35	32.98	0.00	---	Peak																																																																																																
	4	719.67	31.33	46.00	-14.67	34.73	25.47	4.10	32.97	0.00	---	Peak																																																																																																
	5	800.18	37.01	46.00	-8.99	39.17	26.26	4.32	32.74	0.00	---	Peak																																																																																																
	6	960.23	37.00	54.00	-17.00	36.25	27.51	4.74	31.50	0.00	---	Peak																																																																																																
																																																																																																												
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>30.00</td><td>22.99</td><td>40.00</td><td>-17.01</td><td>30.73</td><td>24.57</td><td>0.71</td><td>33.02</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>250.19</td><td>20.32</td><td>46.00</td><td>-25.68</td><td>32.25</td><td>18.42</td><td>2.42</td><td>32.77</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>480.08</td><td>35.26</td><td>46.00</td><td>-10.74</td><td>41.72</td><td>23.17</td><td>3.35</td><td>32.98</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>640.13</td><td>29.38</td><td>46.00</td><td>-16.62</td><td>33.32</td><td>25.17</td><td>3.86</td><td>32.97</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>719.67</td><td>31.91</td><td>46.00</td><td>-14.09</td><td>35.31</td><td>25.47</td><td>4.10</td><td>32.97</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>800.18</td><td>32.83</td><td>46.00</td><td>-13.17</td><td>34.99</td><td>26.26</td><td>4.32</td><td>32.74</td><td>0.00</td><td>---</td><td>Peak</td></tr></table>													Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	30.00	22.99	40.00	-17.01	30.73	24.57	0.71	33.02	0.00	---	Peak	2	250.19	20.32	46.00	-25.68	32.25	18.42	2.42	32.77	0.00	---	Peak	3	480.08	35.26	46.00	-10.74	41.72	23.17	3.35	32.98	0.00	---	Peak	4	640.13	29.38	46.00	-16.62	33.32	25.17	3.86	32.97	0.00	---	Peak	5	719.67	31.91	46.00	-14.09	35.31	25.47	4.10	32.97	0.00	---	Peak	6	800.18	32.83	46.00	-13.17	34.99	26.26	4.32	32.74	0.00	---	Peak	
	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																		
1	30.00	22.99	40.00	-17.01	30.73	24.57	0.71	33.02	0.00	---	Peak																																																																																																	
2	250.19	20.32	46.00	-25.68	32.25	18.42	2.42	32.77	0.00	---	Peak																																																																																																	
3	480.08	35.26	46.00	-10.74	41.72	23.17	3.35	32.98	0.00	---	Peak																																																																																																	
4	640.13	29.38	46.00	-16.62	33.32	25.17	3.86	32.97	0.00	---	Peak																																																																																																	
5	719.67	31.91	46.00	-14.09	35.31	25.47	4.10	32.97	0.00	---	Peak																																																																																																	
6	800.18	32.83	46.00	-13.17	34.99	26.26	4.32	32.74	0.00	---	Peak																																																																																																	



<Co-location mode>

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 2	Part24E PCS1900							
	2400-2483.5	-	802.11n HT40	09	2452	MCS0	-	-
	2400-2483.5	-	Bluetooth-LE_GSKF	0	2402	1Mbps	-	-

Summary of each worse mode





Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
2	802.11n HT40	09	2483.50	43.94	54.00	-10.06	V	AVERAGE	Pass	Band Edge
2	802.11n HT40	09	7356.00	45.03	74.00	-28.97	V	PEAK	Pass	Harmonic
2	Bluetooth-LE_GSKF	0	2389.17	40.80	54.00	-13.20	V	AVERAGE	Pass	Band Edge
2	Bluetooth-LE_GSKF	0	4804.00	38.22	74.00	-35.78	V	PEAK	Pass	Harmonic

WWAN RSE

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
2	PCS1900	810	3820.00	74.10	82.2	-8.1	H	PEAK	Pass	Harmonic
	PCS1900	810	5730.00	76.85	82.2	-5.35	H	PEAK	Pass	Harmonic
	PCS1900	810	7639.00	66.33	82.2	-15.87	H	PEAK	Pass	Harmonic
	PCS1900	810	9549.00	77.95	82.2	-4.25	H	PEAK	Pass	Harmonic
	PCS1900	810	11460.00	68.92	82.2	-13.28	H	PEAK	Pass	Harmonic
	PCS1900	810	13369.00	58.09	82.2	-24.11	H	PEAK	Pass	Harmonic
	PCS1900	810	15277.00	65.86	82.2	-16.31	H	PEAK	Pass	Harmonic
	PCS1900	810	17188.00	60.75	82.2	-21.45	H	PEAK	Pass	Harmonic
	PCS1900	810	3820.00	73.78	82.2	-8.42	V	PEAK	Pass	Harmonic
	PCS1900	810	5730.00	76.79	82.2	-5.41	V	PEAK	Pass	Harmonic
	PCS1900	810	7639.00	66.90	82.2	-15.3	V	PEAK	Pass	Harmonic
	PCS1900	810	9549.00	78.86	82.2	-3.34	V	PEAK	Pass	Harmonic
	PCS1900	810	11460.00	62.74	82.2	-19.46	V	PEAK	Pass	Harmonic
	PCS1900	810	13369.00	54.37	82.2	-27.83	V	PEAK	Pass	Harmonic
	PCS1900	810	15277.00	61.09	82.2	-21.11	V	PEAK	Pass	Harmonic
	PCS1900	810	17187.00	55.66	82.2	-26.54	V	PEAK	Pass	Harmonic

Note: Limit, EIRP (dBm) = E (dBuV/m) + 20log(D) - 104.8, where, D=3m, EIRP(dBm) = PCS1900 limit which is -13dBm.

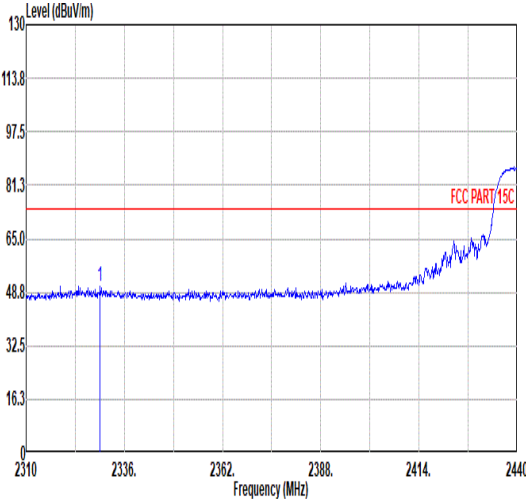
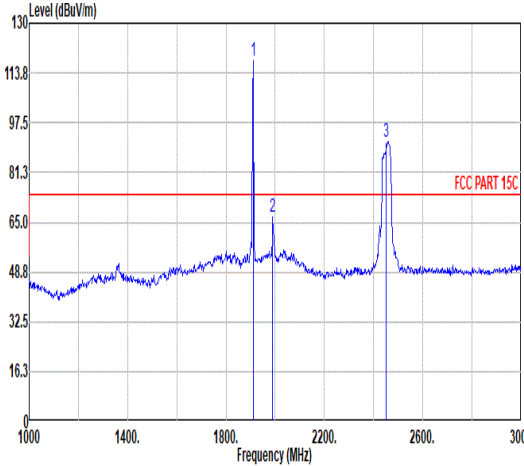
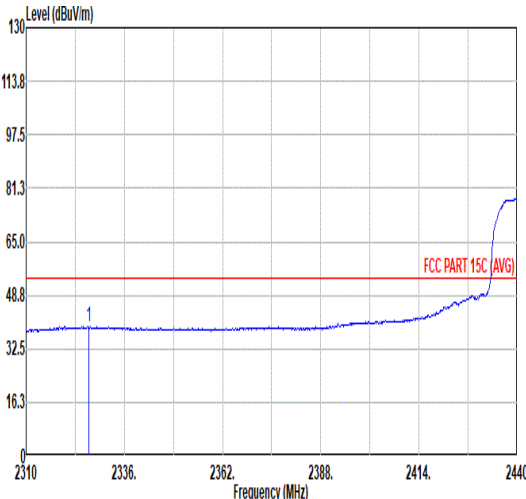
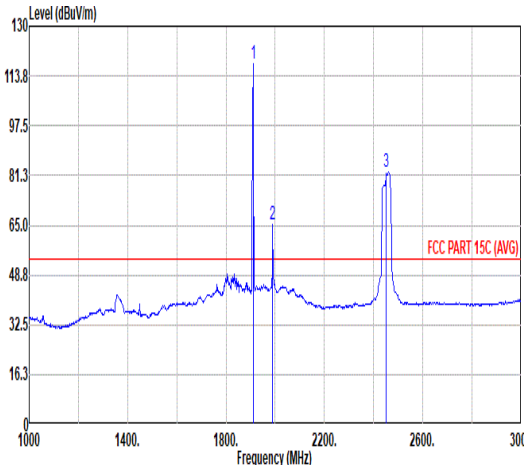


Mode	2																																																																																																																												
	Band Edge - L																																																																																																																												
	2400-2483.5_802.11n HT40_CH09_Full RU_2452MHz																																																																																																																												
Pol.	Horizontal						Fundamental																																																																																																																						
Peak																																																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2329.63</td><td>50.75</td><td>74.00</td><td>-23.25</td><td>43.22</td><td>31.60</td><td>7.01</td><td>37.08</td><td>6.00</td><td>100</td><td>321</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2329.63	50.75	74.00	-23.25	43.22	31.60	7.01	37.08	6.00	100	321	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>1910.00</td><td>117.95</td><td>-----</td><td>-----</td><td>111.92</td><td>31.02</td><td>6.34</td><td>37.33</td><td>6.00</td><td>100</td><td>321</td><td>PEAK</td></tr><tr><td>2</td><td>1990.00</td><td>66.76</td><td>-----</td><td>-----</td><td>59.95</td><td>31.66</td><td>6.48</td><td>37.33</td><td>6.00</td><td>100</td><td>321</td><td>PEAK</td></tr><tr><td>3</td><td>2452.00</td><td>91.42</td><td>-----</td><td>-----</td><td>82.73</td><td>32.40</td><td>7.21</td><td>36.92</td><td>6.00</td><td>100</td><td>321</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	1910.00	117.95	-----	-----	111.92	31.02	6.34	37.33	6.00	100	321	PEAK	2	1990.00	66.76	-----	-----	59.95	31.66	6.48	37.33	6.00	100	321	PEAK	3	2452.00	91.42	-----	-----	82.73	32.40	7.21	36.92	6.00	100	321
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	2329.63	50.75	74.00	-23.25	43.22	31.60	7.01	37.08	6.00	100	321	PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	1910.00	117.95	-----	-----	111.92	31.02	6.34	37.33	6.00	100	321	PEAK																																																																																																																	
2	1990.00	66.76	-----	-----	59.95	31.66	6.48	37.33	6.00	100	321	PEAK																																																																																																																	
3	2452.00	91.42	-----	-----	82.73	32.40	7.21	36.92	6.00	100	321	PEAK																																																																																																																	
Avg																																																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2326.64</td><td>39.22</td><td>54.00</td><td>-14.78</td><td>31.72</td><td>31.57</td><td>7.01</td><td>37.08</td><td>6.00</td><td>100</td><td>321</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2326.64	39.22	54.00	-14.78	31.72	31.57	7.01	37.08	6.00	100	321	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>1910.00</td><td>117.52</td><td>-----</td><td>-----</td><td>111.49</td><td>31.02</td><td>6.34</td><td>37.33</td><td>6.00</td><td>100</td><td>321</td><td>AVERAGE</td></tr><tr><td>2</td><td>1990.00</td><td>65.49</td><td>-----</td><td>-----</td><td>58.68</td><td>31.66</td><td>6.48</td><td>37.33</td><td>6.00</td><td>100</td><td>321</td><td>AVERAGE</td></tr><tr><td>3</td><td>2452.00</td><td>82.34</td><td>-----</td><td>-----</td><td>73.65</td><td>32.40</td><td>7.21</td><td>36.92</td><td>6.00</td><td>100</td><td>321</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	1910.00	117.52	-----	-----	111.49	31.02	6.34	37.33	6.00	100	321	AVERAGE	2	1990.00	65.49	-----	-----	58.68	31.66	6.48	37.33	6.00	100	321	AVERAGE	3	2452.00	82.34	-----	-----	73.65	32.40	7.21	36.92	6.00	100	321
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	2326.64	39.22	54.00	-14.78	31.72	31.57	7.01	37.08	6.00	100	321	AVERAGE																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	1910.00	117.52	-----	-----	111.49	31.02	6.34	37.33	6.00	100	321	AVERAGE																																																																																																																	
2	1990.00	65.49	-----	-----	58.68	31.66	6.48	37.33	6.00	100	321	AVERAGE																																																																																																																	
3	2452.00	82.34	-----	-----	73.65	32.40	7.21	36.92	6.00	100	321	AVERAGE																																																																																																																	
Note:	-						#2 is PCS Base station signal																																																																																																																						



Mode	2																																													
	Band Edge - R																																													
	2400-2483.5_802.11n HT40_CH09_Full RU_2452MHz																																													
Pol.	Horizontal	Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>56.56</td><td>74.00</td><td>-17.44</td><td>47.68</td><td>32.47</td><td>7.26</td><td>36.85</td><td>6.00</td><td>100</td><td>321</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	56.56	74.00	-17.44	47.68	32.47	7.26	36.85	6.00	100	321	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2483.50	56.56	74.00	-17.44	47.68	32.47	7.26	36.85	6.00	100	321	PEAK																																		
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.62</td><td>43.83</td><td>54.00</td><td>-10.17</td><td>34.95</td><td>32.47</td><td>7.26</td><td>36.85</td><td>6.00</td><td>100</td><td>321</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.62	43.83	54.00	-10.17	34.95	32.47	7.26	36.85	6.00	100	321	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2483.62	43.83	54.00	-10.17	34.95	32.47	7.26	36.85	6.00	100	321	AVERAGE																																		

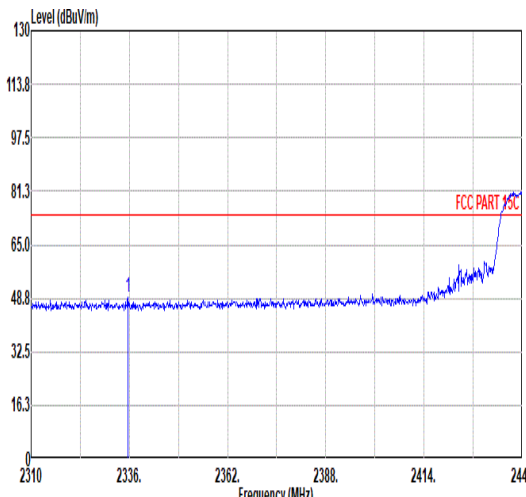
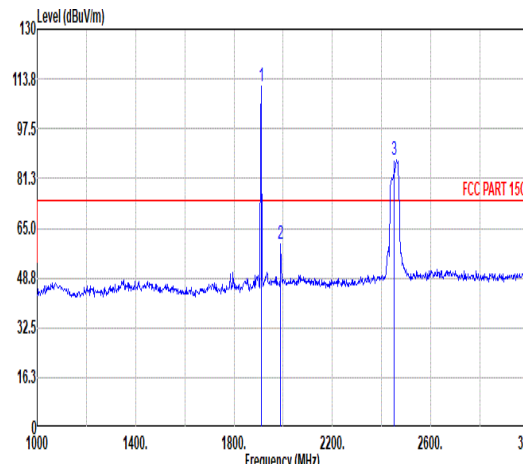
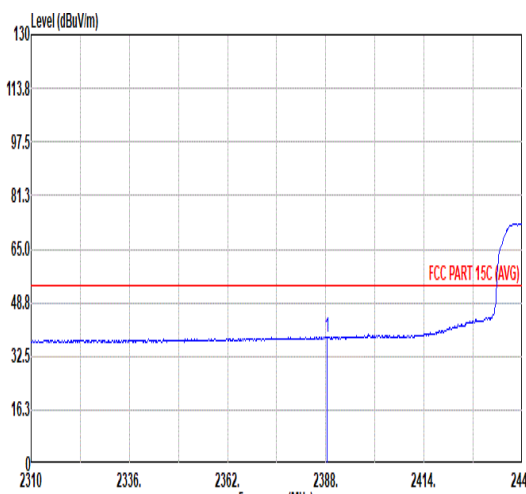
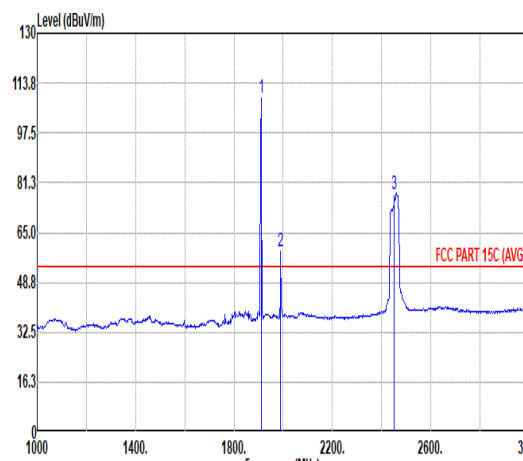


Mode	2																																																																																																										
	Band Edge - L																																																																																																										
	2400-2483.5_802.11n HT40_CH09_Full RU_2452MHz																																																																																																										
Pol.	Vertical					Fundamental																																																																																																					
Peak																																																																																																											
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2335.61	49.08	74.00	-24.92	41.47	31.66	7.02	37.07	6.00	100	89 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 1910.00</td><td>111.51</td><td>-----</td><td>-----</td><td>105.48</td><td>31.02</td><td>6.34</td><td>37.33</td><td>6.00</td><td>100</td><td>89 Peak</td></tr><tr><td>2 1990.00</td><td>59.93</td><td>-----</td><td>-----</td><td>53.12</td><td>31.66</td><td>6.48</td><td>37.33</td><td>6.00</td><td>100</td><td>89 Peak</td></tr><tr><td>3 2452.00</td><td>87.15</td><td>-----</td><td>-----</td><td>78.46</td><td>32.40</td><td>7.21</td><td>36.92</td><td>6.00</td><td>100</td><td>89 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 1910.00	111.51	-----	-----	105.48	31.02	6.34	37.33	6.00	100	89 Peak	2 1990.00	59.93	-----	-----	53.12	31.66	6.48	37.33	6.00	100	89 Peak	3 2452.00	87.15	-----	-----	78.46	32.40	7.21	36.92	6.00	100	89 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																	
1 2335.61	49.08	74.00	-24.92	41.47	31.66	7.02	37.07	6.00	100	89 PEAK																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																	
1 1910.00	111.51	-----	-----	105.48	31.02	6.34	37.33	6.00	100	89 Peak																																																																																																	
2 1990.00	59.93	-----	-----	53.12	31.66	6.48	37.33	6.00	100	89 Peak																																																																																																	
3 2452.00	87.15	-----	-----	78.46	32.40	7.21	36.92	6.00	100	89 PEAK																																																																																																	
Avg																																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2338.39</td><td>38.24</td><td>54.00</td><td>-15.76</td><td>30.01</td><td>32.18</td><td>7.10</td><td>37.05</td><td>6.00</td><td>100</td><td>89 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2338.39	38.24	54.00	-15.76	30.01	32.18	7.10	37.05	6.00	100	89 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 1910.00</td><td>109.10</td><td>-----</td><td>-----</td><td>103.07</td><td>31.02</td><td>6.34</td><td>37.33</td><td>6.00</td><td>100</td><td>89 AVERAGE</td></tr><tr><td>2 1990.00</td><td>58.99</td><td>-----</td><td>-----</td><td>52.18</td><td>31.66</td><td>6.48</td><td>37.33</td><td>6.00</td><td>100</td><td>89 AVERAGE</td></tr><tr><td>3 2452.00</td><td>77.71</td><td>-----</td><td>-----</td><td>69.02</td><td>32.40</td><td>7.21</td><td>36.92</td><td>6.00</td><td>100</td><td>89 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 1910.00	109.10	-----	-----	103.07	31.02	6.34	37.33	6.00	100	89 AVERAGE	2 1990.00	58.99	-----	-----	52.18	31.66	6.48	37.33	6.00	100	89 AVERAGE	3 2452.00	77.71	-----	-----	69.02	32.40	7.21	36.92	6.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																	
1 2338.39	38.24	54.00	-15.76	30.01	32.18	7.10	37.05	6.00	100	89 AVERAGE																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																	
1 1910.00	109.10	-----	-----	103.07	31.02	6.34	37.33	6.00	100	89 AVERAGE																																																																																																	
2 1990.00	58.99	-----	-----	52.18	31.66	6.48	37.33	6.00	100	89 AVERAGE																																																																																																	
3 2452.00	77.71	-----	-----	69.02	32.40	7.21	36.92	6.00	100	89 AVERAGE																																																																																																	
Note:	-					#2 is PCS Base station signal																																																																																																					







Mode	2																																												
	Band Edge - R																																												
	2400-2483.5_802.11n HT40_CH09_Full RU_2452MHz																																												
Pol.	Vertical	Fundamental																																											
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.22</td><td>56.61</td><td>74.00</td><td>-17.39</td><td>47.73</td><td>32.47</td><td>7.26</td><td>36.85</td><td>6.00</td><td>100</td><td>89 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.22	56.61	74.00	-17.39	47.73	32.47	7.26	36.85	6.00	100	89 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																					
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																			
1	2484.22	56.61	74.00	-17.39	47.73	32.47	7.26	36.85	6.00	100	89 PEAK																																		
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>43.94</td><td>54.00</td><td>-10.06</td><td>35.06</td><td>32.47</td><td>7.26</td><td>36.85</td><td>6.00</td><td>100</td><td>89 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	43.94	54.00	-10.06	35.06	32.47	7.26	36.85	6.00	100	89 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																					
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																			
1	2483.50	43.94	54.00	-10.06	35.06	32.47	7.26	36.85	6.00	100	89 AVERAGE																																		

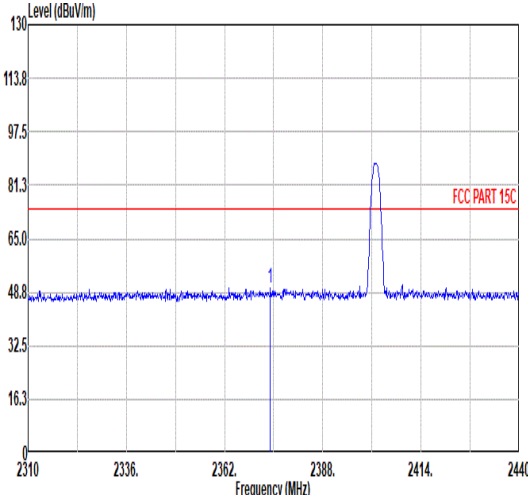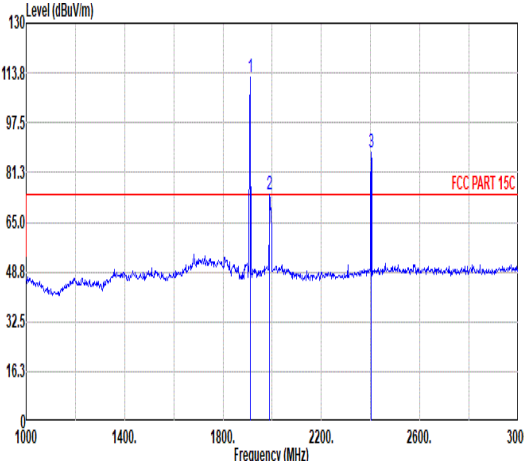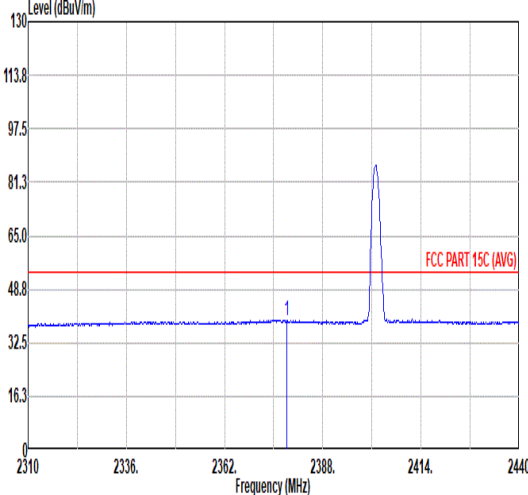
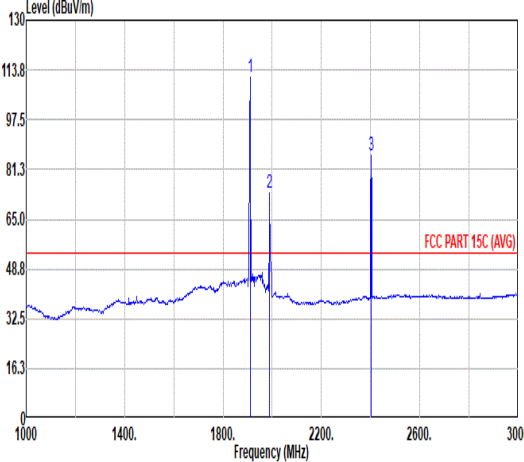


Mode	2																																																																																																																								
	Band Edge																																																																																																																								
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																																																								
Pol.	Horizontal						Fundamental																																																																																																																		
Peak																																																																																																																									
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2374.09</td><td>50.28</td><td>74.00</td><td>-23.72</td><td>42.21</td><td>32.04</td><td>7.08</td><td>37.05</td><td>6.00</td><td>128</td><td>20 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2374.09	50.28	74.00	-23.72	42.21	32.04	7.08	37.05	6.00	128	20 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>1910.00</td><td>112.19</td><td>-----</td><td>-----</td><td>106.16</td><td>31.02</td><td>6.34</td><td>37.33</td><td>6.00</td><td>128</td><td>20 PEAK</td></tr><tr><td>2</td><td>1990.00</td><td>73.94</td><td>-----</td><td>-----</td><td>67.13</td><td>31.66</td><td>6.48</td><td>37.33</td><td>6.00</td><td>128</td><td>20 PEAK</td></tr><tr><td>3</td><td>2402.00</td><td>87.87</td><td>-----</td><td>-----</td><td>79.49</td><td>32.30</td><td>7.12</td><td>37.04</td><td>6.00</td><td>128</td><td>20 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	1910.00	112.19	-----	-----	106.16	31.02	6.34	37.33	6.00	128	20 PEAK	2	1990.00	73.94	-----	-----	67.13	31.66	6.48	37.33	6.00	128	20 PEAK	3	2402.00	87.87	-----	-----	79.49	32.30	7.12	37.04	6.00	128
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	2374.09	50.28	74.00	-23.72	42.21	32.04	7.08	37.05	6.00	128	20 PEAK																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	1910.00	112.19	-----	-----	106.16	31.02	6.34	37.33	6.00	128	20 PEAK																																																																																																														
2	1990.00	73.94	-----	-----	67.13	31.66	6.48	37.33	6.00	128	20 PEAK																																																																																																														
3	2402.00	87.87	-----	-----	79.49	32.30	7.12	37.04	6.00	128	20 PEAK																																																																																																														
Avg																																																																																																																									
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2378.51</td><td>39.46</td><td>54.00</td><td>-14.54</td><td>31.33</td><td>32.09</td><td>7.09</td><td>37.05</td><td>6.00</td><td>128</td><td>20 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2378.51	39.46	54.00	-14.54	31.33	32.09	7.09	37.05	6.00	128	20 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>1910.00</td><td>111.26</td><td>-----</td><td>-----</td><td>105.23</td><td>31.02</td><td>6.34</td><td>37.33</td><td>6.00</td><td>128</td><td>20 AVERAGE</td></tr><tr><td>2</td><td>1990.00</td><td>73.37</td><td>-----</td><td>-----</td><td>66.56</td><td>31.66</td><td>6.48</td><td>37.33</td><td>6.00</td><td>128</td><td>20 AVERAGE</td></tr><tr><td>3</td><td>2402.00</td><td>85.87</td><td>-----</td><td>-----</td><td>77.49</td><td>32.30</td><td>7.12</td><td>37.04</td><td>6.00</td><td>128</td><td>20 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	1910.00	111.26	-----	-----	105.23	31.02	6.34	37.33	6.00	128	20 AVERAGE	2	1990.00	73.37	-----	-----	66.56	31.66	6.48	37.33	6.00	128	20 AVERAGE	3	2402.00	85.87	-----	-----	77.49	32.30	7.12	37.04	6.00	128
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	2378.51	39.46	54.00	-14.54	31.33	32.09	7.09	37.05	6.00	128	20 AVERAGE																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	1910.00	111.26	-----	-----	105.23	31.02	6.34	37.33	6.00	128	20 AVERAGE																																																																																																														
2	1990.00	73.37	-----	-----	66.56	31.66	6.48	37.33	6.00	128	20 AVERAGE																																																																																																														
3	2402.00	85.87	-----	-----	77.49	32.30	7.12	37.04	6.00	128	20 AVERAGE																																																																																																														
Note:	-						#2 is PCS Base station signal																																																																																																																		

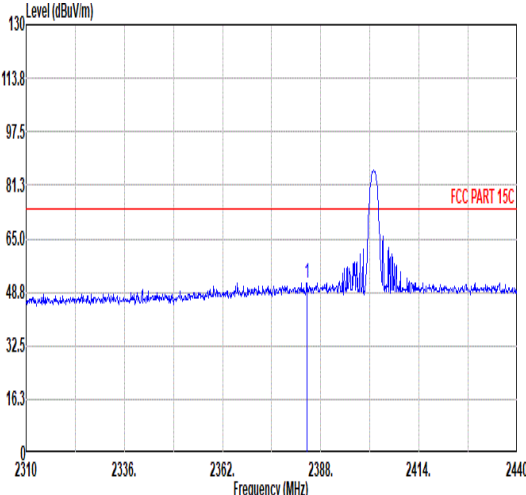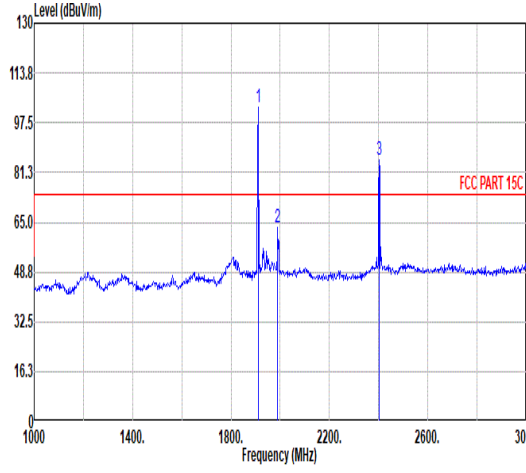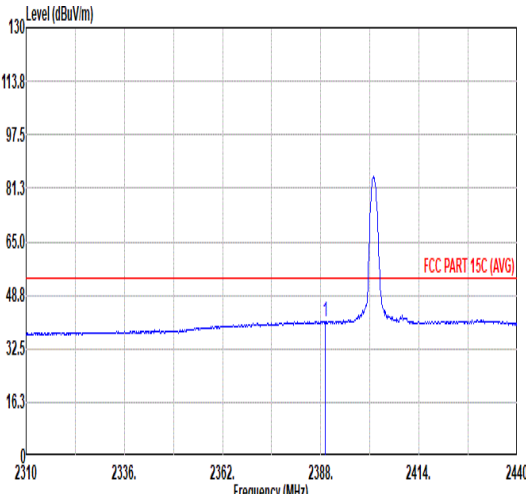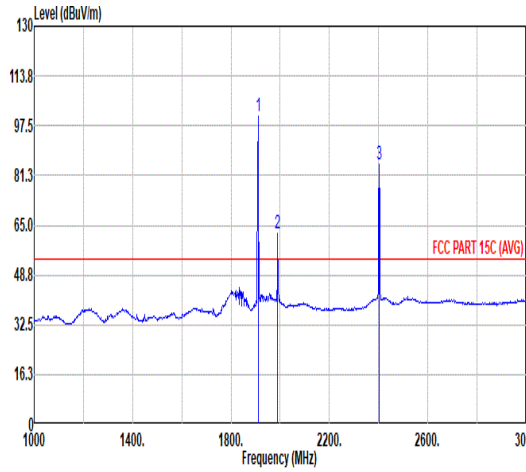

Mode	2																																																																																																																												
	Band Edge																																																																																																																												
	2400-2483.5_Bluetooth-LE_GSKF_CH0_2402MHz																																																																																																																												
Pol.	Vertical						Fundamental																																																																																																																						
Peak																																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2384.36</td><td>51.48</td><td>74.00</td><td>-22.52</td><td>43.29</td><td>32.14</td><td>7.10</td><td>37.05</td><td>6.00</td><td>373</td><td>251</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2384.36	51.48	74.00	-22.52	43.29	32.14	7.10	37.05	6.00	373	251	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1910.00</td><td>102.62</td><td>-----</td><td>-----</td><td>96.59</td><td>31.02</td><td>6.34</td><td>37.33</td><td>6.00</td><td>373</td><td>251</td><td>PEAK</td></tr><tr><td>2</td><td>1990.00</td><td>63.17</td><td>-----</td><td>-----</td><td>56.36</td><td>31.66</td><td>6.48</td><td>37.33</td><td>6.00</td><td>373</td><td>251</td><td>PEAK</td></tr><tr><td>3</td><td>2402.00</td><td>85.48</td><td>-----</td><td>-----</td><td>77.10</td><td>32.30</td><td>7.12</td><td>37.04</td><td>6.00</td><td>373</td><td>251</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	1910.00	102.62	-----	-----	96.59	31.02	6.34	37.33	6.00	373	251	PEAK	2	1990.00	63.17	-----	-----	56.36	31.66	6.48	37.33	6.00	373	251	PEAK	3	2402.00	85.48	-----	-----	77.10	32.30	7.12	37.04	6.00	373	251
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	2384.36	51.48	74.00	-22.52	43.29	32.14	7.10	37.05	6.00	373	251	PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	1910.00	102.62	-----	-----	96.59	31.02	6.34	37.33	6.00	373	251	PEAK																																																																																																																	
2	1990.00	63.17	-----	-----	56.36	31.66	6.48	37.33	6.00	373	251	PEAK																																																																																																																	
3	2402.00	85.48	-----	-----	77.10	32.30	7.12	37.04	6.00	373	251	PEAK																																																																																																																	
Avg																																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.17</td><td>40.80</td><td>54.00</td><td>-13.20</td><td>32.56</td><td>32.19</td><td>7.10</td><td>37.05</td><td>6.00</td><td>373</td><td>251</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.17	40.80	54.00	-13.20	32.56	32.19	7.10	37.05	6.00	373	251	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1910.00</td><td>100.52</td><td>-----</td><td>-----</td><td>94.49</td><td>31.02</td><td>6.34</td><td>37.33</td><td>6.00</td><td>373</td><td>251</td><td>AVERAGE</td></tr><tr><td>2</td><td>1990.00</td><td>62.45</td><td>-----</td><td>-----</td><td>55.64</td><td>31.66</td><td>6.48</td><td>37.33</td><td>6.00</td><td>373</td><td>251</td><td>AVERAGE</td></tr><tr><td>3</td><td>2402.00</td><td>84.68</td><td>-----</td><td>-----</td><td>76.30</td><td>32.30</td><td>7.12</td><td>37.04</td><td>6.00</td><td>373</td><td>251</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	1910.00	100.52	-----	-----	94.49	31.02	6.34	37.33	6.00	373	251	AVERAGE	2	1990.00	62.45	-----	-----	55.64	31.66	6.48	37.33	6.00	373	251	AVERAGE	3	2402.00	84.68	-----	-----	76.30	32.30	7.12	37.04	6.00	373	251
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	2389.17	40.80	54.00	-13.20	32.56	32.19	7.10	37.05	6.00	373	251	AVERAGE																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	1910.00	100.52	-----	-----	94.49	31.02	6.34	37.33	6.00	373	251	AVERAGE																																																																																																																	
2	1990.00	62.45	-----	-----	55.64	31.66	6.48	37.33	6.00	373	251	AVERAGE																																																																																																																	
3	2402.00	84.68	-----	-----	76.30	32.30	7.12	37.04	6.00	373	251	AVERAGE																																																																																																																	
Note:	-						#2 is PCS Base station signal																																																																																																																						

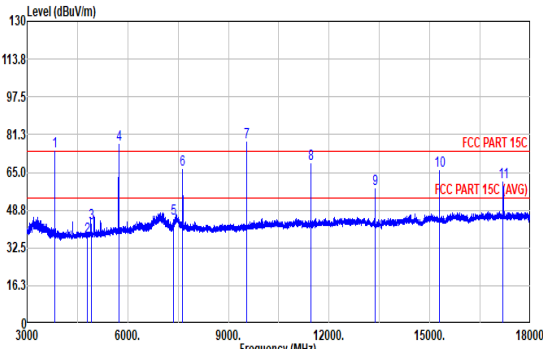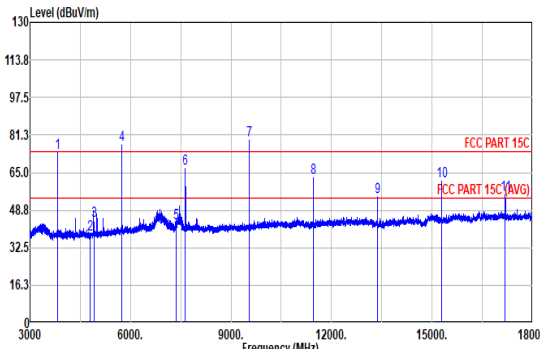

Mode	2																																																																																																																																																																																																																																																																																																																
	Harmonic																																																																																																																																																																																																																																																																																																																
	Co-location mode																																																																																																																																																																																																																																																																																																																
Pol.	Horizontal										Vertical																																																																																																																																																																																																																																																																																																						
Peak Avg																																																																																																																																																																																																																																																																																																																	
	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 3820.00</td><td>74.10</td><td>74.00</td><td>0.10</td><td>97.53</td><td>33.15</td><td>9.08</td><td>65.66</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr><tr><td>2 4804.00</td><td>37.35</td><td>74.00</td><td>-36.65</td><td>58.55</td><td>34.08</td><td>10.20</td><td>65.48</td><td>0.00</td><td>--</td><td>-- Peak</td></tr><tr><td>3 4904.00</td><td>43.35</td><td>74.00</td><td>-30.65</td><td>64.40</td><td>34.17</td><td>10.33</td><td>65.55</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr><tr><td>4 5730.00</td><td>76.86</td><td>74.00</td><td>2.86</td><td>96.12</td><td>34.95</td><td>11.18</td><td>65.39</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr><tr><td>5 7356.00</td><td>45.03</td><td>74.00</td><td>-28.97</td><td>62.91</td><td>35.00</td><td>12.73</td><td>66.41</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr><tr><td>6 7639.00</td><td>66.33</td><td>74.00</td><td>-7.67</td><td>84.15</td><td>35.98</td><td>13.05</td><td>66.85</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr><tr><td>7 9549.00</td><td>77.95</td><td>74.00</td><td>3.95</td><td>93.53</td><td>36.60</td><td>14.86</td><td>67.04</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr><tr><td>8 11460.00</td><td>68.92</td><td>74.00</td><td>-5.08</td><td>80.81</td><td>38.12</td><td>16.34</td><td>66.35</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr><tr><td>9 13369.00</td><td>58.09</td><td>74.00</td><td>-15.91</td><td>66.00</td><td>38.90</td><td>17.60</td><td>65.01</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr><tr><td>10 15277.00</td><td>65.86</td><td>74.00</td><td>-8.14</td><td>71.53</td><td>39.60</td><td>18.87</td><td>64.14</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr><tr><td>11 17188.00</td><td>60.75</td><td>74.00</td><td>-13.25</td><td>63.86</td><td>41.01</td><td>20.13</td><td>64.25</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr></table>										Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 3820.00	74.10	74.00	0.10	97.53	33.15	9.08	65.66	0.00	--	-- PEAK	2 4804.00	37.35	74.00	-36.65	58.55	34.08	10.20	65.48	0.00	--	-- Peak	3 4904.00	43.35	74.00	-30.65	64.40	34.17	10.33	65.55	0.00	--	-- PEAK	4 5730.00	76.86	74.00	2.86	96.12	34.95	11.18	65.39	0.00	--	-- PEAK	5 7356.00	45.03	74.00	-28.97	62.91	35.00	12.73	66.41	0.00	--	-- PEAK	6 7639.00	66.33	74.00	-7.67	84.15	35.98	13.05	66.85	0.00	--	-- PEAK	7 9549.00	77.95	74.00	3.95	93.53	36.60	14.86	67.04	0.00	--	-- PEAK	8 11460.00	68.92	74.00	-5.08	80.81	38.12	16.34	66.35	0.00	--	-- PEAK	9 13369.00	58.09	74.00	-15.91	66.00	38.90	17.60	65.01	0.00	--	-- PEAK	10 15277.00	65.86	74.00	-8.14	71.53	39.60	18.87	64.14	0.00	--	-- PEAK	11 17188.00	60.75	74.00	-13.25	63.86	41.01	20.13	64.25	0.00	--	-- PEAK	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 3820.00</td><td>73.78</td><td>74.00</td><td>-0.22</td><td>97.21</td><td>33.15</td><td>9.08</td><td>65.66</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr><tr><td>2 4804.00</td><td>38.22</td><td>74.00</td><td>-35.78</td><td>59.42</td><td>34.08</td><td>10.20</td><td>65.48</td><td>0.00</td><td>--</td><td>-- Peak</td></tr><tr><td>3 4904.00</td><td>44.05</td><td>74.00</td><td>-29.95</td><td>65.10</td><td>34.17</td><td>10.33</td><td>65.55</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr><tr><td>4 5730.00</td><td>76.79</td><td>74.00</td><td>2.79</td><td>96.05</td><td>34.95</td><td>11.18</td><td>65.39</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr><tr><td>5 7356.00</td><td>43.30</td><td>74.00</td><td>-30.70</td><td>61.18</td><td>35.00</td><td>12.73</td><td>66.41</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr><tr><td>6 7639.00</td><td>66.90</td><td>74.00</td><td>-7.10</td><td>84.72</td><td>35.98</td><td>13.05</td><td>66.85</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr><tr><td>7 9549.00</td><td>78.86</td><td>74.00</td><td>4.86</td><td>94.44</td><td>36.60</td><td>14.86</td><td>67.04</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr><tr><td>8 11460.00</td><td>62.74</td><td>74.00</td><td>-11.26</td><td>74.63</td><td>38.12</td><td>16.34</td><td>66.35</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr><tr><td>9 13369.00</td><td>54.37</td><td>74.00</td><td>-19.63</td><td>62.88</td><td>38.90</td><td>17.60</td><td>65.01</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr><tr><td>10 15279.00</td><td>61.09</td><td>74.00</td><td>-12.91</td><td>66.76</td><td>39.60</td><td>18.87</td><td>64.14</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr><tr><td>11 17187.00</td><td>55.66</td><td>74.00</td><td>-18.34</td><td>58.77</td><td>41.01</td><td>20.13</td><td>64.25</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr></table>										Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 3820.00	73.78	74.00	-0.22	97.21	33.15	9.08	65.66	0.00	--	-- PEAK	2 4804.00	38.22	74.00	-35.78	59.42	34.08	10.20	65.48	0.00	--	-- Peak	3 4904.00	44.05	74.00	-29.95	65.10	34.17	10.33	65.55	0.00	--	-- PEAK	4 5730.00	76.79	74.00	2.79	96.05	34.95	11.18	65.39	0.00	--	-- PEAK	5 7356.00	43.30	74.00	-30.70	61.18	35.00	12.73	66.41	0.00	--	-- PEAK	6 7639.00	66.90	74.00	-7.10	84.72	35.98	13.05	66.85	0.00	--	-- PEAK	7 9549.00	78.86	74.00	4.86	94.44	36.60	14.86	67.04	0.00	--	-- PEAK	8 11460.00	62.74	74.00	-11.26	74.63	38.12	16.34	66.35	0.00	--	-- PEAK	9 13369.00	54.37	74.00	-19.63	62.88	38.90	17.60	65.01	0.00	--	-- PEAK	10 15279.00	61.09	74.00	-12.91	66.76	39.60	18.87	64.14	0.00	--	-- PEAK	11 17187.00	55.66	74.00	-18.34	58.77	41.01	20.13	64.25	0.00	--
Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																																																																							
1 3820.00	74.10	74.00	0.10	97.53	33.15	9.08	65.66	0.00	--	-- PEAK																																																																																																																																																																																																																																																																																																							
2 4804.00	37.35	74.00	-36.65	58.55	34.08	10.20	65.48	0.00	--	-- Peak																																																																																																																																																																																																																																																																																																							
3 4904.00	43.35	74.00	-30.65	64.40	34.17	10.33	65.55	0.00	--	-- PEAK																																																																																																																																																																																																																																																																																																							
4 5730.00	76.86	74.00	2.86	96.12	34.95	11.18	65.39	0.00	--	-- PEAK																																																																																																																																																																																																																																																																																																							
5 7356.00	45.03	74.00	-28.97	62.91	35.00	12.73	66.41	0.00	--	-- PEAK																																																																																																																																																																																																																																																																																																							
6 7639.00	66.33	74.00	-7.67	84.15	35.98	13.05	66.85	0.00	--	-- PEAK																																																																																																																																																																																																																																																																																																							
7 9549.00	77.95	74.00	3.95	93.53	36.60	14.86	67.04	0.00	--	-- PEAK																																																																																																																																																																																																																																																																																																							
8 11460.00	68.92	74.00	-5.08	80.81	38.12	16.34	66.35	0.00	--	-- PEAK																																																																																																																																																																																																																																																																																																							
9 13369.00	58.09	74.00	-15.91	66.00	38.90	17.60	65.01	0.00	--	-- PEAK																																																																																																																																																																																																																																																																																																							
10 15277.00	65.86	74.00	-8.14	71.53	39.60	18.87	64.14	0.00	--	-- PEAK																																																																																																																																																																																																																																																																																																							
11 17188.00	60.75	74.00	-13.25	63.86	41.01	20.13	64.25	0.00	--	-- PEAK																																																																																																																																																																																																																																																																																																							
Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																																																																							
1 3820.00	73.78	74.00	-0.22	97.21	33.15	9.08	65.66	0.00	--	-- PEAK																																																																																																																																																																																																																																																																																																							
2 4804.00	38.22	74.00	-35.78	59.42	34.08	10.20	65.48	0.00	--	-- Peak																																																																																																																																																																																																																																																																																																							
3 4904.00	44.05	74.00	-29.95	65.10	34.17	10.33	65.55	0.00	--	-- PEAK																																																																																																																																																																																																																																																																																																							
4 5730.00	76.79	74.00	2.79	96.05	34.95	11.18	65.39	0.00	--	-- PEAK																																																																																																																																																																																																																																																																																																							
5 7356.00	43.30	74.00	-30.70	61.18	35.00	12.73	66.41	0.00	--	-- PEAK																																																																																																																																																																																																																																																																																																							
6 7639.00	66.90	74.00	-7.10	84.72	35.98	13.05	66.85	0.00	--	-- PEAK																																																																																																																																																																																																																																																																																																							
7 9549.00	78.86	74.00	4.86	94.44	36.60	14.86	67.04	0.00	--	-- PEAK																																																																																																																																																																																																																																																																																																							
8 11460.00	62.74	74.00	-11.26	74.63	38.12	16.34	66.35	0.00	--	-- PEAK																																																																																																																																																																																																																																																																																																							
9 13369.00	54.37	74.00	-19.63	62.88	38.90	17.60	65.01	0.00	--	-- PEAK																																																																																																																																																																																																																																																																																																							
10 15279.00	61.09	74.00	-12.91	66.76	39.60	18.87	64.14	0.00	--	-- PEAK																																																																																																																																																																																																																																																																																																							
11 17187.00	55.66	74.00	-18.34	58.77	41.01	20.13	64.25	0.00	--	-- PEAK																																																																																																																																																																																																																																																																																																							

Note: The Margin for WWAN signals of this plot for reference, please refer to the above the table, "WWAN RSE"

Appendix B. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11n HT40	100	-	-	10Hz

802.11n HT40

