

FCC Test Report (BT-LE)

Report No.: RF150730E02-3

FCC ID: R68PW2050

Test Model: PW 2050

Received Date: July 30, 2015

Test Date: Aug. 21 to Oct. 12, 2015

Issued Date: Nov. 04, 2015

Applicant: Lantronix Inc

Address: 7535 Irvine Center Drive Suite 100, Irvine CA 92618

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan R.O.C.

Test Location (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan R.O.C.

Test Location (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan R.O.C.

Test Location (3): E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT (BT-LE)	7
3.2 Description of Test Modes	9
3.2.1 Test Mode Applicability and Tested Channel Detail	10
3.3 Description of Support Units	12
3.3.1 Configuration of System under Test	12
3.4 General Description of Applied Standards	13
4 Test Types and Results	14
4.1 Radiated Emission and Bandedge Measurement	14
4.1.1 Limits of Radiated Emission and Bandedge Measurement	14
4.1.2 Test Instruments	15
4.1.3 Test Procedures	17
4.1.4 Deviation from Test Standard	17
4.1.5 Test Setup	18
4.1.6 EUT Operating Conditions	18
4.1.7 Test Results (Mode 1)	19
4.1.8 Test Results (Mode 2)	23
4.1.9 Test Results (Mode 3)	27
4.2 Conducted Emission Measurement	31
4.2.1 Limits of Conducted Emission Measurement	31
4.2.2 Test Instruments	31
4.2.3 Test Procedures	32
4.2.4 Deviation from Test Standard	32
4.2.5 TEST SETUP	32
4.2.6 EUT Operating Conditions	32
4.2.7 Test Results	33
4.3 6dB Bandwidth Measurement	35
4.3.1 Limits of 6dB Bandwidth Measurement	35
4.3.2 Test Setup	35
4.3.3 Test Instruments	35
4.3.4 Test Procedure	35
4.3.5 Deviation from Test Standard	35
4.3.6 EUT Operating Conditions	35
4.3.7 Test Result	36
4.4 Conducted Output Power Measurement	37
4.4.1 Limits of Conducted Output Power Measurement	37
4.4.2 Test Setup	37
4.4.3 Test Instruments	37
4.4.4 Test Procedures	37
4.4.5 Deviation from Test Standard	37
4.4.6 EUT Operating Conditions	37
4.4.7 Test Results	38
4.5 Power Spectral Density Measurement	39
4.5.1 Limits of Power Spectral Density Measurement	39
4.5.2 Test Setup	39
4.5.3 Test Instruments	39
4.5.4 Test Procedure	39
4.5.5 Deviation from Test Standard	39

4.5.6 EUT Operating Condition	39
4.5.7 Test Results	40
4.6 Conducted Out of Band Emission Measurement.....	41
4.6.1 Limits of Conducted Out of Band Emission Measurement	41
4.6.2 Test Setup.....	41
4.6.3 Test Instruments	41
4.6.4 Test Procedure	41
4.6.5 Deviation from Test Standard	41
4.6.6 EUT Operating Condition	41
4.6.7 TEST RESULTS	42
5 Pictures of Test Arrangements.....	43
Appendix – Information on the Testing Laboratories	44



A D T

Release Control Record

Issue No.	Description	Date Issued
RF150730E02-3	Original release.	Nov. 04, 2015



A D T

1 Certificate of Conformity

Product: PremierWave 2050
Brand: Lantronix
Test Model: PW 2050
Sample Status: ENGINEERING SAMPLE
Applicant: Lantronix Inc
Test Date: Aug. 21 to Oct. 12, 2015
Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :

, Date:

Nov. 04, 2015

Midoli Peng / Specialist

Approved by :

, Date:

Nov. 04, 2015

May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -19.38dB at 0.37656MHz.
15.205 & 209 & 15.247(d)	Radiated Emissions & Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -3.4dB at 752.27MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is RSMA or i-pex(MHF) not a standard connector.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expended Uncertainty (k=2) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.86 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	5.37 dB
	200MHz ~ 1000MHz	3.72 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	4.00 dB
	18GHz ~ 40GHz	4.11 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT (BT-LE)

Product	PremierWave 2050
Brand	Lantronix
Test Model	PW 2050
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	5Vdc from host equipment
Modulation Type	GFSK
Modulation Technology	DTS
Transfer Rate	Up to 1Mbps
Operating Frequency	2402MHz ~ 2480MHz
Number of Channel	40
Output Power	5.445mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	NA
Data Cable Supplied	NA

Note:

1. The EUT was included two variants, which are identical to each other in all aspects except for the following table:

Module Version	Product	Brand	Model	Different	Antenna
SKU #A	PremierWave 2050	Lantronix	PW 2050	SIP with one ethertronics chip ant and one UFL connector	ethertronics chip ant + ethertronics printed ant / ethertronics chip ant + Taoglas ant
SKU #B				SIP with two UFL connectors	Taoglas ant+Taoglas ant/ ethertronic printed ant+ethertronic printed ant

2. The antenna configurations as following table:

Module Version	Primary TX/RX antenna	RX diversity antenna
SKU #A	Chip Antenna Lantronix 220-613-R Ethertronics M830510	U.FL to PCB Strip Antenna Lantronix 930-099-R Ethertronics 1000602
SKU #A	Chip Antenna Lantronix 220-613-R Ethertronics M830510	U.FL to Taoglas GW.71.5153
SKU #B	U.FL to PCB Strip Antenna Lantronix 930-099-R Ethertronics 1000602	U.FL to PCB Strip Antenna Lantronix 930-099-R Ethertronics 1000602
SKU #B	U.FL to Taoglas GW.71.5153	U.FL to Taoglas GW.71.5153

3. WLAN and BT technology can't transmit at same time.

4. The antennas spec provided to the EUT, please refer to the following table:

Brand	Model	Antenna Gain (dBi) (Excelude cable loss)	Cable Loss (dB)	Net Gain (dBi)	Cable Length (mm)	Frequency range (GHz to GHz)	Antenna Type	Connector Type
taoglas	GW.71.5153	3.8	1	2.8	45	2.4~2.483	Dipole	R-SMA
		5.5	1.7	3.8		5.15~5.85		
Brand	Model	Antenna Gain (dBi)				Frequency range (GHz to GHz)	Antenna Type	Connector Type
ethertronics	M830510	1.1				2.4~2.483	Chip	NA
		3.2				5.15~5.85		
Brand	Model	Antenna Gain (dBi)				Frequency range (GHz to GHz)	Antenna Type	Connector Type
ethertronics	1000602	2.5				2.4~2.483	PCB	i-pex(MHF)
		5				5.15~5.85		

5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 Description of Test Modes

40 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
1	√	√	-	-	Chip antenna + Dipole antenna
2	√	√	√	-	PCB antenna + PCB antenna
3	√	√	-	√	Dipole antenna + Dipole antenna

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE 1: "-" means no effect.

NOTE 2: Antenna placement had been investigated on the positioned of each 3 axis.
Following worst case were found as listed below.

Antenna	Worst position
Chip	X Plane
PCB	X-plane(Below 1GHz) ; Z-plane (Above 1GHz)

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	0, 19, 39	GFSK	1

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	19	GFSK	1

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	19	GFSK	1

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	0, 19, 39	GFSK	1

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
RE≥1G	24deg. C, 68%RH	120Vac, 60Hz	Robert Cheng
RE<1G	25deg. C, 69%RH	120Vac, 60Hz	Robert Cheng
PLC	25deg. C, 65%RH	120Vac, 60Hz	JyunChun.Lin
APCM	25deg. C, 60%RH	120Vac, 60Hz	Anderson Chen

3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	NOTEBOOK COMPUTER	DELL	E5430	GM1SKV1	FCC DoC	Provided by Lab
B.	Test Tool	NA	NA	NA	NA	Supplied by Client

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	MiniUSB	1	1.5	Yes	0	Provided by Lab

3.3.1 Configuration of System under Test



3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

558074 D01 DTS Meas Guidance v03r03

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

For above 1GHz test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY51210202	Dec. 12, 2014	Dec. 11, 2015
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-04	Nov. 12, 2014	Nov. 11, 2015
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Feb. 09, 2015	Feb. 08, 2016
RF Cable	8D-FB	CHHCAB-001-1 CHHCAB-001-2	Oct. 04, 2015	Oct. 03, 2016
	RF-141	CHHCAB-004	Oct. 04, 2015	Oct. 03, 2016
Horn_Antenna AISI	AIH.8018	0000220091110	Feb. 06, 2015	Feb. 05, 2016
Pre-Amplifier Agilent	8449B	3008A01923	Oct. 28, 2014	Oct. 27, 2015
RF Cable	NA	131206 131213 131215 SNMY23685/4	Jan. 16, 2015	Jan. 15, 2016
Spectrum Analyzer R&S	FSV40	100964	Jun. 26, 2015	Jun 25, 2016
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Dec. 12, 2014	Dec. 11, 2015
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Feb. 05, 2015	Feb. 04, 2016
RF Cable	NA	329751/4 RF104-204	Dec. 11, 2014	Dec. 10, 2015
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA
Spectrum Analyzer R&S	FSP40	100060	May 08, 2015	May 07, 2016
Power Meter Anritsu	ML2495A	1014008	Apr. 28, 2015	Apr. 27, 2016
Power Sensor Anritsu	MA2411B	0917122	Apr. 28, 2015	Apr. 27, 2016

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. H.
3. The FCC Site Registration No. is 797305.
4. The CANADA Site Registration No. is IC 7450H-3.
5. Tested Date: Oct. 06, 2015

For below 1GHz test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY51210105	July 24, 2015	July 23, 2016
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 12, 2014	Nov. 11, 2015
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Feb. 06, 2015	Feb. 05, 2016
RF Cable	8D-FB	CHGCAB-001 -1 CHGCAB-001 -2	Oct. 03, 2015	Oct. 02, 2016
	RF-141	CHGCAB-004	Oct. 03, 2015	Oct. 02, 2016
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. G.
3. The FCC Site Registration No. is 966073.
4. The CANADA Site Registration No. is IC 7450H-2.
5. Tested Date: Oct. 08, 2015

4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup

<Frequency Range below 1GHz>

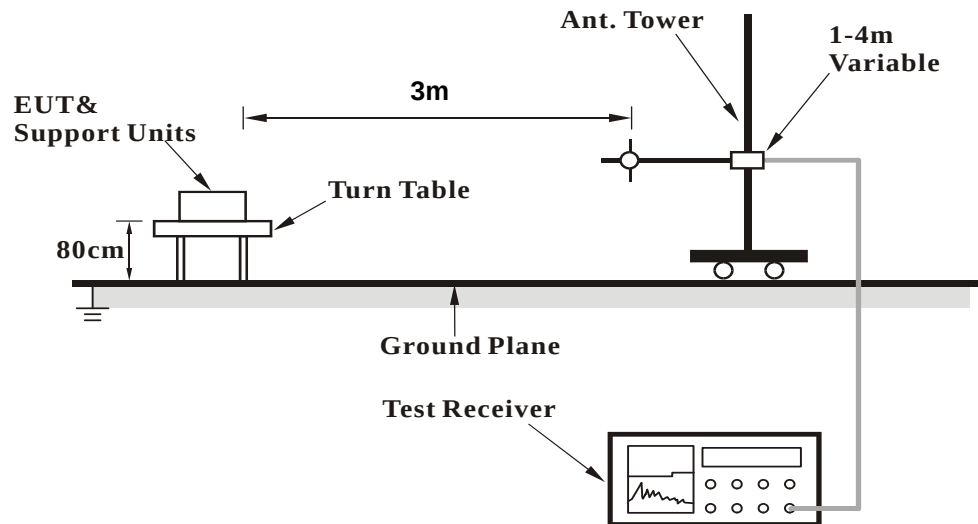

<Frequency Range above 1GHz>

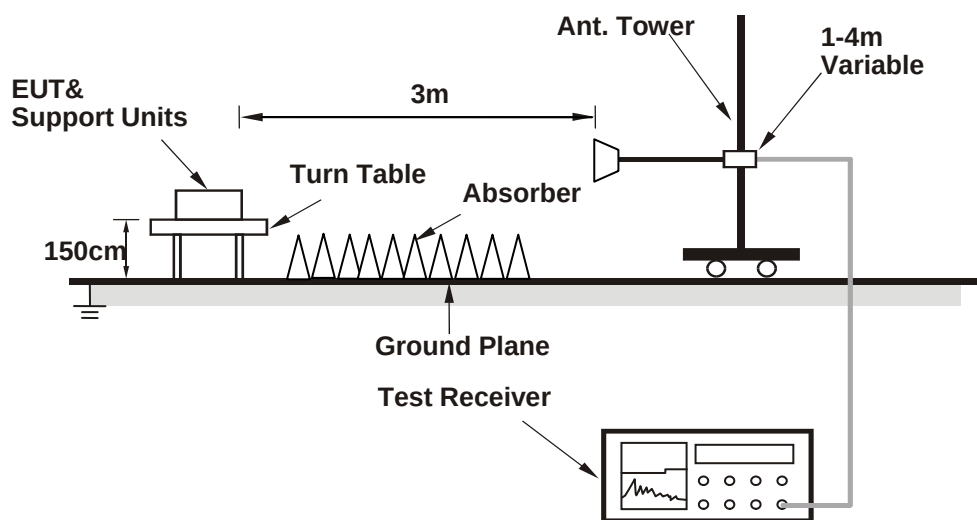

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

1. Connect the EUT with the support unit A (Notebook Computer) which is placed on test table.
2. The communication partner run test program "HyperTerminal paste Script file" to enable EUT under transmission/receiving condition continuously at specific channel frequency.

4.1.7 Test Results (Mode 1)

Above 1GHz Data

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	46.0 PK	74.0	-28.0	1.45 H	190	49.19	-3.19
2	2390.00	34.7 AV	54.0	-19.3	1.45 H	190	37.89	-3.19
3	*2402.00	105.1 PK			1.45 H	190	108.26	-3.16
4	*2402.00	102.9 AV			1.45 H	190	106.06	-3.16
5	4804.00	48.0 PK	74.0	-26.0	1.27 H	250	42.06	5.94
6	4804.00	36.9 AV	54.0	-17.1	1.27 H	250	30.96	5.94
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	46.0 PK	74.0	-28.0	2.45 V	175	49.19	-3.19
2	2390.00	34.9 AV	54.0	-19.1	2.45 V	175	38.09	-3.19
3	*2402.00	99.7 PK			2.45 V	175	102.86	-3.16
4	*2402.00	97.6 AV			2.45 V	175	100.76	-3.16
5	4804.00	48.0 PK	74.0	-26.0	1.22 V	124	42.06	5.94
6	4804.00	37.4 AV	54.0	-16.6	1.22 V	124	31.46	5.94

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	104.6 PK			1.32 H	193	107.63	-3.03
2	*2440.00	102.3 AV			1.32 H	193	105.33	-3.03
3	4880.00	47.3 PK	74.0	-26.7	1.27 H	230	41.25	6.05
4	4880.00	36.6 AV	54.0	-17.4	1.27 H	230	30.55	6.05
5	7320.00	52.7 PK	74.0	-21.3	1.20 H	296	41.70	11.00
6	7320.00	43.3 AV	54.0	-10.7	1.20 H	296	32.30	11.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	99.1 PK			2.48 V	166	102.13	-3.03
2	*2440.00	97.5 AV			2.48 V	166	100.53	-3.03
3	4880.00	47.9 PK	74.0	-26.1	1.22 V	122	41.85	6.05
4	4880.00	37.2 AV	54.0	-16.8	1.22 V	122	31.15	6.05
5	7320.00	52.0 PK	74.0	-22.0	1.33 V	211	41.00	11.00
6	7320.00	42.6 AV	54.0	-11.4	1.33 V	211	31.60	11.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	103.9 PK			1.38 H	192	106.78	-2.88
2	*2480.00	101.8 AV			1.38 H	192	104.68	-2.88
3	2483.50	45.8 PK	74.0	-28.2	1.38 H	192	48.67	-2.87
4	2483.50	34.6 AV	54.0	-19.4	1.38 H	192	37.47	-2.87
5	4960.00	47.4 PK	74.0	-26.6	1.21 H	249	41.36	6.04
6	4960.00	36.7 AV	54.0	-17.3	1.21 H	249	30.66	6.04
7	7440.00	52.5 PK	74.0	-21.5	1.30 H	284	40.77	11.73
8	7440.00	42.9 AV	54.0	-11.1	1.30 H	284	31.17	11.73

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	98.3 PK			2.44 V	181	101.18	-2.88
2	*2480.00	96.9 AV			2.44 V	181	99.78	-2.88
3	2483.50	45.8 PK	74.0	-28.2	2.44 V	181	48.67	-2.87
4	2483.50	34.3 AV	54.0	-19.7	2.44 V	181	37.17	-2.87
5	4960.00	47.8 PK	74.0	-26.2	1.24 V	120	41.76	6.04
6	4960.00	37.4 AV	54.0	-16.6	1.24 V	120	31.36	6.04
7	7440.00	52.9 PK	74.0	-21.1	1.34 V	202	41.17	11.73
8	7440.00	43.0 AV	54.0	-11.0	1.34 V	202	31.27	11.73

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Below 1GHz Data

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	61.14	30.2 QP	40.0	-9.8	1.31 H	317	44.15	-13.97
2	165.62	37.2 QP	43.5	-6.3	1.32 H	217	50.46	-13.26
3	232.28	38.3 QP	46.0	-7.7	1.11 H	205	53.54	-15.25
4	752.21	42.1 QP	46.0	-3.9	1.13 H	201	43.31	-1.17
5	817.40	41.1 QP	46.0	-4.9	1.27 H	232	41.39	-0.26
6	841.15	40.3 QP	46.0	-5.7	1.54 H	311	40.44	-0.13
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	61.50	34.4 QP	40.0	-5.6	1.11 V	87	48.48	-14.12
2	165.53	34.4 QP	43.5	-9.1	1.27 V	229	47.70	-13.26
3	676.34	42.4 QP	46.0	-3.6	1.45 V	219	45.52	-3.10
4	753.06	41.1 QP	46.0	-5.0	1.61 V	126	42.20	-1.15
5	768.49	39.3 QP	46.0	-6.7	1.44 V	67	40.36	-1.05
6	818.50	40.3 QP	46.0	-5.7	1.03 V	43	40.50	-0.24

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.1.8 Test Results (Mode 2)

Above 1GHz Data

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	45.9 PK	74.0	-28.1	1.07 H	285	49.09	-3.19
2	2390.00	34.2 AV	54.0	-19.8	1.07 H	285	37.39	-3.19
3	*2402.00	102.9 PK			1.07 H	285	106.06	-3.16
4	*2402.00	101.9 AV			1.07 H	285	105.06	-3.16
5	4804.00	47.5 PK	74.0	-26.5	1.21 H	257	41.56	5.94
6	4804.00	36.7 AV	54.0	-17.3	1.21 H	257	30.76	5.94
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	44.4 PK	74.0	-29.6	1.09 V	196	47.59	-3.19
2	2390.00	33.9 AV	54.0	-20.1	1.09 V	196	37.09	-3.19
3	*2402.00	96.3 PK			1.09 V	196	99.46	-3.16
4	*2402.00	95.4 AV			1.09 V	196	98.56	-3.16
5	4804.00	47.6 PK	74.0	-26.4	1.25 V	116	41.66	5.94
6	4804.00	37.0 AV	54.0	-17.0	1.25 V	116	31.06	5.94

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	103.3 PK			1.10 H	288	106.33	-3.03
2	*2440.00	101.2 AV			1.10 H	288	104.23	-3.03
3	4880.00	47.4 PK	74.0	-26.6	1.30 H	246	41.35	6.05
4	4880.00	36.8 AV	54.0	-17.2	1.30 H	246	30.75	6.05
5	7320.00	52.0 PK	74.0	-22.0	1.19 H	285	41.00	11.00
6	7320.00	42.7 AV	54.0	-11.3	1.19 H	285	31.70	11.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	97.1 PK			1.05 V	172	100.13	-3.03
2	*2440.00	95.1 AV			1.05 V	172	98.13	-3.03
3	4880.00	48.4 PK	74.0	-25.6	1.18 V	132	42.35	6.05
4	4880.00	37.6 AV	54.0	-16.4	1.18 V	132	31.55	6.05
5	7320.00	51.9 PK	74.0	-22.1	1.34 V	213	40.90	11.00
6	7320.00	42.4 AV	54.0	-11.6	1.34 V	213	31.40	11.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	102.7 PK			1.04 H	279	105.58	-2.88
2	*2480.00	101.3 AV			1.04 H	279	104.18	-2.88
3	2483.50	46.4 PK	74.0	-27.6	1.04 H	279	49.27	-2.87
4	2483.50	34.9 AV	54.0	-19.1	1.04 H	279	37.77	-2.87
5	4960.00	47.5 PK	74.0	-26.5	1.20 H	237	41.46	6.04
6	4960.00	36.9 AV	54.0	-17.1	1.20 H	237	30.86	6.04
7	7440.00	52.2 PK	74.0	-21.8	1.31 H	303	40.47	11.73
8	7440.00	43.0 AV	54.0	-11.0	1.31 H	303	31.27	11.73
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	96.2 PK			1.06 V	194	99.08	-2.88
2	*2480.00	95.1 AV			1.06 V	194	97.98	-2.88
3	2483.50	45.9 PK	74.0	-28.1	1.06 V	194	48.77	-2.87
4	2483.50	34.6 AV	54.0	-19.4	1.06 V	194	37.47	-2.87
5	4960.00	47.2 PK	74.0	-26.8	1.20 V	126	41.16	6.04
6	4960.00	36.8 AV	54.0	-17.2	1.20 V	126	30.76	6.04
7	7440.00	52.4 PK	74.0	-21.6	1.41 V	193	40.67	11.73
8	7440.00	43.0 AV	54.0	-11.0	1.41 V	193	31.27	11.73

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Below 1GHz Data

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	90.31	31.1 QP	43.5	-12.4	1.15 H	31	49.90	-18.81
2	165.68	36.2 QP	43.5	-7.3	1.12 H	75	49.50	-13.27
3	432.47	40.1 QP	46.0	-5.9	1.51 H	80	48.32	-8.18
4	552.24	39.6 QP	46.0	-6.4	1.58 H	28	45.39	-5.76
5	806.21	41.3 QP	46.0	-4.7	1.23 H	312	41.82	-0.51
6	942.30	40.2 QP	46.0	-5.8	1.13 H	105	38.65	1.51
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	81.55	34.2 QP	40.0	-5.8	1.22 V	112	52.22	-18.04
2	265.15	42.3 QP	46.0	-3.7	1.13 V	213	55.70	-13.39
3	476.14	42.2 QP	46.0	-3.8	2.34 V	106	49.55	-7.33
4	553.11	41.0 QP	46.0	-5.0	1.26 V	279	46.76	-5.74
5	668.37	42.2 QP	46.0	-3.8	1.17 V	310	45.46	-3.30
6	718.15	40.1 QP	46.0	-5.9	1.33 V	234	42.68	-2.54

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.1.9 Test Results (Mode 3)

Above 1GHz Data

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	45.4 PK	74.0	-28.6	1.34 H	114	48.59	-3.19
2	2390.00	34.4 AV	54.0	-19.6	1.34 H	114	37.59	-3.19
3	*2402.00	94.4 PK			1.34 H	114	97.56	-3.16
4	*2402.00	93.5 AV			1.34 H	114	96.66	-3.16
5	4804.00	47.9 PK	74.0	-26.1	1.27 H	240	41.96	5.94
6	4804.00	37.1 AV	54.0	-16.9	1.27 H	240	31.16	5.94
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	45.6 PK	74.0	-28.4	1.59 V	123	48.79	-3.19
2	2390.00	34.5 AV	54.0	-19.5	1.59 V	123	37.69	-3.19
3	*2402.00	102.7 PK			1.59 V	123	105.86	-3.16
4	*2402.00	101.5 AV			1.59 V	123	104.66	-3.16
5	4804.00	47.4 PK	74.0	-26.6	1.17 V	139	41.46	5.94
6	4804.00	36.7 AV	54.0	-17.3	1.17 V	139	30.76	5.94

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	95.1 PK			1.36 H	102	98.13	-3.03
2	*2440.00	94.2 AV			1.36 H	102	97.23	-3.03
3	4880.00	48.1 PK	74.0	-25.9	1.28 H	238	42.05	6.05
4	4880.00	37.2 AV	54.0	-16.8	1.28 H	238	31.15	6.05
5	7320.00	51.9 PK	74.0	-22.1	1.29 H	303	40.90	11.00
6	7320.00	42.5 AV	54.0	-11.5	1.29 H	303	31.50	11.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	103.5 PK			1.33 V	116	106.53	-3.03
2	*2440.00	102.3 AV			1.33 V	116	105.33	-3.03
3	4880.00	48.5 PK	74.0	-25.5	1.19 V	115	42.45	6.05
4	4880.00	37.6 AV	54.0	-16.4	1.19 V	115	31.55	6.05
5	7320.00	52.2 PK	74.0	-21.8	1.35 V	212	41.20	11.00
6	7320.00	42.3 AV	54.0	-11.7	1.35 V	212	31.30	11.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	94.6 PK			1.36 H	95	97.48	-2.88
2	*2480.00	93.8 AV			1.36 H	95	96.68	-2.88
3	2483.50	45.4 PK	74.0	-28.6	1.36 H	95	48.27	-2.87
4	2483.50	34.3 AV	54.0	-19.7	1.36 H	95	37.17	-2.87
5	4960.00	47.9 PK	74.0	-26.1	1.25 H	245	41.86	6.04
6	4960.00	37.1 AV	54.0	-16.9	1.25 H	245	31.06	6.04
7	7440.00	52.3 PK	74.0	-21.7	1.25 H	300	40.57	11.73
8	7440.00	42.9 AV	54.0	-11.1	1.25 H	300	31.17	11.73
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	103.0 PK			1.33 V	116	105.88	-2.88
2	*2480.00	101.7 AV			1.33 V	116	104.58	-2.88
3	2483.50	45.8 PK	74.0	-28.2	1.33 V	116	48.67	-2.87
4	2483.50	34.5 AV	54.0	-19.5	1.33 V	116	37.37	-2.87
5	4960.00	47.8 PK	74.0	-26.2	1.22 V	131	41.76	6.04
6	4960.00	37.2 AV	54.0	-16.8	1.22 V	131	31.16	6.04
7	7440.00	52.4 PK	74.0	-21.6	1.36 V	200	40.67	11.73
8	7440.00	42.8 AV	54.0	-11.2	1.36 V	200	31.07	11.73

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Below 1GHz Data

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	61.30	30.1 QP	40.0	-9.9	1.13 H	201	44.13	-14.04
2	165.70	37.2 QP	43.5	-6.3	1.28 H	231	50.50	-13.27
3	232.48	38.3 QP	46.0	-7.8	1.50 H	98	53.47	-15.22
4	752.27	42.6 QP	46.0	-3.4	1.21 H	79	43.76	-1.17
5	817.20	41.3 QP	46.0	-4.7	1.28 H	319	41.57	-0.27
6	841.29	40.2 QP	46.0	-5.8	1.11 H	230	40.29	-0.13
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	61.67	34.2 QP	40.0	-5.8	1.08 V	113	48.36	-14.17
2	165.23	34.4 QP	43.5	-9.1	1.08 V	116	47.59	-13.21
3	676.12	42.4 QP	46.0	-3.7	1.44 V	278	45.47	-3.12
4	753.17	41.3 QP	46.0	-4.7	1.52 V	279	42.40	-1.14
5	768.40	39.2 QP	46.0	-6.9	1.22 V	209	40.19	-1.04
6	818.13	40.2 QP	46.0	-5.8	1.40 V	282	40.47	-0.25

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	100375	May 06, 2015	May 05, 2016
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK-8127	8127-522	Sep. 15, 2014	Sep. 14, 2015
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100072	June 11, 2015	June 10, 2016
RF Cable	5D-FB	COCCAB-001	Mar. 09, 2015	Mar. 08, 2016
50 ohms Terminator	N/A	EMC-03	Sep. 22, 2014	Sep. 21, 2015
50 ohms Terminator	N/A	EMC-02	Sep. 30, 2014	Sep. 29, 2015
Software BVADT	BVADT_Cond_ V7.3.7.3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: Aug. 21, 2015

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 TEST SETUP

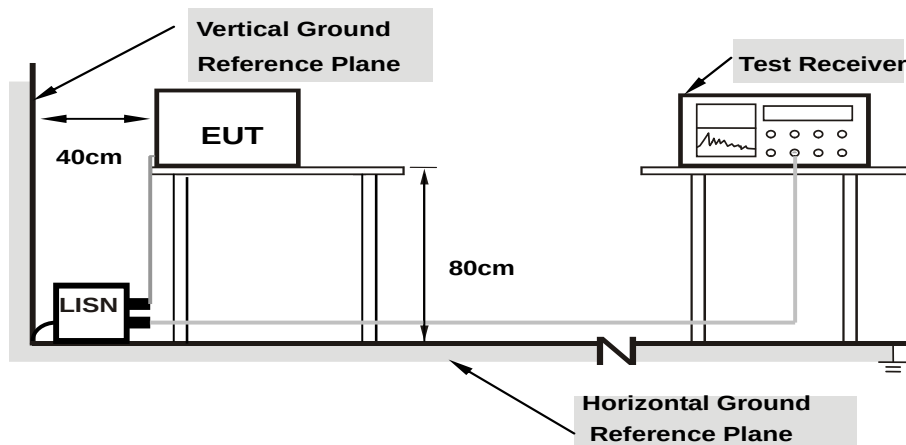

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.08	22.56	16.84	22.64	16.92	66.00	56.00	-43.36	-39.08
2	0.37622	0.10	26.20	24.14	26.30	24.24	58.36	48.36	-32.06	-24.12
3	0.77394	0.12	19.04	16.08	19.16	16.20	56.00	46.00	-36.84	-29.80
4	1.24219	0.14	18.32	12.48	18.46	12.62	56.00	46.00	-37.54	-33.38
5	2.84375	0.19	18.04	12.36	18.23	12.55	56.00	46.00	-37.77	-33.45
6	19.48438	0.69	19.78	13.40	20.47	14.09	60.00	50.00	-39.53	-35.91

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

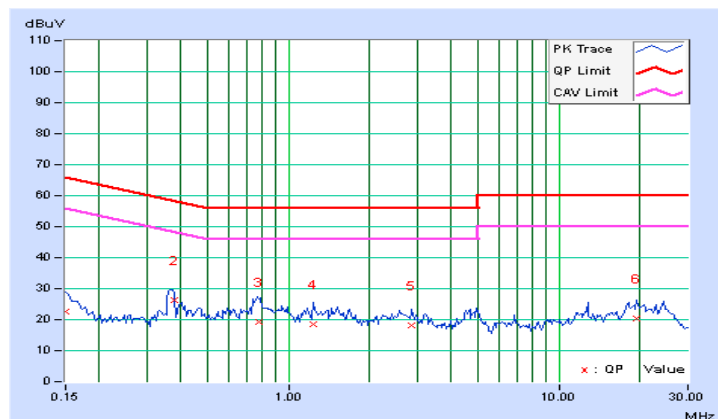


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.23594	0.08	21.60	17.20	21.68	17.28	62.24	52.24	-40.55	-34.95
2	0.37656	0.10	29.58	28.88	29.68	28.98	58.35	48.35	-28.68	-19.38
3	0.77500	0.12	16.26	12.38	16.38	12.50	56.00	46.00	-39.62	-33.50
4	1.27344	0.14	16.98	11.80	17.12	11.94	56.00	46.00	-38.88	-34.06
5	2.69141	0.19	20.52	16.20	20.71	16.39	56.00	46.00	-35.29	-29.61
6	17.08203	0.66	17.44	10.60	18.10	11.26	60.00	50.00	-41.90	-38.74

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

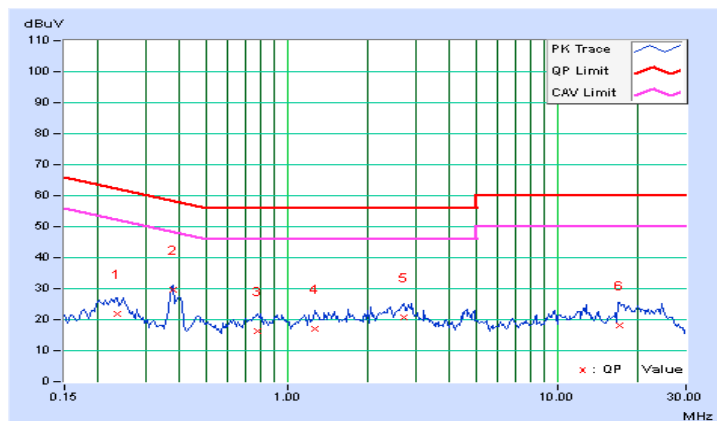


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard


No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
0	2402	0.72	0.5	Pass
19	2440	0.72	0.5	Pass
39	2480	0.72	0.5	Pass

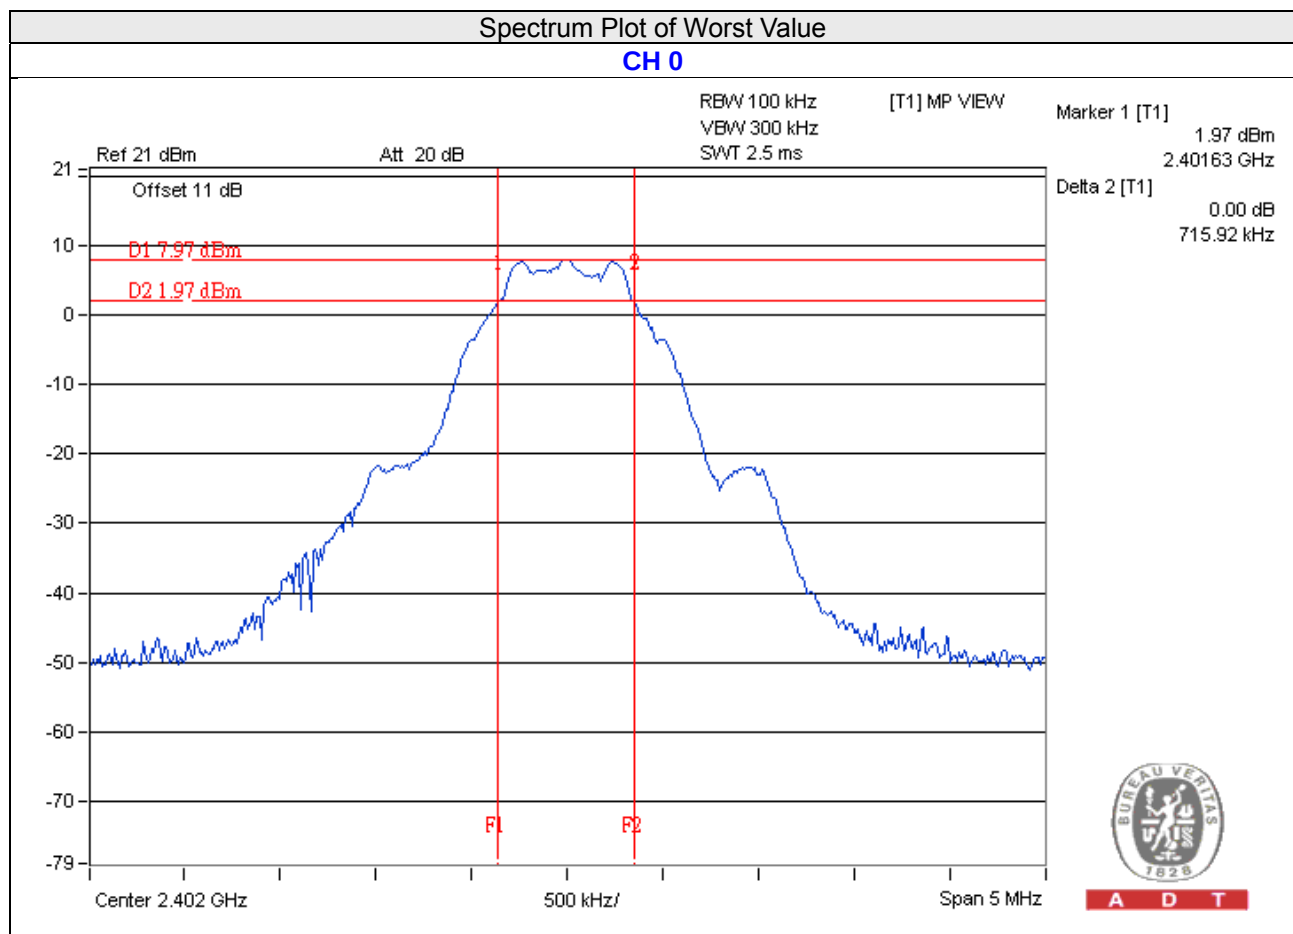


4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

A peak / average power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak / average power sensor. Record the power level.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

FOR PEAK POWER

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
0	2402	5.224	7.18	30	Pass
19	2440	5.445	7.36	30	Pass
39	2480	4.027	6.05	30	Pass

FOR AVERAGE POWER


Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
0	2402	5.070	7.05
19	2440	5.284	7.23
39	2480	3.908	5.92

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition


Same as Item 4.3.6

4.5.7 Test Results

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass/Fail
0	2402	-5.66	8	Pass
19	2440	-7.38	8	Pass
39	2480	-9.35	8	Pass

Spectrum Plot of Worst Value

CH 0

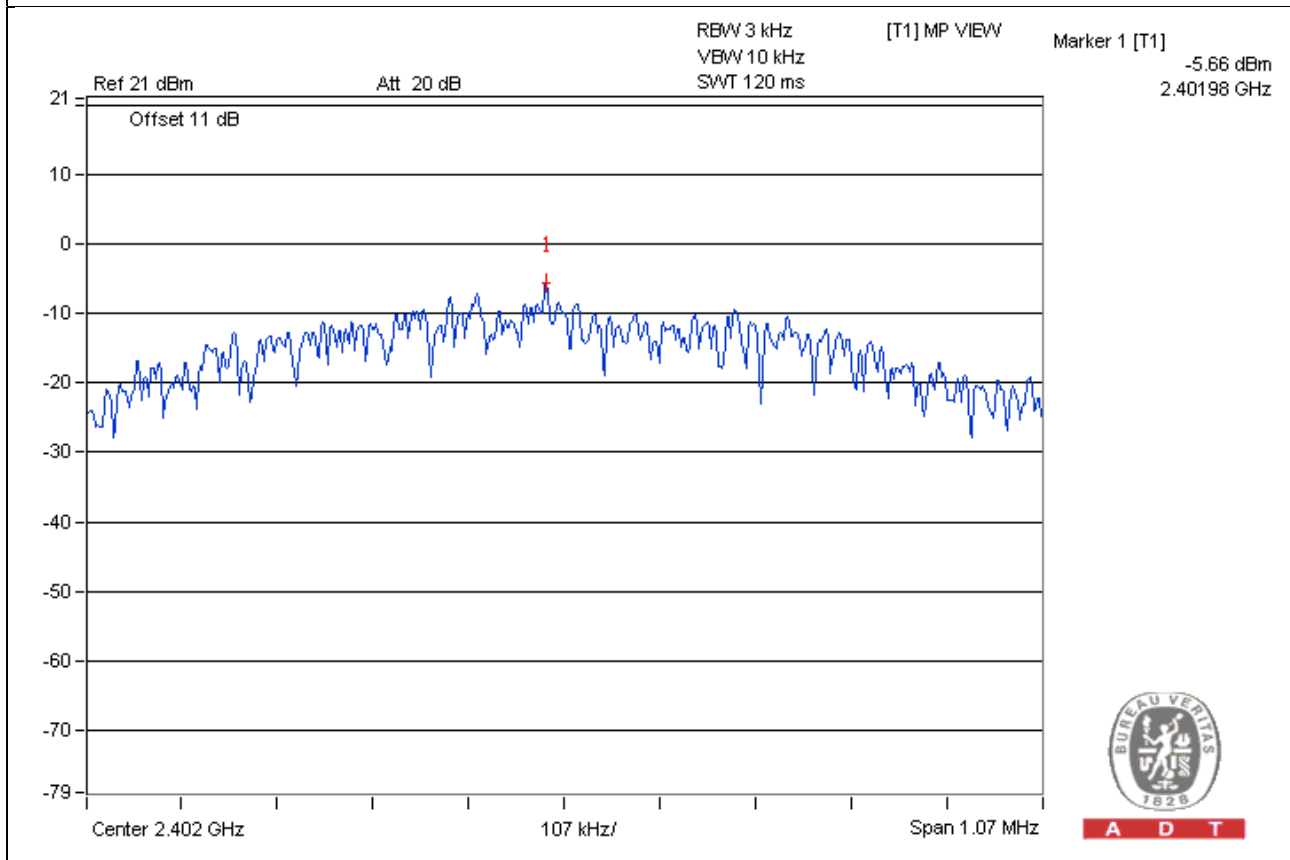


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard


No deviation.

4.6.6 EUT Operating Condition


Same as Item 4.3.6

4.6.7 TEST RESULTS


CH 0

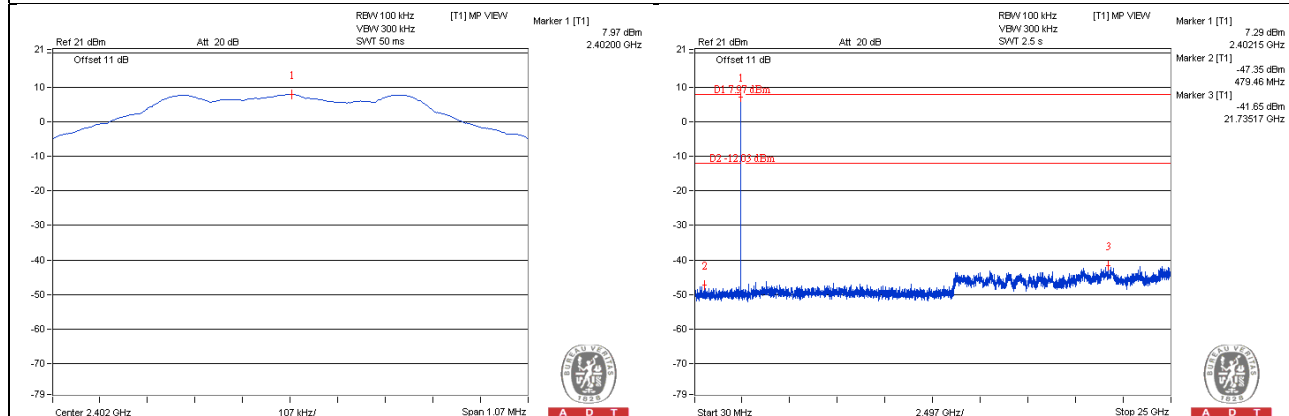


CH 19

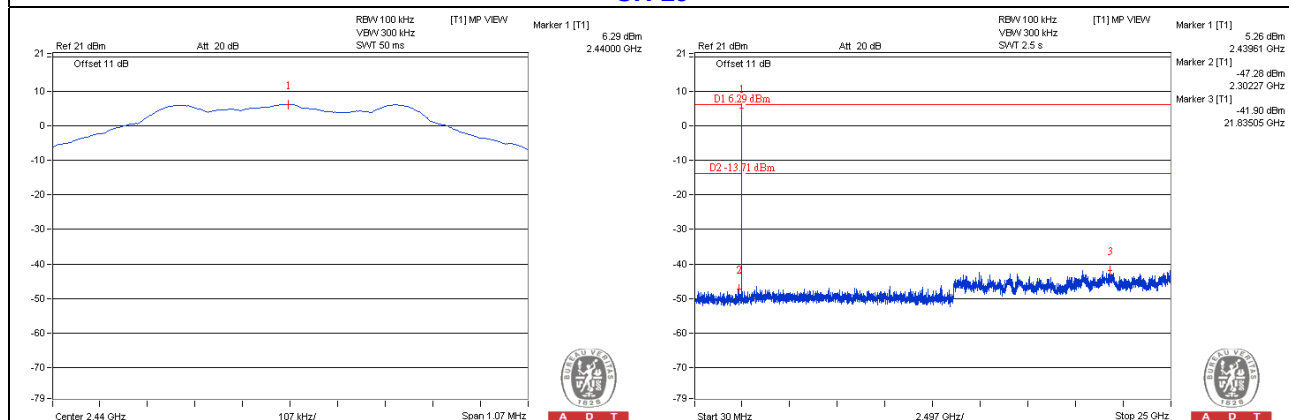


CH 39

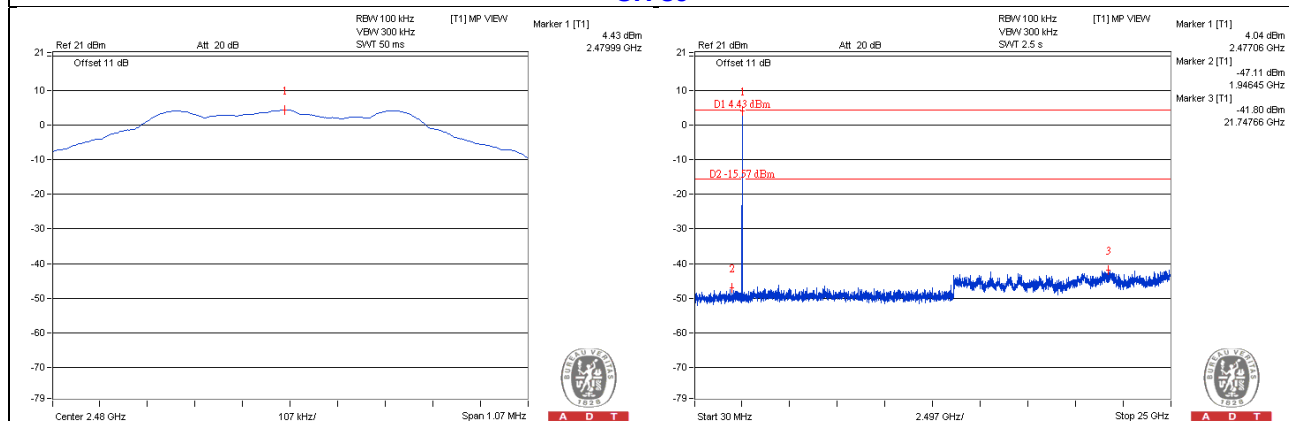

CH 0 Band edge

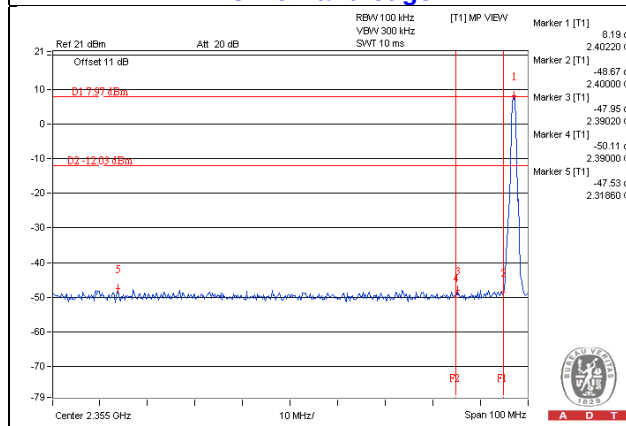

CH 39 Band edge

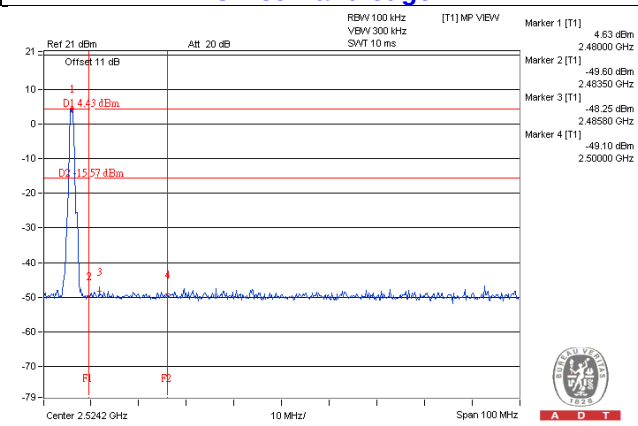

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab/Telecom Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---