

FCC TEST REPORT

for

47 CFR Part 15 Subpart C

Equipment : **W11 GPRS with WLAN PCMCIA Card**

Model No. : **56W11**

FCC ID : **JAP56W11**

Filing Type : **Certification**

Applicant : **BENQ Corporation.**
No. 157, Shan-Ying Road, Gueishan Taoyuan
333, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

History of this test report.....	ii
CERTIFICATE OF COMPLIANCE.....	1
1. General Description of Equipment under Test.....	2
1.1. Applicant.....	2
1.2. Manufacturer	2
1.3. Basic Description of Equipment under Test.....	2
1.4. Feature of Equipment under Test.....	3
2 Test Configuration of Equipment under Test.....	4
2.1. Test Manner	4
2.2. Description of Test System	4
2.3. Connection Diagram of Test System.....	6
3 Operation of Equipment under Test.....	7
4 General Information of Test.....	8
4.1. Test Voltage	8
4.2. Standard for Methods of Measurement.....	8
4.3. Test in Compliance with	8
4.4. Frequency Range Investigated	8
4.5. Test Distance.....	8
5 Report of Measurements and Examinations	9
5.1. List of Measurements and Examinations	9
5.2. 6dB Bandwidth	10
5.3. Power Spectral Density	11
5.4. Band Edges Measurement.....	12
5.5. Peak Output Power	14
6. Test of Conducted Emission.....	15
6.1. Major Measuring Instruments :	15
6.2. Test Procedures :	15
6.3. Test Result of Conducted Emission :	16
6.4. Photographs of Conducted Emission Test Configuration	22
7. Test of Radiated Emission.....	24
7.1. Major Measuring Instruments.....	24
7.2. Test Procedures	25
7.3. Typical Test Setup Layout of Radiated Emission.....	25
7.4. Test Result of Radiated Emission	26
7.5. Photographs of Radiated Emission Test Configuration	46
8. Antenna Requirements	47
8.1. Standard Applicable	47
8.2. Antenna Connected Construction	47
9. List of Measuring Equipments	48
10. Uncertainty Measurement.....	49
Appendix A. Photographs of EUT.....	A1 ~ A13
Appendix B. Set up Photographs	B1 ~ B5
Appendix C. Test pattern	C1 ~ C8

History of this test report

Original Report Issue Date: Mar. 15, 2004

☒ No additional attachment.

☐ Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

CERTIFICATE OF COMPLIANCE
for
47 CFR Part 15 Subpart C

Equipment : **W11 GPRS with WLAN PCMCIA Card**
Model No. : **56W11**
FCC ID : **JVP56W11**
Filing Type : **Certification**
Applicant : **BENQ Corporation.**
No. 157, Shan-Ying Road, Gueishan Taoyuan
333, Taiwan, R.O.C.

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 2001** and the equipment under test was **passed** all test items required in FCC Part 15 subpart C, relative to the equipment under test. Testing was carried out on Feb. 24, 2004 at **SPORTON International Inc. LAB.**



Daniel Lee
Manager

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. General Description of Equipment under Test

1.1. Applicant

BENQ Corporation
No. 157, Shan-Ying Road, Gueishan Taoyuan 333, Taiwan, R.O.C.

1.2 Manufacturer

Same as 1.1

1.3 Basic Description of Equipment under Test

Equipment	: W11 GPRS with WLAN PC Card
Trade Name	: BenQ
Model No.	: 56W11
Power Supply Type	: From system
AC Power Cord	: AC 100~240V, Non-shielded, Wall-Mount
DC Power Cable	: DC 12V, Non-shielded, 1.8 meter, 3 pin

1.4 Feature of Equipment under Test

Product Feature & Specification					
1.	Host/Radio Interface	PCMCIA Card Type II			
2.	Type of Modulation	DBPSK/DQPSK/CCK			
3.	Number of Channels	USA/Canada: 11	V	European: 13	V
		Japan: 13,14.	X	Other:	
4.	Frequency Band	2.412GHz ~ 2.472GHz			
5.	Carrier Frequency of each channel	2412MHz+(n-1)*5MHz, n=1~13			
6.	Bandwidth of each channel	5MHz			
7.	Maximum Output Power to Antenna	18.3dBm			
8.	IF & L.O. frequency	Zero IF Architecture			
9.	Antenna Type / Gain	PCB Antenna / 0dBi			
10.	Function Type	Transmitter		Transceiver	V
11.	Power Rating (DC/AC , Voltage)	DC 5V±0.5V			
12.	Basic function of product	Wireless data communication			
13.	Temperature Range (Operating)	0°C ~ 55°C			
14.	Humidity	15% ~ 85%RH			

2 Test Configuration of Equipment under Test

2.1 Test Manner

- a. The EUT has been associated with peripherals pursuant to ANSI C63.4-2001 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.
- b. The complete test system included LOGITECH USB Mouse, EPSON Printer, ACEEX Modem, DELL Notebook, Gateway USB Keyboard and EUT as local workstations for EMI test.
- c. For WLAN emission The EUT can operate on eleven channels from 2412.0MHz to 2462.0MHz. (as listed in section 1.4).
- d. The following test modes were pretested for conduction and conducted test:
 - Mode 1: Tx CH01 (2412MHz)
 - Mode 2: Tx CH06 (2437MHz)
 - Mode 3: Tx CH11 (2462MHz)
- e. The following test modes were pretested for radiation test:
 - Mode 1: GSM 850 CH189 Link / WLAN CH01 Tx
 - Mode 2: GSM 1900 CH661Link / WLAN CH01 Tx
 - Mode 3: GSM 850 CH189 Link / WLAN CH06 Tx
 - Mode 4: GSM 1900 CH661Link / WLAN CH06 Tx
 - Mode 5: GSM 850 CH189 Link / WLAN CH11 Tx
 - Mode 6: GSM 1900 CH661Link / WLAN CH11Tx
- f. Frequency range investigated: conduction 150 kHz to 30 MHz, radiation 30 MHz to 25000 MHz.

2.2 Description of Test System

Support Unit 1. – Notebook (DELL)-local workstation and remote workstation

FCC ID : E2K24CLNS

Model No. : PP05L

Power Supply Type : From system

Power Cord : Shielded, 0.9m

Serial No. : SP0037

Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 2. –(USB) Mouse (LOGITECH) –local workstation

FCC ID : N/A
Model No. : M-BE58
Serial No. : SP0052
Data Cable : Shielded, 1.7m
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 3. – Printer (EPSON) –local workstation

FCC ID : N/A
Model No. : STYLUS COLOR 680
Serial No. : SP0041
Power Cord : Non-Shielded
Data Cable : Shielded, 1.35m
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.


Support Unit 4. – Modem (ACEEX) –local workstation

FCC ID : IFAXDM141
Model No. : DM141
Power Supply Type : Linear
Power Cord : Shielded, 1.15m
Serial No. : SP0048
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 5. – USB keyboard (Gateway) –local workstation

FCC ID : N/A
Model No. : SK-9900V
Serial No. : SP0049
Data Cable : Shielded, 1.7m
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

2.3 Connection Diagram of Test System

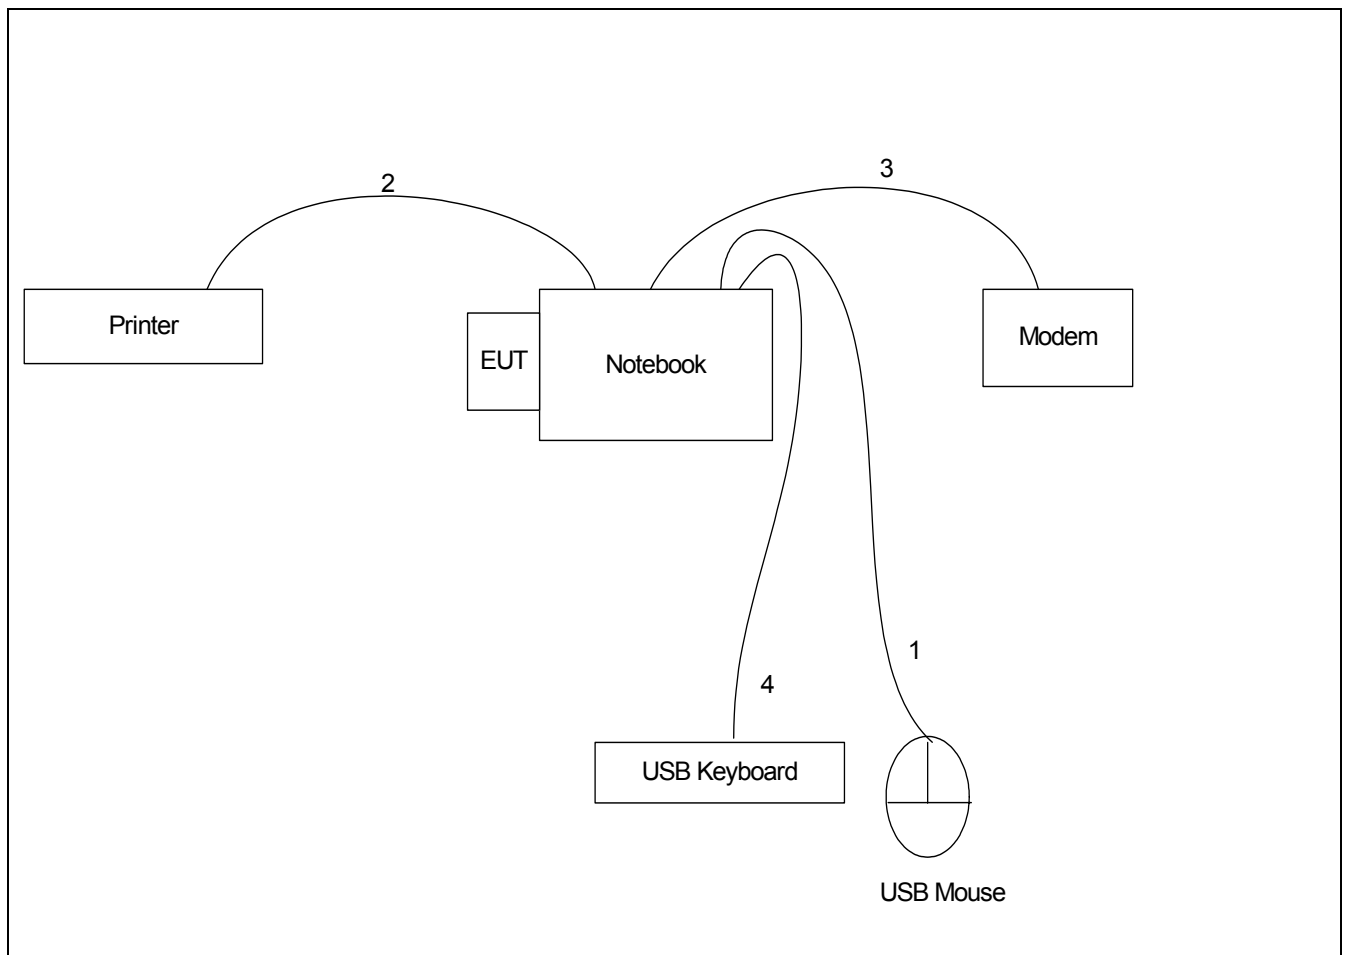

1. The I/O cable is connected from Notebook to the support unit 2
2. The I/O cable is connected from Notebook to the support unit 3
3. The I/O cable is connected from Notebook to the support unit 4
4. The I/O cable is connected from Notebook to the support unit 5

3 Operation of Equipment under Test

An executive program, EMCTEST.EXE on WIN2000 continuously generating a complete line of "H" pattern, was used as the test software.

The program was executed as follows:

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the hard disk drive and runs it.
- c. The PC sends "H" messages to the monitor, and the monitor displays "H" patterns on the screen.
- d. The PC sends "H" messages to the printer, then the printer prints them on the paper.
- e. The PC sends "H" messages to the internal hard disk , and the hard disk reads and writes the message.
- f. Repeat the steps from c to e.

At the same time, the following program was executed:

"RF Hard ware Test" sends continuous Tx.

4 General Information of Test

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park,
Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
TEL : 886-3-327-3456
FAX : 886-3-318-0055
Test Site No : CO01-HY, 03CH03-HY

4.1 Test Voltage

110V/ 60Hz

4.2 Standard for Methods of Measurement

ANSI C63.4-2001

4.3 Test in Compliance with

47 CFR Part 15 Subpart C

4.4 Frequency Range Investigated

- a. Conduction: from 150 kHz to 30 MHz
- b. Radiation: from 30 MHz to 25000 MHz

4.5 Test Distance

The test distance of radiated emission from antenna to EUT is 3 m.

5 Report of Measurements and Examinations

5.1 List of Measurements and Examinations

FCC Rule	Description of Test	Result
15.207	Conducted Emission	Pass
15.247(a)(2)	6dB Bandwidth	Pass
15.247(b)	Maximum Peak Output Power	Pass
15.209(a)	Radiated Emission	Pass
15.247 (c)	100kHz Bandwidth of Frequency Band Edges	Pass
15.247(d)	Power Spectral Density	Pass
15.203	Antenna Requirement	Pass
15.247(b)(4), 1.1307	RF Exposure	Pass

5.2 6dB Bandwidth


5.2.1 Measuring Instruments :

As described in chapter 7 of this test report.

5.2.2 Test Procedure :

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100kHz and VBW to 100kHz.
3. The 6 dB bandwidth is defined as the frequency range where the power is higher than the peak power minus 6dB.

5.2.3 Test Setup Layout :



5.2.4 Test Result :

- Mode 1~3 : WLAN Tx mode
- Temperature : 23 °C
- Relative Humidity : 51%
- Antenna Gain: 0 dBi

Channel	Frequency (MHz)	6dB Emission bandwidth (MHz)	Limits (MHz)	Plot Ref. No.
01	2412	8.5	0.5	B1
06	2437	8.5	0.5	B2
11	2462	8.5	0.5	B3

5.3 Power Spectral Density


5.3.1 Measuring Instruments :

As described in chapter 7 of this test report.

5.3.2 Test Procedure :

1. The transmitter output was connected to spectrum analyzer through an attenuator.
2. The spectrum analyzer's resolution bandwidth was set at 3kHz RBW and 30kHz VBW as that of the fundamental frequency. Set the sweep time=span/3kHz.
3. The power spectral density was measured and recorded.
4. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

5.3.3 Test Setup Layout :



5.3.4 Test Result :

- Mode 1~3 : WLAN Tx mode
- Temperature : 23 °C
- Relative Humidity : 51%
- Antenna Gain: 0 dBi

Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)	Plot Ref. No.
01	2412	-13.53	8	B4
06	2437	-13.61	8	B5
11	2462	-13.52	8	B6

5.4 Band Edges Measurement

5.4.1 Measuring Instruments :

As described in chapter 7 of this test report.

5.4.2 Test Procedure :

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100 kHz bandwidth from band edge.
3. The band edges was measured and recorded.

5.4.3 Test Result :

- Mode 1 ~ 3 : WLAN 802.11b
- Temperature : 23 °C
- Relative Humidity : 51 %
- Antenna Gain: 0 dBi
- Test Result in lower band (Channel 1) : PASS
- Test Result in higher band (Channel 11) : PASS

5.4.4 Note on Band Edge Emission

The band edge emission plot on appendix B page B7 shows 53.29 dB delta between carrier maximum power and local maximum emission in the restricted band (2.390GHz).

The band edge emission plot on appendix B page B8 shows 54.26 dB delta between carrier maximum power and local maximum emission in the restricted band (2.4835GHz).

Test Mode: GSM 850

Channel	Polarity	The emission of band edge power strength	The maximum field strength in restrict band	Limit	Margin	Remark	Result
		(dB μ V/m)	(dB μ V/m)	(dB μ V/m)	(dB)		
01	V	103.59	50.3	74	-23.7	Peak	Pass
	V	96.75	43.46	54	-10.54	Average	Pass
	H	101.94	48.65	74	-25.35	Peak	Pass
	H	94.15	40.86	54	-13.14	Average	Pass
11	V	105.62	51.36	74	-22.64	Peak	Pass
	V	97.78	43.52	54	-10.48	Average	Pass
	H	104.81	50.55	74	-23.45	Peak	Pass
	H	99.39	45.13	54	-8.87	Average	Pass

Test Mode: GSM 1900

Channel	Polarity	The emission of band edge power strength	The maximum field strength in restrict band	Limit	Margin	Remark	Result
		(dB μ V/m)	(dB μ V/m)	(dB μ V/m)	(dB)		
01	V	104.11	50.82	74	-23.18	Peak	Pass
	V	93.41	40.12	54	-13.88	Average	Pass
	H	104.56	51.27	74	-22.73	Peak	Pass
	H	92.08	38.79	54	-15.21	Average	Pass
11	V	104.20	49.94	74	-24.06	Peak	Pass
	V	95.40	41.14	54	-12.86	Average	Pass
	H	99.08	44.82	74	-29.18	Peak	Pass
	H	89.85	35.59	54	-18.41	Average	Pass

5.5 Peak Output Power


5.5.1 Measuring Instruments :

As described in chapter 7 of this test report.

5.5.2 Test Procedure :

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter.
The power is equal to the reading level on power meter plus cable loss at the EUT antenna terminal.

5.5.3 Test Setup Layout :



5.5.4 Test Result :

- Mode 1~3 : WLAN 802.11b
- Temperature : 23 °C
- Relative Humidity : 51%
- Antenna Gain: 0 dBi

Channel	Frequency (MHz)	Measured Output Power (dBm)	Limits (Watt/dBm)
01	2412	18.30	1W/30 dBm
06	2437	17.80	1W/30 dBm
11	2462	17.62	1W/30 dBm

6. Test of Conducted Emission

Conducted emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 kHz and return leads of the EUT according to the methods defined in ANSI C63.4-2001 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

6.1. Major Measuring Instruments :

● Test Receiver	(R&S ESCS 30)
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

6.2. Test Procedures :


- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power port of the line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

6.3. Test Result of Conducted Emission :

6.3.1 Frequency Range of Test : 150kHz to 30 MHz


- Test Mode : Mode 1
- Temperature : 22.5°C
- Relative Humidity : 50 %

■ The test that passed at minimum margin was marked by the frame in the following table.

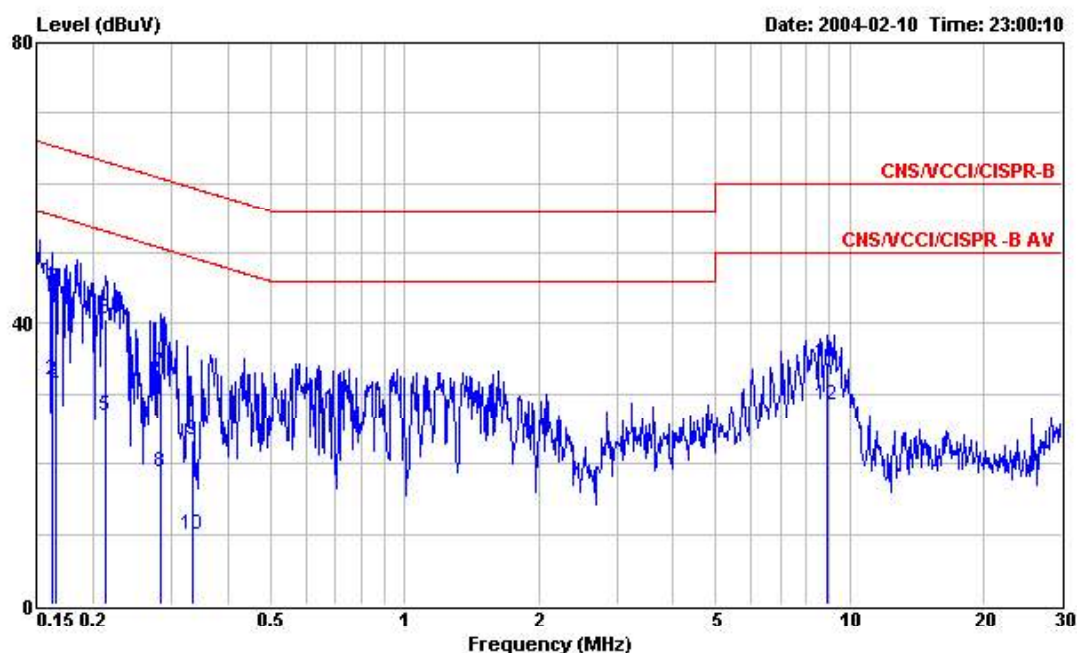


Site : CO01-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 LINE
 EUT : Tri Band GSM/WLAN(802-11B) PCMCIA Card
 Power : AC 110V/60Hz
 Model : 56W11
 Memo : 802.11b Tx CH01 2412MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.162	45.24	-20.14	65.38	45.02	0.10	0.12	QP
2	0.162	32.11	-23.27	55.38	31.89	0.10	0.12	Average
3	0.164	44.95	-20.32	65.27	44.73	0.10	0.12	QP
4	0.164	30.88	-24.39	55.27	30.66	0.10	0.12	Average
5	0.213	26.96	-26.13	53.09	26.73	0.10	0.13	Average
6	0.213	40.75	-22.34	63.09	40.52	0.10	0.13	QP
7	0.282	33.13	-27.63	60.76	32.94	0.10	0.09	QP
8	0.282	18.76	-32.00	50.76	18.57	0.10	0.09	Average
9	0.334	23.27	-36.09	59.36	23.10	0.10	0.07	QP
10	0.334	9.82	-39.54	49.36	9.65	0.10	0.07	Average
11	8.906	34.52	-25.48	60.00	34.20	0.19	0.13	QP
12	8.906	28.52	-21.48	50.00	28.20	0.19	0.13	Average

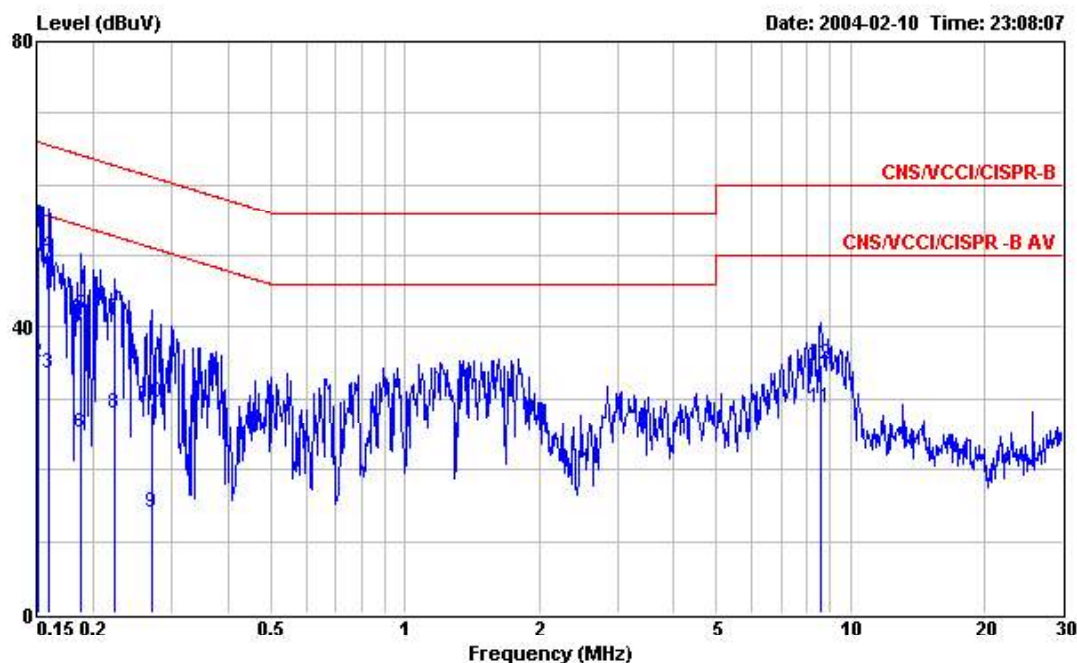

Site : CO01-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 NEUTRAL
 EUT : Tri Band GSM/WLAN(802-11B) PCMCIA Card
 Power : AC 110V/60Hz
 Model : 56W11
 Memo : 802.11b Tx CH01 2412MHz

	Freq	Level	Over	Limit	Read	Probe	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.150	51.32	-14.68	66.00	51.11	0.10	0.11	QP
2	0.150	35.12	-20.88	56.00	34.91	0.10	0.11	Average
3	0.159	33.58	-21.94	55.52	33.36	0.10	0.12	Average
4	0.159	49.96	-15.56	65.52	49.74	0.10	0.12	QP
5	0.187	41.75	-22.42	64.17	41.52	0.10	0.13	QP
6	0.187	25.12	-29.05	54.17	24.89	0.10	0.13	Average
7	0.223	41.03	-21.67	62.70	40.81	0.10	0.12	QP
8	0.223	27.94	-24.76	52.70	27.72	0.10	0.12	Average
9	0.270	13.86	-37.26	51.12	13.66	0.10	0.10	Average
10	0.270	29.42	-31.70	61.12	29.22	0.10	0.10	QP
11	8.581	28.64	-21.36	50.00	28.31	0.20	0.13	Average
12	8.581	34.75	-25.25	60.00	34.42	0.20	0.13	QP


Test Engineer : 

Jay

6.3.2 Frequency Range of Test : 150kHz to 30 MHz


- Test Mode : Mode 2
- Temperature : 22.5°C
- Relative Humidity : 50 %

■ The test that passed at minimum margin was marked by the frame in the following table.

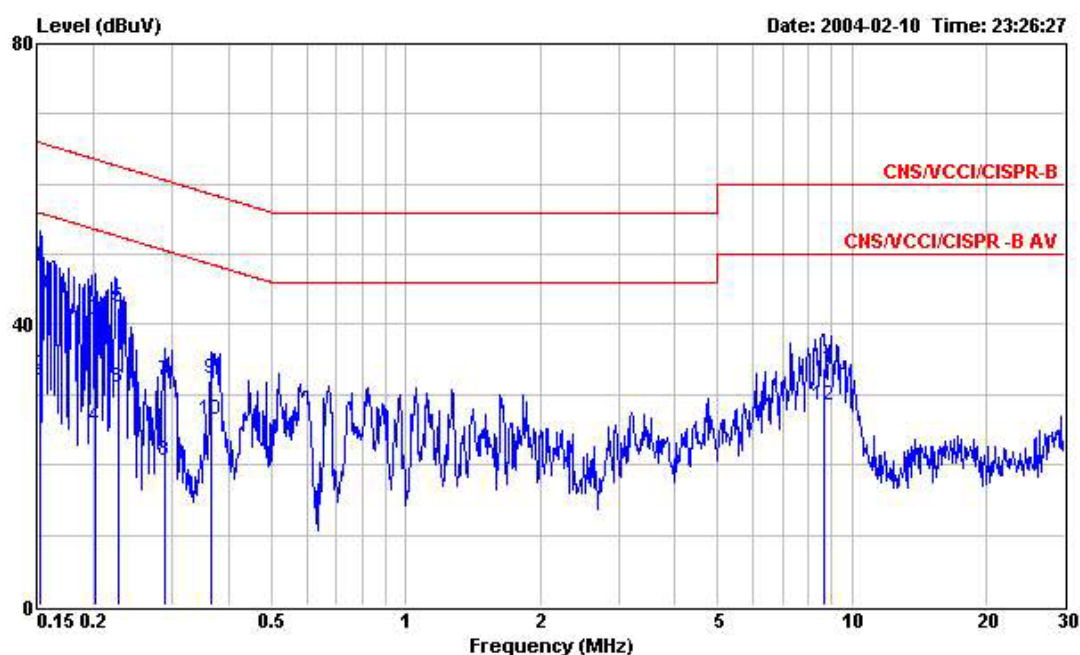

Site : CO01-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 LINE
 EUT : Tri Band GSM/WLAN(802-11B) PCMCIA Card
 Power : AC 110V/60Hz
 Model : 56W11
 Memo : 802.11b Tx CH06 2437MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.152	48.25	-17.64	65.89	48.04	0.10	0.11	QP
2	0.152	32.71	-23.18	55.89	32.50	0.10	0.11	Average
3	0.202	40.52	-23.01	63.53	40.28	0.10	0.14	QP
4	0.202	25.48	-28.05	53.53	25.24	0.10	0.14	Average
5	0.227	42.41	-20.15	62.56	42.19	0.10	0.12	QP
6	0.227	30.88	-21.68	52.56	30.66	0.10	0.12	Average
7	0.289	31.99	-28.56	60.55	31.80	0.10	0.09	QP
8	0.289	20.52	-30.03	50.55	20.33	0.10	0.09	Average
9	0.367	32.24	-26.33	58.57	32.09	0.10	0.05	QP
10	0.367	26.35	-22.22	48.57	26.20	0.10	0.05	Average
11	8.640	33.85	-26.15	60.00	33.54	0.18	0.13	QP
12	8.640	28.42	-21.58	50.00	28.11	0.18	0.13	Average

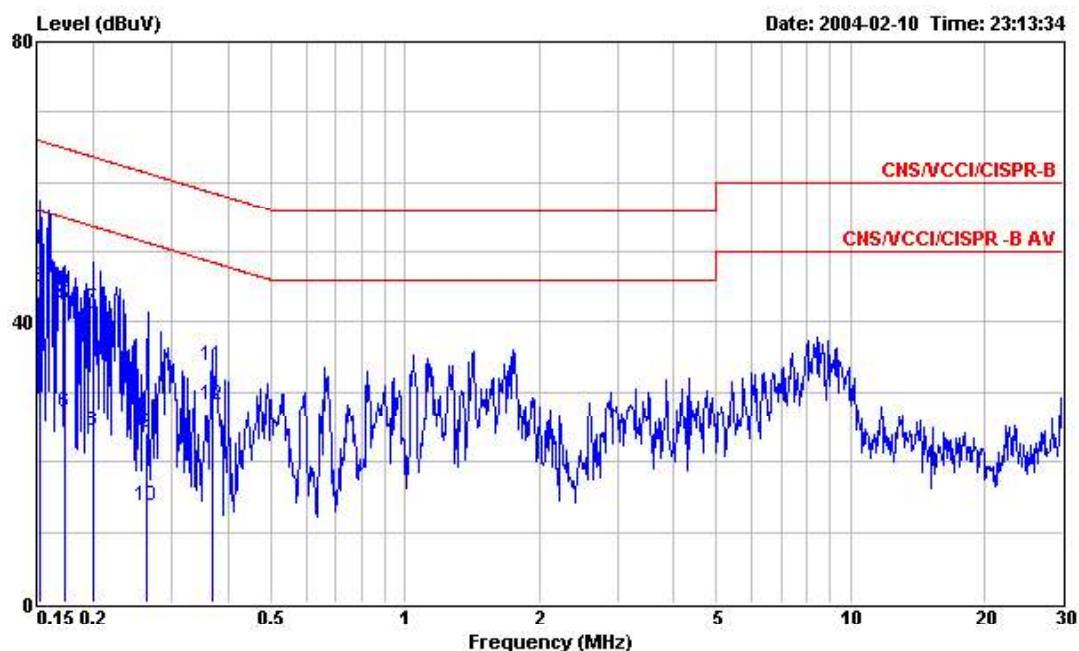

Site : CO01-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 NEUTRAL
 EUT : Tri Band GSM/WLAN(802-11B) PCMCIA Card
 Power : AC 110V/60Hz
 Model : 56W11
 Memo : 802.11b Tx CH06 2437MHz

	Freq	Level	Over	Limit	Read	Probe	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.151	50.23	-15.71	65.94	50.02	0.10	0.11	QP
2	0.151	29.13	-26.81	55.94	28.92	0.10	0.11	Average
3	0.151	44.97	-20.97	65.94	44.76	0.10	0.11	QP
4	0.151	30.12	-25.82	55.94	29.91	0.10	0.11	Average
5	0.172	42.31	-22.55	64.86	42.08	0.10	0.13	QP
6	0.172	27.30	-27.56	54.86	27.07	0.10	0.13	Average
7	0.200	41.85	-21.76	63.61	41.61	0.10	0.14	QP
8	0.200	24.50	-29.11	53.61	24.26	0.10	0.14	Average
9	0.264	24.15	-37.15	61.30	23.95	0.10	0.10	QP
10	0.264	13.75	-37.55	51.30	13.55	0.10	0.10	Average
11	0.370	33.87	-24.64	58.51	33.72	0.10	0.05	QP
12	0.370	28.26	-20.25	48.51	28.11	0.10	0.05	Average


Test Engineer : Jay

Jay

6.3.3 Frequency Range of Test : 150kHz to 30 MHz


- Test Mode : Mode 3
- Temperature : 22.5°C
- Relative Humidity : 50 %

■ The test that passed at minimum margin was marked by the frame in the following table.

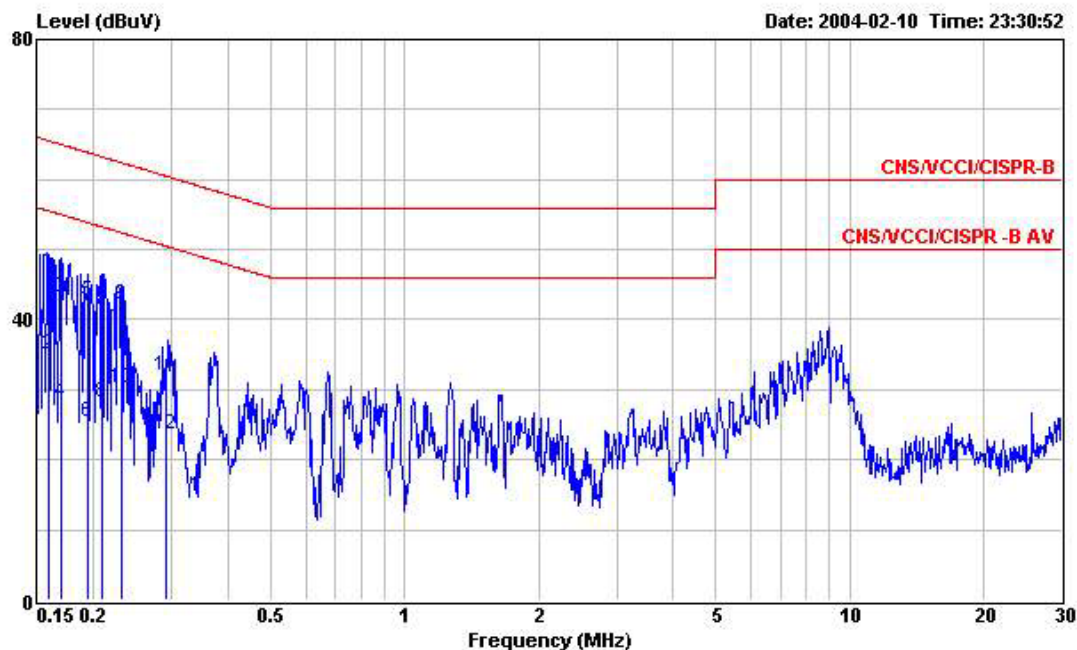


Site : CO01-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 LINE
 EUT : Tri Band GSM/WLAN(802-11B) PCMCIA Card
 Power : AC 110V/60Hz
 Model : 56W11
 Memo : 802.11b Tx CH11 2462MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.159	46.86	-18.66	65.52	46.64	0.10	0.12	QP
2	0.159	35.04	-20.48	55.52	34.82	0.10	0.12	Average
3	0.169	43.05	-21.96	65.01	42.83	0.10	0.12	QP
4	0.169	28.26	-26.75	55.01	28.04	0.10	0.12	Average
5	0.194	42.78	-21.08	63.86	42.54	0.10	0.14	QP
6	0.194	25.42	-28.44	53.86	25.18	0.10	0.14	Average
7	0.209	41.47	-21.77	63.24	41.24	0.10	0.13	QP
8	0.209	28.25	-24.99	53.24	28.02	0.10	0.13	Average
9	0.232	42.05	-20.33	62.38	41.83	0.10	0.12	QP
10	0.232	30.20	-22.18	52.38	29.98	0.10	0.12	Average
11	0.292	32.03	-28.44	60.47	31.84	0.10	0.09	QP
12	0.292	23.53	-26.94	50.47	23.34	0.10	0.09	Average

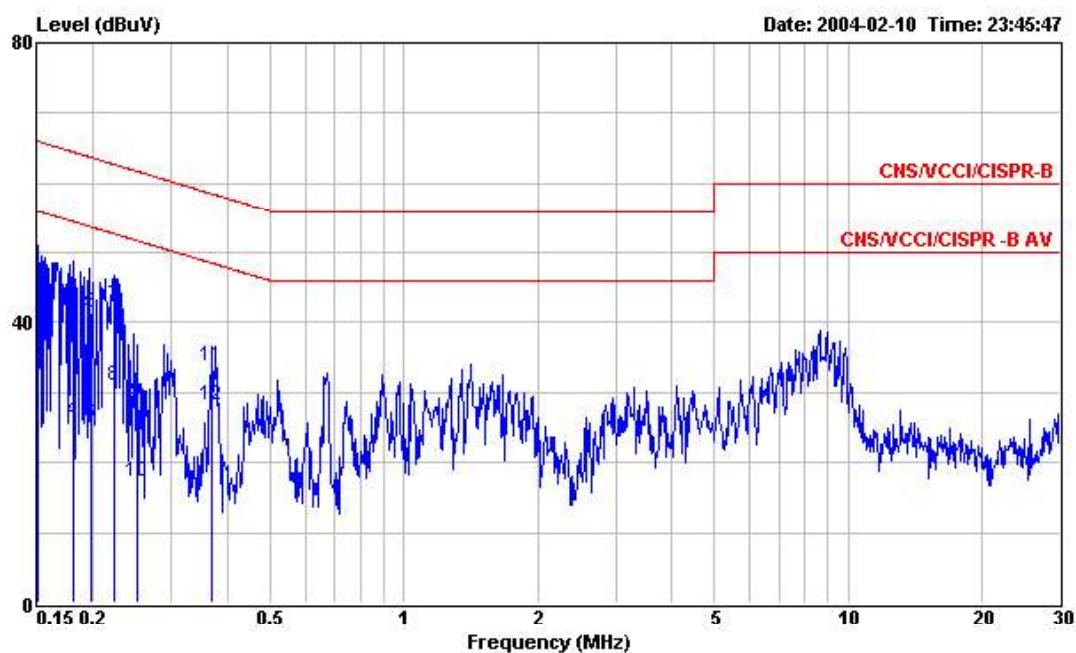

Site : CO01-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 NEUTRAL
 EUT : Tri Band GSM/WLAN(802-11B) PCMCIA Card
 Power : AC 110V/60Hz
 Model : 56W11
 Memo : 802.11b Tx CH11 2462MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.150	49.19	-16.81	66.00	48.98	0.10	0.11	QP
2	0.150	32.71	-23.29	56.00	32.50	0.10	0.11	Average
3	0.180	42.26	-22.23	64.49	42.03	0.10	0.13	QP
4	0.180	25.92	-28.57	54.49	25.69	0.10	0.13	Average
5	0.197	41.30	-22.44	63.74	41.06	0.10	0.14	QP
6	0.197	25.61	-28.13	53.74	25.37	0.10	0.14	Average
7	0.223	42.39	-20.32	62.71	42.17	0.10	0.12	QP
8	0.223	31.01	-21.70	52.71	30.79	0.10	0.12	Average
9	0.252	28.72	-32.97	61.69	28.51	0.10	0.11	QP
10	0.252	17.36	-34.33	51.69	17.15	0.10	0.11	Average
11	0.369	33.85	-24.67	58.52	33.70	0.10	0.05	QP
12	0.369	28.22	-20.30	48.52	28.07	0.10	0.05	Average

Test Engineer : 

Jay


6.4. Photographs of Conducted Emission Test Configuration

- The photographs show the configuration that generates the maximum emission.

FRONT VIEW



REAR VIEW

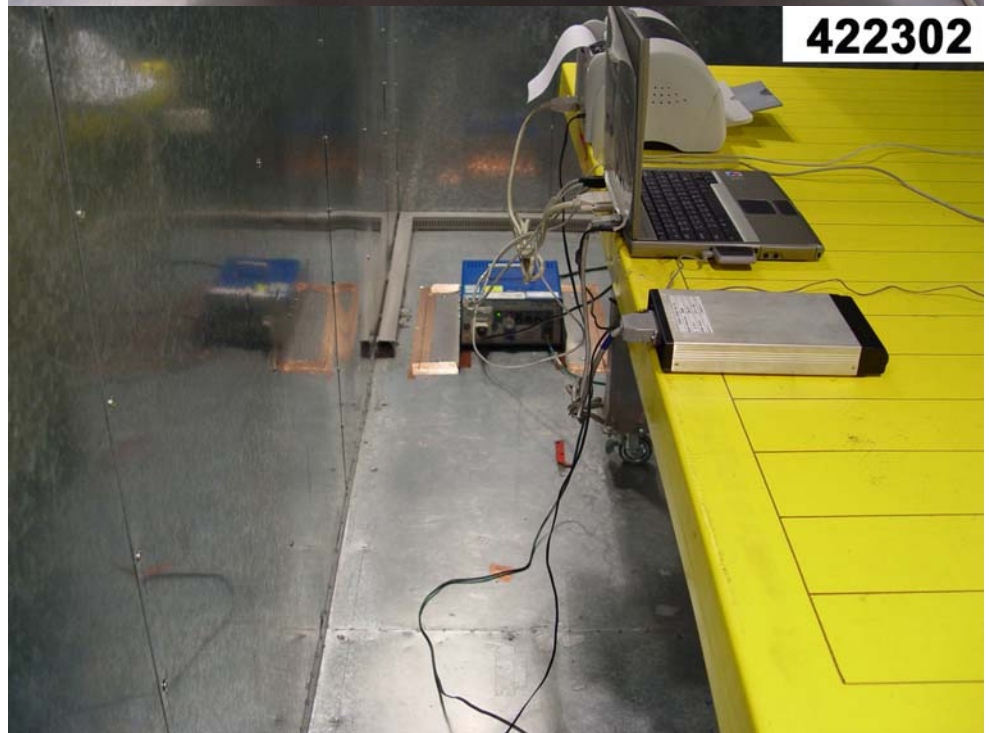

SIDE VIEW



7. Test of Radiated Emission

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defined in ANSI C63.4-2001. The EUT was placed, 0.8 meter above the ground plane, as shown in section 5.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions


7.1. Major Measuring Instruments

- | | |
|----------------------|---------------------|
| ● Amplifier | (MITEQ AFS44) |
| RF Gain | 40 dB |
| Signal Input | 100 MHz to 26.5 GHz |
| ● Amplifier | (HP8447D) |
| RF Gain | 30 dB |
| Signal Input | 100 MHz to 1.3 GHz |
| ● Spectrum analyzer | (R&S FSP40) |
| Attenuation | 10 dB |
| Start Frequency | 1 GHz |
| Stop Frequency | 25 GHz |
| Resolution Bandwidth | 1 MHz |
| Video Bandwidth | 1 MHz |
| Signal Input | 9 kHz to 40 GHz |
| ● Spectrum analyzer | (R&S FSP40) |
| Attenuation | 10 dB |
| Start Frequency | 30MHz |
| Stop Frequency | 1 GHz |
| Resolution Bandwidth | 120 KHz |
| Video Bandwidth | 300KHz |
| Signal Input | 9 kHz to 40 GHz |

7.2. Test Procedures

1. The EUT was placed on a rotatable table top 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

7.3. Typical Test Setup Layout of Radiated Emission

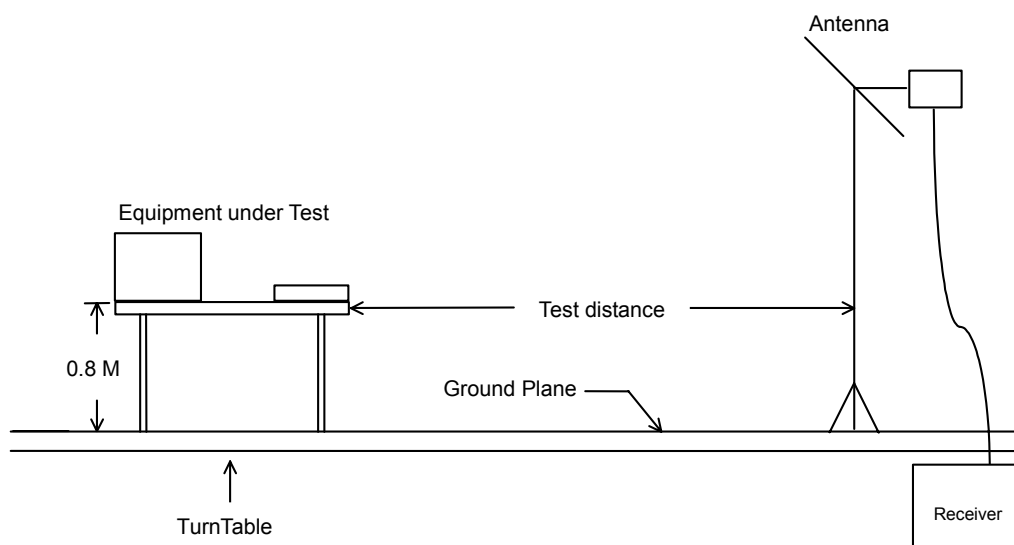

7.4. Test Result of Radiated Emission

7.4.1 Test Mode: Mode 1

- Test Distance : 3 m
- Temperature : 23°C
- Relative Humidity :51 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

■ The test that passed at minimum margin was marked by the frame in the following table.

Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL
 EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
 Power : AC 110V / 60Hz
 Model : 56W11
 Memo : GSM850 CH189 ; TX CH01 2412MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1674.000	57.25	-16.75	74.00	56.68	26.08	1.55	27.06	Peak	100	176
2	1674.000	45.19	-8.81	54.00	44.62	26.08	1.55	27.06	Average	100	176

Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL
 EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
 Power : AC 110V / 60Hz
 Model : 56W11
 Memo : GSM850 CH189 ; TX CH01 2412MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2390.000	38.88	-15.12	54.00	36.12	28.20	1.72	27.16	Average	101	351
2	2390.000	48.55	-25.45	74.00	45.79	28.20	1.72	27.16	Peak	101	351
3 X	2411.000	96.75	42.75	54.00	93.93	28.24	1.74	27.16	Average	105	337
4 X	2411.000	103.59	29.59	74.00	100.77	28.24	1.74	27.16	Peak	105	337
5	2483.500	38.53	-15.47	54.00	35.49	28.39	1.82	27.17	Average	103	348
6	2483.500	47.83	-26.17	74.00	44.79	28.39	1.82	27.17	Peak	103	348
7	2510.000	43.11	-10.89	54.00	39.96	28.47	1.86	27.18	Average	100	341
8	2510.000	52.23	-21.77	74.00	49.08	28.47	1.86	27.18	Peak	100	341

FCC TEST REPORT

Report No. : F422302-01

Site : 03CH03-HY
Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL
EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
Power : AC 110V / 60Hz
Model : 56W11
Memo : GSM850 CH189 ; TX CH01 2412MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1674.000	54.79	-19.21	74.00	54.22	26.08	1.55	27.06	Peak	100	175
2	1674.000	45.25	-8.75	54.00	44.68	26.08	1.55	27.06	Average	100	175

Site : 03CH03-HY
Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL
EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
Power : AC 110V / 60Hz
Model : 56W11
Memo : GSM850 CH189 ; TX CH01 2412MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2390.000	47.91	-26.09	74.00	45.15	28.20	1.72	27.16	Peak	101	343
2	2390.000	38.62	-15.38	54.00	35.86	28.20	1.72	27.16	Average	101	343
3 X	2411.000	101.94	27.94	74.00	99.12	28.24	1.74	27.16	Peak	106	326
4 X	2411.000	94.15	40.15	54.00	91.33	28.24	1.74	27.16	Average	106	326
5	2483.500	48.18	-25.82	74.00	45.14	28.39	1.82	27.17	Peak	103	337
6	2483.500	39.49	-14.51	54.00	36.45	28.39	1.82	27.17	Average	103	337
7	2510.000	41.33	-12.67	54.00	38.18	28.47	1.86	27.18	Average	100	355
8	2510.000	51.38	-22.62	74.00	48.23	28.47	1.86	27.18	Peak	100	355

For 2.510GHz ~ 25GHz

Frequency from 2510MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency	Antenna	Cable	Reading	Limits	Emission	Margin	Detect	
Polarity	Factor	Loss						
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	Mode	
2411.000	V	27.16	1.74	74.69	-	103.59	-	Peak
2411.000	V	27.16	1.74	67.85	-	96.75	-	AV
2411.000	H	28.24	1.74	71.96	-	101.94	-	Peak
2411.000	H	28.24	1.74	64.17	-	94.15	-	AV
4822.000	V/H	-	-	-	-	-	-	AV/Peak
7236.000	V/H	-	-	-	-	-	-	AV/Peak
9648.000	V/H	-	-	-	-	-	-	AV/Peak
12060.000	V/H	-	-	-	-	-	-	AV/Peak
14472.000	V/H	-	-	-	-	-	-	AV/Peak
16884.000	V/H	-	-	-	-	-	-	AV/Peak
19296.000	V/H	-	-	-	-	-	-	AV/Peak
21708.000	V/H	-	-	-	-	-	-	AV/Peak
24120.000	V/H	-	-	-	-	-	-	AV/Peak

Remark:

1. The emission emitted by the EUT is too low to be measured except the emission listed above,
2. Reading = Reading on SA-Preamp Factor

Test Engineer : 

Jay

7.4.2 Test Mode: Mode 2

- Test Distance : 3 m
- Temperature : 23°C
- Relative Humidity :51 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

■ The test that passed at minimum margin was marked by the frame in the following table.

Site : site
 Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL
 EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
 Power : AC 110V / 60Hz
 Model : 56W11
 Memo : GSM1900 CH661 ;TX CH01 2412MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2390.000	58.10	-15.90	74.00	69.32	28.20	1.72	41.14	Peak	100	234
2	2390.000	44.59	-9.41	54.00	55.81	28.20	1.72	41.14	Average	100	234
3 X	2412.000	93.41	39.41	54.00	104.58	28.24	1.74	41.15	Average	107	307
4 X	2412.000	104.11	30.11	74.00	115.28	28.24	1.74	41.15	Peak	107	307
5	2483.500	58.54	-15.46	74.00	69.53	28.39	1.82	41.20	Peak	100	204
6	2483.500	44.84	-9.16	54.00	55.83	28.39	1.82	41.20	Average	100	204

Site : site
 Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL
 EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
 Power : AC 110V / 60Hz
 Model : 56W11
 Memo : GSM1900 CH661 ;TX CH01 2412MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	3758.000	41.04	-12.96	54.00	48.67	31.96	1.82	41.41	Average	100	338
2	3758.000	47.73	-26.27	74.00	55.36	31.96	1.82	41.41	Peak	100	338
3	4828.000	37.75	-16.25	54.00	44.56	33.08	2.49	42.38	Average	100	256
4	4828.000	46.54	-27.46	74.00	53.35	33.08	2.49	42.38	Peak	100	256

FCC TEST REPORT

Report No. : F422302-01

Site : site
Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL
EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
Power : AC 110V / 60Hz
Model : 56W11
Memo : GSM1900 CH661 ;TX CH01 2412MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2390.000	58.70	-15.30	74.00	69.92	28.20	1.72	41.14	Peak	100	96
2	2390.000	44.96	-9.04	54.00	56.18	28.20	1.72	41.14	Average	100	96
3 X	2412.000	104.56	30.56	74.00	115.73	28.24	1.74	41.15	Peak	136	96
4 X	2412.000	92.08	38.08	54.00	103.25	28.24	1.74	41.15	Average	136	96
5	2483.500	45.00	-9.00	54.00	55.99	28.39	1.82	41.20	Average	100	96
6	2483.500	58.66	-15.34	74.00	69.65	28.39	1.82	41.20	Peak	100	96

Site : site
Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL
EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
Power : AC 110V / 60Hz
Model : 56W11
Memo : GSM1900 CH661 ;TX CH01 2412MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	3758.000	38.04	-15.96	54.00	45.67	31.96	1.82	41.41	Average	100	265
2	3758.000	47.73	-26.27	74.00	55.36	31.96	1.82	41.41	Peak	100	265
3	4828.000	46.54	-27.46	74.00	53.35	33.08	2.49	42.38	Peak	100	236
4	4828.000	37.67	-16.33	54.00	44.48	33.08	2.49	42.38	Average	100	236

For 4.828GHz ~ 25GHz

Frequency from 4828MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency	Antenna	Cable	Reading	Limits	Emission	Margin	Detect	
Polarity	Factor	Loss						
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	Mode	
2412.000	V	28.24	1.74	74.13	-	104.11	-	Peak
2412.000	V	28.24	1.74	63.43	-	93.41	-	AV
2412.000	H	28.24	1.74	74.58	-	104.56	-	Peak
2412.000	H	28.24	1.74	62.10	-	92.08	-	AV
3758.000	V	31.96	1.82	13.95	74.00	47.73	-26.27	Peak
3758.000	V	31.96	1.82	7.26	54.00	41.04	-12.96	AV
4828.000	V	33.08	2.49	10.97	74.00	46.54	-27.46	Peak
4828.000	V	33.08	2.49	2.18	54.00	37.75	-16.25	AV
3758.000	H	31.96	41.41	-25.64	74.00	47.73	-26.27	Peak
3758.000	H	31.96	41.41	-35.33	54.00	38.04	-15.96	AV
4828.000	H	33.08	42.38	-28.92	74.00	46.54	-27.46	Peak
4828.000	H	33.08	42.38	-37.79	54.00	37.67	-16.33	AV
7236.000	V/H	-	-	-	-	-	-	AV/Peak
9648.000	V/H	-	-	-	-	-	-	AV/Peak
12060.000	V/H	-	-	-	-	-	-	AV/Peak
14472.000	V/H	-	-	-	-	-	-	AV/Peak
16884.000	V/H	-	-	-	-	-	-	AV/Peak
19296.000	V/H	-	-	-	-	-	-	AV/Peak
21708.000	V/H	-	-	-	-	-	-	AV/Peak
24120.000	V/H	-	-	-	-	-	-	AV/Peak

Remark:

1. The emission emitted by the EUT is too low to be measured except the emission listed above,
2. Reading = Reading on SA-Preamplifier Factor

Test Engineer : 

Jay

7.4.3 Test Mode: Mode 3

- Test Distance : 3 m
- Temperature : 23°C
- Relative Humidity :51 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

■ The test that passed at minimum margin was marked by the frame in the following table.

Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL
 EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
 Power : AC 110V / 60Hz
 Model : 56W11
 Memo : GSM850 CH189 ; TX CH06 2437MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1674.000	57.45	-16.55	74.00	56.88	26.08	1.55	27.06	Peak	100	170
2	1674.000	47.12	-6.88	54.00	46.55	26.08	1.55	27.06	Average	100	170

Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL
 EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
 Power : AC 110V / 60Hz
 Model : 56W11
 Memo : GSM850 CH189 ; TX CH06 2437MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2390.000	48.31	-25.69	74.00	45.55	28.20	1.72	27.16	Peak	106	319
2	2390.000	38.61	-15.39	54.00	35.85	28.20	1.72	27.16	Average	106	319
3 X	2436.000	104.52	30.52	74.00	101.64	28.29	1.76	27.17	Peak	102	332
4 X	2436.000	96.41	42.41	54.00	93.53	28.29	1.76	27.17	Average	102	332
5	2483.500	47.73	-26.27	74.00	44.69	28.39	1.82	27.17	Peak	101	342
6	2483.500	38.50	-15.50	54.00	35.46	28.39	1.82	27.17	Average	101	342
7	2510.000	53.64	-20.36	74.00	50.49	28.47	1.86	27.18	Peak	103	348
8	2510.000	43.19	-10.81	54.00	40.04	28.47	1.86	27.18	Average	103	348

Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL
 EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
 Power : AC 110V / 60Hz
 Model : 56W11
 Memo : GSM850 CH189 ; TX CH06 2437MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1674.000	44.32	-9.68	54.00	43.75	26.08	1.55	27.06	Average	102	177
2	1674.000	53.57	-20.43	74.00	53.00	26.08	1.55	27.06	Peak	102	177

Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL
 EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
 Power : AC 110V / 60Hz
 Model : 56W11
 Memo : GSM850 CH189 ; TX CH06 2437MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2390.000	48.46	-25.54	74.00	45.70	28.20	1.72	27.16	Peak	106	323
2	2390.000	36.91	-17.09	54.00	34.15	28.20	1.72	27.16	Average	106	323
3 X	2438.000	98.72	44.72	54.00	95.83	28.30	1.76	27.17	Average	102	330
4 X	2438.000	105.53	31.53	74.00	102.64	28.30	1.76	27.17	Peak	102	330
5	2483.500	48.69	-25.31	74.00	45.65	28.39	1.82	27.17	Peak	100	315
6	2483.500	38.14	-15.86	54.00	35.10	28.39	1.82	27.17	Average	100	315
7	2510.000	51.55	-22.45	74.00	48.40	28.47	1.86	27.18	Peak	102	324
8	2510.000	41.52	-12.48	54.00	38.37	28.47	1.86	27.18	Average	102	324

For 2.510GHz ~ 25GHz


Frequency from 2510MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency	Antenna	Cable	Reading	Limits	Emission	Margin	Detect	
Polarity	Factor	Loss						
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	Mode	
2436.000	V	28.29	1.76	74.47	-	104.52	-	Peak
2436.000	V	28.29	1.76	66.36	-	96.41	-	AV
2438.000	H	28.30	1.76	75.47	-	105.53	-	Peak
2438.000	H	28.30	1.76	68.66	-	98.72	-	AV
4822.000	V/H	-	-	-	-	-	-	AV/Peak
7236.000	V/H	-	-	-	-	-	-	AV/Peak
9648.000	V/H	-	-	-	-	-	-	AV/Peak
12060.000	V/H	-	-	-	-	-	-	AV/Peak
14472.000	V/H	-	-	-	-	-	-	AV/Peak
16884.000	V/H	-	-	-	-	-	-	AV/Peak
19296.000	V/H	-	-	-	-	-	-	AV/Peak
21708.000	V/H	-	-	-	-	-	-	AV/Peak
24120.000	V/H	-	-	-	-	-	-	AV/Peak

Remark:

1. The emission emitted by the EUT is too low to be measured except the emission listed above,
2. Reading = Reading on SA-Preamp Factor

Test Engineer : 

Jay

7.4.4 Test Mode: Mode 4

- Test Distance : 3 m
- Temperature : 23°C
- Relative Humidity :51 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

■ The test that passed at minimum margin was marked by the frame in the following table.

Site : site
 Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL
 EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
 Power : AC 110V / 60Hz
 Model : 56W11
 Memo : GSM1900 CH661 ;TX CH06 2437MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2390.000	57.75	-16.25	74.00	68.97	28.20	1.72	41.14	Peak	100	154
2	2390.000	44.81	-9.19	54.00	56.03	28.20	1.72	41.14	Average	100	154
3 X	2432.000	96.48	42.48	54.00	107.60	28.29	1.76	41.17	Average	100	186
4 X	2438.000	105.52	31.52	74.00	116.63	28.30	1.76	41.17	Peak	100	186
5	2483.500	58.41	-15.59	74.00	69.40	28.39	1.82	41.20	Peak	100	56
6	2483.500	44.91	-9.09	54.00	55.90	28.39	1.82	41.20	Average	100	56

Site : site
 Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL
 EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
 Power : AC 110V / 60Hz
 Model : 56W11
 Memo : GSM1900 CH661 ;TX CH06 2432MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	3758.000	48.12	-25.88	74.00	55.75	31.96	1.82	41.41	Peak	100	47
2	3758.000	45.92	-8.08	54.00	53.55	31.96	1.82	41.41	Average	100	47
3	4876.000	44.57	-9.43	54.00	51.32	33.17	2.52	42.44	Average	142	126
4	4876.000	48.73	-25.27	74.00	55.48	33.17	2.52	42.44	Peak	142	126

FCC TEST REPORT

Report No. : F422302-01

Site : site
Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL
EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
Power : AC 110V / 60Hz
Model : 56W11
Memo : GSM1900 CH661 ;TX CH06 2437MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2390.000	58.08	-15.92	74.00	69.30	28.20	1.72	41.14	Peak	100	71
2	2390.000	44.60	-9.40	54.00	55.82	28.20	1.72	41.14	Average	100	71
3 X	2436.000	104.57	30.57	74.00	115.69	28.29	1.76	41.17	Peak	100	71
4 X	2436.000	99.95	45.95	54.00	111.07	28.29	1.76	41.17	Average	100	71
5	2483.500	58.39	-15.61	74.00	69.38	28.39	1.82	41.20	Peak	100	71
6	2483.500	44.94	-9.06	54.00	55.93	28.39	1.82	41.20	Average	100	71

Site : site
Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL
EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
Power : AC 110V / 60Hz
Model : 56W11
Memo : GSM1900 CH661 ;TX CH06 2432MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	3758.000	48.61	-25.39	74.00	56.24	31.96	1.82	41.41	Peak	100	238
2	3758.000	40.50	-13.50	54.00	48.13	31.96	1.82	41.41	Average	100	238
3	4870.000	43.35	-10.65	54.00	50.10	33.16	2.52	42.43	Average	106	92
4	4870.000	47.28	-26.72	74.00	54.03	33.16	2.52	42.43	Peak	106	92

For 4.876GHz ~ 25GHz


Frequency from 4876MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency	Antenna	Cable	Reading	Limits	Emission	Margin	Detect	
Polarity	Factor	Loss						
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	Mode	
2438.000	V	28.30	1.76	75.19	-	105.25	-	Peak
2432.000	V	28.29	1.76	66.43	-	96.48	-	AV
2436.000	H	28.29	1.76	74.52	-	104.57	-	Peak
2436.000	H	28.29	1.76	69.90	-	99.95	-	AV
3758.000	V	31.96	1.82	14.34	74.00	48.12	-25.88	Peak
3758.000	V	31.96	1.82	12.14	54.00	45.92	-8.08	AV
4876.000	V	33.17	2.52	13.04	74.00	48.73	-25.27	Peak
4876.000	V	33.17	2.52	8.88	54.00	44.57	-9.43	AV
3758.000	H	31.96	41.41	-24.76	74.00	48.61	-25.39	Peak
3758.000	H	31.96	41.41	-32.87	54.00	40.50	-13.50	AV
4870.000	H	33.16	42.43	-28.31	74.00	47.28	-26.72	Peak
4870.000	H	33.16	42.43	-32.24	54.00	43.35	-10.65	AV
7236.000	V/H	-	-	-	-	-	-	AV/Peak
9648.000	V/H	-	-	-	-	-	-	AV/Peak
12060.000	V/H	-	-	-	-	-	-	AV/Peak
14472.000	V/H	-	-	-	-	-	-	AV/Peak
16884.000	V/H	-	-	-	-	-	-	AV/Peak
19296.000	V/H	-	-	-	-	-	-	AV/Peak
21708.000	V/H	-	-	-	-	-	-	AV/Peak
24120.000	V/H	-	-	-	-	-	-	AV/Peak

Remark:

1. The emission emitted by the EUT is too low to be measured except the emission listed above,
2. Reading = Reading on SA-Preamplifier Factor

Test Engineer : 

Jay

7.4.5 Test Mode: Mode 5

- Test Distance : 3 m
- Temperature : 23°C
- Relative Humidity :51 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

■ The test that passed at minimum margin was marked by the frame in the following table.

Site : 03CH03-HY
 Condition : FCC CLASS-B 3m BIC-9124--301 VERTICAL
 EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
 Power : AC 110V / 60Hz
 Model : 56W11
 Memo : GSM850 CH189 ; TX CH11 2462MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	66.380	33.18	-6.82	40.00	50.42	9.17	1.56	27.97	Peak	---	---
2 !	132.510	37.75	-5.75	43.50	51.90	11.46	2.22	27.83	Peak	102	342
3 !	166.340	37.71	-5.79	43.50	50.00	13.05	2.43	27.77	Peak	---	---

Site : 03CH03-HY
 Condition : FCC CLASS-B 3m LOG-9111-221 VERTICAL
 EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
 Power : AC 110V / 60Hz
 Model : 56W11
 Memo : GSM850 CH189 ; TX CH11 2462MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	363.200	32.59	-13.41	46.00	40.86	15.26	4.08	27.61	Peak	---	---
2	665.600	35.28	-10.72	46.00	39.59	19.10	5.32	28.73	Peak	102	342
3	957.600	37.43	-8.57	46.00	37.15	21.90	6.62	28.24	Peak	---	---

FCC TEST REPORT

Report No. : F422302-01

Site : 03CH03-HY
Condition : FCC CLASS-B 3m BIC-9124--301 HORIZONTAL
EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
Power : AC 110V / 60Hz
Model : 56W11
Memo : GSM850 CH189 ; TX CH11 2462MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1 !	65.870	37.07	-2.93	40.00	54.26	9.22	1.56	27.97	Peak	---	---
2 !	133.190	41.11	-2.39	43.50	55.20	11.49	2.25	27.83	Peak	---	---
3 !	166.490	41.28	-2.22	43.50	53.56	13.06	2.43	27.77	QP	100	270

Site : 03CH03-HY
Condition : FCC CLASS-B 3m LOG-9111-221 HORIZONTAL
EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
Power : AC 110V / 60Hz
Model : 56W11
Memo : GSM850 CH189 ; TX CH11 2462MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1 !	265.600	40.24	-5.76	46.00	51.85	12.50	3.33	27.44	Peak	---	---
2	363.990	38.87	-7.13	46.00	47.23	15.26	4.00	27.62	QP	100	350
3	432.000	39.47	-6.53	46.00	47.16	16.24	4.16	28.09	Peak	---	---

Site : 03CH03-HY
Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL
EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
Power : AC 110V / 60Hz
Model : 56W11
Memo : GSM850 CH189 ; TX CH11 2462MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1194.000	49.78	-24.22	74.00	50.96	24.59	1.22	26.99	Peak	---	---
2	1594.000	48.87	-25.13	74.00	48.66	25.75	1.51	27.05	Peak	---	---
3	1672.660	47.77	-6.23	54.00	47.21	26.07	1.55	27.06	Average	100	171
4	1672.660	57.88	-16.12	74.00	57.32	26.07	1.55	27.06	Peak	100	171

FCC TEST REPORT

Report No. : F422302-01

Site : 03CH03-HY
Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL
EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
Power : AC 110V / 60Hz
Model : 56W11
Memo : GSM850 CH189 ; TX CH11 2462MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2390.000	47.83	-26.17	74.00	45.07	28.20	1.72	27.16	Peak	100	323
2	2390.000	32.14	-21.86	54.00	29.38	28.20	1.72	27.16	Average	100	323
3 X	2462.000	105.62	31.62	74.00	102.65	28.35	1.79	27.17	Peak	112	310
4 X	2462.000	97.78	43.78	54.00	94.81	28.35	1.79	27.17	Average	112	310
5	2483.500	38.47	-15.53	54.00	35.43	28.39	1.82	27.17	Average	102	312
6	2483.500	48.63	-25.37	74.00	45.59	28.39	1.82	27.17	Peak	102	312
7	2510.000	52.37	-21.63	74.00	49.22	28.47	1.86	27.18	Peak	100	353
8	2510.000	42.65	-11.35	54.00	39.50	28.47	1.86	27.18	Average	100	353

Site : 03CH03-HY
Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL
EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
Power : AC 110V / 60Hz
Model : 56W11
Memo : GSM850 CH189 ; TX CH11 2462MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1674.000	49.62	-24.38	74.00	49.05	26.08	1.55	27.06	Peak	103	346

Site : 03CH03-HY
Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL
EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
Power : AC 110V / 60Hz
Model : 56W11
Memo : GSM850 CH189 ; TX CH11 2462MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2390.000	46.70	-27.30	74.00	43.94	28.20	1.72	27.16	Peak	107	315
2	2390.000	36.77	-17.23	54.00	34.01	28.20	1.72	27.16	Average	107	315
3 X	2462.000	104.81	30.81	74.00	101.84	28.35	1.79	27.17	Peak	103	342
4 X	2462.000	99.39	45.39	54.00	96.42	28.35	1.79	27.17	Average	103	342
5	2483.500	36.83	-17.17	54.00	33.79	28.39	1.82	27.17	Average	101	325
6	2483.500	47.78	-26.22	74.00	44.74	28.39	1.82	27.17	Peak	101	325
7	2510.000	51.84	-22.16	74.00	48.69	28.47	1.86	27.18	Peak	105	341
8	2510.000	41.67	-12.33	54.00	38.52	28.47	1.86	27.18	Average	105	341

For 2.510GHz ~ 25GHz

Frequency from 2510MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency (MHz)	Antenna Polarity	Cable Factor	Reading Loss	Limits (dBuV)	Emission (dBuV/m)	Margin (dB)	Detect Mode
2462.000	V	28.35	1.79	75.48	-	105.62	- Peak
2462.000	V	28.35	1.79	67.64	-	97.78	- AV
2462.000	H	28.35	1.79	74.67	-	104.81	- Peak
2462.000	H	28.35	1.79	69.25	-	99.39	- AV
4822.000	V/H	-	-	-	-	-	- AV/Peak
7236.000	V/H	-	-	-	-	-	- AV/Peak
9648.000	V/H	-	-	-	-	-	- AV/Peak
12060.000	V/H	-	-	-	-	-	- AV/Peak
14472.000	V/H	-	-	-	-	-	- AV/Peak
16884.000	V/H	-	-	-	-	-	- AV/Peak
19296.000	V/H	-	-	-	-	-	- AV/Peak
21708.000	V/H	-	-	-	-	-	- AV/Peak
24120.000	V/H	-	-	-	-	-	- AV/Peak

Remark:

1. The emission emitted by the EUT is too low to be measured except the emission listed above,
2. Reading = Reading on SA-Preamp Factor

Test Engineer : 

Jay

7.4.6 Test Mode: Mode 6

- Test Distance : 3 m
- Temperature : 23°C
- Relative Humidity :51 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

■ The test that passed at minimum margin was marked by the frame in the following table.

Site : site
 Condition : FCC CLASS-B 3m BIC-9124--301 VERTICAL
 EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
 Power : AC 110V / 60Hz
 Model : 56W11
 Memo : GSM1900 CH661 ;TX CH11 2462MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	34.420	31.76	-8.24	40.00	45.54	13.18	1.08	28.04	Peak	---	---
2	132.340	29.62	-13.88	43.50	43.79	11.45	2.21	27.83	Peak	---	---
3	198.470	37.90	-5.60	43.50	48.08	14.76	2.76	27.70	Peak	100	267

Site : site
 Condition : FCC CLASS-B 3m LOG-9111-221 VERTICAL
 EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
 Power : AC 110V / 60Hz
 Model : 56W11
 Memo : GSM1900 CH661 ;TX CH11 2462MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	700.800	34.52	-11.48	46.00	38.06	19.80	5.36	28.70	Peak	---	---
2	800.000	34.78	-11.22	46.00	37.26	20.38	5.94	28.80	Peak	---	---
3	905.600	36.22	-9.78	46.00	36.86	21.16	6.49	28.29	Peak	100	265

FCC TEST REPORT

Report No. : F422302-01

Site : site
Condition : FCC CLASS-B 3m BIC-9124--301 HORIZONTAL
EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
Power : AC 110V / 60Hz
Model : 56W11
Memo : GSM1900 CH661 ;TX CH11 2462MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	133.020	30.01	-13.49	43.50	44.11	11.48	2.25	27.83	Peak	---	---
2	165.660	36.92	-6.58	43.50	49.24	13.01	2.44	27.77	Peak	---	---
3	198.470	40.43	-3.07	43.50	50.61	14.76	2.76	27.70	Peak	100	243

Site : site
Condition : FCC CLASS-B 3m LOG-9111-221 HORIZONTAL
EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
Power : AC 110V / 60Hz
Model : 56W11
Memo : GSM1900 CH661 ;TX CH11 2462MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	265.600	36.87	-9.13	46.00	48.48	12.50	3.33	27.44	Peak	---	---
2	332.800	37.16	-8.84	46.00	46.09	14.97	3.56	27.46	Peak	---	---
3	906.400	37.18	-8.82	46.00	37.88	21.18	6.41	28.29	Peak	100	272

Site : site
Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL
EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
Power : AC 110V / 60Hz
Model : 56W11
Memo : GSM1900 CH661 ;TX CH11 2462MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2390.000	58.25	-15.75	74.00	69.47	28.20	1.72	41.14	Peak	100	126
2	2390.000	44.74	-9.26	54.00	55.96	28.20	1.72	41.14	Average	100	126
3	X 2462.000	95.40	41.40	54.00	106.44	28.35	1.79	41.18	Average	100	183
4	X 2462.000	104.20	30.20	74.00	115.24	28.35	1.79	41.18	Peak	100	183
5	2483.500	58.71	-15.29	74.00	69.70	28.39	1.82	41.20	Peak	100	145
6	2483.500	44.83	-9.17	54.00	55.82	28.39	1.82	41.20	Average	100	145

FCC TEST REPORT

Report No. : F422302-01

Site : site
Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL
EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
Power : AC 110V / 60Hz
Model : 56W11
Memo : GSM1900 CH661 ;TX CH11 2462MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	3758.000	48.11	-25.89	74.00	55.74	31.96	1.82	41.41	Peak	---	---
2	3758.000	45.60	-8.40	54.00	53.23	31.96	1.82	41.41	Average	100	52
3	4926.000	49.96	-24.04	74.00	56.72	33.28	2.47	42.51	Peak	---	---
4	4926.000	46.44	-7.56	54.00	53.20	33.28	2.47	42.51	Average	106	128

Site : site
Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL
EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
Power : AC 110V / 60Hz
Model : 56W11
Memo : GSM1900 CH661 ;TX CH11 2462MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2390.000	44.53	-9.47	54.00	55.75	28.20	1.72	41.14	Average	123	52
2	2390.000	57.29	-16.71	74.00	68.51	28.20	1.72	41.14	Peak	123	52
3 X	2462.000	89.85	35.85	54.00	100.89	28.35	1.79	41.18	Average	123	383
4 X	2462.000	99.08	25.08	74.00	110.12	28.35	1.79	41.18	Peak	123	383
5	2483.500	44.82	-9.18	54.00	55.81	28.39	1.82	41.20	Average	123	247
6	2483.500	58.42	-15.58	74.00	69.41	28.39	1.82	41.20	Peak	123	247

Site : site
Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL
EUT : Tri Band GSM/WLAN (802.11b) PCMCIA Card
Power : AC 110V / 60Hz
Model : 56W11
Memo : GSM1900 CH661 ;TX CH11 2462MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	3758.000	41.56	-12.44	54.00	49.19	31.96	1.82	41.41	Average	100	267
2	3758.000	49.04	-24.96	74.00	56.67	31.96	1.82	41.41	Peak	100	267
3	4926.000	42.55	-11.45	54.00	49.31	33.28	2.47	42.51	Average	118	72
4	4926.000	48.00	-26.00	74.00	54.76	33.28	2.47	42.51	Peak	118	72

For 4.926GHz ~ 25GHz

Frequency from 4926MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency	Antenna	Cable	Reading	Limits	Emission	Margin	Detect	
Polarity	Factor	Loss						
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	Mode	
2462.000	V	28.35	1.79	74.06	-	104.20	-	Peak
2462.000	V	28.35	1.79	65.26	-	95.40	-	AV
2462.000	H	28.35	1.79	68.94	-	99.08	-	Peak
2462.000	H	28.35	1.79	59.71	-	89.85	-	AV
3758.000	V	31.96	1.80	14.35	74.00	48.11	-25.89	Peak
3758.000	V	31.96	1.82	11.82	54.00	45.60	-8.40	AV
4926.000	V	33.28	2.47	14.21	74.00	49.96	-24.04	Peak
4926.000	V	33.28	2.47	10.69	54.00	46.44	-7.56	AV
3758.000	H	31.96	1.82	15.26	74.00	49.04	-24.96	Peak
3758.000	H	31.96	1.82	7.78	54.00	41.56	-12.44	AV
4926.000	H	33.28	2.47	12.25	74.00	48.00	-26.00	Peak
4926.000	H	33.28	2.47	6.80	54.00	42.55	-11.45	AV
7236.000	V/H	-	-	-	-	-	-	AV/Peak
9648.000	V/H	-	-	-	-	-	-	AV/Peak
12060.000	V/H	-	-	-	-	-	-	AV/Peak
14472.000	V/H	-	-	-	-	-	-	AV/Peak
16884.000	V/H	-	-	-	-	-	-	AV/Peak
19296.000	V/H	-	-	-	-	-	-	AV/Peak
21708.000	V/H	-	-	-	-	-	-	AV/Peak
24120.000	V/H	-	-	-	-	-	-	AV/Peak

Remark:

1. The emission emitted by the EUT is too low to be measured except the emission listed above,
2. Reading = Reading on SA-Preamplifier Factor

Test Engineer : 

Jay


7.5. Photographs of Radiated Emission Test Configuration

- The photographs show the configuration that generates the maximum emission.

FRONT VIEW



REAR VIEW

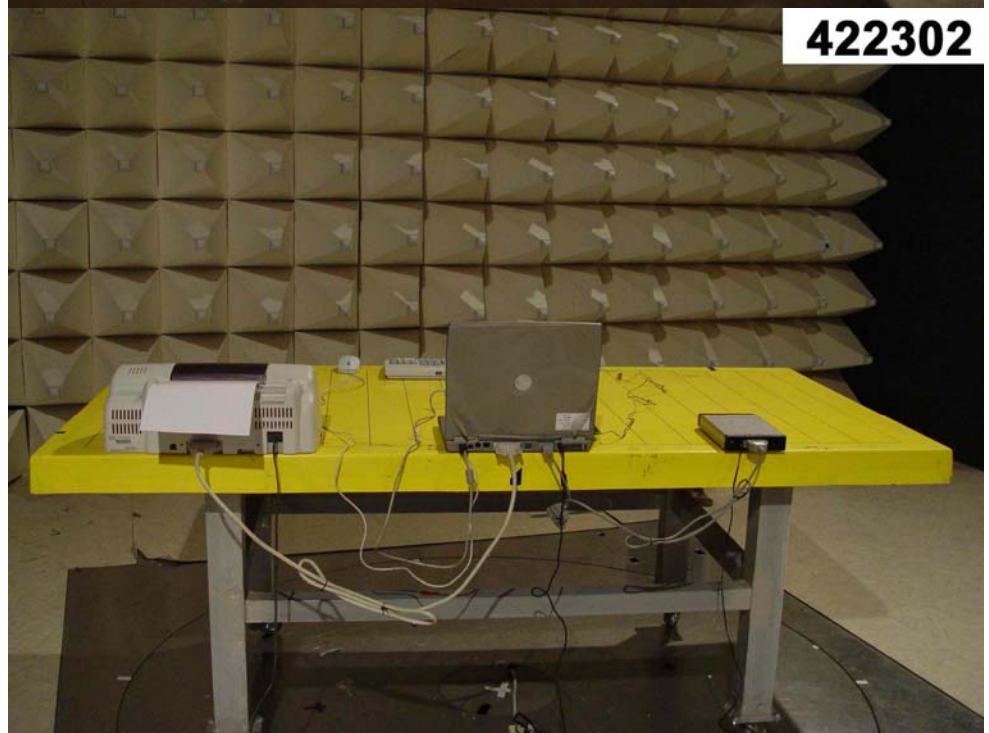

8. Antenna Requirements

The EUT use an embedded PCB antenna without connector. It is considered to meet antenna requirement of FCC.

8.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no other antenna except assembled by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

8.2. Antenna Connected Construction

The antenna used in this product is embedded PCB antenna without connector.

9. List of Measuring Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100132	9 KHz – 2.75 GHz	Jun. 12, 2003	Conduction (CO01-HY)
LISN	MessTec	NNB-2/16Z	2001-008	9 KHz – 30 MHz	Apr. 30, 2003	Conduction (CO01-HY)
LISN (Support Unit)	MessTec	NNB-2/16Z	2001-009	9 KHz – 30 MHz	Apr. 30, 2003	Conduction (CO01-HY)
EMI Filter	LINDGREN	LRE-2060	1004	< 450 Hz	N/A	Conduction (CO01-HY)
EMI Filter	LINDGREN	N6006	201052	0 ~ 60 Hz	N/A	Conduction (CO01-HY)
RF Cable-CON	Suhner Switzerland	RG223/U	CB029	9KHz~30MHz	Dec. 24, 2003	Conduction (CO01-HY)
50 ohm BNC type Terminal	NOBLE	50ohm	TM013	50 ohm	Apr. 24, 2003	Conduction (CO01-HY)

※ Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz~1GHz 3m	Jun. 21, 2003	Radiation (03CH03-HY)
Spectrum analyzer	R&S	FSP40	100004	9KHZ~40GHz	Aug. 23, 2003	Radiation (03CH03-HY)
Amplifier	HP	8447D	2944A09072	100KHz – 1.3GHz	Nov. 05, 2003	Radiation (03CH03-HY)
Biconical Antenna	SCHWARZBECK	VHBB 9124	301	30MHz – 200MHz	Jul. 24, 2003	Radiation (03CH03-HY)
Log Antenna	SCHWARZBECK	VUSLP 9111	221	200MHz -1GHz	Jul. 24, 2003	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz~1GHz	Dec. 03, 2003	Radiation (03CH03-HY)
Amplifier	MITEQ	AFS44	879981	100MHz~26.5GHz	Jul. 23, 2003	Radiation (03CH03-HY)
Horn Antenna	COM-POWER	3115	6741	1GHz – 18GHz	Apr. 08, 2003	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Horn Antenna	Schwarzbeck	BBHA9170	154	15GHz~40GHz	Jun. 02, 2003	Radiation (03CH03-HY)
RF Cable-HIGH	Jye Bao	RG142	CB030-HIGH	1GHz~29.5GHz	Dec. 05, 2003	Radiation (03CH03-HY)

※ Calibration Interval of instruments listed above is one year, except for Horn Antenna, BBHA9170.

※ Calibration Interval of Horn Antenna, BBHA9170, is three years.

10. Uncertainty Measurement

Uncertainty of Conducted Emission Measurement

Contribution	Uncertainty of x_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.10	Normal(k=2)	0.05
Cable loss	0.10	Normal(k=2)	0.05
AMN insertion loss	2.50	Rectangular	0.63
Receiver Spec	1.50	Rectangular	0.43
Site imperfection	1.39	Rectangular	0.80
Mismatch Receiver VSWR Γ_1 = LISN VSWR Γ_2 = Uncertainty= $20\log(1-\Gamma_1\Gamma_2)$	+0.34/-0.35	U-shape	0.24
combined standard uncertainty $U_c(y)$	1.13		
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$	2.26		

$$U = \sqrt{\{(1/2)^2 + (0.3/2)^2 + (2^2 + 0.5^2 + 2^2 + 0.25^2 + 2^2)/3 + (0.54)^2/2\}} = 2.2 \text{ for 10m test distance}$$

$$U = \sqrt{\{(1/2)^2 + (0.3/2)^2 + (2^2 + 3^2 + 2^2 + 0.25^2 + 2^2)/3 + (0.54)^2/2\}} = 2.7 \text{ for 3m test distance}$$

Uncertainty of Radiated Emission Measurement (30MHz ~ 1000MHz)

Contribution	Uncertainty of x_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.41	Normal(k=2)	0.21
Antenna factor calibration	0.83	Normal(k=2)	0.42
Cable loss calibration	0.25	Normal(k=2)	0.13
Pre Amplifier Gain calibration	0.27	Normal(k=2)	0.14
RCV/SPA specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site imperfection	1.43	Rectangular	0.83
Mismatch Receiver VSWR $\Gamma_1 = 0.20$ Antenna VSWR $\Gamma_2 = 0.23$ Uncertainty = $20\log(1 - \Gamma_1 \Gamma_2)$	+0.39/-0.41	U-shaped	0.28
combined standard uncertainty $U_c(y)$	1.27		
Measuring uncertainty for a level of confidence of 95% $U = 2U_c(y)$	2.54		

Uncertainty of Conducted Emission Measurement (1GHz ~ 40GHz)

Contribution	Uncertainty of x_i		$u(x_i)$	C_i	$C_i * u(x_i)$
	dB	Probability Distribution			
Receiver reading	± 0.10	Normal(k=1)	0.10	1	0.10
Antenna factor calibration	± 1.70	Normal(k=2)	0.85	1	0.85
Cable loss calibration	± 0.50	Normal(k=2)	0.25	1	0.25
Receiver Correction	± 2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	± 1.50	Rectangular	0.87	1	0.87
Site imperfection	± 2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\log(1 - \Gamma_1 \Gamma_2 \Gamma_3)$	+0.34/-0.35	U-shaped	0.244	1	0.244
Combined standard uncertainty $U_c(y)$	2.36				
Measuring uncertainty for a level of confidence of 95% $U = 2U_c(y)$	4.72				

$$U = \sqrt{\{(0.3/2)^2 + (2^2 + 1.5^2 + 0.2^2)/3 + (0.2)^2/2\}} = 1.66$$