

**Test Plot 1#: GSM 850\_Head Left Cheek\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.922$  S/m;  $\epsilon_r = 41.721$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @836.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.175 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.453 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.189 W/kg

**SAR(1 g) = 0.143 W/kg; SAR(10 g) = 0.110 W/kg**

Maximum value of SAR (measured) = 0.171 W/kg

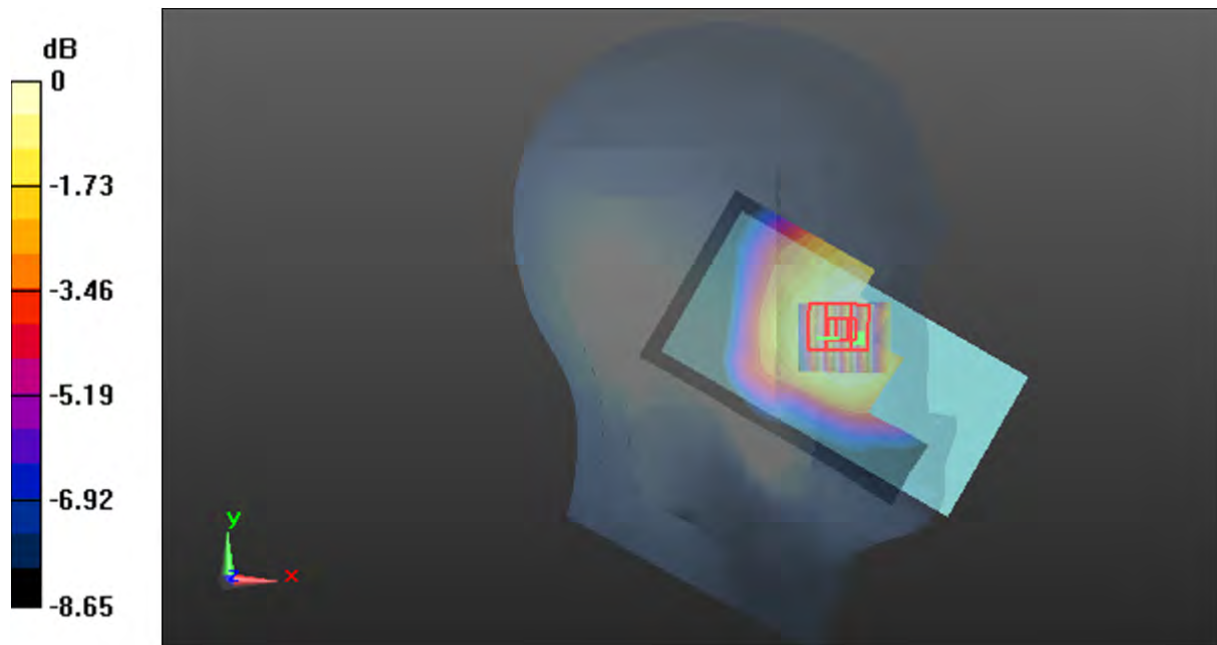

0 dB = 0.171 W/kg = -7.67 dB dBW/kg

**Test Plot 2#: GSM 850\_Head Left Tilt\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.922$  S/m;  $\epsilon_r = 41.721$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @836.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0858 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.034 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0910 W/kg

**SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.056 W/kg**

Maximum value of SAR (measured) = 0.0844 W/kg

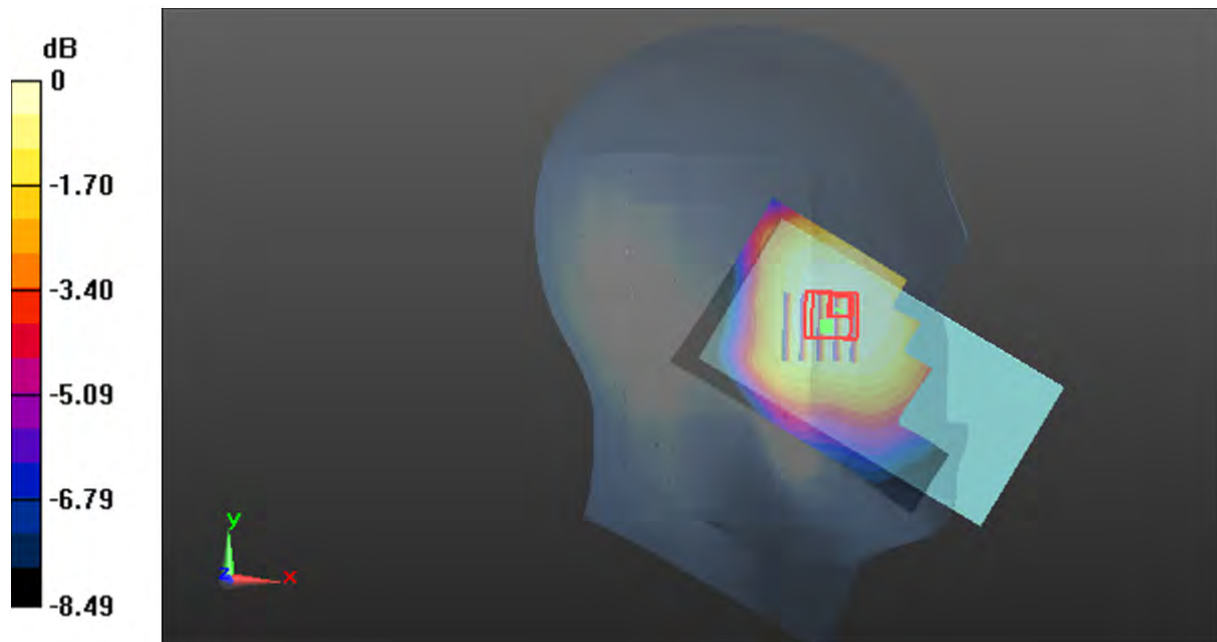

0 dB = 0.0844 W/kg = -10.74 dB dBW/kg

**Test Plot 3#: GSM 850\_Head Right Cheek\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.922$  S/m;  $\epsilon_r = 41.721$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @836.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.180 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.595 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.190 W/kg

**SAR(1 g) = 0.146 W/kg; SAR(10 g) = 0.112 W/kg**

Maximum value of SAR (measured) = 0.174 W/kg

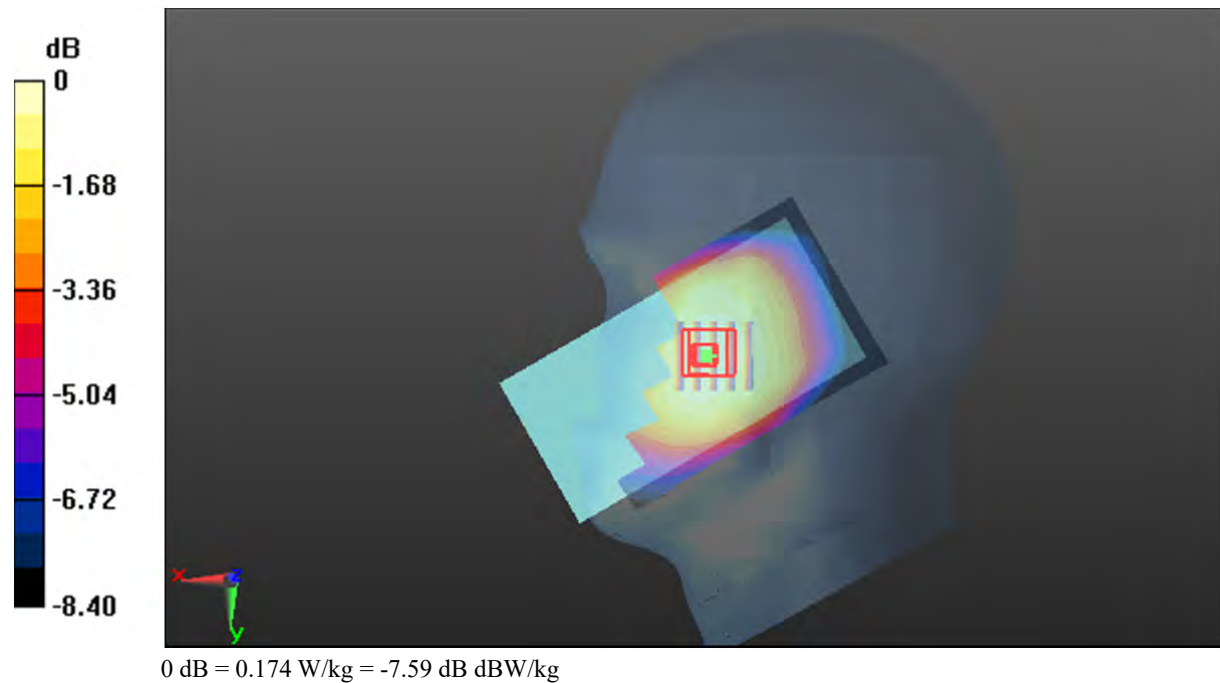

**Test Plot 4#: GSM 850\_Head Right Tilt\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.922$  S/m;  $\epsilon_r = 41.721$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @836.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.112 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.154 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.121 W/kg

**SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.068 W/kg**

Maximum value of SAR (measured) = 0.110 W/kg

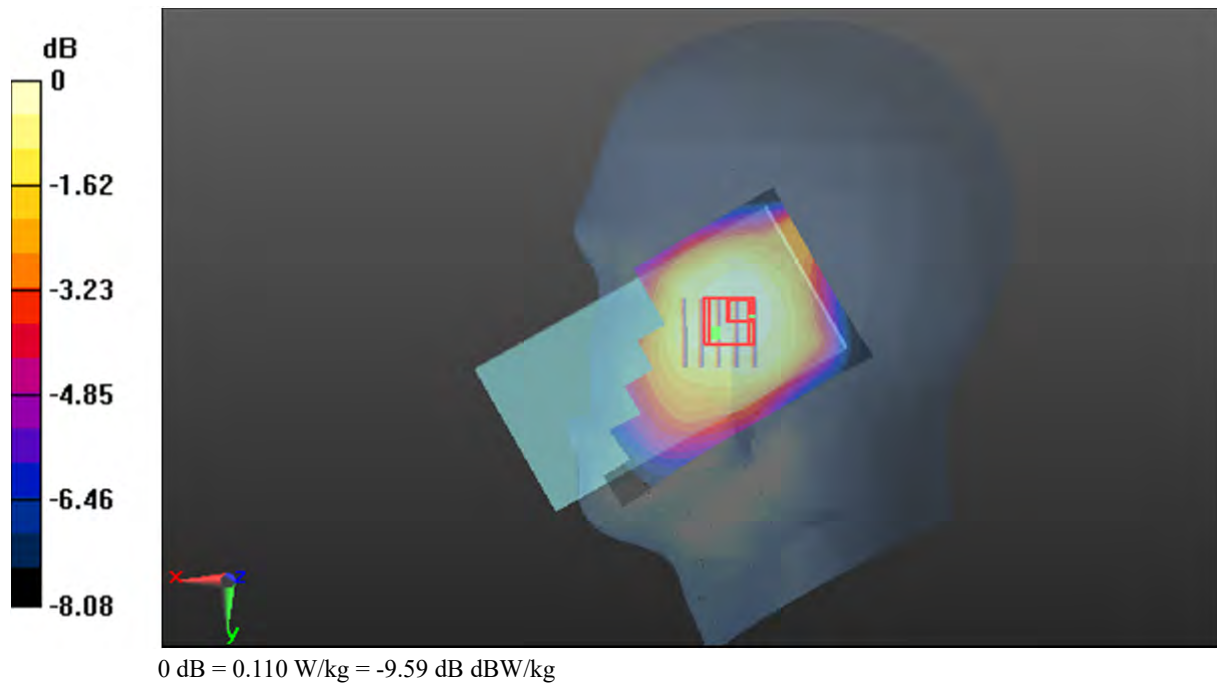

**Test Plot 5#: GSM 850\_Body Worn Front\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.922$  S/m;  $\epsilon_r = 41.721$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @836.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.381 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.42 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.566 W/kg

**SAR(1 g) = 0.265 W/kg; SAR(10 g) = 0.142 W/kg**

Maximum value of SAR (measured) = 0.441 W/kg

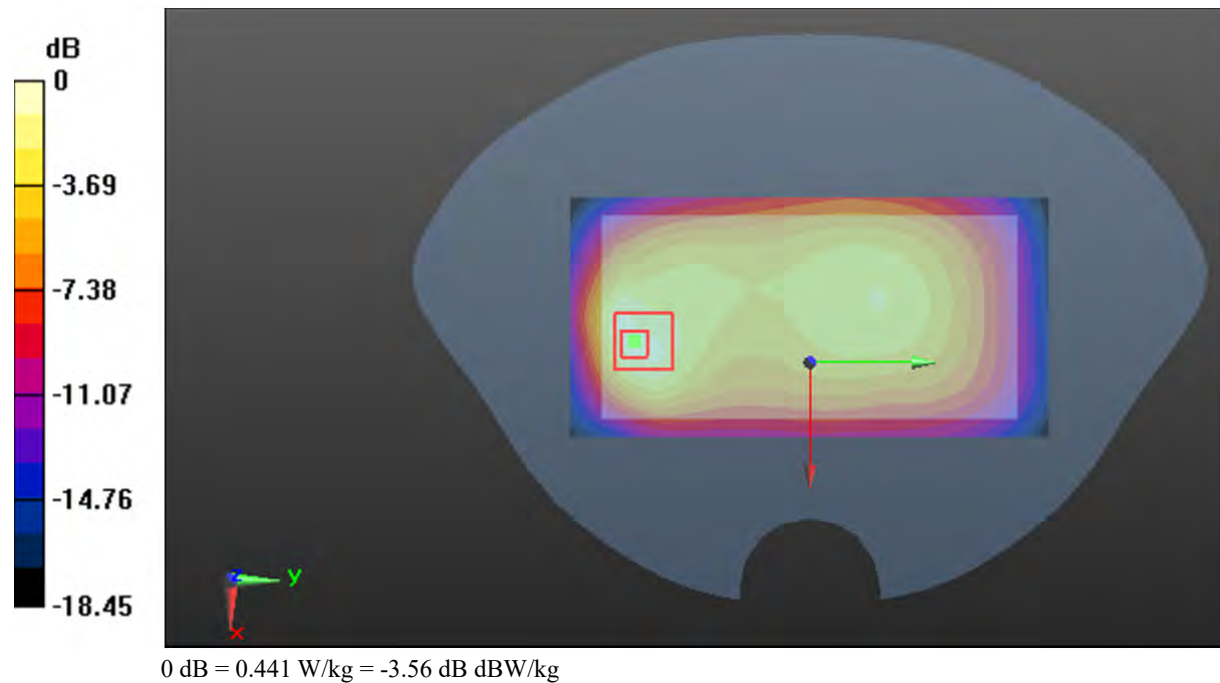

**Test Plot 6#: GSM 850\_Body Worn Back\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.922$  S/m;  $\epsilon_r = 41.721$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @836.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.452 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.58 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.509 W/kg

**SAR(1 g) = 0.244 W/kg; SAR(10 g) = 0.132 W/kg**

Maximum value of SAR (measured) = 0.393 W/kg

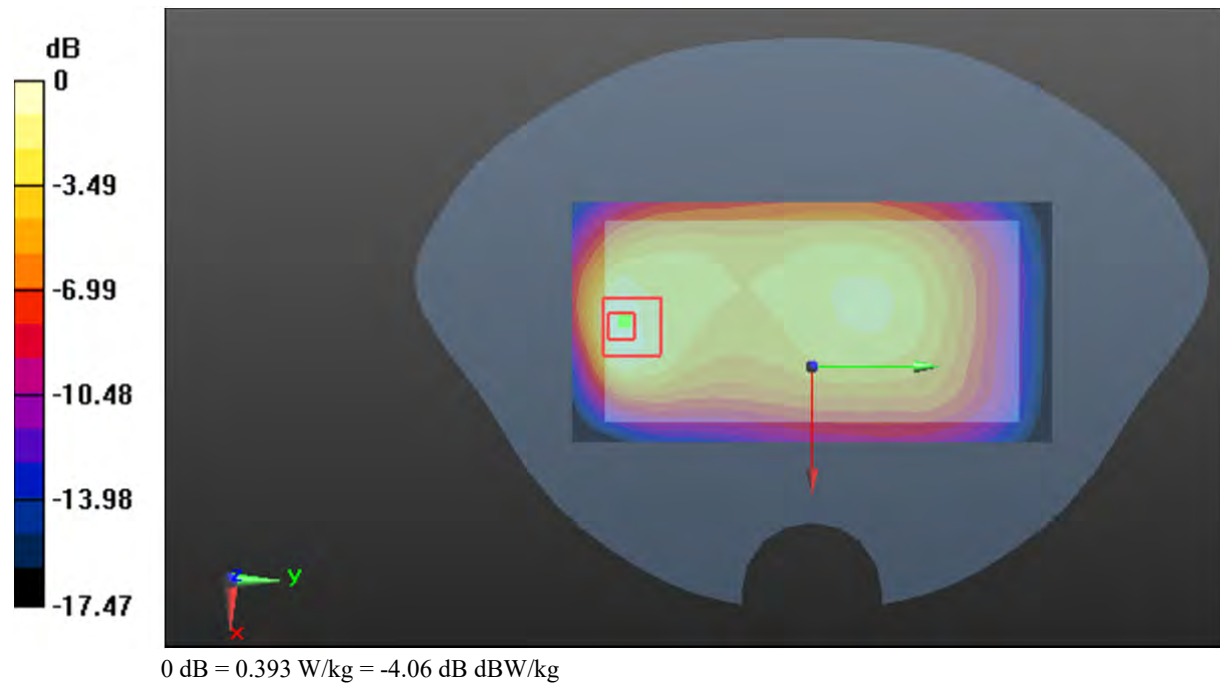

**Test Plot 7#: GSM 850\_Body Front\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.922$  S/m;  $\epsilon_r = 41.721$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @836.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.177 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.40 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.225 W/kg

**SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.078 W/kg**

Maximum value of SAR (measured) = 0.185 W/kg

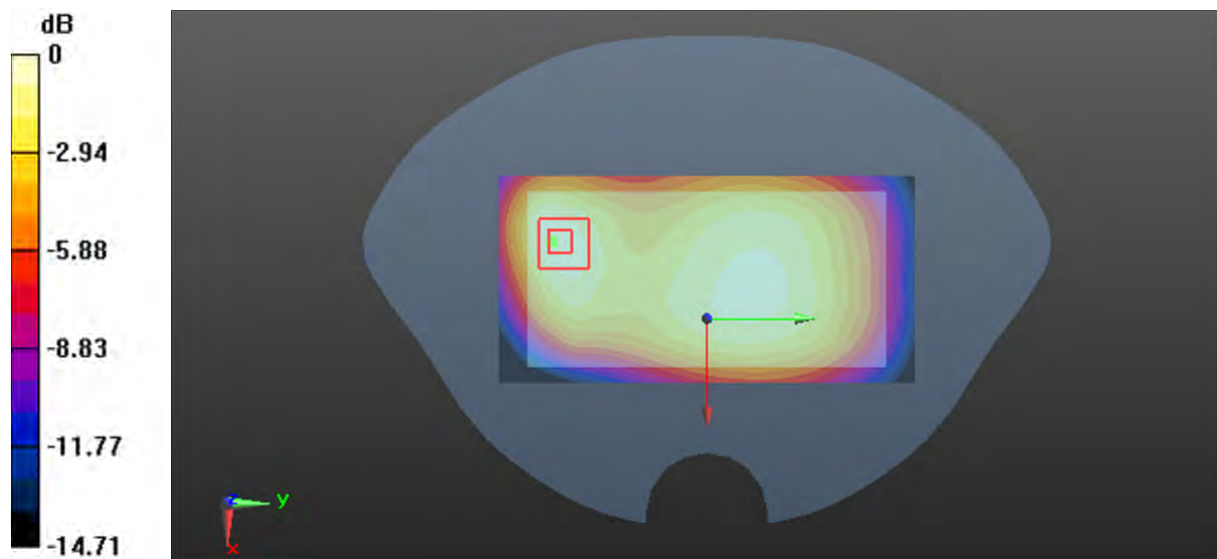

0 dB = 0.185 W/kg = -7.33 dBW/kg

**Test Plot 8#: GSM 850\_Body Back\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.922$  S/m;  $\epsilon_r = 41.721$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @836.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.176 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.87 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.197 W/kg

**SAR(1 g) = 0.141 W/kg; SAR(10 g) = 0.104 W/kg**

Maximum value of SAR (measured) = 0.177 W/kg

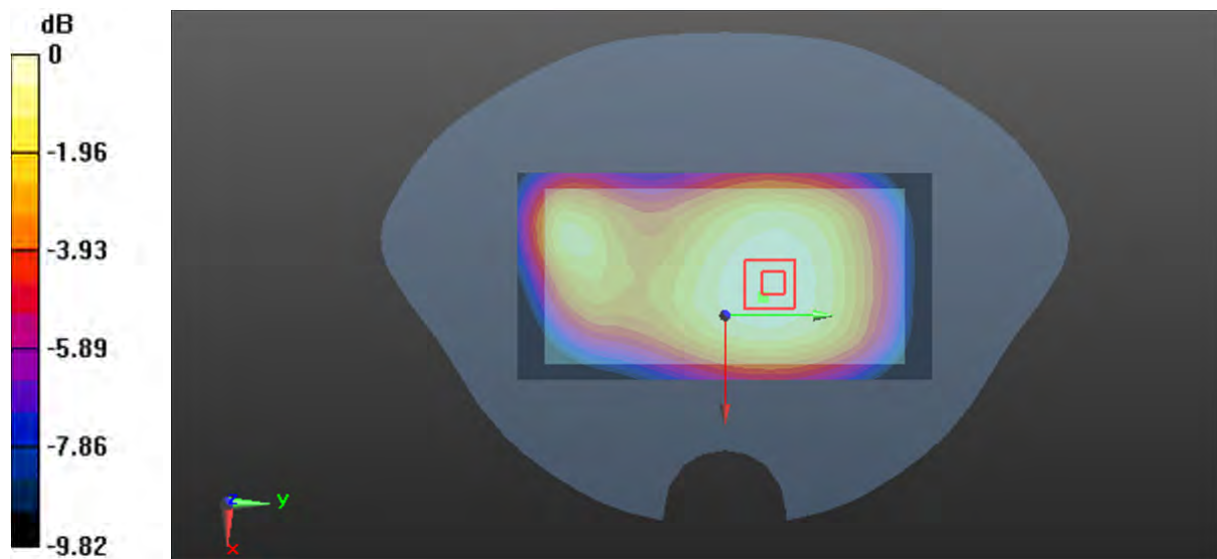

0 dB = 0.177 W/kg = -7.52 dBW/kg

**Test Plot 9#: GSM 850\_Body Left\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.922$  S/m;  $\epsilon_r = 41.721$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @836.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (4x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.155 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.82 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.180 W/kg

**SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.077 W/kg**

Maximum value of SAR (measured) = 0.156 W/kg

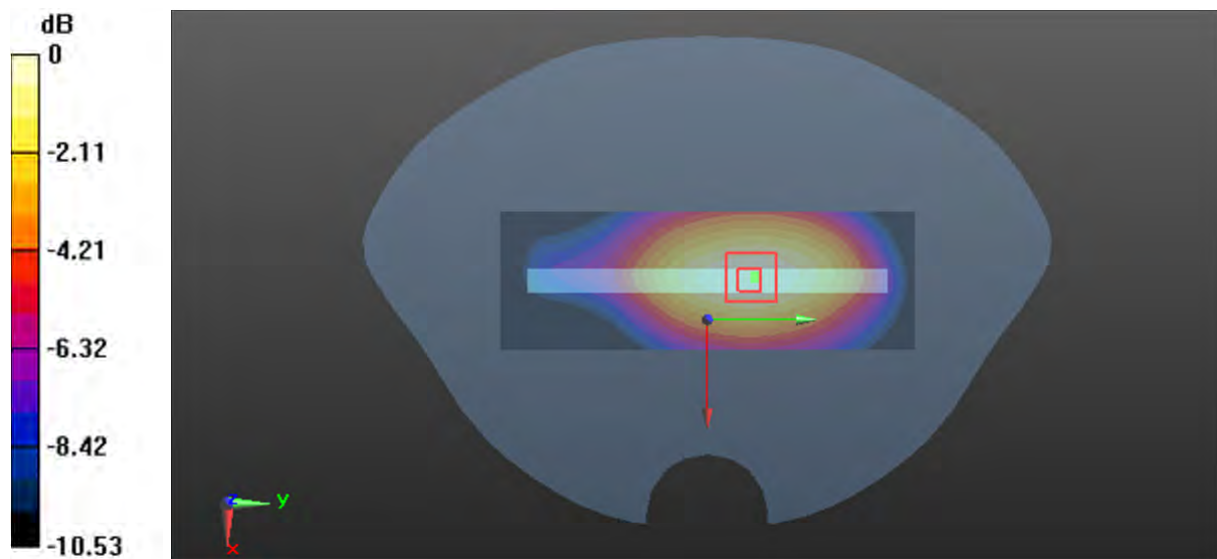

0 dB = 0.156 W/kg = -8.07 dBW/kg

**Test Plot 10#: GSM 850\_Body Bottom\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.922$  S/m;  $\epsilon_r = 41.721$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @ 836.6 MHz; Calibrated: 2022/5/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x10x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0931 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.758 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.127 W/kg

**SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.033 W/kg**

Maximum value of SAR (measured) = 0.0935 W/kg

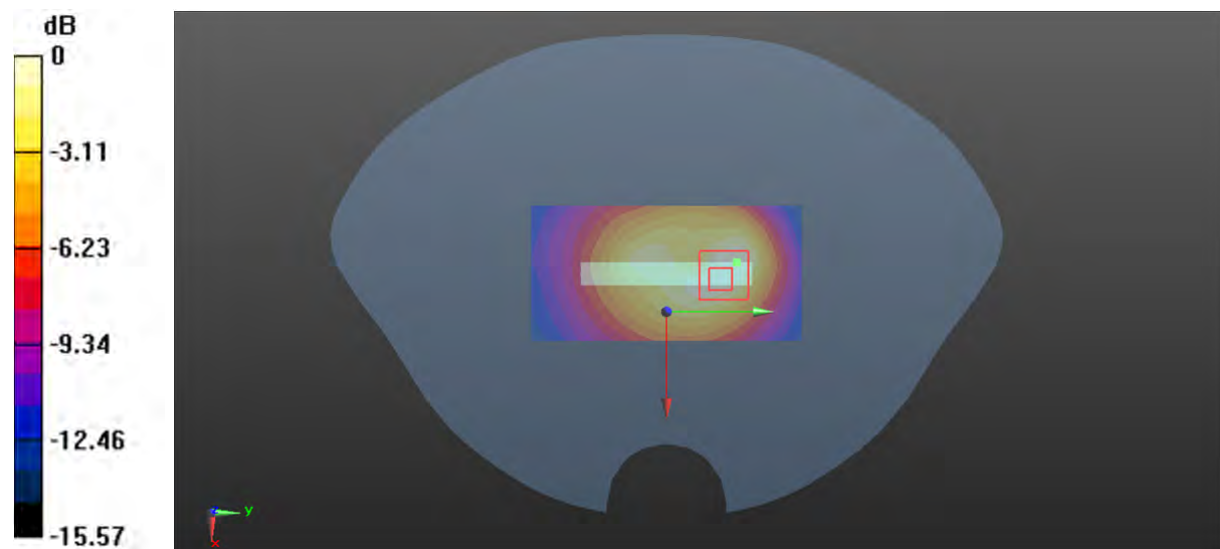

0 dB = 0.0935 W/kg = -10.29 dBW/kg

**Test Plot 11#: PCS 1900\_Head Left Cheek\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.406$  S/m;  $\epsilon_r = 39.86$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0912 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.217 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.110 W/kg

**SAR(1 g) = 0.065 W/kg; SAR(10 g) = 0.046 W/kg**

Maximum value of SAR (measured) = 0.0907 W/kg

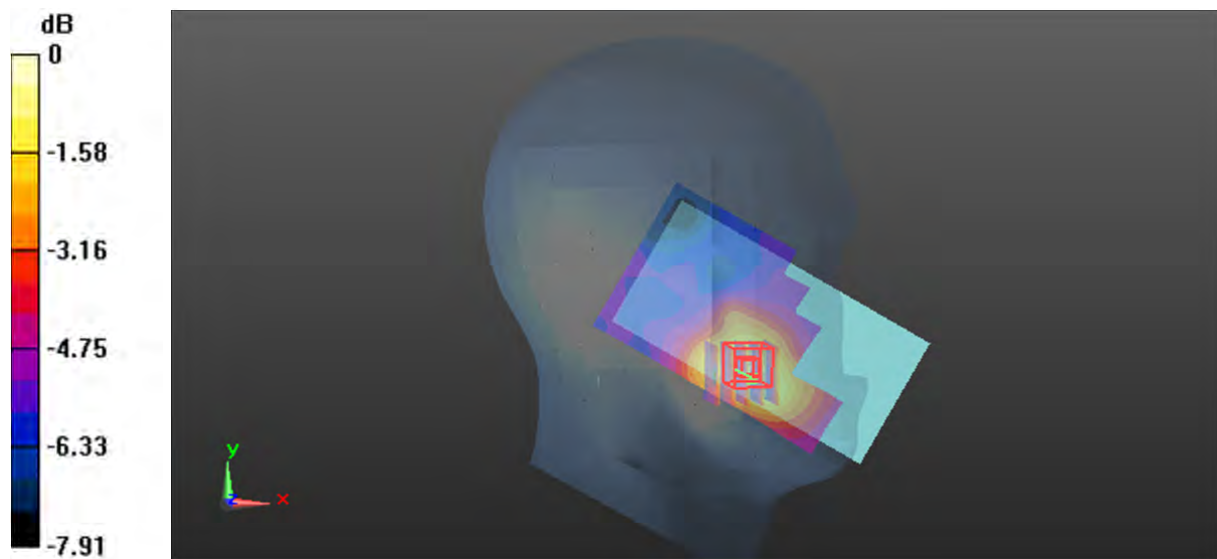

0 dB = 0.0907 W/kg = -10.42 dBW/kg

**Test Plot 12#: PCS 1900\_Head Left Tilt\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.406$  S/m;  $\epsilon_r = 39.86$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0253 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.217 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0260 W/kg

**SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.016 W/kg**

Maximum value of SAR (measured) = 0.0243 W/kg

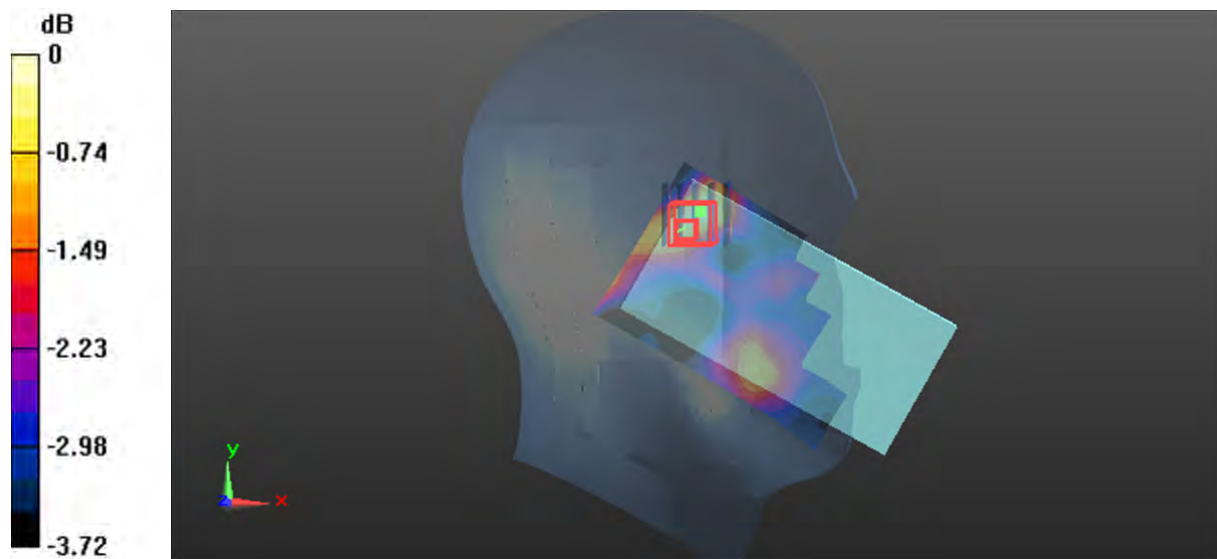

0 dB = 0.0243 W/kg = -16.14 dBW/kg

**Test Plot 13#: PCS 1900\_Head Right Cheek\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.406$  S/m;  $\epsilon_r = 39.86$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0341 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.715 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.0420 W/kg

**SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.018 W/kg**

Maximum value of SAR (measured) = 0.0368 W/kg

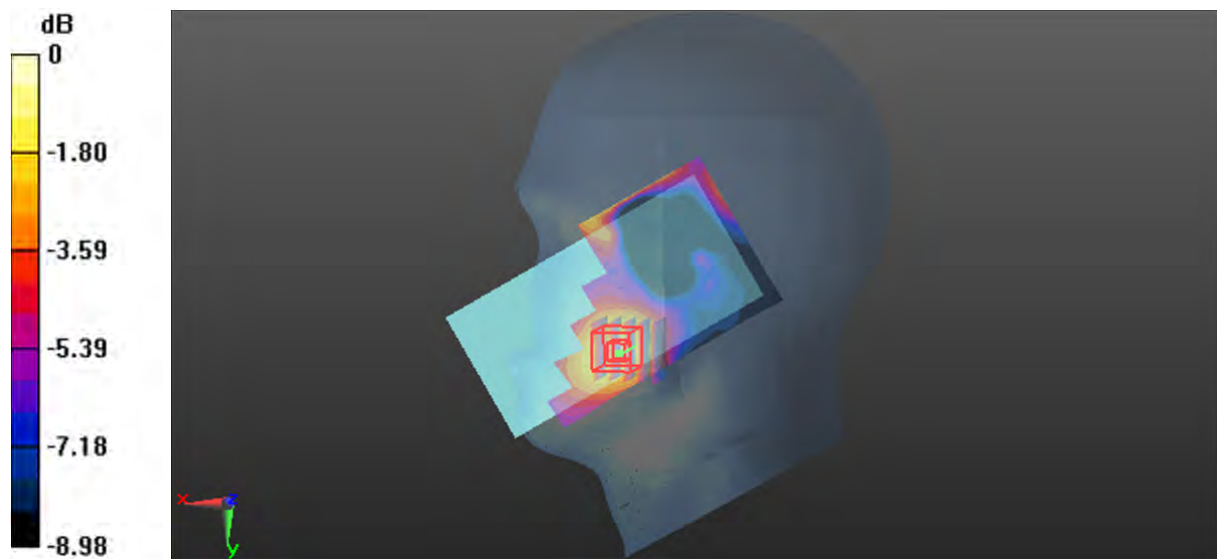

0 dB = 0.0368 W/kg = -14.34 dBW/kg

**Test Plot 14#: PCS 1900\_Head Right Tilt\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.406$  S/m;  $\epsilon_r = 39.86$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0185 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.018 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.0290 W/kg

**SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00767 W/kg**

Maximum value of SAR (measured) = 0.0187 W/kg

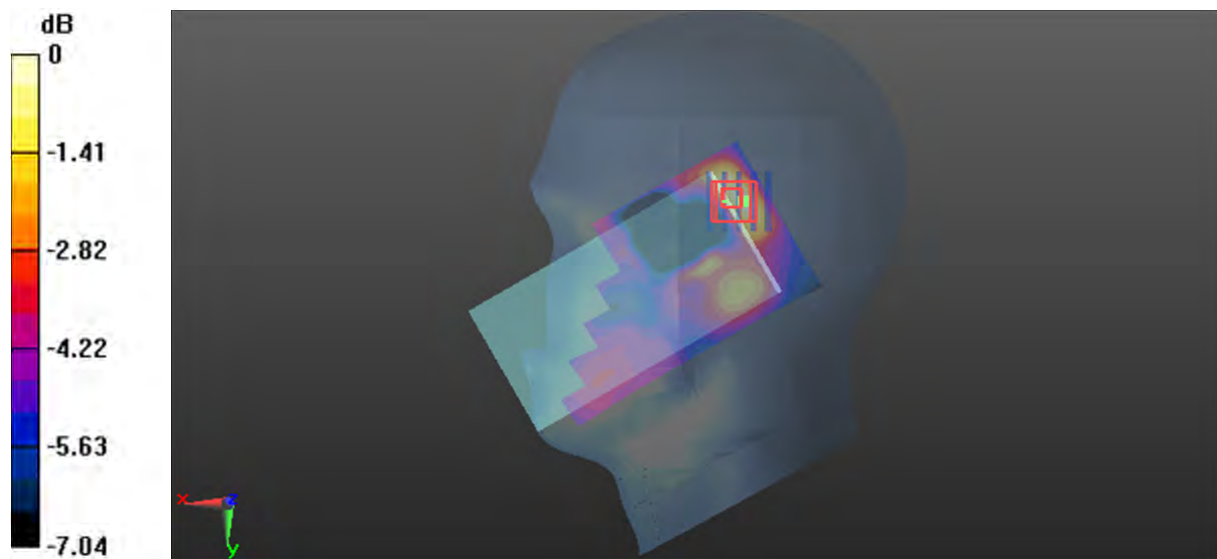

0 dB = 0.0187 W/kg = -17.28 dBW/kg

**Test Plot 15#: PCS 1900\_Body Worn Front\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.406$  S/m;  $\epsilon_r = 39.86$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.209 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.697 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.252 W/kg

**SAR(1 g) = 0.135 W/kg; SAR(10 g) = 0.072 W/kg**

Maximum value of SAR (measured) = 0.204 W/kg

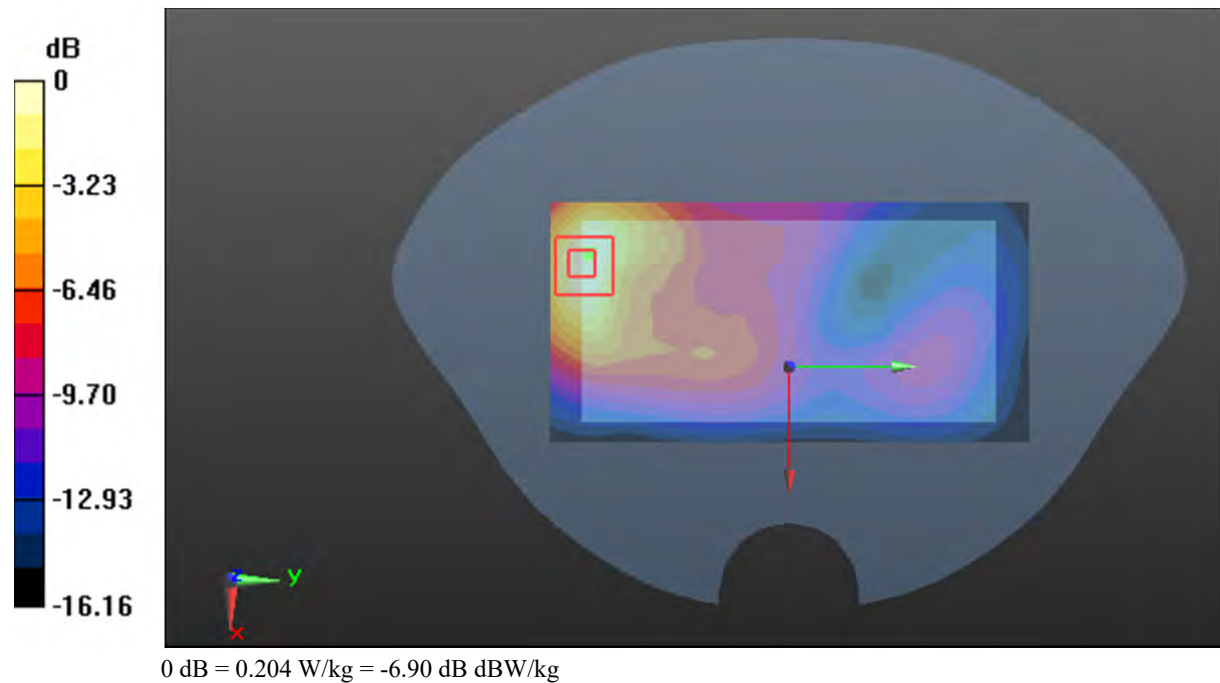

**Test Plot 16#: PCS 1900\_Body Worn Back\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.406$  S/m;  $\epsilon_r = 39.86$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.320 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.946 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.353 W/kg

**SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.106 W/kg**

Maximum value of SAR (measured) = 0.282 W/kg

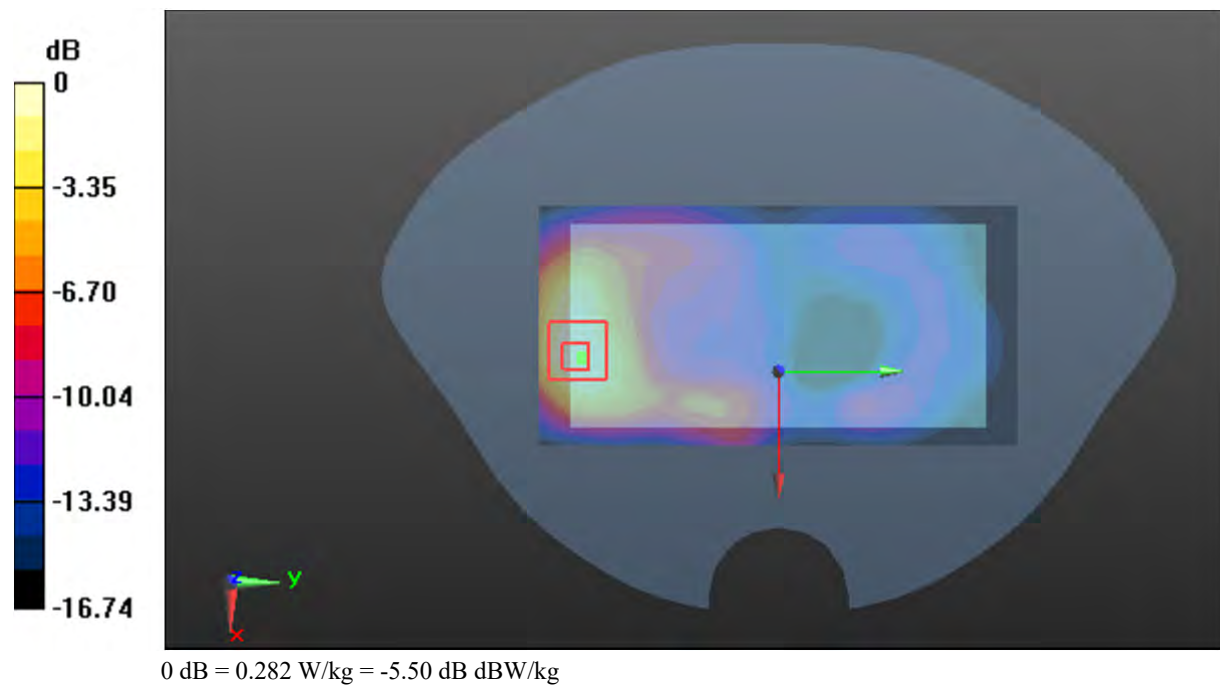

**Test Plot 17#: PCS 1900\_Body Front\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**


Communication System: Generic GPRS-2 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.406 \text{ S/m}$ ;  $\epsilon_r = 39.86$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @ 1880 MHz; Calibrated: 2022/5/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

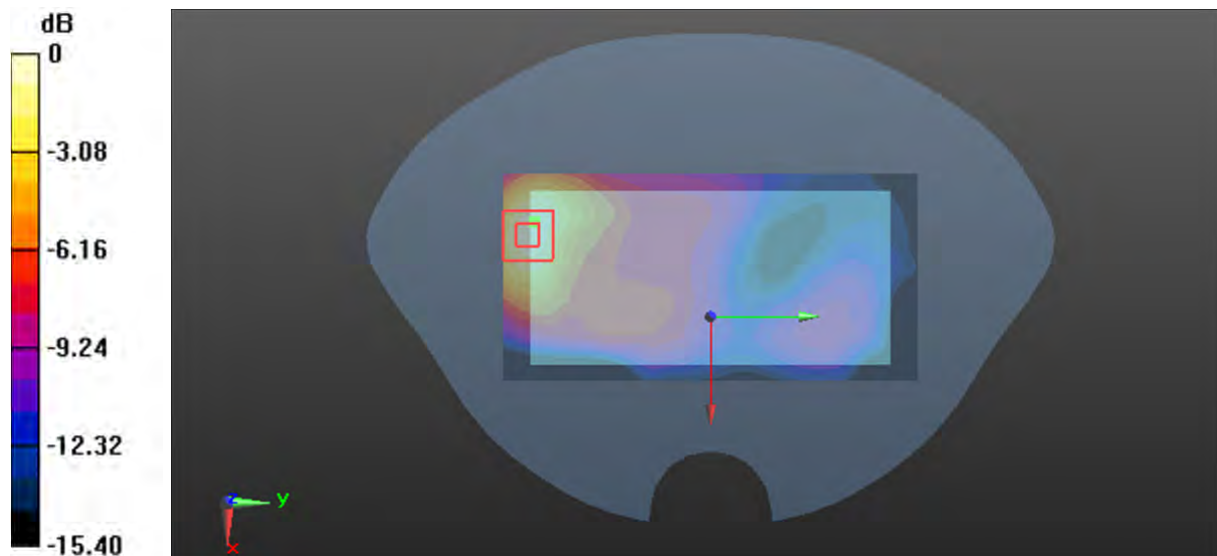**Area Scan (6x12x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ Maximum value of SAR (measured) =  $0.179 \text{ W/kg}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ Reference Value =  $3.649 \text{ V/m}$ ; Power Drift =  $0.18 \text{ dB}$ Peak SAR (extrapolated) =  $0.237 \text{ W/kg}$ **SAR(1 g) =  $0.130 \text{ W/kg}$ ; SAR(10 g) =  $0.070 \text{ W/kg}$** Maximum value of SAR (measured) =  $0.192 \text{ W/kg}$  $0 \text{ dB} = 0.192 \text{ W/kg} = -7.17 \text{ dBW/kg}$

**Test Plot 18#: PCS 1900\_Body Back\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**


Communication System: Generic GPRS-2 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.406 \text{ S/m}$ ;  $\epsilon_r = 39.86$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @ 1880 MHz; Calibrated: 2022/5/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

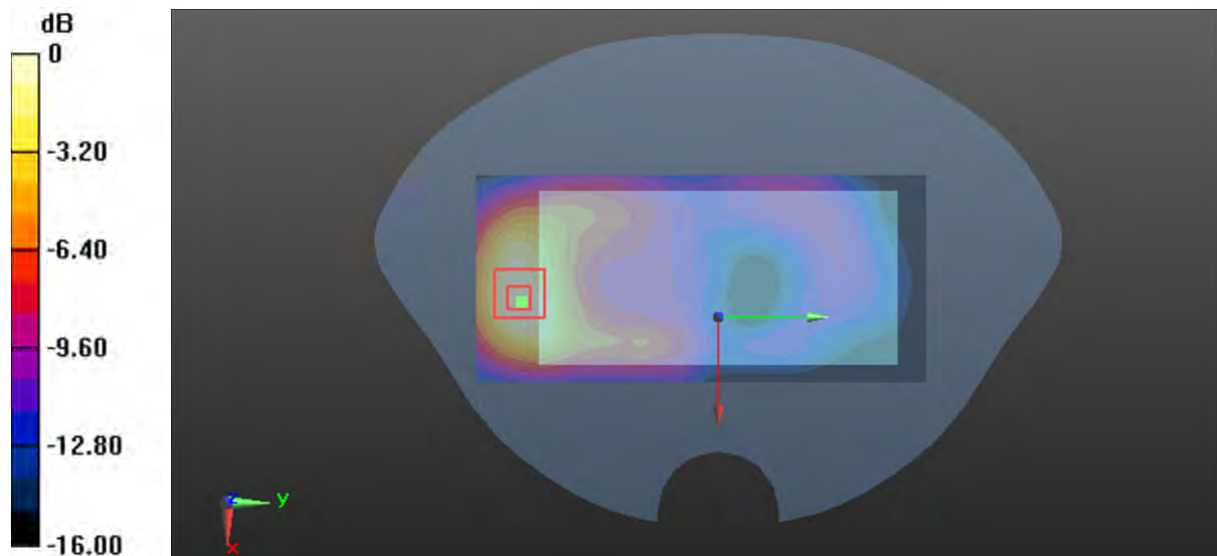**Area Scan (6x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ Maximum value of SAR (measured) =  $0.336 \text{ W/kg}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ Reference Value =  $2.815 \text{ V/m}$ ; Power Drift =  $0.17 \text{ dB}$ Peak SAR (extrapolated) =  $0.379 \text{ W/kg}$ **SAR(1 g) =  $0.215 \text{ W/kg}$ ; SAR(10 g) =  $0.122 \text{ W/kg}$** Maximum value of SAR (measured) =  $0.319 \text{ W/kg}$  $0 \text{ dB} = 0.319 \text{ W/kg} = -4.96 \text{ dBW/kg}$

**Test Plot 19#: PCS 1900\_Body Left\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic GPRS-2 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.406 \text{ S/m}$ ;  $\epsilon_r = 39.86$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @ 1880 MHz; Calibrated: 2022/5/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (4x12x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

Maximum value of SAR (measured) = 0.0406 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 3.148 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.0500 W/kg

**SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.017 W/kg**

Maximum value of SAR (measured) = 0.0409 W/kg

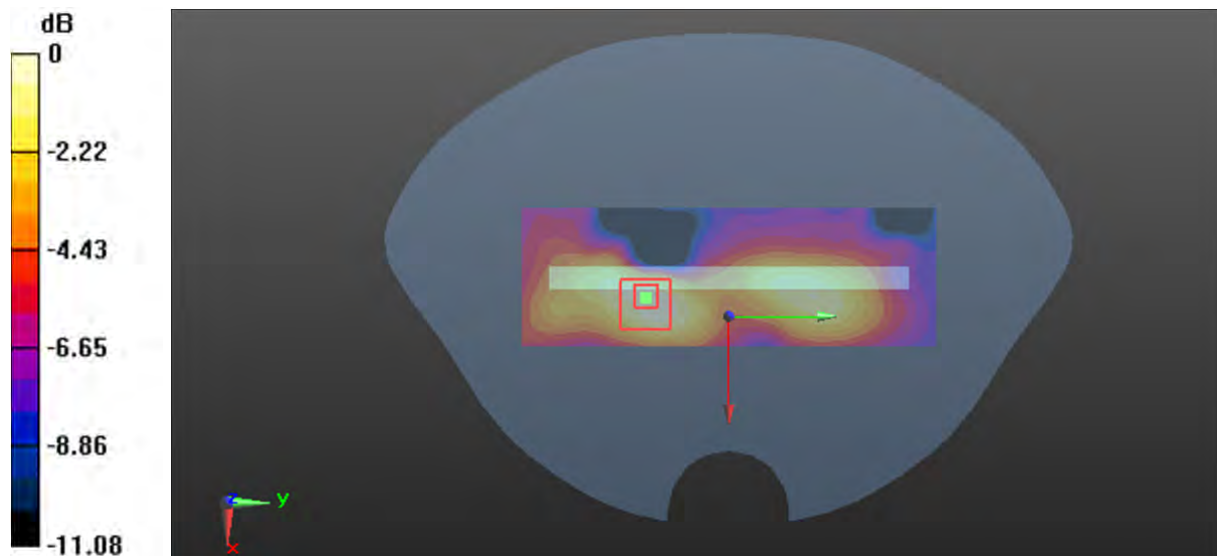

0 dB = 0.0409 W/kg = -13.88 dBW/kg

**Test Plot 20#: PCS 1900\_Body Bottom\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic GPRS-2 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.406$  S/m;  $\epsilon_r = 39.86$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x10x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.734 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.73 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.858 W/kg

**SAR(1 g) = 0.458 W/kg; SAR(10 g) = 0.240 W/kg**

Maximum value of SAR (measured) = 0.709 W/kg

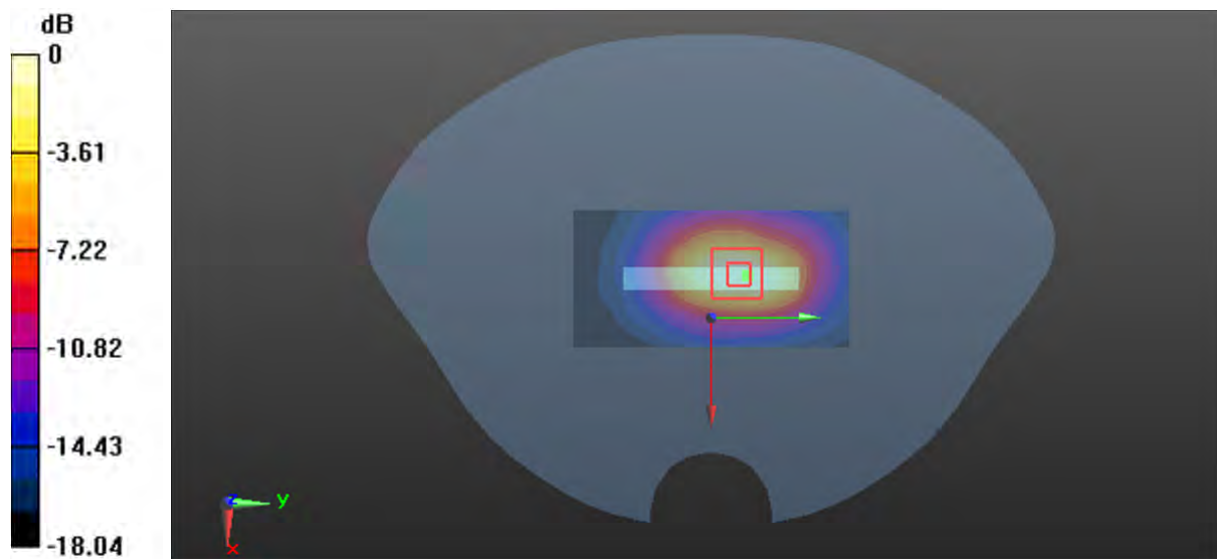

0 dB = 0.709 W/kg = -1.49 dBW/kg

**Test Plot 21#: WCDMA Band 2\_Head Left Cheek\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.406$  S/m;  $\epsilon_r = 39.86$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0958 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.013 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.113 W/kg

**SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.053 W/kg**

Maximum value of SAR (measured) = 0.0999 W/kg

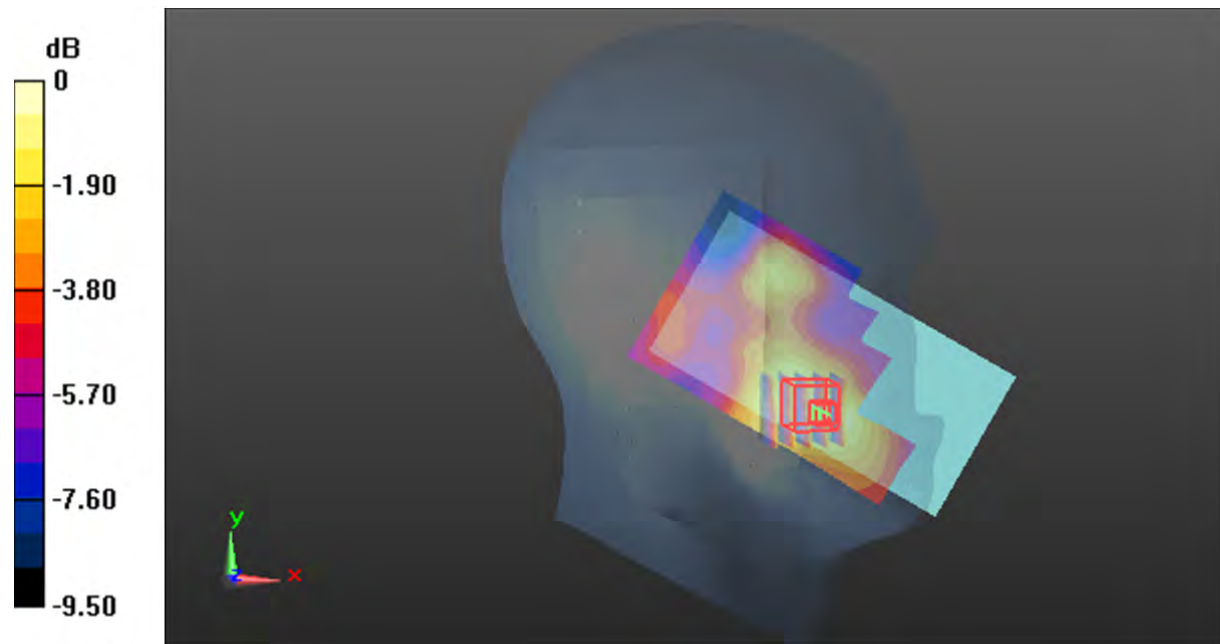

0 dB = 0.0999 W/kg = -10.00 dB dBW/kg

**Test Plot 22#: WCDMA Band 2\_Head Left Tilt\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.406$  S/m;  $\epsilon_r = 39.86$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0610 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.823 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0840 W/kg

**SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.031 W/kg**

Maximum value of SAR (measured) = 0.0715 W/kg

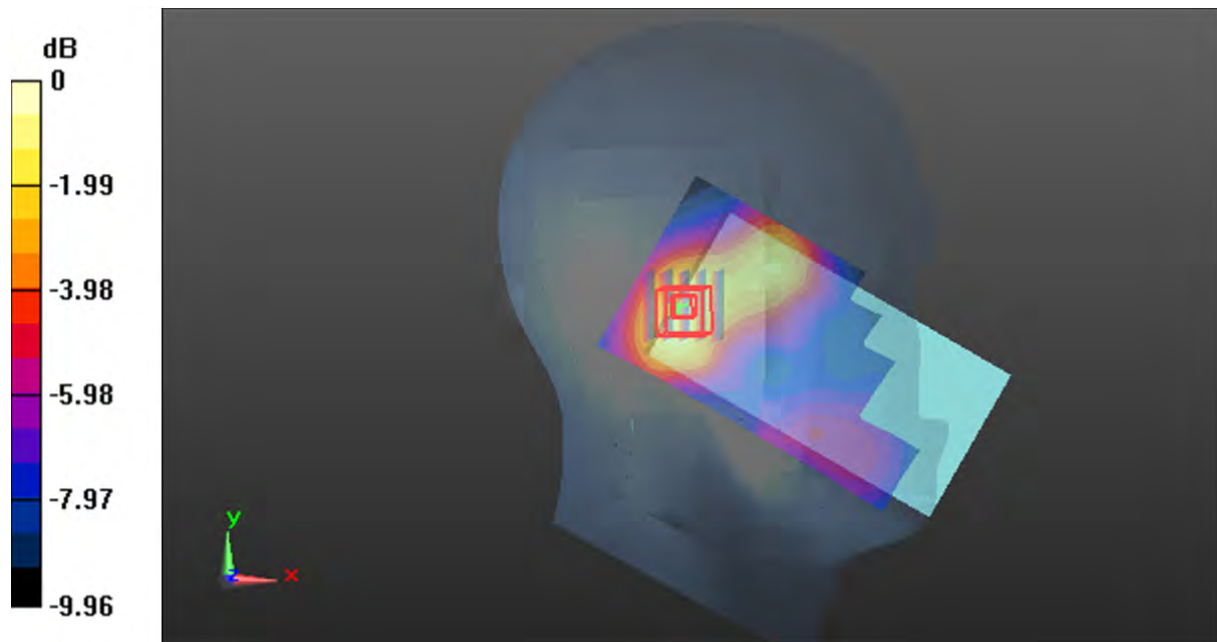

0 dB = 0.0715 W/kg = -11.46 dB dBW/kg

**Test Plot 23#: WCDMA Band 2\_Head Right Cheek\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.406$  S/m;  $\epsilon_r = 39.86$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.104 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.135 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.122 W/kg

**SAR(1 g) = 0.067 W/kg; SAR(10 g) = 0.042 W/kg**

Maximum value of SAR (measured) = 0.0989 W/kg

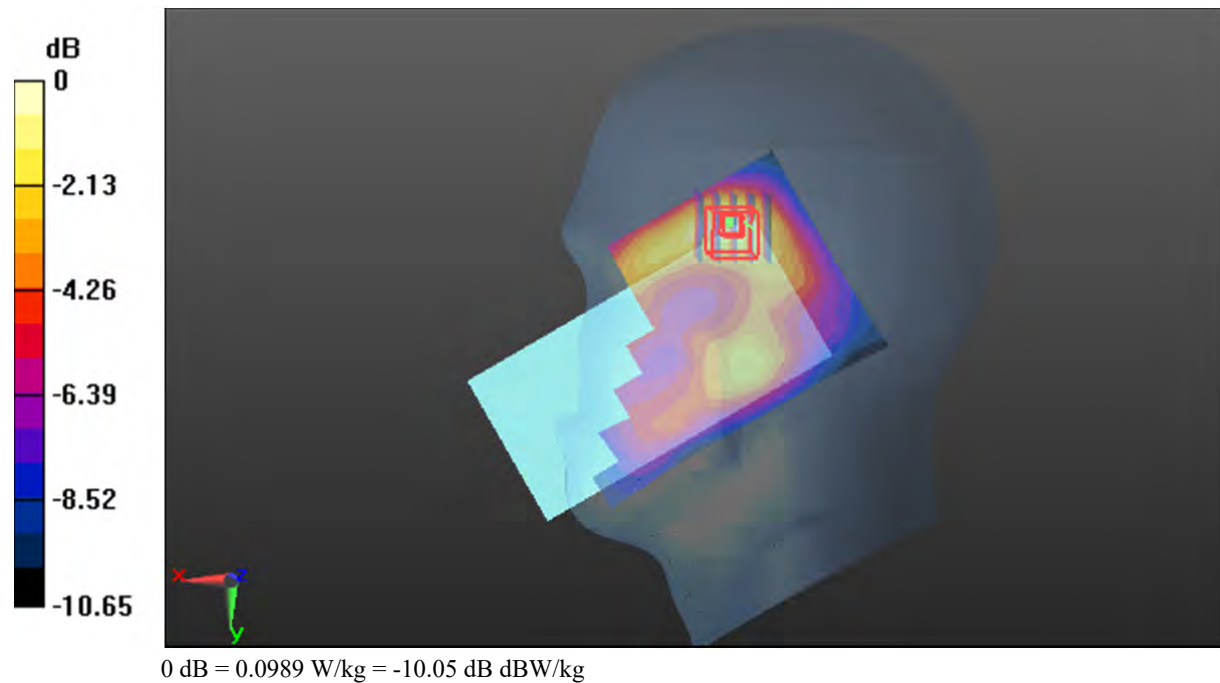

**Test Plot 24#: WCDMA Band 2\_Head Right Tilt\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.406$  S/m;  $\epsilon_r = 39.86$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0760 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.370 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.109 W/kg

**SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.034 W/kg**

Maximum value of SAR (measured) = 0.0858 W/kg

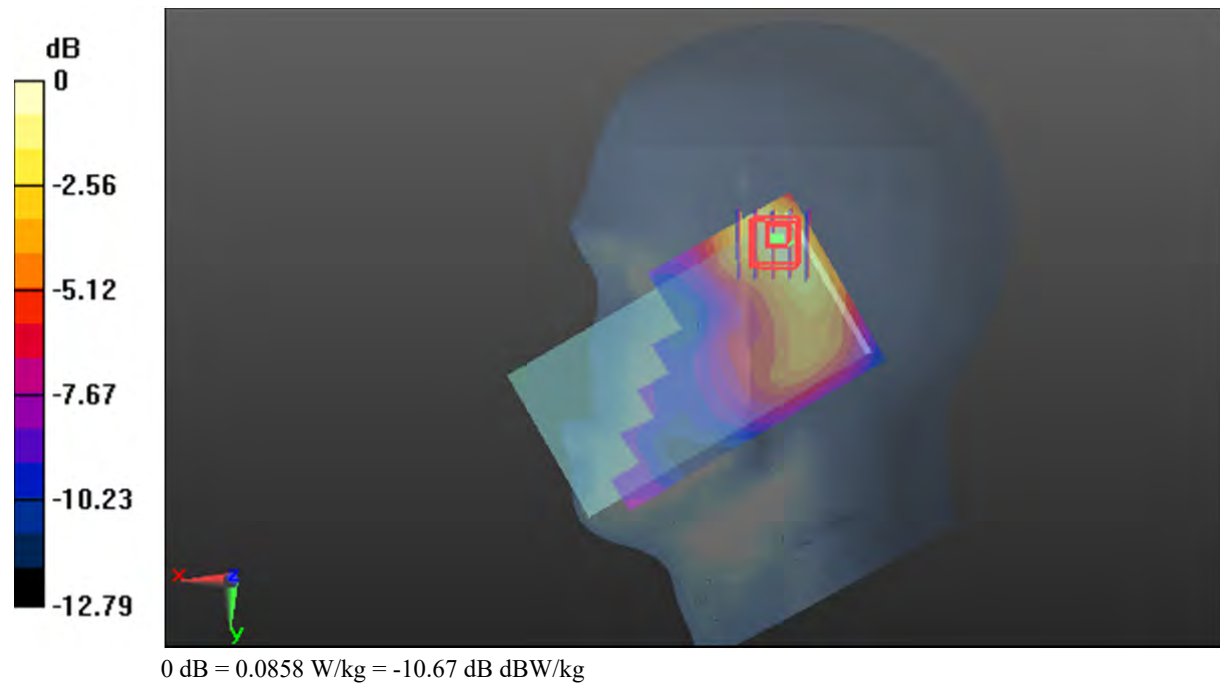

**Test Plot 25#: WCDMA Band 2\_Body Front\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.406$  S/m;  $\epsilon_r = 39.86$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.305 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.995 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.389 W/kg

**SAR(1 g) = 0.212 W/kg; SAR(10 g) = 0.118 W/kg**

Maximum value of SAR (measured) = 0.322 W/kg

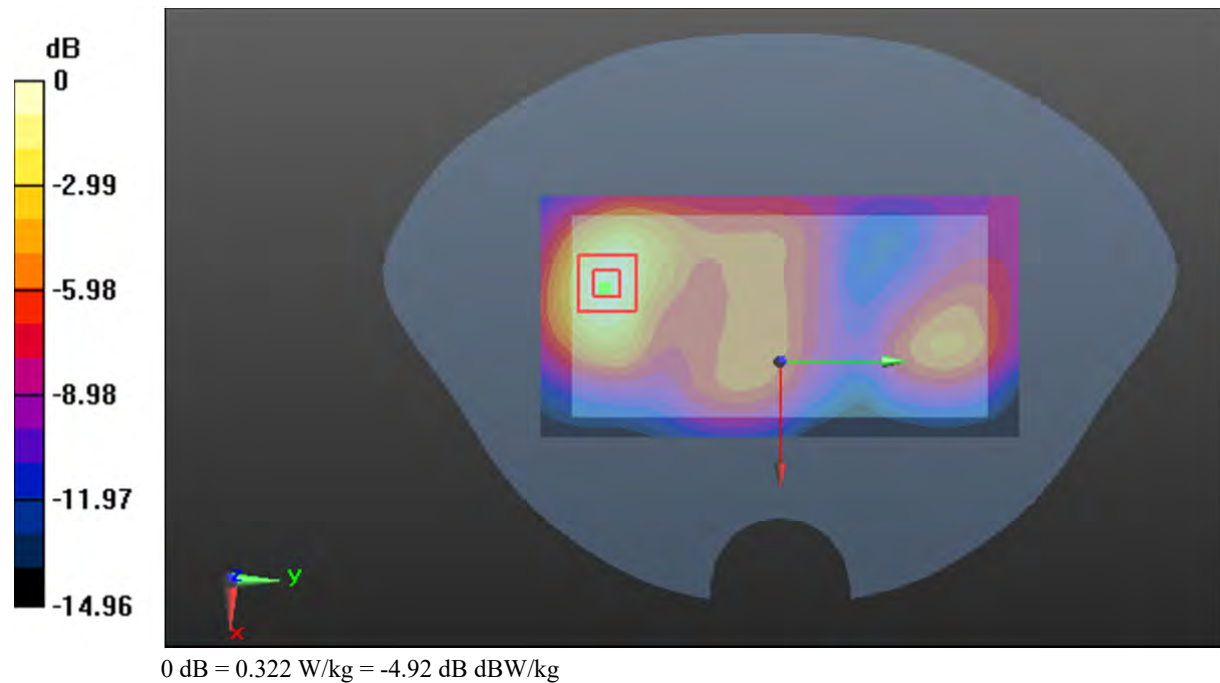

**Test Plot 26#: WCDMA Band 2\_Body Back\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.406$  S/m;  $\epsilon_r = 39.86$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.772 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.200 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 0.990 W/kg

**SAR(1 g) = 0.508 W/kg; SAR(10 g) = 0.263 W/kg**

Maximum value of SAR (measured) = 0.800 W/kg

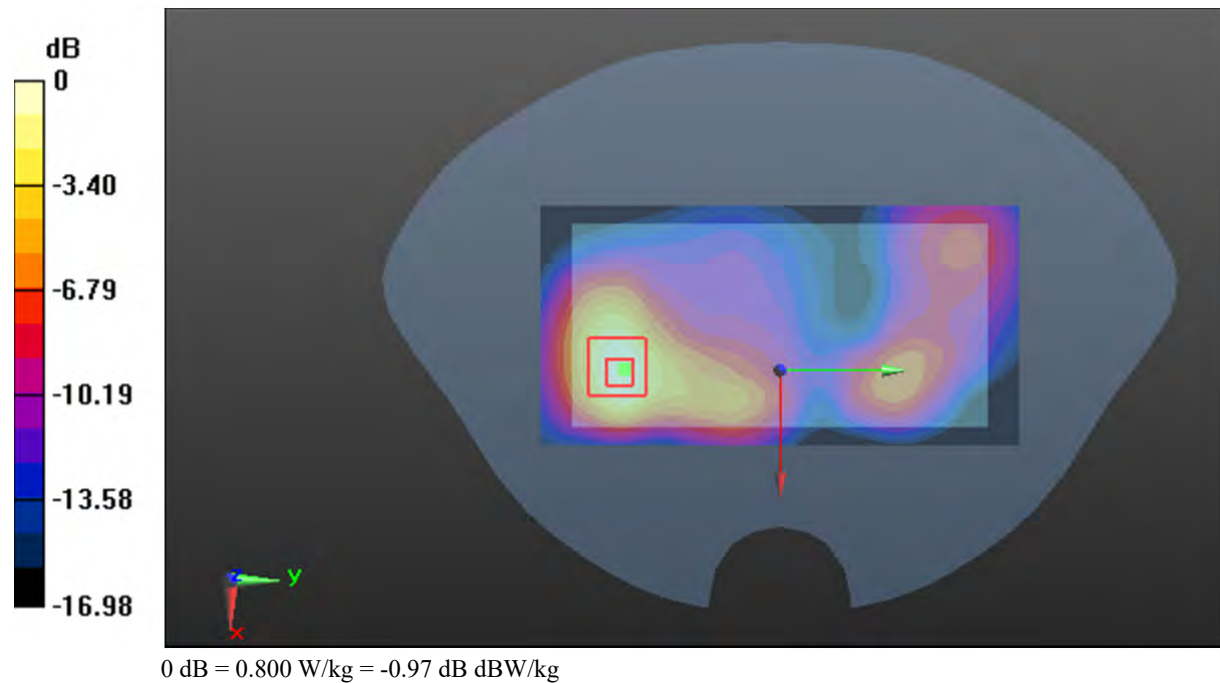

**Test Plot 27#: WCDMA Band 2\_Body Left\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.406$  S/m;  $\epsilon_r = 39.86$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (4x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.120 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.559 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.135 W/kg

**SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.045 W/kg**

Maximum value of SAR (measured) = 0.115 W/kg

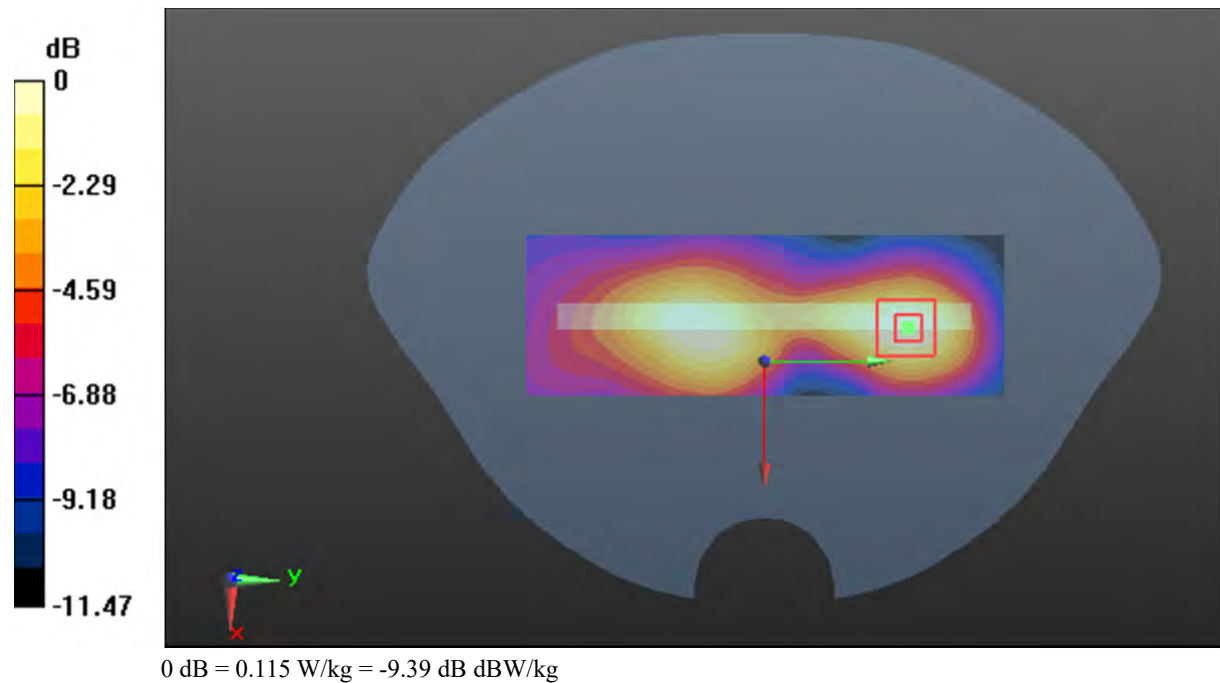

**Test Plot 28#: WCDMA Band 2\_Body Bottom\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.406$  S/m;  $\epsilon_r = 39.86$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x10x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.828 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.43 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.01 W/kg

**SAR(1 g) = 0.546 W/kg; SAR(10 g) = 0.285 W/kg**

Maximum value of SAR (measured) = 0.825 W/kg

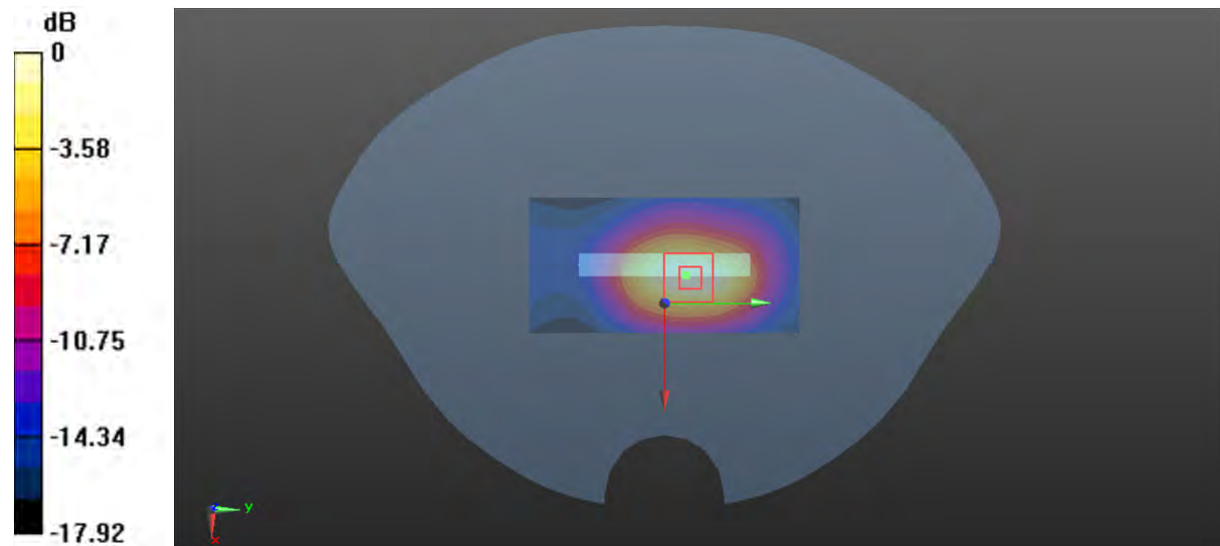

0 dB = 0.825 W/kg = -0.84 dBW/kg

**Test Plot 29#: WCDMA Band 4\_Head Left Cheek\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.346$  S/m;  $\epsilon_r = 39.894$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1732.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.170 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.025 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.192 W/kg

**SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.085 W/kg**

Maximum value of SAR (measured) = 0.167 W/kg

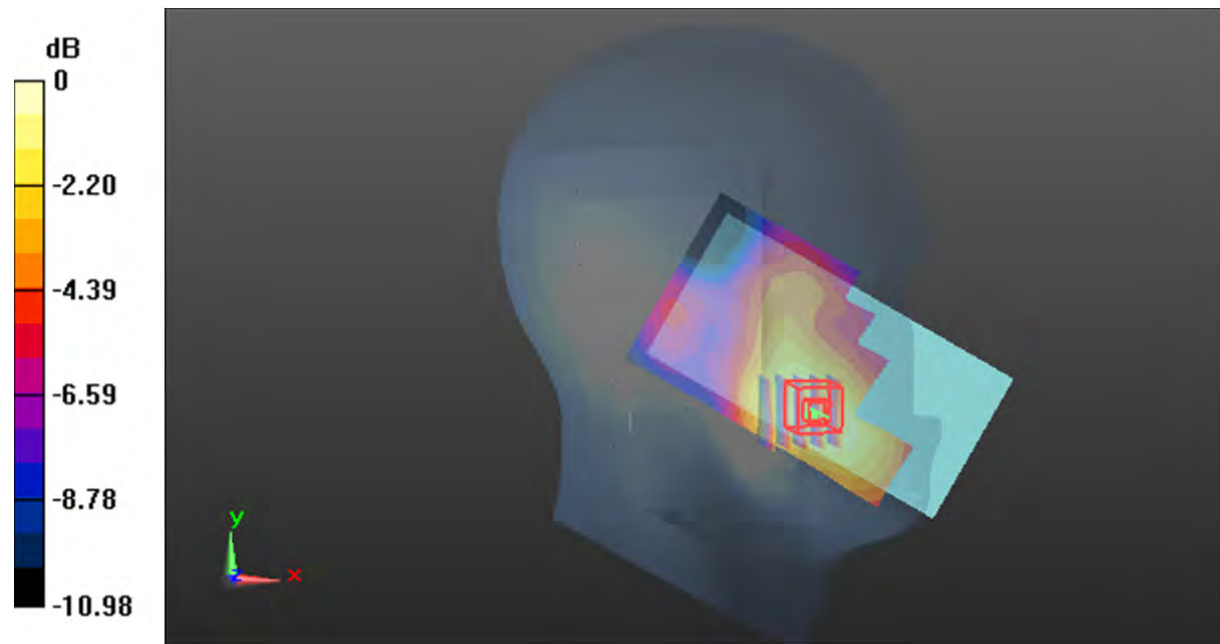

0 dB = 0.167 W/kg = -7.77 dB dBW/kg

**Test Plot 30#: WCDMA Band 4\_Head Left Tilt\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.346$  S/m;  $\epsilon_r = 39.894$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1732.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0634 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.138 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0850 W/kg

**SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.032 W/kg**

Maximum value of SAR (measured) = 0.0734 W/kg

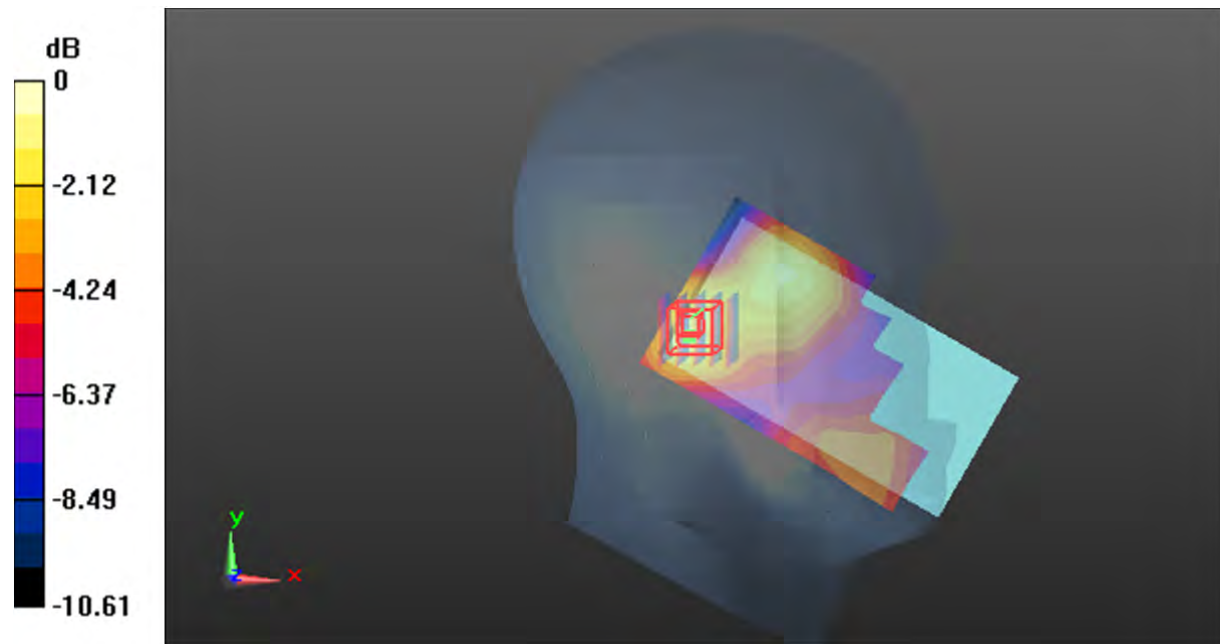

0 dB = 0.0734 W/kg = -11.34 dB dBW/kg

**Test Plot 31#: WCDMA Band 4\_Head Right Cheek\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.346$  S/m;  $\epsilon_r = 39.894$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1732.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0919 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.517 V/m; Power Drift = -00 dB

Peak SAR (extrapolated) = 0.112 W/kg

**SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.040 W/kg**

Maximum value of SAR (measured) = 0.0940 W/kg

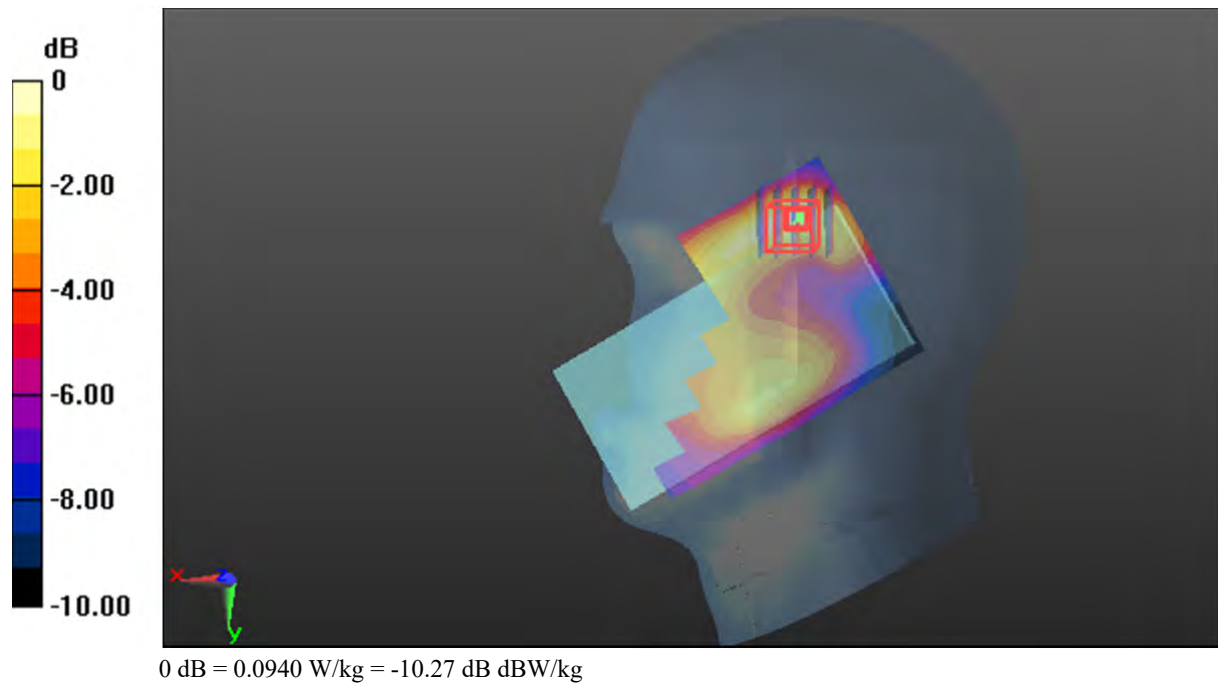

**Test Plot 32#: WCDMA Band 4\_Head Right Tilt\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.346$  S/m;  $\epsilon_r = 39.894$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1732.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0787 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.045 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.115 W/kg

**SAR(1 g) = 0.058 W/kg; SAR(10 g) = 0.034 W/kg**

Maximum value of SAR (measured) = 0.0923 W/kg

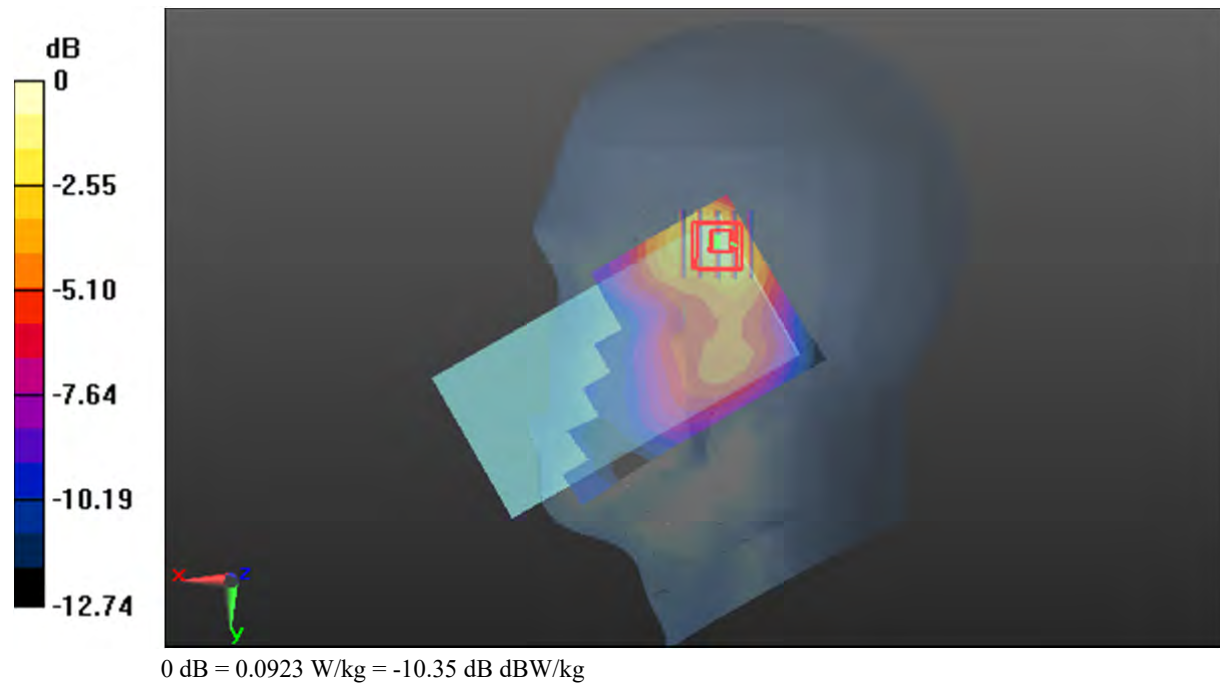

**Test Plot 33#: WCDMA Band 4\_Body Front\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.346$  S/m;  $\epsilon_r = 39.894$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1732.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.381 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.315 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.445 W/kg

**SAR(1 g) = 0.253 W/kg; SAR(10 g) = 0.151 W/kg**

Maximum value of SAR (measured) = 0.359 W/kg

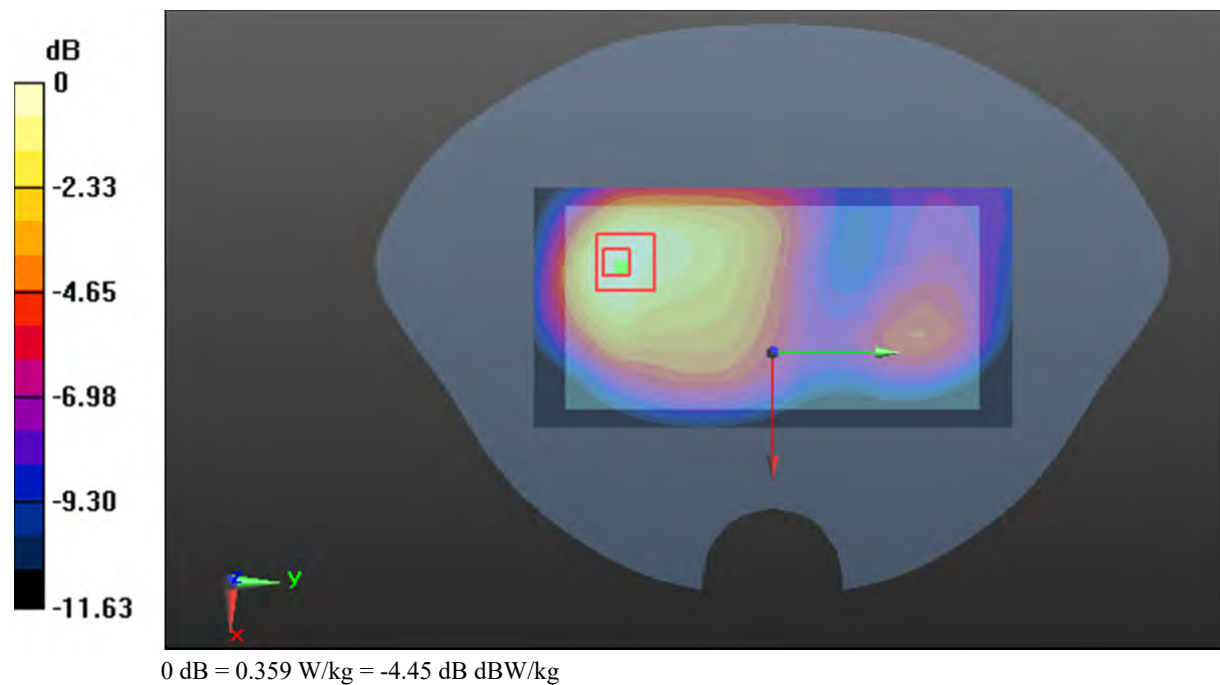

**Test Plot 34#: WCDMA Band 4\_Body Back\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.346$  S/m;  $\epsilon_r = 39.894$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1732.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.646 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.748 V/m; Power Drift = 0 dB

Peak SAR (extrapolated) = 0.786 W/kg

**SAR(1 g) = 0.395 W/kg; SAR(10 g) = 0.216 W/kg**

Maximum value of SAR (measured) = 0.629 W/kg

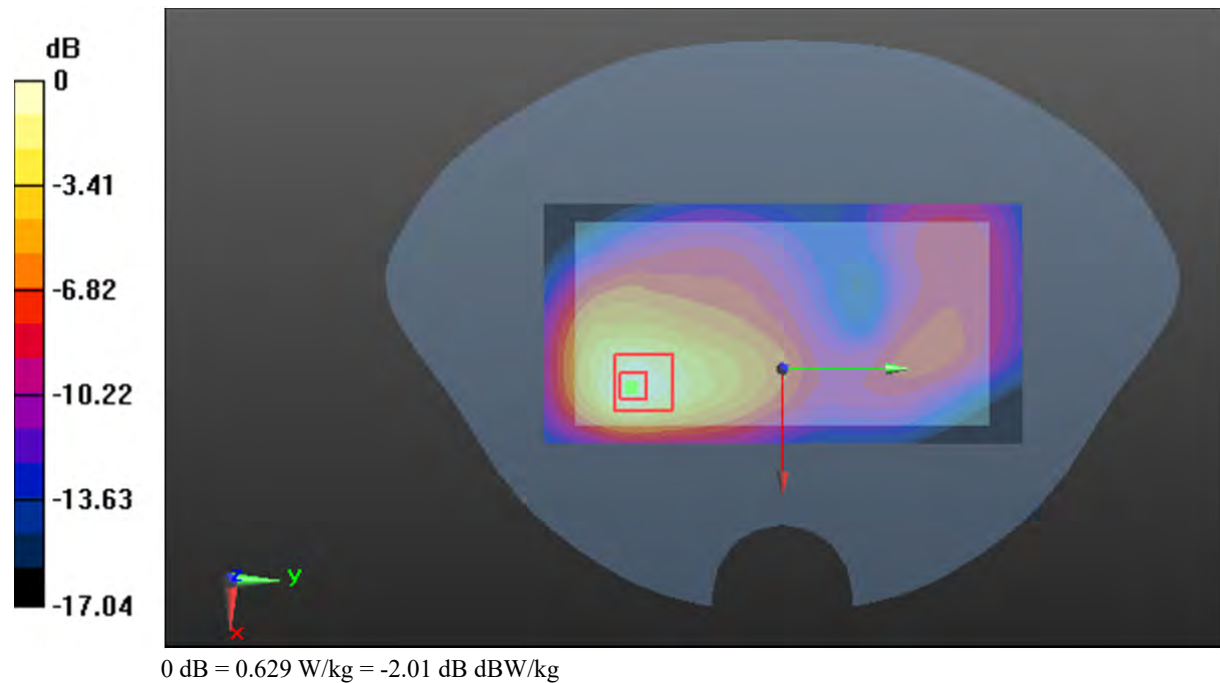

**Test Plot 35#: WCDMA Band 4\_Body Left\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.346$  S/m;  $\epsilon_r = 39.894$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1732.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (4x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.131 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.048 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.154 W/kg

**SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.055 W/kg**

Maximum value of SAR (measured) = 0.129 W/kg

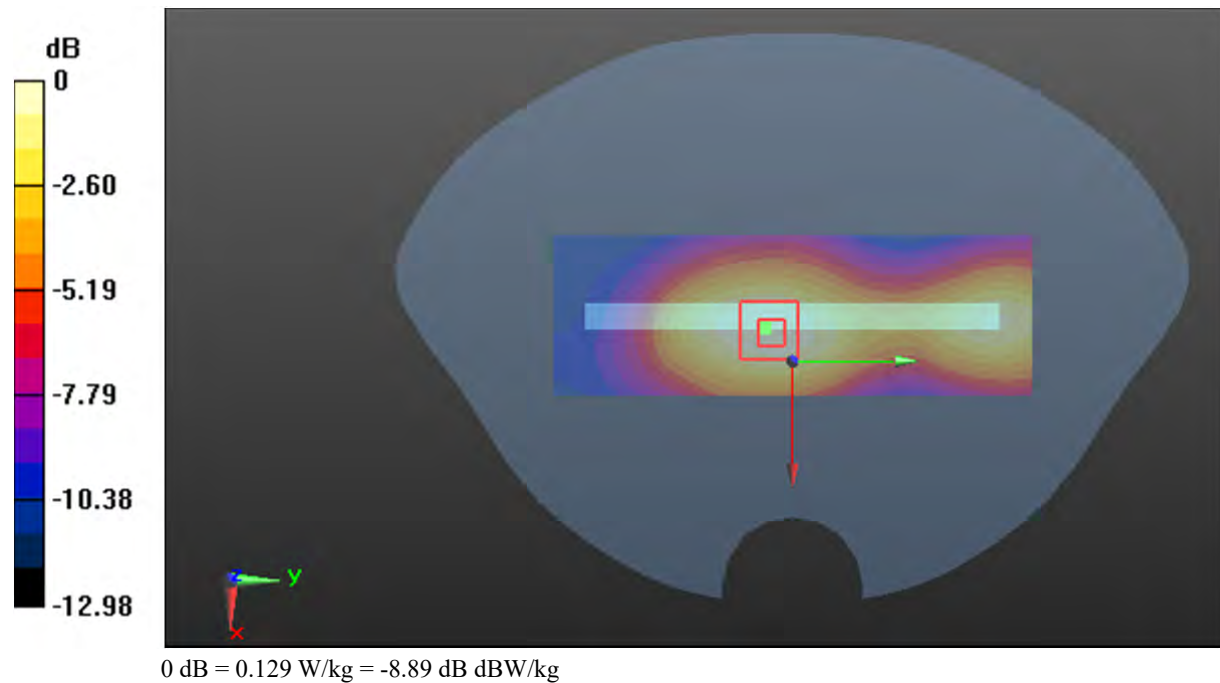

**Test Plot 36#: WCDMA Band 4\_Body Bottom\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.346$  S/m;  $\epsilon_r = 39.894$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1732.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x10x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.828 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.524 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.966 W/kg

**SAR(1 g) = 0.513 W/kg; SAR(10 g) = 0.270 W/kg**

Maximum value of SAR (measured) = 0.802 W/kg

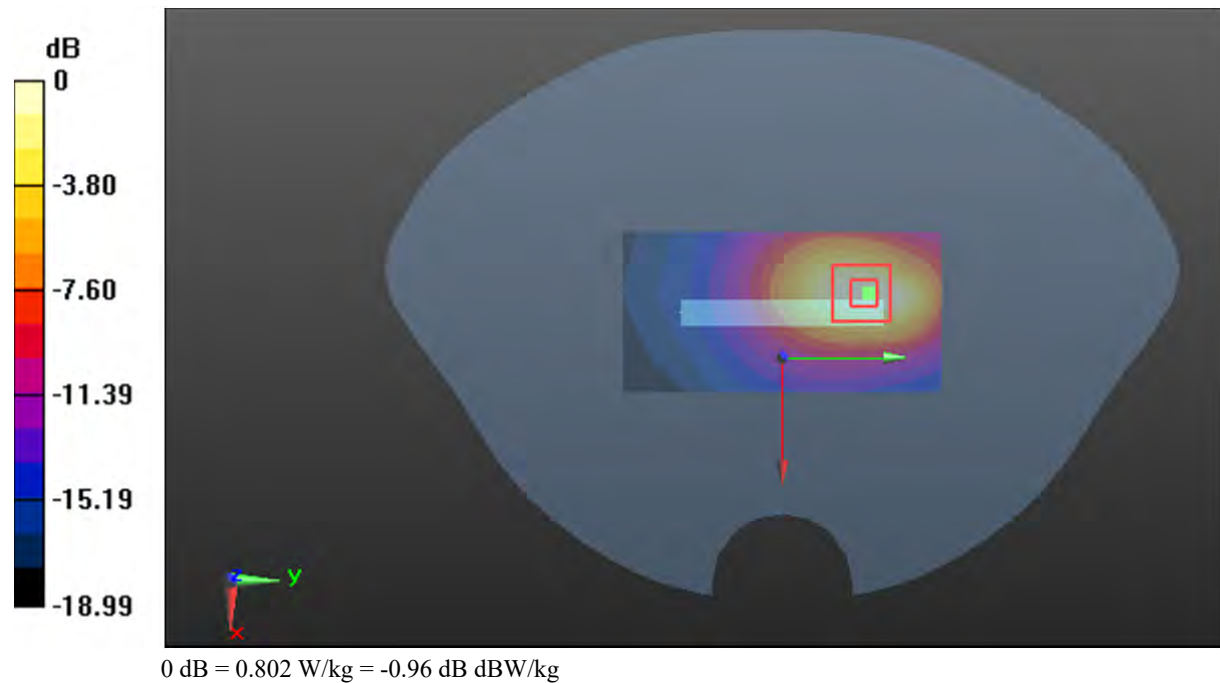

**Test Plot 37#: WCDMA Band 5\_Head Left Cheek\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.922$  S/m;  $\epsilon_r = 41.721$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @836.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0840 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.298 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0890 W/kg

**SAR(1 g) = 0.069 W/kg; SAR(10 g) = 0.054 W/kg**

Maximum value of SAR (measured) = 0.0822 W/kg

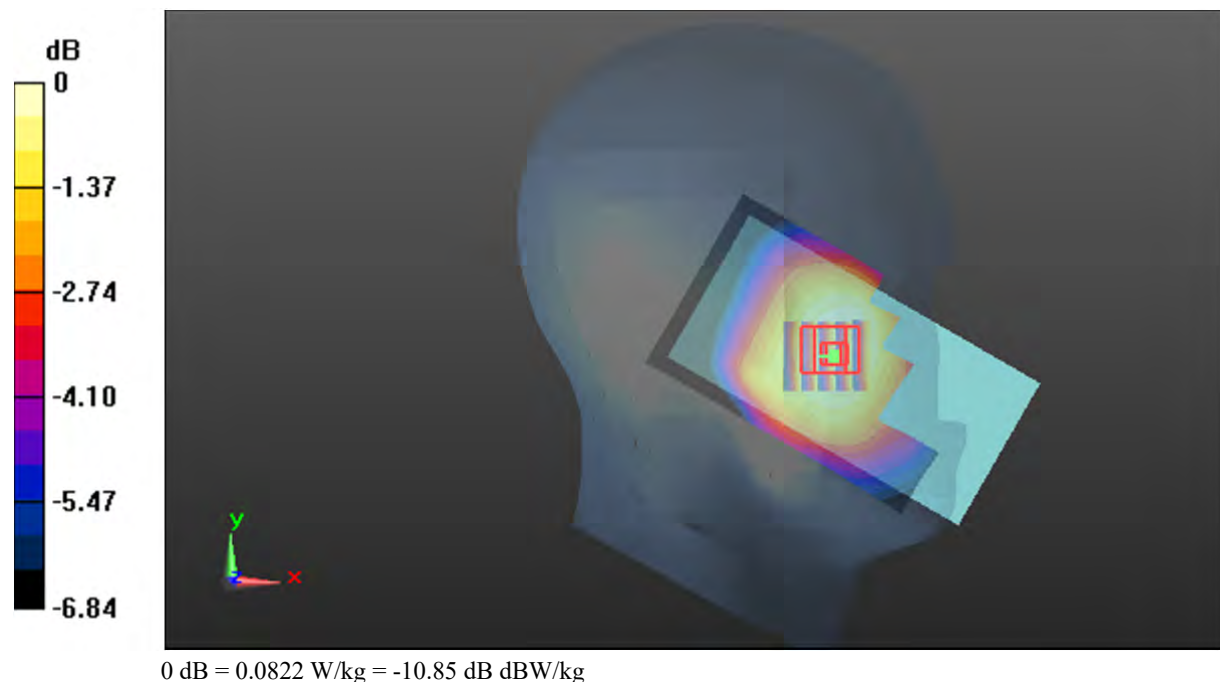

**Test Plot 38#: WCDMA Band 5\_Head Left Tilt\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.922$  S/m;  $\epsilon_r = 41.721$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @836.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0537 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.329 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.0570 W/kg

**SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.035 W/kg**

Maximum value of SAR (measured) = 0.0521 W/kg

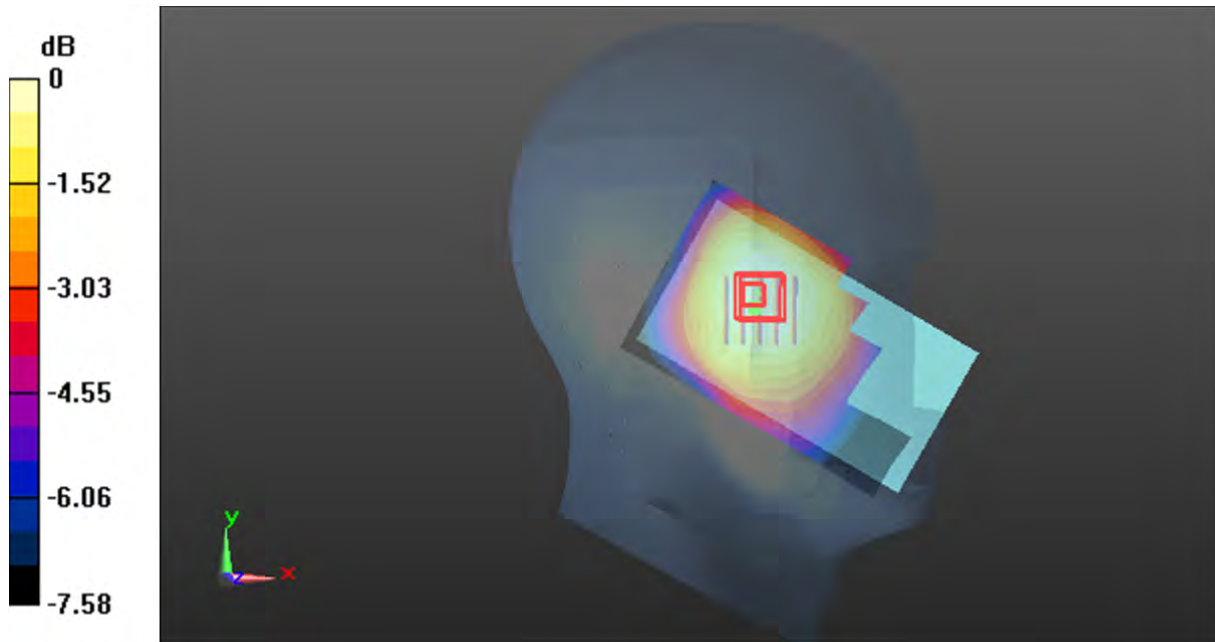

0 dB = 0.0521 W/kg = -12.83 dB dBW/kg

**Test Plot 39#: WCDMA Band 5\_Head Right Cheek\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.922$  S/m;  $\epsilon_r = 41.721$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @836.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0782 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.163 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0860 W/kg

**SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.050 W/kg**

Maximum value of SAR (measured) = 0.0795 W/kg

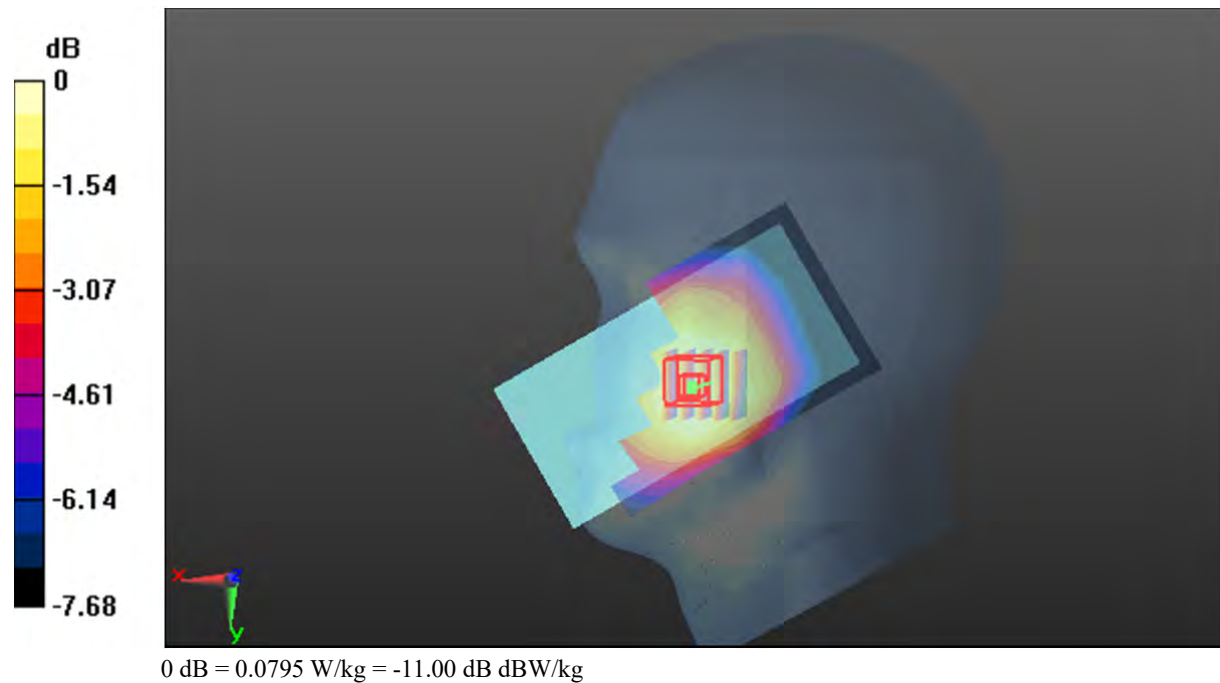

**Test Plot 40#: WCDMA Band 5\_Head Right Tilt\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.922$  S/m;  $\epsilon_r = 41.721$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @836.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0405 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.383 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0410 W/kg

**SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.024 W/kg**

Maximum value of SAR (measured) = 0.0375 W/kg

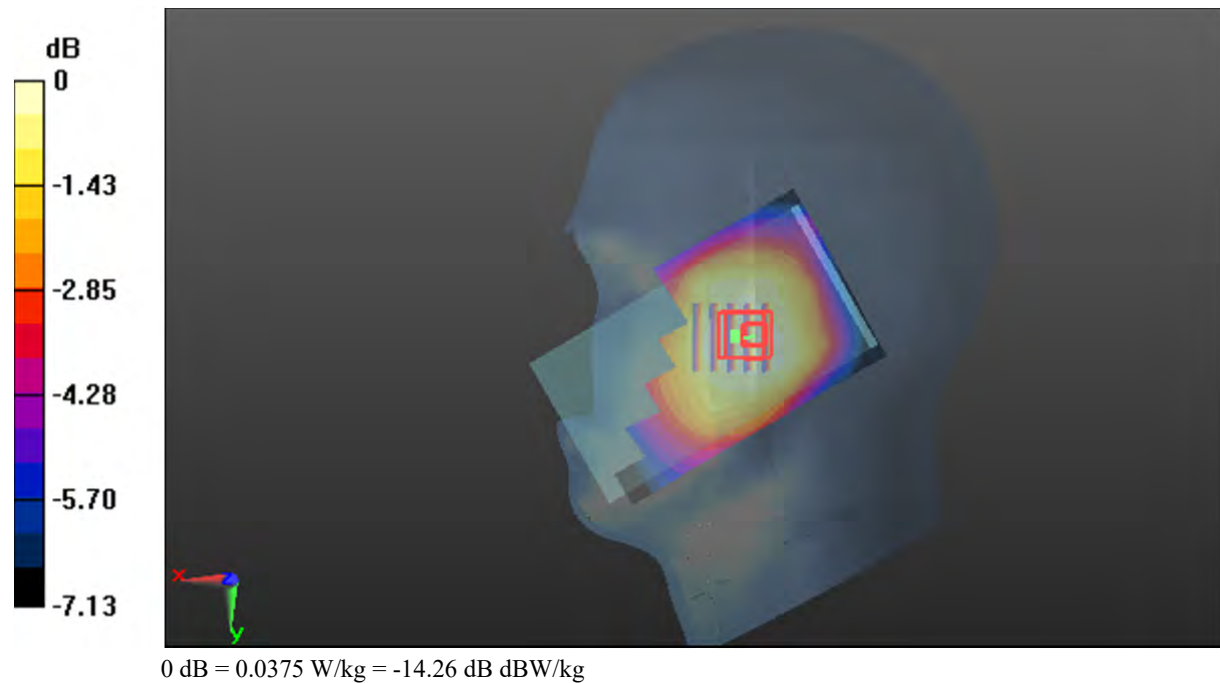

**Test Plot 41#: WCDMA Band 5\_Body Front\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.922$  S/m;  $\epsilon_r = 41.721$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @836.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0932 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.303 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.107 W/kg

**SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.038 W/kg**

Maximum value of SAR (measured) = 0.0854 W/kg

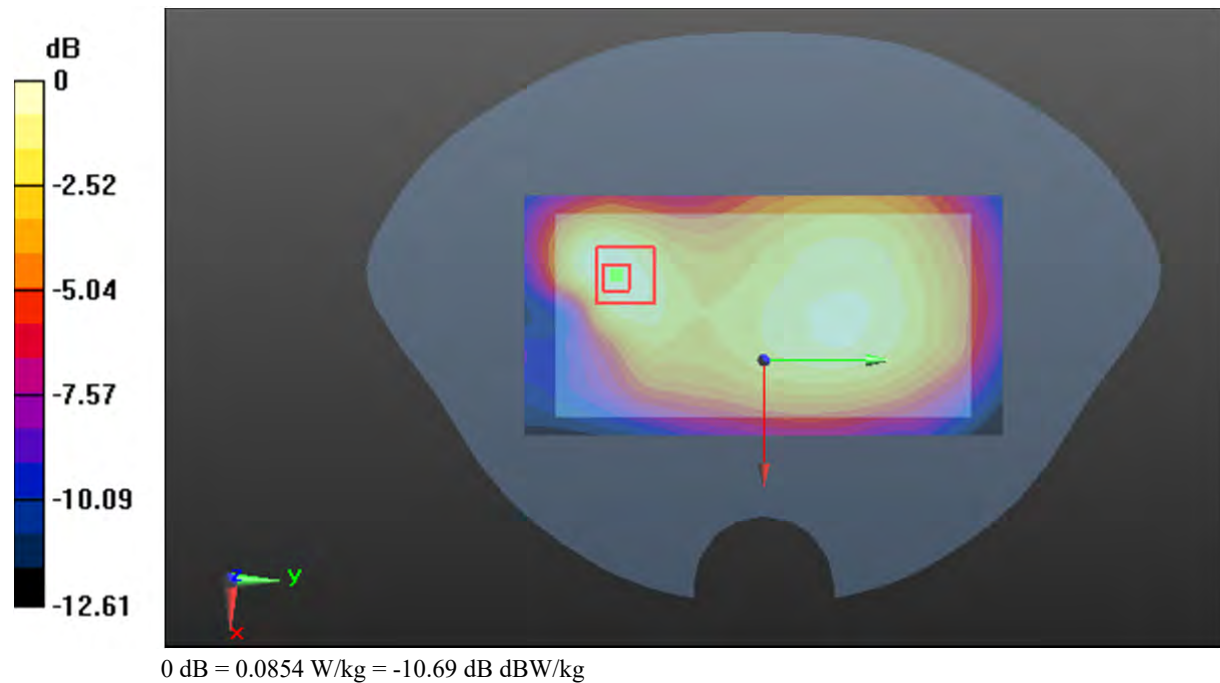

**Test Plot 42#: WCDMA Band 5\_Body Back\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.922$  S/m;  $\epsilon_r = 41.721$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @836.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.298 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.586 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.332 W/kg

**SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.074 W/kg**

Maximum value of SAR (measured) = 0.253 W/kg

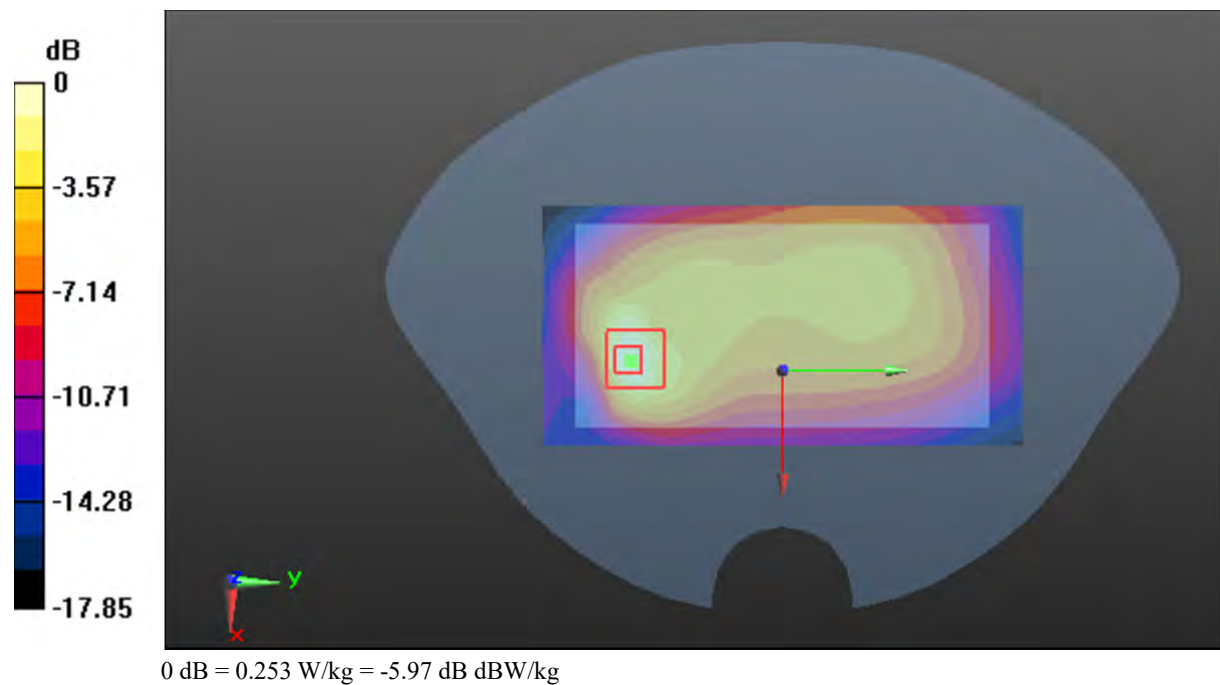

**Test Plot 43#: WCDMA Band 5\_Body Left\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.922$  S/m;  $\epsilon_r = 41.721$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @836.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (4x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.256 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.63 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.297 W/kg

**SAR(1 g) = 0.186 W/kg; SAR(10 g) = 0.124 W/kg**

Maximum value of SAR (measured) = 0.255 W/kg

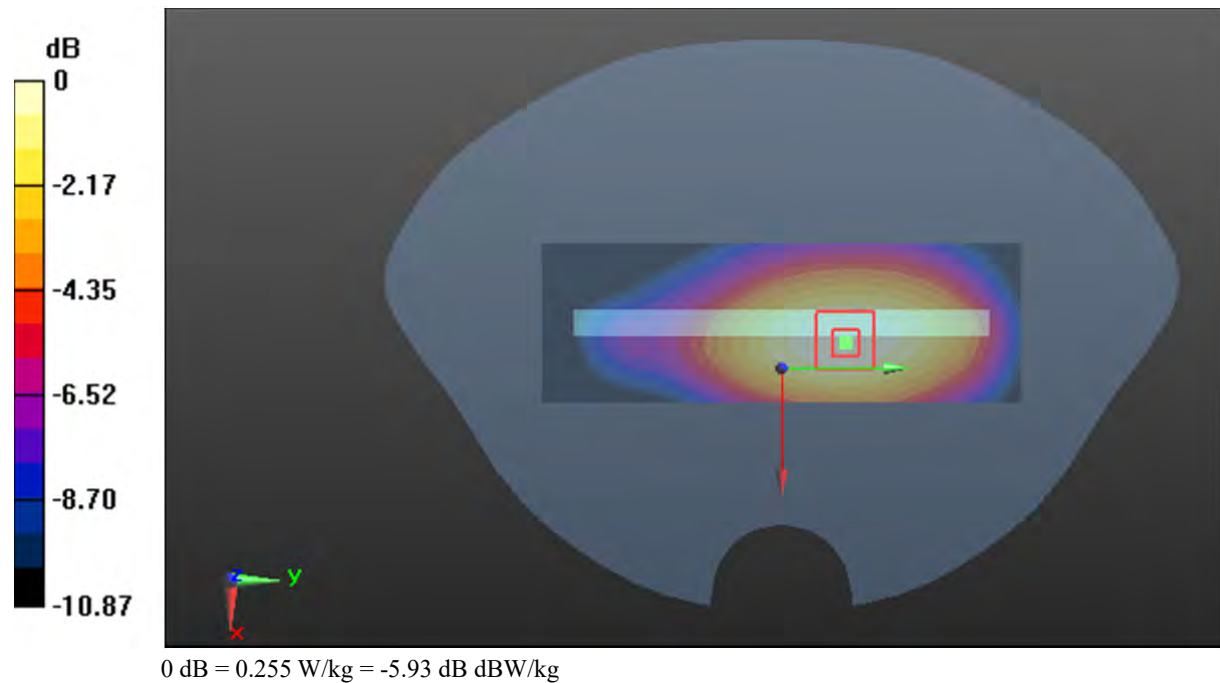

**Test Plot 44#: WCDMA Band 5\_Body Bottom\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.922$  S/m;  $\epsilon_r = 41.721$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @836.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x10x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.134 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.541 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.190 W/kg

**SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.041 W/kg**

Maximum value of SAR (measured) = 0.137 W/kg

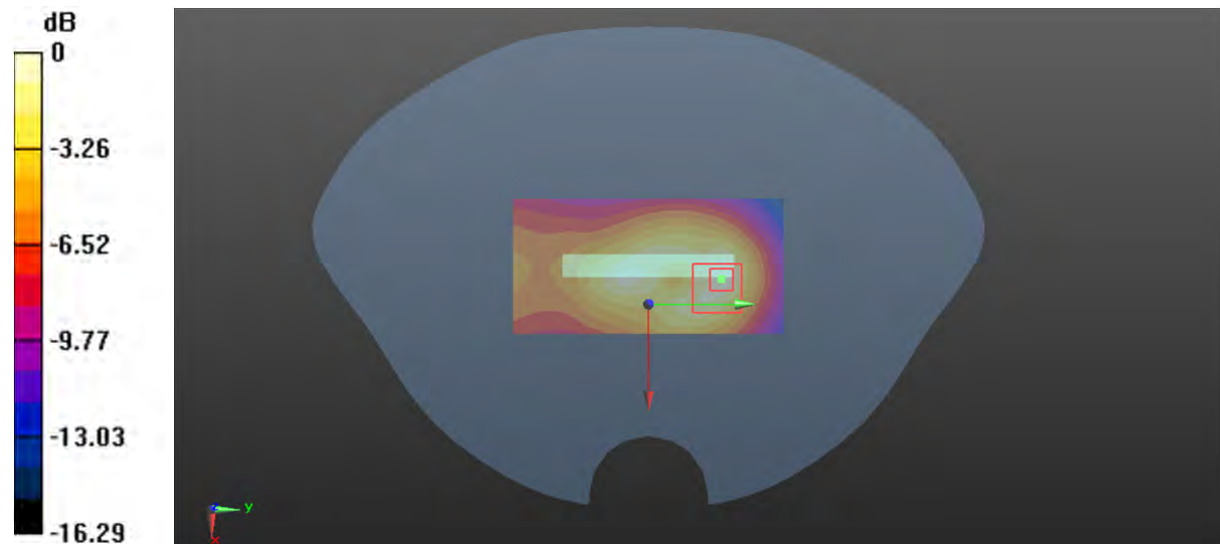

0 dB = 0.137 W/kg = -8.63 dBW/kg

**Test Plot 45#: LTE Band 2\_Head Left Cheek\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.406$  S/m;  $\epsilon_r = 39.86$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0604 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.878 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0750 W/kg

**SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.032 W/kg**

Maximum value of SAR (measured) = 0.0637 W/kg

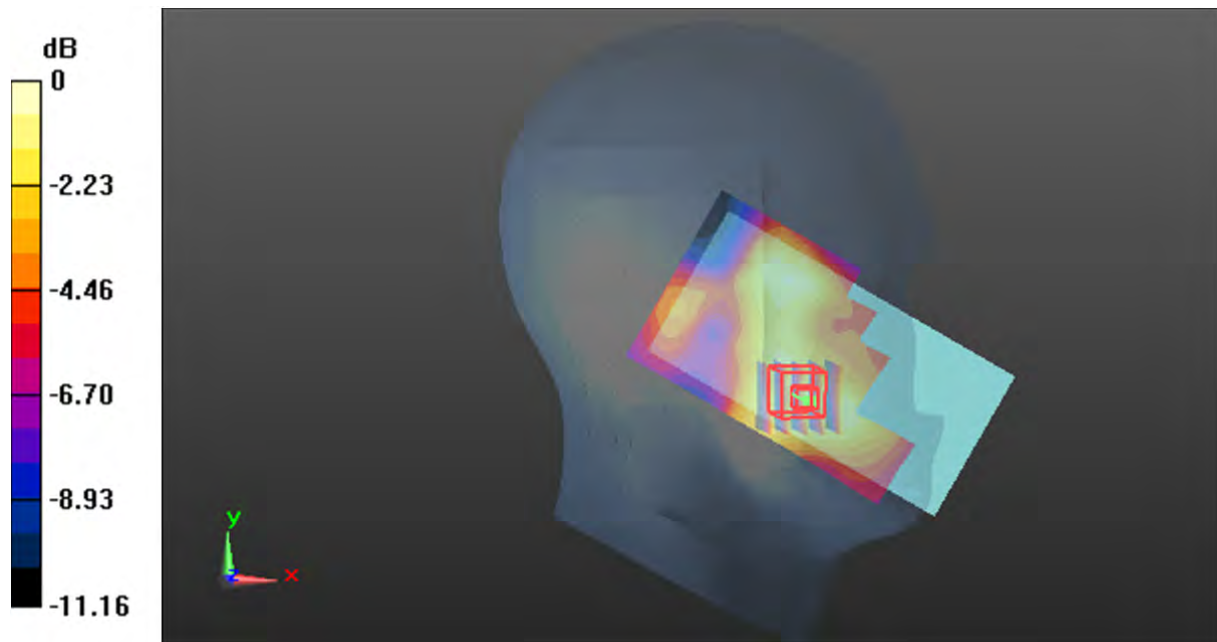

0 dB = 0.0637 W/kg = -11.96 dB dBW/kg

**Test Plot 46#: LTE Band 2\_Head Left Cheek\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.406$  S/m;  $\epsilon_r = 39.86$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0446 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.264 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0540 W/kg

**SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.023 W/kg**

Maximum value of SAR (measured) = 0.0458 W/kg

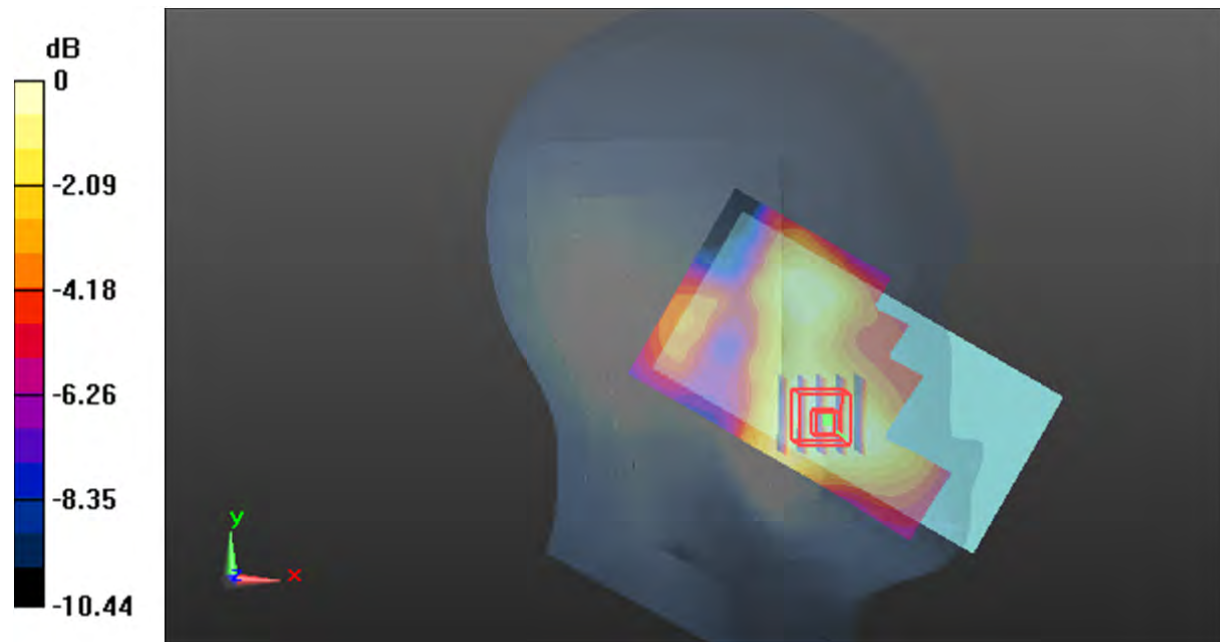

0 dB = 0.0458 W/kg = -13.39 dB dBW/kg

**Test Plot 47#: LTE Band 2\_Head Left Tilt\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.406$  S/m;  $\epsilon_r = 39.86$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0452 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.559 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0570 W/kg

**SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.020 W/kg**

Maximum value of SAR (measured) = 0.0462 W/kg

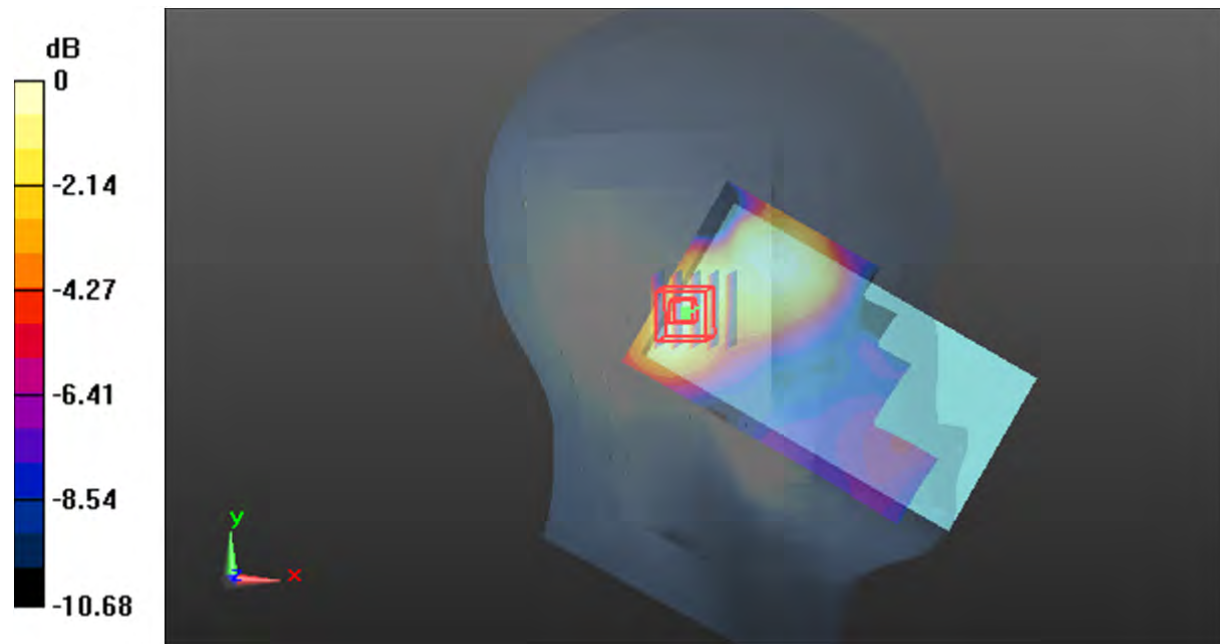

0 dB = 0.0462 W/kg = -13.35 dB dBW/kg

**Test Plot 48#: LTE Band 2\_Head Left Tilt\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.406$  S/m;  $\epsilon_r = 39.86$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0343 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.810 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0440 W/kg

**SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.017 W/kg**

Maximum value of SAR (measured) = 0.0377 W/kg

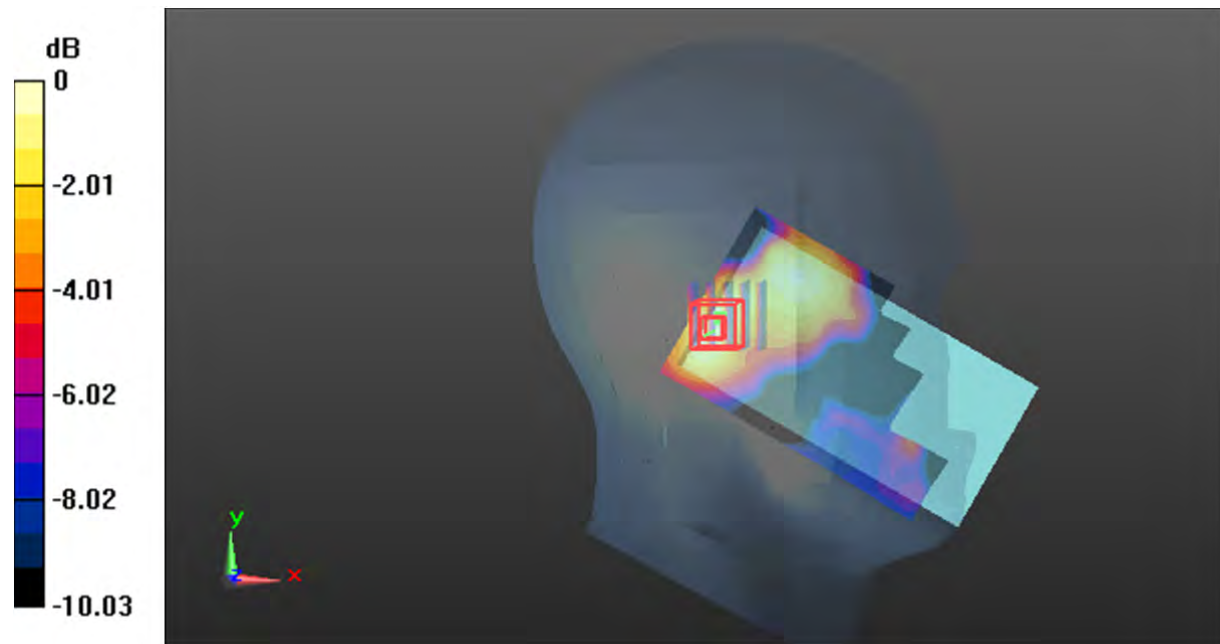

0 dB = 0.0377 W/kg = -14.24 dB dBW/kg

**Test Plot 49#: LTE Band 2\_Head Right Cheek\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.406$  S/m;  $\epsilon_r = 39.86$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0655 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.547 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0760 W/kg

**SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.023 W/kg**

Maximum value of SAR (measured) = 0.0626 W/kg

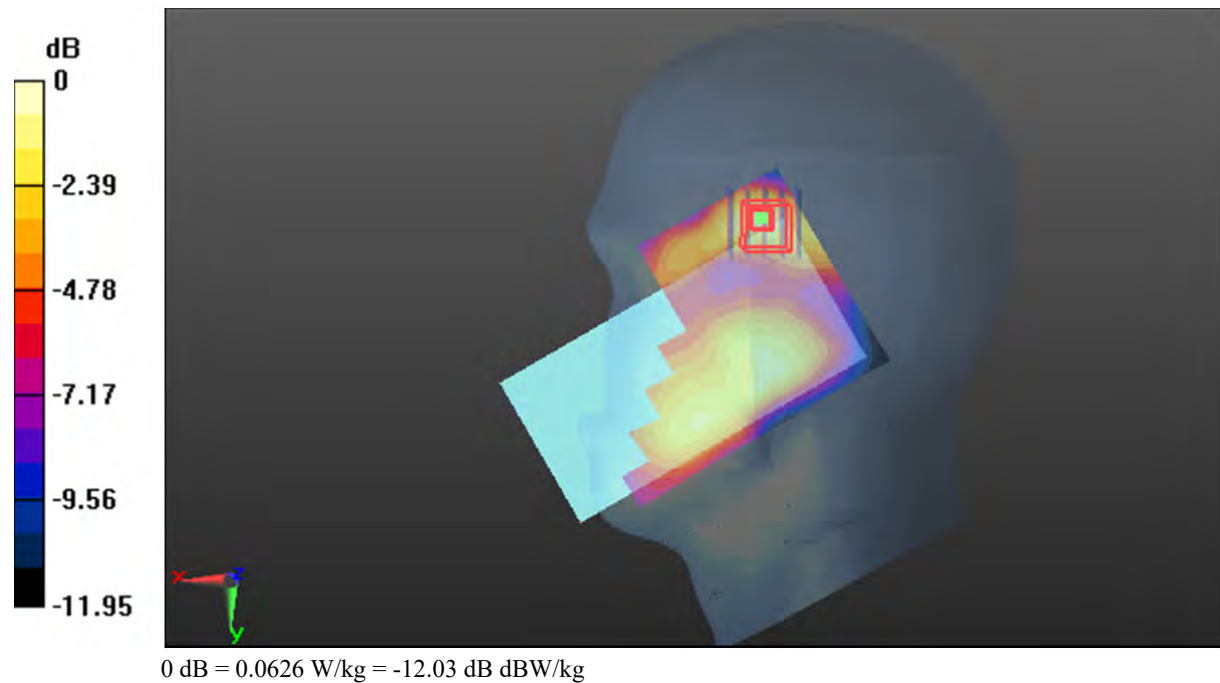

**Test Plot 50#: LTE Band 2\_Head Right Cheek\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.406$  S/m;  $\epsilon_r = 39.86$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0554 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.108 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0630 W/kg

**SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.019 W/kg**

Maximum value of SAR (measured) = 0.0499 W/kg

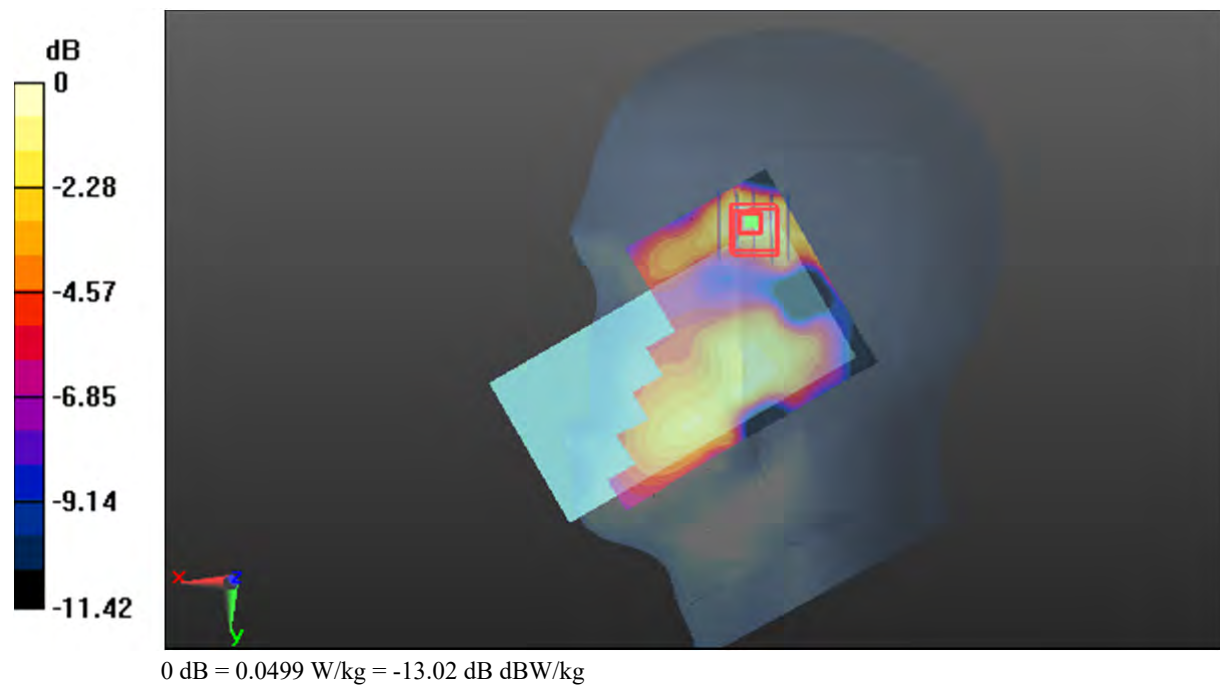

**Test Plot 51#: LTE Band 2\_Head Right Tilt\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.406$  S/m;  $\epsilon_r = 39.86$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0548 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.649 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0870 W/kg

**SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.024 W/kg**

Maximum value of SAR (measured) = 0.0715 W/kg

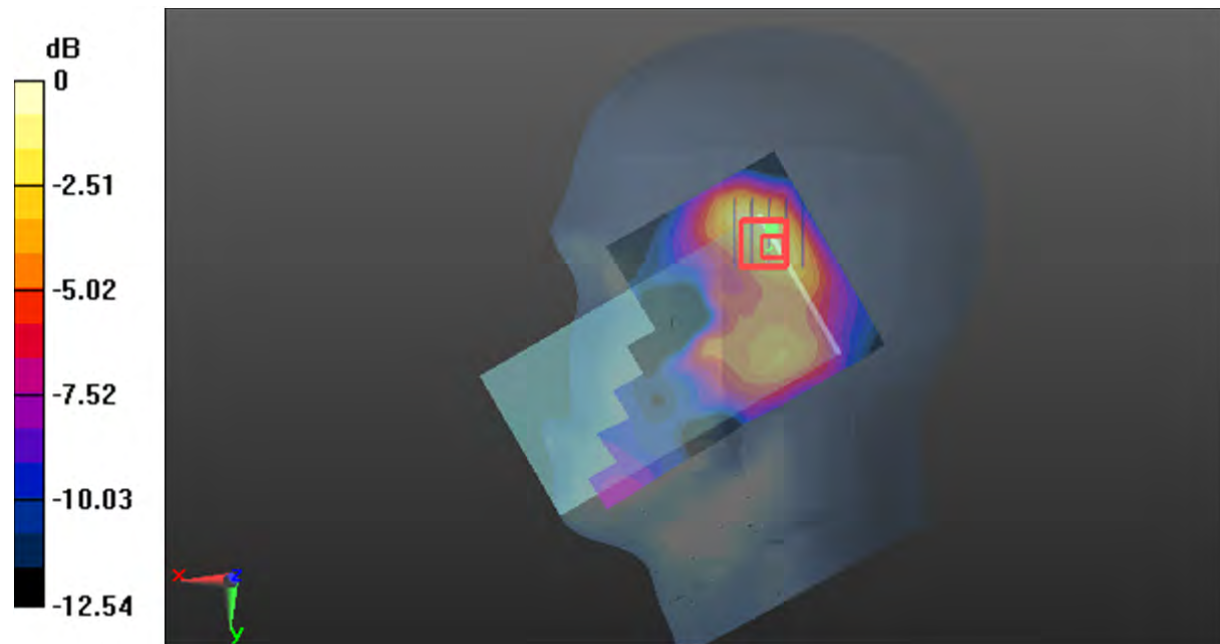

0 dB = 0.0715 W/kg = -11.46 dB dBW/kg

**Test Plot 52#: LTE Band 2\_Head Right Tilt\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.406$  S/m;  $\epsilon_r = 39.86$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0431 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.992 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0670 W/kg

**SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.019 W/kg**

Maximum value of SAR (measured) = 0.0526 W/kg

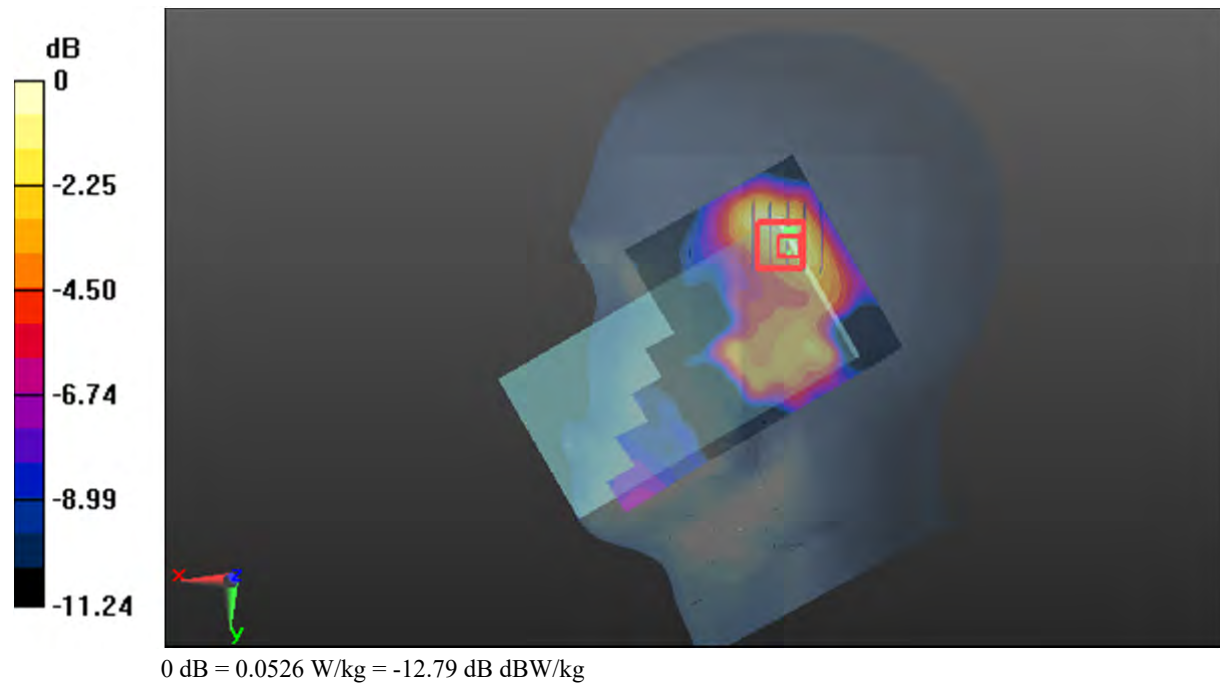

**Test Plot 53#: LTE Band 2\_Body Front\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.406$  S/m;  $\epsilon_r = 39.86$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.343 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.449 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.411 W/kg

**SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.122 W/kg**

Maximum value of SAR (measured) = 0.342 W/kg

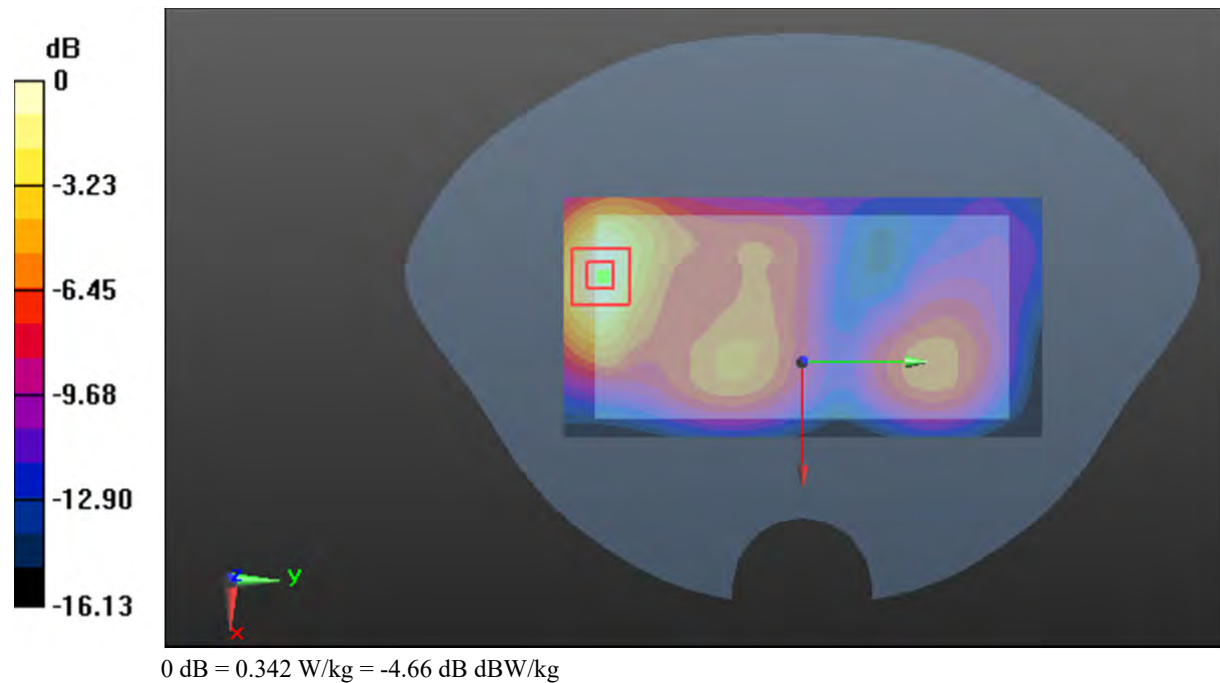

**Test Plot 54#: LTE Band 2\_Body Front\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.406$  S/m;  $\epsilon_r = 39.86$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.281 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.909 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.335 W/kg

**SAR(1 g) = 0.183 W/kg; SAR(10 g) = 0.099 W/kg**

Maximum value of SAR (measured) = 0.280 W/kg

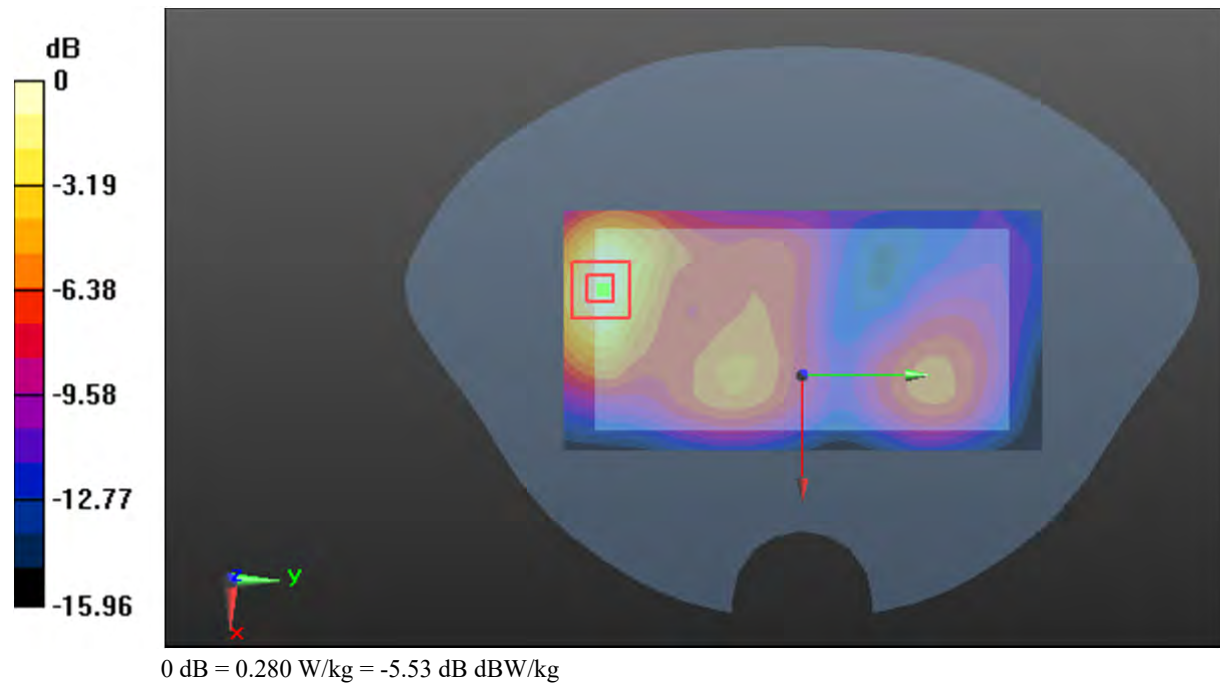

**Test Plot 55#: LTE Band 2\_Body Back\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.406$  S/m;  $\epsilon_r = 39.86$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.731 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.767 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.846 W/kg

**SAR(1 g) = 0.449 W/kg; SAR(10 g) = 0.239 W/kg**

Maximum value of SAR (measured) = 0.679 W/kg

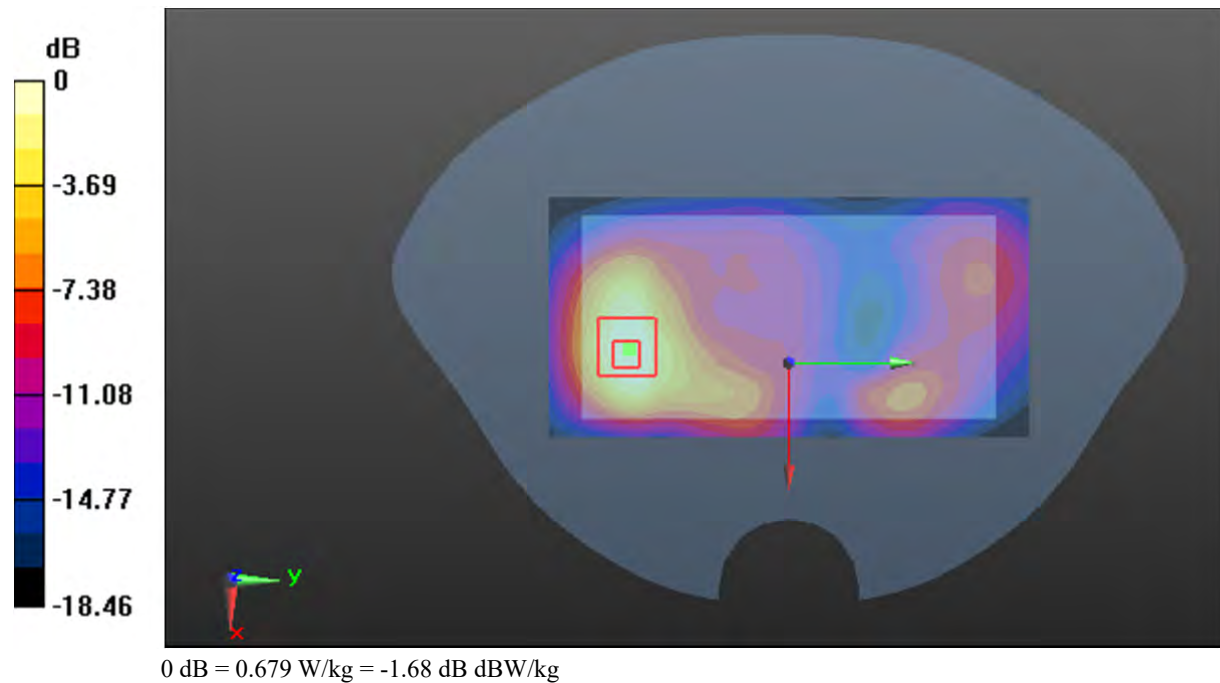

**Test Plot 56#: LTE Band 2\_Body Back\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.406$  S/m;  $\epsilon_r = 39.86$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.573 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.114 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.689 W/kg

**SAR(1 g) = 0.363 W/kg; SAR(10 g) = 0.193 W/kg**

Maximum value of SAR (measured) = 0.541 W/kg

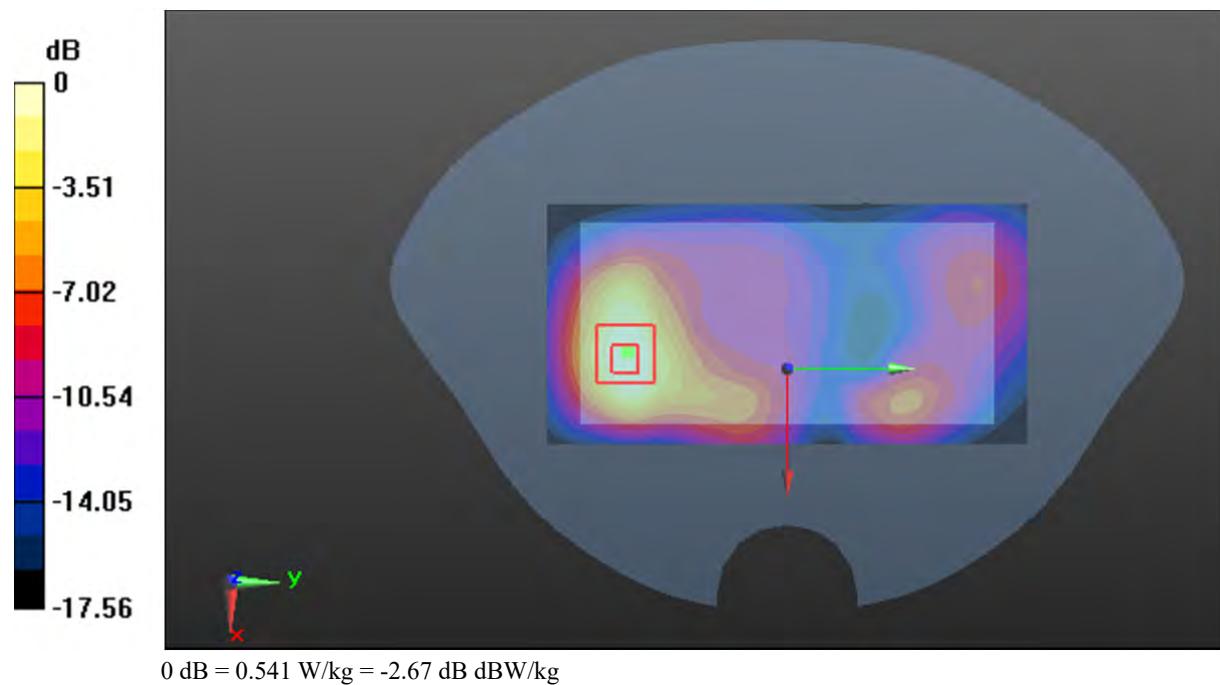

**Test Plot 57#: LTE Band 2\_Body Left\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.406$  S/m;  $\epsilon_r = 39.86$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (4x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.127 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.054 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.161 W/kg

**SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.052 W/kg**

Maximum value of SAR (measured) = 0.135 W/kg

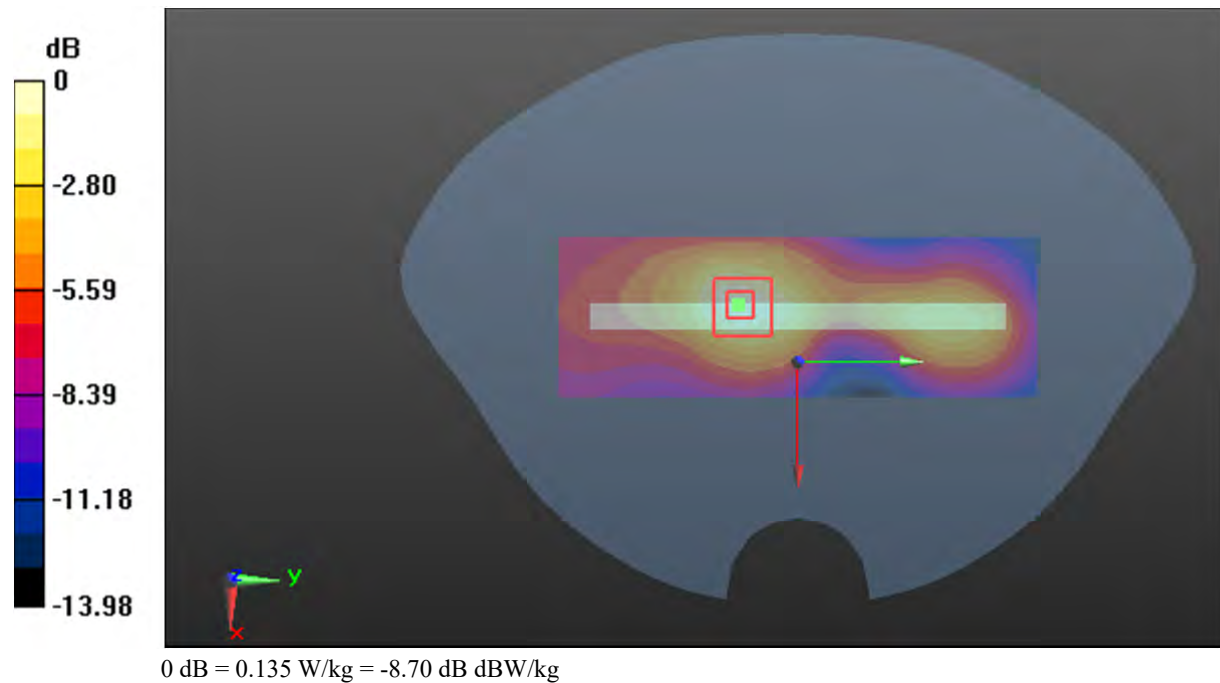

**Test Plot 58#: LTE Band 2\_Body Left\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.406$  S/m;  $\epsilon_r = 39.86$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (4x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.115 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.650 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.134 W/kg

**SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.043 W/kg**

Maximum value of SAR (measured) = 0.111 W/kg

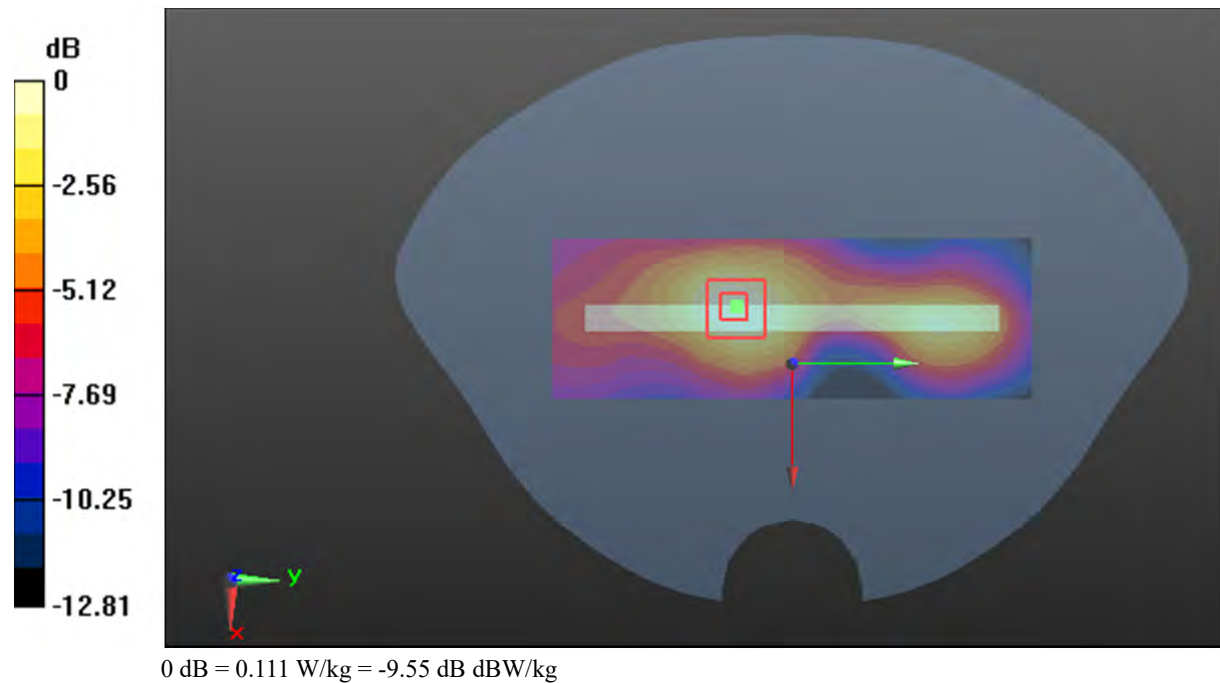

**Test Plot 59#: LTE Band 2\_Body Bottom\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.406$  S/m;  $\epsilon_r = 39.86$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x10x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.07 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.65 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.28 W/kg

**SAR(1 g) = 0.664 W/kg; SAR(10 g) = 0.332 W/kg**

Maximum value of SAR (measured) = 1.06 W/kg

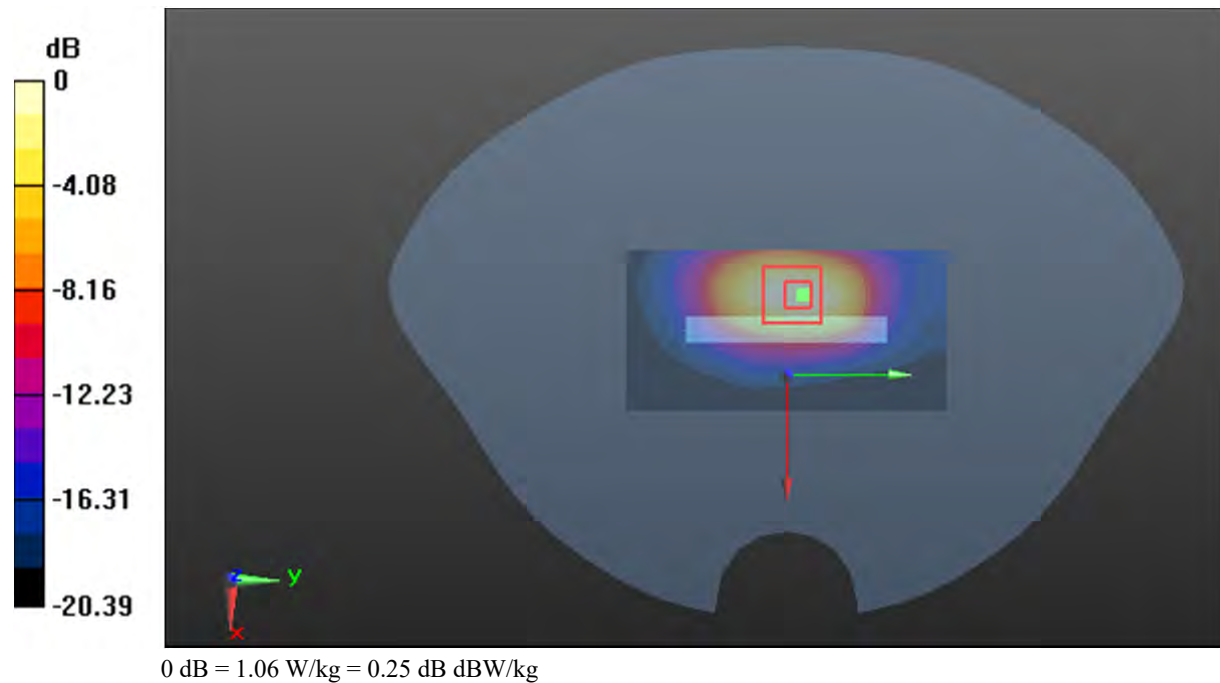

**Test Plot 60#: LTE Band 2\_Body Bottom\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.406$  S/m;  $\epsilon_r = 39.86$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x10x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.974 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.21 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.16 W/kg

**SAR(1 g) = 0.602 W/kg; SAR(10 g) = 0.301 W/kg**

Maximum value of SAR (measured) = 0.960 W/kg

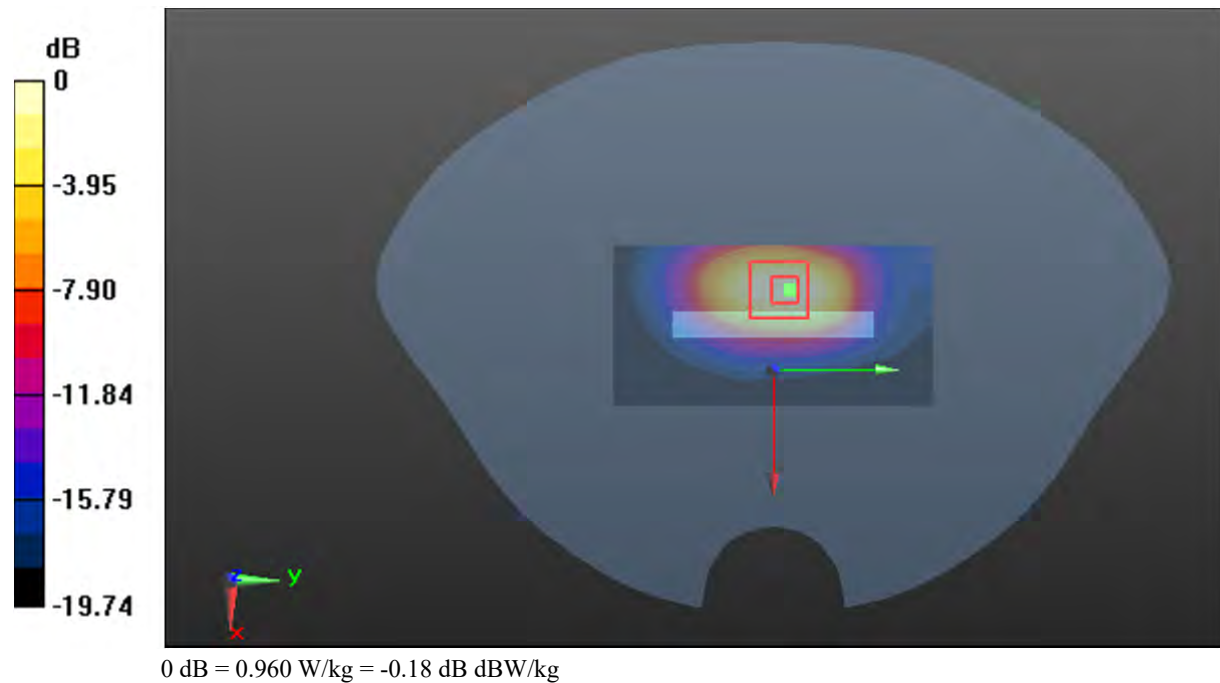

**Test Plot 61#: LTE Band 12\_Head Left Cheek\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.895$  S/m;  $\epsilon_r = 42.286$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @707.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0520 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.074 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0560 W/kg

**SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.029 W/kg**

Maximum value of SAR (measured) = 0.0485 W/kg

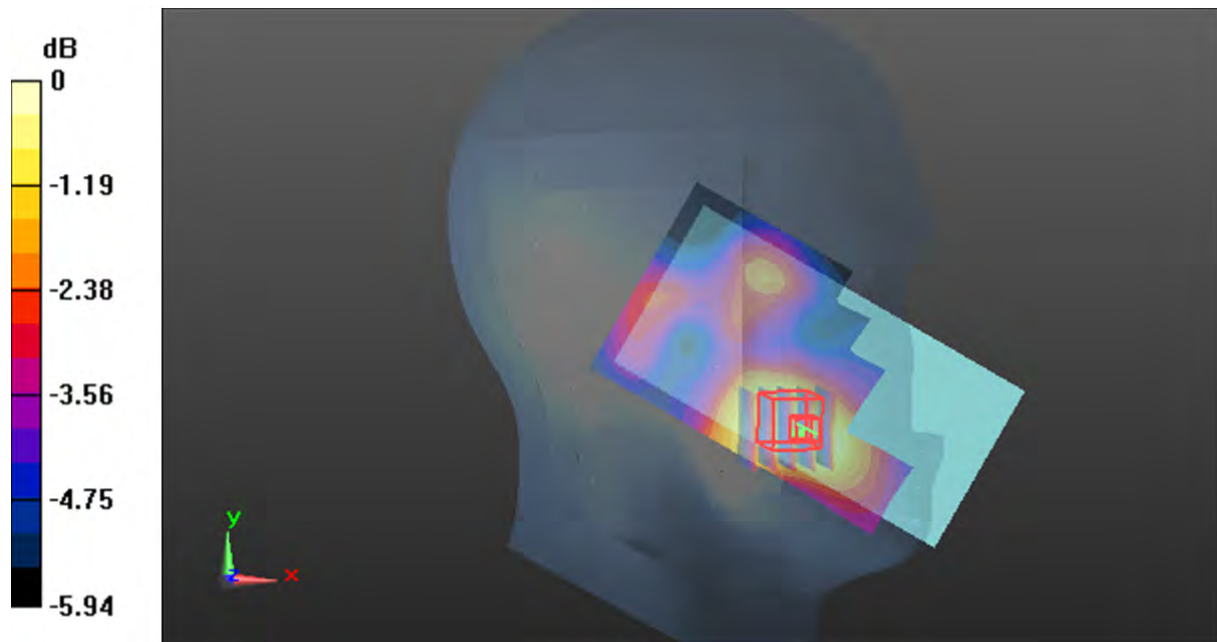

0 dB = 0.0485 W/kg = -13.14 dB dBW/kg

**Test Plot 62#: LTE Band 12\_Head Left Cheek\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.895$  S/m;  $\epsilon_r = 42.286$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @707.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0394 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.866 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.0440 W/kg

**SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.025 W/kg**

Maximum value of SAR (measured) = 0.0397 W/kg

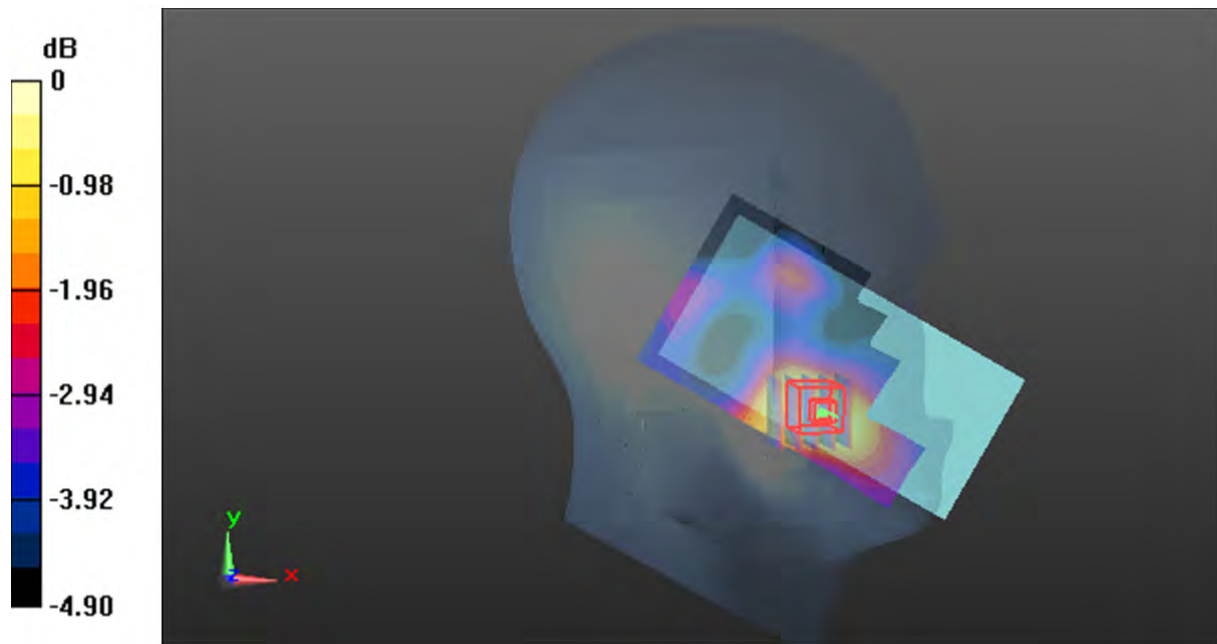

0 dB = 0.0397 W/kg = -14.01 dB dBW/kg

**Test Plot 63#: LTE Band 12\_Head Left Tilt\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.895$  S/m;  $\epsilon_r = 42.286$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @707.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0364 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.518 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0470 W/kg

**SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.018 W/kg**

Maximum value of SAR (measured) = 0.0405 W/kg

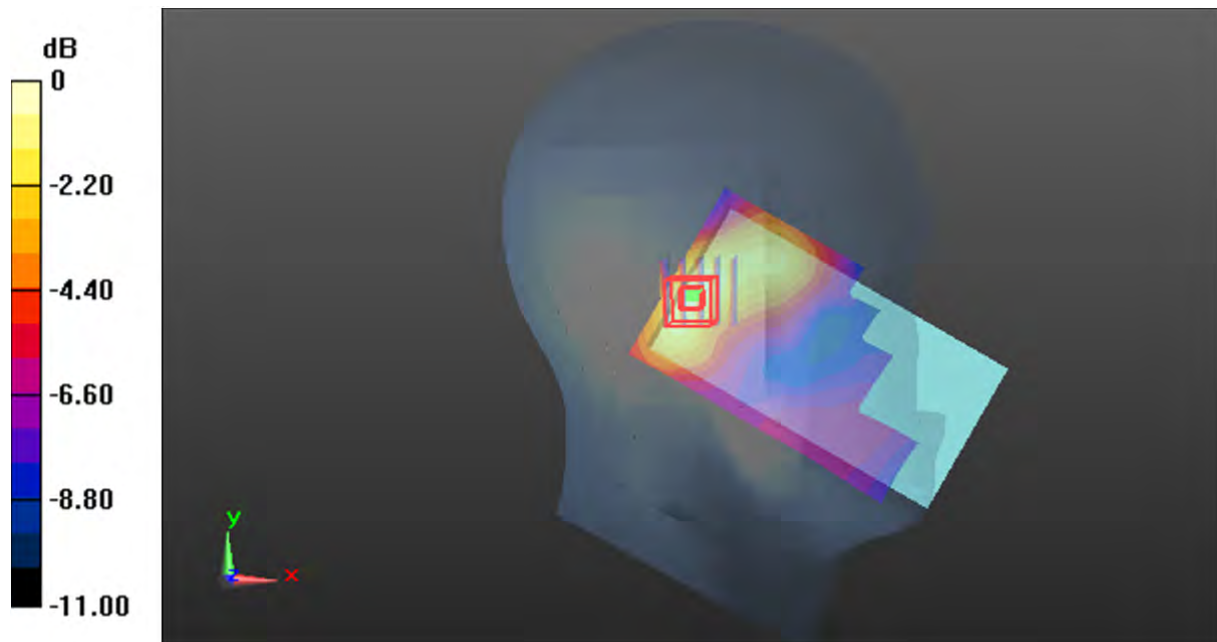

0 dB = 0.0405 W/kg = -13.93 dB dBW/kg

**Test Plot 64#: LTE Band 12\_Head Left Tilt\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.895$  S/m;  $\epsilon_r = 42.286$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @707.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0294 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.076 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0340 W/kg

**SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.014 W/kg**

Maximum value of SAR (measured) = 0.0297 W/kg

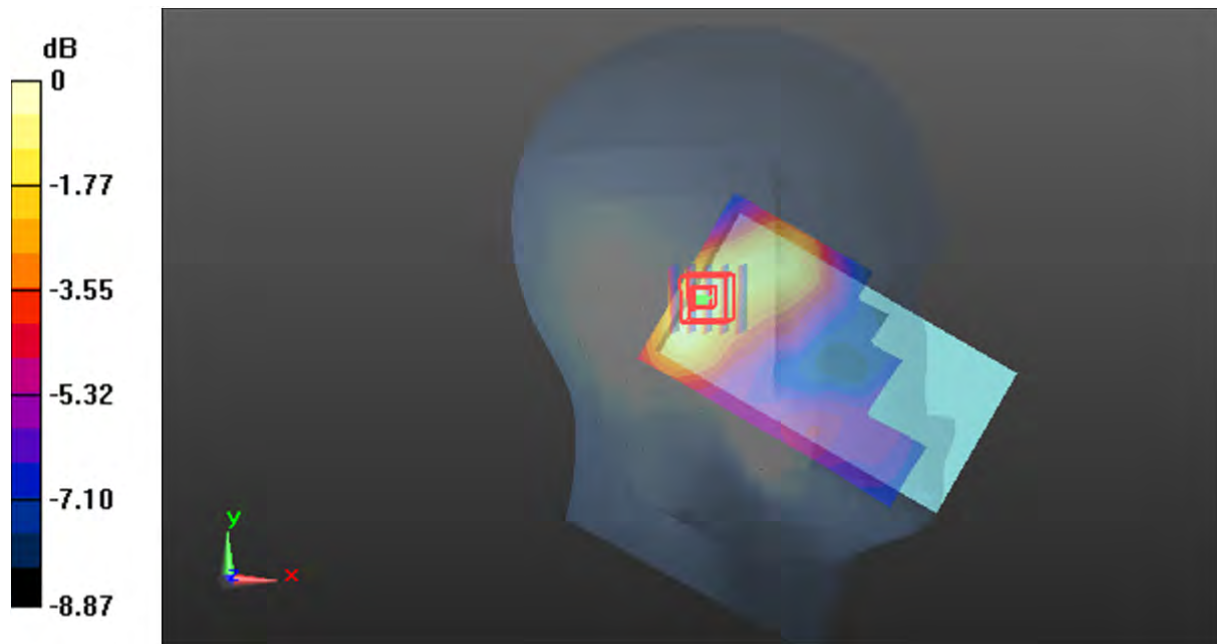

0 dB = 0.0297 W/kg = -15.27 dB dBW/kg

**Test Plot 65#: LTE Band 12\_Head Right Cheek\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.895$  S/m;  $\epsilon_r = 42.286$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @707.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0701 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.277 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0760 W/kg

**SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.046 W/kg**

Maximum value of SAR (measured) = 0.0685 W/kg

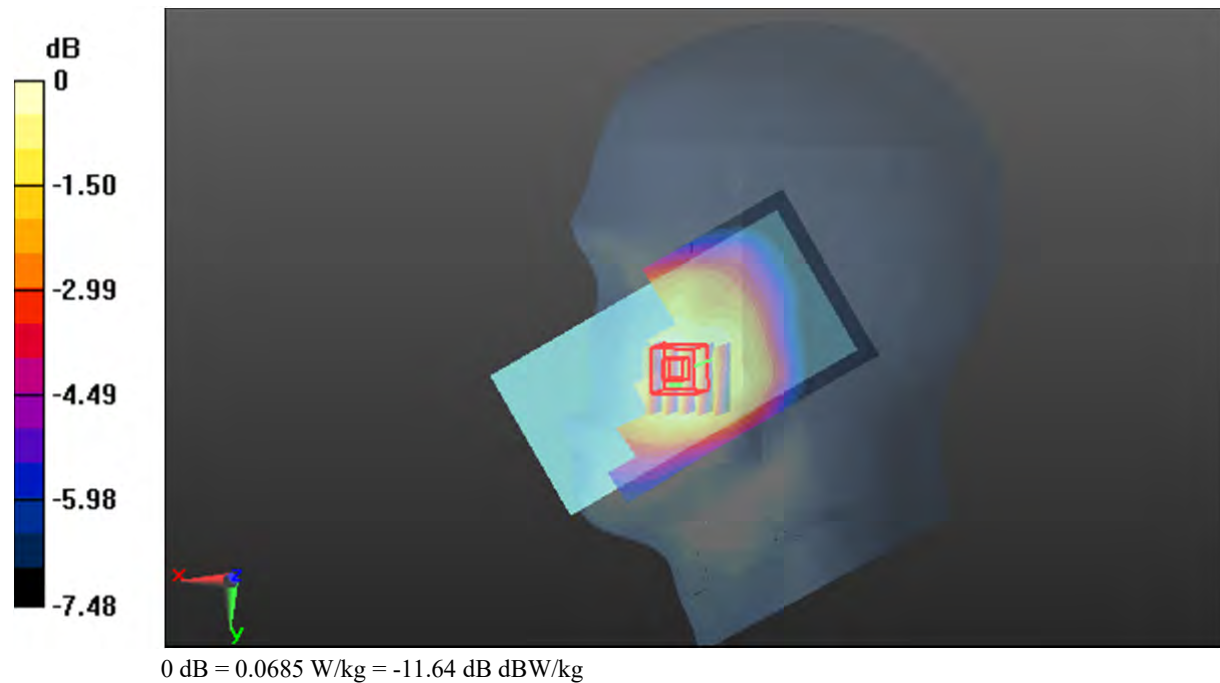

**Test Plot 66#: LTE Band 12\_Head Right Cheek\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.895$  S/m;  $\epsilon_r = 42.286$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @707.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0532 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.670 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0590 W/kg

**SAR(1 g) = 0.046 W/kg; SAR(10 g) = 0.036 W/kg**

Maximum value of SAR (measured) = 0.0534 W/kg

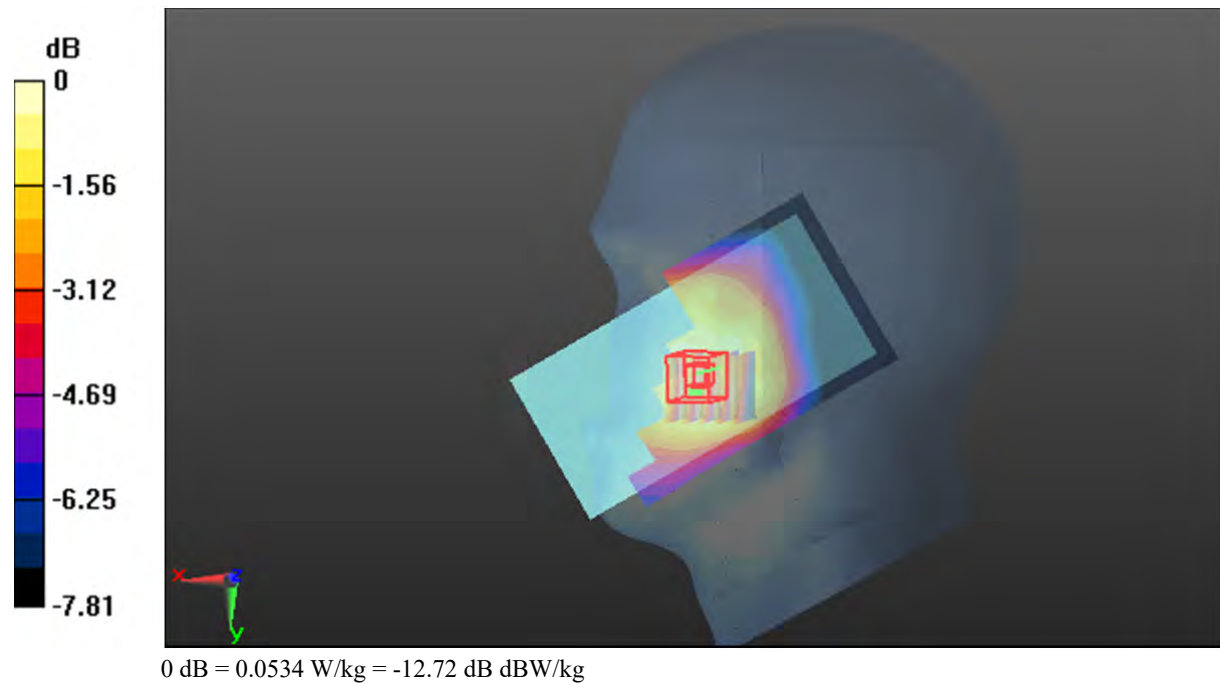

**Test Plot 67#: LTE Band 12\_Head Right Tilt\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.895$  S/m;  $\epsilon_r = 42.286$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @707.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0561 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.668 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0750 W/kg

**SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.022 W/kg**

Maximum value of SAR (measured) = 0.0599 W/kg

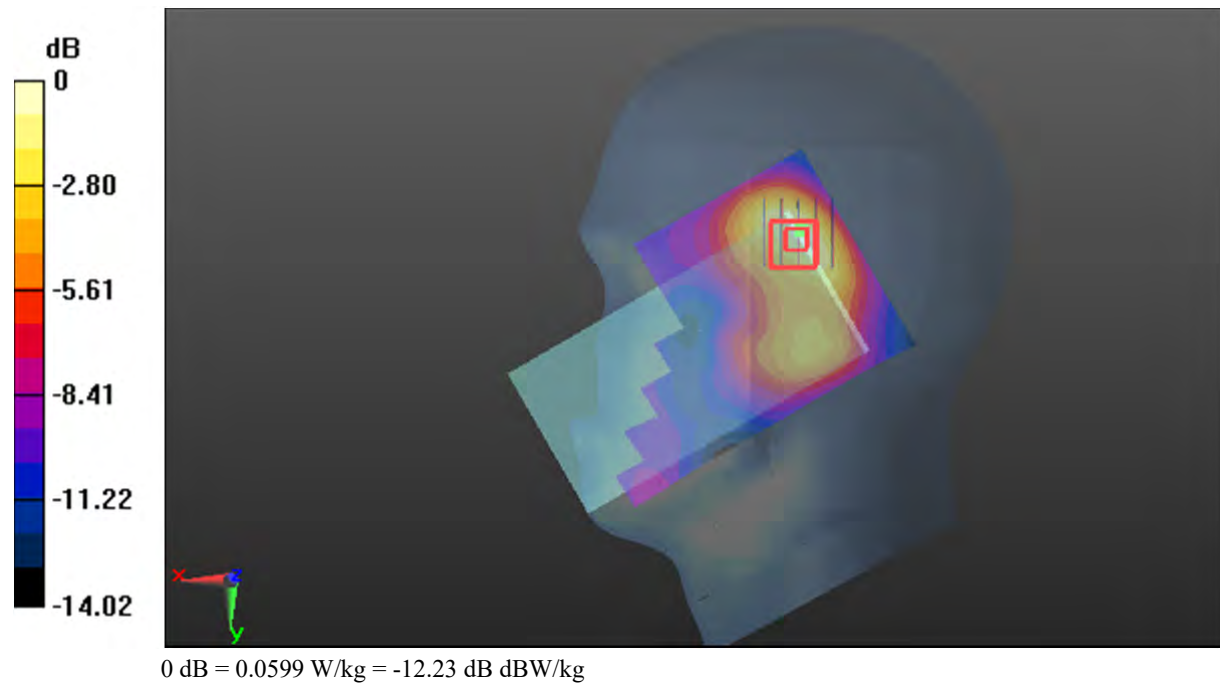

**Test Plot 68#: LTE Band 12\_Head Right Tilt\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.895$  S/m;  $\epsilon_r = 42.286$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @707.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0373 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.793 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0530 W/kg

**SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.017 W/kg**

Maximum value of SAR (measured) = 0.0420 W/kg

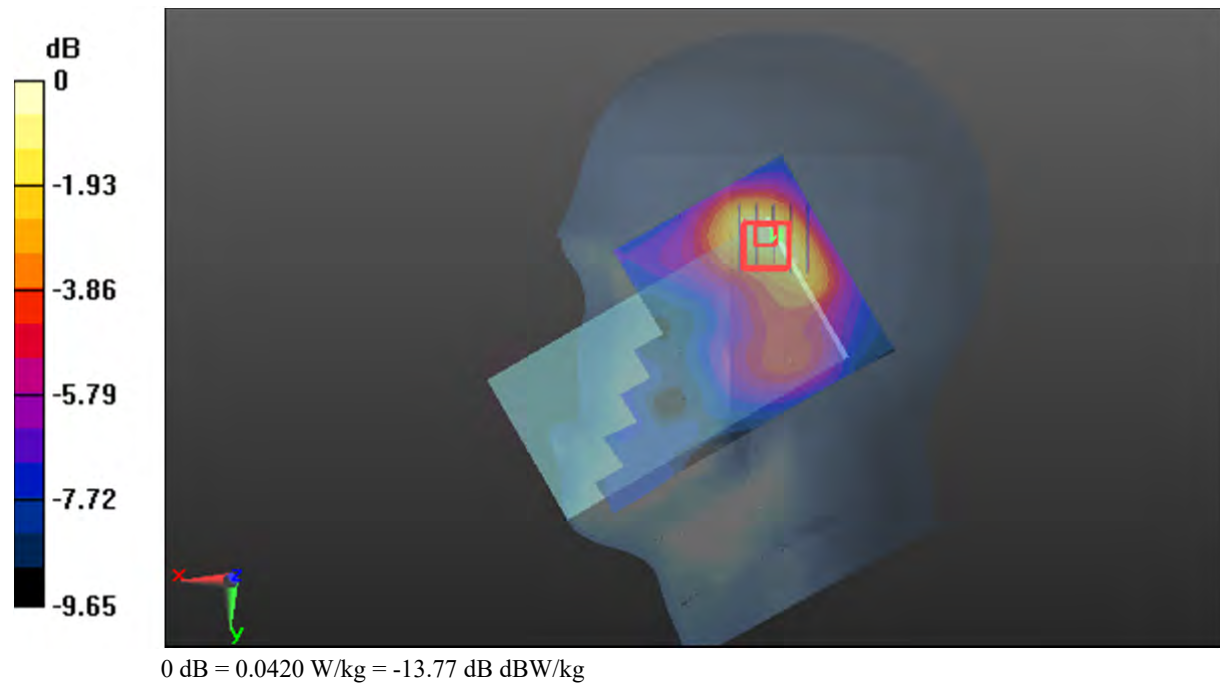

**Test Plot 69#: LTE Band 12\_Body Front\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.895$  S/m;  $\epsilon_r = 42.286$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @707.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.178 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.975 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.189 W/kg

**SAR(1 g) = 0.101 W/kg; SAR(10 g) = 0.057 W/kg**

Maximum value of SAR (measured) = 0.155 W/kg

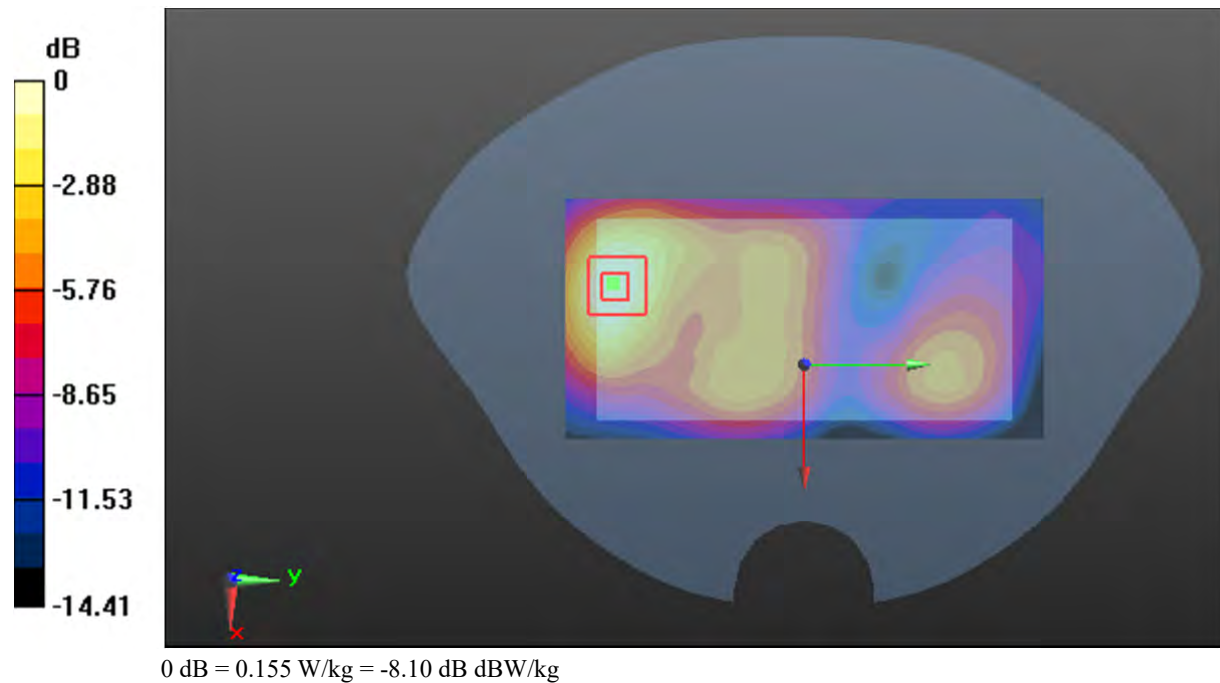

**Test Plot 70#: LTE Band 12\_Body Front\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.895$  S/m;  $\epsilon_r = 42.286$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @707.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.139 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.354 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.169 W/kg

**SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.049 W/kg**

Maximum value of SAR (measured) = 0.138 W/kg

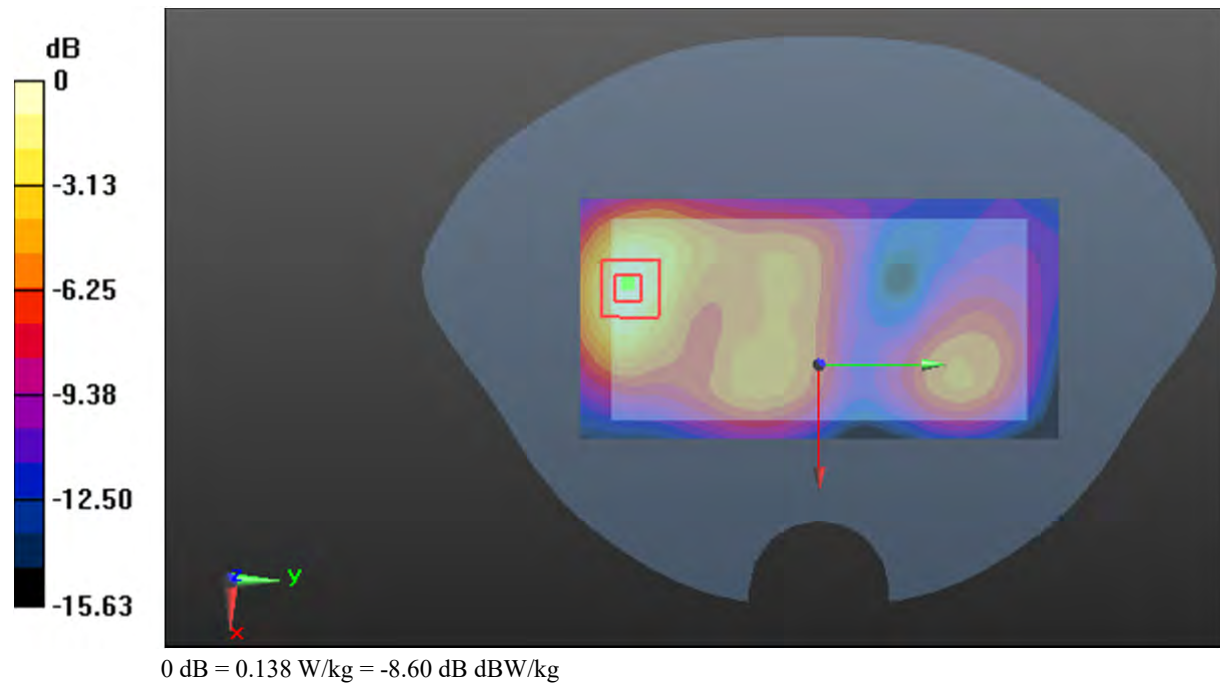

**Test Plot 71#: LTE Band 12\_Body Back\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.895$  S/m;  $\epsilon_r = 42.286$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @707.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.403 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.315 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.541 W/kg

**SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.141 W/kg**

Maximum value of SAR (measured) = 0.431 W/kg

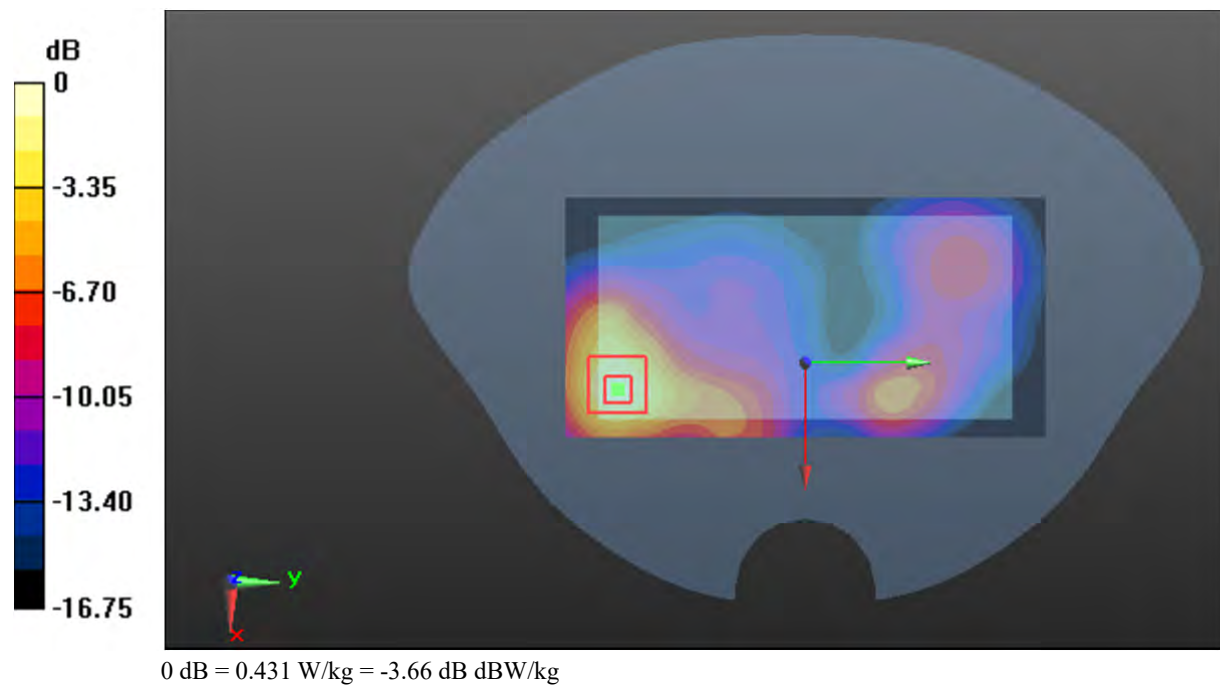

**Test Plot 72#: LTE Band 12\_Body Back\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.895$  S/m;  $\epsilon_r = 42.286$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @707.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.318 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.305 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.401 W/kg

**SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.104 W/kg**

Maximum value of SAR (measured) = 0.310 W/kg

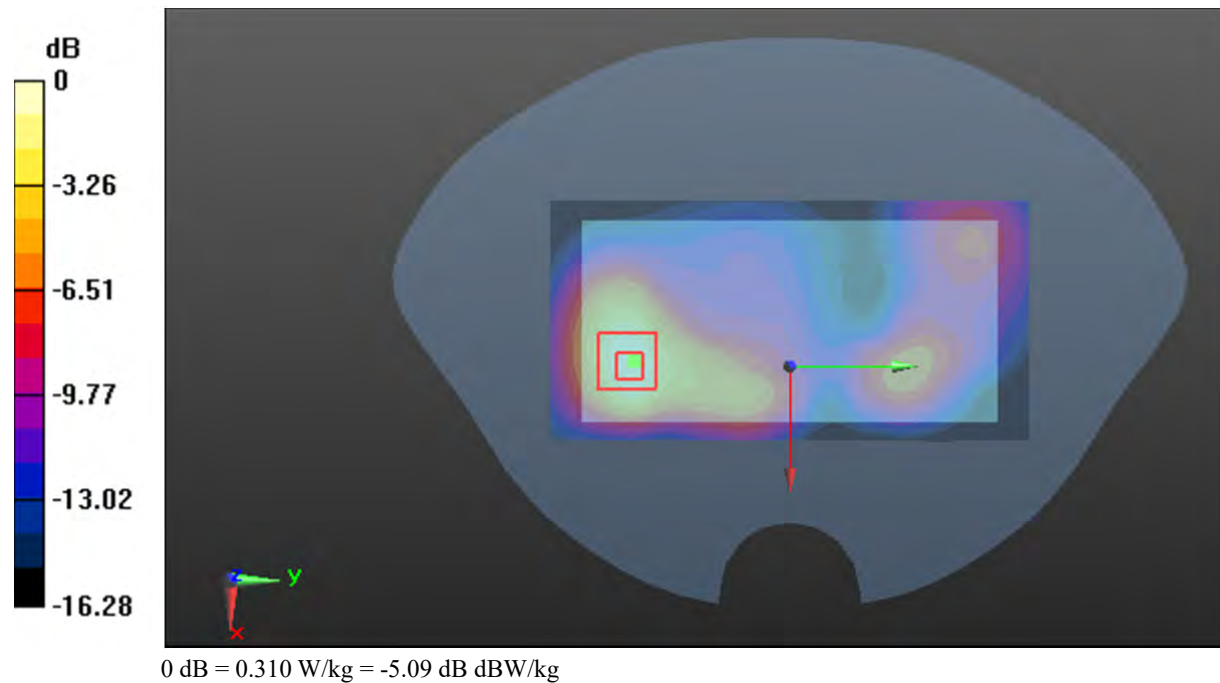

**Test Plot 73#: LTE Band 12\_Body Left\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.895$  S/m;  $\epsilon_r = 42.286$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @707.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (4x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0578 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.073 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0700 W/kg

**SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.030 W/kg**

Maximum value of SAR (measured) = 0.0591 W/kg

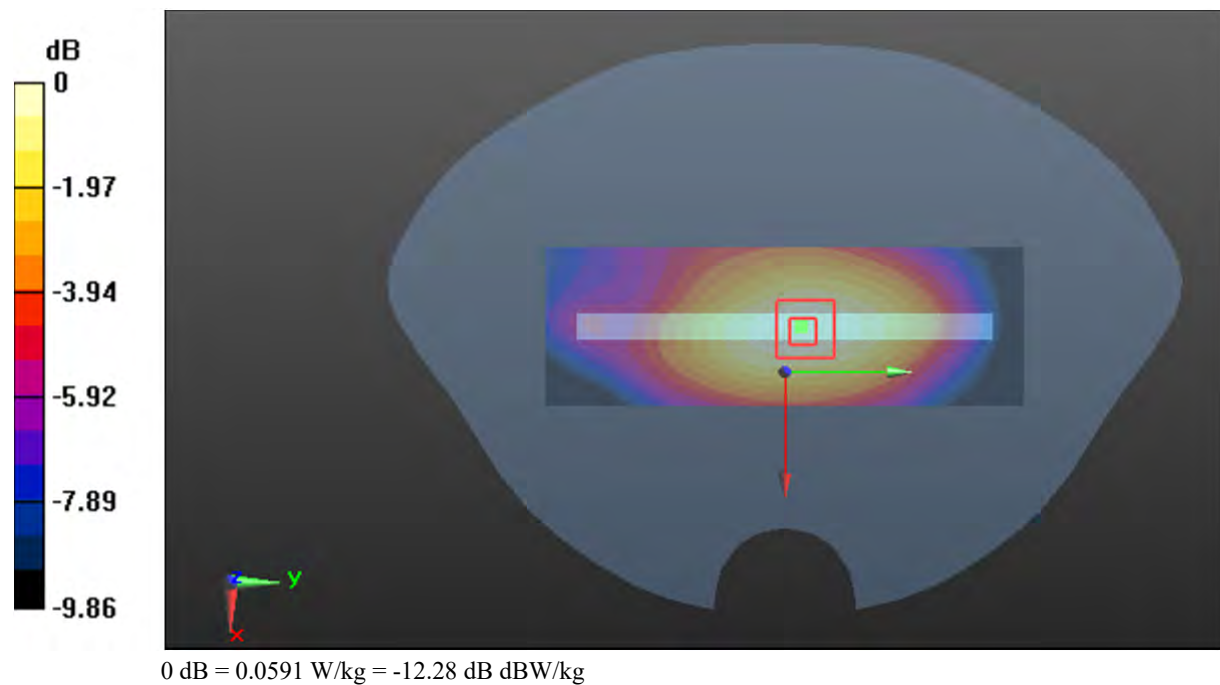

**Test Plot 74#: LTE Band 12\_Body Left\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.895$  S/m;  $\epsilon_r = 42.286$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @707.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (4x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0427 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.153 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.0500 W/kg

**SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.022 W/kg**

Maximum value of SAR (measured) = 0.0431 W/kg

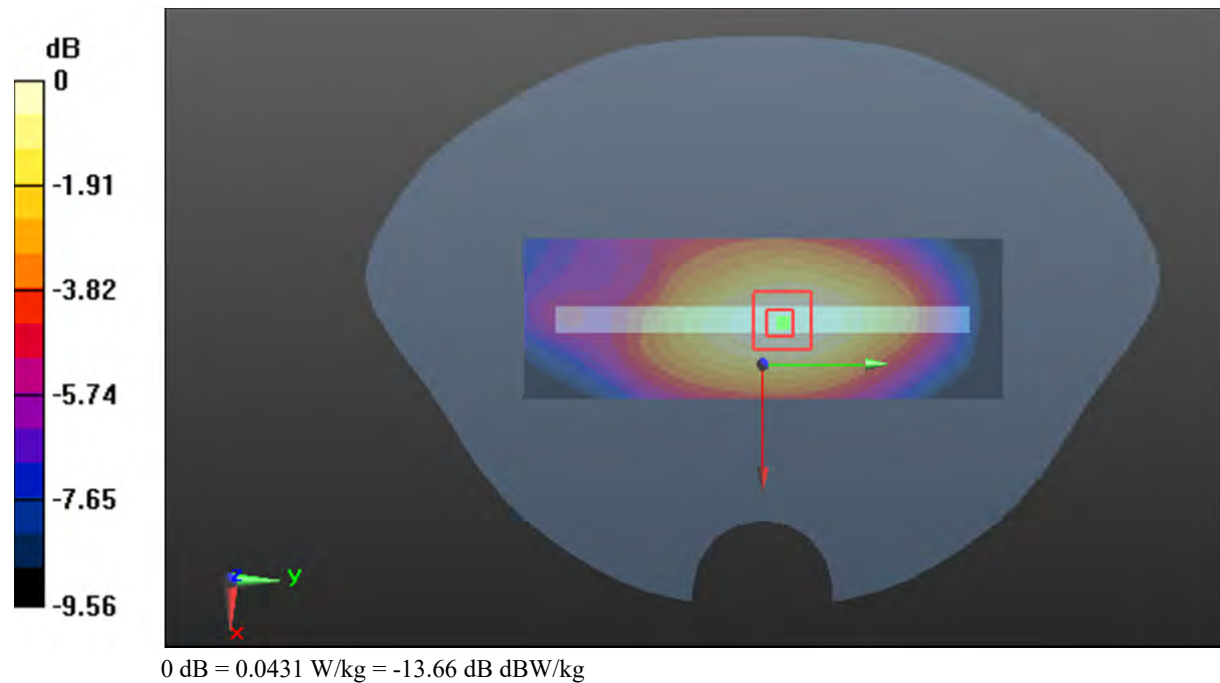

**Test Plot 75#: LTE Band 12\_Body Bottom\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.895$  S/m;  $\epsilon_r = 42.286$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @707.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x10x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0835 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.085 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.116 W/kg

**SAR(1 g) = 0.041 W/kg; SAR(10 g) = 0.022 W/kg**

Maximum value of SAR (measured) = 0.0802 W/kg

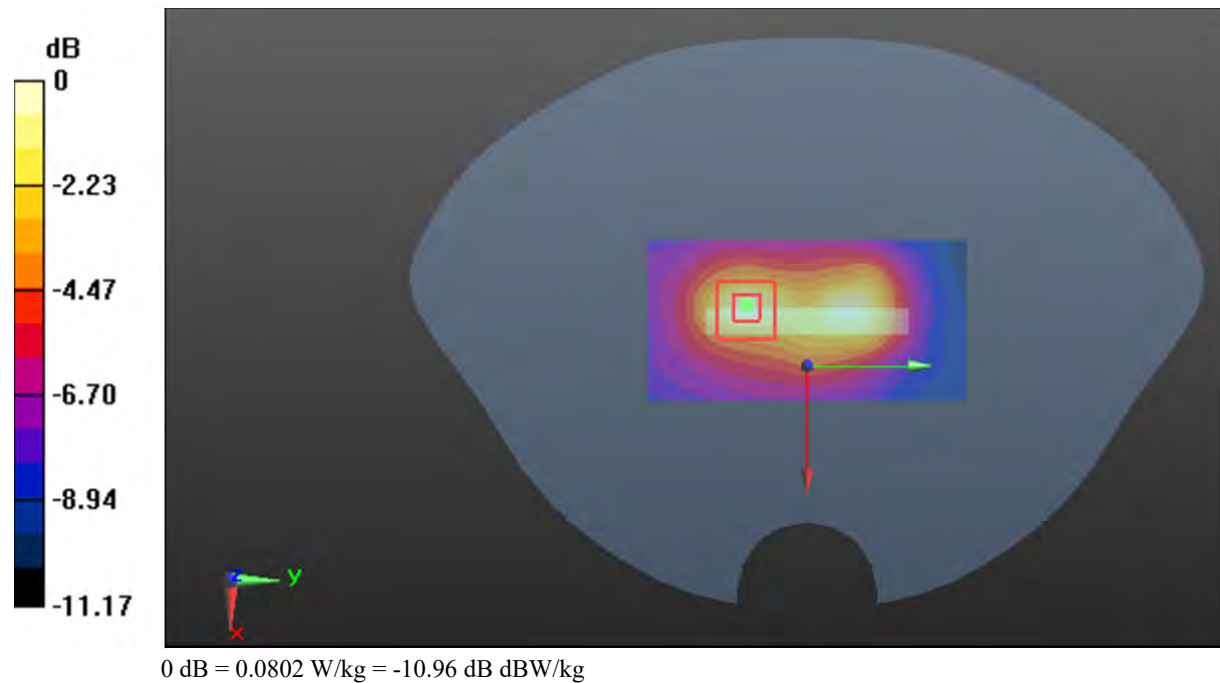

**Test Plot 76#: LTE Band 12\_Body Bottom\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.895$  S/m;  $\epsilon_r = 42.286$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @707.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0699 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.368 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0800 W/kg

**SAR(1 g) = 0.034 W/kg; SAR(10 g) = 0.019 W/kg**

Maximum value of SAR (measured) = 0.0588 W/kg

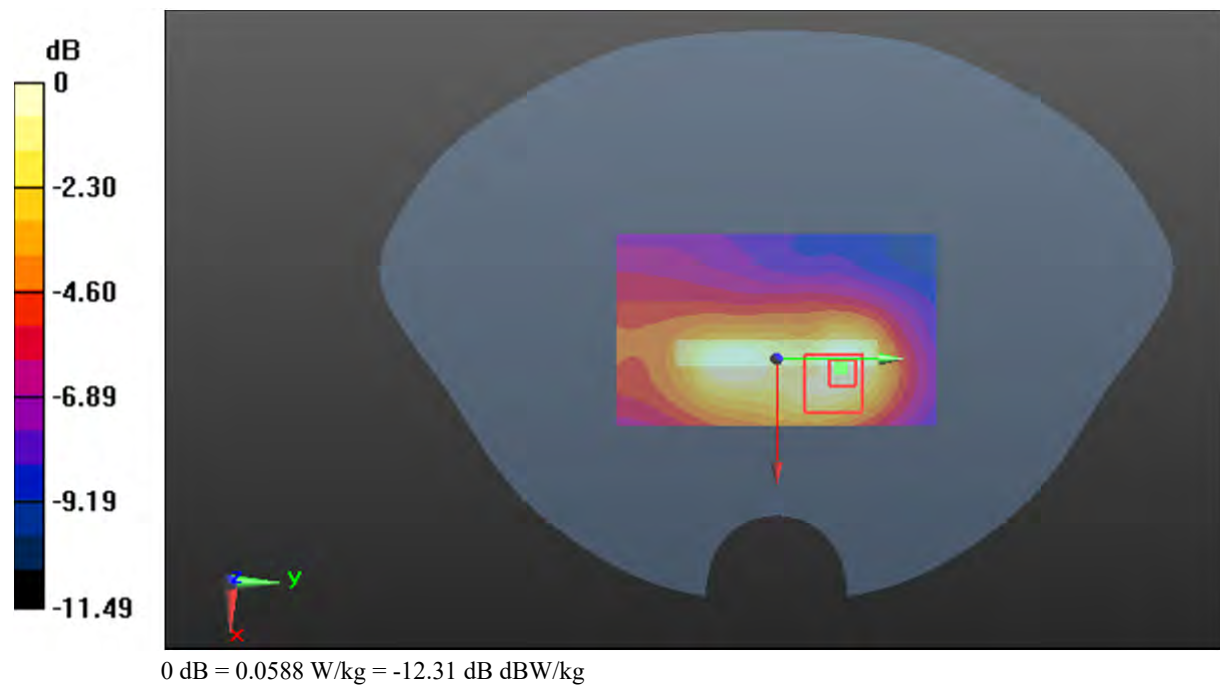

**Test Plot 77#: LTE Band 66\_Head Left Cheek\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.357$  S/m;  $\epsilon_r = 39.619$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1745 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.108 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.064 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.126 W/kg

**SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.060 W/kg**

Maximum value of SAR (measured) = 0.109 W/kg

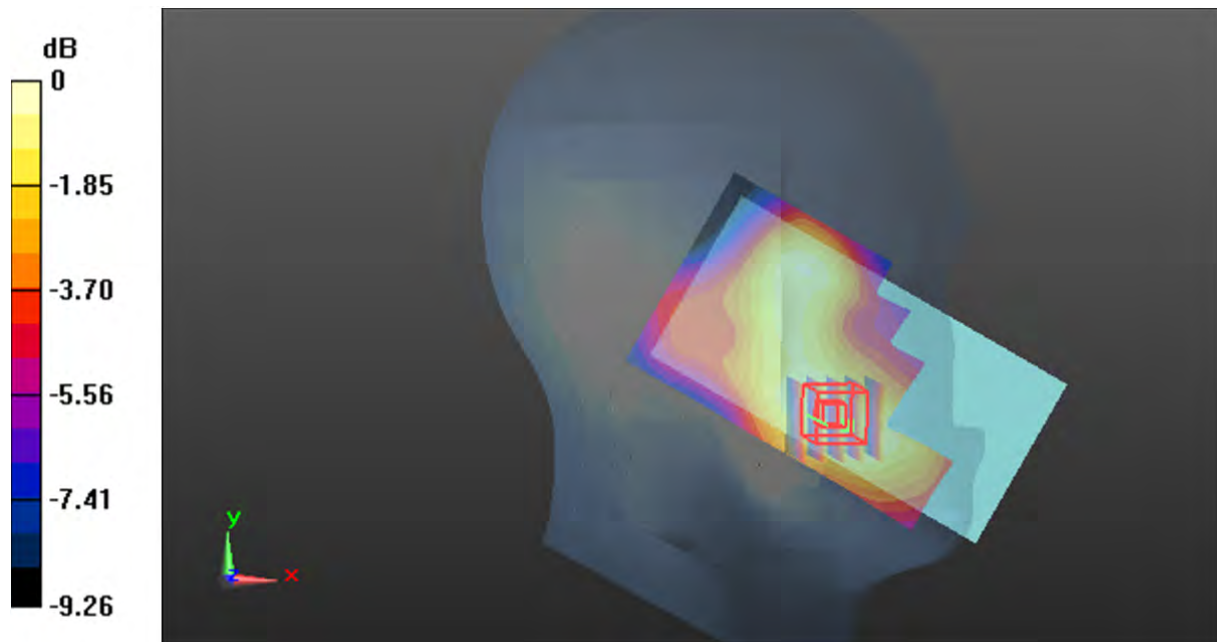

0 dB = 0.109 W/kg = -9.63 dB dBW/kg

**Test Plot 78#: LTE Band 66\_Head Left Cheek\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.357$  S/m;  $\epsilon_r = 39.619$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1745 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0946 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.364 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.118 W/kg

**SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.053 W/kg**

Maximum value of SAR (measured) = 0.103 W/kg

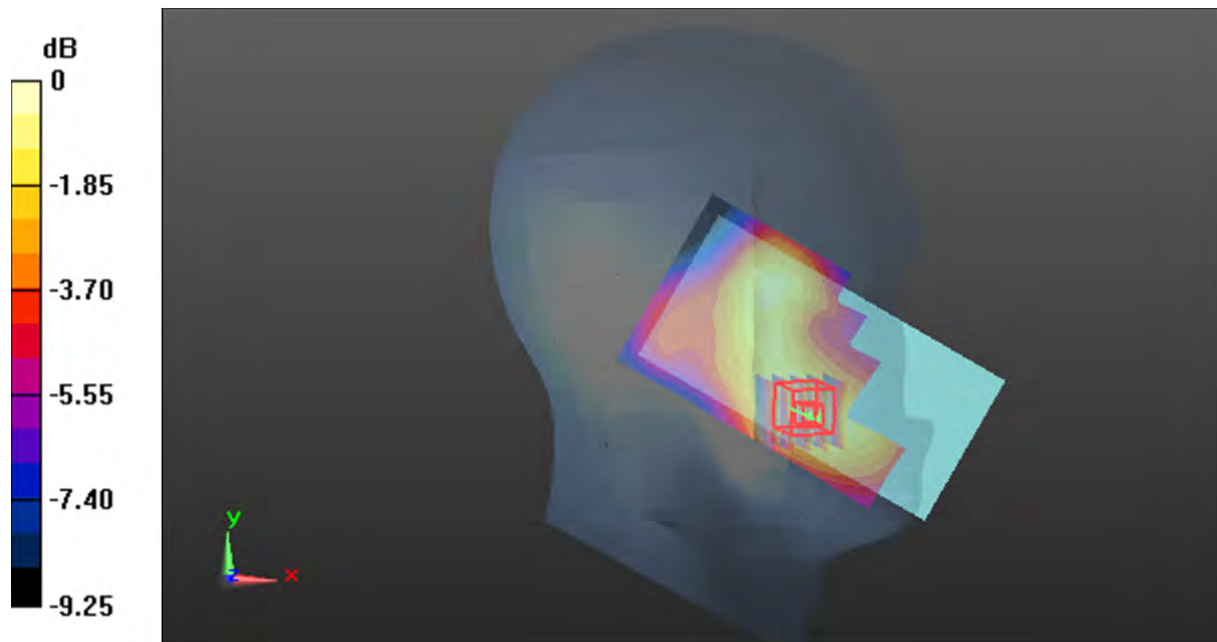

0 dB = 0.103 W/kg = -9.87 dB dBW/kg

**Test Plot 79#: LTE Band 66\_Head Left Tilt\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.357$  S/m;  $\epsilon_r = 39.619$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1745 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0605 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.162 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0660 W/kg

**SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.032 W/kg**

Maximum value of SAR (measured) = 0.0571 W/kg

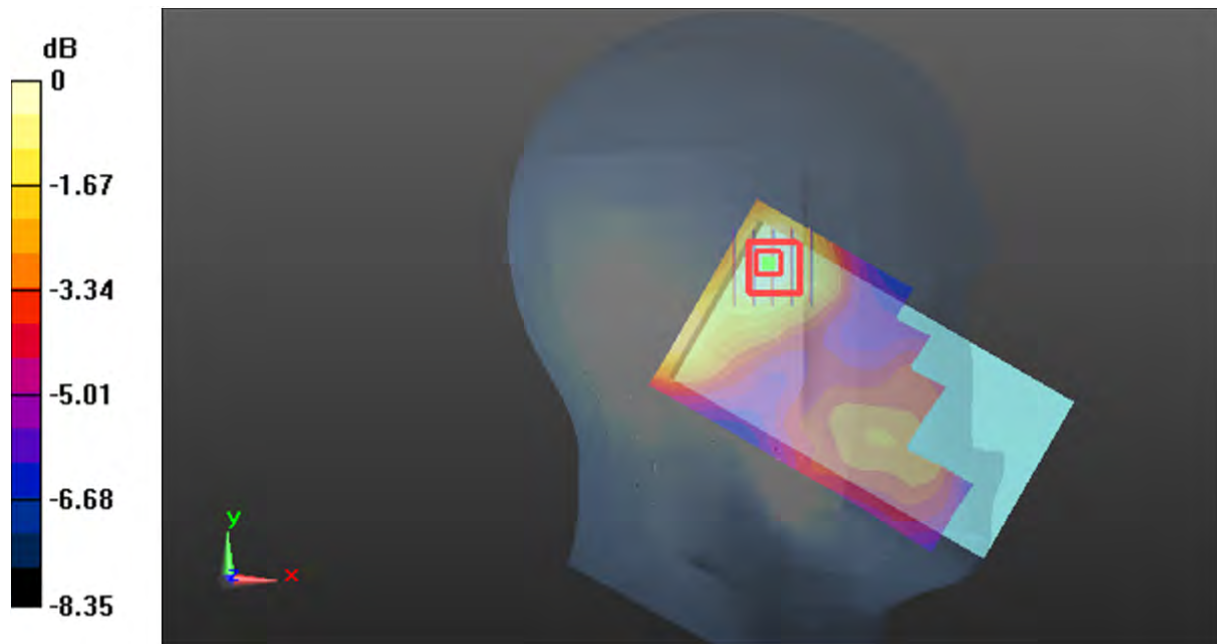

0 dB = 0.0571 W/kg = -12.43 dB dBW/kg

**Test Plot 80#: LTE Band 66\_Head Left Tilt\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.357$  S/m;  $\epsilon_r = 39.619$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1745 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0521 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.908 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0570 W/kg

**SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.028 W/kg**

Maximum value of SAR (measured) = 0.0495 W/kg

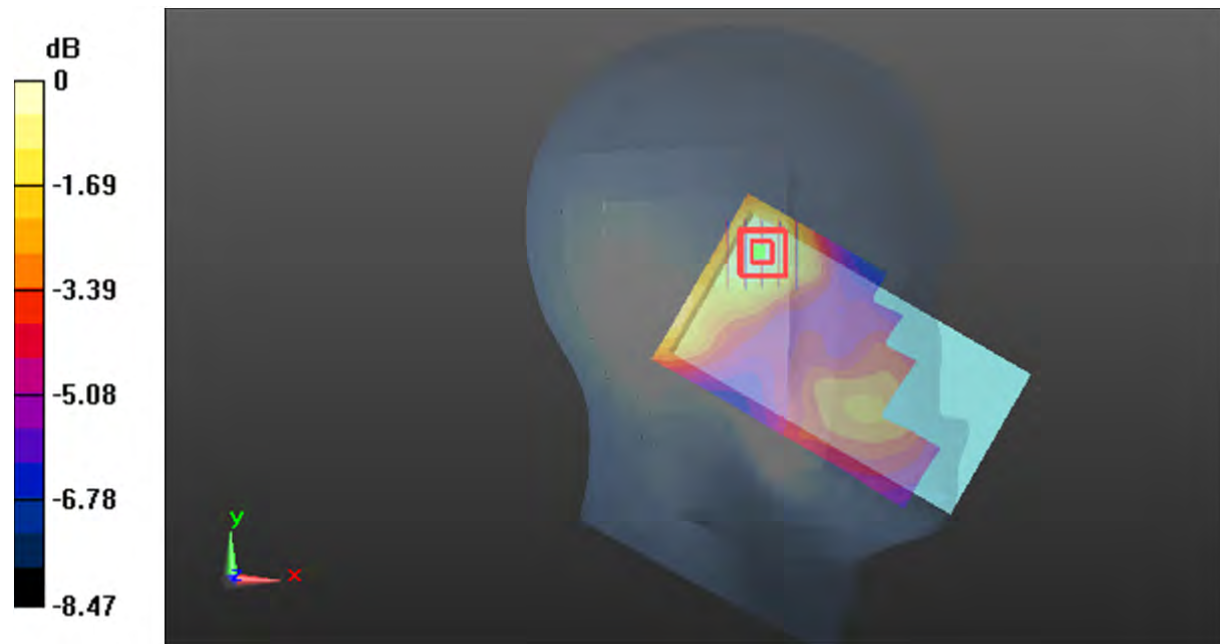

0 dB = 0.0495 W/kg = -13.05 dB dBW/kg

**Test Plot 81#: LTE Band 66\_Head Right Cheek\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.357$  S/m;  $\epsilon_r = 39.619$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1745 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0718 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.248 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.0880 W/kg

**SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.033 W/kg**

Maximum value of SAR (measured) = 0.0709 W/kg

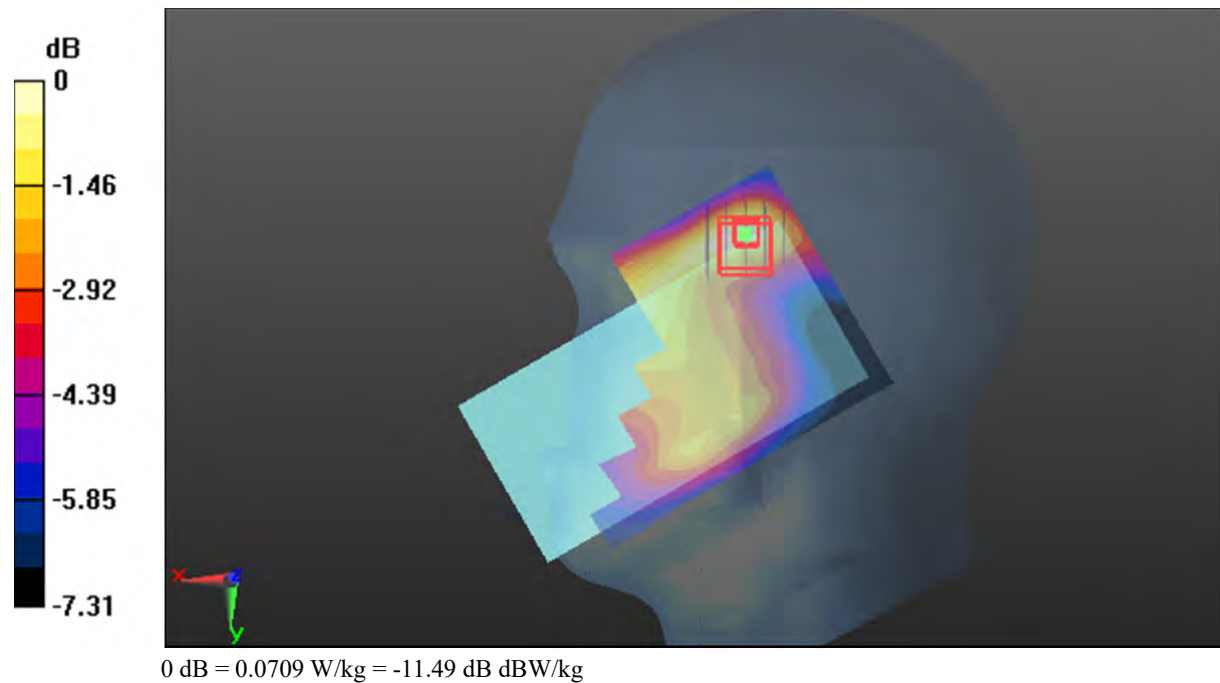

**Test Plot 82#: LTE Band 66\_Head Right Cheek\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.357$  S/m;  $\epsilon_r = 39.619$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1745 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0667 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.041 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.0780 W/kg

**SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.031 W/kg**

Maximum value of SAR (measured) = 0.0635 W/kg

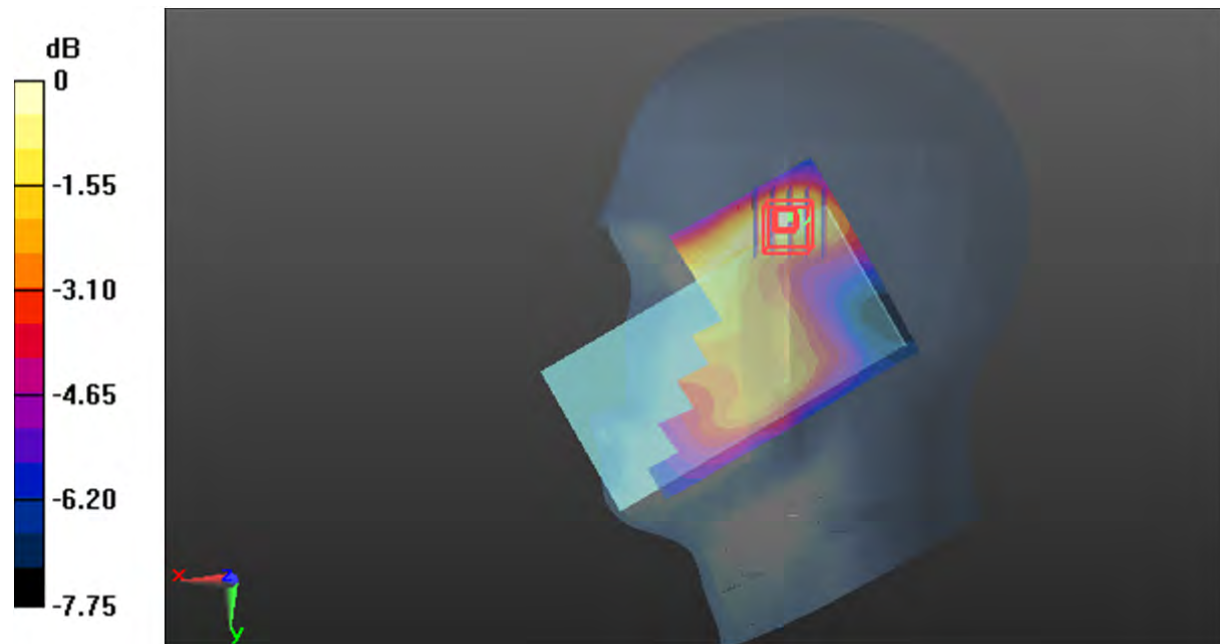

0 dB = 0.0635 W/kg = -11.97 dB dBW/kg

**Test Plot 83#: LTE Band 66\_Head Right Tilt\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.357$  S/m;  $\epsilon_r = 39.619$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1745 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0651 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.161 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.0950 W/kg

**SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.029 W/kg**

Maximum value of SAR (measured) = 0.0728 W/kg

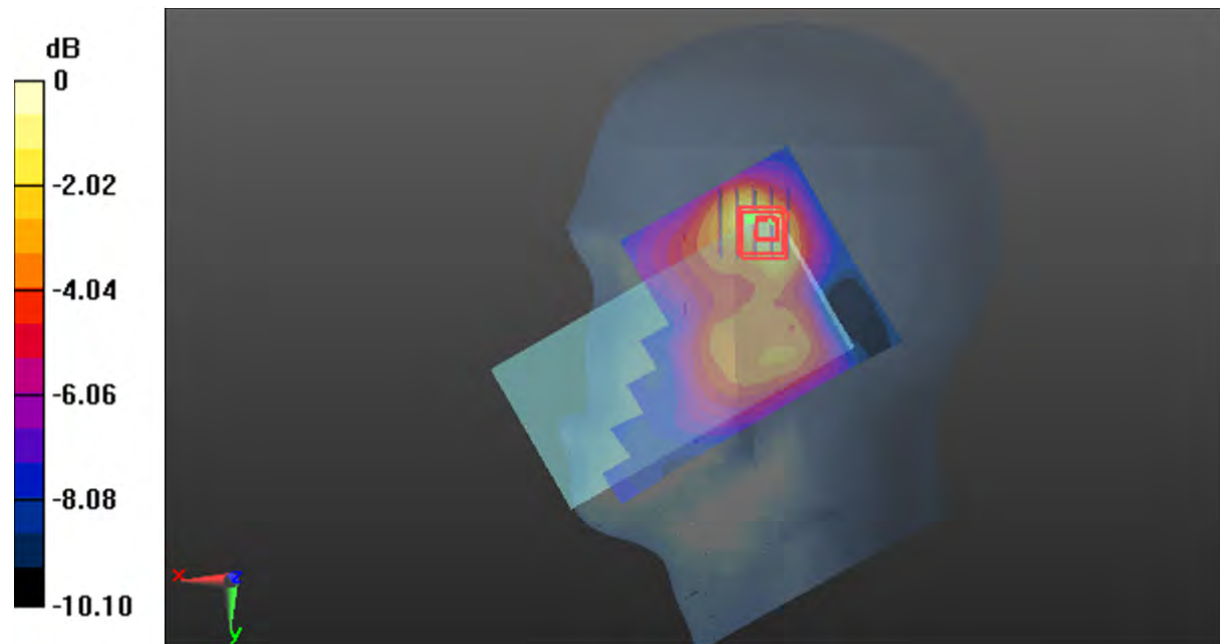

0 dB = 0.0728 W/kg = -11.38 dB dBW/kg

**Test Plot 84#: LTE Band 66\_Head Right Tilt\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.357$  S/m;  $\epsilon_r = 39.619$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1745 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0559 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.938 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0770 W/kg

**SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.025 W/kg**

Maximum value of SAR (measured) = 0.0602 W/kg

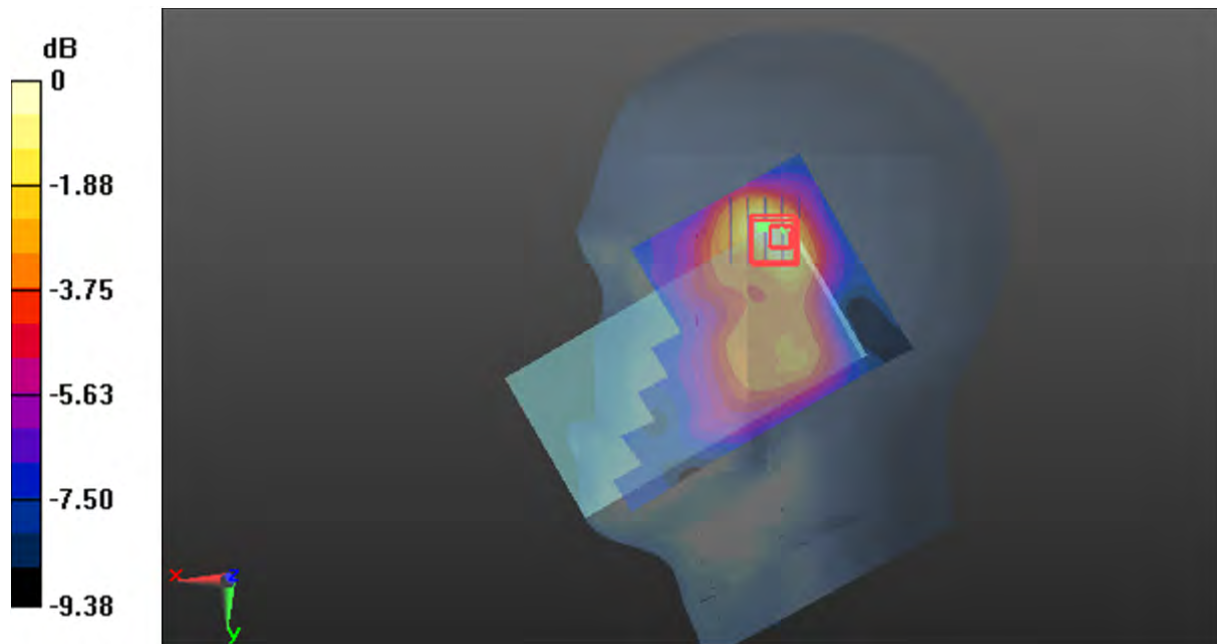

0 dB = 0.0602 W/kg = -12.20 dB dBW/kg

**Test Plot 85#: LTE Band 66\_Body Front\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.357$  S/m;  $\epsilon_r = 39.619$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1745 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.366 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.857 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.430 W/kg

**SAR(1 g) = 0.238 W/kg; SAR(10 g) = 0.139 W/kg**

Maximum value of SAR (measured) = 0.345 W/kg

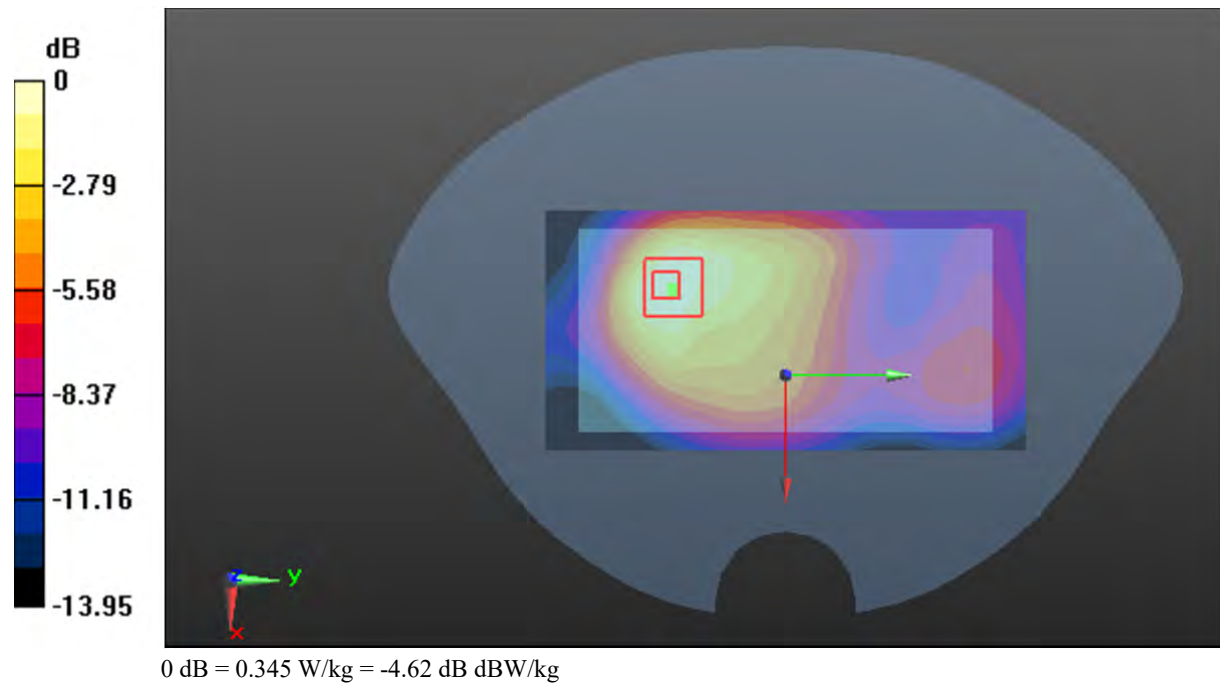

**Test Plot 86#: LTE Band 66\_Body Front\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.357$  S/m;  $\epsilon_r = 39.619$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1745 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.306 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.223 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.362 W/kg

**SAR(1 g) = 0.201 W/kg; SAR(10 g) = 0.118 W/kg**

Maximum value of SAR (measured) = 0.290 W/kg

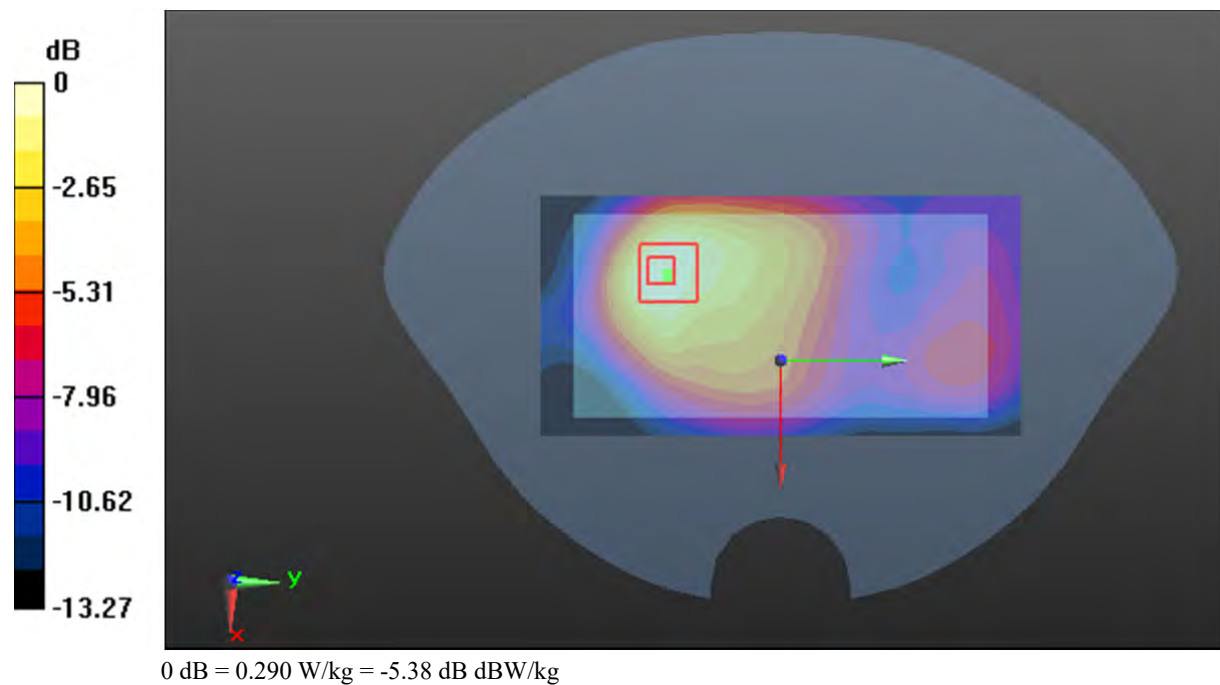

**Test Plot 87#: LTE Band 66\_Body Back\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.357$  S/m;  $\epsilon_r = 39.619$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1745 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.479 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.132 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.622 W/kg

**SAR(1 g) = 0.315 W/kg; SAR(10 g) = 0.171 W/kg**

Maximum value of SAR (measured) = 0.490 W/kg

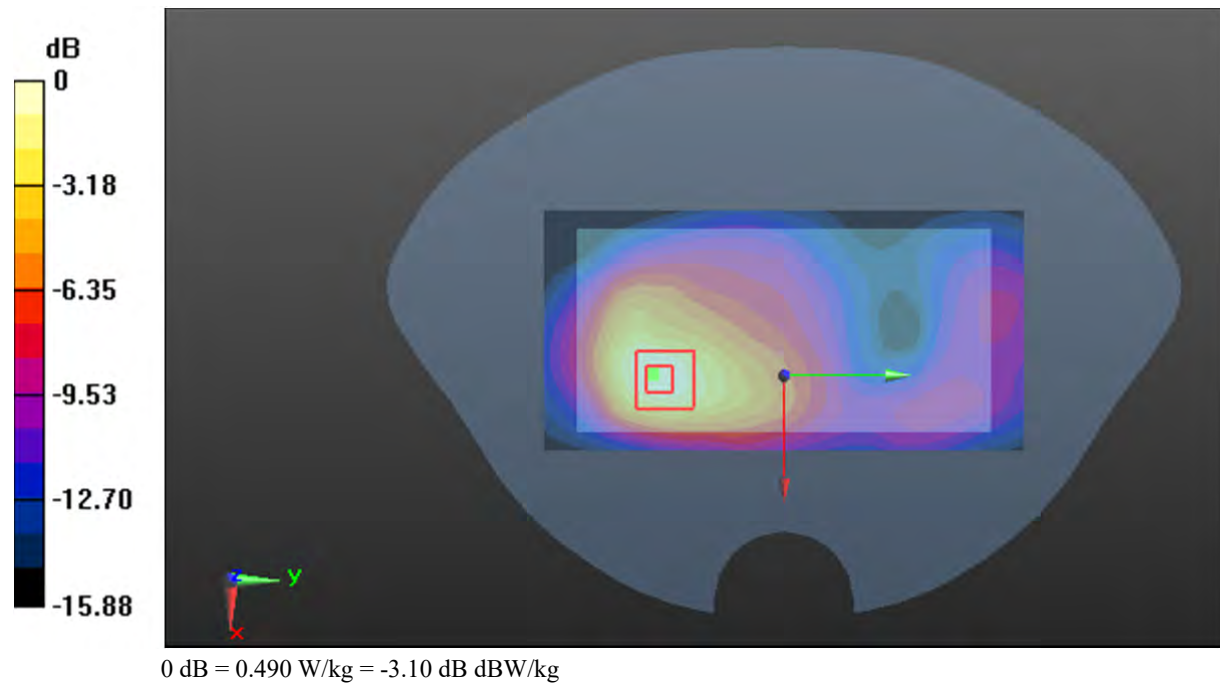

**Test Plot 88#: LTE Band 66\_Body Back\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.357$  S/m;  $\epsilon_r = 39.619$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1745 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.412 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.519 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.533 W/kg

**SAR(1 g) = 0.268 W/kg; SAR(10 g) = 0.144 W/kg**

Maximum value of SAR (measured) = 0.425 W/kg

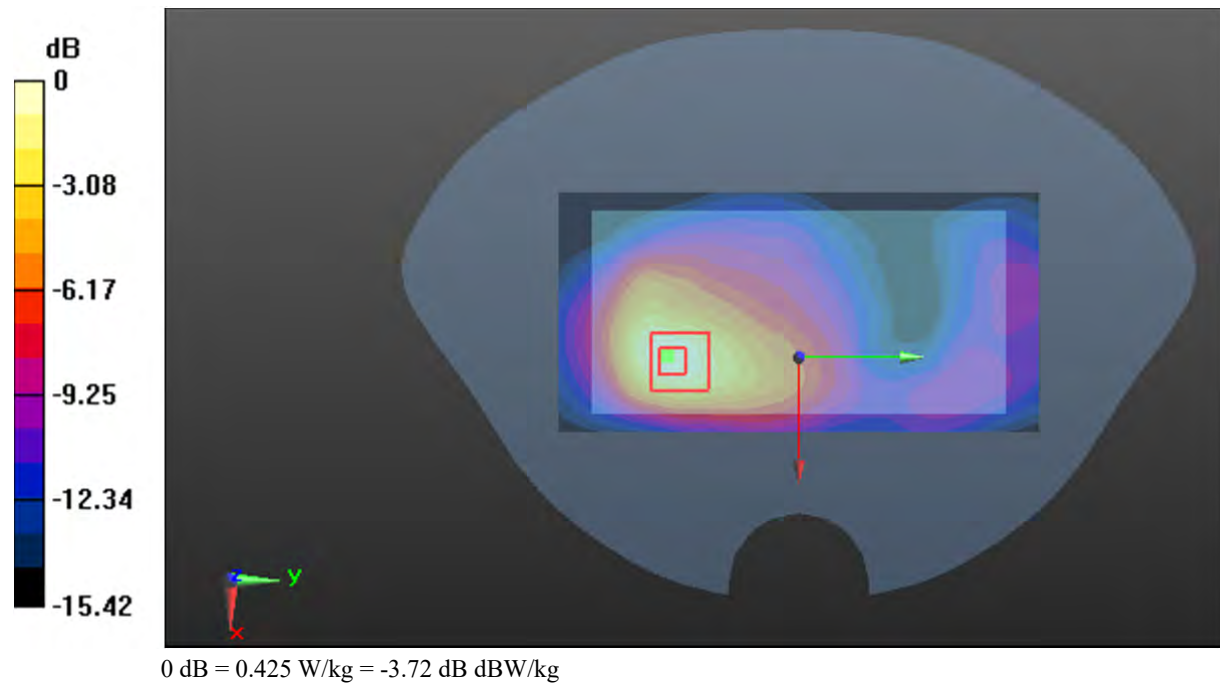

**Test Plot 89#: LTE Band 66\_Body Left\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.357$  S/m;  $\epsilon_r = 39.619$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1745 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (4x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.133 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.965 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.155 W/kg

**SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.055 W/kg**

Maximum value of SAR (measured) = 0.131 W/kg

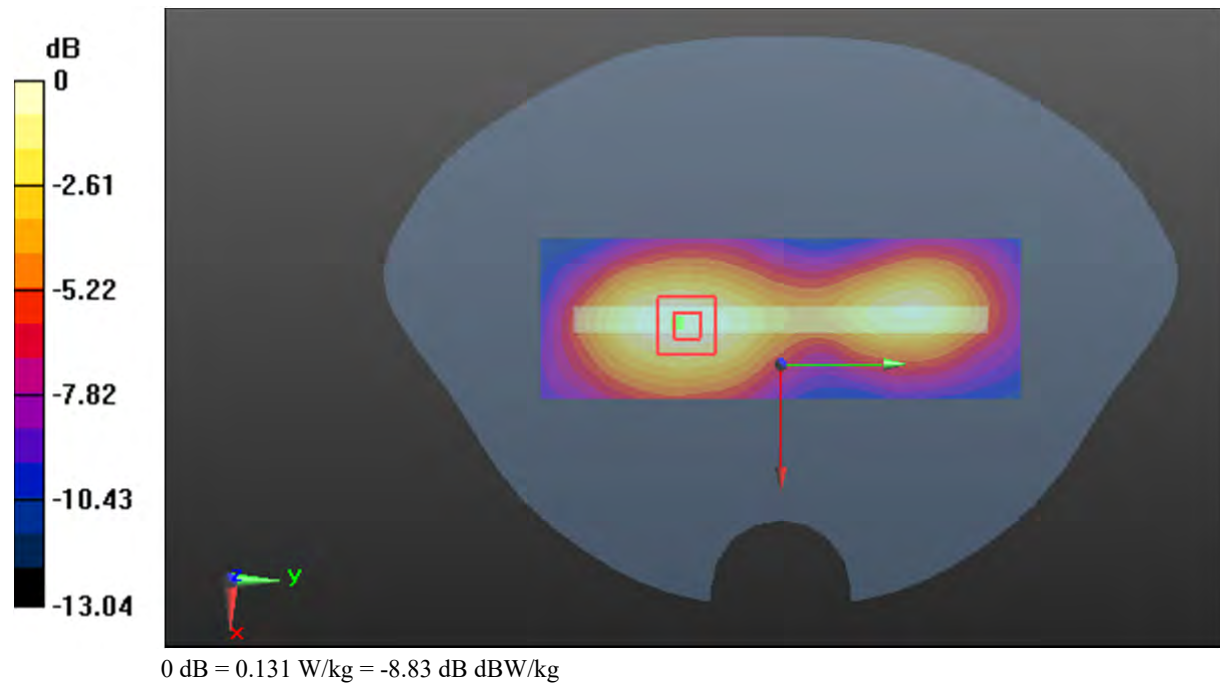

**Test Plot 90#: LTE Band 66\_Body Left\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.357$  S/m;  $\epsilon_r = 39.619$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1745 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (4x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.114 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.583 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.136 W/kg

**SAR(1 g) = 0.079 W/kg; SAR(10 g) = 0.048 W/kg**

Maximum value of SAR (measured) = 0.114 W/kg

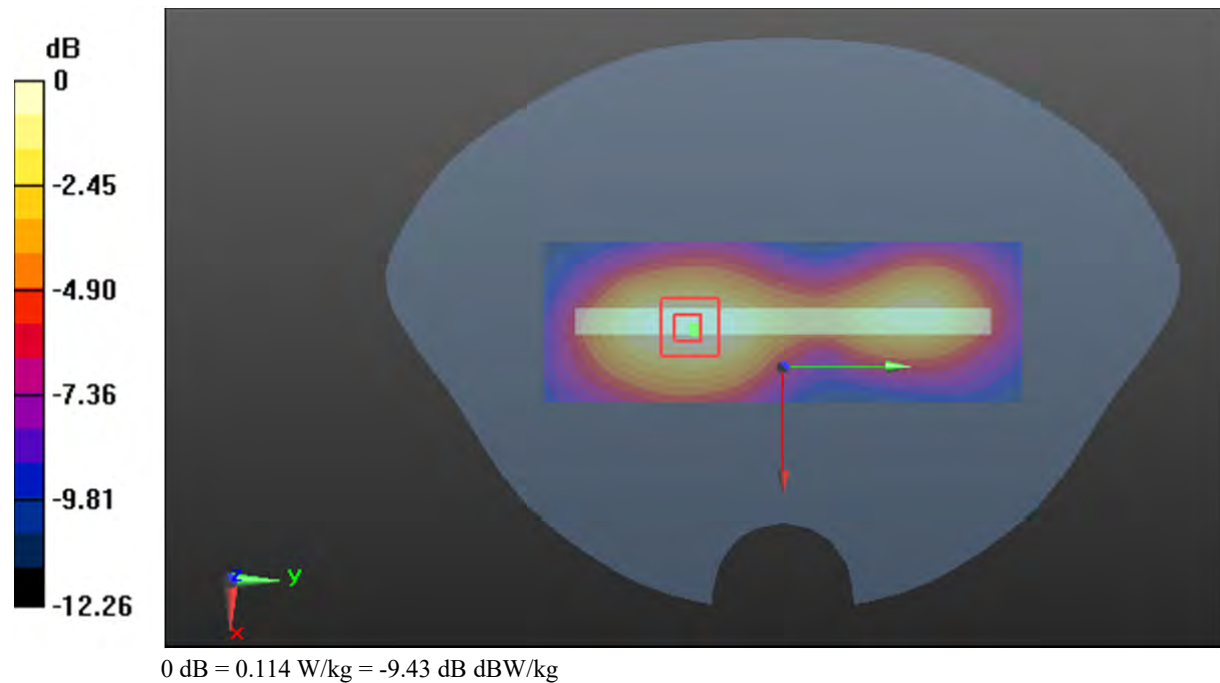

**Test Plot 91#: LTE Band 66\_Body Bottom\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.357$  S/m;  $\epsilon_r = 39.619$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1745 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x10x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.657 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.24 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.847 W/kg

**SAR(1 g) = 0.439 W/kg; SAR(10 g) = 0.222 W/kg**

Maximum value of SAR (measured) = 0.697 W/kg

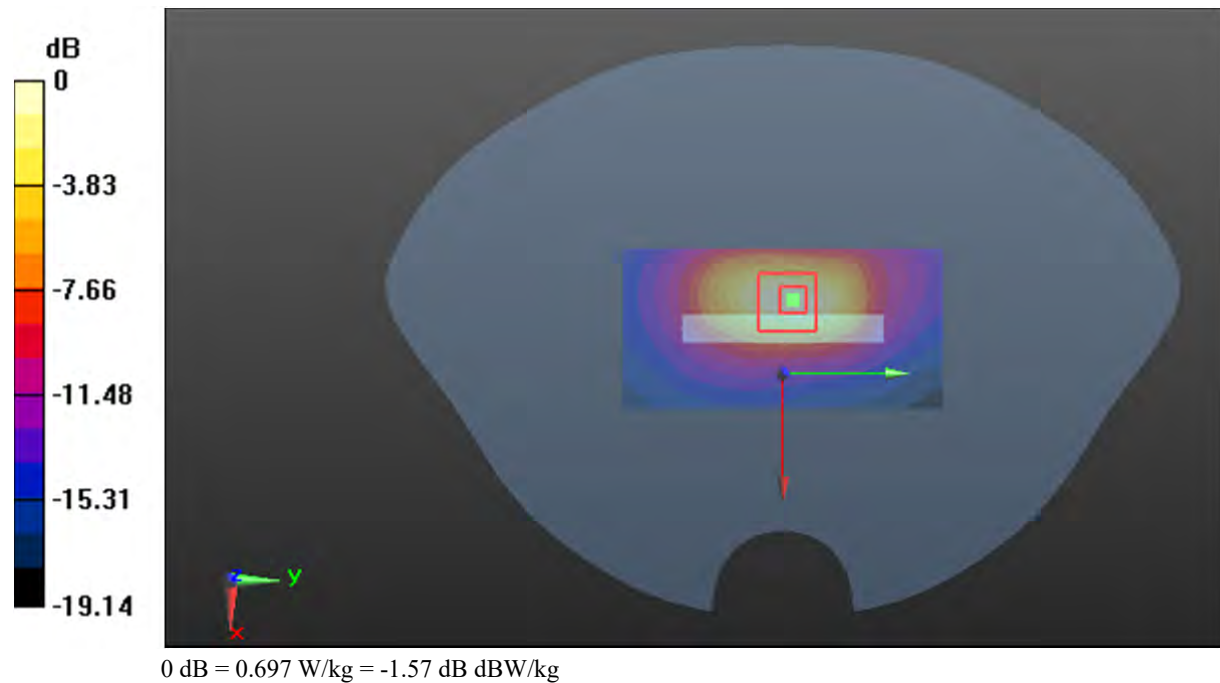

**Test Plot 92#: LTE Band 66\_Body Bottom\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.357$  S/m;  $\epsilon_r = 39.619$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1745 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x10x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.604 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.57 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.761 W/kg

**SAR(1 g) = 0.395 W/kg; SAR(10 g) = 0.200 W/kg**

Maximum value of SAR (measured) = 0.631 W/kg

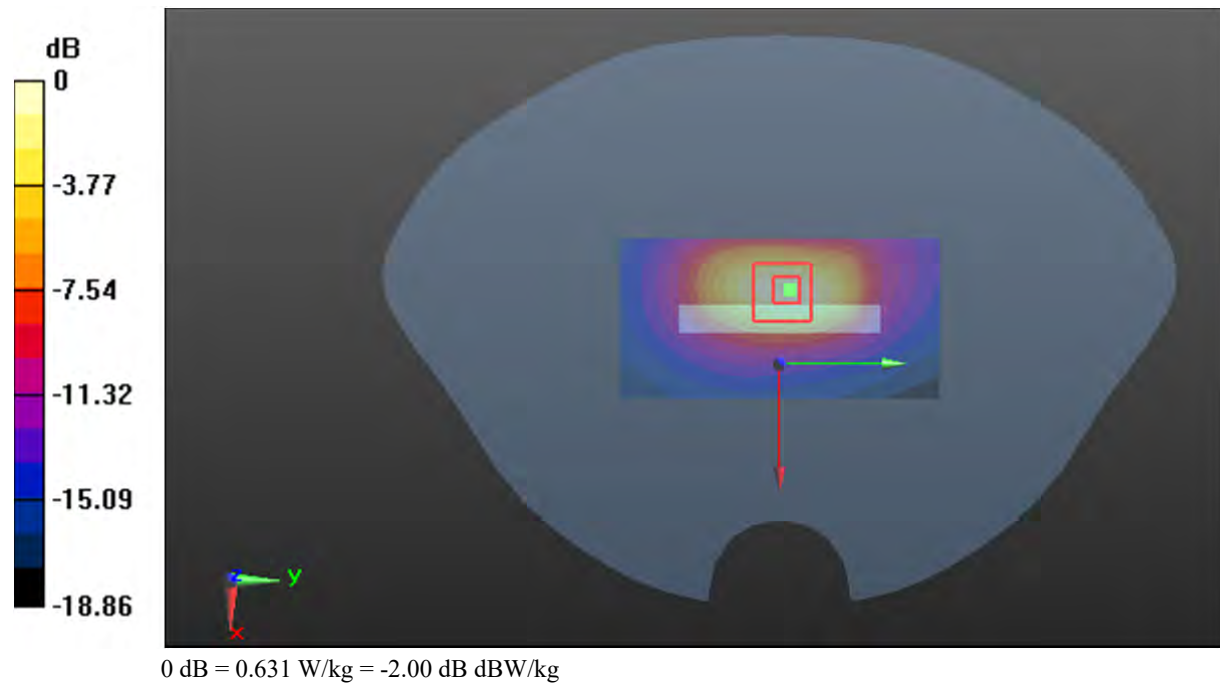

**Test Plot 93#: LTE Band 71\_Head Left Cheek\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.864$  S/m;  $\epsilon_r = 42.547$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @680.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.205 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.300 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.226 W/kg

**SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.127 W/kg**

Maximum value of SAR (measured) = 0.204 W/kg

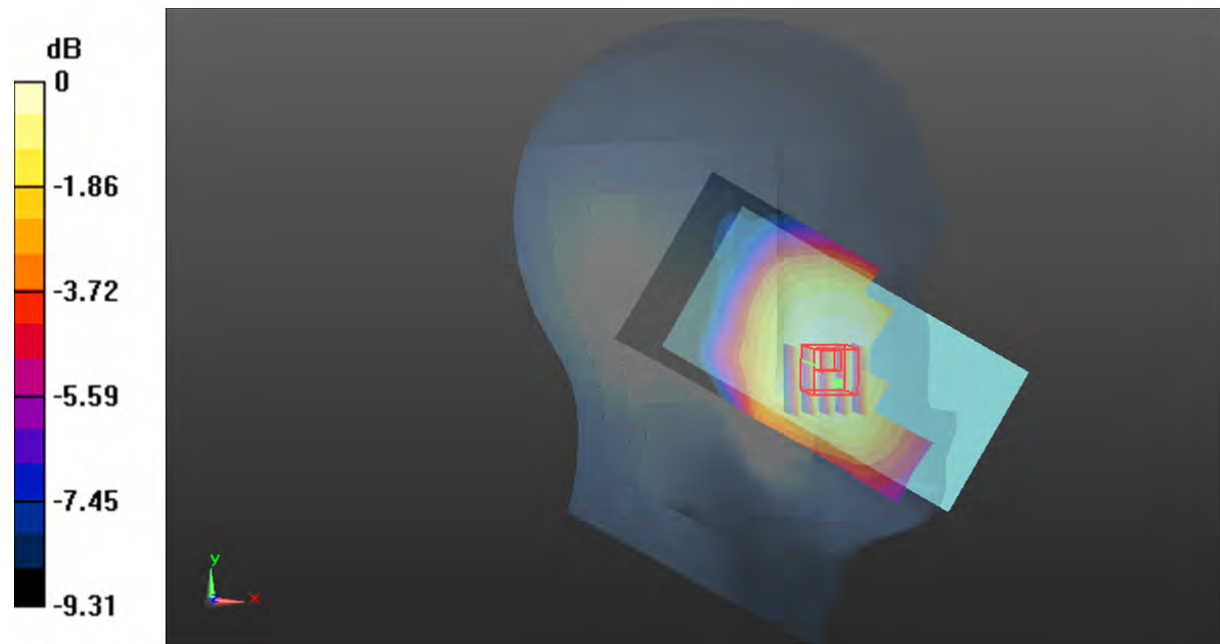

0 dB = 0.204 W/kg = -6.90 dB dBW/kg

**Test Plot 94#: LTE Band 71\_Head Left Cheek\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.864$  S/m;  $\epsilon_r = 42.547$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @680.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.163 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.686 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.178 W/kg

**SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.105 W/kg**

Maximum value of SAR (measured) = 0.162 W/kg

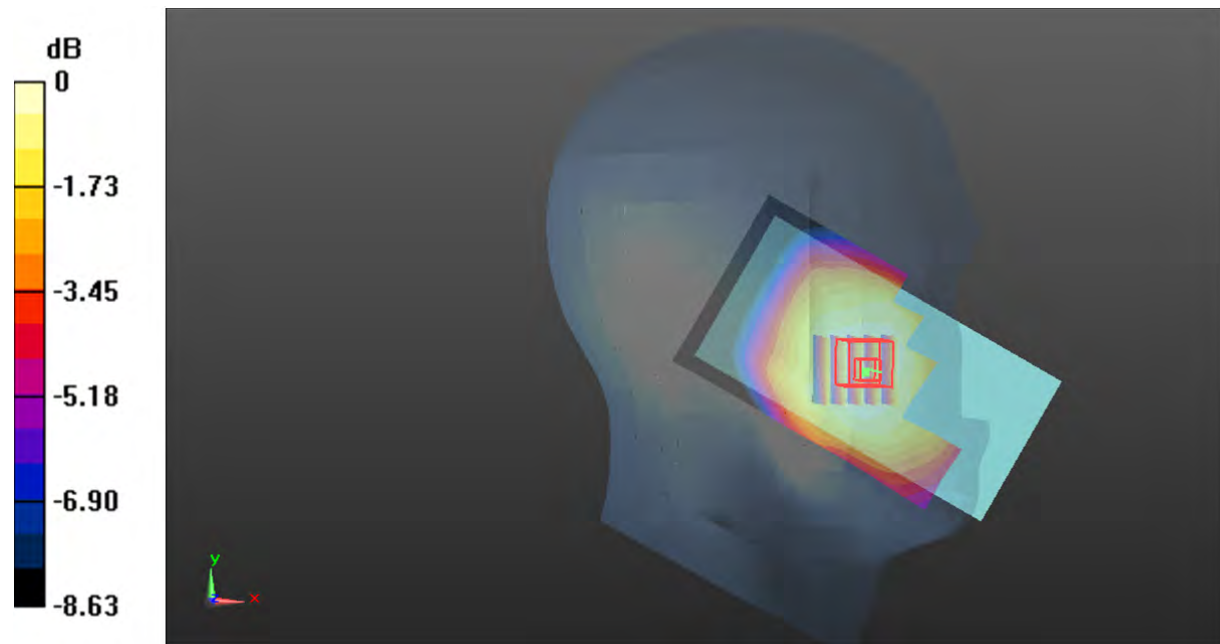

0 dB = 0.162 W/kg = -7.90 dB dBW/kg

**Test Plot 95#: LTE Band 71\_Head Left Tilt\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.864$  S/m;  $\epsilon_r = 42.547$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @680.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0851 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.097 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0900 W/kg

**SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.053 W/kg**

Maximum value of SAR (measured) = 0.0816 W/kg

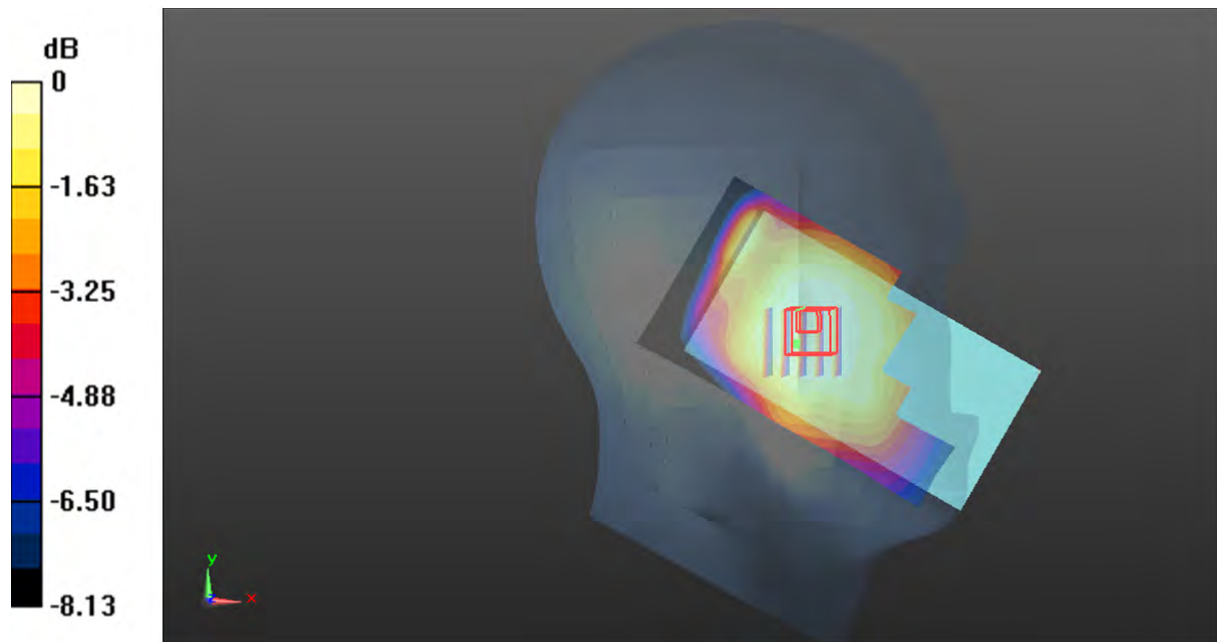

0 dB = 0.0816 W/kg = -10.88 dB dBW/kg

**Test Plot 96#: LTE Band 71\_Head Left Tilt\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.864$  S/m;  $\epsilon_r = 42.547$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @680.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0912 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.593 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0990 W/kg

**SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.059 W/kg**

Maximum value of SAR (measured) = 0.0896 W/kg

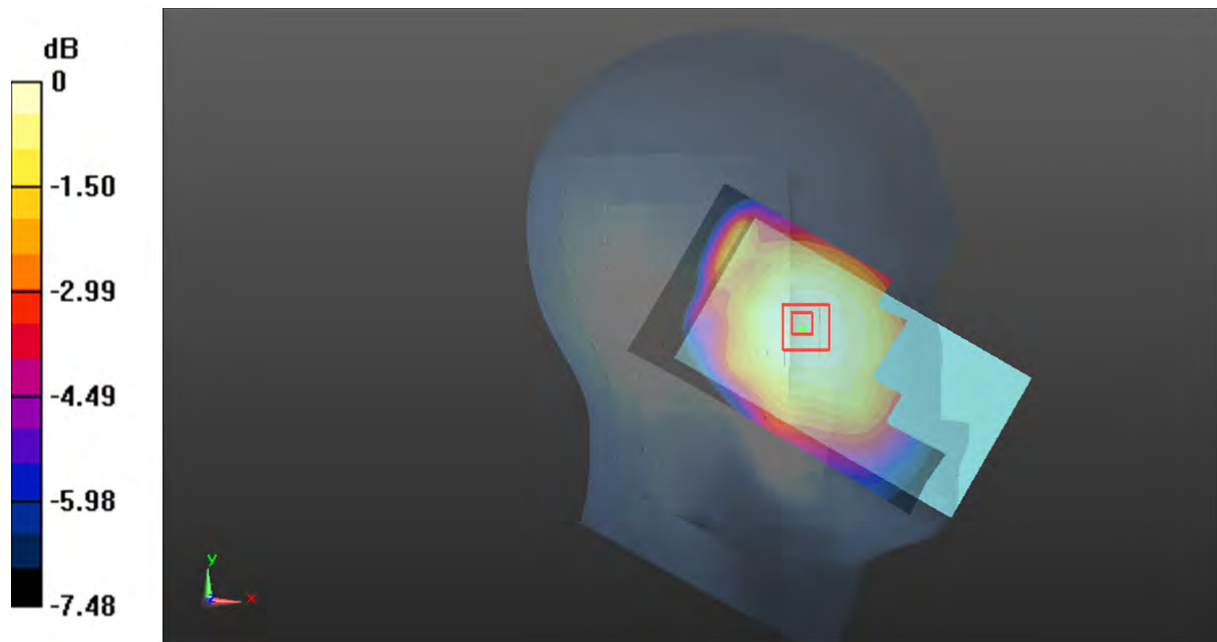

0 dB = 0.0896 W/kg = -10.48 dB dBW/kg

**Test Plot 97#: LTE Band 71\_Head Right Cheek\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.864$  S/m;  $\epsilon_r = 42.547$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @680.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.214 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.742 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.235 W/kg

**SAR(1 g) = 0.175 W/kg; SAR(10 g) = 0.127 W/kg**

Maximum value of SAR (measured) = 0.212 W/kg

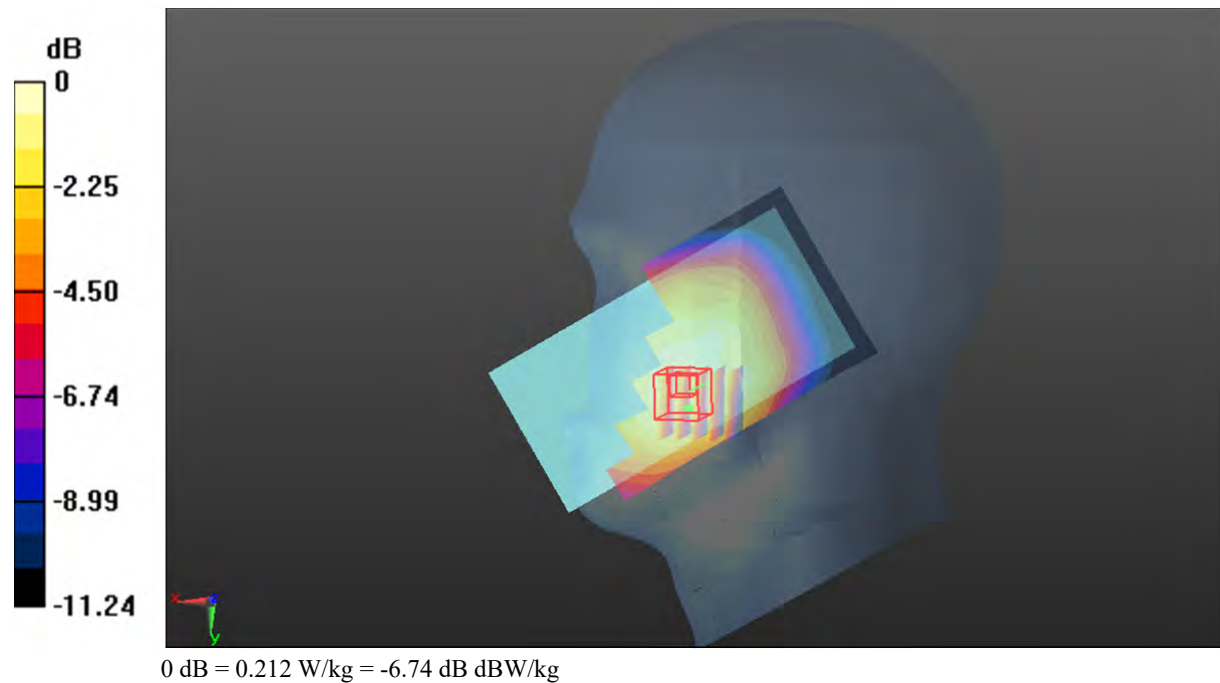

**Test Plot 98#: LTE Band 71\_Head Right Cheek\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.864$  S/m;  $\epsilon_r = 42.547$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @680.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.177 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.355 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.201 W/kg

**SAR(1 g) = 0.146 W/kg; SAR(10 g) = 0.106 W/kg**

Maximum value of SAR (measured) = 0.182 W/kg

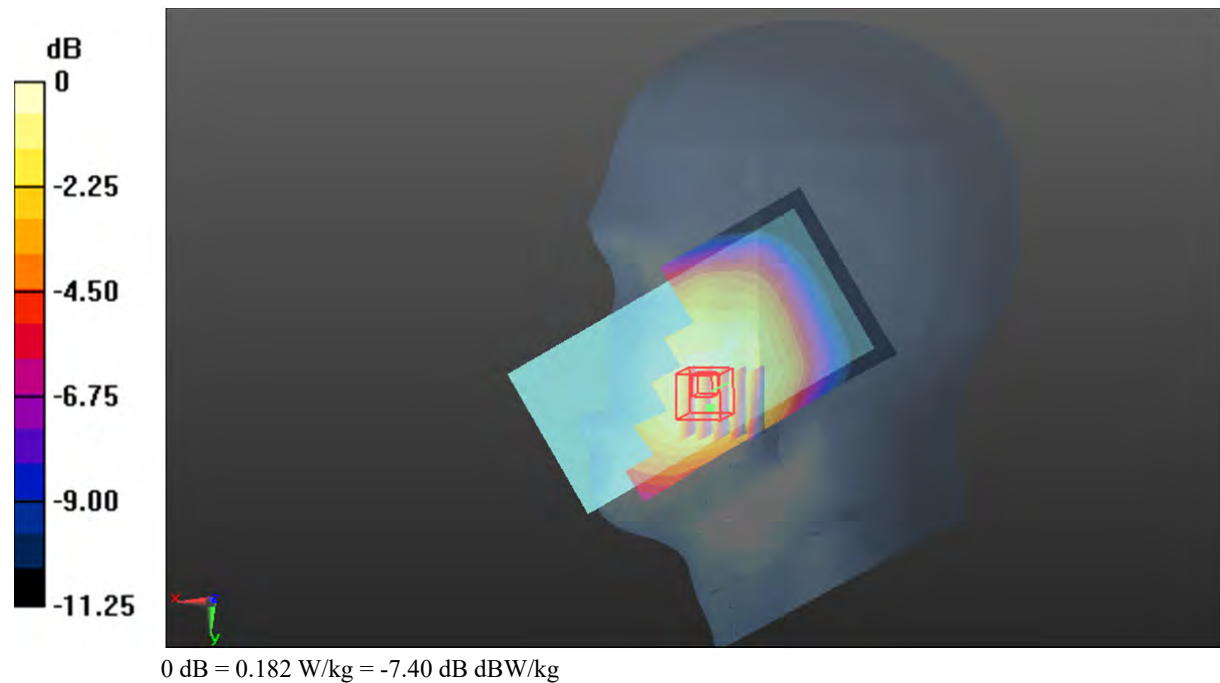

**Test Plot 99#: LTE Band 71\_Head Right Tilt\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.864$  S/m;  $\epsilon_r = 42.547$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @680.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0668 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.818 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0710 W/kg

**SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.041 W/kg**

Maximum value of SAR (measured) = 0.0649 W/kg

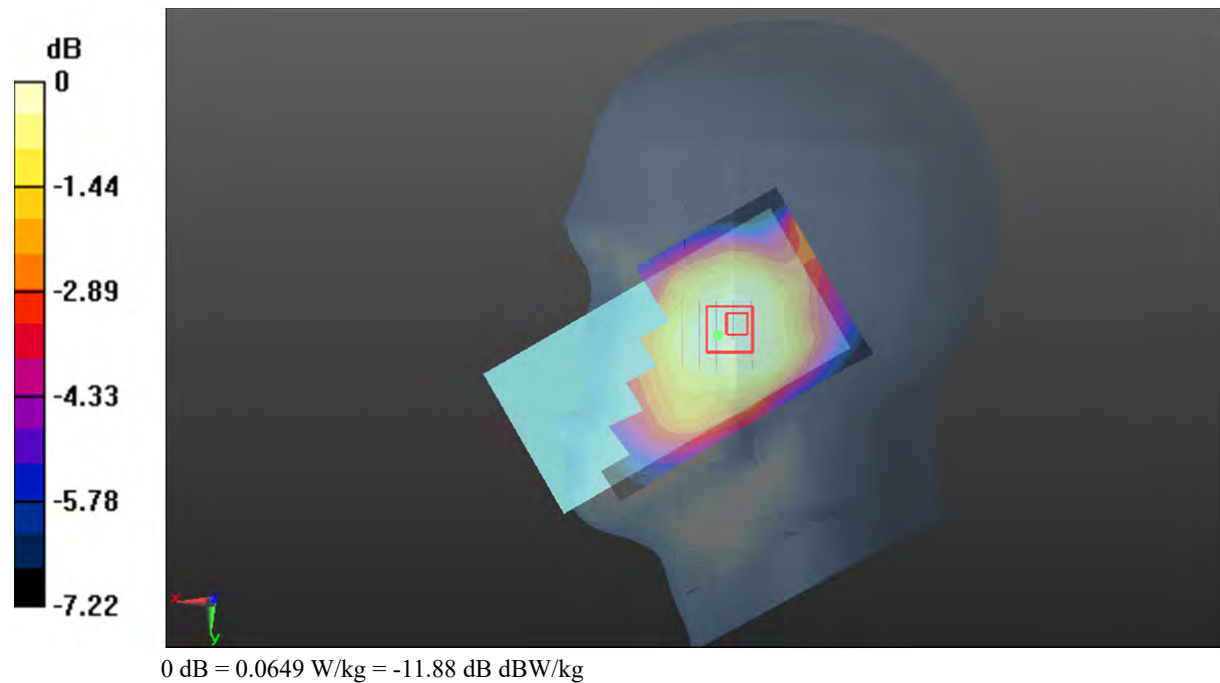

**Test Plot 100#: LTE Band 71\_Head Right Tilt\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.864$  S/m;  $\epsilon_r = 42.547$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @680.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0552 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.186 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.0580 W/kg

**SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.034 W/kg**

Maximum value of SAR (measured) = 0.0525 W/kg

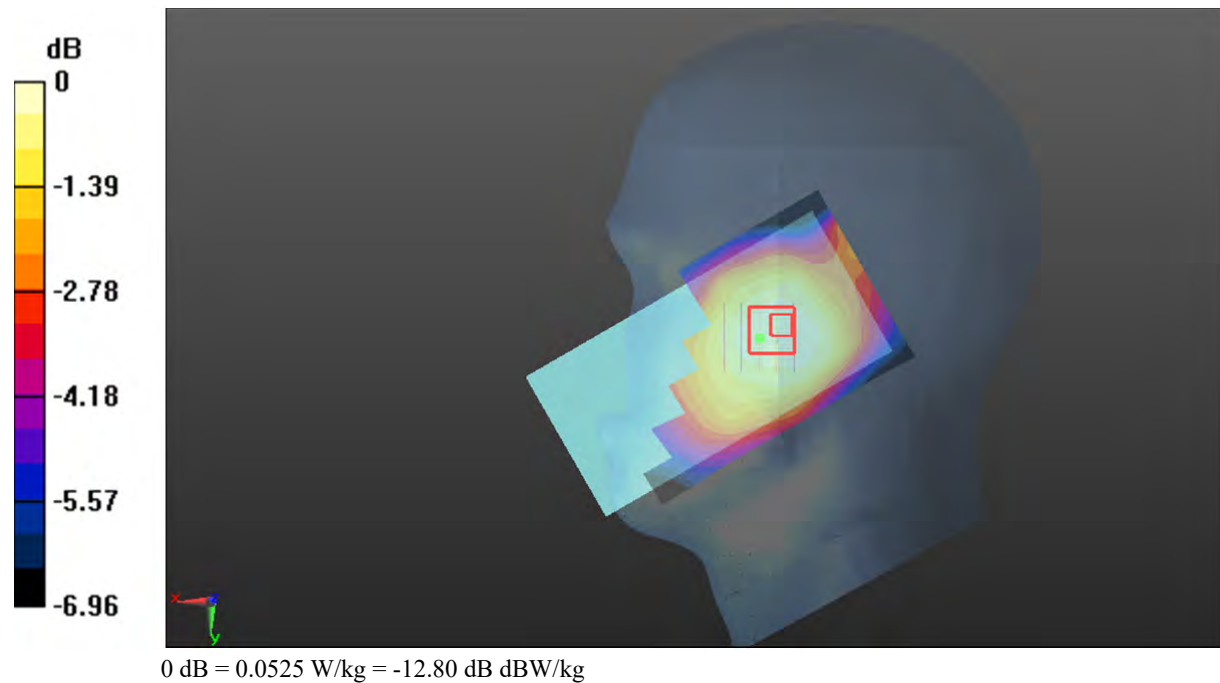

**Test Plot 101#: LTE Band 71\_Body Front\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.864$  S/m;  $\epsilon_r = 42.547$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @680.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0817 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.330 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0950 W/kg

**SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.034 W/kg**

Maximum value of SAR (measured) = 0.0746 W/kg

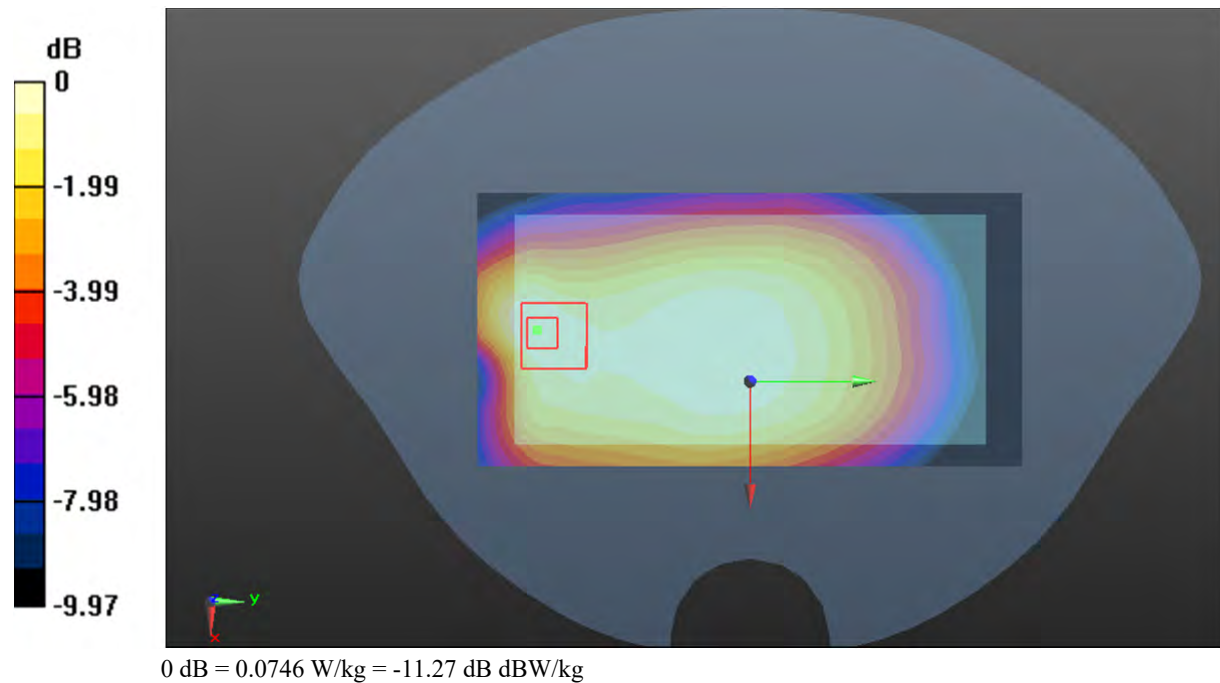

**Test Plot 102#: LTE Band 71\_Body Front\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.864$  S/m;  $\epsilon_r = 42.547$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @680.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0714 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.731 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0830 W/kg

**SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.030 W/kg**

Maximum value of SAR (measured) = 0.0646 W/kg

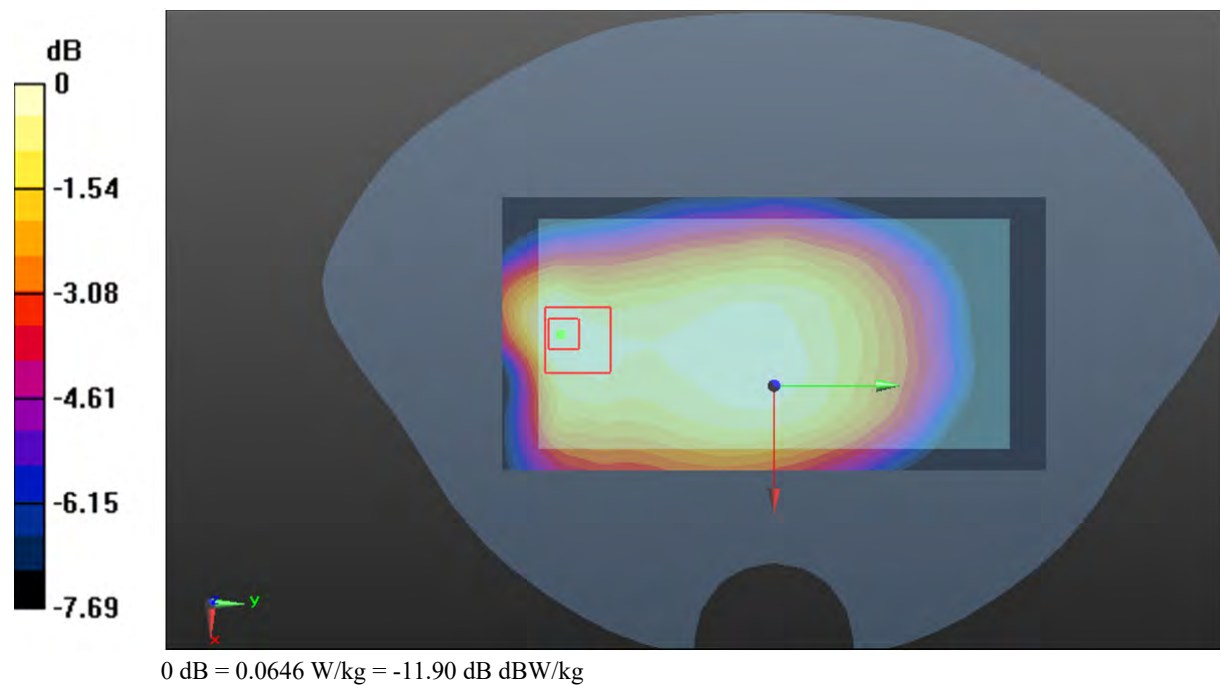

**Test Plot 103#: LTE Band 71\_Body Back\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.864$  S/m;  $\epsilon_r = 42.547$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @680.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.150 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.25 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.167 W/kg

**SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.089 W/kg**

Maximum value of SAR (measured) = 0.149 W/kg

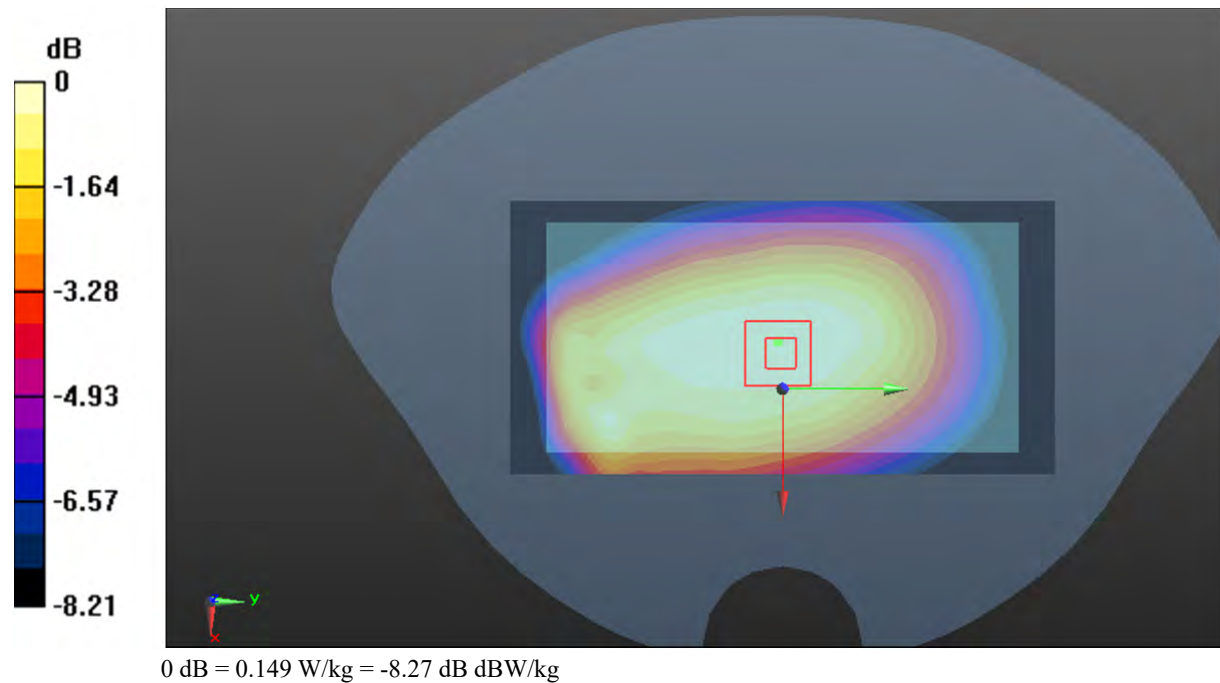

**Test Plot 104#: LTE Band 71\_Body Back\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.864$  S/m;  $\epsilon_r = 42.547$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @680.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.130 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.18 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.142 W/kg

**SAR(1 g) = 0.101 W/kg; SAR(10 g) = 0.075 W/kg**

Maximum value of SAR (measured) = 0.127 W/kg

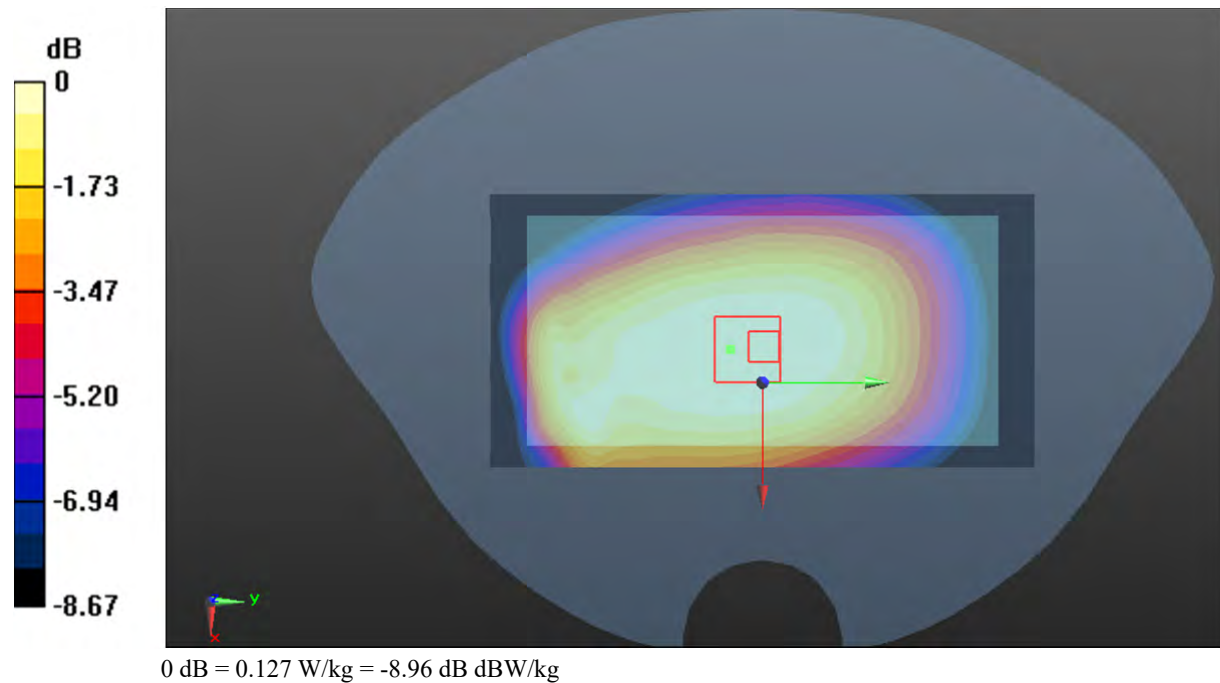

**Test Plot 105#: LTE Band 71\_Body Left\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.864$  S/m;  $\epsilon_r = 42.547$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @680.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (4x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.227 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.16 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.261 W/kg

**SAR(1 g) = 0.167 W/kg; SAR(10 g) = 0.115 W/kg**

Maximum value of SAR (measured) = 0.225 W/kg

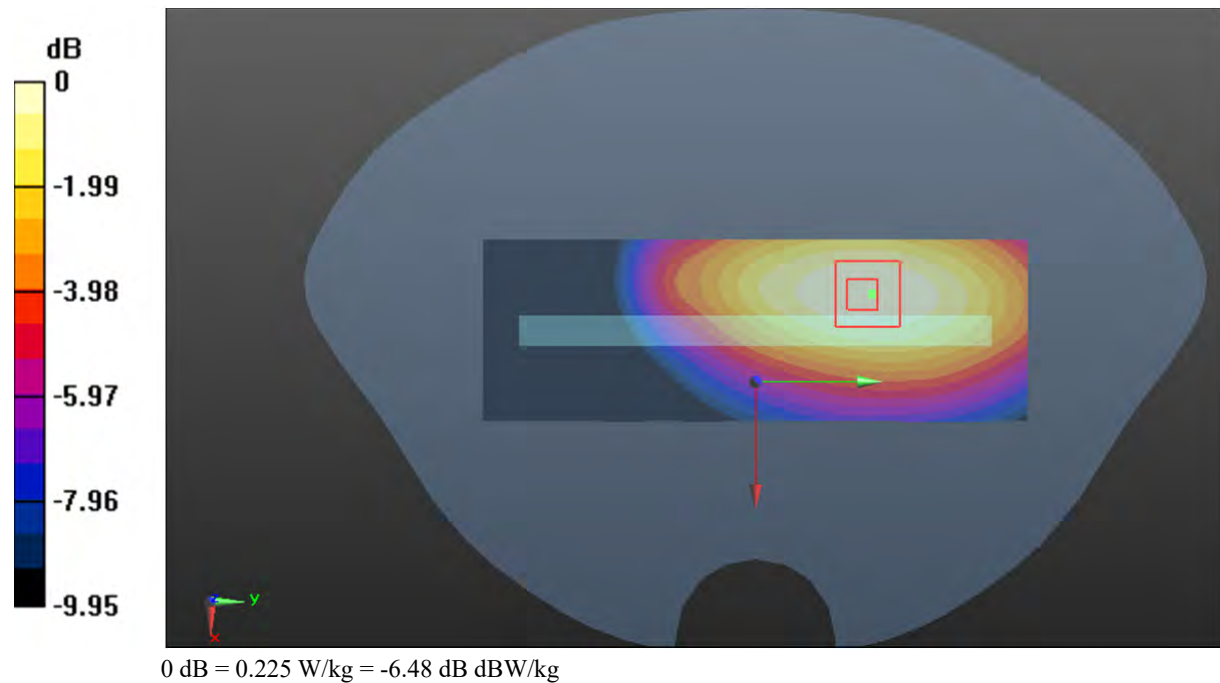

**Test Plot 106#: LTE Band 71\_Body Left\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.864$  S/m;  $\epsilon_r = 42.547$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @680.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (4x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.190 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.627 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.223 W/kg

**SAR(1 g) = 0.141 W/kg; SAR(10 g) = 0.097 W/kg**

Maximum value of SAR (measured) = 0.191 W/kg

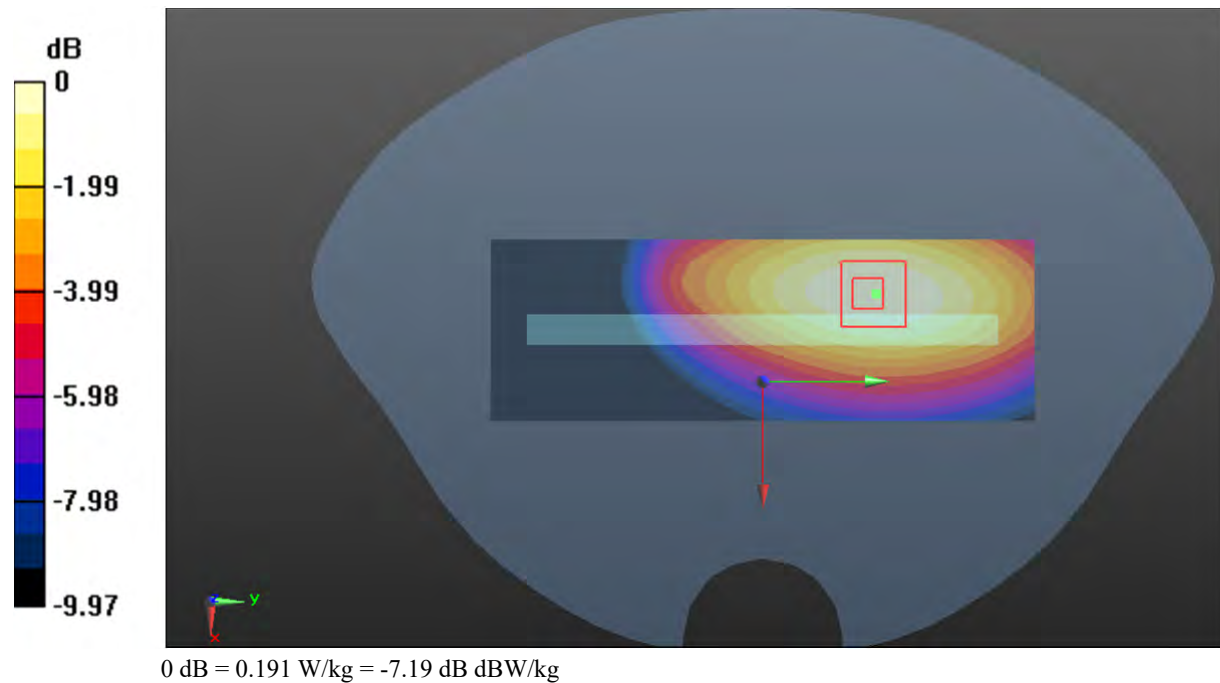

**Test Plot 107#: LTE Band 71\_Body Bottom\_1RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.864$  S/m;  $\epsilon_r = 42.547$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @680.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (4x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0753 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.388 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.122 W/kg

**SAR(1 g) = 0.046 W/kg; SAR(10 g) = 0.024 W/kg**

Maximum value of SAR (measured) = 0.0855 W/kg

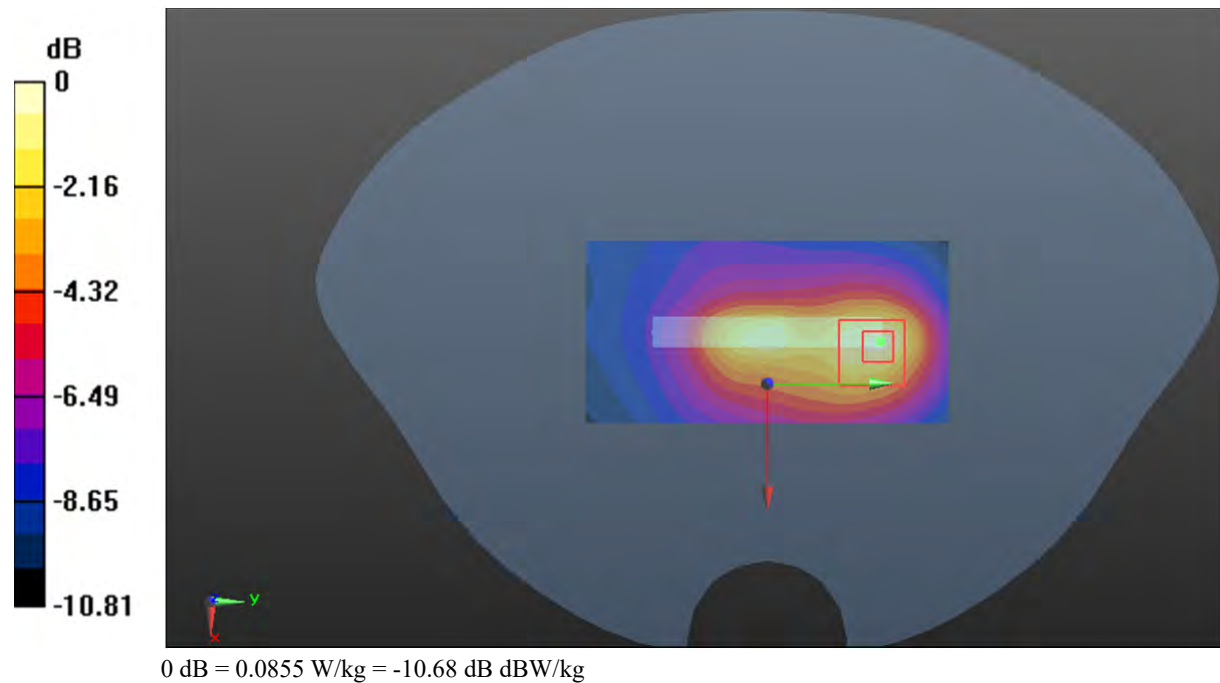

**Test Plot 108#: LTE Band 71\_Body Bottom\_50%RB\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.864$  S/m;  $\epsilon_r = 42.547$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @680.5 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (4x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0639 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.728 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.100 W/kg

**SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.020 W/kg**

Maximum value of SAR (measured) = 0.0691 W/kg

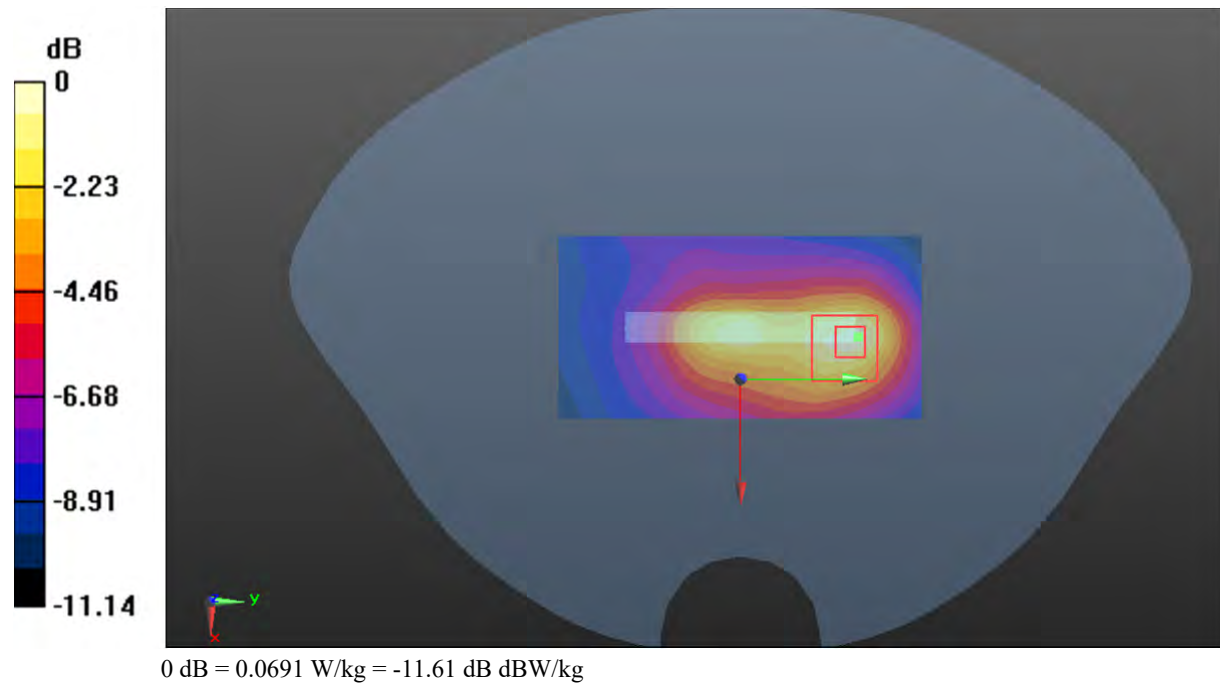

**Test Plot 109#: 2.4G WIFI\_Head Left Cheek\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**


Communication System: 802.11 b (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.798 \text{ S/m}$ ;  $\epsilon_r = 38.852$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.22, 7.22, 7.22) @ 2437 MHz; Calibrated: 2022/5/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

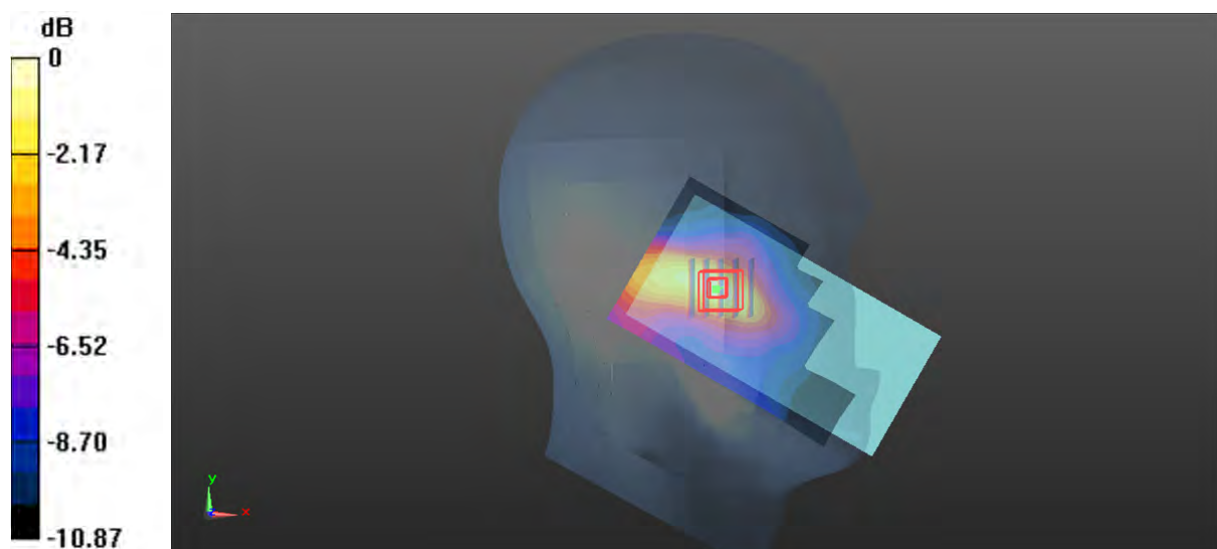**Area Scan (8x10x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$ Maximum value of SAR (measured) =  $0.217 \text{ W/kg}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ Reference Value =  $5.898 \text{ V/m}$ ; Power Drift =  $0.17 \text{ dB}$ Peak SAR (extrapolated) =  $0.269 \text{ W/kg}$ **SAR(1 g) =  $0.145 \text{ W/kg}$ ; SAR(10 g) =  $0.084 \text{ W/kg}$** Maximum value of SAR (measured) =  $0.222 \text{ W/kg}$  $0 \text{ dB} = 0.222 \text{ W/kg} = -6.54 \text{ dBW/kg}$

**Test Plot 110#: 2.4G WIFI\_Head Left Tilt\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: 802.11 b (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.798$  S/m;  $\epsilon_r = 38.852$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.22, 7.22, 7.22) @ 2437 MHz; Calibrated: 2022/5/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x13x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.229 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.980 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.308 W/kg

**SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.074 W/kg**

Maximum value of SAR (measured) = 0.241 W/kg

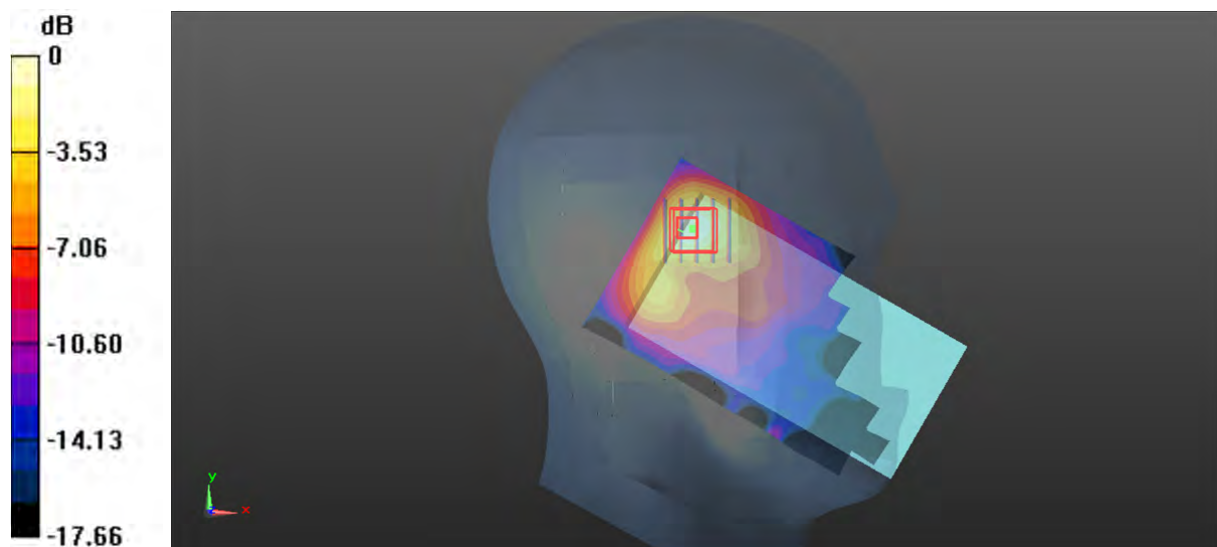

0 dB = 0.241 W/kg = -6.18 dBW/kg

**Test Plot 111#: 2.4G WIFI\_Head Right Cheek\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: 802.11 b (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.798 \text{ S/m}$ ;  $\epsilon_r = 38.852$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.22, 7.22, 7.22) @ 2437 MHz; Calibrated: 2022/5/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x13x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$ 

Maximum value of SAR (measured) = 0.202 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 7.869 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.221 W/kg

**SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.075 W/kg**

Maximum value of SAR (measured) = 0.186 W/kg

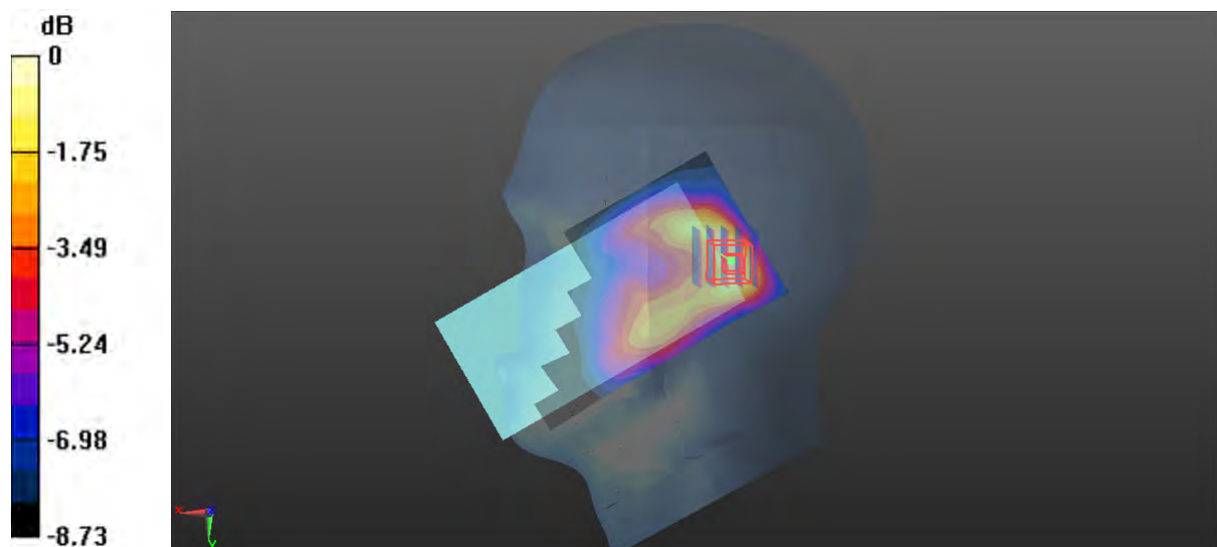

0 dB = 0.186 W/kg = -7.30 dBW/kg

**Test Plot 112#: 2.4G WIFI\_Head Right Tilt\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**


Communication System: 802.11 b (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.798 \text{ S/m}$ ;  $\epsilon_r = 38.852$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.22, 7.22, 7.22) @ 2437 MHz; Calibrated: 2022/5/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

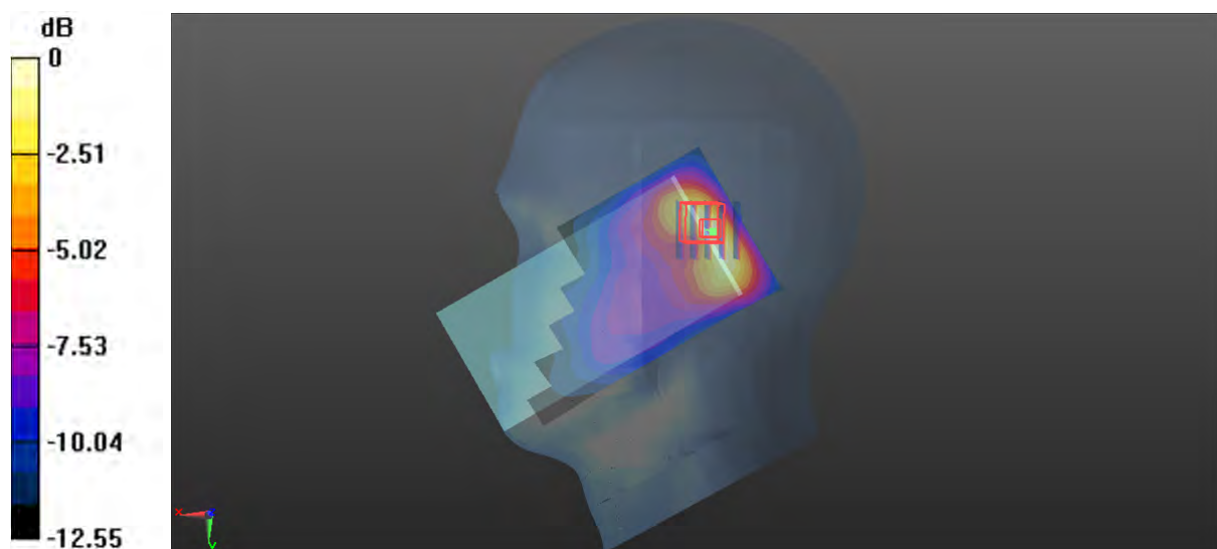**Area Scan (8x13x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$ Maximum value of SAR (measured) =  $0.221 \text{ W/kg}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ Reference Value =  $7.372 \text{ V/m}$ ; Power Drift =  $0.13 \text{ dB}$ Peak SAR (extrapolated) =  $0.249 \text{ W/kg}$ **SAR(1 g) =  $0.122 \text{ W/kg}$ ; SAR(10 g) =  $0.065 \text{ W/kg}$** Maximum value of SAR (measured) =  $0.210 \text{ W/kg}$  $0 \text{ dB} = 0.210 \text{ W/kg} = -6.78 \text{ dBW/kg}$

**Test Plot 113#: 2.4G WIFI\_Body Front\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**


Communication System: 802.11 b (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.798 \text{ S/m}$ ;  $\epsilon_r = 38.852$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.22, 7.22, 7.22) @ 2437 MHz; Calibrated: 2022/5/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

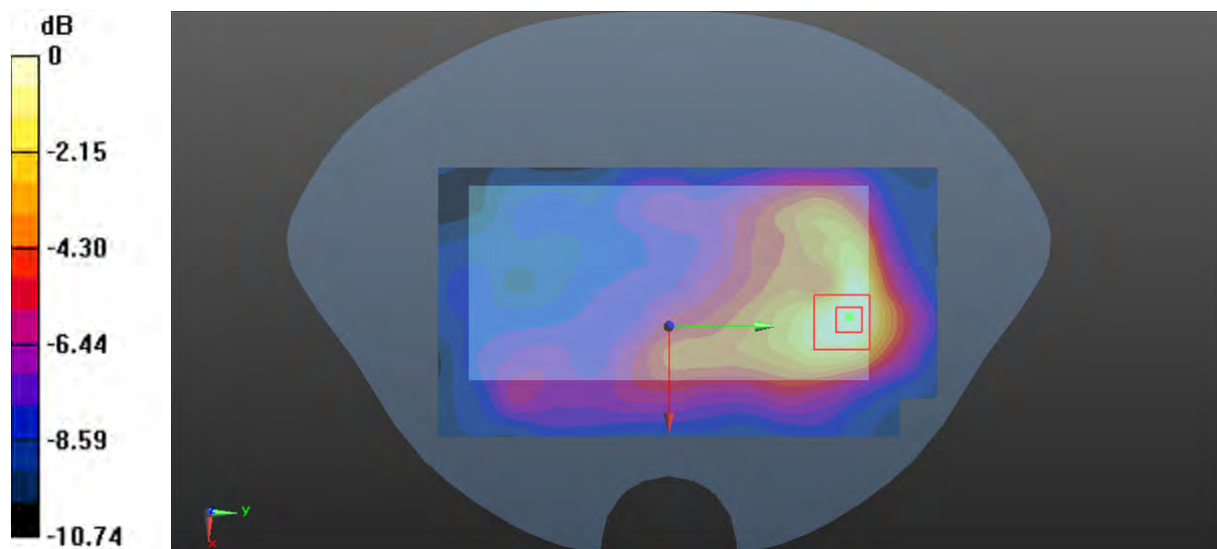**Area Scan (8x13x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$ Maximum value of SAR (measured) =  $0.135 \text{ W/kg}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ Reference Value =  $3.376 \text{ V/m}$ ; Power Drift =  $0.04 \text{ dB}$ Peak SAR (extrapolated) =  $0.148 \text{ W/kg}$ **SAR(1 g) =  $0.082 \text{ W/kg}$ ; SAR(10 g) =  $0.048 \text{ W/kg}$** Maximum value of SAR (measured) =  $0.122 \text{ W/kg}$ 

**Test Plot 114#: 2.4G WIFI\_Body Back\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**


Communication System: 802.11 b (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.798 \text{ S/m}$ ;  $\epsilon_r = 38.852$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.22, 7.22, 7.22) @ 2437 MHz; Calibrated: 2022/5/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

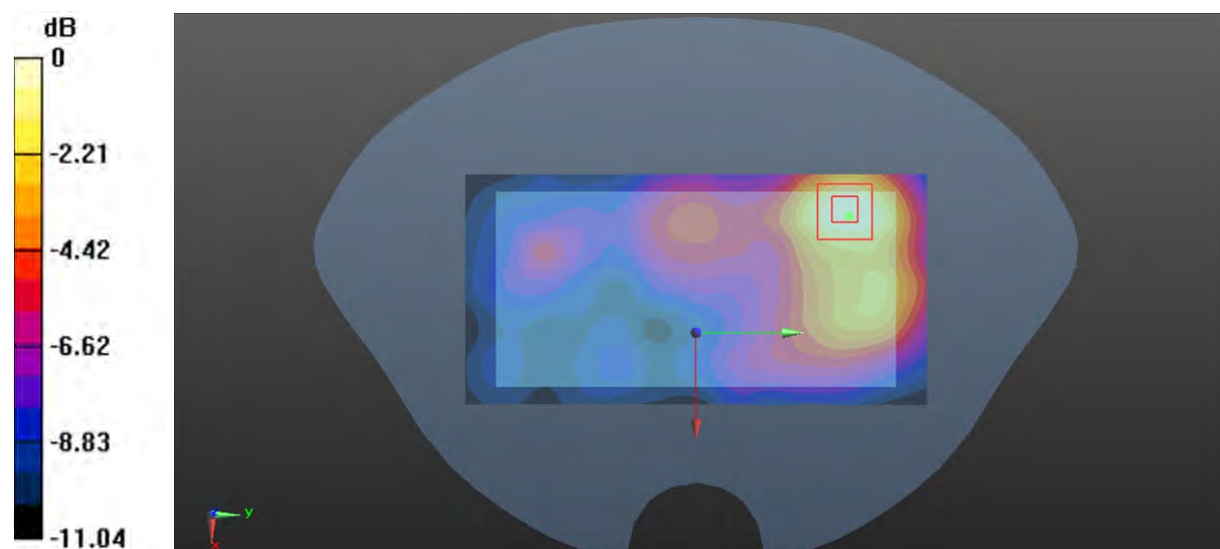**Area Scan (8x13x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$ Maximum value of SAR (measured) =  $0.126 \text{ W/kg}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ Reference Value =  $3.423 \text{ V/m}$ ; Power Drift =  $0.18 \text{ dB}$ Peak SAR (extrapolated) =  $0.156 \text{ W/kg}$ **SAR(1 g) =  $0.086 \text{ W/kg}$ ; SAR(10 g) =  $0.049 \text{ W/kg}$** Maximum value of SAR (measured) =  $0.122 \text{ W/kg}$ 0 dB =  $0.122 \text{ W/kg}$  =  $-9.14 \text{ dBW/kg}$

**Test Plot 115#: 2.4G WIFI\_Body Right\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: 802.11 b (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.798$  S/m;  $\epsilon_r = 38.852$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.22, 7.22, 7.22) @ 2437 MHz; Calibrated: 2022/5/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x12x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0380 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.738 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0500 W/kg

**SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.015 W/kg**

Maximum value of SAR (measured) = 0.0404 W/kg

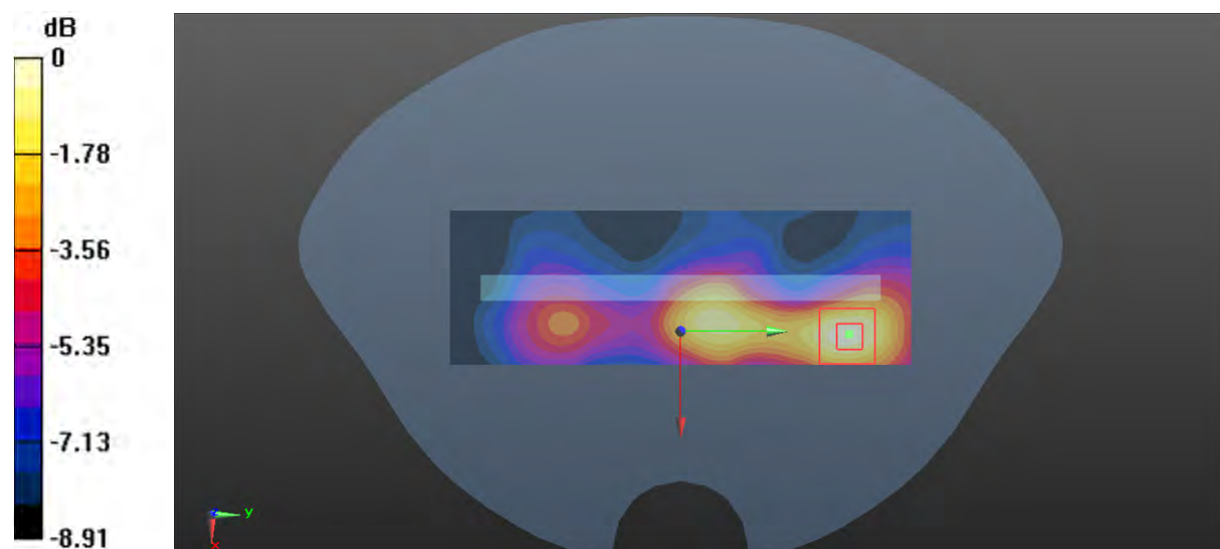

0 dB = 0.0404 W/kg = -13.94 dBW/kg

**Test Plot 116#: 2.4G WIFI\_Body Top\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: 802.11 b (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.798 \text{ S/m}$ ;  $\epsilon_r = 38.852$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.22, 7.22, 7.22) @ 2437 MHz; Calibrated: 2022/5/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x10x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$ 

Maximum value of SAR (measured) = 0.0794 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 3.114 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0960 W/kg

**SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.028 W/kg**

Maximum value of SAR (measured) = 0.0788 W/kg

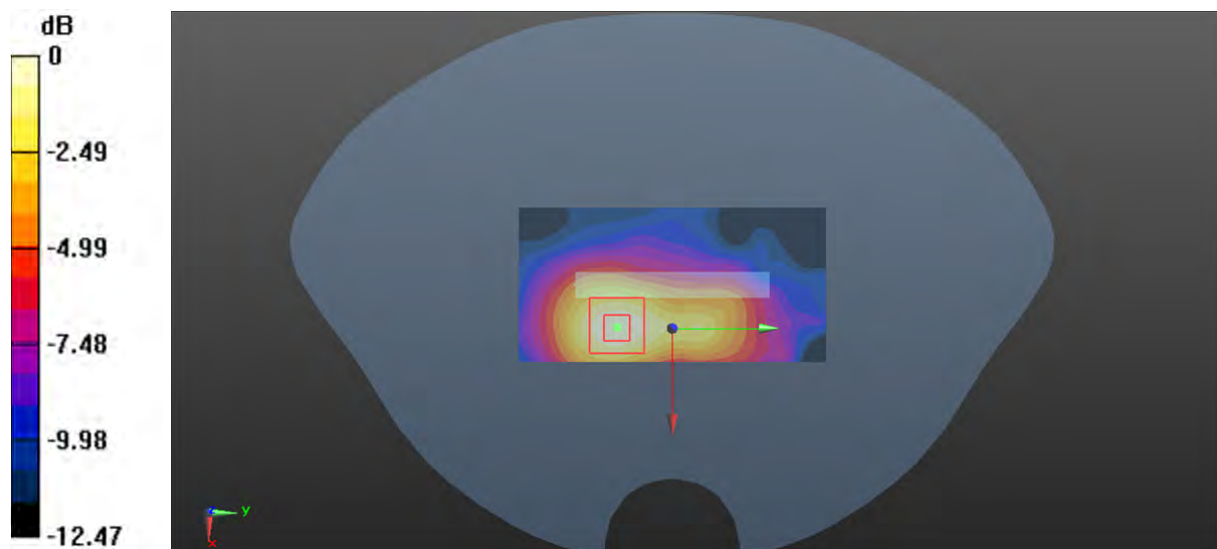

0 dB = 0.0788 W/kg = -11.03 dBW/kg

**Test Plot 117#: 5.2G WIFI\_Head Left Cheek\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: 802.11 a (0); Frequency: 5200 MHz; Duty Cycle: 1:1.008

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.548$  S/m;  $\epsilon_r = 36.412$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.6, 5.6, 5.6) @ 5200 MHz; Calibrated: 2023/1/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x15x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.92 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.101 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 2.89 W/kg

**SAR(1 g) = 0.744 W/kg; SAR(10 g) = 0.288 W/kg**

Maximum value of SAR (measured) = 1.71 W/kg

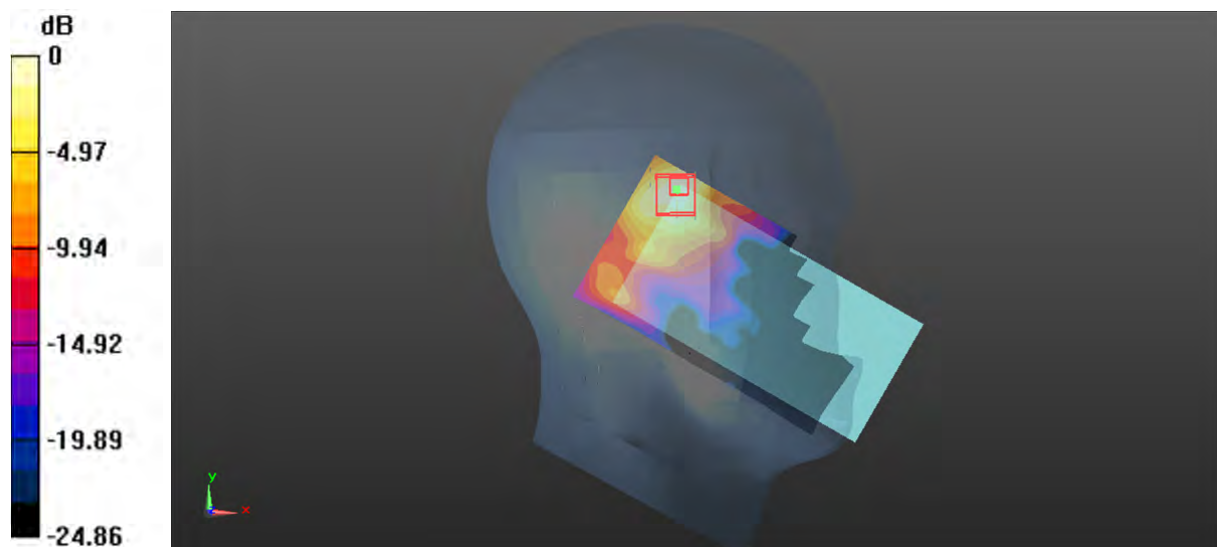

0 dB = 1.71 W/kg = 2.33 dBW/kg

**Test Plot 118#: 5.2G WIFI\_Head Left Tilt\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: 802.11 a (0); Frequency: 5200 MHz; Duty Cycle: 1:1.008

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.548$  S/m;  $\epsilon_r = 36.412$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.6, 5.6, 5.6) @ 5200 MHz; Calibrated: 2023/1/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x16x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.46 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.755 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.23 W/kg

**SAR(1 g) = 0.608 W/kg; SAR(10 g) = 0.256 W/kg**

Maximum value of SAR (measured) = 1.41 W/kg

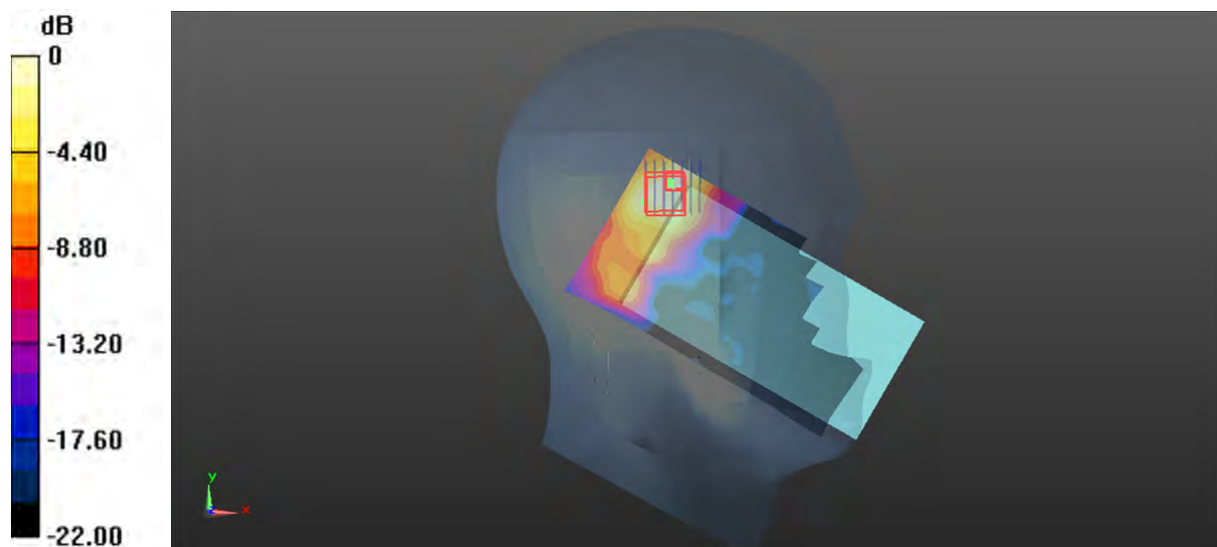

0 dB = 1.41 W/kg = 1.49 dBW/kg

**Test Plot 119#: 5.2G WIFI\_Head Right Cheek\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: 802.11 a (0); Frequency: 5200 MHz; Duty Cycle: 1:1.008

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.548$  S/m;  $\epsilon_r = 36.412$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.6, 5.6, 5.6) @ 5200 MHz; Calibrated: 2023/1/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x15x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.03 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.496 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.50 W/kg

**SAR(1 g) = 0.514 W/kg; SAR(10 g) = 0.221 W/kg**

Maximum value of SAR (measured) = 1.07 W/kg

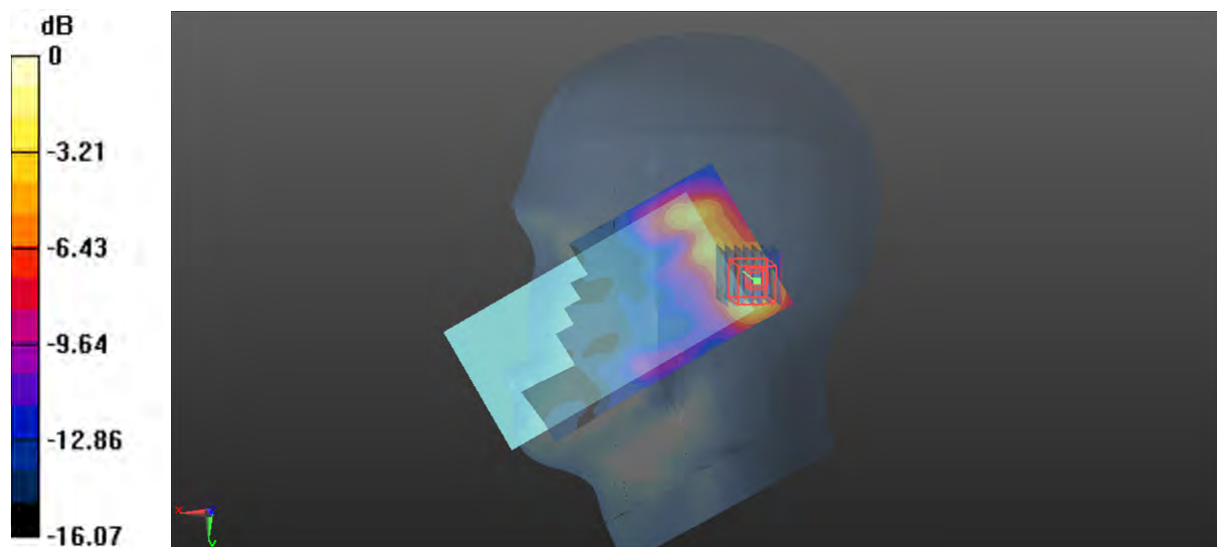

0 dB = 1.07 W/kg = 0.29 dBW/kg

**Test Plot 120#: 5.2G WIFI\_Head Right Tilt\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: 802.11 a (0); Frequency: 5200 MHz; Duty Cycle: 1:1.008

Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 4.548 \text{ S/m}$ ;  $\epsilon_r = 36.412$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.6, 5.6, 5.6) @ 5200 MHz; Calibrated: 2023/1/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x15x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 1.60 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ 

Reference Value = 7.668 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 2.26 W/kg

**SAR(1 g) = 0.758 W/kg; SAR(10 g) = 0.302 W/kg**

Maximum value of SAR (measured) = 1.55 W/kg

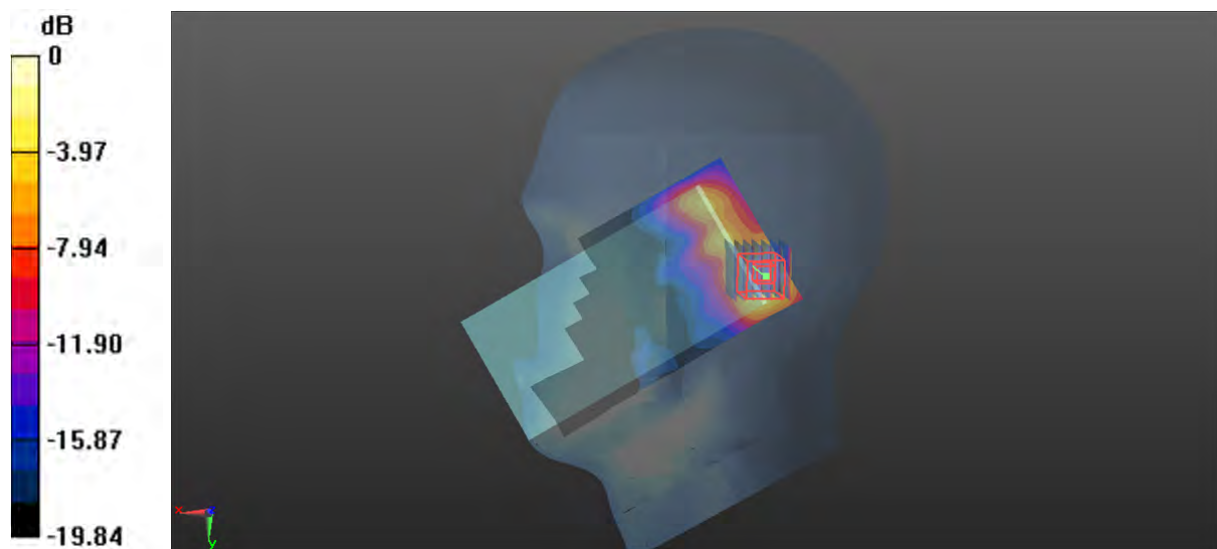

0 dB = 1.55 W/kg = 1.90 dBW/kg

**Test Plot 121#: 5.2G WIFI\_Body Front\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: 802.11 a (0); Frequency: 5200 MHz; Duty Cycle: 1:1.008

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.548$  S/m;  $\epsilon_r = 36.412$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.6, 5.6, 5.6) @ 5200 MHz; Calibrated: 2023/1/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (11x19x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.411 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.942 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.692 W/kg

**SAR(1 g) = 0.191 W/kg; SAR(10 g) = 0.071 W/kg**

Maximum value of SAR (measured) = 0.437 W/kg

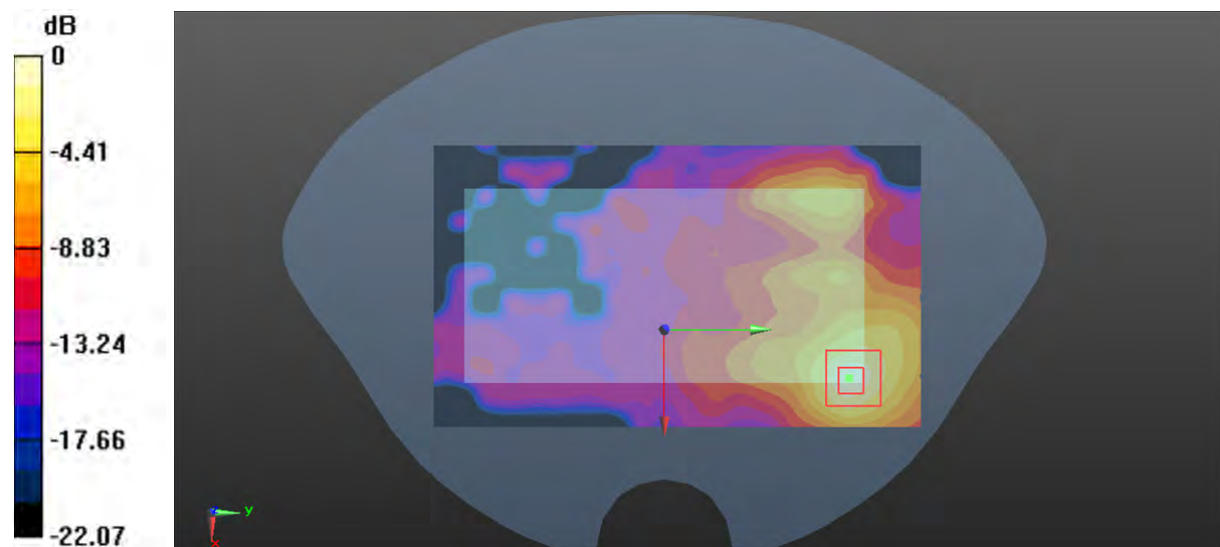

0 dB = 0.437 W/kg = -3.60 dBW/kg

**Test Plot 122#: 5.2G WIFI\_Body Back\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: 802.11 a (0); Frequency: 5200 MHz; Duty Cycle: 1:1.008

Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 4.548 \text{ S/m}$ ;  $\epsilon_r = 36.412$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.6, 5.6, 5.6) @ 5200 MHz; Calibrated: 2023/1/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x18x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 1.04 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ 

Reference Value = 1.693 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.59 W/kg

**SAR(1 g) = 0.493 W/kg; SAR(10 g) = 0.192 W/kg**

Maximum value of SAR (measured) = 1.05 W/kg

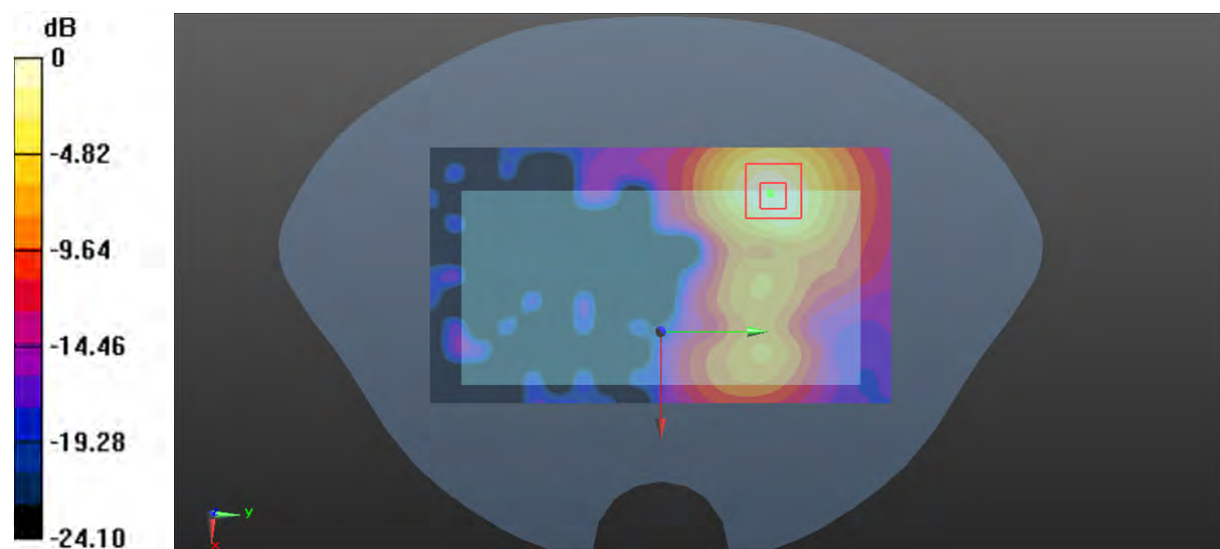

0 dB = 1.05 W/kg = 0.21 dBW/kg

**Test Plot 123#: 5.2G WIFI\_Body Right\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: 802.11 a (0); Frequency: 5200 MHz; Duty Cycle: 1:1.008

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.548$  S/m;  $\epsilon_r = 36.412$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.6, 5.6, 5.6) @ 5200 MHz; Calibrated: 2023/1/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x18x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.572 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.308 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.861 W/kg

**SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.112 W/kg**

Maximum value of SAR (measured) = 0.560 W/kg

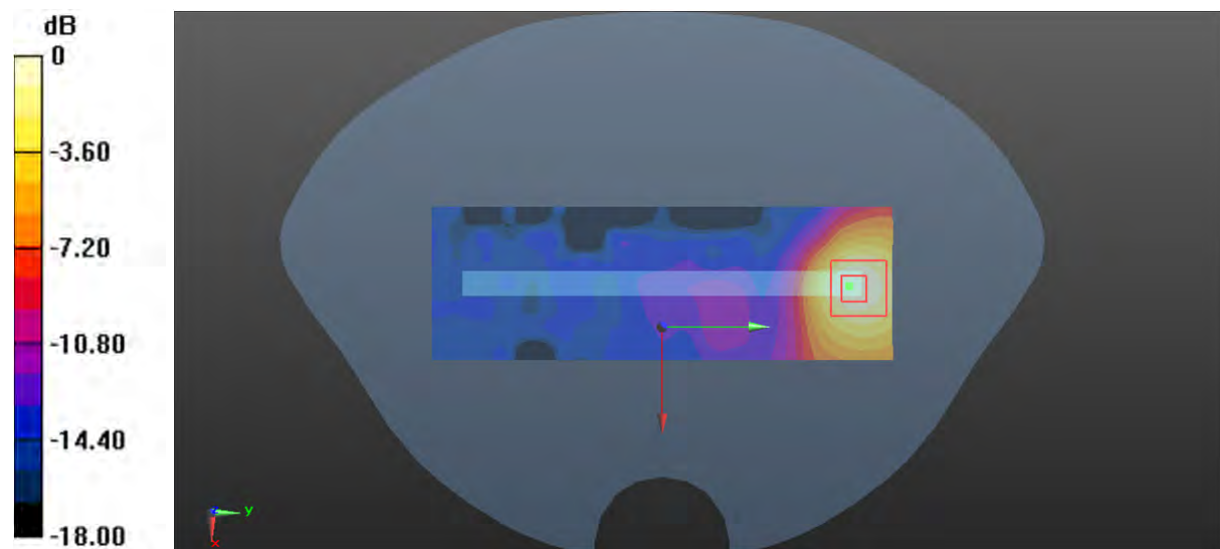

0 dB = 0.560 W/kg = -2.52 dBW/kg

**Test Plot 124#: 5.2G WIFI\_Body Top\_Low****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: 802.11 a (0); Frequency: 5180 MHz; Duty Cycle: 1:1.008

Medium parameters used:  $f = 5180 \text{ MHz}$ ;  $\sigma = 4.493 \text{ S/m}$ ;  $\epsilon_r = 36.529$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.6, 5.6, 5.6) @ 5180 MHz; Calibrated: 2023/1/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x10x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 1.43 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ 

Reference Value = 4.046 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 2.09 W/kg

**SAR(1 g) = 0.646 W/kg; SAR(10 g) = 0.262 W/kg**

Maximum value of SAR (measured) = 1.35 W/kg

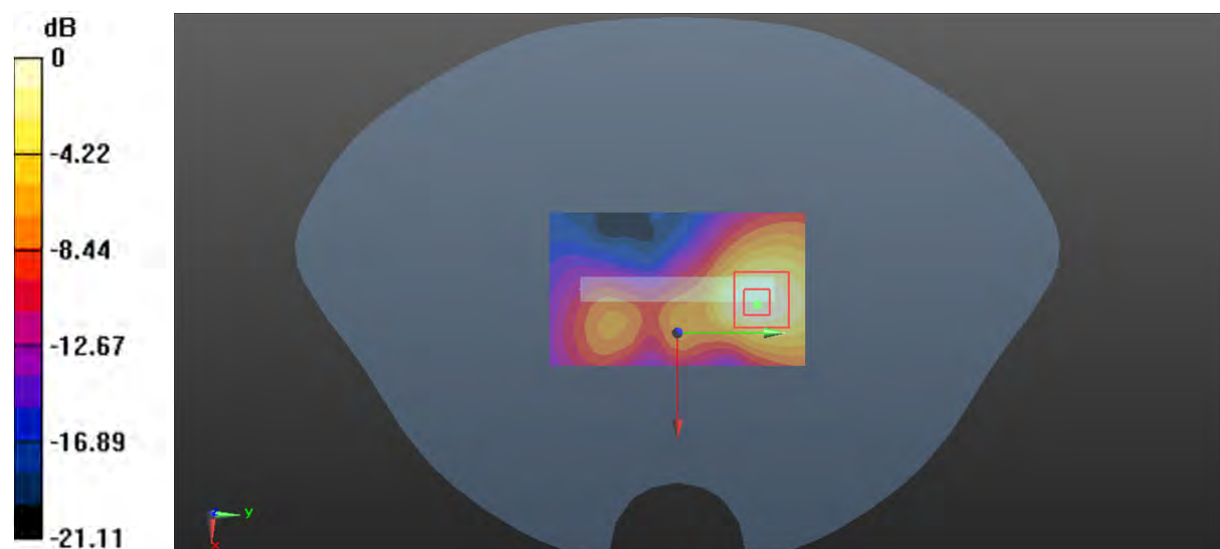

0 dB = 1.35 W/kg = 1.30 dBW/kg

**Test Plot 125#: 5.2G WIFI\_Body Top\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: 802.11 a (0); Frequency: 5200 MHz; Duty Cycle: 1:1.008

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.548$  S/m;  $\epsilon_r = 36.412$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.6, 5.6, 5.6) @ 5200 MHz; Calibrated: 2023/1/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x12x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.68 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.452 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 2.70 W/kg

**SAR(1 g) = 0.782 W/kg; SAR(10 g) = 0.299 W/kg**

Maximum value of SAR (measured) = 1.76 W/kg

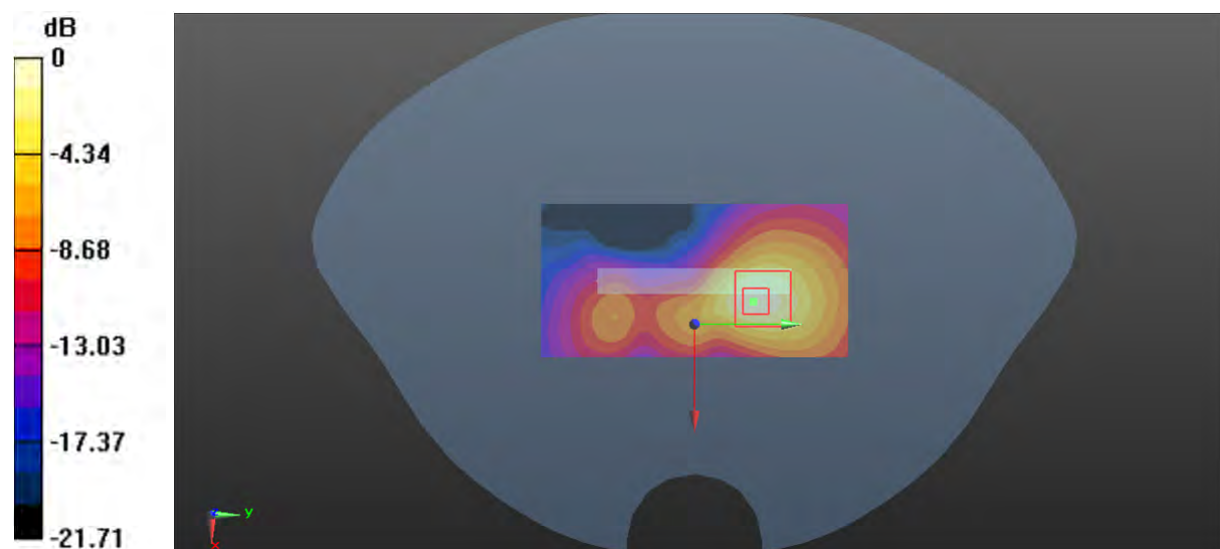

0 dB = 1.76 W/kg = 2.46 dBW/kg

**Test Plot 126#: 5.2G WIFI\_Body Top\_High****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: 802.11 a (0); Frequency: 5240 MHz; Duty Cycle: 1:1.008

Medium parameters used:  $f = 5240$  MHz;  $\sigma = 4.603$  S/m;  $\epsilon_r = 36.353$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.6, 5.6, 5.6) @ 5240 MHz; Calibrated: 2023/1/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x12x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.81 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.261 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.72 W/kg

**SAR(1 g) = 0.808 W/kg; SAR(10 g) = 0.311 W/kg**

Maximum value of SAR (measured) = 1.78 W/kg

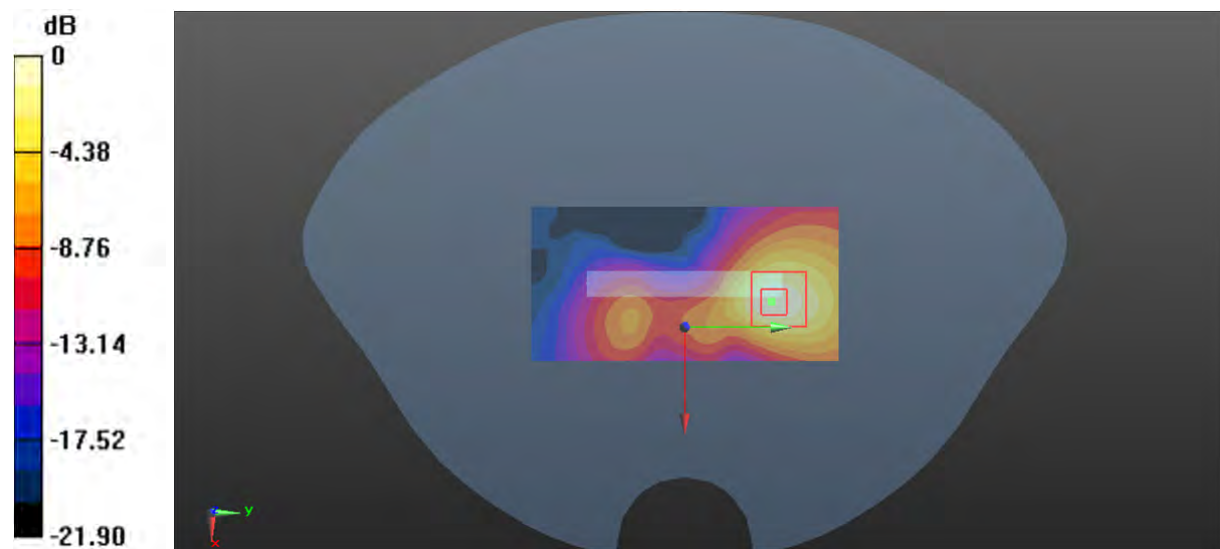

0 dB = 1.78 W/kg = 2.50 dBW/kg

**Test Plot 127#: 5.3G WIFI\_Head Left Cheek\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: 802.11 a (0); Frequency: 5280 MHz; Duty Cycle: 1:1.008

Medium parameters used:  $f = 5280$  MHz;  $\sigma = 4.715$  S/m;  $\epsilon_r = 35.368$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.37, 5.37, 5.37) @ 5280 MHz; Calibrated: 2023/1/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x12x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.43 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.320 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 2.54 W/kg

**SAR(1 g) = 0.655 W/kg; SAR(10 g) = 0.292 W/kg**

Maximum value of SAR (measured) = 1.45 W/kg

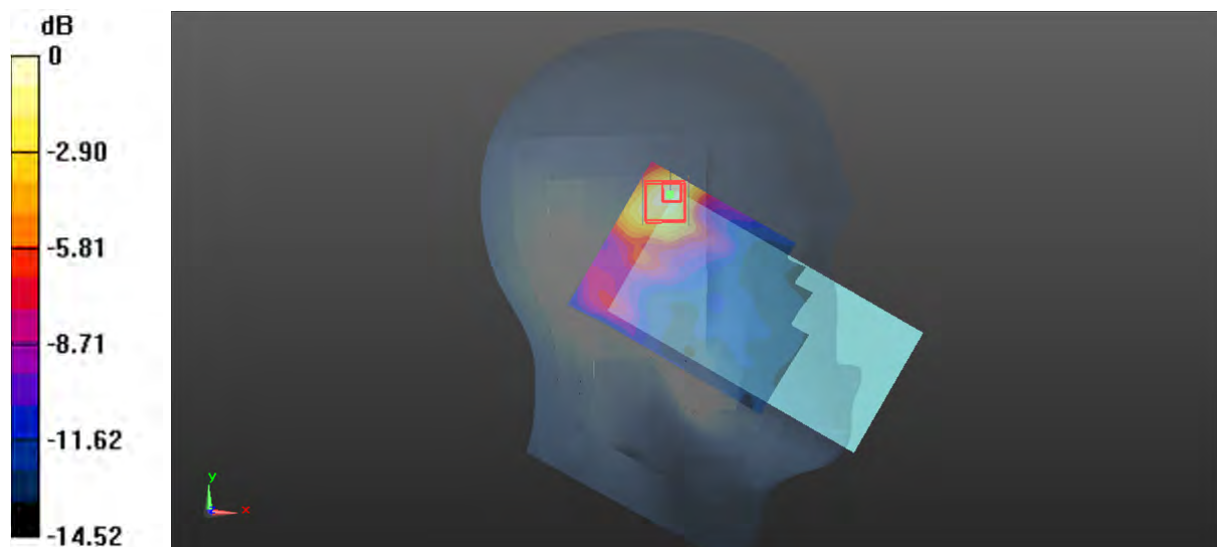

0 dB = 1.45 W/kg = 1.61 dBW/kg

**Test Plot 128#: 5.3G WIFI\_Head Left Tilt\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: 802.11 a (0); Frequency: 5280 MHz; Duty Cycle: 1:1.008

Medium parameters used:  $f = 5280 \text{ MHz}$ ;  $\sigma = 4.715 \text{ S/m}$ ;  $\epsilon_r = 35.368$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.37, 5.37, 5.37) @ 5280 MHz; Calibrated: 2023/1/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x13x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 1.36 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ 

Reference Value = 6.016 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 2.03 W/kg

**SAR(1 g) = 0.606 W/kg; SAR(10 g) = 0.272 W/kg**

Maximum value of SAR (measured) = 1.28 W/kg

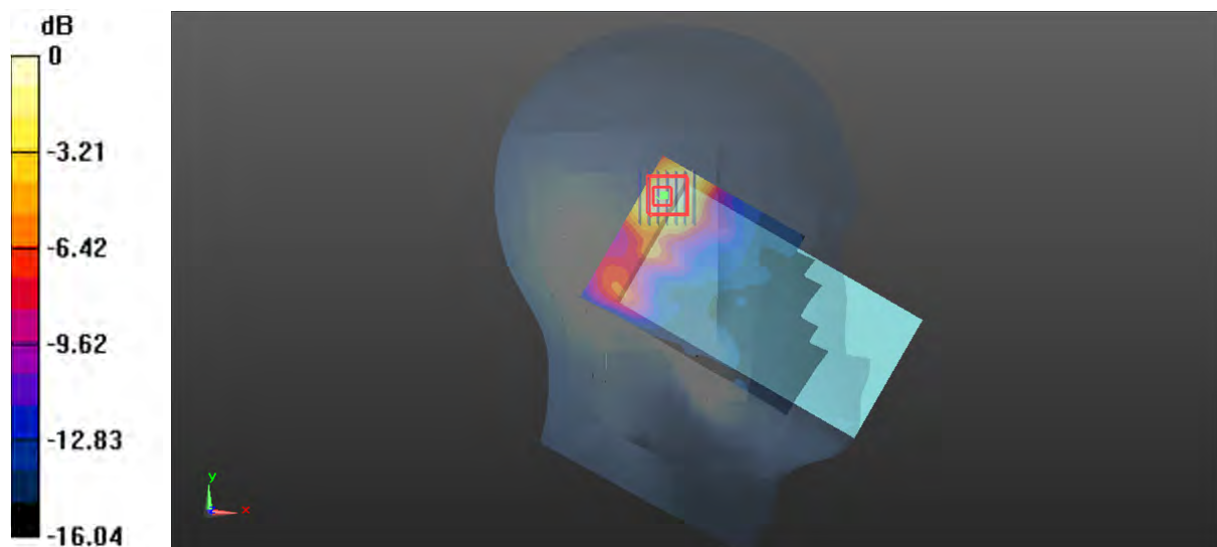

0 dB = 1.28 W/kg = 1.07 dBW/kg

**Test Plot 129#: 5.3G WIFI\_Head Right Cheek\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: 802.11 a (0); Frequency: 5280 MHz; Duty Cycle: 1:1.008

Medium parameters used:  $f = 5280 \text{ MHz}$ ;  $\sigma = 4.715 \text{ S/m}$ ;  $\epsilon_r = 35.368$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.37, 5.37, 5.37) @ 5280 MHz; Calibrated: 2023/1/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x14x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.679 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ 

Reference Value = 6.008 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.989 W/kg

**SAR(1 g) = 0.390 W/kg; SAR(10 g) = 0.215 W/kg**

Maximum value of SAR (measured) = 0.691 W/kg

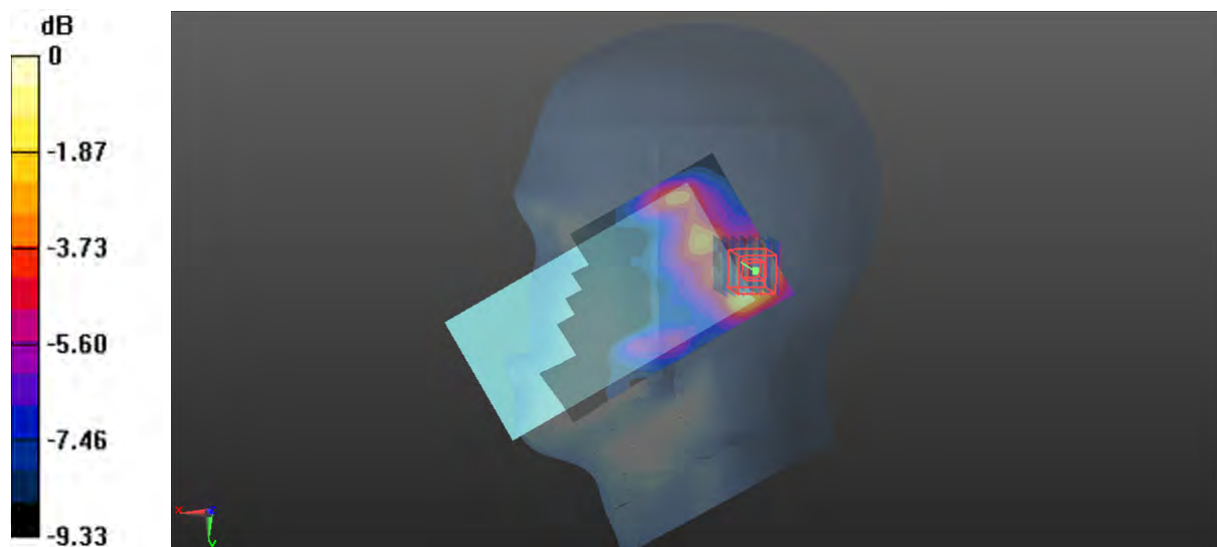

0 dB = 0.691 W/kg = -1.61 dBW/kg

**Test Plot 130#: 5.3G WIFI\_Head Right Tilt\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: 802.11 a (0); Frequency: 5280 MHz; Duty Cycle: 1:1.008

Medium parameters used:  $f = 5280$  MHz;  $\sigma = 4.715$  S/m;  $\epsilon_r = 35.368$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.37, 5.37, 5.37) @ 5280 MHz; Calibrated: 2023/1/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x14x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.998 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.126 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.46 W/kg

**SAR(1 g) = 0.487 W/kg; SAR(10 g) = 0.206 W/kg**

Maximum value of SAR (measured) = 1.01 W/kg

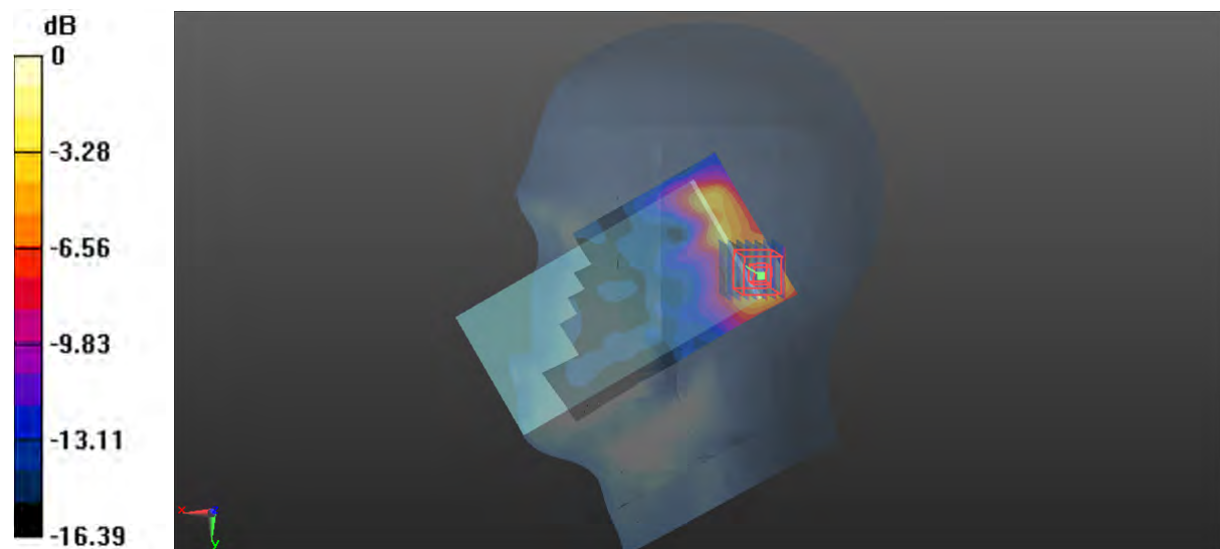

0 dB = 1.01 W/kg = 0.04 dBW/kg

**Test Plot 131#: 5.3G WIFI\_Body Front\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: 802.11 a (0); Frequency: 5280 MHz; Duty Cycle: 1:1.008

Medium parameters used:  $f = 5280 \text{ MHz}$ ;  $\sigma = 4.715 \text{ S/m}$ ;  $\epsilon_r = 35.368$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.37, 5.37, 5.37) @ 5280 MHz; Calibrated: 2023/1/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x18x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.356 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ 

Reference Value = 3.154 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.503 W/kg

**SAR(1 g) = 0.164 W/kg; SAR(10 g) = 0.085 W/kg**

Maximum value of SAR (measured) = 0.312 W/kg

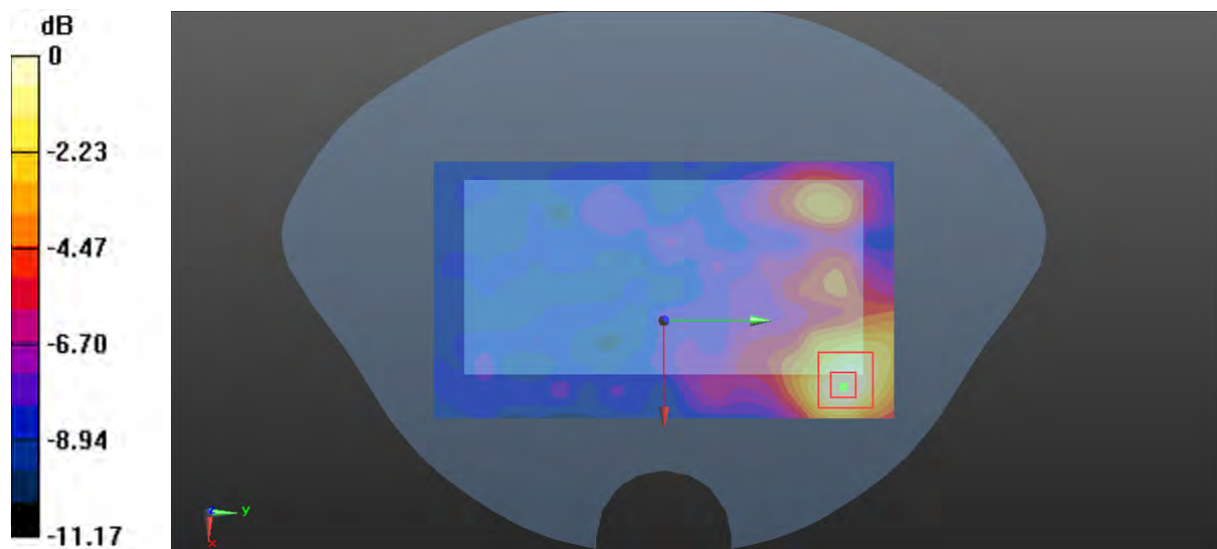

**Test Plot 132#: 5.3G WIFI\_Body Back\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**


Communication System: 802.11 a (0); Frequency: 5280 MHz; Duty Cycle: 1:1.008

Medium parameters used:  $f = 5280 \text{ MHz}$ ;  $\sigma = 4.715 \text{ S/m}$ ;  $\epsilon_r = 35.368$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.37, 5.37, 5.37) @ 5280 MHz; Calibrated: 2023/1/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

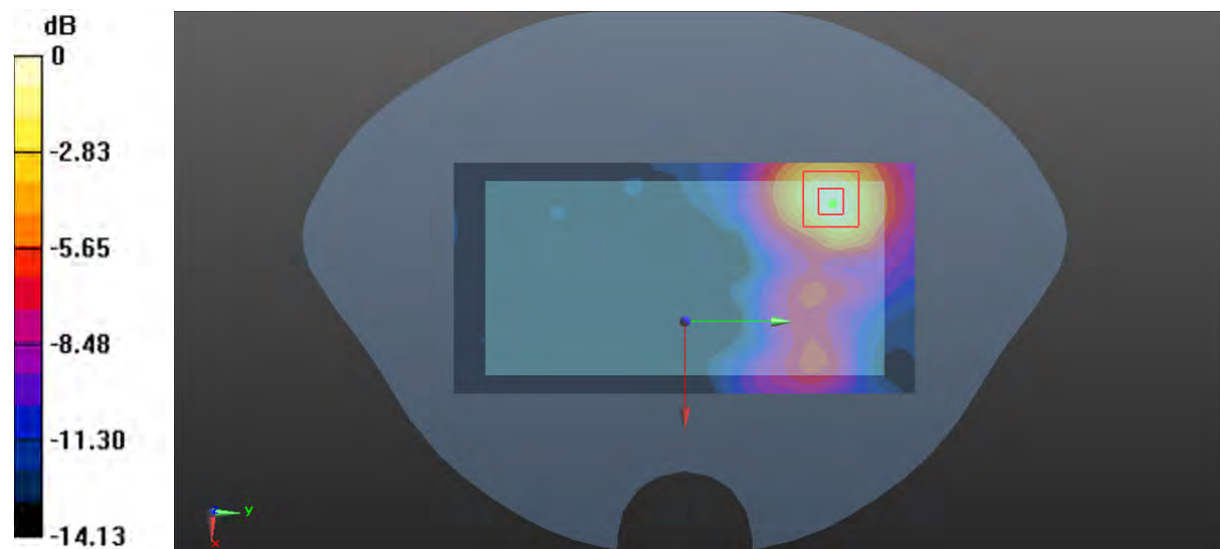**Area Scan (9x18x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ Maximum value of SAR (measured) =  $0.819 \text{ W/kg}$ **Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ Reference Value =  $2.871 \text{ V/m}$ ; Power Drift =  $-0.13 \text{ dB}$ Peak SAR (extrapolated) =  $1.27 \text{ W/kg}$ **SAR(1 g) =  $0.420 \text{ W/kg}$ ; SAR(10 g) =  $0.192 \text{ W/kg}$** Maximum value of SAR (measured) =  $0.856 \text{ W/kg}$ 0 dB =  $0.856 \text{ W/kg}$  =  $-0.68 \text{ dBW/kg}$

**Test Plot 133#: 5.3G WIFI\_Body Right\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**


Communication System: 802.11 a (0); Frequency: 5280 MHz; Duty Cycle: 1:1.008

Medium parameters used:  $f = 5280 \text{ MHz}$ ;  $\sigma = 4.715 \text{ S/m}$ ;  $\epsilon_r = 35.368$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.37, 5.37, 5.37) @ 5280 MHz; Calibrated: 2023/1/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

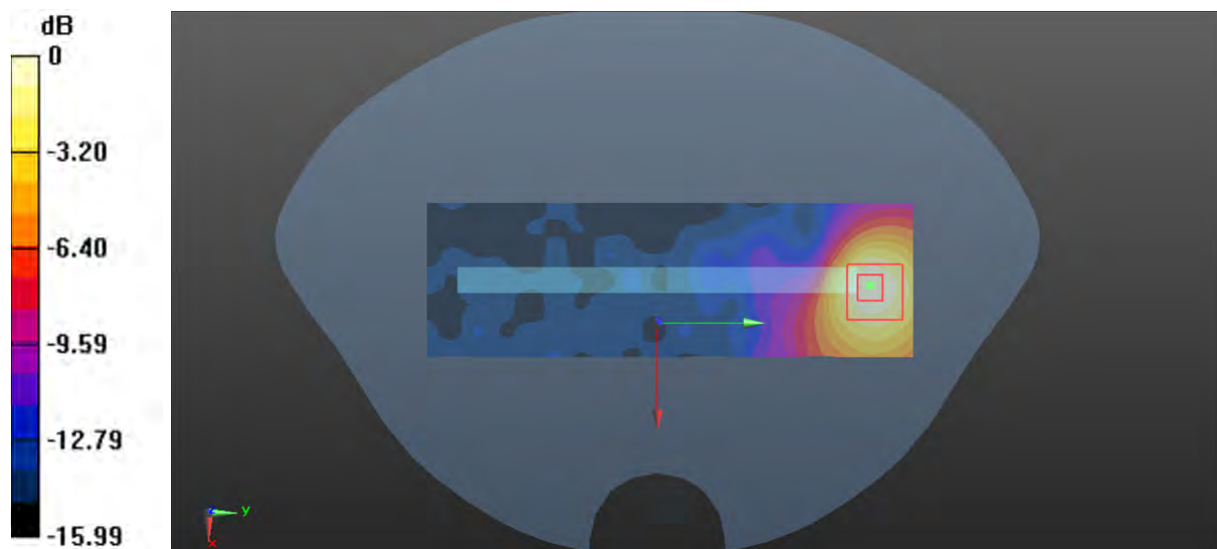**Area Scan (6x19x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ Maximum value of SAR (measured) =  $0.722 \text{ W/kg}$ **Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ Reference Value =  $2.169 \text{ V/m}$ ; Power Drift =  $0.16 \text{ dB}$ Peak SAR (extrapolated) =  $1.08 \text{ W/kg}$ **SAR(1 g) =  $0.341 \text{ W/kg}$ ; SAR(10 g) =  $0.152 \text{ W/kg}$** Maximum value of SAR (measured) =  $0.704 \text{ W/kg}$ 0 dB =  $0.704 \text{ W/kg}$  =  $-1.52 \text{ dBW/kg}$

**Test Plot 134#: 5.3G WIFI\_Body Top\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: 802.11 a (0); Frequency: 5280 MHz; Duty Cycle: 1:1.008

Medium parameters used:  $f = 5280 \text{ MHz}$ ;  $\sigma = 4.715 \text{ S/m}$ ;  $\epsilon_r = 35.368$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.37, 5.37, 5.37) @ 5280 MHz; Calibrated: 2023/1/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x12x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 1.27 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ 

Reference Value = 3.259 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 2.03 W/kg

**SAR(1 g) = 0.582 W/kg; SAR(10 g) = 0.225 W/kg**

Maximum value of SAR (measured) = 1.31 W/kg

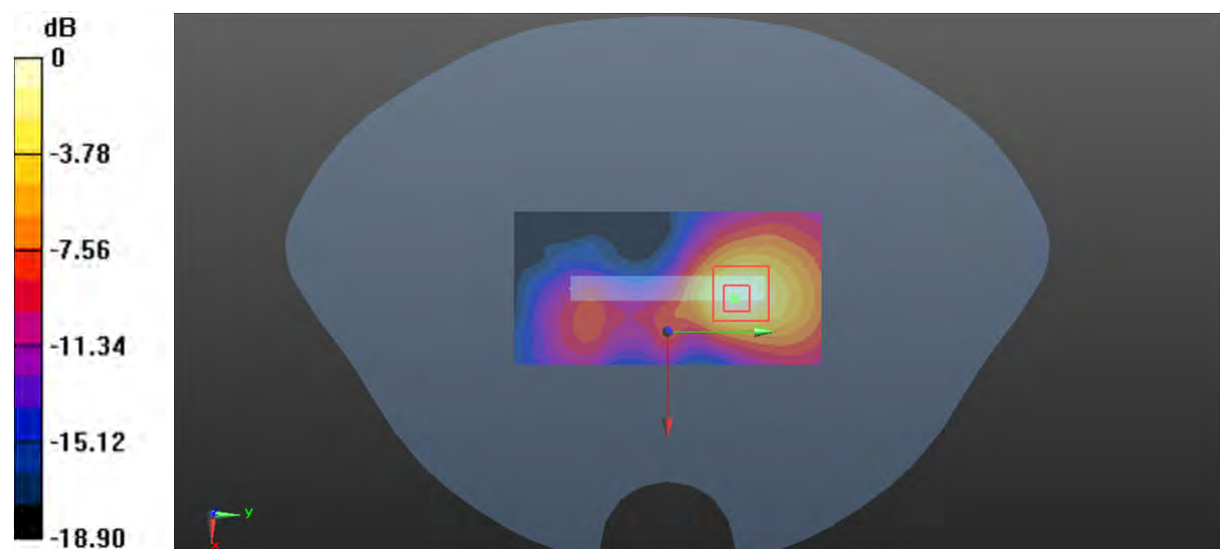

0 dB = 1.31 W/kg = 1.17 dBW/kg

**Test Plot 135#: 5.8G WIFI\_Head Left Cheek\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**


Communication System: 802.11 a (0); Frequency: 5785 MHz; Duty Cycle: 1:1.008

Medium parameters used:  $f = 5785 \text{ MHz}$ ;  $\sigma = 5.295 \text{ S/m}$ ;  $\epsilon_r = 34.667$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.85, 4.85, 4.85) @ 5785 MHz; Calibrated: 2023/1/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

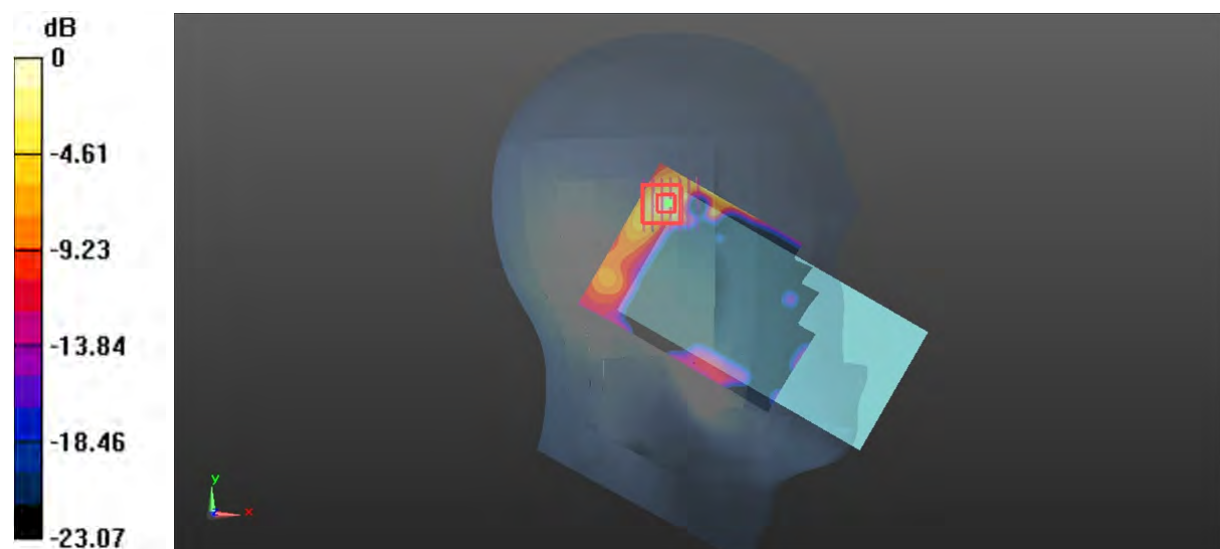**Area Scan (9x12x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ Maximum value of SAR (measured) =  $0.479 \text{ W/kg}$ **Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ Reference Value =  $1.715 \text{ V/m}$ ; Power Drift =  $0.12 \text{ dB}$ Peak SAR (extrapolated) =  $0.824 \text{ W/kg}$ **SAR(1 g) =  $0.194 \text{ W/kg}$ ; SAR(10 g) =  $0.061 \text{ W/kg}$** Maximum value of SAR (measured) =  $0.538 \text{ W/kg}$  $0 \text{ dB} = 0.538 \text{ W/kg} = -2.69 \text{ dBW/kg}$

**Test Plot 136#: 5.8G WIFI\_Head Left Tilt\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**


Communication System: 802.11 a (0); Frequency: 5785 MHz; Duty Cycle: 1:1.008

Medium parameters used:  $f = 5785 \text{ MHz}$ ;  $\sigma = 5.295 \text{ S/m}$ ;  $\epsilon_r = 34.667$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.85, 4.85, 4.85) @ 5785 MHz; Calibrated: 2023/1/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

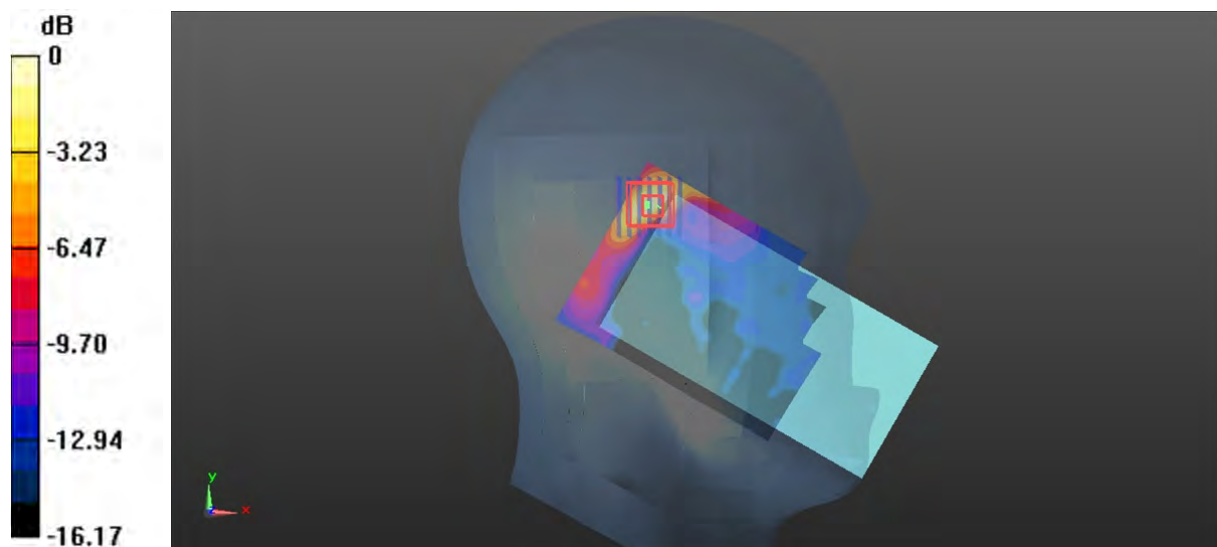**Area Scan (9x12x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ Maximum value of SAR (measured) =  $0.430 \text{ W/kg}$ **Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ Reference Value =  $2.539 \text{ V/m}$ ; Power Drift =  $-0.10 \text{ dB}$ Peak SAR (extrapolated) =  $0.958 \text{ W/kg}$ **SAR(1 g) =  $0.198 \text{ W/kg}$ ; SAR(10 g) =  $0.067 \text{ W/kg}$** Maximum value of SAR (measured) =  $0.526 \text{ W/kg}$  $0 \text{ dB} = 0.526 \text{ W/kg} = -2.79 \text{ dBW/kg}$

**Test Plot 137#: 5.8G WIFI\_Head Right Cheek\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: 802.11 a (0); Frequency: 5785 MHz; Duty Cycle: 1:1.008

Medium parameters used:  $f = 5785 \text{ MHz}$ ;  $\sigma = 5.295 \text{ S/m}$ ;  $\epsilon_r = 34.667$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.85, 4.85, 4.85) @ 5785 MHz; Calibrated: 2023/1/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x13x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.230 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ 

Reference Value = 2.751 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.493 W/kg

**SAR(1 g) = 0.111 W/kg; SAR(10 g) = 0.059 W/kg**

Maximum value of SAR (measured) = 0.229 W/kg

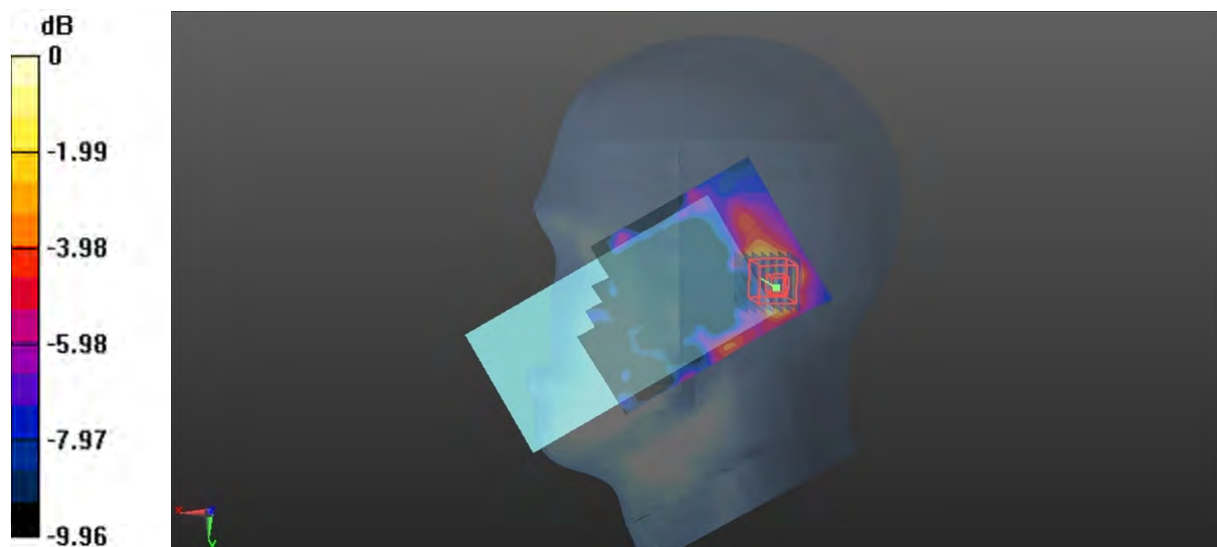

0 dB = 0.229 W/kg = -6.40 dBW/kg

**Test Plot 138#: 5.8G WIFI\_Head Right Tilt\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**


Communication System: 802.11 a (0); Frequency: 5785 MHz; Duty Cycle: 1:1.008

Medium parameters used:  $f = 5785 \text{ MHz}$ ;  $\sigma = 5.295 \text{ S/m}$ ;  $\epsilon_r = 34.667$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.85, 4.85, 4.85) @ 5785 MHz; Calibrated: 2023/1/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

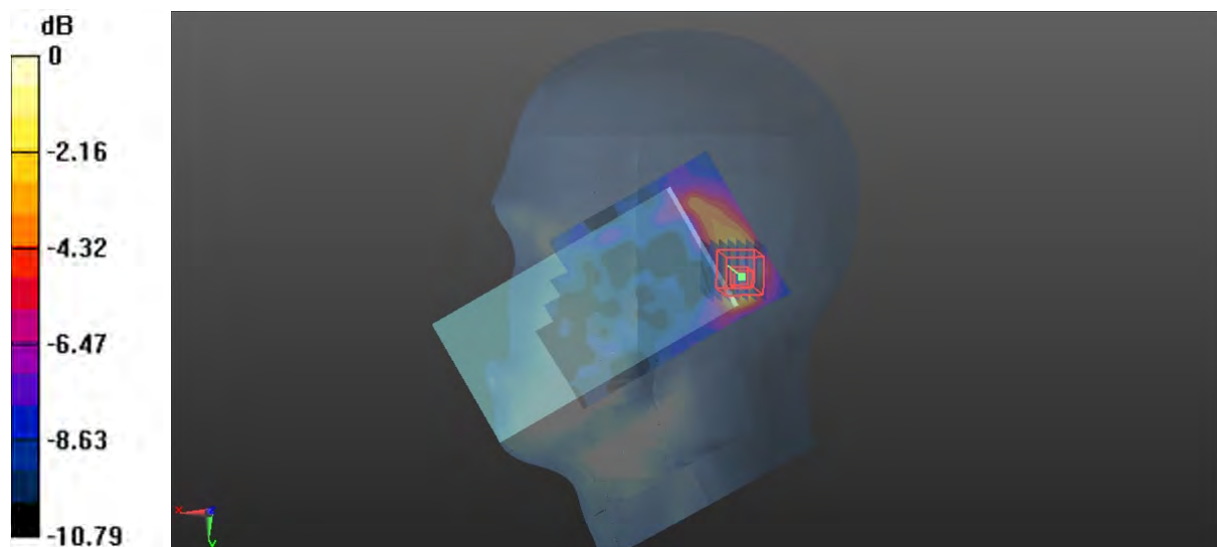**Area Scan (9x13x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ Maximum value of SAR (measured) =  $0.277 \text{ W/kg}$ **Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ Reference Value =  $2.542 \text{ V/m}$ ; Power Drift =  $0.16 \text{ dB}$ Peak SAR (extrapolated) =  $0.441 \text{ W/kg}$ **SAR(1 g) =  $0.122 \text{ W/kg}$ ; SAR(10 g) =  $0.054 \text{ W/kg}$** Maximum value of SAR (measured) =  $0.254 \text{ W/kg}$  $0 \text{ dB} = 0.254 \text{ W/kg} = -5.95 \text{ dBW/kg}$

**Test Plot 139#: 5.8G WIFI\_Body Front\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**

Communication System: 802.11 a (0); Frequency: 5785 MHz; Duty Cycle: 1:1.008

Medium parameters used:  $f = 5785$  MHz;  $\sigma = 5.295$  S/m;  $\epsilon_r = 34.667$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.85, 4.85, 4.85) @ 5785 MHz; Calibrated: 2023/1/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x18x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.108 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.179 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.132 W/kg

**SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.031 W/kg**

Maximum value of SAR (measured) = 0.0943 W/kg

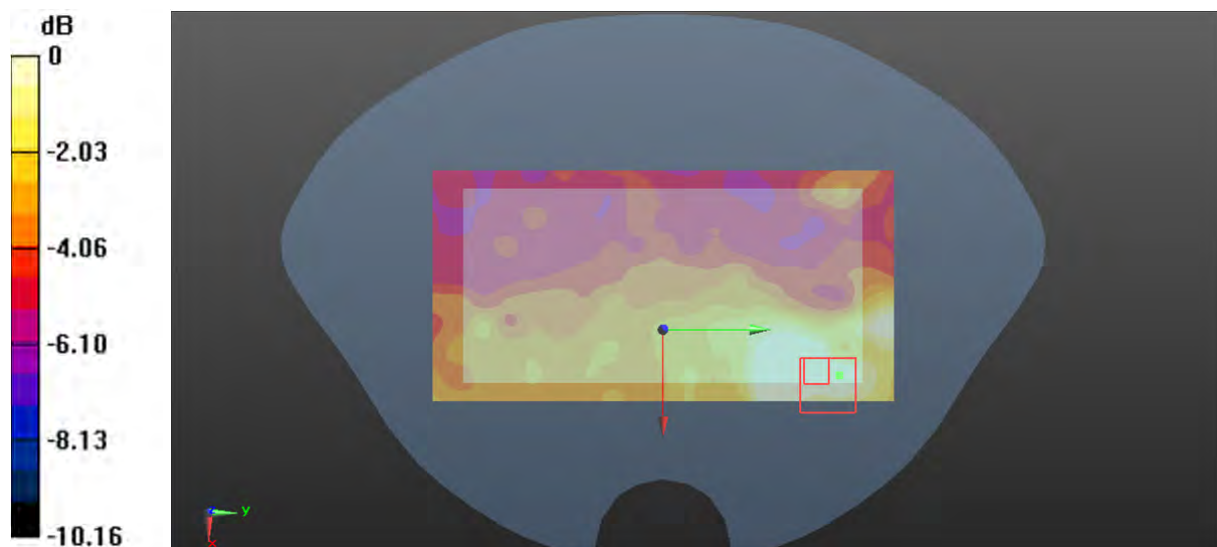

0 dB = 0.0943 W/kg = -10.25 dBW/kg

**Test Plot 140#: 5.8G WIFI\_Body Back\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**


Communication System: 802.11 a (0); Frequency: 5785 MHz; Duty Cycle: 1:1.008

Medium parameters used:  $f = 5785 \text{ MHz}$ ;  $\sigma = 5.295 \text{ S/m}$ ;  $\epsilon_r = 34.667$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.85, 4.85, 4.85) @ 5785 MHz; Calibrated: 2023/1/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

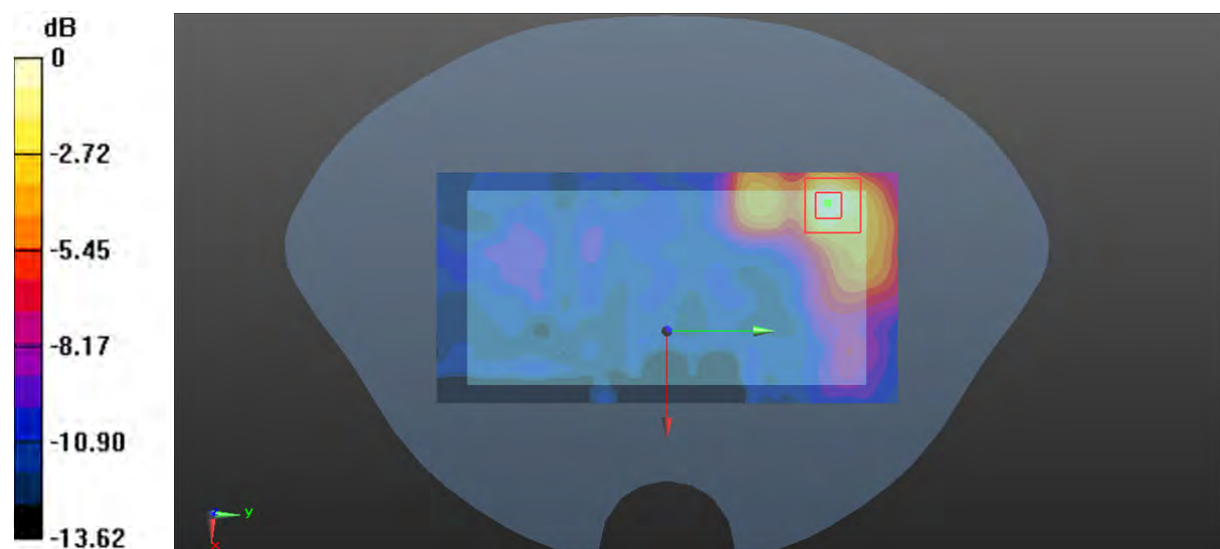**Area Scan (9x18x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ Maximum value of SAR (measured) =  $0.511 \text{ W/kg}$ **Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ Reference Value =  $2.551 \text{ V/m}$ ; Power Drift =  $-0.15 \text{ dB}$ Peak SAR (extrapolated) =  $0.815 \text{ W/kg}$ **SAR(1 g) =  $0.227 \text{ W/kg}$ ; SAR(10 g) =  $0.095 \text{ W/kg}$** Maximum value of SAR (measured) =  $0.495 \text{ W/kg}$ 0 dB =  $0.495 \text{ W/kg}$  =  $-3.05 \text{ dBW/kg}$

**Test Plot 141#: 5.8G WIFI\_Body Right\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**


Communication System: 802.11 a (0); Frequency: 5785 MHz; Duty Cycle: 1:1.008

Medium parameters used:  $f = 5785 \text{ MHz}$ ;  $\sigma = 5.295 \text{ S/m}$ ;  $\epsilon_r = 34.667$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.85, 4.85, 4.85) @ 5785 MHz; Calibrated: 2023/1/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

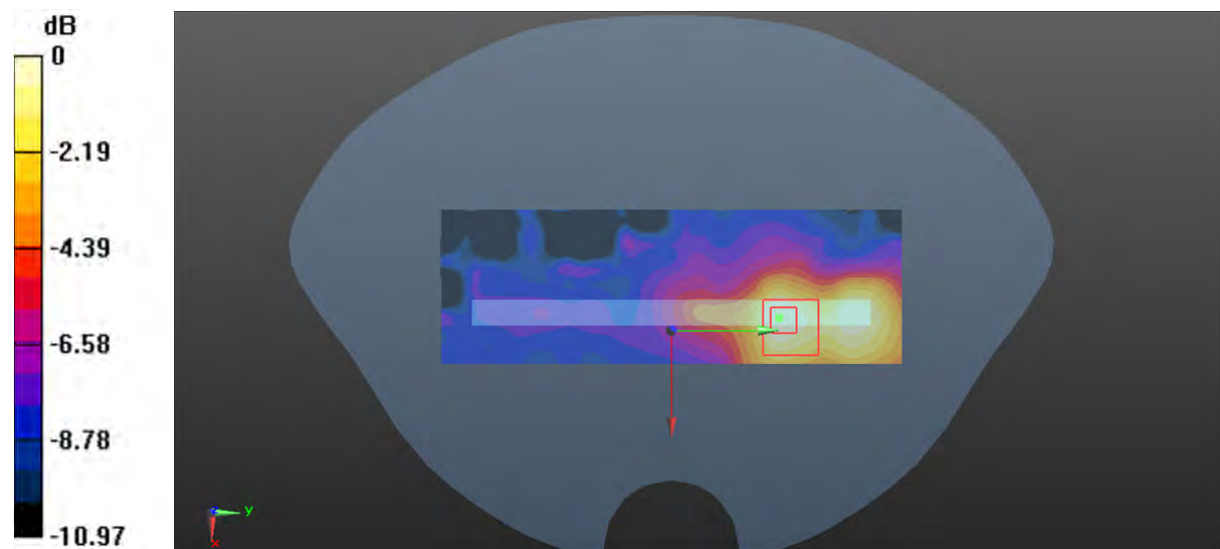**Area Scan (6x18x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ Maximum value of SAR (measured) =  $0.232 \text{ W/kg}$ **Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ Reference Value =  $2.658 \text{ V/m}$ ; Power Drift =  $0.05 \text{ dB}$ Peak SAR (extrapolated) =  $0.370 \text{ W/kg}$ **SAR(1 g) =  $0.098 \text{ W/kg}$ ; SAR(10 g) =  $0.043 \text{ W/kg}$** Maximum value of SAR (measured) =  $0.199 \text{ W/kg}$ 0 dB =  $0.199 \text{ W/kg}$  =  $-7.01 \text{ dBW/kg}$

**Test Plot 142#: 5.8G WIFI\_Body Top\_Middle****DUT: Smartphone; Type: P63L; Serial: 1ZWR**


Communication System: 802.11 a (0); Frequency: 5785 MHz; Duty Cycle: 1:1.008

Medium parameters used:  $f = 5785 \text{ MHz}$ ;  $\sigma = 5.295 \text{ S/m}$ ;  $\epsilon_r = 34.667$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.85, 4.85, 4.85) @ 5785 MHz; Calibrated: 2023/1/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

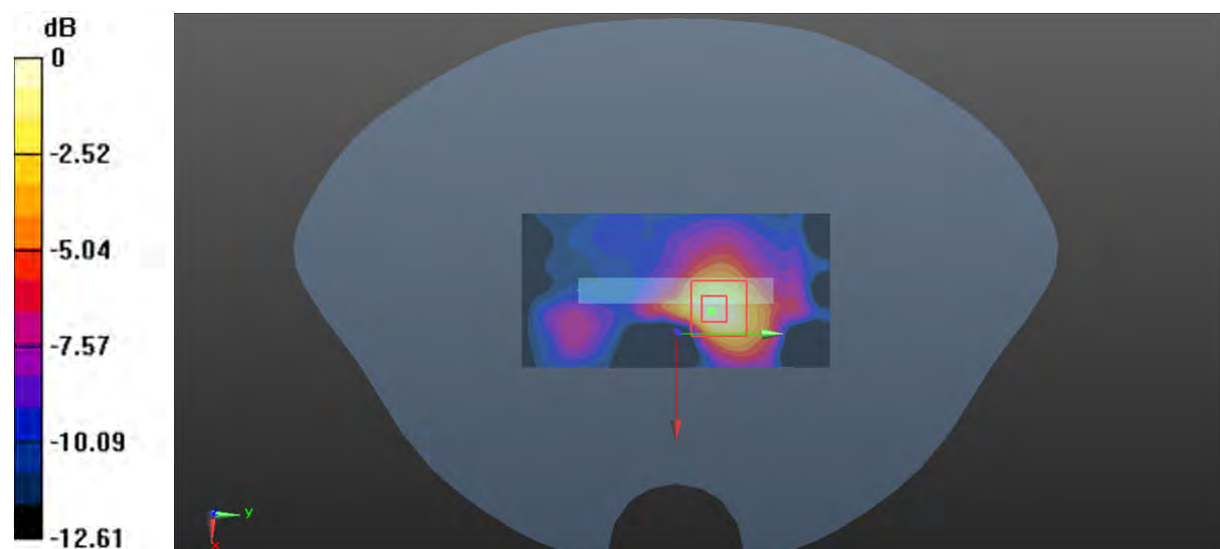**Area Scan (6x12x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ Maximum value of SAR (measured) =  $0.317 \text{ W/kg}$ **Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ Reference Value =  $2.379 \text{ V/m}$ ; Power Drift =  $0.14 \text{ dB}$ Peak SAR (extrapolated) =  $0.510 \text{ W/kg}$ **SAR(1 g) =  $0.121 \text{ W/kg}$ ; SAR(10 g) =  $0.047 \text{ W/kg}$** Maximum value of SAR (measured) =  $0.284 \text{ W/kg}$ 0 dB =  $0.284 \text{ W/kg}$  =  $-5.47 \text{ dBW/kg}$