

Date: 2024/8/7

GSM 850

Communication System: UID 0, GPRS 4TS (0); Communication System Band: GSM 850 ;

Frequency: 836.6 MHz;

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.883$ S/m; $\epsilon_r = 40.099$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -49.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.14 W/kg


Configuration/Body/Zoom Scan (5x6x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 37.29 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.810 W/kg; SAR(10 g) = 0.511 W/kg

Maximum value of SAR (measured) = 1.15 W/kg

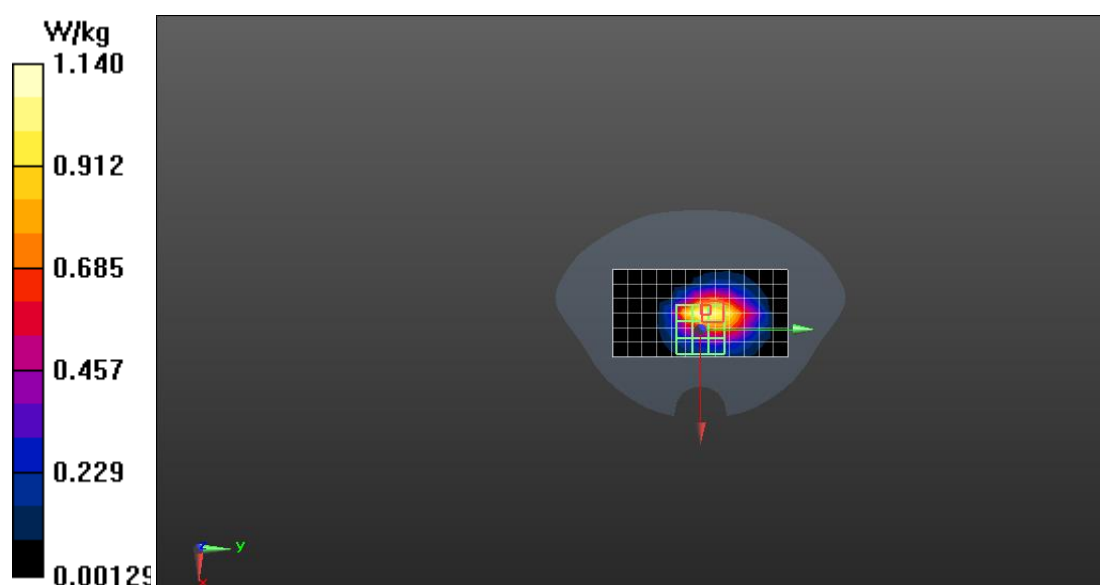

Date: 2024/7/30

GSM 1900

Communication System: UID 0, GPRS 4TS (0); Communication System Band: GSM 1900;

Frequency: 1850.2 MHz;

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.494$ S/m; $\epsilon_r = 40.003$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -49.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.971 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.408 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 0.765 W/kg; SAR(10 g) = 0.369 W/kg

Maximum value of SAR (measured) = 1.19 W/kg

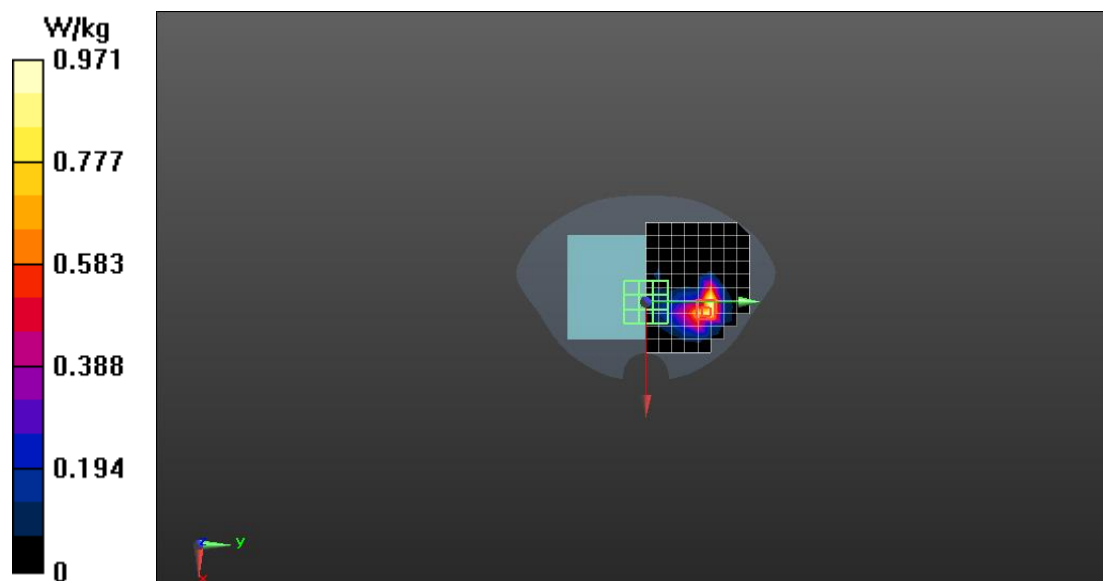

WCDMA B2

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band:

Band 2; Frequency: 1852.4 MHz;

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.494$ S/m; $\epsilon_r = 39.909$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -49.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.769 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.453 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.589 W/kg; SAR(10 g) = 0.281 W/kg

Maximum value of SAR (measured) = 0.930 W/kg

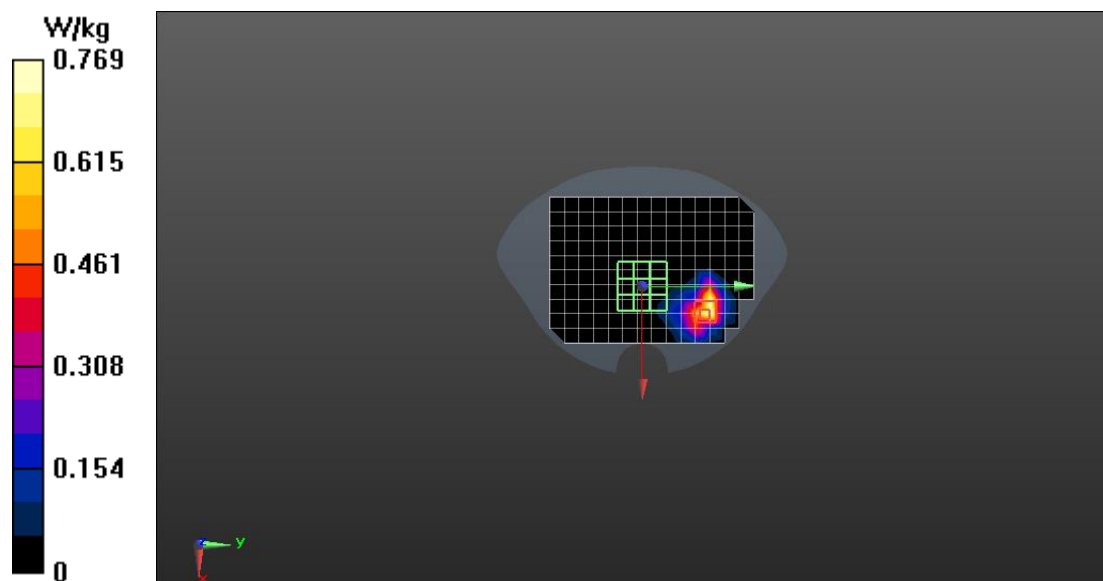

WCDMA B4

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band:

Band 4; Frequency: 1712.4 MHz;

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.343$ S/m; $\epsilon_r = 40.654$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.76, 8.76, 8.76); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -49.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.01 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.526 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.654 W/kg; SAR(10 g) = 0.325 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

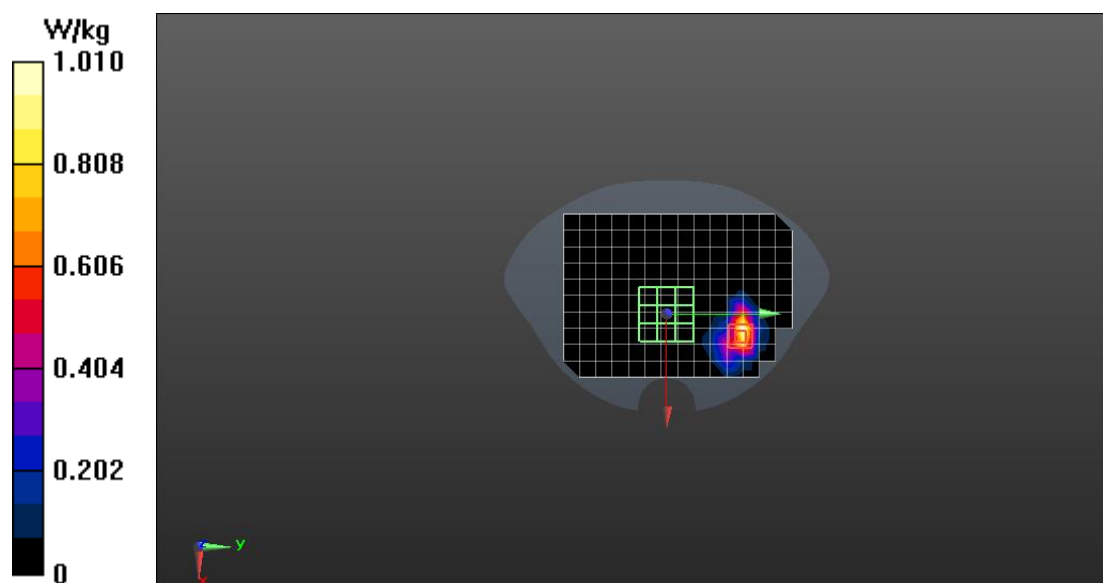

WCDMA B5

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band:

Band 5; Frequency: 836.4 MHz;

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.893$ S/m; $\epsilon_r = 42.021$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -49.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.728 W/kg


Configuration/Body/Zoom Scan (6x6x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.301 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.447 W/kg; SAR(10 g) = 0.239 W/kg

Maximum value of SAR (measured) = 0.932 W/kg

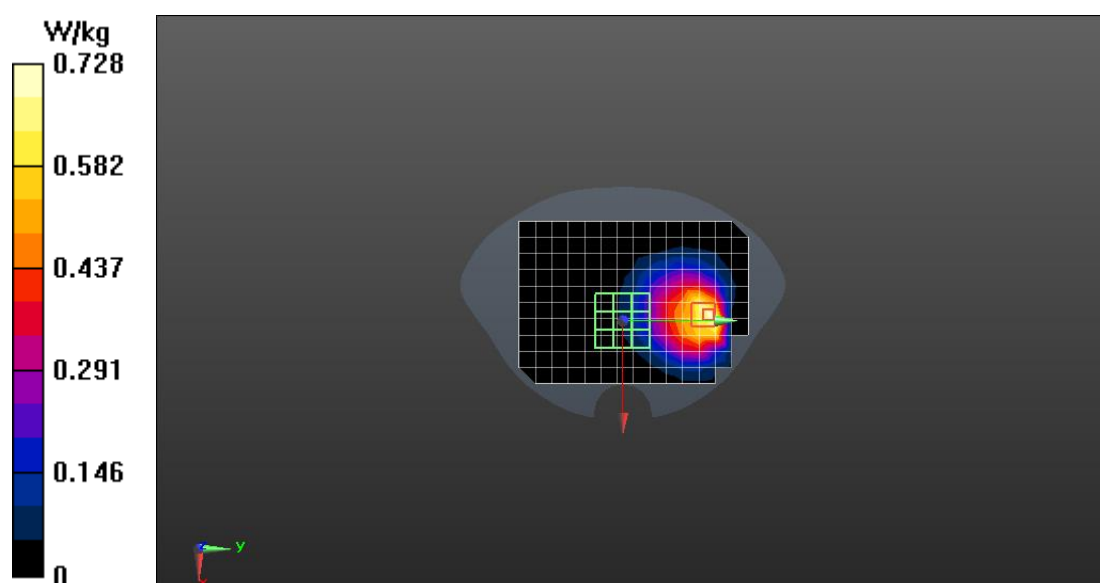

LTE B2

Communication System: UID 0, LTE (0); Communication System Band: Band 2; Frequency: 1900 MHz;

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 41.232$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -49.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.62 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.078 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 2.09 W/kg

SAR(1 g) = 0.877 W/kg; SAR(10 g) = 0.402 W/kg

Maximum value of SAR (measured) = 1.52 W/kg

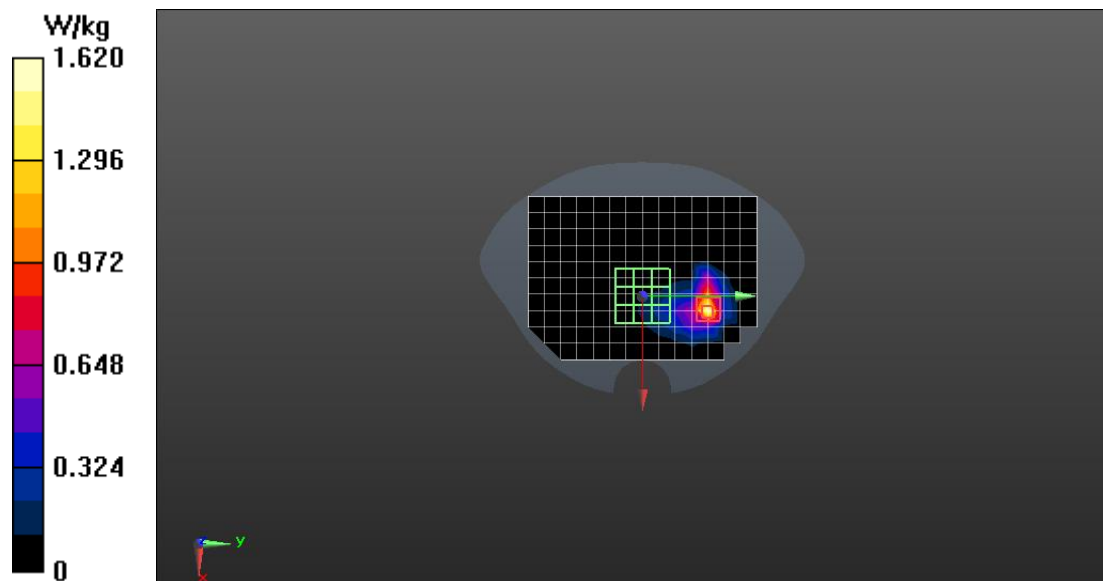

LTE B4

Communication System: UID 0, LTE (0); Communication System Band: Band 4; Frequency: 1745 MHz;

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.363$ S/m; $\epsilon_r = 40.455$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.76, 8.76, 8.76); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -49.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.26 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.368 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 0.779 W/kg; SAR(10 g) = 0.378 W/kg

Maximum value of SAR (measured) = 1.24 W/kg

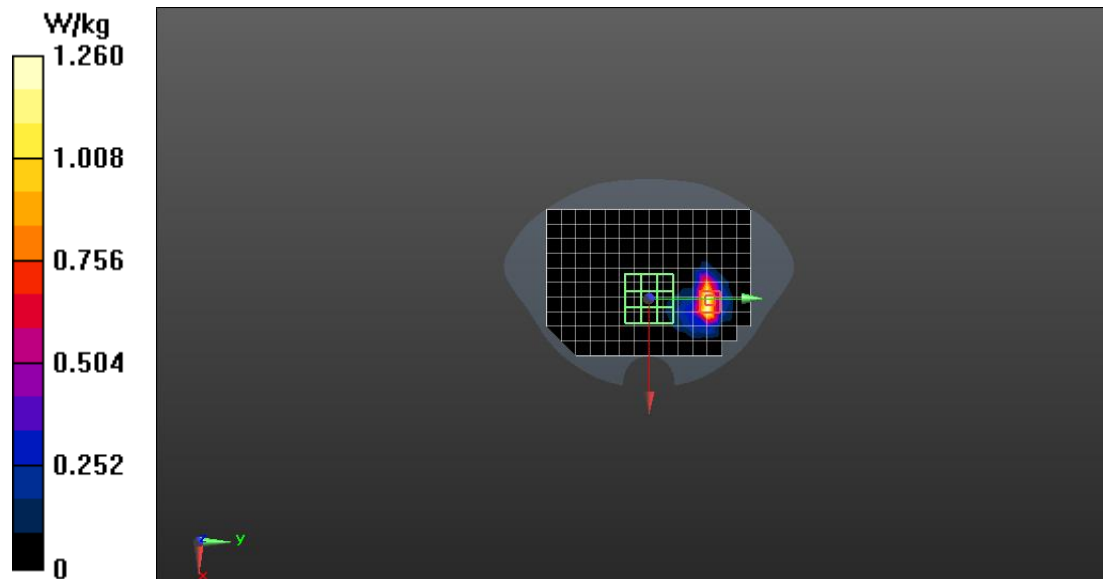

LTE B5

Communication System: UID 0, LTE (0); Communication System Band: Band 5; Frequency: 844 MHz;

Medium parameters used (interpolated): $f = 844$ MHz; $\sigma = 0.883$ S/m; $\epsilon_r = 40.123$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -49.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.14 W/kg


Configuration/Body/Zoom Scan (5x6x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 36.92 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.839 W/kg; SAR(10 g) = 0.534 W/kg

Maximum value of SAR (measured) = 1.21 W/kg

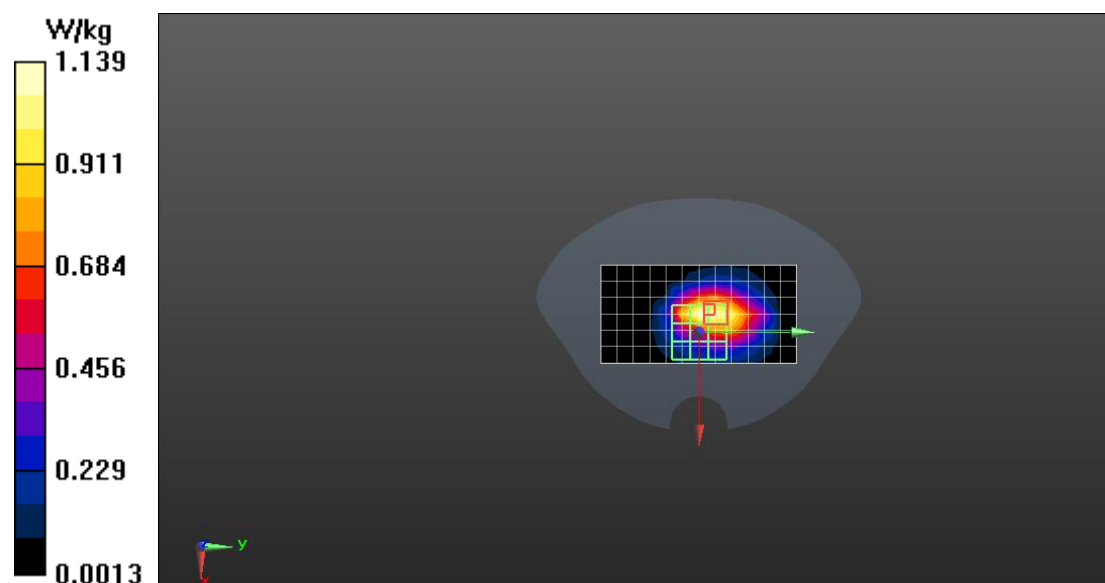

LTE B7

Communication System: UID 0, LTE (0); Communication System Band: Band 7; Frequency: 2560 MHz;

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.931$ S/m; $\epsilon_r = 37.804$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.72, 7.72, 7.72); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -49.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (13x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.805 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 0.576 W/kg; SAR(10 g) = 0.231 W/kg

Maximum value of SAR (measured) = 1.07 W/kg

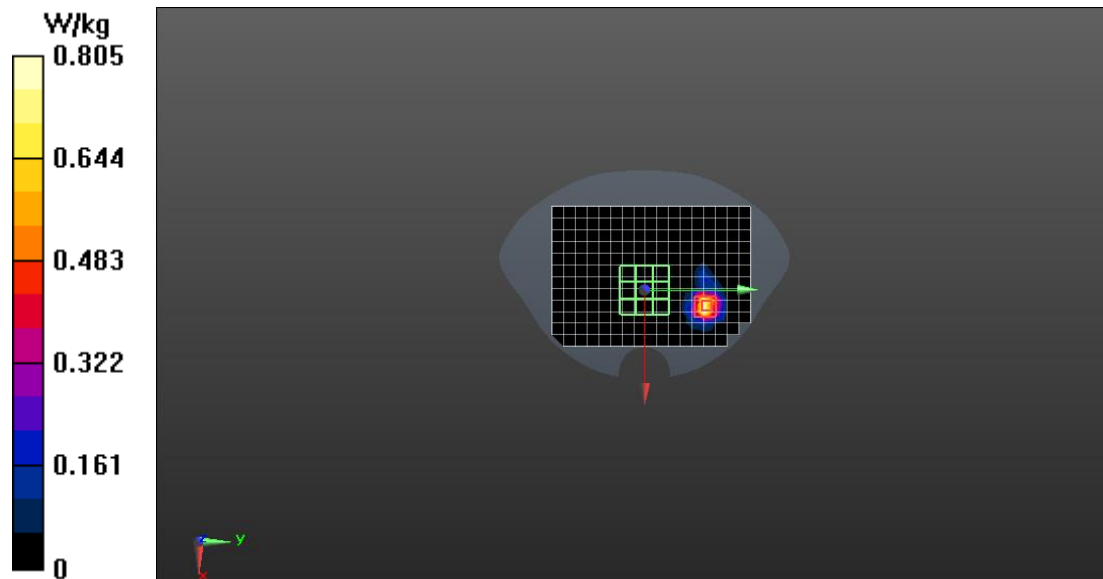

LTE B12

Communication System: UID 0, LTE (0); Communication System Band: Band 12; Frequency: 707.5 MHz;

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.851$ S/m; $\epsilon_r = 42.443$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.45, 10.45, 10.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -49.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.25 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.05 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.27 W/kg

SAR(1 g) = 0.975 W/kg; SAR(10 g) = 0.586 W/kg

Maximum value of SAR (measured) = 1.66 W/kg

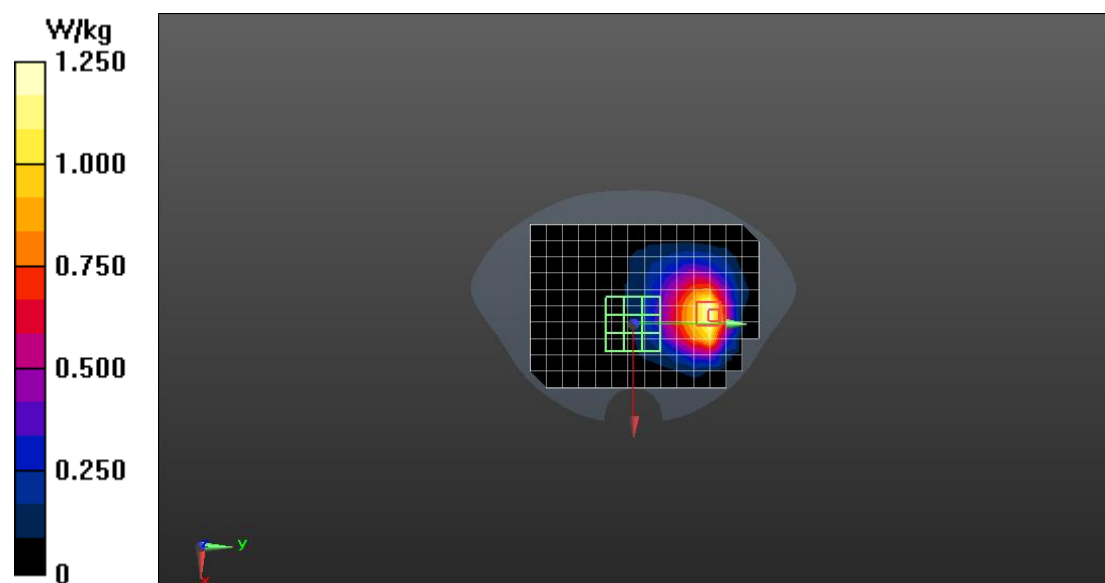

LTE B38

Communication System: UID 0, LTE (0); Communication System Band: Band 38; Frequency: 2610 MHz;

Medium parameters used: $f = 2610$ MHz; $\sigma = 1.993$ S/m; $\epsilon_r = 37.646$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.72, 7.72, 7.72); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -49.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (13x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.04 W/kg

Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm,


$dy=5$ mm, $dz=5$ mm

Reference Value = 0.3000 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 0.760 W/kg; SAR(10 g) = 0.303 W/kg

Maximum value of SAR (measured) = 1.39 W/kg

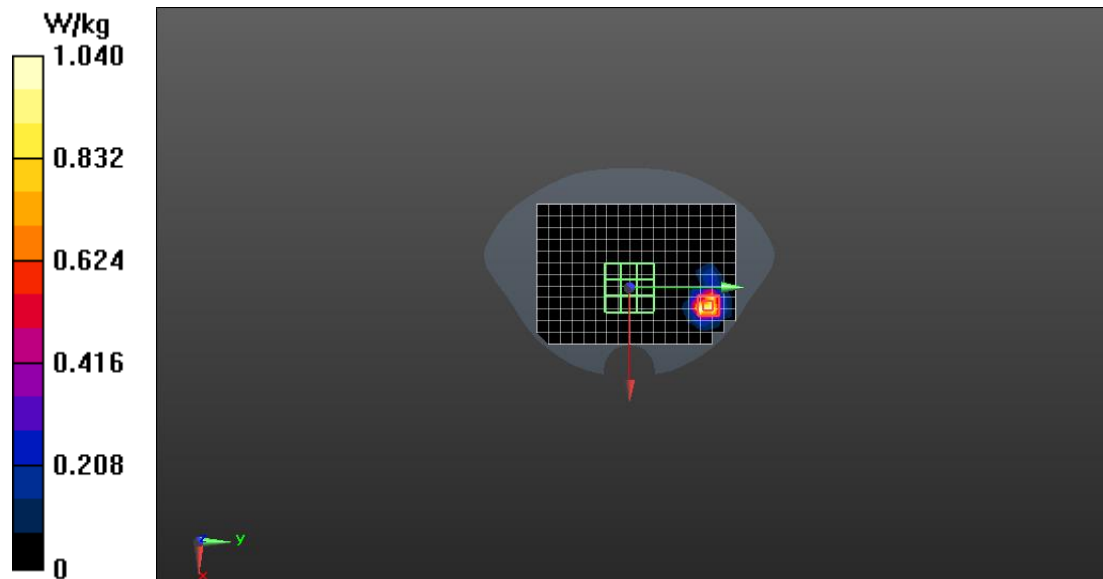

LTE B40

Communication System: UID 0, TDD-LTE (0); Communication System Band: Band40;

Frequency: 2310 MHz;

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.695$ S/m; $\epsilon_r = 38.867$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.3, 8.3, 8.3); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -49.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (13x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.23 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.106 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 0.733 W/kg; SAR(10 g) = 0.310 W/kg

Maximum value of SAR (measured) = 1.33 W/kg

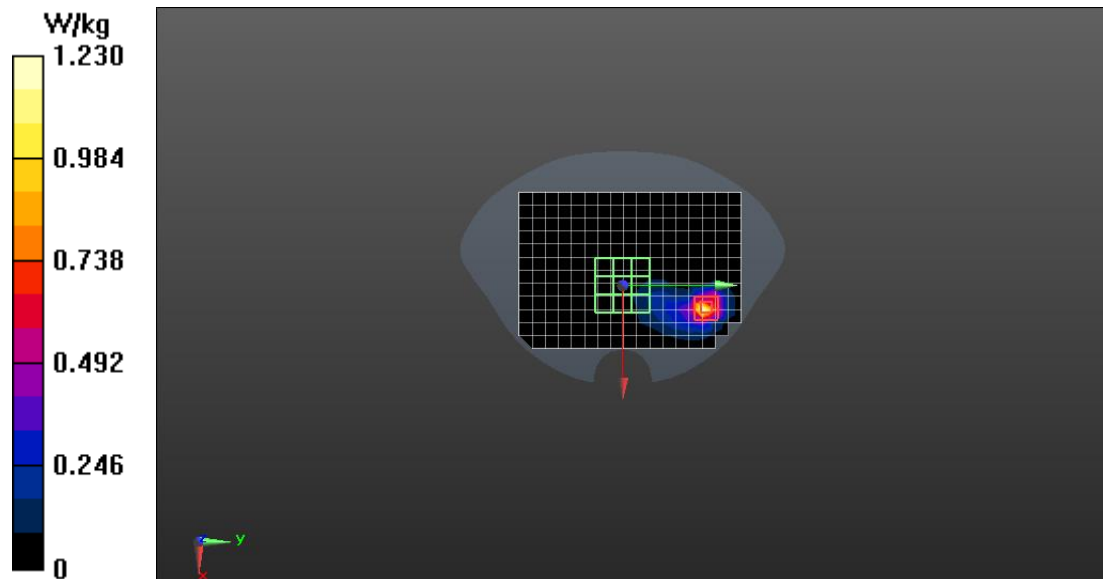

LTE B41

Communication System: UID 0, TDD-LTE (0); Communication System Band: Band 41;

Frequency: 2640 MHz;

Medium parameters used: $f = 2640$ MHz; $\sigma = 2.027$ S/m; $\epsilon_r = 37.596$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.72, 7.72, 7.72); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -49.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (13x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.23 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.33 W/kg

SAR(1 g) = 0.868 W/kg; SAR(10 g) = 0.344 W/kg

Maximum value of SAR (measured) = 1.55 W/kg

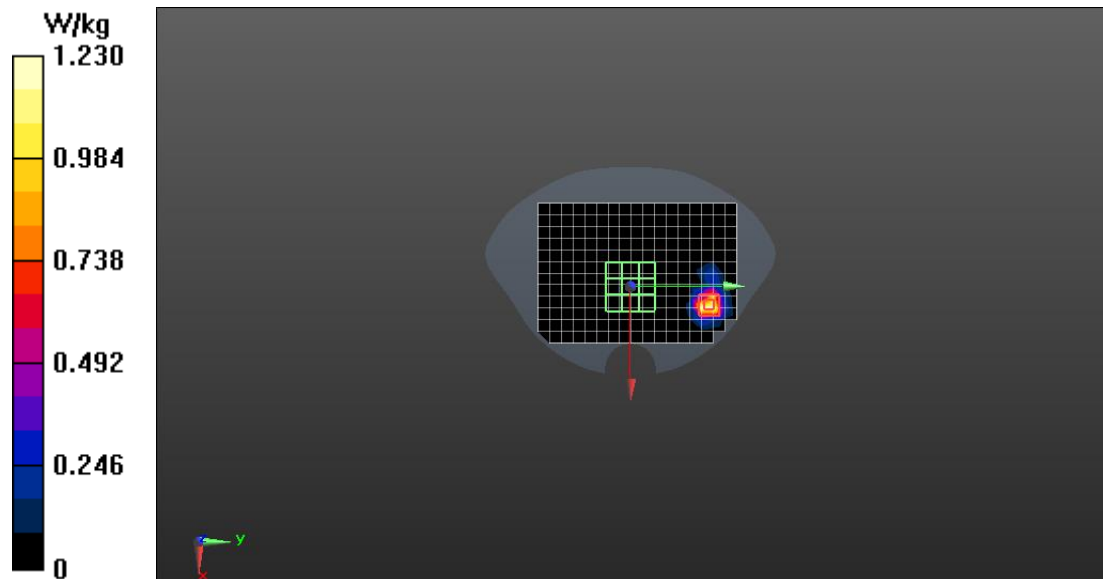

2.4G WIFI

Communication System: UID 0, 2.45GHz Wi-Fi (0); Communication System Band: ISM 2.4GHz; Frequency: 2462 MHz;
Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.757$ S/m; $\epsilon_r = 37.87$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -49.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.563 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.831 W/kg

SAR(1 g) = 0.354 W/kg; SAR(10 g) = 0.152 W/kg

Maximum value of SAR (measured) = 0.614 W/kg

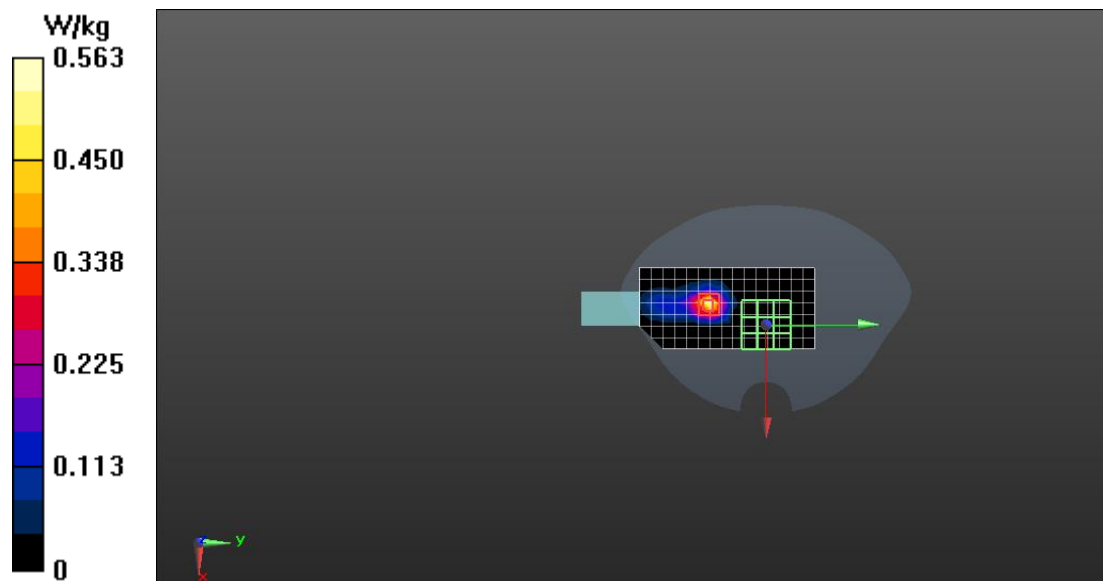

5.3G WIFI


Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5320 MHz;
Medium parameters used: $f = 5320$ MHz; $\sigma = 4.348$ S/m; $\epsilon_r = 34.445$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.64, 5.64, 5.64); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -49.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x19x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 1.73 W/kg

Configuration/Body/Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 2.219 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 3.63 W/kg
SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.329 W/kg
Maximum value of SAR (measured) = 2.28 W/kg

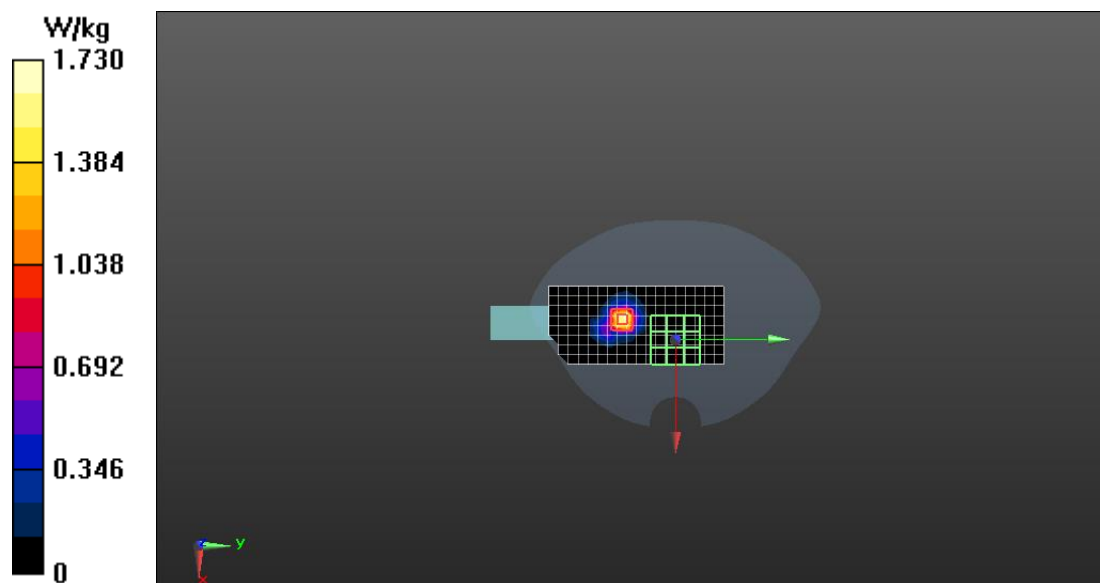

5.6G WIFI


Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5510 MHz;
Medium parameters used: $f = 5510$ MHz; $\sigma = 4.963$ S/m; $\epsilon_r = 34.055$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.01, 5.01, 5.01); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -49.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x19x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 2.10 W/kg

Configuration/Body/Zoom Scan (8x9x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 2.088 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 4.54 W/kg
SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.347 W/kg
Maximum value of SAR (measured) = 2.66 W/kg

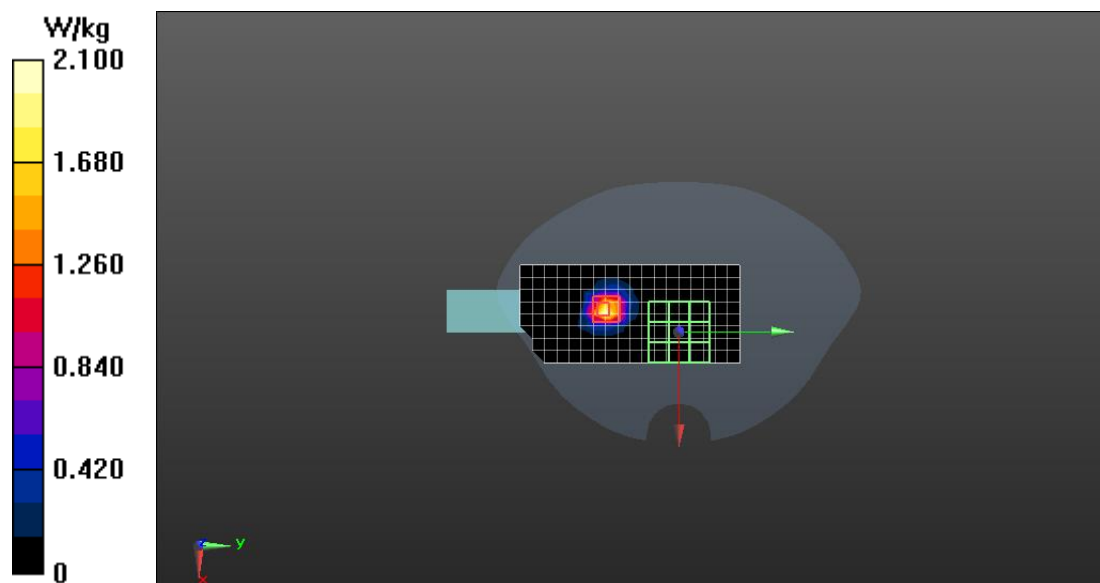

5.8G WIFI

Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5745 MHz;
Medium parameters used: $f = 5745$ MHz; $\sigma = 5.243$ S/m; $\epsilon_r = 33.752$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.05, 5.05, 5.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -49.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x19x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 2.12 W/kg


Configuration/Body/Zoom Scan (8x9x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.337 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 4.85 W/kg

SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.351 W/kg

Maximum value of SAR (measured) = 2.70 W/kg

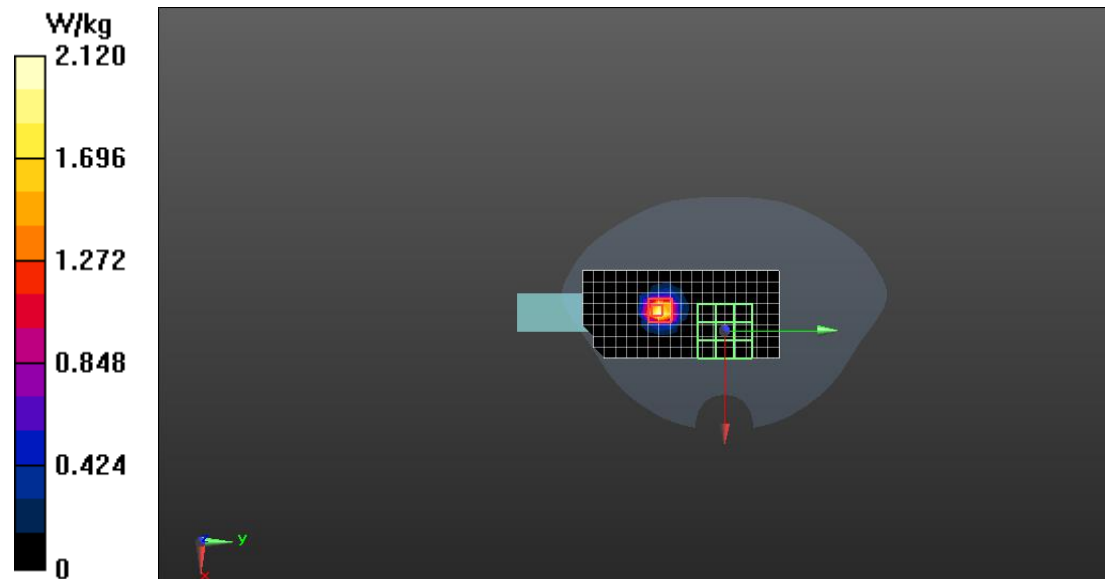

BT

Communication System: UID 0, BT(0) (0); Communication System Band: BT; Frequency: 2402 MHz;

Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.701$ S/m; $\epsilon_r = 37.864$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -49.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.218 W/kg

Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.6590 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.335 W/kg

SAR(1 g) = 0.146 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.260 W/kg

