

# TEST REPORT FROM RADIO FREQUENCY INVESTIGATION LTD.

Test Of: Adaptive Broadband Ltd AB-ACCESS Access Point (AP)

To: FCC Part 15 Subpart E: 1998 (Unlicensed National Information Infrastructure Devices)

> **Test Report Serial No:** RFI/EMCB1/RP38797A

This Test Report Is Issued Under The Authority Of Brian Watson Technical Director:	Checked By: Ploubent
Tested By:	Release Version No: PDF01
Schot	
Issue Date: 04 May 1999	Test Date: 25 September 1997

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, Selecting text and graphics, Adding or changing notes and form fields. Furthermore, the date of creation must match the issue date stated above. This report may be copied in full.

Radio Frequency Investigation Ltd, Ewhurst Park, Ramsdell, Basingstoke, Hampshire, RG26 5RQ, ENGLAND. Tel: +44 (0) 1256 851193 Fax: +44 (0) 1256 851192 Registered in England, No. 211 7901. Registered Office: Ewhurst Park, Ramsdell, Basingstoke, Hampshire RG26 5RQ



**EMC** Department

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

This page has been left intentionally blank.

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 2 of 56 Issue Date:

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 3 of 56 Issue Date:

Test Of:	Adaptive Broadband Ltd
	AB-ACCESS Access Point (AP)
To:	F.C.C. Part 15 Subpart E: 1998

# Table of Contents

1. Client Information	4
2. Equipment Under Test (EUT)	5
3. Test Specification, Methods And Procedures	9
4. Deviations From The Test Specification	10
5. Operation Of The EUT During Testing	11
6. Summary Of Test Results	12
7. Measurements, Examinations And Derived Results	13
8. Measurement Uncertainty	30
Appendix 1. Test Equipment Used	31
Appendix 2. Measurement Methods	33
Appendix 3. Test Configuration Drawings	40
Appendix 4. Graphical Test Results	45
Appendix 5. Photographs of EUT	55

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 4 of 56 Issue Date:

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

# **1. Client Information**

Company Name:	Adaptive Broadband Ltd
Address:	First Floor, Block C1 The Westbrook Centre Milton Road Cambridge CB4 1YQ Tel: +44-1223-713713 Fax: +44-1223-713714
Contact Name:	Mr P. Simpson Tel: +44-1223-713412 E-Mail: <u>ps@adaptive</u> broadband.com

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 5 of 56 Issue Date:

Test Of:Adaptive Broadband LtdAB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

# 2. Equipment Under Test (EUT)

The following information (with the exception of the Date of Receipt) has been supplied by the client:

# 2.1. Identification Of Equipment Under Test (EUT)

Brand Name:	AB-ACCESS
Model Name or Number:	Access Point (AB)
Unique Type Identification:	UNII Pilot
Serial Number:	Pre-Production 001
Country of Manufacture:	UK
FCC ID Number:	Awaiting Certification from the FCC
Date of Receipt:	20 April 1999

Brand Name:	AB-ACCESS
Model Name or Number:	SU and AP 'Wall-Box'
Unique Type Identification:	RJ45
Serial Number:	Pre-Production 001
Country of Manufacture:	UK
FCC ID Number:	Awaiting Certification from the FCC
Date of Receipt:	20 April 1999

Brand Name:	Sinpro Electronic co. Ltd
Description	DC Power Supply Unit
Model Name or Number:	SPU50-9
Unique Type Identification:	None stated by client
Serial Number:	120663
Country of Manufacture:	Taiwan
FCC ID Number:	Awaiting Certification from the FCC
Date of Receipt:	20 April 1999

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 6 of 56 Issue Date:

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

# 2.2. Description Of EUT

AB-ACCESS is targeted at providing high-speed wireless internet access in the recently assigned FCC U-NII bands between 5GHz and 6GHz. AB-ACCESS adopts a cellular structure consisting of base stations (Access Point [AP]) servicing many users. It is a fixed access, point to multipoint infrastructure. The product is targeted at the US market only.

The AP is routed via a 'wall box' to the network service provider's trunked infrastructure. The AP has an integral antenna with a 60 degree 3dB beam width to illuminate the desired coverage area. AP units can be installed around the periphery of a tall building or on a tower for optimum coverage. Power and data (bi-directional) are routed via braid and foil screened, quad twisted pair, CAT 5 data cable from an internally mounted wall box (similar in construction to a standard BT telephone outlet) up to the AP antenna unit. Power and data status is also routed via this cable. Power is provided to the wall box via a standard FCC approved 48V DC supply. The wall box provides ATM connectivity via the RJ45 socket to the service providers network.

#### 2.3. Modifications Incorporated In EUT

The EUT has been modified so that it can be driven from a PC test script enabling worst case conditions for FCC requirements to be evaluated and tested for compliance. This modification is purely a software driver. AB-ACCESS employs a rapid TDD (Time Divisions Duplex) air interface based on ATM (Asynchronous Transfer Mode) networking protocols - data is transmitted asynchronously on demand and as such there is no discernible duty from which 'averaged' measurements can be taken. The following test modes have been implemented:

Continuous Transmit – this enables worst case EIRP and PSD to be measured, the unit is set for maximum transmit power.

Continuous Receive – There may be some fundamental frequency components that exceed the switch receive test-mode, again the unit is set to maximum receive gain.

Bursted Receive - to measure worst radiated and conducted EMC in receive mode. A predetermined duty cycle will be used, the unit is set for maximum receive gain.

Maximum Transmit Power – this is worst case for switching transients creating spurious emissions – EMC radiated and conducted. As above, a predetermined duty cycle will be used, as before the unit is set for maximum transmits power.

Within each of these modes we can change the operating channel as desired by means of the PC controller.

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 7 of 56 Issue Date:

Test Of:Adaptive Broadband LtdAB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

# 2.4. Additional Information Related To Testing

Power Supply Requirement:	115 V, 60 Hz AC Mains to PSU 48 VDC from PSU to EUT
Current Rating	830mA
Intended Operating Environment:	AP antenna units are mounted outside, operational range is -20 to +50 degrees Celsius. "Wall-box" units and PSUs are mounted internally to users buildings/office/home.
Weight:	AP antenna unit 5 Kg max
Dimensions:	AP = 500mm (h) x 250mm (w) x 80mm (d)
Interface Ports:	'Wall-box' RJ45 socket – Ethernet / ATM available
Type of Device	Fixed Access Wireless Internet System
Antenna Details	Permanently Attached
Occupied Bandwidth	17 MHz
Type of Modulation	QPSK at 25Mbits/sec, raised cosine filter ( $\alpha = 0.35$ )
Number of Tx Channels	15 Channels of 15 MHz, 5 channels in each U-NII Band
Method of Frequency Generation	Synthesiser
Category of Receiver	Superheterodyne

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 8 of 56 Issue Date:

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

# 2.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	PC
Brand Name:	Dell
Model Name or Number:	Latitude
Serial Number:	DP/N0009321C - 12800 - 8BM2910 - ZL6D8
FCC ID Number:	None stated by client
Cable Length And Type:	6m Ethernet UTP
Connected to Port:	Wall-Box (Configuration Only)

Description:	PSU for PC
Brand Name:	Dell
Model Name or Number:	PA-2
Serial Number:	DP/N 0085391 REV A01
FCC ID Number:	None stated by client
Cable Length And Type:	1m DC
Connected to Port:	PC Input

Description	ATM Switch
Brand Name:	ATML
Model Name or Number:	VIRATA Switch 1000
Serial Number:	VM1000-01-1001664
FCC ID Number:	None Stated by Client
Cable Length And Type:	6m Ethernet UTP
Connected to Port:	Wall-Box

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 9 of 56 Issue Date:

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

# 3. Test Specification, Methods And Procedures

# 3.1. Test Specification

Reference:	FCC Part 15 Subpart E: 1998
Title:	Code of Federal Regulations, Part 15 (47CFR15) Radio Frequency Devices: Digital Devices. Subpart E: Unlicensed National Information Infrastructure Devices
Comments:	A description of the test facility used for this test is on file with, and has been accepted by, the Federal Communications Commission as required by Section 2.948 of Federal Rules.
Purpose of Test:	To determine whether the equipment complied with the requirements of the specification for the purposes of certification.

#### 3.2. Methods And Procedures

The methods and procedures used were as detailed in:

ANSI C63.2 (1987)

Title: American National Standard for Instrumentation - Electromagnetic noise and field strength.

ANSI C63.4 (1992) Title: American National Standard Methods of Measurement of Electromagnetic Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

ANSI C63.5 (1988) Title: American National Standard for the Calibration of antennas used for Radiated Emission measurements in Electromagnetic Interference (EMI) control.

ANSI C63.7 (1988) Title: American National Standard Guide for Construction of Open Area Test Sites for performing Radiated Emission Measurements.

CISPR 16 (1987) Title: Specification for Radio Interference measuring apparatus and measurement methods.

#### 3.3. Definition Of Measurement Equipment

The measurement equipment used complied with the requirements of the standards referenced in the Methods & Procedures section above. Appendix 1 contains a list of the test equipment used.

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 10 of 56 Issue Date:

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

# **4. Deviations From The Test Specification**

None

**EMC** Department

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

# 5. Operation Of The EUT During Testing

#### 5.1. Operating Conditions

The EUT was tested in a normal laboratory environment.

During testing, the EUT was powered by a 48 V DC Supply from the PSU. The PSU was powered from a 115 V, 60 Hz AC Mains supply.

#### 5.2. Operating Modes

The EUT was tested in the following operating mode:

Continuous and Maximum Transmit Power for transmitter tests to FCC Part 15 Subpart E (15.407).

Continuous and bursted receive for receiver tests to FCC Part 15 Subpart B.

For both transmit and receive modes, tests were performed with the EUT set to the following channels for each of the 3 operating bands.

Bottom Band: 5.15 to 5.25 GHz:	<b>Bottom Channel</b>	(Channel 0)	5.17 GHz
	Top Channel	(Channel 4)	5.23 GHz
Middle Band: 5.25 to 5.35 GHz:	<b>Bottom Channel</b>	(Channel 5)	5.27 GHz
	Top Channel	(Channel 9)	5.33 GHz
Top Band: 5.725 to 5.825 GHz:	<b>Bottom Channel</b>	(Channel 10)	5.745 GHz
	Top Channel	(Channel 14)	5.805 GHz

The reason for choosing this mode was that it was defined by the client as being likely to be the worst case with regards EMC.

#### 5.3. Configuration And Peripherals

The EUT was tested in the following configuration: The AP antenna unit is connected via S-FTP-Cat5 cable to the wall-box. The power was supplied from the PSU to the wall-box. Data was controlled from the support PC to the wall-box via UTP-Cat5 Ethernet cables.

The reason for choosing this configuration was that it was defined by the client as being likely to be the worst case with regards EMC and typical of an installation at a users home / office.

NB Section 2 of this report contains a full list of support equipment used and Appendix 3 contains a schematic diagram of the test configuration.

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 12 of 56 Issue Date:

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

# 6. Summary Of Test Results

# 6.1. Transmitter Tests

Range Of Measurements	Specification Reference	Compliancy Status
AC Powerline Conducted Emissions, 450 kHz to 30 MHz	Section 15.407 (b5) of C.F.R. 47: 1998. (Section 15.207)	Complied
Effective Isotropic Radiated Power Levels, 5 GHz to 6 GHz	Section 15.407 (a) of C.F.R. 47: 1998.	Complied
Electric Field Strength Spurious Emissions, 30 MHz to 1000 MHz	Section 15.407 (b5) of C.F.R. 47: 1998 (Section 15.209)	Complied
Effective Isotropic Radiated Power Spurious Emissions, 1 GHz to 40 GHz	Section 15.407 (b1/2/3) of C.F.R. 47: 1998.	Complied
Frequency Stability -20°C to +50°C 85% to 115% VAC @ 20°C	Section 15.407 (g) of C.F.R. 47: 1997	Complied

# 6.2. Receiver Tests

Range Of Measurements	Specification Reference	Compliancy Status
AC Powerline Conducted Emissions, 450 kHz to 30 MHz	Section 15.107 Class B of C.F.R. 47: 1998.	Complied
Electric Field Strength Spurious Emissions, 30 MHz to 26000 MHz	Section 15.109 Class B of C.F.R. 47: 1998	Complied

# 6.3. Location Of Tests

All the measurements described in this report were performed at the premises of Radio Frequency Investigation Ltd, Ewhurst Park, Ramsdell, Basingstoke, Hampshire, RG26 5RQ, England.

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 13 of 56 Issue Date:

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

# 7. Measurements, Examinations And Derived Results

## 7.1. General Comments

7.1.1. This section contains test results only. Details of the test methods and procedures can be found in Appendix 2 of this report.

7.1.2. The measurement uncertainties stated were calculated in accordance with the requirements of NAMAS Document NIS 81 with a confidence level of 95%. Please refer to Section 8 for details of measurement uncertainties.

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 14 of 56 Issue Date:

Test Of:Adaptive Broadband LtdAB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

# 7.2. Test Results For AC Mains Conducted Emissions: Tx and Rx Mode

#### 7.2.1. Quasi-Peak Detector Measurements On Live And Neutral Lines

7.2.1.1. Measurements were performed to FCC Part 15.107 Class B (Unintentional Radiators) and FCC Part 15.207 (Intentional Radiators).

7.2.1.2. The EUT was operated simultaneously in both maximum transmit power and bursted receive mode on the specified channel.

7.2.1.3. Plots of the initial scans can be found in Appendix 4.

7.2.1.4. Preliminary conducted spurious emission scans were performed with the EUT set to all 6 channels stated in section 5.2. These preliminary scans showed similar emission levels for each of the channels. Therefore final conducted emission measurements were performed with the EUT set to Bottom Band Bottom Channel (Channel 0).

7.2.1.5. The following table lists frequencies at which emissions were measured using a Quasi-Peak detector:

Frequency (MHz)	Line	Q-P Level (dBml/)	Q-P Limit (dB <b>m</b> l/)	Margin (dB)	Result
0.563	Live	35.5	48.0	12.5	Complied
0.563	Neutral	37.3	48.0	10.3	Complied
3.101	Live	43.9	48.0	4.1	Complied
3.101	Neutral	44.8	48.0	3.2	Complied
3.288	Live	45.4	48.0	2.6	Complied
3.288	Neutral	46.2	48.0	1.8	Complied
10.306	Live	33.7	48.0	14.3	Complied
10.306	Neutral	33.5	48.0	14.5	Complied
13.671	Live	38.5	48.0	9.5	Complied
13.671	Neutral	36.8	48.0	11.2	Complied
18.000	Live	36.5	48.0	11.5	Complied
18.000	Neutral	37.2	48.0	10.8	Complied

#### Bottom Band Bottom Channel (Channel 0)

#### **EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 15 of 56 Issue Date:

Test Of:Adaptive Broadband LtdAB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

# 7.2.2. Test Results For AC Mains Conducted Emissions: Tx and Rx Mode (continued)

7.2.2.1. Further to section 7.2.1, additional measurements were performed on frequencies within 6dB of the limit with the EUT set to each of the other 5 operating channels.

Frequency (MHz)	Line	Q-P Level (dBml/)	Q-P Limit (dB <b>m</b> l/)	Margin (dB)	Result
3.101	Live	44.5	48.0	3.5	Complied
3.101	Neutral	45.0	48.0	3.0	Complied
3.288	Live	45.3	48.0	2.7	Complied
3.288	Neutral	46.3	48.0	1.7	Complied

#### **Bottom Band Top Channel (Channel 4)**

#### Middle Band Bottom Channel (Channel 5)

Frequency (MHz)	Line	Q-P Level (dBml/)	Q-P Limit (dB <b>m</b> l/)	Margin (dB)	Result
3.101	Live	44.5	48.0	3.5	Complied
3.101	Neutral	44.9	48.0	3.1	Complied
3.288	Live	45.3	48.0	2.7	Complied
3.288	Neutral	46.3	48.0	1.7	Complied

#### Middle Band Top Channel (Channel 9)

Frequency (MHz)	Line	Q-P Level (dBml/)	Q-P Limit (dBml/)	Margin (dB)	Result
3.101	Live	44.8	48.0	3.2	Complied
3.101	Neutral	45.1	48.0	2.9	Complied
3.288	Live	45.4	48.0	2.6	Complied
3.288	Neutral	46.3	48.0	1.7	Complied

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 16 of 56 Issue Date:

Test Of:	Adaptive Broadband Ltd
	AB-ACCESS Access Point (AP)
То:	F.C.C. Part 15 Subpart E: 1998

# 7.2.3. Test Results For AC Mains Conducted Emissions: Receive Mode (continued)

Frequency (MHz)	Line	Q-P Level (dBml/)	Q-PLimit (dBml/)	Margin (dB)	Result
3.101	Live	44.9	48.0	3.1	Complied
3.101	Neutral	45.2	48.0	2.8	Complied
3.288	Live	45.4	48.0	2.6	Complied
3.288	Neutral	46.3	48.0	1.7	Complied

# Top Band Bottom Channel (Channel 10)

# **Top Band Top Channel (Channel 14)**

Frequency (MHz)	Line	Q-P Level (dBml/)	Q-P Limit (dB <b>ml/</b> )	Margin (dB)	Result
3.101	Live	45.0	48.0	3.0	Complied
3.101	Neutral	45.3	48.0	2.7	Complied
3.288	Live	45.7	48.0	2.3	Complied
3.288	Neutral	46.5	48.0	1.5	Complied

**EMC** Department

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

# 7.3. Test Results For Radiated Emissions: Tx and Rx Mode

#### 7.3.1. Electric Field Strength Measurements: 30 MHz to 1000 MHz

7.3.1.1. Measurements were performed to FCC Part 15.109 Class B (Unintentional Radiators) and FCC Part 15.209 (Intentional Radiators).

7.3.1.2. The EUT was operated simultaneously in both maximum transmit power and bursted receive mode on the specified channel.

7.3.1.3. The client has stated that the highest clock frequency for the EUT was 4.9025 GHz. Therefore tests were performed up to 26.0 GHz.

7.3.1.4. Preliminary radiated spurious emission scans were performed with the EUT set to all 6 channels stated in section 5.2. These preliminary scans showed similar emission levels for each of the channels. Therefore final radiated emission measurements were performed with the EUT set to Bottom Band Bottom Channel (Channel 0).

7.3.1.5. Plots of the initial scans can be found in Appendix 4.

7.3.1.6. The following table lists frequencies at which emissions were measured using a Quasi-Peak detector at a test distance of 3m (results incorporate antenna factors and cable losses):

Frequency (MHz)	Ant. Pol.	Q-P Level (dB <b>ml/</b> /m)	Q-P Limit (dB <b>m</b> l//m)	Margin (dB)	Result
46.510	Vert.	20.2	40.0	19.8	Complied
50.000	Vert.	32.4	40.0	7.6	Complied
100.000	Vert.	28.6	43.5	14.9	Complied
120.005	Vert.	20.8	43.5	22.7	Complied
150.000	Horiz.	27.4	43.5	16.1	Complied
256.000	Vert.	14.9	46.0	31.1	Complied
336.000	Vert.	23.2	46.0	22.8	Complied
352.000	Vert.	23.0	46.0	23.0	Complied
368.000	Vert.	16.4	46.0	29.6	Complied
432.000	Horiz.	22.4	46.0	23.6	Complied
512.000	Horiz.	26.2	46.0	19.8	Complied
528.000	Horiz.	30.6	46.0	15.4	Complied
550.000	Horiz.	35.9	46.0	10.1	Complied
559.000	Horiz.	27.3	46.0	18.7	Complied
576.000	Horiz.	30.1	46.0	15.9	Complied

#### Middle Band Top Channel (Channel 9)

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 18 of 56 Issue Date:

Test Of:Adaptive Broadband LtdAB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

#### 7.3.2. Test Results For Radiated Emissions: Tx and Rx Mode (continued)

7.3.2.1. Further to section 7.3.1, additional measurements were performed on various frequencies of interest with the EUT set to each of the 2 other operating channels.

#### Bottom Band Top Channel (Channel 4)

Frequency	Ant.	Q-P Level	Q-P Limit	Margin	Result
(MHz)	Pol.	(dB <b>m</b> l//m)	(dB <b>m</b> //m)	(dB)	
512.000	Horiz.	27.4	46.0	18.6	Complied

#### **Top Band Bottom Channel (Channel 10)**

Frequency	Ant.	Q-P Level	Q-P Limit	Margin	Result
(MHz)	Pol.	(dB <b>m</b> l/m)	(dB <b>m</b> l//m)	(dB)	
550.000	Horiz.	36.7	46.0	9.3	Complied

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 19 of 56 Issue Date:

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

# 7.4. Test Results For Radiated Emissions: Receive Mode

#### 7.4.1. Electric Field Strength Measurements: 1 GHz to 26 GHz

7.4.1.1. Measurements were performed to FCC Part 15.109 Class B (Unintentional Radiators).

7.4.1.2. The client has stated that the highest clock frequency for the EUT was 4.9025 GHz. Therefore tests were performed up to 26.0 GHz.

7.4.1.3. Preliminary radiated spurious emission scans were performed with the EUT set to all 6 channels stated in section 5.2. Final radiated emission measurements were performed only if the preliminary scan showed any spurious emissions to be within 10dB of the reference limit line.

7.4.1.4. At higher frequencies, due to the limitations of the dynamic range of the measuring receiver it was not possible to perform radiated emission preliminary scans and final measurements at the specified 3m test distance. Therefore the measuring antenna was moved to a test distance of 1m. The limit was extrapolated using the factor 20 log (d1/d2).

7.4.1.5. Plots of the initial scans can be found in Appendix 4.

7.4.1.6. The following tables list frequencies at which emissions were measured using Average and Peak detector functions at a test distance of 1m:

Frequency (GHz)	Antenna Polarity (H/V)	Average Detector level (dBmV)	Antenna factor (dB)	Cable loss (dB)	Actual Average Level (dB <b>m/</b> /m)	Average Limit (dB <b>ml/</b> /m)	Average Margin (dB)	Result
1.29999	Vert.	14.7	21.7	1.0	36.4	63.5	27.1	Complied
1.29999	Horiz.	14.7	21.7	1.0	36.4	63.5	27.1	Complied
8.53494	Vert.	21.2	30.5	2.1	53.8	63.5	9.7	Complied
8.53494	Horiz.	25.9	30.5	2.1	58.5	63.5	5.0	Complied

#### **Bottom Band Bottom Channel (Channel 0)**

Frequency (GHz)	Antenna Polarity (H/V)	Peak Detector level (dB <b>m</b> V)	Antenna factor (dB)	Cable loss (dB)	Actual Peak Level (dB <b>m/</b> /m)	Peak Limit (dB <b>ml/</b> /m)	Peak Margin (dB)	Result
1.29999	Vert.	27.8	21.7	1.0	50.5	83.5	33.0	Complied
1.29999	Horiz.	27.8	21.7	1.0	50.5	83.5	33.0	Complied
8.53494	Vert.	27.7	30.5	2.1	60.3	83.5	23.2	Complied
8.53494	Horiz.	29.5	30.5	2.1	62.1	83.5	21.4	Complied

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 20 of 56 Issue Date:

Test Of:Adaptive Broadband LtdAB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

#### Test Results For Radiated Emissions: Receive Mode (continued)

Frequency (GHz)	Antenna Polarity (H/V)	Average Detector level (dB <b>m\/</b> )	Antenna factor (dB)	Cable loss (dB)	Actual Average Level (dB <b>m/</b> /m)	Average Limit (dB <b>ml/</b> /m)	Average Margin (dB)	Result
1.29999	Vert.	14.7	21.7	1.0	36.4	63.5	27.1	Complied
1.29999	Horiz.	14.7	21.7	1.0	36.4	63.5	27.1	Complied
8.65498	Vert.	25.2	30.5	2.1	57.8	63.5	5.7	Complied
8.65498	Horiz.	26.9	30.5	2.1	61.5	63.5	4.0	Complied

# Bottom Band Top Channel (Channel 4)

Frequency (GHz)	Antenna Polarity (H/V)	Peak Detector level (dB <b>m</b> V)	Antenna factor (dB)	Cable loss (dB)	Actual Peak Level (dB <b>m</b> //m)	Peak Limit (dB <b>ml/</b> /m)	Peak Margin (dB)	Result
1.29999	Vert.	27.8	21.7	1.0	50.5	83.5	33.0	Complied
1.29999	Horiz.	27.8	21.7	1.0	50.5	83.5	33.0	Complied
8.65498	Vert.	31.5	30.5	2.1	64.1	83.5	19.4	Complied
8.65498	Horiz.	35.2	30.5	2.1	67.8	83.5	15.7	Complied

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 21 of 56 Issue Date:

Test Of:Adaptive Broadband LtdAB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

#### Test Results For Radiated Emissions: Receive Mode (continued)

Frequency (GHz)	Antenna Polarity (H/V)	Average Detector level (dB <b>m</b> /)	Antenna factor (dB)	Cable loss (dB)	Actual Average Level (dB <b>m</b> //m)	Average Limit (dB <b>ml/</b> /m)	Average Margin (dB)	Result
1.29999	Vert.	14.7	21.7	1.0	36.4	63.5	27.1	Complied
1.29999	Horiz.	14.7	21.7	1.0	36.4	63.5	27.1	Complied
8.73500	Vert.	22.4	30.5	2.1	55.0	63.5	8.5	Complied
8.73500	Horiz.	23.1	30.5	2.1	55.7	63.5	7.8	Complied

#### Middle Band Bottom Channel (Channel 5)

Frequency (GHz)	Antenna Polarity (H/V)	Peak Detector level (dB <b>m/</b> )	Antenna factor (dB)	Cable loss (dB)	Actual Peak Level (dB <b>nl/</b> /m)	Peak Limit (dB <b>ml/</b> /m)	Peak Margin (dB)	Result
1.29999	Vert.	27.8	21.7	1.0	50.5	83.5	33.0	Complied
1.29999	Horiz.	27.8	21.7	1.0	50.5	83.5	33.0	Complied
8.73500	Vert.	28.6	30.5	2.1	61.2	83.5	22.3	Complied
8.73500	Horiz.	29.5	30.5	2.1	62.1	83.5	21.4	Complied

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 22 of 56 Issue Date:

Test Of:Adaptive Broadband LtdAB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

#### Test Results For Radiated Emissions: Receive Mode (continued)

Frequency (GHz)	Antenna Polarity (H/V)	Average Detector level (dB <b>m\/</b> )	Antenna factor (dB)	Cable loss (dB)	Actual Average Level (dB <b>m/</b> /m)	Average Limit (dB <b>ml/</b> /m)	Average Margin (dB)	Result
1.29999	Vert.	14.7	21.7	1.0	36.4	63.5	27.1	Complied
1.29999	Horiz.	14.7	21.7	1.0	36.4	63.5	27.1	Complied
8.85499	Vert.	23.5	30.5	2.1	56.1	63.5	7.4	Complied
8.85499	Horiz.	22.8	30.5	2.1	55.4	63.5	8.1	Complied

#### Middle Band Top Channel (Channel 9)

Frequency (GHz)	Antenna Polarity (H/V)	Peak Detector level (dB <b>m</b> V)	Antenna factor (dB)	Cable loss (dB)	Actual Peak Level (dB <b>m/</b> /m)	Peak Limit (dB <b>ml/</b> /m)	Peak Margin (dB)	Result
1.29999	Vert.	27.8	21.7	1.0	50.5	83.5	33.0	Complied
1.29999	Horiz.	27.8	21.7	1.0	50.5	83.5	33.0	Complied
8.85499	Vert.	26.9	30.5	2.1	59.5	83.5	24.0	Complied
8.85499	Horiz.	28.7	30.5	2.1	61.3	83.5	22.2	Complied

#### **Top Band Bottom Channel (Channel 10)**

Frequency (GHz)	Antenna Polarity (H/V)	Average Detector level (dB <b>m</b> /)	Antenna factor (dB)	Cable loss (dB)	Actual Average Level (dB <b>ml</b> //m)	Average Limit (dB <b>ml//</b> m)	Average Margin (dB)	Result
1.29999	Vert.	14.7	21.7	1.0	36.4	63.5	27.1	Complied
1.29999	Horiz.	14.7	21.7	1.0	36.4	63.5	27.1	Complied

Frequency (GHz)	Antenna Polarity (H/V)	Peak Detector level (dB <b>m</b> /)	Antenna factor (dB)	Cable loss (dB)	Actual Peak Level (dB <b>m</b> //m)	Peak Limit (dB <b>ml</b> //m)	Peak Margin (dB)	Result
1.29999	Vert.	27.8	21.7	1.0	50.5	83.5	33.0	Complied
1.29999	Horiz.	27.8	21.7	1.0	50.5	83.5	33.0	Complied

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 23 of 56 Issue Date:

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

# Test Results For Radiated Emissions: Receive Mode (continued)

#### Top Band Top Channel (Channel 14)

Frequency (GHz)	Antenna Polarity (H/V)	Average Detector level (dBm/)	Antenna factor (dB)	Cable loss (dB)	Actual Average Level (dB <b>ml/</b> /m)	Average Limit (dB <b>ml/</b> /m)	Average Margin (dB)	Result
1.29999	Vert.	14.7	21.7	1.0	36.4	63.5	27.1	Complied
1.29999	Horiz.	14.7	21.7	1.0	36.4	63.5	27.1	Complied
9.80496	Vert.	22.6	30.5	2.1	55.2	63.5	8.3	Complied
9.80496	Horiz.	22.8	30.5	2.1	55.4	63.5	8.1	Complied

Frequency (GHz)	Antenna Polarity (H/V)	Peak Detector level (dB <b>m</b> V)	Antenna factor (dB)	Cable loss (dB)	Actual Peak Level (dB <b>m</b> //m)	Peak Limit (dB <b>ml/</b> /m)	Peak Margin (dB)	Result
1.29999	Vert.	27.8	21.7	1.0	50.5	83.5	33.0	Complied
1.29999	Horiz.	27.8	21.7	1.0	50.5	83.5	33.0	Complied
9.80496	Vert.	27.4	30.5	2.1	60.0	83.5	23.5	Complied
9.80496	Horiz.	27.8	30.5	2.1	60.4	83.5	23.1	Complied

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 24 of 56 Issue Date:

Test Of:Adaptive Broadband LtdAB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

# 7.5. Test Results For Radiated Emissions: Transmit Mode

#### 7.5.1. Effective Isotropic Radiated Power Measurements: 5.0 GHz to 6.0 GHz.

7.5.1.1. Measurements were performed to FCC Part 15.407(a) (Unlicensed National Information Infrastructure Devices).

7.5.1.2. The client has stated that the EUT operated in the frequency ranges of 5.15 to 5.25 GHz, 5.25 to 5.35 GHz, and 5.725 to 5.825 GHz. Measurements were performed at both bottom and top channels within each band.

7.5.1.3. The EUT was configured with a permanently connected antenna. The client has stated that the directional gain of the antenna is 18dBi. EIRP measurements were performed to determine the output power levels of the EUT, and the limit was increased by 6dB to compensate for the antenna being connected. The specified limit includes the 6dB antenna gain.

7.5.1.4. It was possible to polarise the antenna incorporated within the EUT for both vertical and horizontal polarisation's. Therefore EIRP measurements were performed with the antenna polarised in both planes.

7.5.1.5. Results are shown for the EUT operating on each of the 6 channels stated in section 5.2. Measurements are shown for both transmit power levels and peak power spectral density. Plots showing the characteristics of the transmitter output can be seen in Appendix 4.

7.5.1.6. In addition to the measurements stated in section 7.10.1.5, additional results were calculated for the ratio of the peak excursion of the modulation envelope as stated in FCC Part 15.407(a[6]).

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 25 of 56 Issue Date:

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

#### **Results: Peak Transmit Power Levels**

Tx Band (GHz)	Channel	Tx Antenn a	Measured Peak EIRP (dBm)	Limit (dBm) (Includes 6dBi Antenna Gain for EIRP)	Bandwidth (MHz)	Plot No.	Result
5.15 – 5.25	Bottom (0)	Vert.	13.10	22.02	15.9555	075	Complied
5.15 – 5.25	Bottom (0)	Horiz.	13.76	22.06	16.0666	076	Complied
5.15 – 5.25	Top (4)	Vert.	14.93	22.00	15.8666	077	Complied
5.15 – 5.25	Top (4)	Horiz.	14.82	22.04	15.9777	078	Complied
5.25 - 5.35	Bottom (5)	Horiz.	22.67	29.07	16.1111	079	Complied
5.25 - 5.35	Bottom (5)	Vert.	21.85	29.05	16.0666	080	Complied
5.25 - 5.35	Тор (9)	Vert.	22.92	29.05	16.0444	081	Complied
5.25 - 5.35	(Top (9)	Horiz.	23.50	29.06	16.0888	082	Complied
5.725 - 5.825	Bottom (10)	Horiz.	28.38	35.05	16.0222	083	Complied
5.725 - 5.825	Bottom (10)	Vert.	26.65	35.06	16.0666	084	Complied
5.725 - 5.825	Top (14)	Vert.	27.01	35.05	16.0222	085	Complied
5.725 - 5.825	Тор (14)	Horiz.	29.80	35.13	16.3333	086	Complied

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 26 of 56 Issue Date:

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

# Results: Peak Power Spectral Density (PPSD)

Tx Band (GHz)	Channel	Tx Antenna	Measured PPSD (EIRP) (dBm/MHz)	Limit (dBm/MHz) (Includes 6dBi Antenna Gain for EIRP)	Plot No.	Result
5.15 – 5.25	Bottom (0)	Vert.	8.5	10.0	075	Complied
5.15 – 5.25	Bottom (0)	Horiz.	6.3	10.0	076	Complied
5.15 – 5.25	Top (4)	Vert.	7.1	10.0	077	Complied
5.15 – 5.25	Top (4)	Horiz.	7.8	10.0	078	Complied
5.25 - 5.35	Bottom (5)	Horiz.	15.2	17.0	079	Complied
5.25 - 5.35	Bottom (5)	Vert.	14.0	17.0	080	Complied
5.25 - 5.35	Тор (9)	Vert.	15.2	17.0	081	Complied
5.25 - 5.35	Тор (9)	Horiz.	16.4	17.0	082	Complied
5.725 - 5.825	Bottom (10)	Horiz.	19.9	23.0	083	Complied
5.725 - 5.825	Bottom (10)	Vert.	18.6	23.0	084	Complied
5.725 - 5.825	Top (14)	Vert.	19.2	23.0	085	Complied
5.725 - 5.825	Top (14)	Horiz.	21.6	23.0	086	Complied

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 27 of 56 Issue Date:

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

# Results: Ratio of Peak Excursion of the Modulation Envelope

Tx Band (GHz)	Channel	Tx Ant	Measured Peak EIRP (dBm)	Measured PPSD (EIRP) (dBm/ MHz)	Ratio: Peak Excursion	Limit (dB)	Result
5.15 – 5.25	Bottom (0)	Horiz	13.10	8.5	4.60	13.0	Complied
5.15 – 5.25	Bottom (0)	Vert.	13.76	6.3	7.46	13.0	Complied
5.15 – 5.25	Top (4)	Vert.	14.93	7.1	7.83	13.0	Complied
5.15 – 5.25	Top (4)	Horiz.	14.82	7.8	7.02	13.0	Complied
5.25 - 5.35	Bottom (5)	Horiz.	22.67	15.2	7.47	13.0	Complied
5.25 - 5.35	Bottom (5)	Vert.	21.85	14.0	7.85	13.0	Complied
5.25 – 5.35	Тор (9)	Vert.	22.92	15.2	7.72	13.0	Complied
5.25 - 5.35	Тор (9)	Horiz.	23.50	16.4	7.10	13.0	Complied
5.725 - 5.825	Bottom (10)	Horiz.	28.38	19.9	8.48	13.0	Complied
5.725 - 5.825	Bottom (10)	Vert.	26.65	18.6	8.05	13.0	Complied
5.725 - 5.825	Top (14)	Vert.	27.01	19.2	7.81	13.0	Complied
5.725 - 5.825	Top (14)	Horiz.	29.80	21.6	8.2	13.0	Complied

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 28 of 56 Issue Date:

Test Of:Adaptive Broadband LtdAB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

# 7.6. Test Results For Radiated Emissions: Transmit Mode

# 7.6.1. Effective Isotropic Radiated Power Spurious Measurements: 1.0 GHz to 40.0 GHz.

7.6.1.1. Measurements were performed to FCC Part 15.407(b) (Unlicensed National Information Infrastructure Devices).

7.6.1.2. The client has stated that the highest clock frequency for the EUT was 5.825 GHz. Therefore tests were performed up to 40.0 GHz.

7.6.1.3. Preliminary EIRP scans were performed with the EUT operating on each of the 6 channels stated in section 5.2. Plots showing the spurious (undesirable) emission levels can be seen in Appendix 4.

7.6.1.4. The EUT was configured with a permanently connected antenna. It was possible to polarise the antenna for both vertical and horizontal polarisation's. Therefore EIRP measurements were performed with the antenna polarised in both planes.

#### **Results:**

7.6.1.5. Preliminary scans were performed with the EUT operated on each of the 6 channels stated in section 5.2. It can be shown from the plots (Plots 087 to 134) that all emissions outside of the transmitter band edges are of at least 6dB from the reference limit line. Therefore no final measurements were performed.

7.6.1.6. All preliminary scans (Plots 087 to 134) can be seen in Appendix 4.

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 29 of 56 Issue Date:

Test Of:	Adaptive Broadband Ltd
	AB-ACCESS Access Point (AP)
To:	F.C.C. Part 15 Subpart E: 1998

# 7.7. Test Results For Frequency Stability: Transmit Mode

7.7.1. Measurements for frequency stability were performed in accordance with FCC Part 15.407 (g) of C.F.R. 47:1997.

7.7.2. Measurements were performed over the temperature range of  $-20^{\circ}$ C to  $+50^{\circ}$ C at the nominal operating voltage, and over an operating voltage of 85% to 115% at  $+20^{\circ}$ C.

7.7.3. The client has specified that due to the transmission of broadband data centred around the nominal carrier frequency of the EUT, measurements of any 'drift' are virtually impossible. However valid measurements would be possible by observing the drift on the main local oscillator, which is 902.5 MHz below the nominal centre frequency. All oscillators within the EUT are referenced to a single source and so any drift can be easily quantified. Also due to the integrated nature of the antenna, and its associated gain/frequency response, any 'drift' can be observed whilst operating at the top frequency of the U-NII band (Channel 14).

7.7.4. Measurements for frequency drift were performed with the EUT operating on Channel 14. A plot (Plot 169) of the frequency stability was performed, with the EUT supply voltage, varied from 85% to 110%, and then up to 115%. At all times the ambient temperature was maintained at +20°C. A further plot (Plot 170) was performed to show the frequency stability of the EUT, with the ambient temperature varied from -20°C to +20°C, and then to +50°C. The supply voltage to the EUT remained at a constant 115V. The plots of both measurements can be seen in Appendix 4.

Nominal Operating Frequency	Frequency Deviation @ +20°C			Limit (±10ppm)	Result
	85% Supply Voltage	100% Supply Voltage	115% Supply Voltage		
4.90249 GHz	< 1 kHz	< 1 kHz	< 1 kHz	49 kHz	Complied

#### **Results: Supply Variation**

#### **Results: Temperature Variation**

Nominal Operating Frequency	Frequency Deviation @ 115 V			Limit (±10ppm)	Result
	-20°C	+20°C	+50℃		
4.90249 GHz	< 10 kHz	< 1 kHz	< 10 kHz	49 kHz	Complied

**EMC** Department

Test Of:Adaptive Broadband LtdAB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

# 8. Measurement Uncertainty

8.1. Company Policy, as based on the NAMAS Accreditation Standard, M10, paragraph 12.11 (o), states that Test Reports shall include estimated uncertainty of the calibration or test result (this information need only appear in test reports and test certificates where it is relevant to the validity or application of the test result, where a client's instructions so require or where uncertainty affects compliance to a specification or limit).

8.2. The global uncertainties have been calculated in accordance with NAMAS NIS 81 (Edition 1, May 1994) as follows:

Measurement Type	Range	Confidence Level	Calculated Uncertainty
Conducted Emissions	0.15 MHz to 30 MHz	95%	+/- 2.2 dB
Radiated Field Strength Emissions	30 MHz to 1000 MHz	95%	+/- 4.9 dB
Radiated Field Strength Emissions	1.0 GHz to 26.0 GHz	95%	+/- 4.0 dB
Effective Isotropic Radiated Power	1.0 GHz to 40.0 GHz	95%	+/- 4.0 dB
Frequency Stability	N/A	95%	+/- 4.2 dB

8.3. Measurement uncertainties have been applied in accordance with NAMAS document NIS 81 (edition 1, May 1994), and in the absence of any specification criteria, guidance, or code of practice, compliance has been judged on the basis of shared risk.

8.4. In the case of emissions tests, the measured value of the disturbance from the product sample shall be compared directly with the limits. If the measured value is equal to or less than the limit the product is deemed to pass the test.

8.5. In the case of immunity tests, the equipment is deemed to pass the test if it fulfils the stated performance criteria at the required or a higher severity level. The measurement uncertainty has been taken into account in the calibration procedures stated in the relevant basic standard.

8.6. The methods used to calculate the above uncertainties are in line with those used for calibration laboratories contained in NAMAS document NIS 3003 Edition 8 "The Expression of Uncertainty and Confidence in Measurement" May 1995, which align with international recommendations "Guide to the Expression of Uncertainty in Measurement" ISO/IEC/OIML/BIPM (Prepared by ISO/TAG 4: January 1993).

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 31 of 56 Issue Date:

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

# Appendix 1. Test Equipment Used

Instrument	Manufacturer	Model	RFI No.
Conducted Emissions:	·		
L.I.S.N. (1 ph.)	R & S	ESH3-Z5	A004
Pulse Limitter	R&S	ESH3-Z32	A287
Test Receiver	R&S	ESMI	M069
Plotter	H.P.	7440A	P001
Radiated Electric Field Emission	ons		
Bilog Antenna	Chase	CBL6111	A259
3dB Attenuator	Narda	771003	A262
Bilog Antenna	Chase	CBL6111	A490
Cable	Rosenberger	UFA210A-1- 1182-704704	C460
Cable	Rosenberger	UFA210A-1- 1182-704704	C461
Test Receiver	R&S	ESVP	M002
Spectrum Monitor	R&S	EZM	M003
Test Receiver	R&S	ESMI	M069
Test Receiver	R&S	ESBI	M088
1.0 to 2.0 GHz Horn	Eaton	9188-2	A028
2.0 to 4.0 GHz Horn	Eaton	91889-2	A031
4.0 to 6.0 GHz Horn	Flann	12240-20	A428
6.0 to 8.2 GHz Horn	Narda	642	A439
8.2 to 12.5 GHz Horn	Narda	640	A437
12.5 to 18.0 GHz Horn	Flann	18240-20	A430
18.0 to 26.0 GHz Horn	Flann	20240-20	A436

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 32 of 56 Issue Date:

Test Of:Adaptive Broadband LtdAB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

# Test Equipment Used (continued)

Effective Isotropic Radiated Powe	er		
Test Receiver	R & S	ESMI	M069
Cable	Rosenberger	UFA210A-1- 1182-704704	C460
Cable	Rosenberger	UFA210A-1- 1182-704704	C461
1.0 to 2.0 GHz Horn	Eaton	9188-2	A028
2.0 to 4.0 GHz Horn	Eaton	91889-2	A031
4.0 to 6.0 GHz Horn	Flann	12240-20	A428
6.0 to 8.2 GHz Horn	Narda	642	A439
8.2 to 12.5 GHz Horn	Narda	640	A437
12.5 to 18.0 GHz Horn	Flann	18240-20	A430
18.0 to 26.0 GHz Horn	Flann	20240-20	A436
26.0 to 40.0 GHz Horn	Flann	22240-20	A435
Harmonic Mixer	-	-	W152
Frequency Stability			
Test Receiver	R & S	ESMI	M069
Cable	Rosenberger	UFA210A-1- 1182-704704	C460
4.0 to 6.0 GHz Horn	Flann	12240-20	A428
Environmental Test Chamber	Prolan	PV427H75F 30HV	E007

**NB** In accordance with NAMAS requirements, all the measurement equipment is on a calibration schedule.

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 33 of 56 Issue Date:

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

# **Appendix 2. Measurement Methods**

#### A2.1. AC Mains Conducted Emissions: FCC Part 15

A2.1.1. AC mains conducted emissions measurements were performed in accordance with the standard, against appropriate limits for each detector function.

A2.1.2. The test was performed in a shielded enclosure with the equipment arranged as detailed in the standard on a wooden bench using the floor of the screened enclosure as the ground reference plane and with the EUT powered via a 115 V 60 Hz AC mains supply.

A2.1.3. Initial measurements in the form of swept scans covering the entire measurement band were performed in order to identify frequencies on which the EUT was generating interference. In order to minimise the time taken for these swept measurements, a Peak detector was used in conjunction with the appropriate detector IF measuring bandwidths (see table below). Repetitive scans were performed to allow for emissions with low repetition rates, and the duty cycle of the EUT. The test configuration was the same for the initial scans as for the final measurements.

A2.1.4. Following the initial scans, a graph was produced giving an overview of the emissions from the EUT plotted against the appropriate specification limit. A tolerance line was set 6 dB below the specification limit and levels above the tolerance line were retested (at individual frequencies) using the appropriate detector function.

Receiver Function	Initial Scan	Final Measurements
Detector Type:	Peak	Quasi-Peak (CISPR)*
Mode:	Max Hold	Not applicable
Bandwidth:	10 kHz	9 kHz
Amplitude Range:	60 dB	20 dB
Measurement Time:	Not applicable	>1s
Observation Time:	Not applicable	> 15 s
Step Size:	Continuous sweep	Not applicable
Sweep Time:	Coupled	Not applicable

A2.1.5. The test equipment settings for conducted emissions measurements were as follows:

\* In some instances an Average detector function may also have been used.

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 34 of 56 Issue Date:

Test Of:	Adaptive Broadband Ltd
	AB-ACCESS Access Point (AP)
To:	F.C.C. Part 15 Subpart E: 1998

# A2.2. Radiated Field Strength Emissions

A2.2.1. Radiated emissions measurements were performed in accordance with the standard, against appropriate limits for each detector function.

A2.2.2. Initial measurements covering the entire measurement band in the form of swept scans in a shielded enclosure (for frequencies below 4 GHz) or on an open area test site (for frequencies above 4 GHz) were performed in order to identify frequencies on which the EUT was generating interference. This determined the frequencies on which the EUT should be re-measured in full on the open area test site. In order to minimise the time taken for the swept measurements, a Peak detector was used in conjunction with the appropriate detector IF measuring bandwidth (see table below). Repetitive scans were performed to allow for emissions with low repetition rates, and for the duty cycle of the EUT. The test configuration was the same for the initial scans as for the final measurements.

A2.2.3. The initial scans were performed using an antenna height of 1.5 m and a measurement distance of 3 m. Where (at higher frequencies) the noise floor was found to be of a higher level, a test distance of 1m was used. Following the initial scans, graphs were produced giving an overview of the emissions from the EUT plotted against the appropriate specification limit. A tolerance line was set 6 dB below the specification limit and levels above the tolerance line were re-tested on the open area test site, at the appropriate distance, using a measuring receivers with a Quasi-Peak detector (below 1000 MHz), where applicable, for measurements above 1000 MHz average and peak detectors were used.

A2.2.4. For the main (final) measurements the EUT was arranged on a non-conducting table on an open area test site, as detailed in the specification.

A2.2.5. All measurements on the open area test site were performed using broadband antennas.

A2.2.6. On the open area test site, at each frequency where a signal was found, the levels were maximised by initially rotating the turntable through 360°. In addition, for frequencies below 1000 MHz, the antenna height was varied between 1 and 4 m. For frequencies above 1000 MHz, the antenna was fixed at a height of 1.5m. At this point, any signals found to be between the limit and a level 6 dB below it were further maximised by changing the configuration of the EUT, e.g. re-routing cables to peripherals and moving peripherals with respect to the EUT.

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 35 of 56 Issue Date:

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

A2.2.7. The test equipment settings for radiated emissions measurements were as follows:

Receiver Function	Initial Scan Below 1GHz	Final Measurements Below 1GHz
Detector Type:	Peak	Quasi-Peak (CISPR)
Mode:	Max Hold	Not applicable
Bandwidth:	120 kHz	120 kHz
Amplitude Range:	60 dB	20 dB
Measurement Time:	Not applicable	>1s
Observation Time:	Not applicable	> 15 s
Step Size:	Continuous sweep	Not applicable
Sweep Time:	Coupled	Not applicable

Receiver Function	Initial Scan Above 1GHz	Final Measurements Above 1 GHz
Detector Type:	Peak	Peak/Average
Mode:	Max Hold	Not applicable
Bandwidth:	1 MHz	1 MHz
Amplitude Range:	60 dB	20 dB (typical)
Measurement Time:	Not applicable	>1s
Observation Time:	Not applicable	> 15 s
Step Size:	Continuous sweep	Not applicable
Sweep Time:	Coupled	Not applicable

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 36 of 56 Issue Date:

Test Of:	Adaptive Broadband Ltd
	AB-ACCESS Access Point (AP)
To:	F.C.C. Part 15 Subpart E: 1998

# A.2.3.Effective Isotropic Radiated Power Measurements: 5.0 GHz to 6.0 GHz.

A.2.3.1. Effective Isotropic Radiated Power measurements were performed in accordance with the standard, against the appropriate limits on an open area test site.

A.2.3.2. The EUT was set to transmit on the required channel at maximum transmit power. The channels stated in section 5.2 were tested. The EUT was configured with a permanently attached antenna. Therefore radiated power measurements were performed.

A.2.3.3. The EUT was mounted on a non-metallic table at a 1 m test height. The receive (test) antenna was placed at a test distance of 2m. The EUT was set to operate at the required channel and the exact frequency recorded. A substitution measurement was then performed to determine the loss of the test set-up. (Details of the substitution method can be seen in Appendix A.2.6.).

A.2.3.4. The level recorded for the substitution method was entered as a level offset in the measuring receiver. Initial measurements covering the entire measurement band were performed in the form of a swept scan. In order to minimise the time taken for the swept measurements, a Peak detector was used in conjunction with the appropriate detector IF measuring bandwidth (1MHz). Repetitive scans were performed to allow for emissions with low repetition rates, and for the duty cycle of the EUT. The EUT was rotated through 360° to maximise all emissions. The test was performed with the EUT integral antenna set for both horizontal and vertical polarisations. The test antenna was also set for both polarities.

A.2.3.5. The measured Peak Transmit Power and the Power Spectral Density could then be determined.

A.2.3.6. The EUT was set to the next channel and sections A.2.3.2. to A.2.3.5. were repeated.

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 37 of 56 Issue Date:

Test Of:Adaptive Broadband LtdAB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

### A.2.4. Effective Isotropic Radiated Power Spurious Measurements: 1.0 GHz to 40.0 GHz.

A.2.4.1. Effective Isotropic Radiated Power Spurious measurements were performed in accordance with the standard, against the appropriate limits on an open area test site.

A.2.4.2. The EUT was set to transmit on the required transmit channel at maximum transmit power. The channels stated in section 5.2 were tested. The EUT was configured with a permanently attached antenna. Therefore radiated power measurements were performed.

A.2.4.3. The EUT was mounted on a non-metallic table at a 1.5m test height. The receive (test) antenna was placed at a test distance of 2m. For each of the frequency ranges performed, a substitution method was performed to determine the worst case loss of the test set-up. (Details of the substitution method can be seen in Appendix A.2.6.)

A.2.4.4. The level recorded for the substitution method was entered as a level offset in the measuring receiver. Initial measurements covering the entire measurement band were performed in the form of a swept scan (For frequencies below 4 GHz, initial scans were performed in a shielded enclosure). In order to minimise the time taken for the swept measurements, a Peak detector was used in conjunction with the appropriate detector IF measuring bandwidth (1MHz). Repetitive scans were performed to allow for emissions with low repetition rates, and for the duty cycle of the EUT. The EUT was rotated through 360° to maximise all emissions. The test was performed with the EUT integral antenna set for both horizontal and vertical polarisation. The test antenna was also set for both polarities.

A.2.4.5. The maximum emission level obtained in dBm/MHz could then be determined. Any levels which were found to be within 6dB of the reference limit line were re-measured with a substitution measurement being performed.

A.2.4.6. The EUT was set to the next channel and sections A.2.4.2. to A.2.4.5. were repeated.

**EMC** Department

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

### A2.5. Frequency Stability

A.2.5.1. Measurements were performed to determine the frequency stability against the specified limits.

A.2.5.2. An environmental test chamber was used to perform the resting required.

A.2.5.3. The EUT was situated inside the environmental test chamber and the required temperature (starting from the lowest level) was allowed to settle prior to switching on the EUT.

A.2.5.4. The EUT was switched on and the relevant frequency was recorded. The EUT was left switched on and measurements were performed after 2, 5 and 10 minutes.

A2.5.5. Frequency and RF output power measurements were then made at intervals of one minute for a duration of 10 minutes whilst maintaining the required temperature.

A2.5.6. The EUT was then switched off for a minimum of 30 minutes and the environmental chamber was allowed to stabilise at the next temperature. Points A2.5.3. to A2.5.5. were then repeated.

A.2.5.7. The test chamber was then allowed to stabilise at +20°C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency recorded.

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 39 of 56 Issue Date:

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

### A.2.6. Substitution Methods

A.2.6.1. The equipment is configured as illustrated in Appendix 4.

A.2.6.2. The EUT is replaced by an in-band antenna connected to a signal generator tuned to the frequency of interest. A 10dB attenuator was connected to improve matching.

A.2.6.3. The transmit and receive antennas were vertically polarised at a fixed height of 1.5 metres.

A.2.6.4. The signal generator level is then adjusted to give a level equal to that obtained from the EUT.

A.2.6.5. The radiated power is given by the formula below.

True Signal level = Signal Generator Level -  $\Sigma L$  + Ag

where:

- $\Sigma L$  is the sum of the losses, i.e. cable loss.
- Ag is the isotropic gain of the antenna.

A.2.6.6. The measurement shall be repeated for horizontal polarisation.

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 40 of 56 Issue Date:

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

# **Appendix 3. Test Configuration Drawings**

This appendix contains the following drawings:


Drawing Reference Number	Title
DRG\38797ETF01\EMICON	Test configuration for measurement of conducted emissions
DRG\38797ETF01\EMIRAD	Test configuration for measurement of radiated emissions
DRG\38797ETF01\001	Schematic diagram of the EUT, support equipment and interconnecting cables used for the test
DRG\38797ETF01\002	Substitution measurement test set-up

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 41 of 56 Issue Date:

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

### DRG\38797ETF01\EMICON

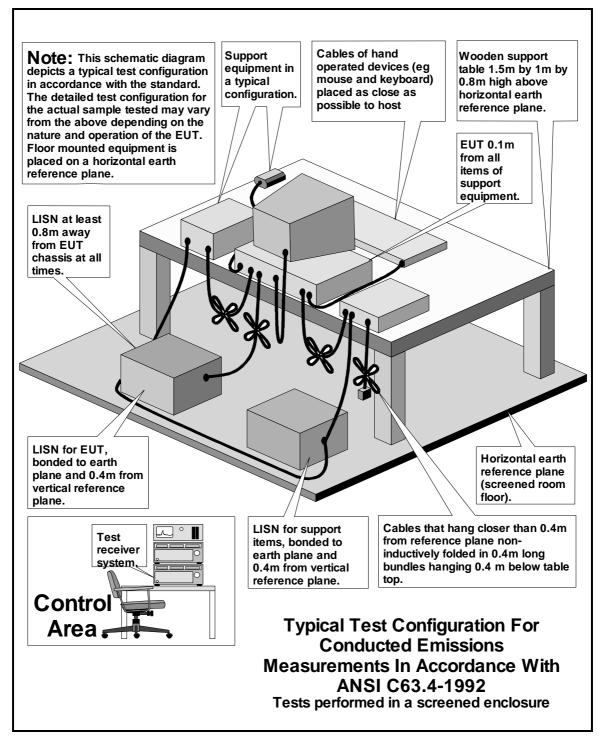


**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 42 of 56 Issue Date:

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

### DRG\38797ETF01\EMIRAD

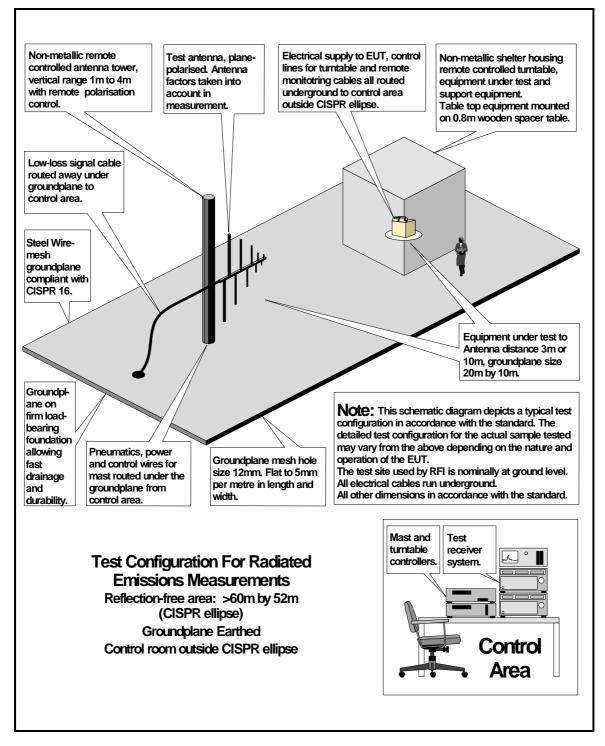


**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 43 of 56 Issue Date:

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

#### DRG\38797ETF01\001

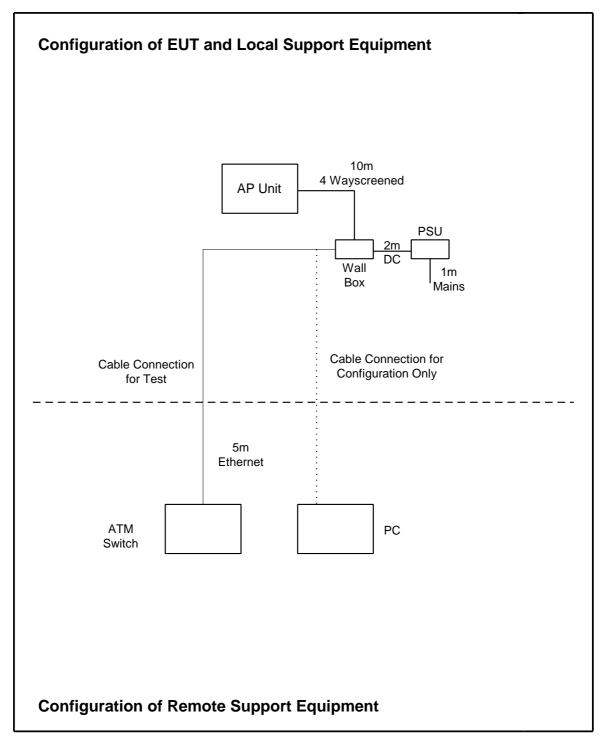


**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 44 of 56 Issue Date:

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

### DRG\38797ETF01\002

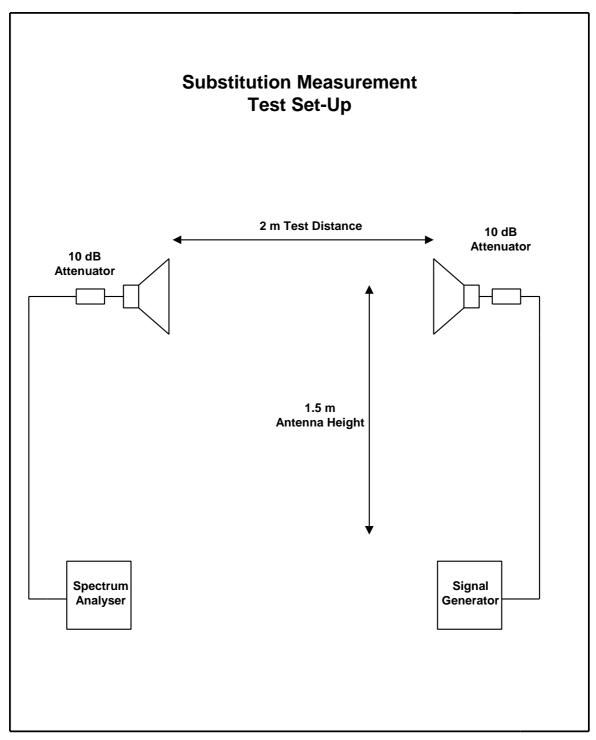

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 45 of 56 Issue Date:

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

# **Appendix 4. Graphical Test Results**

This appendix contains the following graphs:

Graph Reference Number	Title
GPH\38797ETF01\001	Scan of Radiated Electric Field: Receive Mode: 1000 to 2000 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)
GPH\\38797ETF01002	Scan of Radiated Electric Field: Receive Mode: 2000 to 4000 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)
GPH\38797ETF01\003	Scan of Radiated Electric Field: Receive Mode: 2000 to 4000 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38797ETF01004	Scan of Radiated Electric Field: Receive Mode: 1000 to 2000 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38797ETF01\005	Scan of Radiated Electric Field: Receive Mode: 1000 to 2000 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38797ETF01\006	Scan of Radiated Electric Field: Receive Mode: 2000 to 4000 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38797ETF01\007	Scan of Radiated Electric Field: Receive Mode: 2000 to 4000 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)
GPH\38797ETF01\008	Scan of Radiated Electric Field: Receive Mode: 1000 to 2000 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)
GPH\38797ETF01\009	Scan of Radiated Electric Field: Receive Mode: 1000 to 2000 MHz 5.725 to 5.85 GHz Band. Bottom Channel. (Channel 10)
GPH\38797ETF01\010	Scan of Radiated Electric Field: Receive Mode: 2000 to 4000 MHz 5.725 to 5.85 GHz Band. Bottom Channel. (Channel 10)
GPH\38797ETF01\011	Scan of Radiated Electric Field: Receive Mode: 2000 to 4000 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38797ETF01\012	Scan of Radiated Electric Field: Receive Mode: 1000 to 2000 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38797ETF01\013	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). 1.0 to 2.0 GHz.
GPH\38797ETF01\014	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). 2.0 to 4.0 GHz.
GPH\38797ETF01\015	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). 2.0 to 4.0 GHz.
GPH\38797ETF01\016	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). 1.0 to 2.0 GHz.

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 46 of 56 Issue Date:

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

Graph Reference Number	Title
GPH\38797ETF01\017	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). 1.0 to 2.0 GHz.
GPH\38797ETF01\018	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). 2.0 to 4.0 GHz.
GPH\38797ETF01\019	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). 2.0 to 4.0 GHz.
GPH\38797ETF01\020	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). 1.0 to 2.0 GHz.
GPH\38797ETF01\021	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). 1.0 to 2.0 GHz.
GPH\38797ETF01\022	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). 2.0 to 4.0 GHz.
GPH\38797ETF01\023	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). 2.0 to 4.0 GHz.
GPH\38797ETF01\024	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). 1.0 to 2.0 GHz.
GPH\38797ETF01\025	Scan of Conducted Emissions: Tx and Rx Mode: 450 kHz to 30 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). Live Line.
GPH\38797ETF01\026	Scan of Conducted Emissions: Tx and Rx Mode: 450 kHz to 30 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). Neutral Line.
GPH\38797ETF01\027	Scan of Conducted Emissions: Tx and Rx Mode: 450 kHz to 30 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). Neutral Line.
GPH\38797ETF01\028	Scan of Conducted Emissions: Tx and Rx Mode: 450 kHz to 30 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). Live Line.
GPH\38797ETF01\029	Scan of Conducted Emissions: Tx and Rx Mode: 450 kHz to 30 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). Live Line.
GPH\38797ETF01\030	Scan of Conducted Emissions: Tx and Rx Mode: 450 kHz to 30 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). Neutral Line.
GPH\38797ETF01\031	Scan of Conducted Emissions: Tx and Rx Mode: 450 kHz to 30 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). Neutral Line.

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 47 of 56 Issue Date:

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

Graph Reference Number	Title
GPH\38797ETF01\032	Scan of Conducted Emissions: Tx and Rx Mode: 450 kHz to 30 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). Live Line.
GPH\38797ETF01\033	Scan of Conducted Emissions: Tx and Rx Mode: 450 kHz to 30 MHz 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). Live Line.
GPH\38797ETF01\034	Scan of Conducted Emissions: Tx and Rx Mode: 450 kHz to 30 MHz 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). Neutral Line.
GPH\38797ETF01\035	Scan of Conducted Emissions: Tx and Rx Mode: 450 kHz to 30 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). Neutal Line.
GPH\38797ETF01\036	Scan of Conducted Emissions: Tx and Rx Mode: 450 kHz to 30 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). Live Line.
GPH\38797ETF01\037	Scan of Radiated Electric Field: Tx and Rx Mode: 30 to 1000 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)
GPH\38797ETF01\038	Scan of Radiated Electric Field: Tx and Rx Mode: 30 to 1000 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38797ETF01\039	Scan of Radiated Electric Field: Tx and Rx Mode: 30 to 1000 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38797ETF01\040	Scan of Radiated Electric Field: Tx and Rx Mode: 30 to 1000 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)
GPH\38797ETF01\041	Scan of Radiated Electric Field: Tx and Rx Mode: 30 to 1000 MHz 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10)
GPH\38797ETF01\042	Scan of Radiated Electric Field: Tx and Rx Mode: 30 to 1000 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38797ETF01\039A	Scan of Radiated Electric Field: Receive Mode: 4000 to 5000 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)
GPH\38797ETF01\040A	Scan of Radiated Electric Field: Receive Mode: 5000 to 6000 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)
GPH\38797ETF01\041A	Scan of Radiated Electric Field: Receive Mode: 5000 to 6000 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38797ETF01\042A	Scan of Radiated Electric Field: Receive Mode: 4000 to 5000 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38797ETF01\043	Scan of Radiated Electric Field: Receive Mode: 4000 to 5000 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38797ETF01\044	Scan of Radiated Electric Field: Receive Mode: 5000 to 6000 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38797ETF01\045	Scan of Radiated Electric Field: Receive Mode: 5000 to 6000 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 48 of 56 Issue Date:

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

Graph Reference Number	Title
GPH\38797ETF01\046	Scan of Radiated Electric Field: Receive Mode: 4000 to 5000 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)
GPH\38797ETF01\047	Scan of Radiated Electric Field: Receive Mode: 4000 to 5000 MHz 5.725 to 5.85 GHz Band. Bottom Channel. (Channel 10)
GPH\38797ETF01\048	Scan of Radiated Electric Field: Receive Mode: 5000 to 6000 MHz 5.725 to 5.85 GHz Band. Bottom Channel. (Channel 10)
GPH\38797ETF01\049	Scan of Radiated Electric Field: Receive Mode: 5000 to 6000 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38797ETF01\050	Scan of Radiated Electric Field: Receive Mode: 4000 to 5000 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38797ETF01\051	Scan of Radiated Electric Field: Receive Mode: 6000 to 8200 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)
GPH\38797ETF01\052	Scan of Radiated Electric Field: Receive Mode: 6000 to 8200 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38797ETF01\053	Scan of Radiated Electric Field: Receive Mode: 6000 to 8200 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38797ETF01\054	Scan of Radiated Electric Field: Receive Mode: 6000 to 8200 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)
GPH\38797ETF01\055	Scan of Radiated Electric Field: Receive Mode: 6000 to 8200 MHz 5.725 to 5.85 GHz Band. Bottom Channel. (Channel 10)
GPH\38797ETF01\056	Scan of Radiated Electric Field: Receive Mode: 6000 to 8200 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38797ETF01\057	Scan of Radiated Electric Field: Receive Mode: 8200 to 12500 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)
GPH\38797ETF01\058	Scan of Radiated Electric Field: Receive Mode: 8200 to 12500 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38797ETF01\059	Scan of Radiated Electric Field: Receive Mode: 8200 to 12500 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38797ETF01\060	Scan of Radiated Electric Field: Receive Mode: 8200 to 12500 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)
GPH\38797ETF01\061	Scan of Radiated Electric Field: Receive Mode: 8200 to 12500 MHz 5.725 to 5.85 GHz Band. Bottom Channel. (Channel 10)
GPH\38797ETF01\062	Scan of Radiated Electric Field: Receive Mode: 8200 to 12500 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38797ETF01\063	Scan of Radiated Electric Field: Receive Mode: 12500 to 18000 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 49 of 56 Issue Date:

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

Graph Reference Number	Title
GPH\38797ETF01\064	Scan of Radiated Electric Field: Receive Mode: 12500 to 18000 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38797ETF01\065	Scan of Radiated Electric Field: Receive Mode: 12500 to 18000 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38797ETF01\066	Scan of Radiated Electric Field: Receive Mode: 12500 to 18000 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)
GPH\38797ETF01\067	Scan of Radiated Electric Field: Receive Mode: 12500 to 18000 MHz 5.725 to 5.85 GHz Band. Bottom Channel. (Channel 10)
GPH\38797ETF01\068	Scan of Radiated Electric Field: Receive Mode: 12500 to 18000 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38797ETF01\069	Scan of Radiated Electric Field: Receive Mode: 12500 to 18000 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)
GPH\38797ETF01\070	Scan of Radiated Electric Field: Receive Mode: 12500 to 18000 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38797ETF01\071	Scan of Radiated Electric Field: Receive Mode: 12500 to 18000 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38797ETF01\072	Scan of Radiated Electric Field: Receive Mode: 12500 to 18000 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)
GPH\38797ETF01\073	Scan of Radiated Electric Field: Receive Mode: 12500 to 18000 MHz 5.725 to 5.85 GHz Band. Bottom Channel. (Channel 10)
GPH\38797ETF01\074	Scan of Radiated Electric Field: Receive Mode: 12500 to 18000 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38797ETF01\075	Transmitter Power Level: EIRP. Tx Vertical. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)
GPH\38797ETF01\076	Transmitter Power Level: EIRP. Tx Horizontal. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)
GPH\38797ETF01\077	Transmitter Power Level: EIRP. Tx Vertical. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38797ETF01\078	Transmitter Power Level: EIRP. Tx Horizontal. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38797ETF01\079	Transmitter Power Level: EIRP. Tx Horizontal. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38797ETF01\080	Transmitter Power Level: EIRP. Tx Vertical. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38797ETF01\081	Transmitter Power Level: EIRP. Tx Vertical. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)
GPH\38797ETF01\082	Transmitter Power Level: EIRP. Tx Horizontal. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 50 of 56 Issue Date:

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

Graph Reference Number	Title
GPH\38797ETF01\083	Transmitter Power Level: EIRP. Tx Horizontal. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10)
GPH\38797ETF01\084	Transmitter Power Level: EIRP. Tx Vertical. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10)
GPH\38797ETF01\085	Transmitter Power Level: EIRP. Tx Vertical. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38797ETF01\086	Transmitter Power Level. Tx Horizontal. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38797ETF01\087	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). Tx Lower Band Edge. 5.0 to 5.16 GHz.
GPH\38797ETF01\088	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). Tx Upper Band Edge. 5.18 to 6.0 GHz.
GPH\38797ETF01\089	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). 4.0 to 5.0 GHz.
GPH\38797ETF01\090	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). 4.0 to 5.0 GHz.
GPH\38797ETF01\091	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). Tx Lower Band Edge. 5.0 to 5.22 GHz.
GPH\38797ETF01\092	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). Tx Upper Band Edge. 5.24 to 6.0 GHz.
GPH\38797ETF01\093	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). Tx Lower Band Edge. 5.0 to 5.26 GHz.
GPH\38797ETF01\094	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). Tx Upper Band Edge. 5.28 to 6.0 GHz.
GPH\38797ETF01\095	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). 4.0 to 5.0 GHz.
GPH\38797ETF01\096	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). 4.0 to 5.0 GHz.
GPH\38797ETF01\097	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). Tx Lower Band Edge. 5.0 to 5.32 GHz.

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 51 of 56 Issue Date:

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

Graph Reference Number	Title
GPH\38797ETF01\098	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). Tx Upper Band Edge. 5.34 to 6.0 GHz.
GPH\38797ETF01\099	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). Tx Lower Band Edge. 5.0 to 5.735 GHz.
GPH\38797ETF01\100	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). Tx Upper Band Edge. 5.815 to 6.0 GHz.
GPH\38797ETF01\101	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). 4.0 to 5.0 GHz.
GPH\38797ETF01\102	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). 4.0 to 5.0 GHz.
GPH\38797ETF01\103	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 14). Tx Lower Band Edge. 5.0 to 5.795 GHz.
GPH\38797ETF01\104	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 14). Tx Upper Band Edge. 5.815 to 6.0 GHz.
GPH\38797ETF01\105	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). 6.0 to 8.2 GHz.
GPH\38797ETF01\106	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). 6.0 to 8.2 GHz.
GPH\38797ETF01\107	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). 6.0 to 8.2 GHz.
GPH\38797ETF01\108	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). 6.0 to 8.2 GHz.
GPH\38797ETF01\109	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). 6.0 to 8.2 GHz.
GPH\38797ETF01\110	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). 6.0 to 8.2 GHz.

**EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 52 of 56 Issue Date:

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

Graph Reference Number	Title
GPH\38797ETF01\111	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). 8.2 to 12.5 GHz.
GPH\38797ETF01\112	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). 8.2 to 12.5 GHz.
GPH\38797ETF01\113	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). 8.2 to 12.5 GHz.
GPH\38797ETF01\114	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). 8.2 to 12.5 GHz.
GPH\38797ETF01\115	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). 8.2 to 12.5 GHz.
GPH\38797ETF01\116	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). 8.2 to 12.5 GHz.
GPH\38797ETF01\117	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). 12.5 to 18.0 GHz.
GPH\38797ETF01\118	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). 12.5 to 18.0 GHz.
GPH\38797ETF01\119	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). 12.5 to 18.0 GHz.
GPH\38797ETF01\120	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). 12.5 to 18.0 GHz.
GPH\38797ETF01\121	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). 12.5 to 18.0 GHz.
GPH\38797ETF01\122	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). 12.5 to 18.0 GHz.
GPH\38797ETF01\123	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). 18.0 to 26.0 GHz.

**EMC** Department


TEST REPORT S.No: RFI/EMCB1/RP38797A Page 53 of 56 Issue Date:

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998


### **Graphical Test Results (continued)**

Graph Reference Number	Title
GPH\38797ETF01\124	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). 18.0 to 26.0 GHz.
GPH\38797ETF01\125	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). 18.0 to 26.0 GHz.
GPH\38797ETF01\126	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). 18.0 to 26.0 GHz.
GPH\38797ETF01\127	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). 18.0 to 26.0 GHz.
GPH\38797ETF01\128	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). 18.0 to 26.0 GHz.
GPH\38797ETF01\129	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). 26.0 to 40.0 GHz.
GPH\38797ETF01\130	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). 26.0 to 40.0 GHz.
GPH\38797ETF01\131	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). 26.0 to 40.0 GHz.
GPH\38797ETF01\132	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). 26.0 to 40.0 GHz.
GPH\38797ETF01\133	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). 26.0 to 40.0 GHz.
GPH\38797ETF01\134	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). 26.0 to 40.0 GHz.
GPH\38797ETF01\135	Frequency Stability. Supply Variation.
GPH\38797ETF01\136	Frequency Stability. Temperature Variation.


These pages are not included in the total number of pages for this report.

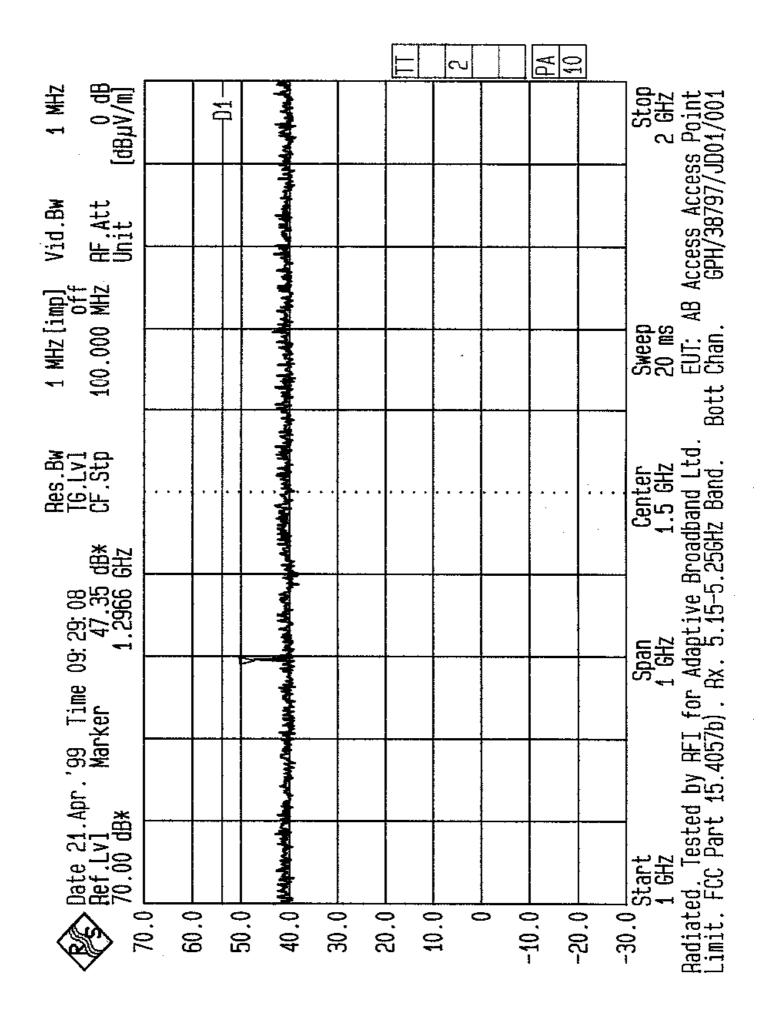


And States

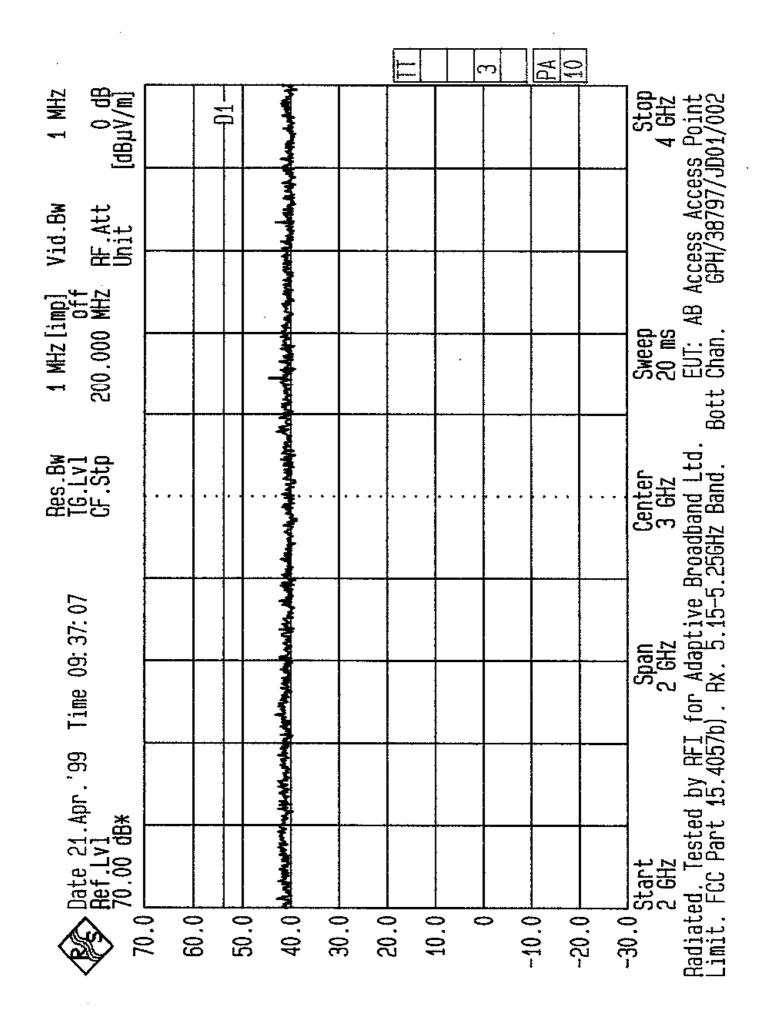

a se a lega a colo de la secara a la colo de la del deservador de la colo de la colo de la colo de la colo de l

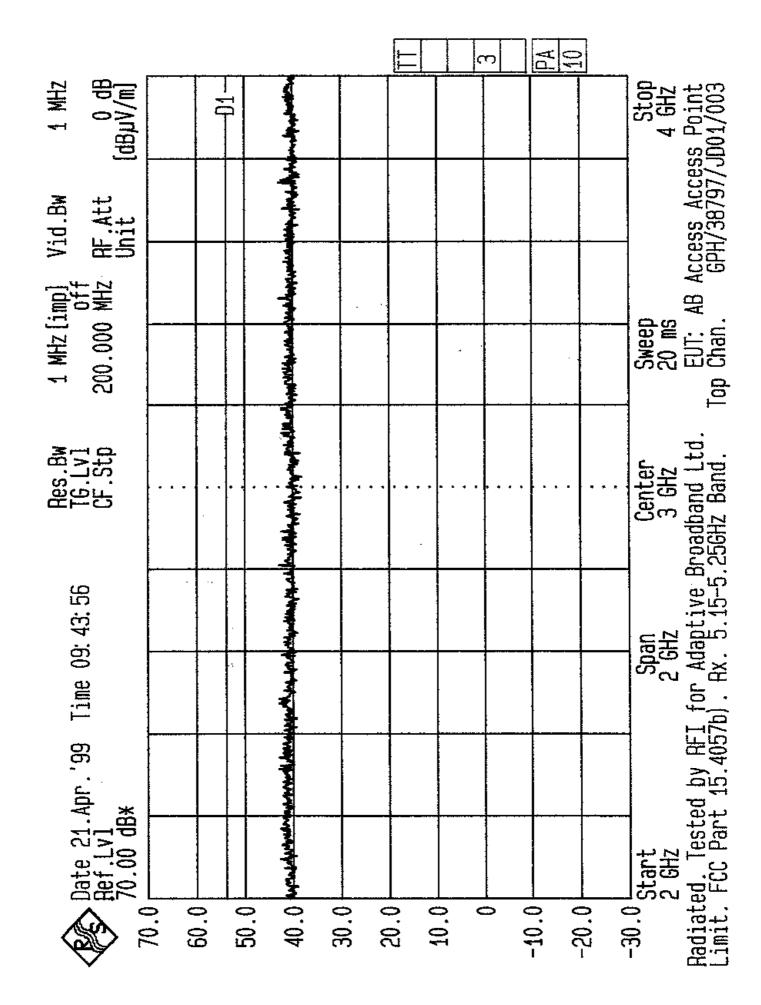

e personal alle and a static differences and a consistence of the static difference of the static difference of

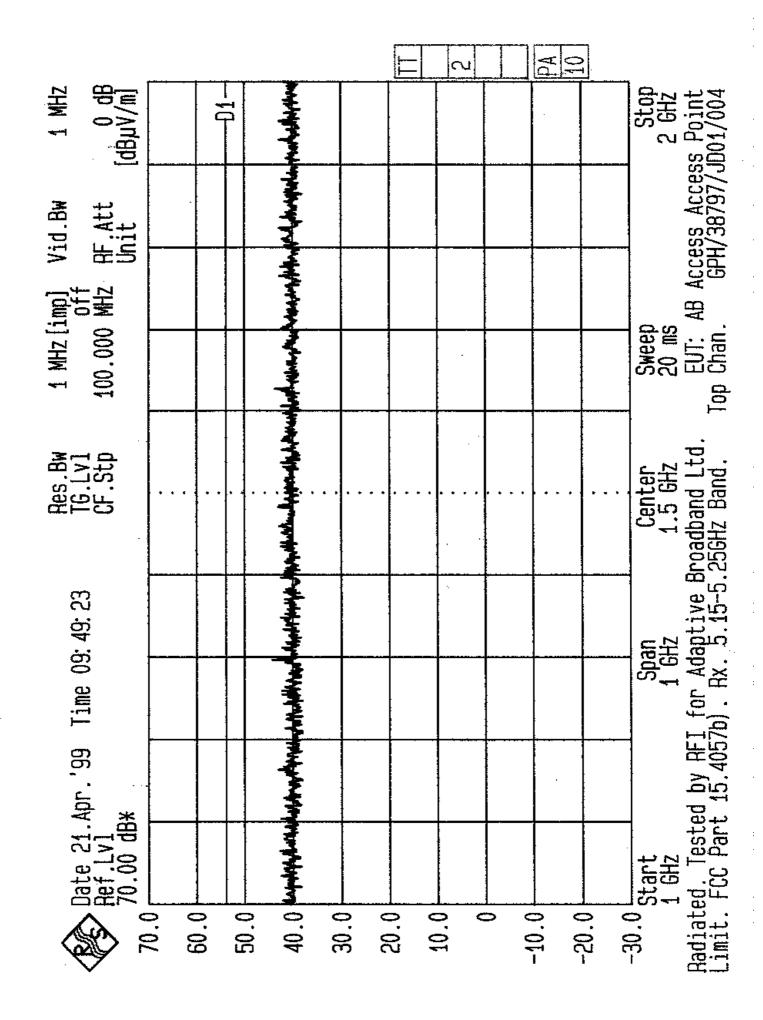

. Na serie de la serie de la


	10 J D J 0 J 10 J 10 J 10 J 10 J 10 J 10
1 MHz [dBµU//m] [dBµU//m]	Stop 2 GHz JD01/005
Vid.Bw BF. Att Unit Unit	AB Access Access Point 6PH/38797/JD01/005
	ABAC
1 MHz [imp] 0ff 100.000 MHz	Bott Chan.
Res. Bw TG. Lv1 CF. Stp	
	Broad 2
0: 01: 07 46. 90 dB¥ 1. 2966 GHz	GHz 6Hz 5.25-5
Time Tker	FI for A S7b) . Bx
	1 by R 15.40
Date 21. Apr. '99 Time 10: 0 Ref. Lv1 Marker 1. 70.00 dB* 1. 0.0 0.0 0.0 0.0	20.0 10.0 0 -10.0 -20.0 -20.0 -30.0 Start 1 GHz 1
9.05 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0	20.0 10.0 -10.0 -20.0 -30.0 Start 1 GHz Padiated. Tes Limit. FCC Pe

 $\{x_{i,k_{1}}^{i}, x_{i,k_{1}}^{i}\}$ 


ī

:


÷

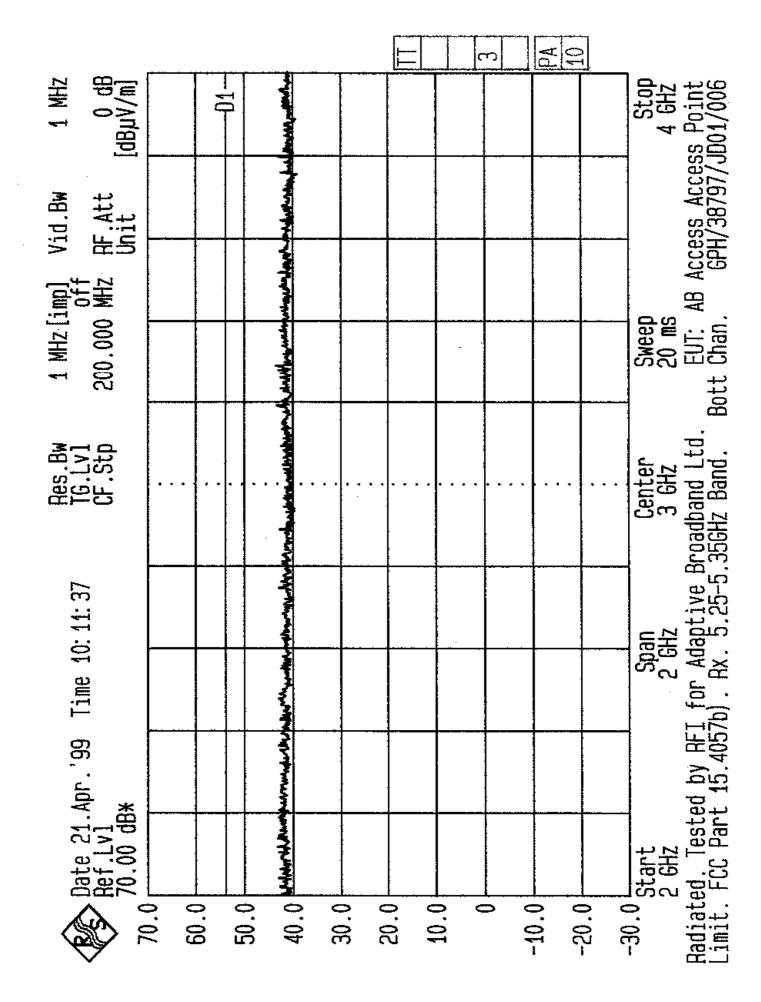


р-15 Де<sup>96</sup>

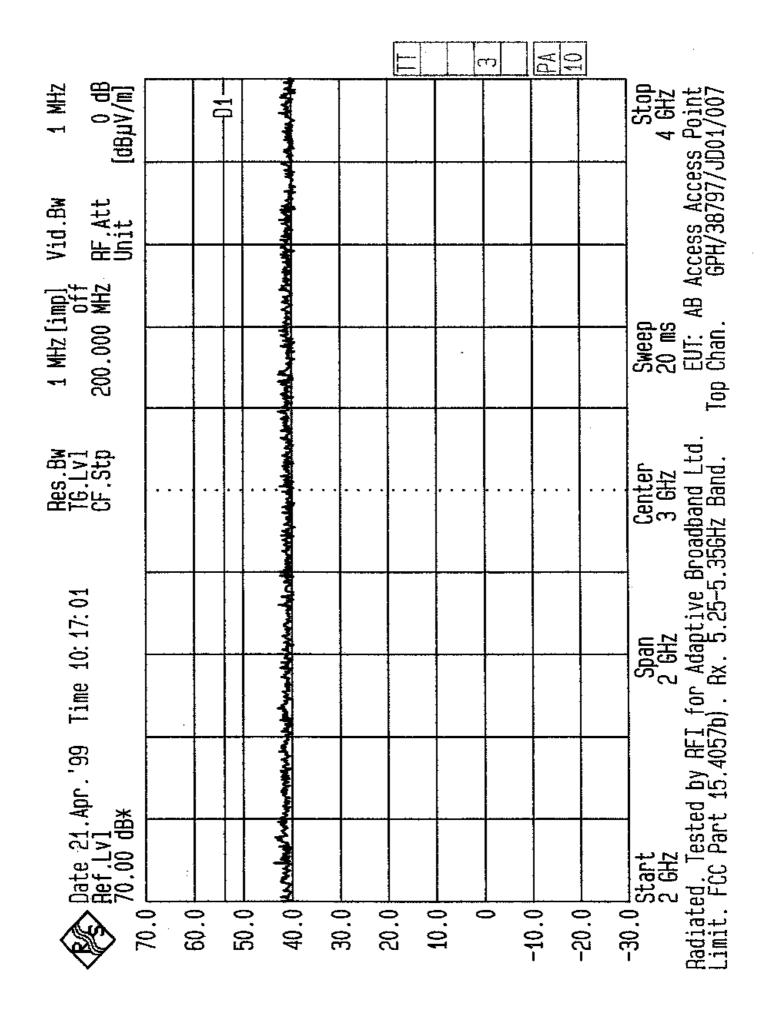


后来来说,我们开心,你是这些爱好的,我们就是你们,你们们是你说,你可能是我们们不可以是我们都是你是你。"他说道:"你不能是你。"

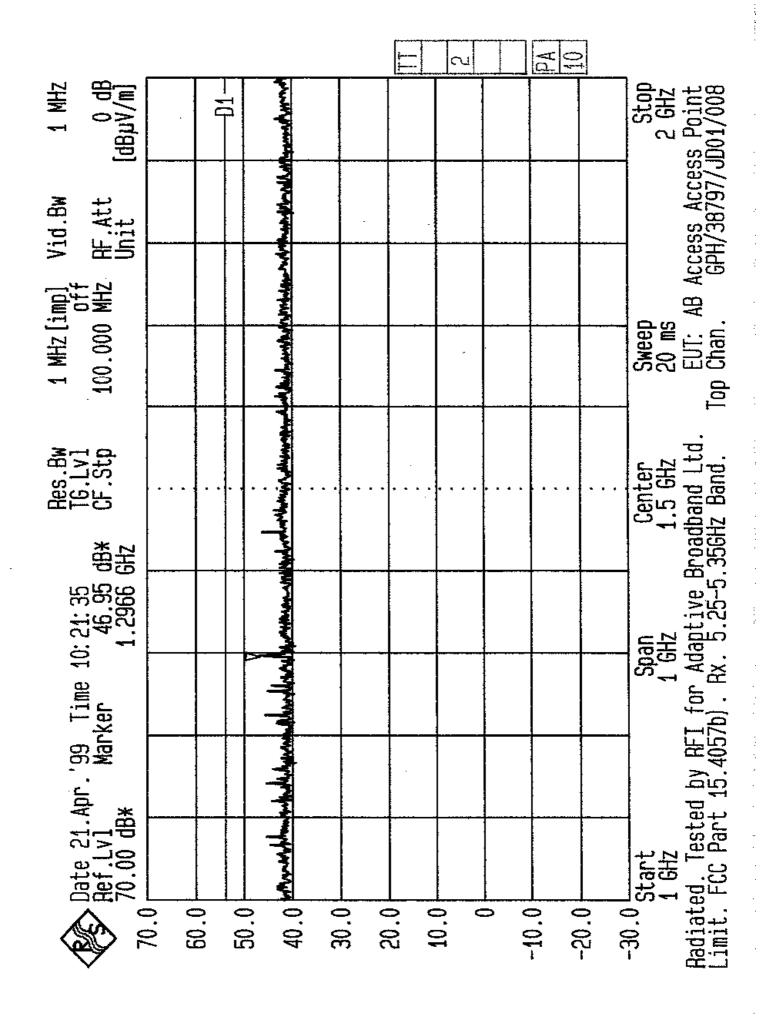

a Manana ang kanana ang kanana ang kanang kanana kanana kanana kanana kanana kanana kanana kanana kanana kanana

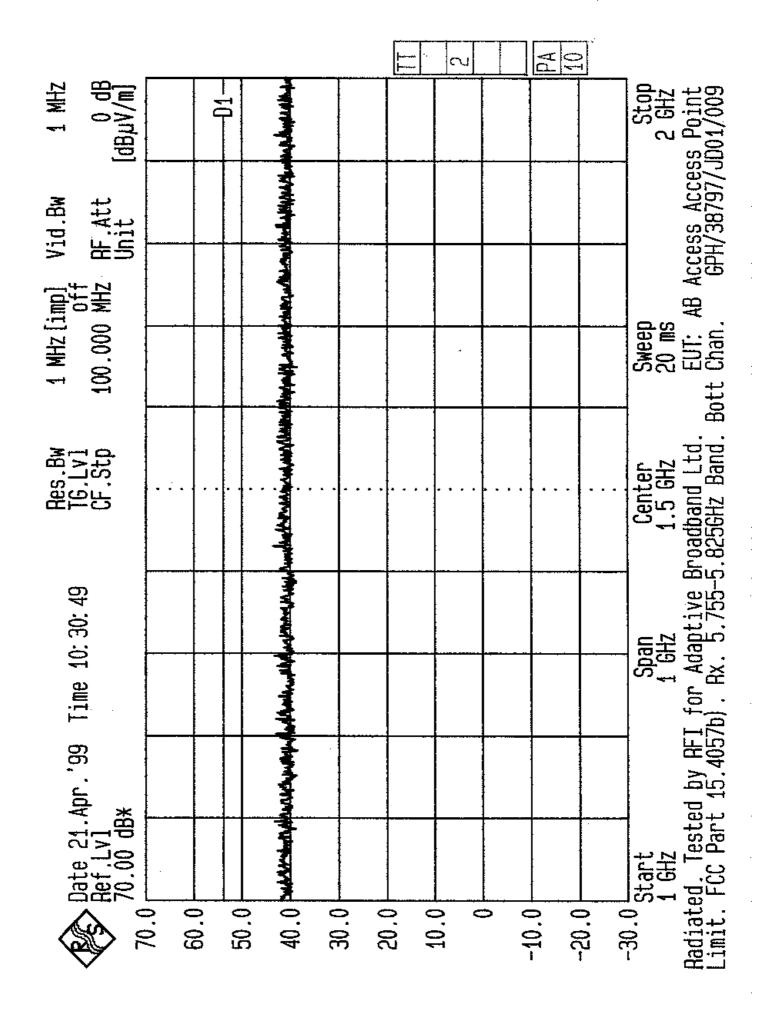



1111日 二 第2013

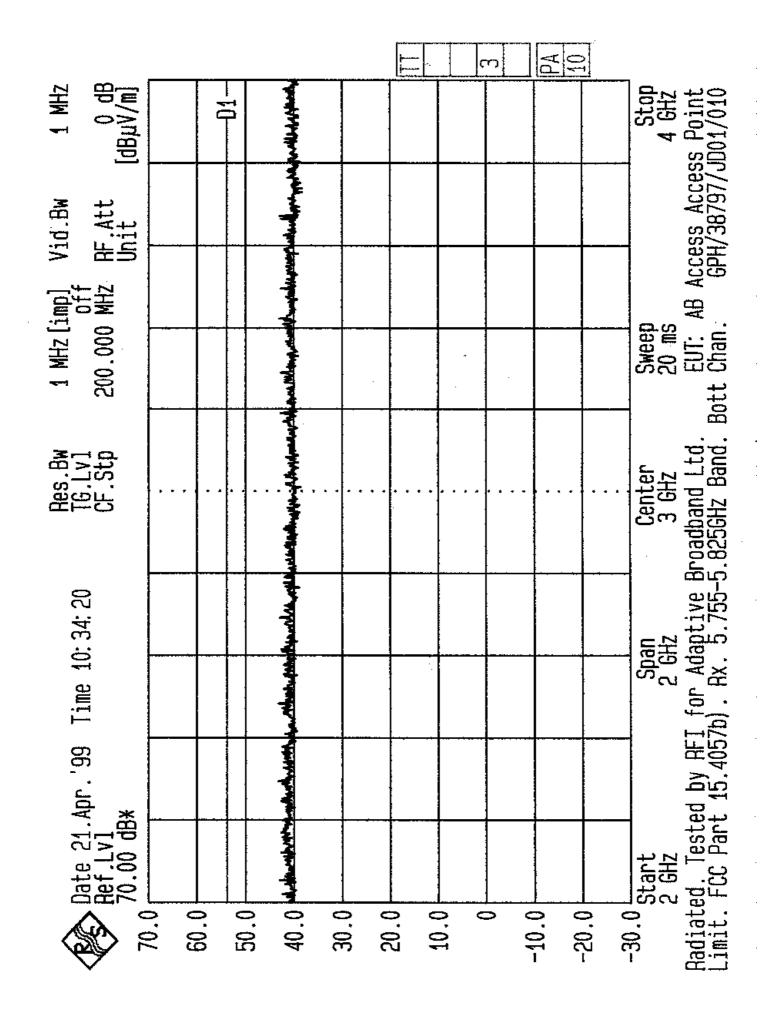

: ?3 ~/

· 建苯基苯基基苯基苯基苯基基苯基 化合理 化合理 化合理 化合理 法法律法律法律 化合理 法法律法律法 化合理 化合理

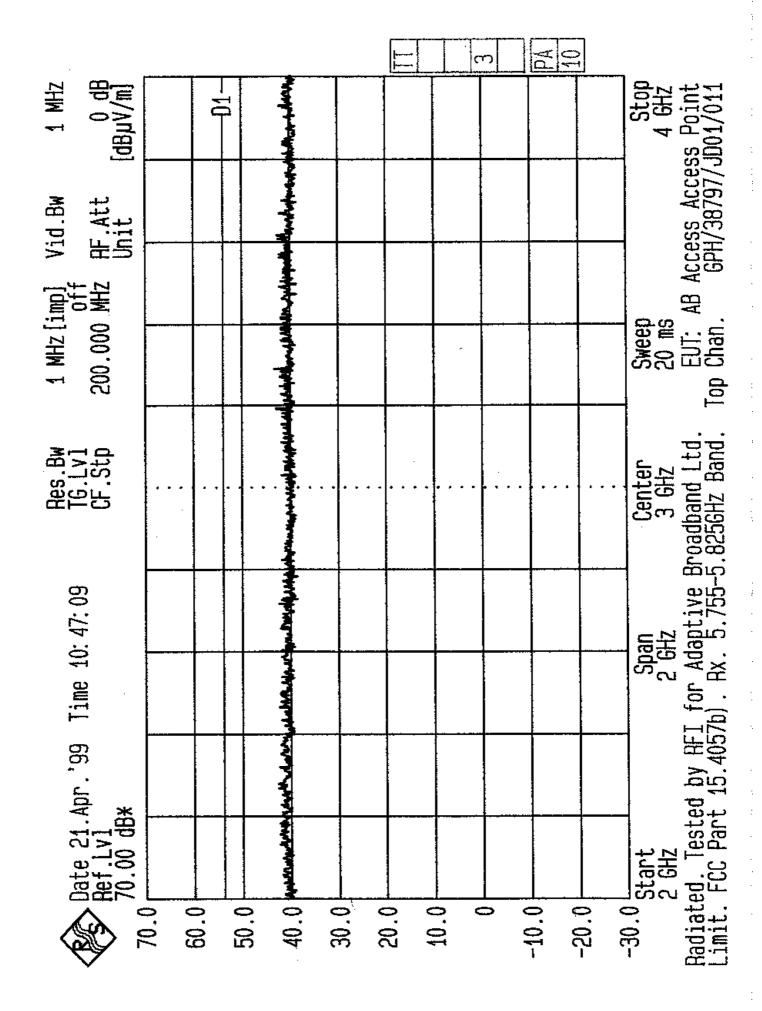


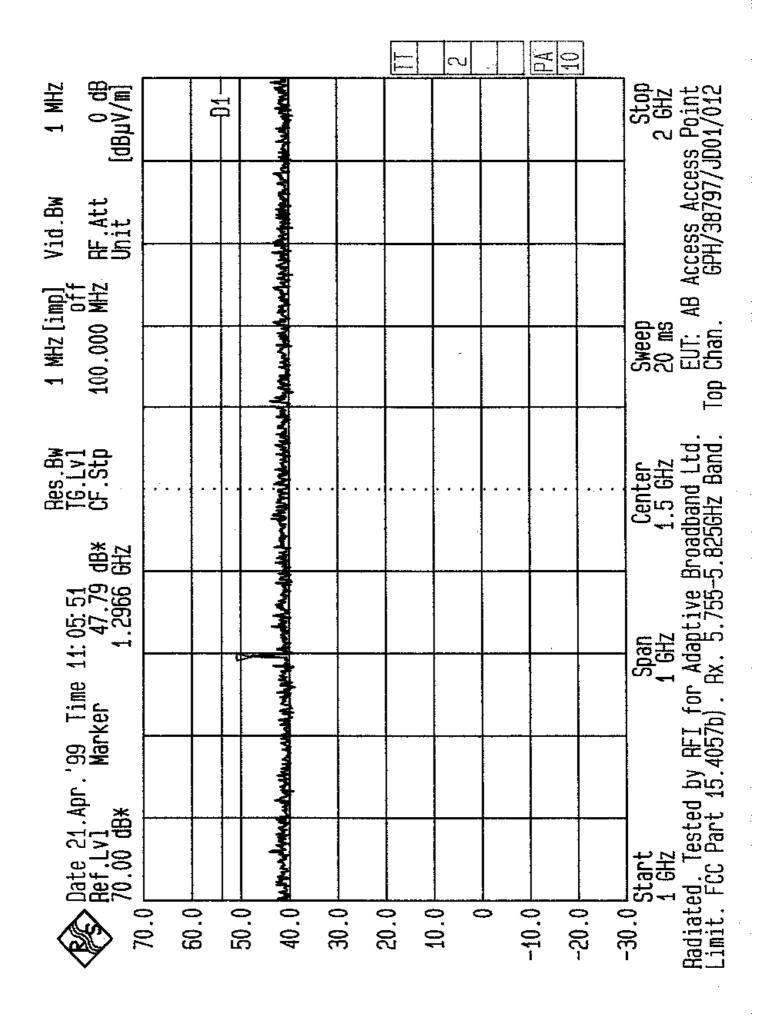



alina di kalan kalan di kalendari da kalendari da kalendari k


and the second secon

a an an Araba an Araba. An Araba an Araba an Araba

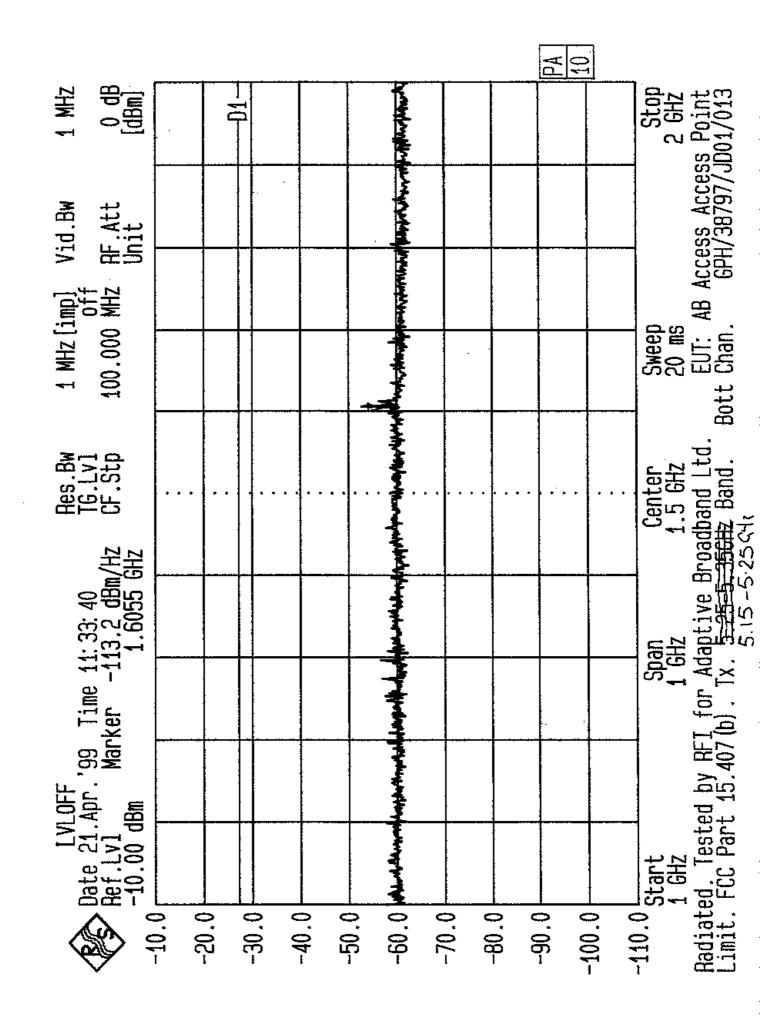


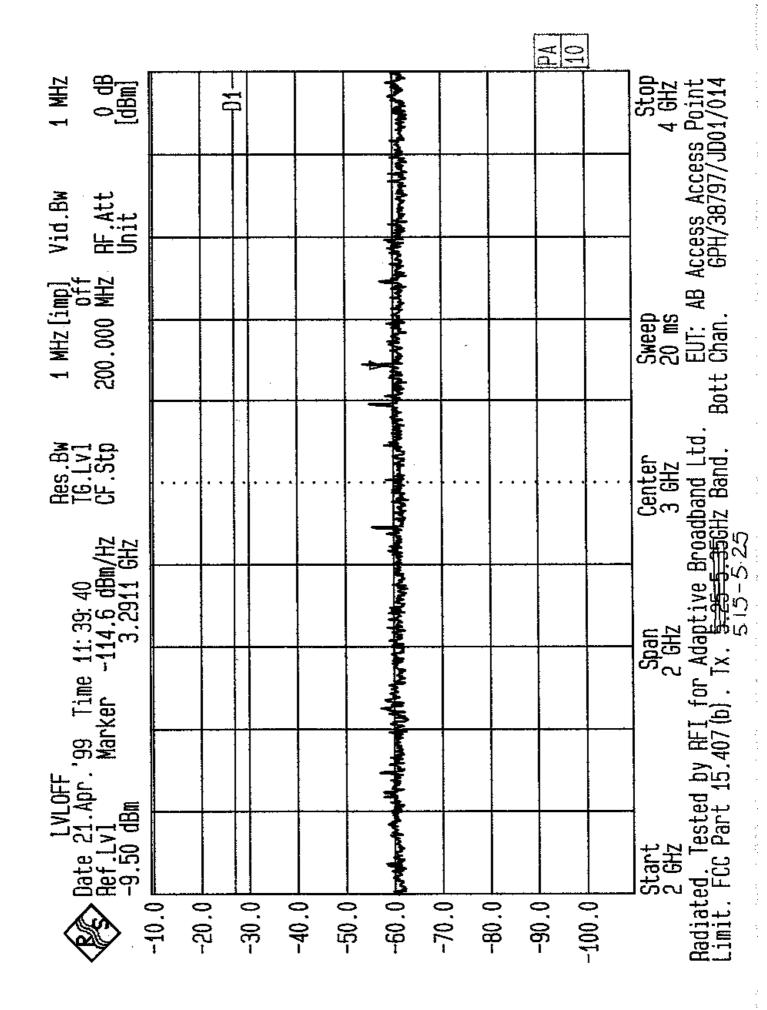

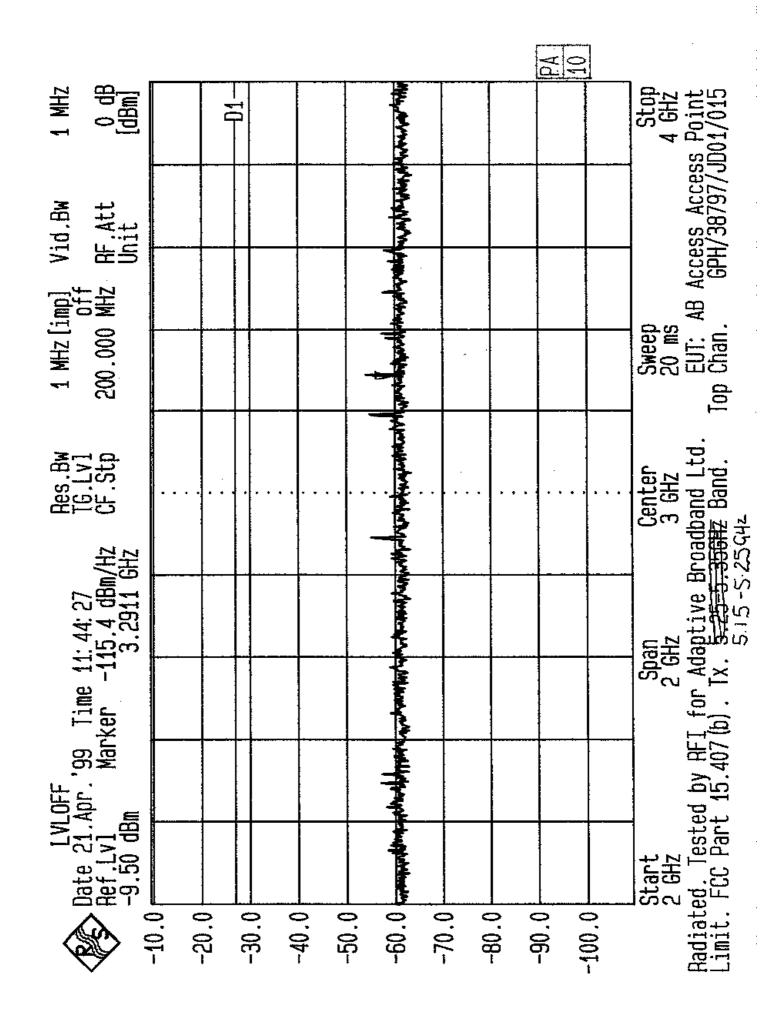


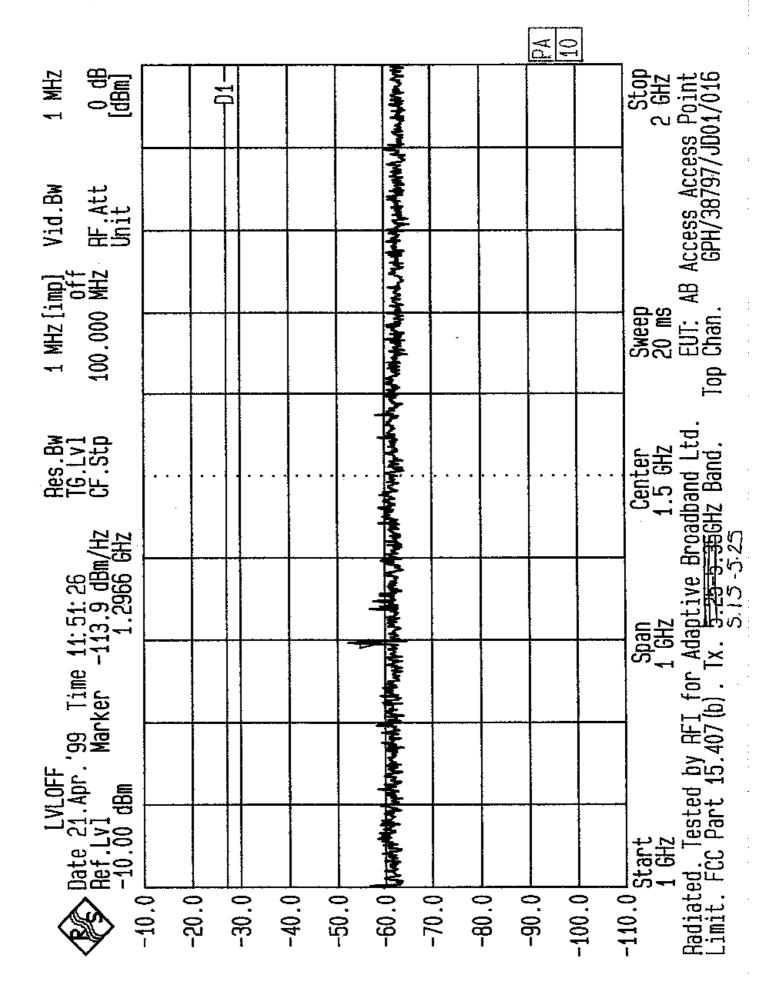


We we have a stream the second s

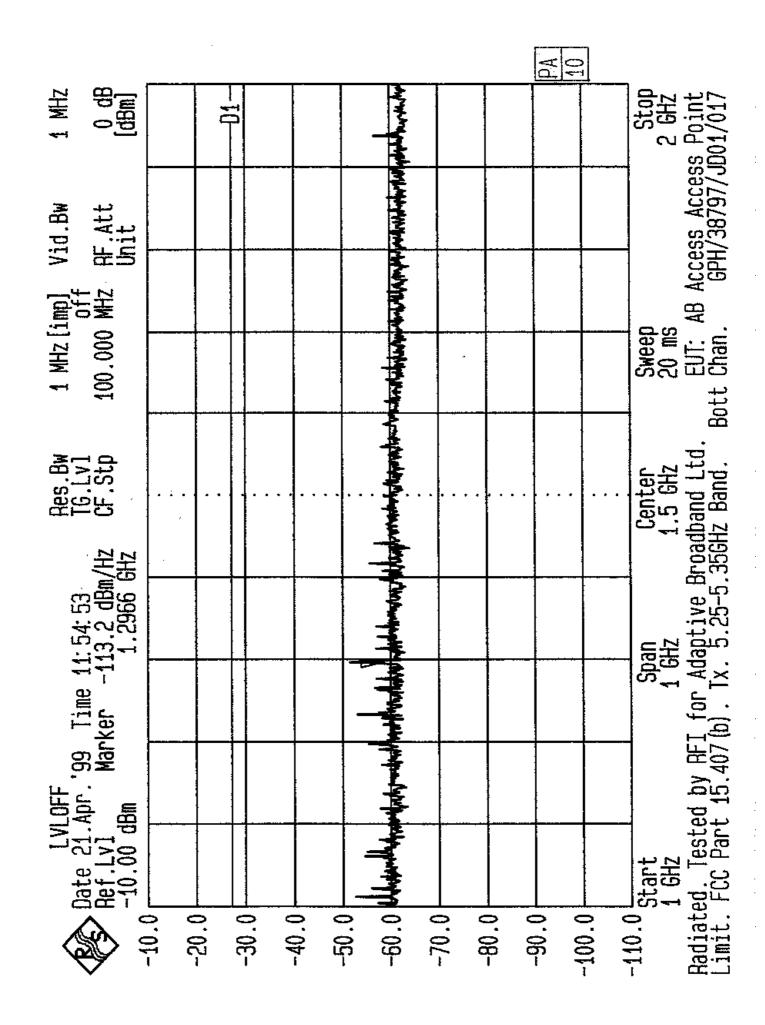


le en englemandele e le constant d'anna e en divert a la constante de la constant de la constant de la constant

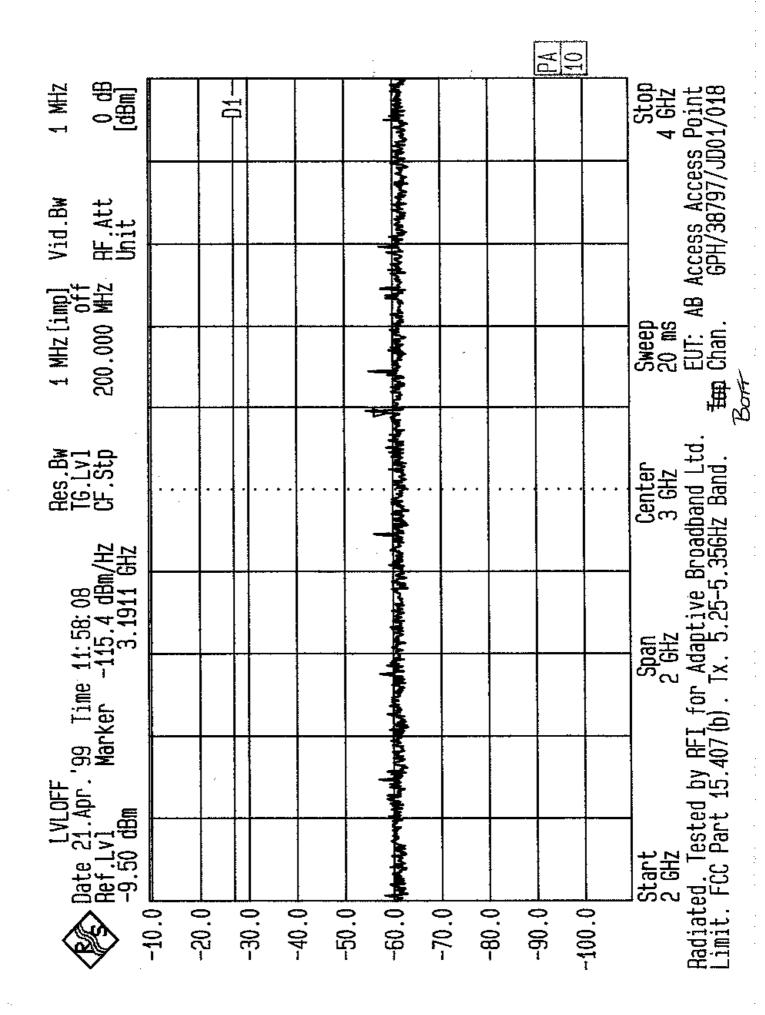

요즘 이 있는 것 같은 것은 것은 말했다. 이 것은 것은 것을 가지 않는 것을 많이 것을 수 있는 것.

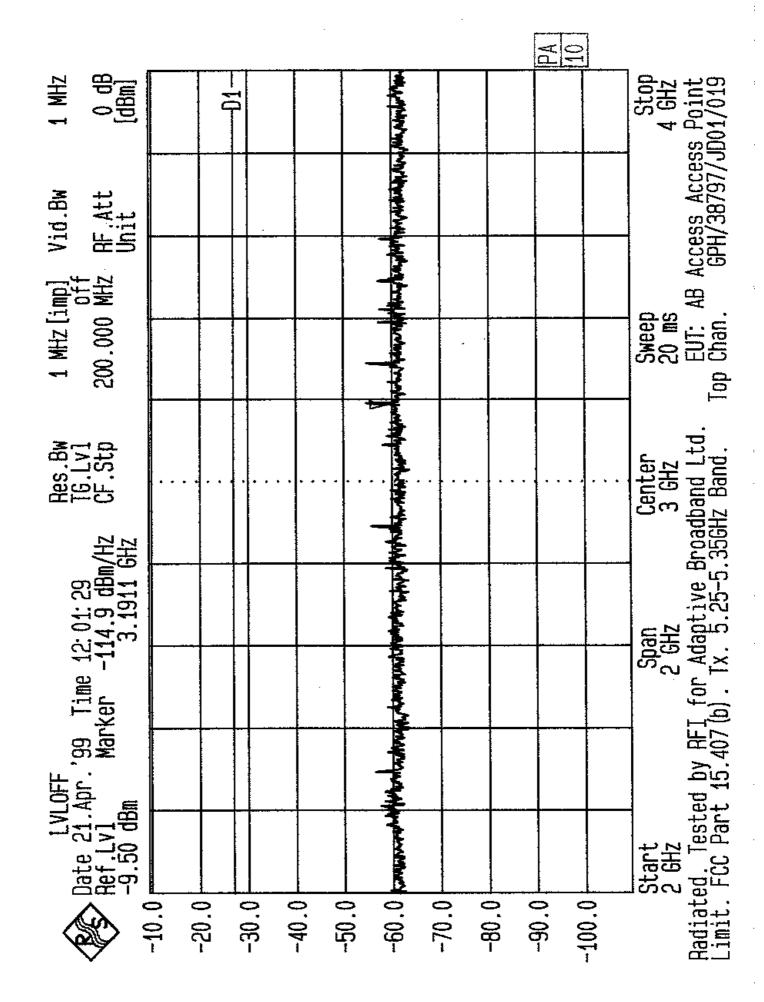



a na serie da al al serie de la serie a

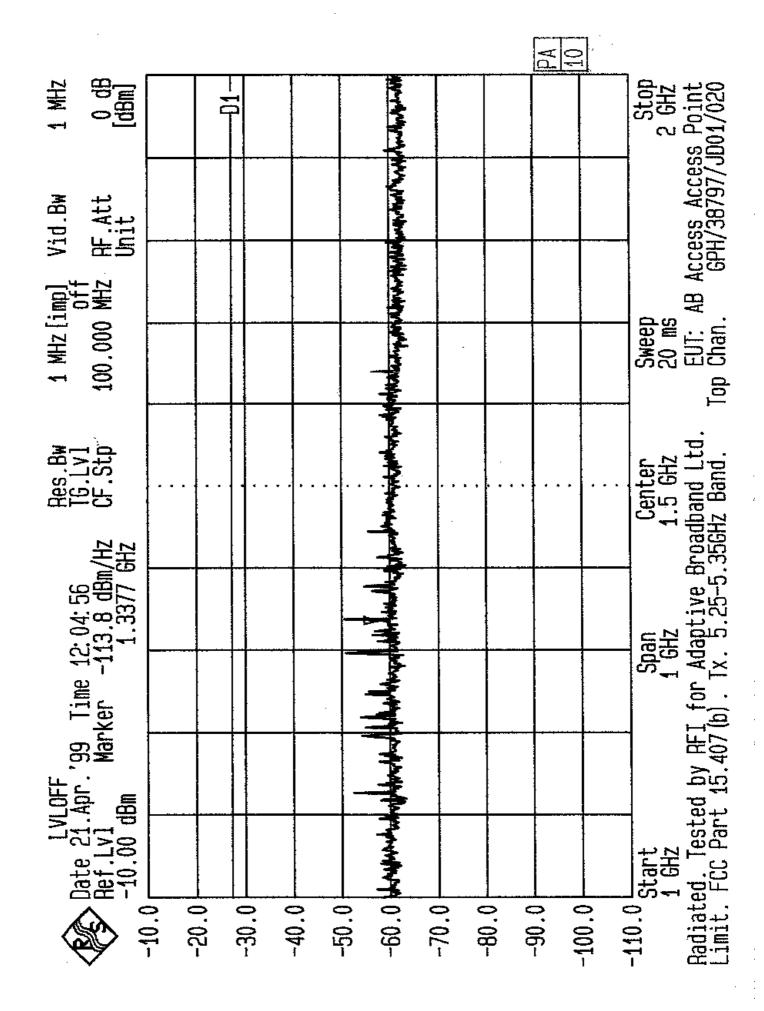


- 日本には、「「「「「「」」」

经济税收益 化合成离子 化化合理器 化合成合理器 化分子分子 化合理器 化合理器 化合理器 化合理器

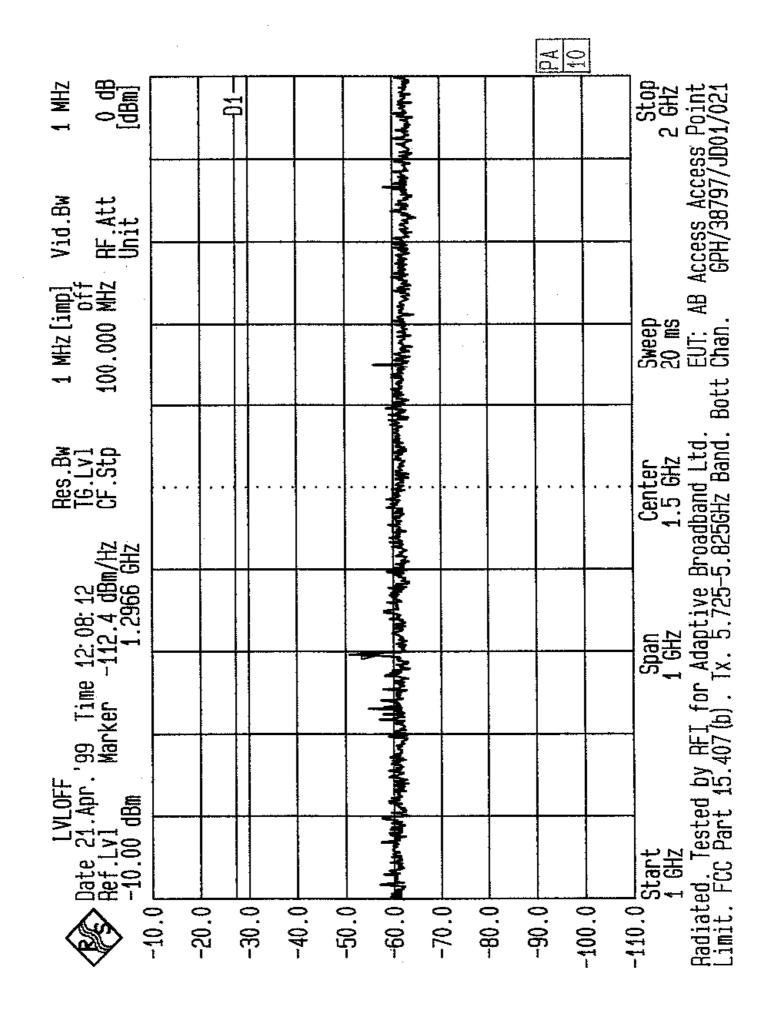


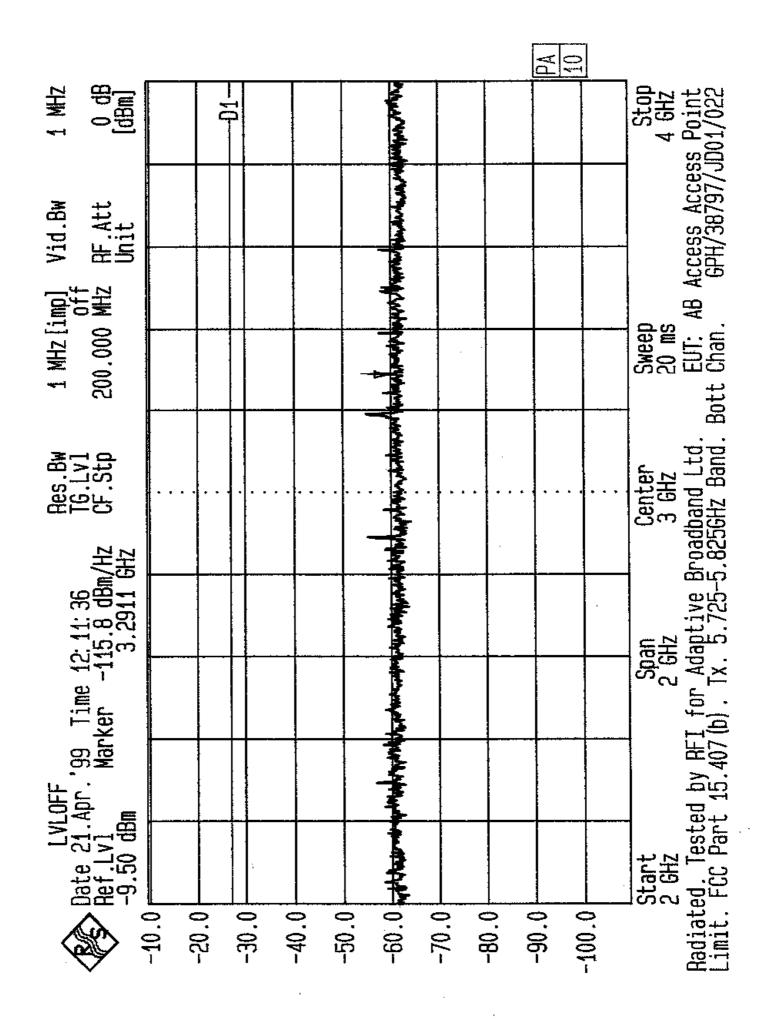


80.8 · · · 1 · · ·

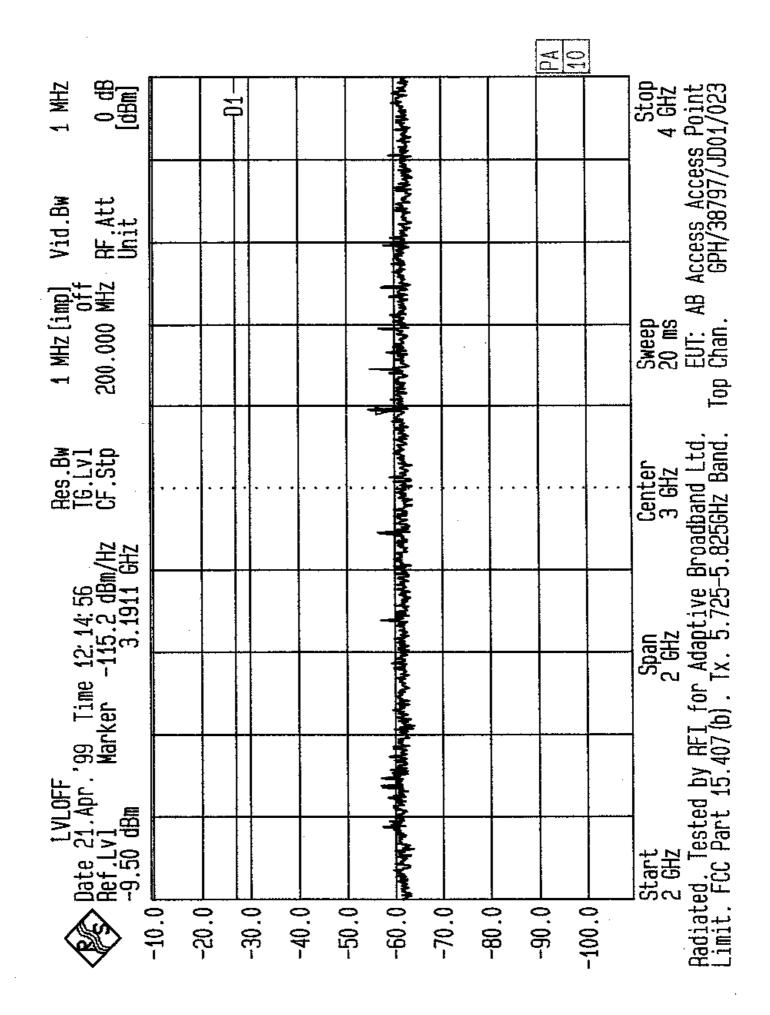

8.751

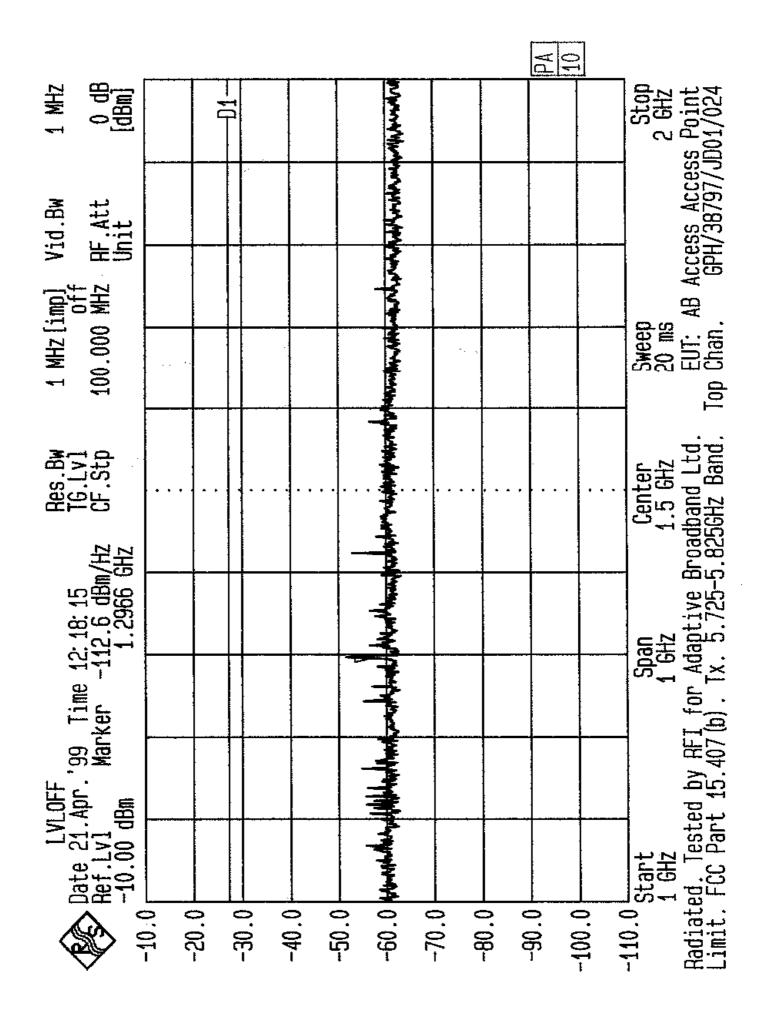


1977 - 1977 - 1978 - 1978 - 1978 - 1978 - 1978 - 1978 - 1978 - 1978 - 1978 - 1978 - 1978 - 1978 - 1978 - 1978 -

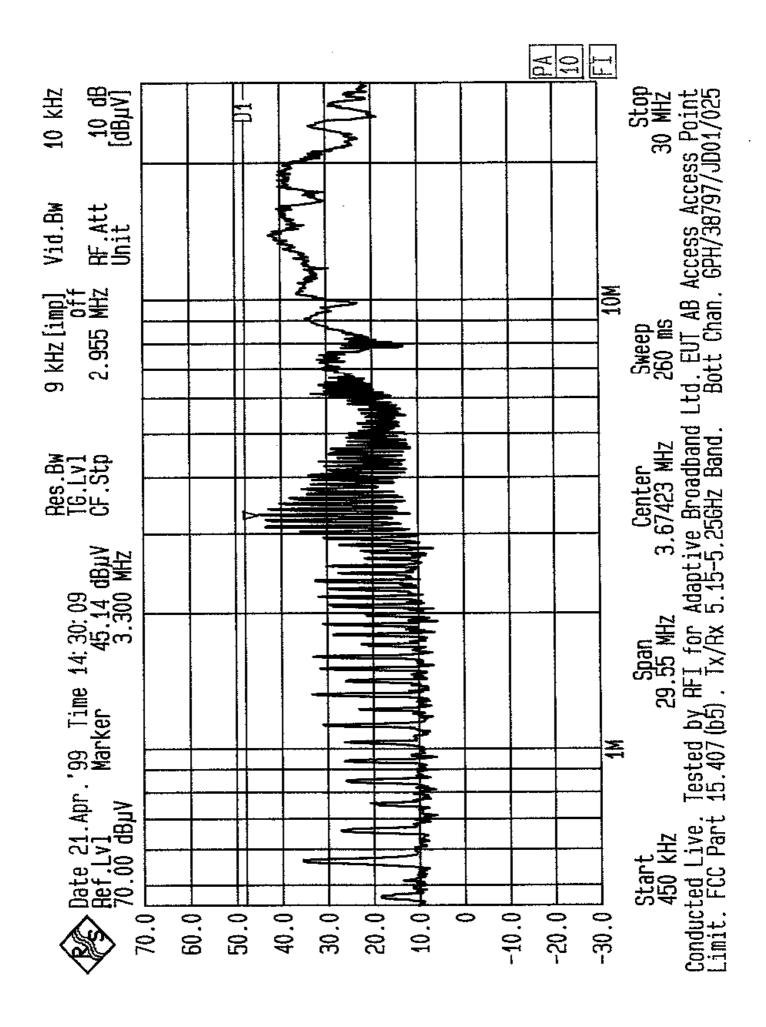


R. - 5 - - - -


e gun a calenda e galene a suggesta da calenda e su calenda e a calenda e galenda e a calenda.

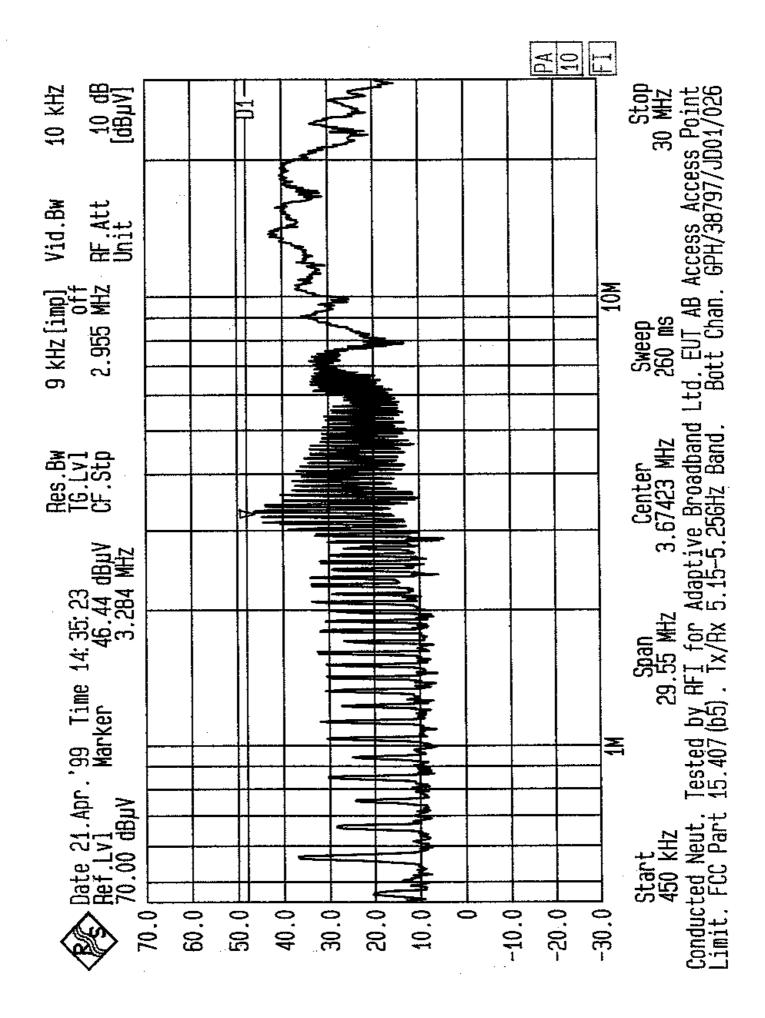


这些是不是我们最新的时候,这些是是我们都不知道,这些最好的,我们还是这些常常的。""这些是我的感觉了。"

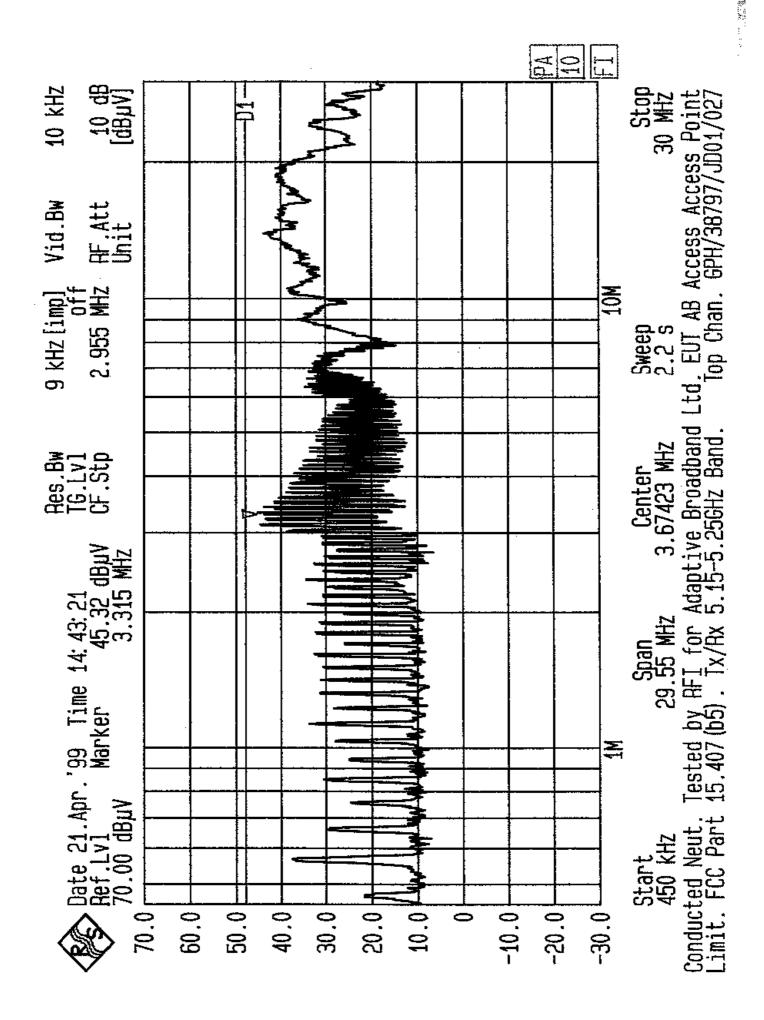

4、"你们,这种感到自己的。"这些我的复数形式,这些是我的问题。

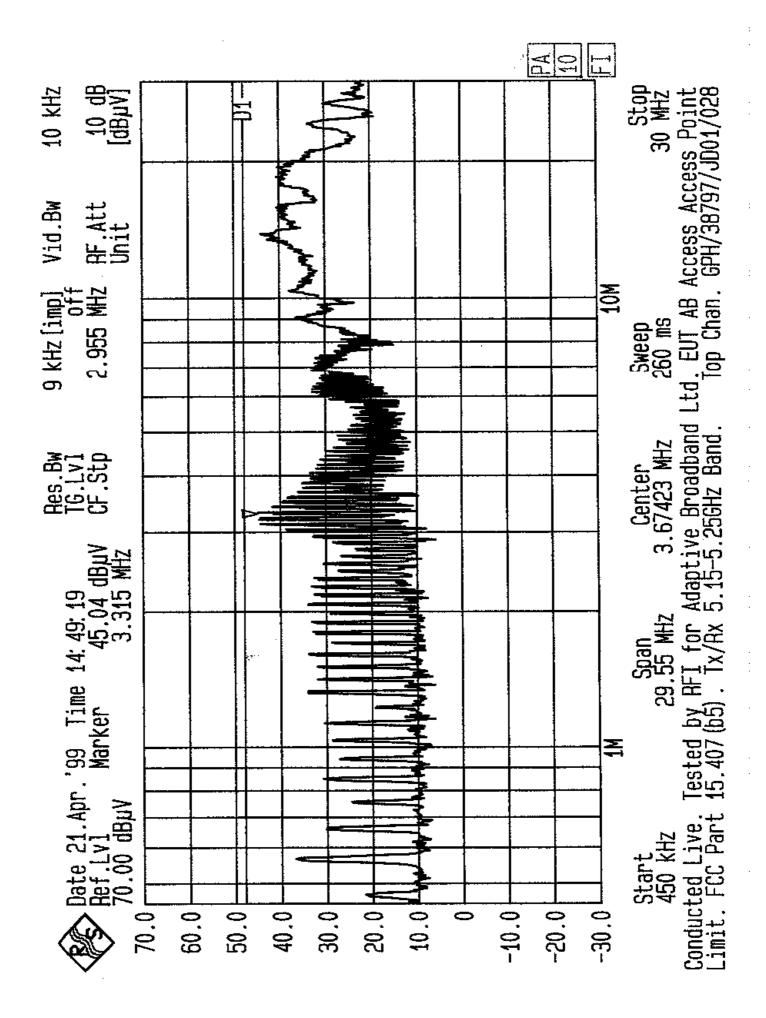


그는 그는 것은 것은 것은 것을 것을 수 있는 것은 것은 것을 가지 않는 것이 없는 것이 없는 것이 없다.

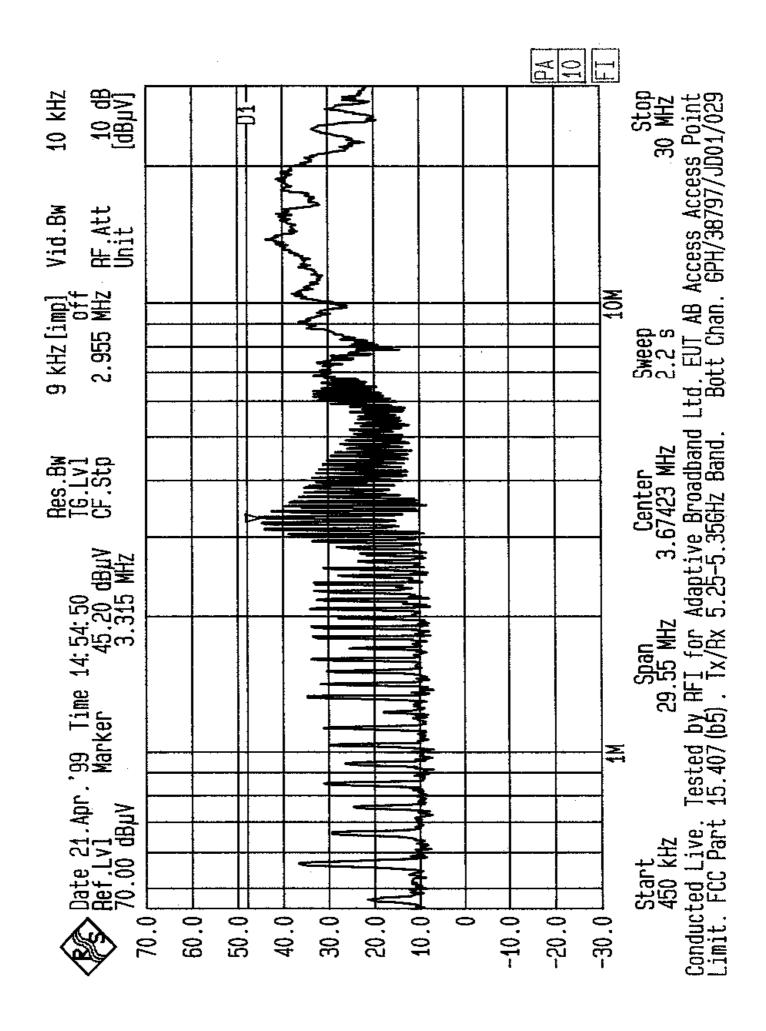


 $\mathcal{X} \in \mathcal{X}$ 


al de la sector de la calendario de la contra de la contra

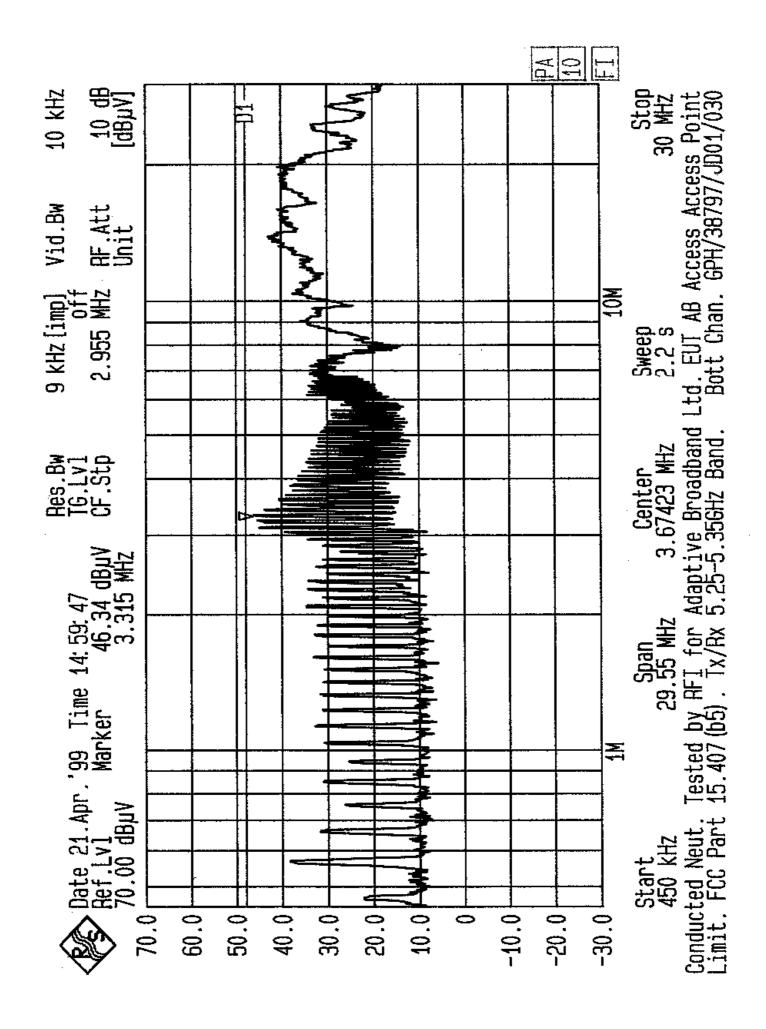


100 AN 4

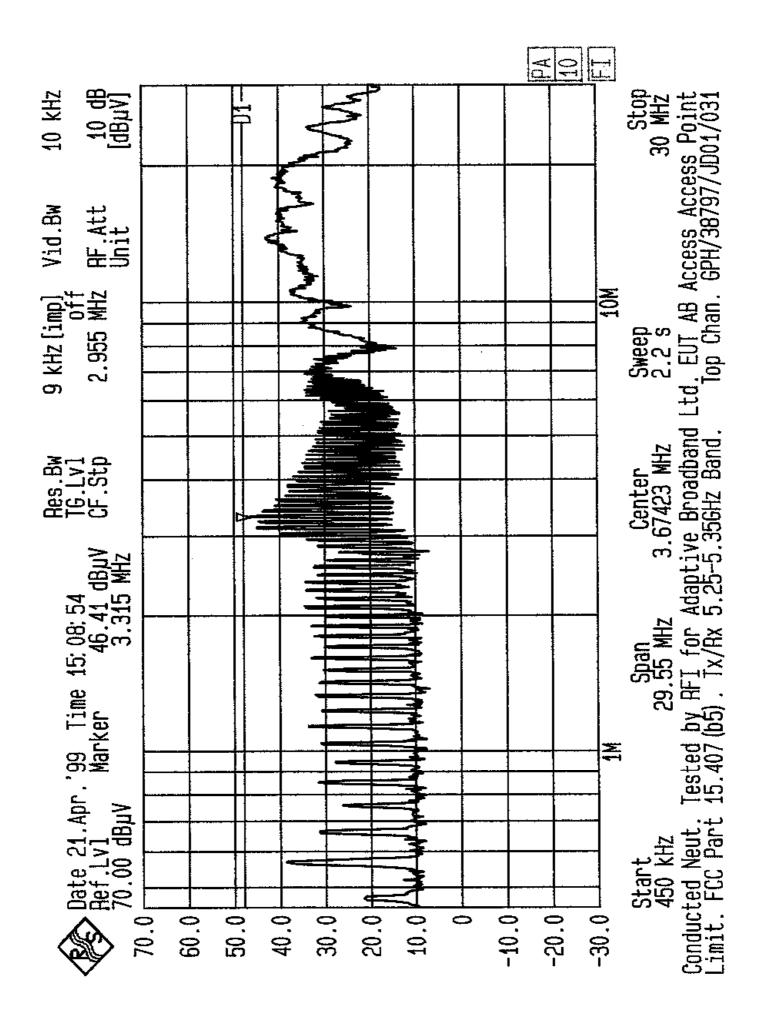

ALC N. C. C.

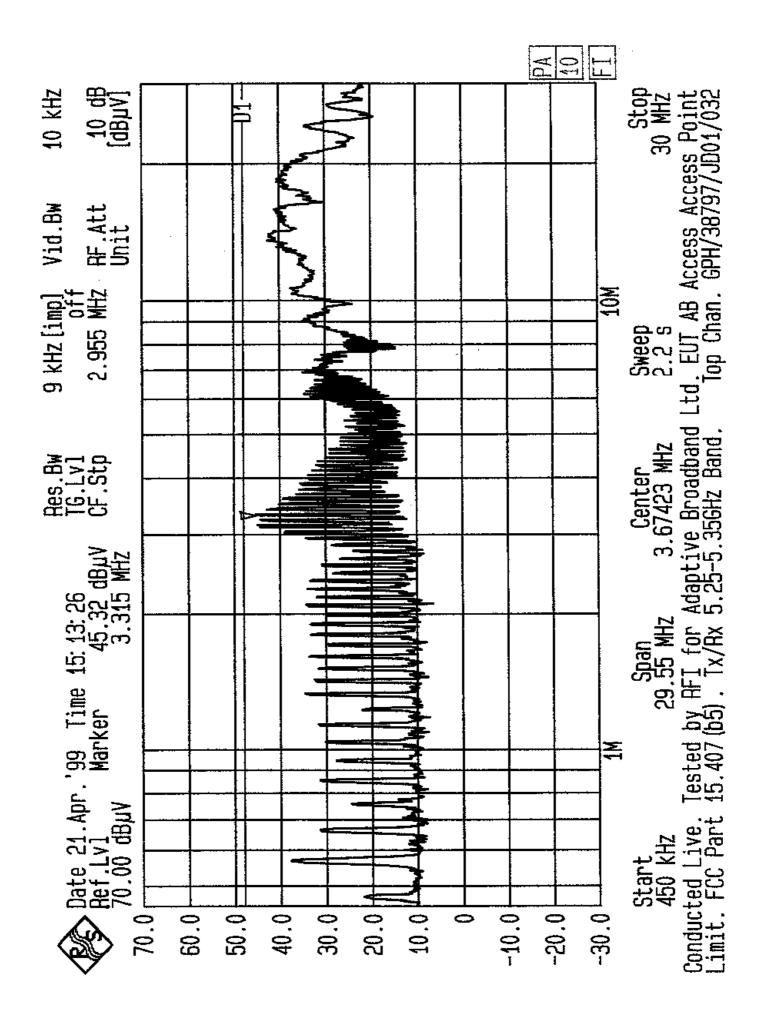


\$273 v

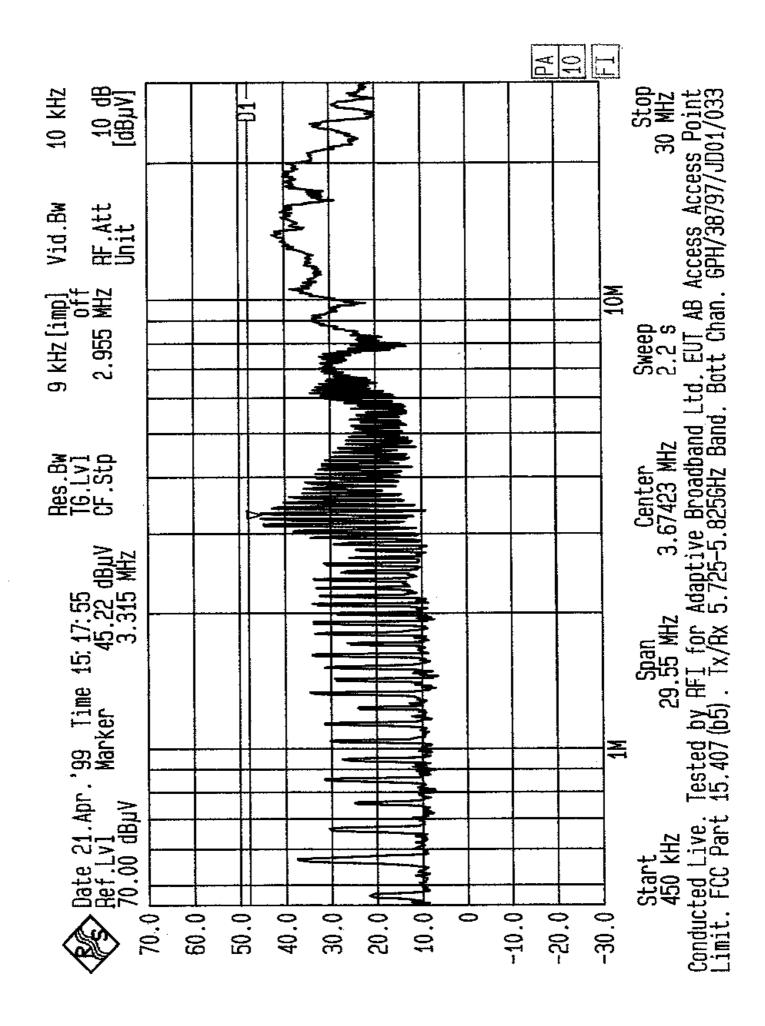


9-4 2-4 2-3

医结核 医爱德德斯氏试验 化合物试验 机合物 化乙酰基乙酰氨酸乙酯 化苯乙基乙酰胺 建苯乙烯

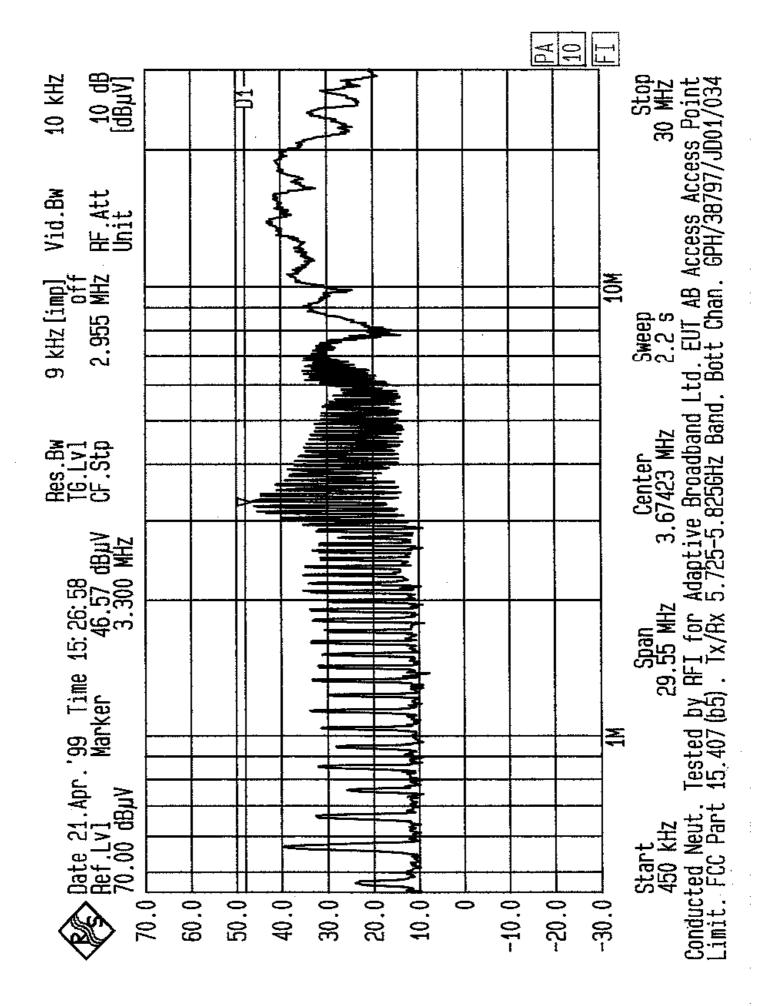


N N N


è .

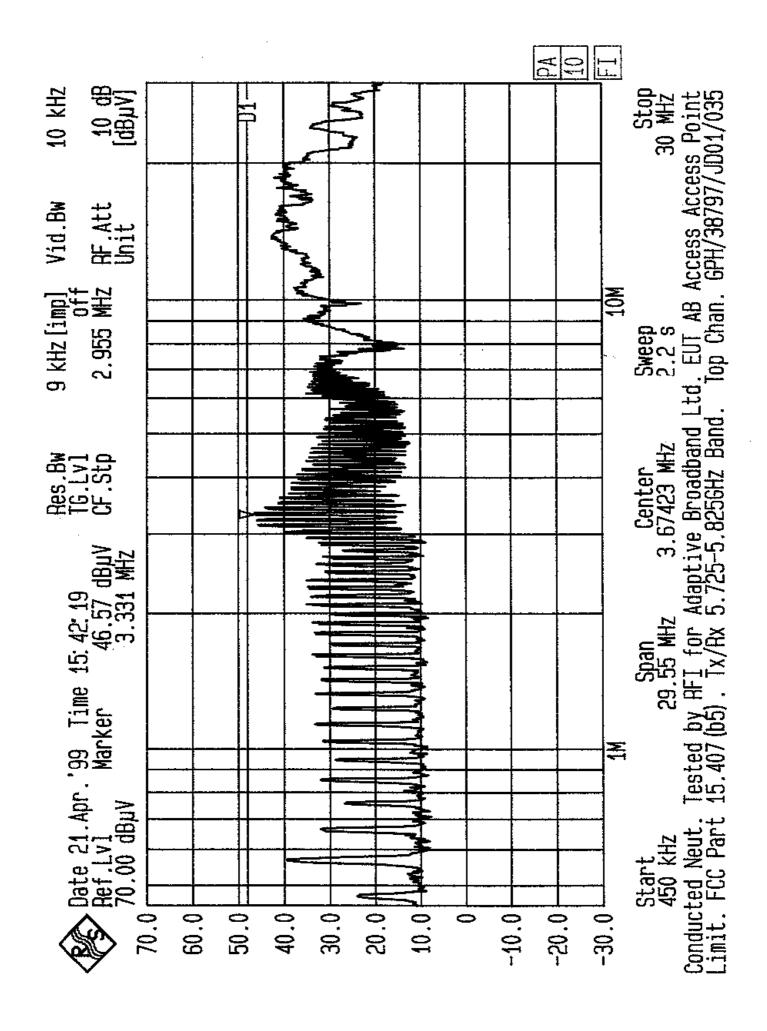

Sec. 3

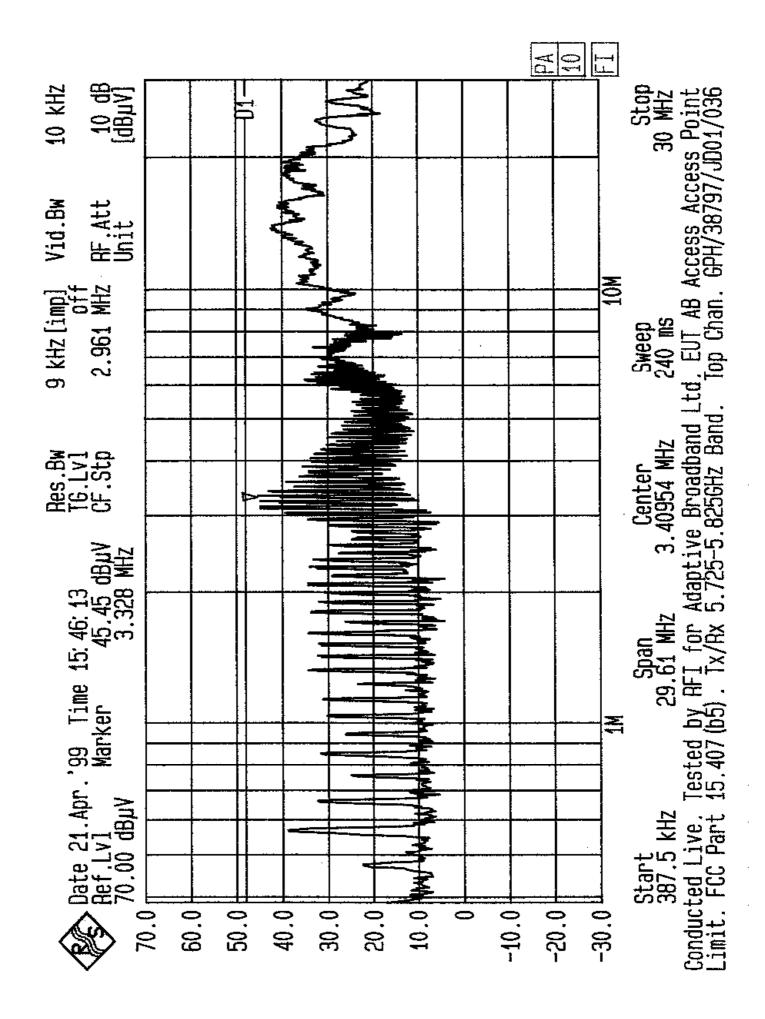


× · · ·

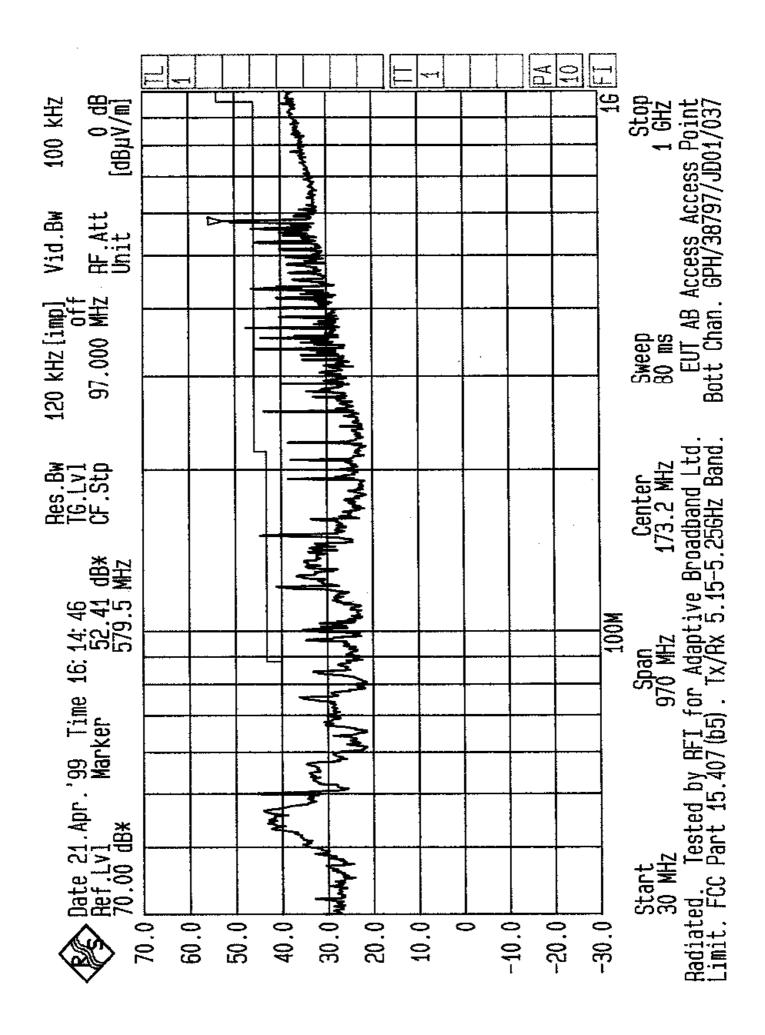


20 B.


e en el ser d'hier esta de la companya de la defensión de la companya de la companya de la companya de la comp

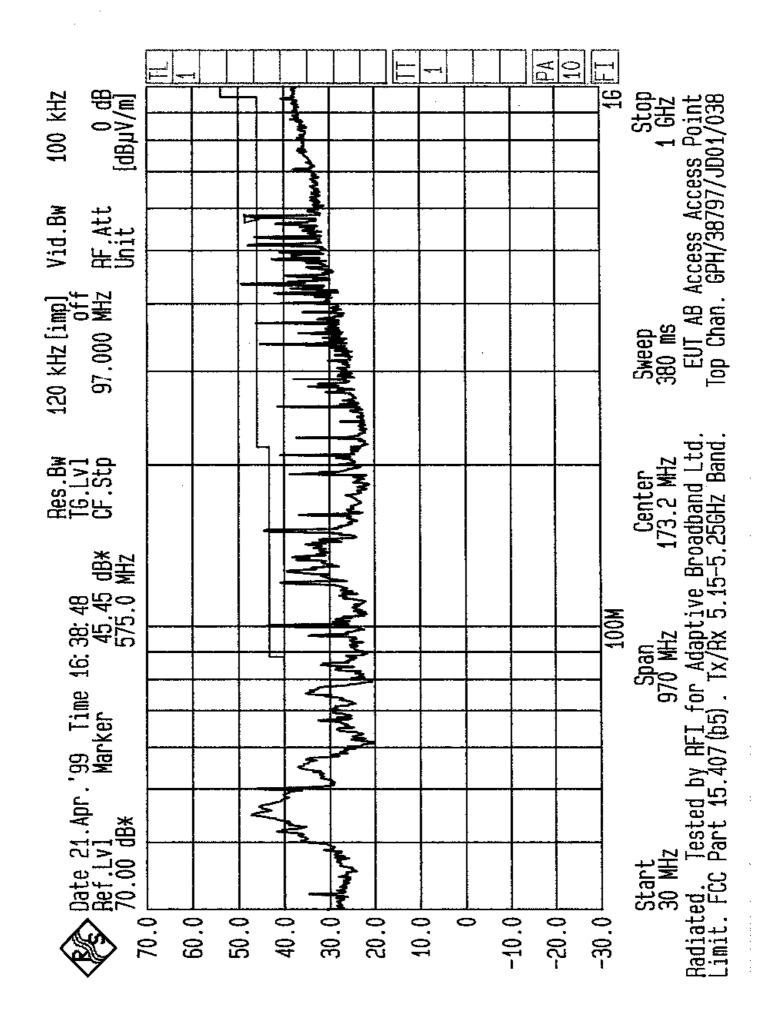


Reserve a construction of the second seco

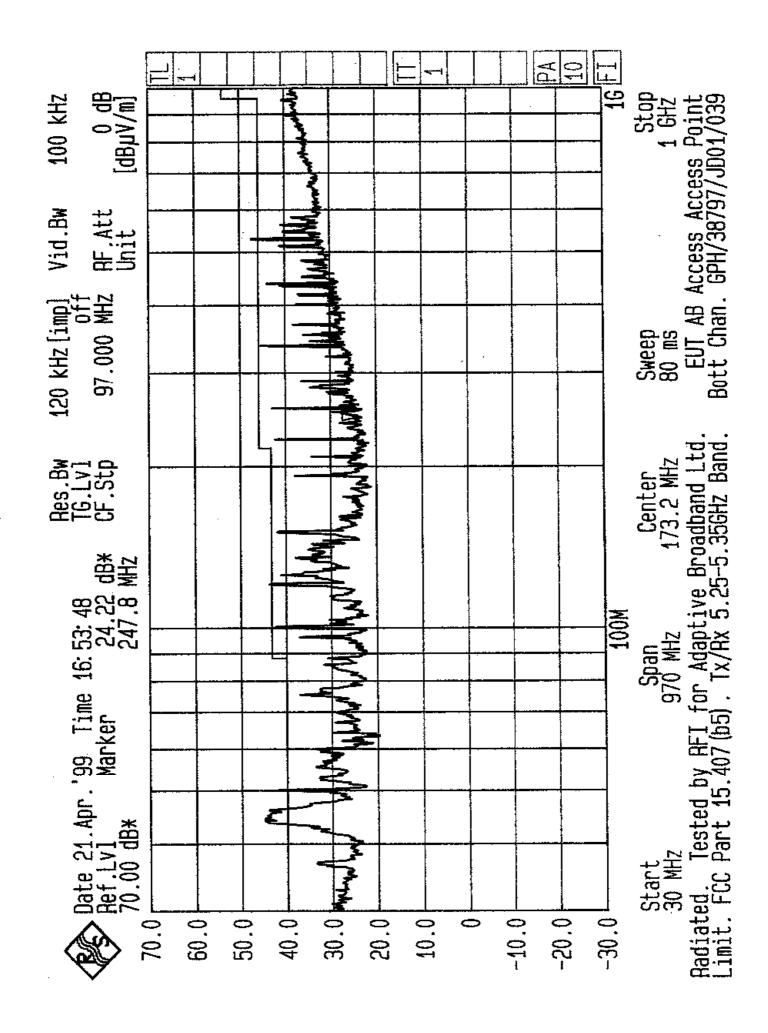

en her en en en en fan de fan de de fan de fan en en en de fan de fan en en de fan en en en en en en en en en e

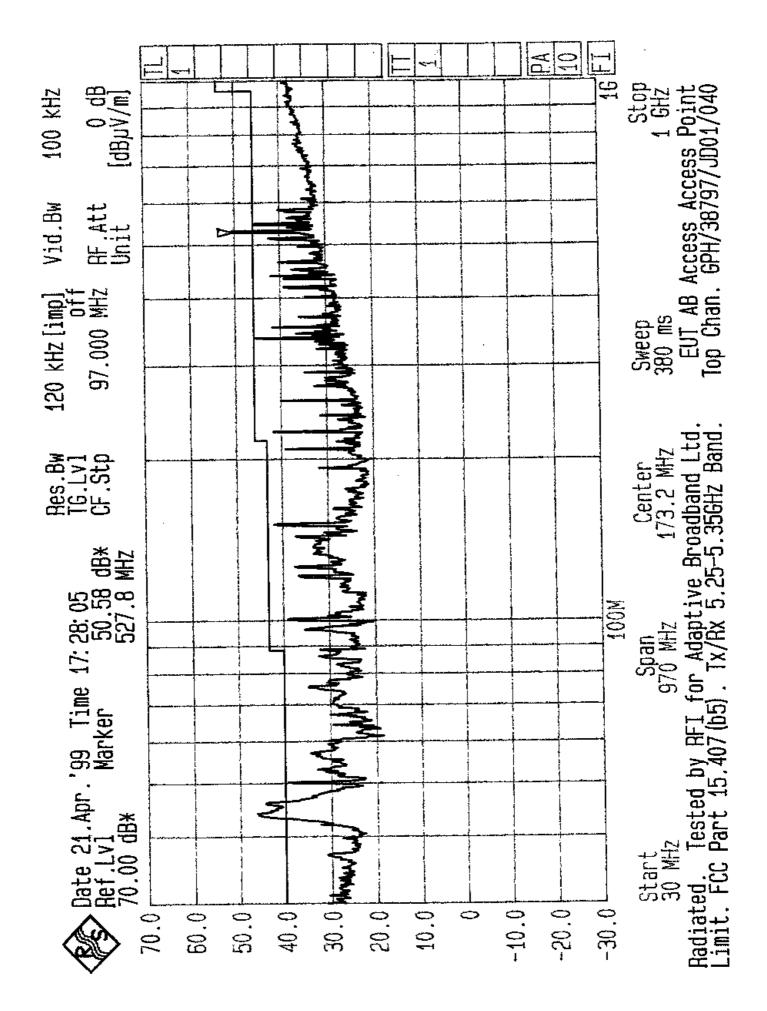


a second sec Second second

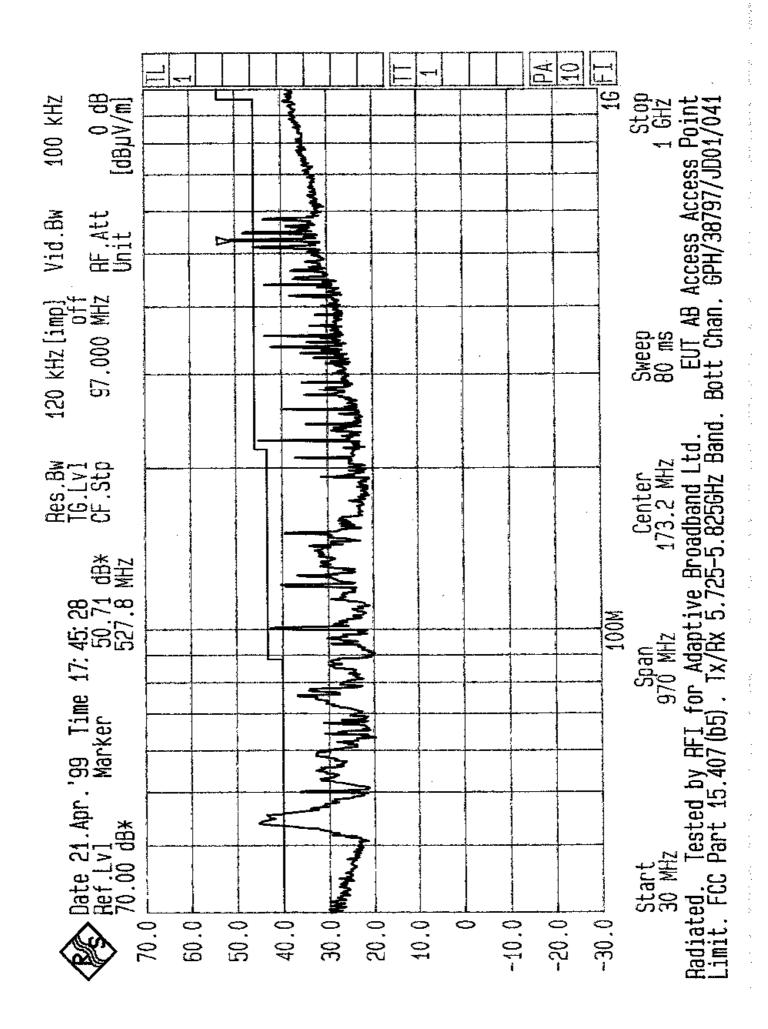


all the second second the later.

100


A decision associate the protected charge of a state day of the term of the

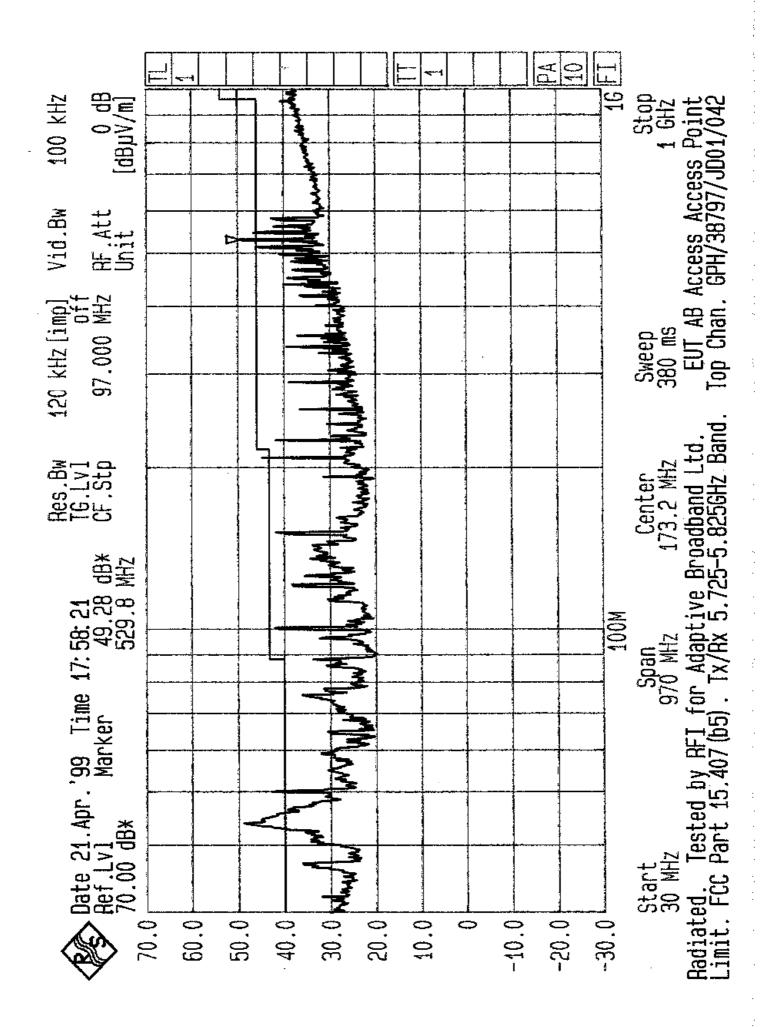

e ta sue en

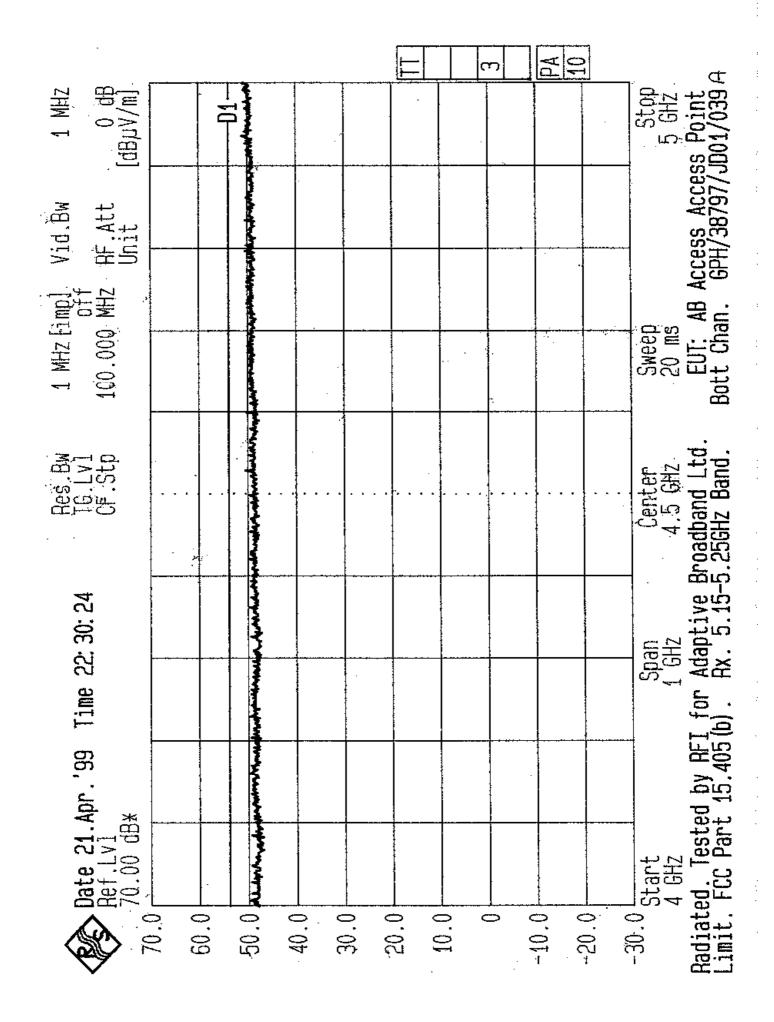



en en structure de la company.

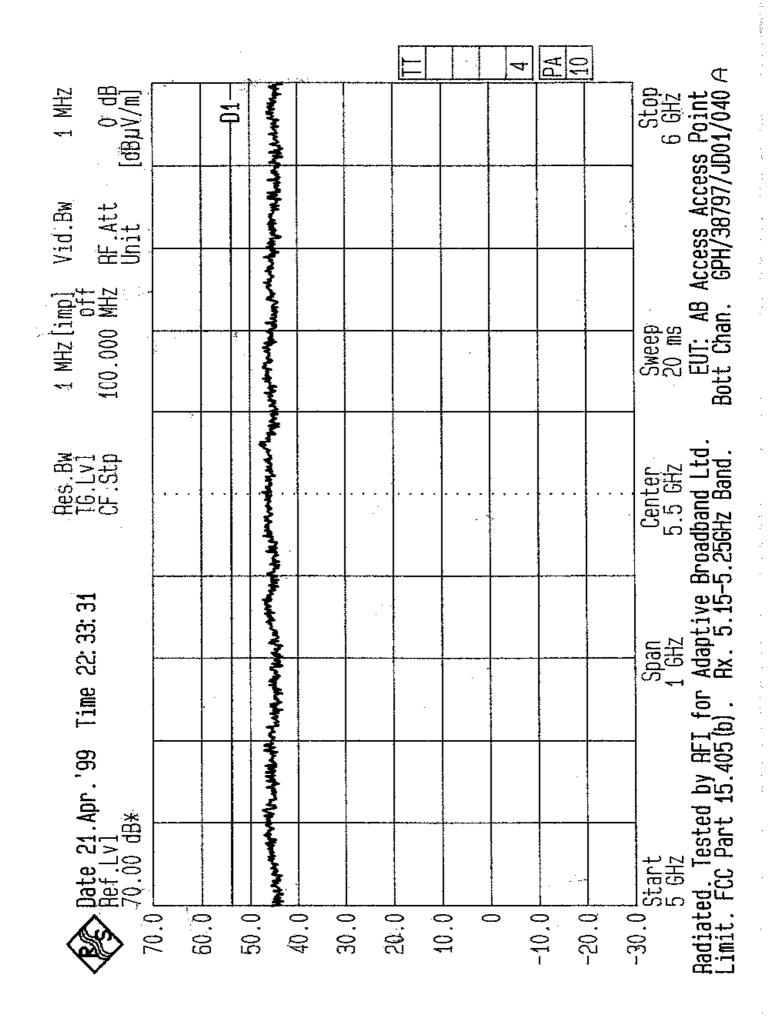

en el ser de la composición de la compo


and provide the second s

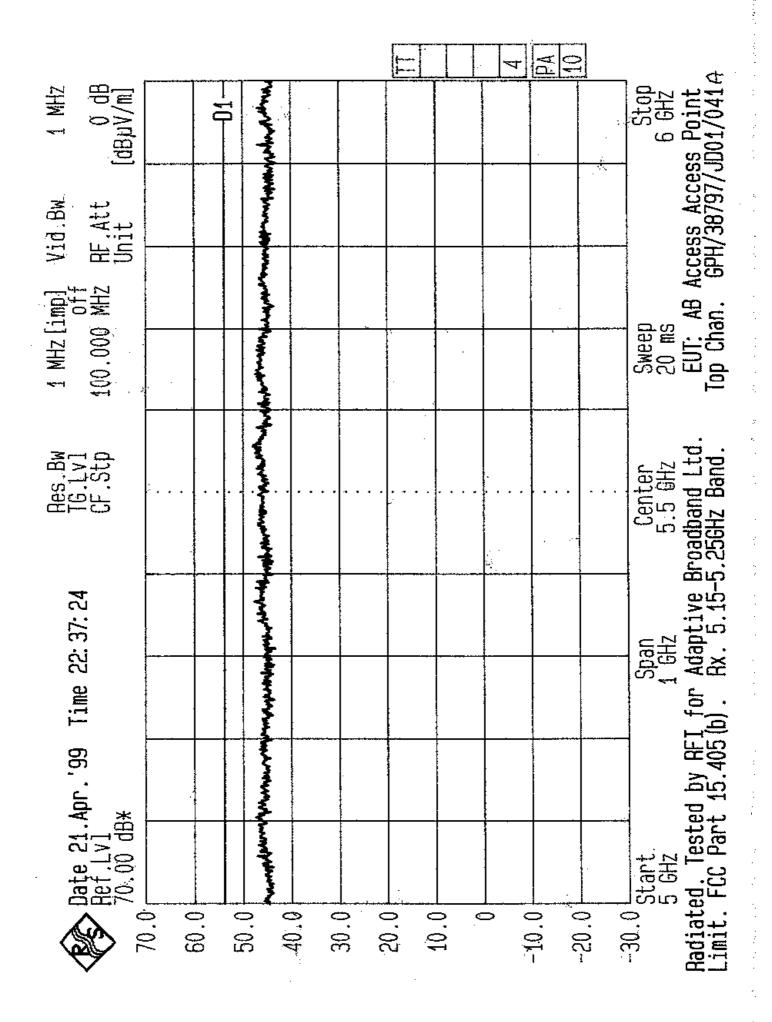

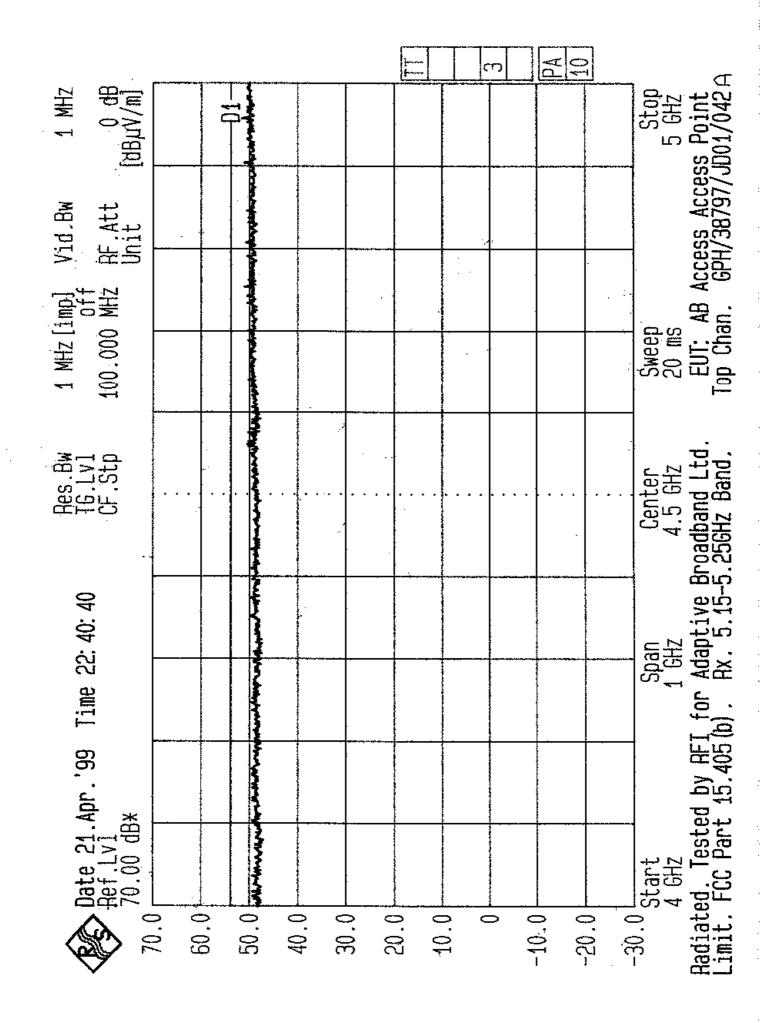

Received and the last of the second second


teresta de la construcción de la constru

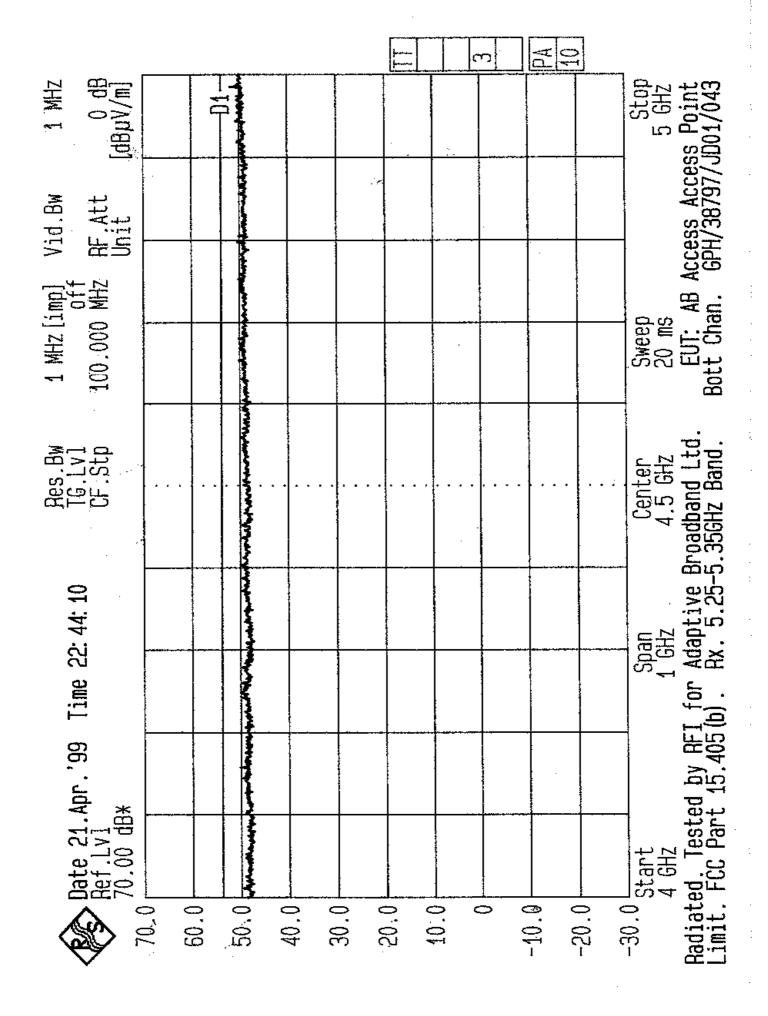

e a sua secondada

n a secondaria da secondaria


is little s

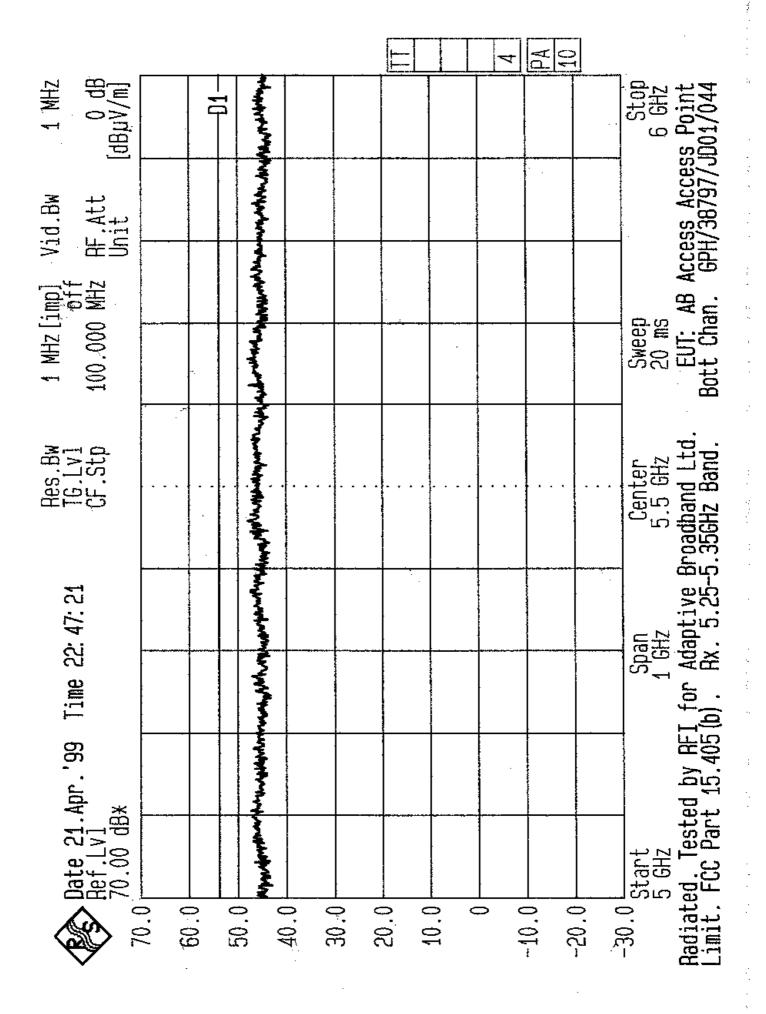

e de la composition d

an an an an Araba

. .

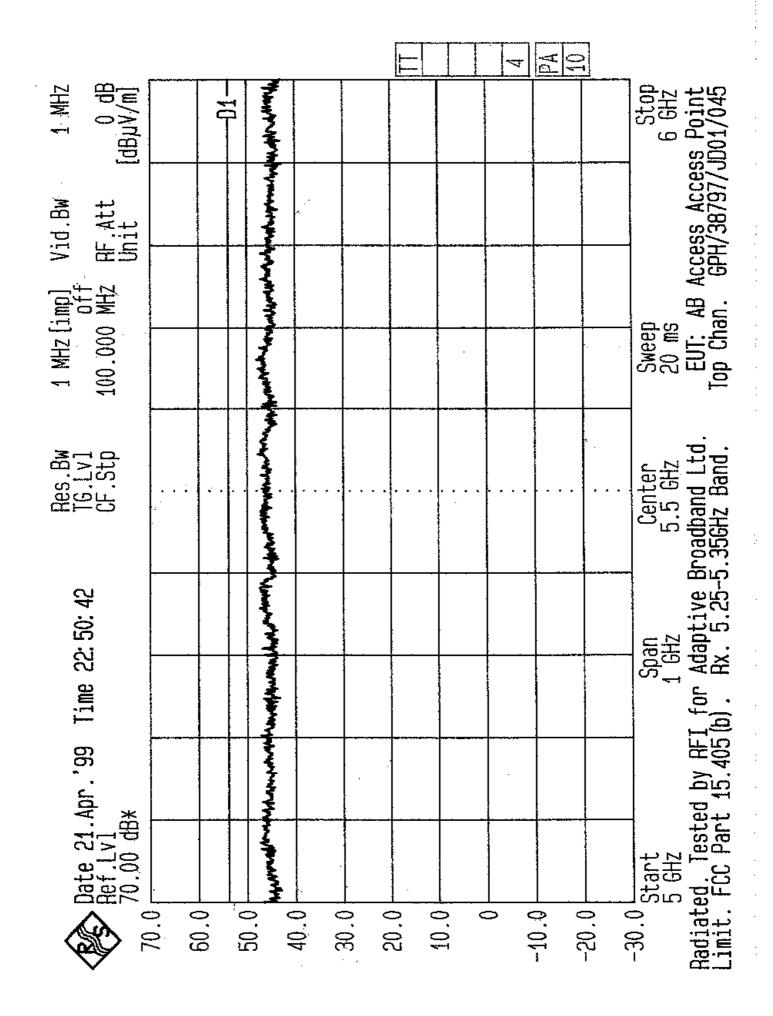

nala este constructiva de la constructiva de la seconda de la seconda de la seconda de la seconda de la second


t af start start

Res.Bw TG.Lv1 CF.Stp
_
Cer
Radiated. Tested by RFI for Adaptive Broadband Ltd :
5

e transformer and the state of the state of the


an den en de la composition de la compo

ere din de

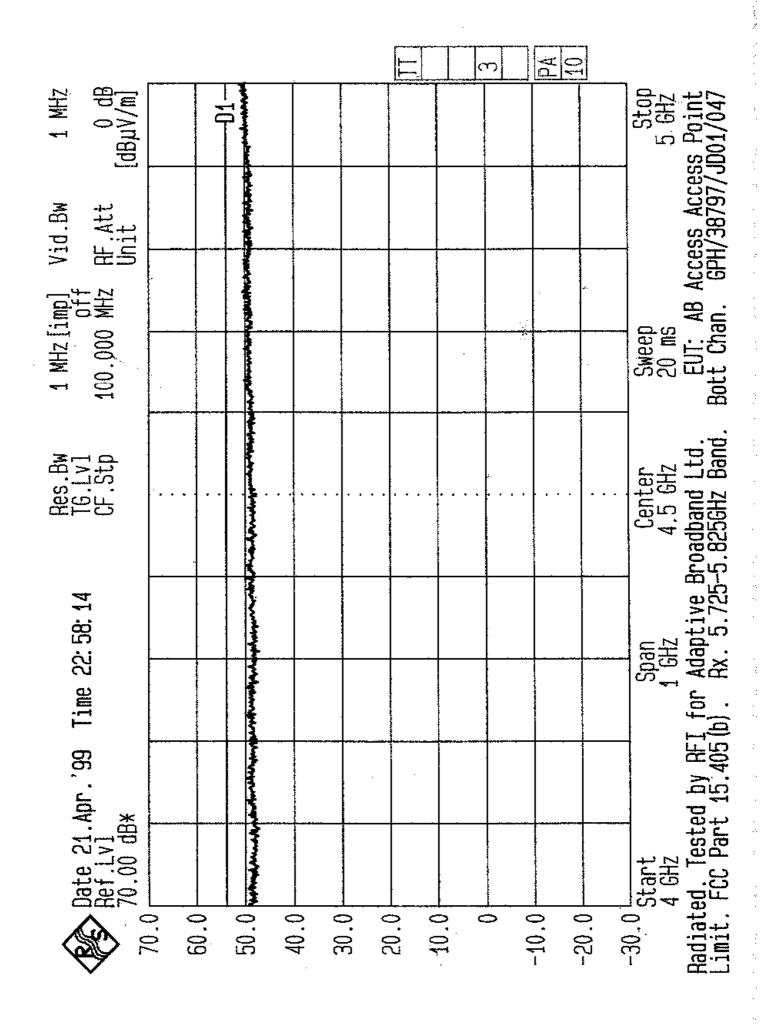


an an an the State of the

ŝ

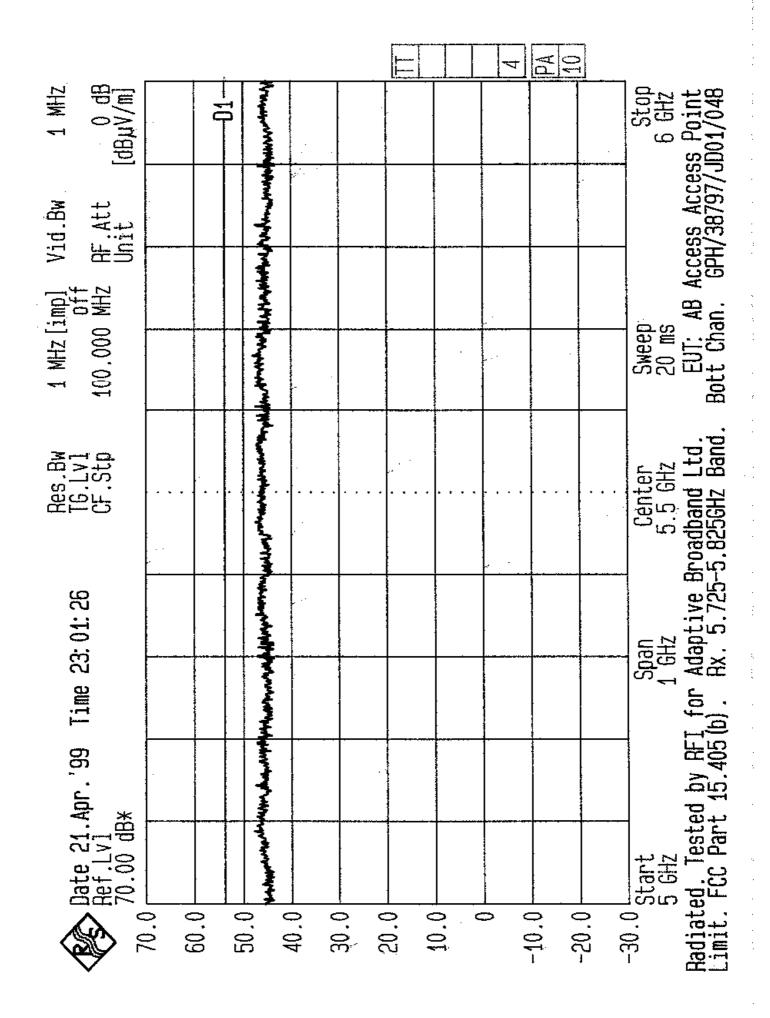


and the second second

A strategy of the strategy of the

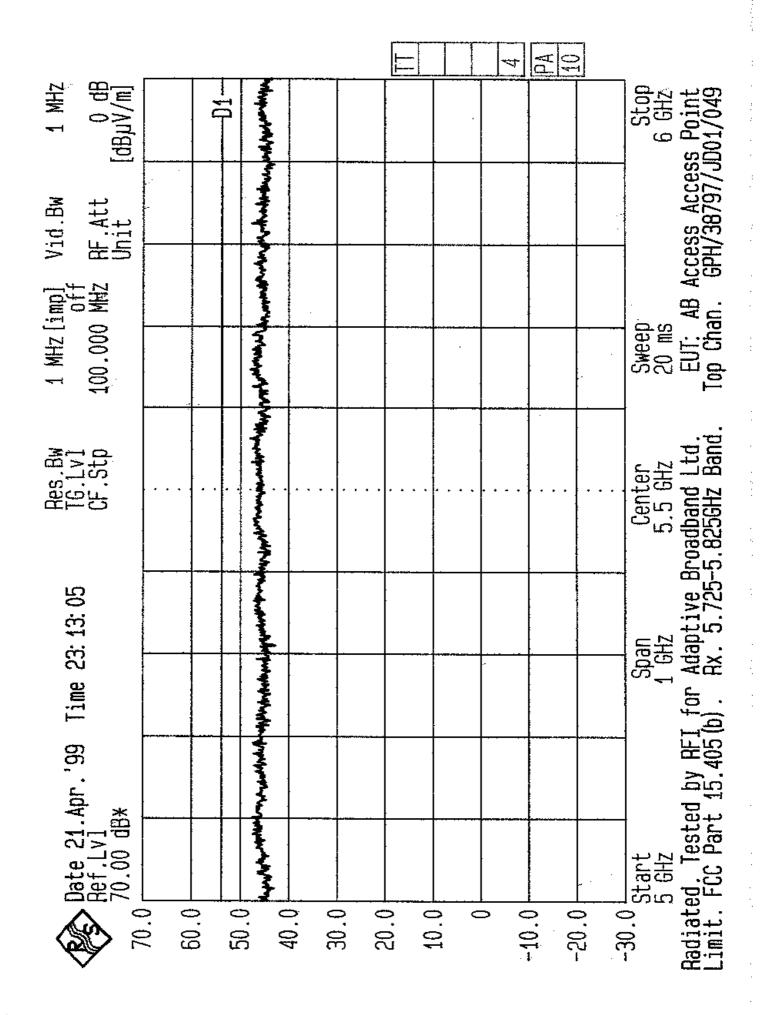


a fatti sa sha she she she

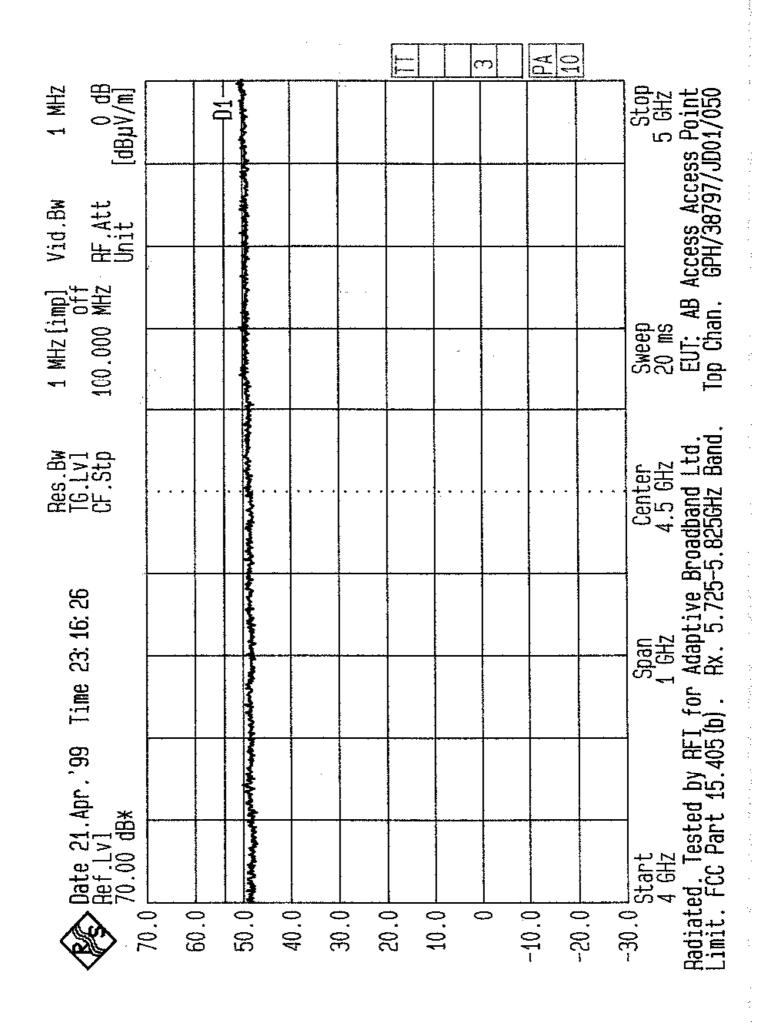

ş


<sup>1</sup> New York, A. L. Stranderson, edited and proterior states.

e en Sterre de la contra de sel

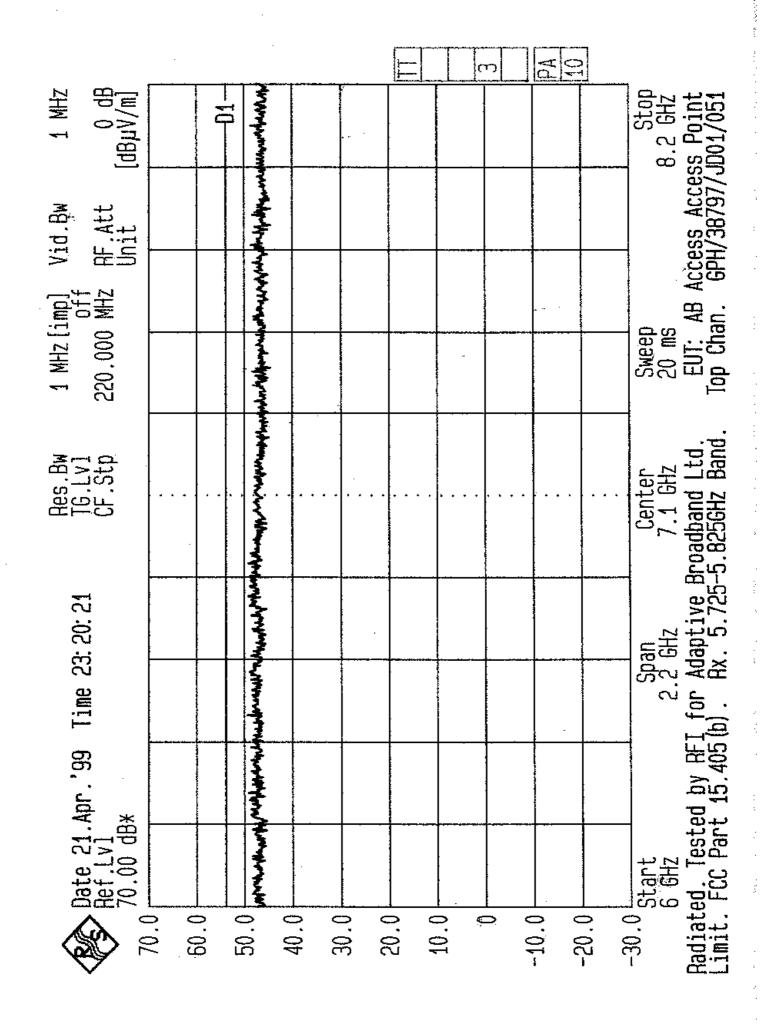


en en en entre de la completa entre en la completa de la completa de la completa de la completa de la completa


enteta (d. 1

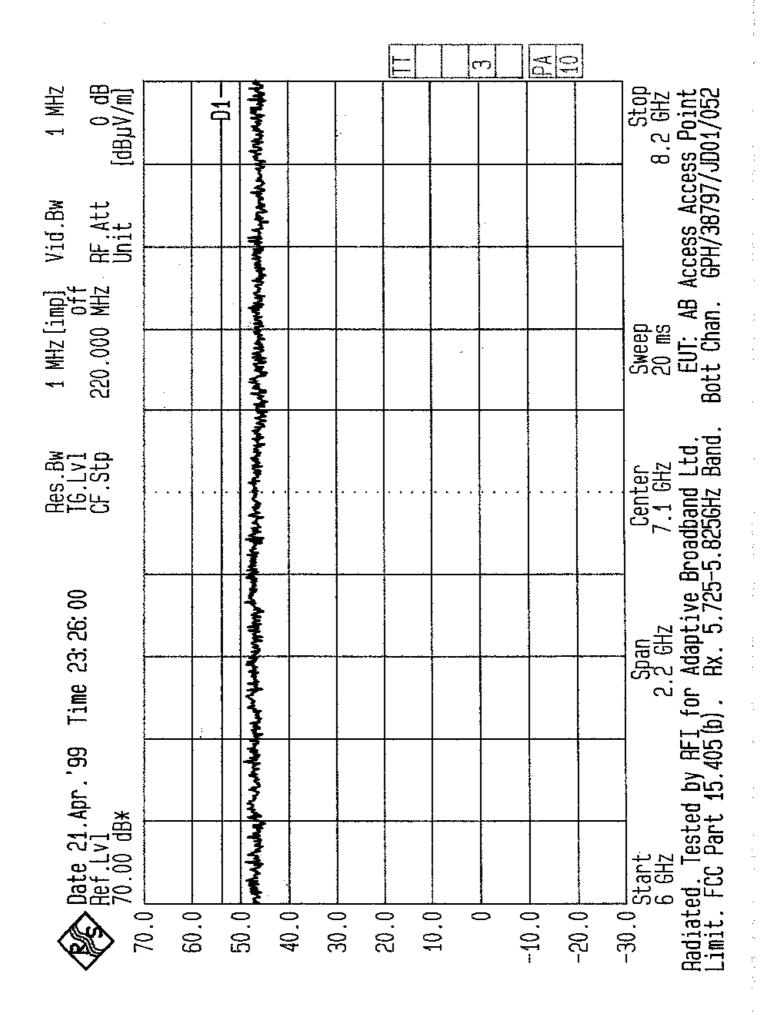

"这些你们,我们就是我们的时候,我们们们还是我们这些你们,我们就能知道你。""你们都是你们就是你们的你,我们就是你是你们的?""你是你们,我们就是你的吗?"

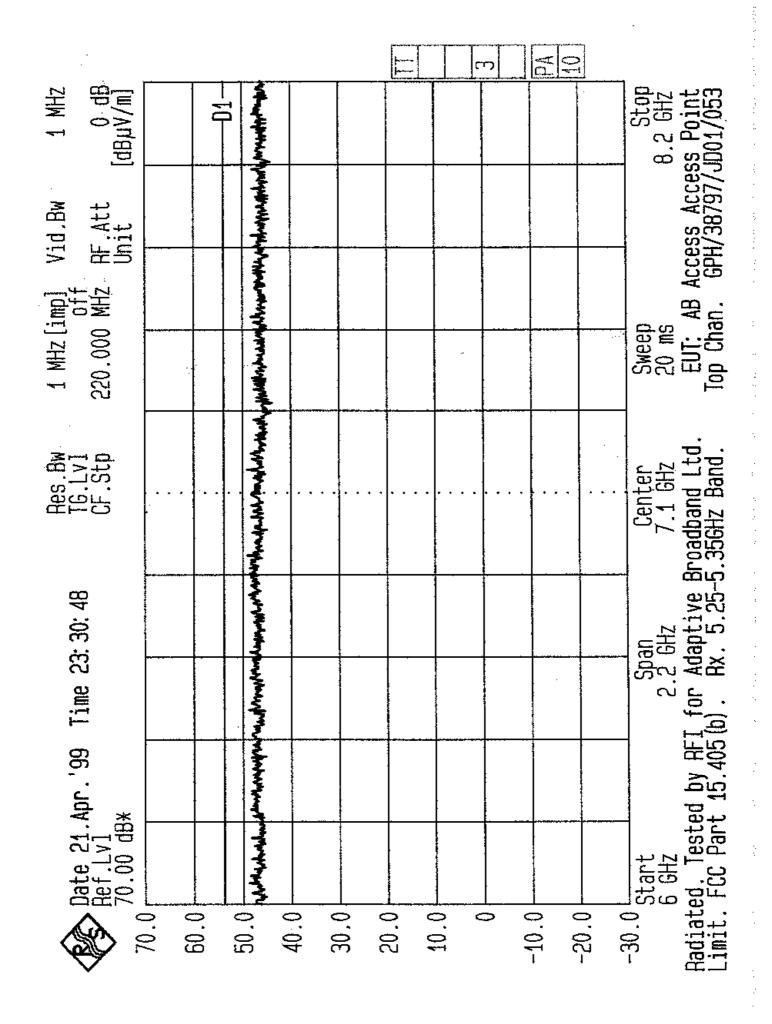


.

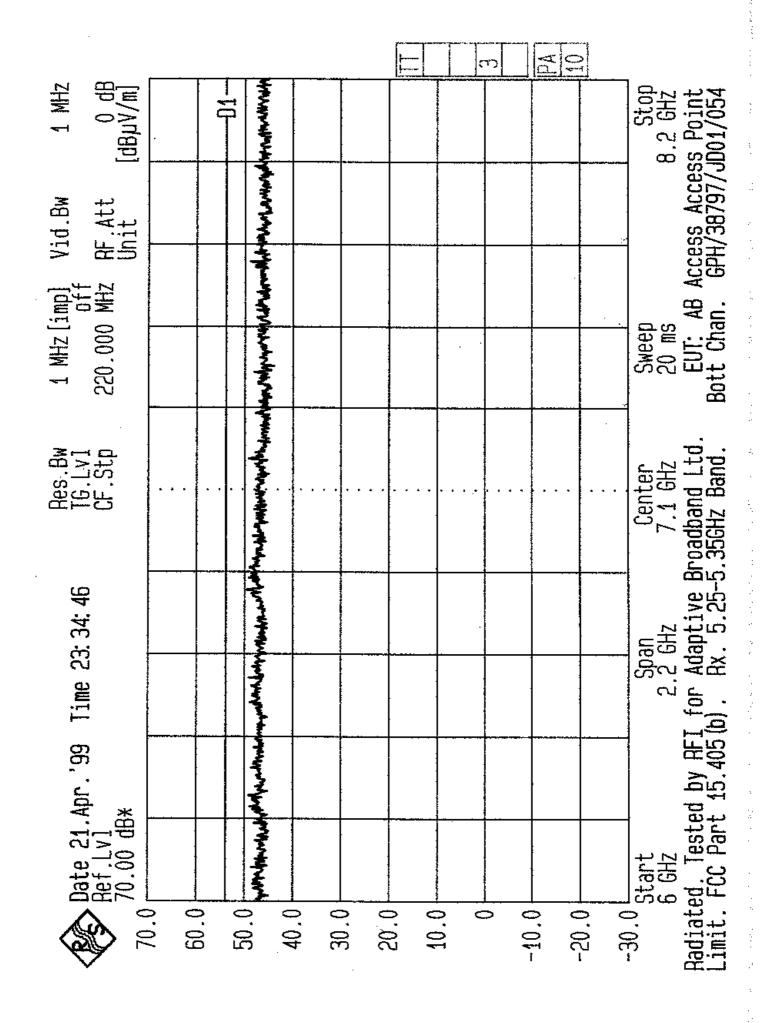

development of the second


and the second sec

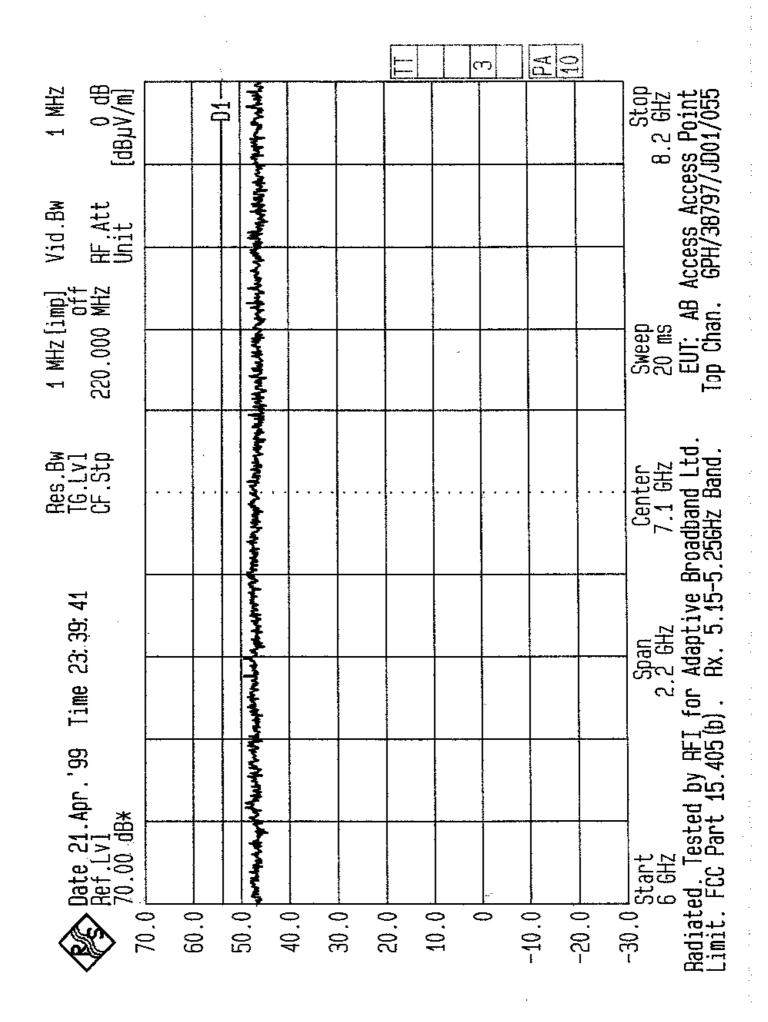


e de la companya de la companya de la


60.00X

and the second second

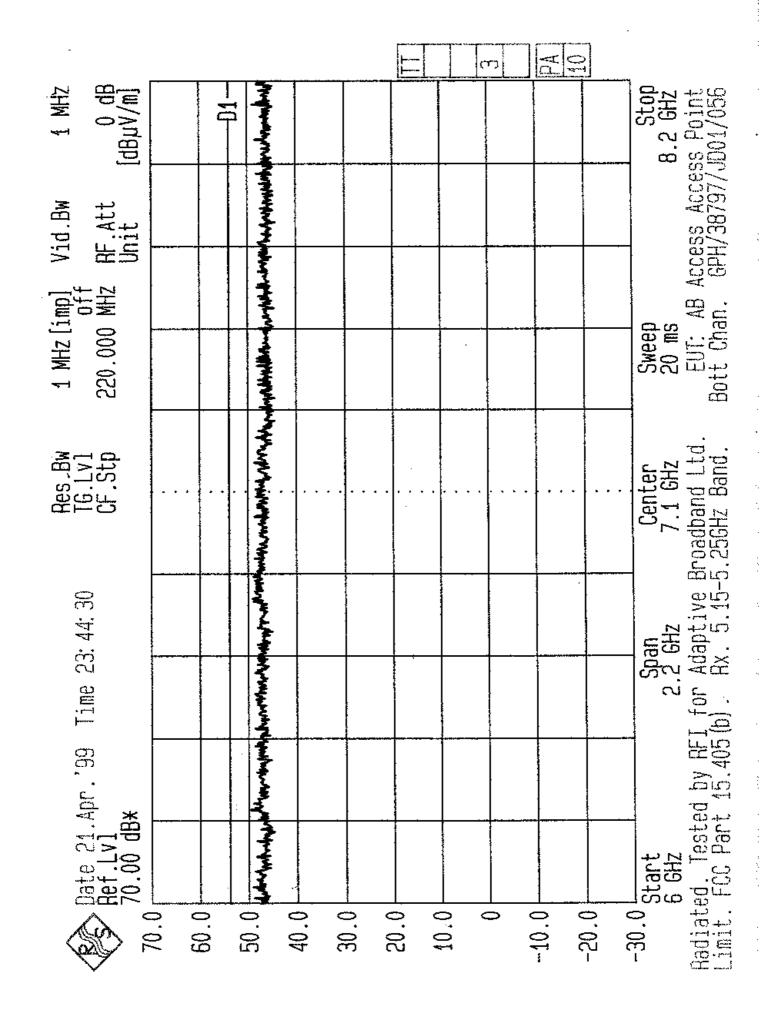

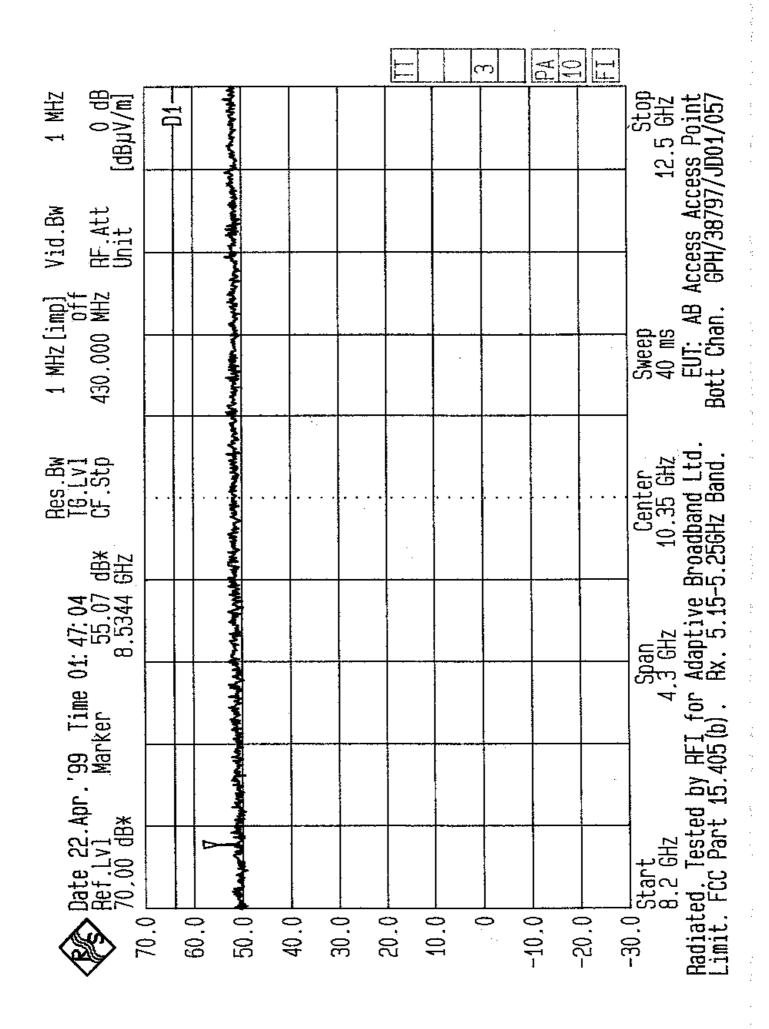


N N O

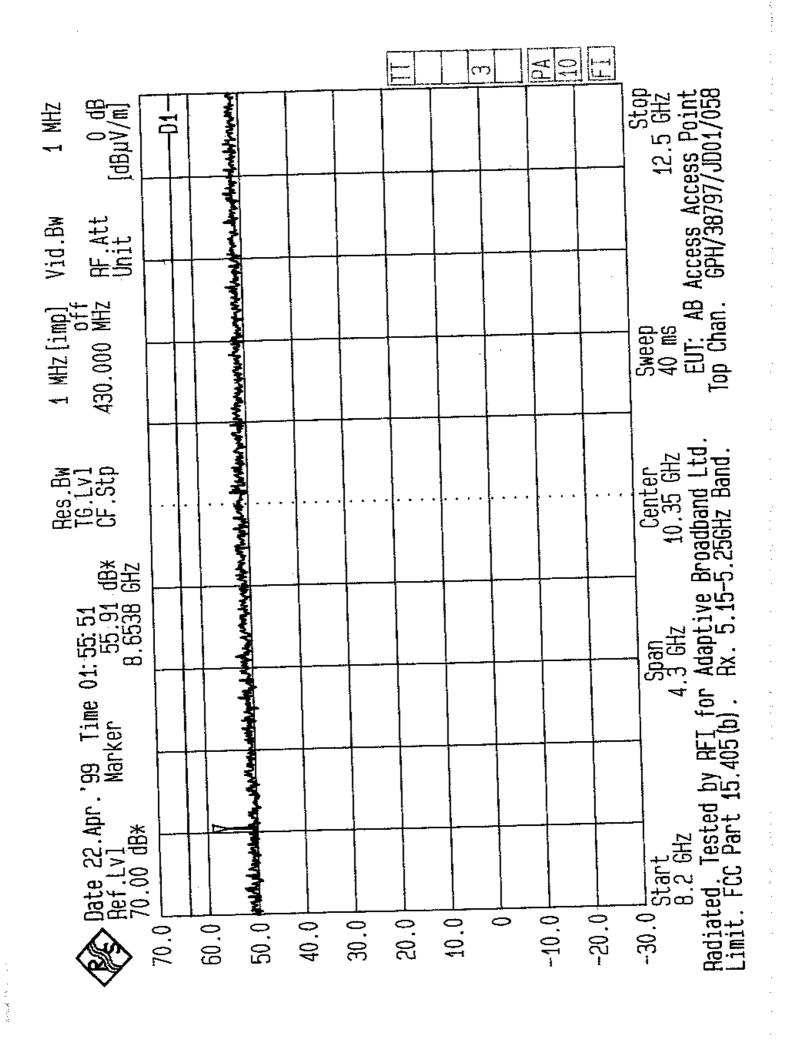


a state and a second second

a a substantia de la companya de la seconda de la secon

e de la set

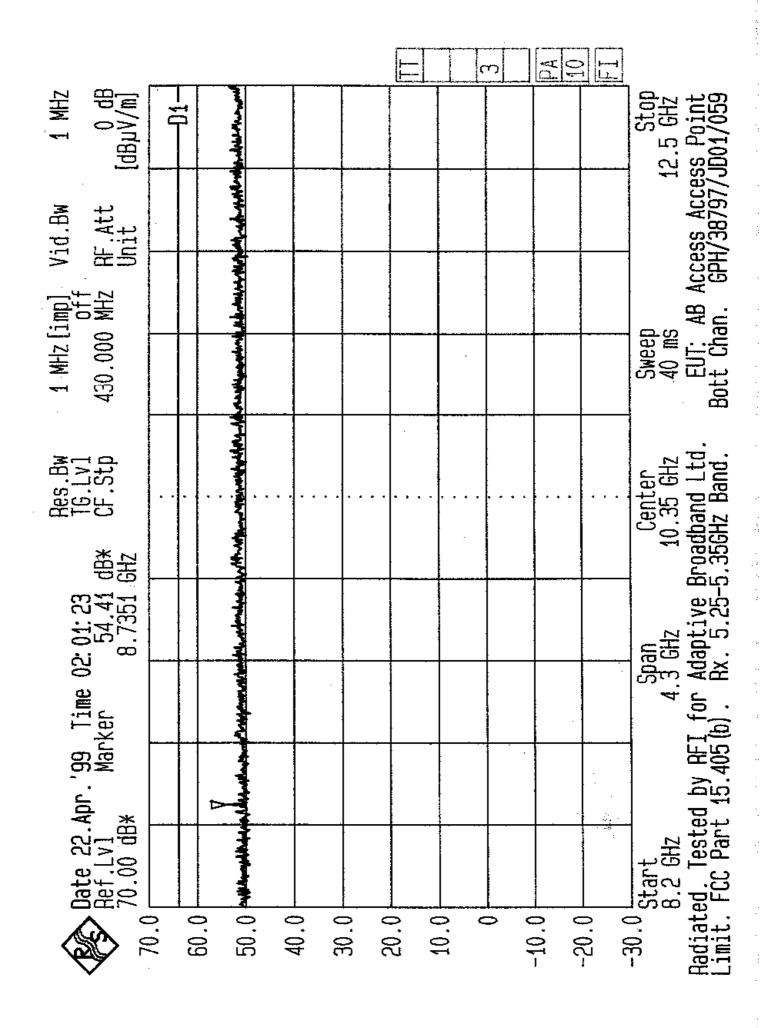

1. 12

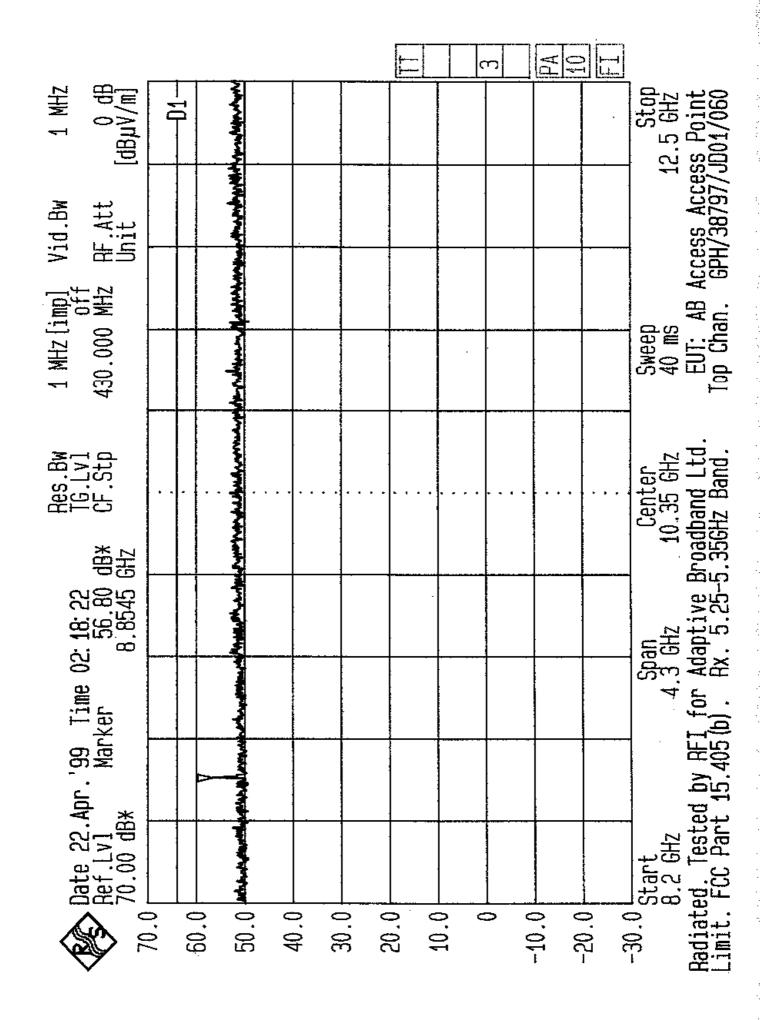

 $u^{(1)} = \frac{1}{2} (1 + 1)^{-1}$ 


test s<u>e</u>tion in the sta

en el recipita de la companya


											6				2		
1 MHz	0 dB [dB,uV/m]	2															Stop 12.5 GHz ss Point JD01/061
Vid.Bw	RF.Att Unit																Sweep 40 ms EUT: AB Access Access Point Bott Chan. GPH/38797/JD01/061
1 MHz[imp]	000 MHZ																veep ) ms UT: AB Ac Chan. G
1 1	430.									-							Bott El
Res.Bw TG Lv1	CF.Stp		4		-	* *			 					<b></b> .	,	•••	Center 10.35 GHz padband Ltd. .825GHz Band.
. 26. 02	. FC.											-					-30.0 Start Cente 8.2 GHz 4.3 GHz 10.35 ( Radiated. Tested by RFI for Adaptive Broadband Limit. FCC Part 15.405 (b). Ax. 5.725-5.825GHz
Time N2-																	I for Ad
Anr '00	Pet LVI 70.00 dBX			- - - -												<u>.</u>	ted by RF t 15.405
CC ata	Ref.Lv1 70.00 df										_						Start 8.2 GHz ted. Test
		/0.0	0 00	0.00	50.0	0.01	4 <u>0</u> . U	30.0	2 <b>0.</b> 0	10.01	n. u	0	-10 0	). ),	-20.0		-30.0 Radiat Limit.

and a second second second


いった 読み あいてん たんかい たんながい 大学 いたき しょうざん たいかん たいたん たいたい たいざい いたい

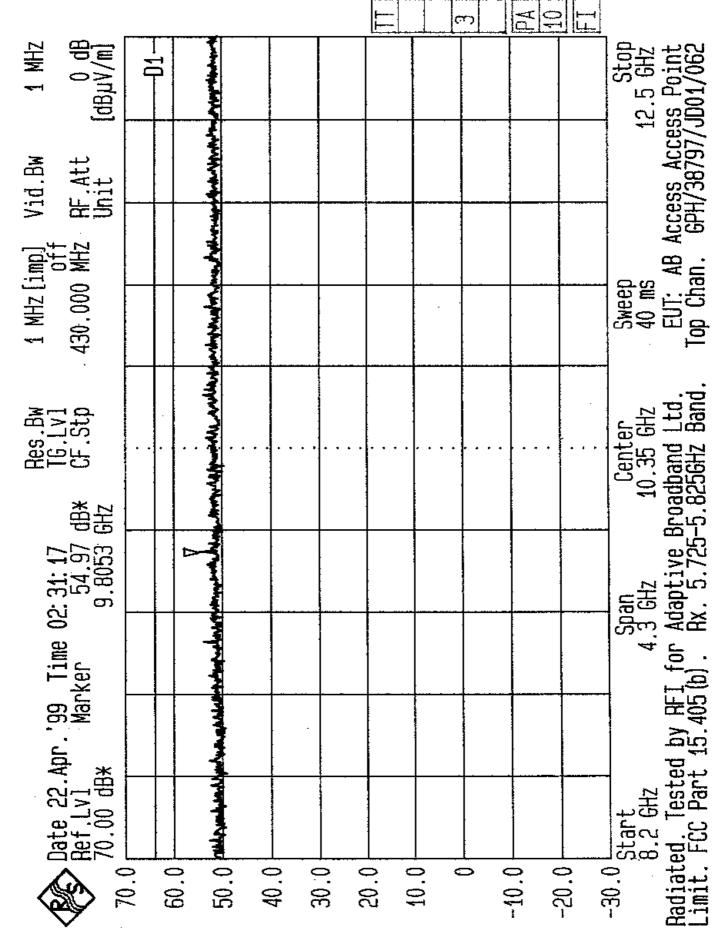

· · ·

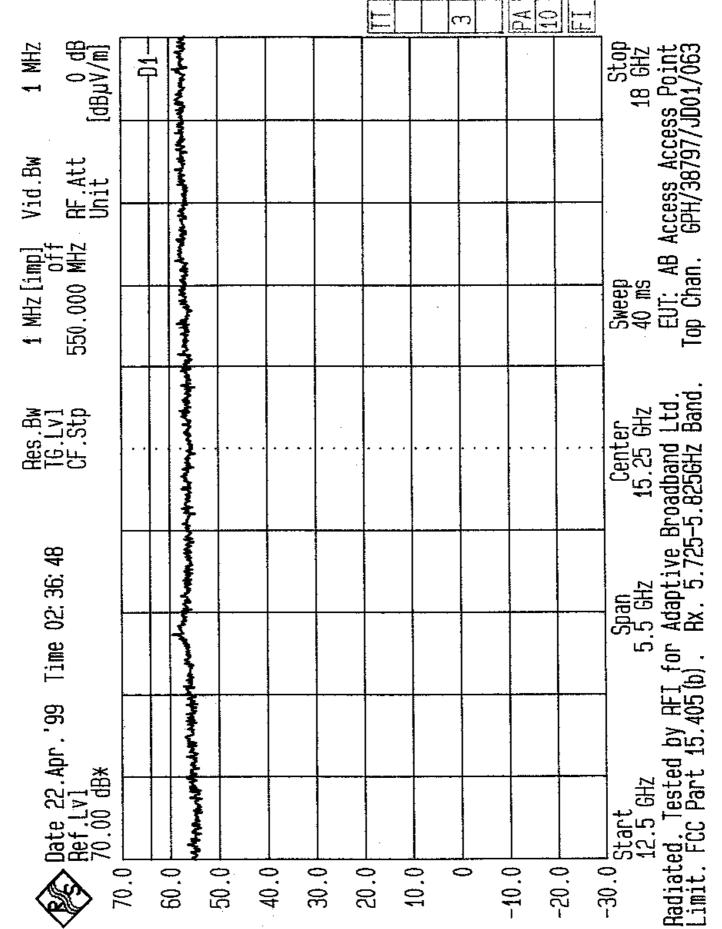


			_						c		A C		
1 MHz	0_dB [dBµV/m]	2											Stop 18 GHz 35 Point 1001/064
Vid.Bw	RF.Att Unit			Kurgungungungu						: : :			Sweep 40 ms EUT: AB Access Access Point Bott Chan. 6PH/38797/JD01/064
				Non-Andrewsky			:						AB ACC an. 6P
1 MHz[imp]	550.000			www.									Sweet 40 ms EUT: Bott Chá
Res.Bw TG [v]	CF.Stp	• •		un an					· · · · ·				Center 15.25 GHz roadband Ltd. 5.825GHz Band. I
• 41• 46													an GHz aptive B .725-
Time O2		-											(b) . HX
pp, Ju	· · · · · · · · · · · · · · · · · · ·				:								d by RF 15.405
Date 22 /	Ref.Lvl 70.00 dB¥			WALKAN									-30.0 Start Cente 12.5 GHz 5.5 GHz 15.25 A Radiated. Tested by RFI for Adaptive Broadband Limit. FCC Part 15.405 (b). Ax. 5.725-5.825GHz
Ś		/0.0	00		0.00	40.0	30 <b>.</b> 0	50.U	10.0		-10.0	-20.0	-30.0 Radiat Limit.

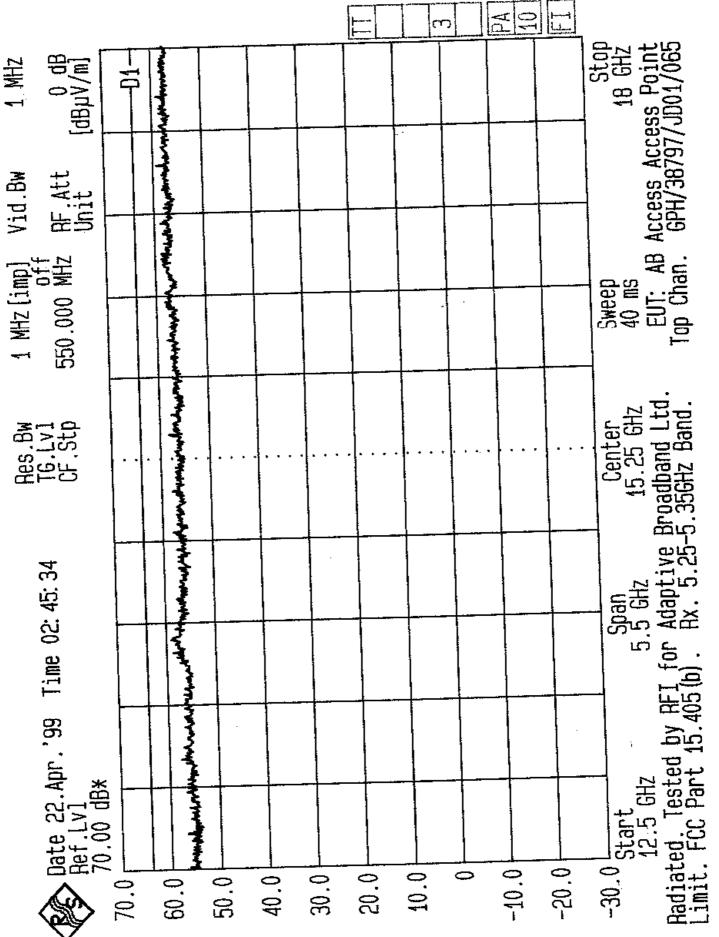

したい はため たいてん たいけんしゅう しゅうかん 

Zyntek switcher in der

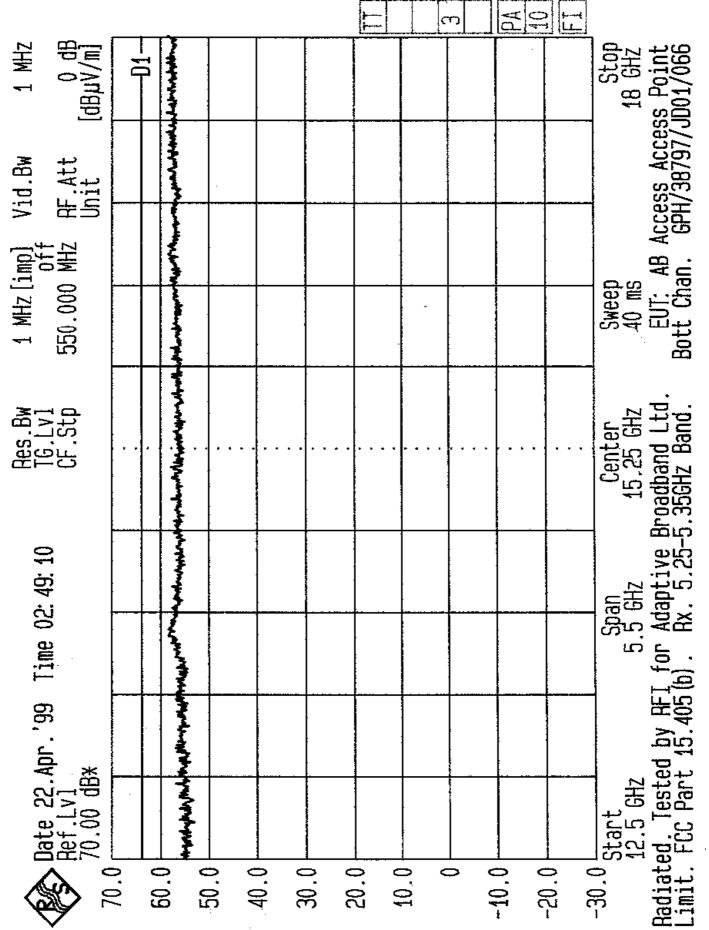

							<u>   </u>		A C		
1 MHz 0 dB [dBµV/m]	-11										Sweep 40 ms EUT: AB Access Access Point Top Chan. GPH/38797/JD01/067
Vid.Bw RF.Att Unit											sss Accee
imp] V 0ff MHz R U		and the second s									an. 6Pt
1 MHz [imp] 0ff 550.000 MHz											Sweet 40 mg FUT: Ch
Res Bw TG.Lvl CF.Stp		Malanin Juman and					· ·				-30.0 Start Center 12.5 GHz 5.5 GHz 15.25 GHz Radiated. Tested by RFI for Adaptive Broadband Ltd. Limit. FCC Part 15.405 (b) . Rx. 5.15-5.25GHz Band.
52: 57											n Hz ptive Br 5.15-5
Time 02:									<u> </u>		(b) . By add
Чрг.'99 К											d by RF 15.405
<pre>Date 22.Apr.'99     Ref.Lvl     70.00 dB*</pre>											Start 12.5 GHz 3d. Teste FCC Part
	0.07	00.0	0.00	40.0	0.0E	0.02	10.U	<u> </u>	-10.0	-70.05-	-30.0 adiate imit.

	-							 	c		A C		
1 MHz	[dBµV/m]		77							· · · · ·			Stop 18 GHz 58 Point 1001/068
Vid.Bw	RF.Att Unit			a ada a for for a	- - -								Sweep 40 ms EUT: AB Access Access Point Bott Chan. GPH/38797/JD01/068
													R AB ACC Ian. GP
1 MHz[imp]	550.00		-									×	Swee 40 m Bott Cr
Hes.BW	CF.Stp			Andrewski and an and	• • • •	••••							-30.0 Start Center 12.5 GHz 5.5 GHz 15.25 GHz Radiated. Tested by RFI for Adaptive Broadband Ltd. Limit. FCC Part 15.405 (b). Ax. 5.15-5.25GHz Band.
о. Б.б. 27	00° F			and a state of the									an GHz laptive B (. 5.15-5
Time 02				and and a									I for Ad (b) . By
ձոր՝գգ													ed by RF t 15.405
Date 22	Plate LVI 70.00 dB*												Start 12.5 GHz ted. Testu FCC Pari
		N.N/	60 D		0.00	40.0	0.06 0.06	0.02	10.0	$\rightarrow$	-10.0	-20.0	-30.0 Radiat Limit.

. Ş

:

F10PA ന 0 dB [dBµV/m] 1 MHZ Sweep 60 ms EUT: AB Access Access Point Bott Chan. 6PH/38797/JD01/069 1, Thread is Vid.Bw RF.Att Unit 1 MHz [imp] V 0ff 800.000 MHz F Hes.Bw TG.Lvl CF.Stp -30.0 Long Span Center 18 GHz B CHz 22 GHz 22 GHz Radiated. Tested by RFI for Adaptive Broadband Lt Limit. FCC Part 15.405 (b) . Ax. 5.15-5.25GHz Band > Date 22.Apr.'99 Time 03:00:26
Ref.Lv]
70.00 dB\* 60.0 -20.0 -10.0 70.0 50.0 40.0 30.0 20.0 10.0 $\circ$ 

●愛養愛を含むる かくかくない たいかんていたい あいしょうかい たいたい しょうしょう

							<u>m</u>	PA A	
1 MHz 0 dB [dBµV/m]	-10-								 Stop 26 GHz 35 Point 3001/070
Vid.Bw RF.Att Unit									Sweep 60 ms EUT: AB Access Access Point Top Chan. GPH/38797/JD01/070
							:		s AB Acci Tan. 6P
1 MHz[imp] 0ff 800.000 MHz									Swee 60 m FUT: CP: CP:
Res.Bw TG.Lvl CF.Stp			• • • •				· · · ·		-30.0 Start Span Center 18 GHz 8 GHz 22 GHz Radiated. Tested by RFI for Adaptive Broadband Ltd. Limit. FCC Part 15.405 (b). Rx. 5.15-5.25GHz Band.
3: 12: 33									an Hz aptive B . 15-5
Time 03:									Span 8 GHz (b) . Adap
Apr.'99 *									ed by RF t 15.405
Date 22.Apr.'99 Ref.Lv1 70.00 dB*									Start 18 GHz ed. Teste FCC Part
	N.V	0.00	20.0	40.0	90.0£	10.U		-10.0	 -30.0 Radiato Limit.

,

PA 110  $\hat{\sigma}$ 1 MHz 0 dB [dBµV/m] Sweep 60 ms EUT: AB Access Access Point Bott Chan. GPH/38797/JD01/071 1 MHz[imp] Vid.Bw off 800.000 MHz RF.Att RF.Att Unit -30.0 Start Span Center 18 GHz 8 GHz 22 GHz 22 GHz Radiated. Tested by RFI for Adaptive Broadband Ltd. Limit. FCC Part 15.405 (b). Rx. 5.25-5.35GHz Band. Res.Bw TG.Lvl CF.Stp Pef.Lvl 70.00 dB\* -10.0 -20.0 70.01 30.0 50.0 40.0 20.0 10.00

■ 製造器はないというである あって 他にいい しょうしょう しょう いたい たんぽい いたり 森良い あ

わたり きょうさい 白田 あいたい さいたい たいざい

						c	רי	PA DA		
1 MHz 0 dB [dB,uV/m]	- Alle									Stop 26 GHz 59 Point JD01/072
Vid.Bw RF.Att Unit	- A - I - A - I - A - I - A - A - A - A						: : : :			Sweep 60 ms EUT: AB Access Access Point Top Chan. 6PH/38797/JD01/072
										ep IS AB Acc Nan. GP
1 MHz[imp] 0ff 800.000 MHz										Swee EUT: Top CI
Hes.Bw TG.Lvl CF.Stp					• • •					z Center z 22 GHz ptive Broadband Ltd. 5.25-5.35GHz Band.
1: 25: 51										an Hz laptive E 5.25-5
Time 03:										Span 8 GHz (b) . Adap
Apr.'99 *										ed by RF t 15.405
Date 22.Apr.'99 Ref.Lv1 70.00 dB*										-30.0 Start Spar 18 GHz 8 GH Radiated. Tested by AFI for Ada Limit. FCC Part 15.405(b). Ax.
	/0.0	0.00	40.0	0.0£	20.0	10.0		-10.0	-20.0	-30.0 Radiate Limit.

. . . -


:

したため、そうながったがない。 名言になったが、「おいた」が、「ない」では、「おいた」がないが、「ない」が、「おいた」、 おいたい、 はいかいがい たいかい マイ・マ


NATIONAL STREET

								PA 40	
1 MHz 0 dB [dB,UV/m]						· · · · · · · · · · · · · · · · · · ·			26 GHz 26 GHz 30 20 1073
Vid.Bw RF.Att Unit									ccess Acce PH/38797/
1 MHz[imp] 0ff 800.000 MHz	and the second second			-					Sweep 60 ms EUT: AB Access Access Point Bott Chan. 6PH/38797/JD01/073
Res.Bw TG.Lv1 CF.Stp									 Center 22 GHz roadband Ltd. 5.825GHz Band.
03: 30: 46									Span 8 GHz Adaptive B Ax. 5.725-
99 Time 03:									RFI for A
<pre>&gt; Date 22.Apr.'99 Ref.Lv1 70.00 dB*</pre>	- 4								-30.0 Start Cente 18 GHz 8 GHz 22 GH Radiated. Tested by RFI for Adaptive Broadband Limit. FCC Part 15.405 (b). Ax. 5.725-5.825GHz
Po Port		0.00	20.0	40.0	0.05	0.02	10.0	 -10.0	 -30.0 <u>Start</u> 18 GHz Radiated. Test Limit. FCC Par

■ 曹操遭曹操的人 人名法 化合成化合成合成化合成合成化合成化合成合成合成 化合成化合成化合成化合成化合成化合成化合成化合成化合成合成

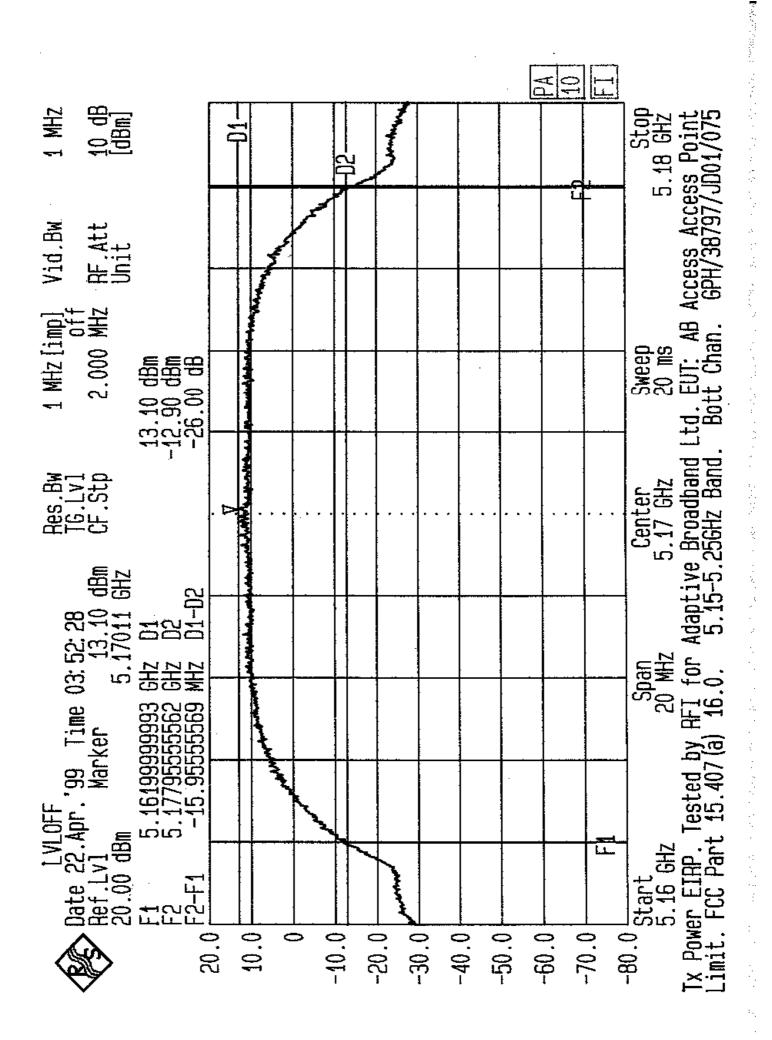



.

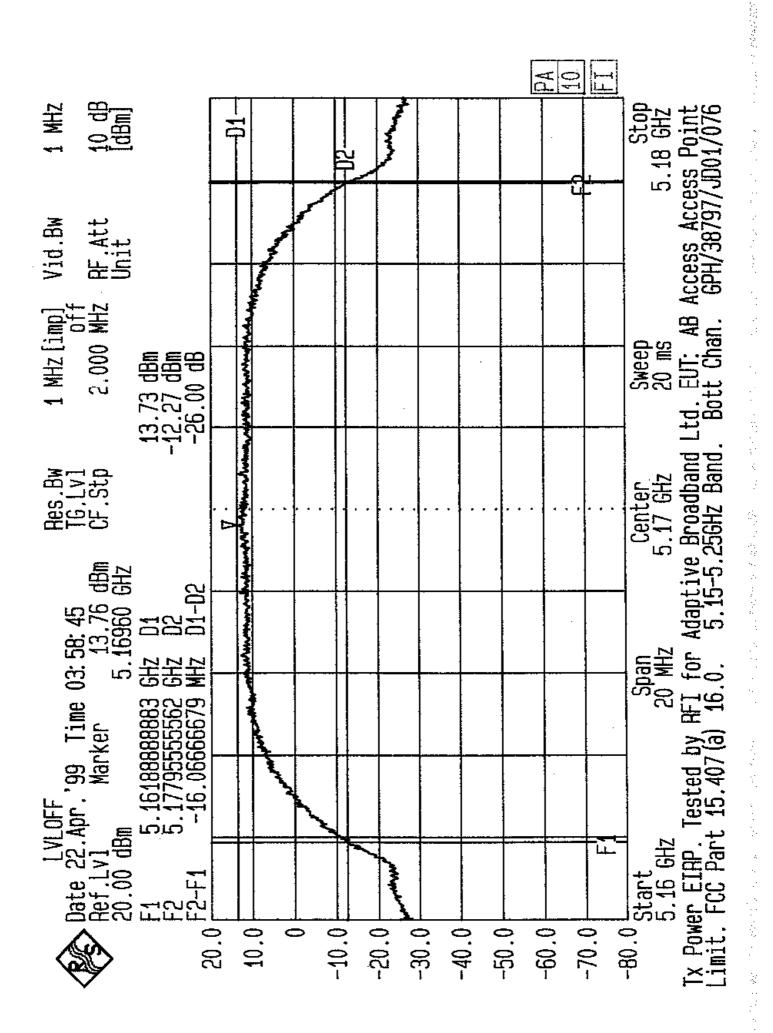


.

.

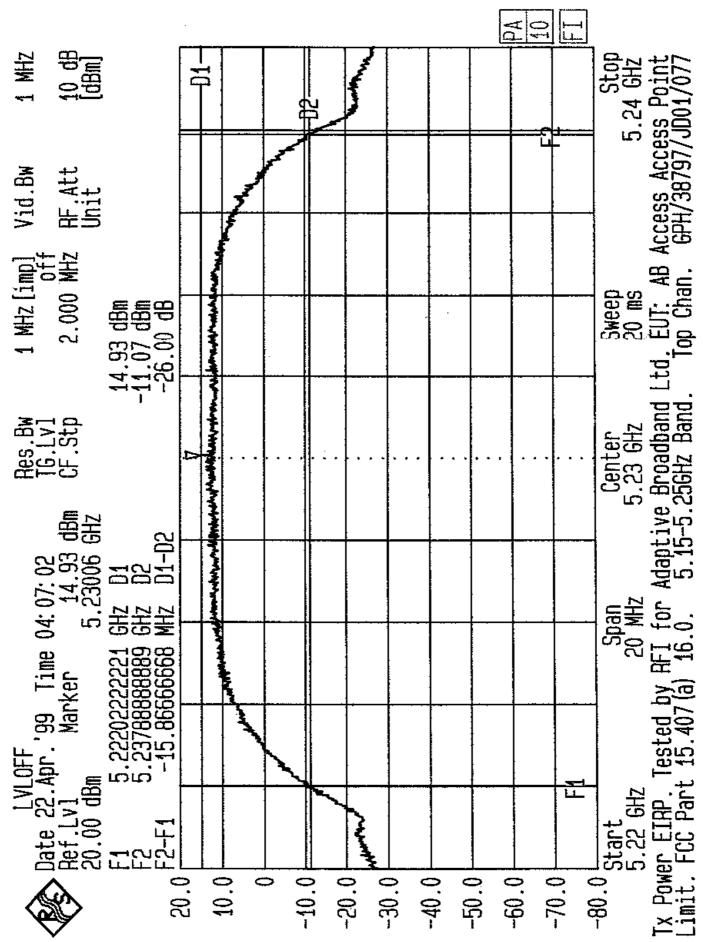


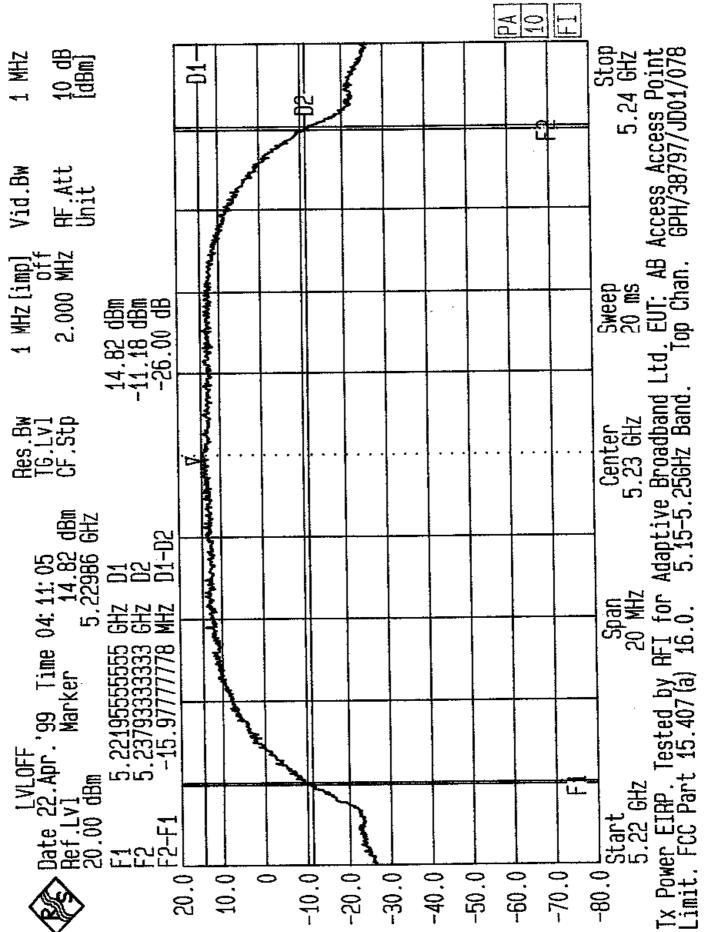

これはいいでは、そうに、私たちない、アフロントがいたができたね。 という 

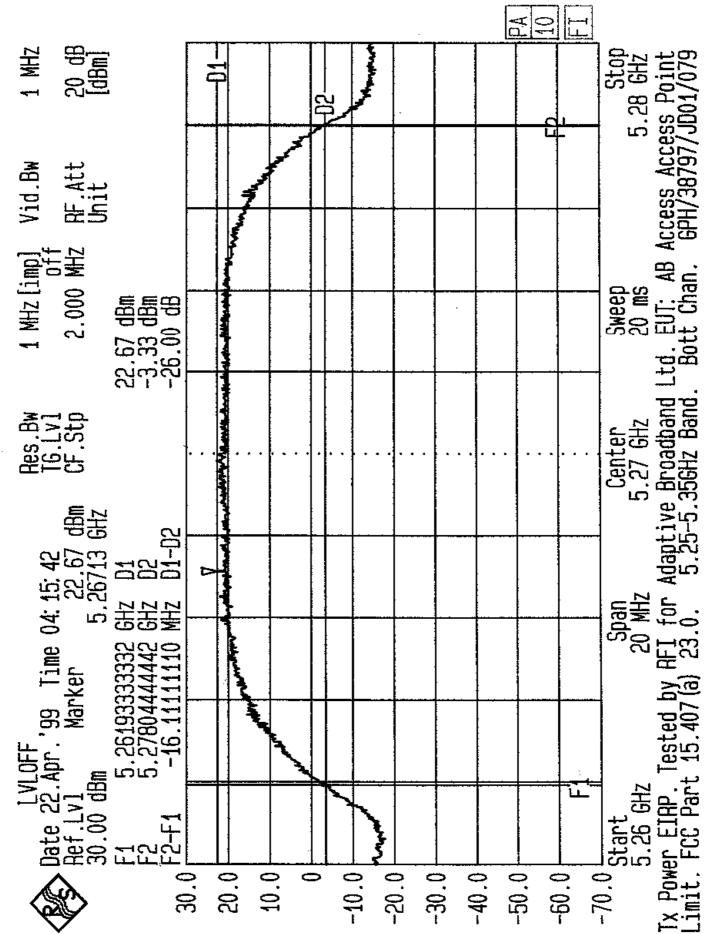


「おいった」のないでは、「ない」「といわた」であり、

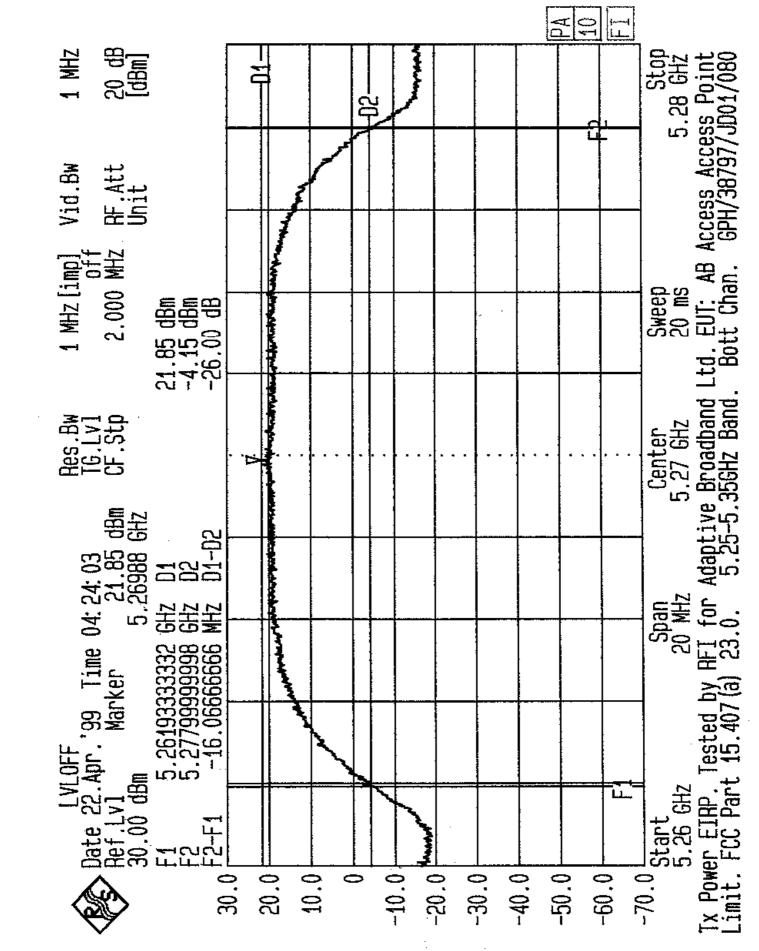



おお しったい さいえいい しいえい アンドライタ 言語化 いっかい たたい 気 解放 かいたい アン


一般になった。 とうにん ふたている 1. 1. 1. 1. 

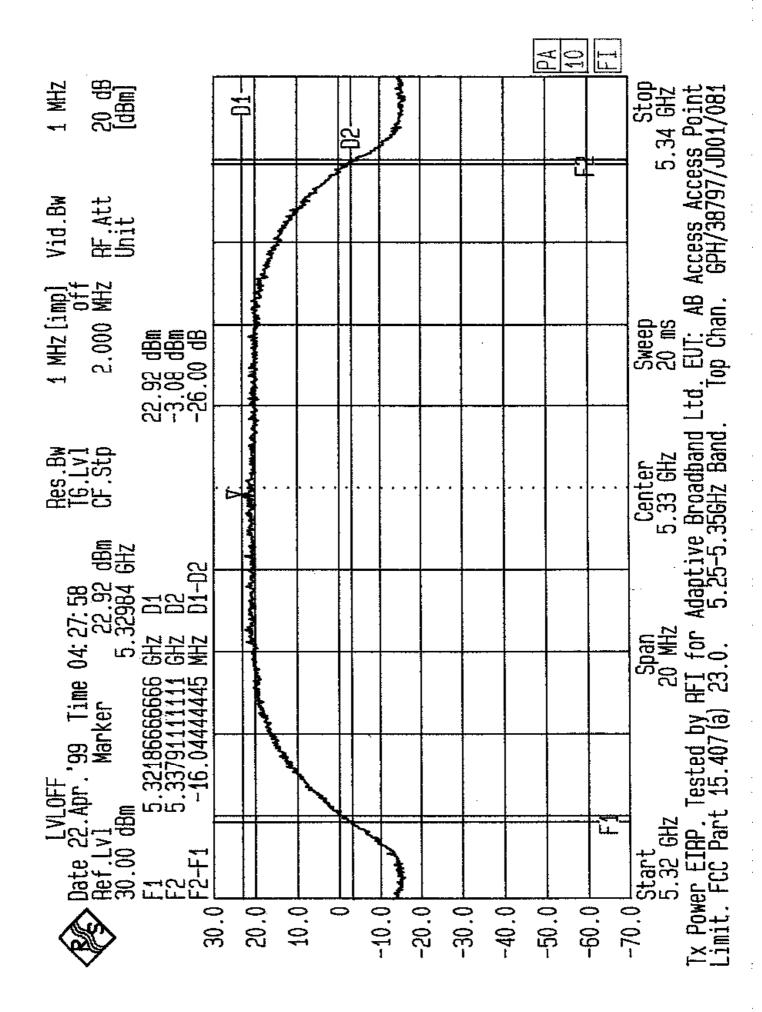

医乳糖酶酶 化乙基苯基苯基苯基苯基苯基 法选择的法法 人名法法法 人名

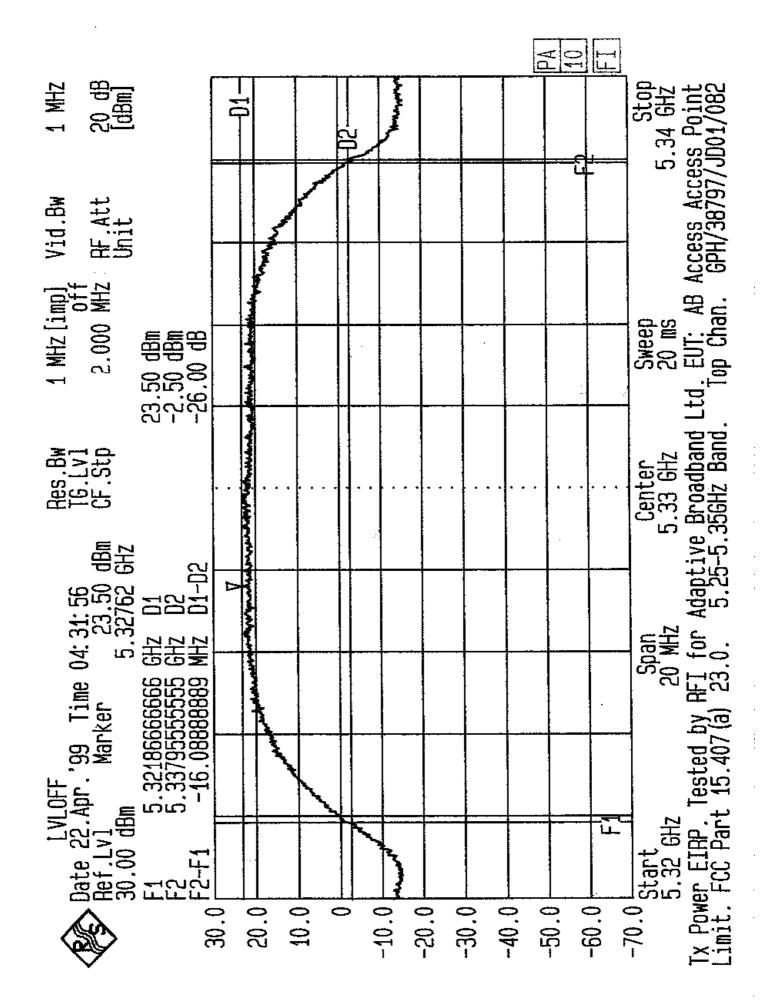


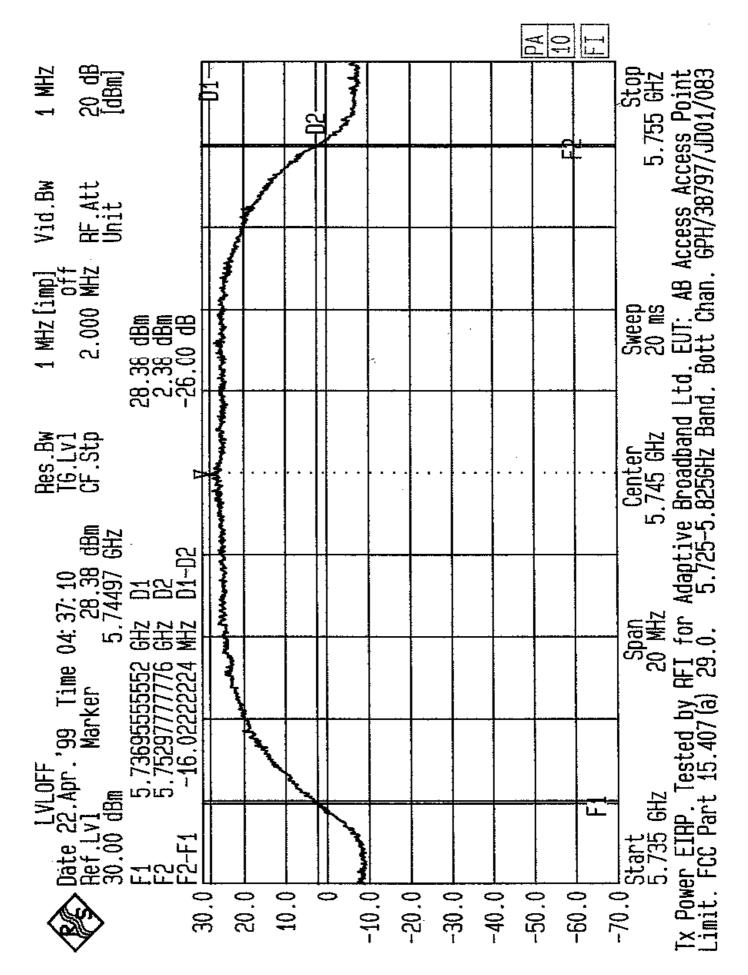


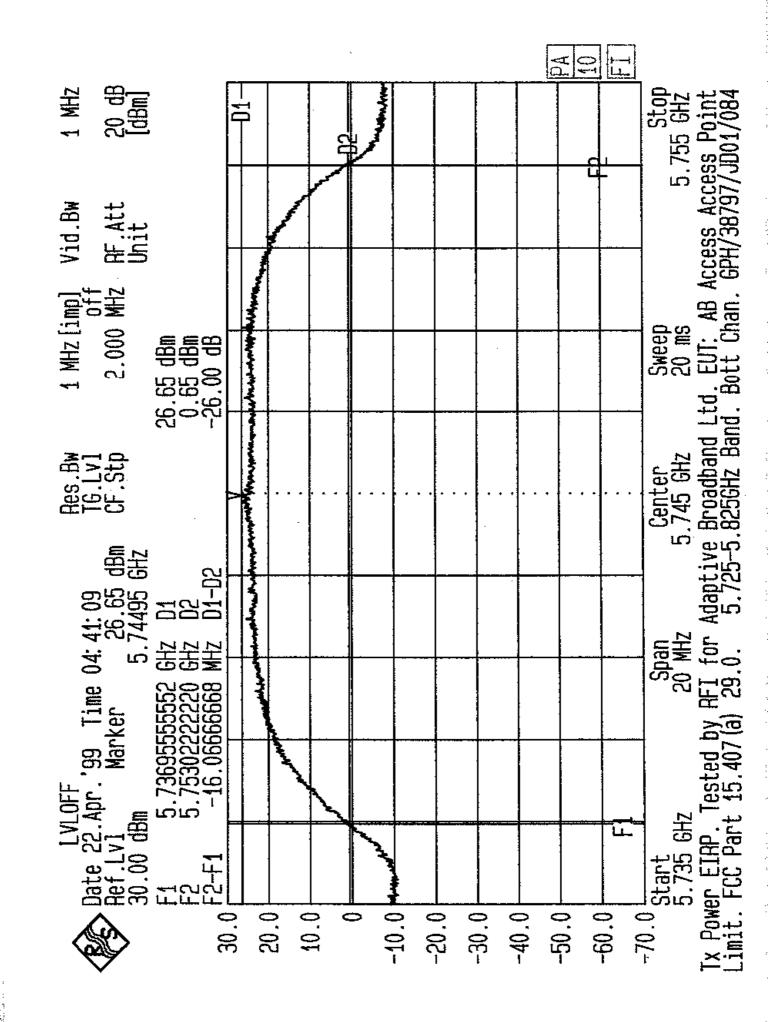

: :: 201 202


a such that the second were a place of the such as the second field of the second second field when a second

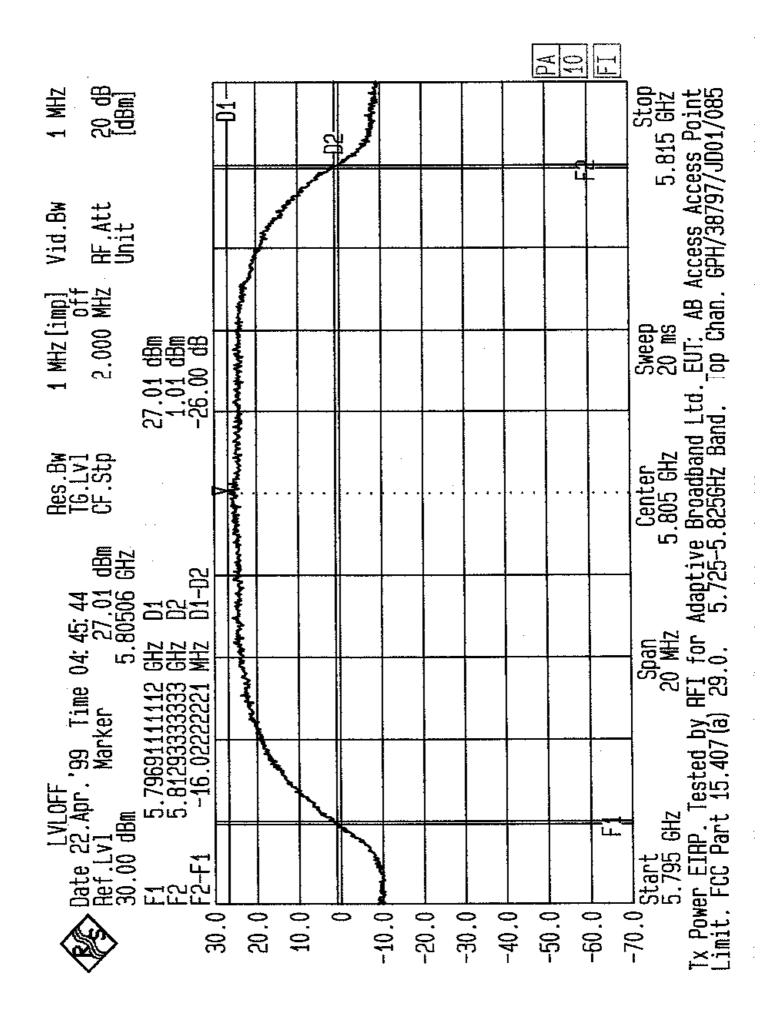


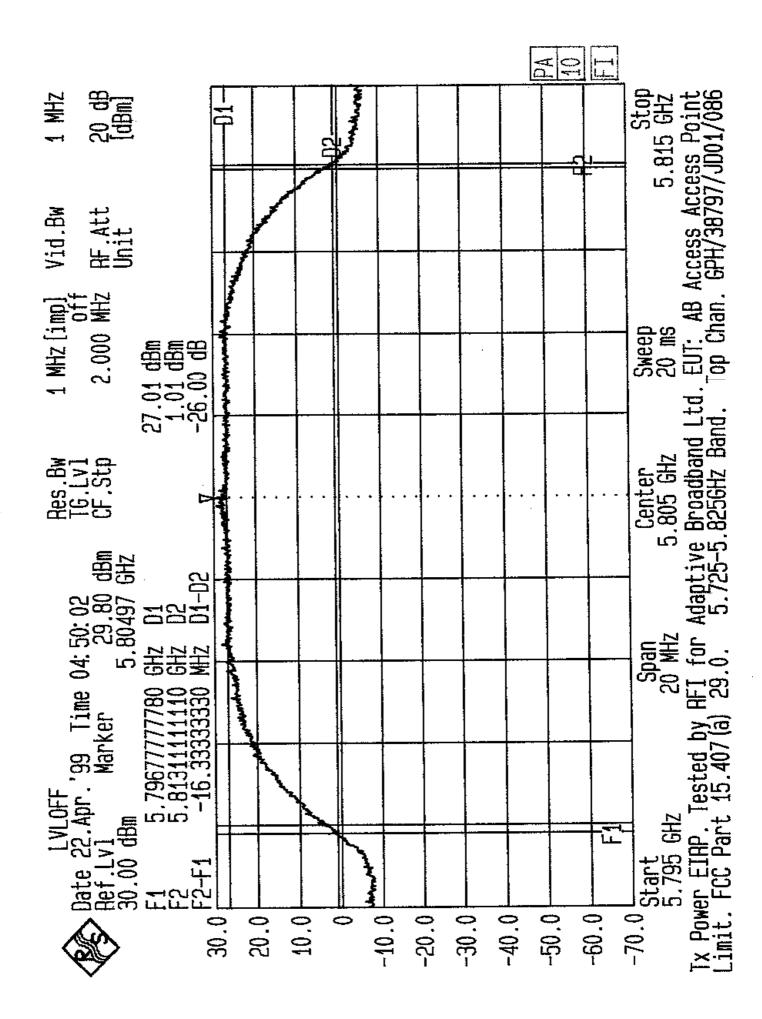

цар Çала


机发动器 化过去分词 法未知法 化过程分词 法财产 医无口腔 网络拉拉斯 化乙酸丁酯林林林

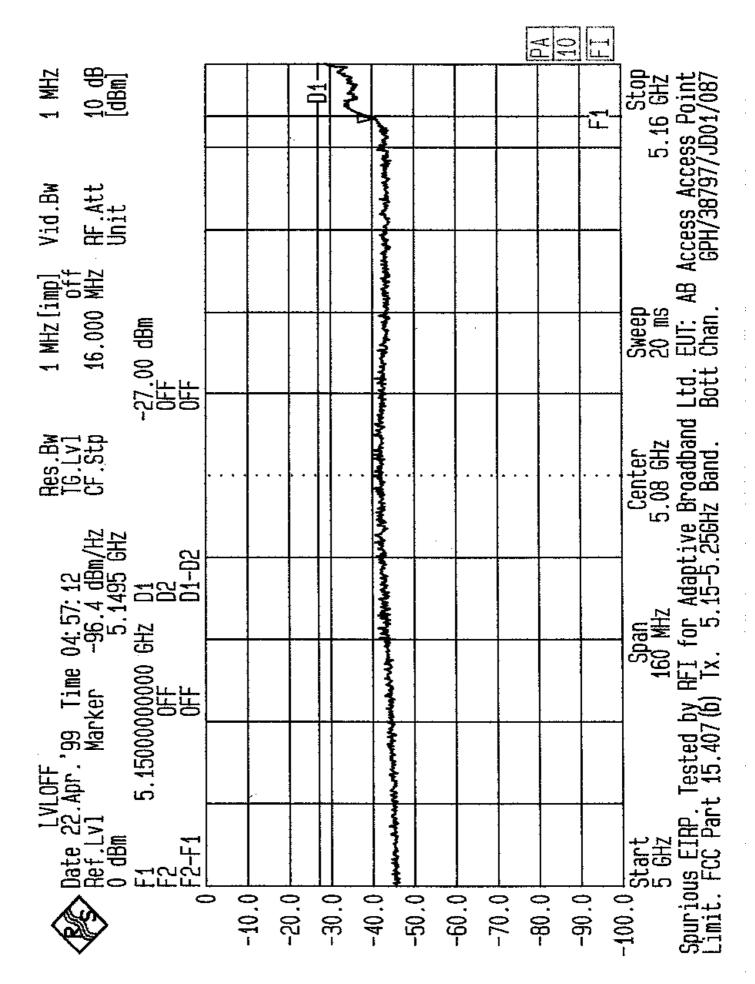

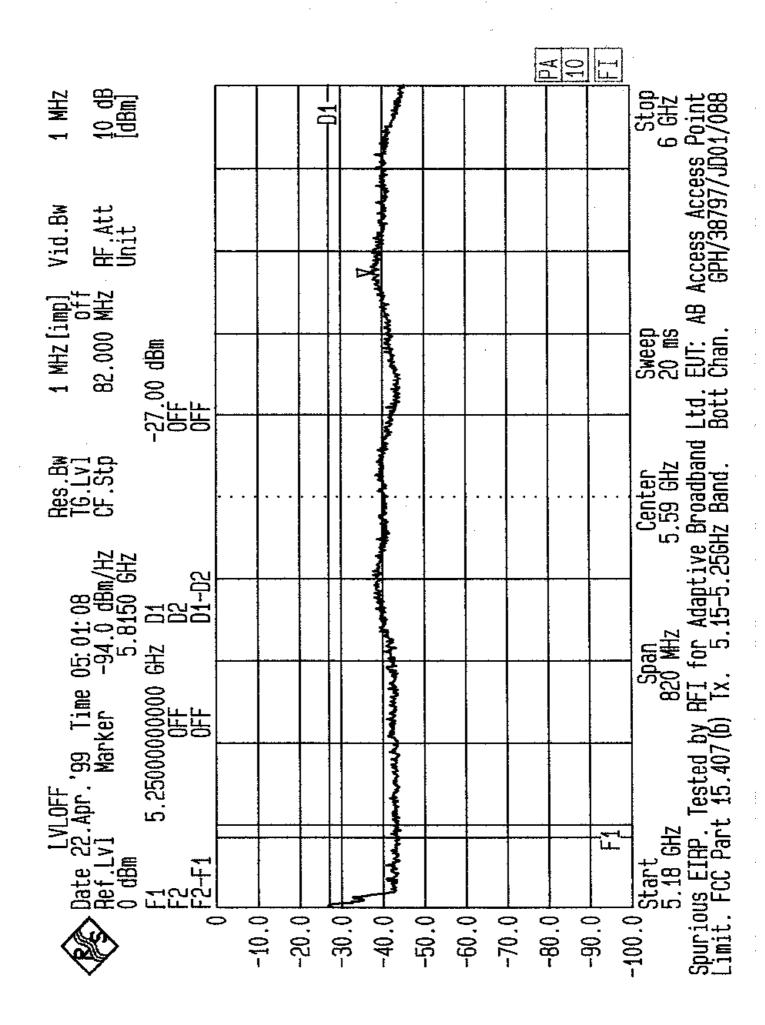



Eastern and a state of the second state of the


나 가지 않는 것을 보았다

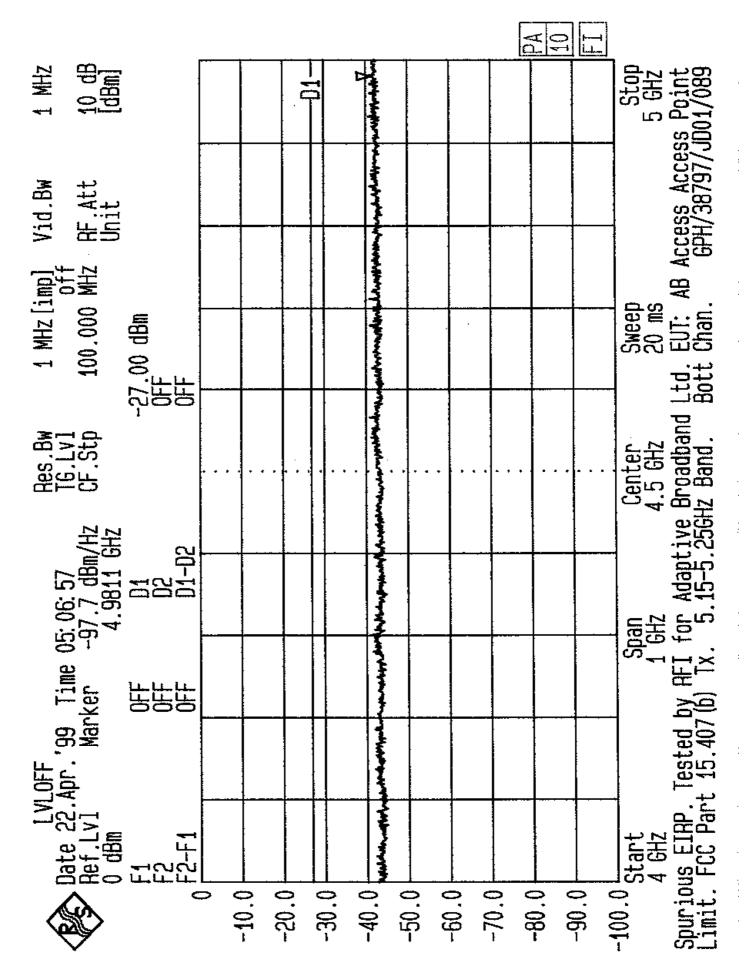


1.11

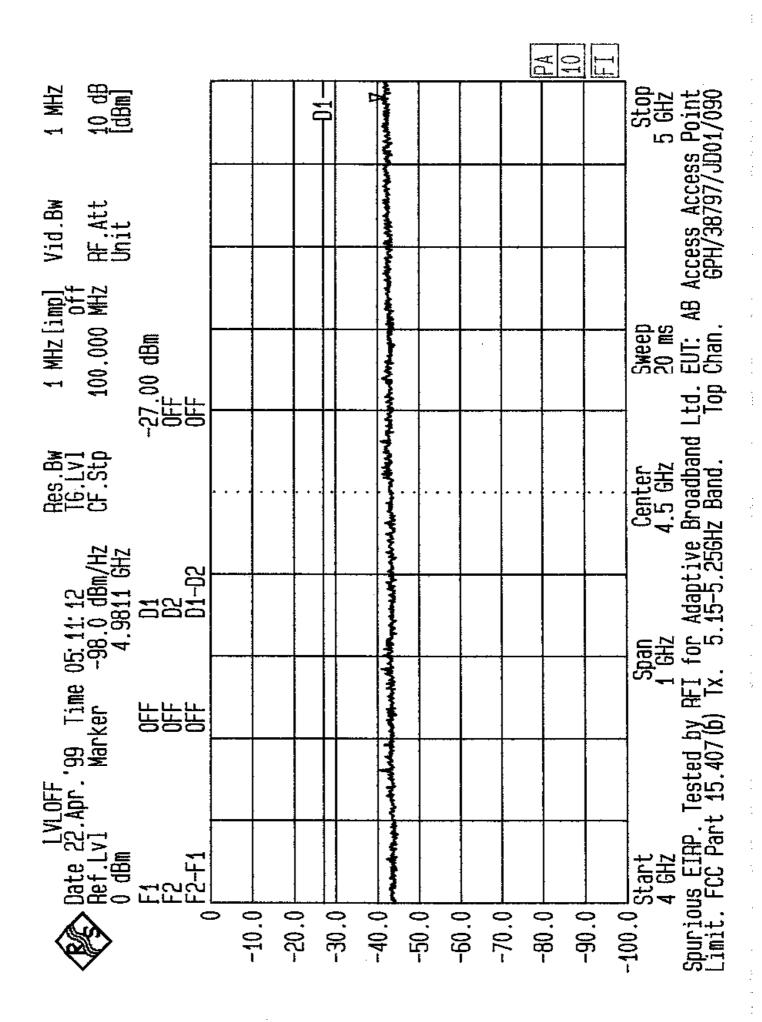

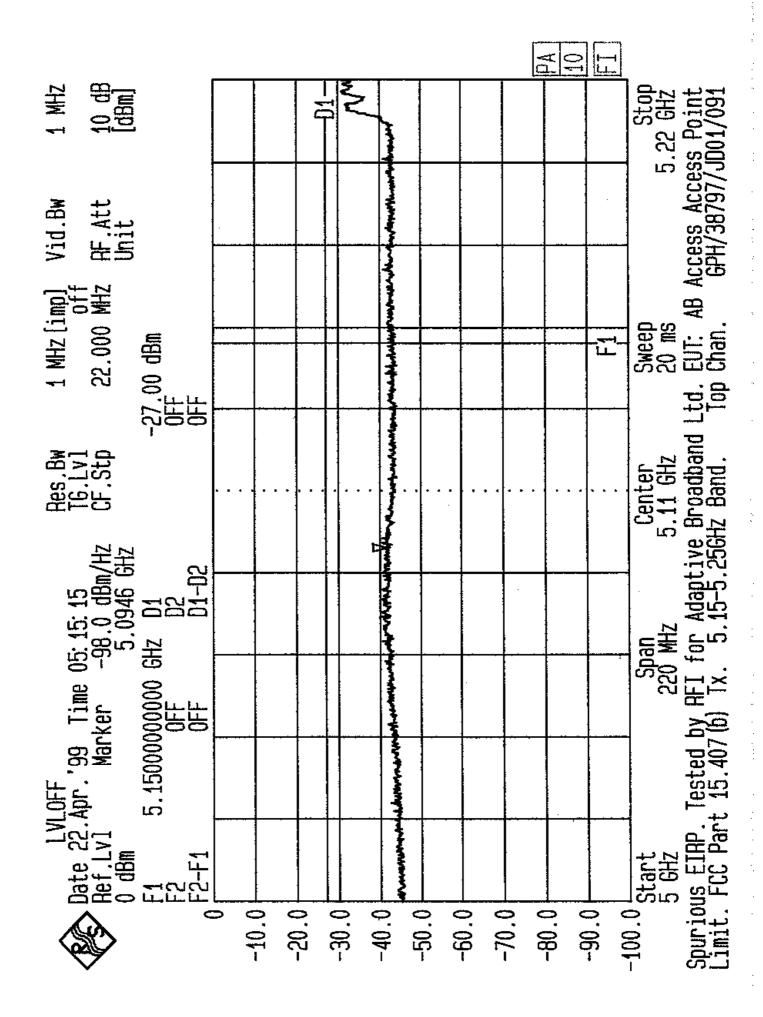


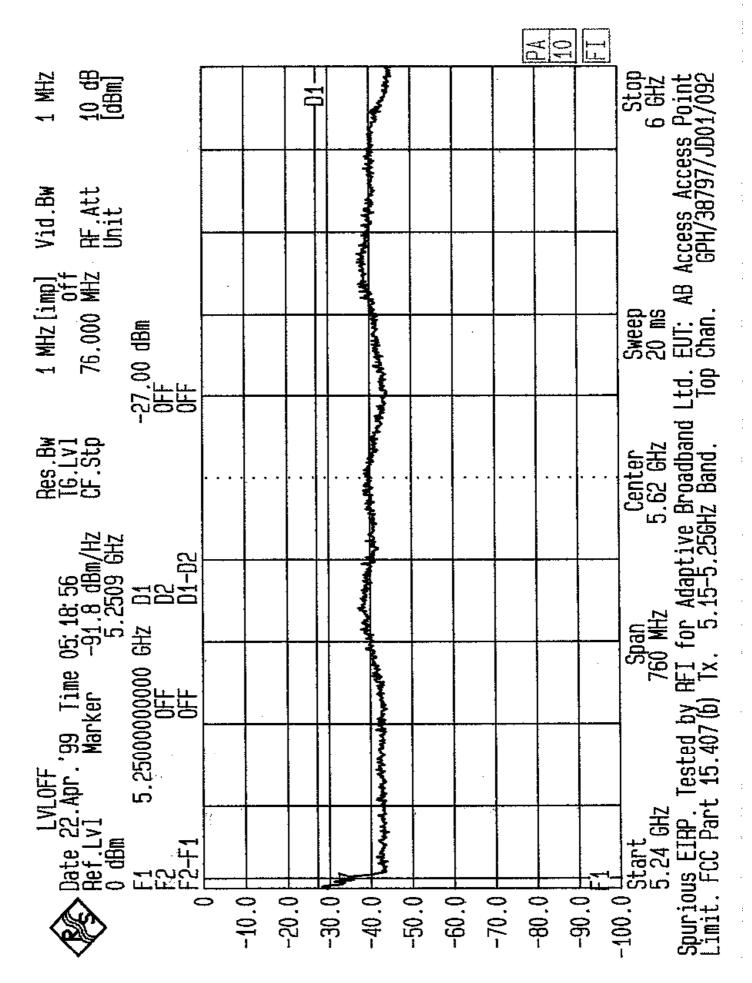

and the state of the second second states and the states and the second second second second second second seco

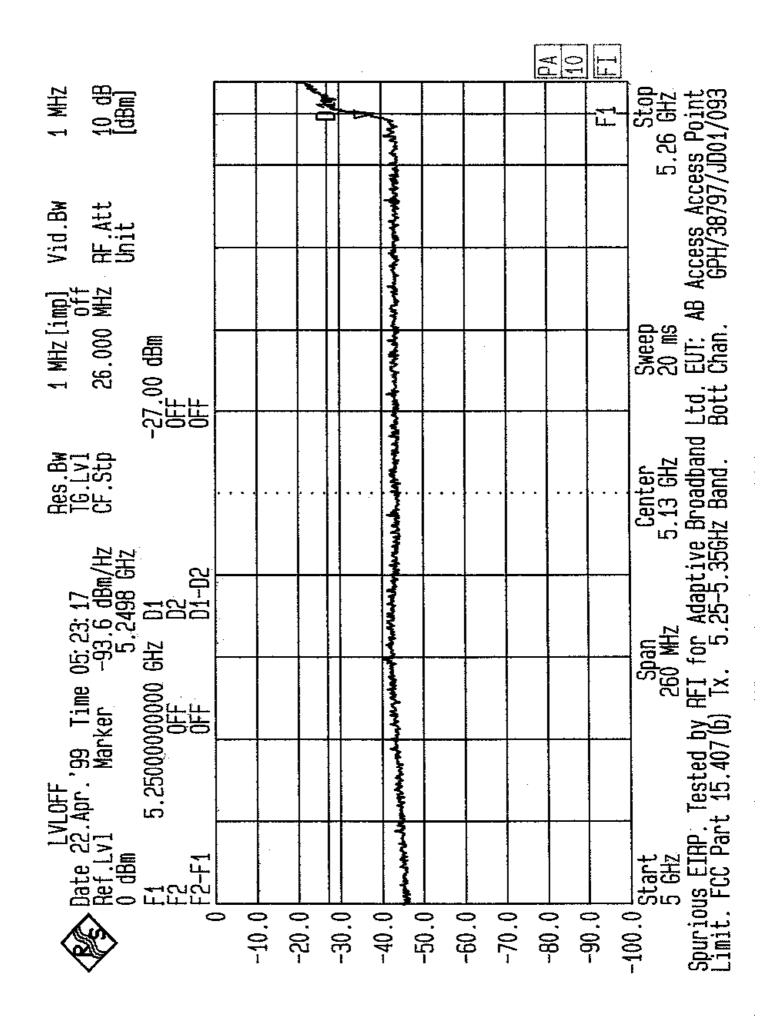



en andere alle alle en en en el alle alle en el el alle el alle

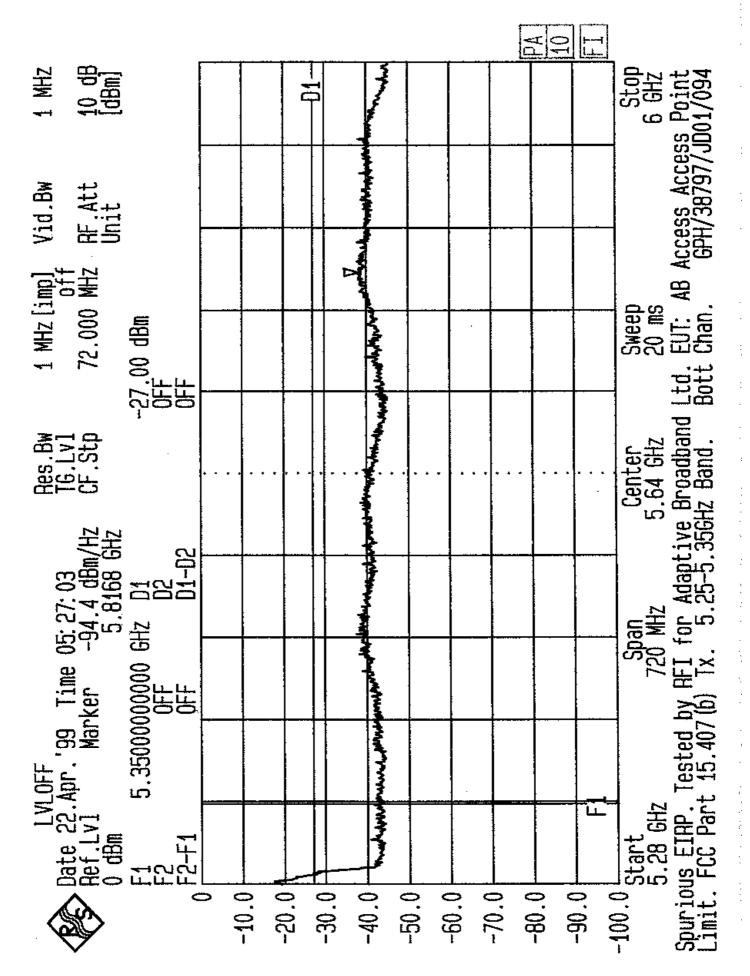


ali ka sana a sin

-2

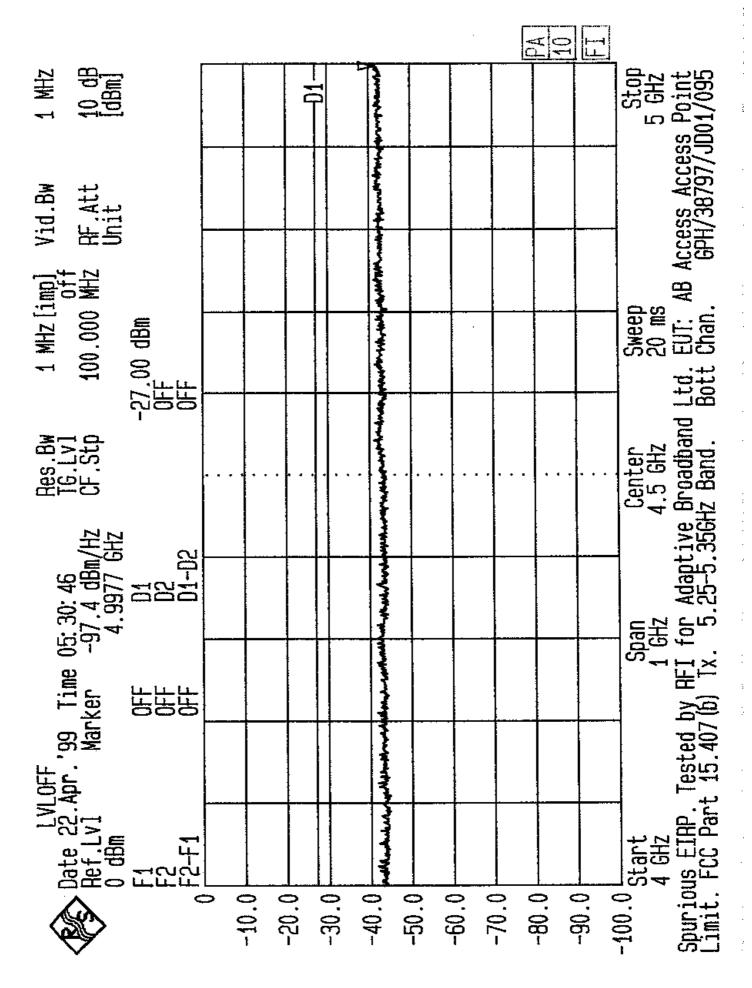


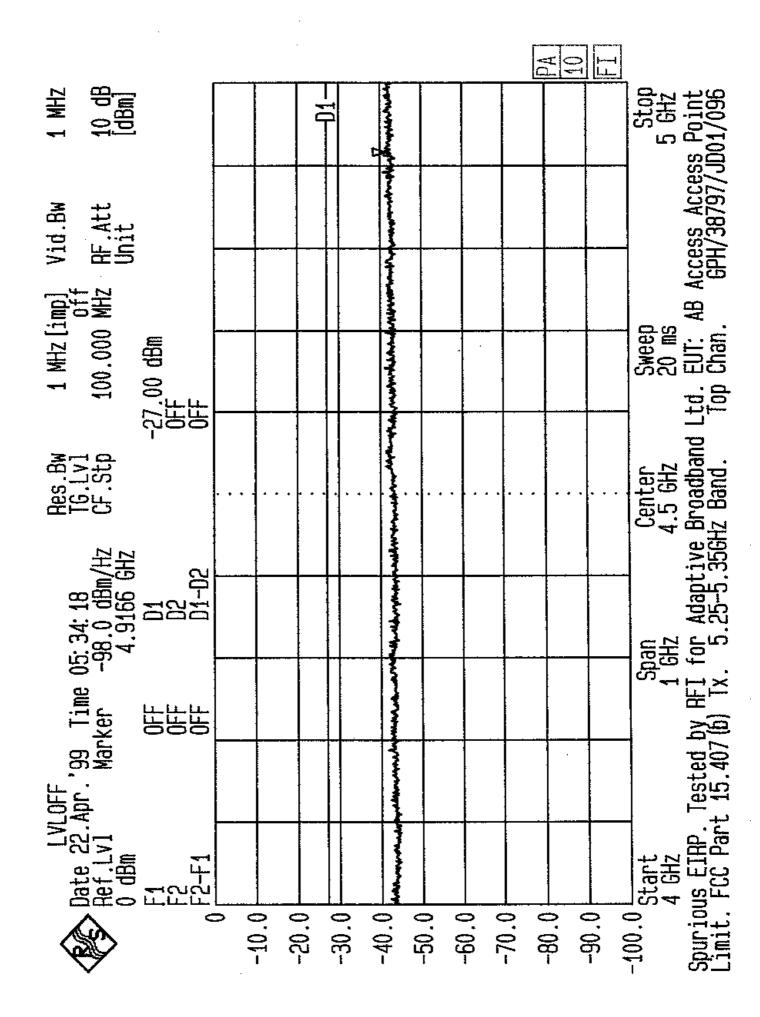


人名英格兰姓氏 化学校 化化学校 法公司公共法律 网络拉马克 法法法法 计自己分析 化合金

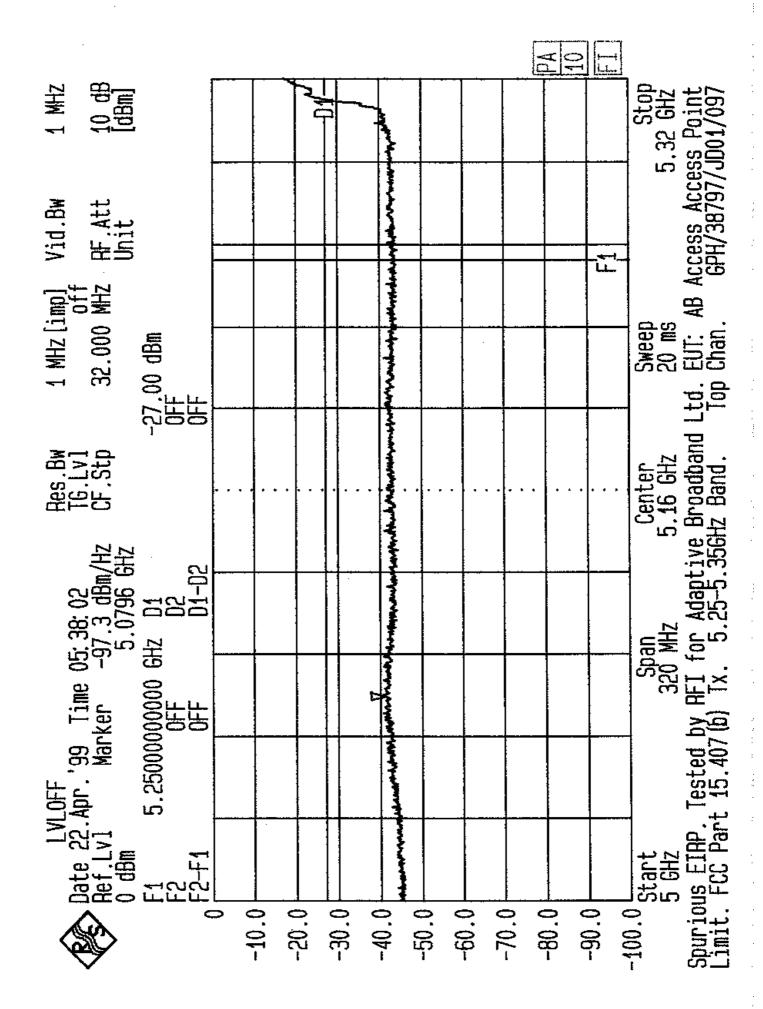


yan alaya dahari kara karakariyi kara waxa kara di tini dalah dahari karakar karakar da dalayi tini

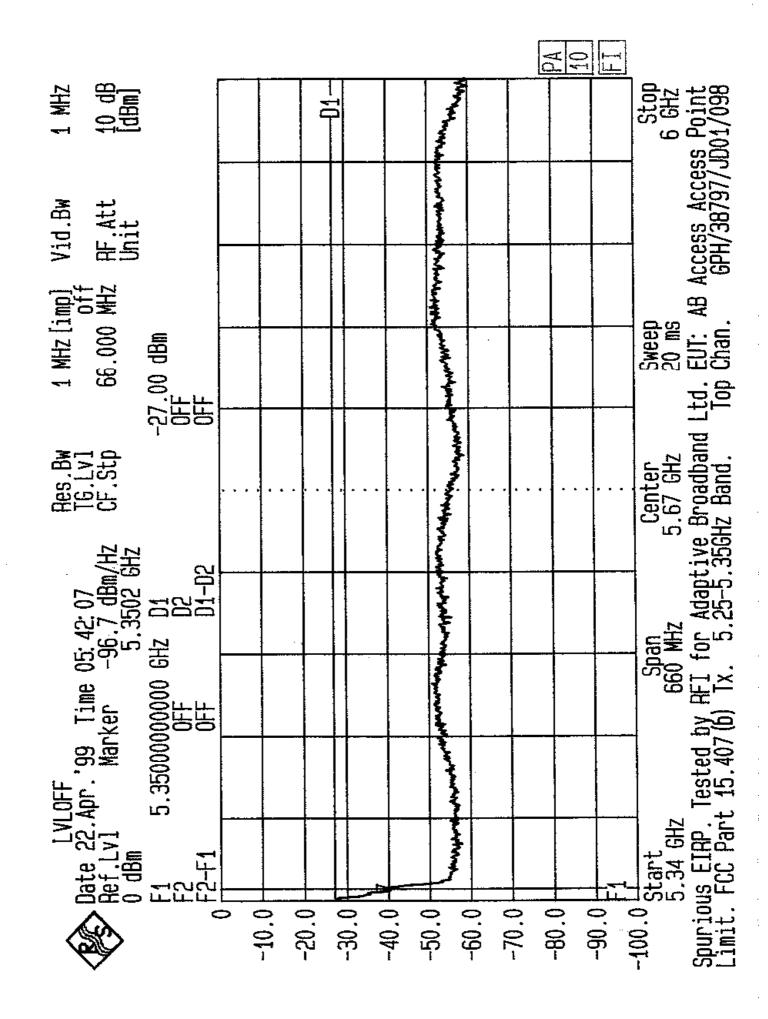


繁荣之后,这些人是要的最新做新的问题。 计可可读 化拉利曼二乙酸 化乙基乙酸乙二乙二乙基乙酸乙二乙二乙基

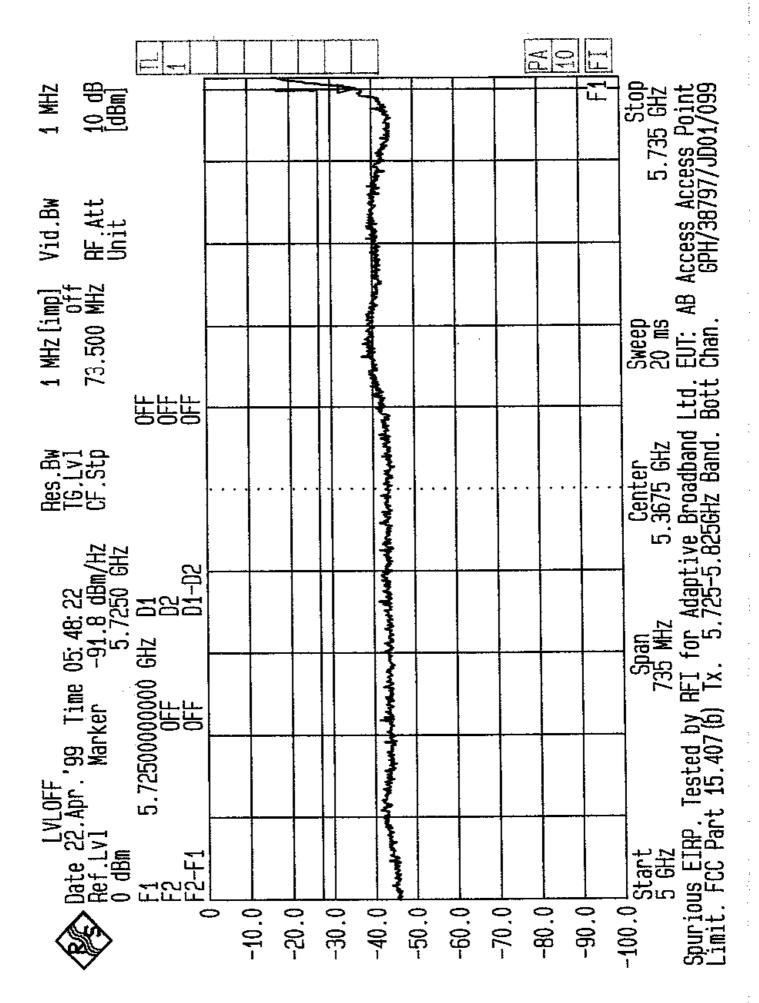


教育 マキシア しょうしんか ううかん うらか うちゃく ショント 前部 職員 かいしんかくひょう からう

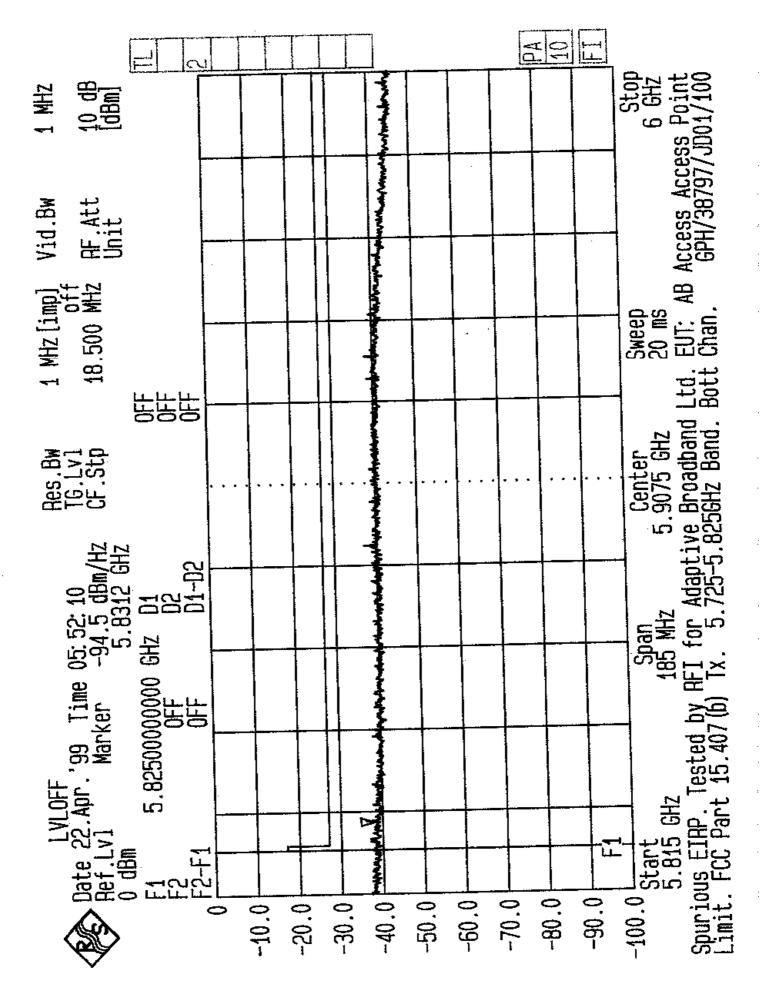


「「「「「「「」」」

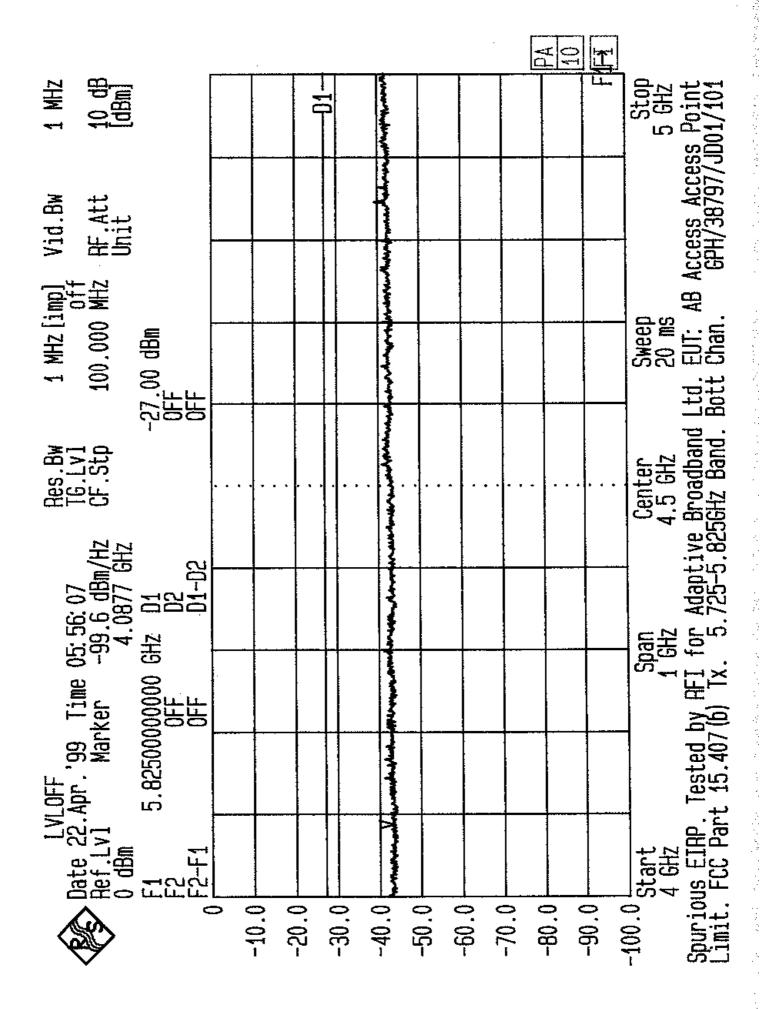

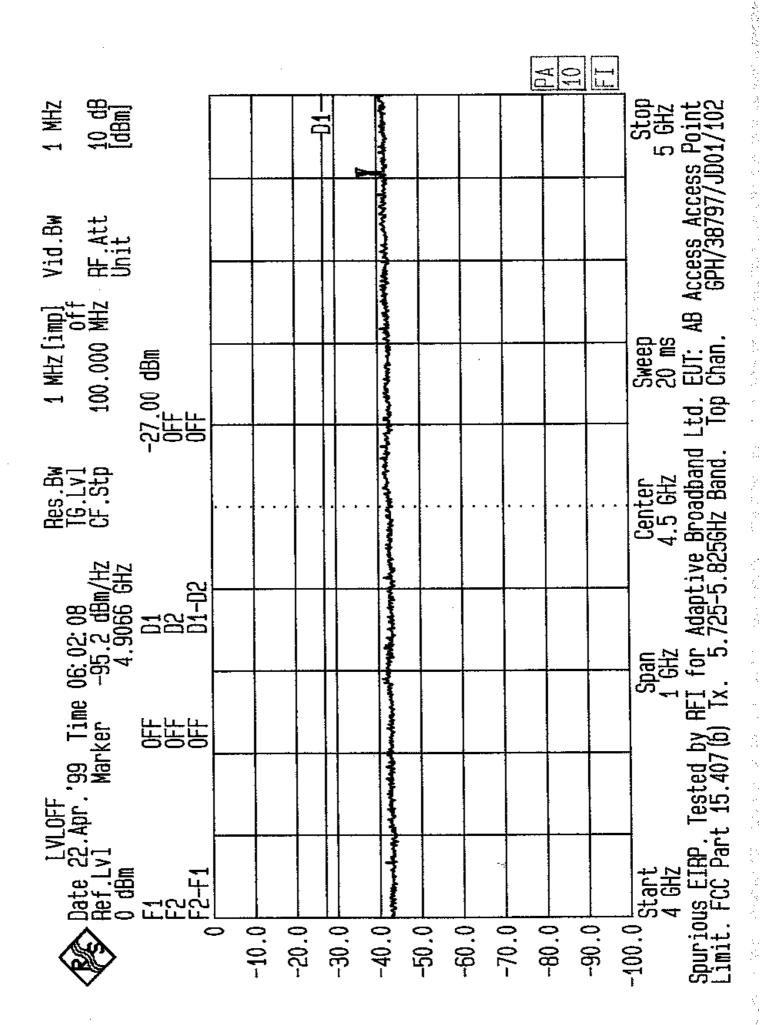


Not state of the second second


Test and the second seco

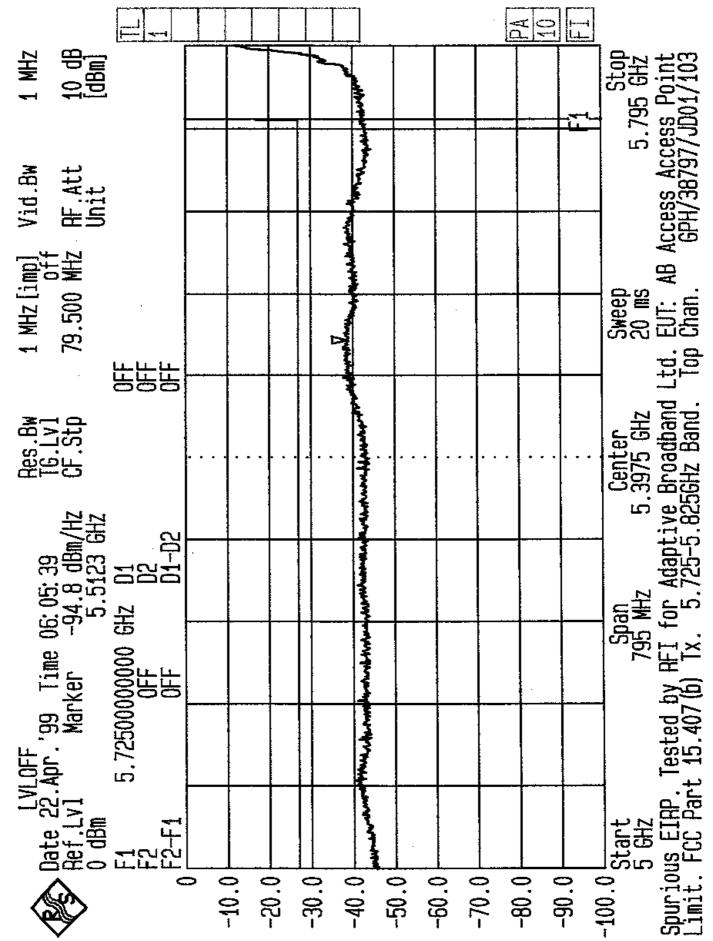


「新学校を行いた」となった。

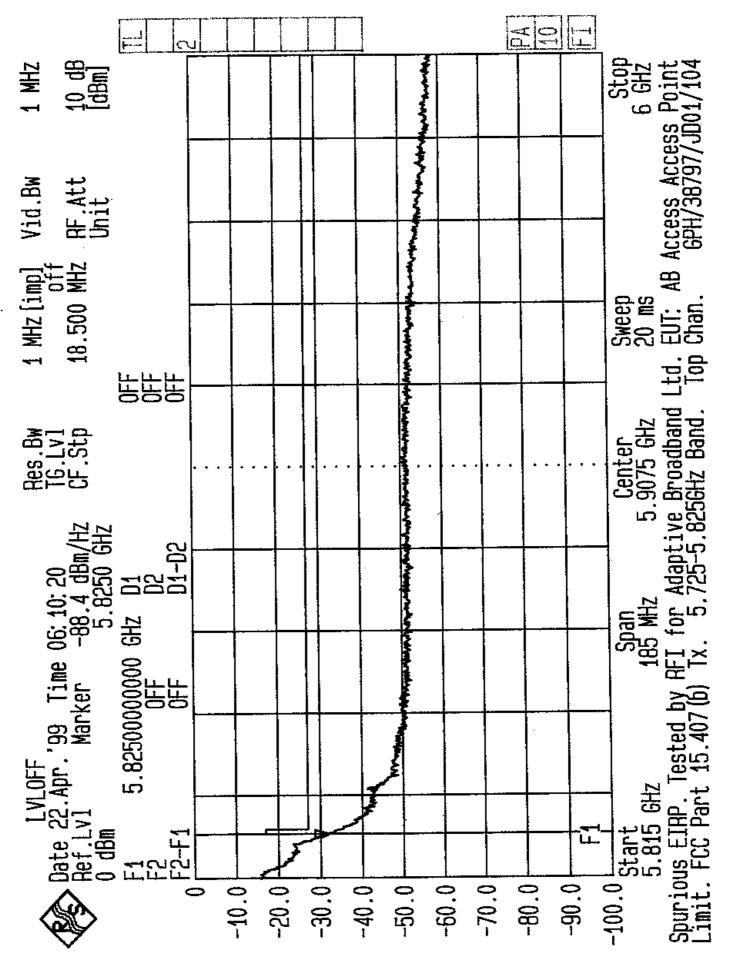

-1 14

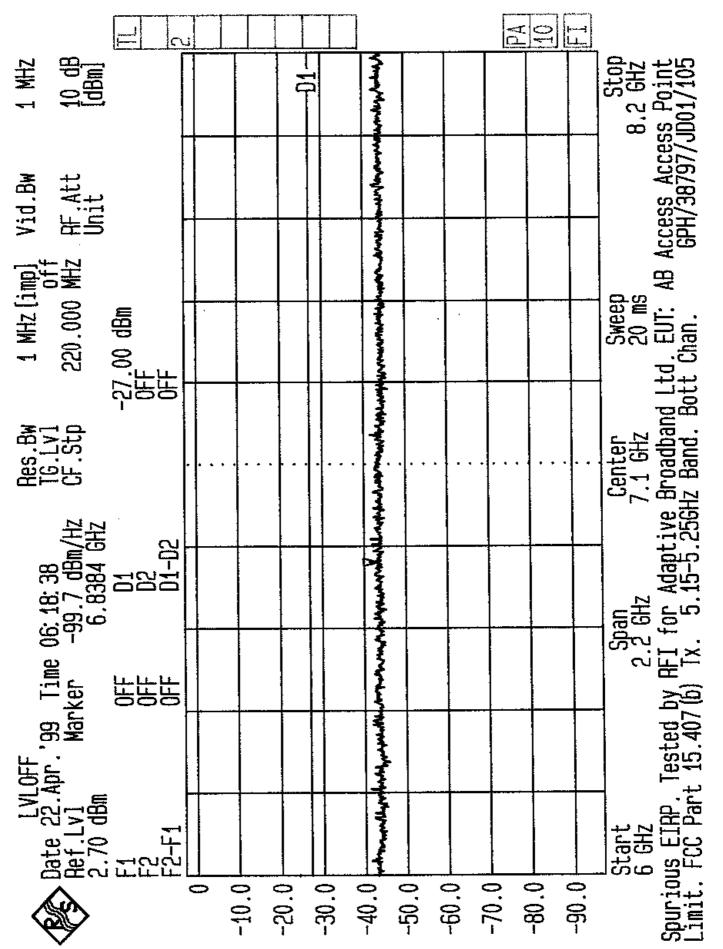


うたいがい アイ・バックまどう 

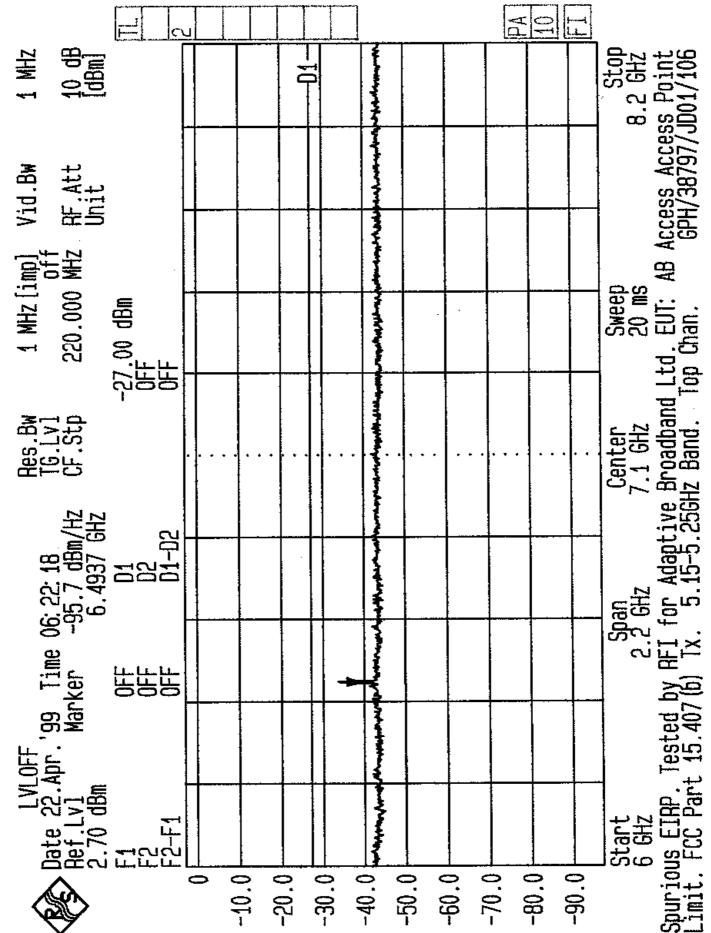

如此,是"是是不是你的,你看着你的是不不能是你的,你不能不能不能,你要把你们不是不能的。""你不是你的?"他的话,就是你不能能


「変要語言の」 せいじょう ちゅうせい たいぼうちょう アンド・ディー・ディング ふくいちょう

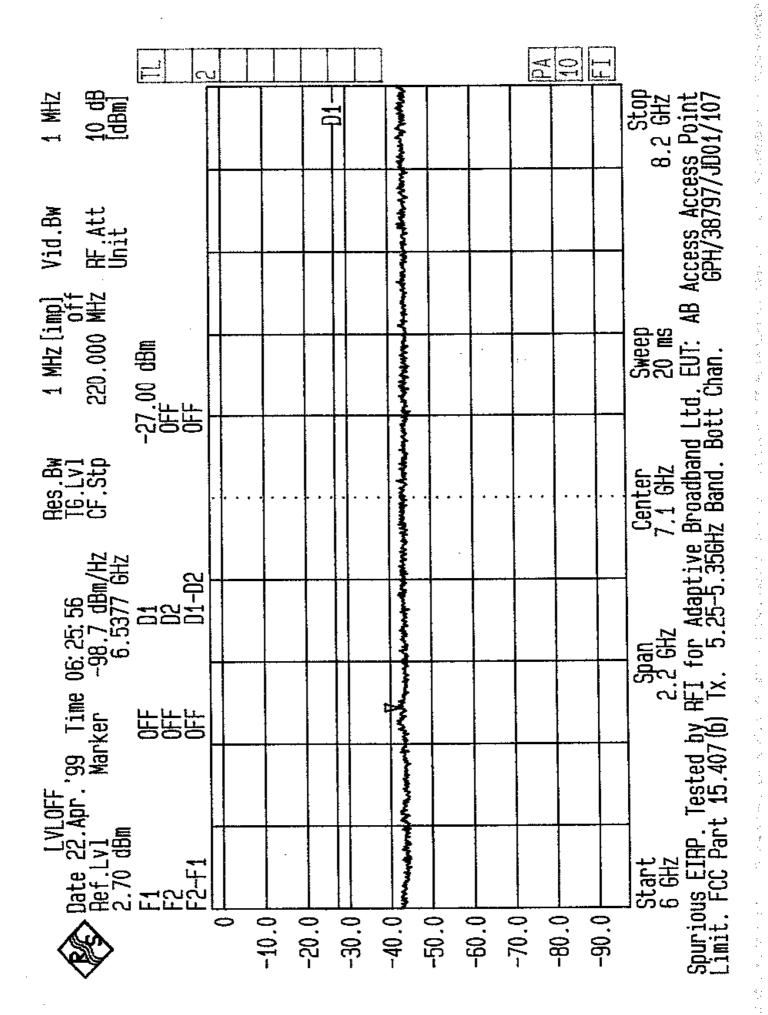


•

e de la companya de l

· . · · · ·

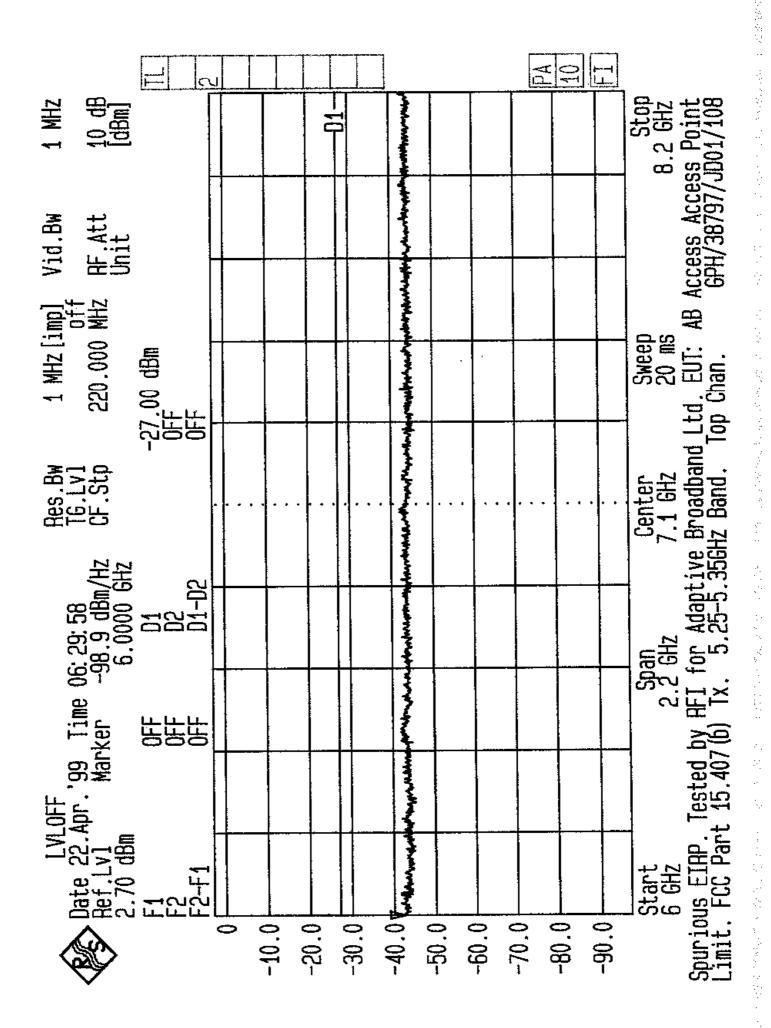



1.000

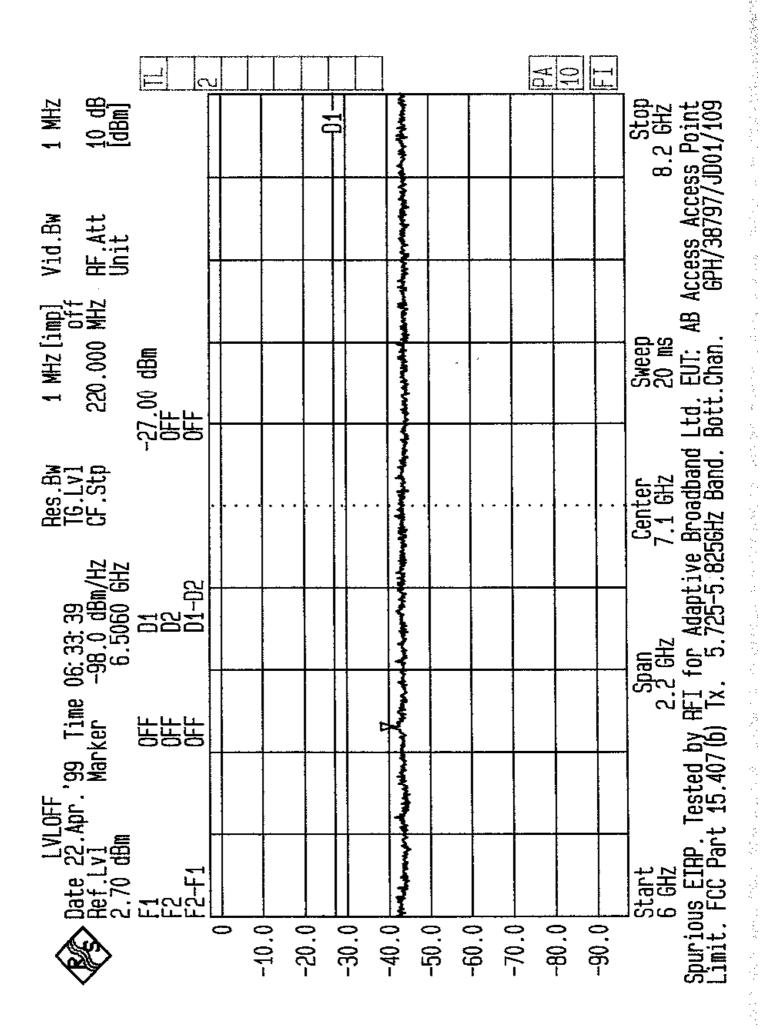


, so secondaria.


and the second second

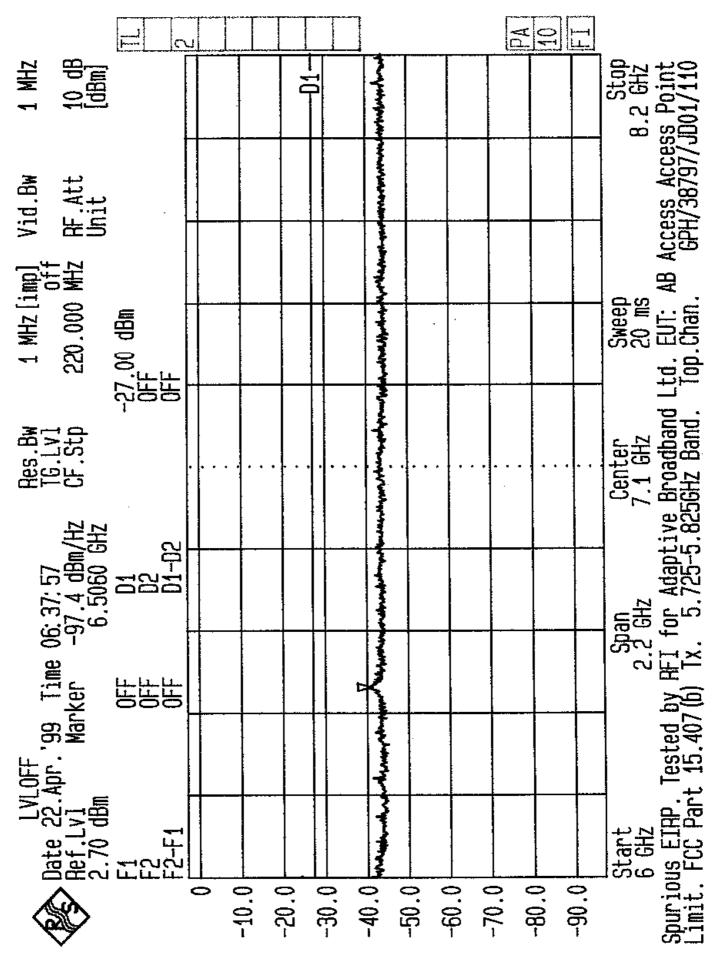


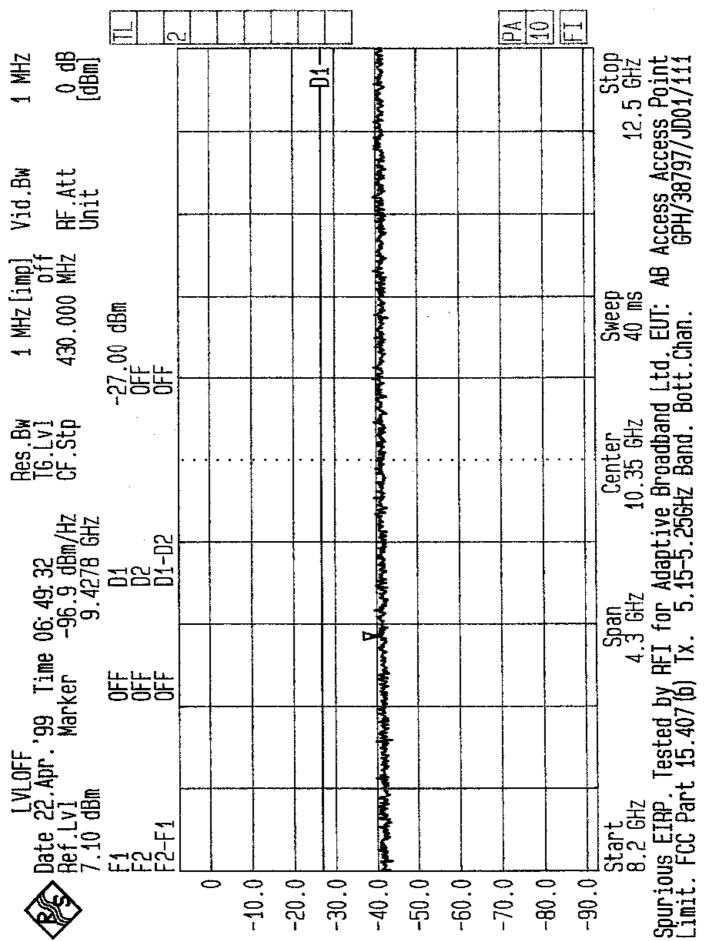

The A. S. M. M. W. 

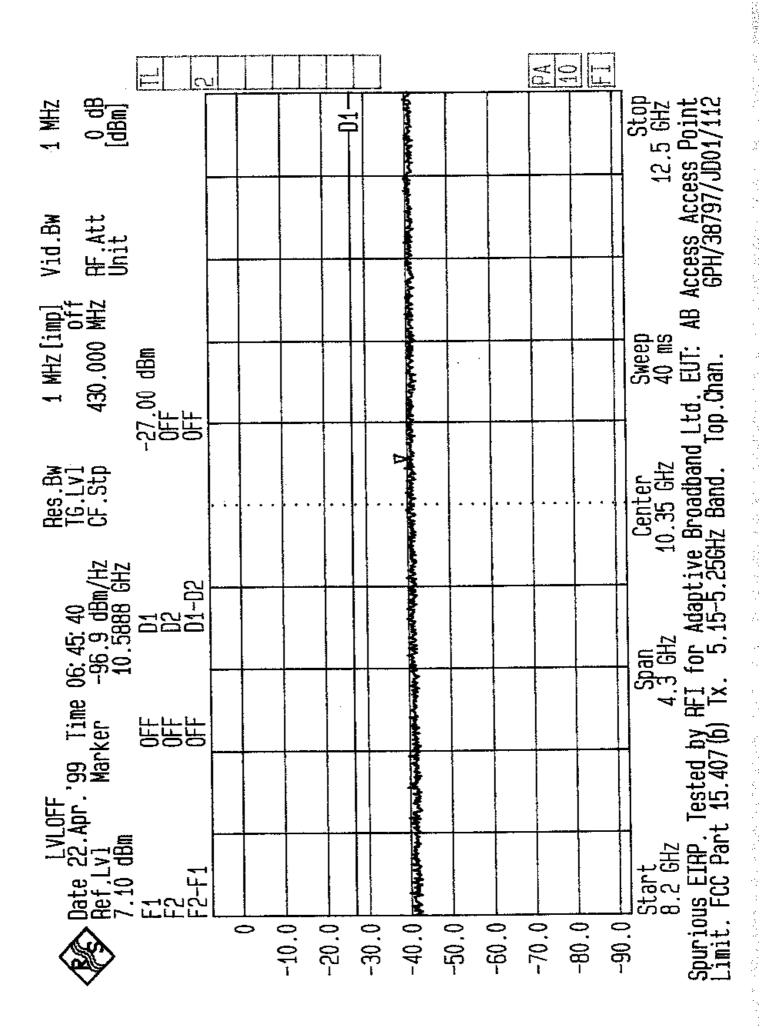

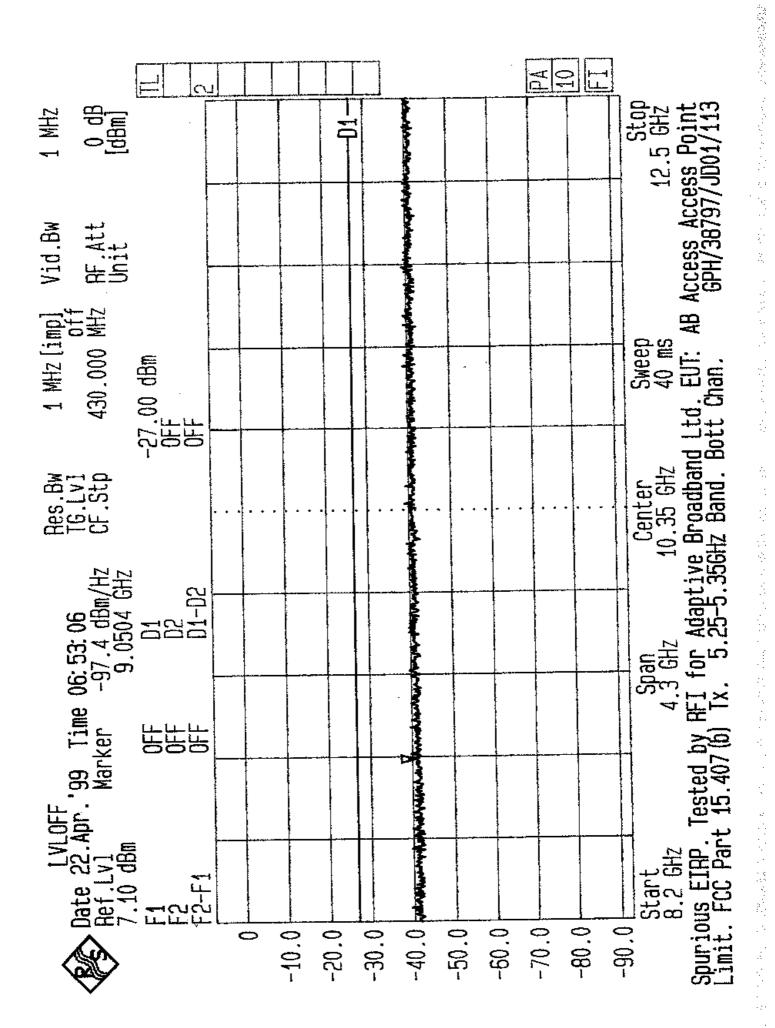


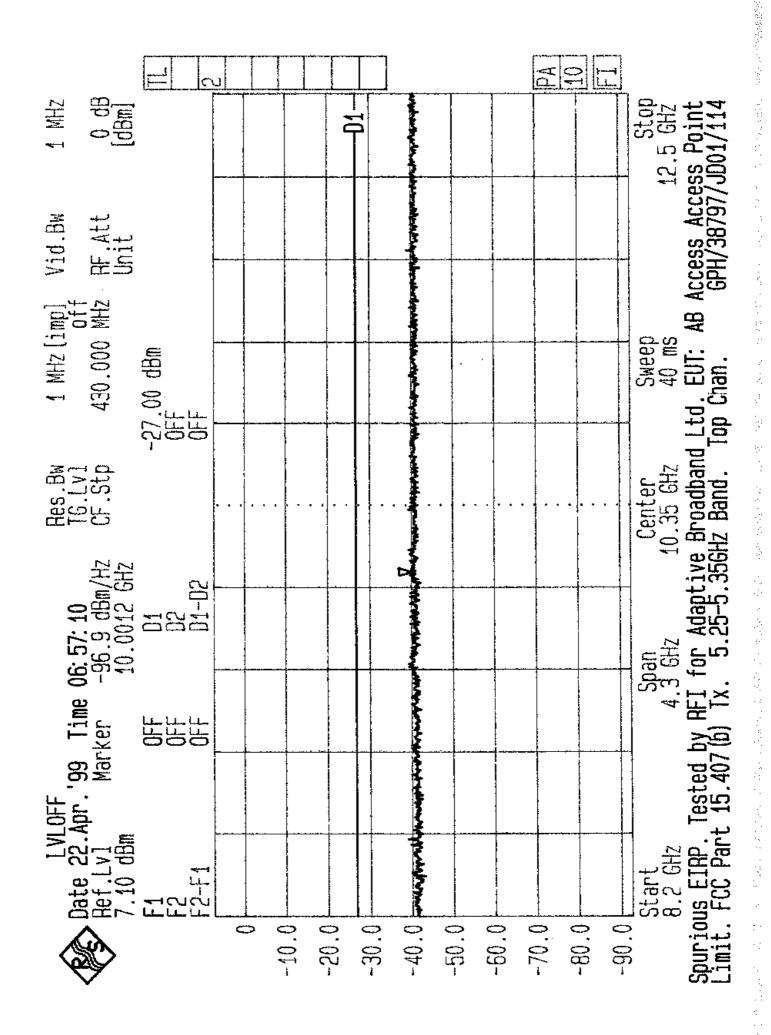


· ...

et de la sec

s y ser

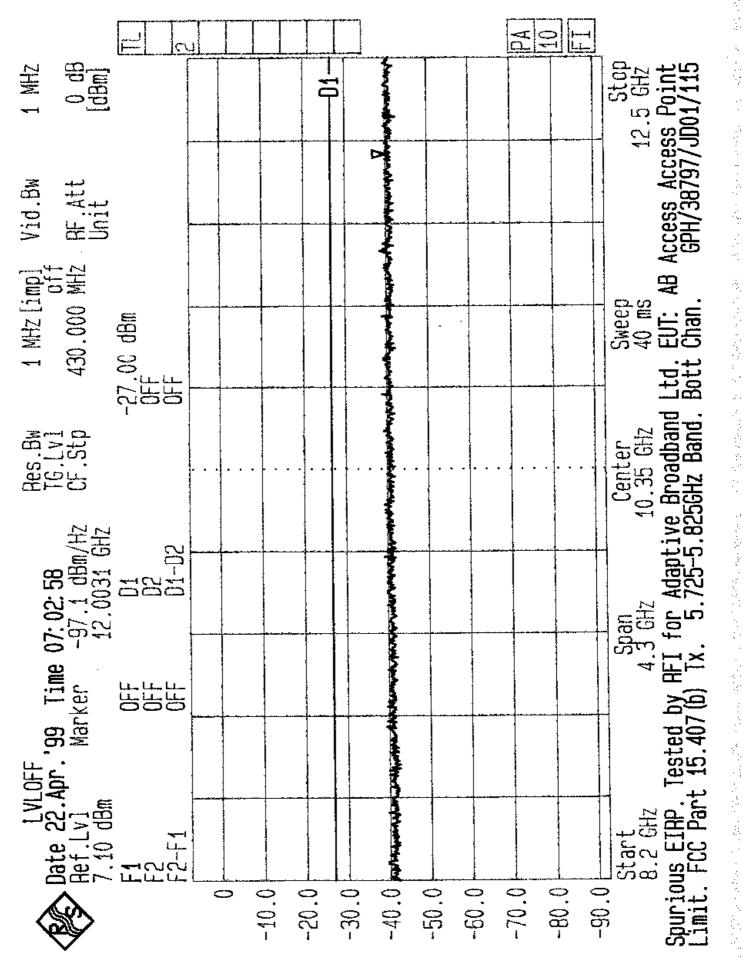

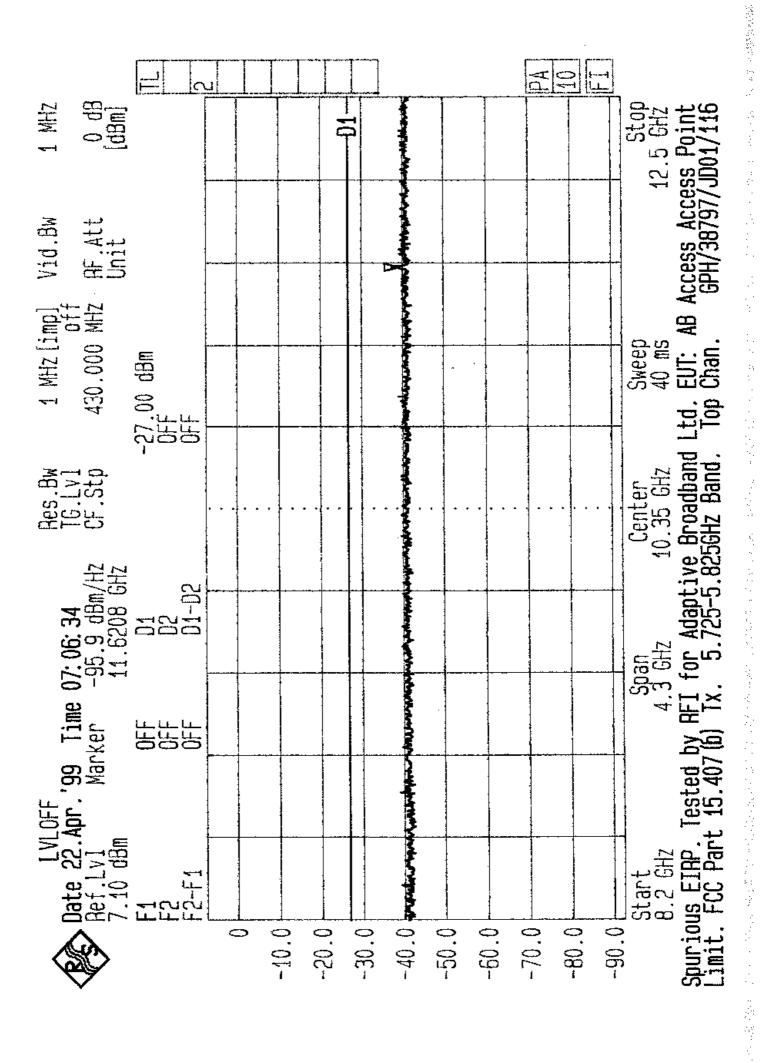



7

- - <u>-</u> - -


• .

n an an tha an an an

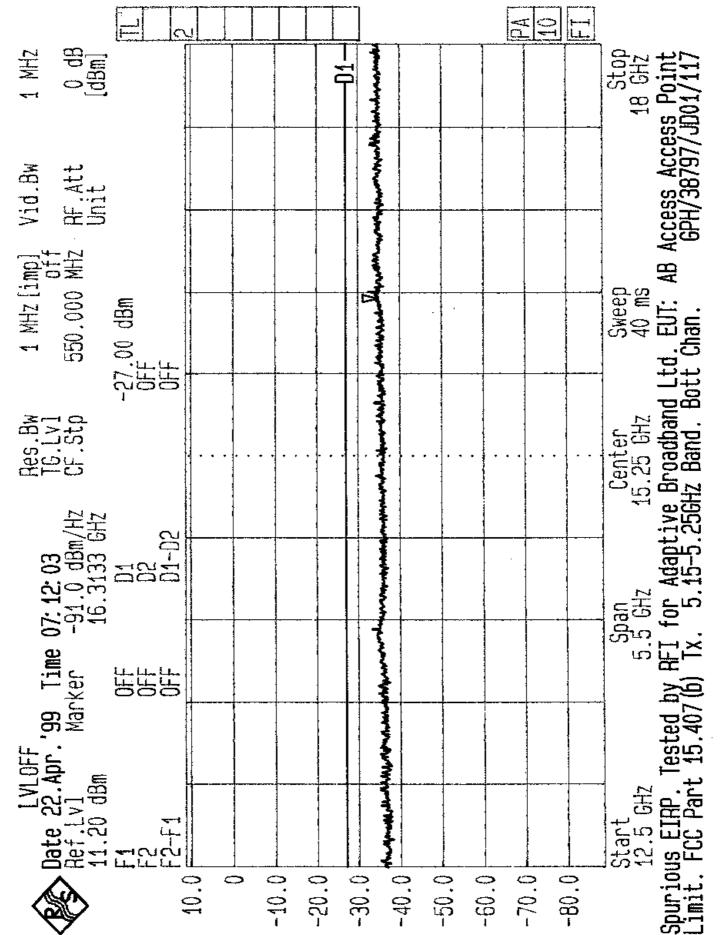


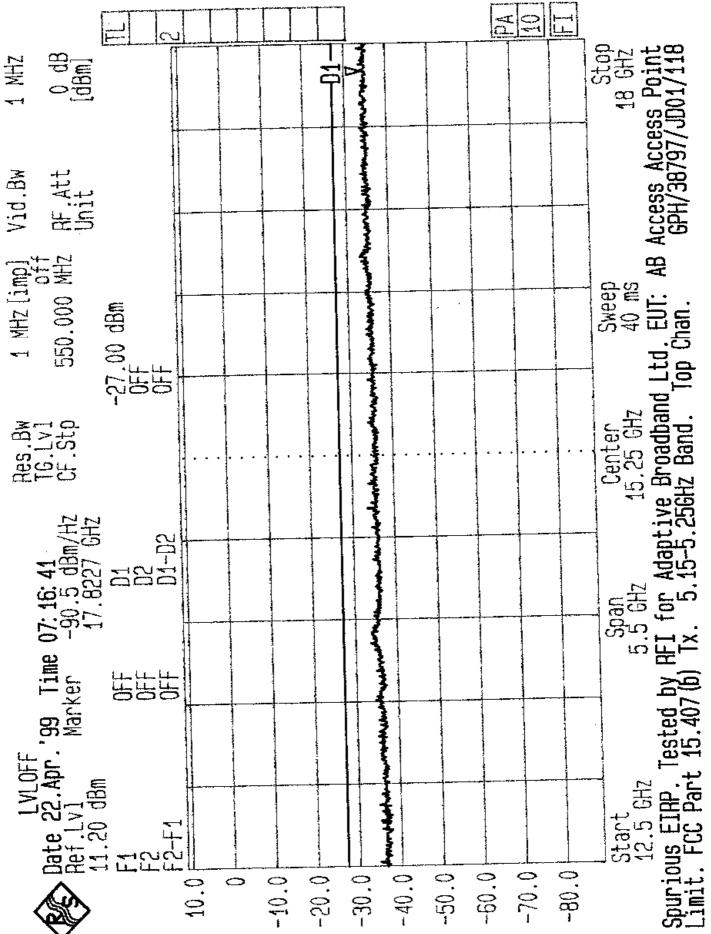


「読み変要素が、いたがながる」になって、ためです。 いたい たいさか たましん いたい 感が ストリー たまし たまし いちょう たんしょう さいぼう いいせき い 

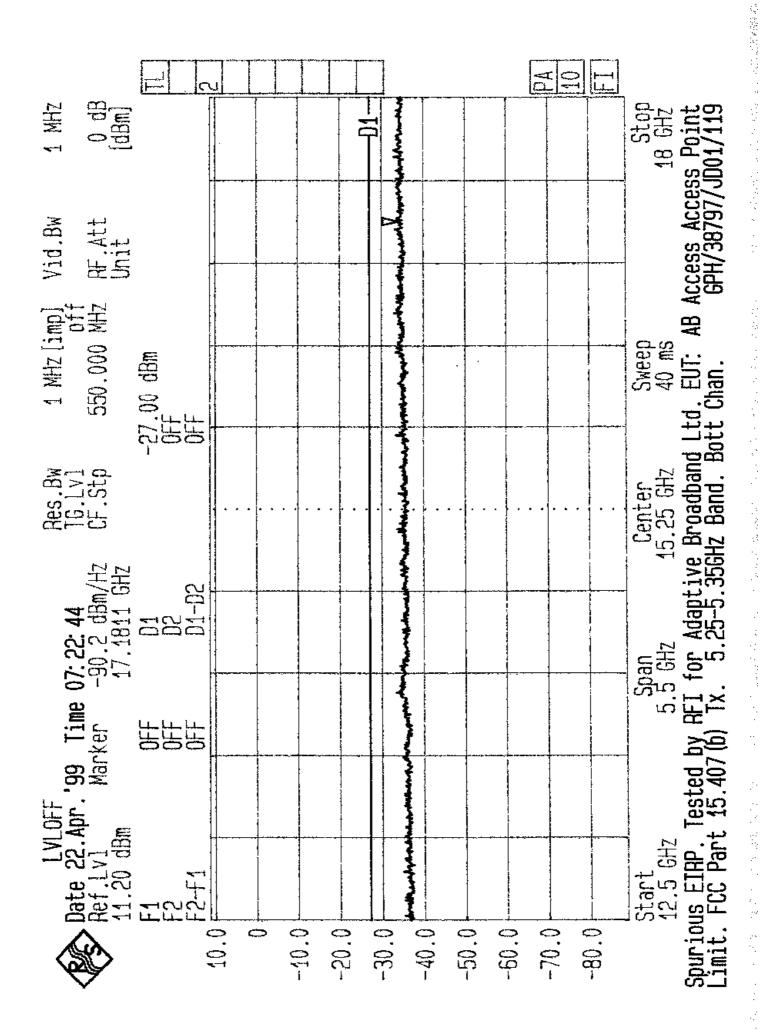


ł 100

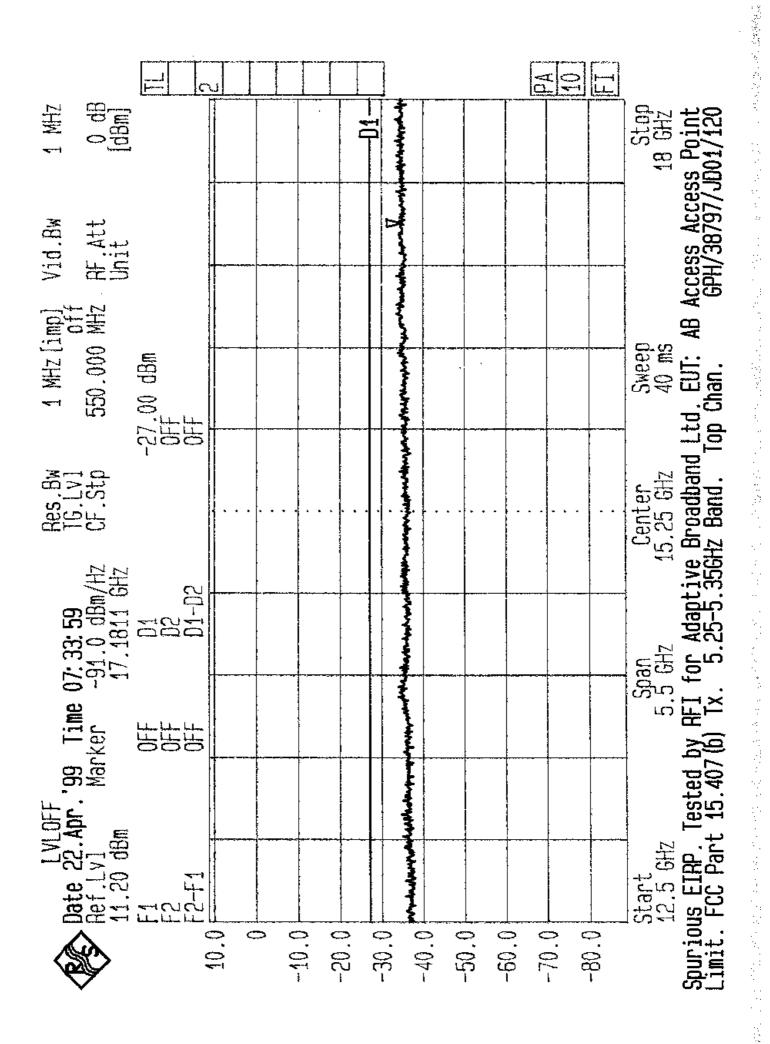


· · · · ·

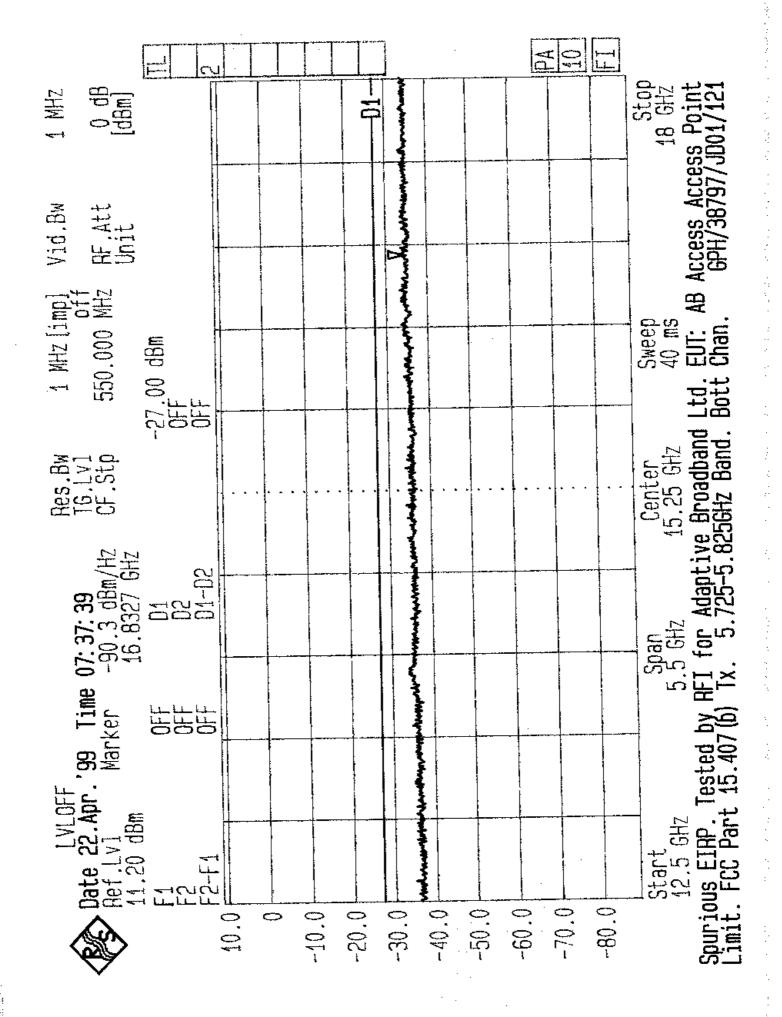


. .

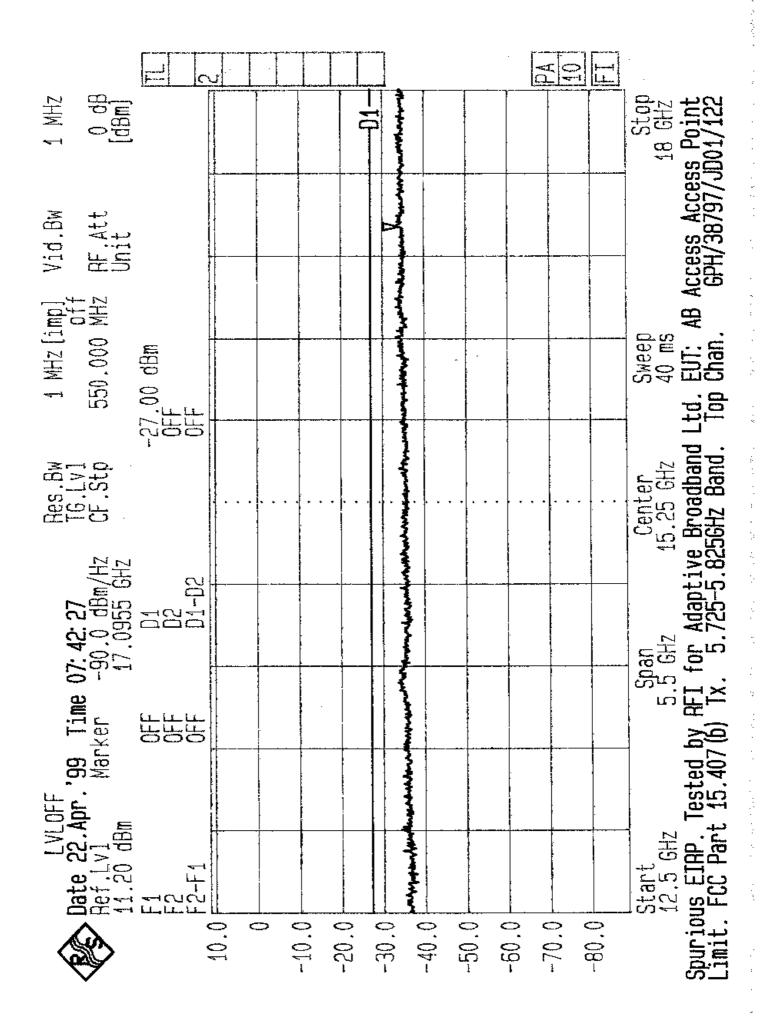

e al contra de la co

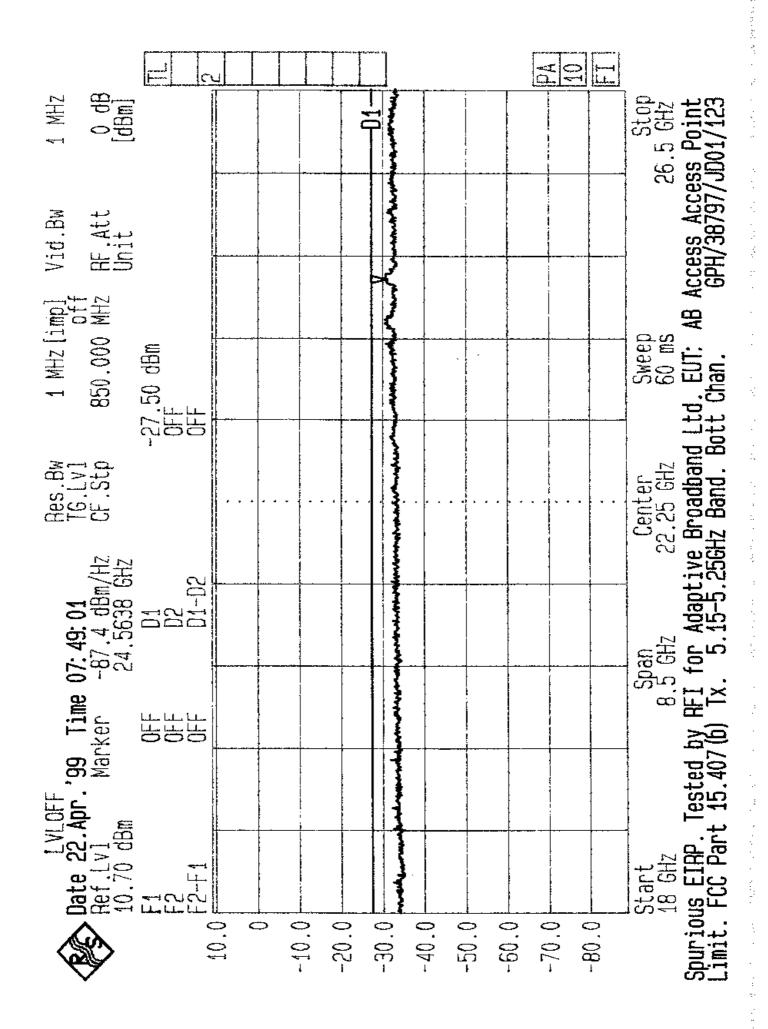


nga ng kanalaran

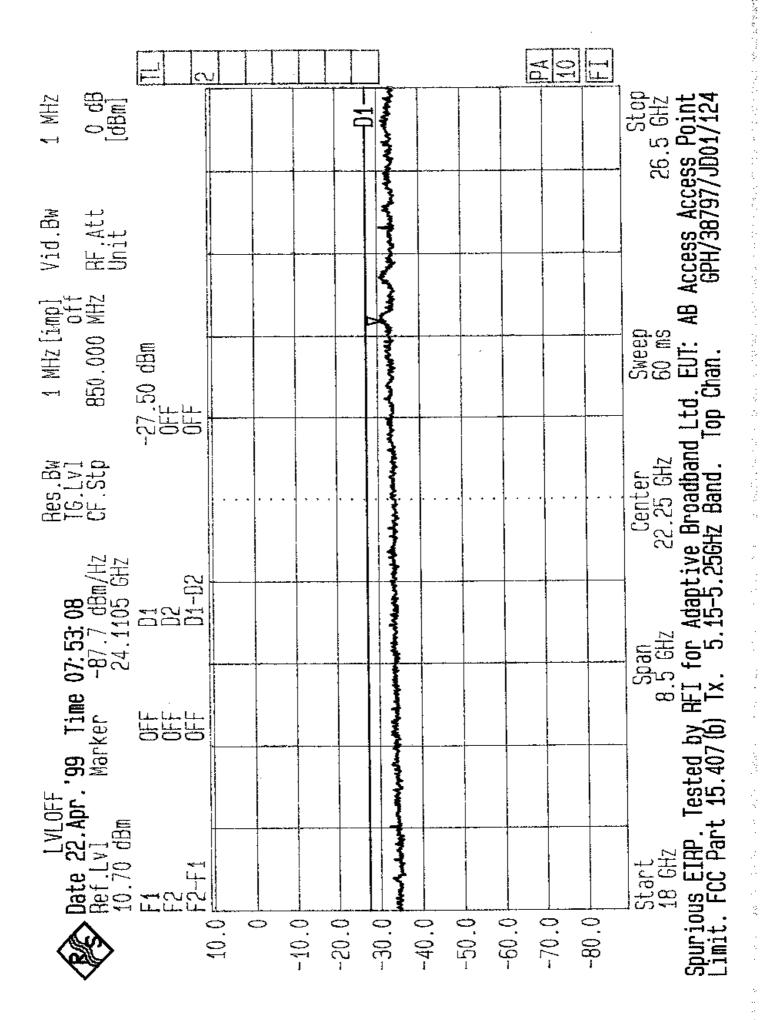


•

.

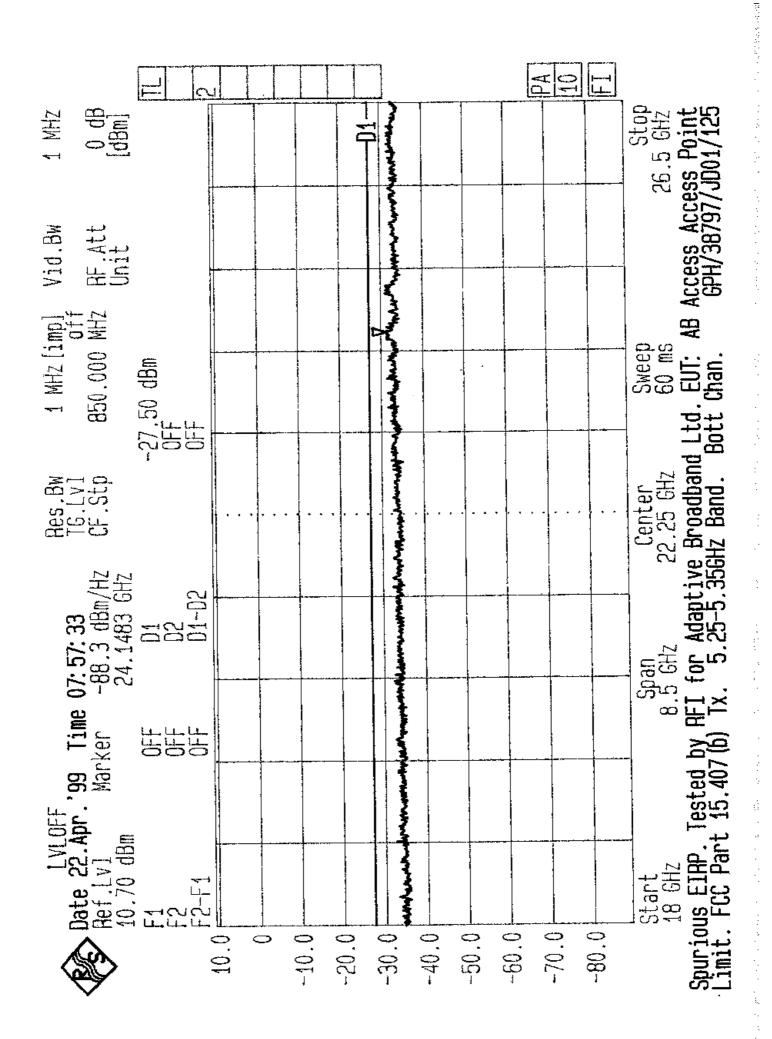


4-30

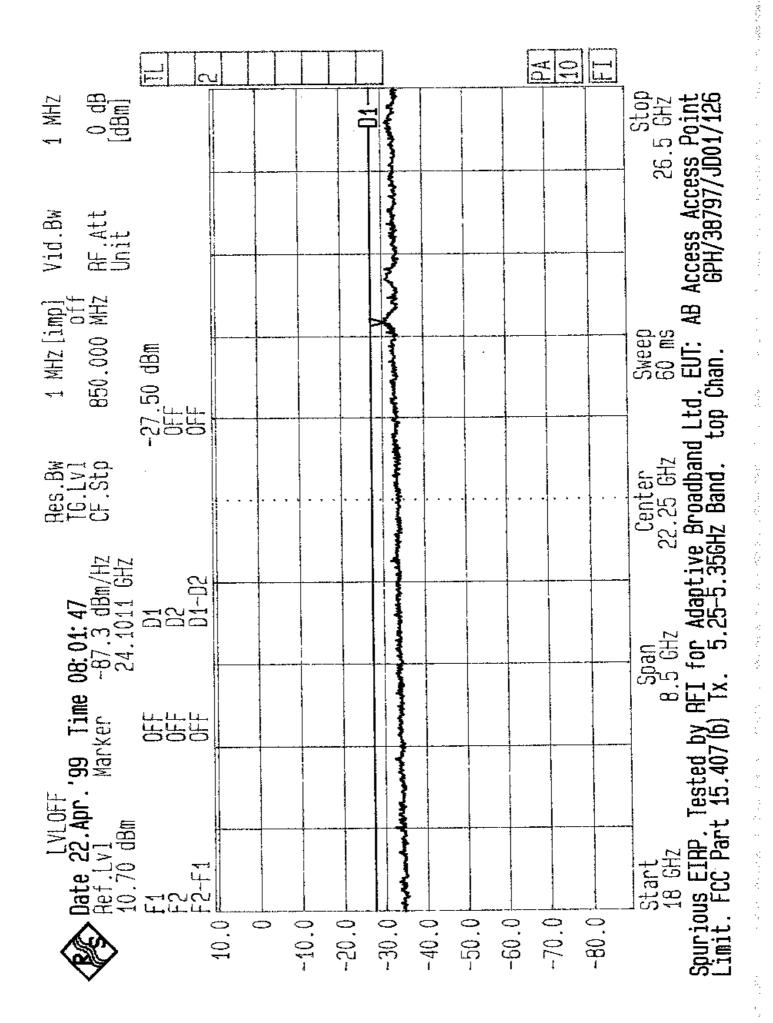


and the second second

an Marina an ann an Airtí

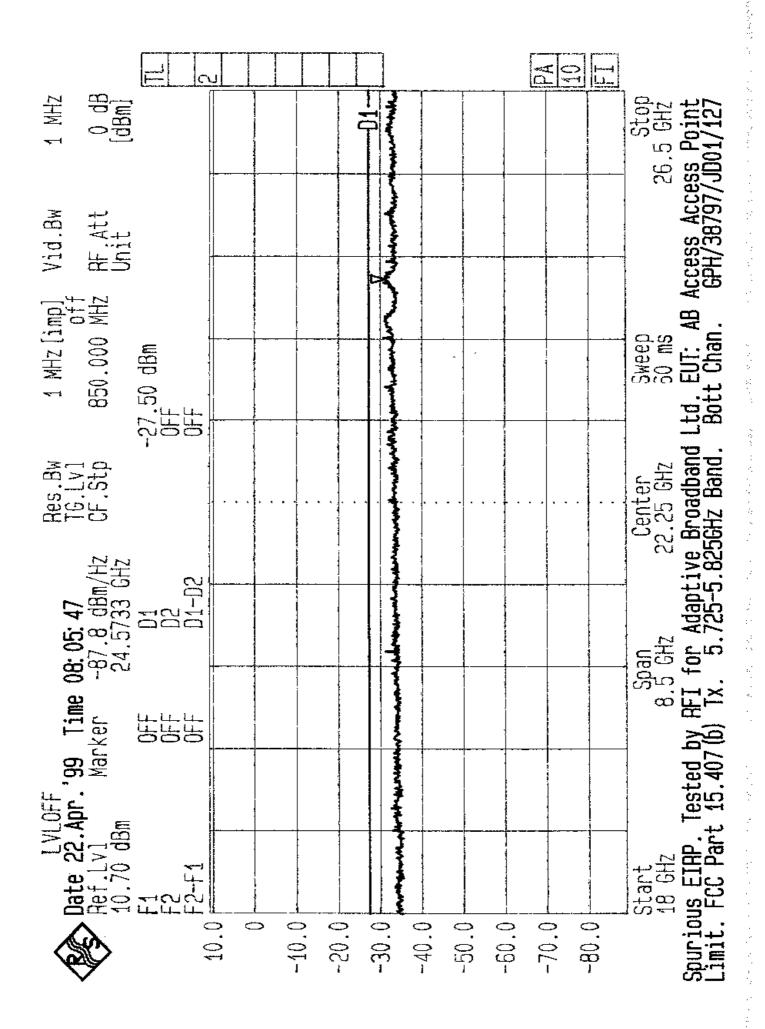

· · · · · ·

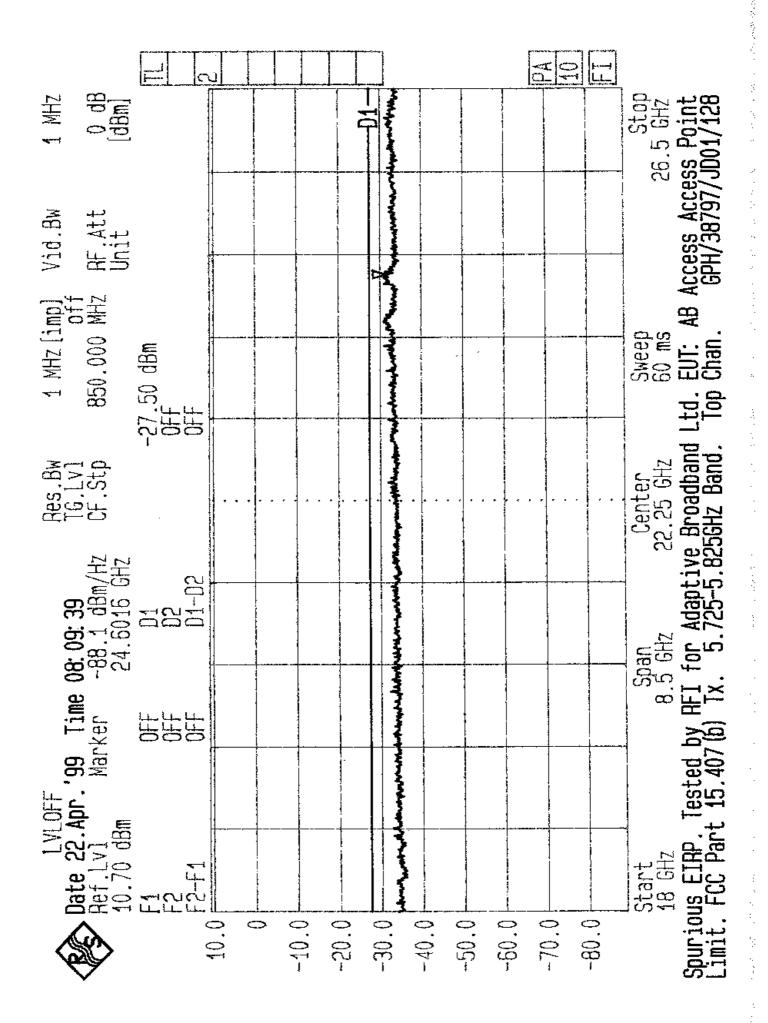

والمراجع والمراجع والمراجع والمنافع والمراجع والمراجع والمراجع والمراجع والمراجع والمراجع والمراجع والمراجع

070

.....


Date 22.Apr.'99 Time 09:53:07 Ref.Lv1 -14.90 dBm	Res.Bw CF.Stp	1.0 NHZ [3dB] 1.350 GHz	Mid.Bw P.R.Att Unit	
-20.0				
-30.0-				
-40.0 Eveninghamphareners and the second second	مساسطهم يسمرومهم	and de <sup>N</sup> o-Antoine	بالمستحديه يعاقبه فالاسخ	Argidian metaboli
- 0 0 0 -				
-0.0-				- · • • · · · ·
				1
-80.0		. ·		1
0.06				···· e··· ·
-700.0				h
-7.0.0-	-	-	-	·, ··
Start 26.5 GHZ Span 26.5 GHZ 3.5 GHZ 3 Spurious EIRP. Tested By AFI For Adaptive Limit. FCC Part 15.407 (b) Tx. 5.15-5.250	Center 33.25 GHz e Broadband I 5GHz Band.	Stor 50 ms 50 ms Ltd. EUT: AB Access Access Point Bott. Chan. GPH/38797/JD01/129	Access Acce 6PH/38797//	Stop 40 GHZ <b>55 Point</b> <b>JD01/129</b>

:

 $\mathbb{R}^{n+1}$ 

	Res.Bw	1.0 XH2 [3d3]	Vic.BN		
Ref. Lvi Narker -38,99 dBm -14,90 dBm -14,90 dBm	CF. Stp			က ကြား ကြား	
-20.0-	<b>-</b> -	••	-	· , · · ·	
-30,0-					
-40.0 - annorman ann an ann ann ann ann ann ann ann a		بالجاد لماريك المحالية والمحالية	مالىيەلىكى بىرىكىيەلىكىكىكىكىكىكىكىكىكىكىكىكىكىكىكىكىكىكىك	the states and	
- 0.0G-					
				ʻ r	
				Ч.	
- 80°0 -		、 /		Ч <b>Г</b> (	
-30.0-				р	
					÷
	-			· · · · · · · · · · · · · · · · · · ·	
Start 26.5 GHZ 33.5 GHZ 3 Spurious EIRP. Tested By RFI For Adaptive Limit. FCC Part 15.407 (b) Tx. 5.15-5.256	Center 33.25 GHz tve Broadband 256Hz Band.	Sweep 50 ms 10p Chan.	AB Access Access Point 6PH/38797/JD01/130	Stop 40 GHC ss Point JD01/130	
$\phi_{i}$ , $\phi_{i$					

;

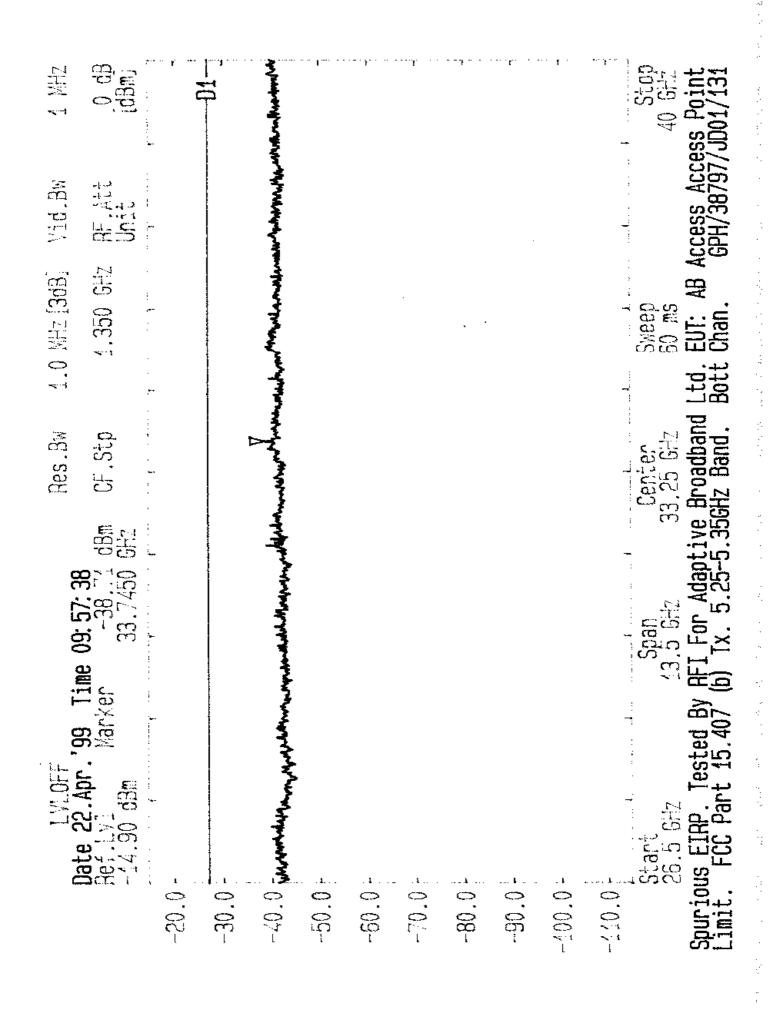

er er de


1VLOFF	Res.Bw	2.0 XH2 [3d8]	71d.B%	
Ref.Lyl Karker -38.49 dBm -14.90 dBm 33.6700 GHL	CF.Stp	1.350 GHI	it tt	0 dB CBm, CBm
	· · · ·	· ·	•	• • • • • • • • • • • • • • • • • • •
-30.0-				
-40.0 -444 Marine marker and a second and a second se	manual and a second		and a second	
				·· 4
-60.0+				
				··· £···
-80.0-				···· <b>,</b> · ·
- 0.06-				
-400.0				••• <b>v</b> ••••
- 0.0,1-	-		-	
Start 26.5 GHZ Call Call Conduction Span Cell Spurious EIRP. Tested By RFI For Adaptive Bro Limit. FCC Part 15.407 (b) Tx. 5.25-5.35GHz	Center 33.25 GHz e Broadband Ltd. 5GHz Band. Top	Sweep 50 ms 60 ms Chan.	AD ACCESS ACCESS Point 6PH/38797/JD01/132	Stop 40 GHZ 55 Point 132
	· · · ·			


 $\sim 100$  M  $_\odot$  at the state of the state of the state 100 M  $_\odot$ 


1 . . . . . M

the second second second second

ť

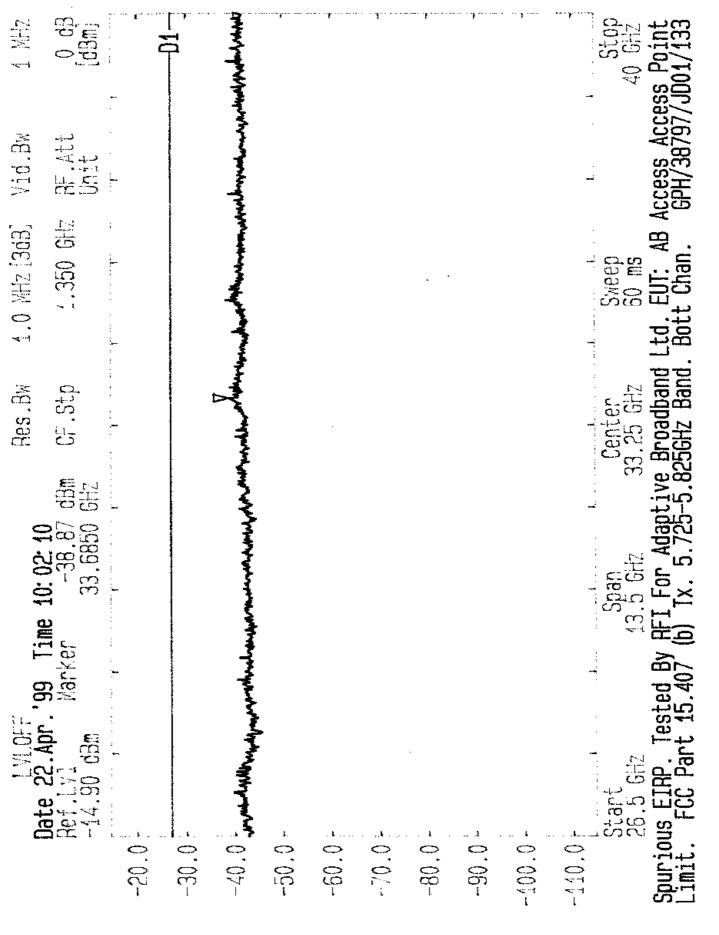

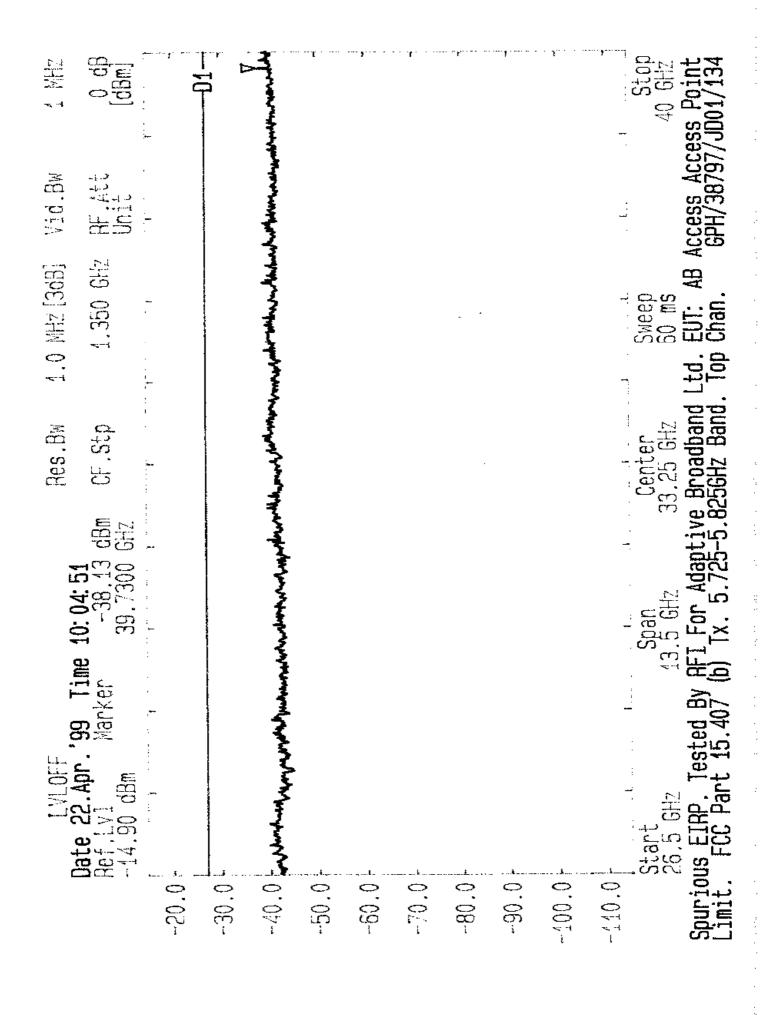

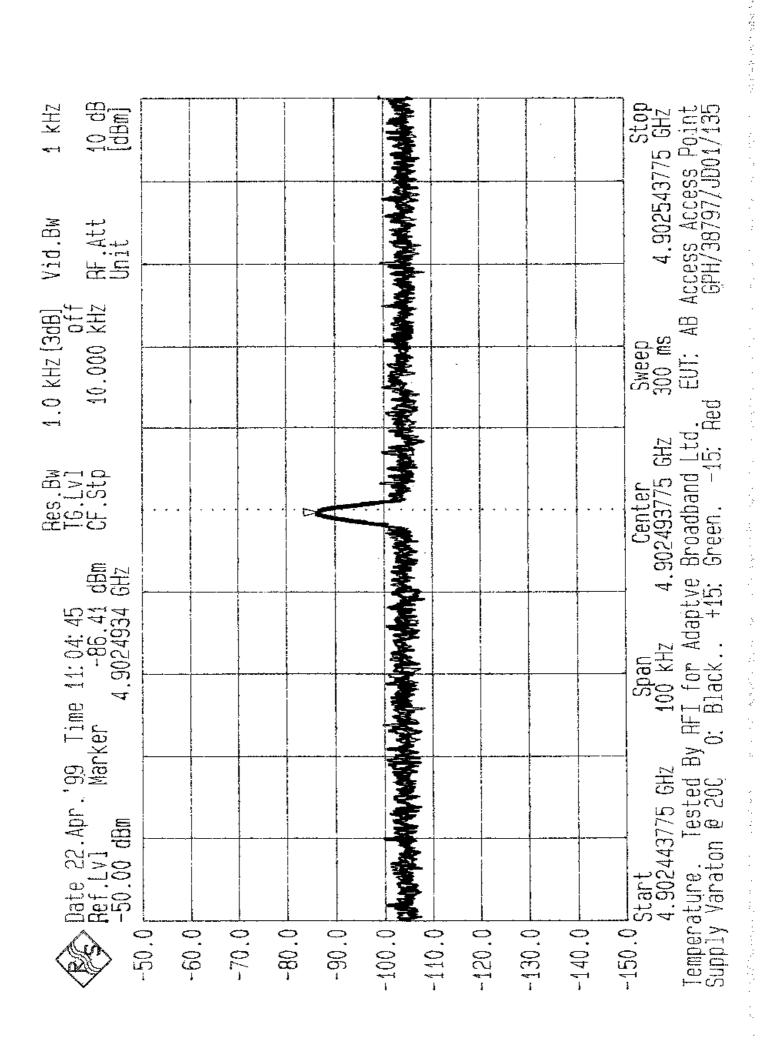

Long the Second

1 kHz 10 dB [dBm]						·			int 136 136
		· · · · · · · · · · · · · · · · · · ·					· · · · · · -		3775 3775 1001/
Vid.Bw PF.Att Unit									Stop 4.902543775 GHz Access Access Point 6PH/38797/JD01/136
dBJ off KHz									AB AC G
1.0 kHz [3dB] 0ff 10.000 kHz				-			<u> </u>		Sweep 300 ms EUT: AB A Red
								·····	+50:-
Hes.Bw TG.Lvl CF.Stp								,	pan kHz 4.902493775 GHz or Adaptve Broadband Lto Black. +20: Green. +5(
dBm GHZ					Š.				4.90 +20:
12: 32: 00 -103. 93 1. 9024645									Hz Adapt ack.
4.90 4.90		·				·			Spar for Bla
Time ker									V HF1
99 Man									GHz ted B tion
o.Apr dBm									13775 Test ariat
<pre>&gt; Date 22.Apr.'99 Time : Ref.Lvl Marker -50.00 dBm 4.</pre>									ant 9024 ure
			 	-0.06-				0.0	
	0.06-	-70.0	-80.0	)6-	-110.0	-120.0	-130.0	-140.0	Temperature Variation -20: Black

2.8

The second second second

٠

· · ·

**EMC** Department

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

This page has been left intentionally blank.

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 54 of 56 Issue Date: **EMC** Department

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 55 of 56 Issue Date:

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

# Appendix 5. Photographs of EUT

This appendix contains the following photographs

Photo Reference Number	Title
PHT\38797ETF01\001	Side view of conducted emissions
PHT\38797ETF01\002	Front view of conducted emissions
PHT\38797ETF01\003	Rear view of radiated emissions
PHT\38797ETF01\004	Front view of radiated emissions

These pages are not included in the total number of pages for this report.

**EMC** Department

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

This page has been left intentionally blank.

TEST REPORT S.No: RFI/EMCB1/RP38797A Page 56 of 56 Issue Date:

#### TEST REPORT Photograph Section

**EMC** Department

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

# PHT\38797\001 Side view of conducted emissions




#### TEST REPORT Photograph Section

**EMC** Department

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

# PHT\38797\002 Front view of conducted emissions

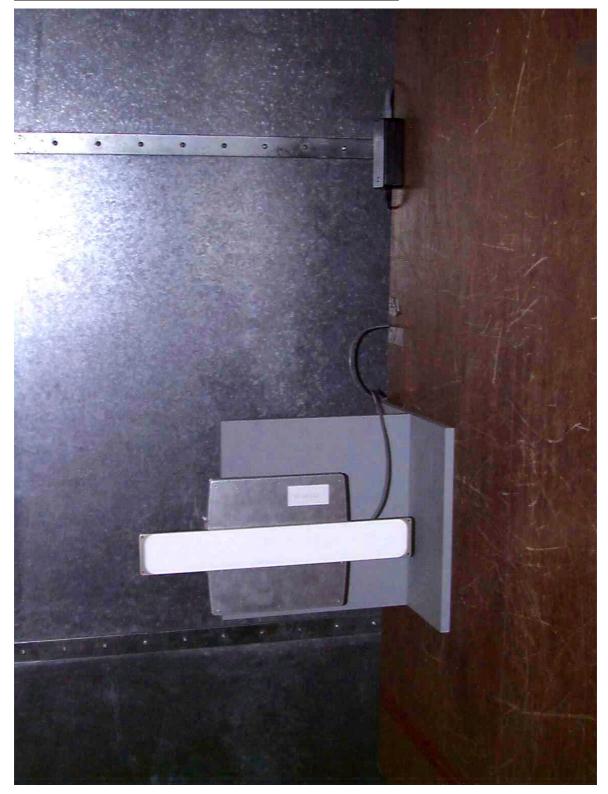

#### TEST REPORT Photograph Section

**EMC** Department

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

# PHT\38797\003 Rear view of radiated emissions



#### TEST REPORT Photograph Section

**EMC** Department

Test Of:Adaptive Broadband Ltd<br/>AB-ACCESS Access Point (AP)To:F.C.C. Part 15 Subpart E: 1998

# PHT\38797\004 Front view of radiated emissions

