



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 22H, PART 24E MEASUREMENT AND TEST REPORT

For

CLC HONG KONG LIMITED

1011A, 10/F., Harbour Centre Tower 1, No.1 Hok Cheung St., Hung Hom, Kowloon, Hong Kong

FCC ID: 2AG4WZ712

Report Type: Original Report	Product Type: Optimax 12
Report Number: RDG180319005-00D	
Report Date: 2018-04-27	
Reviewed By:	Jerry Zhang EMC Manager
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
JUSTIFICATION	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
CONFIGURATION OF TEST SETUP	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §1.1310 & §2.1093- RF EXPOSURE	9
APPLICABLE STANDARD	9
TEST RESULT	9
FCC §2.1047 - MODULATION CHARACTERISTIC	10
FCC § 2.1046, § 22.913 (A) & § 24.232 (C) - RF OUTPUT POWER.....	11
APPLICABLE STANDARD	11
TEST PROCEDURE	11
TEST EQUIPMENT LIST AND DETAILS.....	15
TEST DATA	15
FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH	19
APPLICABLE STANDARD	19
TEST PROCEDURE	19
TEST EQUIPMENT LIST AND DETAILS.....	19
TEST DATA	20
FCC §2.1051, §22.917(A) & §24.238(A) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	25
APPLICABLE STANDARD	25
TEST PROCEDURE	25
TEST EQUIPMENT LIST AND DETAILS.....	25
TEST DATA	25
FCC §2.1053, §22.917 & §24.238 & §27.53 - SPURIOUS RADIATED EMISSIONS	30
APPLICABLE STANDARD	30
TEST PROCEDURE	30
TEST EQUIPMENT LIST AND DETAILS.....	31
TEST DATA	31
FCC §22.917(A) & §24.238(A)- BAND EDGES.....	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST EQUIPMENT LIST AND DETAILS.....	34
TEST DATA	34
FCC §2.1055, §22.355 & §24.235 - FREQUENCY STABILITY	43

APPLICABLE STANDARD43

TEST PROCEDURE43

TEST EQUIPMENT LIST AND DETAILS.....44

TEST DATA44

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:		Optimax 12
EUT Model:		Z712
FCC ID:		2AG4WZ712
Rated Input Voltage:		DC3.7V from Battery or DC5V from adapter
Adapter Information	Model Name:	PMC44
	Input:	100-240V~, 50/60Hz 0.2A
	Output:	DC5V, 1.5A
External Dimension:		Length (188 mm)*Width (107.5 mm)*High (10.3 mm)
Serial Number:		180319005
EUT Received Date:		2018.03.19

Objective

This report is prepared on behalf of *CLC HONG KONG LIMITED* in accordance with: Part 2-Subpart J, Part 22-Subpart H, and Part 24-Subpart E of the Federal Communications Commission's rules.

The objective is to determine compliance with FCC Rules for output power, modulation characteristic, occupied bandwidth, spurious emissions at antenna terminal, spurious radiated emission, frequency stability and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: 2AG4WZ712.
FCC Part 15C DSS submissions with FCC ID: 2AG4WZ712.
FCC Part 15B JBP submissions with FCC ID: 2AG4WZ712.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services
Part 24 Subpart E - Personal Communication Services

Applicable Standards: TIA/EIA 603-D-2010.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp.(Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Unwanted Emissions, radiated	30MHz ~ 1GHz: 5.85 dB 1G~26.5GHz: 5.23 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062D.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA-603-D 2010.

The test items were performed with the EUT operating at testing mode.


Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
R&S	Universal Radio Communication Tester	CMU200	109038
N/A	ANTENNA	N/A	N/A

Configuration of Test Setup

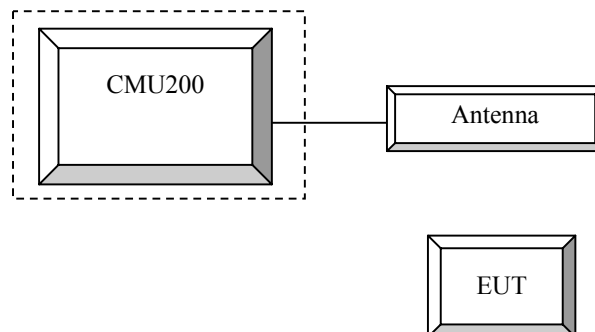

Block Diagram of Test Setup

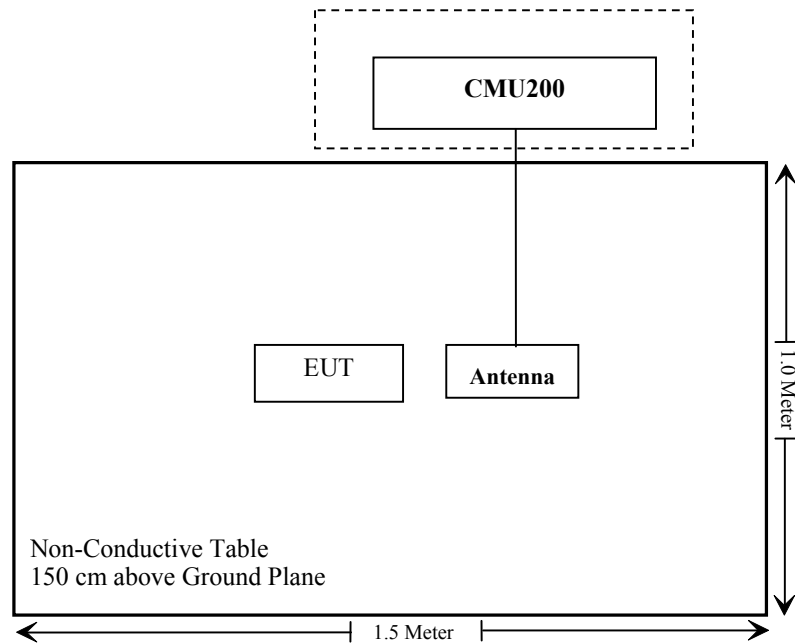

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310, §2.1093	RF Exposure	Compliance
§2.1046; § 22.913 (a); § 24.232 (c);	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905 § 22.917; § 24.238	Occupied Bandwidth	Compliance
§ 2.1051, § 22.917 (a); § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053 § 22.917 (a); § 24.238 (a)	Spurious Radiation Emissions	Compliance
§ 22.917 (a); § 24.238 (a)	Out of band emission, Band Edge	Compliance
§ 2.1055 § 22.355; § 24.235	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

FCC §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliant, please refer to the SAR report: RDG180319005-20.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046, § 22.913 (a) & § 24.232 (c) - RF OUTPUT POWER

Applicable Standard

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §24.232 (d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Test Procedure

GSM/GPRS/EGPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM + GPRS or GSM + EGSM

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850

> 30 dBm for GPRS 1900

> 27 dBm for EGPRS 850

> 26 dBm for EGPRS 1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3

Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)

Bit Stream > 2E9-1 PSR Bit Stream

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal on to turn on the signal and change settings

WCDMA-Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c / β_d	8/15

WCDMA HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode Subset	HSDPA 1	HSDPA 2	HSDPA 3	HSDPA 4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c / β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR(dB)	0	0	0.5	0.5
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs} / \beta_c$	30/15			

WCDMA HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
	MPR(dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs}=\beta_{hs}/\beta_c$	30/15				
HSUPA Specific Settings	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCI	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27

HSPA+

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.

DC-HSDPA

The following tests were conducted according to the test requirements in Table C.8.1.12 of 3GPP TS 34.121-1

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-12-11	2018-12-11
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
Agilent	Spectrum Analyzer	E4440A	SG43360054	2017-12-08	2018-12-08
HP	Signal Generator	1026	320408	2017-12-14	2018-12-14
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
TDK RF	Horn Antenna	HRN-0118	130 084	2016-01-05	2019-01-04
N/A	Coaxial Cable	C-NJNJ-50	C-0400-01	2017-09-05	2018-09-05
N/A	Coaxial Cable	C-NJNJ-50	C-0075-01	2017-09-05	2018-09-05
N/A	Coaxial Cable	C-NJNJ-50	C-1000-01	2017-09-05	2018-09-05
N/A	Coaxial Cable	C-SJSJ-50	C-0800-01	2017-09-05	2018-09-05
N/A	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A
R&S	Universal Radio Communication Tester	CMU200	109 038	2017-07-21	2018-07-21

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24.4~25.1 °C
Relative Humidity:	40~52 %
ATM Pressure:	100.9~101.4 kPa

* The testing was performed by Blake Yang and Steven Zuo on 2018-03-26 and 2018-04-26.

Conducted Output Power**Cellular Band & PCS Band**

Band	Channel No.	Conducted Peak Output Power (dBm)				
		GSM	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot
Cellular	128	31.20	31.19	30.69	29.13	28.09
	190	31.30	31.27	30.70	29.14	28.05
	251	31.40	31.31	30.72	29.11	27.96
PCS	512	28.20	28.23	27.92	26.86	25.98
	661	28.30	28.28	27.88	26.76	25.81
	810	28.30	28.25	27.81	26.51	25.90

WCDMA Band II

Mode	3GPP Sub Test	Low Channel		Middle Channel		High Channel	
		Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)
Rel 99	1	22.83	1.96	22.58	1.96	22.33	2.02
HSDPA	1	21.82	1.85	21.64	2.06	21.33	1.84
	2	20.93	2.07	20.66	1.78	20.43	1.88
	3	20.90	1.94	20.63	1.96	20.40	1.92
	4	20.93	2.10	20.66	1.97	20.43	2.11
HSUPA	1	21.91	1.98	21.70	1.77	21.47	2.16
	2	21.85	2.08	21.58	1.99	21.35	2.00
	3	21.81	2.08	21.54	1.98	21.31	2.06
	4	21.90	1.93	21.63	1.82	21.40	2.07
	5	21.86	2.11	21.59	1.87	21.36	2.04
DC-HSDPA	1	21.95	2.01	21.68	2.08	21.45	2.21
	2	22.34	1.87	22.07	1.82	21.84	2.15
	3	21.85	2.05	21.58	1.82	21.35	2.09
	4	22.34	2.05	22.07	2.15	21.84	2.07
HSPA+	1	21.73	2.13	21.46	1.82	21.23	2.03

WCDMA Band V

Mode	3GPP Sub Test	Low Channel		Middle Channel		High Channel	
		Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)
Rel 99	1	22.91	2.82	22.49	2.44	22.42	2.95
HSDPA	1	21.78	2.86	21.16	2.27	21.47	3.08
	2	21.03	2.66	20.53	2.49	20.45	3.11
	3	21.00	2.68	20.50	2.30	20.42	3.05
	4	21.03	2.88	20.53	2.56	20.45	3.15
HSUPA	1	21.86	2.98	21.48	2.52	21.49	2.99
	2	21.95	2.73	21.45	2.37	21.37	3.05
	3	21.91	2.83	21.41	2.58	21.33	2.86
	4	22.00	2.73	21.50	2.31	21.42	2.90
	5	21.96	2.86	21.46	2.37	21.38	3.02
DC-HSDPA	1	22.05	2.81	21.55	2.30	21.47	3.00
	2	22.44	2.71	21.94	2.31	21.86	3.07
	3	21.95	2.98	21.45	2.34	21.37	3.05
	4	22.44	2.91	21.94	2.42	21.86	2.76
HSPA+	1	21.83	2.71	21.33	2.59	21.25	2.93

ERP & EIRP

Part 22H

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM 850 Middle Channel								
836.600	H	98.74	23.8	0.0	1	22.8	38.45	15.7
836.600	V	98.82	27	0.0	1	26.0	38.45	12.5
WCDMA Band V Middle Channel								
836.600	H	91.25	16.3	0.0	1	15.3	38.45	23.2
836.600	V	90.96	19.2	0.0	1	18.2	38.45	16.3

Part 24E

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
PCS 1900 Middle Channel								
1880.000	H	88.44	15.8	11.7	2.7	24.8	33.00	8.2
1880.000	V	84.13	11.7	11.7	2.7	20.7	33.00	12.3
WCDMA Band II Middle Channel								
1880.000	H	81.08	8.5	11.7	2.7	17.5	33.00	15.5
1880.000	V	74.22	1.8	11.7	2.7	10.8	33.00	22.2

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level


FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH**Applicable Standard**

FCC §2.1049, §22.917, §22.905, §24.238

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The 26 dB & 99% bandwidth was recorded.

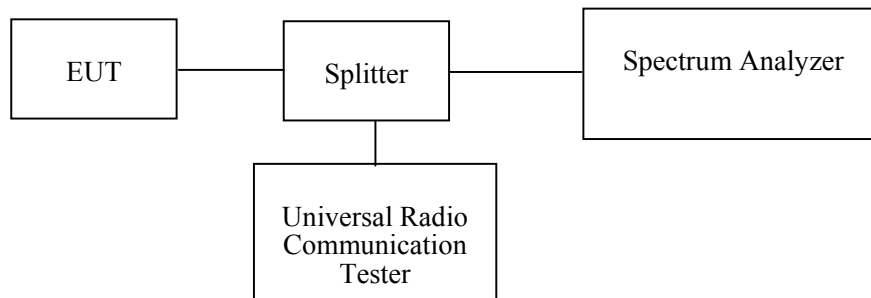**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
R&S	Universal Radio Communication Tester	CMU200	109 038	2017-07-21	2018-07-21
N/A	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each Time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	25.2~25.7 °C
Relative Humidity:	50~54 %
ATM Pressure:	100.8~100.9 kPa

* The testing was performed by Nami Quan on 2018-03-27&2018-03-28.


Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.


Band	Test Channel	Mode	99% Occupied Bandwidth (MHz)	26 dB Occupied Bandwidth (MHz)
Cellular	M	GSM	0.246	0.325
PCS		PCS	0.248	0.316
WCDMA Band II		Rel 99	4.180	4.776
		HSDPA	4.199	4.696
		HSUPA	4.199	4.744
WCDMA Band V		Rel 99	4.160	4.736
		HSDPA	4.151	4.712
		HSUPA	4.151	4.712

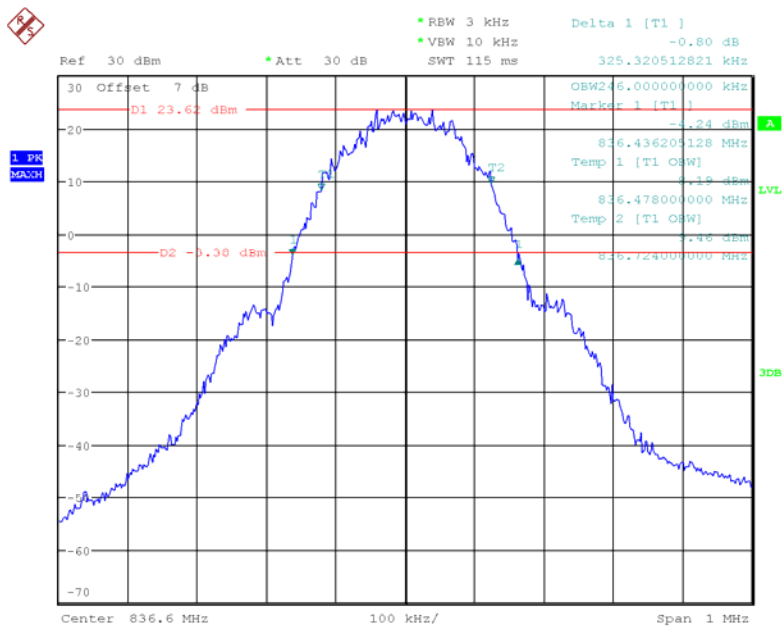GSM 850 Cellular Band


Date: 28.MAR.2018 09:45:16

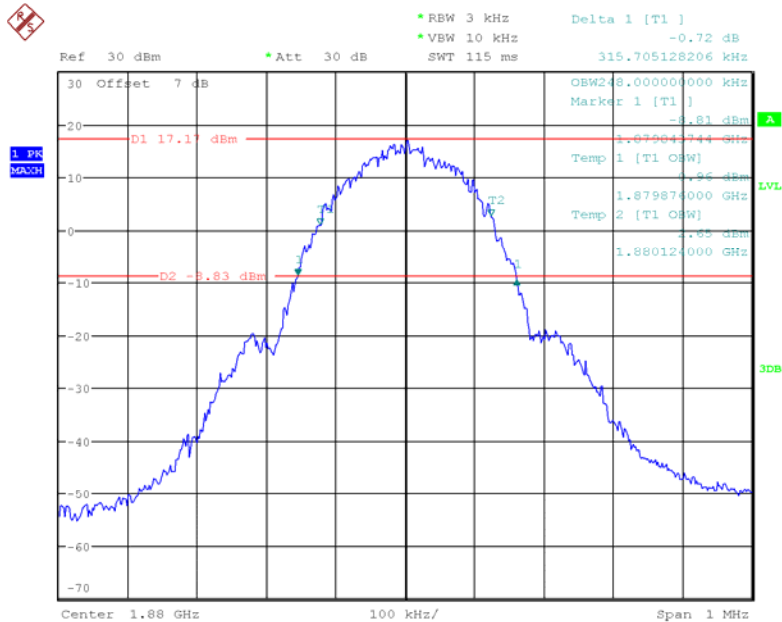GSM PCS1900 Cellular Band


Date: 28.MAR.2018 14:07:37

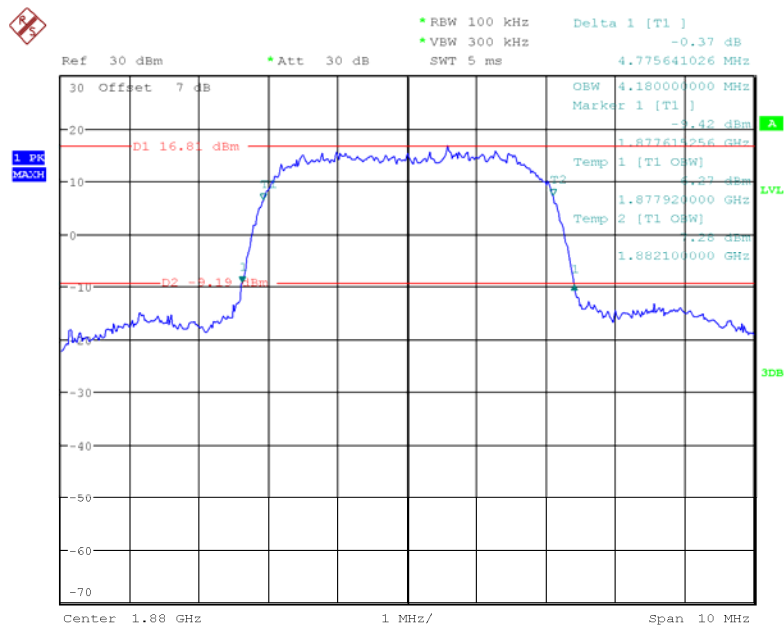REL99 Band II


Date: 27.MAR.2018 15:04:57

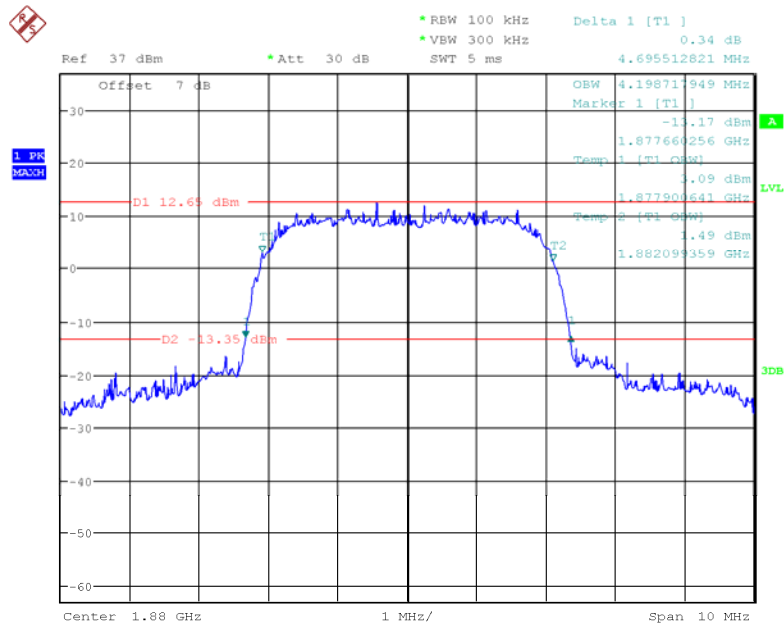HSDPA Band II


Date: 27.MAR.2018 15:41:07

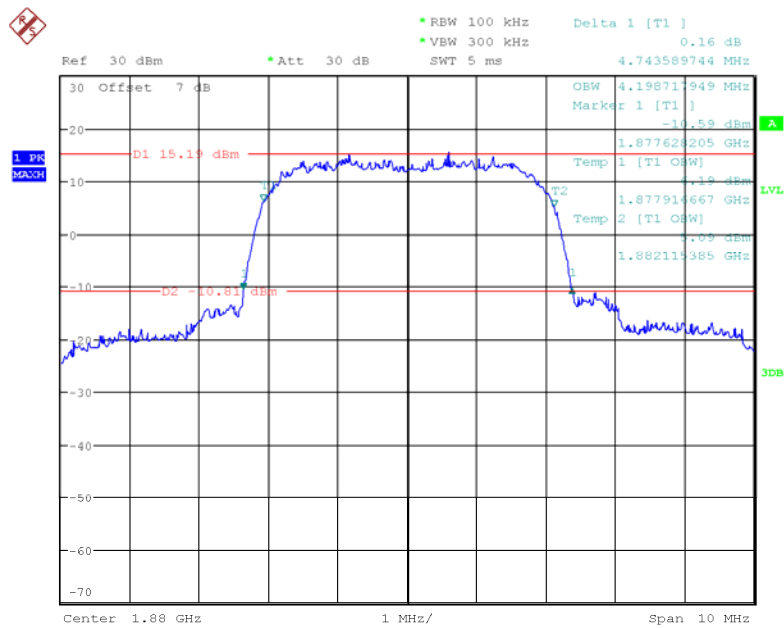HSUPA Band II


Date: 27.MAR.2018 16:03:00

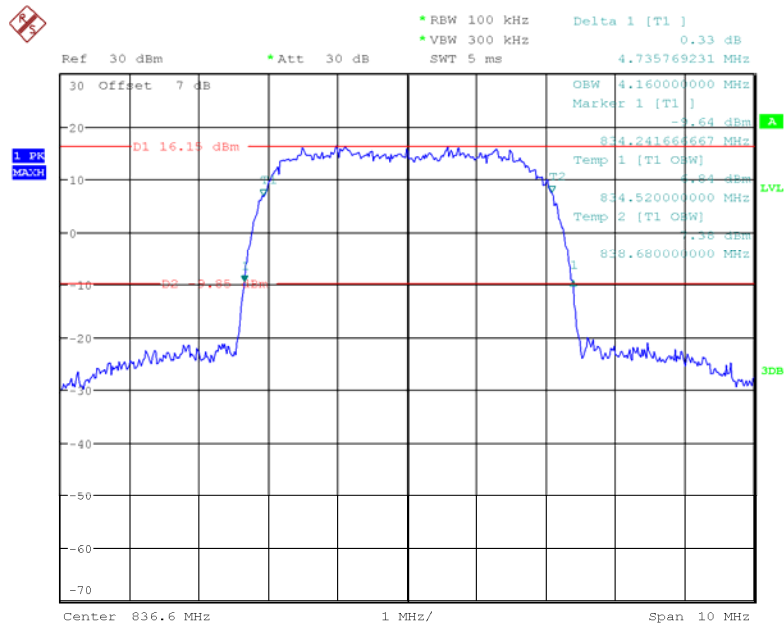REL99 Band V

Date: 27.MAR.2018 15:02:45

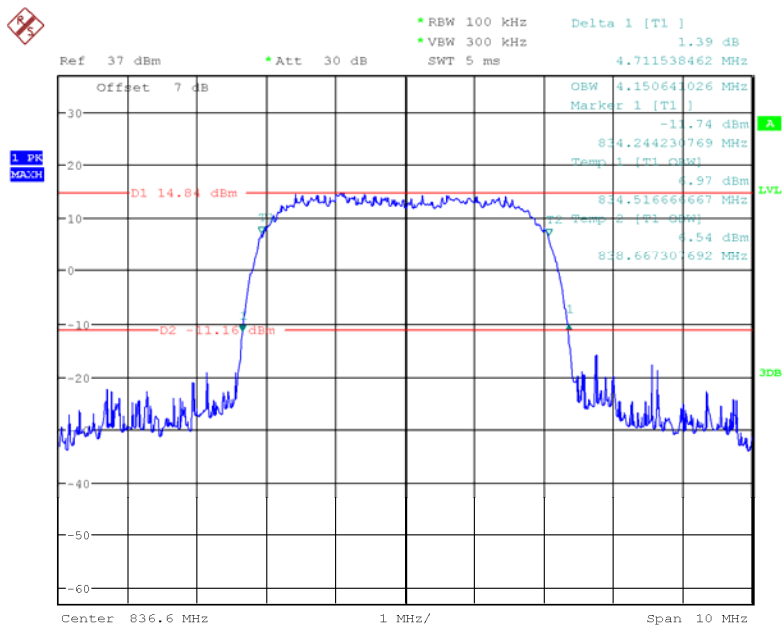HSDPA Band V

Date: 27.MAR.2018 15:37:40

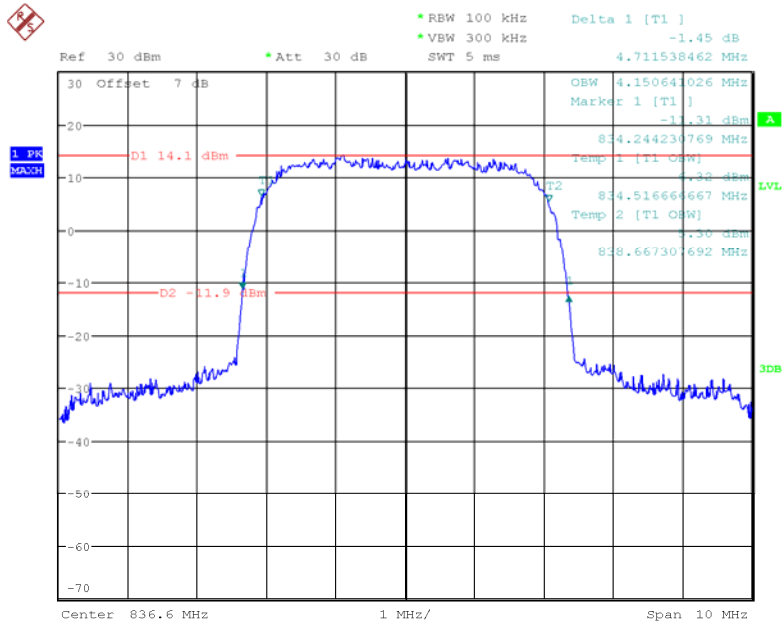HSUPA Band V

Date: 27.MAR.2018 16:04:23

FCC §2.1051, §22.917(a) & §24.238(a) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standard

FCC §2.1051, §22.917(a) , §24.238(a).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

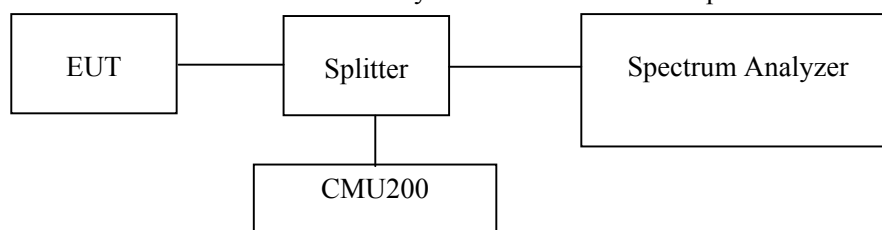

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
R&S	Universal Radio Communication Tester	CMU200	109 038	2017-07-21	2018-07-21
N/A	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each Time	N/A

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	25.2~25.7 °C
Relative Humidity:	50~54 %
ATM Pressure:	100.8~101.9 kPa


** The testing was performed by Nami Quan from 2018-03-27 to 2018-03-29.*

Please refer to the following plots.

GSM850_Middle Channel

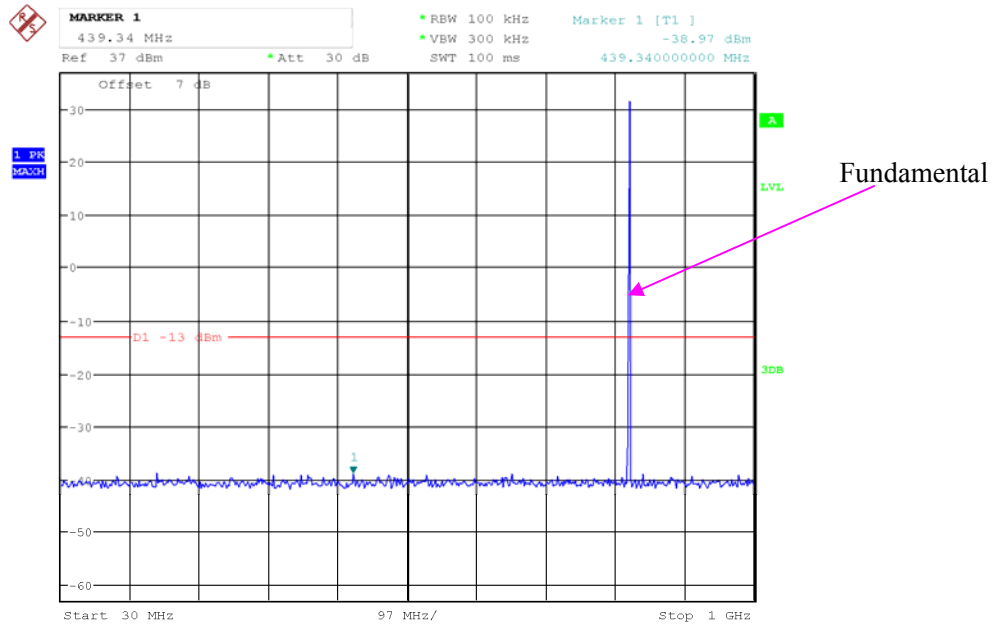

Date: 28.MAR.2018 09:47:42

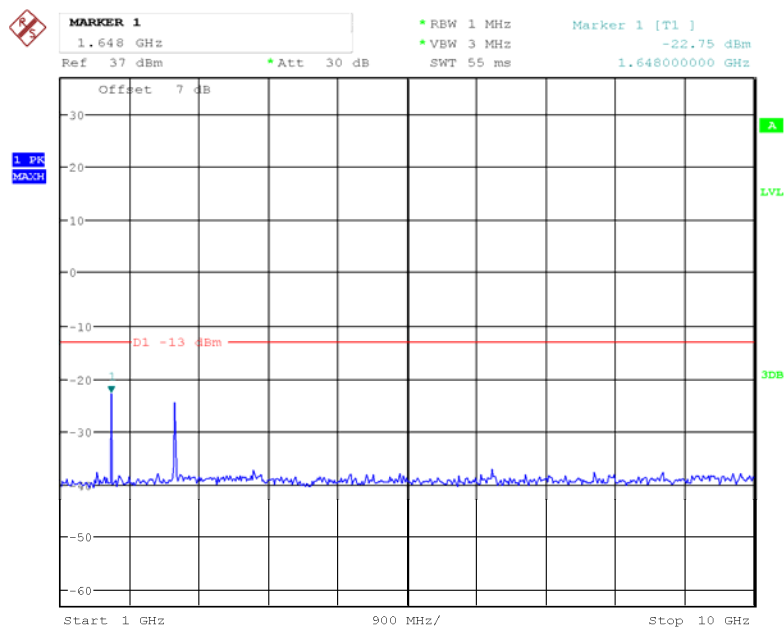

Date: 28.MAR.2018 09:48:24

MARKER 1
92.17948718 MHz

Ref 30 dBm Att 30 dB

RBW 100 kHz VBW 300 kHz SWT 100 ms

Marker 1 [T1] -44.64 dBm 92.179487179 MHz

30 Offset 7 dB

1. PR
MAGN

D1 -13 dBm

1

Start 30 MHz 97 MHz/ Stop 1 GHz

MARKER 1
3.740384615 GHz

Ref 35 dBm * Att 30 dB

* RBW 1 MHz
* VBW 3 MHz
SWT 110 ms

Marker 1 [T1]
-29.28 dBm
3.740384615 GHz

Offset 7 dB

1 PR
MACCH


D1 -13 dBm

1

Start 1 GHz 1.9 GHz/ Stop 20 GHz


Page 27 of 46

REL99 Band II_ Middle Channel

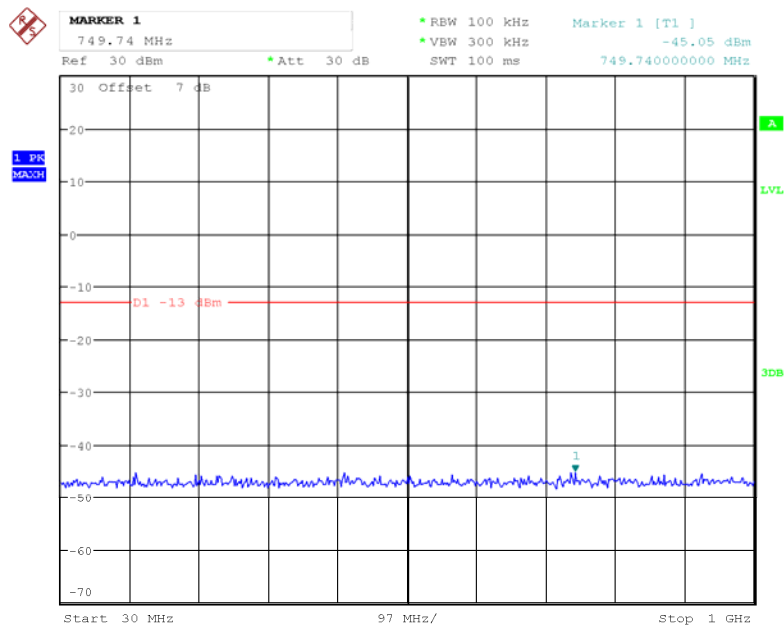


Date: 27.MAR.2018 15:22:08

Fundamental

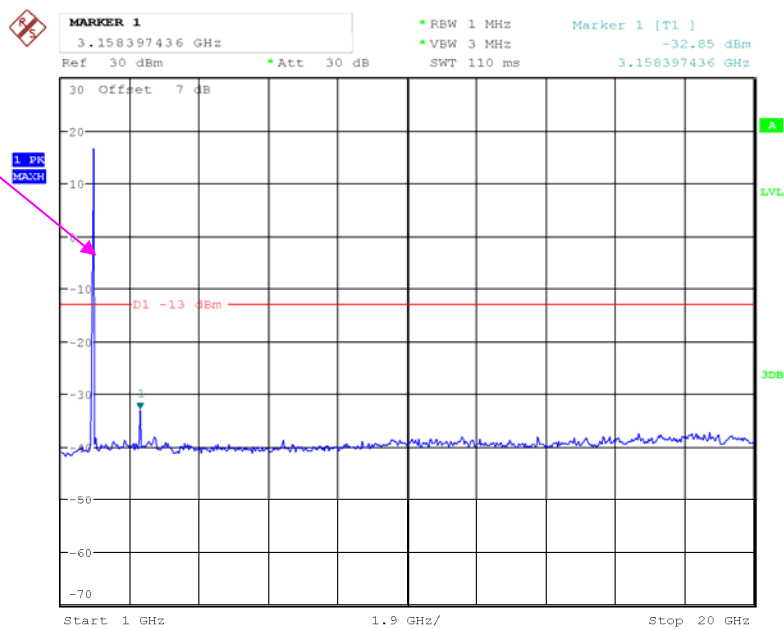


Date: 28.MAR.2018 13:49:57

Rel 99 Band V_ Middle Channel

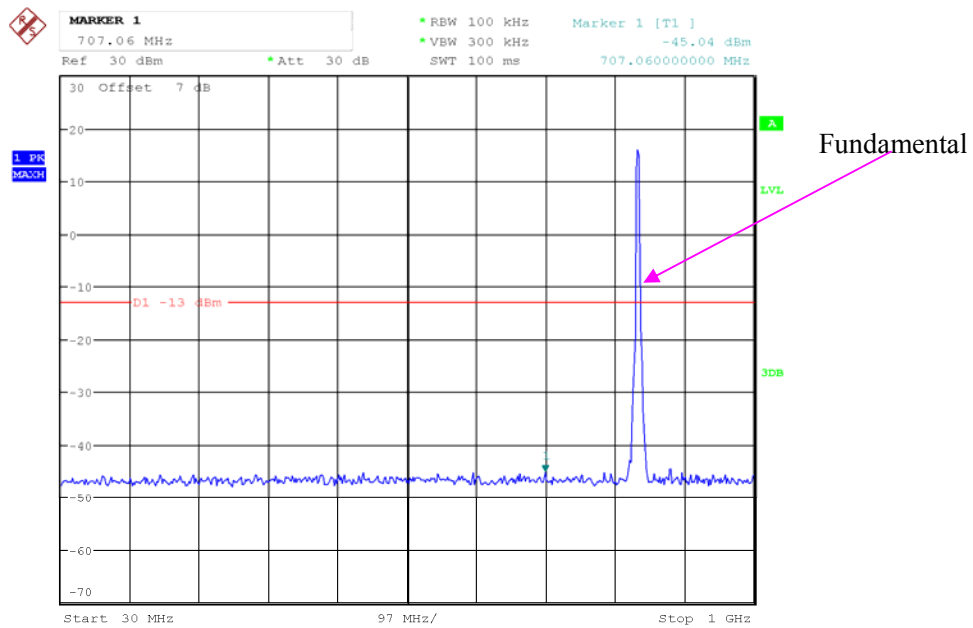

Date: 27.MAR.2018 15:21:02

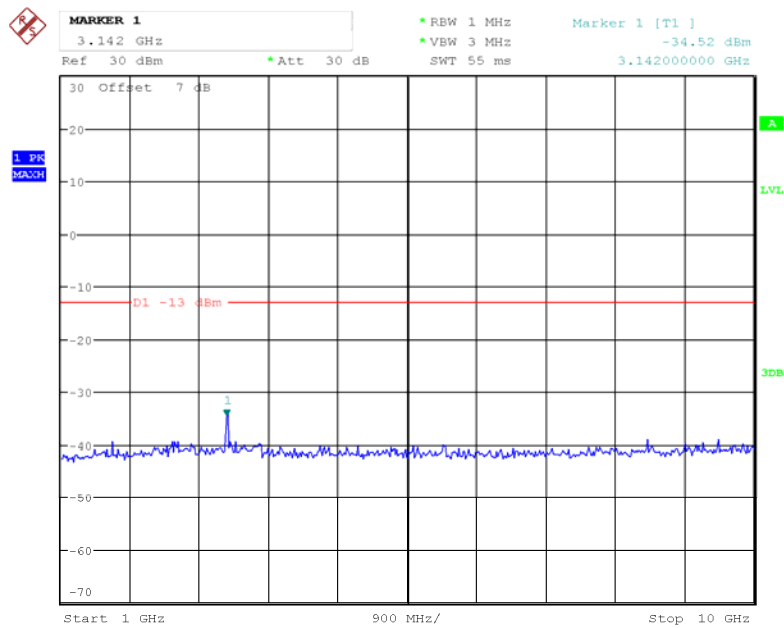

Date: 27.MAR.2018 15:21:20

FCC §2.1053, §22.917 & §24.238 & §27.53 - SPURIOUS RADIATED EMISSIONS

Applicable Standard

FCC § 2.1053, §22.917, § 24.238 and § 27.53.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg (\text{TXpwr in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \text{Log}_{10} (\text{power out in Watts})$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
R&S	EMI Test Receiver	ESCI	100224	2017-12-11	2018-12-11
HP	Amplifier	8447D	2727A05902	2017-09-05	2018-09-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2017-12-08	2018-12-08
ETS-Lindgren	Horn Antenna	3115	000 527 35	2016-01-05	2019-01-04
MITEQ	Amplifier	AFS42-00101800-25-S-42	2001271	2017-09-05	2018-09-05
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2016-11-18	2019-11-18
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2017-06-27	2018-06-27
N/A	Coaxial Cable	C-NJNJ-50	C-0400-01	2017-09-05	2018-09-05
N/A	Coaxial Cable	C-NJNJ-50	C-0075-01	2017-09-05	2018-09-05
N/A	Coaxial Cable	C-NJNJ-50	C-1000-01	2017-09-05	2018-09-05
N/A	Coaxial Cable	C-SJSJ-50	C-0800-01	2017-09-05	2018-09-05
N/A	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2017-06-27	2018-06-27
HP	Signal Generator	1026	320408	2017-12-08	2018-12-08
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
TDK RF	Horn Antenna	HRN-0118	130 084	2016-01-05	2019-01-04
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25.1 °C
Relative Humidity:	40 %
ATM Pressure:	101.4 kPa

* The testing was performed by Blake Yang&Steven Zuo on 2018-03-26.

*EUT Operation Mode: Transmitting***Cellular Band (PART 22H)****30 MHz-10 GHz:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM850, Frequency:836.600 MHz								
1673.200	H	58.93	-55.3	10.6	0.7	-45.4	-13.0	32.4
1673.200	V	55.35	-59.5	10.6	0.7	-49.6	-13.0	36.6
2509.800	H	53.64	-59.4	13.1	1.2	-47.5	-13.0	34.5
2509.800	V	52.48	-60.6	13.1	1.2	-48.7	-13.0	35.7
3346.400	H	49.56	-61.1	13.8	1.6	-48.9	-13.0	35.9
3346.400	V	47.53	-63.2	13.8	1.6	-51.0	-13.0	38.0
348.000	H	45.35	-61.5	0.0	0.6	-62.1	-13.0	49.1
348.000	V	46.64	-62.5	0.0	0.6	-63.1	-13.0	50.1
WCDMA Band V R99, Frequency:836.600 MHz								
1673.200	H	58.62	-55.6	10.6	0.7	-45.7	-13.0	32.7
1673.200	V	52.54	-62.3	10.6	0.7	-52.4	-13.0	39.4
2509.800	H	53.49	-59.5	13.1	1.2	-47.6	-13.0	34.6
2509.800	V	58.73	-54.3	13.1	1.2	-42.4	-13.0	29.4
3346.400	H	60.13	-50.5	13.8	1.6	-38.3	-13.0	25.3
3346.400	V	47.28	-63.4	13.8	1.6	-51.2	-13.0	38.2
473.000	H	46.06	-58.3	0.0	0.7	-59.0	-13.0	46.0
473.000	V	47.23	-60.3	0.0	0.7	-61.0	-13.0	48.0

PCS Band (PART 24E)**30 MHz-20 GHz:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM1900, Frequency:1880.000 MHz								
3760.000	H	56.28	-52.5	13.8	1.6	-40.3	-13.0	27.3
3760.000	V	50.65	-58	13.8	1.6	-45.8	-13.0	32.8
5640.000	H	63.13	-42.9	14.0	1.3	-30.2	-13.0	17.2
5640.000	V	61.27	-44.6	14.0	1.3	-31.9	-13.0	18.9
199.000	H	46.25	-62.4	0.0	0.5	-62.9	-13.0	49.9
199.000	V	48.32	-62.2	0.0	0.5	-62.7	-13.0	49.7
WCDMA Band II, R99, Frequency:1880.000 MHz								
3760.000	H	53.64	-55.2	13.8	1.6	-43.0	-13.0	30.0
3760.000	V	49.62	-59	13.8	1.6	-46.8	-13.0	33.8
5640.000	H	56.18	-49.9	14.0	1.3	-37.2	-13.0	24.2
5640.000	V	55.38	-50.5	14.0	1.3	-37.8	-13.0	24.8
286.000	H	46.31	-62.5	0.0	0.5	-63.0	-13.0	50.0
286.000	V	48.02	-62.7	0.0	0.5	-63.2	-13.0	50.2

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

FCC §22.917(a) & §24.238(a)- BAND EDGES


Applicable Standard

FCC § 2.1053, §22.917, § 24.238.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

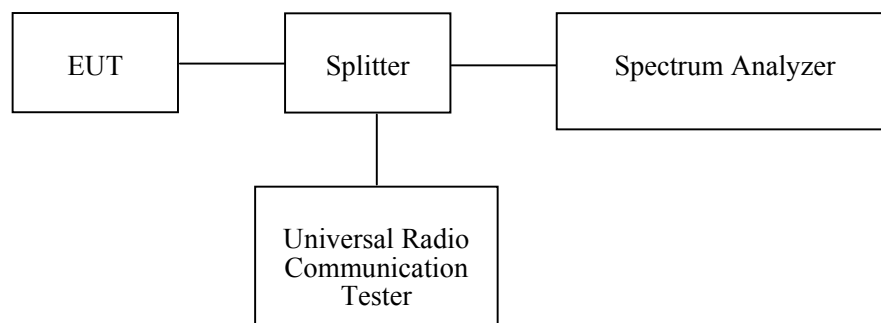

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Universal Radio Communication Tester	CMU200	109 038	2017-07-21	2018-07-21
N/A	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each Time	N/A
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	25.2~25.7 °C
Relative Humidity:	50~54 %
ATM Pressure:	100.8~100.9 kPa

* The testing was performed by Nami Quan on 2018-03-27&2018-03-28.

Test Mode: Transmitting


Test Result: Compliant. Please refer to the following plots.

GSM 850, Left Band Edge

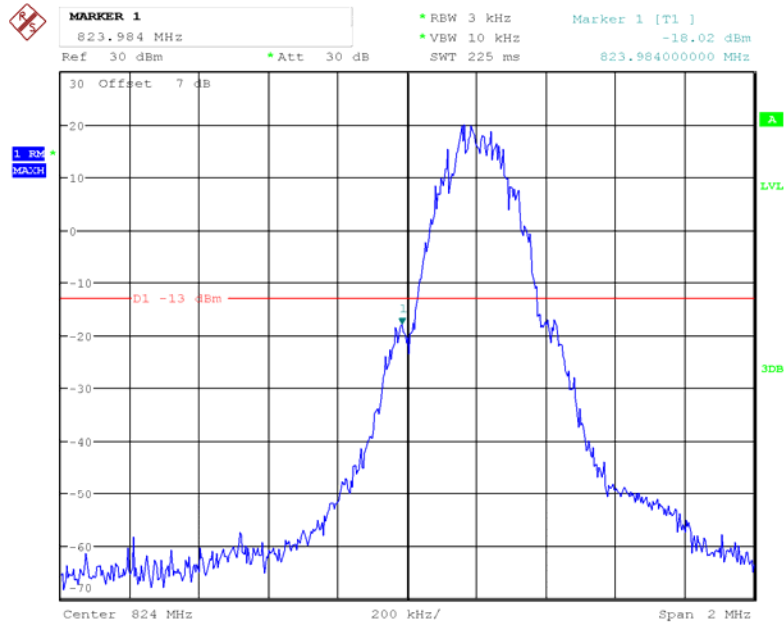

Date: 28.MAR.2018 09:46:46

GSM 850, Right Band Edge

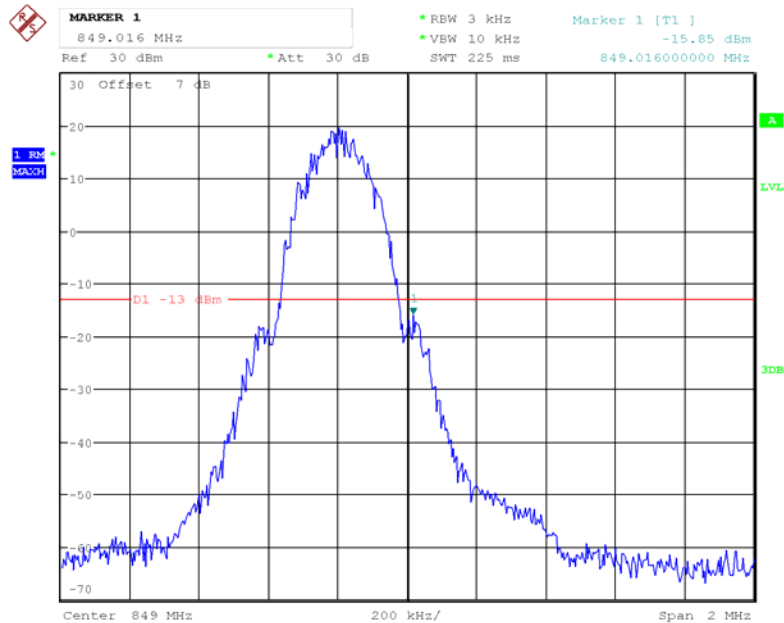

Date: 28.MAR.2018 09:53:48

MARKER 1
1.849978 GHz

Ref 30 dBm Att 30 dB

* RBW 3 kHz
* VBW 10 kHz
SWT 115 ms


Marker 1 [T1]
-20.69 dBm
1.849978000 GHz

1.849978 GHz
-20.69 dBm

D1 -13 dBm

Center 1.85 GHz Span 1 MHz


GSM 1900, Right Band Edge

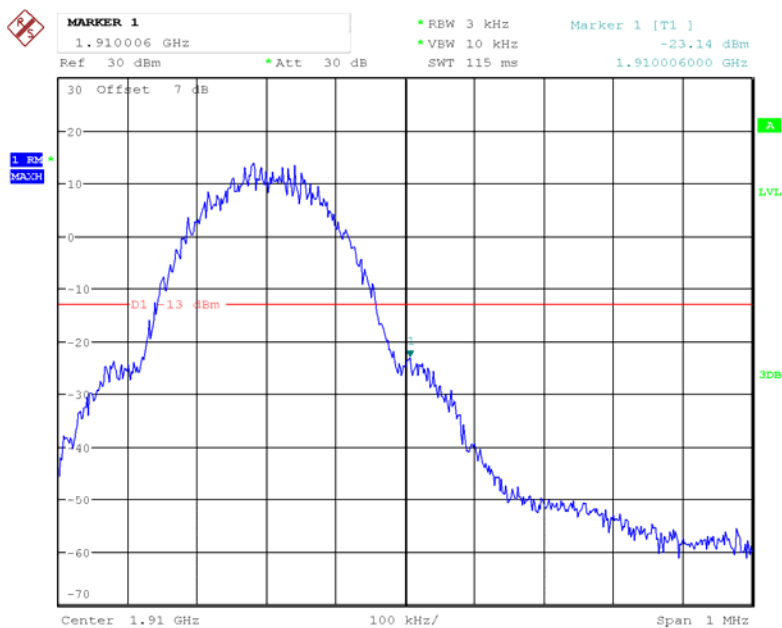

Page 36 of 46


WCDMA Band II:

REL99 Band II, Left Band Edge

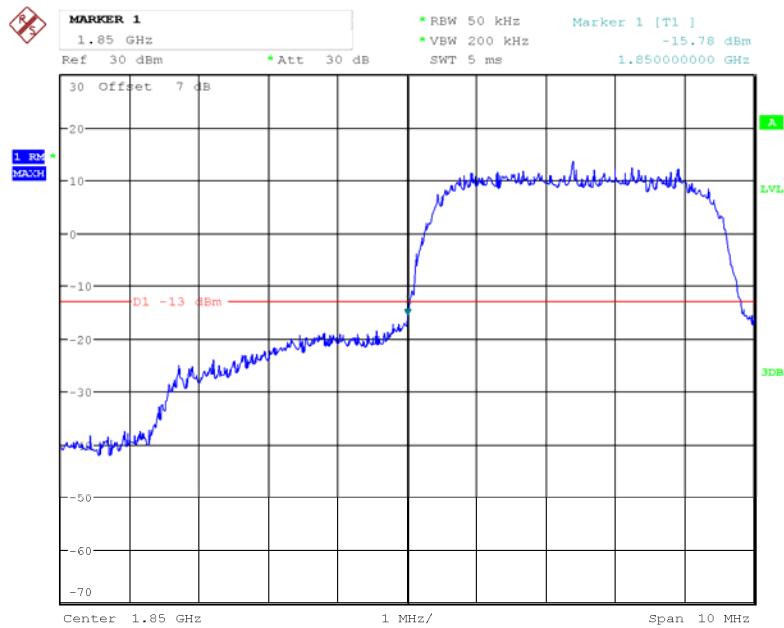

Date: 27.MAR.2018 16:30:23

REL99 Band II, Right Band Edge

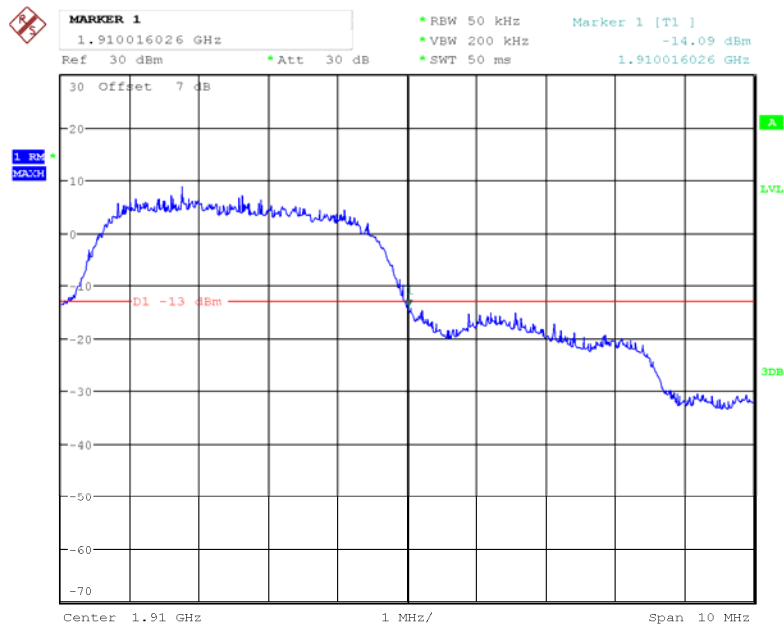

Date: 27.MAR.2018 16:31:14

MARKER 1
1.849855769 GHz

Ref 30 dBm Att 30 dB

* RBW 50 kHz
* VBW 200 kHz
SWT 5 ms

Marker 1 [T1]
-16.74 dBm
1.849855769 GHz


30 Offset 7 dB

1.849855769 GHz

D1 -13 dBm


Center 1.85 GHz 1 MHz/ Span 10 MHz

HSDPA Band II, Right Band Edge

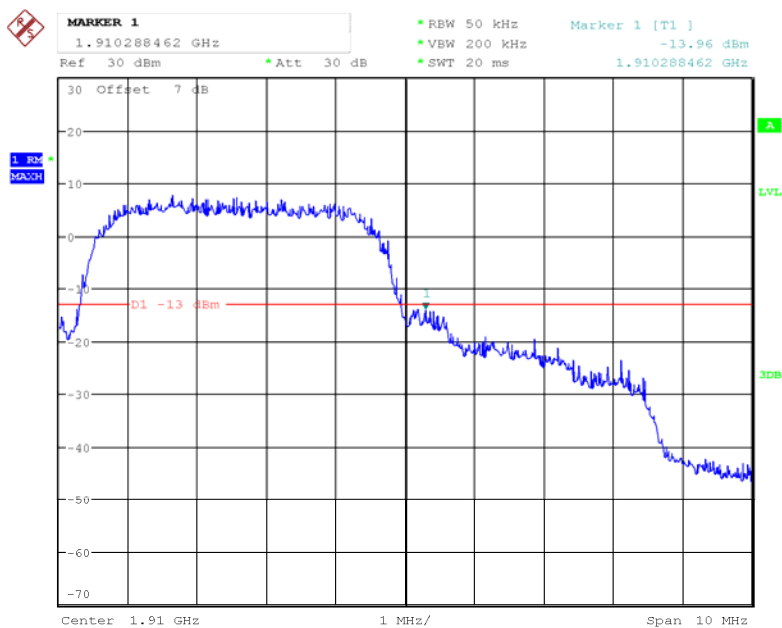


Page 38 of 46

HSUPA Band II, Left Band Edge

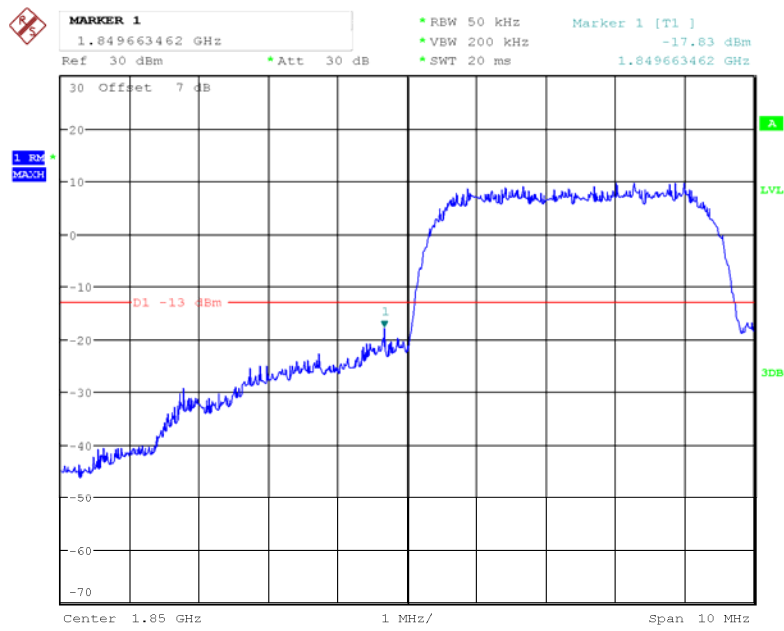

Date: 27.MAR.2018 16:16:43


HSUPA Band II, Right Band Edge

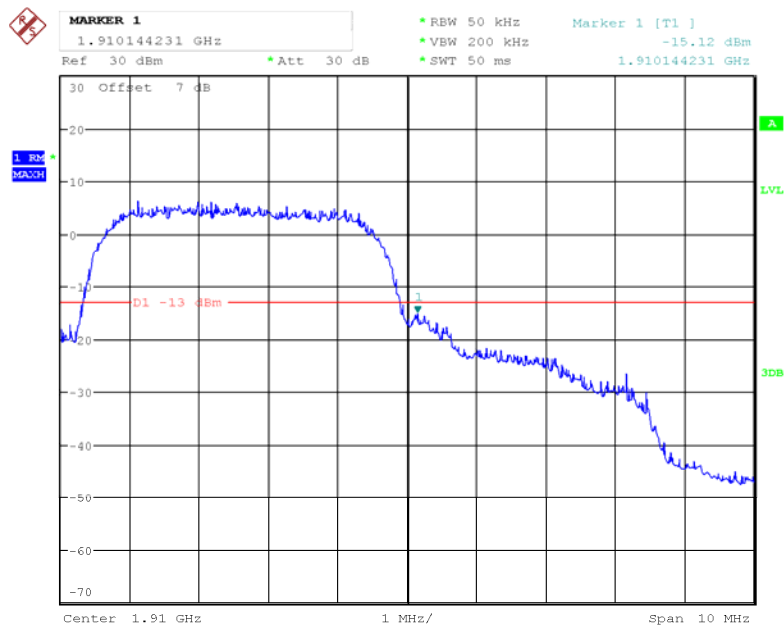

Date: 27.MAR.2018 16:22:47


WCDMA Band V

REL99 Band V, Left Band Edge

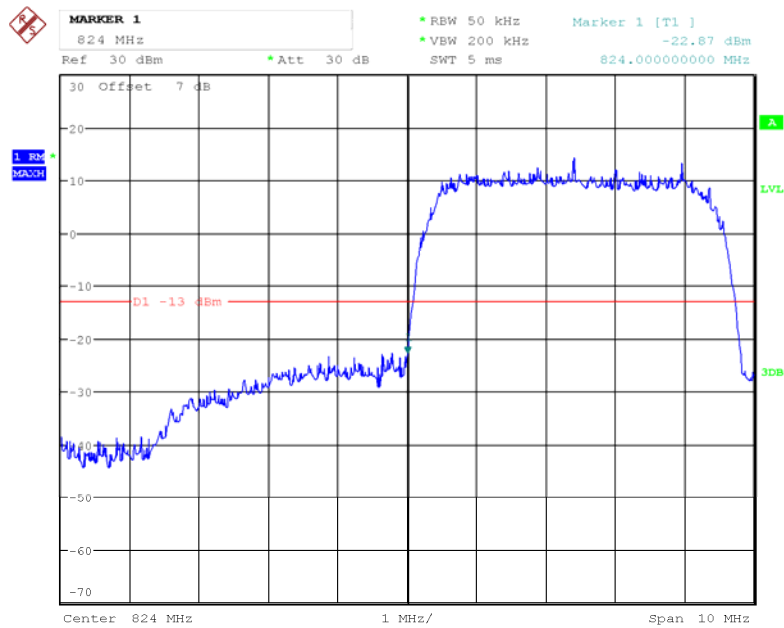


Date: 27.MAR.2018 16:33:10

REL99 Band V Right Band Edge

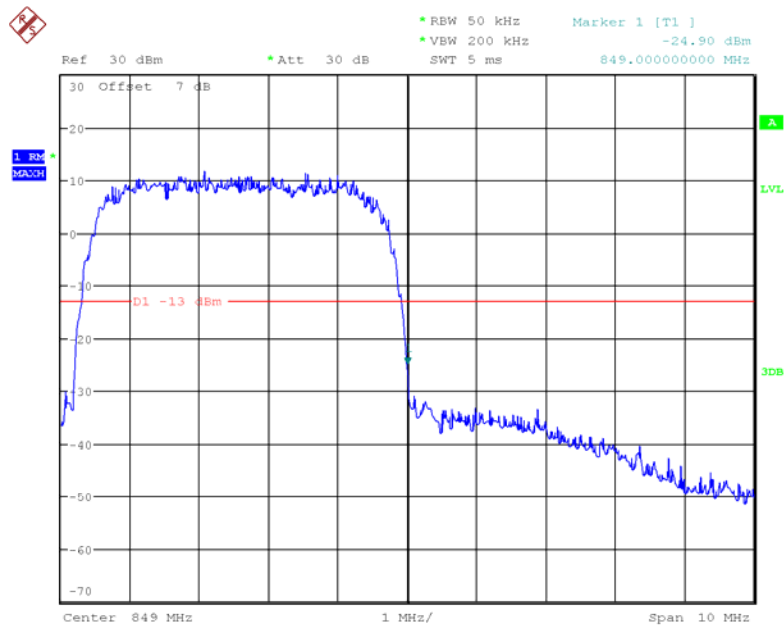


Date: 27.MAR.2018 16:32:54

HSDPA Band V, Left Band Edge

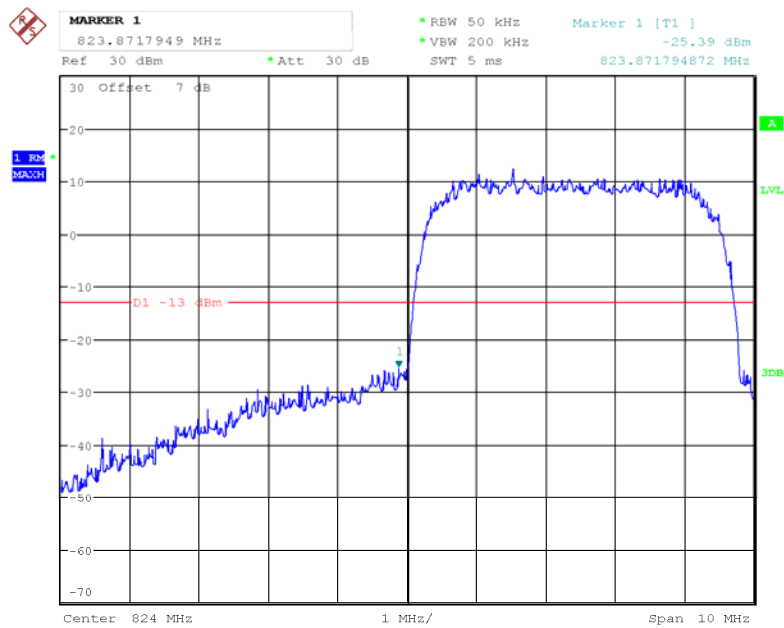


Date: 27.MAR.2018 16:25:46

HSDPA Band V, Right Band Edge

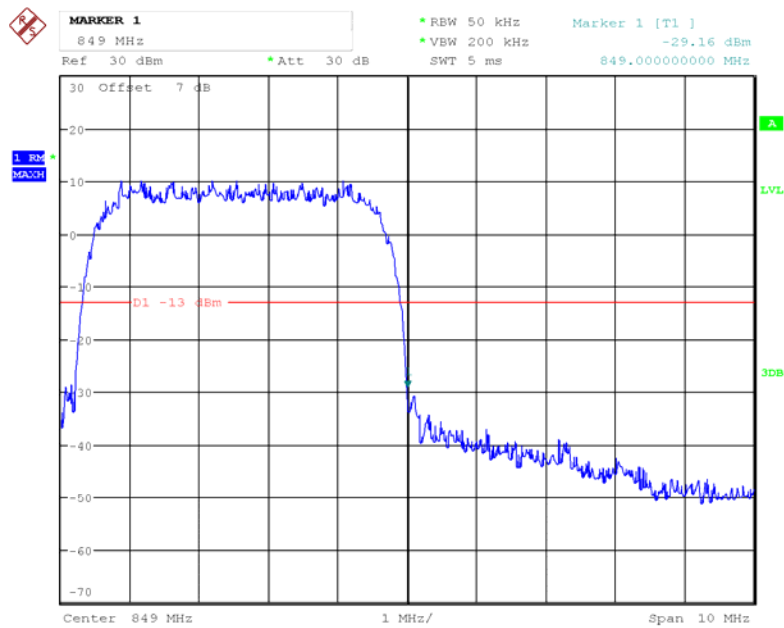


Date: 27.MAR.2018 16:26:08

HSUPA Band V, Left Band Edge

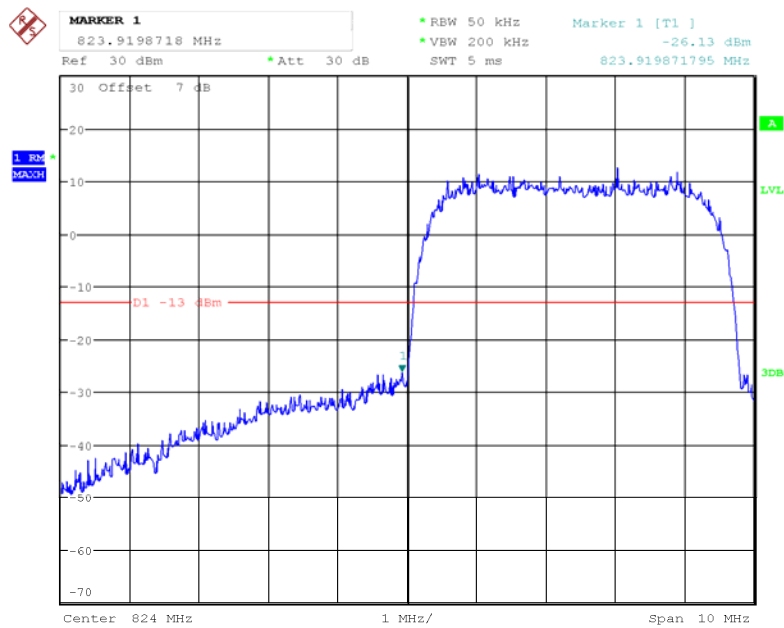

Date: 27.MAR.2018 16:15:11

HSUPA Band V, Right Band Edge

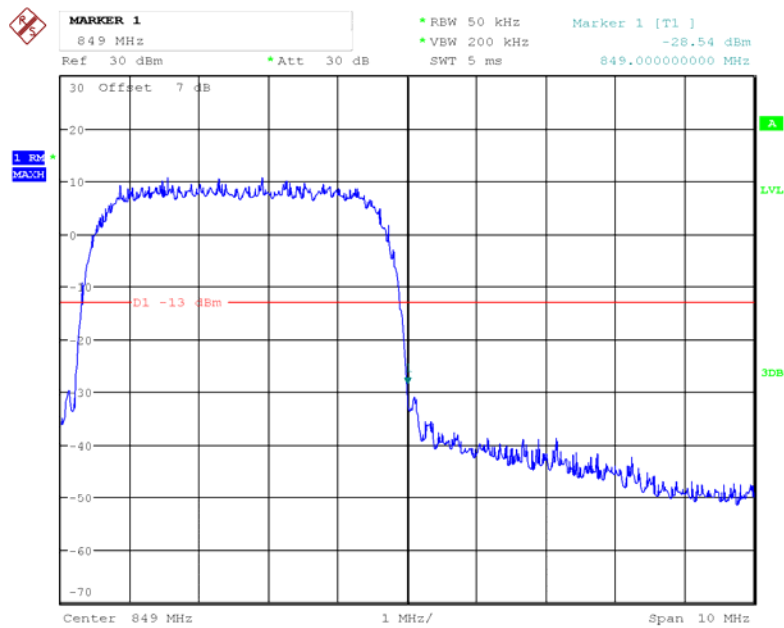

Date: 27.MAR.2018 16:14:51

FCC §2.1055, §22.355 & §24.235 - FREQUENCY STABILITY**Applicable Standard**

FCC § 2.1055 (a), § 2.1055 (d), §22.355, §24.235

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: An external variable DC power supply was connected to the battery terminals of the equipment under test. The voltage was set from 85% to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the battery end point. The output frequency was recorded for each battery voltage.

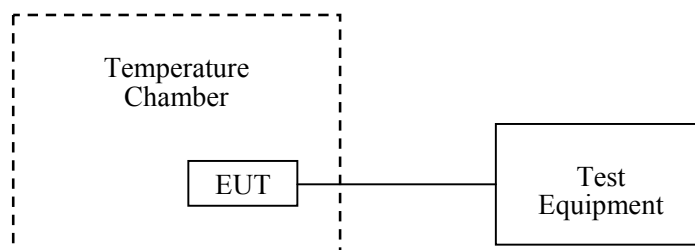

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Dongzhixu	High Temperature Test Chamber	DP1000	201105083-4	2017-08-28	2018-08-28
R&S	Universal Radio Communication Tester	CMU200	109 038	2017-07-21	2018-07-21
UNI-T	Multimeter	UT39A	M130199938	2017-05-09	2018-05-09
Unknown	Coaxial Cable	0.1m	C-1	Each Time	/
Pro instrument	DC Power Supply	pps3300	N/A	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25.7 °C
Relative Humidity:	50 %
ATM Pressure:	100.9 kPa

* The testing was performed by Nami Quan on 2018-03-28.

Cellular Band (Part 22H)

GMSK, Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30	3.7	7	0.008	2.5
-20		9	0.011	
-10		10	0.012	
0		7	0.008	
10		8	0.010	
20		9	0.011	
30		13	0.016	
40		8	0.010	
50		9	0.011	
25	3.5	8	0.010	
25	4.35	7	0.008	

PCS Band (Part 24E)

GMSK, Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Results
°C	V _{DC}	Hz	ppm	
-30	3.7	19	0.010	Pass
-20		18	0.010	
-10		18	0.010	
0		14	0.007	
10		15	0.008	
20		18	0.010	
30		18	0.010	
40		19	0.010	
50		19	0.010	
25	3.5	15	0.008	
25	4.35	17	0.009	

WCDMA Band II: R99

Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Results
°C	V _{DC}	Hz	ppm	
-30	3.7	7	0.004	Pass
-20		5	0.003	
-10		5	0.003	
0		8	0.004	
10		5	0.003	
20		4	0.002	
30		3	0.002	
40		4	0.002	
50		7	0.004	
25	3.5	0	0.000	
25	4.35	7	0.004	

WCDMA Band V: R99

Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30	3.7	2	0.002	2.5
-20		3	0.004	
-10		3	0.004	
0		7	0.008	
10		5	0.006	
20		2	0.002	
30		7	0.008	
40		1	0.001	
50		1	0.001	
25	3.5	3	0.004	
25	4.35	-1	-0.001	

Note: The fundamental emissions stay within the authorized bands of operation based on the frequency deviation measured is small, the extreme voltage was declared by applicant.

******* END OF REPORT *******