



RF - TEST REPORT

- Human Exposure -

Type / Model Name : KINEXON Mesh Anchor / A040001

Product Description : Anchor for UWB localization system

Applicant : KINEXON Inc.

Address : 200 S Wacker Drive, Suite 3100

CHICAGO, IL 60606, USA

Manufacturer : KINEXON GmbH

Address : Schellingstr. 35

80799 MÜNCHEN, GERMANY

Test Result according to the standards
listed in clause 1 test standards:

POSITIVE

Test Report No. : 80185270-07 Rev_0

07. March 2024

Date of issue



Deutsche
Akkreditierungsstelle
D-PL-12030-01-03
D-PL-12030-01-04

FCC ID: 2ALC5-KNX-AM1**IC: 25557-KNXAM1**

Contents

1	<u>TEST STANDARDS</u>	3
2	<u>EQUIPMENT UNDER TEST</u>	4
2.1	Information provided by the Client	4
2.2	Sampling	4
2.3	Photo documentation of the EUT – See ATTACHMENT A	4
2.4	Equipment type, category	4
2.5	Short description of the equipment under test (EUT)	4
2.6	Variants of the EUT	4
2.7	Operation frequency and channel plan	4
2.8	Transmit operating modes	4
2.9	Antennas	5
2.10	Power supply system utilised	5
3	<u>TEST RESULT SUMMARY</u>	6
3.1	Revision history of test report	6
3.2	Final assessment	6
4	<u>TEST ENVIRONMENT</u>	7
4.1	Address of the test laboratory	7
4.2	Environmental conditions	7
4.3	Statement of the measurement uncertainty	7
5	<u>HUMAN EXPOSURE</u>	8
5.1	SAR test exclusion considerations	8
5.2	Exemption limits for routine evaluation - SAR evaluation	10
6	<u>USED TEST EQUIPMENT AND ACCESSORIES</u>	12

ATTACHMENT A as separate supplement

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

FCC ID: 2ALC5-KNX-AM1

IC: 25557-KNXAM1

1 TEST STANDARDS

The tests were performed according to following standards:

FCC Rules and Regulations Part 1, Subpart I - Procedures Implementing the National Environmental Policy Act of 1969

Part 1, Subpart I, Section 1.1310 Radiofrequency radiation exposure limits

Part 1, Subpart 2, Section 2.1091 Radiofrequency radiation exposure evaluation: **mobile devices**.

Part 1, Subpart 2, Section 2.1093 Radiofrequency radiation exposure evaluation: **portable devices**.

KDB 447498 D04 RF Exposure procedures and equipment authorisation policies for mobile and portable devices, November 29, 2021.

RSS-102 Issue 5, March 2015 Radio Frequency (RF) Exposure Compliance of Radiocommunication apparatus (All Frequency Bands)

ANSI C95.1: 2005 IEEE Standard for Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz

ETSI TR 100 028 V1.3.1: 2001-03, Electromagnetic Compatibility and Radio Spectrum Matters (ERM); Uncertainties in the Measurement of Mobile Radio Equipment Characteristics—Part 1 and Part 2

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

FCC ID: 2ALC5-KNX-AM1

IC: 25557-KNXAM1

2 EQUIPMENT UNDER TEST

2.1 Information provided by the Client

Please note, we do not take any responsibility for information provided by the client or his representative which may have an influence on the validity of the test results.

2.2 Sampling

The customer is responsible for the choice of sample. Sample configuration, start-up and operation is carried out by the customer or according to his/her instructions.

2.3 Photo documentation of the EUT – See ATTACHMENT A

2.4 Equipment type, category

UWB device, BLE device, mobile equipment.

2.5 Short description of the equipment under test (EUT)

The KINEXON Mesh system is a real-time location system (RTLS) designed to provide precise tracking and asset management solutions.

Number of tested samples: 1
Serial number: pre-production sample #217
Firmware version: V1.0.0

2.6 Variants of the EUT

There are no variants.

2.7 Operation frequency and channel plan

Operating range 1: 2400 MHz to 2483.5 MHz.
Operating range 2: 3100 MHz to 10600 MHz.

2.8 Transmit operating modes

BLE:
The EUT uses GFSK modulation and may provide the following data rates: 1000 kbps.

UWB:
Modulation: variable pulse position modulation (PPM) in combination with binary phase shift keying (BPSK).
Data rate: 6.8 Mbit/s

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

FCC ID: 2ALC5-KNX-AM1
IC: 25557-KNXAM1

2.9 Antennas

BLE:

Number	Characteristic	Model number	Plug	f-range (GHz)	Gain (dBi)
1	Omni	PCB antenna, MIFA	None	2.4 – 2.5	1.6

UWB:

Number	Characteristic	Model number	Plug	f-range (GHz)	Max. Gain (dBi)
1	Omni	PCB antenna	None, PCB	4 – 7	5.8

2.10 Power supply system utilised

Power supply voltage, V_{nom} : 5 V_{DC} (USB)
Power supply voltage (alternative) : 3.6 V_{DC} (internal battery)

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

FCC ID: 2ALC5-KNX-AM1
IC: 25557-KNXAM1

3 TEST RESULT SUMMARY

FCC Rule Part	RSS Rule Part	Description	Result
KDB 447498, 7.1	RSS 102, 2.5.2	MPE	not applicable
KDB 447498, 4.3.1	RSS 102, 2.5.1	SAR exclusion consideration	passed
KDB 447498, 7.2	RSS102, 3.2	Co-location, Co-transmission	passed

The mentioned RSS Rule Parts in the above table are related to:
RSS 102, Issue 5, March 2015

3.1 Revision history of test report

Test report No	Rev.	Issue Date	Changes
80185270-07	0	07 March 2024	Initial test report

The test report with the highest revision number replaces the previous test reports.

3.2 Final assessment

The equipment under test fulfills the requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 04 March 2024

Testing concluded on : 04 March 2024

Checked by:

Tested by:

Klaus Gegenfurtner
Teamleader Radio

Franz-Xaver Schrettenbrunner
Radio Team

FCC ID: 2ALC5-KNX-AM1

IC: 25557-KNXAM1

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

**CSA Group Bayern GmbH
Ohmstrasse 1-4
94342 STRASSKIRCHEN
GERMANY**

4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15 - 35 °C

Humidity: 30 - 60 %

Atmospheric pressure: 86 - 106 kPa

4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. It is noted that the expanded measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor $k = 2$. The true value is located in the corresponding interval with a probability of 95 %. The measurement uncertainty was calculated for all measurements listed in this test report on basis of the ETSI Technical Report TR 100 028 Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1 and Part 2. The results are documented in the quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

4.4 Conformity Decision Rule

The applied conformity decision rule is based on ILAC G8:09/2019 clause 4.2.1 Binary Statement for Simple Acceptance Rule ($w = 0$).

Details can be found in the procedure CSA_B_V50_29.

FCC ID: 2ALC5-KNX-AM1

IC: 25557-KNXAM1

5 HUMAN EXPOSURE

5.1 SAR test exclusion considerations


For test instruments and accessories used see section 6 Part HE.

5.1.1 Description of the test location


Test location: Shielded Room S6

5.1.2 Photo documentation of the test set-up

BLE

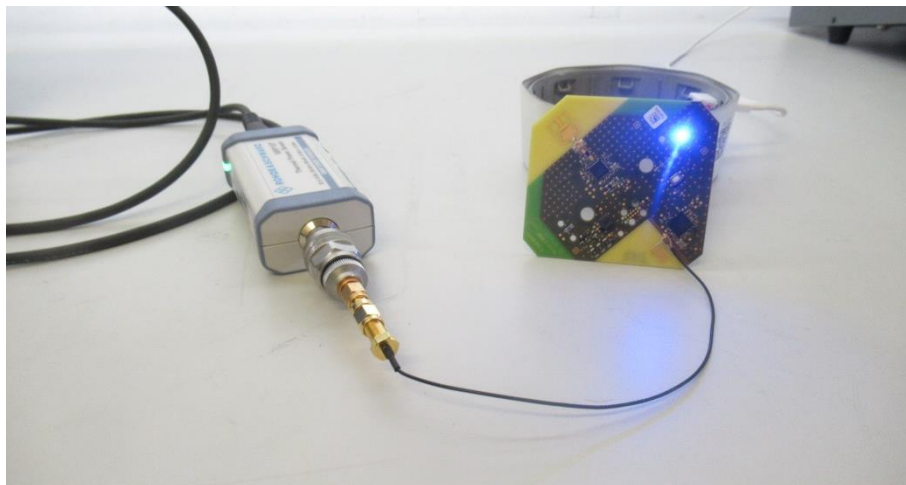

UWB

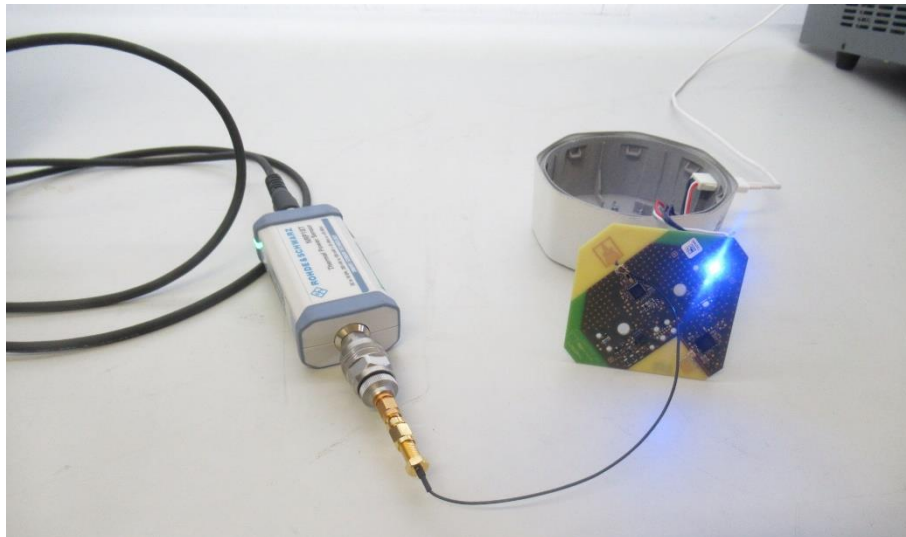

FCC ID: 2ALC5-KNX-AM1
IC: 25557-KNXAM1

5.1.3 Applicable standard

According to KDB 447498 clause 2.2.1:

As discussed in § 1.1307(b)(3)(ii)(A), the 1-mW exemption intended for single transmitters may be also applied to simultaneous transmission conditions, within the same host device, according one of the following criteria:

- a) When maximum available power each individual transmitting antenna within the same time averaging period is ≤ 1 mW, and the nearest parts of the antenna structures of the simultaneously operating transmitters are separated by at least 2 cm.
- b) When the aggregate maximum available power of all transmitting antennas is ≤ 1 mW in the same time-averaging period.

This exemption may not be combined with any other exemption.

5.1.4 Determination of RF exposure exemption for simultaneous transmission

The conducted emissions of both UWB and BLE are measured with a power meter.

UWB	$P_c = -31.3$ dBm $G = 5.8$ dBi $EIRP = -25.5$ dBm	$P_c = 741$ nW $EIRP = 2.81$ μW
BLE	$P_c = -9.6$ dBm $G = 1.6$ dBi $EIRP = -8.0$ dBm	$P_c = 0.110$ mW $EIRP = 0.158$ mW

The total sum of all radiated emissions is 0.158 mW + 2.81 μ W = 0.16 mW

The EUT qualifies for 1 mW exemption for simultaneous transmission.

The requirements are **FULFILLED**.

Remarks: None.

FCC ID: 2ALC5-KNX-AM1
IC: 25557-KNXAM1

5.2 Exemption limits for routine evaluation - SAR evaluation

5.2.1 Applicable standard

According to RSS-102, item 2.5.1:

SAR evaluation is required if the separation distance between the user and/or bystander and the antenna and/or radiating element of the device is less than or equal to 20 cm, except when the device operates at or below the applicable output power level (adjusted for tune-up tolerance) for the specified separation distance defined in Table 1.

Table 1: SAR evaluation – Exemption limits for routine evaluation based on frequency and separation distance
4, 5

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of ≤5 mm	At separation distance of 10 mm	At separation distance of 15 mm	At separation distance of 20 mm	At separation distance of 25 mm
≤ 300	71 mW	101 mW	132 mW	162 mW	193 mW
450	52 mW	70 mW	88 mW	106 mW	123 mW
835	17 mW	30 mW	42 mW	55 mW	67 mW
1900	7 mW	10 mW	18 mW	34 mW	60 mW
2450	4 mW	7 mW	15 mW	30 mW	52 mW
3500	2 mW	6 mW	16 mW	32 mW	55 mW
5800	1 mW	6 mW	15 mW	27 mW	41 mW

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of 30 mm	At separation distance of 35 mm	At separation distance of 40 mm	At separation distance of 45 mm	At separation distance of ≥50 mm
≤ 300	223 mW	254 mW	284 mW	315 mW	345 mW
450	141 mW	159 mW	88 mW	195 mW	213 mW
835	80 mW	92 mW	177 mW	117 mW	130 mW
1900	99 mW	153 mW	225 mW	316 mW	431 mW
2450	83 mW	123 mW	173 mW	235 mW	309 mW
3500	86 mW	124 mW	170 mW	225 mW	290 mW
5800	56 mW	71 mW	85 mW	97 mW	106 mW

4 The exemption limits in Table 1 are based on measurements and simulations of half-wave dipole antennas at separation distances of 5 mm to 25 mm from a flat phantom, providing a SAR value of approximately 0.4 W/kg for 1 g of tissue. For low frequencies (300 MHz to 835 MHz), the exemption limits are derived from a linear fit. For high frequencies (1900 MHz and above), the exemption limits are derived from a third order polynomial fit.

5 Transmitters operating between 0.003-10 MHz, meeting the exemption from routine SAR evaluation, shall demonstrate compliance to the instantaneous limits in Section 4.

FCC ID: 2ALC5-KNX-AM1
IC: 25557-KNXAM1
5.2.2 Conclusion according to RSS-102.

UWB	$P_c = -31.3 \text{ dBm}$	$P_c = 741 \text{ nW}$
	$G = 5.8 \text{ dBi}$	
	$EIRP = -25.5 \text{ dBm}$	$EIRP = 2.81 \text{ }\mu\text{W}$
BLE	$P_c = -9.6 \text{ dBm}$	$P_c = 0.110 \text{ mW}$
	$G = 1.6 \text{ dBi}$	
	$EIRP = -8.0 \text{ dBm}$	$EIRP = 0.158 \text{ mW}$

$$EIRP_{\text{total}} = 0.158 \text{ mW} + 2.81 \text{ }\mu\text{W} = 0.16 \text{ mW}$$

The requirements are **FULFILLED**.

Remarks: None.

FCC ID: 2ALC5-KNX-AM1**IC: 25557-KNXAM1**

6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used are calibrated and verified regularly. The calibration history is available on request.

Test ID	Model Type	Equipment No.	Next Calib.	Last Calib.	Next Verif.	Last Verif.
HE	NRP18T	02-02/07-19-001	12/09/2024	12/09/2023		

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.