

EMC TEST REPORT

No. 151201631SHA-002

Applicant : KID GALAXY INC
150 Dow Street Tower 2, Unit 425B, Manchester, New
Hampshire 03101 U.S.A

Manufacturer : KID GALAXY INC
150 Dow Street Tower 2, Unit 425B, Manchester, New
Hampshire 03101 U.S.A

Product Name : R/C Stunt Car

Type/Model : 10307

TEST RESULT : PASS

SUMMARY

The equipment complies with the requirements according to the following standard(s):

47CFR Part 15 (2015): Radio Frequency Devices (Subpart B)

ANSI C63.4 (2014): American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

Date of issue: February 17, 2016

Prepared by:



Wade Zhang (Project Engineer)

Reviewed by:



Daniel Zhao (Reviewer)



Description of Test Facility

Name: Intertek Testing Services Limited Shanghai

Address: Building 86, No. 1198 Qinzhou Rd., North, Shanghai 200233, P.R. China

FCC Registration Number: 236597

IC Assigned Code: 2042B-1

Name of contact: Jonny Jing

Tel: +86 21 61278271

Fax: +86 21 54262353

Content

SUMMARY	1
DESCRIPTION OF TEST FACILITY	2
1. GENERAL INFORMATION	4
1.1 Applicant Information.....	4
1.2 Identification of the EUT	4
2. TEST SPECIFICATION	5
2.1 Instrument list	5
2.2 Test Standard	5
2.3 Mode of operation during the test / Test peripherals used.....	5
2.4 Test Summary	6
3. RADIATED EMISSION	7
3.1 Radiated emission limits	7
3.1.1 Limits for radiated disturbance of class A device.....	7
3.1.2 Limits for radiated disturbance of class B device.....	7
3.2 Block diagram and test set up	8
3.3 Test Setup and Test Procedure.....	9
3.4 Test protocol	10
4. POWER LINE CONDUCTED EMISSION	12
4.1 Limits	12
4.1.1 Limits for conducted disturbance voltage at the mains ports of class A device	12
4.1.2 Limits for conducted disturbance voltage at the mains ports of class B device ...	12
4.2 Test setup	13
4.3 Test Setup and Test Procedure.....	14
4.4 Test protocol	14
APPENDIX I: PHOTOGRAPH OF EQUIPMENT UNDER TEST	15

1. General Information

1.1 Applicant Information

Applicant : KID GALAXY INC
150 Dow Street Tower 2, Unit 425B, Manchester, New
Hampshire 03101 U.S.A
Name of contact : Irene Ngai
Tel : 800- 816-1135
Fax : /
Manufacturer : KID GALAXY INC
150 Dow Street Tower 2, Unit 425B, Manchester, New
Hampshire 03101 U.S.A

1.2 Identification of the EUT

Equipment : R/C Stunt Car
Type/model : 10307
Description of EUT : The EUT has only one model. We tested it and listed the
receiver result in this report.
Rating : 4.8V DC 700mAh
Port identification : /
Category of EUT : Class B
EUT type : ☒ Table top ☐ Floor standing
Sample received date : 2015.12.31
Sample Identification : *0151231-48-002*
No
Date of test : 2015.12.31 ~ 2016.01.07

2. Test Specification

2.1 Instrument list

Equipment	Type	Manu.	Internal no.	Valid until date
Test Receiver	ESIB 26	R&S	EC 3045	2016-10-18
Test Receiver	ESCI 7	R&S	EC4501	2017-1-12
Bilog Antenna	CBL 6112D	TESEQ	EC 4206	2016-5-13
Horn antenna	HF 906	R&S	EC 3049	2016-5-10
Pre-amplifier	Pre-amp 18	R&S	EC 3222	2016-4-9
Semi-anechoic chamber	-	Albatross project	EC 3048	2016-5-18
Shielded room	-	Zhongyu	EC 2839	2017-1-7

2.2 Test Standard

47CFR Part 15: 2015

ANSI C63.4: 2014

2.3 Mode of operation during the test / Test peripherals used

Within this test report, EUT was tested under all available operation modes, and we verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Mode1: Normally working;

Test Peripherals:

Product	Manufacture	Model No.	Serial No.	Power Cord	FCC Approved
NA	NA	NA	NA	NA	NA

2.4 Test Summary

This report applies to tested sample only. This report shall not be reproduced in part without written approval of Intertek Testing Service Shanghai Limited.

TEST ITEM	FCC REFERANCE	RESULT
Power line conducted emission	15.107	NA
Radiated emission	15.109	Pass

3. Radiated emission

Test result: PASS

3.1 Radiated emission limits

3.1.1 Limits for radiated disturbance of class A device


Frequency (MHz)	Permitted limit in dB μ V/m (Quasi-peak) of Measurement Distance 10m
30 – 88	39
88 – 216	43.5
216 – 960	46.4
Above 960	49.5
Note: for the measurement distance other than 3m and 10m, the limit is varied according to 20dB/10 decades.	

3.1.2 Limits for radiated disturbance of class B device


Frequency (MHz)	Permitted limit in dB μ V/m (Quasi-peak) of Measurement Distance 3m
30 – 88	40.0
88 – 216	43.5
216 – 960	46.0
Above 960	54.0
Note: for the measurement distance other than 3m and 10m, the limit is varied according to 20dB/10 decades.	

3.2 Block diagram and test set up

☒ For table top equipment

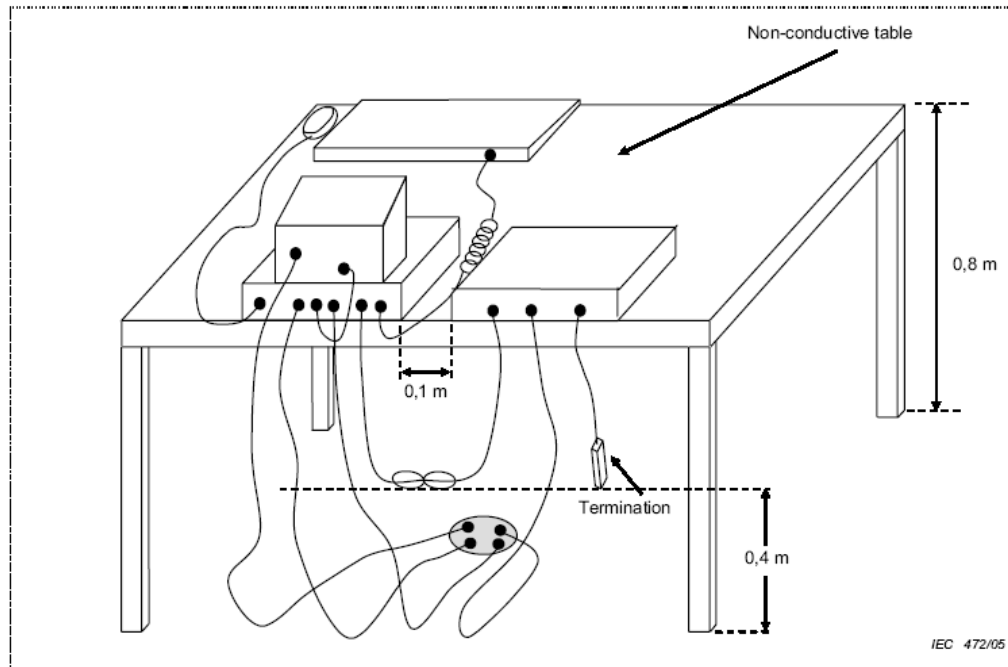

☐ For floor standing equipment

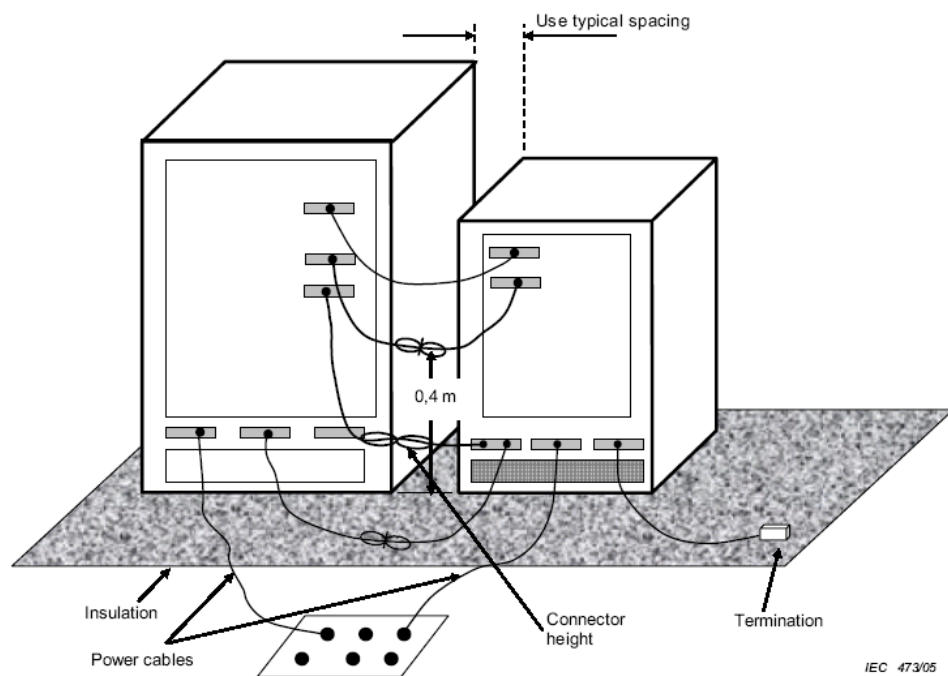

3.3 Test Setup and Test Procedure

The measurement was performed in a semi-anechoic chamber. While testing for spurious emission higher than 1GHz, the pre-amplifier (and high pass filter if necessary) is equipped just at the output terminal of the antenna.

The distance from EUT to receiving antenna is **3 meter**.

Measurement was performed according to clause 4 and clause 5 of ANSI 63.4.

Test procedure was according to clause 8.3 of ANSI 63.4.

EUT arrangement and operate condition were according to clause 6 and clause 8 of ANSI 63.4.

The radiated emission was measured using the test receiver with the resolutions bandwidth set as:

RBW = 100kHz, VBW = 300kHz (30MHz~1GHz)


RBW = 1MHz, VBW = 3MHz (>1GHz for PK)

RBW = 1MHz, VBW = 10Hz (>1GHz for AV)


3.4 Test protocol

Temperature : 25 °C
Relative Humidity : 55 %

Horizontal Polarization

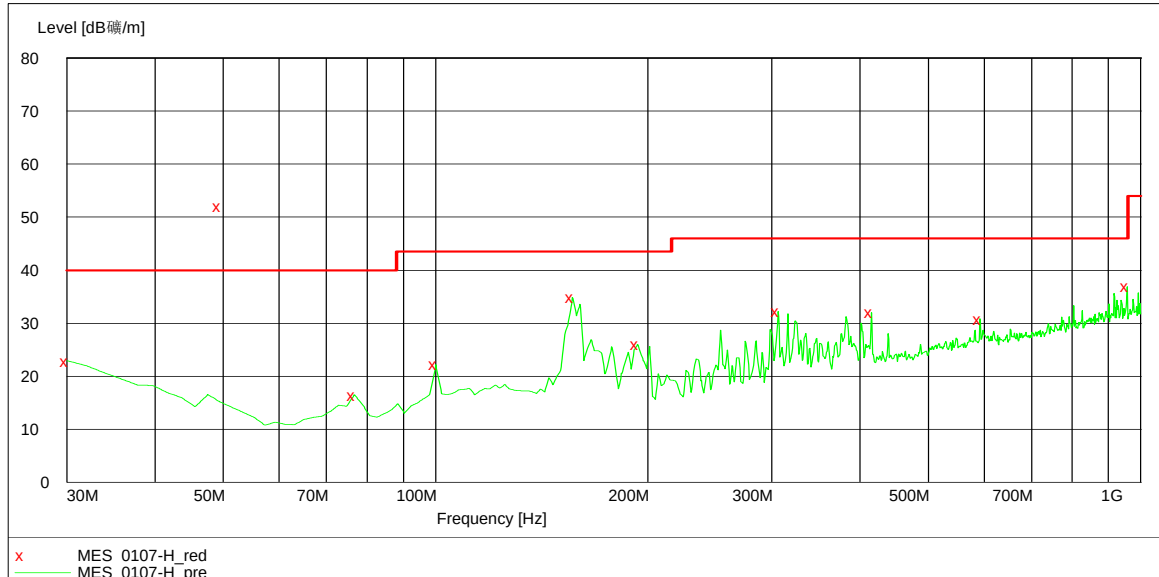

Vertical Polarization

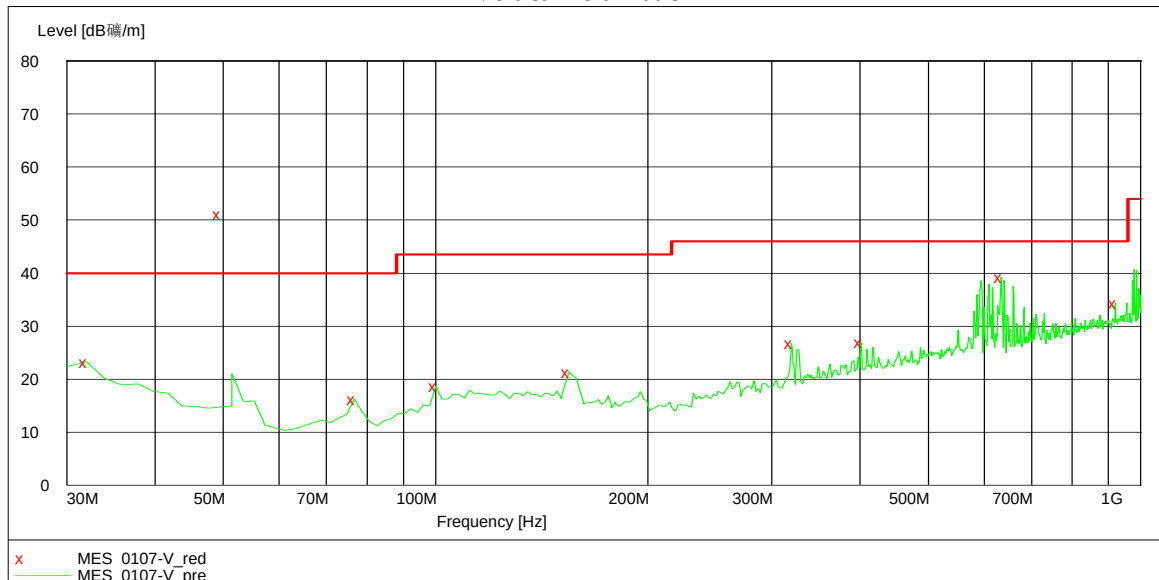

Test data:

Polarization	Frequency (MHz)	Emission level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB μ V/m)	Detector
H	30.00	22.9	40.0	17.1	PK
	76.65	16.5	40.0	23.5	PK
	99.98	22.2	43.5	21.3	PK
	156.35	34.8	43.5	8.7	PK
	193.29	26.0	43.5	17.5	PK
	306.03	32.2	46.0	13.8	PK
	414.89	32.0	46.0	14.0	PK
	591.78	30.8	46.0	15.2	PK
	957.23	36.9	46.0	9.1	PK
V	31.94	23.2	40.0	16.8	PK
	76.65	16.2	40.0	23.8	PK
	99.98	18.7	43.5	24.8	PK
	154.41	21.4	43.5	22.1	PK
	319.64	26.8	46.0	19.2	PK
	401.28	26.9	46.0	19.1	PK
	634.55	39.2	46.0	6.8	PK
	920.30	34.4	46.0	11.6	PK

4. Power line conducted emission

Test result: NA

4.1 Limits

4.1.1 Limits for conducted disturbance voltage at the mains ports of class A device


Frequency range (MHz)	Limits dB(μV)	
	Quasi-peak	Average
0.15 ~ 0.5	79	66
0.5 ~ 30	73	60
Note: If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.		

4.1.2 Limits for conducted disturbance voltage at the mains ports of class B device


Frequency range (MHz)	Limits dB(μV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 ~ 56 *	56 ~ 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50
Note: 1. * Means the limit decreasing linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz 2. If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.		

4.2 Test setup

☐ For table top equipment

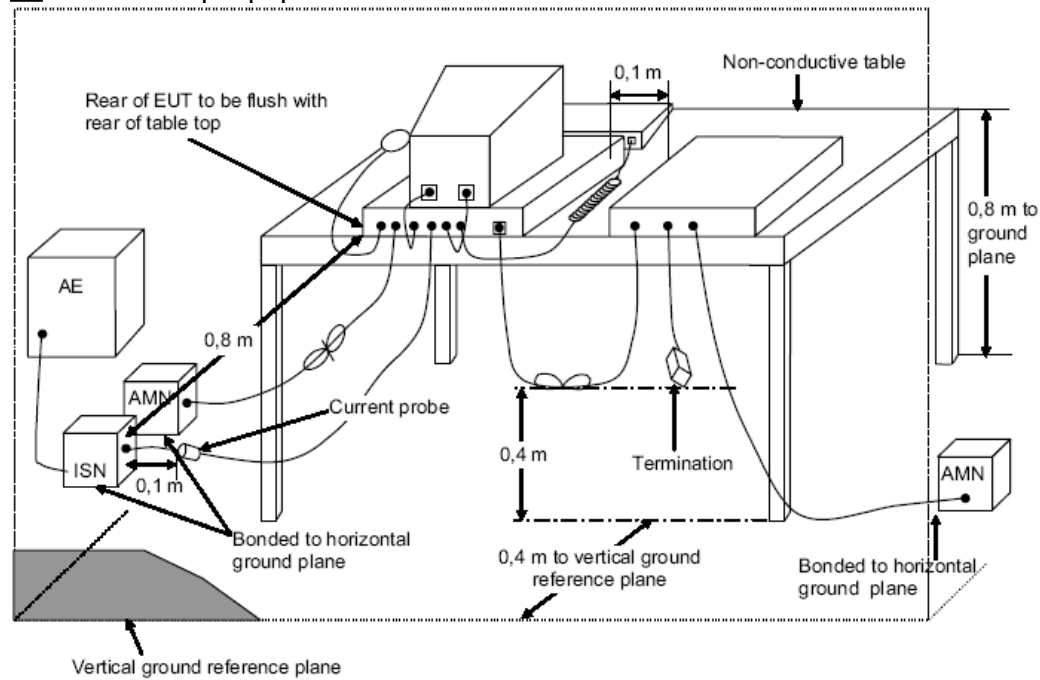

☐ For floor standing equipment

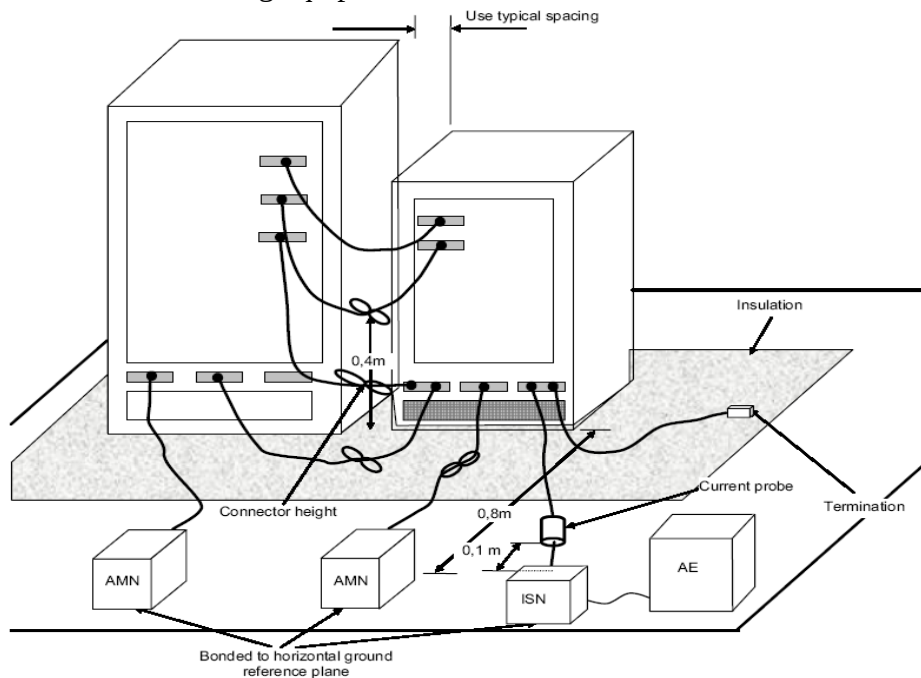

4.3 Test Setup and Test Procedure

Measurement was performed in shielded room, and instruments used were following clause 4 and clause 5 of ANSI 63.4.

Detailed test procedure was following clause 7.2 of ANSI 63.4.

EUT arrangement and operation conditions were according to clause 6 and clause 7 of ANSI 63.4.

Frequency range 150kHz – 30MHz was checked and EMI receiver measurement bandwidth was set to 9 kHz.

4.4 Test protocol

Temperature : °C
Relative Humidity : %

Test Data:

Frequency (MHz)	Quasi-peak			Average		
	level dB(μV)	Limit dB(μV)	Margin (dB)	level dB(μV)	limit dB(μV)	Margin (dB)
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-

Appendix I: Photograph of equipment under test





