



MEASUREMENT REPORT

FCC PART 15.247 / RSS-247 Bluetooth-LE

FCC ID: VPYLBCA1KU1WA
IC: 772C-LBCA1KU1WA
APPLICANT: Murata Manufacturing Co., Ltd.

Application Type: Certification
Product: Communication Module
Model No.: LBCA1KU1WA
FCC Classification: FCC Part 15 Spread Spectrum Transmitter (DSS)
FCC Rule Part(s): Part 15 Subpart C (Section 15.247)
IC Rule(s): RSS-247 Issue 2, RSS-GEN Issue 5
Test Procedure(s): ANSI C63.10-2013, KDB 558074 D01v05r02
Test Date: October 22 ~ November 24, 2019

Reviewed By: 
(Kevin Guo)

Approved By: 
(Robin Wu)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
1910WSU012-U2	Rev. 01	Initial Report	12-05-2019	Valid

CONTENTS

Description	Page
1. INTRODUCTION	7
1.1. Scope	7
1.2. MRT Test Location	7
2. PRODUCT INFORMATION	8
2.1. Feature of Equipment under Test	8
2.2. Product Specification Subjective to this Report.....	8
2.3. Description of Available Antennas	8
2.4. Working Frequencies for this Report.....	9
2.5. Test Mode	9
2.6. Configuration of Test System.....	10
2.7. Test System Details.....	10
2.8. Device Capabilities	11
2.9. Test Configuration	11
2.10. EMI Suppression Device(s)/Modifications.....	11
2.11. Description of Test Software.....	11
2.12. Labeling Requirements.....	12
3. DESCRIPTION OF TEST	13
3.1. Evaluation Procedure	13
3.2. AC Line Conducted Emissions	13
3.3. Radiated Emissions	14
4. ANTENNA REQUIREMENTS	15
5. TEST EQUIPMENT CALIBRATION DATE	16
6. MEASUREMENT UNCERTAINTY	18
7. TEST RESULT	19
7.1. Summary	19
7.2. 99%Bandwidth Measurement.....	20
7.2.1. Test Limit	20
7.2.2. Test Procedure used.....	20
7.2.3. Test Setting.....	20
7.2.4. Test Setup.....	20
7.2.5. Test Result.....	21
7.3. 6dB Bandwidth Measurement.....	23
7.3.1. Test Limit	23

7.3.2.	Test Procedure used	23
7.3.3.	Test Setting	23
7.3.4.	Test Setup.....	23
7.3.5.	Test Result.....	24
7.4.	Output Power Measurement	26
7.4.1.	Test Limit	26
7.4.2.	Test Procedure Used	26
7.4.3.	Test Setting	26
7.4.4.	Test Setup.....	27
7.4.5.	Test Result.....	28
7.5.	Power Spectral Density Measurement	29
7.5.1.	Test Limit	29
7.5.2.	Test Procedure Used	29
7.5.3.	Test Setting	29
7.5.4.	Test Setup.....	29
7.5.5.	Test Result.....	30
7.6.	Conducted Band Edge and Out-of-Band Emissions.....	32
7.6.1.	Test Limit	32
7.6.2.	Test Procedure Used	32
7.6.3.	Test Setting	32
7.6.4.	Test Setup.....	33
7.6.5.	Test Result.....	34
7.7.	Radiated Spurious Emission Measurement	39
7.7.1.	Test Limit	39
7.7.2.	Test Procedure Used	39
7.7.3.	Test Setting	40
7.7.4.	Test Setup.....	41
7.7.5.	Test Result.....	43
7.8.	Radiated Restricted Band Edge Measurement	59
7.8.1.	Test Limit	59
7.8.2.	Test Procedure Used	62
7.8.3.	Test Setting	62
7.8.4.	Test Setup.....	63
7.8.5.	Test Result.....	64
7.9.	AC Conducted Emissions Measurement.....	96
7.9.1.	Test Limit	96
7.9.2.	Test Setup.....	96
7.9.3.	Test Result.....	97

8. CONCLUSION.....	101
Appendix A - Test Setup Photograph	102
Appendix B - EUT Photograph.....	103

§2.1033 General Information

Applicant:	Murata Manufacturing Co., Ltd.
Applicant Address:	10-1, Higashikotari 1-chome, Nagaokakyo-shi, Kyoto 617-8555, Japan
Manufacturer:	Murata Manufacturing Co., Ltd.
Manufacturer Address:	10-1, Higashikotari 1-chome, Nagaokakyo-shi, Kyoto 617-8555, Japan
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
Test Device Serial No.:	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 893164) test facility with the site description report on file and has met all the requirements specified in ANSI C63.4-2014.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-20025, G-20034, C-20020, T-20020) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications, Radio and SAR testing.



1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada and Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The measurement facility compliant with the test site requirements specified in ANSI C63.4-2014.



2. PRODUCT INFORMATION

2.1. Feature of Equipment under Test

Product Name:	Communication Module
Model No.:	LBCA1KU1WA
Bluetooth Version:	V5.0 dual mode

2.2. Product Specification Subjective to this Report

Frequency Range:	2402 ~ 2480MHz
Channel Number:	40
Type of modulation:	GFSK
Data Rate:	Up to 2Mbps

Note: For other features of this EUT, test report will be issued separately.

2.3. Description of Available Antennas

Antenna Type	Frequency Band (MHz)	TX Paths	Max Antenna Gain (dBi)
Chip Antenna	2402 ~ 2480	1	2.0
Pattern Antenna	2402 ~ 2480	1	4.0

2.4. Working Frequencies for this Report

Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz
03	2408 MHz	04	2410 MHz	05	2412 MHz
06	2414 MHz	07	2416 MHz	08	2418 MHz
09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz
15	2432 MHz	16	2434 MHz	17	2436 MHz
18	2438 MHz	19	2440 MHz	20	2442 MHz
21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz
27	2456 MHz	28	2458 MHz	29	2460 MHz
30	2462 MHz	31	2464 MHz	32	2466 MHz
33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz
39	2480 MHz	--	--	--	--


2.5. Test Mode

Test Mode	Mode 1: Transmit by Bluetooth-LE (1Mbps)
	Mode 2: Transmit by Bluetooth-LE (2Mbps)

2.6. Configuration of Test System

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

Connection Diagram

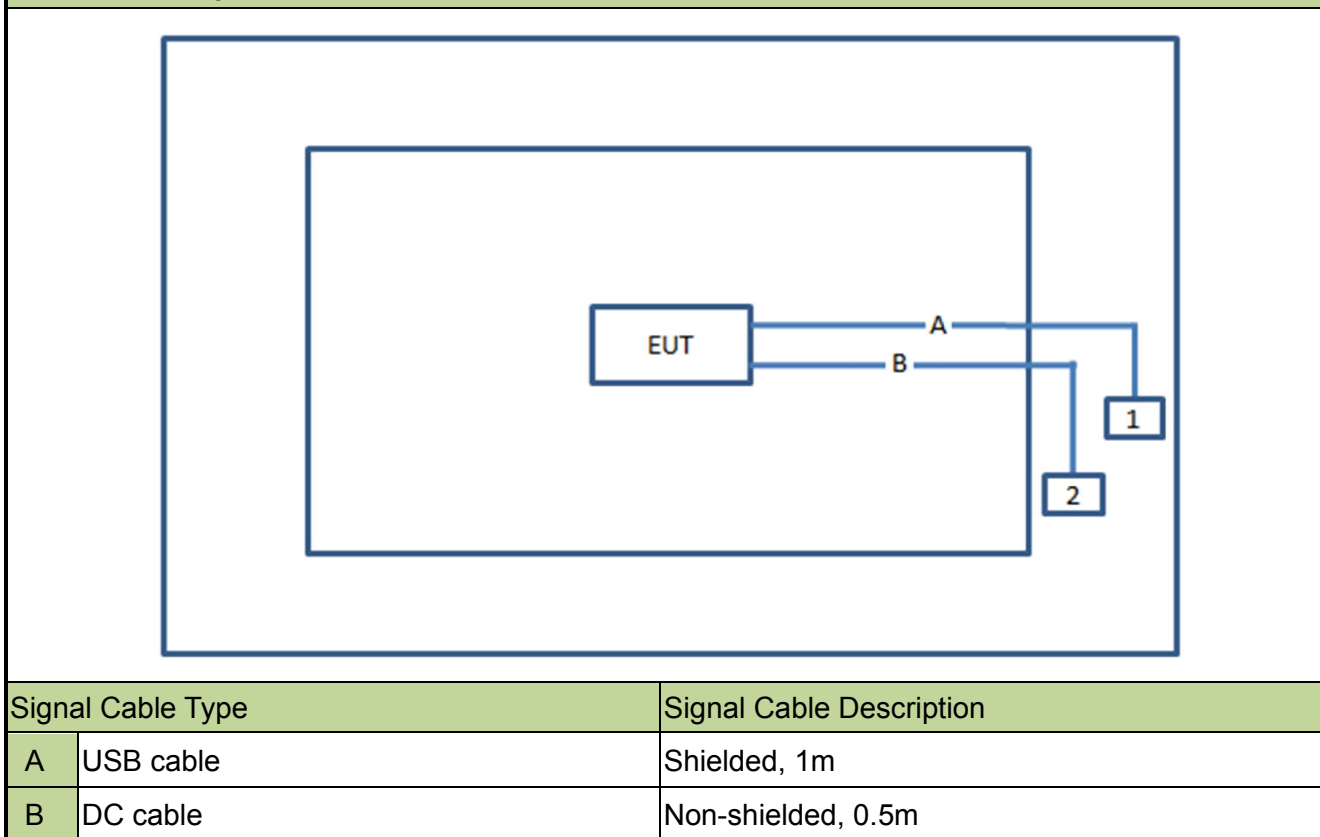

2.7. Test System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook	Lenovo	E431	PF-10ZRN 13/12	Non-Shielded, 1.8m
2	DC Power Supply	GWINSTEK	DPS-3303C	N/A	N/A


2.8. Device Capabilities

This device contains the following capabilities:

Bluetooth v5.0 (DSS, DTS)

Note: The maximum achievable duty cycles was determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Duty Cycle
Bluetooth-LE - 1Mbps	62.26%
Bluetooth-LE - 2Mbps	32.93%

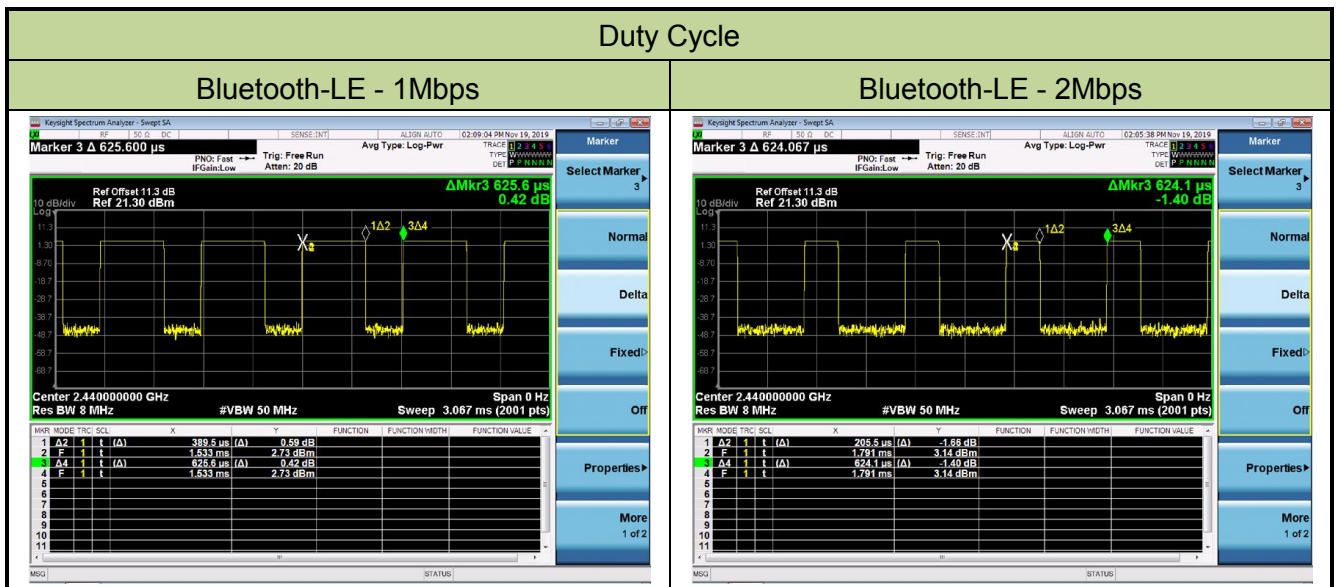

2.9. Test Configuration

The device was tested per the guidance of ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.10. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.11. Description of Test Software

The test utility software used during testing was “BlueTool”, and the version was 1.9.7.9.

2.12. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

RSP-100 Issue 12

The manufacturer, importer or distributor shall meet the labeling requirements set out in this section for every unit:

- (i) prior to marketing in Canada, for products manufactured in Canada
- (ii) prior to importation into Canada, for imported products

For information regarding the e-labeling option, see Notice 2014-DRS1003. The label for the certified product represents the manufacturer's or importer's compliance with Innovation, Science and Economic Development Canada's (ISED) regulatory requirements.

Please see attachment for IC label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013), and were used in the measurement.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions were used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the Antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable. For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive Antenna height using a broadband Antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn Antennas were used. For frequencies below 30MHz, a calibrated loop Antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband Antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive Antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn Antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive Antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive Antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn Antenna, the horn Antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions - SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2020/04/15
Two-Line V-Network	R&S	ENV 216	MRTSUE06002	1 year	2020/06/13
Two-Line V-Network	R&S	ENV 216	MRTSUE06003	1 year	2020/06/13
Thermohygrometer	Testo	608-H1	MRTSUE06404	1 year	2020/08/08
Shielding Room	MIX-BEP	Chamber-SR2	MRTSUE06215	N/A	N/A

Radiated Emissions - AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2020/08/01
PXA Signal Analyzer	Keysight	9030B	MRTSUE06395	1 year	2020/09/03
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2020/11/13
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2020/03/31
Broad Band Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2020/10/13
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06024	1 year	2019/12/17
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2020/11/15
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2020/06/11
Thermohygrometer	Testo	608-H1	MRTSUE06403	1 year	2020/08/08
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2020/04/30

Radiated Emission - AC2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Keysight	N9038A	MRTSUE06125	1 year	2020/08/01
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2020/11/13
Bilog Period Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2020/10/13
Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06171	1 year	2020/10/27
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06024	1 year	2019/12/17
Broadband Coaxial Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2020/11/15
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2020/06/11
Temperature/Humidity Meter	Minggao	ETH529	MRTSUE06170	1 year	2019/12/13
Anechoic Chamber	RIKEN	Chamber-AC2	MRTSUE06213	1 year	2020/04/30

Conducted Test Equipment - TR3

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2020/04/15
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06452	1 year	2020/07/11
Signal Analyzer	R&S	FSV40	MRTSUE06218	1 year	2020/04/15
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2020/11/17
USB wideband power sensor	Keysight	U2021XA	MRTSUE06446	1 year	2020/06/30
USB wideband power sensor	Keysight	U2021XA	MRTSUE06447	1 year	2020/06/30
Bluetooth Test Set	Anritsu	MT8852B-042	MRTSUE06389	1 year	2020/06/13
Audio Analyzer	Agilent	U8903B	MRTSUE06143	1 year	2020/06/13
Modulation Analyzer	HP	8901A	MRTSUE06098	1 year	2020/10/10
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2020/11/07
DC Power Supply	GWINSTEK	DPS-3303C	MRTSUE06064	N/A	N/A
Temperature & Humidity Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2020/11/07
Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2020/08/08

Software	Version	Function
EMI Software	V3	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement - SR2
<p>Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$):</p> <p>9kHz~150kHz: 3.84dB</p> <p>150kHz~30MHz: 3.46dB</p>
Radiated Emission Measurement - AC1
<p>Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$):</p> <p>Horizontal: 30MHz~300MHz: 4.07dB</p> <p> 300MHz~1GHz: 3.63dB</p> <p> 1GHz~18GHz: 4.16dB</p> <p>Vertical: 30MHz~300MHz: 4.18dB</p> <p> 300MHz~1GHz: 3.60dB</p> <p> 1GHz~18GHz: 4.76dB</p>
Radiated Emission Measurement - AC2
<p>Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$):</p> <p>Horizontal: 30MHz~300MHz: 3.75dB</p> <p> 300MHz~1GHz: 3.53dB</p> <p> 1GHz~18GHz: 4.28dB</p> <p>Vertical: 30MHz~300MHz: 3.86dB</p> <p> 300MHz~1GHz: 3.53dB</p> <p> 1GHz~18GHz: 4.33dB</p>

7. TEST RESULT

7.1. Summary

FCC Part Section(s)	IC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
N/A	RSS-GEN [6.7]	99% Bandwidth	N/A	Conducted	Pass	Section 7.2
15.247(a)(2)	RSS-247 [5.2]	6dB Bandwidth	$\geq 500\text{kHz}$		Pass	Section 7.3
15.247(b)(3)	RSS-247 [5.4(d)]	Output Power	$\leq 1\text{Watt}$ & $\text{EIRP} \leq 4\text{Watt}$		Pass	Section 7.4
15.247(e)	RSS-247 [5.2]	Power Spectral Density	$\leq 8\text{dBm} / 3\text{kHz}$		Pass	Section 7.5
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	$\geq 20\text{dBc(Peak)}$		Pass	Section 7.6
15.205 15.209	RSS-247 [5.5]	General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 7.7 Section 7.8
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits>	Line Conducted	Pass	Section 7.9

Notes:

- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.

7.2. 99%Bandwidth Measurement

7.2.1.Test Limit

N/A


7.2.2.Test Procedure used

ANSI C63.10-2013 Section 6.9.3

7.2.3.Test Setting

1. Set center frequency to the nominal EUT channel center frequency.
2. Span = 1.5 times to 5.0 times the OBW.
3. RBW = 1 % to 5 % of the OBW.
4. VBW $\geq 3 \times$ RBW.
5. Detector = Peak.
6. Trace mode = max hold.
7. Use the 99 % power bandwidth function of the instrument.


7.2.4.Test Setup

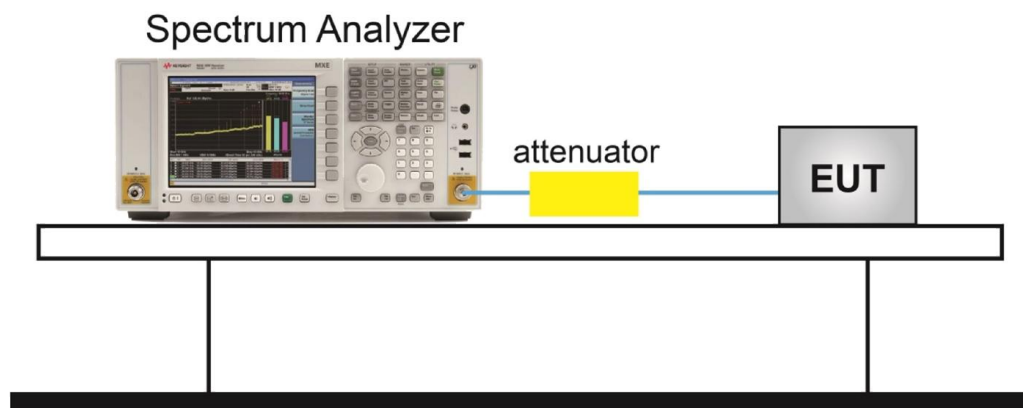

7.2.5. Test Result

Product	Communication Module	Temperature	25°C
Test Engineer	Snake Ni	Relative Humidity	52%
Test Site	TR3	Test Date	2019/11/19

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	99% Bandwidth (MHz)
Bluetooth-LE	1	00	2402	1.141
Bluetooth-LE	1	19	2440	1.142
Bluetooth-LE	1	39	2480	1.136
Bluetooth-LE	2	00	2402	2.091
Bluetooth-LE	2	19	2440	2.096
Bluetooth-LE	2	39	2480	2.087

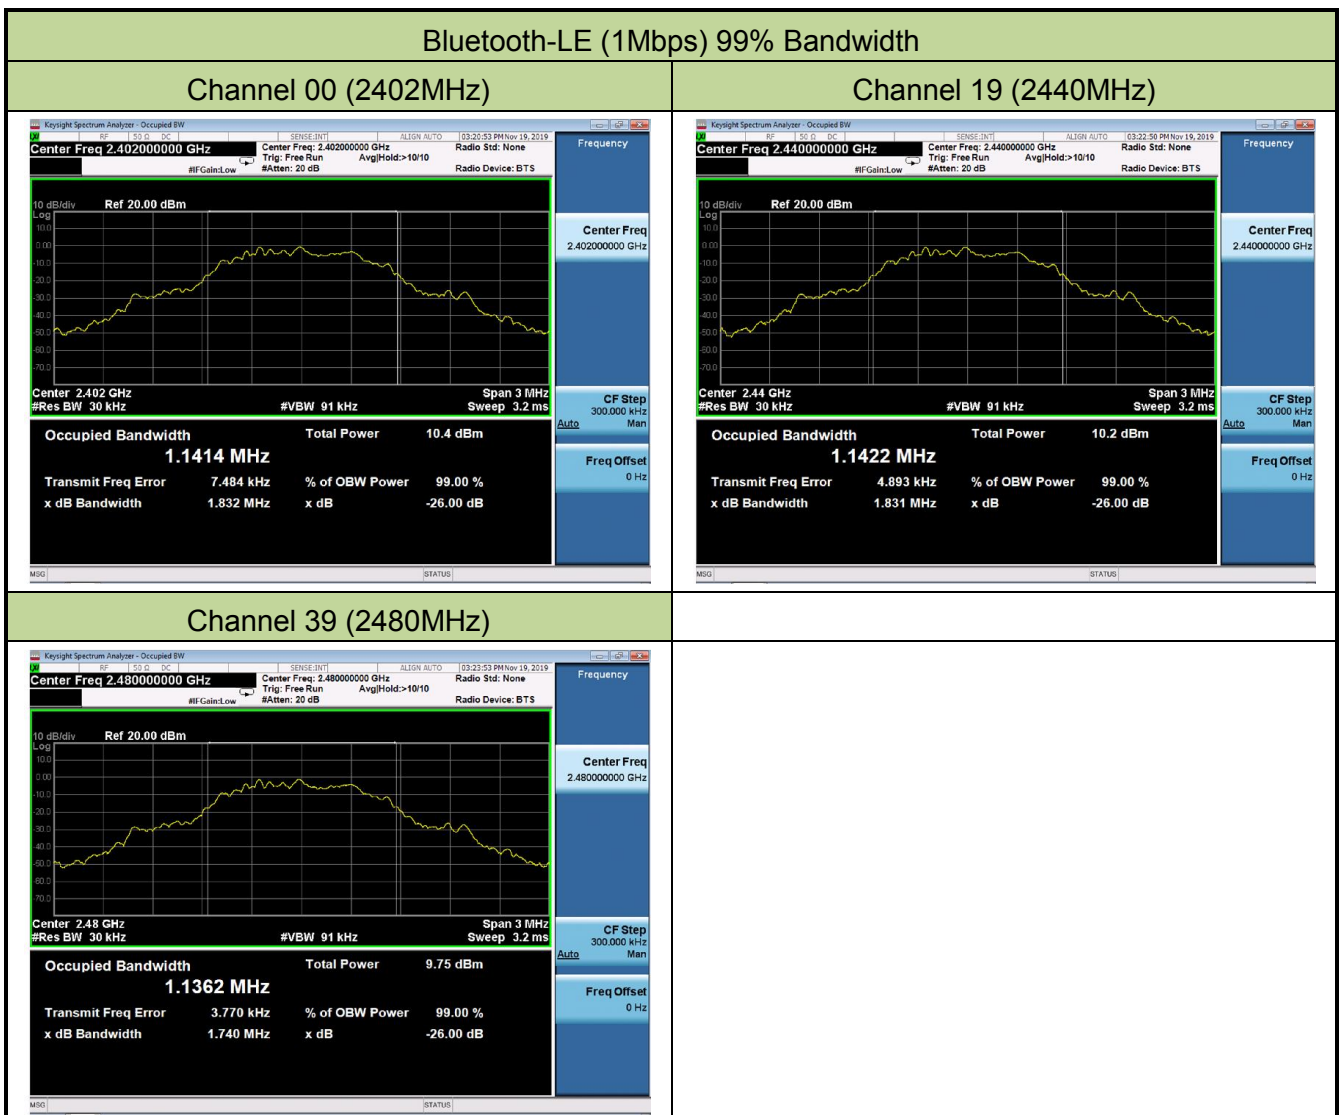

Bluetooth-LE (2Mbps) 99% Bandwidth

Channel 00 (2402MHz)



Channel 19 (2440MHz)



Channel 39 (2480MHz)



7.3. 6dB Bandwidth Measurement

7.3.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.3.2. Test Procedure used

ANSI C63.10-2013 - Section 11.8

7.3.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace was allowed to stabilize


7.3.4. Test Setup

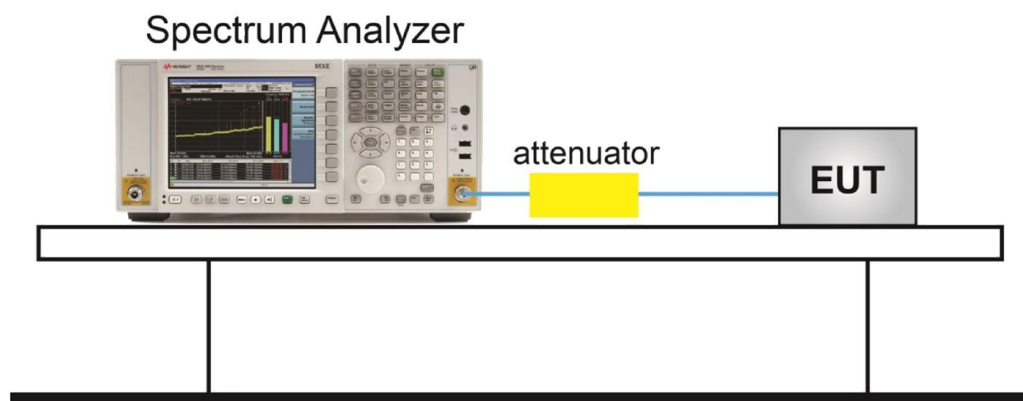

7.3.5. Test Result


Product	Communication Module	Temperature	25°C
Test Engineer	Snake Ni	Relative Humidity	52%
Test Site	TR3	Test Date	2019/11/19

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
Bluetooth-LE	1	00	2402	0.795	≥ 0.5	Pass
Bluetooth-LE	1	19	2440	0.801	≥ 0.5	Pass
Bluetooth-LE	1	39	2480	0.795	≥ 0.5	Pass
Bluetooth-LE	2	00	2402	1.108	≥ 0.5	Pass
Bluetooth-LE	2	19	2440	1.109	≥ 0.5	Pass
Bluetooth-LE	2	39	2480	1.118	≥ 0.5	Pass

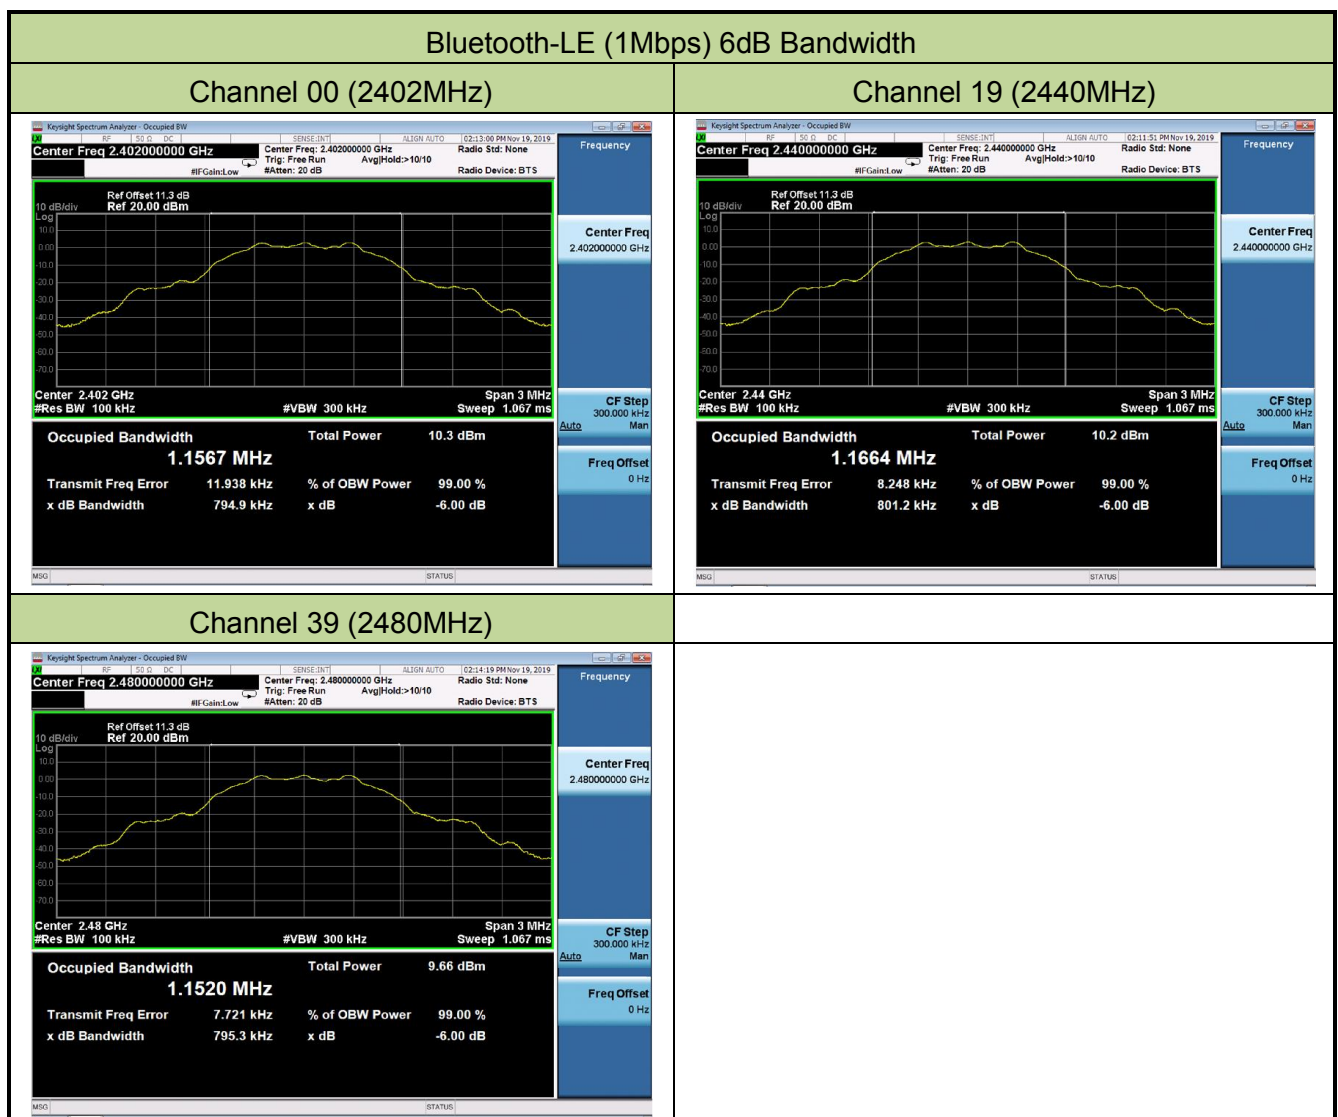


Bluetooth-LE (2Mbps) 6dB Bandwidth


Channel 00 (2402MHz)

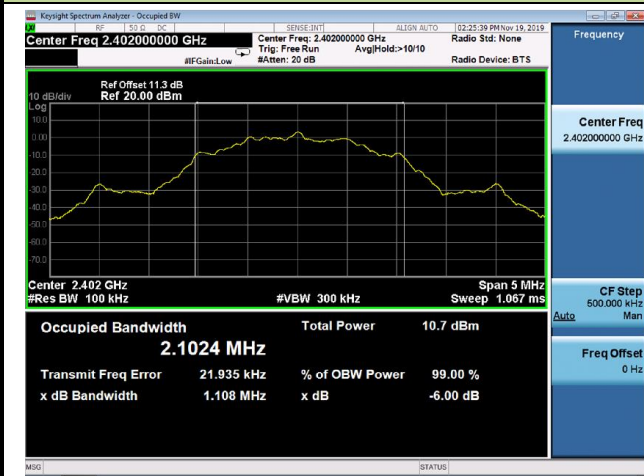

Channel 19 (2440MHz)

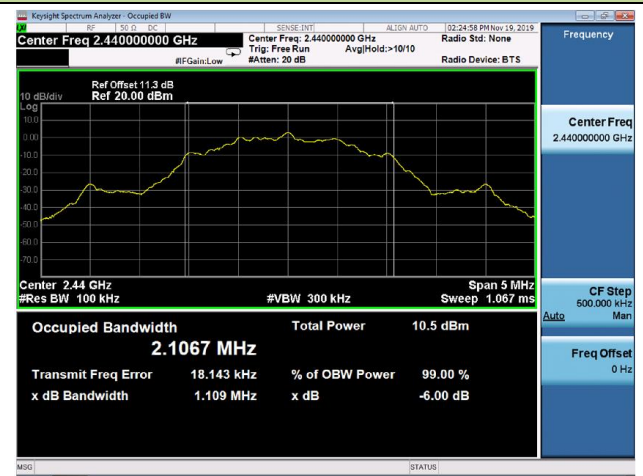

Channel 39 (2480MHz)

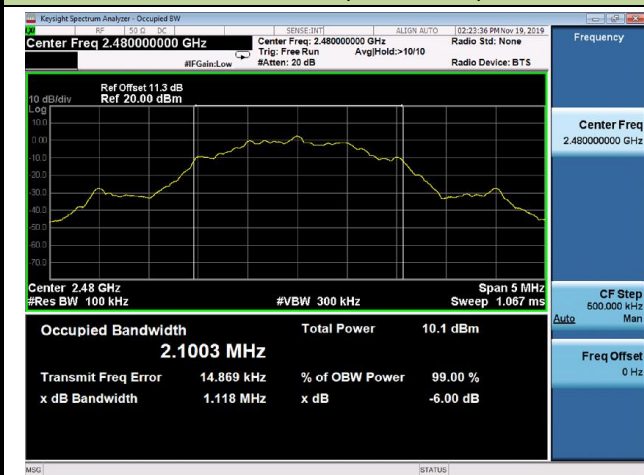

7.4. Output Power Measurement

7.4.1. Test Limit

The maximum out power shall be less 1 Watt (30dBm) and the E.I.R.P shall not exceed 4 Watt (36.02dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

7.4.2. Test Procedure Used

ANSI C63.10 - Section 11.9.1.3

ANSI C63.10 - Section 11.9.2.3.2

7.4.3. Test Setting


Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Method AVGPM-G (Measurement using a gated RF average-reading power meter)

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

7.4.4. Test Setup

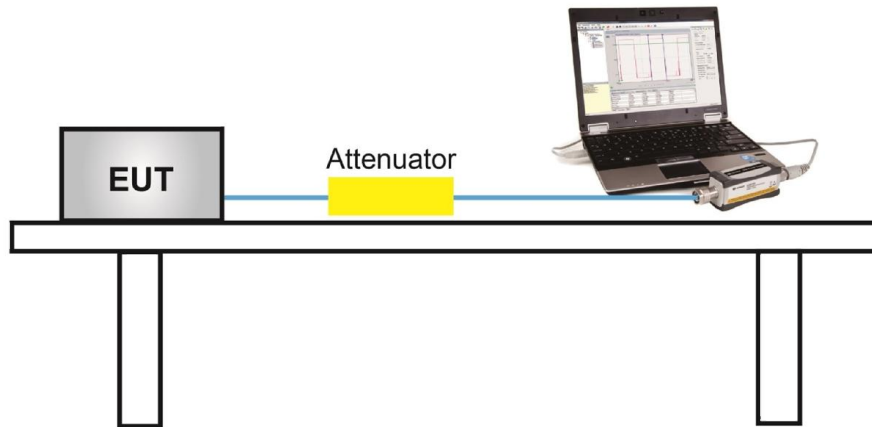

7.4.5. Test Result

Product	Communication Module	Temperature	25°C
Test Engineer	Snake Ni	Relative Humidity	52%
Test Site	TR3	Test Date	2019/11/19

Test Result of Peak Output Power

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	E.I.R.P (dBm)	E.I.R.P Limit (dBm)	Result
Bluetooth-LE	1	00	2402	3.75	≤ 30.00	7.75	≤ 36.02	Pass
Bluetooth-LE	1	19	2440	3.63	≤ 30.00	7.63	≤ 36.02	Pass
Bluetooth-LE	1	39	2480	3.29	≤ 30.00	7.29	≤ 36.02	Pass
Bluetooth-LE	2	00	2402	3.78	≤ 30.00	7.78	≤ 36.02	Pass
Bluetooth-LE	2	19	2440	3.66	≤ 30.00	7.66	≤ 36.02	Pass
Bluetooth-LE	2	39	2480	3.32	≤ 30.00	7.32	≤ 36.02	Pass

Note: E.I.R.P (dBm) = Peak Power (dBm) + Antenna Gain (dBi), Antenna Gain = 4.0 dBi.

Test Result of Average Output Power (Reporting Only)

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Average Power (dBm)	Limit (dBm)	E.I.R.P (dBm)	E.I.R.P Limit (dBm)	Result
Bluetooth-LE	1	00	2402	3.61	≤ 30.00	7.61	≤ 36.02	Pass
Bluetooth-LE	1	19	2440	3.47	≤ 30.00	7.47	≤ 36.02	Pass
Bluetooth-LE	1	39	2480	3.11	≤ 30.00	7.11	≤ 36.02	Pass
Bluetooth-LE	2	00	2402	3.61	≤ 30.00	7.61	≤ 36.02	Pass
Bluetooth-LE	2	19	2440	3.47	≤ 30.00	7.47	≤ 36.02	Pass
Bluetooth-LE	2	39	2480	3.12	≤ 30.00	7.12	≤ 36.02	Pass

Note: E.I.R.P (dBm) = Average Power (dBm) + Antenna Gain (dBi), Antenna Gain = 4.0 dBi.

7.5. Power Spectral Density Measurement

7.5.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.


7.5.2. Test Procedure Used

ANSI C63.10 - Section 11.10.2

7.5.3. Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 10kHz
5. Detector = Peak
6. Sweep time = Auto couple
7. Trace mode = Max hold
8. Trace was allowed to stabilize


7.5.4. Test Setup

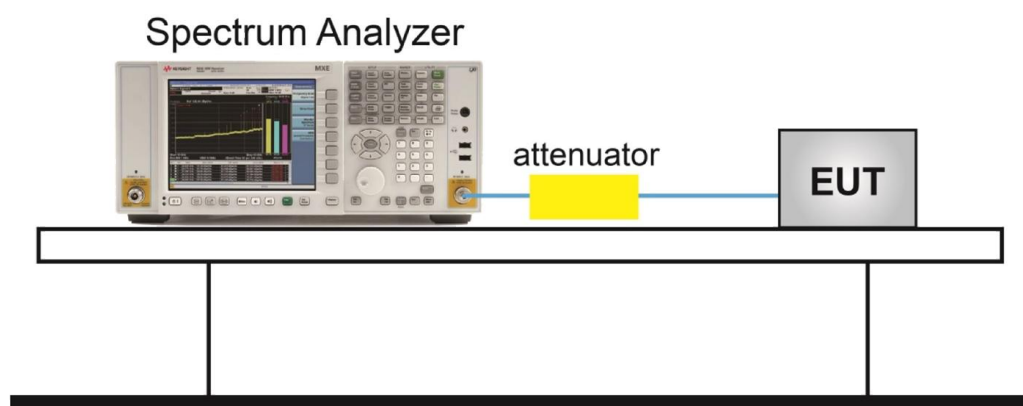

7.5.5.Test Result


Product	Communication Module	Temperature	25°C
Test Engineer	Snake Ni	Relative Humidity	52%
Test Site	TR3	Test Date	2019/11/19

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	PSD Result (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
Bluetooth-LE	1	00	2402	-10.74	≤ 8.00	Pass
Bluetooth-LE	1	19	2440	-10.88	≤ 8.00	Pass
Bluetooth-LE	1	39	2480	-11.30	≤ 8.00	Pass
Bluetooth-LE	2	00	2402	-13.35	≤ 8.00	Pass
Bluetooth-LE	2	19	2440	-13.58	≤ 8.00	Pass
Bluetooth-LE	2	39	2480	-13.86	≤ 8.00	Pass

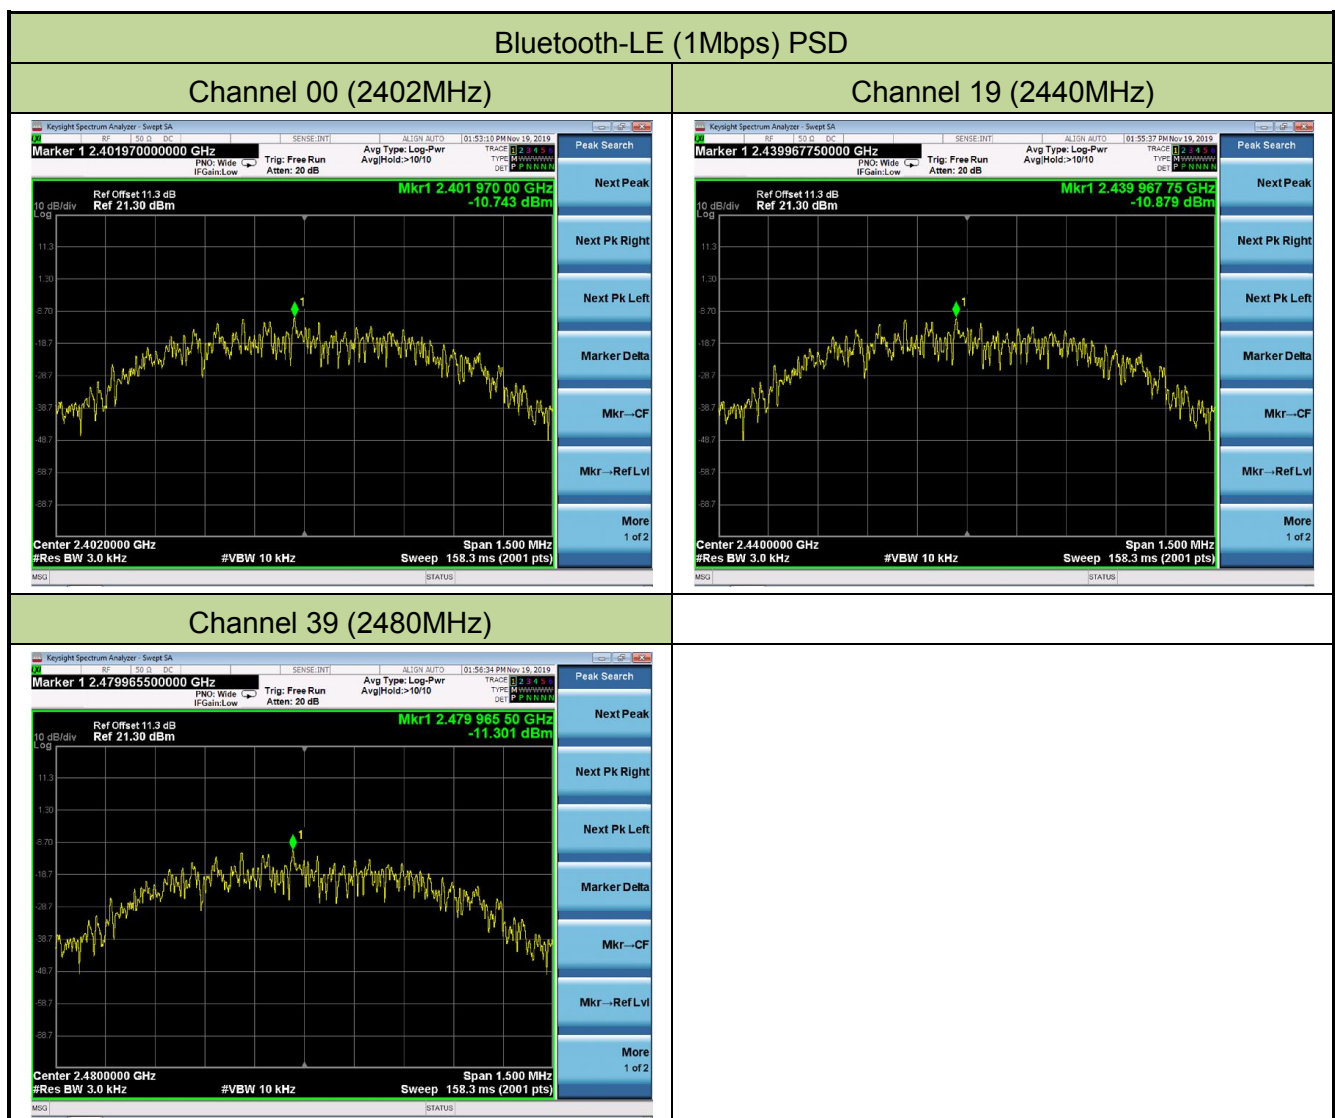


Bluetooth-LE (2Mbps) PSD


Channel 00 (2402MHz)

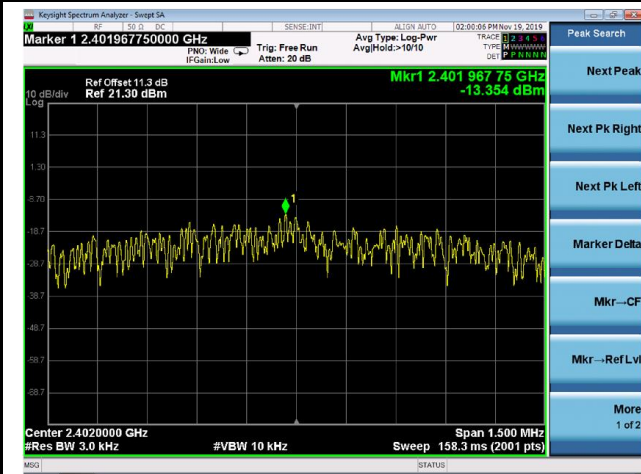

Channel 19 (2440MHz)

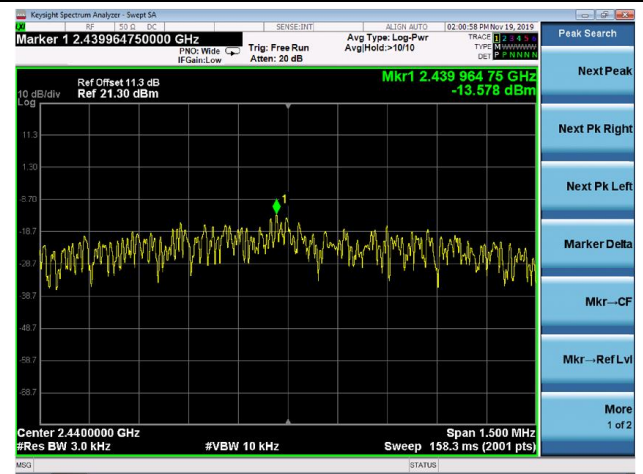

Channel 39 (2480MHz)

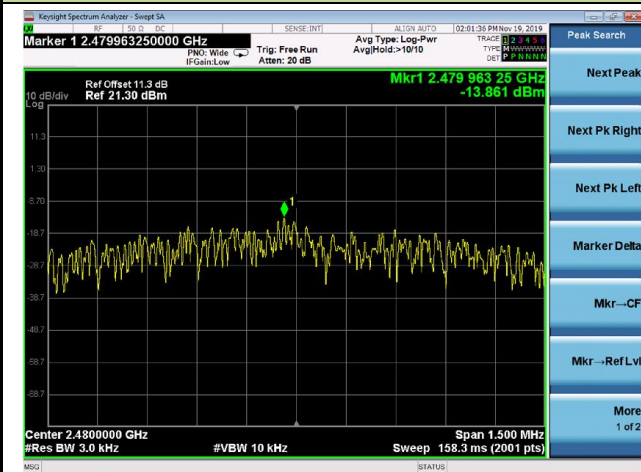

7.6. Conducted Band Edge and Out-of-Band Emissions

7.6.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 20 dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

7.6.2. Test Procedure Used

ANSI C63.10 - Section 11.11

7.6.3. Test Setting

Reference level measurement

1. Set instrument center frequency to DTS channel center frequency
2. Set the span to ≥ 1.5 times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW $\geq 3 \times$ RBW
5. Detector = Peak
6. Sweep time = Auto couple
7. Trace mode = Max hold
8. Allow trace to fully stabilize


Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 1.3MHz
3. VBW = 4MHz
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep time = Auto couple
7. The trace was allowed to stabilize

Test Notes

1. RBW was set to 1.3MHz rather than 100kHz in order to increase the measurement speed; meanwhile, the VBW was set to 4MHz instead of 300kHz.
2. The display line shown in the following plots denotes the limit at 20dB below the fundamental emission level measured in a 100kHz bandwidth. However, since the traces in the following plots are measured with a 1.3MHz RBW, the display line may not necessarily appear to be 20dB below the level of the fundamental measured in a 1.3MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.

7.6.4. Test Setup

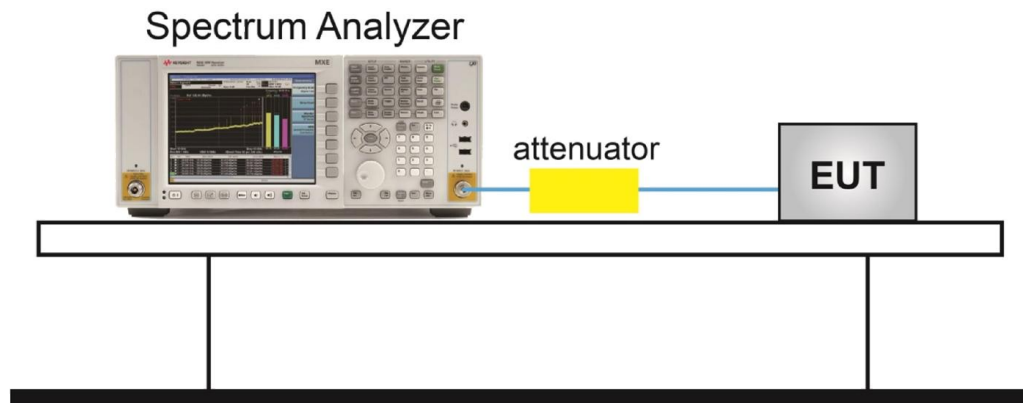

7.6.5. Test Result

Product	Communication Module	Temperature	25°C
Test Engineer	Snake Ni	Relative Humidity	52%
Test Site	TR3	Test Date	2019/11/19

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Limit	Result
Bluetooth-LE	1	00	2402	20dBc	Pass
Bluetooth-LE	1	19	2440	20dBc	Pass
Bluetooth-LE	1	39	2480	20dBc	Pass
Bluetooth-LE	2	00	2402	20dBc	Pass
Bluetooth-LE	2	19	2440	20dBc	Pass
Bluetooth-LE	2	39	2480	20dBc	Pass


Bluetooth-LE (1Mbps) Out-of-Band Emissions

Channel 00 (2402MHz)

100kHz PSD reference Level



Low Band Edge

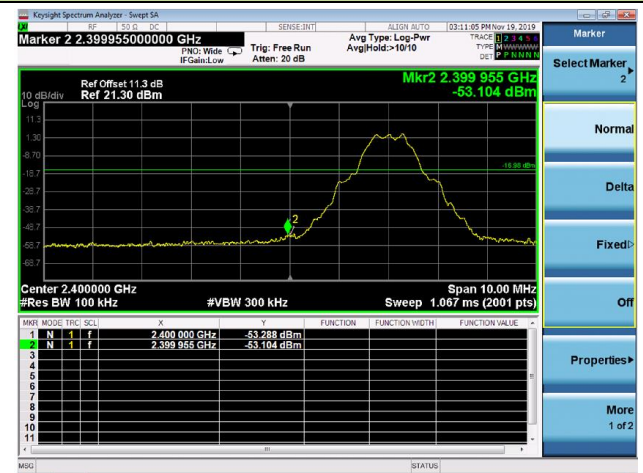

Spurious Emission 30MHz ~ 25GHz




Channel 19 (2440MHz)

100kHz PSD reference Level



Spurious Emission 30MHz ~ 25GHz

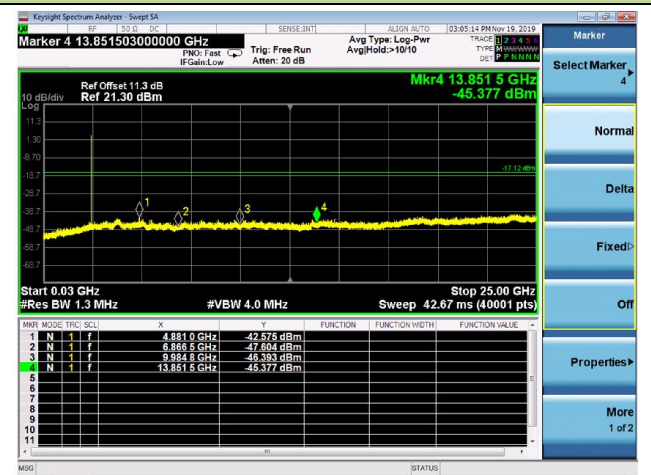


Channel 39 (2480MHz)

100kHz PSD reference Level



High Band Edge

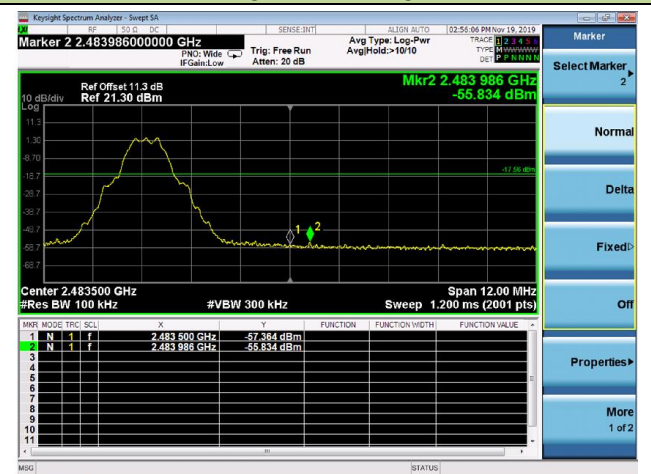


Spurious Emission 30MHz ~ 25GHz



Bluetooth-LE (2Mbps) Out-of-Band Emissions

Channel 00 (2402MHz)


100kHz PSD reference Level

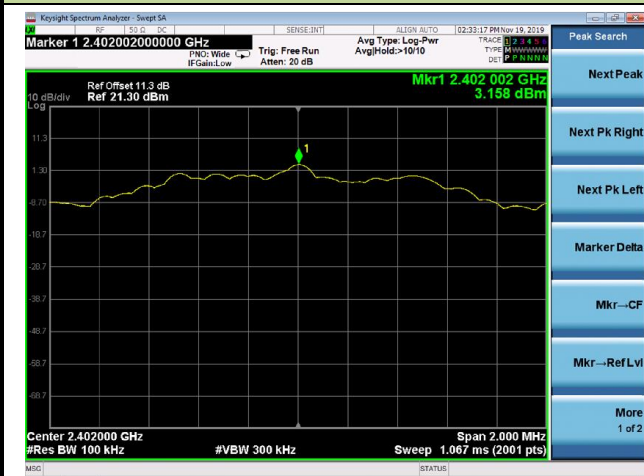

Low Band Edge



Spurious Emission 30MHz ~ 25GHz

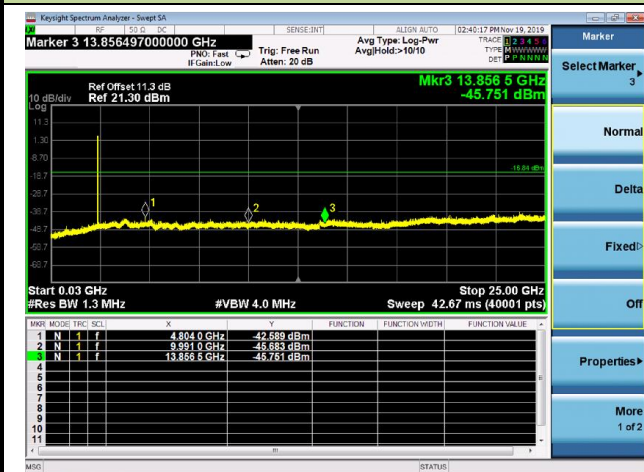


Channel 19 (2440MHz)

100kHz PSD reference Level



Spurious Emission 30MHz ~ 25GHz

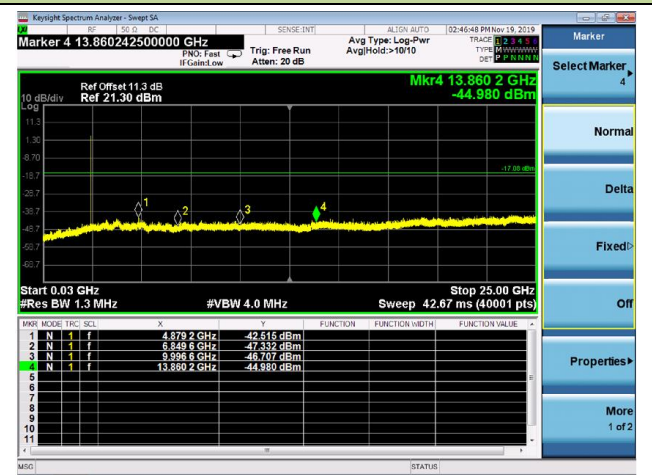


Channel 39 (2480MHz)


100kHz PSD reference Level



High Band Edge

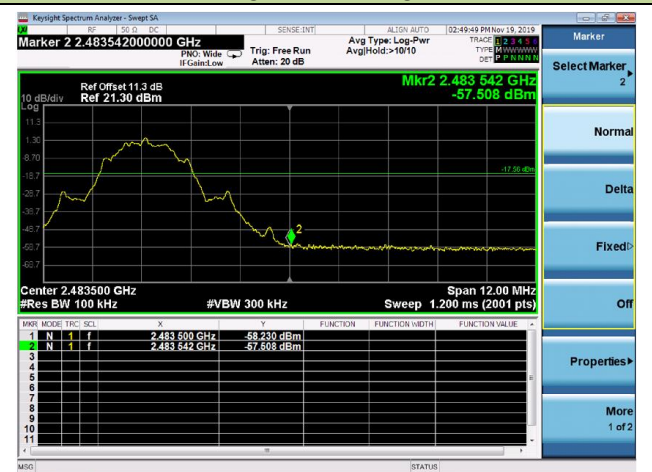

Spurious Emission 30MHz ~ 25GHz

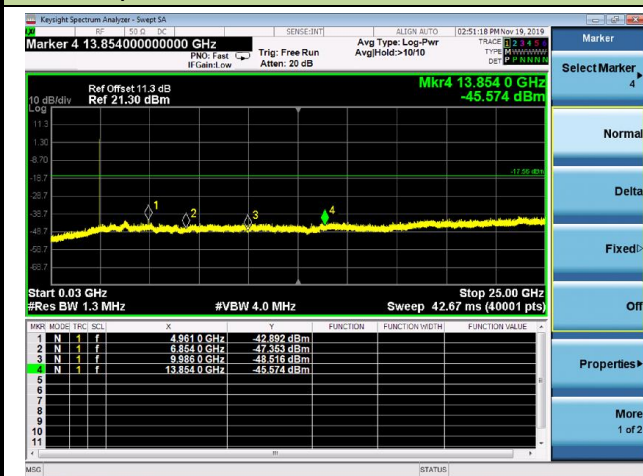

7.7. Radiated Spurious Emission Measurement

7.7.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Field Strength (μ V/m)	Measured Distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

All out of band emissions appearing in a restricted band as specified in Section 8.10 of the RSS-Gen must not exceed the limits shown in Table per Section 8.9.

RSS-Gen Section 8.9		
Frequency [MHz]	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

ANSI C63.10 - Section 6.3 (General Requirements)

ANSI C63.10 - Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - Section 6.6 (Standard test method above 1GHz)

7.7.3.Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz
If the EUT duty cycle is $< 98\%$, set $\text{VBW} \geq 1/T$. T is the minimum transmission duration
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

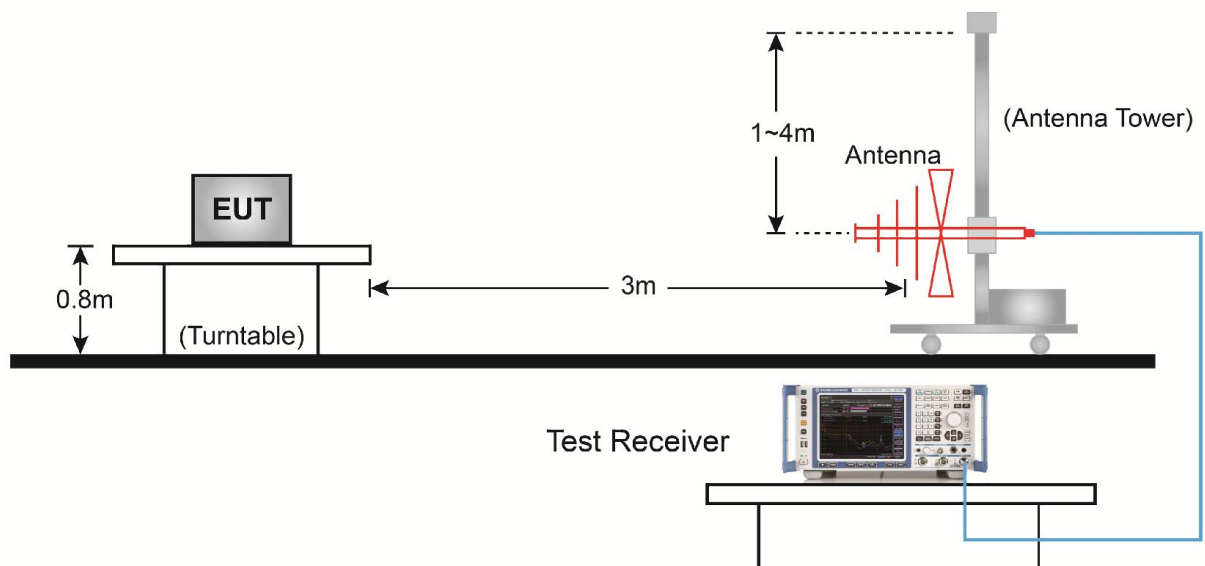7.7.4. Test Setup**Below 1GHz Test Setup:**

Above 1GHz Test Setup:

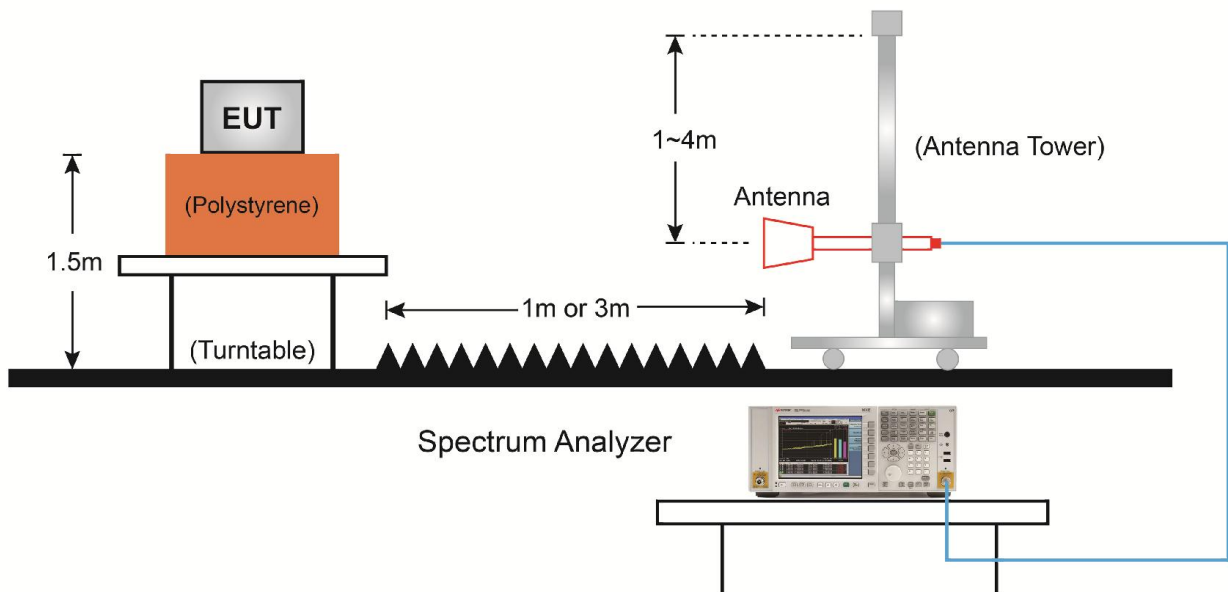

7.7.5. Test Result

Product	Communication Module	Temperature	25°C
Test Engineer	David Lv	Relative Humidity	54%
Test Site	AC1	Test Date	2019/11/20
Test Mode	Bluetooth-LE (1Mbps)	Test Channel:	00
Antenna Type	Chip Antenna		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3992.0	39.2	3.4	42.6	74.0	-31.4	Peak	Horizontal
	4978.0	39.1	6.4	45.5	74.0	-28.5	Peak	Horizontal
*	5998.0	41.1	7.9	49.0	75.1	-26.1	Peak	Horizontal
*	7077.5	38.4	11.2	49.6	75.1	-25.5	Peak	Horizontal
	3975.0	39.5	3.3	42.8	74.0	-31.2	Peak	Vertical
	4961.0	39.2	6.2	45.4	74.0	-28.6	Peak	Vertical
*	5998.0	41.6	7.9	49.5	75.1	-25.6	Peak	Vertical
*	7162.5	38.3	11.5	49.8	75.1	-25.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (95.1dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Communication Module	Temperature	25°C
Test Engineer	David Lv	Relative Humidity	54%
Test Site	AC1	Test Date	2019/11/20
Test Mode	Bluetooth-LE (1Mbps)	Test Channel:	19
Antenna Type	Chip Antenna		
Remark	<p>1. Average measurement was not performed if peak level lower than average limit. So the margin was calculated using the average limit for emissions fall within the restricted bands.</p> <p>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.</p>		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4374.5	40.2	4.4	44.6	74.0	-29.4	Peak	Horizontal
	4859.0	39.2	5.9	45.1	74.0	-28.9	Peak	Horizontal
*	5998.0	42.0	7.9	49.9	75.5	-25.6	Peak	Horizontal
*	6491.0	39.2	9.4	48.6	75.5	-26.9	Peak	Horizontal
	3737.0	41.5	2.6	44.1	74.0	-29.9	Peak	Vertical
	4995.0	38.1	6.4	44.5	74.0	-29.5	Peak	Vertical
*	5998.0	42.8	7.9	50.7	75.5	-24.8	Peak	Vertical
*	7111.5	37.9	11.3	49.2	75.5	-26.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (95.5dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Communication Module	Temperature	25°C
Test Engineer	David Lv	Relative Humidity	54%
Test Site	AC1	Test Date	2019/11/20
Test Mode	Bluetooth-LE (1Mbps)	Test Channel:	39
Antenna Type	Chip Antenna		
Remark	<p>1. Average measurement was not performed if peak level lower than average limit. So the margin was calculated using the average limit for emissions fall within the restricted bands.</p> <p>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.</p>		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3856.0	39.9	2.8	42.7	74.0	-31.3	Peak	Horizontal
	4961.0	37.8	6.2	44.0	74.0	-30.0	Peak	Horizontal
*	5998.0	41.7	7.9	49.6	76.0	-26.4	Peak	Horizontal
*	6916.0	37.4	10.3	47.7	76.0	-28.3	Peak	Horizontal
	3932.5	38.0	3.1	41.1	74.0	-32.9	Peak	Vertical
	5063.0	38.2	6.7	44.9	74.0	-29.1	Peak	Vertical
*	5998.0	43.5	7.9	51.4	76.0	-24.6	Peak	Vertical
*	7043.5	38.1	10.9	49.0	76.0	-27.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (96.0dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Communication Module	Temperature	25°C
Test Engineer	David Lv	Relative Humidity	54%
Test Site	AC1	Test Date	2019/11/20
Test Mode	Bluetooth-LE (2Mbps)	Test Channel:	00
Antenna Type	Chip Antenna		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4034.5	39.9	3.3	43.2	74.0	-30.8	Peak	Horizontal
	4808.0	42.0	5.8	47.8	74.0	-26.2	Peak	Horizontal
*	5998.0	41.1	7.9	49.0	74.0	-25.0	Peak	Horizontal
*	7018.0	37.9	11.0	48.9	74.0	-25.1	Peak	Horizontal
	3992.0	38.7	3.4	42.1	74.0	-31.9	Peak	Vertical
	4799.5	41.2	5.8	47.0	74.0	-27.0	Peak	Vertical
*	5998.0	43.2	7.9	51.1	74.0	-22.9	Peak	Vertical
*	6754.5	37.2	9.9	47.1	74.0	-26.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (93.1dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Communication Module	Temperature	25°C
Test Engineer	David Lv	Relative Humidity	54%
Test Site	AC1	Test Date	2019/11/20
Test Mode	Bluetooth-LE (2Mbps)	Test Channel:	19
Antenna Type	Chip Antenna		
Remark	1. Average measurement was not performed if peak level lower than average limit. So the margin was calculated using the average limit for emissions fall within the restricted bands. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3983.5	40.2	3.3	43.5	74.0	-30.5	Peak	Horizontal
	4850.5	39.7	5.9	45.6	74.0	-28.4	Peak	Horizontal
*	5998.0	41.7	7.9	49.6	74.0	-24.4	Peak	Horizontal
*	6924.5	38.3	10.3	48.6	74.0	-25.4	Peak	Horizontal
	4247.0	39.6	3.9	43.5	74.0	-30.5	Peak	Vertical
	4961.0	41.0	6.2	47.2	74.0	-26.8	Peak	Vertical
*	5998.0	42.6	7.9	50.5	74.0	-23.5	Peak	Vertical
*	6788.5	37.8	9.8	47.6	74.0	-26.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (93.4dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Communication Module	Temperature	25°C
Test Engineer	David Lv	Relative Humidity	54%
Test Site	AC1	Test Date	2019/11/20
Test Mode	Bluetooth-LE (2Mbps)	Test Channel:	39
Antenna Type	Chip Antenna		
Remark	<p>1. Average measurement was not performed if peak level lower than average limit. So the margin was calculated using the average limit for emissions fall within the restricted bands.</p> <p>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.</p>		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3881.5	39.6	3.0	42.6	74.0	-31.4	Peak	Horizontal
	5029.0	38.8	6.5	45.3	74.0	-28.7	Peak	Horizontal
*	5998.0	41.4	7.9	49.3	74.0	-24.7	Peak	Horizontal
*	6933.0	38.1	10.3	48.4	74.0	-25.6	Peak	Horizontal
	4026.0	38.8	3.3	42.1	74.0	-31.9	Peak	Vertical
	5105.5	38.8	6.7	45.5	74.0	-28.5	Peak	Vertical
*	5998.0	41.7	7.9	49.6	74.0	-24.4	Peak	Vertical
*	7128.5	38.4	11.3	49.7	74.0	-24.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (93.5dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Communication Module	Temperature	25°C
Test Engineer	David Lv	Relative Humidity	54%
Test Site	AC1	Test Date	2019/11/20
Test Mode	Bluetooth-LE (1Mbps)	Test Channel:	00
Antenna Type	Pattern Antenna		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3992.0	40.0	3.4	43.4	74.0	-30.6	Peak	Horizontal
	4961.0	43.1	6.2	49.3	74.0	-24.7	Peak	Horizontal
*	5998.0	42.9	7.9	50.8	77.6	-26.8	Peak	Horizontal
*	7009.5	39.1	10.9	50.0	77.6	-27.6	Peak	Horizontal
	4850.5	45.1	5.9	51.0	74.0	-23.0	Peak	Vertical
	4961.0	46.0	6.2	52.2	74.0	-21.8	Peak	Vertical
*	5998.0	44.2	7.9	52.1	77.6	-25.5	Peak	Vertical
*	7171.0	38.4	11.6	50.0	77.6	-27.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (97.6dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Communication Module	Temperature	25°C
Test Engineer	David Lv	Relative Humidity	54%
Test Site	AC1	Test Date	2019/11/20
Test Mode	Bluetooth-LE (1Mbps)	Test Channel:	19
Antenna Type	Pattern Antenna		
Remark	1. Average measurement was not performed if peak level lower than average limit. So the margin was calculated using the average limit for emissions fall within the restricted bands. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4187.5	39.7	3.7	43.4	74.0	-30.6	Peak	Horizontal
	5063.0	39.2	6.7	45.9	74.0	-28.1	Peak	Horizontal
*	5998.0	41.9	7.9	49.8	81.3	-31.5	Peak	Horizontal
*	6771.5	38.5	9.9	48.4	81.3	-32.9	Peak	Horizontal
	4850.5	45.5	5.9	51.4	74.0	-22.6	Peak	Vertical
	4961.0	44.5	6.2	50.7	74.0	-23.3	Peak	Vertical
*	5998.0	44.5	7.9	52.4	81.3	-28.9	Peak	Vertical
*	6686.5	46.9	0.0	46.9	81.3	-34.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (101.3dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Communication Module	Temperature	25°C
Test Engineer	David Lv	Relative Humidity	54%
Test Site	AC1	Test Date	2019/11/20
Test Mode	Bluetooth-LE (1Mbps)	Test Channel:	39
Antenna Type	Pattern Antenna		
Remark	<p>1. Average measurement was not performed if peak level lower than average limit. So the margin was calculated using the average limit for emissions fall within the restricted bands.</p> <p>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.</p>		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3830.5	40.4	2.9	43.3	74.0	-30.7	Peak	Horizontal
	4910.0	39.3	6.2	45.5	74.0	-28.5	Peak	Horizontal
*	5998.0	42.3	7.9	50.2	82.5	-32.3	Peak	Horizontal
*	6984.0	38.3	10.6	48.9	82.5	-33.6	Peak	Horizontal
	3813.5	40.9	2.8	43.7	74.0	-30.3	Peak	Vertical
	5097.0	39.0	6.8	45.8	74.0	-28.2	Peak	Vertical
*	5998.0	44.6	7.9	52.5	82.5	-30.0	Peak	Vertical
*	6754.5	39.2	9.9	49.1	82.5	-33.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (102.5dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Communication Module	Temperature	25°C
Test Engineer	David Lv	Relative Humidity	54%
Test Site	AC1	Test Date	2019/11/20
Test Mode	Bluetooth-LE (2Mbps)	Test Channel:	00
Antenna Type	Pattern Antenna		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3830.5	40.5	2.9	43.4	74.0	-30.6	Peak	Horizontal
	4961.0	42.4	6.2	48.6	74.0	-25.4	Peak	Horizontal
*	5998.0	42.1	7.9	50.0	81.3	-31.3	Peak	Horizontal
*	7001.0	38.1	10.8	48.9	81.3	-32.4	Peak	Horizontal
	3822.0	40.1	2.9	43.0	74.0	-31.0	Peak	Vertical
	4850.5	42.2	5.9	48.1	74.0	-25.9	Peak	Vertical
*	5998.0	43.6	7.9	51.5	81.3	-29.8	Peak	Vertical
*	7128.5	38.4	11.3	49.7	81.3	-31.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (101.3dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Communication Module	Temperature	25°C
Test Engineer	David Lv	Relative Humidity	54%
Test Site	AC1	Test Date	2019/11/20
Test Mode	Bluetooth-LE (2Mbps)	Test Channel:	19
Antenna Type	Pattern Antenna		
Remark	<p>1. Average measurement was not performed if peak level lower than average limit. So the margin was calculated using the average limit for emissions fall within the restricted bands.</p> <p>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.</p>		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3949.5	40.2	3.2	43.4	74.0	-30.6	Peak	Horizontal
	5071.5	40.1	6.7	46.8	74.0	-27.2	Peak	Horizontal
*	5998.0	42.0	7.9	49.9	81.2	-31.3	Peak	Horizontal
*	6763.0	38.1	9.9	48.0	81.2	-33.2	Peak	Horizontal
	3992.0	38.7	3.4	42.1	74.0	-31.9	Peak	Vertical
	4876.0	37.5	5.9	43.4	74.0	-30.6	Peak	Vertical
*	5998.0	43.9	7.9	51.8	81.2	-29.4	Peak	Vertical
*	7103.0	37.9	11.3	49.2	81.2	-32.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (101.2dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Communication Module	Temperature	25°C
Test Engineer	David Lv	Relative Humidity	54%
Test Site	AC1	Test Date	2019/11/20
Test Mode	Bluetooth-LE (2Mbps)	Test Channel:	39
Antenna Type	Pattern Antenna		
Remark	<p>1. Average measurement was not performed if peak level lower than average limit. So the margin was calculated using the average limit for emissions fall within the restricted bands.</p> <p>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.</p>		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4060.0	39.3	3.5	42.8	74.0	-31.2	Peak	Horizontal
	4952.5	39.9	6.2	46.1	74.0	-27.9	Peak	Horizontal
*	5998.0	41.8	7.9	49.7	81.6	-31.9	Peak	Horizontal
*	6941.5	38.5	10.4	48.9	81.6	-32.7	Peak	Horizontal
	4289.5	40.3	4.0	44.3	74.0	-29.7	Peak	Vertical
	4961.0	46.0	6.2	52.2	74.0	-21.8	Peak	Vertical
*	5998.0	42.8	7.9	50.7	81.6	-30.9	Peak	Vertical
*	7128.5	38.3	11.3	49.6	81.6	-32.0	Peak	Vertical


Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (101.6dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Worst Case of Radiated Emission below 1GHz:

Site: AC1	Time: 2019/11/20 - 07:42
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: VULB 9168 _20-2000MHz	Polarity: Horizontal
EUT: Communication Module	Power: DC 3V
Test Mode: Transmit by Bluetooth-LE (1Mbps) at Channel 2402MHz with Chip Antenna	

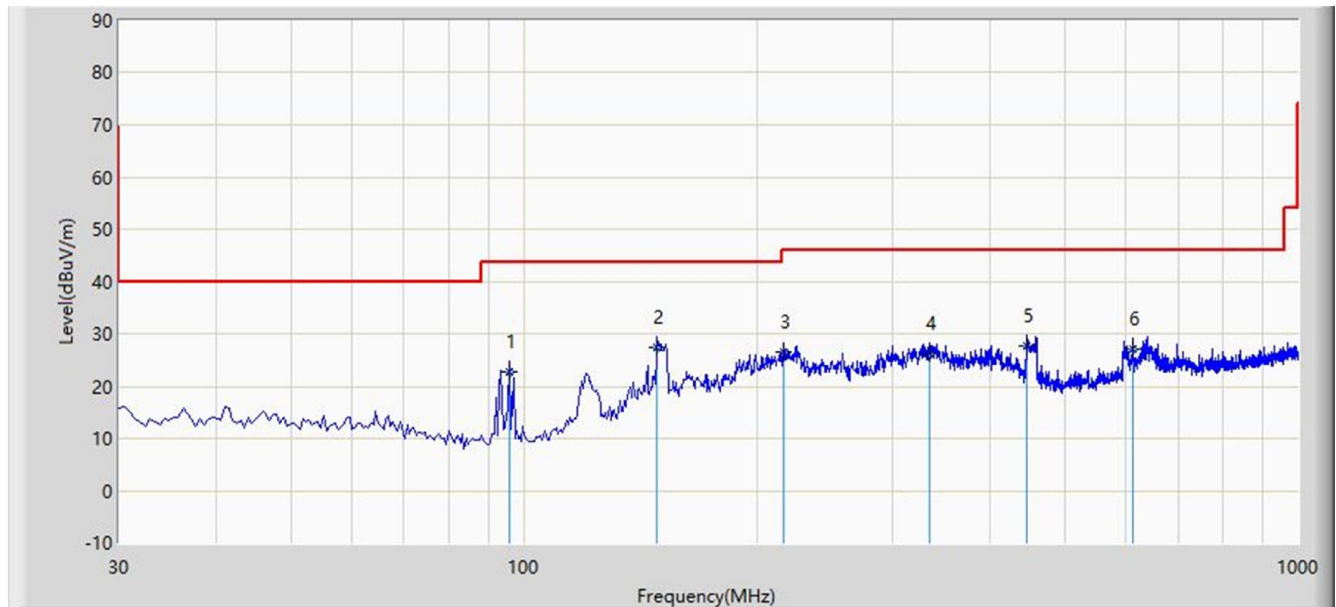


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			95.960	22.641	11.923	-20.859	43.500	10.718	QP
2			148.825	27.455	12.293	-16.045	43.500	15.161	QP
3			216.725	26.397	14.634	-19.603	46.000	11.763	QP
4		*	333.610	26.239	11.052	-19.761	46.000	15.187	QP
5			447.100	27.628	9.859	-18.372	46.000	17.770	QP
6			612.000	27.018	6.190	-18.982	46.000	20.828	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

Site: AC1	Time: 2019/11/20 - 07:43
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: VULB 9168 _20-2000MHz	Polarity: Vertical
EUT: Communication Module	Power: DC 3V
Test Mode: Transmit by Bluetooth-LE (1Mbps) at Channel 2402MHz with Chip Antenna	

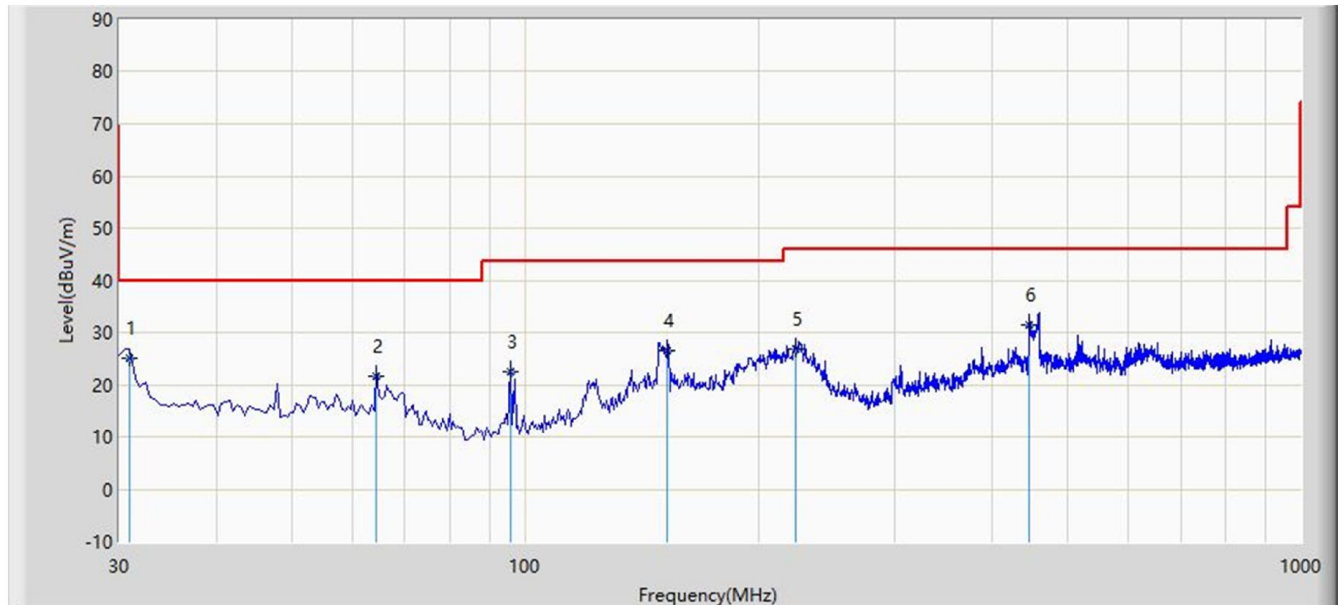


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			30.970	24.970	11.260	-15.030	40.000	13.710	QP
2		*	64.435	21.619	9.038	-18.381	40.000	12.581	QP
3			95.960	22.546	11.828	-20.954	43.500	10.718	QP
4			152.705	26.460	11.213	-17.040	43.500	15.247	QP
5			223.030	26.894	14.754	-19.106	46.000	12.140	QP
6			446.615	31.499	13.743	-14.501	46.000	17.756	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

Site: AC1	Time: 2019/11/20 - 07:37
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: VULB 9168 _20-2000MHz	Polarity: Horizontal
EUT: Communication Module	Power: DC 3V
Test Mode: Transmit by Bluetooth-LE (1Mbps) at Channel 2402MHz with Pattern Antenna	

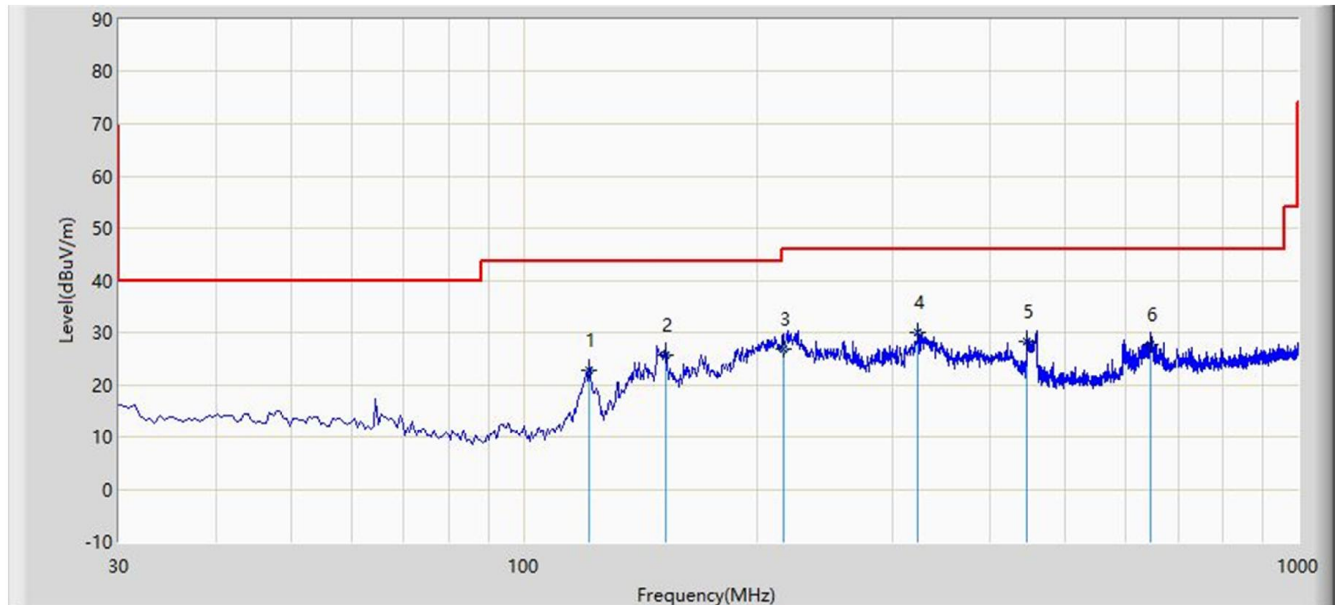


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			121.625	22.677	9.380	-20.823	43.500	13.297	QP
2			152.705	25.607	10.360	-17.893	43.500	15.247	QP
3			216.240	26.874	15.140	-19.126	46.000	11.734	QP
4		*	323.425	29.925	14.950	-16.075	46.000	14.975	QP
5			446.130	28.244	10.500	-17.756	46.000	17.744	QP
6			646.435	27.595	6.200	-18.405	46.000	21.395	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

Site: AC1	Time: 2019/11/20 - 07:38
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: VULB 9168 _20-2000MHz	Polarity: Vertical
EUT: Communication Module	Power: DC 3V
Test Mode: Transmit by Bluetooth-LE (1Mbps) at Channel 2402MHz with Pattern Antenna	

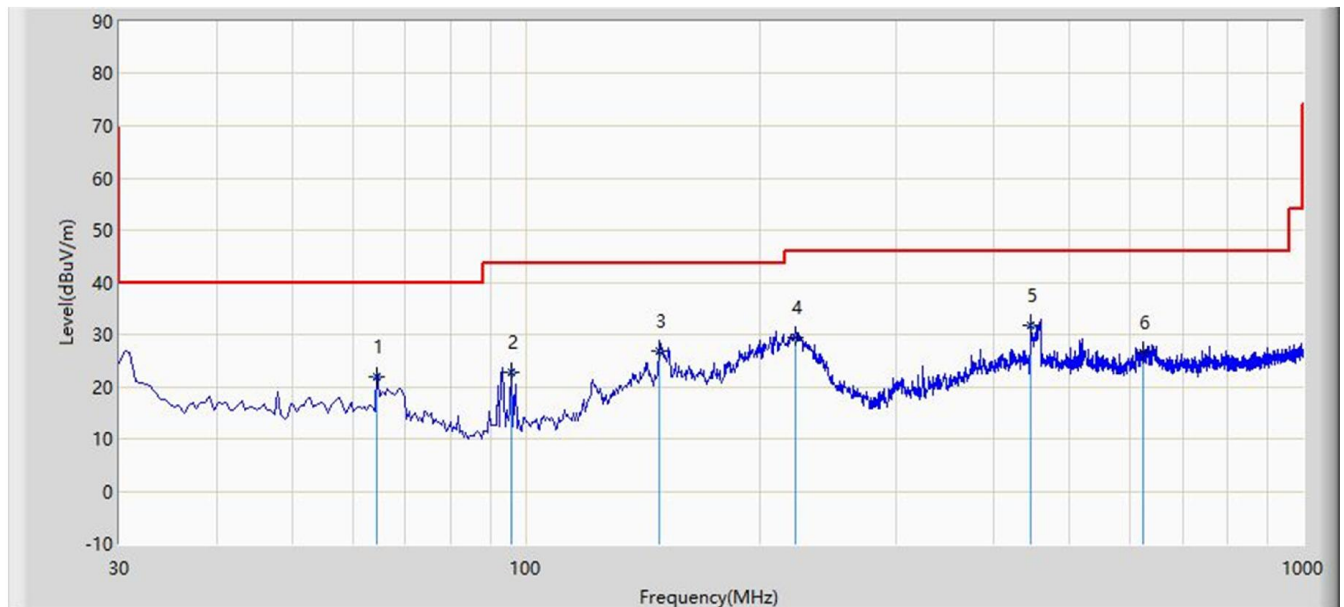

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			64.435	21.753	9.172	-18.247	40.000	12.581	QP
2		*	95.960	22.634	11.916	-20.866	43.500	10.718	QP
3			148.825	26.737	11.575	-16.763	43.500	15.161	QP
4			222.545	29.314	17.202	-16.686	46.000	12.112	QP
5			446.615	31.719	13.963	-14.281	46.000	17.756	QP
6			623.640	26.604	5.528	-19.396	46.000	21.076	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

7.8. Radiated Restricted Band Edge Measurement

7.8.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

For RSS-Gen Section 8.10 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 8.10 of RSS-Gen, must also comply with the radiated emission limits specified in Section 8.9.

Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.009 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.525225	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125-4.128	167.72 - 173.2	14.47 - 14.5
4.17725-4.17775	240 - 285	15.35 - 16.2
4.20725-4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	--
8.37625 - 8.38675	1718.8 -1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 -2390	
12.51975 - 12.52025	2483.5 -2500	
12.57675 - 12.57725	2655 - 2900	
13.36 -13.41	3260 - 3267	
16.42 - 16.423	3332 -3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

All out of band emissions appearing in a restricted band as specified in Section 8.10 of the RSS-Gen must not exceed the limits shown in Table per Section 8.9.

RSS-Gen Section 8.9		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.8.2.Test Procedure Used

ANSI C63.10 - Section 6.3 (General Requirements)

ANSI C63.10 - Section 6.6 (Standard test method above 1GHz)


7.8.3.Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize


Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz
4. If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

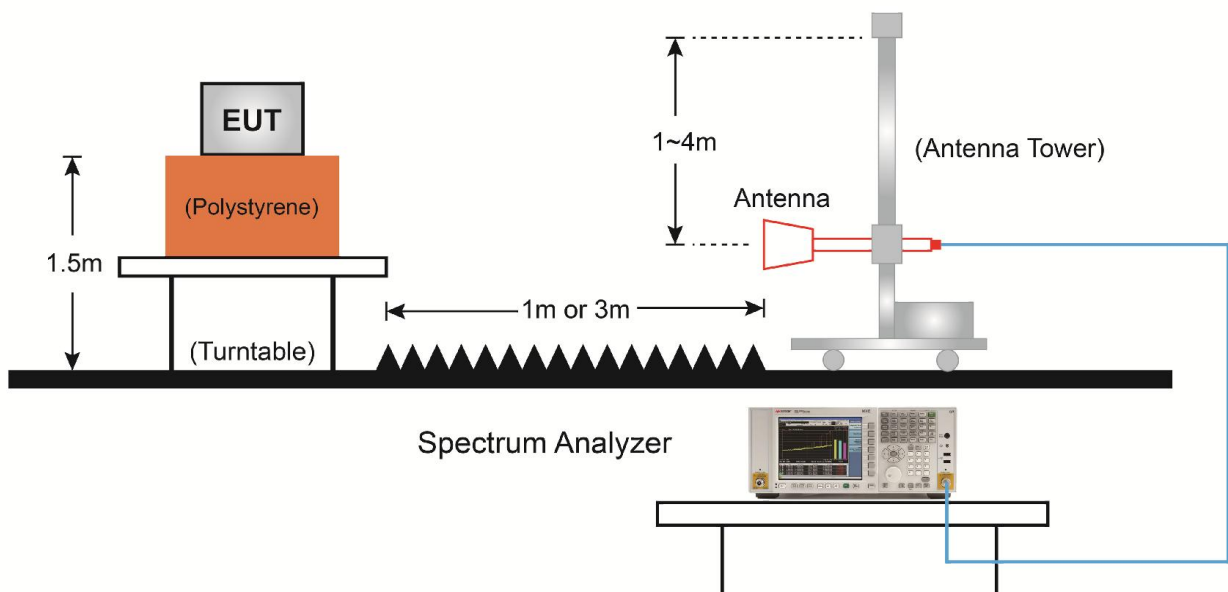7.8.4. Test Setup

7.8.5.Test Result

Site: AC1	Time: 2019/11/20 - 00:32
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Communication Module	Power: DC 3V
Test Mode: Transmit by Bluetooth-LE (1Mbps) at channel 2402MHz with Chip Antenna	

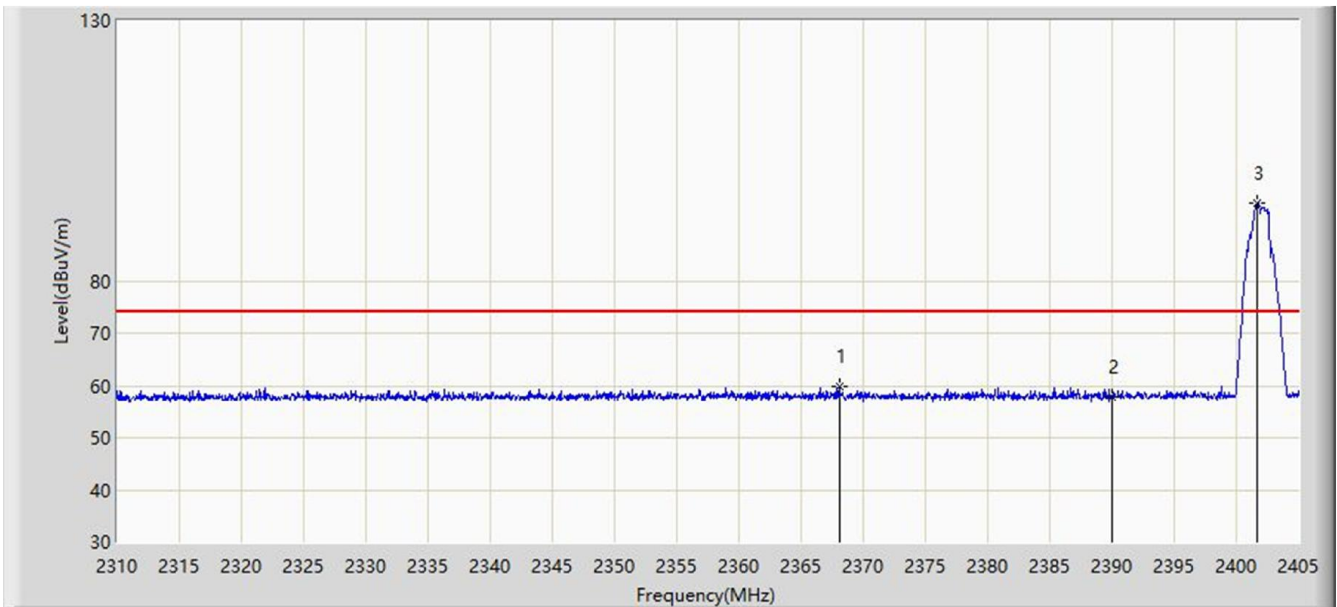


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2368.045	59.947	27.847	-14.053	74.000	32.101	PK
2			2390.000	57.746	25.674	-16.254	74.000	32.072	PK
3		*	2401.722	95.062	62.987	NA	NA	32.075	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/11/20 - 00:37
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Communication Module	Power: DC 3V
Test Mode: Transmit by Bluetooth-LE (1Mbps) at channel 2402MHz with Chip Antenna	

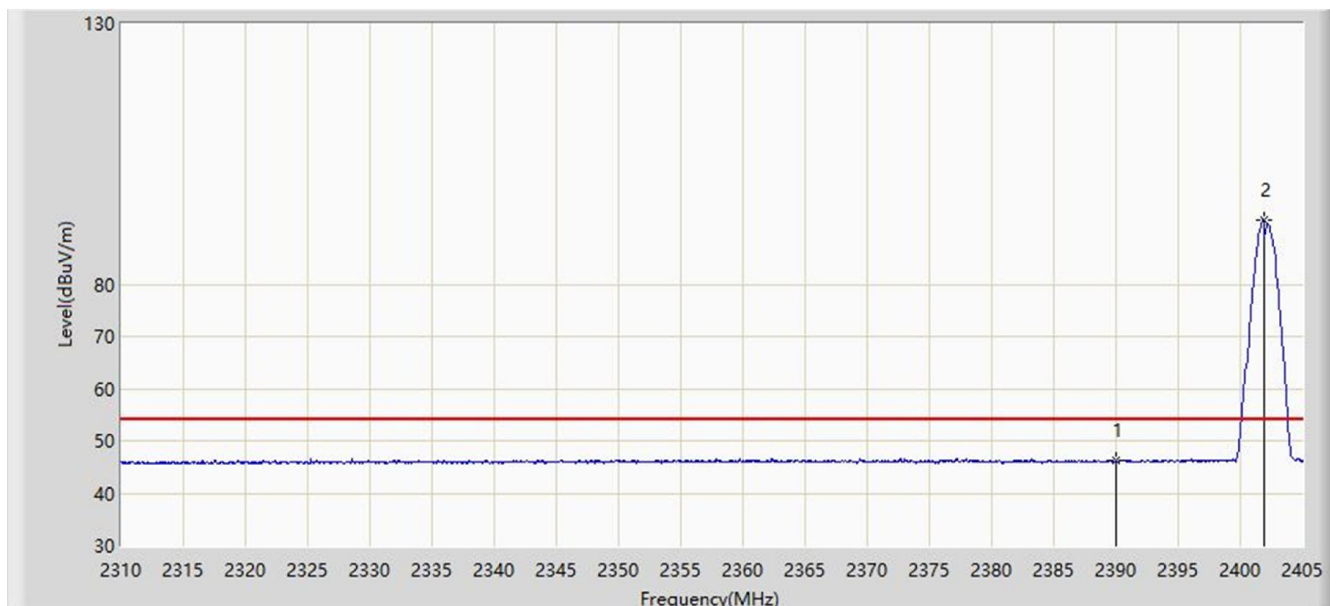


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.204	14.132	-7.796	54.000	32.072	AV
2		*	2401.865	92.361	60.286	NA	NA	32.075	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/11/20 - 00:38
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Communication Module	Power: DC 3V
Test Mode: Transmit by Bluetooth-LE (1Mbps) at channel 2402MHz with Chip Antenna	

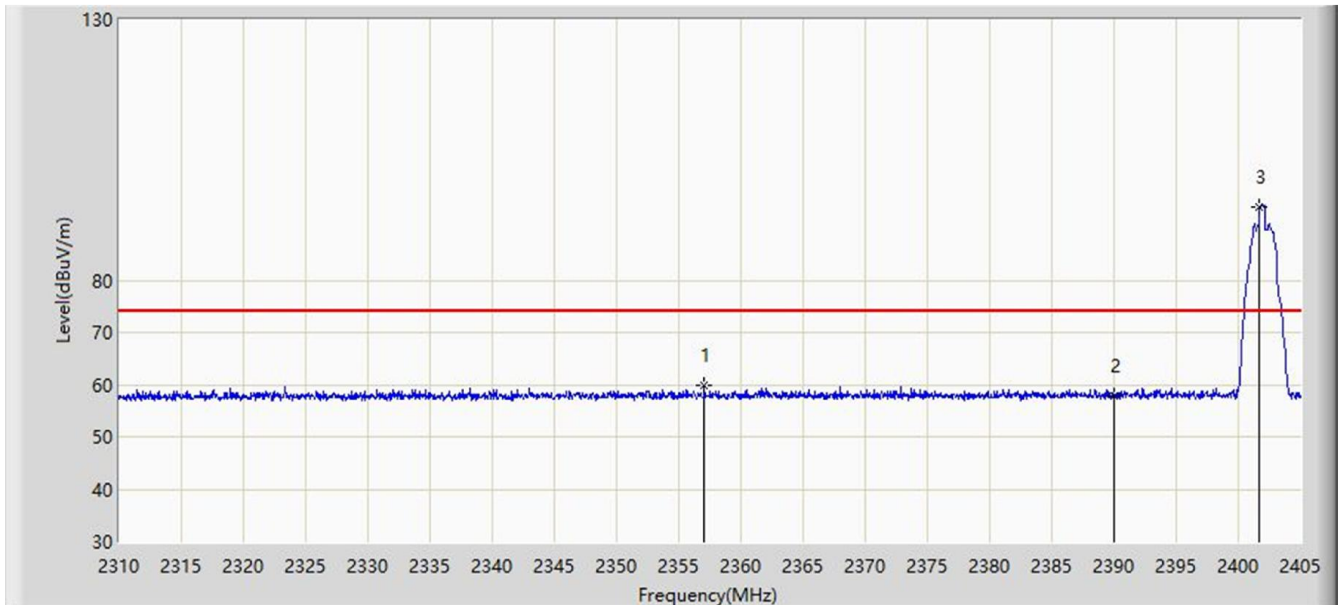


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2357.073	59.819	27.694	-14.181	74.000	32.125	PK
2			2390.000	57.728	25.656	-16.272	74.000	32.072	PK
3		*	2401.722	94.136	62.061	NA	NA	32.075	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/11/20 - 00:41
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Communication Module	Power: DC 3V
Test Mode: Transmit by Bluetooth-LE (1Mbps) at channel 2402MHz with Chip Antenna	

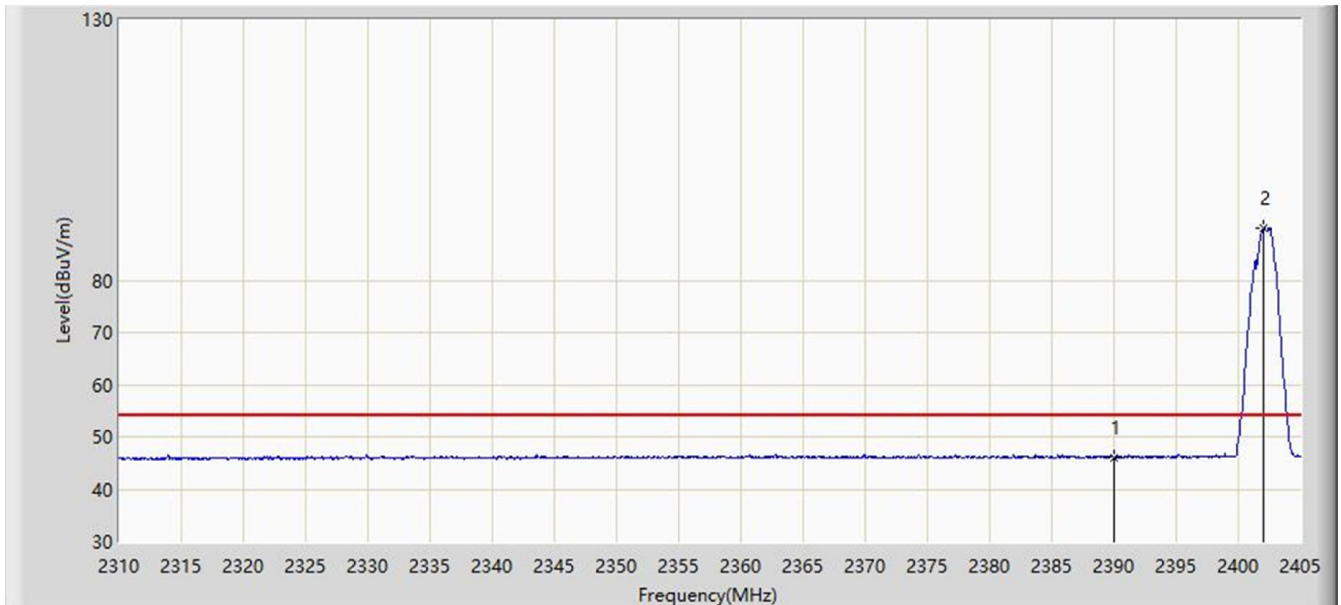


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.903	13.831	-8.097	54.000	32.072	AV
2		*	2402.055	89.881	57.806	NA	NA	32.076	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/11/20 - 00:43
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Communication Module	Power: DC 3V
Test Mode: Transmit by Bluetooth-LE (1Mbps) at channel 2480MHz with Chip Antenna	

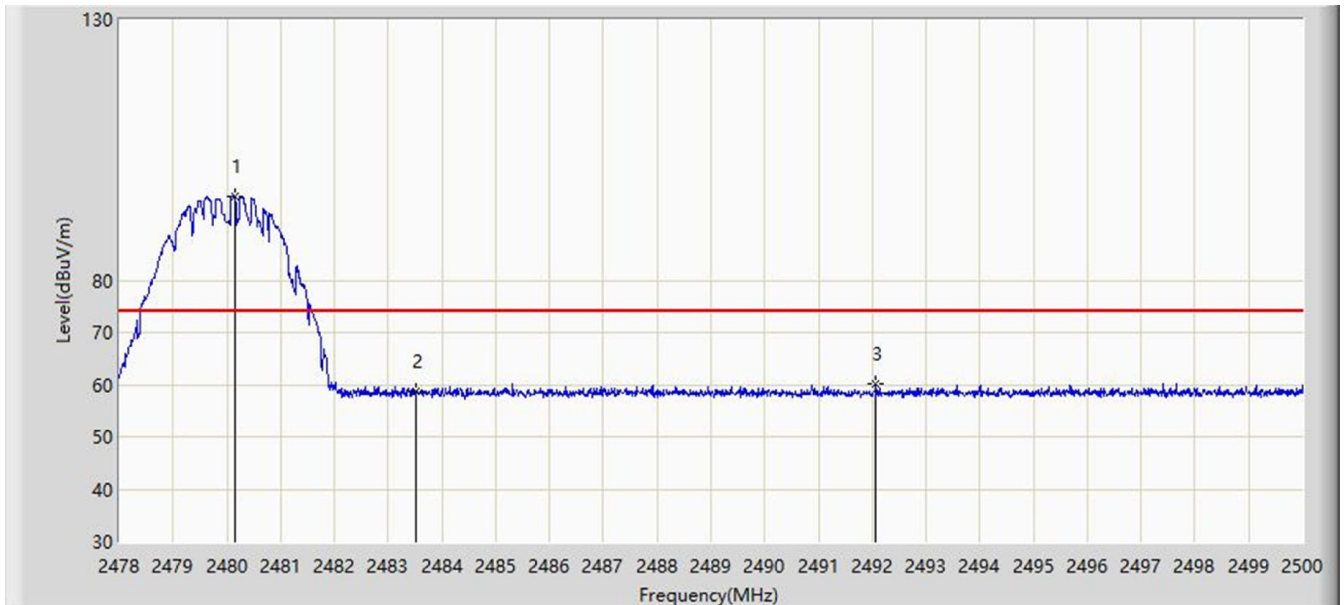


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.145	96.010	63.967	NA	NA	32.043	PK
2			2483.500	58.562	26.525	-15.438	74.000	32.037	PK
3			2492.069	60.023	28.002	-13.977	74.000	32.021	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/11/20 - 00:47
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Communication Module	Power: DC 3V
Test Mode: Transmit by Bluetooth-LE (1Mbps) at channel 2480MHz with Chip Antenna	

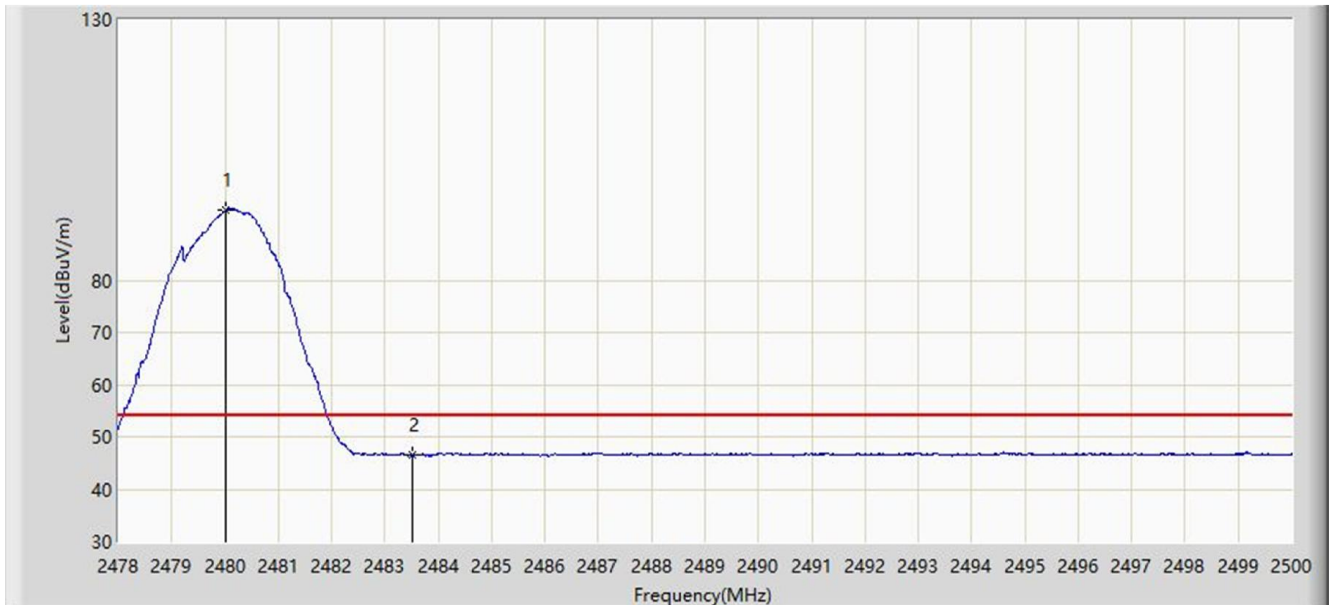

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.024	93.519	61.475	NA	NA	32.044	AV
2			2483.500	46.469	14.432	-7.531	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)