



Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: www.cqa-cert.com

Report Template Version: V03

Report Template Revision Date: Mar.1st, 2017

RF Exposure Evaluation Report

Report No. : CQASZ20190700650E-02
Applicant: ZAGG Inc.
Address of Applicant: 910 West Legacy Center Way, Suite 500 Midvale, Utah 84047, USA

Equipment Under Test (EUT):

Product: IFROGZ Airtime Vibe
Test Model No.: IFOEHANC29
Brand Name: IFROGZ
FCC ID: QTG-IFAIYANC
Standards: 47 CFR Part 1.1307
47 CFR Part 2.1093
KDB447498D01 General RF Exposure Guidance v06

Date of Receipt: 2019-07-26
Date of Test: 2019-07-29 to 2019-08-07
Date of Issue: 2019-08-07
Test Result : PASS*

Tested By:

Tom Chen

(Tom Chen)

Reviewed By:

Sheek Luo

(Sheek Luo)

Approved By:

Jack Ai

(Jack Ai)



* In the configuration tested, the EUT complied with the standards specified above.

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20190700650E-02	Rev.01	Initial report	2019-08-07

2 Contents

	Page
1 VERSION.....	2
2 CONTENTS.....	3
3 GENERAL INFORMATION.....	4
3.1 CLIENT INFORMATION.....	4
3.2 GENERAL DESCRIPTION OF EUT.....	4
4 SAR EVALUATION.....	5
4.1 RF EXPOSURE COMPLIANCE REQUIREMENT.....	5
4.1.1 <i>Standard Requirement</i>	5
4.1.2 <i>Limits</i>	5
4.1.3 <i>EUT RF Exposure</i>	6
APPENDIX 1 PHOTOGRAPHS OF EUT.....	7

3 General Information

3.1 Client Information

Applicant:	ZAGG Inc.
Address of Applicant:	910 West Legacy Center Way, Suite 500 Midvale, Utah 84047, USA
Manufacturer:	ZAGG Inc.
Address of Manufacturer:	910 West Legacy Center Way, Suite 500 Midvale, Utah 84047, USA

3.2 General Description of EUT

Product Name:	IFROGZ Airtime Vibe	
Model No.:	IFOEHANC29	
Trade Mark:	IFROGZ	
Hardware Version:	AST_2300Z_BAHP001_V02 0705	
Software Version:	YT_IFROG_best2300_ep_anc_20190719_V22	
Operation Frequency:	2402MHz~2480MHz	
Bluetooth Version:	V5.0	
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)	
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK	
Transfer Rate:	1Mbps/2Mbps/3Mbps	
Number of Channel:	79	
Hopping Channel Type:	Adaptive Frequency Hopping systems	
Product Type:	☐ Mobile ☒ Portable ☐ Fix Location	
Test Software of EUT:	Non Signaling Test tool (manufacturer declare)	
Antenna Type:	Ceramic antenna	
Antenna Gain:	2.5dBi	
Power Supply:	Lithium Battery:450mAh,1.67Wh,3.7V, Charge by Micro USB (DC 5V, 350 mA)	
Battery information:	Lithium Battery:450mAh,1.67Wh,3.7V	
	Battery factory:	DONGGUAN ENCORE ENERGY CO.,LTD
	Model:	EN502540

Note: Only one model number: IFOEHANC29, but it comes in three colors (black, blue, white), only the white EUT was tested.

4 SAR Evaluation

4.1 RF Exposure Compliance Requirement

4.1.1 Standard Requirement

According to KDB447498D01 General RF Exposure Guidance v06

4.3.1. Standalone SAR test exclusion considerations

Unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and 10-g extremity SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied.

4.1.2 Limits

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$\left[\frac{(\text{max. power of channel, including tune-up tolerance, mW})}{(\text{min. test separation distance, mm})} \right] \cdot \sqrt{f(\text{GHz})} \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$

$f(\text{GHz})$ is the RF channel transmit frequency in GHz

Power and distance are rounded to the nearest mW and mm before calculation¹⁷

The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

4.1.3 EUT RF Exposure

Measurement Data



GFSK mode				
Test channel	Peak Output Power (dBm)	Tune up tolerance (dBm)	Maximum tune-up Power	
			(dBm)	(mW)
Lowest(2402MHz)	2.220	2±1	3	1.995
Middle(2441MHz)	1.860	1±1	2	1.585
Highest(2480MHz)	0.950	1±1	2	1.585
π/4DQPSK mode				
Test channel	Peak Output Power (dBm)	Tune up tolerance (dBm)	Maximum tune-up Power	
			(dBm)	(mW)
Lowest(2402MHz)	2.190	2±1	3	1.995
Middle(2441MHz)	1.850	1±1	2	1.585
Highest(2480MHz)	0.920	1±1	2	1.585
8DPSK mode				
Test channel	Peak Output Power (dBm)	Tune up tolerance (dBm)	Maximum tune-up Power	
			(dBm)	(mW)
Lowest(2402MHz)	2.230	2±1	3	1.995
Middle(2441MHz)	1.840	1±1	2	1.585
Highest(2480MHz)	0.930	1±1	2	1.585



Worst case: 8DPSK						
Channel	Maximum Peak Conducted Output Power (dBm)	Tune up tolerance (dBm)	Maximum tune- up Power		Calculated value	Exclusion threshold
			(dBm)	(mW)		
Lowest (2402MHz)	2.230	2±1	3	1.995	0.62	3.0
Middle (2441MHz)	1.840	1±1	2	1.585	0.50	
Highest (2480MHz)	0.930	1±1	2	1.585	0.50	
Conclusion: the calculated value ≤3.0, SAR is exempted.						

Remark: The Max Conducted Peak Output Power data refer to report Report No.: CQASZ20190700650E-01


APPENDIX 1 PHOTOGRAPHS OF EUT


Test mode No.: IFOEHANC29

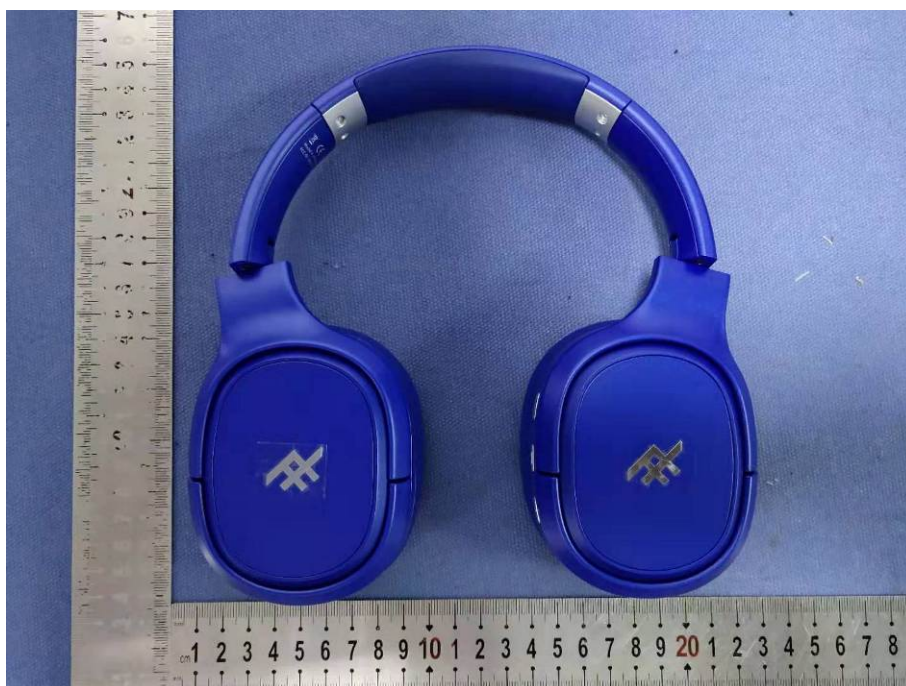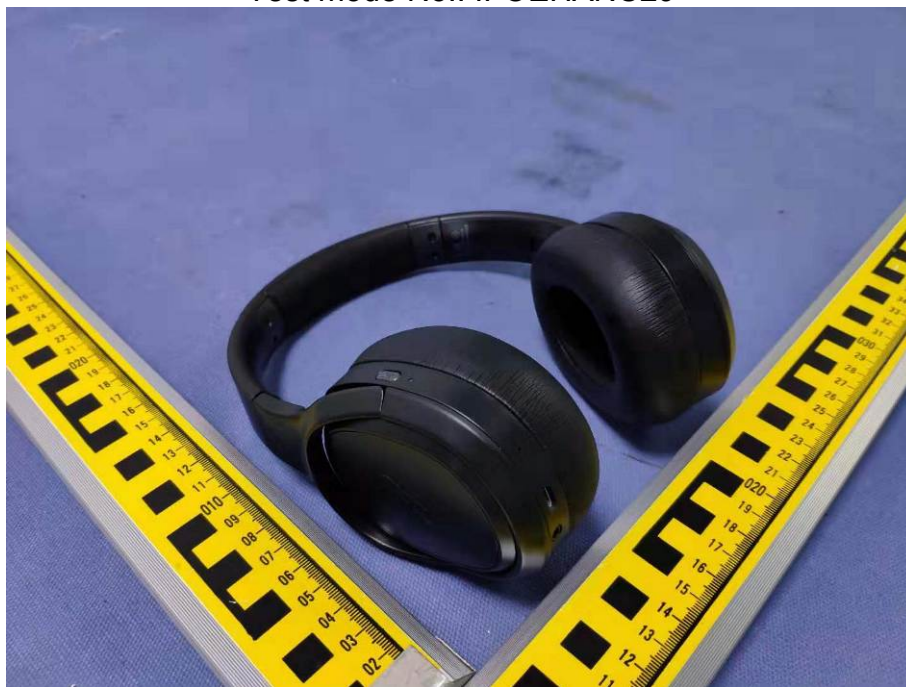

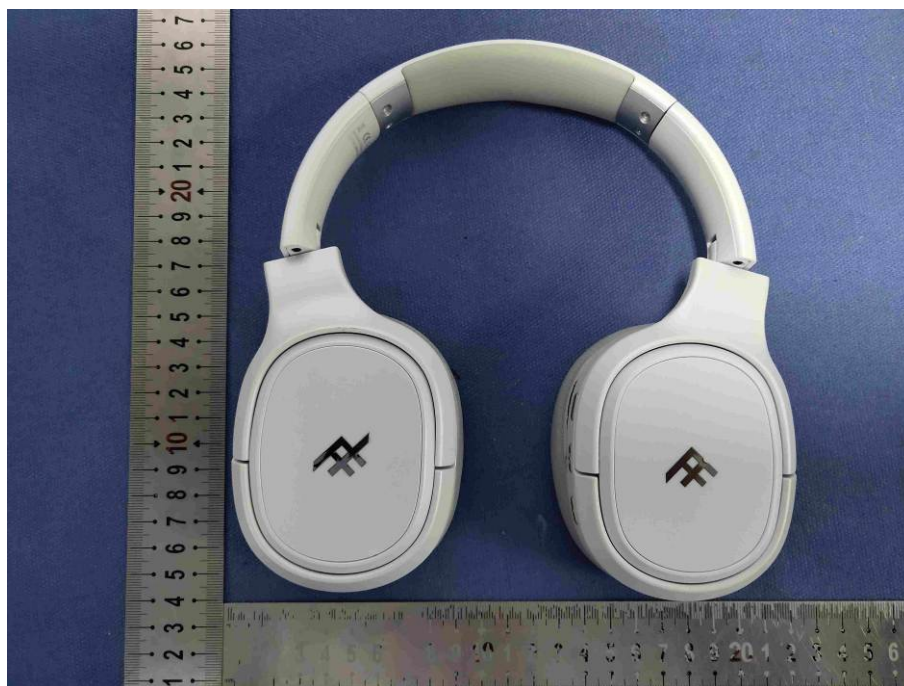
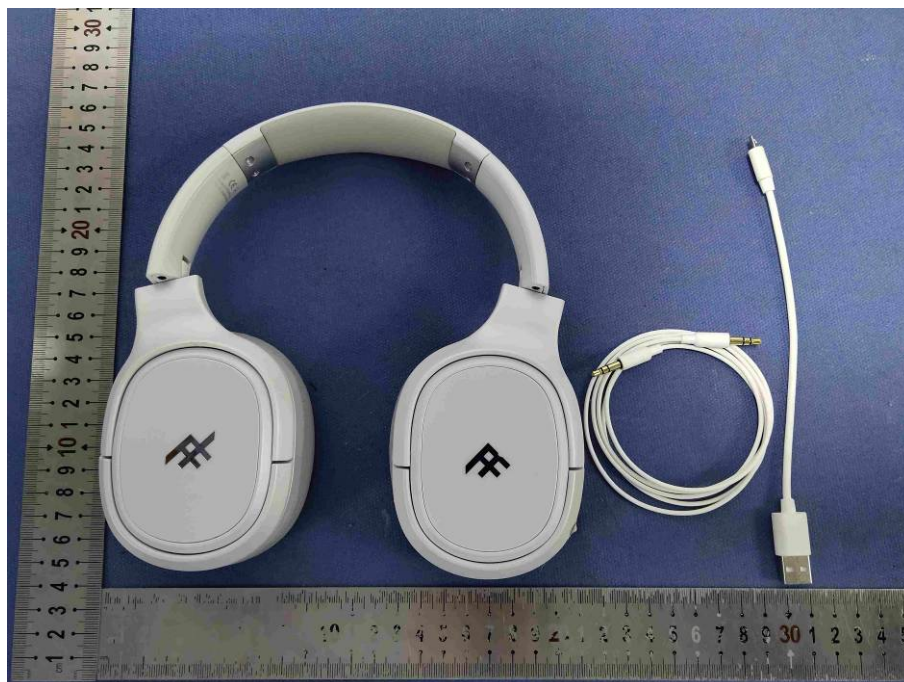






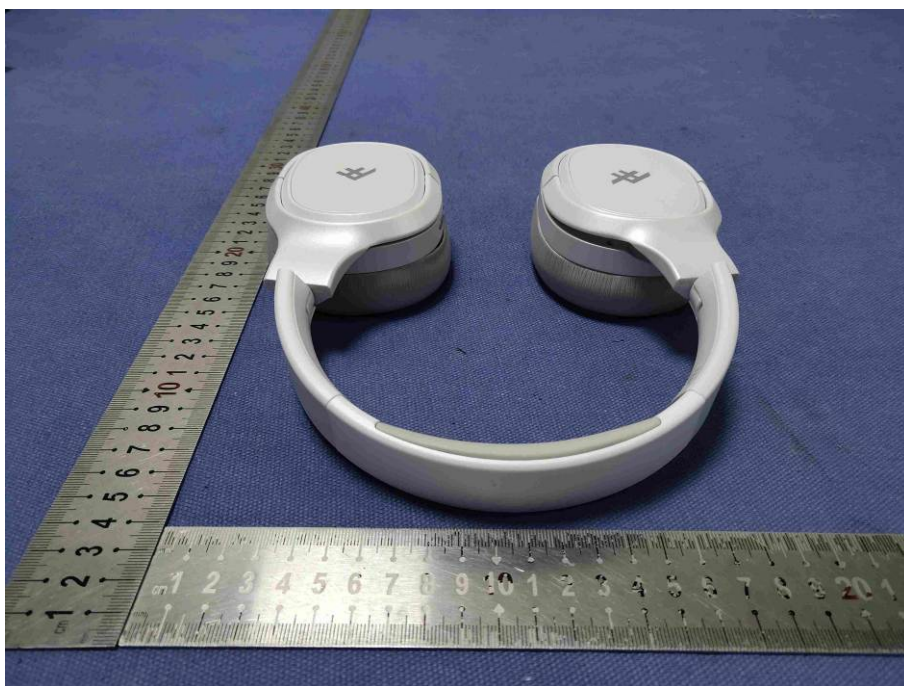


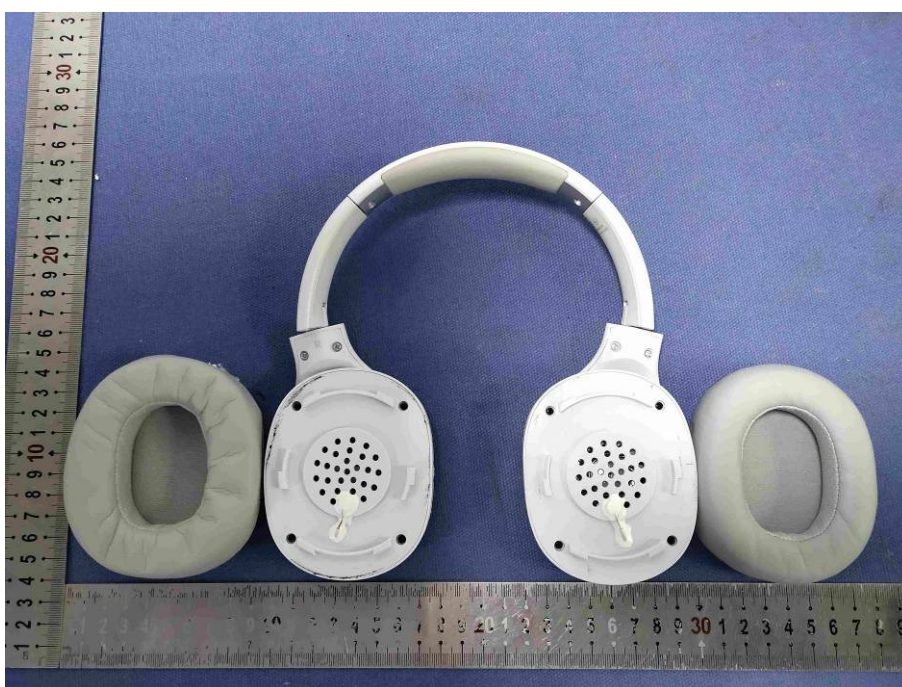



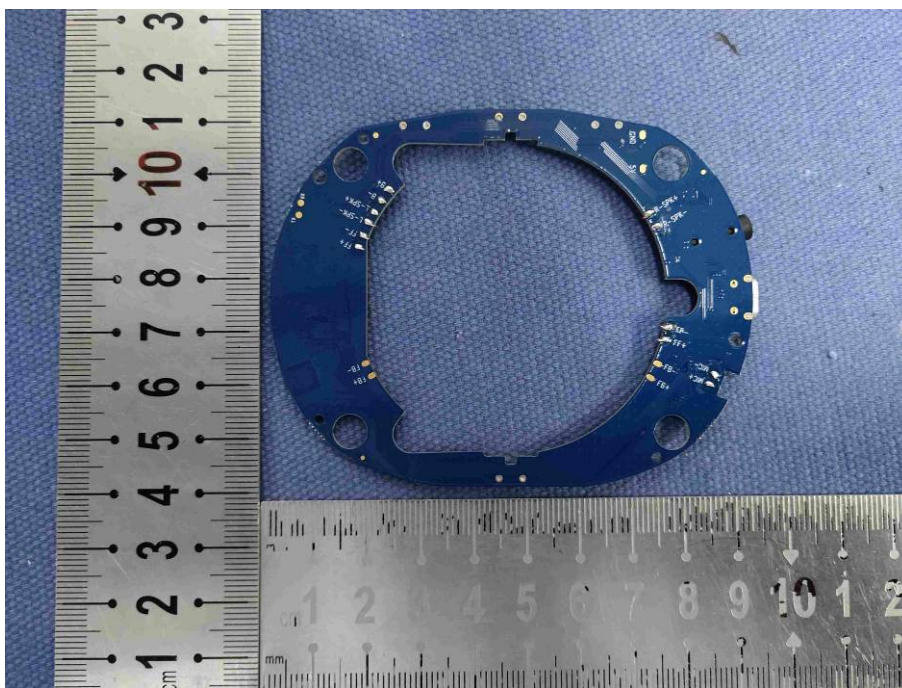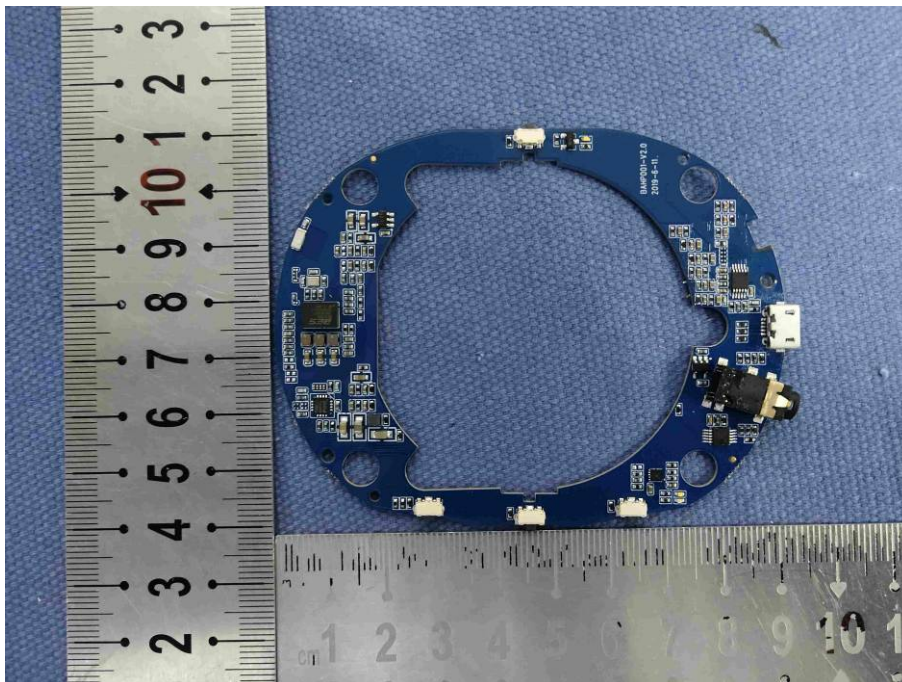

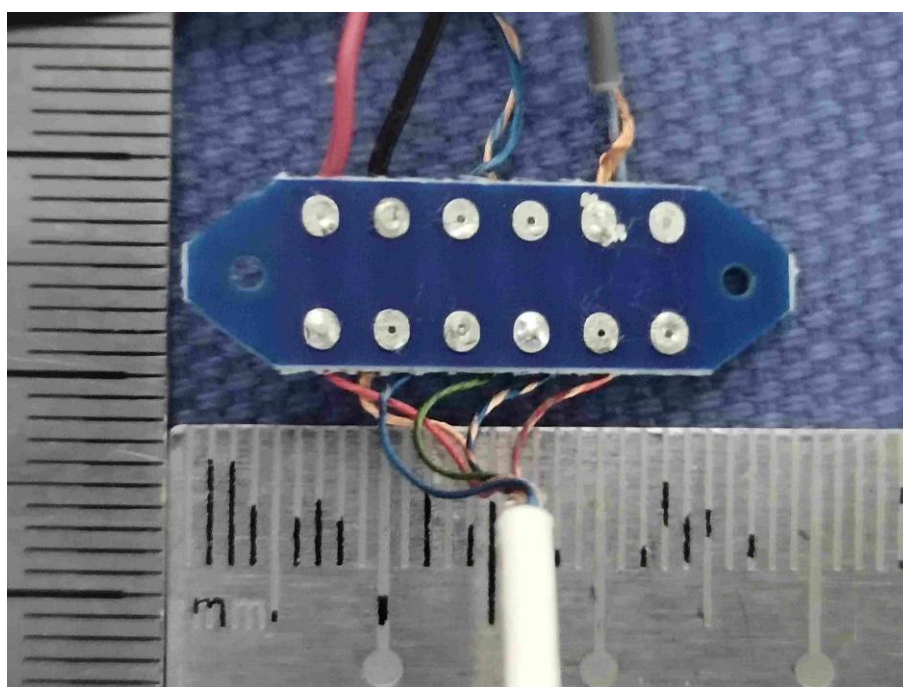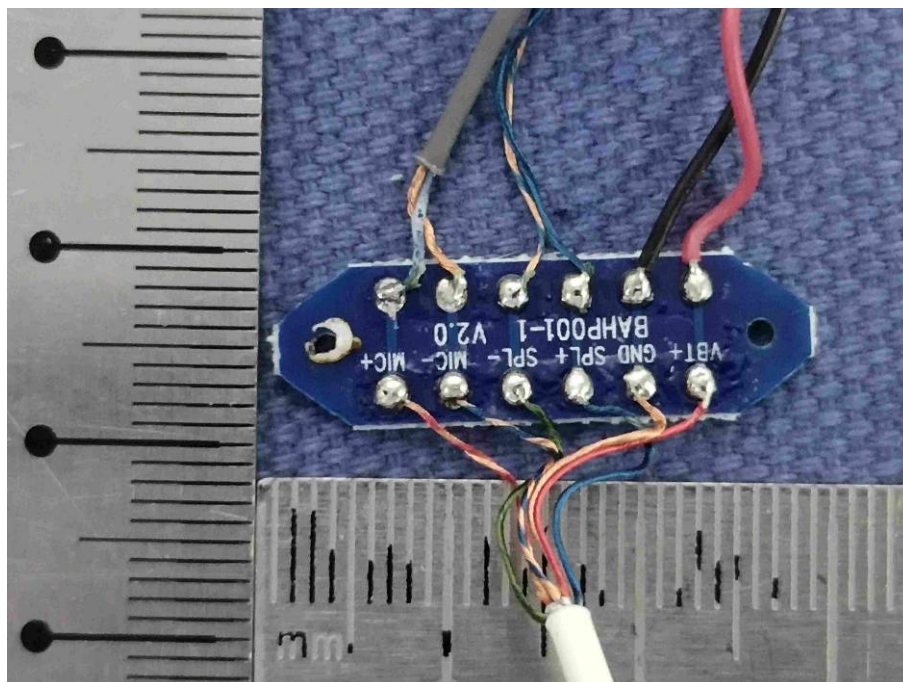

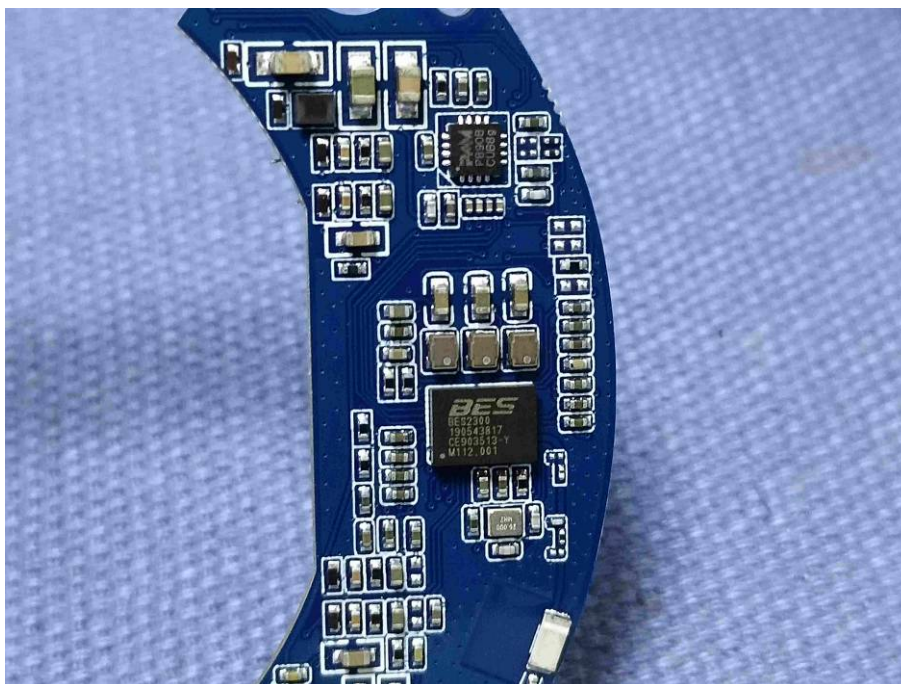

*** End of Report ***