

FCC SAR EVALUATION REPORT

**In accordance with the requirements of
FCC 47 CFR Part 2(2.1093), ANSI/IEEE C95.1-1992 and
IEEE Std 1528-2013**

Product Name : Mobile phone

Brand Name : Bmobile

Model Name : BL63 PRO

Family Model : N/A

Report No. : S23030902103001

FCC ID : ZSW-30-126

Prepared for

b mobile HK Limited

Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung;
New Territories; Hong Kong, China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street,
Bao'an District, Shenzhen 518126 P.R.China.

Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090

Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION**Applicant's name** b mobile HK LimitedAddress..... Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai
Chung; New Territories; Hong Kong, China**Manufacturer's Name** . b mobile HK LimitedAddress..... Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai
Chung; New Territories; Hong Kong, China**Product description**

Product name Mobile phone

Brand Name Bmobile

Model and/or type
reference BL63 PRO

Family Model N/A

FCC 47 CFR Part 2(2.1093)

ANSI/IEEE C95.1-1992

Standards IEEE Std 1528-2013

Published RF exposure KDB procedures

This device described above has been tested by Shenzhen NTEK. In accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 and KDB 865664 D01. Testing has shown that this device is capable of compliance with localized specific absorption rate (SAR) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992. The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK, this document may be altered or revised by Shenzhen NTEK, personal only, and shall be noted in the revision of the document.

Test Sample Number S230309021003

Date of Test

Date (s) of performance of tests... Mar. 08, 2023 ~ Mar. 23, 2023

Date of Issue Apr. 12, 2023

Test Result **Pass**Prepared By
(Test Engineer): Jacob. chen
(Jacob Chen)Approved By
(Lab Manager): Alex
(Alex Li)

※ ※ Revision History ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	Apr. 12, 2023	Jacob Chen

TABLE OF CONTENTS

1. General Information	6
1.1. RF exposure limits.....	6
1.2. Statement of Compliance	7
1.3. EUT Description	7
1.4. Test specification(s)	9
1.5. Ambient Condition.....	9
2. SAR Measurement System	10
2.1. SATIMO SAR Measurement Set-up Diagram	10
2.2. Robot	11
2.3. E-Field Probe.....	12
2.3.1. E-Field Probe Calibration	12
2.4. SAM phantoms	13
2.4.1. Technical Data	14
2.5. Device Holder	15
2.6. Test Equipment List	16
3. SAR Measurement Procedures	18
3.1. Power Reference	18
3.2. Area scan & Zoom scan.....	18
3.3. Description of interpolation/extrapolation scheme	20
3.4. Volumetric Scan	20
3.5. Power Drift	20
4. System Verification Procedure	21
4.1. Tissue Verification	21
4.1.1. Tissue Dielectric Parameter Check Results	22
4.2. System Verification Procedure	23
4.2.1. System Verification Results	24
5. SAR Measurement variability and uncertainty	25
5.1. SAR measurement variability.....	25
5.2. SAR measurement uncertainty	25
6. RF Exposure Positions	26
6.1. Ear and handset reference point	26
6.2. Definition of the cheek position	26
6.3. Definition of the tilt position	28
6.4. Body Worn Accessory	28
6.5. Wireless Router Devices	29
7. RF Output Power	30
7.1. GSM Conducted Power	30
7.2. WCDMA Conducted Power	30
7.3. LTE Conducted Power	32

7.4. WLAN & Bluetooth Output Power	51
8. Antenna Location.....	53
9. Stand-alone SAR test exclusion.....	53
10. SAR Results	54
10.1. SAR measurement Result.....	54
10.1.1. SAR measurement Result of GSM850	54
10.1.2. SAR measurement Result of GSM1900	55
10.1.3. SAR measurement Result of WCDMA Band 2	56
10.1.4. SAR measurement Result of WCDMA Band 4	57
10.1.5. SAR measurement Result of WCDMA Band 5	58
10.1.6. SAR measurement Result of LTE Band 2	59
10.1.7. SAR measurement Result of LTE Band 4	62
10.1.8. SAR measurement Result of LTE Band 5	64
10.1.9. SAR measurement Result of LTE Band 7	65
10.1.10. SAR measurement Result of LTE Band 12	68
10.1.11. SAR measurement Result of LTE Band 26A	70
10.1.12. SAR measurement Result of LTE Band 26B	71
10.1.13. SAR measurement Result of LTE Band 38	73
10.1.14. SAR measurement Result of LTE Band 66	76
10.1.15. SAR measurement Result of WLAN2.4G	77
10.2. Simultaneous Transmission Analysis.....	78
1. Appendix A. Photo documentation.....	80
2. Appendix B. System Check Plots	80
1. Appendix C. Plots of High SAR Measurement	93
2. Appendix D. Calibration Certificate	154

1. General Information

1.1. RF exposure limits

(A).Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B).Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

NOTE

HEAD AND TRUNK LIMIT

1.6 W/kg

APPLIED TO THIS EUT

1.2. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for A53 Pro are as follows.

RF Exposure Conditions		Equipment Class -Highest Reported SAR (W/kg)			
		PCE	DTS	NII	DSS
1-g Head		0.407	0.150	N/A	N/A
1-g Body-Worn (Separation distance of 10mm)		1.106	0.178	N/A	N/A
1-g Hotspot (Separation distance of 10mm)		1.106	0.178	N/A	N/A
Max Simultaneous Tx	Head	0.672	0.557	N/A	0.672
	Body-Worn	1.284	1.284	N/A	1.238
	Hotspot	1.284	1.284	N/A	1.238

Note: The Max Simultaneous Tx is calculated based on the same configuration and test position. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 & KDB 865664 D01.

1.3. EUT Description

Device Information	
Product Name	Mobile phone
Brand Name	Bmobile
Model Name	BL63 PRO
Family Model	N/A
Model Difference	N/A
FCC ID	ZSW-30-126
Device Phase	Identical Prototype
Exposure Category	General population / Uncontrolled environment
Antenna Type	PIFA Antenna
Battery Information	DC 3.8V/3000mAh from battery or DC 5V from Adapter.
HW Version	Bmobile_BL63Pro_HW_V001
SW Version	Bmobile_BL63Pro_TEM_MX_V001
Device Operating Configurations	
Supporting Mode(s)	GSM850/1900,WCDMABand2/4/5,LTEBand2/4/5/7/12/26/38/66 WLAN 2.4G, Bluetooth
Test Modulation	GSM(GMSK/8PSK), WCDMA(QPSK), LTE(QPSK/16QAM), WLAN(DSSS/OFDM), Bluetooth(GFSK, $\pi/4$ -DQPSK, 8DPSK)

Device Class	B		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM 850	824-849	869-894
	GSM 1900	1850-1910	1930-1990
	WCDMA Band 2	1850-1910	1930-1990
	WCDMA Band 4	1710-1755	2110-2155
	WCDMA Band 5	824-849	869-894
	LTE Band 2	1850-1910	1930-1990
	LTE Band 4	1710-1755	2110-2155
	LTE Band 5	824-849	869-894
	LTE Band 7	2500-2570	2620-2690
	LTE Band 12	699-716	729-746
	LTE Band 26	704-716	734-746
	LTE Band 38	2412-2462	
	LTE Band 66	5180-5240	
	WLAN 2.4G	5745-5825	
	Bluetooth	2402-2480	
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink		4
	Max Number of Timeslots in Downlink		4
	Max Total Timeslot		5
EGPRS Multislot Class(12)	Max Number of Timeslots in Uplink		4
	Max Number of Timeslots in Downlink		4
	Max Total Timeslot		5
Power Class	4, tested with power level 5(GSM 850)		
	1, tested with power level 0(GSM 1900)		
	3, tested with power control "all 1"(WCDMA Band 2)		
	3, tested with power control "all 1"(WCDMA Band 4)		
	3, tested with power control "all 1"(WCDMA Band 5)		
	3, tested with power control all Max.(LTE Band 2)		
	3, tested with power control all Max.(LTE Band 4)		
	3, tested with power control all Max.(LTE Band 5)		
	3, tested with power control all Max.(LTE Band 7)		
	3, tested with power control all Max.(LTE Band 12)		
	3, tested with power control all Max.(LTE Band 26)		
	3, tested with power control all Max.(LTE Band 38)		
	3, tested with power control all Max.(LTE Band 66)		

1.4. Test specification(s)


FCC 47 CFR Part 2(2.1093)
ANSI/IEEE C95.1-1992
IEEE Std 1528-2013
KDB 865664 D01 SAR measurement 100 MHz to 6 GHz
KDB 865664 D02 RF Exposure Reporting
KDB 447498 D01 General RF Exposure Guidance
KDB 248227 D01 802.11 Wi-Fi SAR
KDB 941225 D01 3G SAR Procedures
KDB 941225 D05 SAR for LTE Devices
KDB 941225 D06 Hotspot SAR
KDB 648474 D04 Handset SAR

1.5. Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

2. SAR Measurement System

2.1. SATIMO SAR Measurement Set-up Diagram

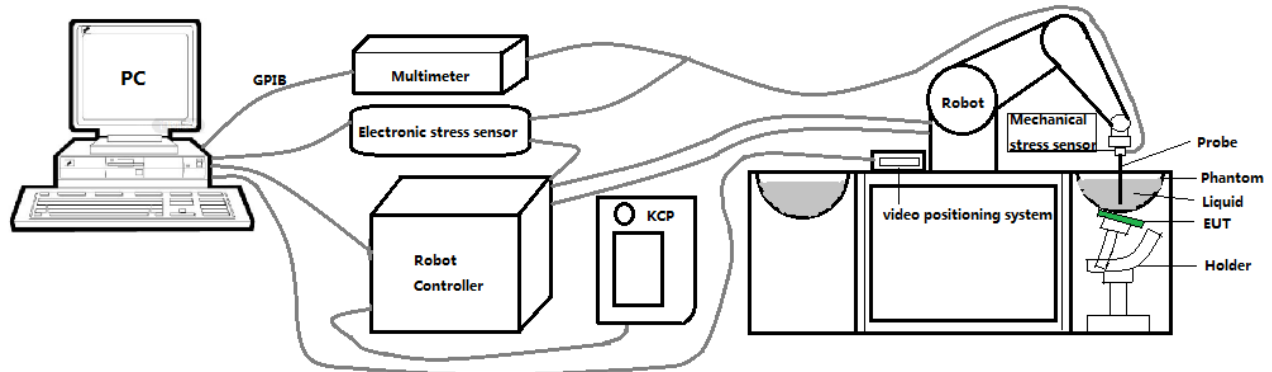

These measurements were performed with the automated near-field scanning system OPENSAR from SATIMO. The system is based on a high precision robot (working range: 901 mm), which positions the probes with a positional repeatability of better than ± 0.03 mm. The SAR measurements were conducted with dosimetric probe (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation.

The first step of the field measurement is the evaluation of the voltages induced on the probe by the device under test. Probe diode detectors are nonlinear. Below the diode compression point, the output voltage is proportional to the square of the applied E-field; above the diode compression point, it is linear to the applied E-field. The compression point depends on the diode, and a calibration procedure is necessary for each sensor of the probe.

The Keithley multimeter reads the voltage of each sensor and send these three values to the PC. The corresponding E field value is calculated using the probe calibration factors, which are stored in the working directory. This evaluation includes linearization of the diode characteristics. The field calculation is done separately for each sensor. Each component of the E field is displayed on the "Dipole Area Scan Interface" and the total E field is displayed on the "3D Interface"

2.2. Robot

The SATIMO SAR system uses the high precision robots from KUKA. For the 6-axis controller system, the robot controller version (KUKA) from KUKA is used. The KUKA robot series have many features that are important for our application:



- High precision (repeatability ± 0.03 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

2.3. E-Field Probe

This E-field detection probe is composed of three orthogonal dipoles linked to special Schottky diodes with low detection thresholds. The probe allows the measurement of electric fields in liquids such as the one defined in the IEEE and CENELEC standards.

For the measurements the Specific Dosimetric E-Field Probe SN 08/16 EPGO287 with following specifications is used



- Dynamic range: 0.01-100 W/kg
 - Tip Diameter : 2.5 mm
 - Distance between probe tip and sensor center: 1 mm
 - Distance between sensor center and the inner phantom surface: 2 mm (repeatability better than ± 1 mm).
 - Probe linearity: ± 0.08 dB
 - Axial isotropy: ± 0.01 dB
 - Hemispherical Isotropy: ± 0.01 dB
 - Calibration range: 650MHz to 5900MHz for head & body simulating liquid.
 - Lower detection limit: 8mW/kg
- Angle between probe axis (evaluation axis) and surface normal line: less than 30° .

2.3.1. E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (Norm X, Norm Y, and Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe are tested. The calibration data can be referred to appendix D of this report.

2.4. SAM phantoms


Photo of SAM phantom SN 16/15 SAM119



The SAM phantom is used to measure the SAR relative to people exposed to electro-magnetic field radiated by Smart Phones.

2.4.1. Technical Data

Serial Number	Shell thickness	Filling volume	Dimensions	Positionner Material	Permittivity	Loss Tangent
SN 16/15 SAM119	2 mm $\pm$ 0.2 mm	27 liters	Length:1000 mm Width:500 mm Height:200 mm	Gelcoat with fiberglass	3.4	0.02

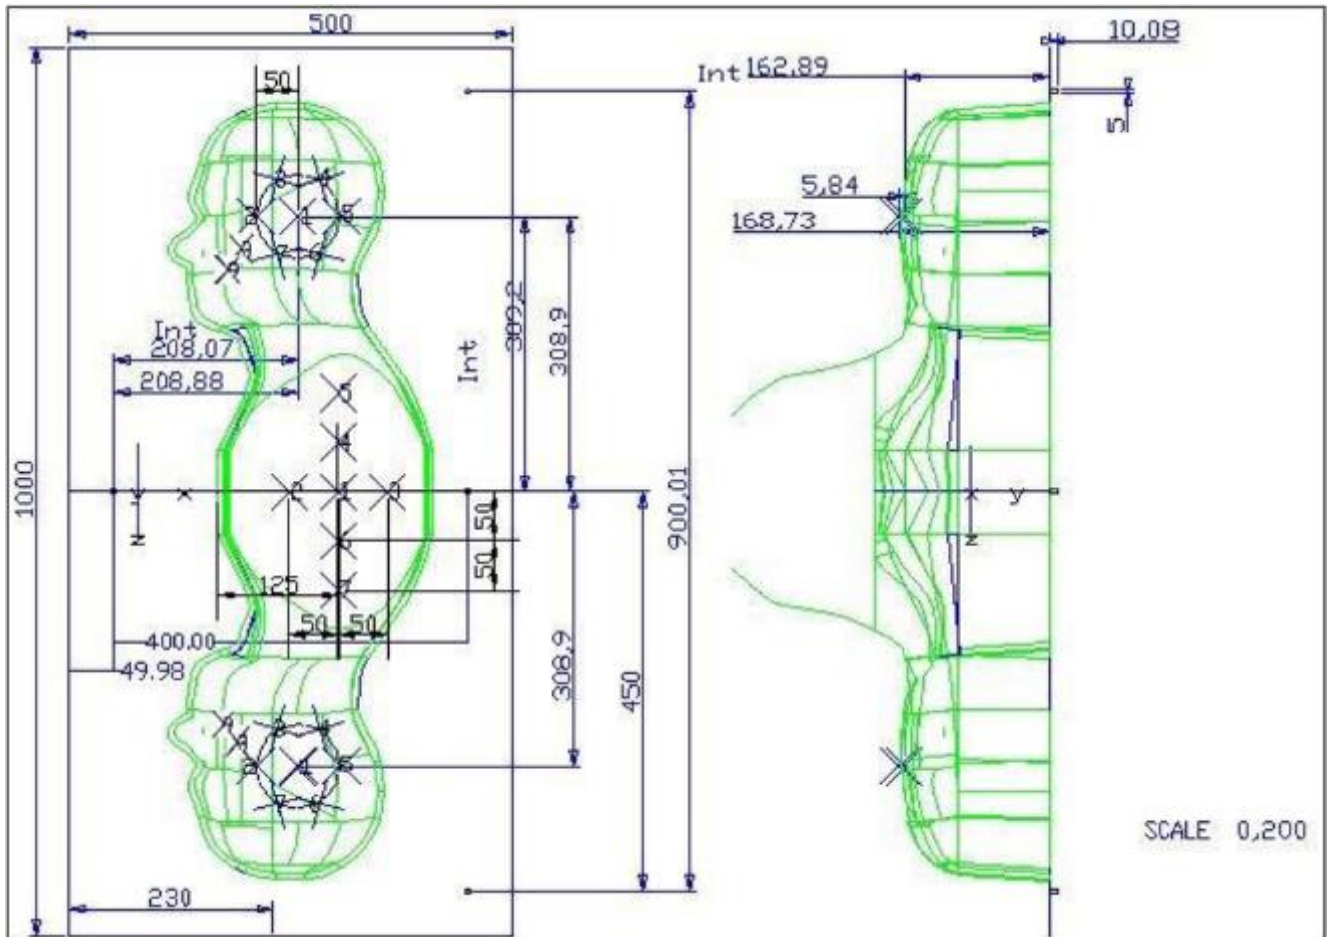


Serial Number	Left Head(mm)		Right Head(mm)		Flat Part(mm)	
SN 16/15 SAM119	2	2.02	2	2.08	1	2.09
	3	2.05	3	2.06	2	2.06
	4	2.07	4	2.07	3	2.08
	5	2.08	5	2.08	4	2.10
	6	2.05	6	2.07	5	2.10
	7	2.05	7	2.05	6	2.07
	8	2.07	8	2.06	7	2.07
	9	2.08	9	2.06	-	-

The test, based on ultrasonic system, allows measuring the thickness with an accuracy of 10 μ m.

2.5. Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1 degree.

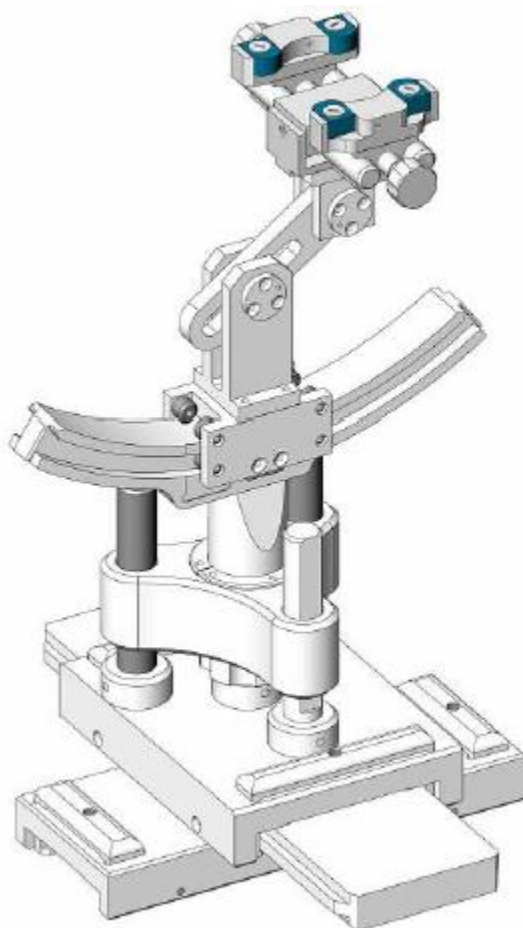

Serial Number	Holder Material	Permittivity	Loss Tangent
SN 16/15 MSH100	Delrin	3.7	0.005

2.6. Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked ☒

	Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
					Last Cal.	Due Date
☒	MVG	E FIELD PROBE	SSE2	SN 08/16 EPGO287	Jan. 10, 2023	Jan. 09, 2024
☒	MVG	750 MHz Dipole	SID750	SN 03/15 DIP 0G750-355	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	835 MHz Dipole	SID835	SN 03/15 DIP 0G835-347	Mar. 01, 2021	Feb. 28, 2024
☐	MVG	900 MHz Dipole	SID900	SN 03/15 DIP 0G900-348	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	1800 MHz Dipole	SID1800	SN 03/15 DIP 1G800-349	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	1900 MHz Dipole	SID1900	SN 03/15 DIP 1G900-350	Mar. 01, 2021	Feb. 28, 2024
☐	MVG	2000 MHz Dipole	SID2000	SN 03/15 DIP 2G000-351	Mar. 01, 2021	Feb. 28, 2024
☐	MVG	2300 MHz Dipole	SID2300	SN 03/16 DIP 2G300-358	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	2450 MHz Dipole	SID2450	SN 03/15 DIP 2G450-352	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	2600 MHz Dipole	SID2600	SN 03/15 DIP 2G600-356	Mar. 01, 2021	Feb. 28, 2024
☐	MVG	3500 MHz Dipole	SID3500	SN 09/12 DIP 3G500-360	Oct. 15, 2022	Oct. 14, 2025
☐	MVG	5000 MHz Dipole	SWG5500	SN 13/14 WGA 33	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	Liquid measurement Kit	SCLMP	SN 21/15 OCPG 72	NCR	NCR
☒	MVG	Power Amplifier	N.A	AMPLISAR_28/14_003	NCR	NCR
☒	KEITHLEY	Millivoltmeter	2000	4072790	NCR	NCR
☒	R&S	Universal radio communication tester	CMU200	117858	Jun. 17, 2022	Jun. 16, 2023
☒	R&S	Wideband radio communication tester	CMW500	103917	Jun. 17, 2022	Jun. 16, 2023

☒	HP	Network Analyzer	8753D	3410J01136	Jun. 17, 2022	Jun. 16, 2023
☒	Agilent	MXG Vector Signal Generator	N5182A	MY47070317	Jun. 16, 2022	Jun. 15, 2023
☒	Agilent	Power meter	E4419B	MY45102538	Jun. 17, 2022	Jun. 16, 2023
☒	Agilent	Power sensor	E9301A	MY41495644	Jun. 17, 2022	Jun. 16, 2023
☒	Agilent	Power sensor	E9301A	US39212148	Jun. 17, 2022	Jun. 16, 2023
☒	MCLI/USA	Directional Coupler	CB11-20	0D2L51502	Jul. 17, 2020	Jul. 16, 2023

3. SAR Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For Wi-Fi/BT power measurement, use engineering software to configure EUT Wi-Fi/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- (d) Connect EUT RF port through RF cable to the power meter, and measure Wi-Fi/BT output power.

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT Wi-Fi/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix A demonstrates.
- (c) Set scan area, grid size and other setting on the OPENSAR software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band.
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

3.1. Power Reference

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

3.2. Area scan & Zoom scan

The area scan is a 2D scan to find the hot spot location on the DUT. The zoom scan is a 3D scan

above the hot spot to calculate the 1g and 10g SAR value.

Measurement of the SAR distribution with a grid of 8 to 16 mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8 * 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g., 1 W/kg for 1,6 W/kg 1 g limit, or 1,26 W/kg for 2 W/kg, 10 g limit).

Area scan & Zoom scan scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$			$\leq 2 \text{ GHz}: \leq 15 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 12 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 12 \text{ mm}$ $4 - 6 \text{ GHz}: \leq 10 \text{ mm}$
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

* When zoom scan is required and the *reported* SAR from the *area scan based 1-g SAR estimation* procedures of KDB 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

3.3. Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is used to determine these highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1 mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

3.4. Volumetric Scan

The volumetric scan consists of a full 3D scan over a specific area. This 3D scan is useful for multi Tx SAR measurement. Indeed, it is possible with OpenSAR to add, point by point, several volumetric scans to calculate the SAR value of the combined measurement as it is defined in the standard IEEE1528 and IEC62209.

3.5. Power Drift

All SAR testing is under the EUT with full charged battery and transmit maximum output power. In OpenSAR measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in V/m. If the power drifts more than $\pm 5\%$, the SAR will be retested.

4. System Verification Procedure

4.1. Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% of weight)	Head Tissue									
Frequency Band (MHz)	750	835	900	1800	1900	2000	2450	2600	5200	5800
Water	34.40	34.40	34.40	55.36	55.36	57.87	57.87	57.87	65.53	65.53
NaCl	0.79	0.79	0.79	0.35	0.35	0.16	0.16	0.16	0.00	0.00
1,2-Propanediol	64.81	64.81	64.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	30.45	30.45	19.97	19.97	19.97	24.24	24.24
DGBE	0.00	0.00	0.00	13.84	13.84	22.00	22.00	22.00	10.23	10.23

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid depth from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm.

Photo of Liquid depth for Head Position	Photo of Liquid depth for Body Position
	

4.1.1. Tissue Dielectric Parameter Check Results

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.


Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		$\epsilon_r (\pm 5\%)$	σ (S/m) ($\pm 5\%$)	ϵ_r	σ (S/m)		
Head 750	750	41.96 (39.86~44.06)	0.89 (0.85~0.93)	40.56	0.89	21.8 °C	Mar. 17, 2023
Head 850	835	41.50 (39.43~43.58)	0.90 (0.86~0.95)	41.29	0.92	21.7 °C	Mar. 14, 2023
Head 1800	1800	40.00 (38.00~42.00)	1.40 (1.33~1.47)	38.81	1.37	21.3 °C	Mar. 23, 2023
Head 1900	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	38.70	1.42	21.4 °C	Mar. 13, 2023
Head 2450	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	38.64	1.83	21.8 °C	Mar. 08, 2023
Head 2600	2600	39.01 (37.06~40.96)	1.96 (1.86~2.06)	38.05	1.98	21.5 °C	Mar. 10, 2023

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

4.2. System Verification Procedure

The system verification is performed for verifying the accuracy of the complete measurement system and performance of the software. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 100mW (below 5GHz) or 100mW (above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system verification to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system verification to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

The system verification is shown as below picture:

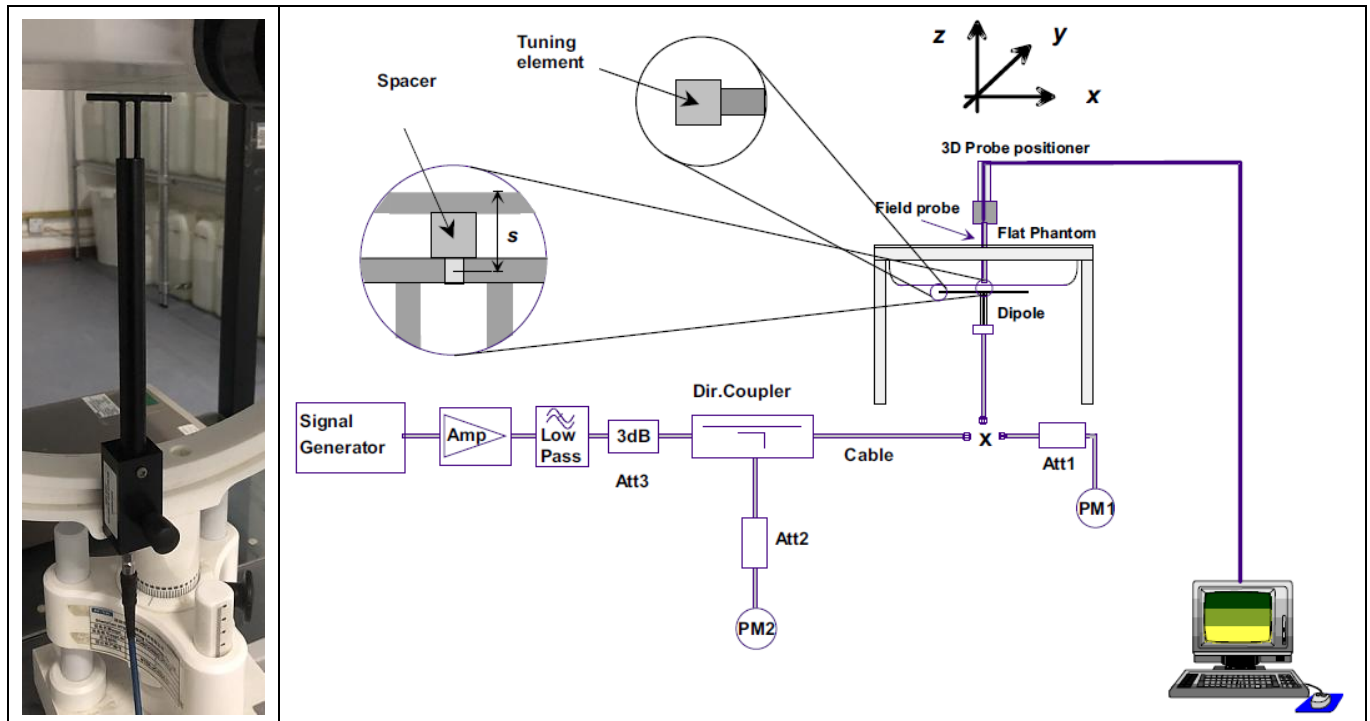

4.2.1. System Verification Results

Comparing to the original SAR value provided by SATIMO, the verification data should be within its specification of $\pm 10\%$. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance verification can meet the variation criterion and the plots can be referred to Appendix B of this report.

System Verification	Target SAR (1W) ($\pm 10\%$)		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (W/Kg)	10-g (W/Kg)	1-g (W/Kg)	10-g (W/Kg)		
750MHz	8.53 (7.68~9.38)	5.56 (5.01~6.11)	8.81	5.71	21.8 °C	Mar. 17, 2023
835MHz	9.84 (8.86~10.82)	6.22 (5.60~6.84)	9.36	6.50	21.7 °C	Mar. 14, 2023
1800MHz	37.96 (34.17~41.75)	19.81 (17.83~21.79)	37.47	20.58	21.3 °C	Mar. 23, 2023
1900MHz	40.37 (36.34~44.40)	20.48 (18.44~22.52)	41.60	21.71	21.4 °C	Mar. 13, 2023
2450MHz	53.69 (48.33~59.05)	23.94 (21.55~26.33)	51.29	25.23	21.8 °C	Mar. 08, 2023
2600MHz	55.83 (50.25~61.41)	24.19 (21.78~26.60)	54.07	22.24	21.5 °C	Mar. 10, 2023

5. SAR Measurement variability and uncertainty

5.1. SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

5.2. SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

6. RF Exposure Positions

6.1. Ear and handset reference point

Figure 6.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M”, the left ear reference point (ERP) is marked “LE”, and the right ERP is marked “RE”.

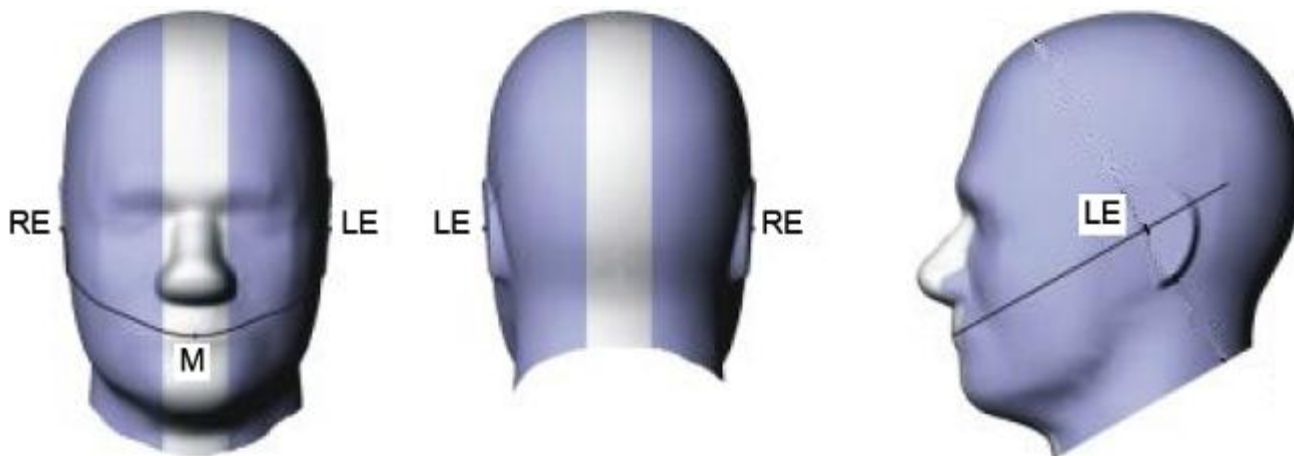


Fig 6.1.1 Front, back, and side views of SAM phantom

6.2. Definition of the cheek position

1. Define two imaginary lines on the handset, the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 6.2.1 and Figure 6.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 6.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 6.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
2. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
3. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP
4. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
5. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.

6. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 6.2.3. The actual rotation angles should be documented in the test report.

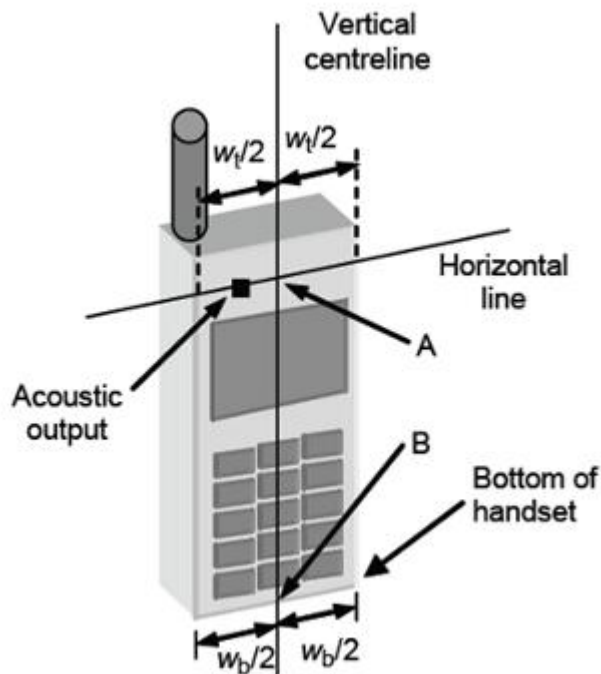


Fig 6.2.1 Handset vertical and horizontal reference lines—"fixed case"

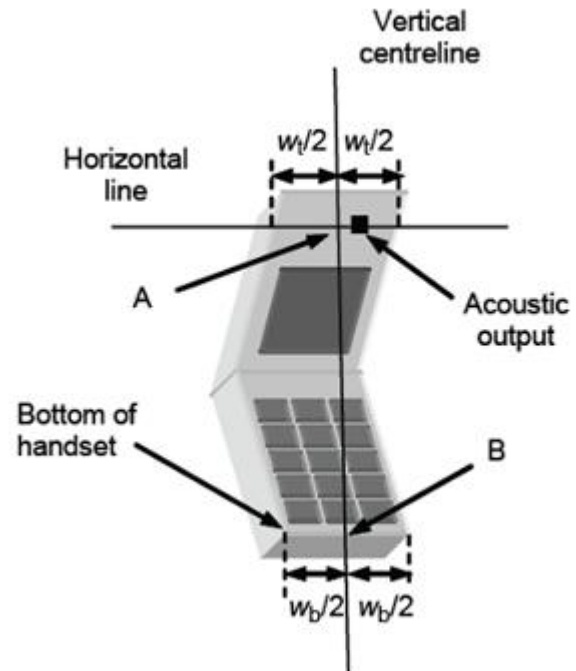


Fig 6.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

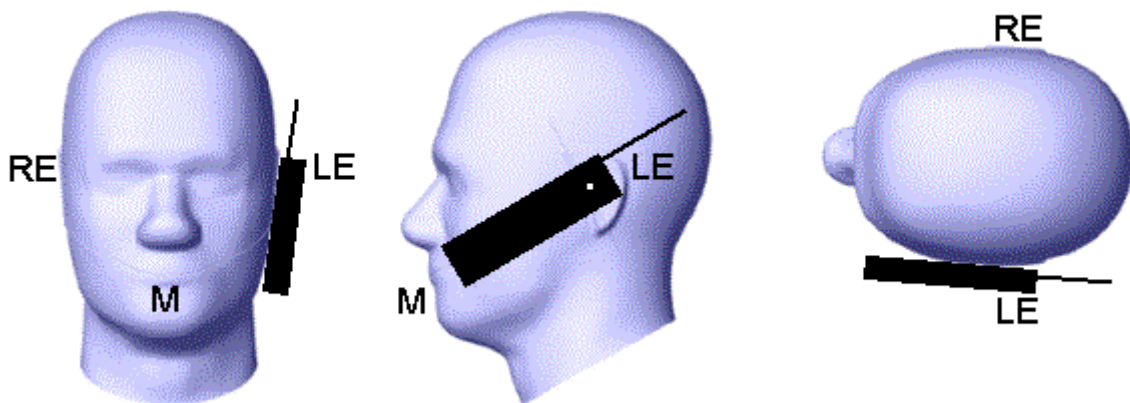


Fig 6.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

6.3. Definition of the tilt position

1. While maintaining the orientation of the handset, retract the handset parallel to the reference plane far enough away from the phantom to enable a rotation of the device by 15 degree.
2. Rotate the Handset around the horizontal line by 15 degree (see Figure 6.3.1).
3. While maintaining the orientation of the handset, move the handset towards the phantom on a line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, e.g., the antenna with the back of the phantom head, the angle of the handset shall be reduced. In this case, the tilt position is obtained if any part of the handset is in contact with the pinna as well as a second part of the handset is in contact with the phantom, e.g., the antenna with the back of the head.

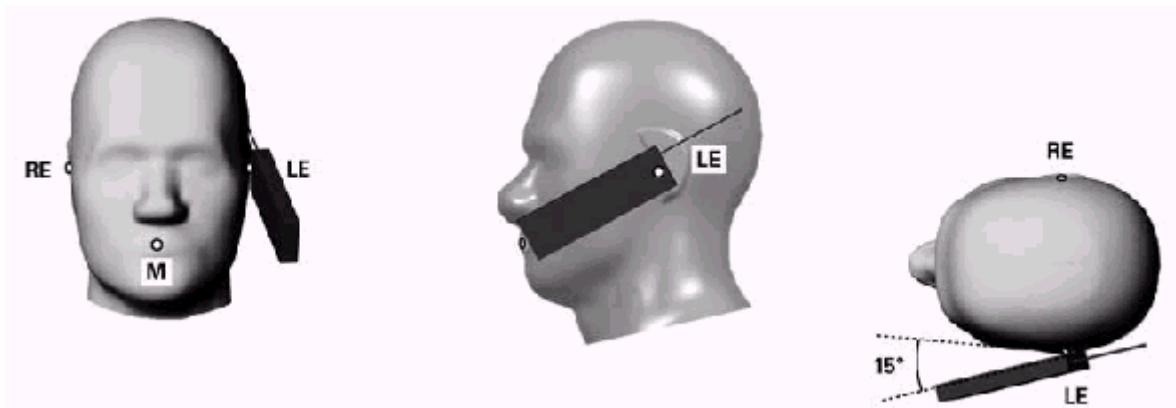


Figure 6.3.1 – Tilt position of the wireless device on the left side of SAM

6.4. Body Worn Accessory

1. Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6.4.1). Per KDB 648474 D04, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $< 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.
2. Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest

spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

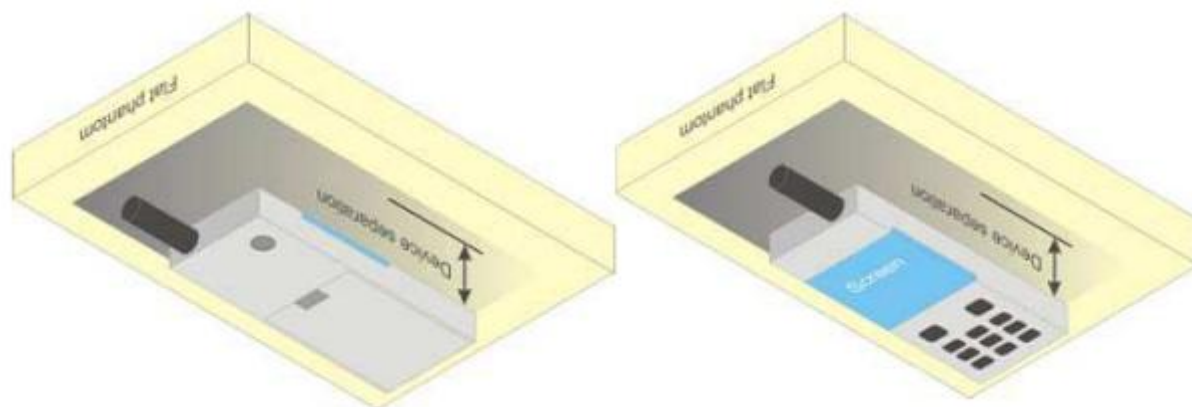


Figure 6.4.1 – Test positions for body-worn devices

6.5. Wireless Router Devices

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WLAN simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WLAN transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WLAN transmitter according to FCC KDB Publication 447498 D01 publication procedures. The “Portable Hotspot” feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

7. RF Output Power

7.1. GSM Conducted Power

Band GSM850	Burst-Averaged output Power (dBm)				Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	128	189	251	Tune-up	128	189	251
Frequency (MHz)	(dBm)	824.2	836.4	848.8	(dBm)	824.2	836.4	848.8
GSM (GMSK)	32.50	32.20	32.26	32.06	23.47	23.17	23.23	23.03
GPRS(GMSK,1 Tx slot)	32.50	32.16	32.23	32.04	23.47	23.13	23.20	23.01
GPRS(GMSK,2 Tx slot)	30.50	30.07	30.14	29.96	24.48	24.05	24.12	23.94
GPRS(GMSK,3 Tx slot)	28.50	28.11	28.17	28.01	24.24	23.85	23.91	23.75
GPRS(GMSK,4 Tx slot)	26.00	25.76	25.79	25.62	22.99	22.75	22.78	22.61
EGPRS(8PSK,1 Tx slot)	25.50	25.06	25.42	24.72	16.47	16.03	16.39	15.69
EGPRS(8PSK,2 Tx slot)	25.50	25.30	25.40	24.94	19.48	19.28	19.38	18.92
EGPRS(8PSK,3 Tx slot)	24.50	23.81	24.21	23.83	20.24	19.55	19.95	19.57
EGPRS(8PSK,4 Tx slot)	22.50	21.46	22.01	21.42	19.49	18.45	19.00	18.41
Band GSM1900	Burst-Averaged output Power (dBm)				Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	512	661	810	Tune-up	512	661	810
Frequency (MHz)	(dBm)	1850.2	1880	1909.8	(dBm)	1850.2	1880	1909.8
GSM (GMSK)	30.00	29.99	29.87	29.76	20.97	20.96	20.84	20.73
GPRS(GMSK,1 Tx slot)	30.00	29.98	29.87	29.73	20.97	20.95	20.84	20.70
GPRS(GMSK,2 Tx slot)	28.00	27.61	27.30	27.01	21.98	21.59	21.28	20.99
GPRS(GMSK,3 Tx slot)	26.50	26.02	25.69	25.37	22.24	21.76	21.43	21.11
GPRS(GMSK,4 Tx slot)	24.50	24.05	23.68	23.34	21.49	21.04	20.67	20.33
EGPRS(8PSK,1 Tx slot)	27.00	26.32	26.67	26.14	17.97	17.29	17.64	17.11
EGPRS(8PSK,2 Tx slot)	27.00	25.85	26.59	26.15	20.98	19.83	20.57	20.13
EGPRS(8PSK,3 Tx slot)	25.00	24.79	24.95	24.50	20.74	20.53	20.69	20.24
EGPRS(8PSK,4 Tx slot)	23.00	22.39	22.63	21.93	19.99	19.38	19.62	18.92

7.2. WCDMA Conducted Power

WCDMA Band 2	Burst-Averaged output Power (dBm)			
Tx Channel	Tune-up (dBm)	9262	9400	9538
Frequency (MHz)		1852.4	1880	1907.6
RMC12.2K	23.50	23.14	23.14	23.13
HSDPA Sub 1	23.00	22.74	21.93	22.07
HSDPA Sub 2	22.50	22.37	21.94	21.80

HSDPA Sub 3	22.50	22.10	21.62	21.46
HSDPA Sub 4	22.00	21.96	21.39	21.47
HSUPA Sub 1	23.00	22.54	22.05	21.91
HSUPA Sub 2	23.00	22.70	22.11	22.00
HSUPA Sub 3	22.50	22.49	21.74	21.83
HSUPA Sub 4	23.00	22.60	21.99	22.16
HSUPA Sub 5	22.50	22.32	21.76	21.79
WCDMA Band 4	Burst-Averaged output Power (dBm)			
Tx Channel	Tune-up (dBm)	1312	1413	1513
Frequency (MHz)		1712.4	1732.6	1752.6
RMC12.2K	23.50	23.21	23.22	23.17
HSDPA Sub 1	23.00	22.79	22.69	22.60
HSDPA Sub 2	23.00	22.66	22.31	22.41
HSDPA Sub 3	22.50	22.32	22.07	21.90
HSDPA Sub 4	22.50	22.05	21.92	21.50
HSUPA Sub 1	23.00	22.70	22.50	22.34
HSUPA Sub 2	23.00	22.76	22.75	22.42
HSUPA Sub 3	23.00	22.53	22.34	22.11
HSUPA Sub 4	23.00	22.71	22.53	22.33
HSUPA Sub 5	22.50	22.35	22.36	22.31
WCDMA Band 5	Burst-Averaged output Power (dBm)			
Tx Channel	Tune-up (dBm)	4132	4182	4233
Frequency (MHz)		826.4	836.4	846.6
RMC12.2K	23.00	22.71	22.68	22.74
HSDPA Sub 1	23.00	22.56	22.21	22.49
HSDPA Sub 2	22.50	22.17	22.00	22.25
HSDPA Sub 3	22.00	21.94	21.63	21.96
HSDPA Sub 4	22.00	21.69	21.49	21.91
HSUPA Sub 1	23.00	22.59	21.99	22.18
HSUPA Sub 2	22.50	22.42	22.23	22.34
HSUPA Sub 3	22.50	22.21	21.96	22.05
HSUPA Sub 4	22.50	22.40	21.94	22.18
HSUPA Sub 5	22.50	22.33	21.99	22.09

7.3. LTE Conducted Power

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18607/1850.7	18900/1880	19193/1909.3
LTE Band 2	1.4MHz	QPSK	1	0	25.50	23.94	24.86	25.03
			1	2	25.50	23.95	24.91	25.20
			1	5	25.50	23.89	24.75	24.89
			3	0	25.00	23.16	24.74	24.75
			3	1	25.00	23.11	24.61	24.83
			3	2	25.00	23.15	24.63	24.77
			6	0	24.00	23.56	23.61	23.80
		16QAM	1	0	24.50	24.08	23.50	23.97
			1	2	24.50	24.02	23.55	24.14
			1	5	24.50	24.11	23.31	24.07
			3	0	24.00	23.93	23.72	23.86
			3	1	24.00	23.83	23.60	23.96
			3	2	24.00	23.78	23.53	23.90
			6	0	23.00	22.40	22.56	22.65
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18615/1851.5	18900/1880	19185/1908.5
LTE Band 2	3MHz	QPSK	1	0	25.50	24.84	24.79	24.69
			1	7	25.50	24.73	24.82	24.82
			1	14	25.50	24.86	24.74	24.86
			8	0	24.00	23.80	23.78	23.79
			8	4	24.00	23.76	23.71	23.84
			8	7	24.00	23.59	23.64	23.77
			15	0	24.00	23.78	23.67	23.79
		16QAM	1	0	24.50	24.34	23.71	24.24
			1	7	24.50	24.27	23.61	24.27
			1	14	24.50	24.13	23.76	24.32
			8	0	23.50	23.01	22.71	22.87
			8	4	23.50	22.95	22.75	22.93
			8	7	23.50	22.82	22.79	22.99
			15	0	23.00	22.82	22.78	22.79
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		

			RB Size	RB Offset		18625/1852.5	18900/1880	19175/1907.5
LTE Band 2	5MHz	QPSK	1	0	25.50	24.82	24.99	25.00
			1	12	25.50	24.79	24.94	25.14
			1	24	25.50	24.66	24.93	25.05
			12	0	24.00	23.66	23.71	23.71
			12	6	24.00	22.39	23.59	23.88
			12	11	24.00	22.68	23.69	23.74
			25	0	24.00	23.07	23.70	23.74
		16QAM	1	0	24.50	24.29	24.06	24.21
			1	12	24.50	24.14	24.11	24.20
			1	24	24.50	24.25	24.04	24.18
			12	0	23.00	22.89	22.75	22.72
			12	6	23.00	22.76	22.69	22.90
			12	11	23.00	22.78	22.70	22.92
			25	0	23.50	22.74	22.94	23.01
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18650/1855	18900/1880	19150/1905
LTE Band 2	10MHz	QPSK	1	0	25.50	24.85	24.91	24.78
			1	24	25.50	24.82	24.99	24.72
			1	49	25.50	24.78	25.03	24.82
			25	0	24.00	23.56	23.78	23.76
			25	12	24.00	23.72	23.73	23.73
			25	24	24.00	23.65	23.72	23.80
			50	0	24.00	23.60	23.62	23.76
		16QAM	1	0	24.50	24.30	24.04	24.27
			1	24	24.50	24.18	24.06	24.34
			1	49	24.50	24.16	24.16	24.33
			25	0	23.50	22.71	23.06	22.80
			25	12	23.50	22.94	22.96	22.84
			25	24	23.50	22.91	23.08	22.74
			50	0	23.00	22.71	22.73	22.92
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18675/1857.5	18900/1880	19125/1902.5
LTE Band	15MHz	QPSK	1	0	25.50	24.97	24.63	24.84
			1	37	25.50	24.86	24.67	25.08

2			1	74	25.50	24.87	24.73	25.03
			36	0	24.00	23.84	23.64	23.69
			36	18	24.00	23.30	23.77	23.74
			36	37	24.00	22.82	23.57	23.69
			75	0	24.00	22.82	23.76	23.76
		16QAM	1	0	24.50	24.30	24.25	24.41
			1	37	24.50	24.22	24.19	24.32
			1	74	24.50	24.12	24.39	24.34
			36	0	23.00	22.75	22.84	22.83
			36	18	23.00	22.62	22.73	22.88
			36	37	23.00	22.65	22.77	22.78
			75	0	23.00	22.81	22.89	22.83
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18700/1860	18900/1880	19100/1900
LTE Band 2	20MHz	QPSK	1	0	25.50	25.07	24.91	25.02
			1	49	25.50	24.93	24.97	25.02
			1	99	25.50	24.97	24.86	25.13
			50	0	24.00	23.63	23.66	23.68
			50	24	24.00	23.69	23.82	23.69
			50	49	24.00	23.59	23.84	23.71
			100	0	24.00	23.71	23.73	23.79
		16QAM	1	0	24.50	24.15	23.55	24.15
			1	49	24.50	24.09	23.48	24.14
			1	99	24.50	23.96	23.49	24.23
			50	0	23.00	22.79	22.86	22.83
			50	24	23.00	22.71	22.74	22.92
			50	49	23.00	22.82	22.77	22.99
			100	0	23.00	22.81	22.77	22.93

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		19957/1710.7	20175/1732.5	20393/1754.3
LTE Band 4	1.4MHz	QPSK	1	0	25.50	24.32	24.95	24.81
			1	2	25.50	24.50	24.99	24.78
			1	5	25.50	24.44	25.02	24.80
			3	0	25.00	24.49	24.80	24.71
			3	1	25.00	24.55	24.85	24.66

				3	2	25.00	24.52	24.80	24.62
				6	0	24.00	23.50	23.64	23.53
				1	0	24.50	23.71	24.01	23.90
				1	2	24.50	23.79	24.01	23.96
				1	5	24.50	23.86	24.01	23.86
				3	0	24.50	23.61	23.85	23.98
				3	1	24.50	23.64	23.87	23.96
				3	2	24.50	23.67	23.90	24.08
				6	0	23.00	22.50	22.61	22.58
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)			
			RB Size	RB Offset		19965/1711.5	20175/1732.5	20385/1753.5	
LTE Band 4	3MHz	QPSK	1	0	25.50	24.73	24.74	24.68	
			1	7	25.50	24.73	24.80	24.69	
			1	14	25.50	24.98	24.83	24.67	
			8	0	24.00	23.37	23.73	23.79	
			8	4	24.00	23.56	23.78	23.72	
			8	7	24.00	23.57	23.73	23.67	
			15	0	24.00	23.52	23.74	23.69	
		16QAM	1	0	24.50	23.80	24.31	24.26	
			1	7	24.50	23.74	24.31	24.14	
			1	14	24.50	24.08	24.30	24.16	
			8	0	23.00	22.64	22.84	22.85	
			8	4	23.00	22.64	22.84	22.87	
			8	7	23.00	22.76	22.84	22.88	
			15	0	23.00	22.62	22.83	22.91	
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)			
			RB Size	RB Offset		19975/1712.5	20175/1732.5	20375/1752.5	
LTE Band 4	5MHz	QPSK	1	0	25.50	24.78	24.05	24.74	
			1	12	25.50	24.80	24.96	24.78	
			1	24	25.50	24.77	24.95	24.72	
			12	0	24.00	23.43	23.68	23.60	
			12	6	24.00	23.48	23.68	23.63	
			12	11	24.00	23.53	23.72	23.51	
			25	0	24.00	23.56	23.73	23.49	
		16QAM	1	0	24.50	23.83	24.05	23.84	
			1	12	24.50	24.08	24.05	23.97	

			1	24	24.50	24.00	24.10	23.92
			12	0	23.00	22.96	22.80	22.62
			12	6	23.00	22.96	22.75	22.71
			12	11	23.00	22.01	22.85	22.68
			25	0	23.00	22.58	22.98	22.80
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20000/1715	20175/1732.5	20350/1750
LTE Band 4	10MHz	QPSK	1	0	25.50	24.45	24.69	24.50
			1	24	25.50	24.53	24.77	24.55
			1	49	25.50	24.58	24.77	24.42
			25	0	24.00	23.46	23.74	23.63
			25	12	24.00	23.46	23.68	23.64
			25	24	24.00	23.59	23.81	23.50
			50	0	24.00	23.58	23.61	23.68
		16QAM	1	0	24.50	23.91	24.20	24.11
			1	24	24.50	24.00	24.28	24.33
			1	49	24.50	24.06	24.33	24.30
			25	0	23.00	22.61	22.66	22.56
			25	12	23.00	22.57	22.76	22.69
			25	24	23.00	22.54	22.81	22.57
			50	0	23.00	22.51	22.81	22.76
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20025/1717.5	20175/1732.5	20325/1747.5
LTE Band 4	15MHz	QPSK	1	0	25.50	24.46	24.89	24.46
			1	37	25.50	24.58	25.01	24.53
			1	74	25.50	24.64	24.98	24.40
			36	0	24.00	23.45	23.82	23.45
			36	18	24.00	23.54	23.69	23.63
			36	37	24.00	23.54	23.71	23.47
			75	0	24.00	23.61	23.76	23.62
		16QAM	1	0	24.50	23.97	24.14	24.23
			1	37	24.50	24.05	24.08	24.17
			1	74	24.50	24.06	24.17	24.25
			36	0	23.00	22.52	22.89	22.52
			36	18	23.00	22.61	22.77	22.82
			36	37	23.00	22.62	22.88	22.67

			75	0	23.00	22.68	22.74	22.61
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20050/1720	20175/1732.5	20300/1745
LTE Band 4	20MHz	QPSK	1	0	25.50	24.69	24.94	24.66
			1	49	25.50	24.81	24.98	24.65
			1	99	25.50	24.94	24.92	24.62
			50	0	24.00	23.61	23.85	23.57
			50	24	24.00	23.57	23.69	23.61
			50	49	24.00	23.51	23.71	23.73
			100	0	24.00	23.45	23.59	23.59
		16QAM	1	0	24.50	23.80	24.09	23.76
			1	49	24.50	23.90	24.17	23.76
			1	99	24.50	24.15	24.09	23.76
			50	0	23.00	22.55	22.79	22.76
			50	24	23.00	22.58	22.79	22.71
			50	49	23.00	22.56	22.77	22.80
			100	0	23.00	22.65	22.90	22.70

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20407/824.7	20525/836.5	20643/848.3
LTE Band 5	1.4MHz	QPSK	1	0	24.50	23.50	24.01	23.77
			1	2	24.50	23.62	24.09	23.86
			1	5	24.50	23.57	24.09	23.82
			3	0	24.00	23.69	23.91	23.66
			3	1	24.00	23.73	23.98	23.69
			3	2	24.00	23.66	23.95	23.80
			6	0	23.00	22.44	22.75	22.63
		16QAM	1	0	23.50	22.77	23.33	23.01
			1	2	23.50	22.59	23.06	22.95
			1	5	23.50	22.76	23.01	22.87
			3	0	23.00	22.74	22.94	22.83
			3	1	23.00	22.60	22.96	22.84
			3	2	23.00	22.70	22.92	22.65
			6	0	22.00	21.29	21.64	21.88
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		

			RB Size	RB Offset		20415/825.5	20525/836.5	20635/847.5
LTE Band 5	3MHz	QPSK	1	0	24.50	23.72	23.82	23.73
			1	7	24.50	23.76	23.97	23.71
			1	14	24.50	23.72	23.90	23.66
			8	0	23.00	22.41	22.80	22.96
			8	4	23.00	22.45	22.80	22.95
			8	7	23.00	22.64	22.68	22.79
			15	0	23.00	22.44	22.67	22.94
		16QAM	1	0	24.00	22.84	23.32	23.56
			1	7	24.00	22.81	23.04	23.31
			1	14	24.00	22.80	23.18	23.21
			8	0	22.50	21.55	22.30	21.92
			8	4	22.50	21.54	21.86	21.71
			8	7	22.50	21.47	21.79	22.29
			15	0	22.00	21.49	21.74	21.88
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20425/826.5	20525/836.5	20625/846.5
LTE Band 5	5MHz	QPSK	1	0	24.50	23.95	23.96	24.08
			1	12	24.50	23.81	23.98	24.03
			1	24	24.50	23.94	23.98	23.91
			12	0	23.00	22.44	22.88	22.81
			12	6	23.00	22.55	22.69	22.95
			12	11	23.00	22.62	22.72	22.85
			25	0	23.50	22.58	22.70	23.04
		16QAM	1	0	23.50	22.95	23.25	23.10
			1	12	23.50	23.09	23.25	23.31
			1	24	23.50	23.13	23.35	23.03
			12	0	22.50	21.53	22.21	21.90
			12	6	22.50	21.65	21.87	21.76
			12	11	22.50	21.66	21.77	21.85
			25	0	22.50	21.46	21.76	22.08
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20450/829	20525/836.5	20600/844
LTE Band	10MHz	QPSK	1	0	24.50	23.72	23.74	23.82
			1	24	24.50	23.67	23.96	23.79

5			1	49	24.50	23.86	23.83	23.76
			25	0	23.00	22.54	22.96	22.84
			25	12	23.00	22.58	22.81	22.78
			25	24	23.00	22.60	22.93	22.97
			50	0	23.00	22.54	22.78	22.92
		16QAM	1	0	23.50	22.96	23.21	23.35
			1	24	23.50	23.09	23.34	23.28
			1	49	23.50	23.23	23.19	23.14
			25	0	22.50	21.61	22.17	22.20
			25	12	22.50	21.55	21.75	21.78
			25	24	22.50	21.74	22.12	22.00
			50	0	22.00	21.67	21.82	21.68

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20775/2502.5	21100/2535	21425/2567.5
LTE Band 7	5MHz	QPSK	1	0	25.50	24.70	23.92	24.57
			1	12	25.50	25.01	24.56	24.02
			1	24	25.50	24.78	24.33	24.26
			12	0	24.50	24.12	24.08	23.96
			12	6	24.50	24.04	24.07	24.00
			12	11	24.50	24.16	24.07	23.74
			25	0	24.50	24.23	24.16	23.86
		16QAM	1	0	25.00	24.38	24.03	23.76
			1	12	25.00	24.95	24.75	24.08
			1	24	25.00	24.76	24.48	23.31
			12	0	23.50	23.38	23.10	23.19
			12	6	23.50	23.37	23.25	23.23
			12	11	23.50	23.38	23.23	23.30
			25	0	23.50	23.36	23.25	23.20
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20800/2505	21100/2535	21400/2565
LTE Band 7	10MHz	QPSK	1	0	25.50	24.37	23.90	24.17
			1	24	25.50	25.03	24.42	23.83
			1	49	25.50	25.45	25.14	23.76
			25	0	24.50	24.25	24.17	23.66
			25	12	24.50	24.18	24.02	23.89

				25	24	24.50	24.21	24.00	24.01
				50	0	24.50	24.30	24.21	23.85
				1	0	25.50	24.41	23.93	23.92
				1	24	25.50	25.06	24.55	23.94
				1	49	25.50	24.88	24.49	23.71
				25	0	23.50	23.30	23.33	23.34
				25	12	23.50	23.32	23.45	23.49
				25	24	23.50	23.31	23.36	23.34
				50	0	23.50	23.36	23.28	23.26
				RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
Band	Band Width	Modulation		RB Size	RB Offset		20825/2507.5	21100/2535	21375/2562.5
LTE Band 7	15MHz	QPSK		1	0	25.50	24.55	24.07	23.84
				1	37	25.50	25.11	24.42	23.79
				1	74	25.50	25.12	24.94	23.61
				36	0	24.50	24.25	24.16	23.45
				36	18	24.50	24.20	24.05	23.53
				36	37	24.50	24.37	24.21	23.86
				75	0	24.50	24.09	24.18	23.64
		16QAM		1	0	25.00	24.67	24.21	23.68
				1	37	25.00	24.52	24.59	23.69
				1	74	25.00	24.54	24.94	23.69
				36	0	23.50	23.40	23.09	23.19
				36	18	23.50	23.33	23.13	23.06
				36	37	23.50	23.39	23.22	23.05
				75	0	23.50	23.32	23.31	23.20
Band	Band Width	Modulation		RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
				RB Size	RB Offset		20850/2510	21100/2535	21350/2560
LTE Band 7	20MHz	QPSK		1	0	25.50	24.68	24.35	24.32
				1	49	25.50	25.07	24.30	24.19
				1	99	25.50	25.31	25.39	24.18
				50	0	24.50	24.27	24.05	23.56
				50	24	24.50	24.31	24.20	23.40
				50	49	24.50	24.37	24.16	23.97
				100	0	24.50	24.29	24.20	23.73
		16QAM		1	0	25.50	24.57	24.47	24.27
				1	49	25.50	25.10	24.42	24.42

			1	99	25.50	25.07	24.29	24.21
			50	0	23.50	23.38	23.24	23.08
			50	24	23.50	23.35	23.29	23.17
			50	49	23.50	23.41	23.28	23.30
			100	0	23.50	23.34	23.34	23.28

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23017/699.7	23095/707.5	23173/715.3
LTE Band 12	1.4MHz	QPSK	1	0	24.50	23.79	23.61	23.76
			1	2	24.50	23.84	23.76	23.80
			1	5	24.50	23.72	23.64	23.63
			3	0	24.00	23.80	23.51	23.65
			3	1	24.00	23.77	23.66	23.65
			3	2	24.00	23.88	23.58	23.60
			6	0	23.00	22.78	22.58	22.77
		16QAM	1	0	23.50	23.15	23.00	22.98
			1	2	23.50	23.27	23.10	23.04
			1	5	23.50	23.29	23.03	22.88
			3	0	23.50	23.03	22.94	22.85
			3	1	23.50	23.00	22.93	23.05
			3	2	23.50	22.99	22.91	23.02
			6	0	22.00	21.54	21.80	21.92
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23025/700.5	23095/707.5	23165/714.5
LTE Band 12	3MHz	QPSK	1	0	24.50	23.81	23.67	23.43
			1	7	24.50	23.84	23.56	23.73
			1	14	24.50	23.71	23.58	23.47
			8	0	23.50	22.86	22.72	22.77
			8	4	23.50	22.77	22.72	22.84
			8	7	23.50	23.15	22.78	22.93
			15	0	23.00	22.88	22.52	22.49
		16QAM	1	0	24.00	23.29	23.33	23.05
			1	7	24.00	23.18	22.97	23.05
			1	14	24.00	23.50	22.99	23.08
			8	0	22.50	21.98	21.40	21.41
			8	4	22.50	21.92	22.11	21.67

			8	7	22.50	22.25	22.03	22.16
			15	0	22.50	21.90	22.10	21.73
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23035/701.5	23095/707.5	23155/713.5
LTE Band 12	5MHz	QPSK	1	0	24.50	24.12	23.84	24.12
			1	12	24.50	23.98	23.87	23.96
			1	24	24.50	23.98	24.09	23.84
			12	0	23.50	22.85	22.70	22.83
			12	6	23.50	23.15	22.80	22.86
			12	11	23.50	23.12	22.73	22.83
			25	0	23.50	23.15	22.64	22.84
		16QAM	1	0	23.50	23.19	23.29	23.21
			1	12	23.50	23.39	23.15	23.06
			1	24	23.50	22.79	23.29	23.15
			12	0	22.50	21.95	21.71	21.83
			12	6	22.50	22.23	22.01	21.66
			12	11	22.50	22.15	21.94	21.67
			25	0	22.50	22.29	22.01	21.95
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23060/704	23095/707.5	23130/711
LTE Band 12	10MHz	QPSK	1	0	24.50	24.12	23.72	23.70
			1	24	24.50	23.88	23.53	23.83
			1	49	24.50	23.75	23.71	23.65
			25	0	23.50	23.07	22.97	22.70
			25	12	23.50	22.63	22.80	22.89
			25	24	23.50	22.84	22.66	22.56
			50	0	23.50	22.54	22.55	23.01
		16QAM	1	0	23.50	23.09	23.48	23.46
			1	24	23.50	22.64	22.96	23.34
			1	49	23.50	23.05	23.30	23.28
			25	0	22.50	22.28	21.39	21.89
			25	12	22.50	22.16	21.98	22.00
			25	24	22.50	21.70	21.75	21.55
			50	0	22.50	22.01	22.05	22.06

Band	Band	Modulation	RB	Tune-up	Channel/Frequency(MHz)
------	------	------------	----	---------	------------------------

	Width		Configuration		(dBm)			
			RB Size	RB Offset		26697/814.7	26740/819	26783/823.3
LTE Band 26a	1.4MHz	QPSK	1	0	24.50	23.73	23.73	23.89
			1	2	24.50	23.71	23.65	23.85
			1	5	24.50	23.56	23.76	24.00
			3	0	24.00	23.61	23.58	23.65
			3	1	24.00	23.75	23.47	23.53
			3	2	24.00	23.63	23.49	23.57
			6	0	23.00	22.56	22.42	22.64
		16QAM	1	0	23.50	23.10	22.73	23.03
			1	2	23.50	23.31	22.81	22.90
			1	5	23.50	23.21	22.58	22.95
			3	0	23.00	22.85	22.51	22.63
			3	1	23.00	22.85	22.58	22.90
			3	2	23.00	22.72	22.55	22.63
			6	0	22.00	21.89	21.80	21.71
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26705/818.5	26740/819	26775/822.5
LTE Band 26a	3MHz	QPSK	1	0	24.50	23.79	23.52	23.78
			1	7	24.50	23.64	23.46	23.62
			1	14	24.50	23.52	23.67	23.57
			8	0	24.00	22.76	22.51	22.62
			8	4	24.00	23.04	22.55	22.73
			8	7	24.00	23.55	22.50	22.76
			15	0	24.00	23.56	22.37	22.73
		16QAM	1	0	23.50	23.18	23.17	22.98
			1	7	23.50	23.21	23.06	23.20
			1	14	23.50	23.23	23.07	23.14
			8	0	22.50	22.19	22.15	22.09
			8	4	22.50	22.11	22.15	21.93
			8	7	22.50	22.19	22.10	21.99
			15	0	22.50	22.15	22.07	21.91
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26715/816.5	26740/819	26765/821.5
LTE	5MHz	QPSK	1	0	24.50	24.12	23.91	23.78

Band 26a			1	12	24.50	23.90	23.80	24.03
			1	24	24.50	23.61	23.86	23.82
			12	0	23.00	22.72	22.70	22.62
			12	6	23.00	22.61	22.51	22.52
			12	11	23.00	22.69	22.50	22.80
			25	0	23.00	22.64	22.45	22.47
		16QAM	1	0	23.50	23.36	23.21	22.79
			1	12	23.50	23.34	22.84	22.98
			1	24	23.50	22.88	23.00	23.01
			12	0	22.50	22.11	22.03	22.11
			12	6	22.50	22.10	22.11	21.98
			12	11	22.50	22.11	22.00	21.97
			25	0	22.50	22.06	22.21	22.23
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		N/A	26740/819	N/A
LTE Band 26a	10MHz	QPSK	1	0	24.50	N/A	23.89	N/A
			1	24	24.50	N/A	23.46	N/A
			1	49	24.50	N/A	23.61	N/A
			25	0	23.00	N/A	22.70	N/A
			25	12	23.00	N/A	22.50	N/A
			25	24	23.00	N/A	22.61	N/A
			50	0	23.00	N/A	22.55	N/A
		16QAM	1	0	23.50	N/A	23.36	N/A
			1	24	23.50	N/A	23.03	N/A
			1	49	23.50	N/A	23.13	N/A
			25	0	22.50	N/A	22.10	N/A
			25	12	22.50	N/A	21.94	N/A
			25	24	22.50	N/A	21.90	N/A
			50	0	22.00	N/A	21.99	N/A

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26797/824.7	26915/836.5	27033/848.3
LTE Band 26b	1.4MHz	QPSK	1	0	24.50	23.57	24.00	23.84
			1	2	24.50	23.60	24.15	23.89
			1	5	24.50	23.53	24.11	23.85
			3	0	24.00	23.51	23.93	23.79

				3	1	24.00	23.55	23.90	23.82
				3	2	24.00	23.62	23.93	23.77
				6	0	23.00	22.74	22.80	22.69
			16QAM	1	0	23.50	22.88	22.99	22.96
				1	2	23.50	22.90	23.19	23.01
				1	5	23.50	23.06	23.05	22.94
				3	0	23.50	22.99	23.01	22.90
				3	1	23.50	23.00	22.77	22.82
				3	2	23.50	23.03	22.93	22.86
				6	0	22.50	21.43	22.12	21.86
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)			
			RB Size	RB Offset		26805/825.5	26915/836.5	27025/847.5	
LTE Band 26b	3MHz	QPSK	1	0	24.50	23.81	23.81	23.76	
			1	7	24.50	23.76	23.92	23.70	
			1	14	24.50	23.93	23.98	23.66	
			8	0	23.00	22.81	22.74	22.85	
			8	4	23.00	22.77	22.92	22.70	
			8	7	23.00	22.77	22.76	22.83	
			15	0	23.00	22.74	22.92	22.83	
		16QAM	1	0	23.50	23.02	23.16	23.33	
			1	7	23.50	22.88	23.27	23.10	
			1	14	23.50	22.87	23.29	23.20	
			8	0	22.50	21.78	22.40	22.36	
			8	4	22.50	21.67	22.45	22.29	
			8	7	22.50	21.80	22.44	22.24	
			15	0	22.50	21.73	22.38	22.29	
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)			
			RB Size	RB Offset		26815/826.5	26915/836.5	27015/846.5	
LTE Band 26b	5MHz	QPSK	1	0	24.50	23.77	24.12	24.24	
			1	12	24.50	24.04	24.15	24.09	
			1	24	24.50	24.03	24.13	24.01	
			12	0	23.00	22.78	22.68	22.68	
			12	6	23.00	22.86	22.91	22.89	
			12	11	23.00	22.67	22.94	22.68	
			25	0	23.00	22.79	22.91	22.71	
		16QAM	1	0	23.50	23.22	23.05	23.22	

			1	12	23.50	23.33	23.20	23.10
			1	24	23.50	23.34	23.23	23.06
			12	0	22.50	21.72	22.27	21.78
			12	6	22.50	21.68	22.37	22.27
			12	11	22.50	21.68	22.26	22.29
			25	0	22.50	21.57	22.46	22.45
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26840/829	26915/836.5	26990/844
LTE Band 26b	10MHz	QPSK	1	0	24.50	23.79	23.89	23.94
			1	24	24.50	23.95	23.94	23.87
			1	49	24.50	24.06	23.95	23.77
			25	0	23.50	22.86	22.66	23.18
			25	12	23.50	22.75	22.93	22.80
			25	24	23.50	22.69	22.81	22.75
			50	0	23.00	22.79	22.90	22.69
		16QAM	1	0	24.00	23.02	23.20	23.45
			1	24	24.00	23.03	23.20	23.12
			1	49	24.00	23.23	23.60	23.26
			25	0	22.50	21.85	22.28	21.94
			25	12	22.50	21.87	22.30	22.19
			25	24	22.50	21.89	22.25	22.17
			50	0	22.50	21.74	22.26	22.13
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26865/831.5	26915/836.5	26965/841.5
LTE Band 26b	15MHz	QPSK	1	0	24.50	23.79	23.86	23.87
			1	37	24.50	24.13	23.90	23.87
			1	74	24.50	24.18	23.80	23.82
			36	0	23.50	22.61	22.88	22.90
			36	18	23.50	22.62	22.82	23.12
			36	37	23.50	22.63	23.16	22.71
			75	0	23.50	22.65	22.95	23.10
		16QAM	1	0	24.00	23.13	23.19	23.29
			1	37	24.00	23.10	23.32	23.51
			1	74	24.00	23.26	23.20	23.24
			36	0	22.50	21.81	22.20	22.37
			36	18	22.50	21.78	22.29	21.80

			36	37	22.50	22.23	21.87	21.64
			75	0	22.50	21.68	22.29	21.83

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		37775/2572.5	38000/2595	38225/2617.5
LTE Band 38	5MHz	QPSK	1	0	26.00	24.66	24.35	24.85
			1	12	26.00	25.13	24.86	25.29
			1	24	26.00	24.60	24.50	25.07
			12	0	24.50	24.35	24.15	24.06
			12	6	24.50	24.30	24.19	24.14
			12	11	24.50	24.14	24.10	24.07
			25	0	24.50	24.18	24.07	24.02
		16QAM	1	0	24.50	23.98	23.93	23.96
			1	12	24.50	24.00	23.98	23.88
			1	24	24.50	24.03	24.03	23.86
			12	0	23.50	23.39	23.22	23.24
			12	6	23.50	23.47	23.28	23.28
			12	11	23.50	23.36	23.34	23.23
			25	0	24.00	23.54	23.46	23.34
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		37800/2575	38000/2595	38200/2615
LTE Band 38	10MHz	QPSK	1	0	26.00	25.03	24.54	24.94
			1	24	26.00	25.22	24.93	25.28
			1	49	26.00	25.20	25.23	25.59
			25	0	24.50	24.35	24.24	24.39
			25	12	24.50	24.24	24.33	24.24
			25	24	24.50	24.20	24.41	24.21
			50	0	24.50	24.24	24.21	24.13
		16QAM	1	0	24.50	24.06	24.00	24.03
			1	24	24.50	24.07	24.03	23.92
			1	49	24.50	23.97	24.13	23.98
			25	0	24.00	23.42	23.48	23.41
			25	12	24.00	23.46	23.54	23.40
			25	24	24.00	23.40	23.62	23.47
			50	0	24.00	23.52	23.49	23.49
Band	Band	Modulation	RB		Tune-up	Channel/Frequency(MHz)		

	Width		Configuration		(dBm)			
			RB Size	RB Offset		37825/2577.5	38000/2595	38175/2615
LTE Band 38	15MHz	QPSK	1	0	26.00	25.31	24.83	25.21
			1	37	26.00	25.20	24.95	25.24
			1	74	26.00	24.88	25.14	25.44
			36	0	25.00	24.52	24.40	24.51
			36	18	25.00	24.19	24.33	24.35
			36	37	25.00	24.14	24.40	24.18
			75	0	24.50	24.23	24.26	24.24
		16QAM	1	0	24.50	24.10	23.98	24.06
			1	37	24.50	24.04	24.06	24.00
			1	74	24.50	23.90	24.12	23.96
			36	0	24.00	23.32	23.40	23.40
			36	18	24.00	23.21	23.48	23.40
			36	37	24.00	23.32	23.53	23.41
			75	0	23.50	23.44	23.46	23.36
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		37850/2580	38000/2595	38150/2610
LTE Band 38	20MHz	QPSK	1	0	26.00	25.29	25.15	25.40
			1	49	26.00	25.16	24.94	25.21
			1	99	26.00	25.11	25.80	25.82
			50	0	24.50	24.19	24.31	24.42
			50	24	24.50	24.17	24.38	24.38
			50	49	24.50	24.11	24.41	24.24
			100	0	24.50	24.09	24.21	24.34
		16QAM	1	0	24.50	24.03	23.94	24.26
			1	49	24.50	23.83	24.05	23.96
			1	99	24.50	23.74	24.10	23.91
			50	0	24.00	23.27	23.48	23.59
			50	24	24.00	23.24	23.59	23.49
			50	49	24.00	23.13	23.62	23.41
			100	0	24.00	23.25	23.45	23.51

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		131979/1710.7	132322/1745	132665/1779.3

LTE Band 66	1.4MHz	QPSK	1	0	25.50	24.23	24.57	25.03
			1	2	25.50	24.30	24.59	25.14
			1	5	25.50	24.38	24.61	25.17
			3	0	25.00	24.41	24.57	24.75
			3	1	25.00	24.47	24.62	24.80
			3	2	25.00	24.40	24.52	24.78
			6	0	24.00	23.31	23.55	23.67
		16QAM	1	0	24.50	23.64	23.72	24.24
			1	2	24.50	23.82	23.84	24.22
			1	5	24.50	23.66	23.81	24.20
			3	0	24.00	23.53	23.74	23.94
			3	1	24.00	23.63	23.89	23.94
			3	2	24.00	23.68	23.94	23.96
			6	0	23.00	22.34	22.47	22.78
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		131987/1711.5	132322/1745	132657/1778.5
LTE Band 66	3MHz	QPSK	1	0	25.50	24.68	24.57	24.89
			1	7	25.50	24.72	24.64	24.81
			1	14	25.50	24.70	24.54	24.89
			8	0	24.00	23.30	23.67	23.64
			8	4	24.00	23.38	23.61	23.71
			8	7	24.00	23.49	23.59	23.64
			15	0	24.00	23.45	23.56	23.74
		16QAM	1	0	24.50	23.95	23.72	24.05
			1	7	24.50	23.88	23.86	23.99
			1	14	24.50	24.04	23.74	24.12
			8	0	23.00	22.61	22.78	22.82
			8	4	23.00	22.56	22.82	22.84
			8	7	23.00	22.56	22.79	22.95
			15	0	23.00	22.58	22.77	22.79
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		131997/1712.5	132322/1745	132647/1777.5
LTE Band 66	5MHz	QPSK	1	0	25.50	24.73	24.82	24.83
			1	12	25.50	24.66	24.88	24.85
			1	24	25.50	24.72	24.79	24.87
			12	0	24.00	23.48	23.69	23.67

				12	6	24.00	23.60	23.51	23.79
				12	11	24.00	23.54	23.63	23.69
				25	0	24.00	23.45	23.61	23.73
			16QAM	1	0	24.50	23.86	24.10	24.09
				1	12	24.50	23.88	24.16	23.98
				1	24	24.50	23.96	23.98	24.12
				12	0	23.00	22.61	22.74	22.82
				12	6	23.00	22.63	22.78	22.74
				12	11	23.00	22.60	22.67	22.87
				25	0	23.00	22.72	22.65	22.90
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)			
			RB Size	RB Offset		132022/1715	132322/1745	132622/1775	
LTE Band 66	10MHz	QPSK	1	0	25.50	24.54	24.53	24.70	
			1	24	25.50	24.54	24.55	24.74	
			1	49	25.50	24.51	24.45	24.74	
			25	0	24.00	23.57	23.59	23.56	
			25	12	24.00	23.45	23.70	23.63	
			25	24	24.00	23.47	23.45	23.69	
			50	0	24.00	23.36	23.52	23.64	
		16QAM	1	0	24.50	23.93	24.32	24.22	
			1	24	24.50	24.06	24.28	24.14	
			1	49	24.50	23.90	24.28	24.24	
			25	0	23.00	22.56	22.67	22.69	
			25	12	23.00	22.58	22.73	22.68	
			25	24	23.00	22.51	22.63	22.67	
			50	0	23.00	22.62	22.81	22.62	
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)			
			RB Size	RB Offset		132047/1717.5	132322/1745	132597/1772.5	
LTE Band 66	15MHz	QPSK	1	0	25.50	24.75	24.61	24.92	
			1	37	25.50	24.81	24.82	24.85	
			1	74	25.50	24.77	24.80	24.96	
			36	0	24.00	23.37	23.51	23.61	
			36	18	24.00	23.44	23.70	23.69	
			36	37	24.00	23.66	23.54	23.69	
			75	0	24.00	23.50	23.57	23.67	
		16QAM	1	0	24.50	23.92	23.93	24.10	

			1	37	24.50	23.97	23.85	23.99
			1	74	24.50	23.99	23.76	24.10
			36	0	23.00	22.62	22.70	22.90
			36	18	23.00	22.73	22.76	22.83
			36	37	23.00	22.73	22.72	22.85
			75	0	23.00	22.58	22.65	22.74
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		132072/1720	132322/1745	132572/1770
LTE Band 66	20MHz	QPSK	1	0	25.50	24.70	24.61	24.90
			1	49	25.50	24.74	24.58	24.85
			1	99	25.50	24.96	24.63	24.98
			50	0	24.00	23.56	23.65	23.79
			50	24	24.00	23.55	23.68	23.73
			50	49	24.00	23.60	23.59	23.69
			100	0	24.00	23.54	23.55	23.62
		16QAM	1	0	24.50	23.85	23.83	24.09
			1	49	24.50	24.00	23.83	24.10
			1	99	24.50	24.05	23.85	24.04
			50	0	23.00	22.64	22.71	22.79
			50	24	23.00	22.51	22.77	22.80
			50	49	23.00	22.64	22.72	22.72
			100	0	23.00	22.62	22.76	22.80

7.4. WLAN & Bluetooth Output Power

Mode	Channel	Frequency (MHz)	Tune-up (dBm)	Output Power (dBm)
802.11b	1	2412	16.00	15.24
	6	2437	16.00	15.91
	11	2462	16.00	15.33
802.11g	1	2412	13.50	12.97
	6	2437	13.50	12.73
	11	2462	13.50	13.20
802.11n HT20	1	2412	11.00	10.77
	6	2437	11.00	10.60
	11	2462	12.00	11.17


NOTE: Power measurement results of WLAN 2.4G.

BR+EDR	Output Power (dBm)				
	Channel	Tune-up (dBm)	Data Rates		
			1M	2M	3M
	0CH	7.00	6.30	6.59	6.94
	39CH	8.00	6.65	7.32	7.63
	78CH	8.00	6.26	6.86	7.12

BLE	Channel	Tune-up (dBm)	Output Power (dBm)
	0CH	-2.00	-1.98
	19CH	-2.00	-1.55
	39CH	-3.00	-2.23

NOTE: Power measurement results of Bluetooth.

8. Antenna Location

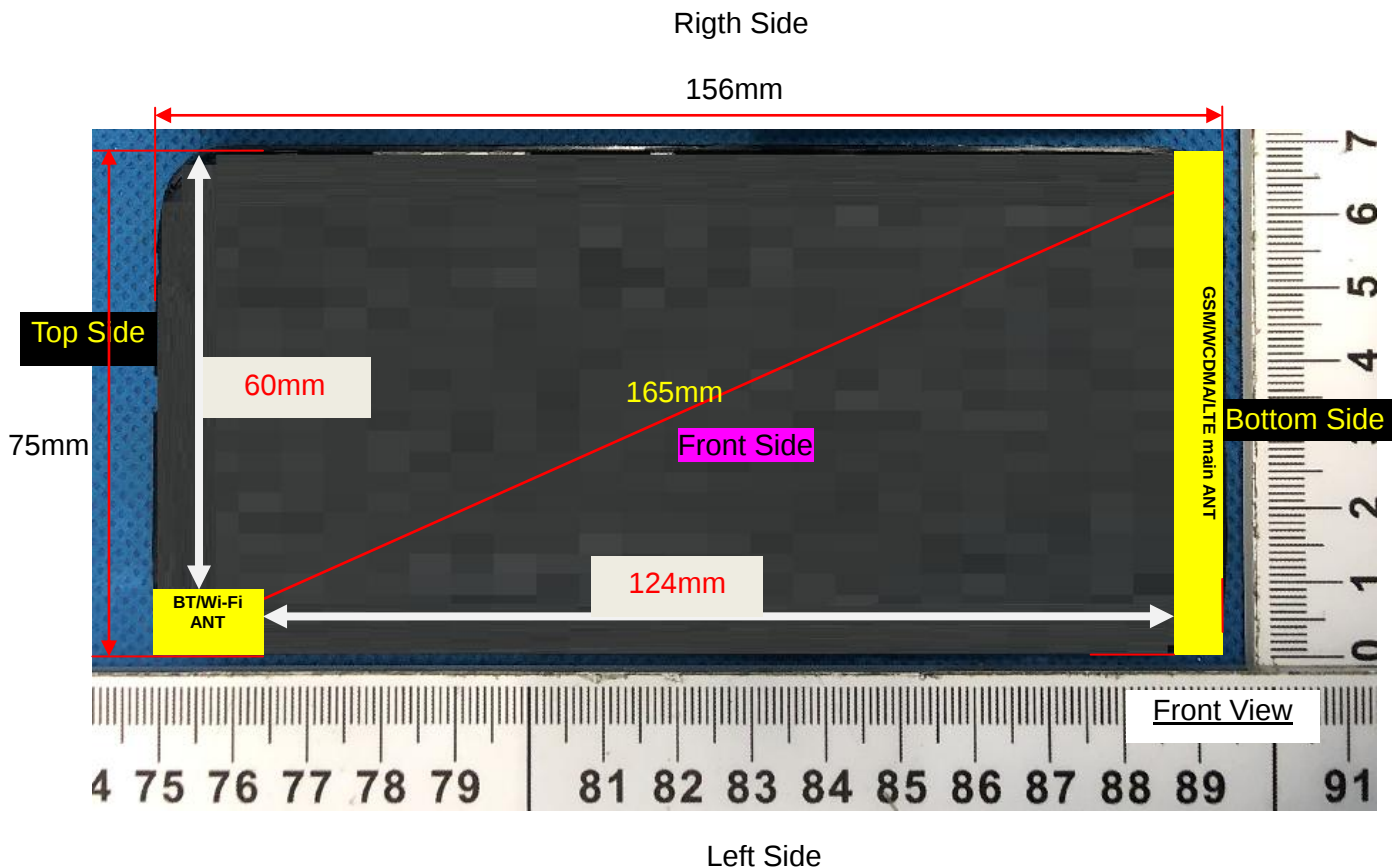

Note: Since the confidentiality request of EUT, the antenna location example diagram see as above.

Distance of the Antenna to the EUT surface/edge						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
WWAN Main ANT	≤ 25mm	≤ 25mm	≤ 25mm	≤ 25mm	> 25mm	≤ 25mm
WLAN & Bluetooth	≤ 25mm	≤ 25mm	≤ 25mm	> 25mm	≤ 25mm	>25mm
Positions for SAR tests						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
WWAN Main ANT	Yes	Yes	Yes	Yes	NO	Yes
WLAN & Bluetooth	Yes	Yes	Yes	NO	Yes	NO

9. Stand-alone SAR test exclusion

Refer to FCC KDB 447498D01, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$\left[\frac{(\text{max. power of channel, including tune-up tolerance, mW})}{(\text{min. test separation distance, mm})} \right] \cdot [\sqrt{f_{(\text{GHz})}}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where:}$$

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine

SAR test exclusion.

Mode	P _{max} (dBm)	P _{max} (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
Bluetooth	8.00	6.31	5	2.480	1.98	3	Yes

NOTE: Standalone SAR test exclusion for Bluetooth.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] * [\sqrt{f_{\text{(GHz)}}/x}] \text{ W/kg}$ for test separation distances $\leq 50\text{mm}$, where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

When the minimum test separation distance is $< 5 \text{ mm}$, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	P _{max} (dBm)	P _{max} (mW)	Distance (mm)	f (GHz)	x	Estimated SAR (W/Kg)
Bluetooth	Head	8.00	6.31	5	2.48	7.5	0.264
Bluetooth	Body	8.00	6.31	10	2.48	7.5	0.132
Bluetooth	Hotspot	8.00	6.31	10	2.48	7.5	0.132

NOTE: Estimated SAR calculation for Bluetooth

10. SAR Results

10.1. SAR measurement Result

10.1.1. SAR measurement Result of GSM850

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	189/836.4	GPRS(GMSK 2TS)	0.314	0.219	-1.73	30.14	30.50	0.341	2023/3/14	1#
Left Tilt 15 Degree	189/836.4	GPRS(GMSK 2TS)	0.183	0.125	0.24	30.14	30.50	0.199	2023/3/14	
Right Cheek	189/836.4	GPRS(GMSK 2TS)	0.284	0.190	-3.76	30.14	30.50	0.309	2023/3/14	
Right Tilt 15 Degree	189/836.4	GPRS(GMSK 2TS)	0.151	0.102	2.95	30.14	30.50	0.164	2023/3/14	

NOTE: Head SAR test results of GSM850.

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
Front Side	189/836.4	GPRS(GMSK 2TS)	0.330	0.166	1.52	30.14	30.50	0.359	2023/3/14	
Back Side	189/836.4	GPRS(GMSK 2TS)	0.514	0.267	3.52	30.14	30.50	0.558	2023/3/14	2#

NOTE: Body-Worn SAR test results of GSM850

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	189/836.4	GPRS(GMSK 2TS)	0.330	0.166	1.52	30.14	30.50	0.359	2023/3/14	
Back Side	189/836.4	GPRS(GMSK 2TS)	0.514	0.267	3.52	30.14	30.50	0.558	2023/3/14	2#
Left Side	189/836.4	GPRS(GMSK 2TS)	0.106	0.054	-1.38	30.14	30.50	0.115	2023/3/14	
Right Side	189/836.4	GPRS(GMSK 2TS)	0.162	0.080	-2.09	30.14	30.50	0.176	2023/3/14	
Bottom Side	189/836.4	GPRS(GMSK 2TS)	0.224	0.114	3.24	30.14	30.50	0.243	2023/3/14	

NOTE: Hotspot SAR test results of GSM850

10.1.2. SAR measurement Result of GSM1900

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	661/1880	GPRS(GMSK 3TS)	0.059	0.034	-0.47	26.69	26.50	0.056	2023/3/13	3#
Left Tilt 15 Degree	661/1880	GPRS(GMSK 3TS)	0.030	0.017	0.06	26.69	26.50	0.029	2023/3/13	
Right	661/1880	GPRS(GMSK 3TS)	0.053	0.030	0.75	26.69	26.50	0.051	2023/3/13	

NOTE: Head SAR test results of GSM1900

NOTE: Body-Worn SAR test results of GSM1900

NOTE: Hotspot SAR test results of GSM1900

10.1.3. SAR measurement Result of WCDMA Band 2

Test Position of Head	Test channel /Freq	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						

Left Cheek	9400/1880	RMC12.2K	0.101	0.061	0.03	23.14	23.50	0.110	2023/3/13	5#
Left Tilt 15 Degree	9400/1880	RMC12.2K	0.056	0.034	1.57	23.14	23.50	0.061	2023/3/13	
Right Cheek	9400/1880	RMC12.2K	0.091	0.052	-3.27	23.14	23.50	0.099	2023/3/13	
Right Tilt 15 Degree	9400/1880	RMC12.2K	0.045	0.027	-0.38	23.14	23.50	0.049	2023/3/13	

NOTE: Head SAR test results of WCDMA Band 2

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
Front Side	9400/1880	RMC12.2K	0.474	0.251	-1.81	23.14	23.50	0.515	2023/3/13	
Back Side	9400/1880	RMC12.2K	0.726	0.411	-0.27	23.14	23.50	0.789	2023/3/13	6#

NOTE: Body-Worn SAR test results of WCDMA Band 2

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	9400/1880	RMC12.2K	0.474	0.251	-1.81	23.14	23.50	0.515	2023/3/13	
Back Side	9400/1880	RMC12.2K	0.726	0.411	-0.27	23.14	23.50	0.789	2023/3/13	6#
Left Side	9400/1880	RMC12.2K	0.150	0.083	-4.00	23.14	23.50	0.163	2023/3/13	
Right Side	9400/1880	RMC12.2K	0.234	0.126	2.93	23.14	23.50	0.254	2023/3/13	
Bottom Side	9400/1880	RMC12.2K	0.308	0.166	-2.44	23.14	23.50	0.335	2023/3/13	

NOTE: Hotspot SAR test results of WCDMA Band 2

10.1.4. SAR measurement Result of WCDMA Band 4

Test Position of Head	Test channel /Freq	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						

Left Cheek	1413/1732.6	RMC12.2K	0.136	0.085	-1.50	23.22	23.50	0.145	2023/3/23	7#
Left Tilt 15 Degree	1413/1732.6	RMC12.2K	0.077	0.048	-1.67	23.22	23.50	0.082	2023/3/23	
Right Cheek	1413/1732.6	RMC12.2K	0.123	0.075	0.99	23.22	23.50	0.131	2023/3/23	
Right Tilt 15 Degree	1413/1732.6	RMC12.2K	0.061	0.038	-1.22	23.22	23.50	0.065	2023/3/23	

NOTE: Head SAR test results of WCDMA Band 4

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
Front Side	1413/1732.6	RMC12.2K	0.282	0.152	0.17	23.22	23.50	0.301	2023/3/23	
Back Side	1413/1732.6	RMC12.2K	0.465	0.264	0.29	23.22	23.50	0.496	2023/3/23	8#

NOTE: Body-Worn SAR test results of WCDMA Band 4

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	1413/1732.6	RMC12.2K	0.282	0.152	0.17	23.22	23.50	0.301	2023/3/23	
Back Side	1413/1732.6	RMC12.2K	0.465	0.264	0.29	23.22	23.50	0.496	2023/3/23	8#
Left Side	1413/1732.6	RMC12.2K	0.094	0.053	0.90	23.22	23.50	0.100	2023/3/23	
Right Side	1413/1732.6	RMC12.2K	0.144	0.078	3.18	23.22	23.50	0.154	2023/3/23	
Bottom Side	1413/1732.6	RMC12.2K	0.192	0.104	-3.63	23.22	23.50	0.205	2023/3/23	

NOTE: Hotspot SAR test results of WCDMA Band 4

10.1.5. SAR measurement Result of WCDMA Band 5

Test Position of Head	Test channel /Freq	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	4182/836.4	RMC12.2K	0.272	0.200	-0.30	22.68	23.00	0.293	2023/3/14	9#
Left Tilt 15 Degree	4182/836.4	RMC12.2K	0.148	0.106	-2.29	22.68	23.00	0.159	2023/3/14	
Right Cheek	4182/836.4	RMC12.2K	0.255	0.178	-0.56	22.68	23.00	0.274	2023/3/14	
Right Tilt 15 Degree	4182/836.4	RMC12.2K	0.133	0.093	-3.16	22.68	23.00	0.143	2023/3/14	

NOTE: Head SAR test results of WCDMA Band 5

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
Front Side	4182/836.4	RMC12.2K	0.246	0.133	-2.81	22.68	23.00	0.265	2023/3/14	
Back Side	4182/836.4	RMC12.2K	0.389	0.210	0.11	22.68	23.00	0.419	2023/3/14	10#

NOTE: Body-Worn SAR test results of WCDMA Band 5

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	4182/836.4	RMC12.2K	0.246	0.133	-2.81	22.68	23.00	0.265	2023/3/14	
Back Side	4182/836.4	RMC12.2K	0.389	0.210	0.11	22.68	23.00	0.419	2023/3/14	10#
Left Side	4182/836.4	RMC12.2K	0.080	0.041	0.20	22.68	23.00	0.086	2023/3/14	
Right Side	4182/836.4	RMC12.2K	0.123	0.066	2.07	22.68	23.00	0.132	2023/3/14	
Bottom Side	4182/836.4	RMC12.2K	0.168	0.086	2.49	22.68	23.00	0.181	2023/3/14	

NOTE: Hotspot SAR test results of WCDMA Band 5

10.1.6. SAR measurement Result of LTE Band 2

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left	18900/1880	20M	0.142	0.085	-0.59	24.86	25.50	0.165	2023/3/13	13#

Cheek		QPSK(1,99)								
Left Tilt 15 Degree	18900/1880	20M QPSK(1,99)	0.078	0.047	-0.35	24.86	25.50	0.090	2023/3/13	
Right Cheek	18900/1880	20M QPSK(1,99)	0.124	0.072	3.87	24.86	25.50	0.144	2023/3/13	
Right Tilt 15 Degree	18900/1880	20M QPSK(1,99)	0.059	0.034	-0.57	24.86	25.50	0.068	2023/3/13	
50%RB										
Left Cheek	18900/1880	20M QPSK(50,49)	0.075	0.051	0.32	23.84	24.00	0.078	2023/3/13	
Left Tilt 15 Degree	18900/1880	20M QPSK(50,49)	0.040	0.024	4.42	23.84	24.00	0.042	2023/3/13	
Right Cheek	18900/1880	20M QPSK(50,49)	0.065	0.037	2.05	23.84	24.00	0.067	2023/3/13	
Right Tilt 15 Degree	18900/1880	20M QPSK(50,49)	0.031	0.020	1.74	23.84	24.00	0.032	2023/3/13	

NOTE: Head SAR test results of LTE Band 2

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
1RB										
Front Side	18900/1880	20M QPSK(1,99)	0.534	0.286	-0.46	24.86	25.50	0.619	2023/3/13	
Back Side	18900/1880	20M QPSK(1,99)	0.875	0.493	-1.98	24.86	25.50	1.014	2023/3/13	
Back Side	18700/1860	20M QPSK(1,99)	0.979	0.549	0.80	24.97	25.50	1.106	2023/3/13	14#
Back Side	19100/1900	20M QPSK(1,99)	0.845	0.467	0.35	25.13	25.50	0.920	2023/3/13	
BackSide Repeated	18700/1860	20M QPSK(1,99)	0.950	0.533	0.98	24.97	25.50	1.073	2023/3/13	
50%RB										
Front Side	18900/1880	20M QPSK(50,49)	0.296	0.154	-4.60	23.84	24.00	0.307	2023/3/13	

Back Side	18900/1880	20M QPSK(50,49)	0.505	0.255	-4.43	23.84	24.00	0.524	2023/3/13	
-----------	------------	--------------------	-------	-------	-------	-------	-------	-------	-----------	--

NOTE: Body-Worn SAR test results of LTE Band 2

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	18900/1880	20M QPSK(1,99)	0.534	0.286	-0.46	24.86	25.50	0.619	2023/3/13	
Back Side	18900/1880	20M QPSK(1,99)	0.875	0.493	-1.98	24.86	25.50	1.014	2023/3/13	
Left Side	18900/1880	20M QPSK(1,99)	0.184	0.101	2.33	24.86	25.50	0.213	2023/3/13	
Right Side	18900/1880	20M QPSK(1,99)	0.276	0.154	-0.07	24.86	25.50	0.320	2023/3/13	
Bottom Side	18900/1880	20M QPSK(1,99)	0.368	0.197	0.18	24.86	25.50	0.426	2023/3/13	
Back Side	18700/1860	20M QPSK(1,99)	0.979	0.549	0.80	24.97	25.50	1.106	2023/3/13	14#
Back Side	19100/1900	20M QPSK(1,99)	0.845	0.467	0.35	25.13	25.50	0.920	2023/3/13	
BackSide Repeated	18700/1860	20M QPSK(1,99)	0.950	0.533	0.98	24.97	25.50	1.073	2023/3/13	
50%RB										
Front Side	18900/1880	20M QPSK(50,49)	0.296	0.154	-4.60	23.84	24.00	0.307	2023/3/13	
Back Side	18900/1880	20M QPSK(50,49)	0.505	0.255	-4.43	23.84	24.00	0.524	2023/3/13	
Left Side	18900/1880	20M QPSK(50,49)	0.099	0.060	3.88	23.84	24.00	0.103	2023/3/13	
Right Side	18900/1880	20M QPSK(50,49)	0.163	0.089	4.91	23.84	24.00	0.169	2023/3/13	
Bottom Side	18900/1880	20M QPSK(50,49)	0.195	0.110	-0.58	23.84	24.00	0.202	2023/3/13	
100%RB										
Back Side	18900/1880	20M QPSK(100,0)	0.423	0.278	-0.49	23.73	24.00	0.450	2023/3/13	

NOTE: Hotspot SAR test results of LTE Band 2

10.1.7. SAR measurement Result of LTE Band 4

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	20175/1732.5	20M QPSK(1,49)	0.138	0.087	1.23	24.98	25.50	0.156	2023/3/23	15#
Left Tilt 15 Degree	20175/1732.5	20M QPSK(1,49)	0.078	0.049	3.34	24.98	25.50	0.088	2023/3/23	
Right Cheek	20175/1732.5	20M QPSK(1,49)	0.122	0.075	-0.58	24.98	25.50	0.138	2023/3/23	
Right Tilt 15 Degree	20175/1732.5	20M QPSK(1,49)	0.058	0.037	-3.79	24.98	25.50	0.065	2023/3/23	
50%RB										
Left Cheek	20175/1732.5	20M QPSK(50,0)	0.079	0.044	4.73	23.85	24.00	0.082	2023/3/23	
Left Tilt 15 Degree	20175/1732.5	20M QPSK(50,0)	0.039	0.027	-2.17	23.85	24.00	0.040	2023/3/23	
Right Cheek	20175/1732.5	20M QPSK(50,0)	0.071	0.042	2.50	23.85	24.00	0.073	2023/3/23	
Right Tilt 15 Degree	20175/1732.5	20M QPSK(50,0)	0.030	0.021	2.54	23.85	24.00	0.031	2023/3/23	

NOTE: Head SAR test results of LTE Band 4

Test Position of Body- Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
1RB										
Front	20175/1732.5	20M	0.306	0.171	2.58	24.98	25.50	0.345	2023/3/23	

Side		QPSK(1,49)								
Back Side	20175/1732.5	20M QPSK(1,49)	0.498	0.279	-1.82	24.98	25.50	0.561	2023/3/23	16#
50%RB										
Front Side	20175/1732.5	20M QPSK(50,0)	0.173	0.102	-1.32	23.85	24.00	0.179	2023/3/23	
Back Side	20175/1732.5	20M QPSK(50,0)	0.275	0.154	-1.73	23.85	24.00	0.285	2023/3/23	

NOTE: Body-Worn SAR test results of LTE Band 4

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	20175/1732.5	20M QPSK(1,49)	0.306	0.171	2.58	24.98	25.50	0.345	2023/3/23	
Back Side	20175/1732.5	20M QPSK(1,49)	0.498	0.279	-1.82	24.98	25.50	0.561	2023/3/23	16#
Left Side	20175/1732.5	20M QPSK(1,49)	0.106	0.057	-3.21	24.98	25.50	0.119	2023/3/23	
Right Side	20175/1732.5	20M QPSK(1,49)	0.159	0.088	-1.75	24.98	25.50	0.179	2023/3/23	
Bottom Side	20175/1732.5	20M QPSK(1,49)	0.200	0.108	2.87	24.98	25.50	0.225	2023/3/23	
50%RB										
Front Side	20175/1732.5	20M QPSK(50,0)	0.173	0.102	-1.32	23.85	24.00	0.179	2023/3/23	
Back Side	20175/1732.5	20M QPSK(50,0)	0.275	0.154	-1.73	23.85	24.00	0.285	2023/3/23	
Left Side	20175/1732.5	20M QPSK(50,0)	0.059	0.034	-2.51	23.85	24.00	0.061	2023/3/23	
Right Side	20175/1732.5	20M QPSK(50,0)	0.088	0.048	4.44	23.85	24.00	0.091	2023/3/23	
Bottom Side	20175/1732.5	20M QPSK(50,0)	0.104	0.055	-0.89	23.85	24.00	0.108	2023/3/23	

NOTE: Hotspot SAR test results of LTE Band 4

10.1.8. SAR measurement Result of LTE Band 5

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	20525/836.5	10M QPSK(1,24)	0.293	0.217	0.02	23.96	24.50	0.332	2023/3/14	17#
Left Tilt 15 Degree	20525/836.5	10M QPSK(1,24)	0.156	0.113	0.11	23.96	24.50	0.177	2023/3/14	
Right Cheek	20525/836.5	10M QPSK(1,24)	0.253	0.186	0.89	23.96	24.50	0.286	2023/3/14	
Right Tilt 15 Degree	20525/836.5	10M QPSK(1,24)	0.139	0.099	-1.23	23.96	24.50	0.157	2023/3/14	
50%RB										
Left Cheek	20525/836.5	10M QPSK(25,24)	0.157	0.112	-0.22	22.93	23.00	0.160	2023/3/14	
Left Tilt 15 Degree	20525/836.5	10M QPSK(25,24)	0.083	0.059	4.90	22.93	23.00	0.084	2023/3/14	
Right Cheek	20525/836.5	10M QPSK(25,24)	0.130	0.110	1.58	22.93	23.00	0.132	2023/3/14	
Right Tilt 15 Degree	20525/836.5	10M QPSK(25,24)	0.077	0.050	1.15	22.93	23.00	0.078	2023/3/14	

NOTE: Head SAR test results of LTE Band 5

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
1RB										
Front Side	20525/836.5	10M QPSK(1,24)	0.276	0.147	-3.19	23.96	24.50	0.313	2023/3/14	
Back	20525/836.5	10M	0.415	0.231	-0.66	23.96	24.50	0.470	2023/3/14	18#

Side		QPSK(1,24)								
50%RB										
Front Side	20525/836.5	10M QPSK(25,24)	0.146	0.087	-1.37	22.93	23.00	0.148	2023/3/14	
Back Side	20525/836.5	10M QPSK(25,24)	0.244	0.133	0.48	22.93	23.00	0.248	2023/3/14	

NOTE: Body-Worn SAR test results of LTE Band 5

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	20525/836.5	10M QPSK(1,24)	0.276	0.147	-3.19	23.96	24.50	0.313	2023/3/14	
Back Side	20525/836.5	10M QPSK(1,24)	0.415	0.231	-0.66	23.96	24.50	0.470	2023/3/14	18#
Left Side	20525/836.5	10M QPSK(1,24)	0.088	0.047	3.98	23.96	24.50	0.100	2023/3/14	
Right Side	20525/836.5	10M QPSK(1,24)	0.126	0.069	-2.03	23.96	24.50	0.143	2023/3/14	
Bottom Side	20525/836.5	10M QPSK(1,24)	0.176	0.097	0.90	23.96	24.50	0.199	2023/3/14	
50%RB										
Front Side	20525/836.5	10M QPSK(25,24)	0.146	0.087	-1.37	22.93	23.00	0.148	2023/3/14	
Back Side	20525/836.5	10M QPSK(25,24)	0.244	0.133	0.48	22.93	23.00	0.248	2023/3/14	
Left Side	20525/836.5	10M QPSK(25,24)	0.046	0.026	-3.15	22.93	23.00	0.047	2023/3/14	
Right Side	20525/836.5	10M QPSK(25,24)	0.074	0.038	4.15	22.93	23.00	0.075	2023/3/14	
Bottom Side	20525/836.5	10M QPSK(25,24)	0.095	0.052	3.57	22.93	23.00	0.097	2023/3/14	

NOTE: Hotspot SAR test results of LTE Band 5

10.1.9. SAR measurement Result of LTE Band 7

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	21100/2535	20M QPSK(1,99)	0.115	0.057	-0.94	25.39	25.50	0.118	2023/3/10	19#
Left Tilt 15 Degree	21100/2535	20M QPSK(1,99)	0.063	0.031	-3.47	25.39	25.50	0.065	2023/3/10	
Right Cheek	21100/2535	20M QPSK(1,99)	0.107	0.053	-0.65	25.39	25.50	0.110	2023/3/10	
Right Tilt 15 Degree	21100/2535	20M QPSK(1,99)	0.058	0.028	2.47	25.39	25.50	0.059	2023/3/10	
50%RB										
Left Cheek	21100/2535	20M QPSK(50,49)	0.061	0.034	3.20	24.16	24.50	0.066	2023/3/10	
Left Tilt 15 Degree	21100/2535	20M QPSK(50,49)	0.034	0.017	3.00	24.16	24.50	0.037	2023/3/10	
Right Cheek	21100/2535	20M QPSK(50,49)	0.059	0.028	0.94	24.16	24.50	0.064	2023/3/10	
Right Tilt 15 Degree	21100/2535	20M QPSK(50,49)	0.034	0.016	3.52	24.16	24.50	0.037	2023/3/10	

NOTE: Head SAR test results of LTE Band 7

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	21100/2535	20M QPSK(1,99)	0.612	0.209	2.71	25.39	25.50	0.628	2023/3/10	
Back Side	21100/2535	20M QPSK(1,99)	0.981	0.339	0.79	25.39	25.50	1.006	2023/3/10	20#
Back Side	21100/2535	20M QPSK(1,99)	0.927	0.304	-0.89	25.31	25.50	0.968	2023/3/10	
Back Side	21100/2535	20M	0.700	0.235	-3.73	24.18	25.50	0.949	2023/3/10	

		QPSK(1,99)								
BackSide Repeated	21100/2535	20M QPSK(1,99)	0.970	0.322	1.77	25.39	25.50	0.995	2023/3/10	
50%RB										
Front Side	21100/2535	20M QPSK(50,49)	0.360	0.118	-4.36	24.16	24.50	0.389	2023/3/10	
Back Side	21100/2535	20M QPSK(50,49)	0.540	0.195	-4.53	24.16	24.50	0.584	2023/3/10	

NOTE: Body-Worn SAR test results of LTE Band 7

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	21100/2535	20M QPSK(1,99)	0.612	0.209	2.71	25.39	25.50	0.628	2023/3/10	
Back Side	21100/2535	20M QPSK(1,99)	0.981	0.339	0.79	25.39	25.50	1.006	2023/3/10	20#
Left Side	21100/2535	20M QPSK(1,99)	0.206	0.069	-2.06	25.39	25.50	0.211	2023/3/10	
Right Side	21100/2535	20M QPSK(1,99)	0.306	0.104	-3.97	25.39	25.50	0.314	2023/3/10	
Bottom Side	21100/2535	20M QPSK(1,99)	0.412	0.135	1.36	25.39	25.50	0.423	2023/3/10	
Back Side	21100/2535	20M QPSK(1,99)	0.927	0.304	-0.89	25.31	25.50	0.968	2023/3/10	
Back Side	21100/2535	20M QPSK(1,99)	0.700	0.235	-3.73	24.18	25.50	0.949	2023/3/10	
BackSide Repeated	21100/2535	20M QPSK(1,99)	0.970	0.322	1.77	25.39	25.50	0.995	2023/3/10	
50%RB										
Front Side	21100/2535	20M QPSK(50,49)	0.360	0.118	-4.36	24.16	24.50	0.389	2023/3/10	
Back Side	21100/2535	20M QPSK(50,49)	0.540	0.195	-4.53	24.16	24.50	0.584	2023/3/10	
Left Side	21100/2535	20M QPSK(50,49)	0.114	0.037	1.08	24.16	24.50	0.123	2023/3/10	
Right	21100/2535	20M	0.179	0.061	0.52	24.16	24.50	0.194	2023/3/10	

Side		QPSK(50,49)								
Bottom Side	21100/2535	20M QPSK(50,49)	0.213	0.072	4.84	24.16	24.50	0.230	2023/3/10	
100%RB										
Back Side	21100/2535	20M QPSK(100,0)	0.407	0.120	0.41	24.16	24.50	0.440	2023/3/10	

NOTE: Hotspot SAR test results of LTE Band 7

10.1.10. SAR measurement Result of LTE Band 12

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	23095/707.5	10M QPSK(1,0)	0.239	0.190	1.23	23.72	24.50	0.286	2023/3/17	21#
Left Tilt 15 Degree	23095/707.5	10M QPSK(1,0)	0.124	0.094	3.00	23.72	24.50	0.148	2023/3/17	
Right Cheek	23095/707.5	10M QPSK(1,0)	0.206	0.159	-3.71	23.72	24.50	0.247	2023/3/17	
Right Tilt 15 Degree	23095/707.5	10M QPSK(1,0)	0.110	0.083	-2.50	23.72	24.50	0.132	2023/3/17	
50%RB										
Left Cheek	23095/707.5	10M QPSK(25,0)	0.120	0.106	3.51	22.97	23.50	0.136	2023/3/17	
Left Tilt 15 Degree	23095/707.5	10M QPSK(25,0)	0.068	0.051	0.27	22.97	23.50	0.077	2023/3/17	
Right Cheek	23095/707.5	10M QPSK(25,0)	0.107	0.085	4.58	22.97	23.50	0.121	2023/3/17	
Right Tilt 15 Degree	23095/707.5	10M QPSK(25,0)	0.056	0.045	2.47	22.97	23.50	0.063	2023/3/17	

NOTE: Head SAR test results of LTE Band 12

Test Position of	Test channel /Freq.	Mode	SAR Value (W/kg)	Power Drift(%)	Conducted Power	Tune-up Power	Scaled SAR	Date	Plot
------------------	---------------------	------	------------------	----------------	-----------------	---------------	------------	------	------

Body-Worn with 10mm			1-g	10-g		(dBm)	(dBm)	1-g (W/Kg)		
1RB										
Front Side	23095/707.5	10M QPSK(1,0)	0.216	0.167	-2.97	23.72	24.50	0.258	2023/3/17	
Back Side	23095/707.5	10M QPSK(1,0)	0.339	0.268	-0.25	23.72	24.50	0.406	2023/3/17	22#
50%RB										
Front Side	23095/707.5	10M QPSK(25,0)	0.118	0.095	-0.57	22.97	23.50	0.133	2023/3/17	
Back Side	23095/707.5	10M QPSK(25,0)	0.188	0.141	-2.26	22.97	23.50	0.212	2023/3/17	

NOTE: Body-Worn SAR test results of LTE Band 12

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	23095/707.5	10M QPSK(1,0)	0.216	0.167	-2.97	23.72	24.50	0.258	2023/3/17	
Back Side	23095/707.5	10M QPSK(1,0)	0.339	0.268	-0.25	23.72	24.50	0.406	2023/3/17	22#
Left Side	23095/707.5	10M QPSK(1,0)	0.111	0.087	-2.94	23.72	24.50	0.133	2023/3/17	
Right Side	23095/707.5	10M QPSK(1,0)	0.111	0.086	1.83	23.72	24.50	0.133	2023/3/17	
Bottom Side	23095/707.5	10M QPSK(1,0)	0.175	0.138	3.00	23.72	24.50	0.209	2023/3/17	
50%RB										
Front Side	23095/707.5	10M QPSK(25,0)	0.118	0.095	-0.57	22.97	23.50	0.133	2023/3/17	
Back Side	23095/707.5	10M QPSK(25,0)	0.188	0.141	-2.26	22.97	23.50	0.212	2023/3/17	
Left Side	23095/707.5	10M QPSK(25,0)	0.066	0.046	2.32	22.97	23.50	0.075	2023/3/17	
Right Side	23095/707.5	10M QPSK(25,0)	0.066	0.044	-1.09	22.97	23.50	0.075	2023/3/17	

Bottom Side	23095/707.5	10M QPSK(25,0)	0.089	0.074	-3.45	22.97	23.50	0.101	2023/3/17	
-------------	-------------	----------------	-------	-------	-------	-------	-------	-------	-----------	--

NOTE: Hotspot SAR test results of LTE Band 12

10.1.11. SAR measurement Result of LTE Band 26A

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	26740/819	10M QPSK(1,0)	0.339	0.258	0.09	23.89	24.50	0.390	2023/3/14	23#
Left Tilt 15 Degree	26740/819	10M QPSK(1,0)	0.177	0.131	-3.54	23.89	24.50	0.204	2023/3/14	
Right Cheek	26740/819	10M QPSK(1,0)	0.314	0.234	-0.33	23.89	24.50	0.361	2023/3/14	
Right Tilt 15 Degree	26740/819	10M QPSK(1,0)	0.164	0.121	-3.22	23.89	24.50	0.189	2023/3/14	
50%RB										
Left Cheek	26740/819	10M QPSK(25,0)	0.182	0.130	-4.29	22.70	23.00	0.195	2023/3/14	
Left Tilt 15 Degree	26740/819	10M QPSK(25,0)	0.098	0.066	-1.14	22.70	23.00	0.105	2023/3/14	
Right Cheek	26740/819	10M QPSK(25,0)	0.184	0.138	-0.10	22.70	23.00	0.197	2023/3/14	
Right Tilt 15 Degree	26740/819	10M QPSK(25,0)	0.084	0.070	2.83	22.70	23.00	0.090	2023/3/14	

NOTE: Head SAR test results of LTE Band 26A

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	26740/819	10M	0.246	0.186	-1.84	23.89	24.50	0.283	2023/3/14	

		QPSK(1,0)								
Back Side	26740/819	10M QPSK(1,0)	0.380	0.288	-0.11	23.89	24.50	0.437	2023/3/14	24#
50%RB										
Front Side	26740/819	10M QPSK(25,0)	0.129	0.110	-2.49	22.70	23.00	0.138	2023/3/14	
Back Side	26740/819	10M QPSK(25,0)	0.227	0.172	-4.86	22.70	23.00	0.243	2023/3/14	

NOTE: Body-Worn SAR test results of LTE Band 26A

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	26740/819	10M QPSK(1,0)	0.246	0.186	-1.84	23.89	24.50	0.283	2023/3/14	
Back Side	26740/819	10M QPSK(1,0)	0.380	0.288	-0.11	23.89	24.50	0.437	2023/3/14	24#
Left Side	26740/819	10M QPSK(1,0)	0.117	0.086	-0.45	23.89	24.50	0.135	2023/3/14	
Right Side	26740/819	10M QPSK(1,0)	0.129	0.095	1.27	23.89	24.50	0.148	2023/3/14	
Bottom Side	26740/819	10M QPSK(1,0)	0.200	0.147	-1.08	23.89	24.50	0.230	2023/3/14	
50%RB										
Front Side	26740/819	10M QPSK(25,0)	0.129	0.110	-2.49	22.70	23.00	0.138	2023/3/14	
Back Side	26740/819	10M QPSK(25,0)	0.227	0.172	-4.86	22.70	23.00	0.243	2023/3/14	
Left Side	26740/819	10M QPSK(25,0)	0.062	0.049	-3.10	22.70	23.00	0.066	2023/3/14	
Right Side	26740/819	10M QPSK(25,0)	0.077	0.050	-0.45	22.70	23.00	0.083	2023/3/14	
Bottom Side	26740/819	10M QPSK(25,0)	0.102	0.074	3.32	22.70	23.00	0.109	2023/3/14	

NOTE: Hotspot SAR test results of LTE Band 26A

10.1.12. SAR measurement Result of LTE Band 26B

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	26865/831.5	15M QPSK(1,74)	0.346	0.262	-0.21	23.80	24.50	0.407	2023/3/14	25#
Left Tilt 15 Degree	26865/831.5	15M QPSK(1,74)	0.178	0.132	2.09	23.80	24.50	0.209	2023/3/14	
Right Cheek	26865/831.5	15M QPSK(1,74)	0.324	0.236	0.87	23.80	24.50	0.381	2023/3/14	
Right Tilt 15 Degree	26865/831.5	15M QPSK(1,74)	0.156	0.118	2.03	23.80	24.50	0.183	2023/3/14	
50%RB										
Left Cheek	26865/831.5	15M QPSK(36,37)	0.175	0.157	2.31	23.16	23.50	0.189	2023/3/14	
Left Tilt 15 Degree	26865/831.5	15M QPSK(36,37)	0.104	0.069	2.02	23.16	23.50	0.112	2023/3/14	
Right Cheek	26865/831.5	15M QPSK(36,37)	0.169	0.129	-0.08	23.16	23.50	0.183	2023/3/14	
Right Tilt 15 Degree	26865/831.5	15M QPSK(36,37)	0.079	0.068	1.76	23.16	23.50	0.085	2023/3/14	

NOTE: Head SAR test results of LTE Band 26B

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	26865/831.5	15M QPSK(1,74)	0.234	0.174	-1.55	23.80	24.50	0.275	2023/3/14	
Back Side	26865/831.5	15M QPSK(1,74)	0.357	0.268	-0.27	23.80	24.50	0.419	2023/3/14	26#
50%RB										
Front Side	26865/831.5	15M QPSK(36,37)	0.134	0.102	-3.45	23.16	23.50	0.145	2023/3/14	

Back Side	26865/831.5	15M QPSK(36,37)	0.201	0.138	1.68	23.16	23.50	0.217	2023/3/14	
-----------	-------------	--------------------	-------	-------	------	-------	-------	-------	-----------	--

NOTE: Body-Worn SAR test results of LTE Band 26B

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	26865/831.5	15M QPSK(1,74)	0.234	0.174	-1.55	23.80	24.50	0.275	2023/3/14	
Back Side	26865/831.5	15M QPSK(1,74)	0.357	0.268	-0.27	23.80	24.50	0.419	2023/3/14	26#
Left Side	26865/831.5	15M QPSK(1,74)	0.120	0.088	1.76	23.80	24.50	0.141	2023/3/14	
Right Side	26865/831.5	15M QPSK(1,74)	0.114	0.085	-2.09	23.80	24.50	0.134	2023/3/14	
Bottom Side	26865/831.5	15M QPSK(1,74)	0.180	0.130	-0.39	23.80	24.50	0.211	2023/3/14	
50%RB										
Front Side	26865/831.5	15M QPSK(36,37)	0.134	0.102	-3.45	23.16	23.50	0.145	2023/3/14	
Back Side	26865/831.5	15M QPSK(36,37)	0.201	0.138	1.68	23.16	23.50	0.217	2023/3/14	
Left Side	26865/831.5	15M QPSK(36,37)	0.066	0.047	-1.61	23.16	23.50	0.071	2023/3/14	
Right Side	26865/831.5	15M QPSK(36,37)	0.061	0.047	2.24	23.16	23.50	0.066	2023/3/14	
Bottom Side	26865/831.5	15M QPSK(36,37)	0.108	0.066	-0.55	23.16	23.50	0.117	2023/3/14	

NOTE: Hotspot SAR test results of LTE Band 26B

10.1.13. SAR measurement Result of LTE Band 38

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						

1RB										
Left Cheek	38000/2595	20M QPSK(1,99)	0.066	0.033	-0.68	25.80	26.00	0.069	2023/3/10	27#
Left Tilt 15 Degree	38000/2595	20M QPSK(1,99)	0.035	0.017	-2.55	25.80	26.00	0.037	2023/3/10	
Right Cheek	38000/2595	20M QPSK(1,99)	0.062	0.030	-0.24	25.80	26.00	0.065	2023/3/10	
Right Tilt 15 Degree	38000/2595	20M QPSK(1,99)	0.032	0.016	1.61	25.80	26.00	0.034	2023/3/10	
50%RB										
Left Cheek	38000/2595	20M QPSK(50,0)	0.039	0.017	0.42	24.31	24.50	0.041	2023/3/10	
Left Tilt 15 Degree	38000/2595	20M QPSK(50,0)	0.021	0.009	-4.03	24.31	24.50	0.022	2023/3/10	
Right Cheek	38000/2595	20M QPSK(50,0)	0.035	0.017	-0.77	24.31	24.50	0.037	2023/3/10	
Right Tilt 15 Degree	38000/2595	20M QPSK(50,0)	0.018	0.009	3.86	24.31	24.50	0.019	2023/3/10	

NOTE: Head SAR test results of LTE Band 38

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	38000/2595	20M QPSK(1,99)	0.546	0.253	0.76	25.80	26.00	0.572	2023/3/10	
Back Side	38000/2595	20M QPSK(1,99)	0.876	0.414	0.10	25.80	26.00	0.917	2023/3/10	
Back Side	37850/2580	20M QPSK(1,99)	0.894	0.423	-0.41	25.11	26.00	1.097	2023/3/10	28#
Back Side	38150/2610	20M QPSK(1,99)	0.843	0.397	-1.53	25.82	26.00	0.879	2023/3/10	
BackSide Repeated	37850/2580	20M QPSK(1,99)	0.884	0.412	3.77	25.11	26.00	1.085	2023/3/10	
50%RB										

Front Side	38000/2595	20M QPSK(50,0)	0.283	0.146	-4.18	24.31	24.50	0.296	2023/3/10	
Back Side	38000/2595	20M QPSK(50,0)	0.510	0.244	-4.57	24.31	24.50	0.533	2023/3/10	

NOTE: Body-Worn SAR test results of LTE Band 38

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	38000/2595	20M QPSK(1,99)	0.546	0.253	0.76	25.80	26.00	0.572	2023/3/10	
Back Side	38000/2595	20M QPSK(1,99)	0.876	0.414	0.10	25.80	26.00	0.917	2023/3/10	
Left Side	38000/2595	20M QPSK(1,99)	0.273	0.124	0.49	25.80	26.00	0.286	2023/3/10	
Right Side	38000/2595	20M QPSK(1,99)	0.273	0.124	0.39	25.80	26.00	0.286	2023/3/10	
Bottom Side	38000/2595	20M QPSK(1,99)	0.440	0.200	-1.70	25.80	26.00	0.461	2023/3/10	
Back Side	37850/2580	20M QPSK(1,99)	0.894	0.423	-0.41	25.11	26.00	1.097	2023/3/10	28#
Back Side	38150/2610	20M QPSK(1,99)	0.843	0.397	-1.53	25.82	26.00	0.879	2023/3/10	
BackSide Repeated	37850/2580	20M QPSK(1,99)	0.884	0.412	3.77	25.11	26.00	1.085	2023/3/10	
50%RB										
Front Side	38000/2595	20M QPSK(50,0)	0.283	0.146	-4.18	24.31	24.50	0.296	2023/3/10	
Back Side	38000/2595	20M QPSK(50,0)	0.510	0.244	-4.57	24.31	24.50	0.533	2023/3/10	
Left Side	38000/2595	20M QPSK(50,0)	0.149	0.073	1.67	24.31	24.50	0.156	2023/3/10	
Right Side	38000/2595	20M QPSK(50,0)	0.149	0.065	-1.00	24.31	24.50	0.156	2023/3/10	
Bottom Side	38000/2595	20M QPSK(50,0)	0.228	0.117	-0.49	24.31	24.50	0.238	2023/3/10	
100%RB										

Back Side	38000/2595	20M QPSK(100,0)	0.445	0.225	3.96	23.45	24.00	0.505	2023/3/10	
-----------	------------	--------------------	-------	-------	------	-------	-------	-------	-----------	--

NOTE: Hotspot SAR test results of LTE Band 38

10.1.14. SAR measurement Result of LTE Band 66

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	132322/1745	20M QPSK(1,99)	0.159	0.100	-0.24	24.63	25.50	0.194	2023/3/23	29#
Left Tilt 15 Degree	132322/1745	20M QPSK(1,99)	0.091	0.056	-1.28	24.63	25.50	0.111	2023/3/23	
Right Cheek	132322/1745	20M QPSK(1,99)	0.145	0.089	1.58	24.63	25.50	0.177	2023/3/23	
Right Tilt 15 Degree	132322/1745	20M QPSK(1,99)	0.067	0.041	0.83	24.63	25.50	0.082	2023/3/23	
50%RB										
Left Cheek	132322/1745	20M QPSK(50,0)	0.092	0.055	2.53	23.65	24.00	0.100	2023/3/23	
Left Tilt 15 Degree	132322/1745	20M QPSK(50,0)	0.048	0.033	1.66	23.65	24.00	0.052	2023/3/23	
Right Cheek	132322/1745	20M QPSK(50,0)	0.075	0.053	-2.47	23.65	24.00	0.081	2023/3/23	
Right Tilt 15 Degree	132322/1745	20M QPSK(50,0)	0.038	0.024	2.46	23.65	24.00	0.041	2023/3/23	

NOTE: Head SAR test results of LTE Band 66

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	132322/1745	20M QPSK(1,99)	0.342	0.191	-3.00	24.63	25.50	0.418	2023/3/23	

Back Side	132322/1745	20M QPSK(1,99)	0.563	0.318	-1.06	24.63	25.50	0.688	2023/3/23	30#
50%RB										
Front Side	132322/1745	20M QPSK(50,0)	0.171	0.106	2.19	23.65	24.00	0.185	2023/3/23	
Back Side	132322/1745	20M QPSK(50,0)	0.332	0.163	-1.19	23.65	24.00	0.360	2023/3/23	

NOTE: Body-Worn SAR test results of LTE Band 66

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	132322/1745	20M QPSK(1,99)	0.342	0.191	-3.00	24.63	25.50	0.418	2023/3/23	
Back Side	132322/1745	20M QPSK(1,99)	0.563	0.318	-1.06	24.63	25.50	0.688	2023/3/23	30#
Left Side	132322/1745	20M QPSK(1,99)	0.180	0.102	-1.51	24.63	25.50	0.220	2023/3/23	
Right Side	132322/1745	20M QPSK(1,99)	0.174	0.098	2.39	24.63	25.50	0.213	2023/3/23	
Bottom Side	132322/1745	20M QPSK(1,99)	0.285	0.158	-2.28	24.63	25.50	0.348	2023/3/23	
50%RB										
Front Side	132322/1745	20M QPSK(50,0)	0.171	0.106	2.19	23.65	24.00	0.185	2023/3/23	
Back Side	132322/1745	20M QPSK(50,0)	0.332	0.163	-1.19	23.65	24.00	0.360	2023/3/23	
Left Side	132322/1745	20M QPSK(50,0)	0.093	0.056	-3.82	23.65	24.00	0.101	2023/3/23	
Right Side	132322/1745	20M QPSK(50,0)	0.088	0.058	-4.20	23.65	24.00	0.095	2023/3/23	
Bottom Side	132322/1745	20M QPSK(50,0)	0.167	0.093	-2.38	23.65	24.00	0.181	2023/3/23	

NOTE: Hotspot SAR test results of LTE Band 66

10.1.15. SAR measurement Result of WLAN2.4G

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	6/2437	802.11b	0.147	0.085	0.35	15.91	16.00	0.150	2023/3/08	11#
Left Tilt 15 Degree	6/2437	802.11b	0.086	0.049	-2.61	15.91	16.00	0.088	2023/3/08	
Right Cheek	6/2437	802.11b	0.129	0.071	-2.27	15.91	16.00	0.132	2023/3/08	
Right Tilt 15 Degree	6/2437	802.11b	0.064	0.036	2.88	15.91	16.00	0.065	2023/3/08	

NOTE: Head SAR test results of WLAN2.4G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	6/2437	802.11b	0.108	0.055	-2.46	15.91	16.00	0.110	2023/3/08	
Back Side	6/2437	802.11b	0.174	0.090	-0.83	15.91	16.00	0.178	2023/3/08	12#

NOTE: Body-worn SAR test results of WLAN2.4G

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	6/2437	802.11b	0.108	0.055	-2.46	15.91	16.00	0.110	2023/3/08	
Back Side	6/2437	802.11b	0.174	0.090	-0.83	15.91	16.00	0.178	2023/3/08	12#
Left Side	6/2437	802.11b	0.084	0.043	-0.61	15.91	16.00	0.086	2023/3/08	
Top Side	6/2437	802.11b	0.057	0.028	-2.97	15.91	16.00	0.058	2023/3/08	

NOTE: Hotspot SAR test results of WLAN2.4G

10.2. Simultaneous Transmission Analysis

Per KDB 447498 D01, simultaneous transmission SAR is compliant if,

- 1) Scalar SAR summation $< 1.6 \text{ W/kg}$.
- 2) $\text{SPLSR} = (\text{SAR}_1 + \text{SAR}_2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan. If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WWAN	DTS			
Head	Left Cheek	0.407	0.150	0.557	N/A	N/A
	Left Tilt 15 Degree	0.209	0.088	0.297	N/A	N/A
	Right Cheek	0.381	0.132	0.513	N/A	N/A
	Right Tilt 15 Degree	0.189	0.065	0.254	N/A	N/A
Body-Worn	Front Side	0.628	0.110	0.738	N/A	N/A
	Back Side	1.106	0.178	1.284	N/A	N/A
Hotspot	Front Side	0.628	0.110	0.738	N/A	N/A
	Back Side	1.106	0.178	1.284	N/A	N/A
	Left Side	0.286	0.086	0.372	N/A	N/A
	Right Side	0.320	N/A	0.320	N/A	N/A
	Top Side	N/A	0.058	0.058	N/A	N/A
	Bottom Side	0.461	N/A	0.461	N/A	N/A

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WWAN	DSS			
Head	Left Cheek	0.407	0.265	0.672	N/A	N/A
	Left Tilt 15 Degree	0.209	0.265	0.474	N/A	N/A
	Right Cheek	0.381	0.265	0.646	N/A	N/A
	Right Tilt 15 Degree	0.189	0.265	0.454	N/A	N/A
Body-Worn	Front Side	0.628	0.132	0.760	N/A	N/A
	Back Side	1.106	0.132	1.238	N/A	N/A
Hotspot	Front Side	0.628	0.132	0.760	N/A	N/A
	Back Side	1.106	0.132	1.238	N/A	N/A

	Left Side	0.286	0.132	0.418	N/A	N/A
	Right Side	0.320	0.132	0.452	N/A	N/A
	Top Side	N/A	0.132	0.132	N/A	N/A
	Bottom Side	0.461	0.132	0.593	N/A	N/A

1. Appendix A. Photo documentation

Refer to appendix Test Setup photo---SAR

2. Appendix B. System Check Plots

Table of contents
MEASUREMENT 1 System Performance Check - 750MHz
MEASUREMENT 2 System Performance Check - 835MHz
MEASUREMENT 3 System Performance Check - 1800MHz
MEASUREMENT 4 System Performance Check - 1900MHz
MEASUREMENT 5 System Performance Check - 2450MHz
MEASUREMENT 6 System Performance Check - 2600MHz

MEASUREMENT 1

Date of measurement: 17/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW750</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.49</u>

B. SAR Measurement Results

Frequency (MHz)	750.000000
Relative permittivity (real part)	40.557819
Relative permittivity (imaginary part)	21.288818
Conductivity (S/m)	0.887034
Variation (%)	2.730000



SURFACE SAR

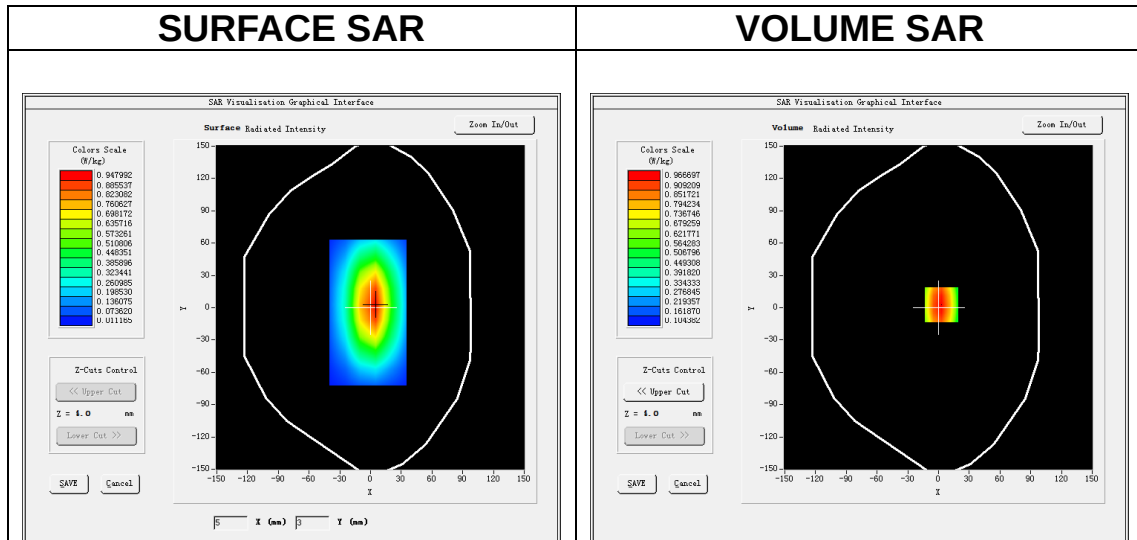

Maximum location: X=3.00, Y=3.00

SAR Peak: 1.30 W/kg

SAR 10g (W/Kg)	0.571332
SAR 1g (W/Kg)	0.881321

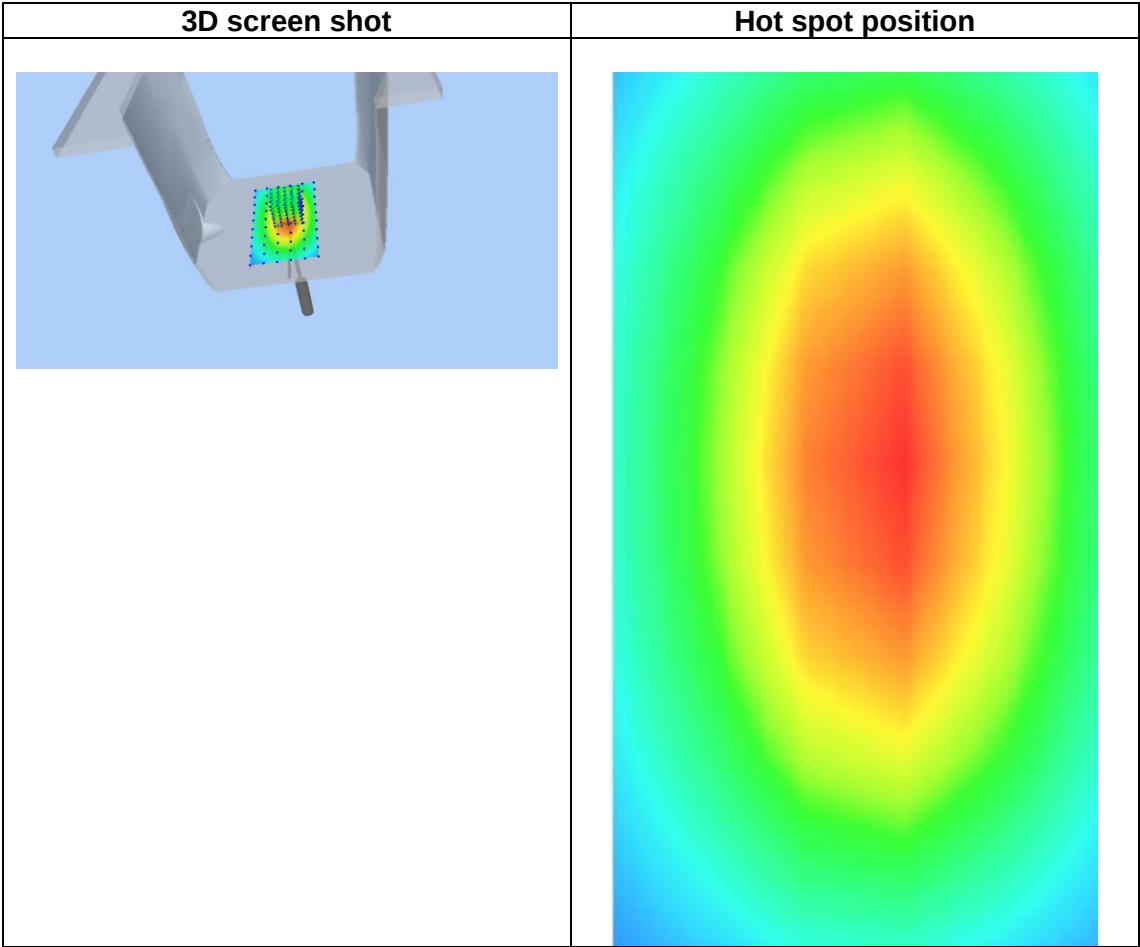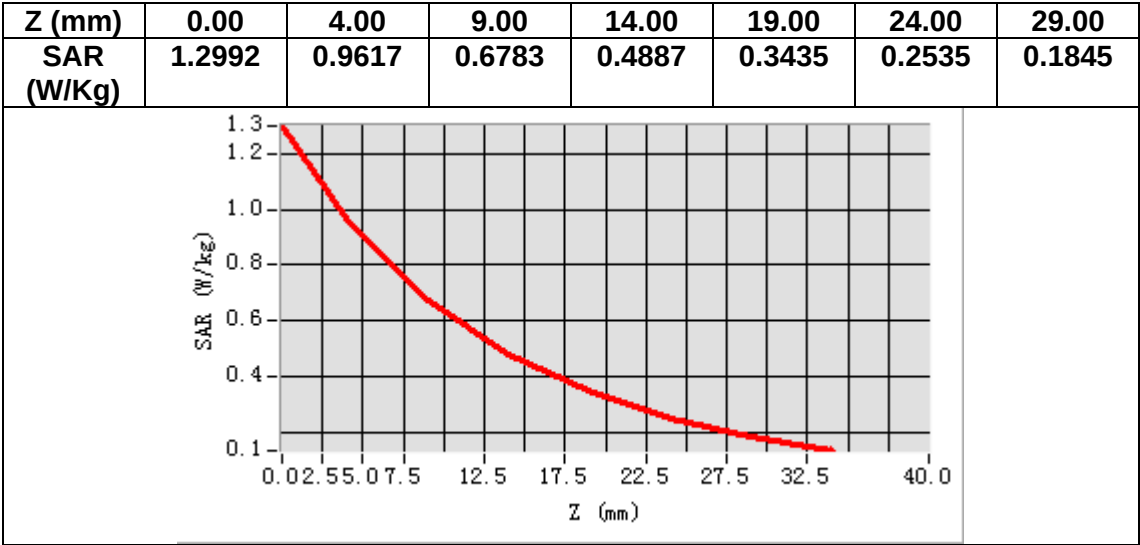

MEASUREMENT 2


Date of measurement: 14/3/2023

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW835</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>
ConvF	<u>1.50</u>

B. SAR Measurement Results



Frequency (MHz)	835.000000
Relative permittivity (real part)	41.293576
Relative permittivity (imaginary part)	19.919841
Conductivity (S/m)	0.924059
Variation (%)	-3.920000

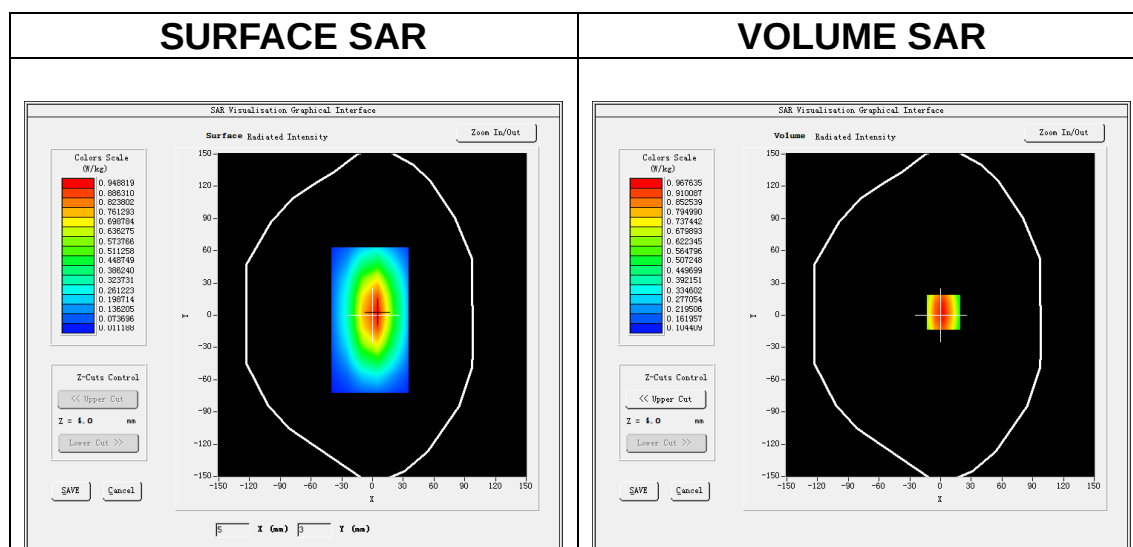

Maximum location: X=3.00, Y=3.00

SAR Peak: 1.30 W/kg

SAR 10g (W/Kg)	0.650158
SAR 1g (W/Kg)	0.936222

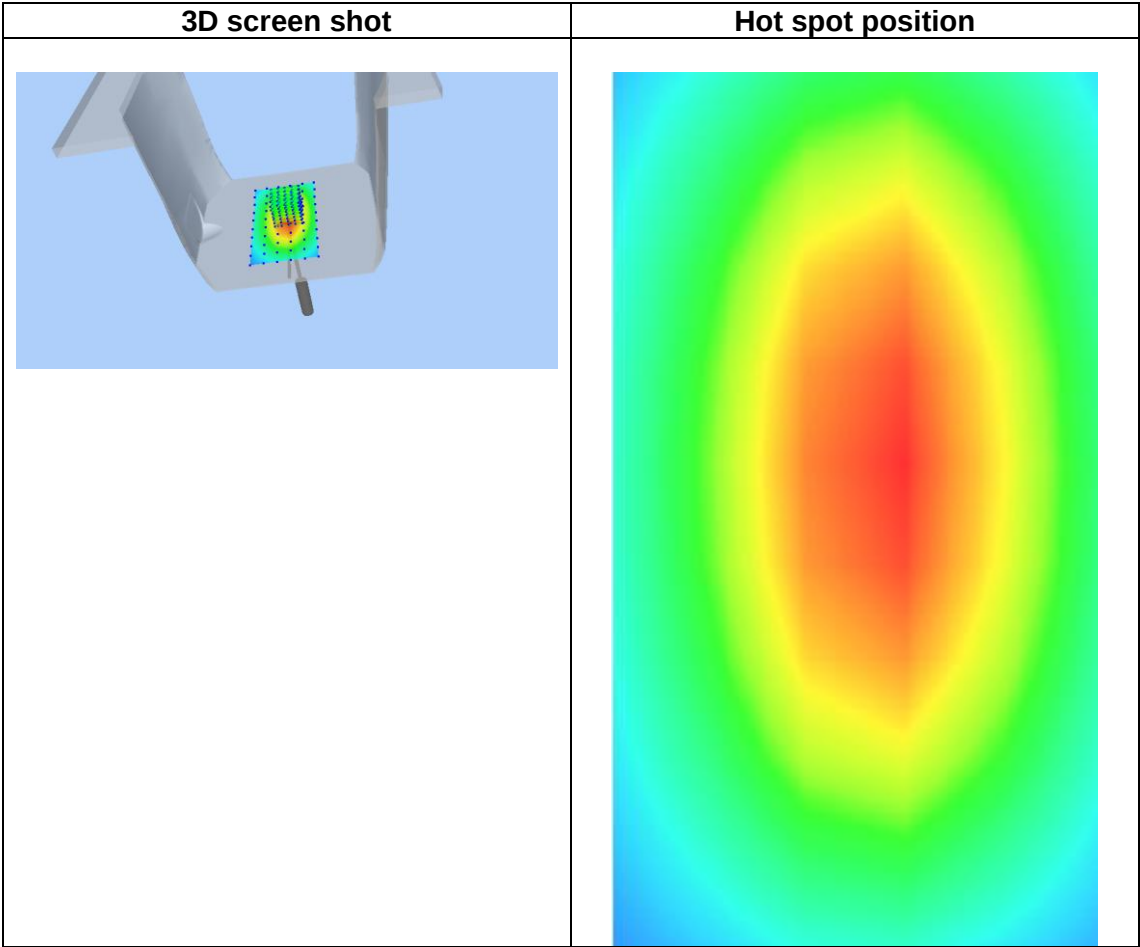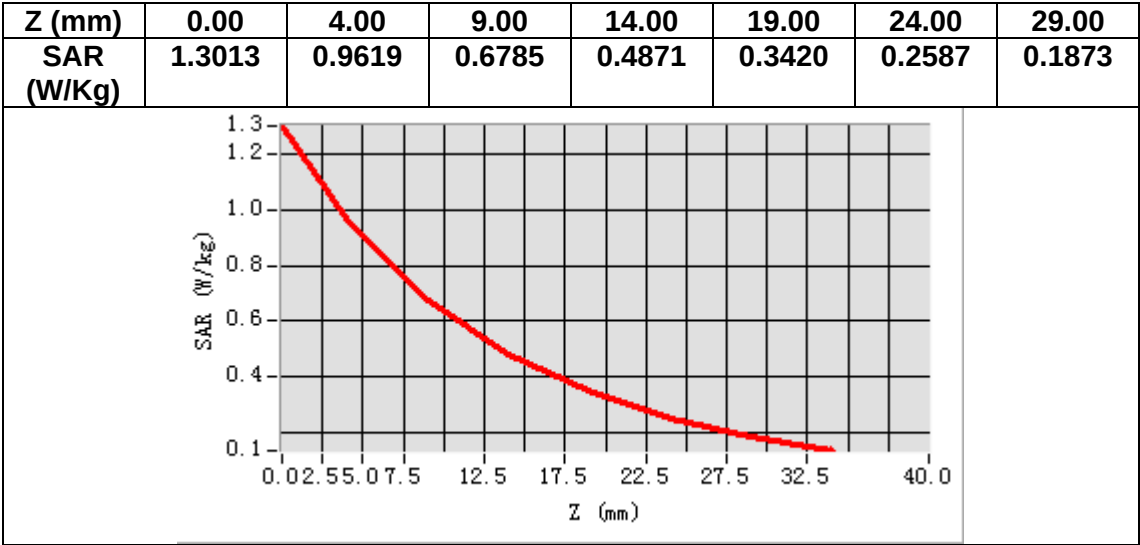

MEASUREMENT 3


Date of measurement: 23/3/2023

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW1800</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>
ConvF	<u>1.73</u>

B. SAR Measurement Results



Frequency (MHz)	1800.000000
Relative permittivity (real part)	38.814605
Relative permittivity (imaginary part)	13.698720
Conductivity (S/m)	1.369872
Variation (%)	-1.080000

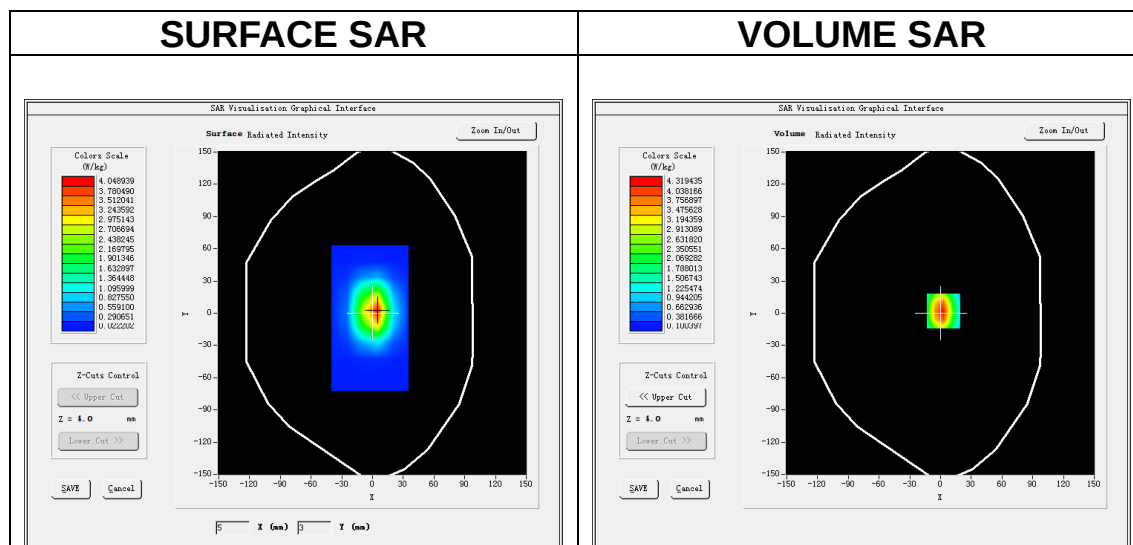

Maximum location: X=3.00, Y=2.00

SAR Peak: 6.82 W/kg

SAR 10g (W/Kg)	2.058321
SAR 1g (W/Kg)	3.747203

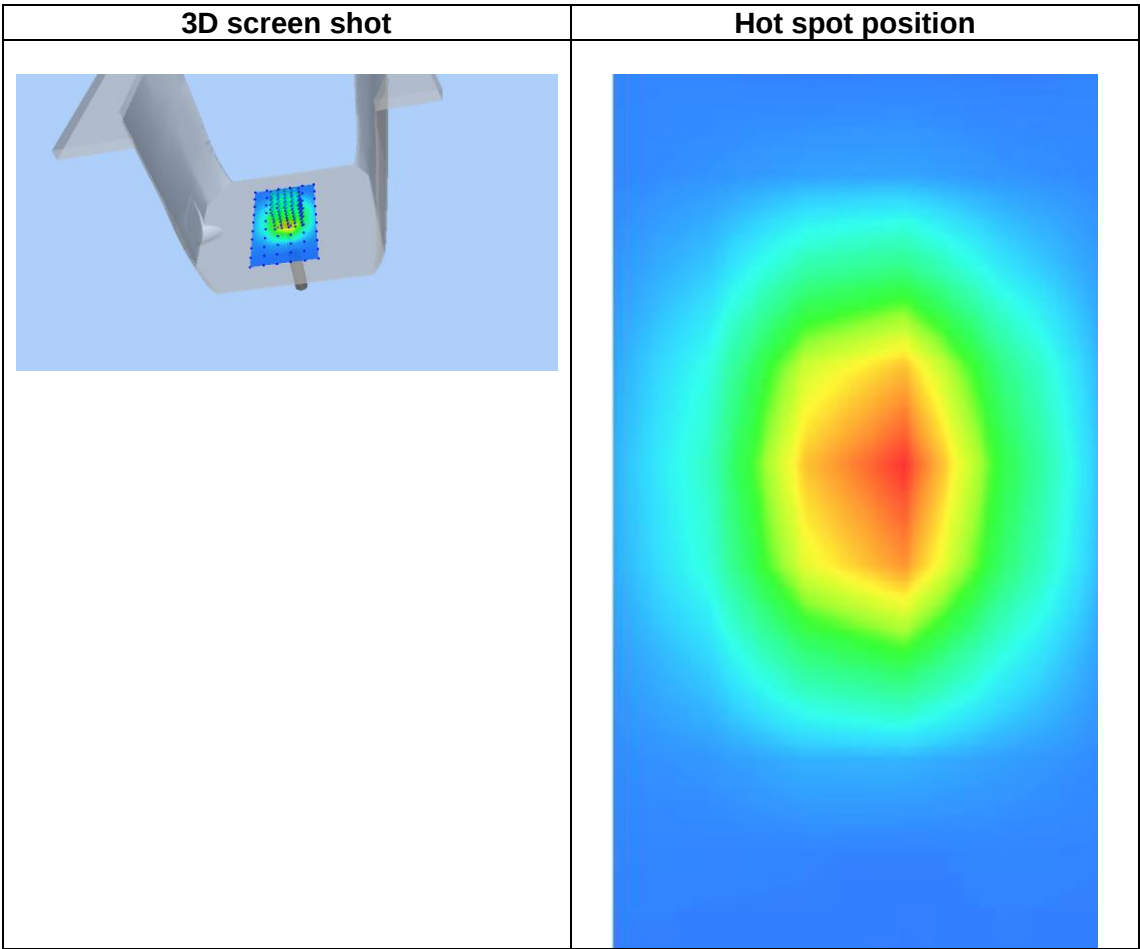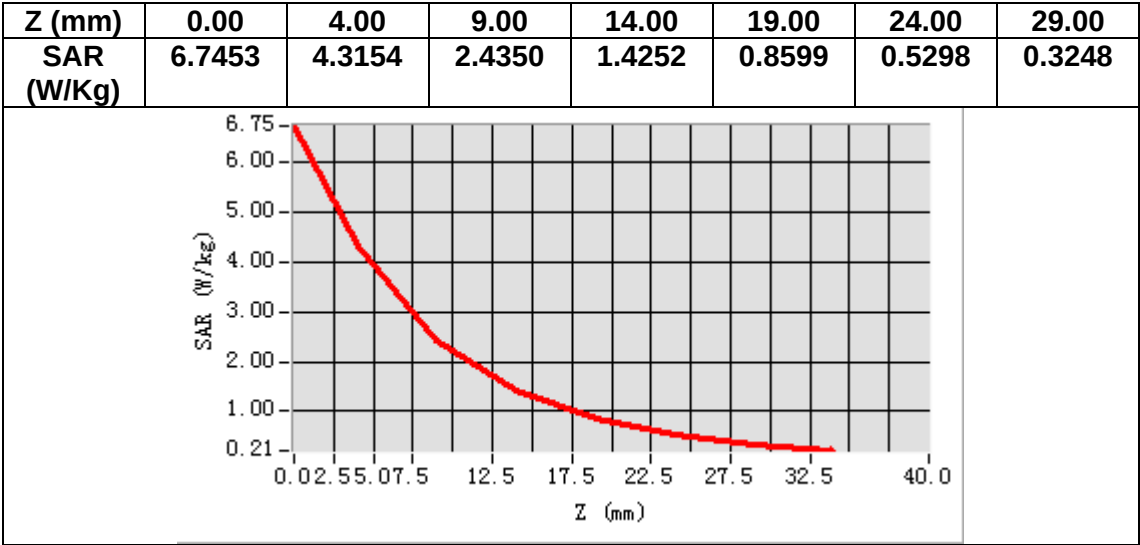

MEASUREMENT 4

Date of measurement: 13/3/2023


A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW1900</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>
ConvF	<u>1.91</u>


B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative permittivity (real part)	38.698190
Relative permittivity (imaginary part)	13.429836
Conductivity (S/m)	1.417594
Variation (%)	1.540000

SURFACE SAR

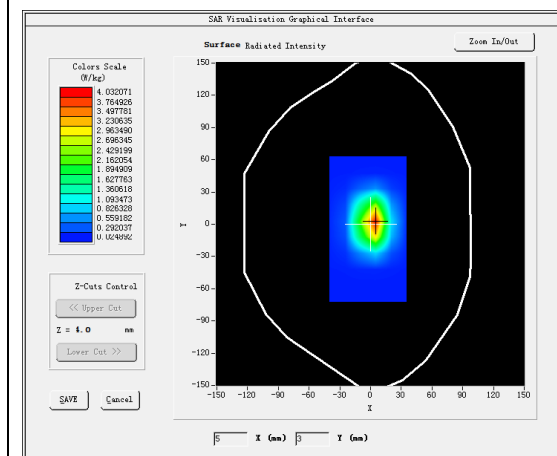



VOLUME SAR

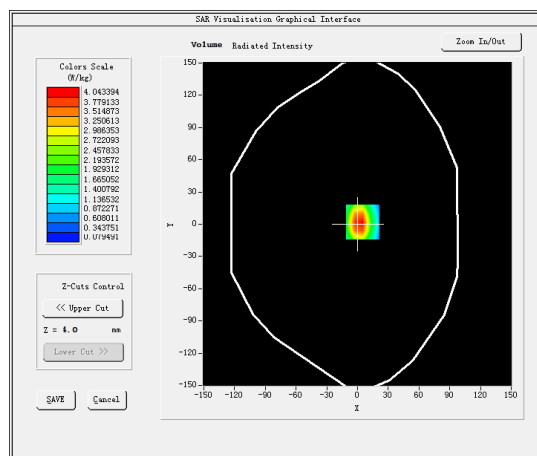

Maximum location: X=5.00, Y=2.00

SAR Peak: 6.70 W/kg

SAR 10g (W/Kg)	2.171249
SAR 1g (W/Kg)	4.160252

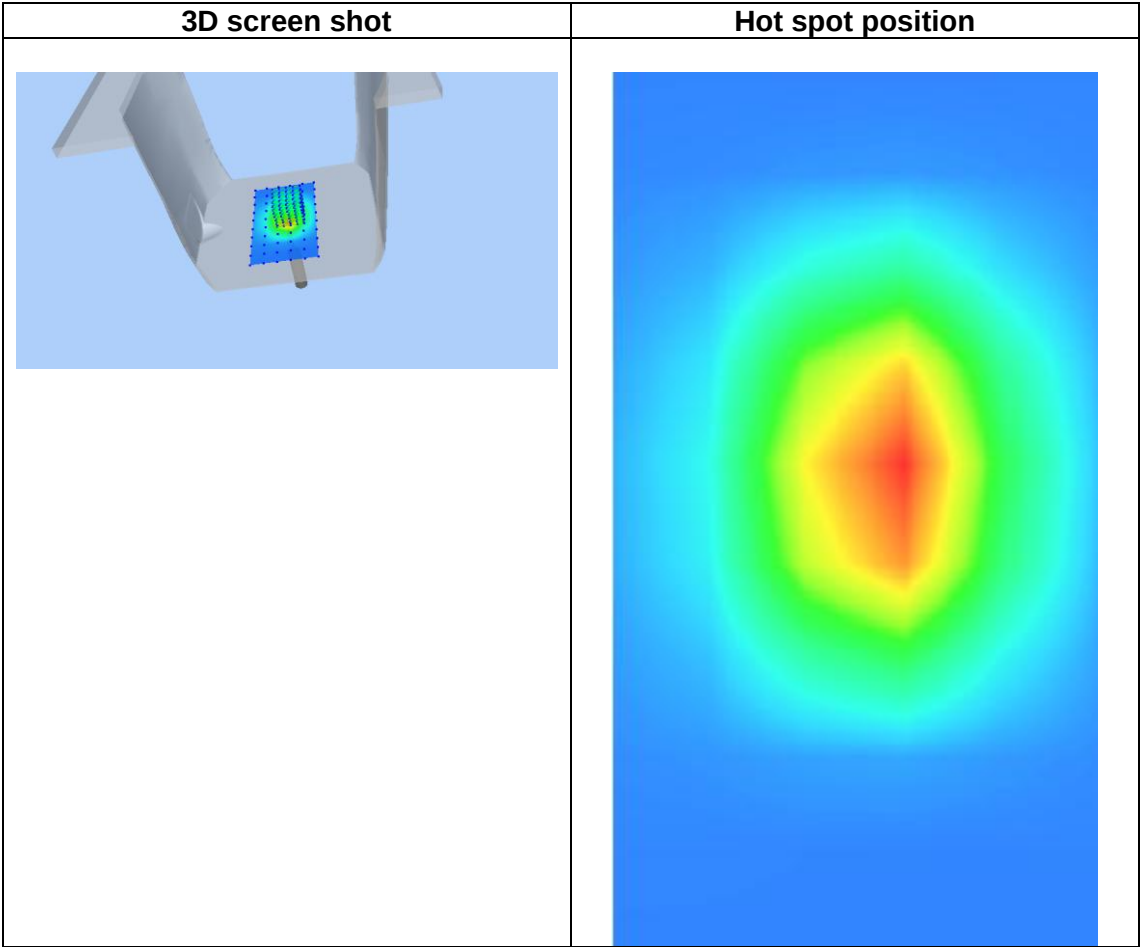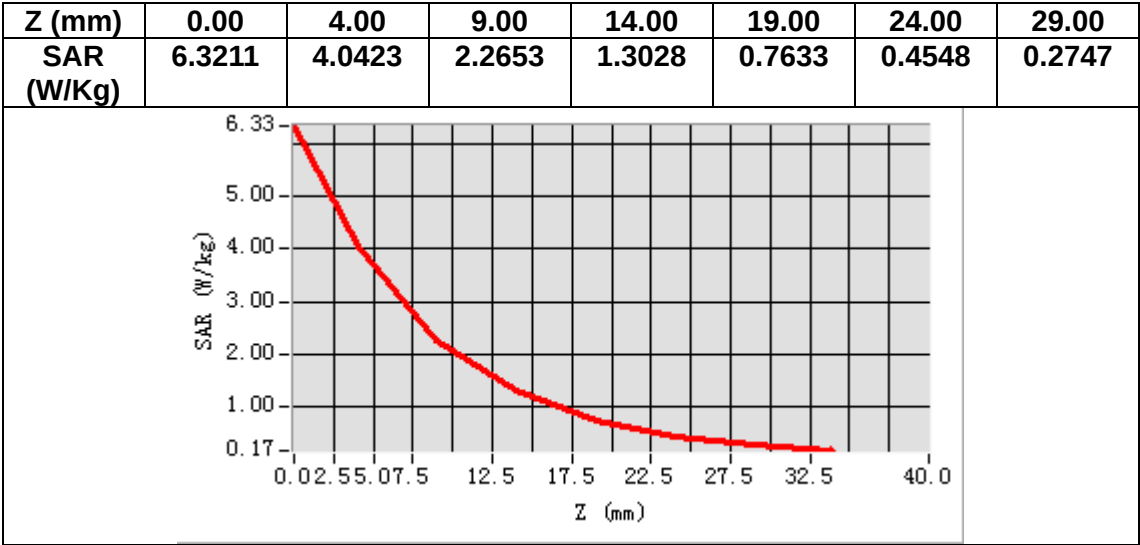

MEASUREMENT 5


Date of measurement: 8/3/2023

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2450</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.98</u>

B. SAR Measurement Results



Frequency (MHz)	2450.000000
Relative permittivity (real part)	38.640497
Relative permittivity (imaginary part)	13.448411
Conductivity (S/m)	1.830478
Variation (%)	0.660000

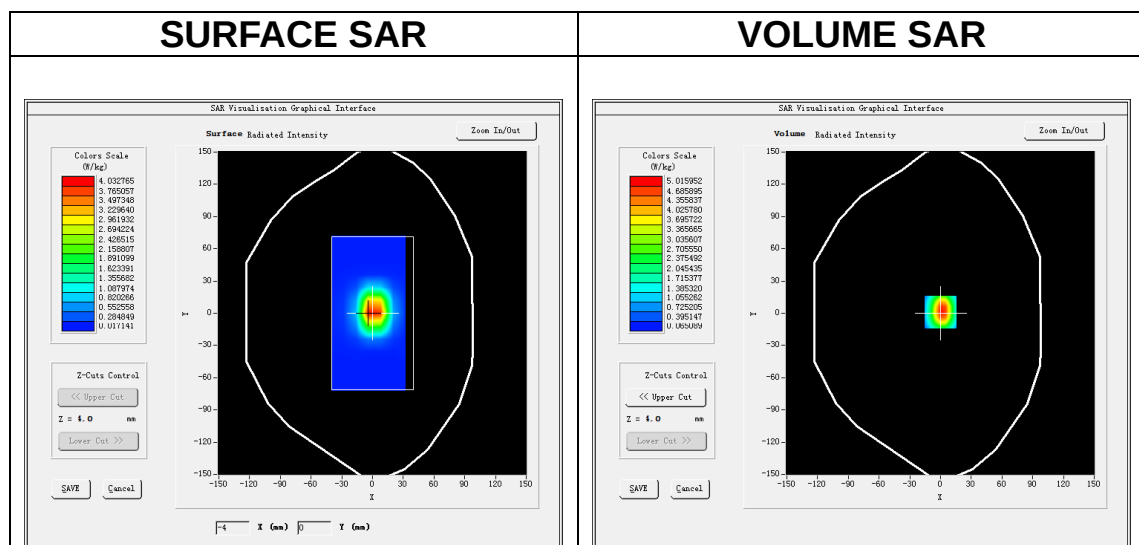

Maximum location: X=0.00, Y=1.00

SAR Peak: 8.14 W/kg

SAR 10g (W/Kg)	2.523157
SAR 1g (W/Kg)	5.129305

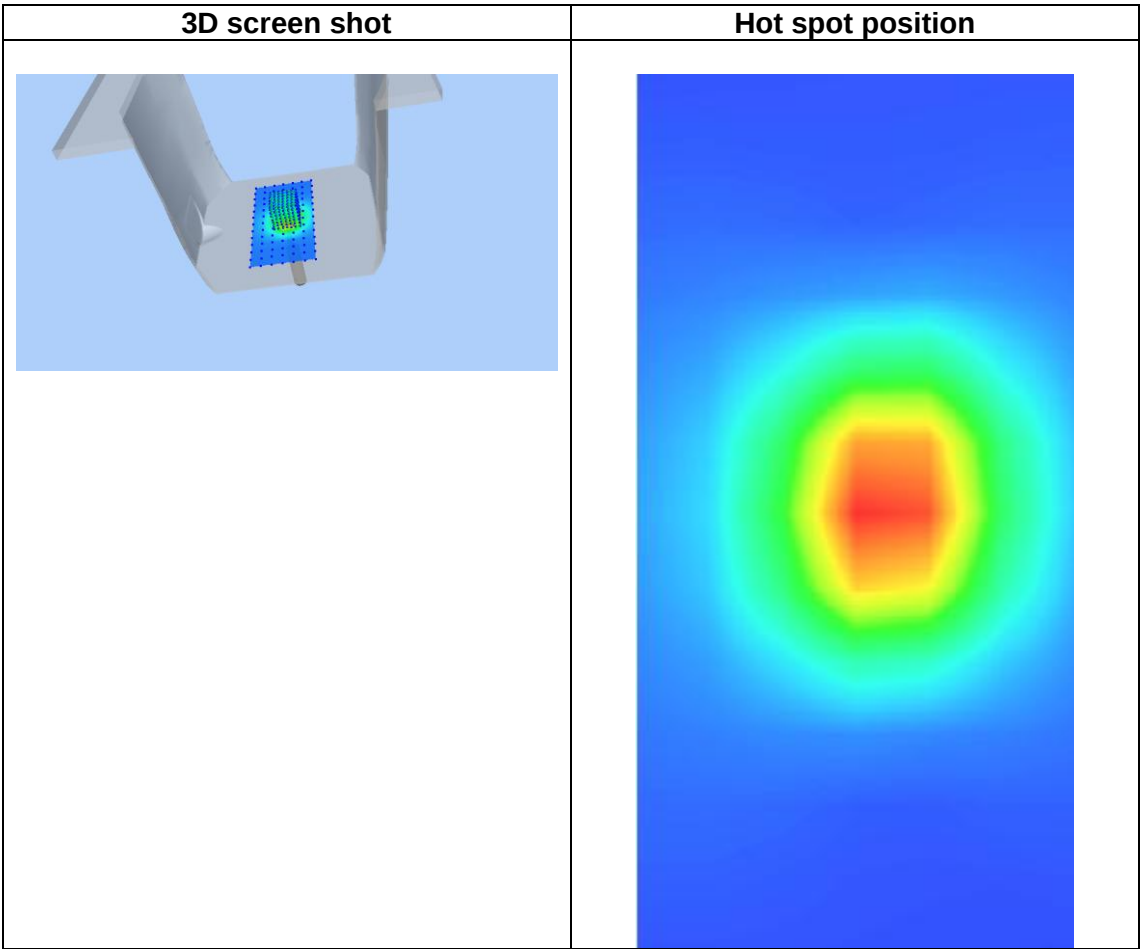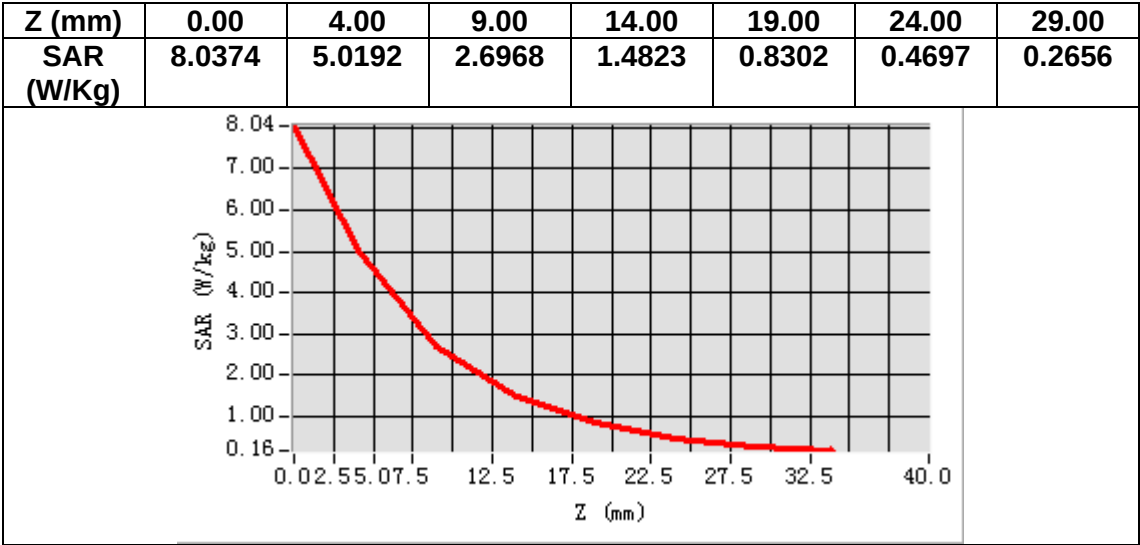

MEASUREMENT 6


Date of measurement: 10/3/2023

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2600</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.87</u>

B. SAR Measurement Results



Frequency (MHz)	2600.000000
Relative permittivity (real part)	38.046305
Relative permittivity (imaginary part)	13.714823
Conductivity (S/m)	1.981030
Variation (%)	-0.680000

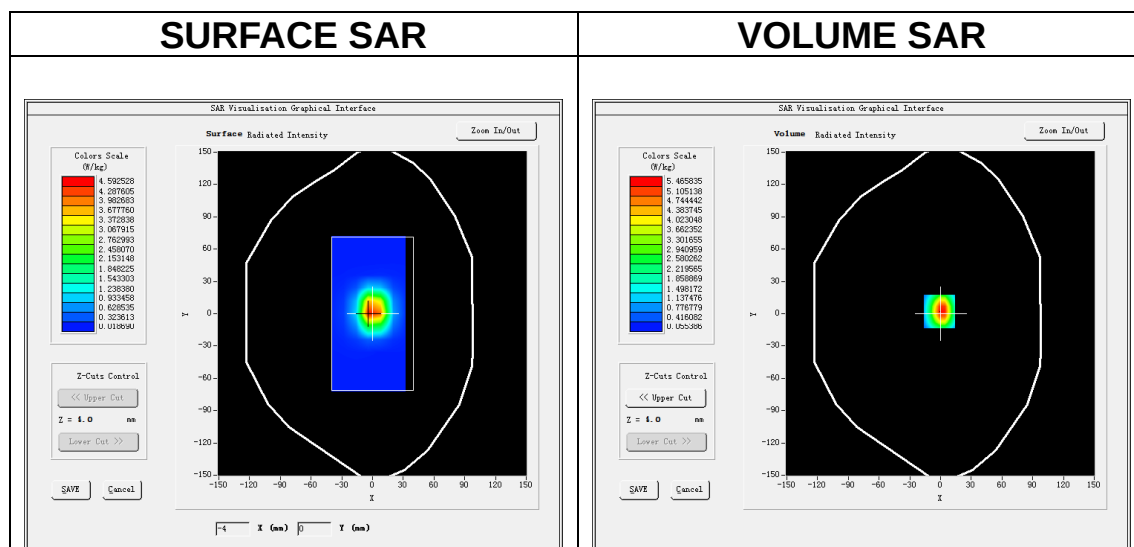

Maximum location: X=-1.00, Y=2.00

SAR Peak: 9.07 W/kg

SAR 10g (W/Kg)	2.224045
SAR 1g (W/Kg)	5.407270

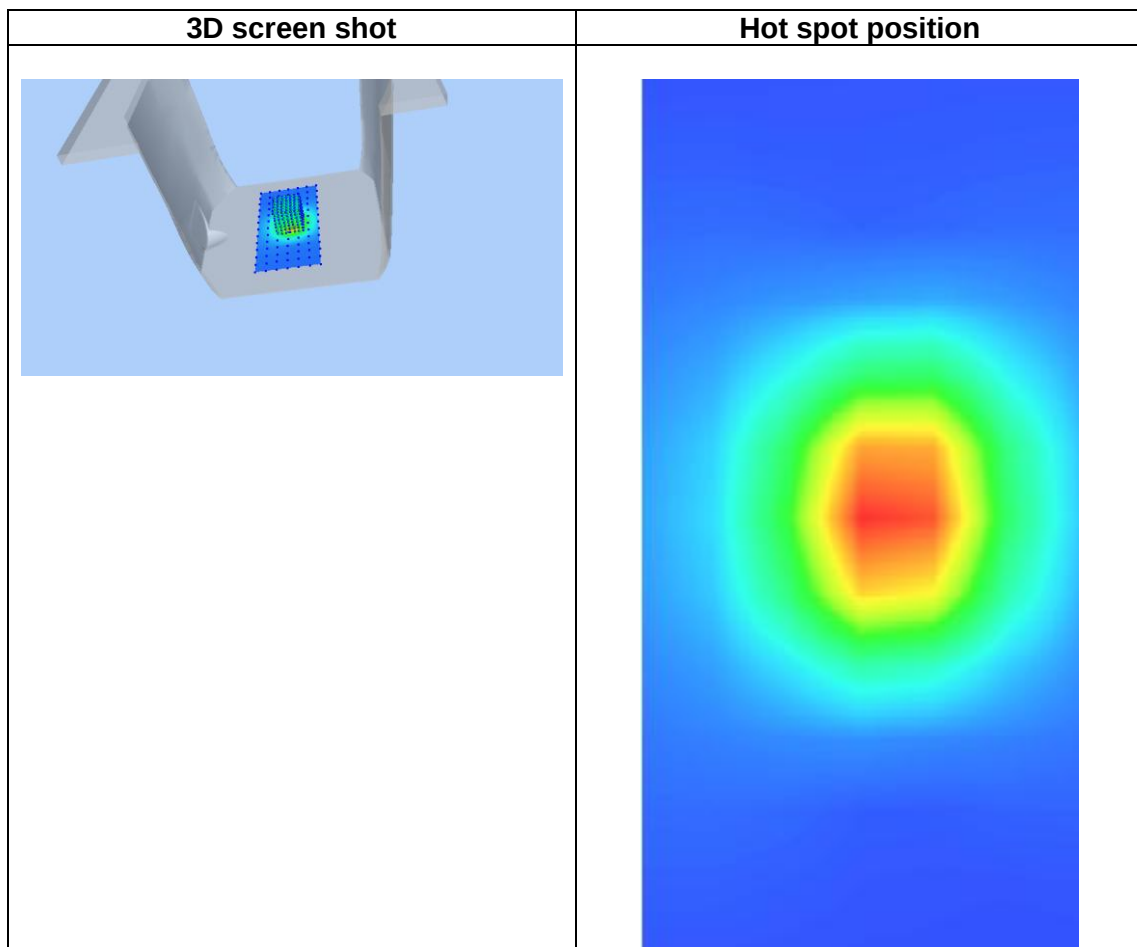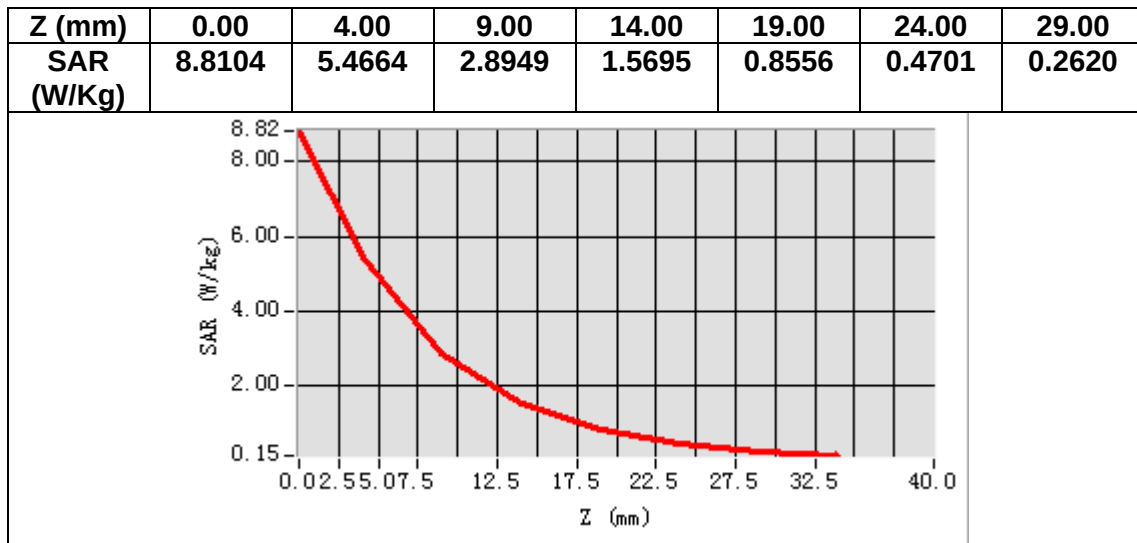

1. Appendix C. Plots of High SAR Measurement

Table of contents
MEASUREMENT 1 GSM 850 Head
MEASUREMENT 2 GSM 850 Body
MEASUREMENT 3 GSM 1900 Head
MEASUREMENT 4 GSM 1900 Body
MEASUREMENT 5 WCDMA Band 2 Head
MEASUREMENT 6 WCDMA Band 2 Body
MEASUREMENT 7 WCDMA Band 4 Head
MEASUREMENT 8 WCDMA Band 4 Body
MEASUREMENT 9 WCDMA Band 5 Head
MEASUREMENT 10 WCDMA Band 5 Body
MEASUREMENT 11 WLAN 2.4G Head
MEASUREMENT 12 WLAN 2.4G Body
MEASUREMENT 13 LTE Band 2 Head
MEASUREMENT 14 LTE Band 2 Body
MEASUREMENT 15 LTE Band 4 Head
MEASUREMENT 16 LTE Band 4 Body
MEASUREMENT 17 LTE Band 5 Head
MEASUREMENT 18 LTE Band 5 Body
MEASUREMENT 19 LTE Band 7 Head
MEASUREMENT 20 LTE Band 7 Body
MEASUREMENT 21 LTE Band 12 Head
MEASUREMENT 22 LTE Band 12 Body
MEASUREMENT 23 LTE Band 26A Head
MEASUREMENT 24 LTE Band 26A Body
MEASUREMENT 25 LTE Band 26B Head
MEASUREMENT 26 LTE Band 26B Body
MEASUREMENT 27 LTE Band 38 Head
MEASUREMENT 28 LTE Band 38 Body
MEASUREMENT 29 LTE Band 66 Head
MEASUREMENT 30 LTE Band 66 Body

MEASUREMENT 1

Date of measurement: 14/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>GSM850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 4.0)</u>
<u>ConvF</u>	<u>1.50</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	41.209236
Relative permittivity (imaginary part)	19.945681
Conductivity (S/m)	0.926809
Variation (%)	-1.730000

SURFACE SAR

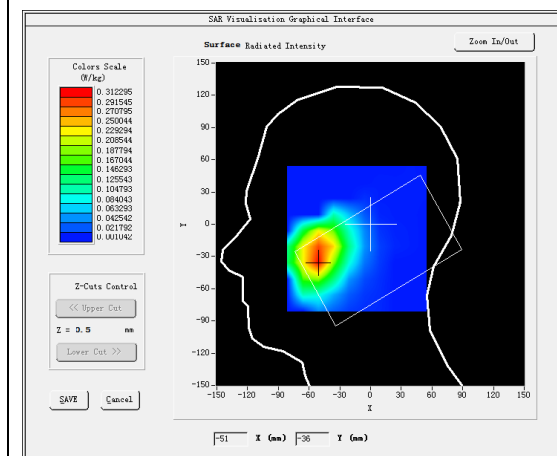



VOLUME SAR

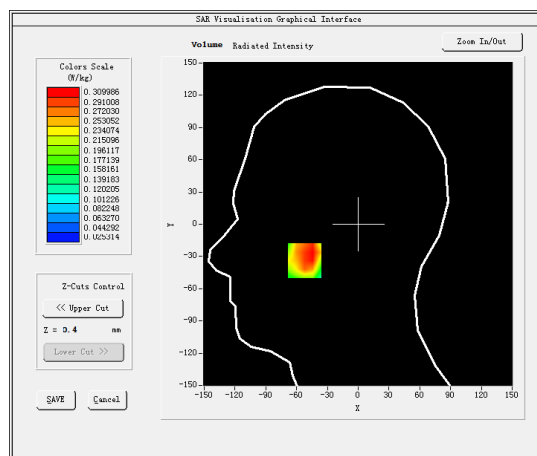

Maximum location: X=-52.00, Y=-34.00

SAR Peak: 0.43 W/kg

SAR 10g (W/Kg)	0.219171
SAR 1g (W/Kg)	0.314034

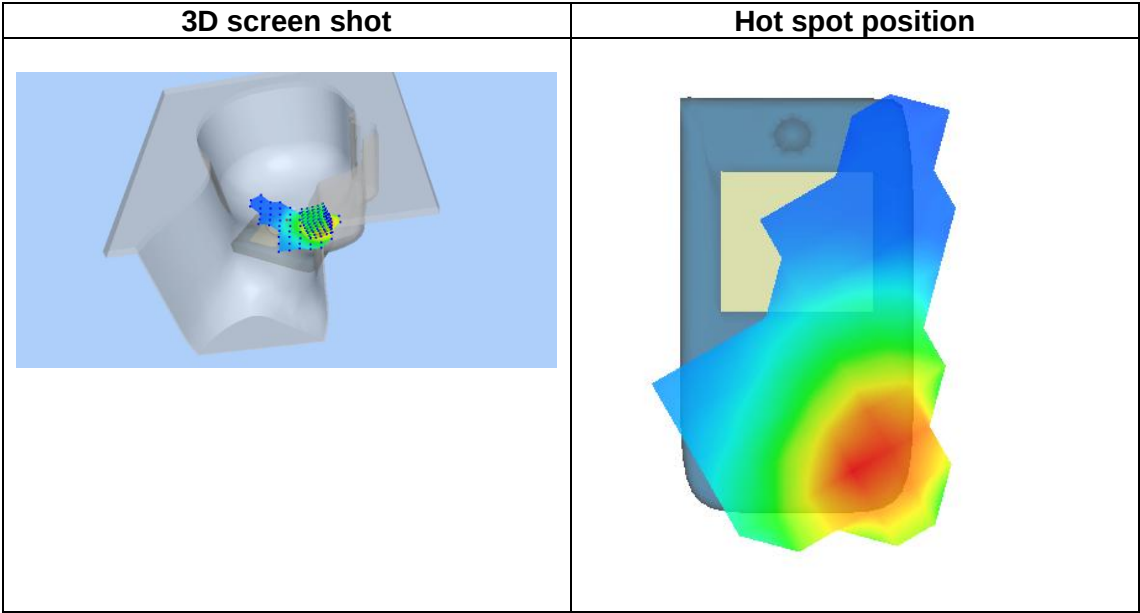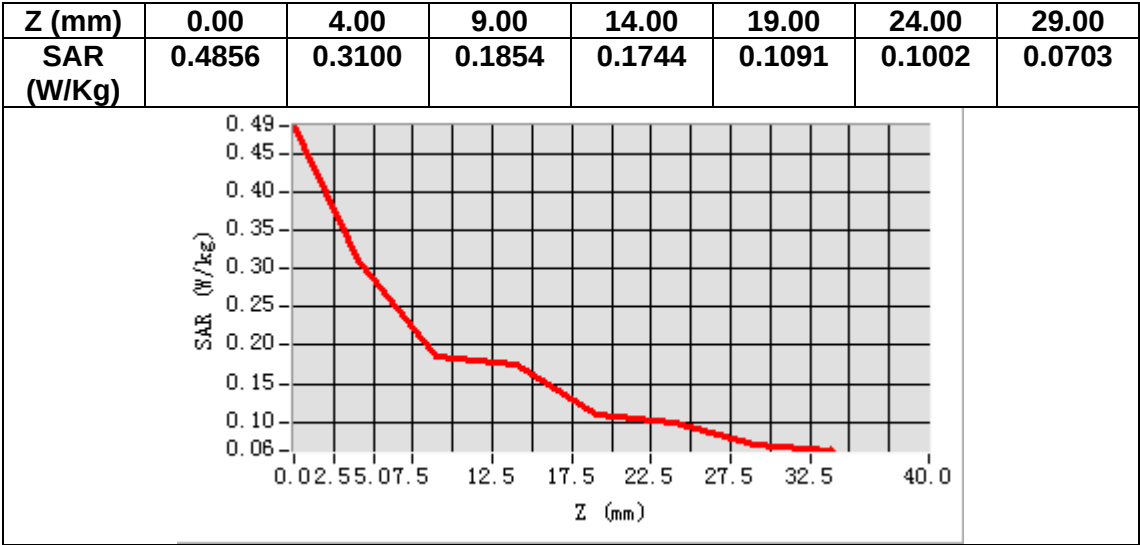

MEASUREMENT 2

Date of measurement: 14/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 4.0)</u>
<u>ConvF</u>	<u>1.50</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	41.209236
Relative permittivity (imaginary part)	19.945681
Conductivity (S/m)	0.926809
Variation (%)	3.520000

SURFACE SAR

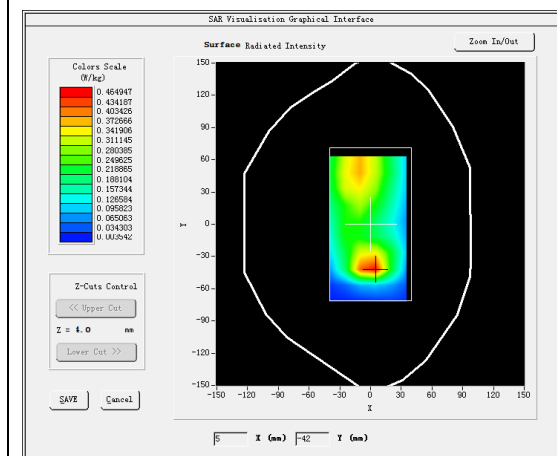



VOLUME SAR

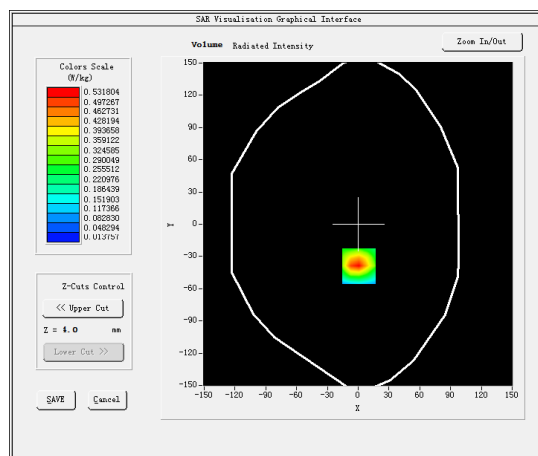

Maximum location: X=1.00, Y=-39.00

SAR Peak: 0.87 W/kg

SAR 10g (W/Kg)	0.267137
SAR 1g (W/Kg)	0.513903

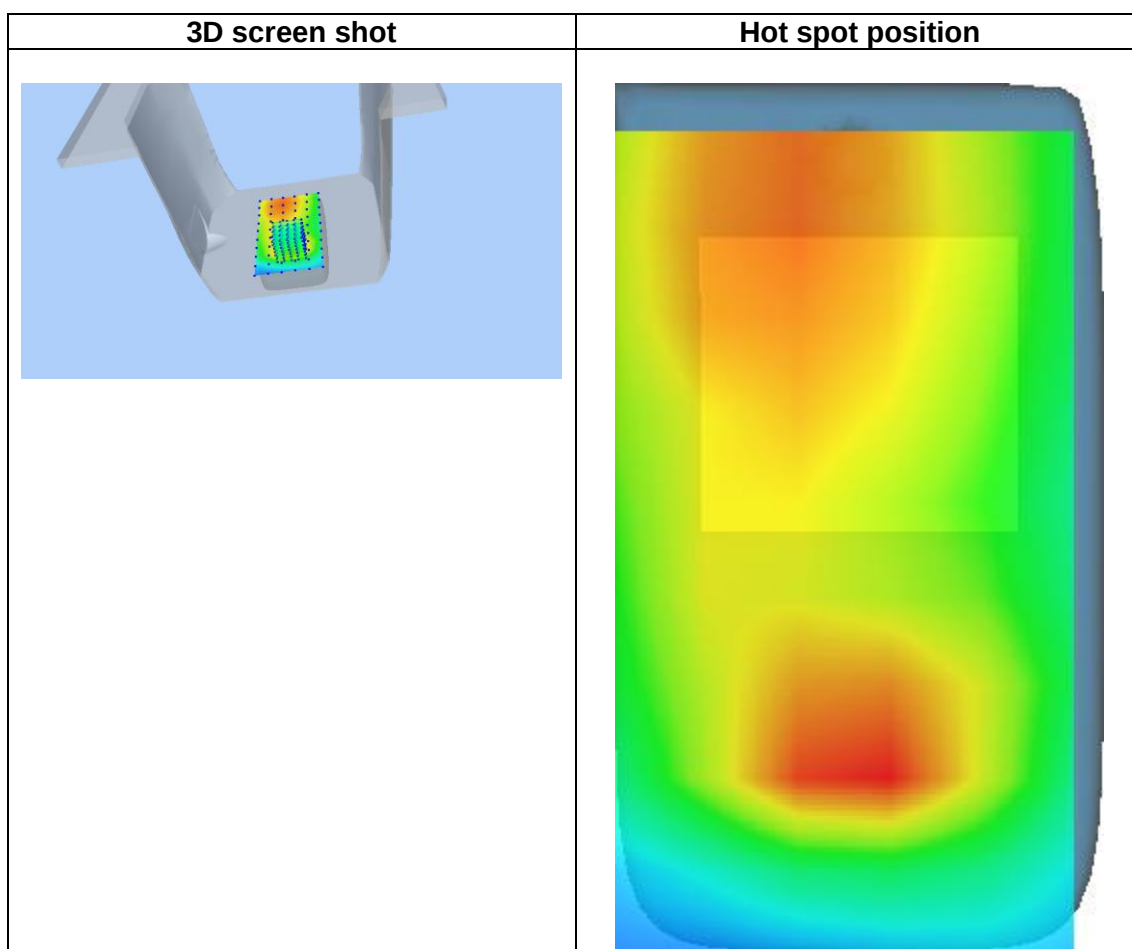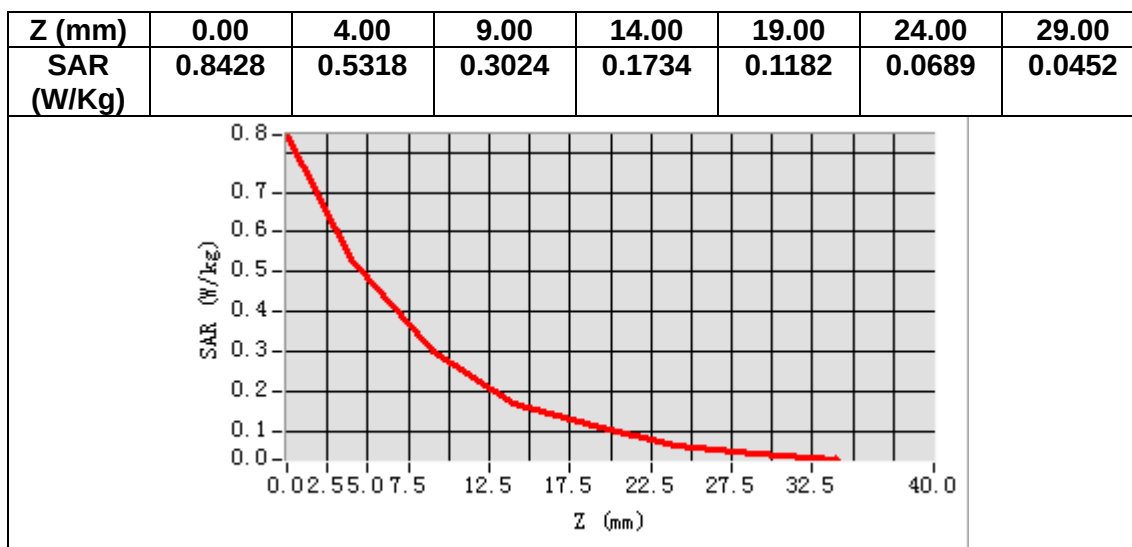

MEASUREMENT 3

Date of measurement: 13/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>GSM1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.7)</u>
<u>ConvF</u>	<u>1.91</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.784592
Relative permittivity (imaginary part)	13.447636
Conductivity (S/m)	1.404531
Variation (%)	-0.470000

SURFACE SAR

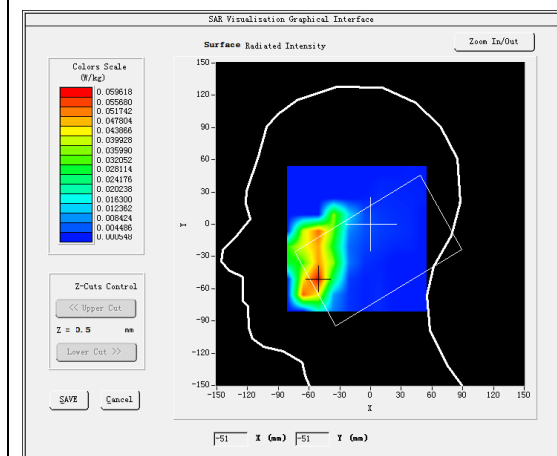



VOLUME SAR

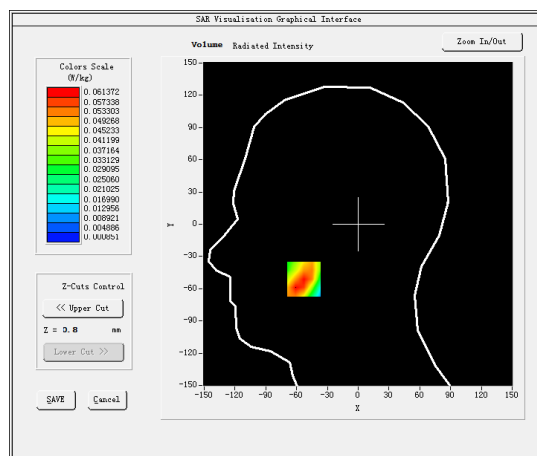

Maximum location: X=-53.00, Y=-51.00

SAR Peak: 0.09 W/kg

SAR 10g (W/Kg)	0.034298
SAR 1g (W/Kg)	0.058986

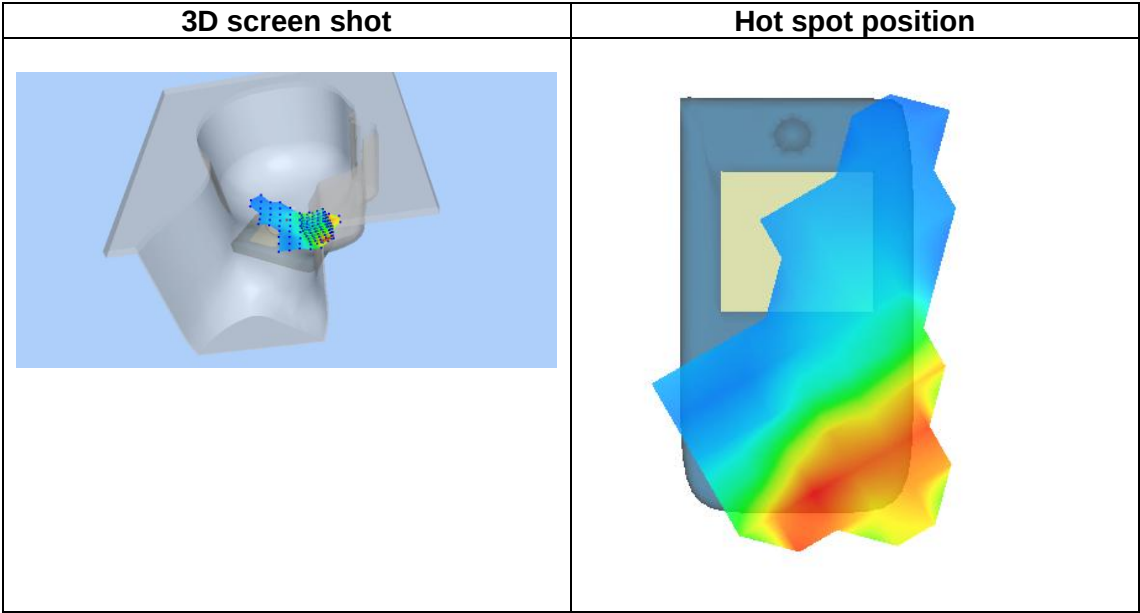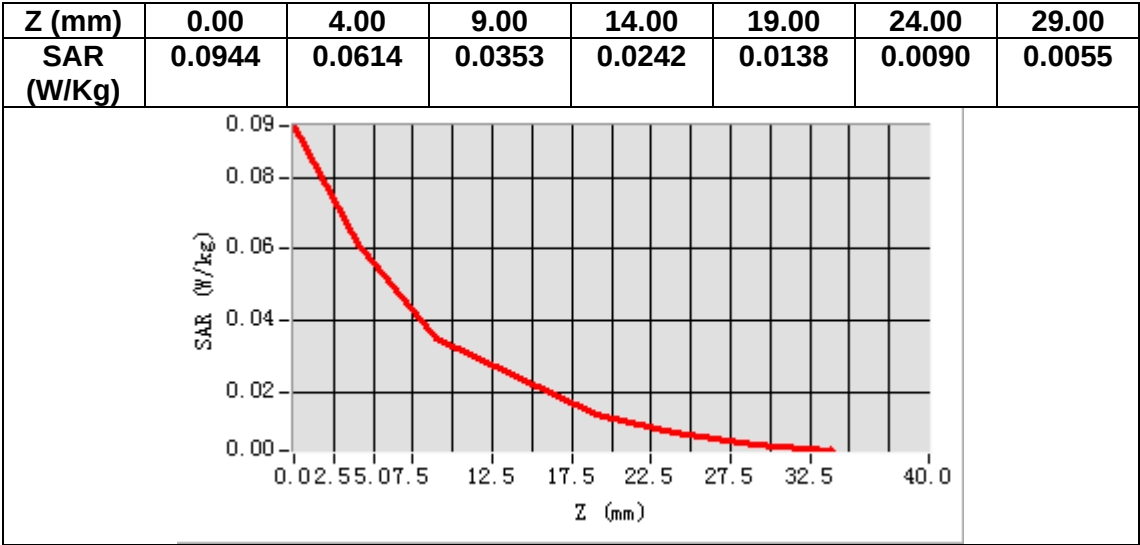

MEASUREMENT 4

Date of measurement: 13/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.7)</u>
<u>ConvF</u>	<u>1.91</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.784592
Relative permittivity (imaginary part)	13.447636
Conductivity (S/m)	1.404531
Variation (%)	-1.990000

SURFACE SAR

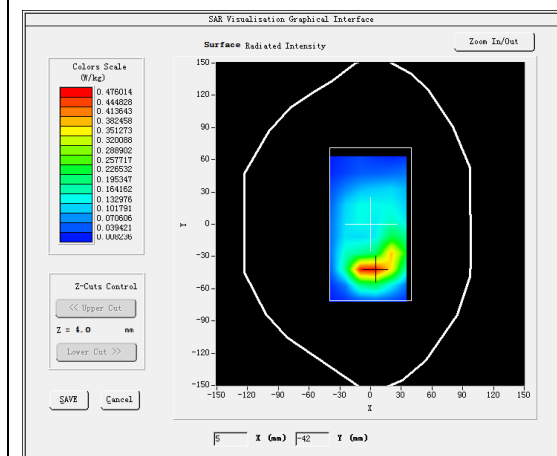



VOLUME SAR

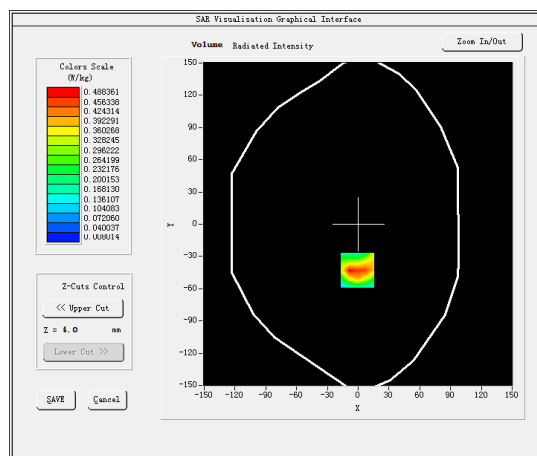

Maximum location: X=-1.00, Y=-43.00

SAR Peak: 0.80 W/kg

SAR 10g (W/Kg)	0.230059
SAR 1g (W/Kg)	0.457236

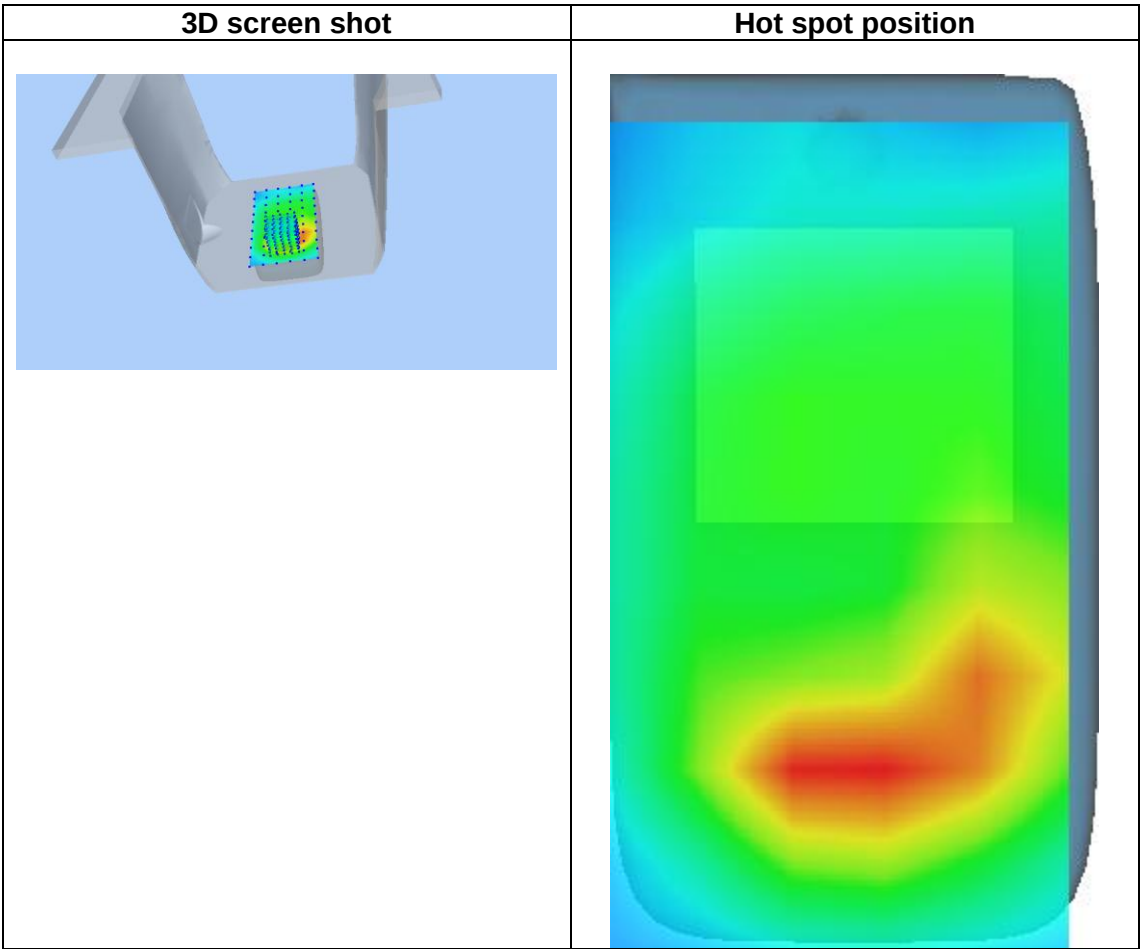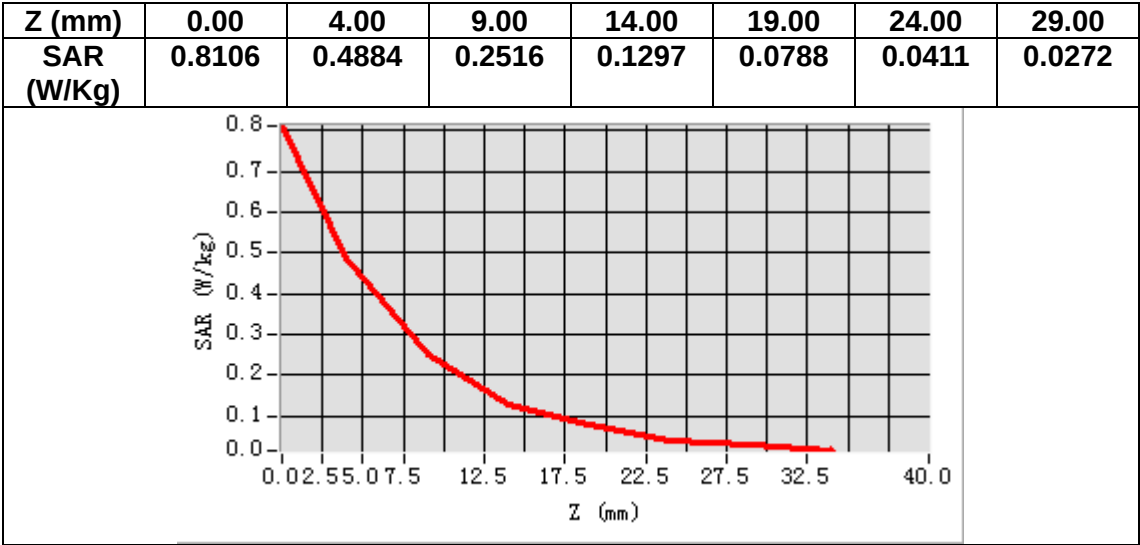

MEASUREMENT 5

Date of measurement: 13/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>Band2 WCDMA1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.91</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.784592
Relative permittivity (imaginary part)	13.447636
Conductivity (S/m)	1.404531
Variation (%)	0.030000

SURFACE SAR

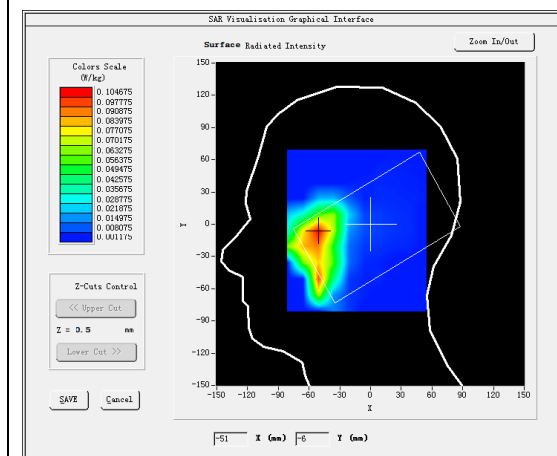



VOLUME SAR

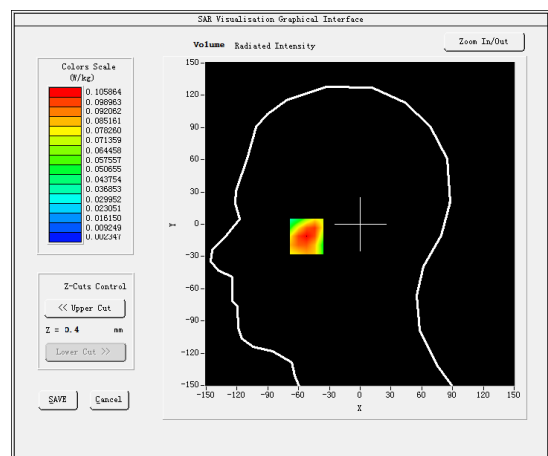

Maximum location: X=-52.00, Y=-9.00

SAR Peak: 0.15 W/kg

SAR 10g (W/Kg)	0.061480
SAR 1g (W/Kg)	0.100919

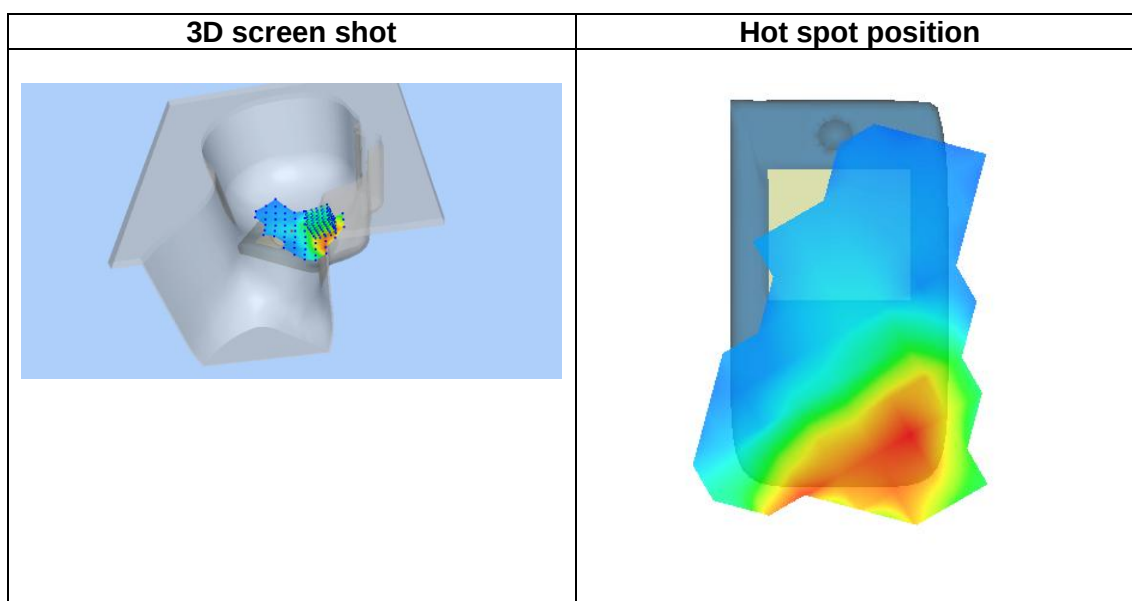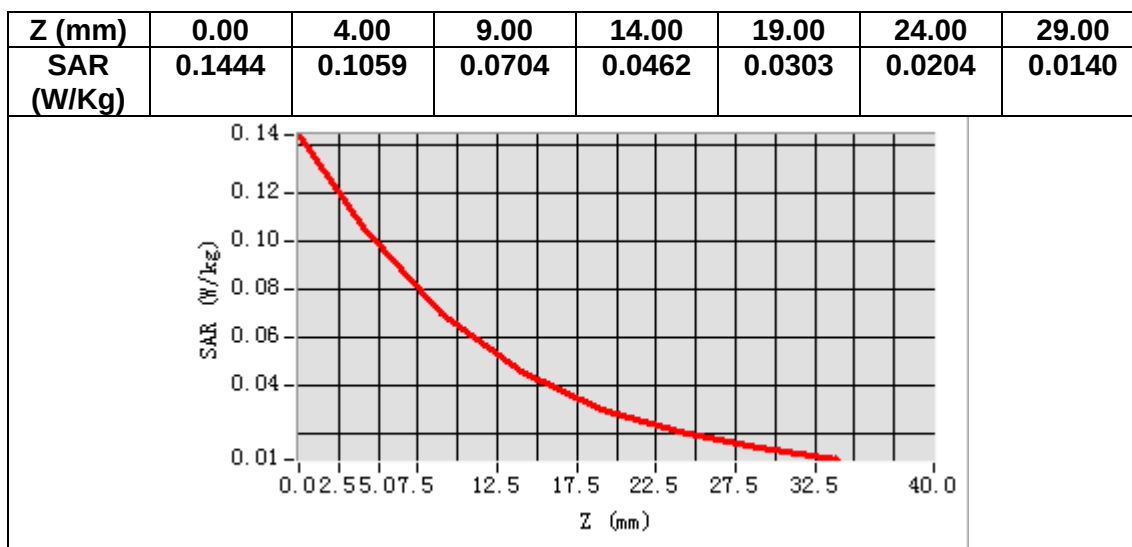

MEASUREMENT 6

Date of measurement: 13/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band2 WCDMA1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.91</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.784592
Relative permittivity (imaginary part)	13.447636
Conductivity (S/m)	1.404531
Variation (%)	-0.270000

SURFACE SAR

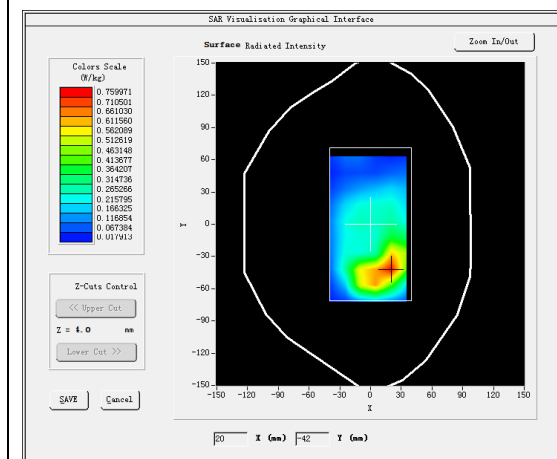



VOLUME SAR

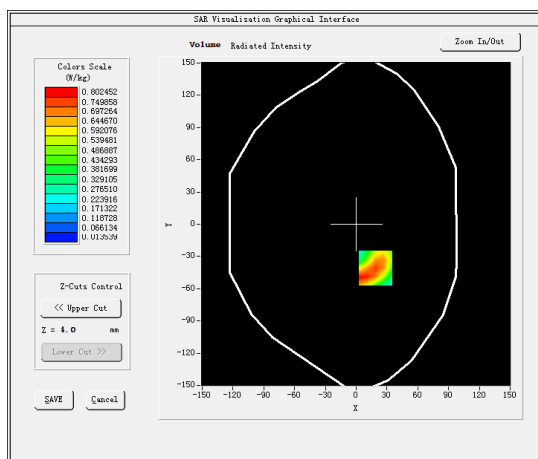

Maximum location: X=19.00, Y=-41.00

SAR Peak: 1.23 W/kg

SAR 10g (W/Kg)	0.411276
SAR 1g (W/Kg)	0.726458

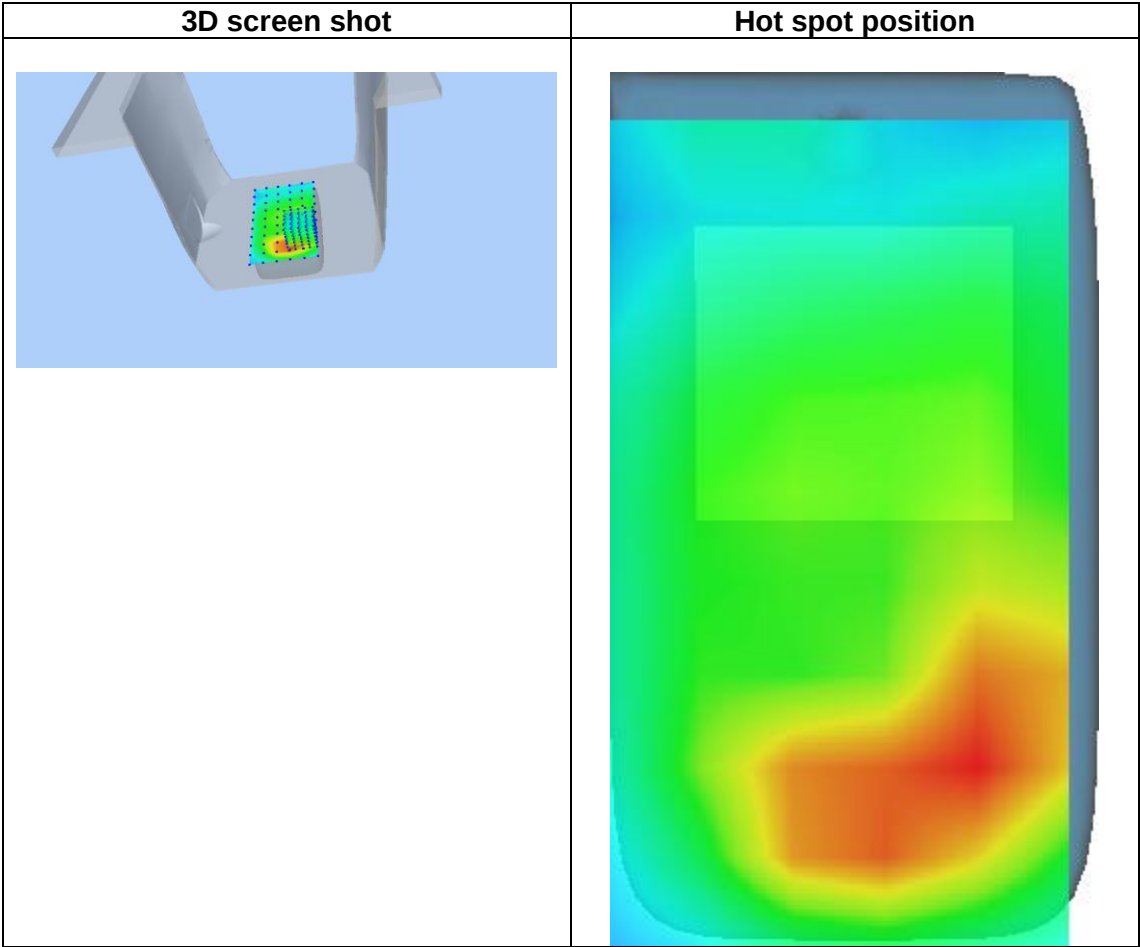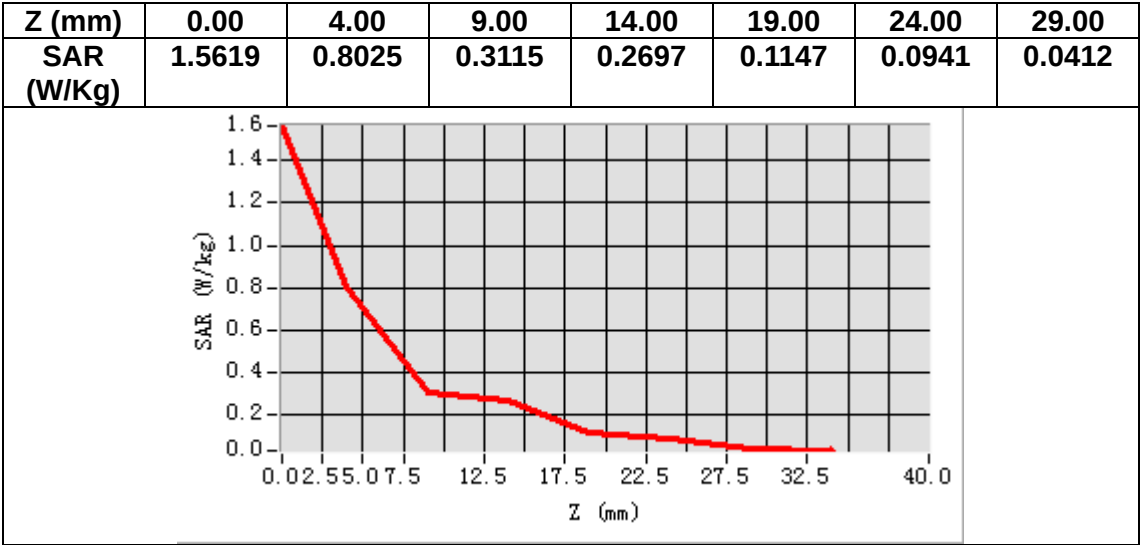

MEASUREMENT 7


Date of measurement: 23/3/2023

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>Band4 WCDMA1700</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.73</u>

B. SAR Measurement Results



Frequency (MHz)	1732.600000
Relative permittivity (real part)	39.274303
Relative permittivity (imaginary part)	13.651020
Conductivity (S/m)	1.313531
Variation (%)	-1.500000

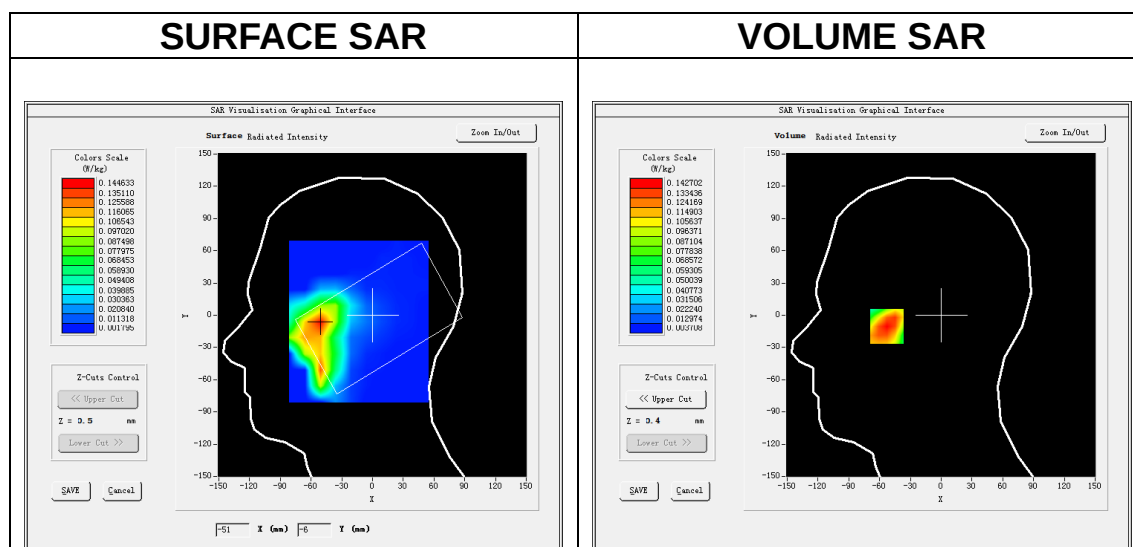

Maximum location: X=-53.00, Y=-8.00

SAR Peak: 0.20 W/kg

SAR 10g (W/Kg)	0.084507
SAR 1g (W/Kg)	0.135662

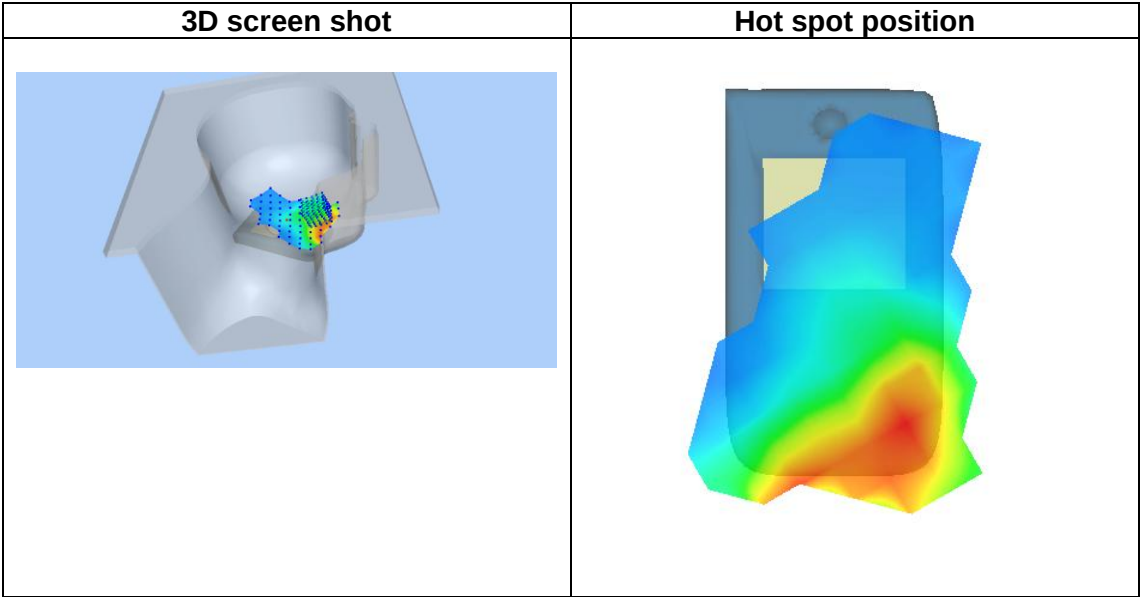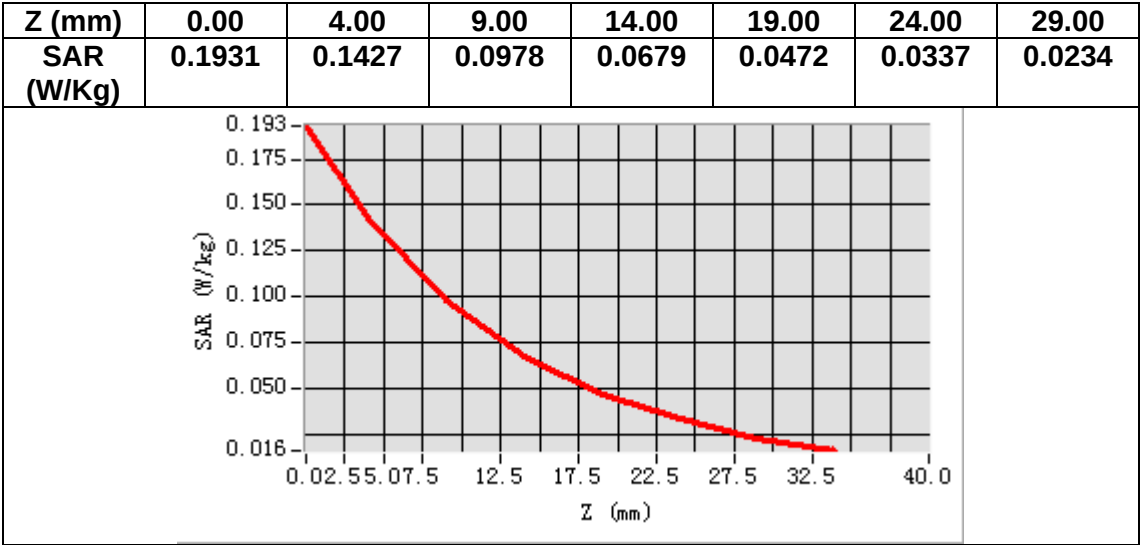

MEASUREMENT 8

Date of measurement: 23/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band4 WCDMA1700</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.73</u>


B. SAR Measurement Results

Frequency (MHz)	1732.600000
Relative permittivity (real part)	39.274303
Relative permittivity (imaginary part)	13.651020
Conductivity (S/m)	1.313531
Variation (%)	0.290000

SURFACE SAR

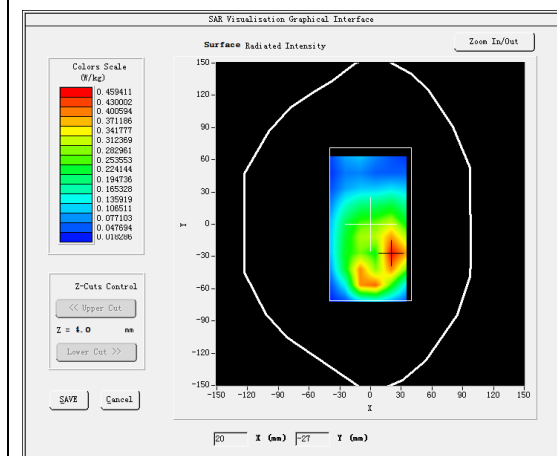



VOLUME SAR

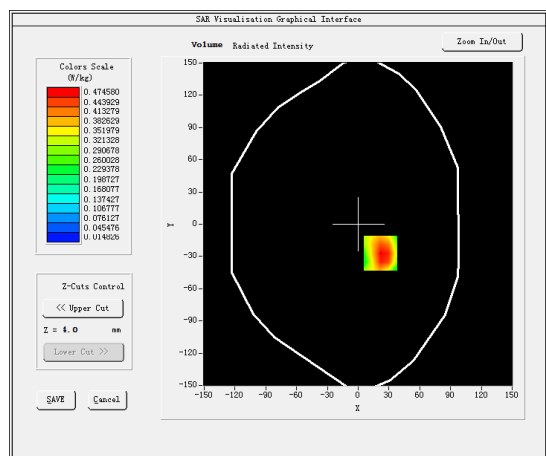

Maximum location: X=22.00, Y=-27.00

SAR Peak: 0.74 W/kg

SAR 10g (W/Kg)	0.263778
SAR 1g (W/Kg)	0.464655

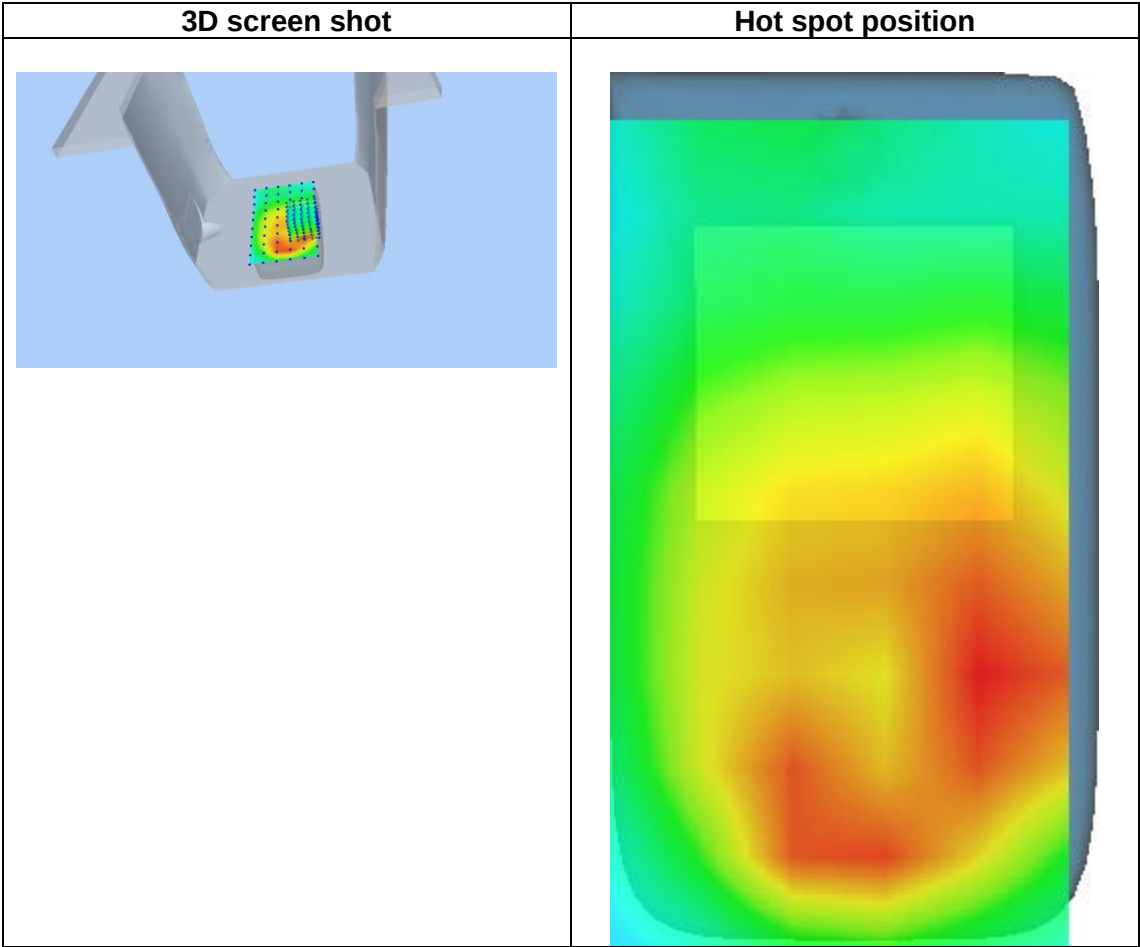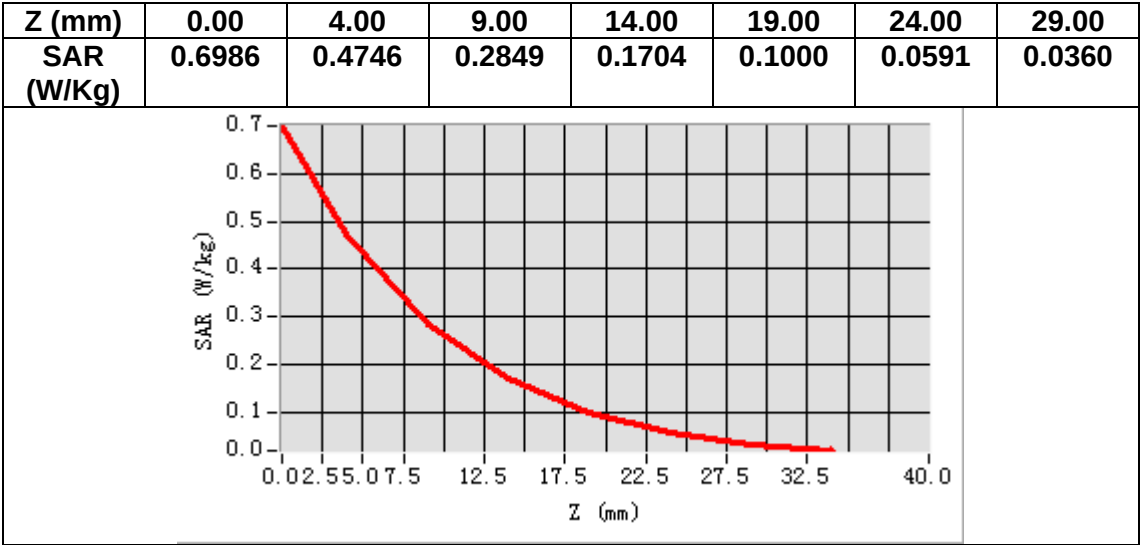

MEASUREMENT 9

Date of measurement: 14/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>Band5 WCDMA850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.50</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	41.209236
Relative permittivity (imaginary part)	19.945681
Conductivity (S/m)	0.926809
Variation (%)	-0.300000

SURFACE SAR

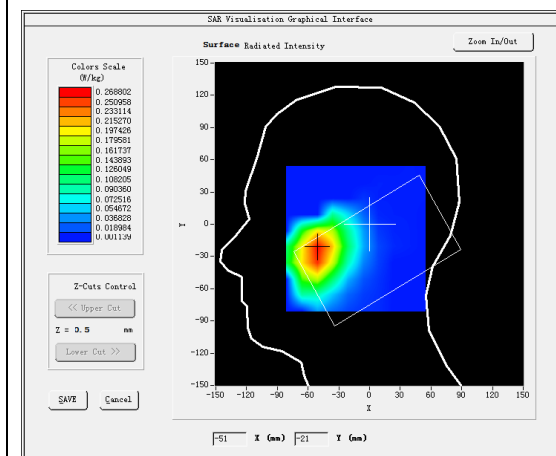



VOLUME SAR

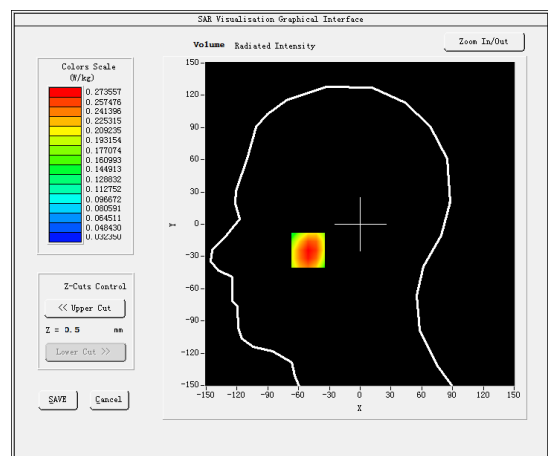

Maximum location: X=-51.00, Y=-24.00

SAR Peak: 0.33 W/kg

SAR 10g (W/Kg)	0.200419
SAR 1g (W/Kg)	0.271968

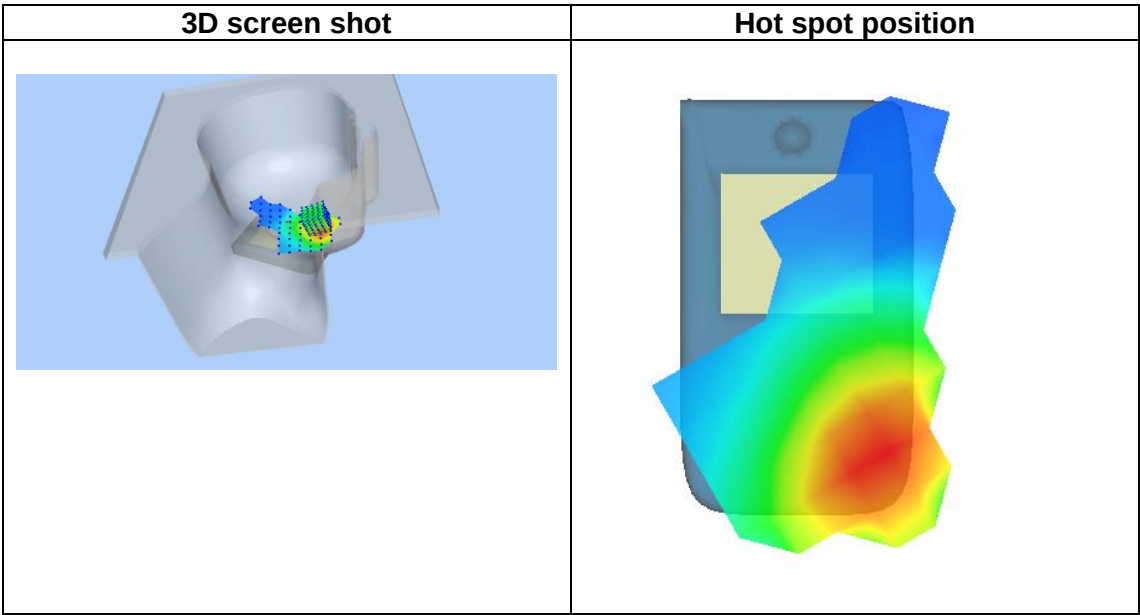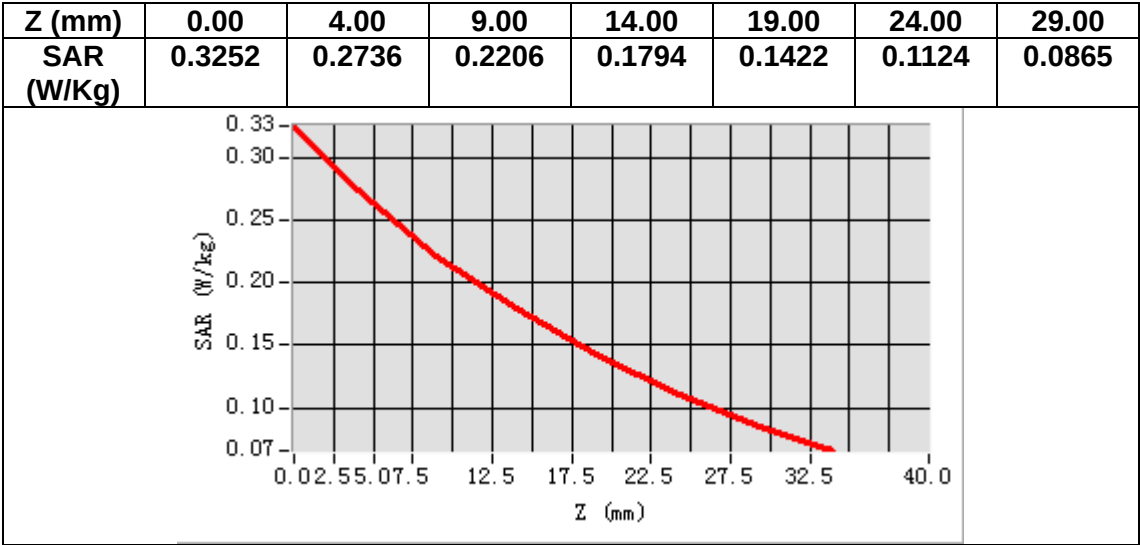

MEASUREMENT 10

Date of measurement: 14/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band5 WCDMA850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.50</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	41.209236
Relative permittivity (imaginary part)	19.945681
Conductivity (S/m)	0.926809
Variation (%)	0.110000

SURFACE SAR

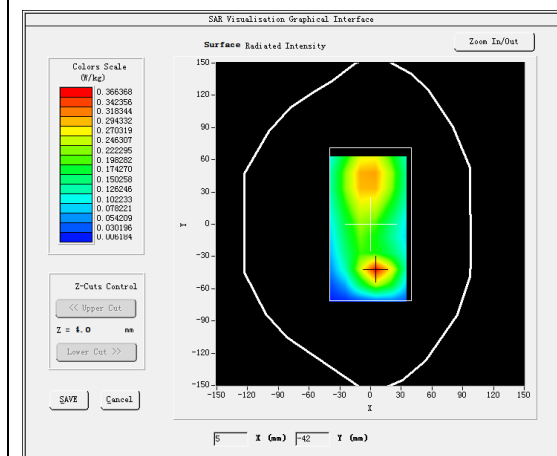



VOLUME SAR

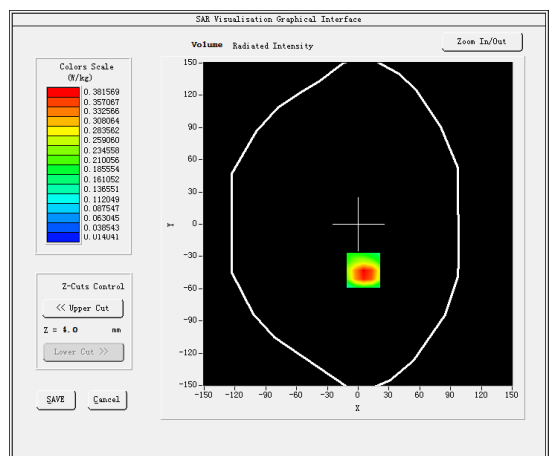

Maximum location: X=5.00, Y=-43.00

SAR Peak: 0.62 W/kg

SAR 10g (W/Kg)	0.210109
SAR 1g (W/Kg)	0.388934

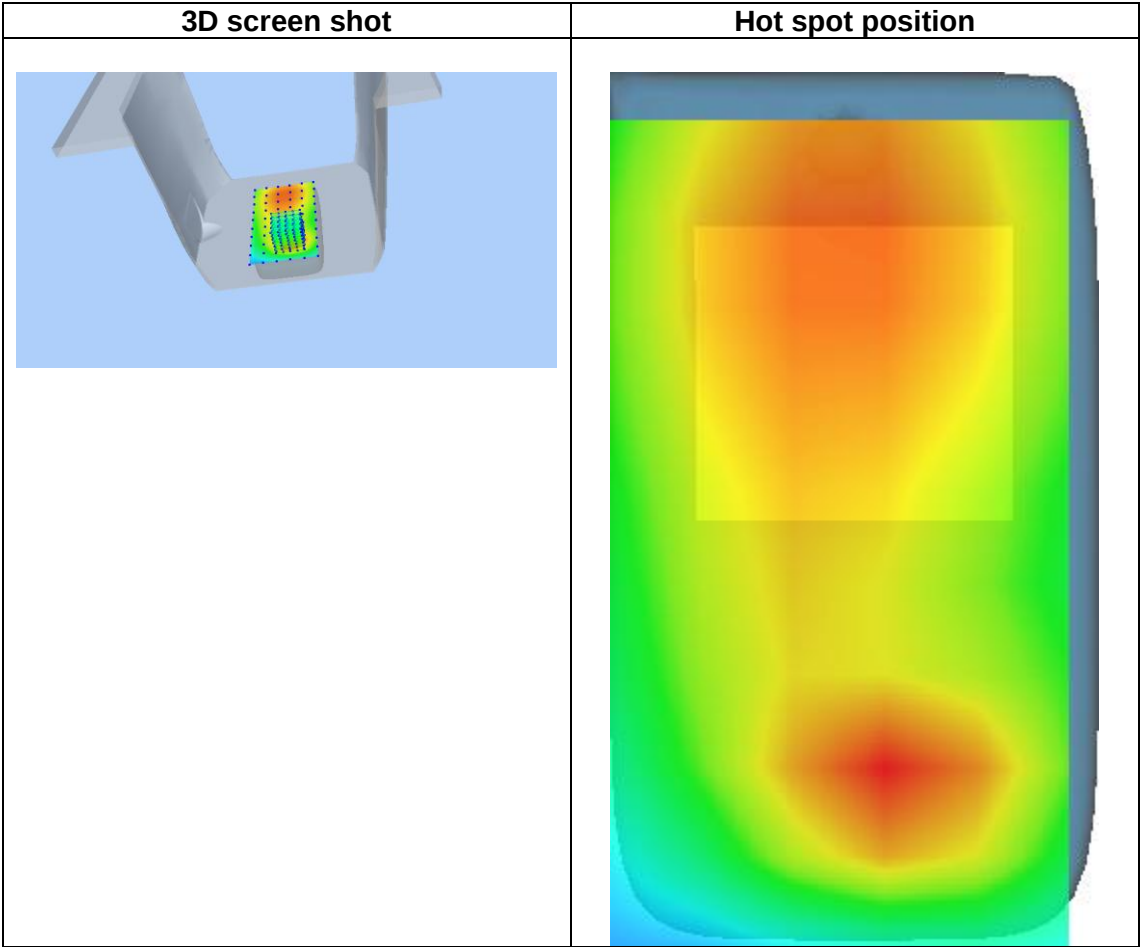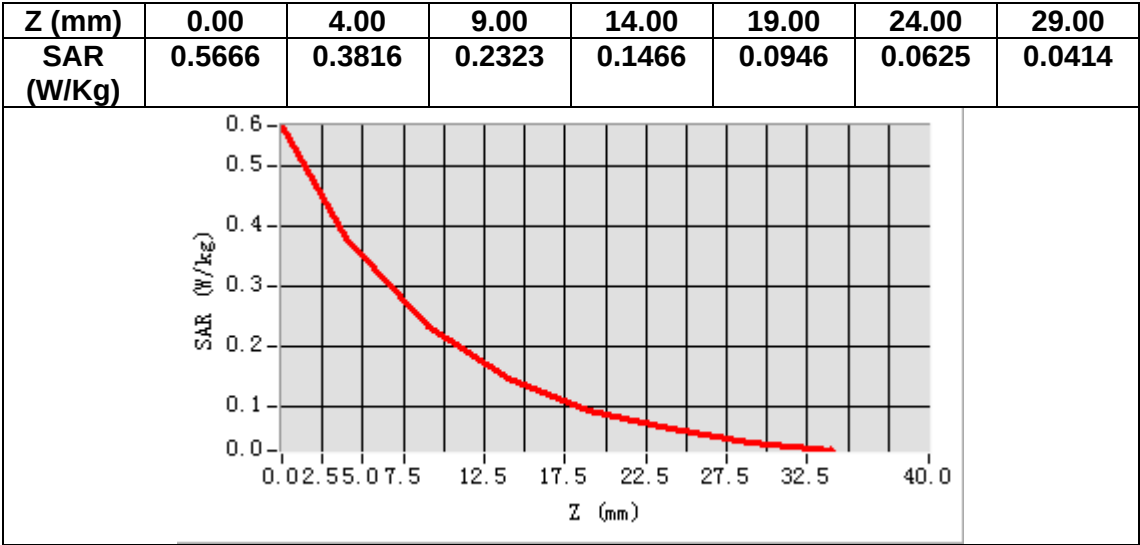

MEASUREMENT 11

Date of measurement: 8/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11b ISM</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11b (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.98</u>


B. SAR Measurement Results

Frequency (MHz)	2437.000000
Relative permittivity (real part)	38.692596
Relative permittivity (imaginary part)	13.366911
Conductivity (S/m)	1.809731
Variation (%)	0.350000

SURFACE SAR

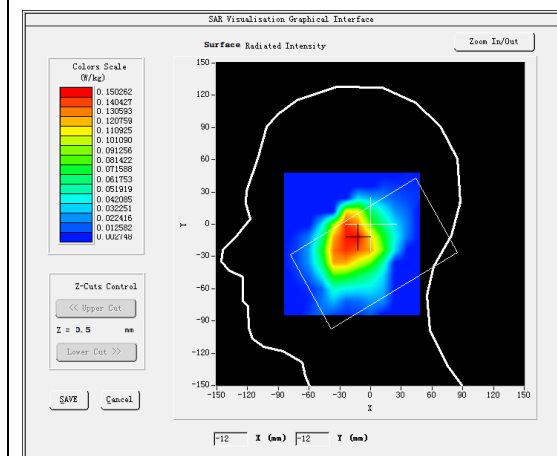



VOLUME SAR

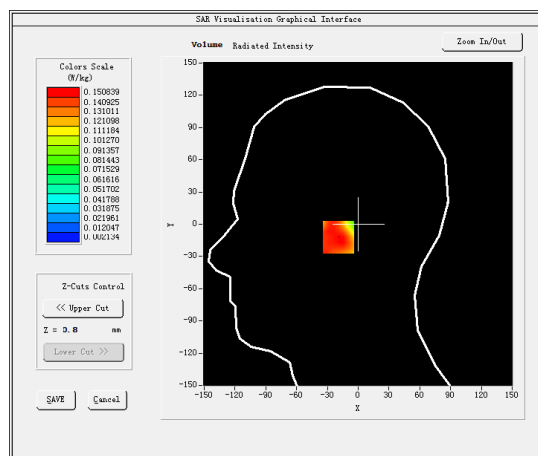

Maximum location: X=-15.00, Y=-12.00

SAR Peak: 0.24 W/kg

SAR 10g (W/Kg)	0.084555
SAR 1g (W/Kg)	0.146818

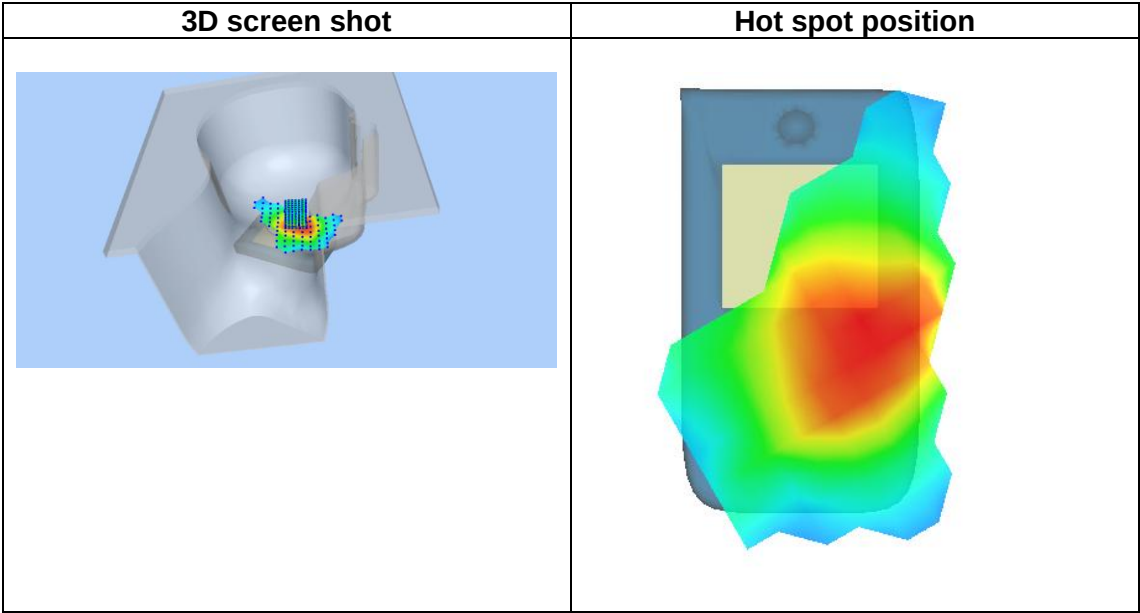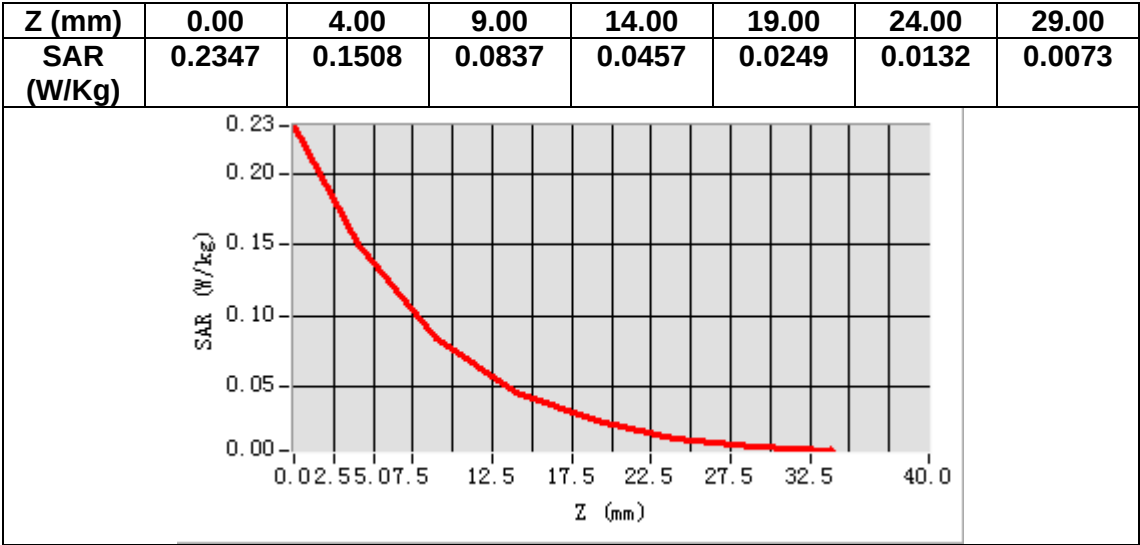

MEASUREMENT 12

Date of measurement: 8/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11b ISM</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11b (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.98</u>


B. SAR Measurement Results

Frequency (MHz)	2437.000000
Relative permittivity (real part)	38.692596
Relative permittivity (imaginary part)	13.366911
Conductivity (S/m)	1.809731
Variation (%)	-0.830000

SURFACE SAR

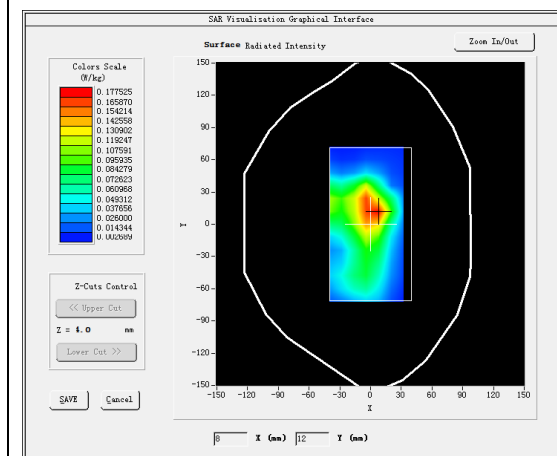



VOLUME SAR

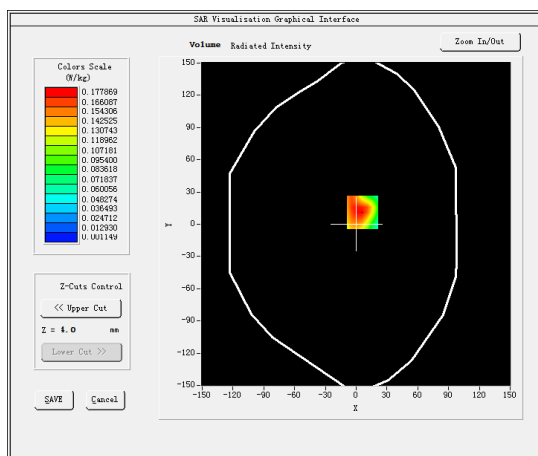

Maximum location: X=6.00, Y=11.00

SAR Peak: 0.31 W/kg

SAR 10g (W/Kg)	0.089917
SAR 1g (W/Kg)	0.173868

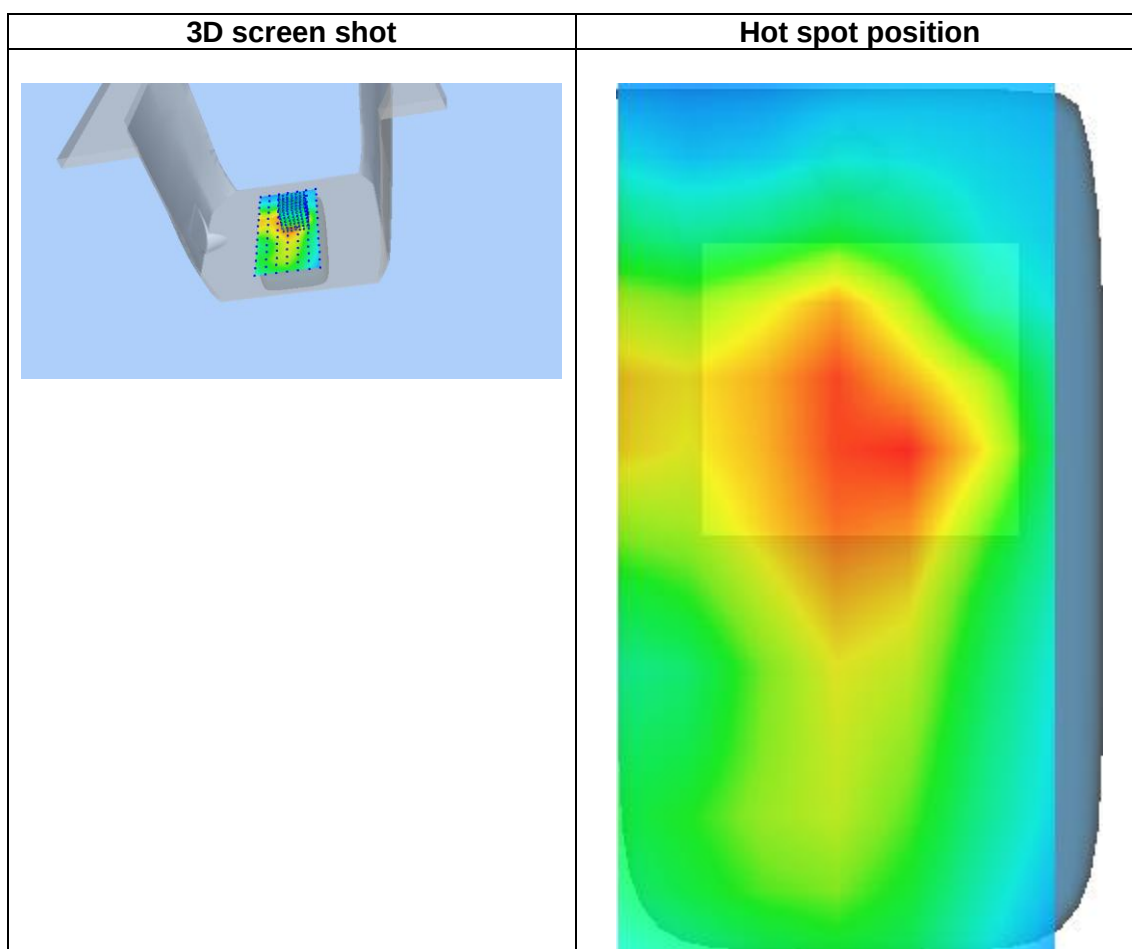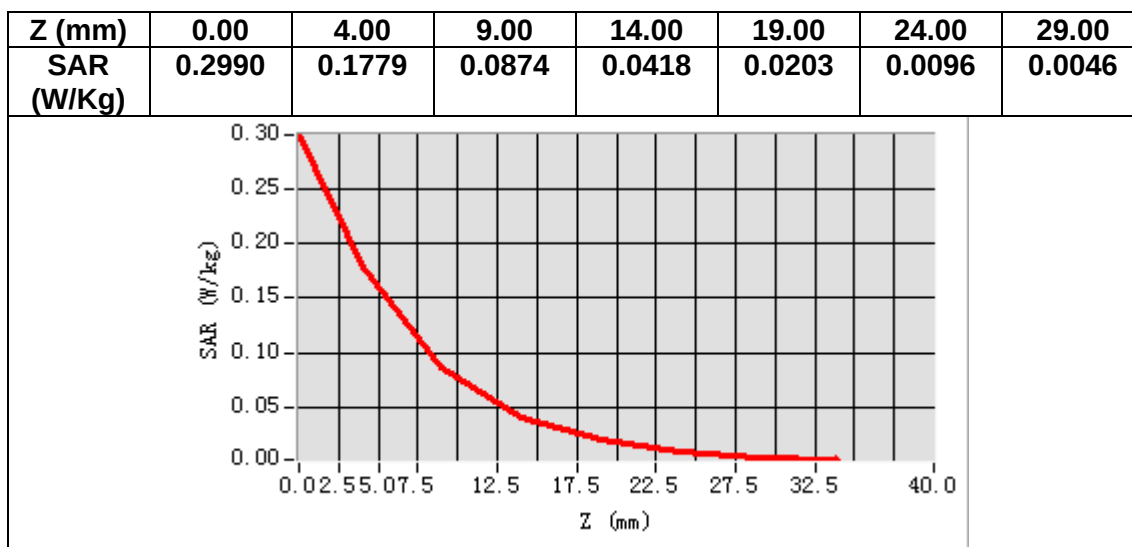

MEASUREMENT 13

Date of measurement: 13/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 2</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.91</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.784592
Relative permittivity (imaginary part)	13.447636
Conductivity (S/m)	1.404531
Variation (%)	-0.590000

SURFACE SAR

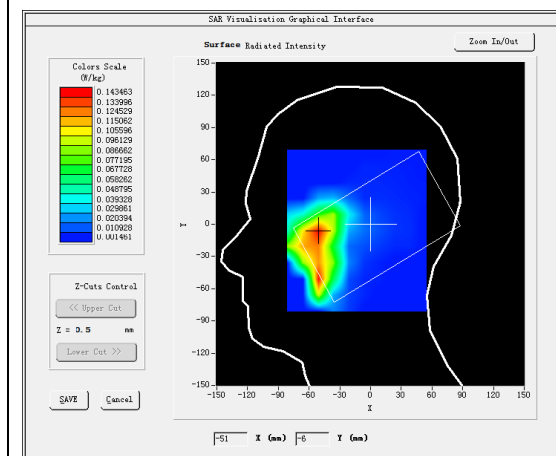



VOLUME SAR

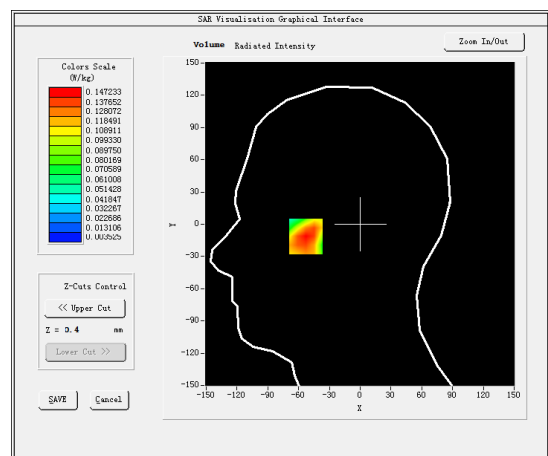

Maximum location: X=-53.00, Y=-9.00

SAR Peak: 0.21 W/kg

SAR 10g (W/Kg)	0.085359
SAR 1g (W/Kg)	0.141771

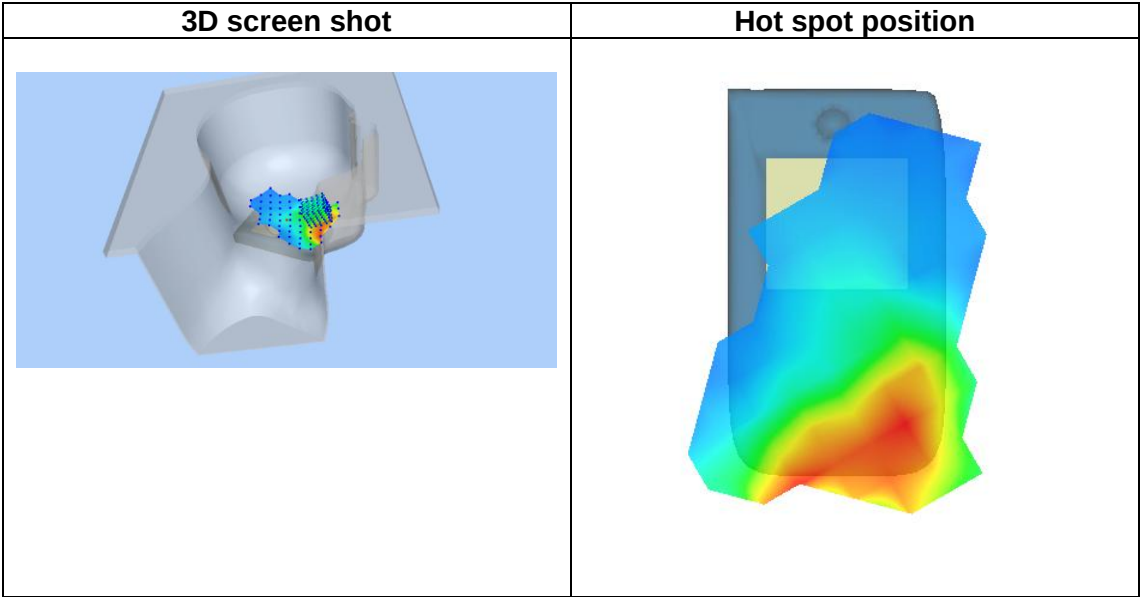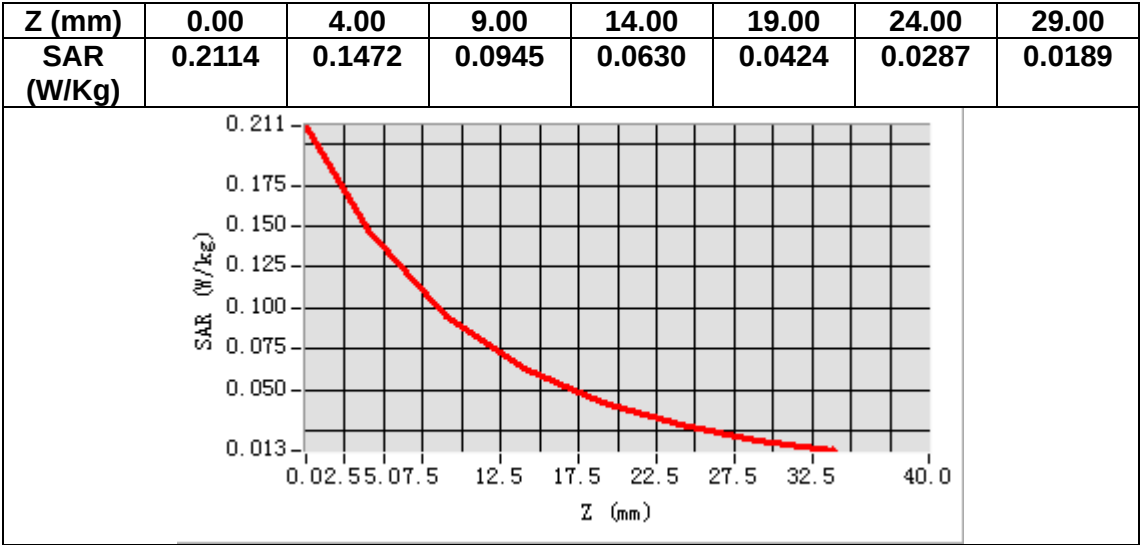

MEASUREMENT 14

Date of measurement: 13/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 2</u>
<u>Channels</u>	<u>Low</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.91</u>


B. SAR Measurement Results

Frequency (MHz)	1860.000000
Relative permittivity (real part)	38.873590
Relative permittivity (imaginary part)	13.494136
Conductivity (S/m)	1.394394
Variation (%)	0.800000

SURFACE SAR

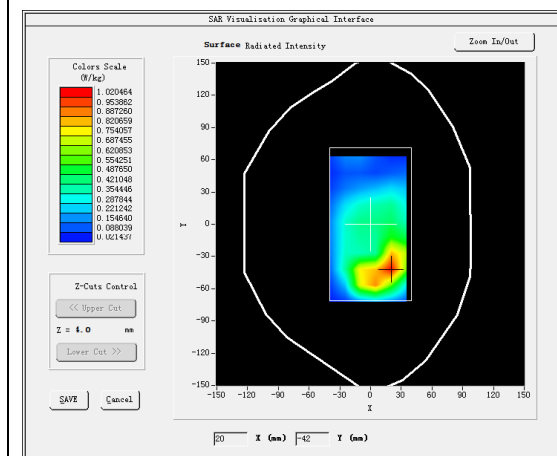



VOLUME SAR

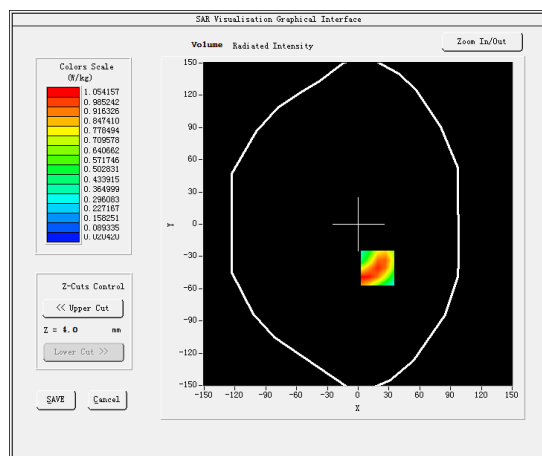

Maximum location: X=19.00, Y=-41.00

SAR Peak: 1.60 W/kg

SAR 10g (W/Kg)	0.549343
SAR 1g (W/Kg)	0.978641

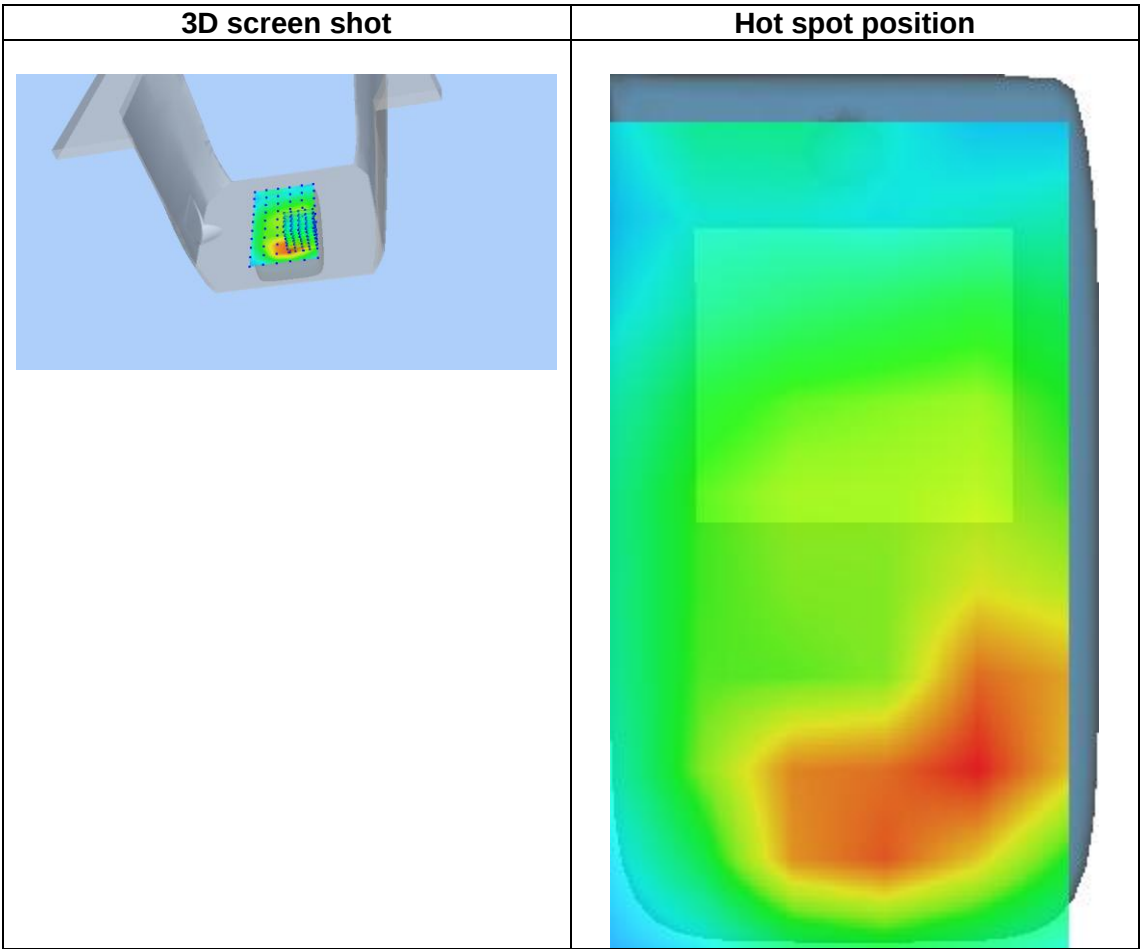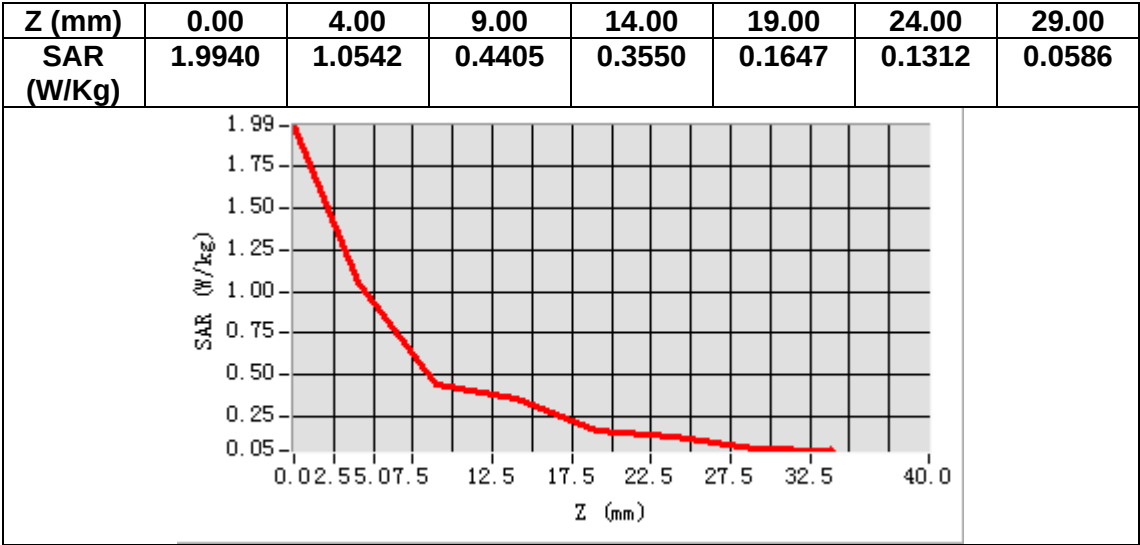

MEASUREMENT 15

Date of measurement: 23/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 4</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.73</u>


B. SAR Measurement Results

Frequency (MHz)	1732.500000
Relative permittivity (real part)	39.282204
Relative permittivity (imaginary part)	13.635870
Conductivity (S/m)	1.312452
Variation (%)	1.230000

SURFACE SAR

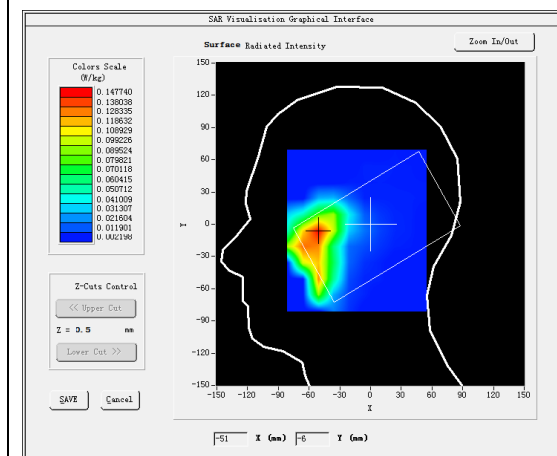



VOLUME SAR

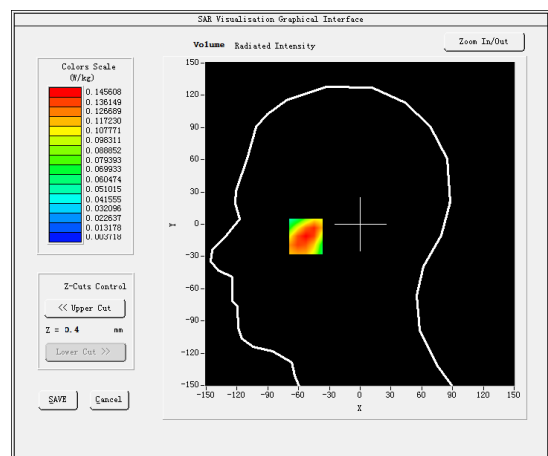

Maximum location: X=-53.00, Y=-9.00

SAR Peak: 0.20 W/kg

SAR 10g (W/Kg)	0.087254
SAR 1g (W/Kg)	0.137516

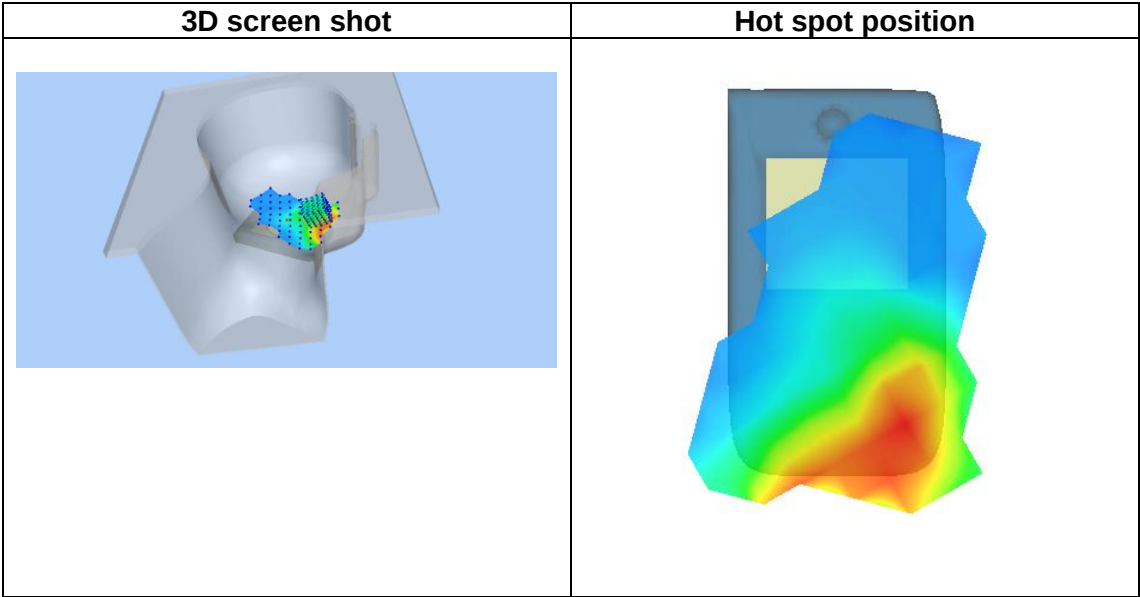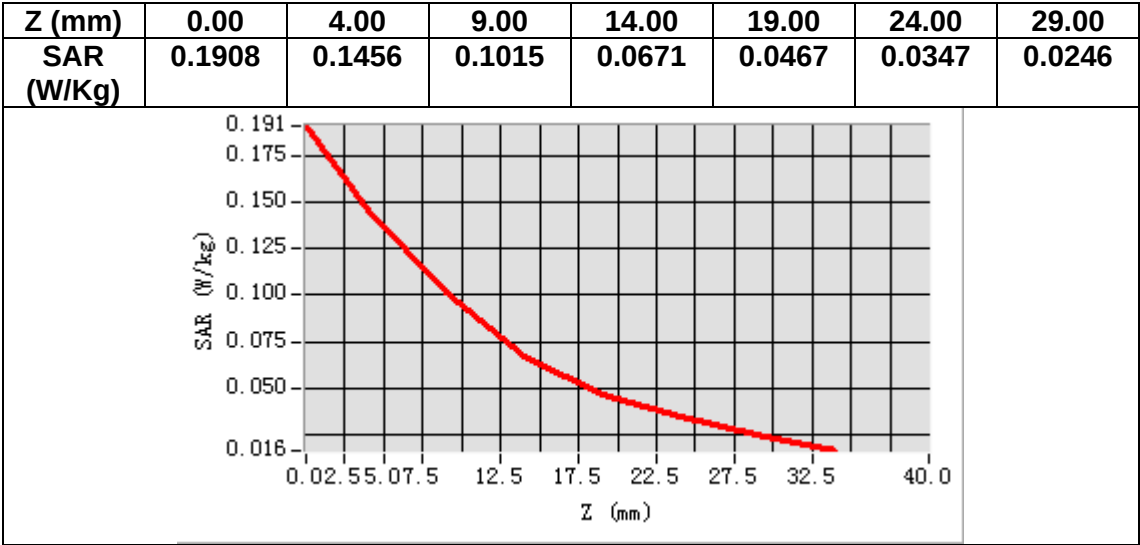

MEASUREMENT 16


Date of measurement: 23/3/2023

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 4</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.73</u>

B. SAR Measurement Results



Frequency (MHz)	1732.500000
Relative permittivity (real part)	39.282204
Relative permittivity (imaginary part)	13.635870
Conductivity (S/m)	1.312452
Variation (%)	-1.820000

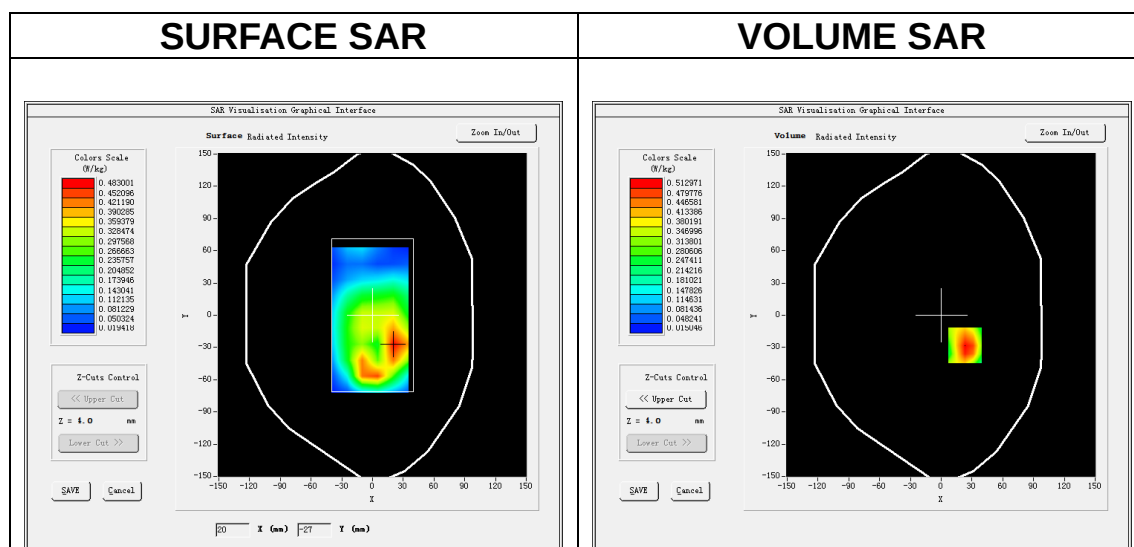

Maximum location: X=23.00, Y=-28.00

SAR Peak: 0.79 W/kg

SAR 10g (W/Kg)	0.279388
SAR 1g (W/Kg)	0.497846

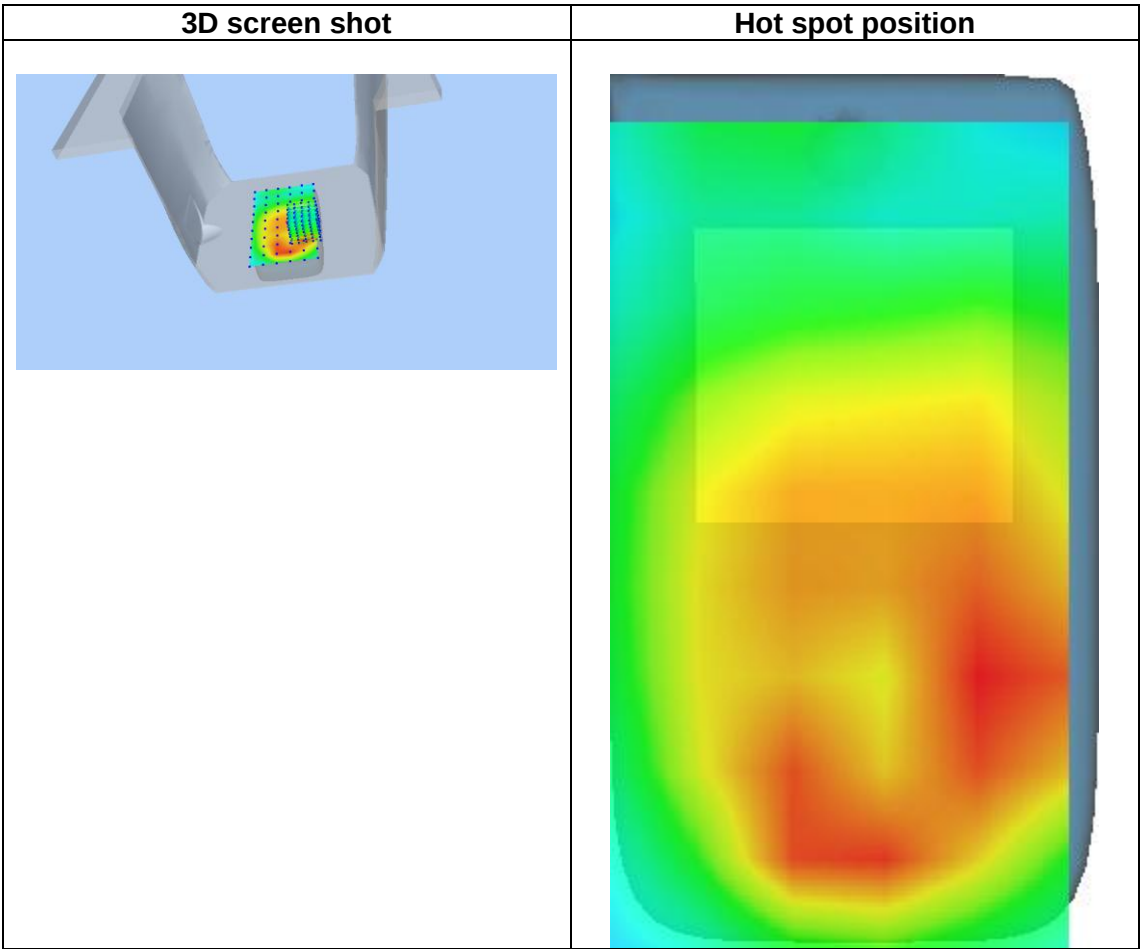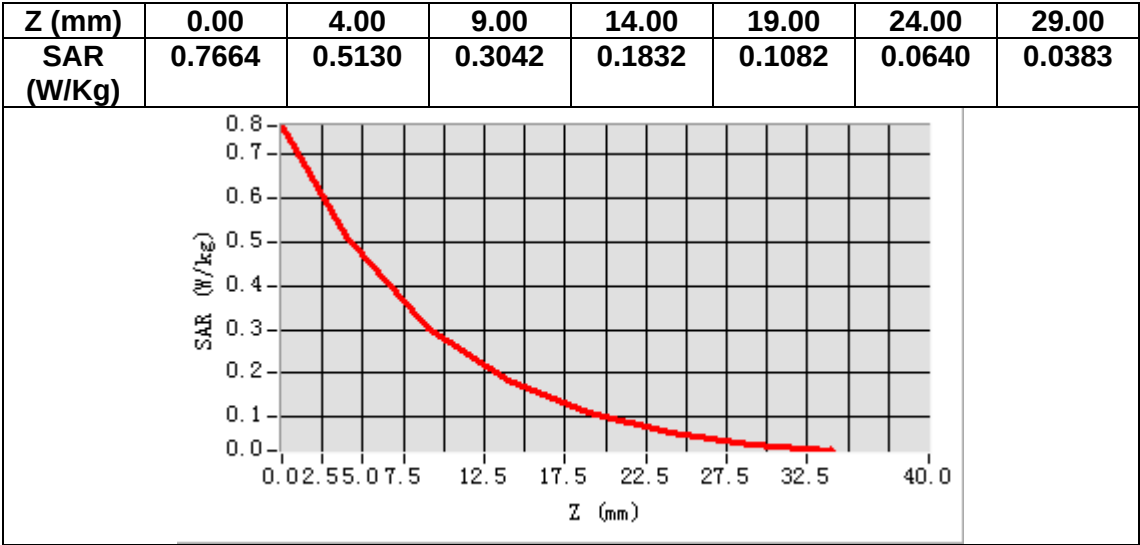

MEASUREMENT 17

Date of measurement: 14/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 5</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.50</u>


B. SAR Measurement Results

Frequency (MHz)	836.500000
Relative permittivity (real part)	41.211826
Relative permittivity (imaginary part)	19.944342
Conductivity (S/m)	0.926858
Variation (%)	0.020000

SURFACE SAR

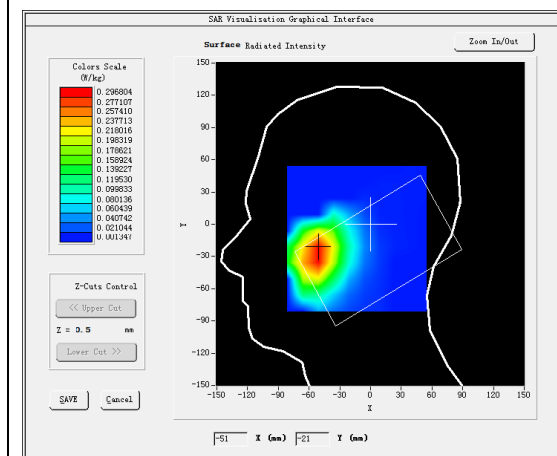



VOLUME SAR

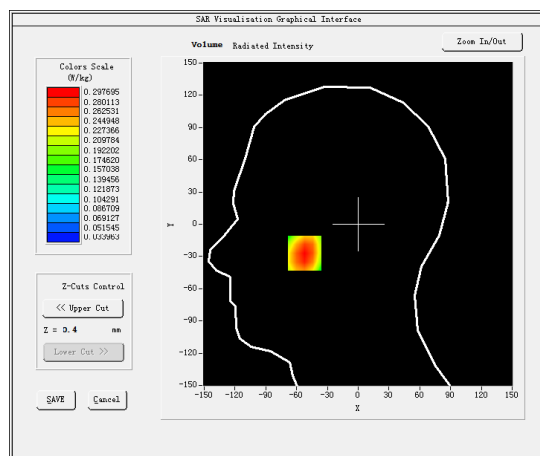

Maximum location: X=-52.00, Y=-27.00

SAR Peak: 0.35 W/kg

SAR 10g (W/Kg)	0.217254
SAR 1g (W/Kg)	0.293210

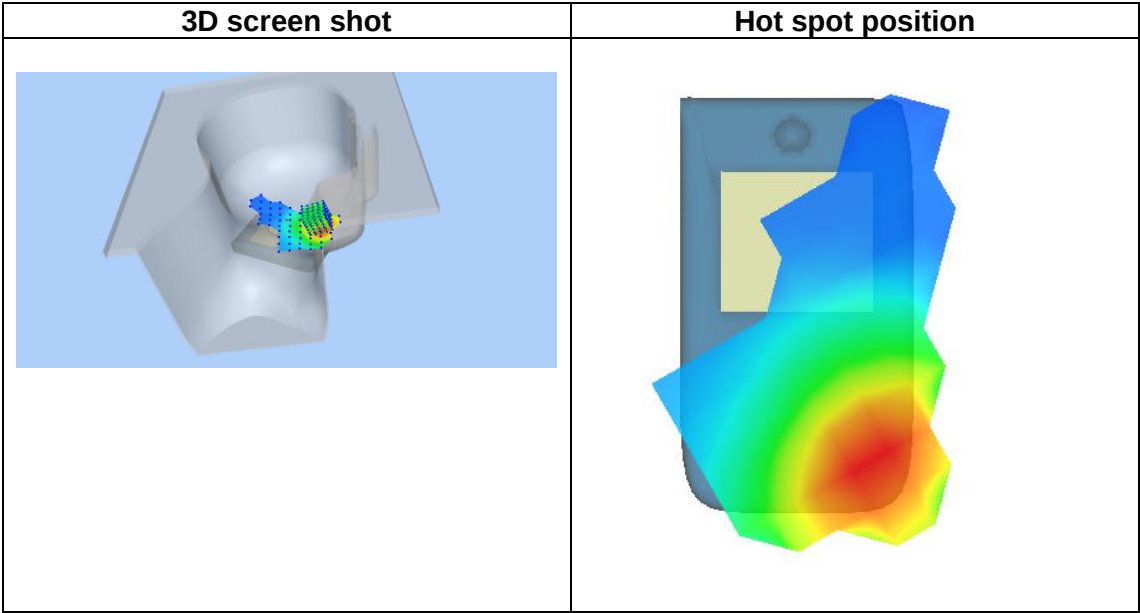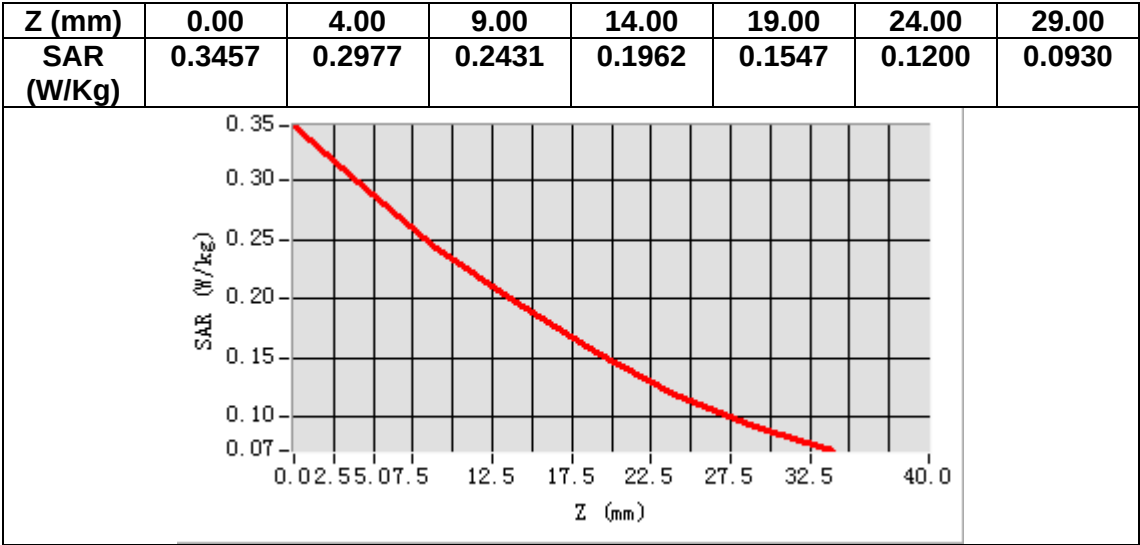

MEASUREMENT 18

Date of measurement: 14/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 5</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.50</u>


B. SAR Measurement Results

Frequency (MHz)	836.500000
Relative permittivity (real part)	41.211826
Relative permittivity (imaginary part)	19.944342
Conductivity (S/m)	0.926858
Variation (%)	-0.660000

SURFACE SAR

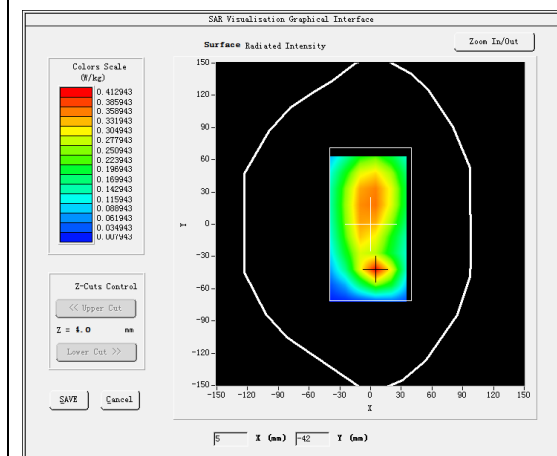



VOLUME SAR

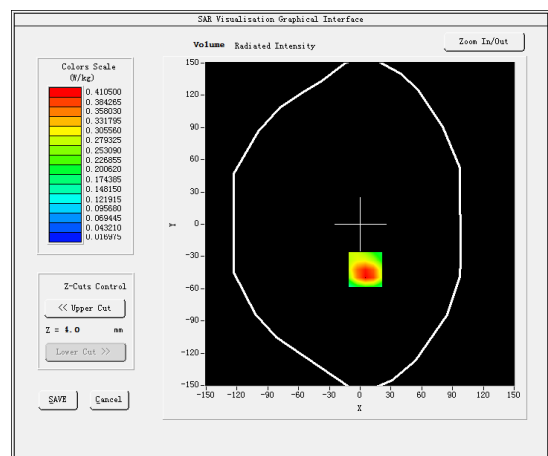

Maximum location: X=5.00, Y=-42.00

SAR Peak: 0.65 W/kg

SAR 10g (W/Kg)	0.231461
SAR 1g (W/Kg)	0.415218

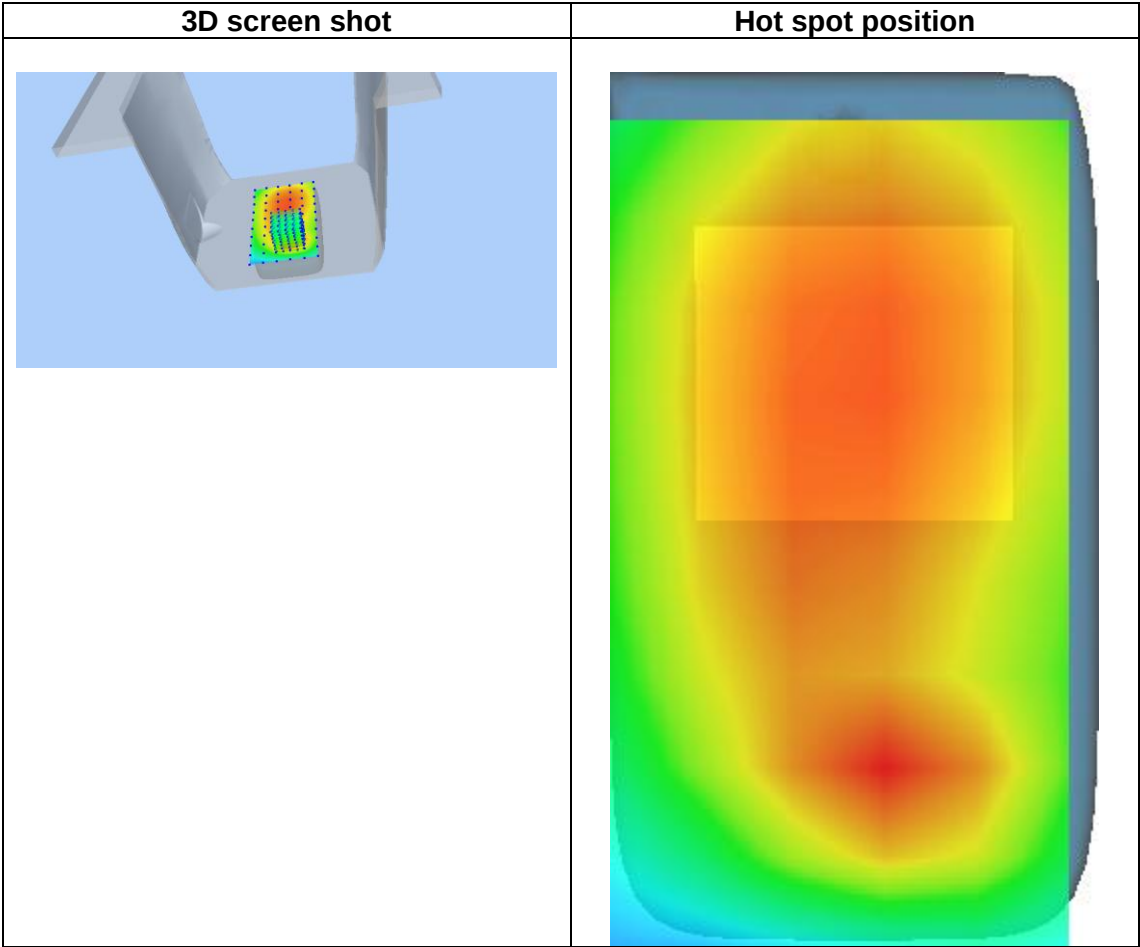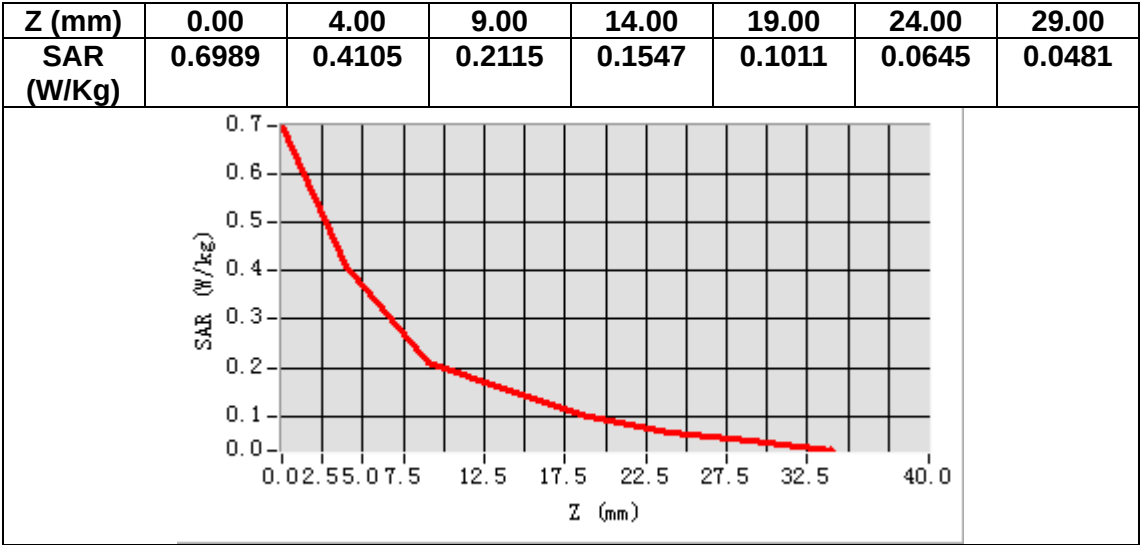

MEASUREMENT 19

Date of measurement: 10/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 7</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.87</u>


B. SAR Measurement Results

Frequency (MHz)	2535.000000
Relative permittivity (real part)	38.381603
Relative permittivity (imaginary part)	13.582723
Conductivity (S/m)	1.912900
Variation (%)	-0.940000

SURFACE SAR

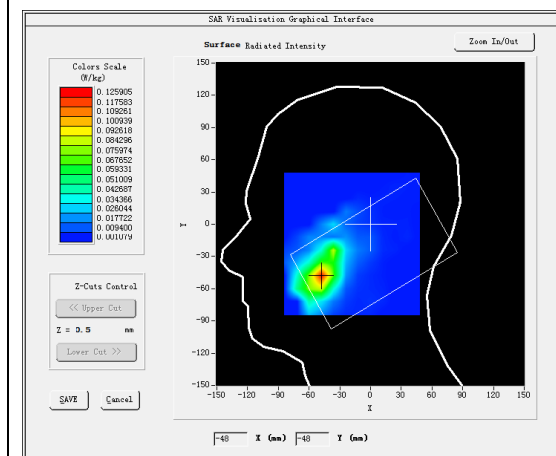



VOLUME SAR

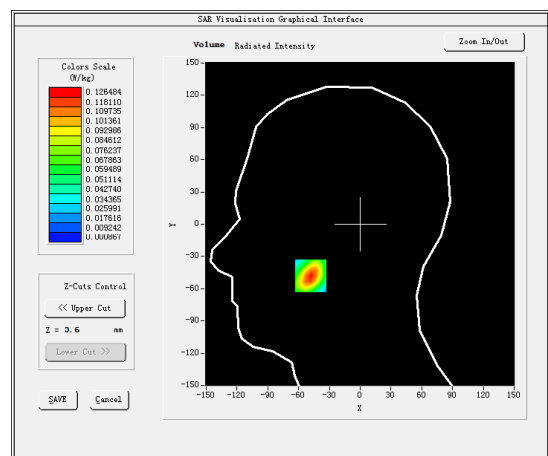

Maximum location: X=-48.00, Y=-48.00

SAR Peak: 0.20 W/kg

SAR 10g (W/Kg)	0.056824
SAR 1g (W/Kg)	0.115102

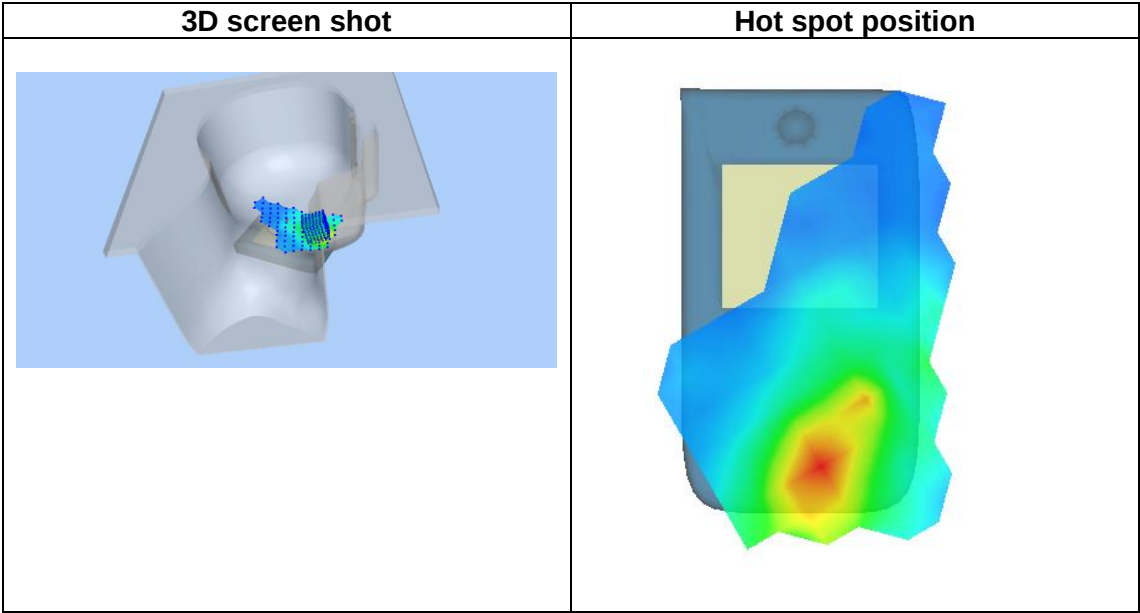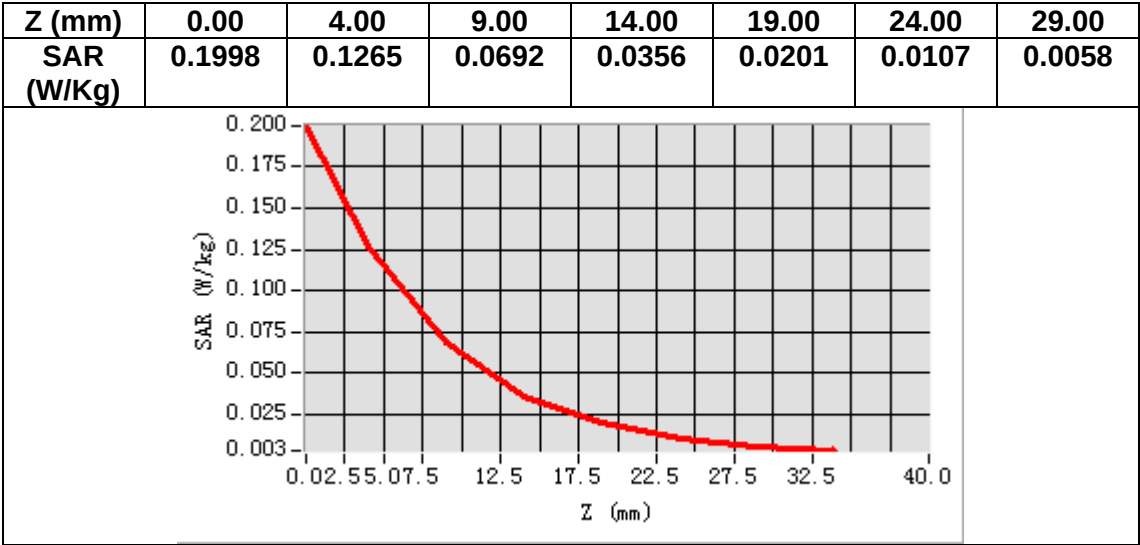

MEASUREMENT 20

Date of measurement: 10/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 7</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.87</u>


B. SAR Measurement Results

Frequency (MHz)	2535.000000
Relative permittivity (real part)	38.381603
Relative permittivity (imaginary part)	13.582723
Conductivity (S/m)	1.912900
Variation (%)	0.790000

SURFACE SAR

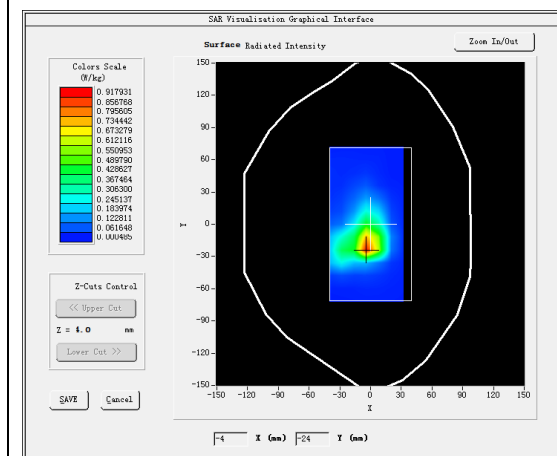



VOLUME SAR

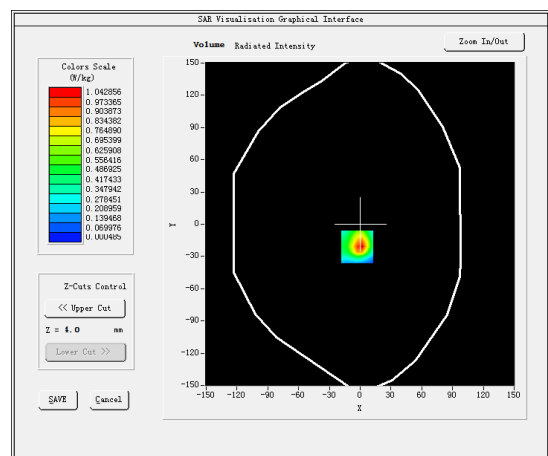

Maximum location: X=-3.00, Y=-21.00

SAR Peak: 2.25 W/kg

SAR 10g (W/Kg)	0.339427
SAR 1g (W/Kg)	0.980735

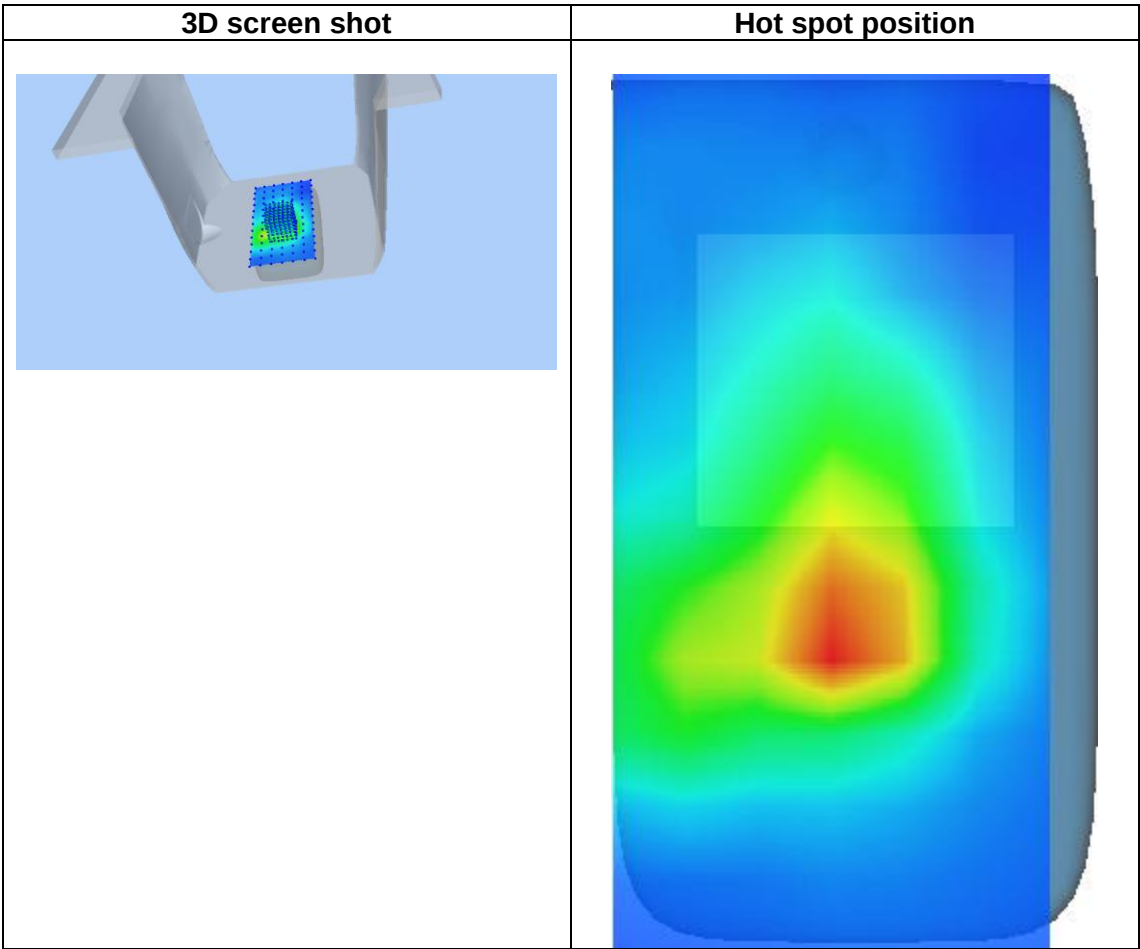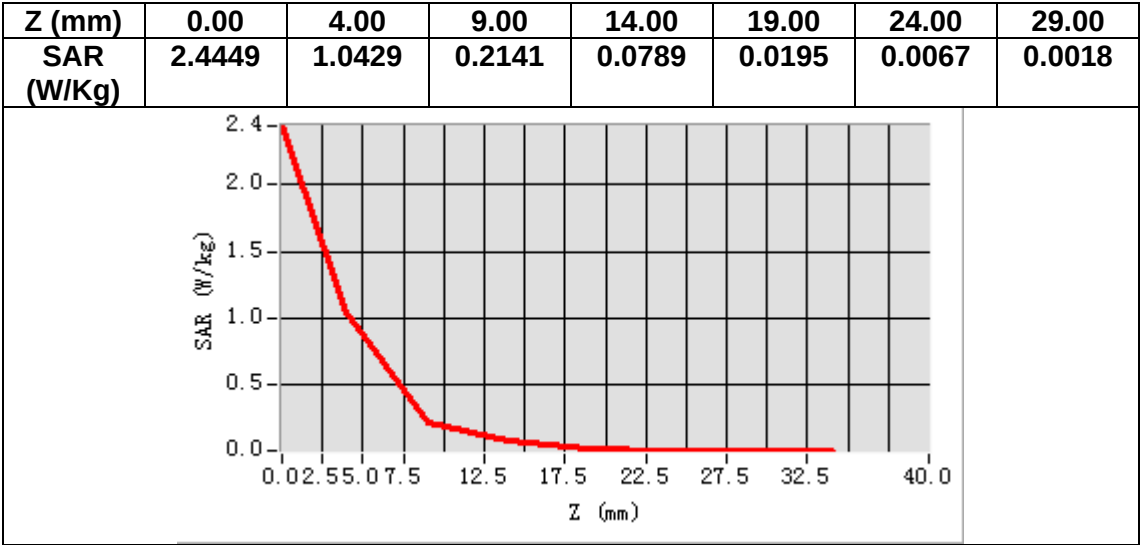

MEASUREMENT 21

Date of measurement: 17/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 12</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.49</u>


B. SAR Measurement Results

Frequency (MHz)	707.500000
Relative permittivity (real part)	41.100468
Relative permittivity (imaginary part)	21.600569
Conductivity (S/m)	0.849022
Variation (%)	1.230000

SURFACE SAR

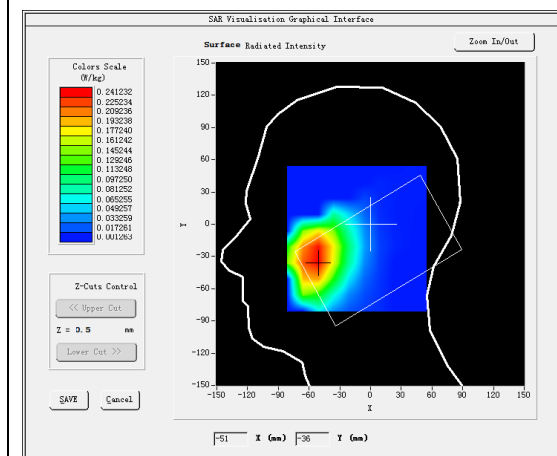



VOLUME SAR

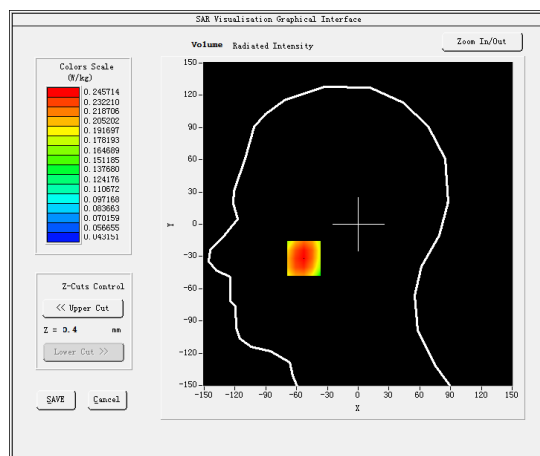

Maximum location: X=-53.00, Y=-32.00

SAR Peak: 0.28 W/kg

SAR 10g (W/Kg)	0.190286
SAR 1g (W/Kg)	0.238654

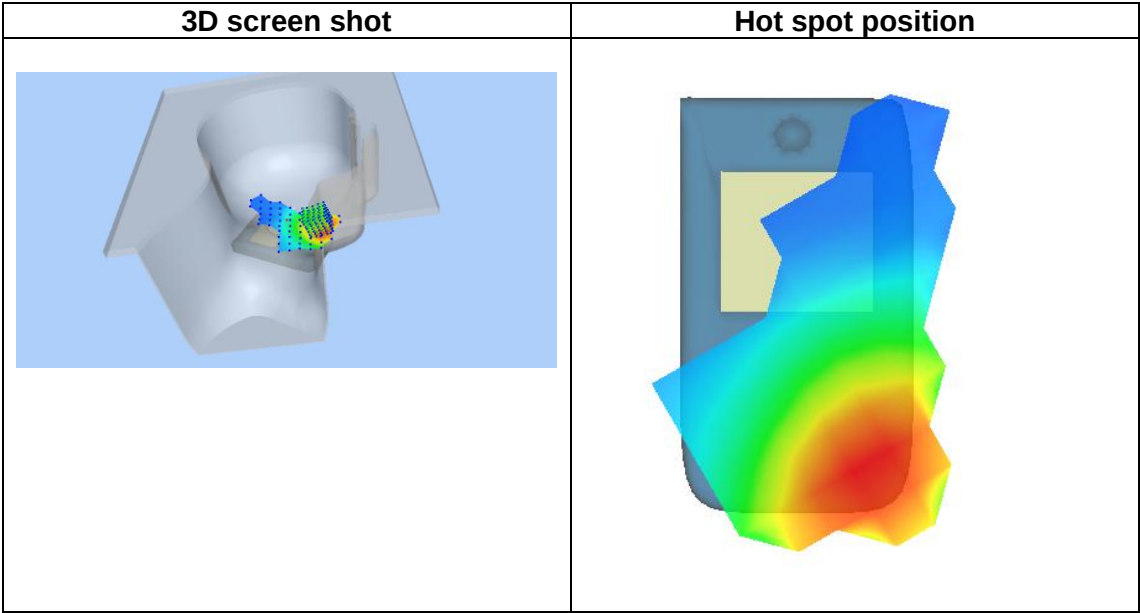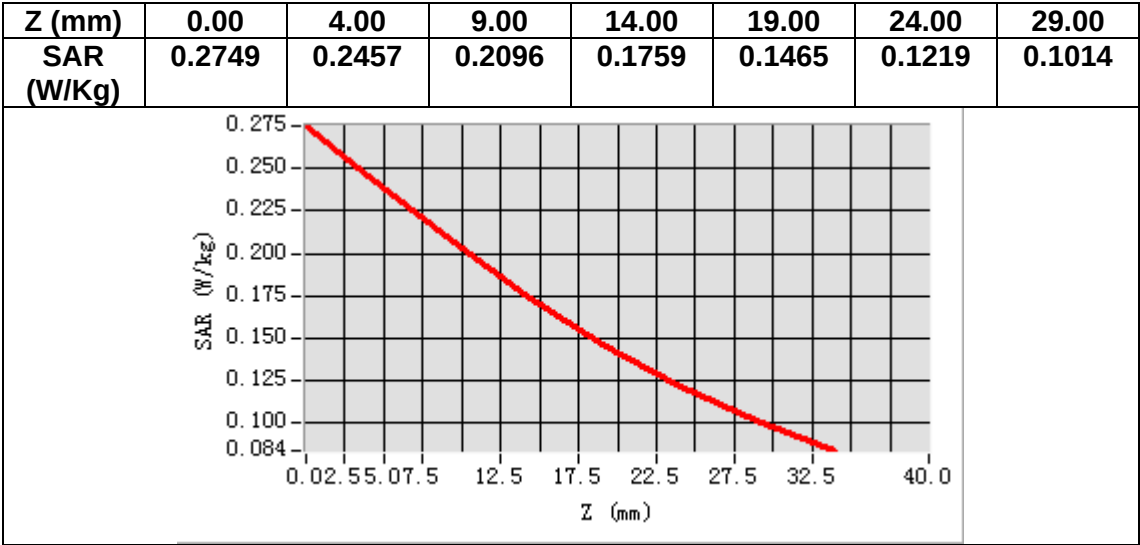

MEASUREMENT 22


Date of measurement: 17/3/2023

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 12</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.49</u>

B. SAR Measurement Results



Frequency (MHz)	707.500000
Relative permittivity (real part)	41.100468
Relative permittivity (imaginary part)	21.600569
Conductivity (S/m)	0.849022
Variation (%)	-0.250000

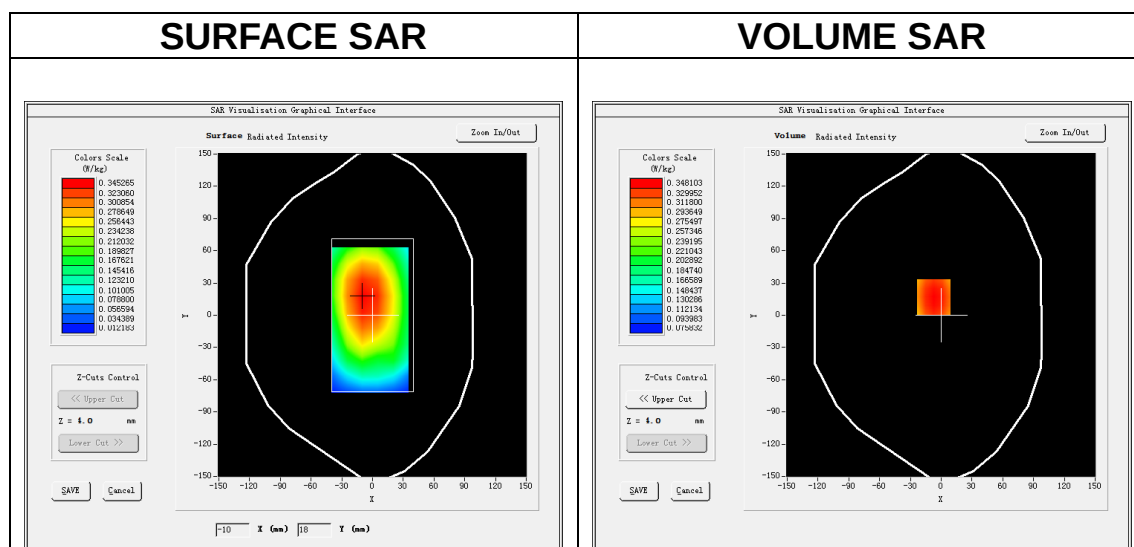

Maximum location: X=-7.00, Y=17.00

SAR Peak: 0.41 W/kg

SAR 10g (W/Kg)	0.267911
SAR 1g (W/Kg)	0.338569

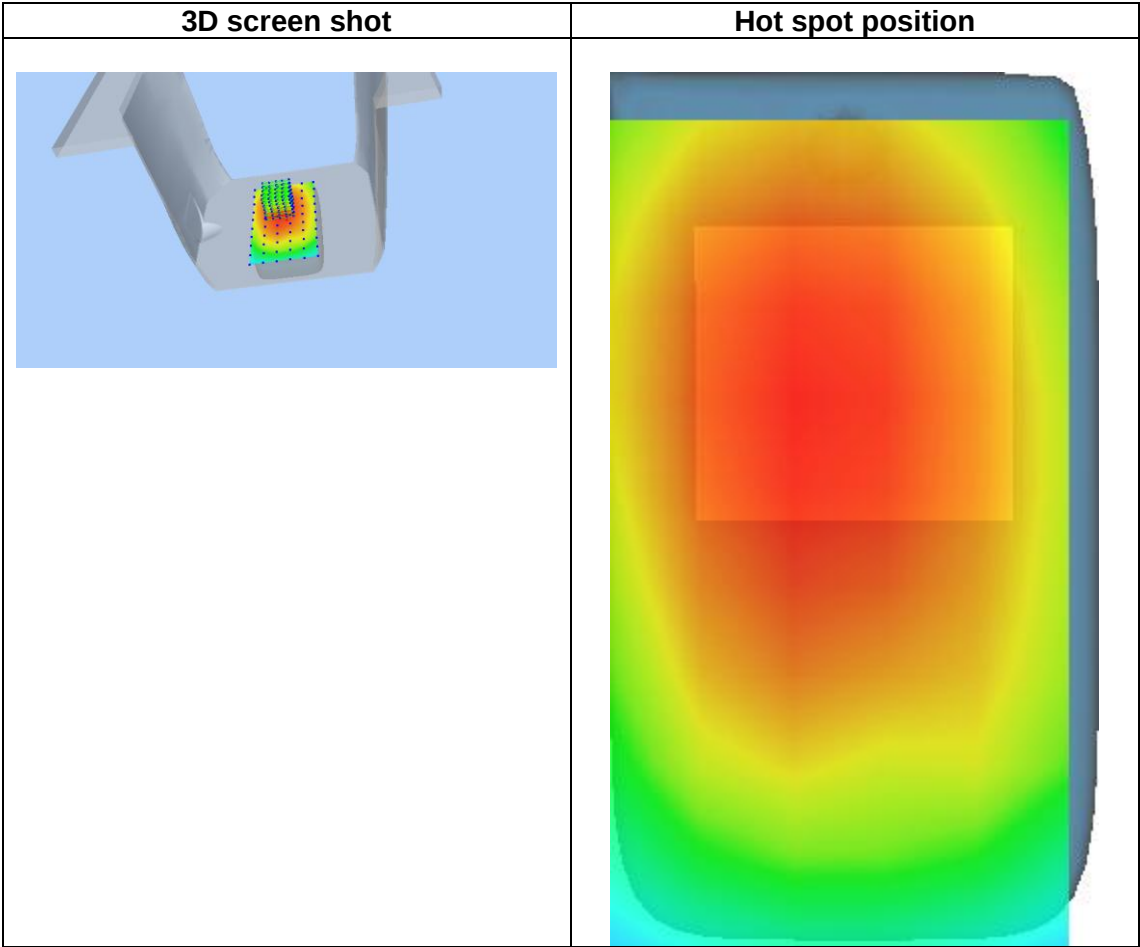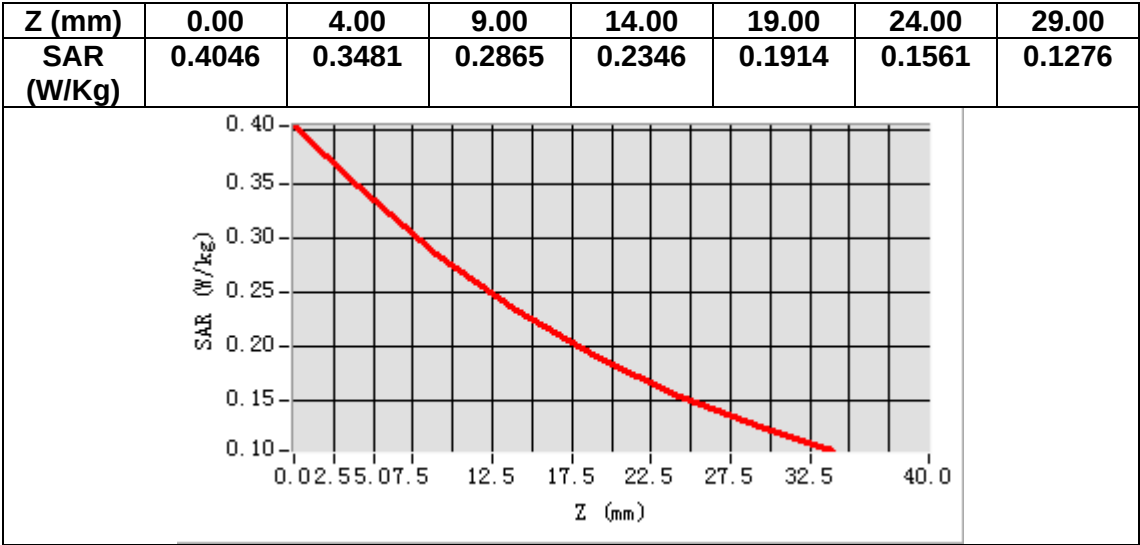

MEASUREMENT 23

Date of measurement: 14/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>FDDBand26A</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.50</u>


B. SAR Measurement Results

Frequency (MHz)	819.000000
Relative permittivity (real part)	41.478476
Relative permittivity (imaginary part)	19.928141
Conductivity (S/m)	0.906730
Variation (%)	0.090000

SURFACE SAR

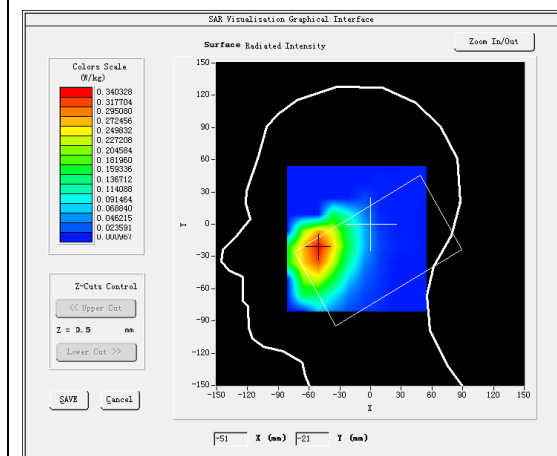



VOLUME SAR

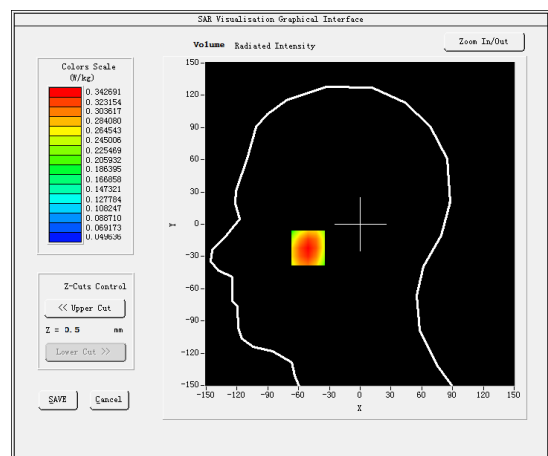

Maximum location: X=-51.00, Y=-22.00

SAR Peak: 0.40 W/kg

SAR 10g (W/Kg)	0.258154
SAR 1g (W/Kg)	0.338996

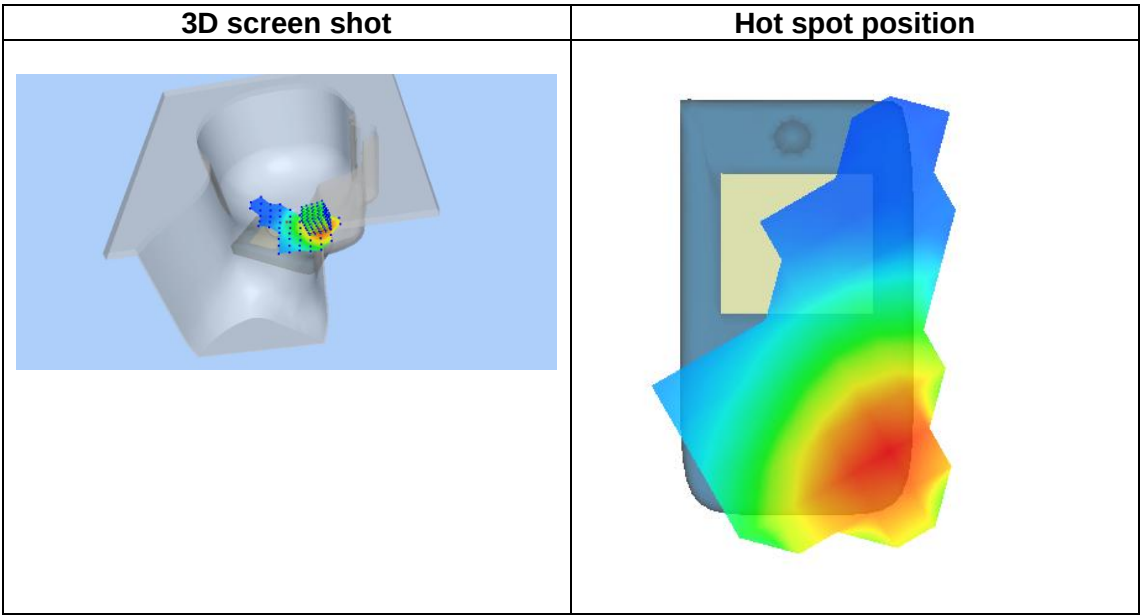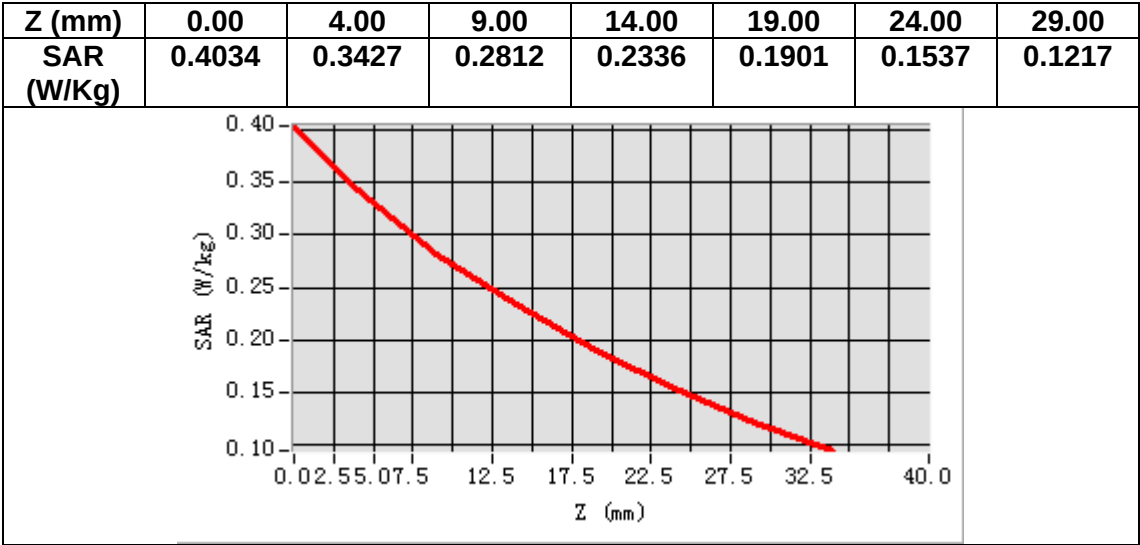

MEASUREMENT 24

Date of measurement: 14/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>FDDBand26A</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.50</u>


B. SAR Measurement Results

Frequency (MHz)	819.000000
Relative permittivity (real part)	41.478476
Relative permittivity (imaginary part)	19.928141
Conductivity (S/m)	0.906730
Variation (%)	-0.110000

SURFACE SAR

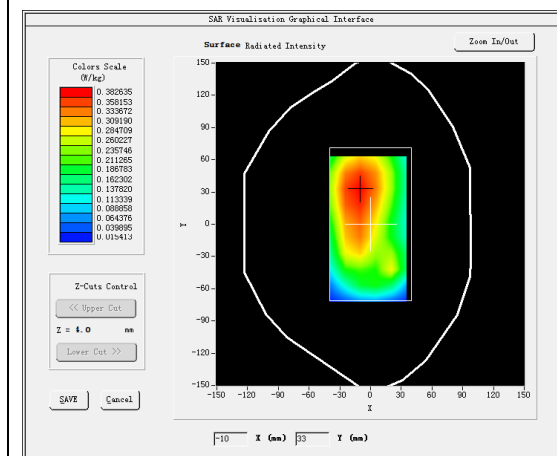



VOLUME SAR

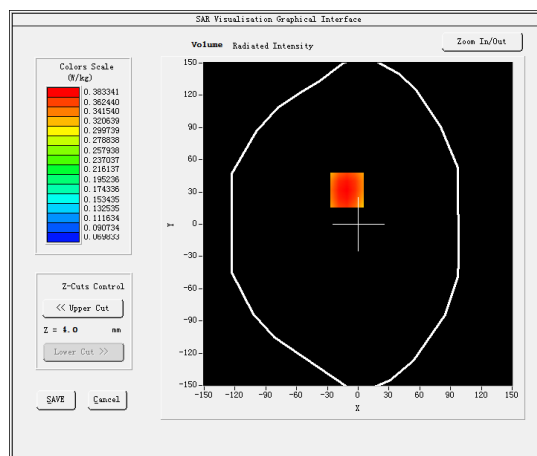

Maximum location: X=-11.00, Y=32.00

SAR Peak: 0.46 W/kg

SAR 10g (W/Kg)	0.288487
SAR 1g (W/Kg)	0.380166

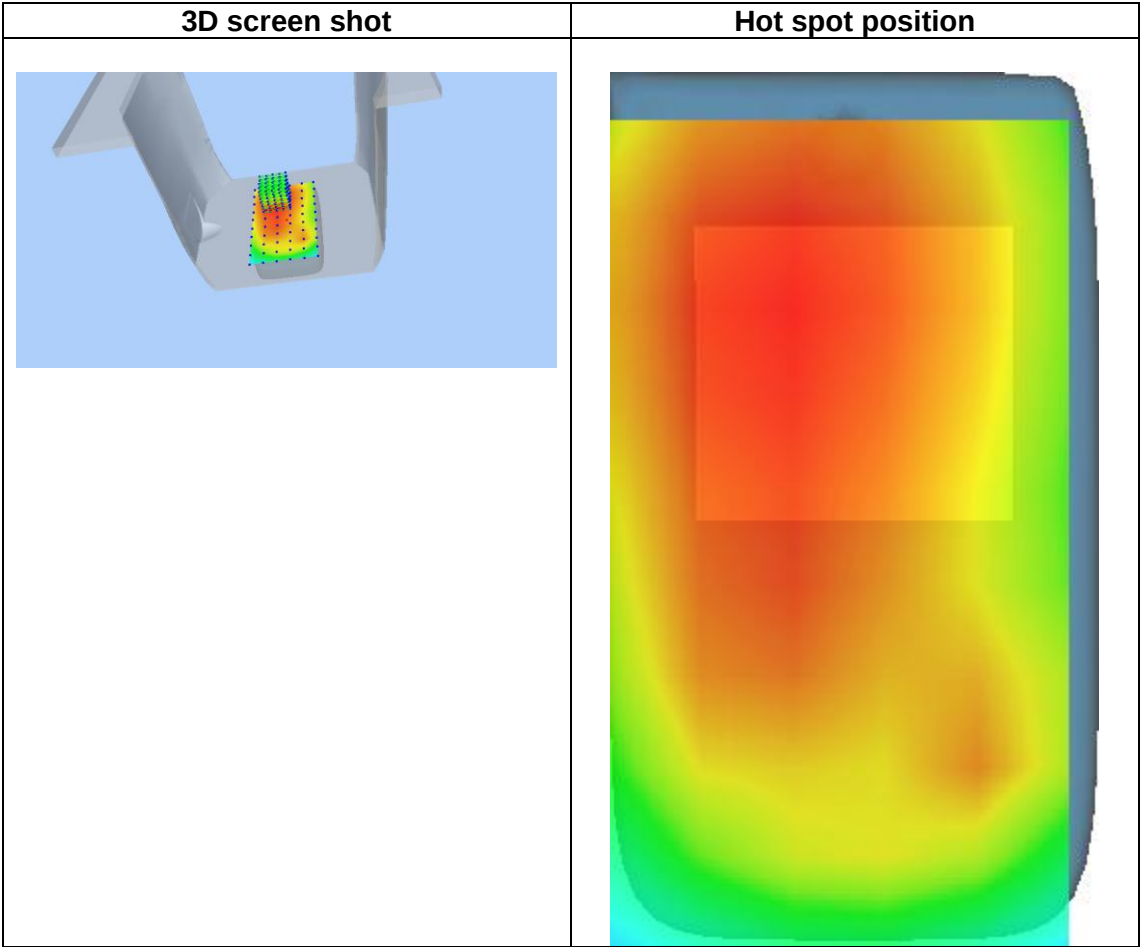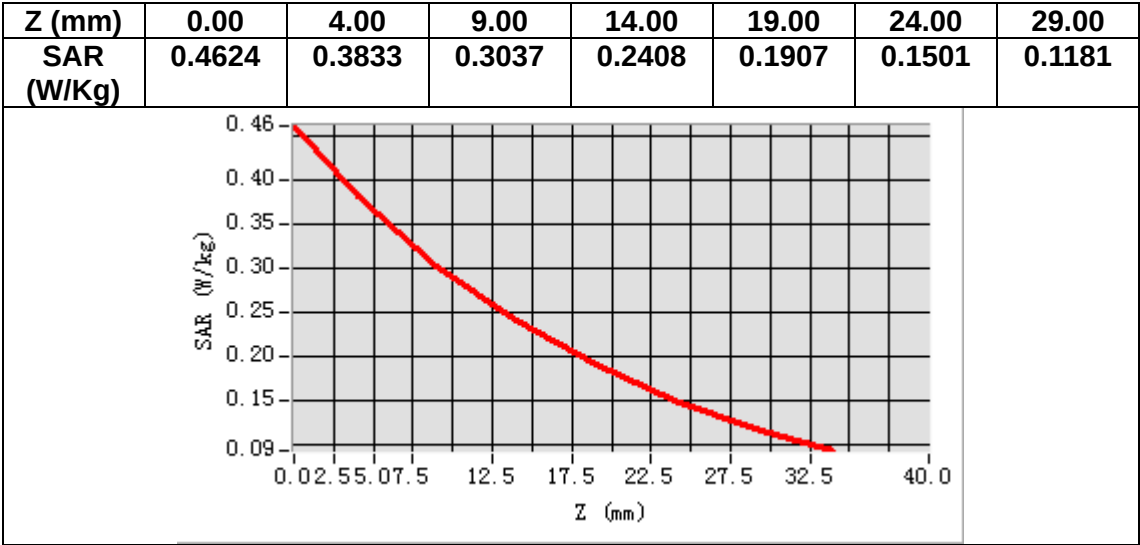

MEASUREMENT 25

Date of measurement: 14/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>FDDBand26B</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>Crest factor: 1.0</u>
<u>ConvF</u>	<u>1.50</u>


B. SAR Measurement Results

Frequency (MHz)	831.500000
Relative permittivity (real part)	41.262527
Relative permittivity (imaginary part)	19.934092
Conductivity (S/m)	0.920844
Variation (%)	-0.210000

SURFACE SAR

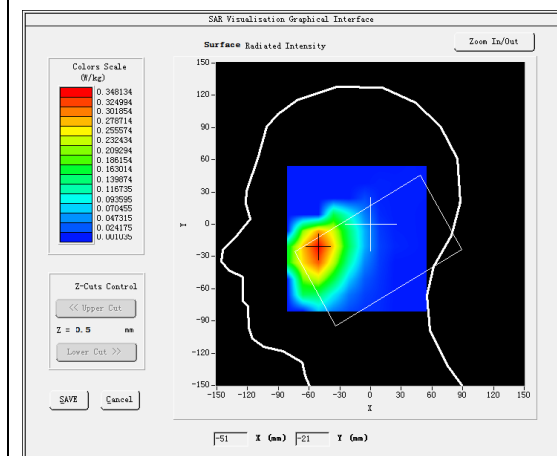



VOLUME SAR

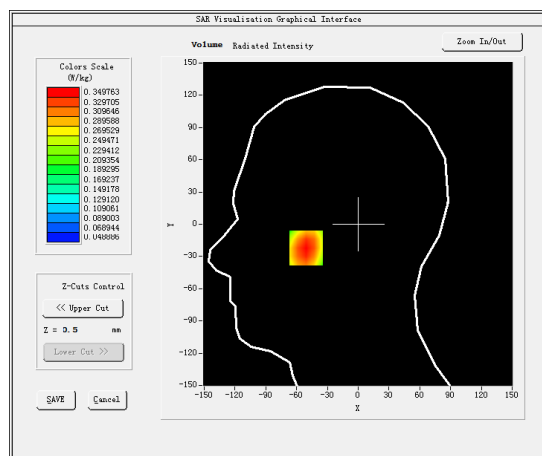

Maximum location: X=-51.00, Y=-22.00

SAR Peak: 0.41 W/kg

SAR 10g (W/Kg)	0.261591
SAR 1g (W/Kg)	0.345732

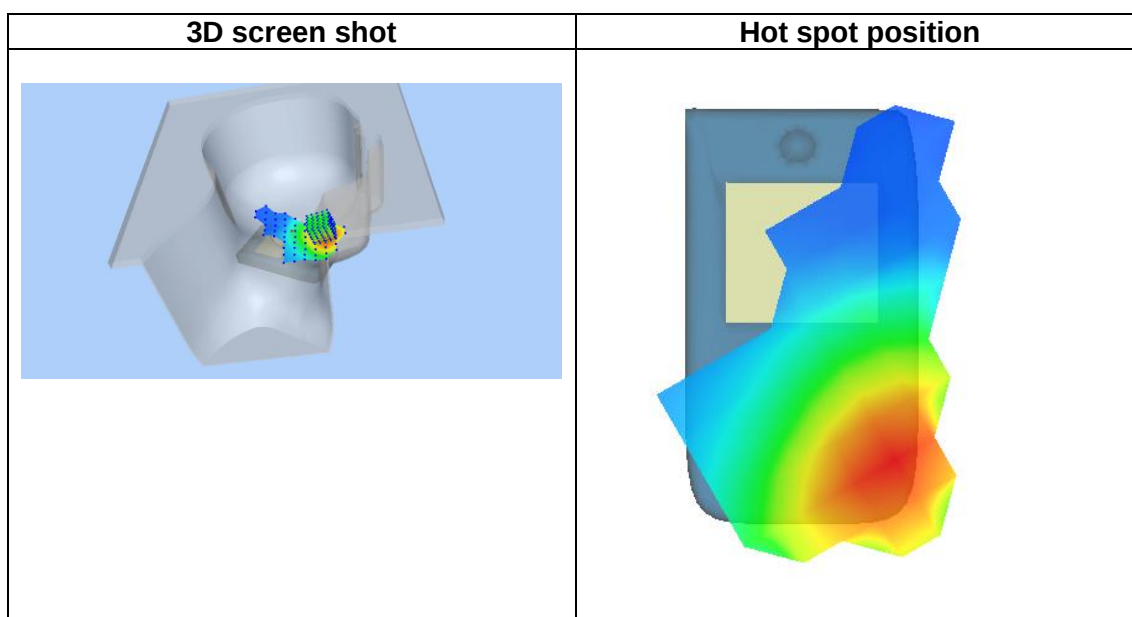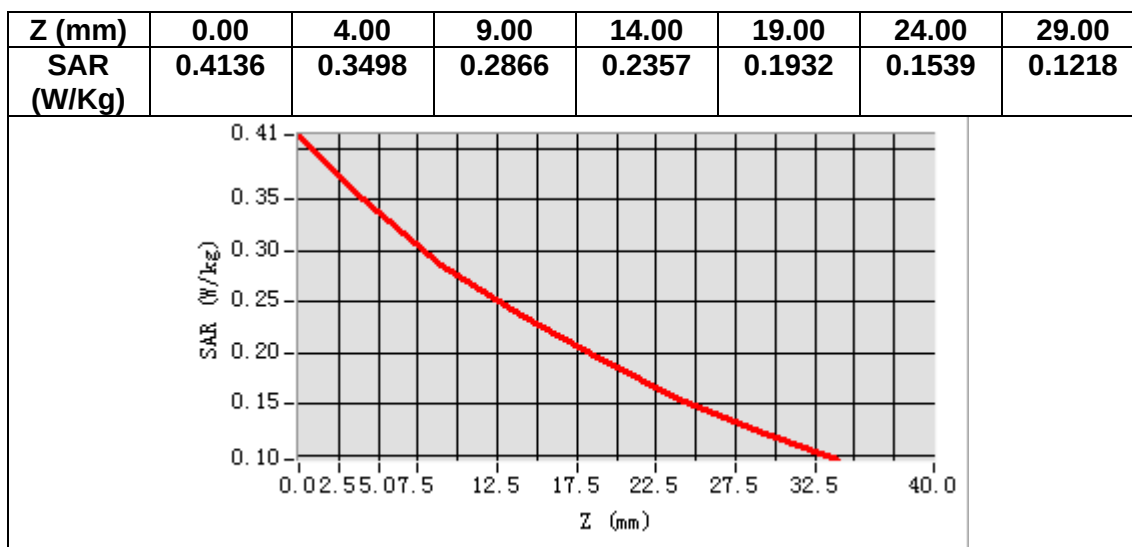

MEASUREMENT 26

Date of measurement: 14/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>FDDBand26B</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.50</u>


B. SAR Measurement Results

Frequency (MHz)	831.500000
Relative permittivity (real part)	41.262527
Relative permittivity (imaginary part)	19.934092
Conductivity (S/m)	0.920844
Variation (%)	-0.270000

SURFACE SAR

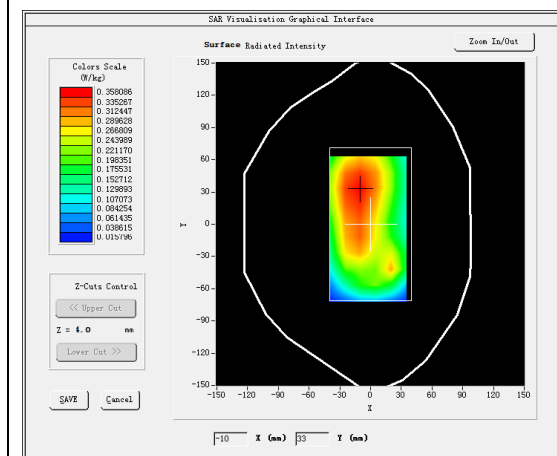



VOLUME SAR

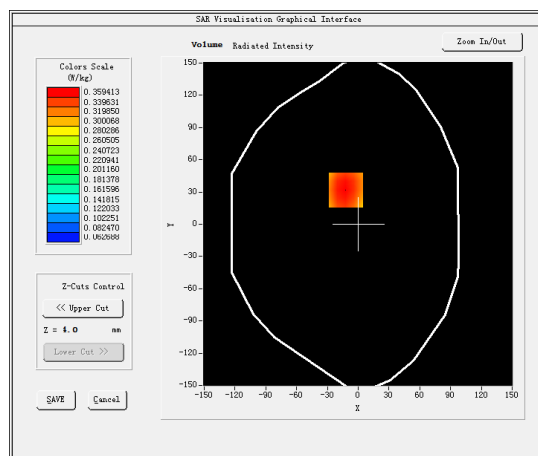

Maximum location: X=-12.00, Y=32.00

SAR Peak: 0.44 W/kg

SAR 10g (W/Kg)	0.268401
SAR 1g (W/Kg)	0.356587

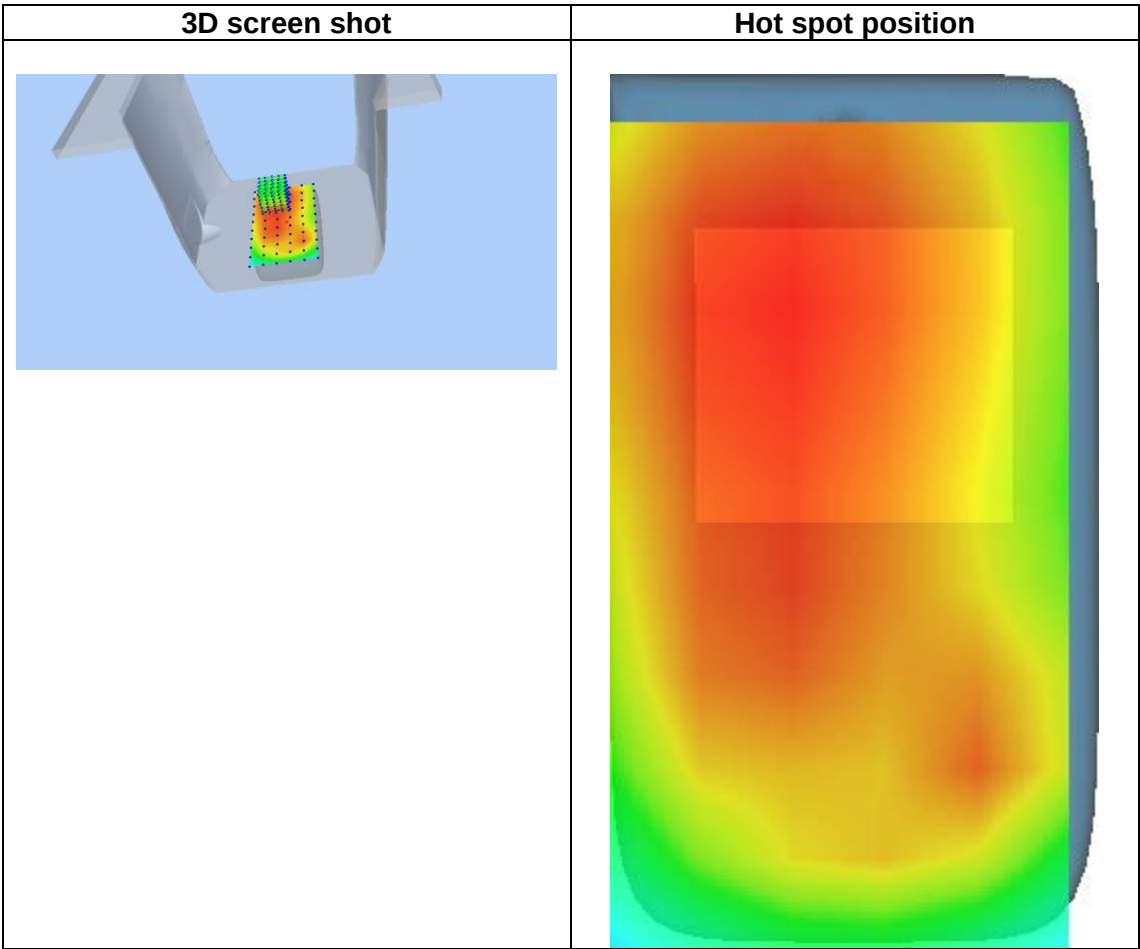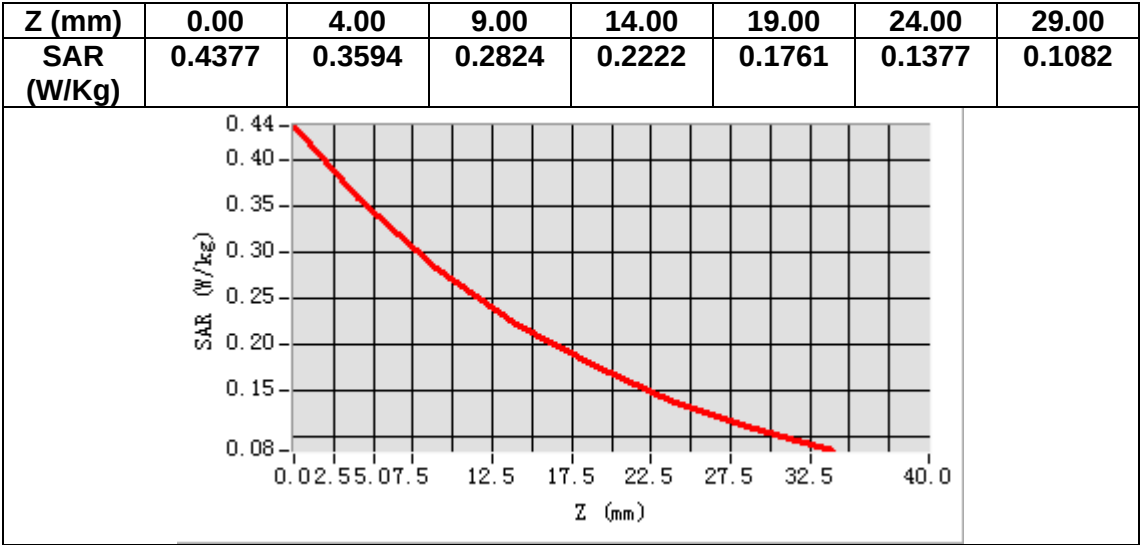

MEASUREMENT 27

Date of measurement: 10/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 38</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.87</u>


B. SAR Measurement Results

Frequency (MHz)	2595.000000
Relative permittivity (real part)	38.013706
Relative permittivity (imaginary part)	13.796523
Conductivity (S/m)	1.988999
Variation (%)	-0.680000

SURFACE SAR

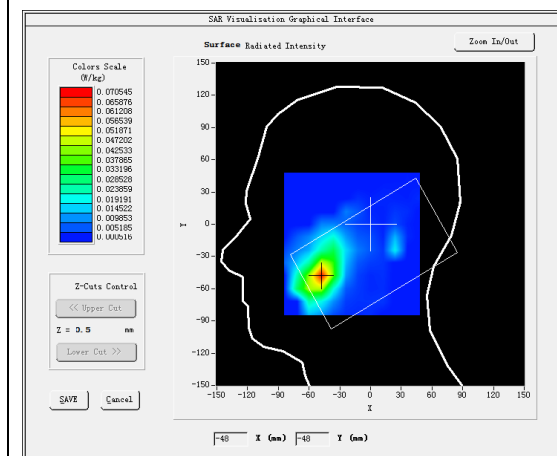



VOLUME SAR

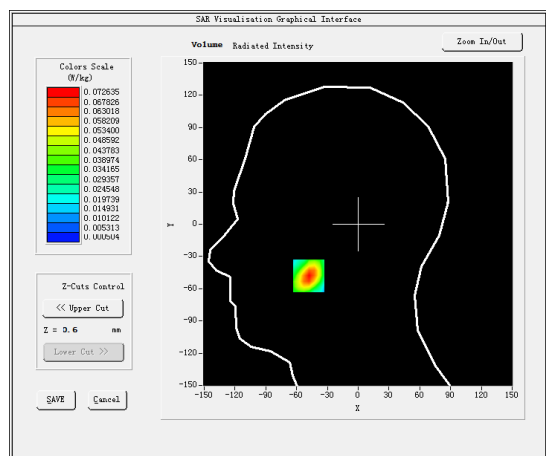

Maximum location: X=-48.00, Y=-48.00

SAR Peak: 0.12 W/kg

SAR 10g (W/Kg)	0.032547
SAR 1g (W/Kg)	0.066054

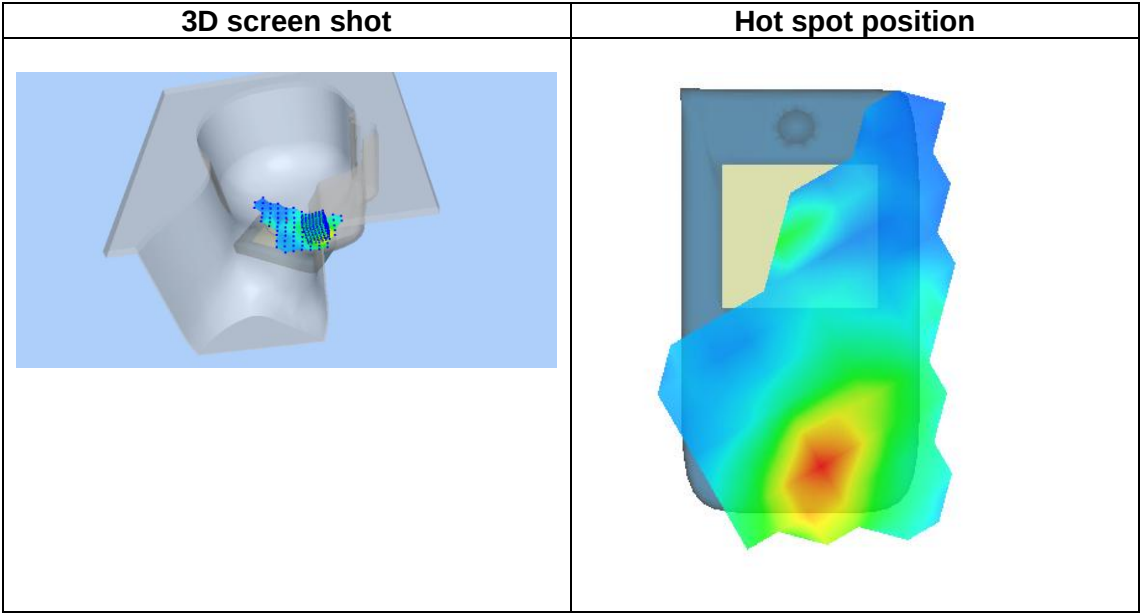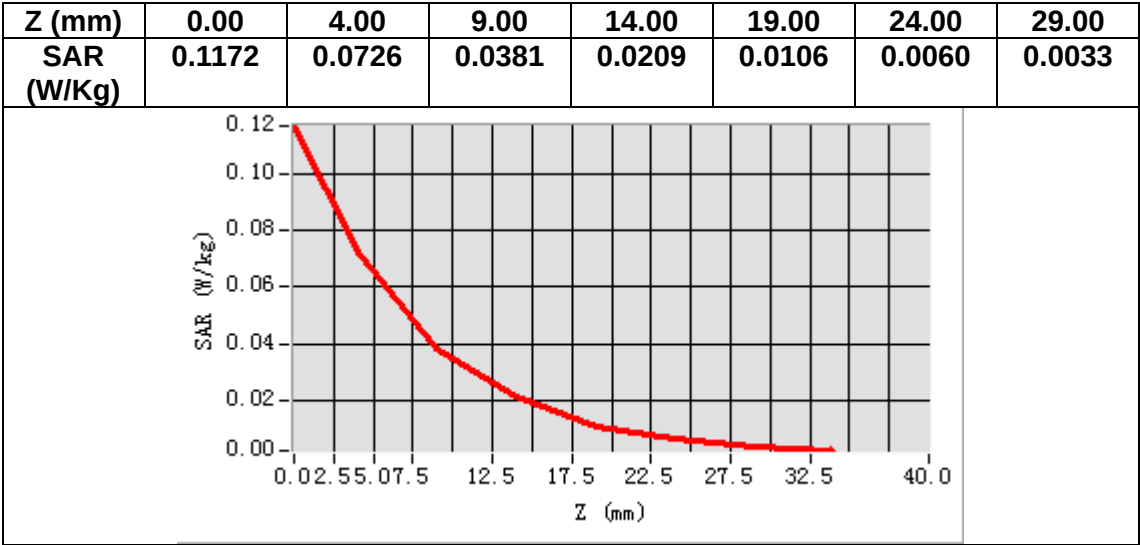

MEASUREMENT 28

Date of measurement: 10/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 38</u>
<u>Channels</u>	<u>Low</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.87</u>


B. SAR Measurement Results

Frequency (MHz)	2580.000000
Relative permittivity (real part)	38.119003
Relative permittivity (imaginary part)	13.736823
Conductivity (S/m)	1.968945
Variation (%)	-0.410000

SURFACE SAR

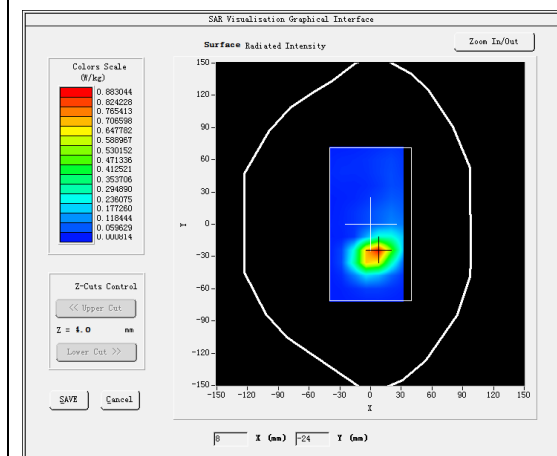



VOLUME SAR

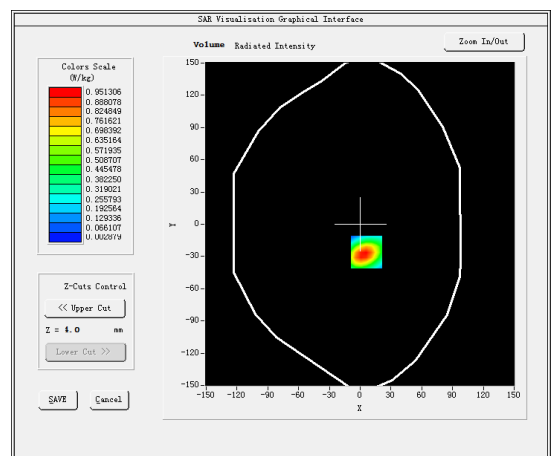

Maximum location: X=6.00, Y=-26.00

SAR Peak: 1.56 W/kg

SAR 10g (W/Kg)	0.422579
SAR 1g (W/Kg)	0.894483

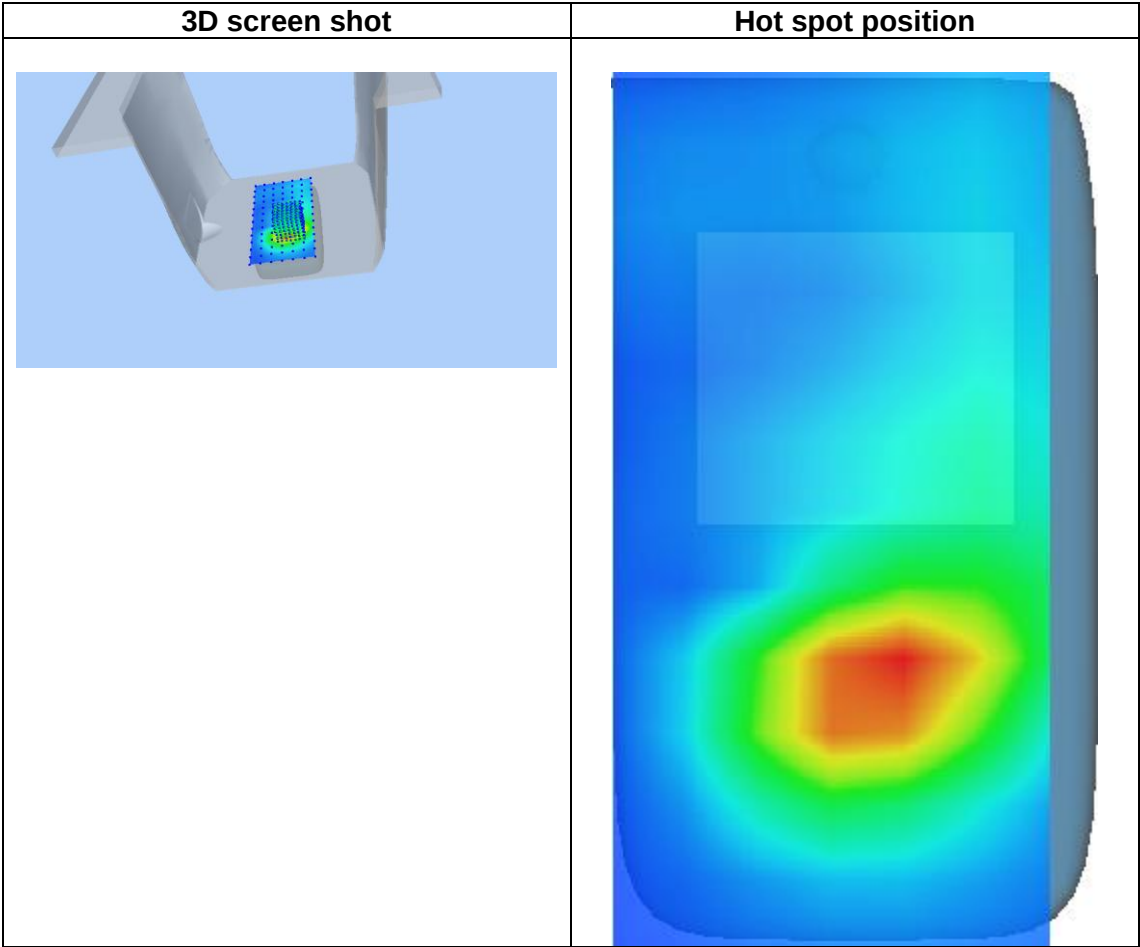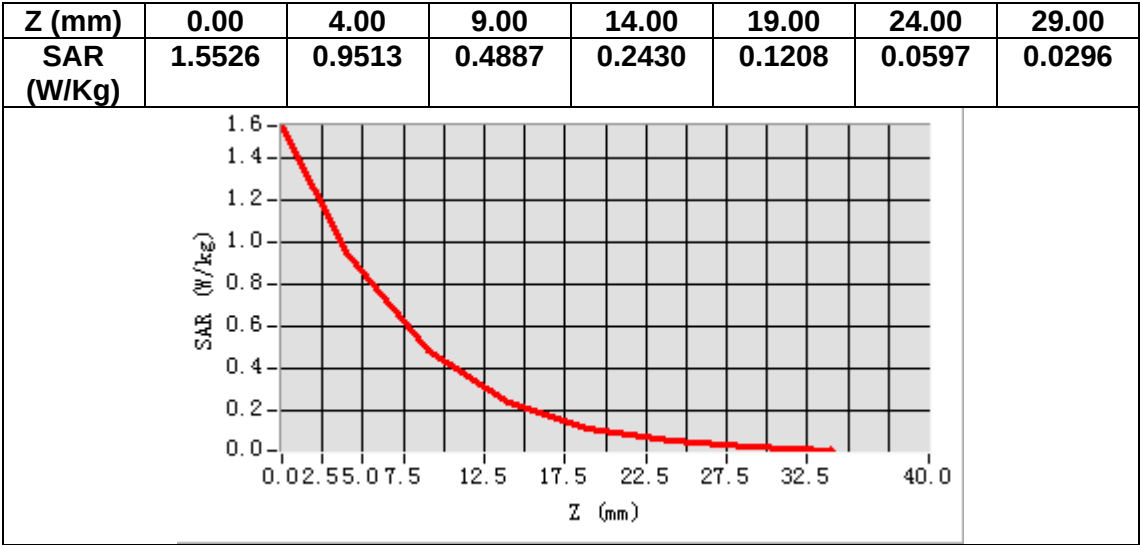

MEASUREMENT 29

Date of measurement: 23/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>FDDBand66</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.73</u>


B. SAR Measurement Results

Frequency (MHz)	1745.000000
Relative permittivity (real part)	39.210403
Relative permittivity (imaginary part)	13.633420
Conductivity (S/m)	1.321684
Variation (%)	-0.240000

SURFACE SAR

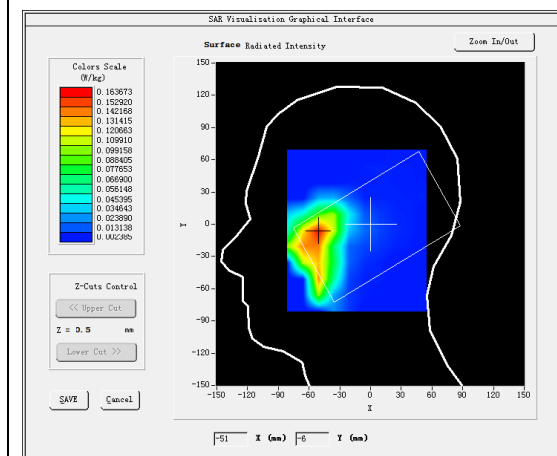

VOLUME SAR

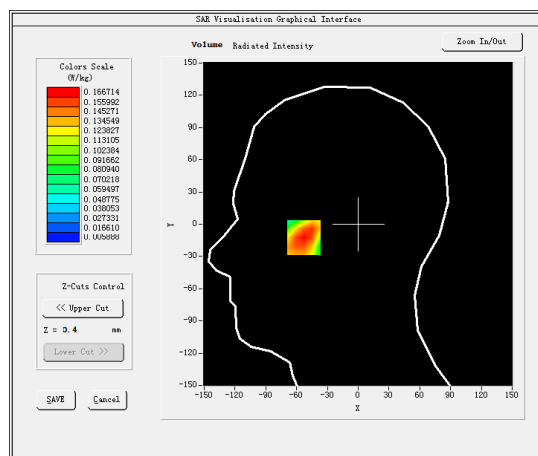

Maximum location: X=-53.00, Y=-10.00

SAR Peak: 0.23 W/kg

SAR 10g (W/Kg)	0.100416
SAR 1g (W/Kg)	0.158844