

Huawei Technologies Co., Ltd.

TEST REPORT



SCOPE OF WORK

FCC TESTING—X22B-C, X22A-C, X22D-C, X22E-C

REPORT NUMBER

190102037SZN-001

ISSUE DATE

29 March 2019

[REVISED DATE]

[-----]

PAGES

64

DOCUMENT CONTROL NUMBER

FCC ID 247_b

© 2017 INTERTEK

Huawei Technologies Co., Ltd.

Application
For
Certification

FCC ID: QIS-X22B-C**Huawei STB/Huawei BOX****Model: X22B-C, X22A-C, X22D-C, X22E-C****Brand name: HUAWEI****2.4GHz Transceiver**

Report No.: 190102037SZN-001

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-1-17]

Prepared and Checked by:**Approved by:**

Rui Zhou
Project Engineer

Kidd Yang
Technical Supervisor
Date: 29 March 2019

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Service Shenzhen Ltd. Longhua Branch

101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, Shenzhen.

Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

LIST OF EXHIBITS

INTRODUCTION

<i>EXHIBIT 1:</i>	General Description
<i>EXHIBIT 2:</i>	System Test Configuration
<i>EXHIBIT 3:</i>	Emission Results
<i>EXHIBIT 4:</i>	Equipment Photographs
<i>EXHIBIT 5:</i>	Product Labelling
<i>EXHIBIT 6:</i>	Technical Specifications
<i>EXHIBIT 7:</i>	Instruction Manual
<i>EXHIBIT 8:</i>	Miscellaneous Information
<i>EXHIBIT 9:</i>	Confidentiality request
<i>EXHIBIT10:</i>	Test Equipment List

MEASUREMENT/TECHNICAL REPORT

Huawei Technologies Co., Ltd.

Model: X22B-C

Additional Model: X22A-C, X22D-C, X22E-C

FCC ID: QJS-X22B-C

This report concerns (check one): Original Grant Class I Change

Equipment Type: DSS - Part 15 Spread Spectrum Transmitter

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes No

If yes, defer until: _____
date

Company Name agrees to notify the Commission by: _____
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes No

If no, assumed Part 15, Subpart C for intentional radiator – the new 47 CFR [10-1-17 Edition] provision.

Report prepared by:

Rui Zhou
Intertek Testing Services Shenzhen Ltd. Longhua Branch
101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing
Community, GuanHu Subdistrict, LongHua District, Shenzhen.
Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6680

Table of Contents

1.0	<u>General Description</u>	7
1.1	Product Description	7
1.2	Related Submittal(s) Grants	7
1.3	Test Methodology	8
1.4	Test Facility	8
2.0	<u>System Test Configuration</u>	10
2.1	Justification	10
2.2	EUT Exercising Software	10
2.3	Special Accessories	10
2.4	Equipment Modification	10
2.5	Measurement Uncertainty	11
2.6	Support Equipment List and Description	11
3.0	<u>Test Results</u>	13
3.1	Radiated Test Result	14
3.1.1	Field Strength Calculation	14
3.1.2	Radiated Emission Configuration Photograph	15
3.1.3	Radiated Emission	15
3.1.4	Transmitter Spurious Emissions (Radiated)	18
3.2	Conducted Emission at Mains Terminal	22
3.2.1	Conducted Emission Configuration Photograph	22
3.2.2	Conducted Emissions	22
3.3	Peak Power	25
3.4	20dB Bandwidth	28
3.5	Channel Number (Number of Hopping Frequencies)	30
3.6	Channel Separation (Carrier Frequency Separation)	33
3.7	Dwell Time (Time of Occupancy)	35
3.8	Band Edge	41
3.9	Transmitter Spurious Emission (Conducted)	44
4.0	<u>Equipment Photographs</u>	49
5.0	<u>Product Labelling</u>	51
6.0	<u>Technical Specifications</u>	53
7.0	<u>Instruction Manual</u>	55
8.0	<u>Miscellaneous Information</u>	57
8.1	Discussion of Pulse Desensitization	58
8.2	Transmitter Duty Cycle Calculation	59
8.3	Emissions Test Procedures	60
9.0	<u>Confidentiality Request</u>	62
10.0	<u>Test Equipment List</u>	64

List of attached file

Exhibit type	File Description	filename
Test Report	Test Report	report.pdf
Operational Description	Technical Description	descri.pdf
Test Setup Photo	Radiated Emission	radiated photos.pdf
Test Setup Photo	Conducted Emission	conducted photos.pdf
External Photos	External Photo	external photos.pdf
Internal Photos	Internal Photo	internal photos.pdf
ID Label/Location Info	Label Artwork and Location	label.pdf
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
User Manual	User Manual	manual.pdf
Cover Letter	Letter of Agency	agency.pdf
Cover Letter	Confidentiality Letter	request.pdf

EXHIBIT 1

GENERAL DESCRIPTION

1.0 General Description

1.1 Product Description

The equipment under test (EUT) is a Huawei STB/Huawei BOX with Bluetooth FHSS technology operating in 2402-2480MHz. The EUT is powered by DC 12V/1A from Adapter.

For more detail information pls. refer to the user manual.

Bluetooth Version: 4.2

Antenna Type: Integral antenna

Antenna Gain: 0 dBi Max

Modulation Type: GFSK, $\pi/4$ -DQPSK and 8-DPSK

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

The Model: X22A-C, X22D-C, X22E-C are the same as the Model: X22B-C in hardware aspect (circuitry and electrical, mechanical and physical construction), the only differences is the model no. for trading purpose.

Each model may have multiple configurations due to the optional interfaces. The test was based on the worst configuration (full interface configuration).

Standard interface	Optional interface
ETH, USB (rear), HDMI, DVB, DC, 11ac 2*2 wifi, BT 4.2	SPDIF, Mini AV, WPS, Micro SD, Reset, USB (Side)

The Huawei STB/Huawei BOX, Model: X22B-C has three designing schemes. It would be placed on the market with three different adapters, Partly tests are required to both designing schemes, and show the worst case in report.

Adapter	Model	Manufacture	Electrical parameters
Adapter 1	HW-120100UOW	Shenzhen TOPOW Electronics Co.,Ltd.	Input: AC 100-240V, 50/60Hz, 0.5A Output: DC 12V 1A
Adapter 2	HW-120100UOW	Shenzhen Huntkey Electronic Co.,Ltd.	Input: AC 100-240V, 50/60Hz, 0.5A Output: DC 12V 1A
Adapter 3	HW-120100UOW	Dongguan Phitek Electronics Co.,Ltd.	Input: AC 100-240V, 50/60Hz, 0.5A Output: DC 12V 1A

1.2 Related Submittal(s) Grants

This is an application for certification of transceiver for the Huawei STB/Huawei BOX which has classic Bluetooth function.

For the BT BLE function was tested and demonstrated in report 190102037SZN-002.

For the 2.4GHz WiFi function was tested and demonstrated in report 190102037SZN-003.

For the 5GHz WiFi function was tested and demonstrated in report 190102037SZN-004.

For other functions were reported in the SDOC report: 190102036SZN-001.

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application.

1.4 Test Facility

The Semi-anechoic chamber and shielding room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Longhua Branch** and located at 101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, Shenzhen. This test facility and site measurement data have been fully placed on file with File Number: CN1188.

EXHIBIT 2

SYSTEM TEST CONFIGURATION

2.0 System Test Configuration

2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The EUT was powered by DC 12V/1A through adapter and the adapter was powered by AC 120V, 60Hz during the test.

All packets DH1, DH3 & DH5 mode in modulation type GFSK, $\pi/4$ -DQPSK and 8-DPSK were tested and only the worst data was reported in this report.

For maximizing emissions below 30 MHz, the EUT was rotated through 360°, the centre of the loop antenna was placed 1 meter above the ground, and the antenna polarization was changed. For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The rear of unit was flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on a turn table, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

2.2 EUT Exercising Software

The EUT exercise program (provided by client) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The worst case configuration is used in all specified testing.

The parameters of test software setting:

During the test, Channel and power controlling software provided by the applicant was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the application and is going to be fixed on the firmware of the end product.

2.3 Special Accessories

No special accessory attached.

2.4 Equipment Modification

Any modifications installed previous to testing by Huawei Technologies Co., Ltd. will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Longhua Branch.

2.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

2.6 Support Equipment List and Description

Description	Manufacturer	Model No.
Laptop (Provided by Intertek)	Lenovo	T420
Test TV (Provided by Intertek)	SONY	KDL-24EX520
Mini Bluetooth Speak (Provided by Intertek)	/	M20
USB Memory (Provided by Intertek)	SanDisk	SDCZ36-002G-P36
Optical cable (Provided by Intertek)	/	unshielded, 130cm
Dummy Load (Provided by Intertek)	/	/
HDMI Cable (Provided by Applicant)	/	unshielded, 150cm
AV out Cable (Provided by Applicant)	/	unshielded, 150cm
RJ45 Cable (Provided by Applicant)	/	unshielded, 150cm
Remote Control	/	/

EXHIBIT 3

TEST RESULTS

3.0 Test Results

Data is included worst-case configuration (the configuration which resulted in the highest emission levels). Simultaneous transmission was considered during the test.

3.1 Radiated Test Results

A sample calculation, configuration photographs and data tables of the emissions are included.

3.1.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- PD = Pulse Desensitization in dB
- AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

RA = 62.0 dB μ V
AF = 7.4 dB
CF = 1.6 dB
AG = 29.0 dB
PD = 0 dB

AV = -10 dB

$$FS = 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32 \text{ dB}\mu\text{V/m}$$

Level in μ V/m = Common Antilogarithm [(32 dB μ V/m)/20] = 39.8 μ V/m

3.1.2 Radiated Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

3.1.3 Radiated Emissions- FCC section 15.209

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Worst Case Radiated Emission

at 30.97 MHz

Judgement: Passed by 13.0 dB

Applicant: Huawei Technologies Co., Ltd.

Date of Test: January 16, 2019

Worst Case Operating Mode:

Worst Case Adapter:


Model: X22B-C

Transmitting(2402MHz)

Adapter1


ANT Polarity: Horizontal

FCC Part 15

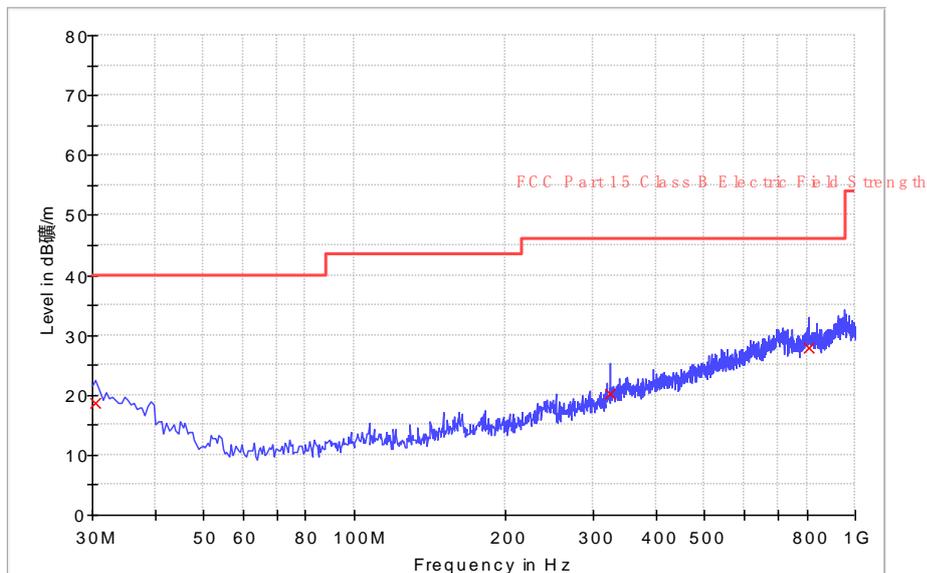

ANT Polarity: Vertical

FCC Part 15

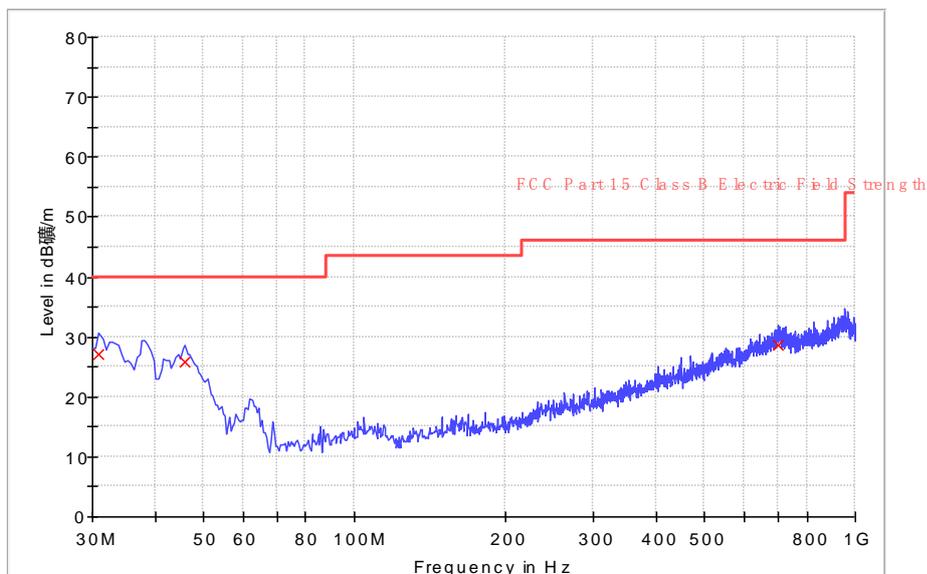

Applicant: Huawei Technologies Co., Ltd.

Date of Test: January 16, 2019

Worst Case Operating Mode:

Worst Case Adapter:

Model: X22B-C

Transmitting(2402MHz)

Adapter1

Table 1

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	30.485000	21.0	20.0	17.6	18.6	40.0	-21.4
Horizontal	323.910000	23.9	20.0	16.2	20.1	46.0	-25.9
Horizontal	808.910000	22.2	20.0	25.8	28.0	46.0	-18.0
Vertical	30.970000	29.7	20.0	17.3	27.0	40.0	-13.0
Vertical	46.005000	35.6	20.0	10.3	25.9	40.0	-14.1
Vertical	701.240000	23.1	20.0	25.5	28.6	46.0	-17.4

- NOTES:
1. Quasi-Peak detector is used except for others stated.
 2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. All emissions are below the QP limit.

3.1.4 Transmitter Spurious Emissions (Radiated) - FCC section 15.209

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Worst Case Radiated Emission

at 4960.000 MHz

Judgement: Passed by 5.4 dB

Applicant: Huawei Technologies Co., Ltd.
Date of Test: January 16, 2019
Worst Case Operating Mode:

Model: X22B-C
Transmitting(2402MHz)

Table 2

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	**2402.000	109.3	36.7	28.5	101.1	--	--
Horizontal	*4804.000	51.3	36.7	33.2	47.8	74.0	-26.2
Horizontal	*2389.600	51.6	36.7	28.4	43.3	74.0	-30.7

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	**2402.000	101.7	36.7	28.5	93.5	--	--
Horizontal	*4804.000	41.9	36.7	33.2	38.4	54.0	-15.6
Horizontal	*2389.600	42.5	36.7	28.4	34.2	54.0	-19.8

- NOTES: 1. RBW=1MHz/VBW=3MHz was used for peak measurements and average measurements were made with measurement instrumentation employing an average detector function using a minimum resolution bandwidth of 1 MHz.
2. All measurements were made at 3 meters.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205 and RSS Gen (issue 4) - 8.10. The corresponding limit as per 15.209 and RSS Gen (issue 4) - 8.9 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.
- ** Fundamental emission was measured for determining band-edge compliance of using delta measurement technique.

Applicant: Huawei Technologies Co., Ltd.
Date of Test: January 16, 2019
Worst Case Operating Mode:

Model: X22B-C
Transmitting(2441MHz)

Table 3

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	**2441.000	110.3	36.7	28.6	102.2	--	--
Horizontal	*4882.000	57.1	36.7	33.3	53.7	74.0	-20.3
Horizontal	*7323.000	51.8	36.1	38.1	53.8	74.0	-20.2

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	**2441.000	103.0	36.7	28.5	94.8	--	--
Horizontal	*4882.000	51.7	36.7	33.3	48.3	54.0	-5.7
Horizontal	*7323.000	41.5	36.1	38.1	43.5	54.0	-10.5

- NOTES:
1. RBW=1MHz/VBW=3MHz was used for peak measurements and average measurements were made with measurement instrumentation employing an average detector function using a minimum resolution bandwidth of 1 MHz.
 2. All measurements were made at 3 meters.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205 and RSS Gen (issue 4) - 8.10. The corresponding limit as per 15.209 and RSS Gen (issue 4) - 8.9 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.
- ** Fundamental emission was measured for determining band-edge compliance of using delta measurement technique.

Applicant: Huawei Technologies Co., Ltd.
Date of Test: January 16, 2019
Worst Case Operating Mode:

Model: X22B-C
Transmitting(2480MHz)

Table 4

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	**2480.000	109.3	36.7	28.6	101.2	--	--
Horizontal	*4960.000	57.1	36.7	33.5	53.9	74.0	-20.1
Horizontal	*7440.000	50.9	36.1	38.5	53.3	74.0	-20.7

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	**2480.000	103.7	36.7	28.6	95.6	--	--
Horizontal	*4960.000	51.8	36.7	33.5	48.6	54.0	-5.4
Horizontal	*7440.000	42.8	36.1	38.5	45.2	54.0	-8.8

- NOTES:
1. RBW=1MHz/VBW=3MHz was used for peak measurements and average measurements were made with measurement instrumentation employing an average detector function using a minimum resolution bandwidth of 1 MHz.
 2. All measurements were made at 3 meters.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205 and RSS Gen (issue 4) - 8.10. The corresponding limit as per 15.209 and RSS Gen (issue 4) - 8.9 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.
- ** Fundamental emission was measured for determining band-edge compliance of using delta measurement technique.

3.2 Conducted Emission at Mains Terminal

3.2.1 Conducted Emissions Configuration Photograph

For electronic filing, the worst case conducted emission configuration photograph is saved with filename: conducted photos.pdf.

3.2.2 Conducted Emissions

Worst Case Conducted Configuration

at 0.372 MHz

Judgement: Passed by 12.4 dB margin

Applicant: Huawei Technologies Co., Ltd.

Date of Test: January 17, 2019

Worst Case Operating Mode:

Phase: Live


Worst Case Adapter:

Model: X22B-C

BT Link

Adapter 3

Conducted Emission Test - FCC

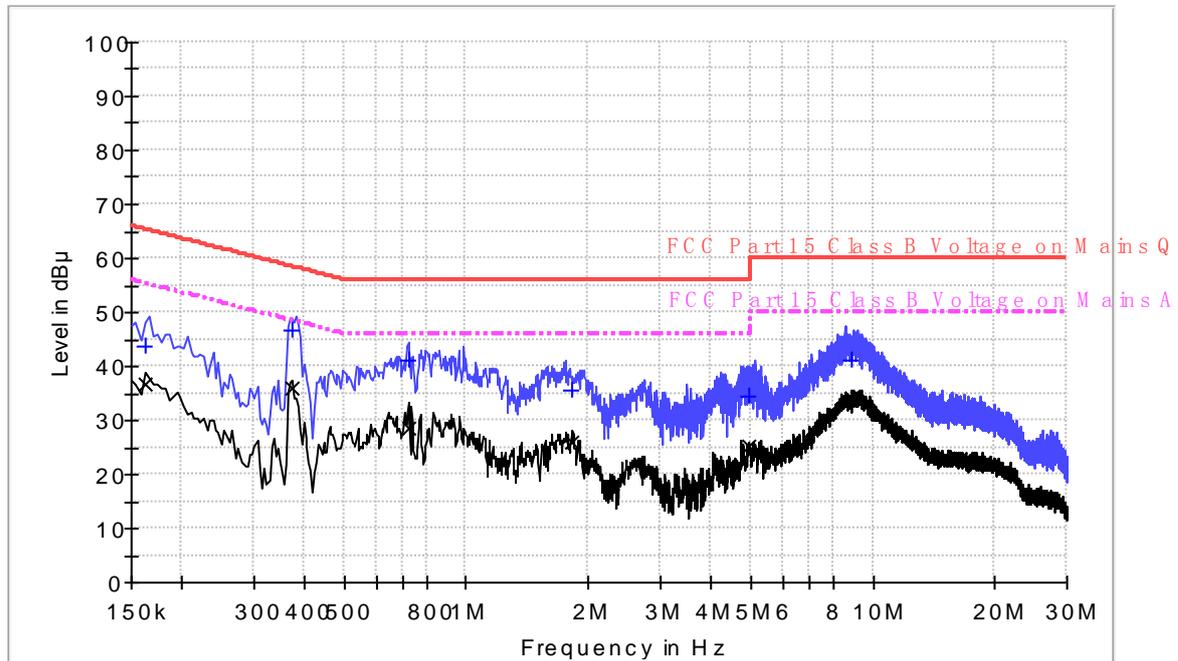

Result Table QP

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.162000	43.8	9.000	L	9.6	21.6	65.4
0.372000	46.6	9.000	L	9.6	11.9	58.5
0.722000	41.0	9.000	L	9.7	15.0	56.0
1.826000	35.5	9.000	L	9.7	20.5	56.0
4.946000	34.4	9.000	L	9.7	21.6	56.0
8.894000	40.9	9.000	L	9.8	19.1	60.0

Result Table AV

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.162000	36.7	9.000	L	9.6	18.7	55.4
0.372000	36.1	9.000	L	9.6	12.4	48.5
0.722000	28.4	9.000	L	9.7	17.6	46.0
1.826000	25.8	9.000	L	9.7	20.2	46.0
4.946000	25.3	9.000	L	9.7	20.7	46.0
8.894000	33.9	9.000	L	9.8	16.1	50.0

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Limit (dBμV) – Level (dBμV)

Applicant: Huawei Technologies Co., Ltd.

Date of Test: January 17, 2019

Worst Case Operating Mode:

Phase: Neutral


Worst Case Adapter:

Model: X22B-C

BT Link

Adapter 3

Conducted Emission Test - FCC

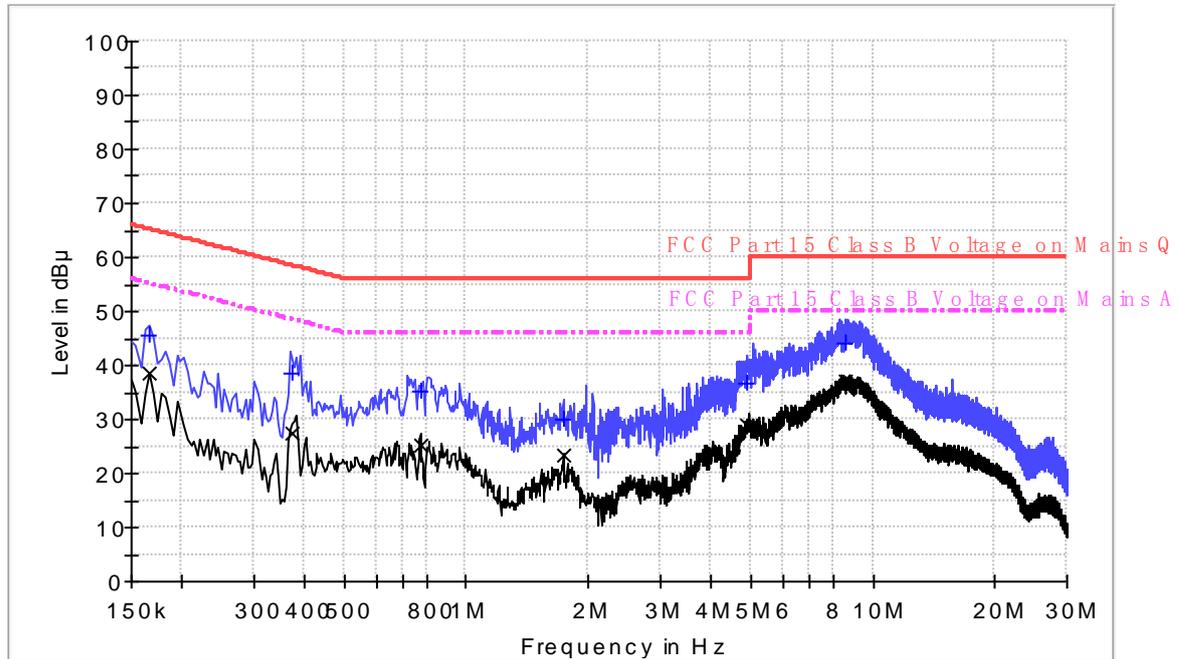

Result Table QP

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.166000	45.7	9.000	N	9.6	19.5	65.2
0.374000	38.5	9.000	N	9.6	19.9	58.4
0.770000	35.2	9.000	N	9.7	20.8	56.0
1.730000	30.1	9.000	N	9.7	25.9	56.0
4.898000	36.7	9.000	N	9.8	19.3	56.0
8.526000	43.9	9.000	N	9.9	16.1	60.0

Result Table AV

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.166000	38.5	9.000	N	9.6	16.7	55.2
0.374000	27.4	9.000	N	9.6	21.0	48.4
0.770000	25.4	9.000	N	9.7	20.6	46.0
1.730000	23.4	9.000	N	9.7	22.6	46.0
4.898000	28.9	9.000	N	9.8	17.1	46.0
8.526000	36.9	9.000	N	9.9	13.1	50.0

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Limit (dB μ V) – Level (dB μ V)

Applicant: Huawei Technologies Co., Ltd.

Date of Test: January 23, 2019

Model: X22B-C

3.3 Peak Power

Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b)(1).

The antenna port of the EUT was connected to the input of a spectrum analyzer. The analyzer was set for RBW > 20dB bandwidth and power was read directly in dBm.

For antenna with gains of 6dBi or less, and frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, the systems operate with an output power no greater than 125 mW.


Antenna Gain = 0dBi			
Modulation Type	Frequency (MHz)	Output Power (Peak Reading) (dBm)	Output Power (mW)
GFSK	2402	6.46	4.426
	2441	6.53	4.498
	2480	6.11	4.083

Cable loss: 1.0 dB External Attenuation: 0 dB


Cable loss, external attenuation has been included in OFFSET function

Modulation Type: GFSK


CH00

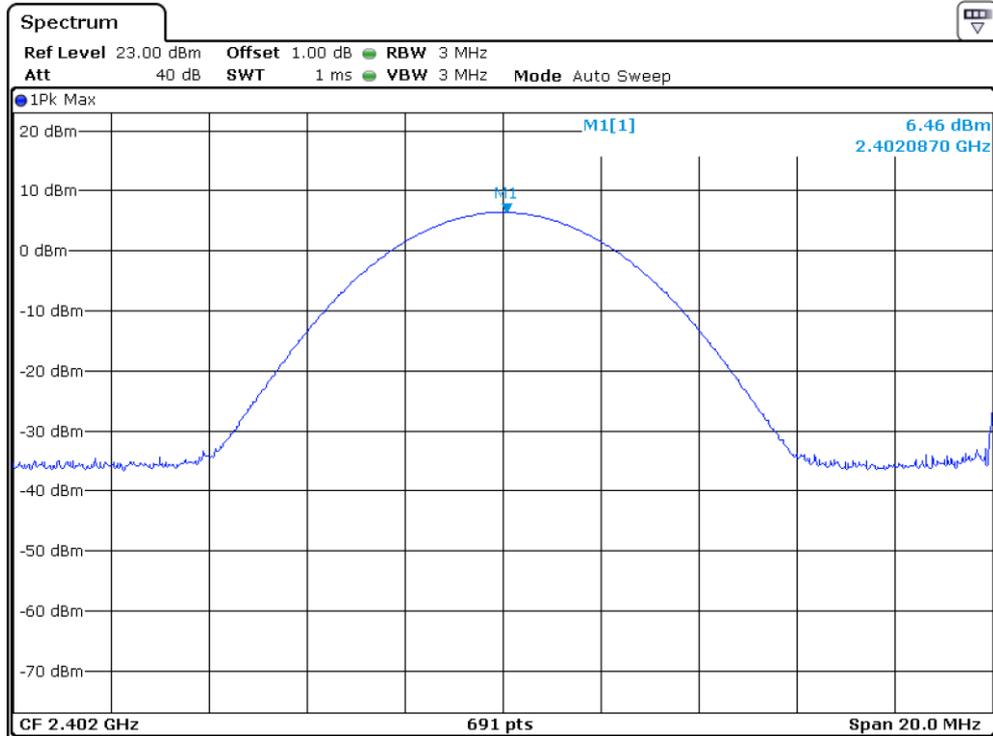

CH39

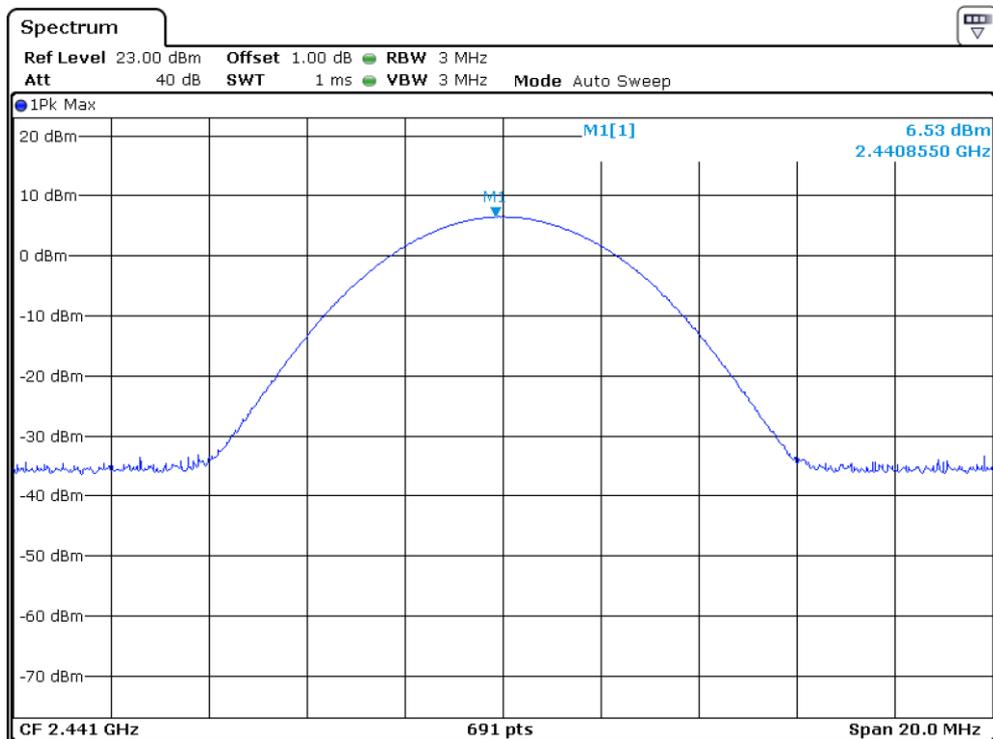

CH78

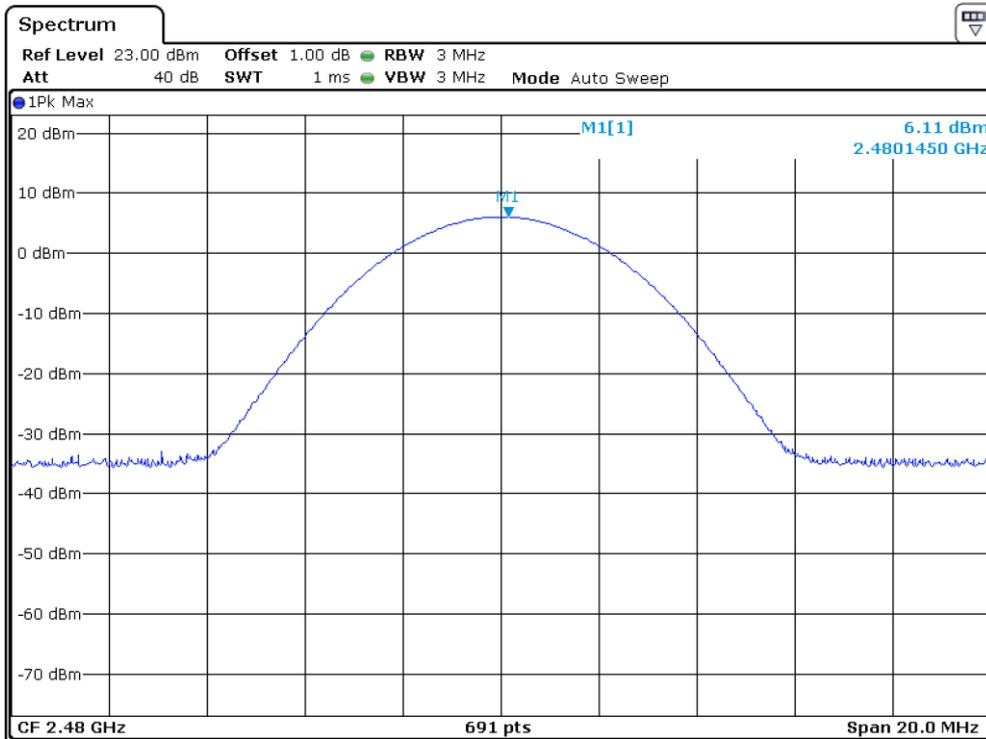

Applicant: Huawei Technologies Co., Ltd.

Date of Test: January 23, 2019

Model: X22B-C

3.4 20dB Bandwidth


Maximum 20dB RF Bandwidth, FCC Rule 15.247(a) (1):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was chosen so that the display was a result of the hopping channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. Use the spectrum 20dB down delta function to measure the bandwidth.


Frequency (MHz)	20 dB Bandwidth (MHz)
2402	1.3676
2441	1.3676
2480	1.3676

Modulation Type: 8DPSK


CH00

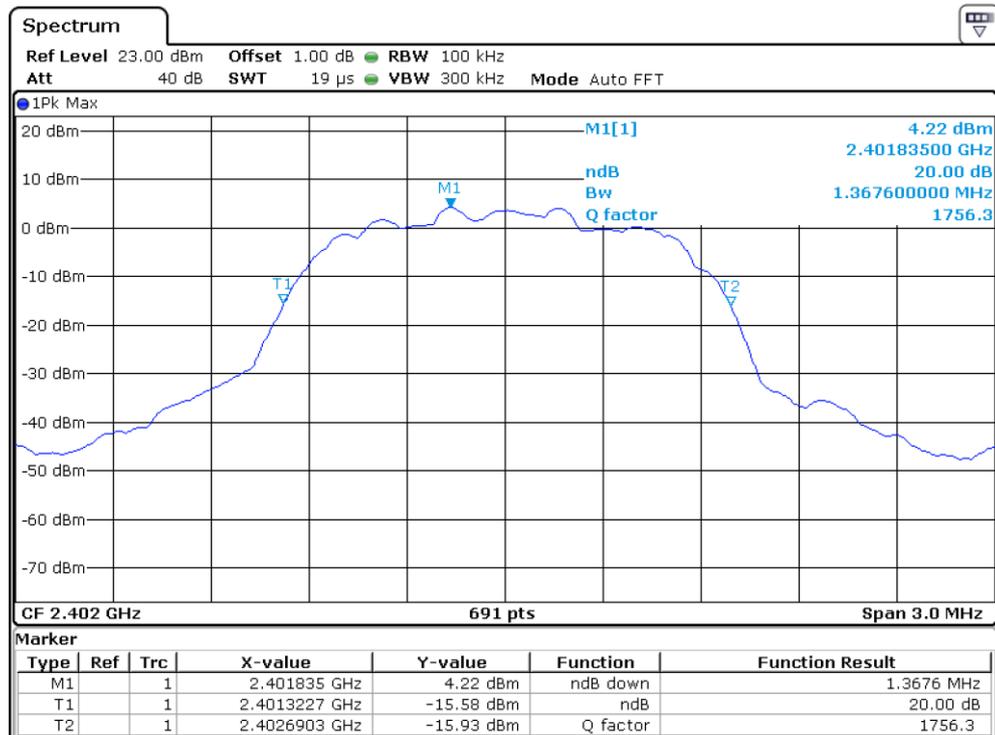

CH39

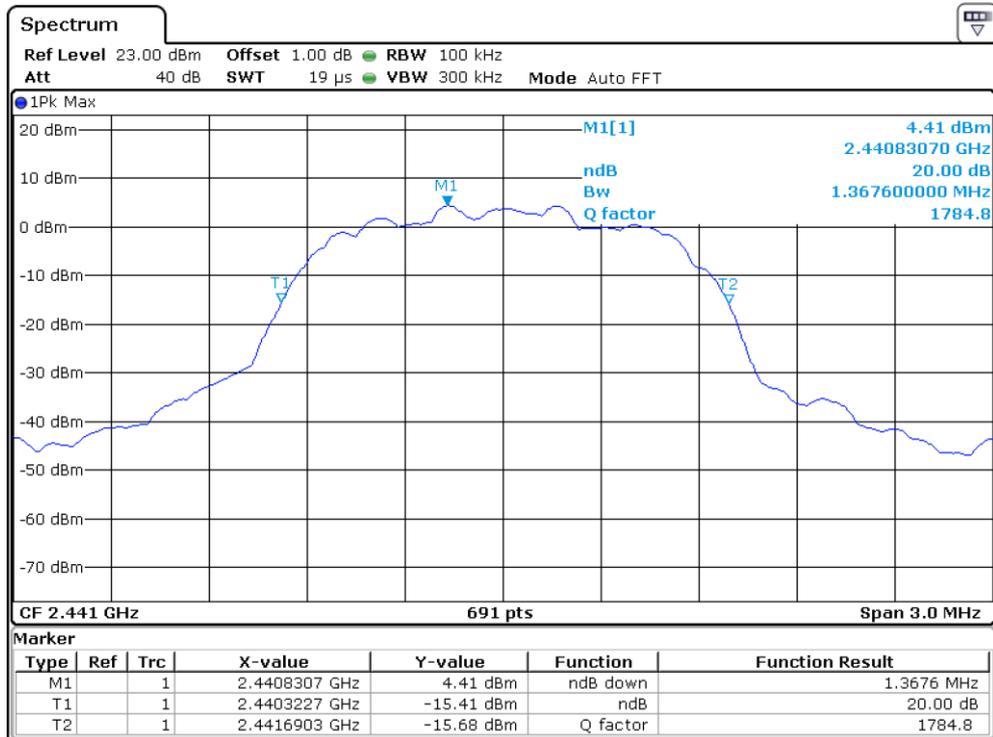

CH78

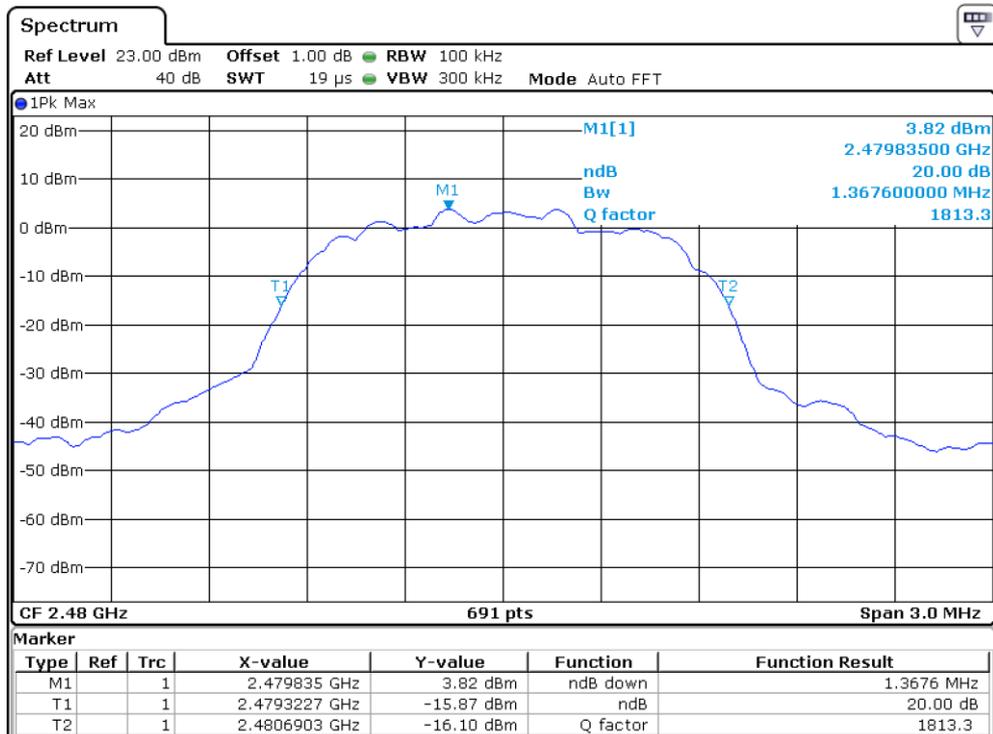

Applicant: Huawei Technologies Co., Ltd.
Date of Test: January 23, 2019

Model: X22B-C

3.5 Channel Number (Number of Hopping Frequencies)

Minimum Number of Hopping Frequencies, FCC Rule 15.247(a) (1) (iii):


The RF passband of the EUT was divided into 3 approximately equal bands. With the analyzer set to MAX HOLD readings were taken for 2-3 minutes. The channel peaks so recorded were added together, and the total number compared to the minimum number of channels required in the regulation.

Number of hopping channels =	79
------------------------------	----


Note: In AFH mode, this device operates using 20 channels and it's satisfied the requirement of limit of minimum of 15 hopping channels.

Modulation Type: GFSK


CH00-CH78

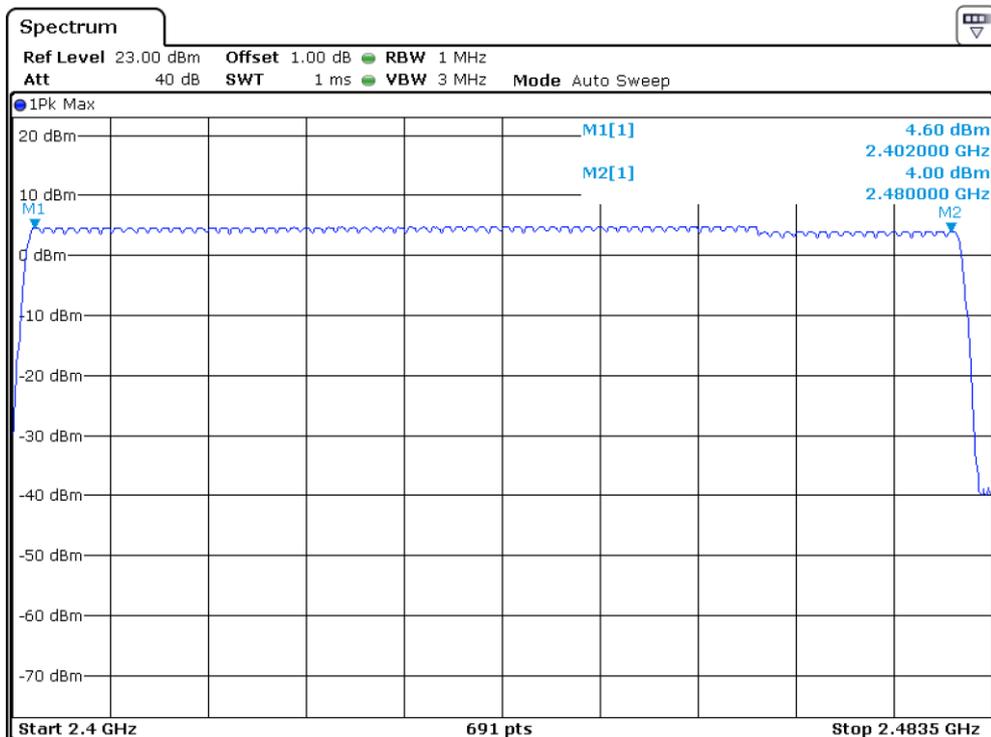


CH00-CH24

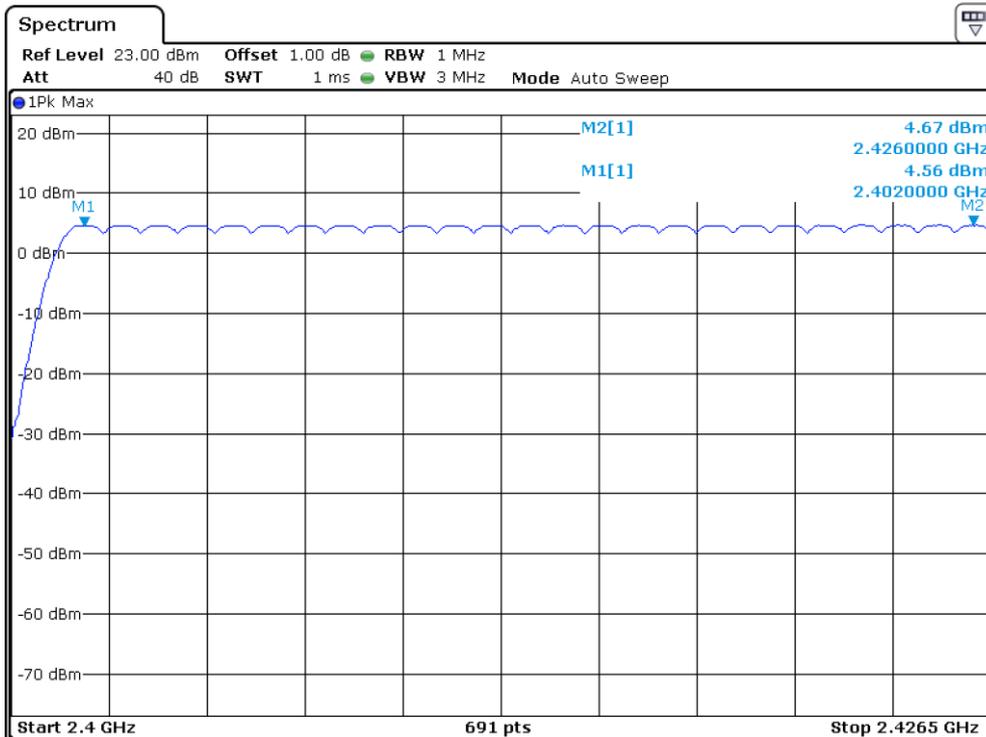

CH25-CH52

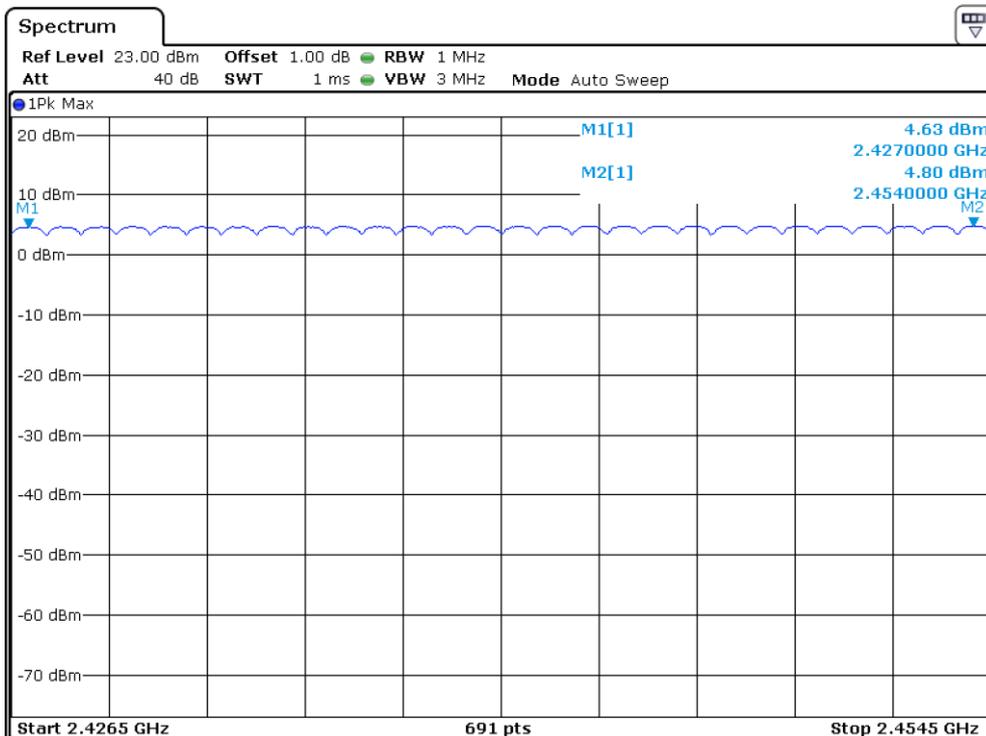

CH53-CH78

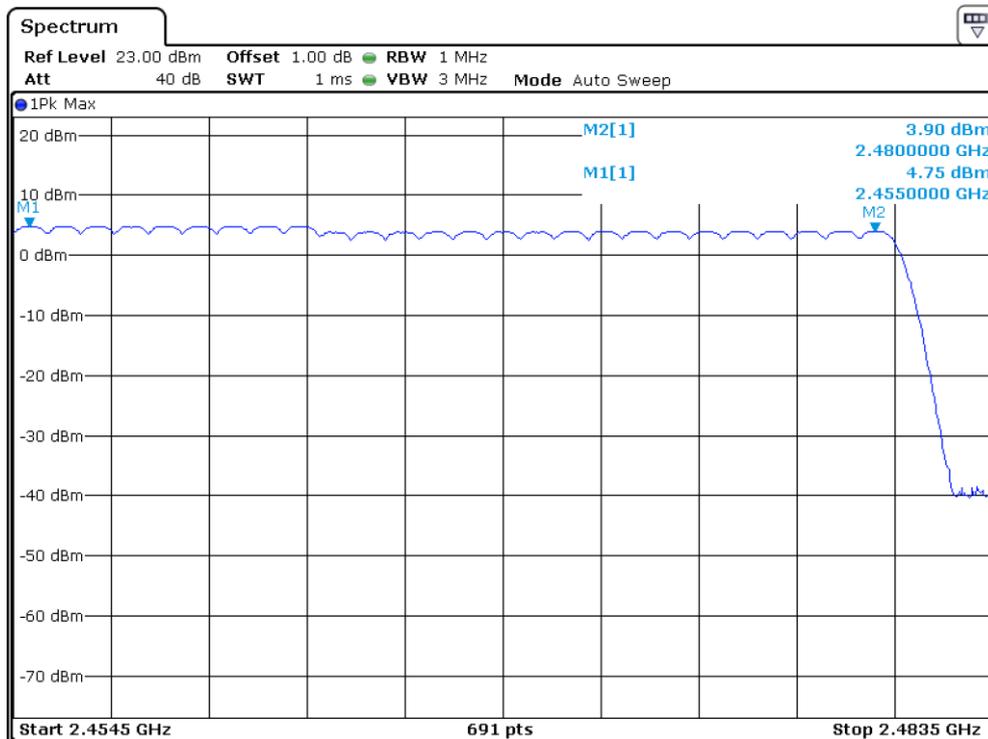

Applicant: Huawei Technologies Co., Ltd.

Date of Test: January 23, 2019

Model: X22B-C

3.6 Channel Separation (Carrier Frequency Separation)

Minimum Hopping Channel Carrier Frequency Separation, FCC Ref: 15.247(a)(1):


Using the DELTA MARKER function of the analyzer, the frequency separation between two adjacent channels was measured and compared against the limit:

Not less than 2/3 of 20dB bandwidth of hopping channel: $1.3676 \times 2/3 = 0.9117\text{MHz}$


Minimum Channel Separation	0.9986 MHz
----------------------------	------------

Modulation Type: GFSK


Low Channel

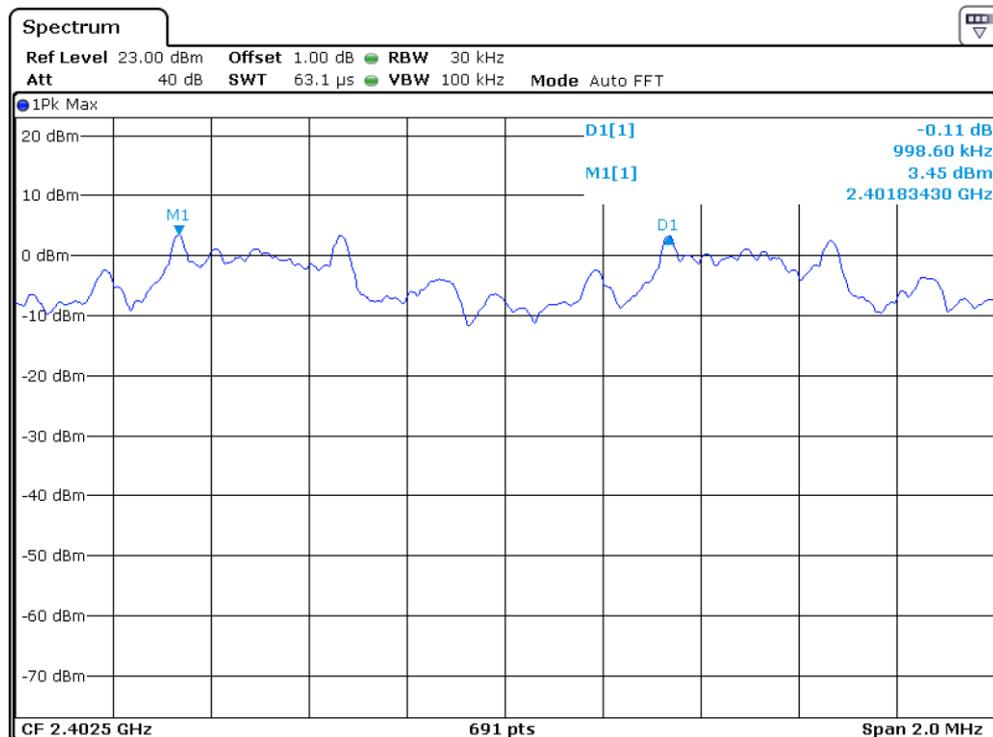

Middle Channel

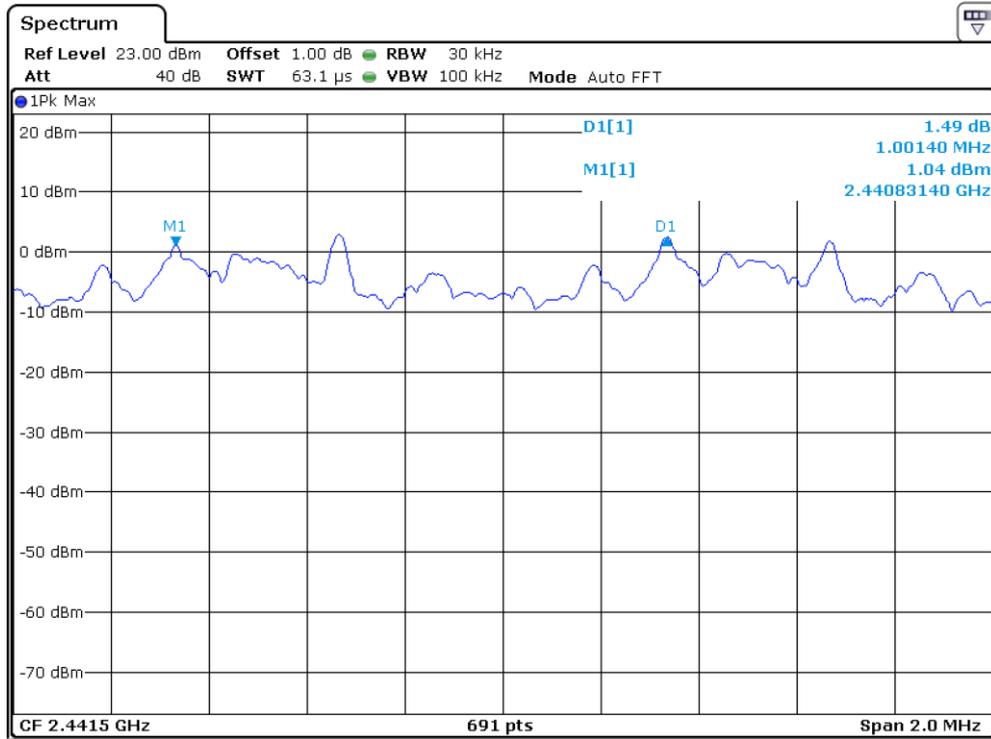

High Channel

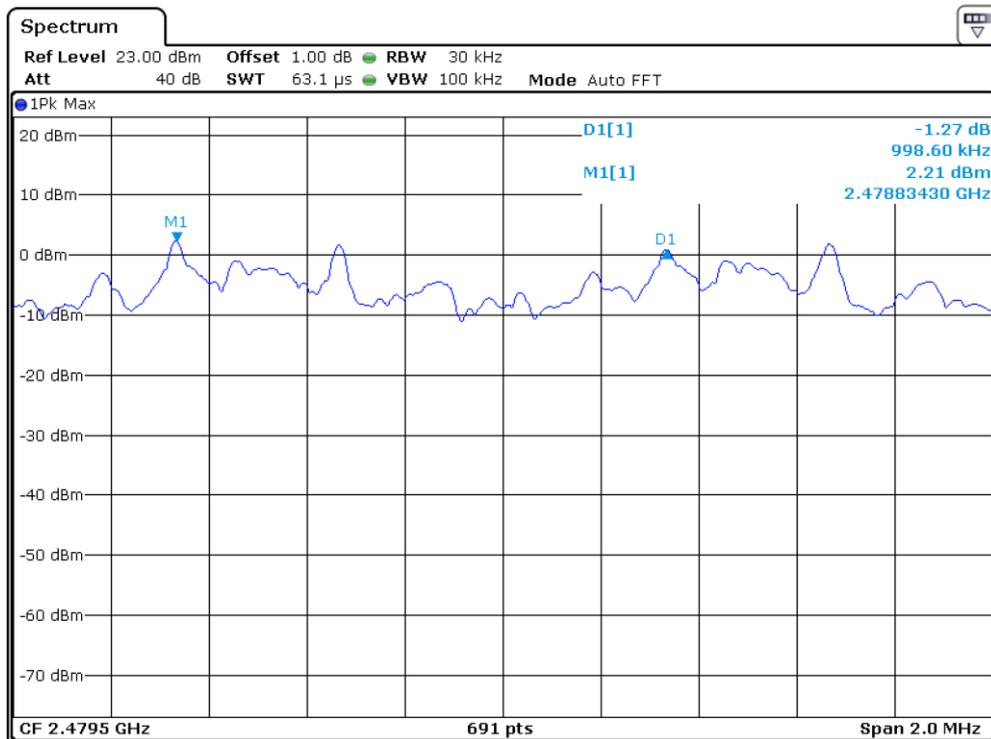

Applicant: Huawei Technologies Co., Ltd.

Date of Test: January 23, 2019

Model: X22B-C

3.7 Dwell Time (Time of Occupancy)

Average Channel Occupancy Time, FCC Ref: 15.247(a) (1)(iii):

The spectrum analyzer center frequency was set to one of the known hopping channels with a longer sweep time to show two successive hops on a channel; the SPAN was set to ZERO SPAN, and the TRIGGER was set to VIDEO. RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel. The time duration of the transmissions so captured was measured with the MARKER DELTA function.

Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Different modes of operation were performed and only the worst case data was reported.

Worst Test Result:


Normal hopping mode:

Modulation Type	Packet	Max Dwell Time	Limit (s)	Result
8DPSK	3DH1	$0.316\text{ms} * 178 = 56.248\text{ms}$	0.4	Pass
	3DH3	$1.641\text{ms} * 151 = 247.791\text{ms}$	0.4	Pass
	3DH5	$2.899\text{ms} * 112 = 324.688\text{ms}$	0.4	Pass


AFH mode:

Modulation Type	Packet	Max Dwell Time	Limit (s)	Result
8DPSK	3DH1	$0.316\text{ms} * 65 = 20.540\text{ms}$	0.4	Pass
	3DH3	$1.641\text{ms} * 116 = 190.356\text{ms}$	0.4	Pass
	3DH5	$2.899\text{ms} * 87 = 252.213\text{ms}$	0.4	Pass


Modulation Type: 8DPSK
Packet: 3DH1

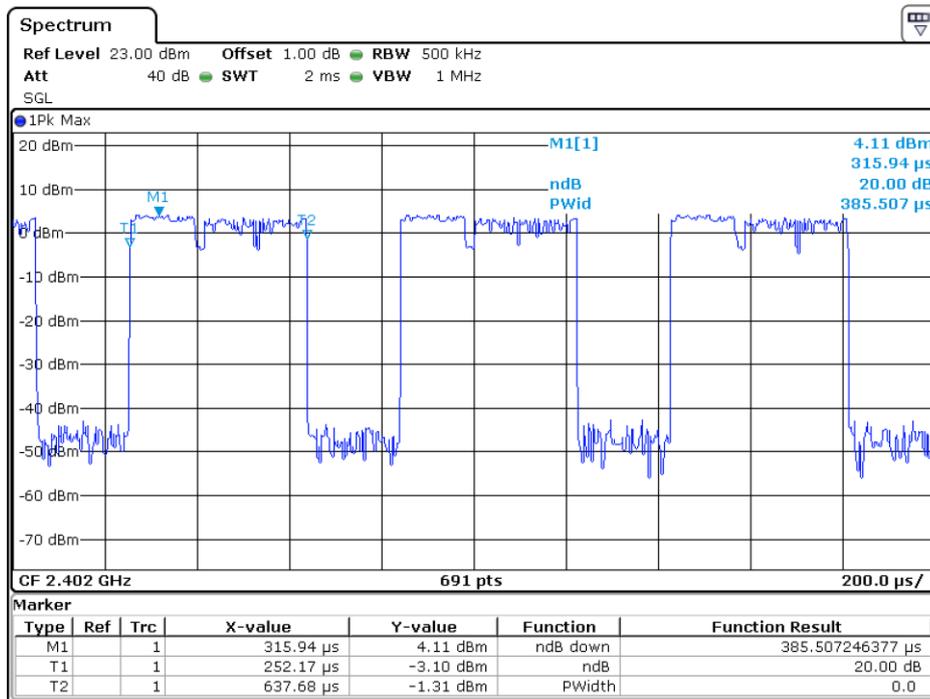


Number of hops (Normal hopping mode)

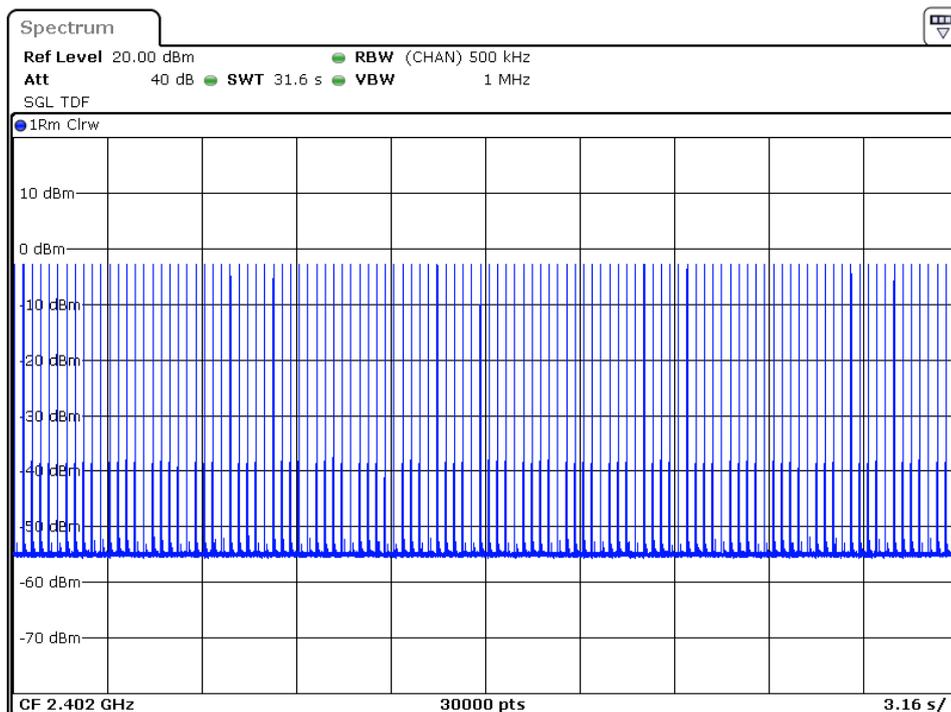


Number of hops (Normal hopping mode)

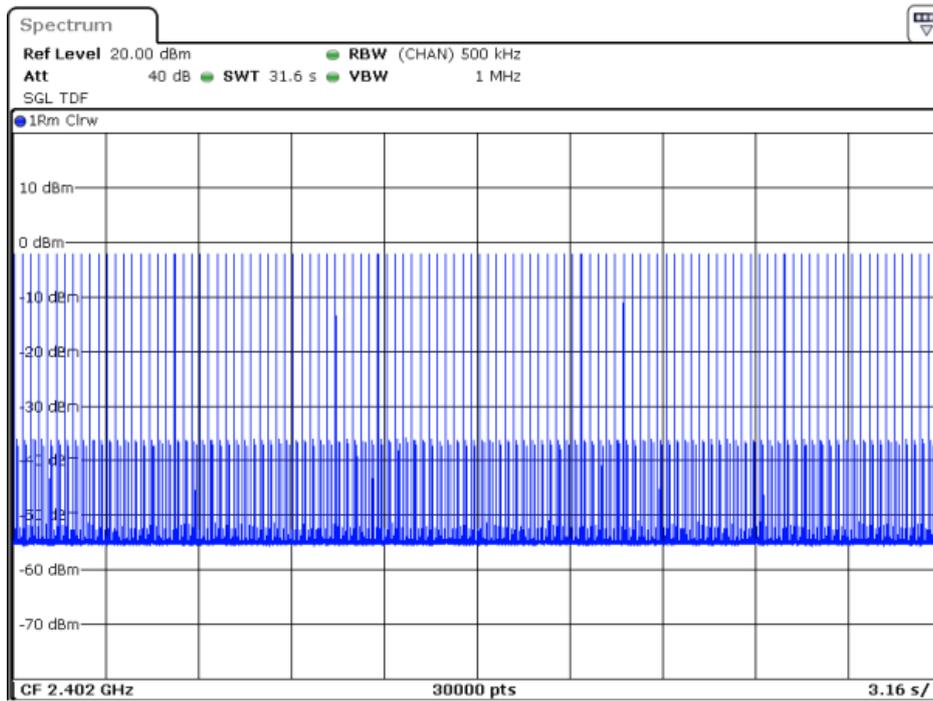


Number of hops (AFH mode)

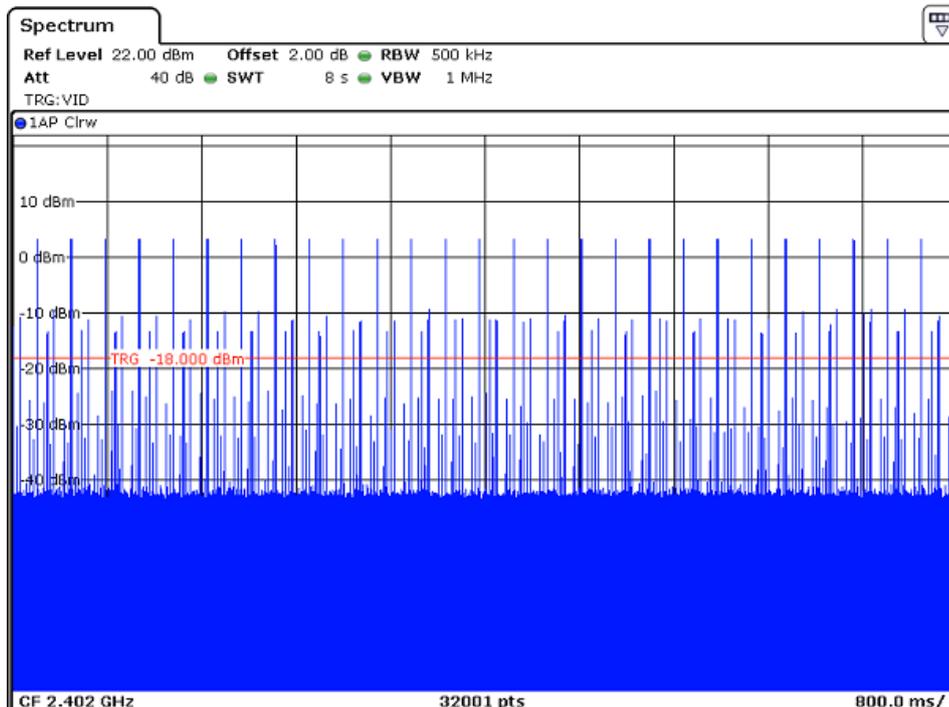


Packet: 3DH5

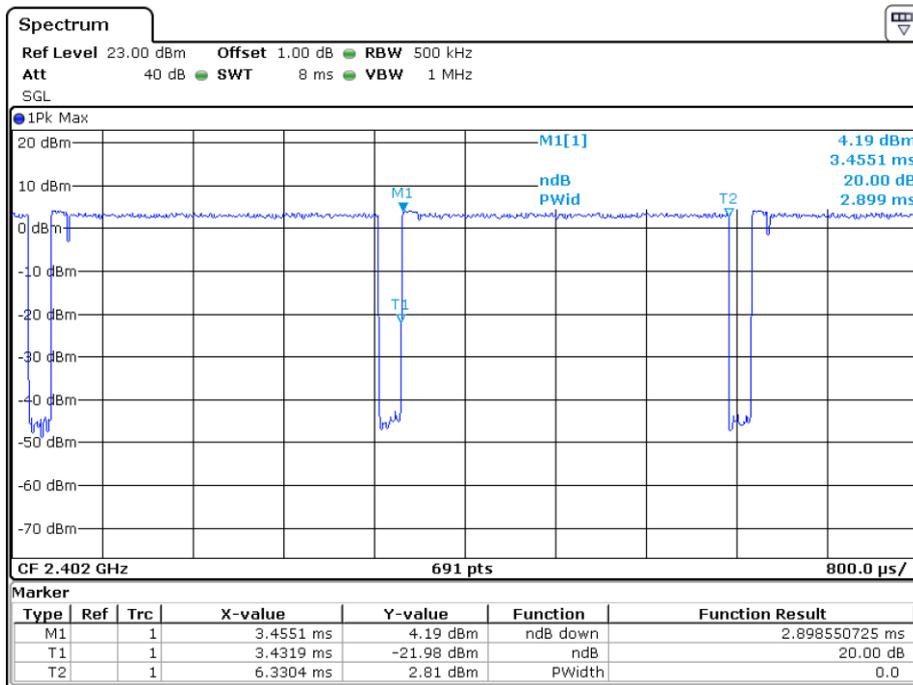

Number of hops (Normal hopping mode)

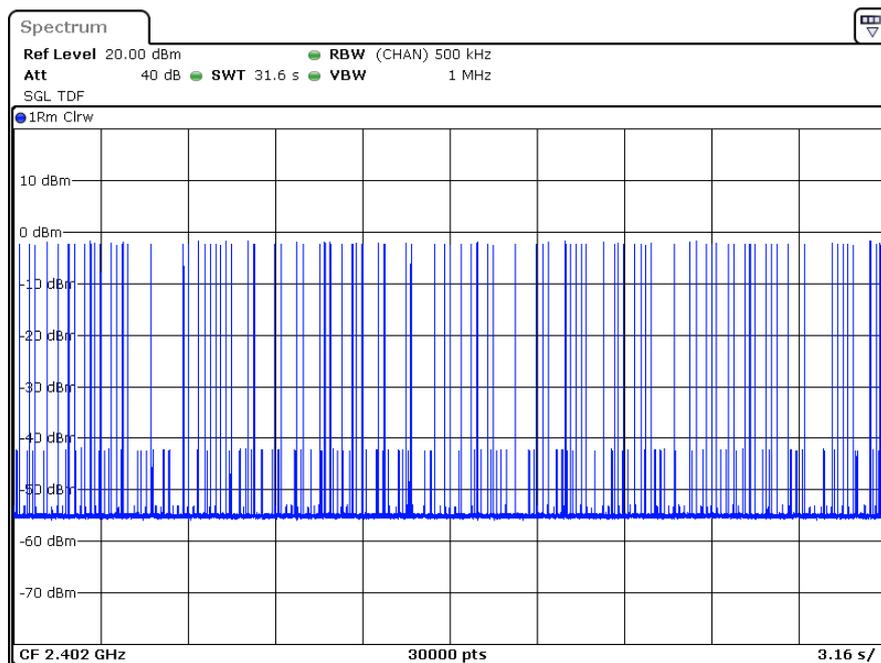

Number of hops (AFH mode)

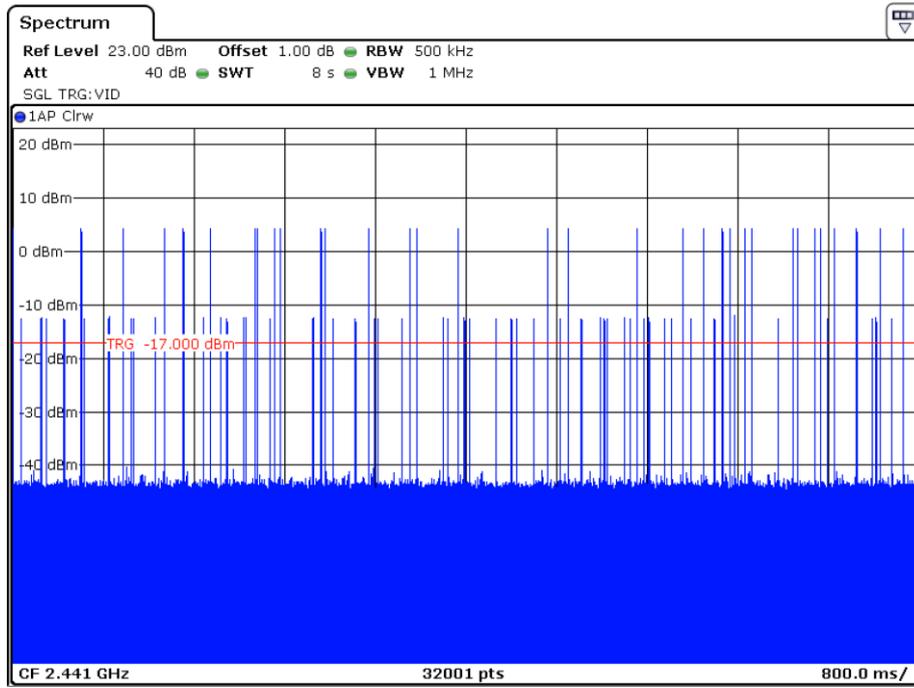

Applicant: Huawei Technologies Co., Ltd.

Date of Test: January 23, 2019

Model: X22B-C

3.8 Band Edge

Out of Band Conducted Emissions, FCC Rule 15.247(d):

In any 100 KHz bandwidth outside the EUT passband, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, or else shall meet the general limits for radiated emissions at frequencies outside the passband, whichever results in lower attenuation.

Furthermore, delta measurement technique for measuring bandage emissions was shown as below:

(i) Lower channel 2402MHz:

$$\begin{aligned}\text{Peak Resultant field strength} &= \text{Fundamental emissions (peak value)} - \text{delta from the} \\ &\quad \text{bandedge plot} \\ &= 101.1\text{dB}\mu\text{v/m} - 52.12\text{dB} \\ &= 48.98\text{dB}\mu\text{v/m}\end{aligned}$$

$$\begin{aligned}\text{Average Resultant field strength} &= \text{Fundamental emissions (Average value)} - \text{delta from the} \\ &\quad \text{bandedge plot} \\ &= 93.5\text{dB}\mu\text{v/m} - 52.12\text{dB} \\ &= 41.38\text{dB}\mu\text{v/m}\end{aligned}$$


(ii) Upper channel 2480MHz:

$$\begin{aligned}\text{Peak Resultant field strength} &= \text{Fundamental emissions (peak value)} - \text{delta from the} \\ &\quad \text{bandedge plot} \\ &= 101.2\text{dB}\mu\text{v/m} - 52.60\text{dB} \\ &= 48.6\text{dB}\mu\text{v/m}\end{aligned}$$


$$\begin{aligned}\text{Average Resultant field strength} &= \text{Fundamental emissions (Average value)} - \text{delta from the} \\ &\quad \text{bandedge plot} \\ &= 95.6\text{dB}\mu\text{v/m} - 52.60\text{dB} \\ &= 43.0\text{dB}\mu\text{v/m}\end{aligned}$$

The resultant field strength meets the general radiated emission limit in section 15.209, which does not exceed 74dB μ v/m (Peak Limit) and 54dB μ v/m (Average Limit).


Modulation Type: GFSK
Single Channel

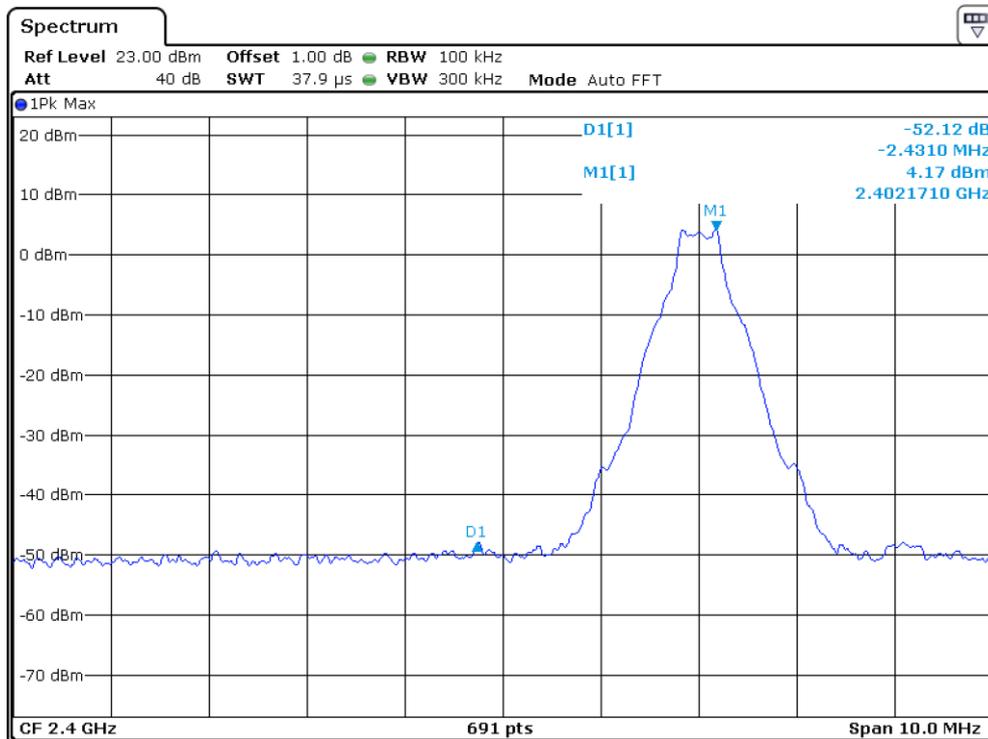


Single Channel

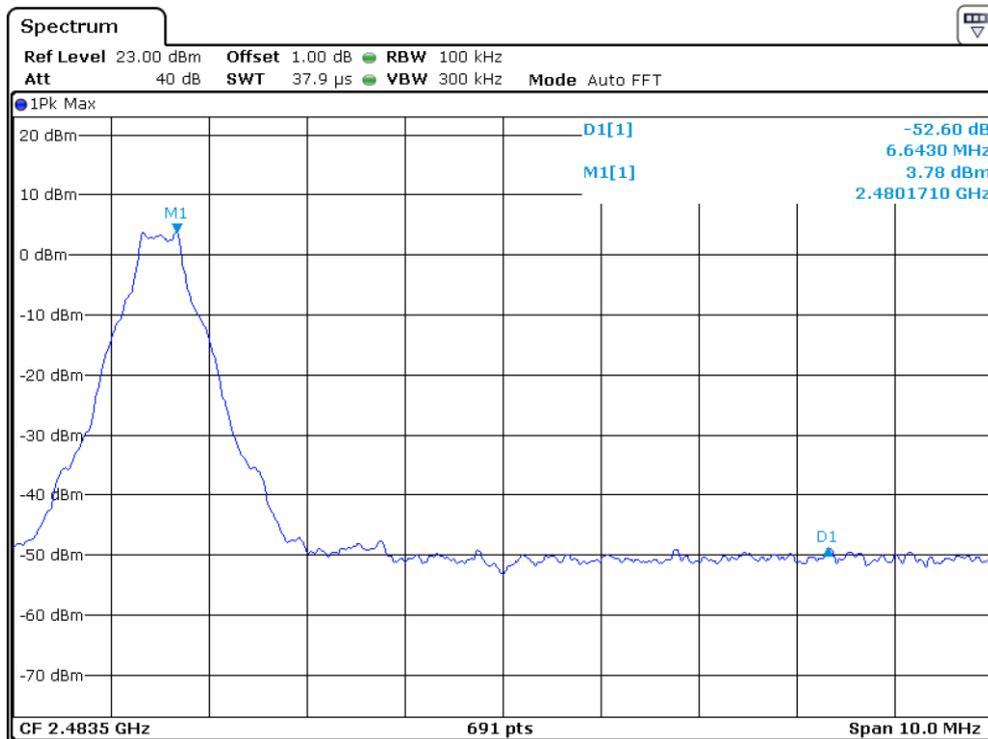

Hopping

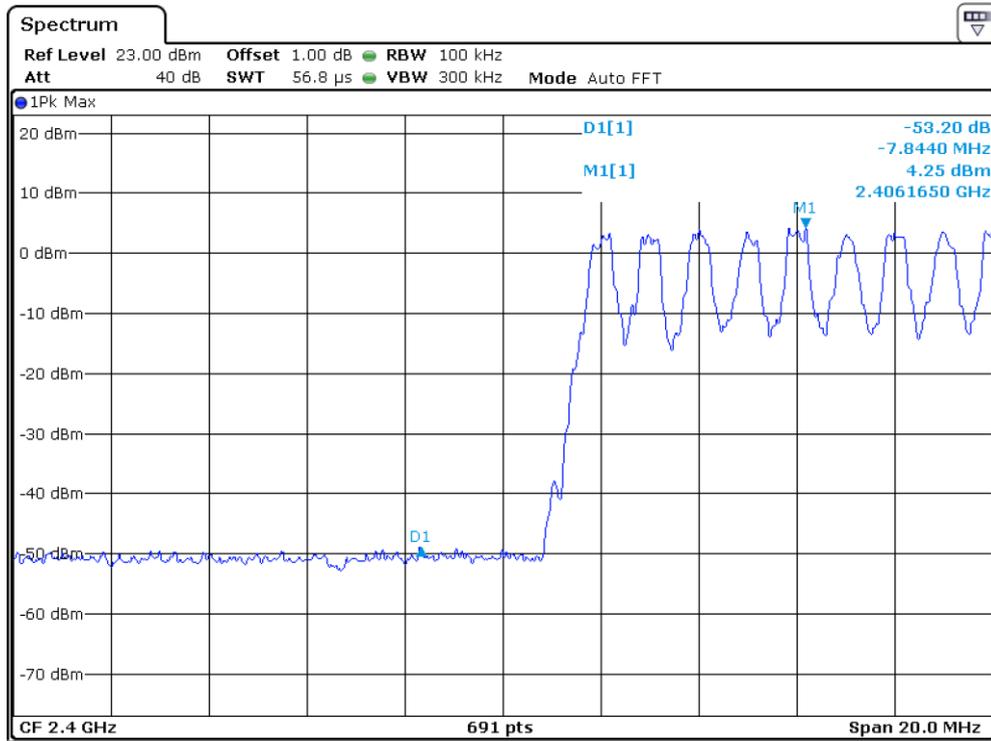

Hopping

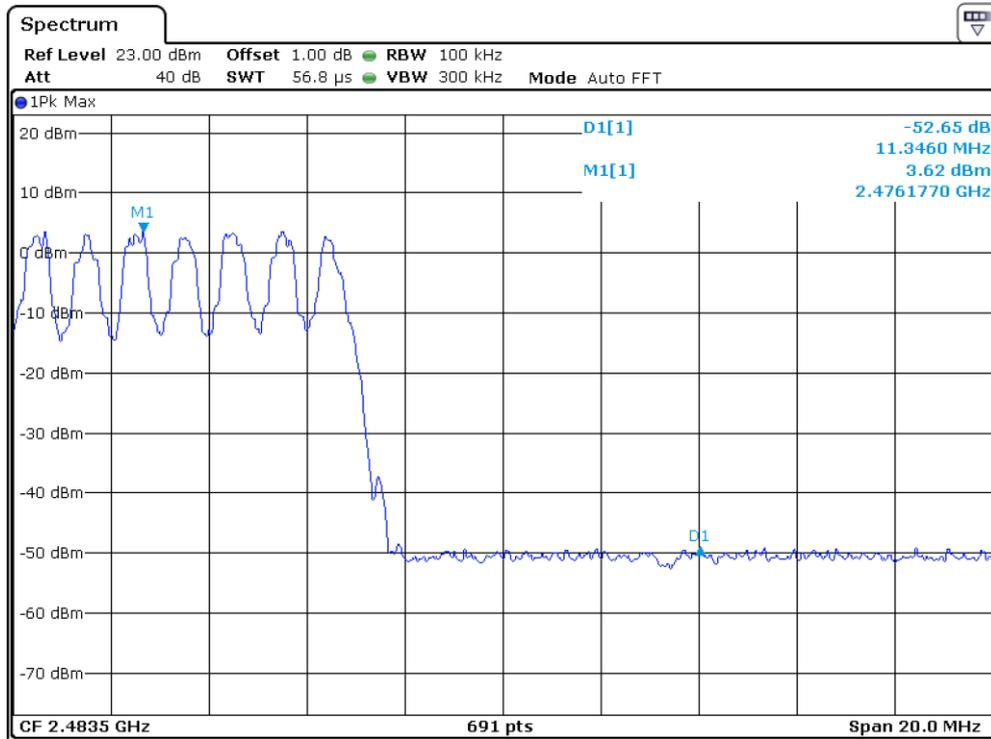



3.9 Transmitter Spurious Emissions (Conducted)

Out of Band Conducted Spurious Emissions, FCC Rule 15.247(d):



All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20 dB below the highest level of the desired power in the passband.

Modulation Type: GFSK

CH00

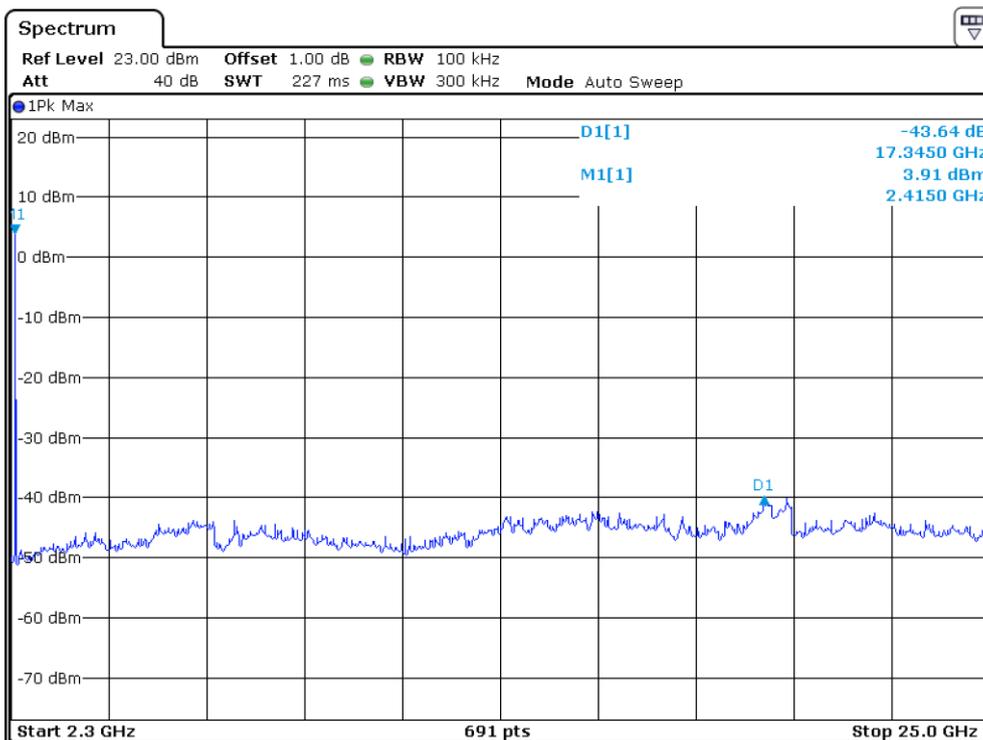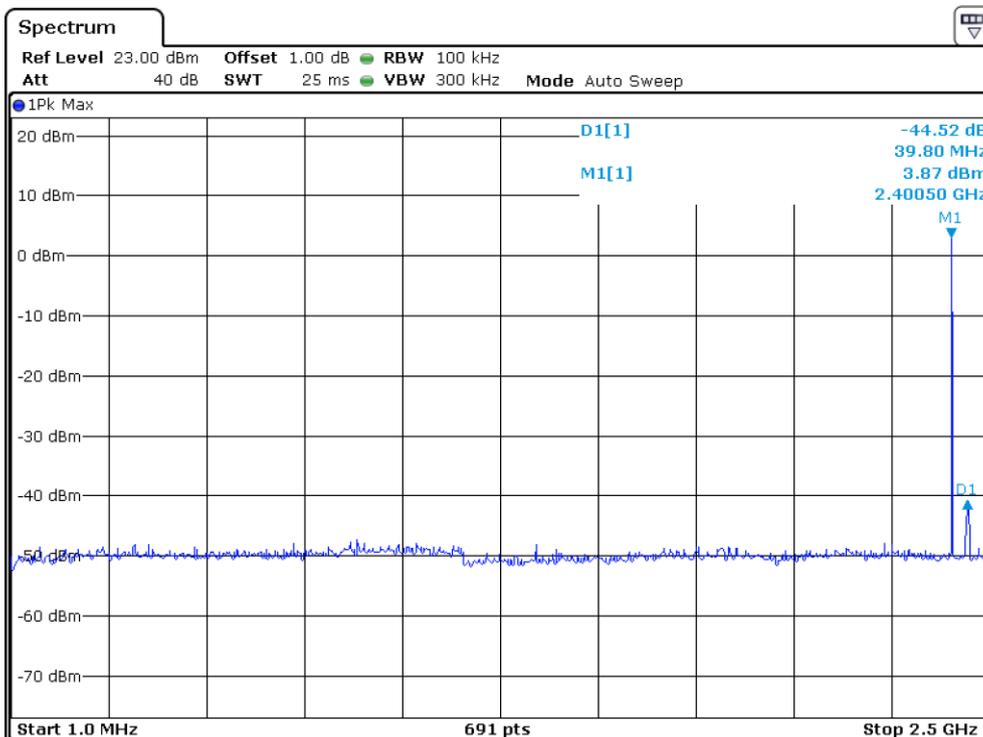

CH39

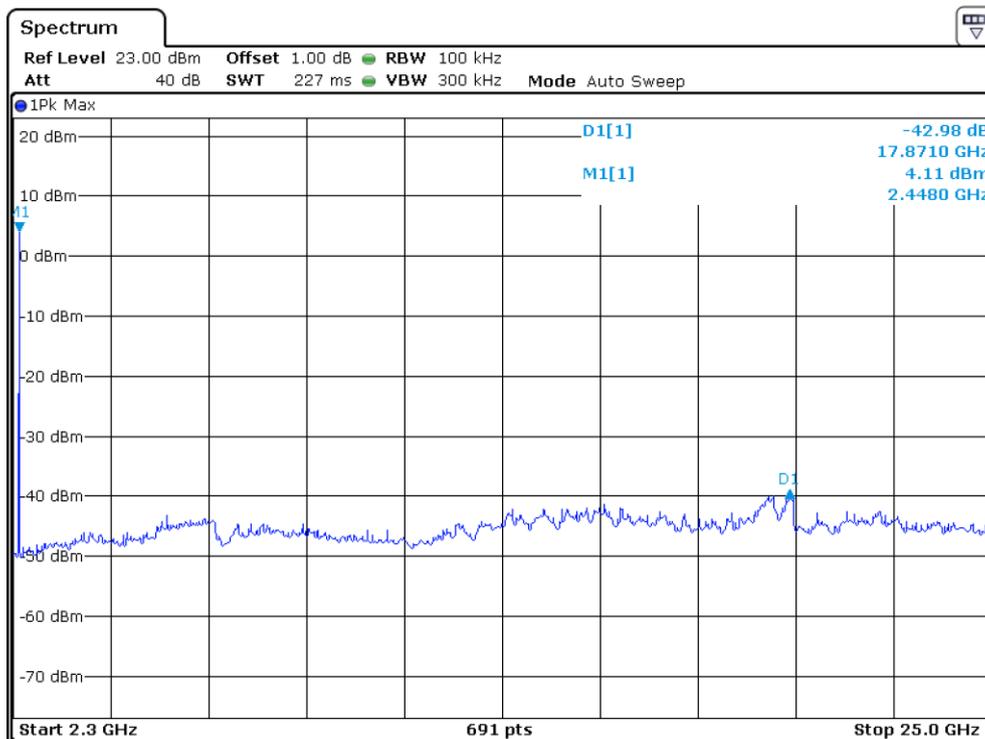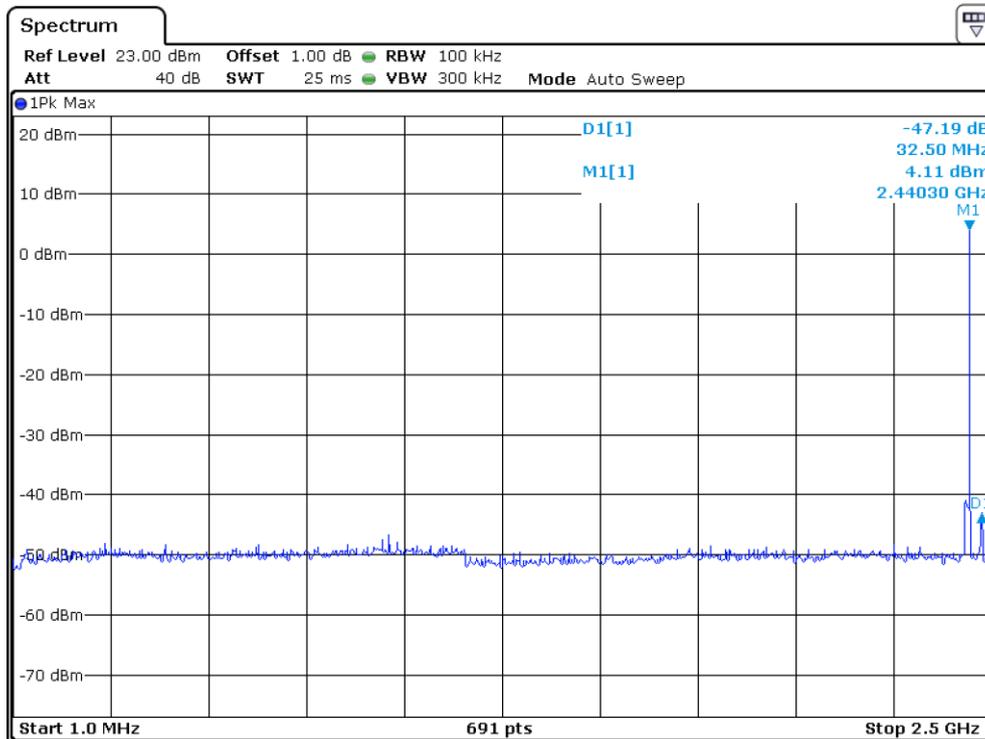

CH78

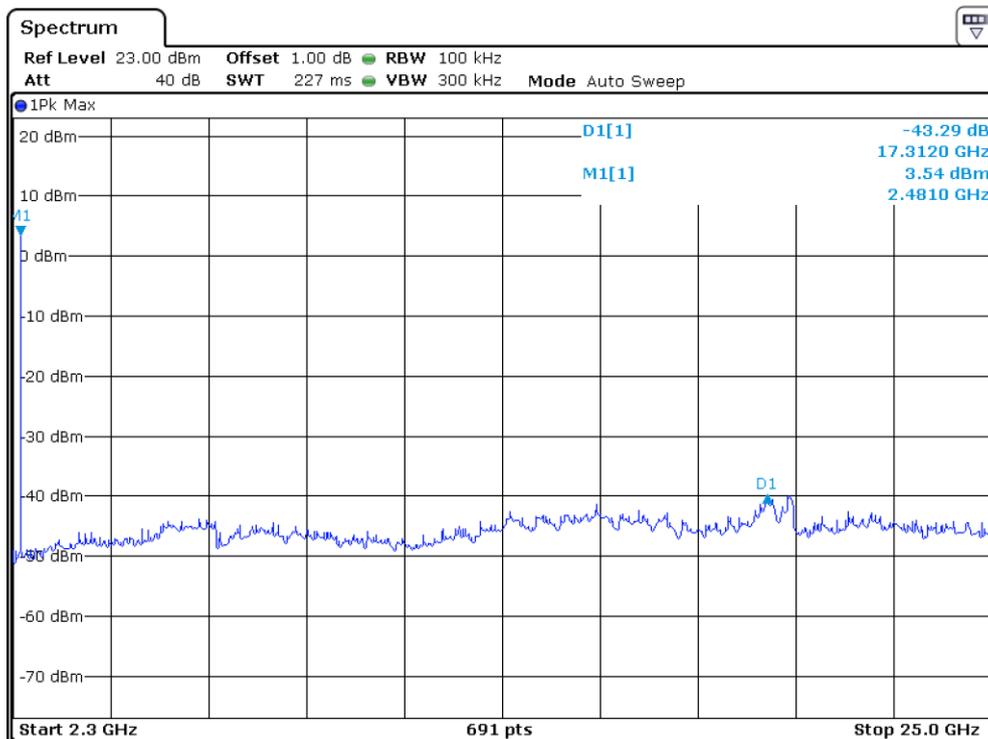
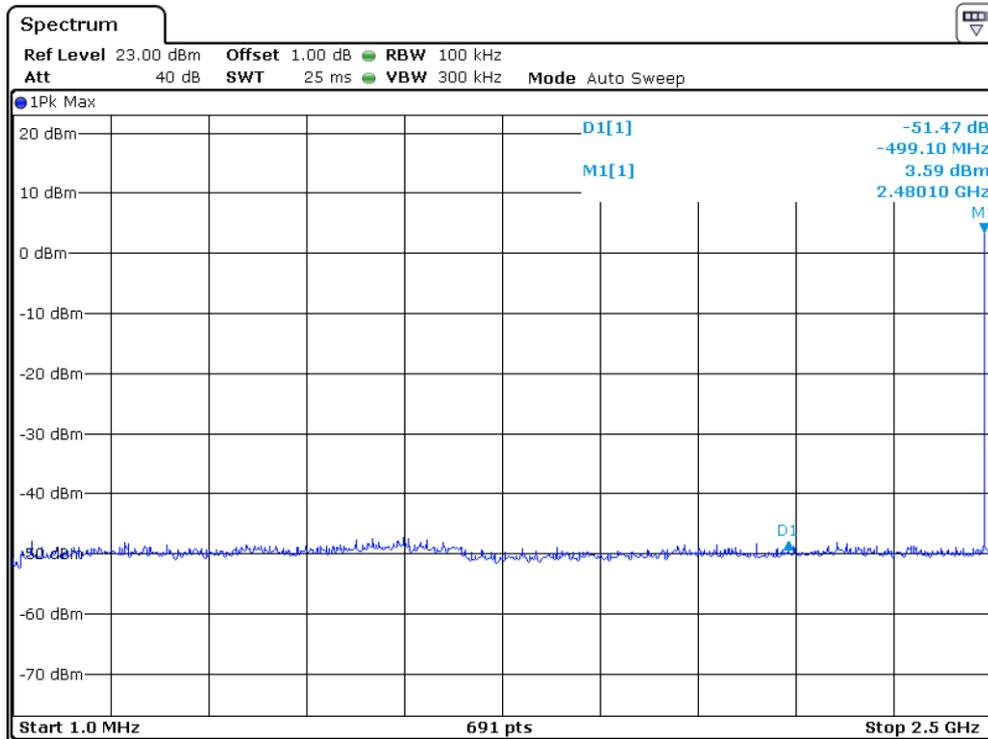


EXHIBIT 4

EQUIPMENT PHOTOGRAPHS

4.0 Equipment Photographs

For electronic filing, the photographs of the tested EUT are saved with filename: external photos.pdf & internal photos.pdf.

EXHIBIT 5

PRODUCT LABELLING

5.0 Product Labelling

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

EXHIBIT 6

TECHNICAL SPECIFICATIONS

6.0 Technical Specifications

For electronic filing, the block diagram and schematics of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.



Total Quality. Assured.

TEST REPORT

Intertek Report No.: 190102037SZN-001

EXHIBIT 7

INSTRUCTION MANUAL

7.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

EXHIBIT 8

MISCELLANEOUS INFORMATION

8.0 Miscellaneous Information

This miscellaneous information includes details of the measured bandedge, the test procedure and calculation of factor such as pulse desensitization.

8.1 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. The effective period (T_{eff}) is approximately $625\mu s$ for Bluetooth. With a resolution bandwidth (3dB) of 1MHz, so the pulse desensitivity factor is 0dB.

8.2 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.10: 2013.

The transmitting equipment under test (EUT) is placed on a styrene turntable which is four feet in diameter, up to 1GHz 0.8m and above 1GHz 1.5m in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjust through all three orthogonal axes to obtain maximum emission levels. The antenna height and polarization are varied during the testing to search for maximum signal levels.

Detector function for radiated emissions is in peak mode. Average measurements were made with measurement instrumentation employing an average detector function using a minimum resolution bandwidth of 1 MHz.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower. For line conducted emissions, the range scanned is 150 kHz to 30 MHz with RBW 9KHz used.

8.3 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements are made as described in ANSI C63.10: 2013.

The IF bandwidth used for measurement of radiated signal strength was 10 kHz for emission below 30 MHz and 120 kHz for emission from 30 MHz to 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. Above 1000 MHz, a resolution bandwidth of 1 MHz is used (RBW 3MHz used for fundamental emission).

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the restricted bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, but those measurements taken at a closer distance are so marked.

EXHIBIT 9

CONFIDENTIALITY REQUEST

9.0 Confidentiality Request

For electronic filing, the confidentiality request of the tested EUT is saved with filename: request.pdf.

EXHIBIT 10

TEST EQUIPMENT LIST

10 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ061-12	BiConiLog Antenna	ETS	3142E	00166158	14-Sep-2018	14-Sep-2019
SZ185-01	EMI Receiver	R&S	ESCI	100547	4-Jan-2019	4-Jan-2020
SZ061-08	Horn Antenna	ETS	3115	00092346	14-Sep-2018	14-Sep-2019
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	21-May-2018	21-May-2019
SZ056-03	Spectrum Analyzer	R&S	FSP 30	101148	05-Jun-2018	05-Jun-2019
SZ056-06	Signal Analyzer	R&S	FSV 40	101101	05-Jun-2018	05-Jun-2019
SZ181-04	Preamplifier	Agilent	8449B	3008A02474	24-Jan-2018	24-Jan-2019
					15-Jan-2019	15-Jan-2020
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	15-Dec-2018	15-Dec-2020
SZ062-02	RF Cable	RADIALL	RG 213U	--	10-Jun-2018	10-Jun-2019
SZ062-05	RF Cable	RADIALL	0.04-26.5GHz	--	10-Jun-2018	10-Jun-2019
SZ062-12	RF Cable	RADIALL	0.04-26.5GHz	--	10-Jun-2018	10-Jun-2019
SZ067-04	Notch Filter	Micro-Tronics	BRM50702-02	--	05-Jun-2018	05-Jun-2019
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	26-Oct-2018	26-Oct-2019
SZ187-01	Two-Line V-Network	R&S	ENV216	100072	26-Oct-2018	26-Oct-2019
SZ188-03	Shielding Room	ETS	RFD-100	4100	16-Jan-2017	16-Jan-2020

***** End of Report*****