

RADIO TEST REPORT

Test Report No. 14913531H-B-R1

Customer	Panasonic Automotive Systems Co., Ltd.
Description of EUT	Car Navigation
Model Number of EUT	AT2403
FCC ID	ACJ932AT2403
Test Regulation	FCC Part 15 Subpart C
Test Result	Complied
Issue Date	May 8, 2025
Remarks	- Wireless LAN (2.4 GHz band) and Bluetooth Low Energy part(s) - Radiated Spurious Emission only

Representative Test EngineerTomoya Sone
Engineer**Approved By**Takumi Shimada
Engineer

CERTIFICATE 5107.02

- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.
- ☒ There is no testing item of "Non-accreditation".

Report Cover Page - Form-ULID-003532 (DCS:13-EM-F0429) Issue# 24.0

ANNOUNCEMENT

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested. (Laboratory was not involved in sampling.)
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided by the customer for this report is identified in SECTION 1.
- The laboratory is not responsible for information provided by the customer which can impact the validity of the results.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

REVISION HISTORY

Original Test Report No.: 14913531H-B

This report is a revised version of 14913531H-B. 14913531H-B is replaced with this report.

Revision	Test Report No.	Date	Page Revised Contents
- (Original)	14913531H-B	December 20, 2024	-
1	14913531H-B-R1	May 8, 2025	<u>SECTION 2: Equipment Under Test (EUT)</u> - Added Test Date: April 24 to 27, 2025 <u>4.1 Operating Mode(s)</u> - Added mode and note *2) to Table of Simultaneous transmission (Page 11) <u>4.2 Configuration and Peripherals</u> - Exchanged cable information of Cable No.9 and No.10 in Table of List of Cables Used (Page 13) <u>SECTION 5: Radiated Spurious Emission</u> - Added calculation of Distance Factor for simultaneous transmission mode to Figure 1 <u>APPENDIX 1: Test Data</u> - Deleted data for Below 1 GHz from Page 46, 48, 49, 53, 54 - Added data of Simultaneous transmission mode (Page 58, 59): Tx 11ax-20 [OFDM] 2462 MHz + 11ax-40 [OFDM] 5795 MHz <u>APPENDIX 2: Test Instruments</u> - Added Test Equipment used from April 24 to 27, 2025

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	ICES	Interference-Causing Equipment Standard
AC	Alternating Current	IEC	International Electrotechnical Commission
AFH	Adaptive Frequency Hopping	IEEE	Institute of Electrical and Electronics Engineers
AM	Amplitude Modulation	IF	Intermediate Frequency
Amp, AMP	Amplifier	ILAC	International Laboratory Accreditation Conference
ANSI	American National Standards Institute	ISED	Innovation, Science and Economic Development Canada
Ant, ANT	Antenna	ISO	International Organization for Standardization
AP	Access Point	JAB	Japan Accreditation Board
ASK	Amplitude Shift Keying	LAN	Local Area Network
Atten., ATT	Attenuator	LIMS	Laboratory Information Management System
AV	Average	MCS	Modulation and Coding Scheme
BPSK	Binary Phase-Shift Keying	MRA	Mutual Recognition Arrangement
BR	Bluetooth Basic Rate	N/A	Not Applicable
BT	Bluetooth	NIST	National Institute of Standards and Technology
BT LE	Bluetooth Low Energy	NS	No signal detect.
BW	BandWidth	NSA	Normalized Site Attenuation
Cal Int	Calibration Interval	NVLAP	National Voluntary Laboratory Accreditation Program
CCK	Complementary Code Keying	OBW	Occupied Band Width
Ch., CH	Channel	OFDM	Orthogonal Frequency Division Multiplexing
CISPR	Comite International Special des Perturbations Radioelectriques	P/M	Power meter
CW	Continuous Wave	PCB	Printed Circuit Board
DBPSK	Differential BPSK	PER	Packet Error Rate
DC	Direct Current	PHY	Physical Layer
D-factor	Distance factor	PK	Peak
DFS	Dynamic Frequency Selection	PN	Pseudo random Noise
DQPSK	Differential QPSK	PRBS	Pseudo-Random Bit Sequence
DSSS	Direct Sequence Spread Spectrum	PSD	Power Spectral Density
EDR	Enhanced Data Rate	QAM	Quadrature Amplitude Modulation
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	QP	Quasi-Peak
EMC	ElectroMagnetic Compatibility	QPSK	Quadri-Phase Shift Keying
EMI	ElectroMagnetic Interference	RBW	Resolution Band Width
EN	European Norm	RDS	Radio Data System
ERP, e.r.p.	Effective Radiated Power	RE	Radio Equipment
EU	European Union	RF	Radio Frequency
EUT	Equipment Under Test	RMS	Root Mean Square
Fac.	Factor	RSS	Radio Standards Specifications
FCC	Federal Communications Commission	Rx	Receiving
FHSS	Frequency Hopping Spread Spectrum	SA, S/A	Spectrum Analyzer
FM	Frequency Modulation	SG	Signal Generator
Freq.	Frequency	SVSWR	Site-Voltage Standing Wave Ratio
FSK	Frequency Shift Keying	TR	Test Receiver
GFSK	Gaussian Frequency-Shift Keying	Tx	Transmitting
GNSS	Global Navigation Satellite System	VBW	Video BandWidth
GPS	Global Positioning System	Vert.	Vertical
Hori.	Horizontal	WLAN	Wireless LAN

CONTENTS	PAGE
SECTION 1: Customer Information	5
SECTION 2: Equipment Under Test (EUT).....	5
SECTION 3: Test Specification, Procedures & Results	7
SECTION 4: Operation of EUT during testing	10
SECTION 5: Radiated Spurious Emission.....	14
APPENDIX 1: Test Data	17
Burst rate confirmation	17
Radiated Spurious Emission.....	20
APPENDIX 2: Test Instruments	62
APPENDIX 3: Photographs of Test Setup	64
Radiated Spurious Emission.....	64

SECTION 1: Customer Information

Company Name	Panasonic Automotive Systems Co., Ltd.*1)
Address	4261, Ikonobe-cho, Tsuzuki-ku, Yokohama-shi, Kanagawa-ken 224-8520, Japan
Telephone Number	+81-50-1802-5117
Contact Person	Daisuke Takahata

*1) The Grantee name in the FCC application is "Panasonic Corporation of North America".

The information provided by the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer Information
- SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
- SECTION 4: Operation of EUT during testing

SECTION 2: Equipment Under Test (EUT)

2.1 Identification of EUT

Description	Car Navigation
Model Number	AT2403
Serial Number	Refer to SECTION 4.2
Condition	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	No Modification by the test lab
Receipt Date	October 25, 2024
Test Date	October 28 to November 17, 2024 April 24 to 27, 2025

2.2 Product Description

General Specification

Rating	DC 13.2 V
Operating temperature	-30 deg. C to 65 deg. C

Radio Specification

Bluetooth (BR / EDR / BT LE)

Equipment Type	Transceiver
Frequency of Operation	2402 MHz to 2480 MHz
Type of Modulation	FHSS, GFSK / $\pi/4$ -DQPSK, 8DPSK / GFSK
Antenna Gain	4 dBi

WLAN (IEEE802.11b/11g/11n-20/11ax-20)

Equipment Type	Transceiver
Frequency of Operation	2412 MHz to 2462 MHz
Type of Modulation	DSSS, OFDM
	OFDMA (IEEE802.11ax only) 26/52/106/242-tone RU
Antenna Gain	4 dBi

WLAN (IEEE802.11a/11n-20/11ac-20/11ax-20/11n-40/11ac-40/11ax-40/11ac-80/11ax-80)

Equipment Type	Transceiver	
Frequency of Operation	20 MHz Band	5180 MHz to 5240 MHz 5745 MHz to 5825 MHz
	40 MHz Band	5190 MHz to 5230 MHz 5755 MHz to 5795 MHz
	80 MHz Band	5210 MHz, 5775 MHz
Type of Modulation	OFDM	
	OFDMA (IEEE802.11ax only)	20 MHz: 26/52/106/242-tone RU
		40 MHz: 26/52/106/242/484-tone RU
80 MHz: 26/52/106/242/484/996-tone RU		
Antenna Gain	RF0: 5 dBi RF1: 5 dBi	

SECTION 3: Test Specification, Procedures & Results

3.1 Test Specification

Test Specification	FCC Part 15 Subpart C The latest version on the first day of the testing period
Title	FCC 47 CFR Part 15 Radio Frequency Device Subpart C Intentional Radiators Section 15.207 Conducted limits Section 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

3.2 Procedures and Results

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
Spurious Emission Restricted Band Edges	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.13	FCC: Section 15.247(d) ISED: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10	4.2 dB 2483.5 MHz, AV, Horizontal	Complied	Radiated (above 30 MHz) *1)
Note: UL Japan, Inc.'s EMI Work Procedures: Work Instructions-ULID-003591 and Work Instructions-ULID-003593. * In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred. *1) Radiated test was selected over 30 MHz based on section 15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02 8.5 and 8.6.					

FCC Part 15.31 (e)

This EUT provides the stable voltage constantly to RF part regardless of input voltage.
Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT.
Therefore, the equipment complies with the antenna requirement of Section 15.203.

3.3 Addition to Standard

No addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

Measurement uncertainty is not taken into account when stating conformity with a specified requirement.
Note: When margins obtained from test results are less than the measurement uncertainty, the test results may exceed the limit.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k = 2$.

Radiated emission

Measurement distance	Frequency range		Unit	Calculated Uncertainty (+/-)
3 m	9 kHz to 30 MHz		dB	3.3
10 m			dB	3.1
3 m	30 MHz to 200 MHz	Horizontal	dB	5.0
		Vertical	dB	5.0
	200 MHz to 1000 MHz	Horizontal	dB	5.2
		Vertical	dB	6.2
10 m	30 MHz to 200 MHz	Horizontal	dB	5.5
		Vertical	dB	5.4
	200 MHz to 1000 MHz	Horizontal	dB	5.5
		Vertical	dB	5.5
3 m	1 GHz to 6 GHz		dB	5.1
	6 GHz to 18 GHz		dB	5.4
1 m	10 GHz to 18 GHz		dB	5.4
	18 GHz to 26.5 GHz		dB	5.3
	26.5 GHz to 40 GHz		dB	4.8
0.5 m	26.5 GHz to 40 GHz		dB	5.0

3.5 Test Location

UL Japan, Inc. Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 Japan

Telephone: +81-596-24-8999

A2LA Certificate Number: 5107.02 / FCC Test Firm Registration Number: 884919

ISED Lab Company Number: 2973C / CAB identifier: JP0002

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.5 measurement room	6.4 x 6.4 x 3.0	6.4 x 6.4	-	-
No.6 shielded room	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.10 shielded room	3.8 x 2.8 x 2.8	3.8 x 2.8	-	-
No.11 measurement room	4.0 x 3.4 x 2.5	N/A	-	-
No.12 measurement room	2.6 x 3.4 x 2.5	N/A	-	-
Large Chamber	16.9 x 22.1 x 10.17	16.9 x 22.1	-	10 m
Small Chamber	5.3 x 6.69 x 3.59	5.3 x 6.69	-	-

3.6 Test Data, Test Instruments, and Test Set Up

Refer to APPENDIX.

SECTION 4: Operation of EUT during testing

4.1 Operating Mode(s)

Mode	Remarks*
IEEE 802.11b (11b)	1 Mbps, PN9
IEEE 802.11n SISO 20 MHz BW (11ax-20)	MCS 10 (G.I. 1600 ns)
*The worst condition was determined based on the test result of Maximum Peak Output Power (Mid Channel)	
*Power of the EUT was set by the software as follows; Power Setting: 11b: 12 dBm 11ax-20 (OFDM): 13 dBm 11ax-20 (OFDMA): 7 dBm (26-tone RU), 10 dBm (52-tone RU), 13 dBm (106-tone RU / 242-tone RU) Software: OFDM: wifi_2g_serial OFDMA: OFDMA_TX_2G_serial_v2 (Date: 2024.06.25, Storage location: Driven by connected PC) *This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product. Test operating mode was determined as follows according to "Section 1 of 6 802.11 a/b/g/n testing - Managing Complex Regulatory Approvals - " of TCB Council Workshop October 2009 and also was judged the necessity of 802.11ax mode by the pre-test.	

*The Details of Operating Mode(s)

Test Item	Operating Mode	Tested Frequency
Radiated Spurious Emission (Below 1 GHz)	Tx 11ax-20 *1)	2462 MHz
Radiated Spurious Emission (Above 1 GHz)	Tx 11b	2412 MHz
	Tx 11ax-20 [OFDM] *2)	2437 MHz
	Tx 11ax-20 [OFDMA] *3)	2462 MHz
*1) The mode was tested as a representative, because it had the highest power at antenna terminal test. *2) Since 11g, 11n-20, and 11ax-20 have the same modulation method and no differences in transmitting specification, test was performed on the representative mode that had the highest output power. *3) OFDMA configuration tests were conducted only at the band edge since preliminary testing indicated that the other spurious emission was lower than OFDM.		

[BT LE]

Mode	Remarks*
Bluetooth Low Energy (BT LE)	1M-PHY Uncoded PHY (1M), Maximum Packet Size, PRBS9
Bluetooth Low Energy (BT LE)	2M-PHY Uncoded PHY (2M), Maximum Packet Size, PRBS9
*Power of the EUT was set by the software as follows; Power Setting: 9 dBm Software: bluetooth_serial_v3 (Date: 2024.07.25, Storage location: Driven by connected PC) *This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.	


*The Details of Operating Mode(s)

Test Item	Operating Mode	Tested Frequency
Radiated Spurious Emission (Below 1 GHz)	Tx BT LE, 2M *1)	2402 MHz
Radiated Spurious Emission (Above 1 GHz)	Tx BT LE, 1M Tx BT LE, 2M	2402 MHz 2440 MHz 2480 MHz
*1) Spurious emissions for frequencies below 1 GHz were limited to the channel that had the highest power during the antenna terminal test, as preliminary testing indicated that changing the operating frequency had no significant impact on the emissions in those frequency bands.		

Simultaneous transmission

Test Item	Mode
Radiated Spurious Emission	Tx BT LE 2M 2480 MHz + 11ax-20 [52-tone RU/Index 40] 5825 MHz *1) Tx 11ax-20 [OFDM] 2462 MHz + 11ax-40 [OFDM] 5795 MHz *2)
*1) The test was conducted on representative mode, the worst mode of GHz band at Spurious emission test for BT and the mode had the highest power at Antenna terminal conducted test for WLAN 5 GHz band. *2) The test was conducted on representative mode, the worst mode of GHz band at Spurious emission test for WLAN 2.4 GHz band (OFDM) and the mode had the highest power at Antenna terminal conducted test for WLAN 5 GHz band (OFDM).	

4.2 Configuration and Peripherals

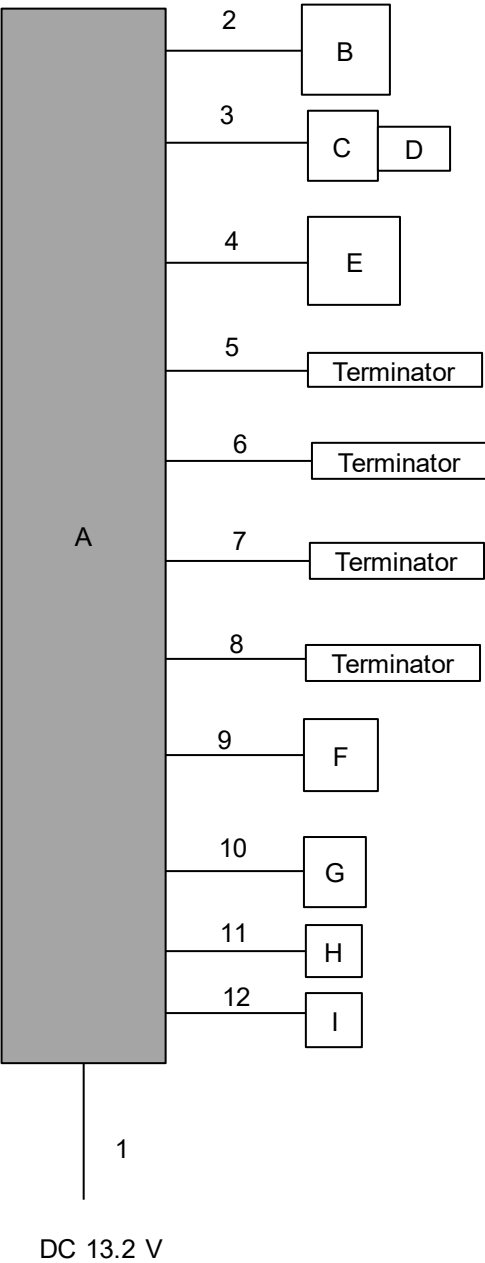

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support Equipment

No.	Item	Model number	Serial Number	Manufacturer	Remarks
A	Car Navigation	AT2403	500001	Panasonic Automotive Systems Co., Ltd.	EUT
B	ADAS Jig	GVIF3OUT2A	8	Persol AVC Technology Co., Ltd.	-
C	USB BOX	DEP38-10029	-	Japan Aviation Electronics Industry, Ltd.	-
D	USB Memory	RUF3-K16GB	P10416	Buffalo	-
E	Steering switch	-	1400	Panasonic	-
F	GPS Antenna	ANN-MS	20N40132	U-Blox	-
G	Microphone	SDA3520A	4AC011628	Panasonic	-
H	Microphone	SDA3520A	4AC011628	Panasonic	-
I	Amplifier	7669	01A230000384V	DENSO	-

List of Cables Used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	DC Cable	4.3	Unshielded	Unshielded	-
2	Signal Cable	1.9	Unshielded	Unshielded	-
3	USB Cable	2.3	Shielded	Shielded	-
4	Signal Cable	3.0	Unshielded	Unshielded	-
5	XM Antenna Cable	3.0	Shielded	Shielded	-
6	Signal Cable	1.0	Shielded	Shielded	-
7	FM Cable	3.0	Shielded	Shielded	-
8	FM Cable	3.0	Shielded	Shielded	-
9	GPS Antenna Cable	2.0	Shielded	Shielded	-
10	Signal Cable	4.3	Unshielded	Unshielded	-
11	Signal Cable	4.3	Unshielded	Unshielded	-
12	Signal Cable	3.0	Unshielded	Unshielded	-

SECTION 5: Radiated Spurious Emission

Test Procedure

It was measured based on "8.5 and 8.6 of KDB 558074 D01 15.247 Meas Guidance v05r02".

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane. Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn


In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9(ISED) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (ISED).

Frequency	Below 1 GHz	Above 1 GHz		20 dBc
Instrument Used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	PK	AV	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	11.12.2.5.1 RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (RMS) Trace: 100 traces 11.12.2.5.2 The duty cycle was less than 98% for detected noise, a duty factor was added to the 11.12.2.5.1 results.	RBW: 100 kHz VBW: 300 kHz

Figure 1: Test Setup


Below 1 GHz

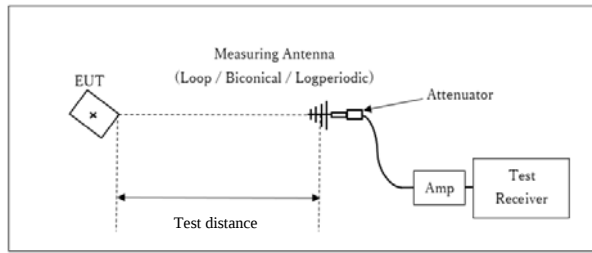

* : Center of turn table

Test Distance: 3 m

1 GHz to 10 GHz

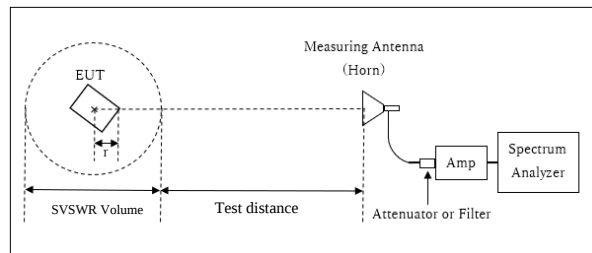

r : Radius of an outer periphery of EUT

* : Center of turn table

**Other than 11ax-20 [OFDM] 2462MHz +
11ax-40 [OFDM] 5795 MHz**

[1 GHz to 6 GHz]

Distance Factor: $20 \times \log (3.8 \text{ m} / 3.0 \text{ m}) = 2.06 \text{ dB}$

* Test Distance: $(3 + \text{SVSWR Volume} / 2) - r = 3.8 \text{ m}$

SVSWR Volume : 2.0 m

(SVSWR Volume has been calibrated based on CISPR 16-1-4.)

r = 0.2 m

[6 GHz to 10 GHz]

Distance Factor: $20 \times \log (4.8 \text{ m} / 3.0 \text{ m}) = 4.09 \text{ dB}$

* Test Distance: $(4.3 + \text{SVSWR Volume} / 2) - r = 4.8 \text{ m}$

SVSWR Volume : 1.4 m

(SVSWR Volume has been calibrated based on CISPR 16-1-4.)

r = 0.2 m

**Only 11ax-20 [OFDM] 2462MHz +
11ax-40 [OFDM] 5795 MHz**

[1 GHz to 6 GHz]

Distance Factor: $20 \times \log (3.55 \text{ m} / 3.0 \text{ m}) = 1.47 \text{ dB}$

* Test Distance: $(3 + \text{SVSWR Volume} / 2) - r = 3.55 \text{ m}$

SVSWR Volume : 1.5 m

(SVSWR Volume has been calibrated based on CISPR 16-1-4.)

r = 0.2 m

[6 GHz to 10 GHz]

Distance Factor: $20 \times \log (3.55 \text{ m} / 3.0 \text{ m}) = 1.47 \text{ dB}$


* Test Distance: $(3.25 + \text{SVSWR Volume} / 2) - r = 3.55 \text{ m}$

SVSWR Volume : 1.0 m

(SVSWR Volume has been calibrated based on CISPR 16-1-4.)

r = 0.2 m

10 GHz to 26.5 GHz

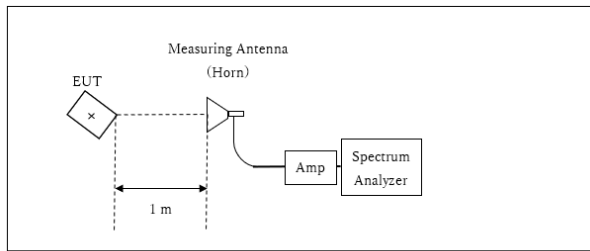

× : Center of turn table

Distance Factor: $20 \times \log (1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$
*Test Distance: 1 m

The test was made on EUT at the normal use position.

Test results are rounded off and limit are rounded down, so some differences might be observed.

Measurement Range : 30 MHz to 26.5 GHz
Test Data : APPENDIX
Test Result : Pass


APPENDIX 1: Test Data

Burst rate confirmation

Test place Ise EMC Lab. No.3 Semi Anechoic Chamber
Date October 30, 2024
Temperature / Humidity 22 deg. C / 63 % RH
Engineer Tetsuro Yoshida
Mode Tx

11b 1 Mbps

11ax-20 MCS10

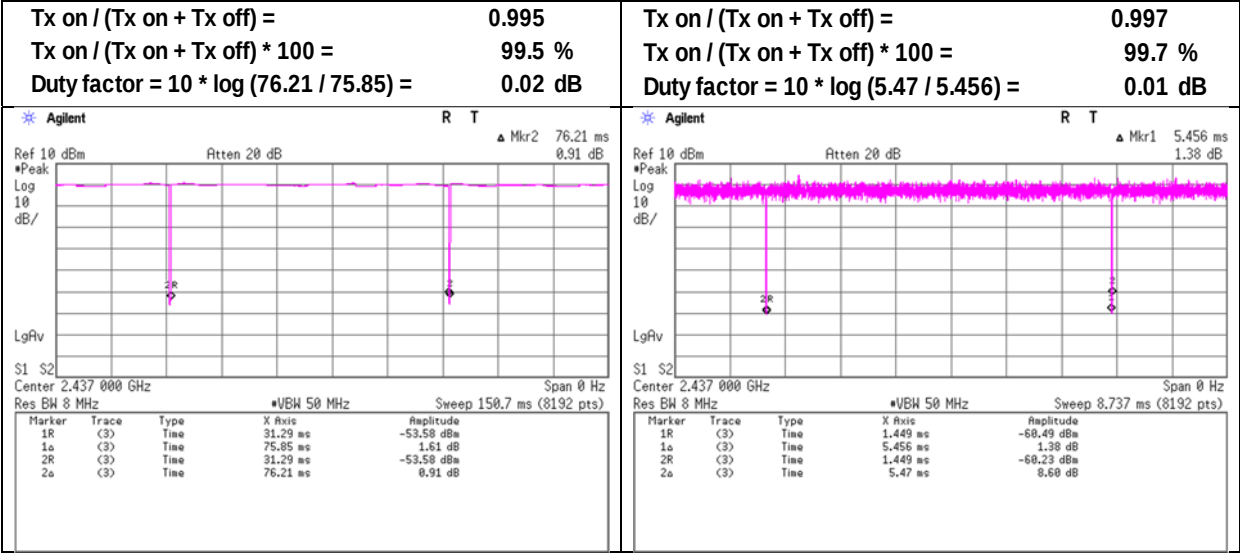


* Since the burst rate is not different between the channels, the data has been obtained on the representative channel.

Burst rate confirmation

Test place Ise EMC Lab. No.3 Semi Anechoic Chamber
Date October 30, 2024
Temperature / Humidity 22 deg. C / 63 % RH
Engineer Tetsuro Yoshida
Mode Tx


11ax-20 MCS10

26-tone RU

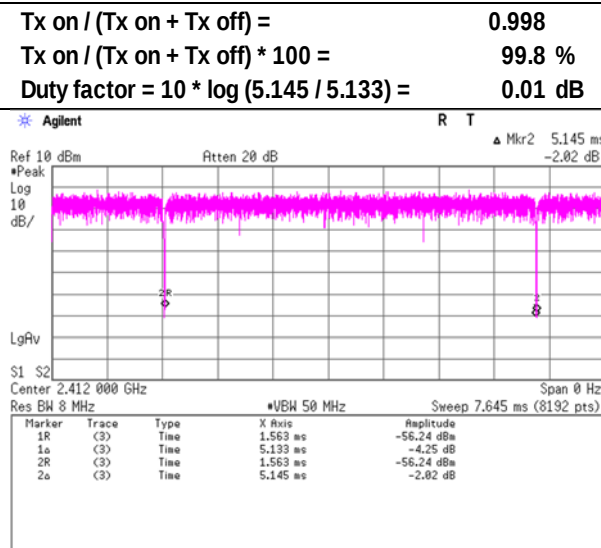


11ax-20 MCS10

52-tone RU

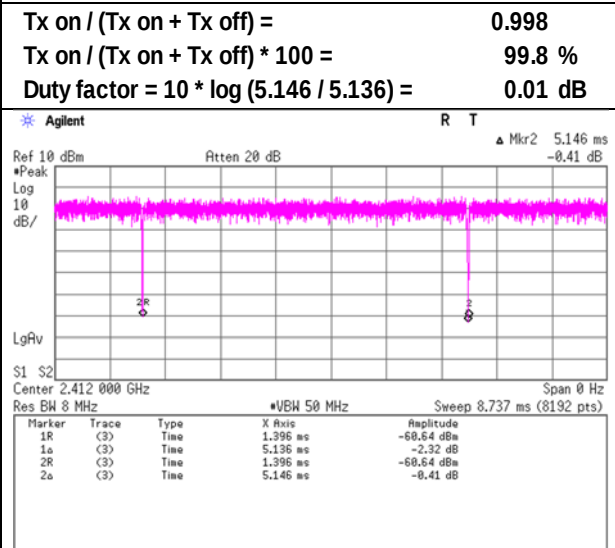


11ax-20 MCS10

106-tone RU

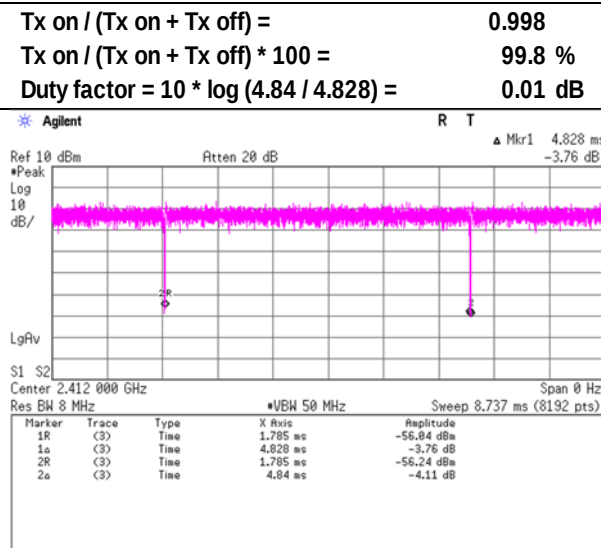

11ax-20 MCS10

242-tone RU

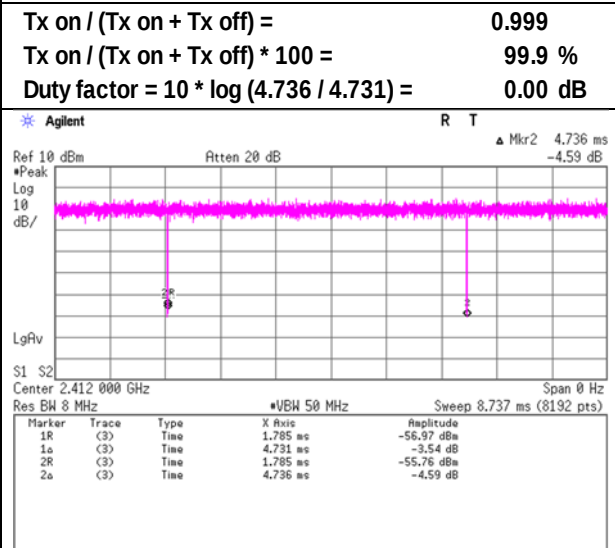


* Since the burst rate is not different between the channels, the data has been obtained on the representative channel.


Burst rate confirmation

Test place	Ise EMC Lab. No.3 Semi Anechoic Chamber
Date	October 30, 2024
Temperature / Humidity	22 deg. C / 63 % RH
Engineer	Tetsuro Yoshida
Mode	Tx

BT LE 1M

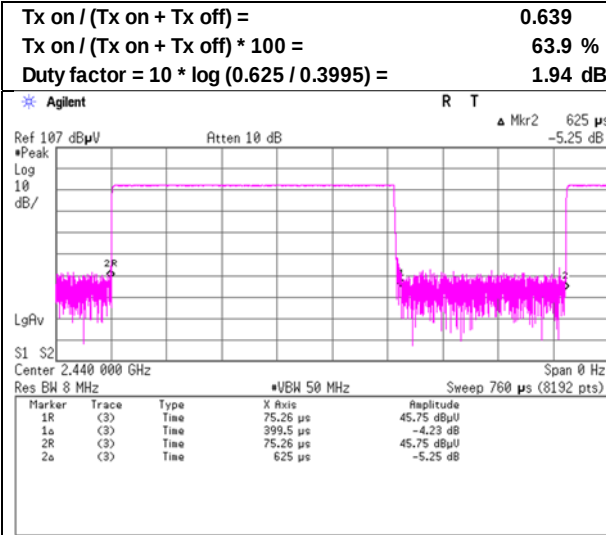

BT LE 2M

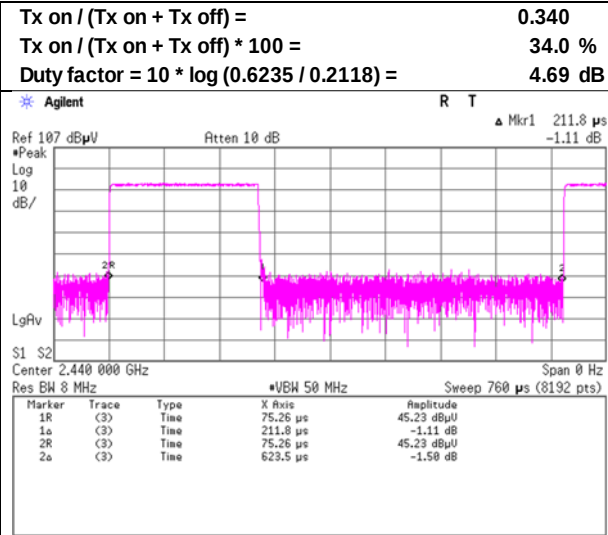

* Since the burst rate is not different between the channels, the data has been obtained on the representative channel.

Radiated Spurious Emission

Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	October 30, 2024	October 29, 2024	October 29, 2024
Temperature / Humidity	24 deg. C / 59 % RH	23 deg. C / 66 % RH	22 deg. C / 59 % RH
Engineer	Tomoya Sone (1 GHz to 6 GHz)	Tomoya Sone (6 GHz to 10 GHz)	Tetsuro Yoshida (10 GHz to 18 GHz)
Semi Anechoic Chamber	No.3		
Date	October 28, 2024		
Temperature / Humidity	23 deg. C / 56 % RH		
Engineer	Tomoya Sone (Above 18 GHz)		
Mode	Tx 11b 2412 MHz		

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	2390.0	47.7	36.3	27.5	5.0	32.2	-	48.1	36.6	73.9	53.9	25.8	17.3	
Hori.	4824.0	40.3	32.1	31.4	7.2	31.2	-	47.7	39.6	73.9	53.9	26.2	14.4	Floor noise
Hori.	5000.0	40.4	33.0	31.7	7.3	31.1	-	48.2	40.8	73.9	53.9	25.7	13.1	
Hori.	7236.0	42.0	33.9	35.6	8.5	32.0	-	54.1	46.0	73.9	53.9	19.8	7.9	Floor noise
Hori.	9648.0	42.1	34.4	35.7	8.9	32.7	-	54.1	46.3	73.9	53.9	19.8	7.6	Floor noise
Vert.	2390.0	45.3	33.2	27.5	5.0	32.2	-	45.7	33.6	73.9	53.9	28.3	20.3	
Vert.	4824.0	40.2	32.0	31.4	7.2	31.2	-	47.6	39.5	73.9	53.9	26.3	14.5	Floor noise
Vert.	5000.0	41.9	36.8	31.7	7.3	31.1	-	49.7	44.6	73.9	53.9	24.2	9.3	
Vert.	7236.0	41.9	33.8	35.6	8.5	32.0	-	54.0	45.9	73.9	53.9	19.9	8.0	Floor noise
Vert.	9648.0	42.0	34.3	35.7	8.9	32.7	-	54.0	46.2	73.9	53.9	19.9	7.7	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)
Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor
*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).
*QP detector was used up to 1GHz.



20dBc Data Sheet

Polarity	Frequency	Reading (PK)	Ant Factor	Loss	Gain	Result	Limit	Margin	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dB/m]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
Hori.	2412.0	100.8	27.5	5.1	32.2	101.1	-	-	Carrier
Hori.	2400.0	48.9	27.5	5.1	32.2	49.2	81.1	31.9	
Vert.	2412.0	95.5	27.5	5.1	32.2	95.8	-	-	Carrier
Vert.	2400.0	44.0	27.5	5.1	32.2	44.3	75.8	31.5	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)
Distance factor:
1 GHz - 6 GHz 20log (3.8 m / 3.0 m) = 2.06 dB
6 GHz - 10 GHz 20log (4.8 m / 3.0 m) = 4.09 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	October 30, 2024
Temperature / Humidity	24 deg. C / 59 % RH
Engineer	Tomoya Sone
	(1 GHz to 6 GHz)
Mode	Tx 11b 2412 MHz

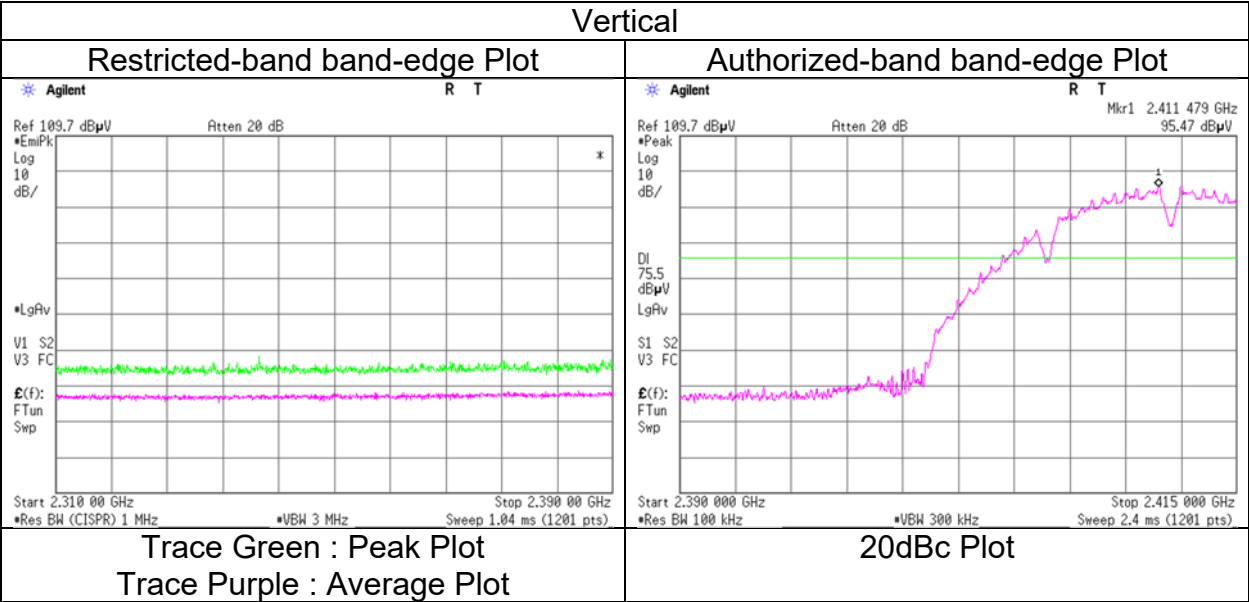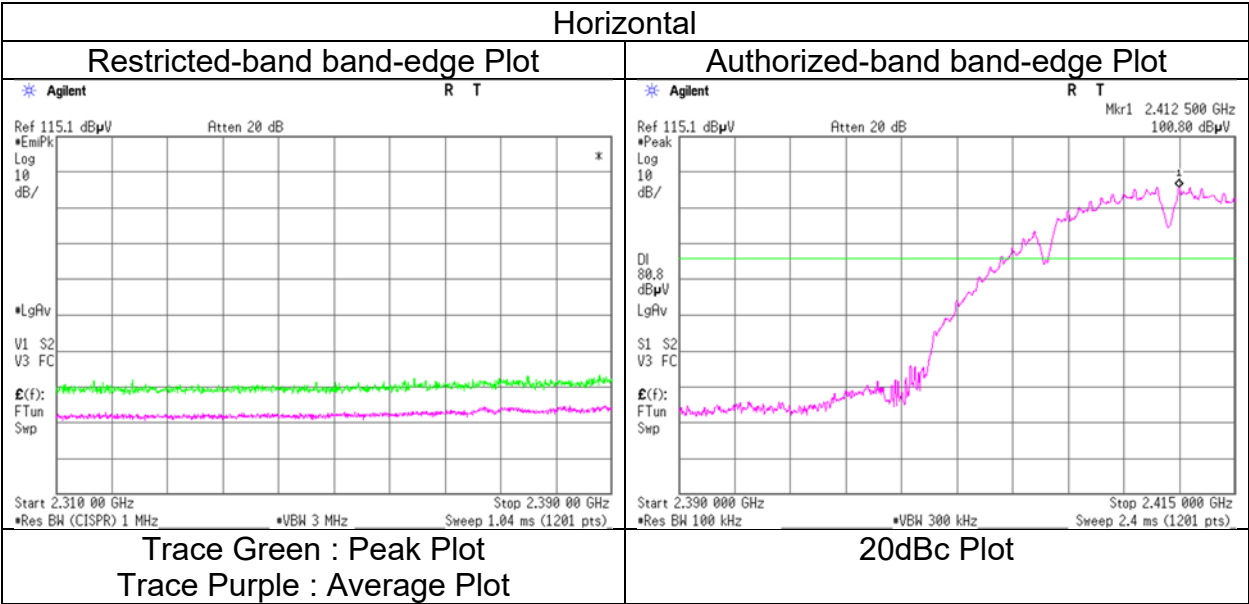

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge and authorized band edge were shown in tabular data.

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	4874.0	40.5	32.2	31.4	7.2	31.2	-	47.9	39.7	73.9	53.9	26.0	14.2	Floor noise
Hori.	5000.0	40.3	32.9	31.7	7.3	31.1	-	48.1	40.7	73.9	53.9	25.8	13.2	
Hori.	7311.0	42.1	33.9	35.6	8.4	32.0	-	54.1	45.9	73.9	53.9	19.8	8.1	Floor noise
Hori.	9748.0	41.7	33.7	35.9	9.0	32.7	-	53.8	45.9	73.9	53.9	20.1	8.0	Floor noise
Vert.	4874.0	40.4	32.1	31.4	7.2	31.2	-	47.8	39.6	73.9	53.9	26.1	14.3	Floor noise
Vert.	5000.0	41.8	36.7	31.7	7.3	31.1	-	49.6	44.5	73.9	53.9	24.3	9.4	
Vert.	7311.0	42.0	33.8	35.6	8.4	32.0	-	54.0	45.8	73.9	53.9	19.9	8.2	Floor noise
Vert.	9748.0	41.6	33.6	35.9	9.0	32.7	-	53.7	45.8	73.9	53.9	20.2	8.1	Floor noise

Distance factor:	1 GHz - 6 GHz	$20\log (3.8 \text{ m} / 3.0 \text{ m}) = 2.06 \text{ dB}$
	6 GHz - 10 GHz	$20\log (4.8 \text{ m} / 3.0 \text{ m}) = 4.09 \text{ dB}$
	10 GHz - 26.5 GHz	$20\log (1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

Radiated Spurious Emission

Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date October 30, 2024 No.3 No.3
 October 29, 2024 October 29, 2024
Temperature / Humidity 24 deg. C / 59 % RH 23 deg. C / 66 % RH 22 deg. C / 59 % RH
Engineer Tomoya Sone Tomoya Sone Tetsuro Yoshida
 (1 GHz to 6 GHz) (6 GHz to 10 GHz) (10 GHz to 18 GHz)

Semi Anechoic Chamber No.3
Date October 28, 2024
Temperature / Humidity 23 deg. C / 56 % RH
Engineer Tomoya Sone
 (Above 18 GHz)
Mode Tx 11b 2462 MHz



Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	2483.5	48.6	38.3	27.4	5.1	32.2	-	48.9	38.6	73.9	53.9	25.0	15.3	
Hori.	4924.0	40.8	32.4	31.5	7.2	31.1	-	48.3	40.0	73.9	53.9	25.6	14.0	Floor noise
Hori.	5000.0	40.2	32.8	31.7	7.3	31.1	-	48.0	40.6	73.9	53.9	25.9	13.3	
Hori.	7386.0	42.6	33.7	35.5	8.4	32.1	-	54.5	45.6	73.9	53.9	19.4	8.3	Floor noise
Hori.	9848.0	41.6	33.5	36.0	9.0	32.7	-	54.0	45.8	73.9	53.9	20.0	8.1	Floor noise
Vert.	2483.5	44.5	33.9	27.4	5.1	32.2	-	44.8	34.2	73.9	53.9	29.1	19.7	
Vert.	4924.0	40.7	32.3	31.5	7.2	31.1	-	48.2	39.9	73.9	53.9	25.7	14.1	Floor noise
Vert.	5000.0	41.7	36.6	31.7	7.3	31.1	-	49.5	44.4	73.9	53.9	24.4	9.5	
Vert.	7386.0	42.5	33.6	35.5	8.4	32.1	-	54.4	45.5	73.9	53.9	19.5	8.4	Floor noise
Vert.	9848.0	41.5	33.4	36.0	9.0	32.7	-	53.9	45.7	73.9	53.9	20.1	8.2	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)
Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor
*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).
*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 6 GHz 20log (3.8 m / 3.0 m) = 2.06 dB
 6 GHz - 10 GHz 20log (4.8 m / 3.0 m) = 4.09 dB
 10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date October 30, 2024
Temperature / Humidity 24 deg. C / 59 % RH
Engineer Tomoya Sone
 (1 GHz to 6 GHz)
Mode Tx 11b 2462 MHz

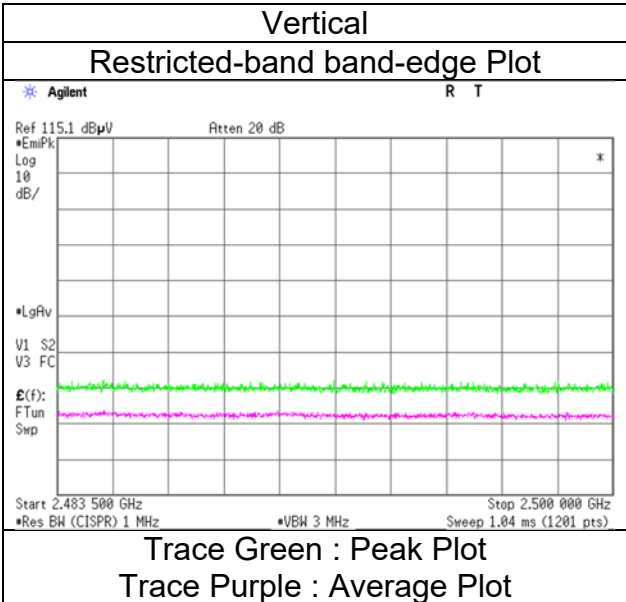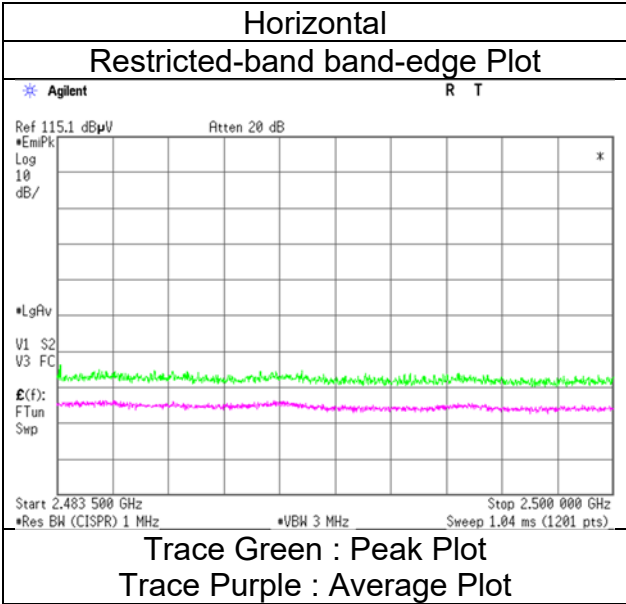

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	October 30, 2024	October 29, 2024	October 29, 2024
Temperature / Humidity	24 deg. C / 59 % RH	23 deg. C / 66 % RH	22 deg. C / 59 % RH
Engineer	Tomoya Sone (1 GHz to 6 GHz)	Tomoya Sone (6 GHz to 10 GHz)	Tetsuro Yoshida (10 GHz to 18 GHz)
Semi Anechoic Chamber	No.3		
Date	October 28, 2024		
Temperature / Humidity	23 deg. C / 56 % RH		
Engineer	Tomoya Sone (Above 18 GHz)		
Mode	Tx 11ax-20 [OFDM] 2412 MHz		

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	2390.0	57.8	39.8	27.5	5.0	32.2	-	58.1	40.1	73.9	53.9	15.8	13.8	Floor noise
Hori.	4824.0	40.3	32.1	31.4	7.2	31.2	-	47.7	39.6	73.9	53.9	26.2	14.4	
Hori.	5000.0	40.1	32.7	31.7	7.3	31.1	-	47.9	40.5	73.9	53.9	26.0	13.4	
Hori.	7236.0	42.0	33.9	35.6	8.5	32.0	-	54.1	46.0	73.9	53.9	19.8	7.9	
Hori.	9648.0	42.1	34.4	35.7	8.9	32.7	-	54.1	46.3	73.9	53.9	19.8	7.6	Floor noise
Vert.	2390.0	52.0	36.0	27.5	5.0	32.2	-	52.4	36.4	73.9	53.9	21.5	17.5	Floor noise
Vert.	4824.0	40.2	32.0	31.4	7.2	31.2	-	47.6	39.5	73.9	53.9	26.3	14.5	
Vert.	5000.0	41.6	36.5	31.7	7.3	31.1	-	49.4	44.3	73.9	53.9	24.5	9.6	
Vert.	7236.0	41.9	33.8	35.6	8.5	32.0	-	54.0	45.9	73.9	53.9	19.9	8.0	
Vert.	9648.0	42.0	34.3	35.7	8.9	32.7	-	54.0	46.2	73.9	53.9	19.9	7.7	Floor noise

$$\text{Result (QP / PK)} = \text{Reading} + \text{Ant Factor} + \text{Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))} - \text{Gain(Amplifier)}$$
$$\text{Result (AV)} = \text{Reading} + \text{Ant Factor} + \text{Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))} - \text{Gain(Amplifier)} + \text{Duty factor}$$

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

20dBc Data Sheet



Polarity	Frequency	Reading (PK)	Ant Factor	Loss	Gain	Result	Limit	Margin	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dB/m]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
Hori.	2412.0	99.6	27.5	5.1	32.2	99.9	-	-	Carrier
Hori.	2400.0	68.5	27.5	5.1	32.2	68.9	79.9	11.0	
Vert.	2412.0	93.5	27.5	5.1	32.2	93.8	-	-	Carrier
Vert.	2400.0	62.8	27.5	5.1	32.2	63.1	73.8	10.7	

$$\text{Result} = \text{Reading} + \text{Ant Factor} + \text{Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))} - \text{Gain(Amplifier)}$$

Distance factor:	1 GHz - 6 GHz	$20\log(3.8 \text{ m} / 3.0 \text{ m}) = 2.06 \text{ dB}$
	6 GHz - 10 GHz	$20\log(4.8 \text{ m} / 3.0 \text{ m}) = 4.09 \text{ dB}$
	10 GHz - 26.5 GHz	$20\log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	October 30, 2024
Temperature / Humidity	24 deg. C / 59 % RH
Engineer	Tomoya Sone
	(1 GHz to 6 GHz)
Mode	Tx 11ax-20 [OFDM] 2412 MHz

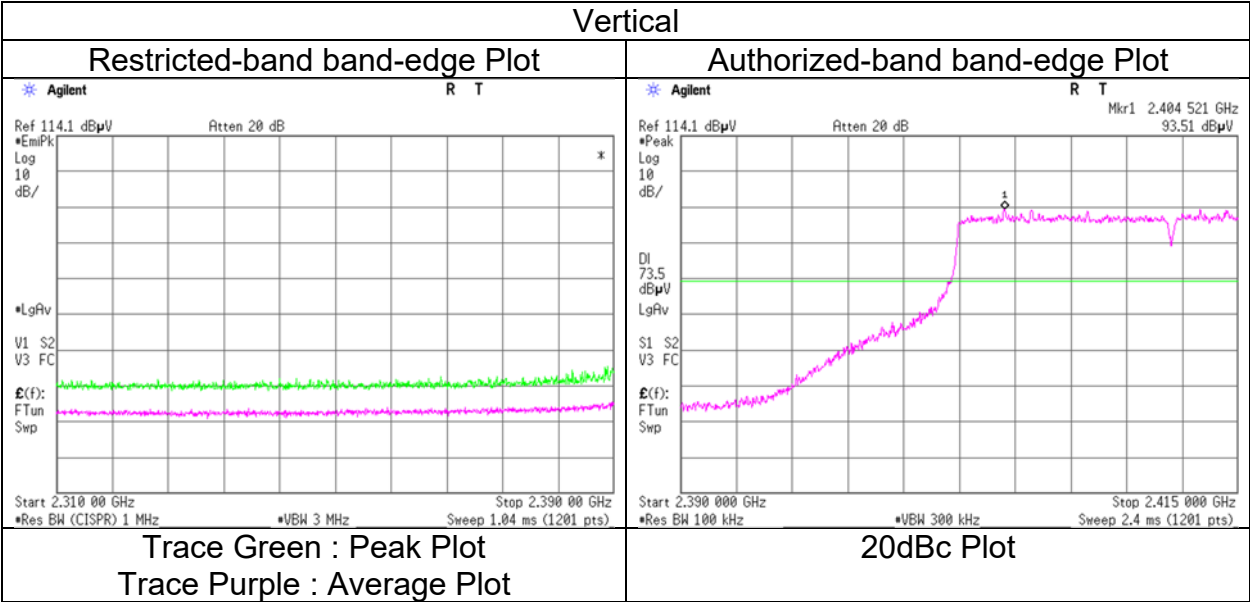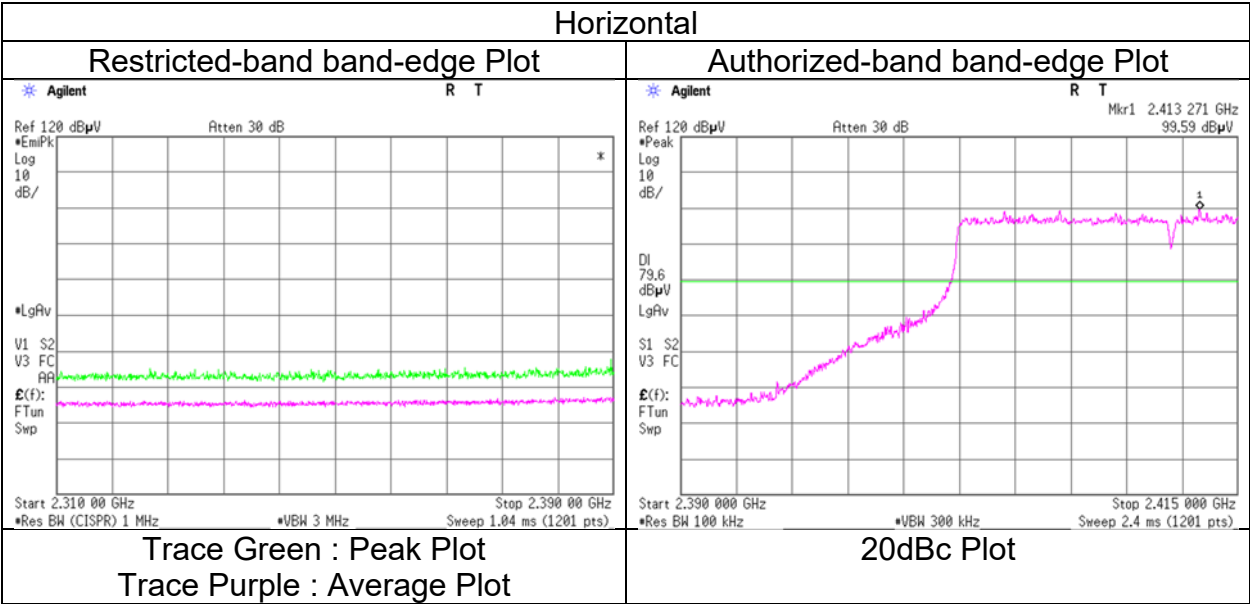

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge and authorized band edge were shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	October 30, 2024	October 29, 2024	October 29, 2024
Temperature / Humidity	24 deg. C / 59 % RH	23 deg. C / 66 % RH	22 deg. C / 59 % RH
Engineer	Tomoya Sone (1 GHz to 6 GHz)	Tomoya Sone (6 GHz to 10 GHz)	Tetsuro Yoshida (10 GHz to 18 GHz)

Semi Anechoic Chamber	No.3
Date	October 28, 2024
Temperature / Humidity	23 deg. C / 56 % RH
Engineer	Tomoya Sone (Above 18 GHz)
Mode	Tx 11ax-20 [OFDM] 2437 MHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	4874.0	40.5	32.2	31.4	7.2	31.2	-	47.9	39.7	73.9	53.9	26.0	14.2	Floor noise
Hori.	5000.0	40.1	32.7	31.7	7.3	31.1	-	47.9	40.5	73.9	53.9	26.0	13.4	
Hori.	7311.0	42.1	33.9	35.6	8.4	32.0	-	54.1	45.9	73.9	53.9	19.8	8.1	Floor noise
Hori.	9748.0	41.7	33.7	35.9	9.0	32.7	-	53.8	45.9	73.9	53.9	20.1	8.0	Floor noise
Vert.	4874.0	40.4	32.1	31.4	7.2	31.2	-	47.8	39.6	73.9	53.9	26.1	14.3	Floor noise
Vert.	5000.0	41.6	36.5	31.7	7.3	31.1	-	49.4	44.3	73.9	53.9	24.5	9.6	
Vert.	7311.0	42.0	33.8	35.6	8.4	32.0	-	54.0	45.8	73.9	53.9	19.9	8.2	Floor noise
Vert.	9748.0	41.6	33.6	35.9	9.0	32.7	-	53.7	45.8	73.9	53.9	20.2	8.1	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

$$\text{Result (AV)} = \text{Reading} + \text{Ant Factor} + \text{Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))} - \text{Gain(Amplifier)} + \text{Duty factor}$$

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1 GHz.

Distance factor:	1 GHz - 6 GHz	$20\log(3.8 \text{ m} / 3.0 \text{ m}) = 2.06 \text{ dB}$
	6 GHz - 10 GHz	$20\log(4.8 \text{ m} / 3.0 \text{ m}) = 4.09 \text{ dB}$
	10 GHz - 26.5 GHz	$20\log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

Radiated Spurious Emission

Test place Ise EMC Lab.
Semi Anechoic Chamber No.3 No.3 No.3
Date October 30, 2024 October 29, 2024 October 29, 2024
Temperature / Humidity 24 deg. C / 59 % RH 23 deg. C / 66 % RH 22 deg. C / 59 % RH
Engineer Tomoya Sone Tomoya Sone Tetsuro Yoshida
 (1 GHz to 6 GHz) (6 GHz to 10 GHz) (10 GHz to 18 GHz)

Semi Anechoic Chamber No.3 No.3
Date October 28, 2024 November 17, 2024
Temperature / Humidity 23 deg. C / 56 % RH 23 deg. C / 62 % RH
Engineer Tomoya Sone Hiroki Numata
 (Above 18 GHz) (Below 1 GHz)
Mode Tx 11ax-20 [OFDM] 2462 MHz



Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	42.7	27.2	-	13.8	7.2	32.2	-	16.0	-	40.0	-	24.0	-	
Hori.	52.6	31.8	-	10.3	7.3	32.2	-	17.3	-	40.0	-	22.8	-	
Hori.	66.7	28.7	-	6.7	7.5	32.2	-	10.7	-	40.0	-	29.3	-	
Hori.	265.9	33.0	-	12.6	9.4	32.0	-	23.0	-	46.0	-	23.0	-	
Hori.	298.9	30.2	-	13.6	9.7	32.0	-	21.5	-	46.0	-	24.5	-	
Hori.	320.5	27.3	-	14.1	9.8	32.0	-	19.2	-	46.0	-	26.8	-	
Hori.	2483.5	62.6	46.3	27.4	5.1	32.2	-	62.9	46.6	73.9	53.9	11.0	7.3	
Hori.	4924.0	40.8	32.4	31.5	7.2	31.1	-	48.3	40.0	73.9	53.9	25.6	14.0	Floor noise
Hori.	5000.0	40.2	32.8	31.7	7.3	31.1	-	48.0	40.6	73.9	53.9	25.9	13.3	
Hori.	7386.0	42.6	33.7	35.5	8.4	32.1	-	54.5	45.6	73.9	53.9	19.4	8.3	Floor noise
Hori.	9848.0	41.6	33.5	36.0	9.0	32.7	-	54.0	45.8	73.9	53.9	20.0	8.1	Floor noise
Vert.	36.9	33.2	-	16.0	7.1	32.2	-	24.1	-	40.0	-	16.0	-	
Vert.	49.3	32.4	-	11.4	7.3	32.2	-	18.9	-	40.0	-	21.1	-	
Vert.	59.0	27.5	-	8.3	7.4	32.2	-	11.0	-	40.0	-	29.0	-	
Vert.	227.7	30.8	-	11.4	9.1	32.0	-	19.3	-	46.0	-	26.8	-	
Vert.	309.9	26.5	-	13.7	9.8	32.0	-	18.0	-	46.0	-	28.0	-	
Vert.	481.0	28.6	-	17.2	10.9	32.0	-	24.6	-	46.0	-	21.4	-	
Vert.	2483.5	52.8	41.5	27.4	5.1	32.2	-	53.1	41.8	73.9	53.9	20.8	12.2	
Vert.	4924.0	40.7	32.3	31.5	7.2	31.1	-	48.2	39.9	73.9	53.9	25.7	14.1	Floor noise
Vert.	5000.0	41.7	36.9	31.7	7.3	31.1	-	49.5	44.7	73.9	53.9	24.4	9.2	
Vert.	7386.0	42.5	33.6	35.5	8.4	32.1	-	54.4	45.5	73.9	53.9	19.5	8.4	Floor noise
Vert.	9848.0	41.5	33.4	36.0	9.0	32.7	-	53.9	45.7	73.9	53.9	20.1	8.2	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)
Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor
*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).
*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 6 GHz 20log (3.8 m / 3.0 m) = 2.06 dB
 6 GHz - 10 GHz 20log (4.8 m / 3.0 m) = 4.09 dB
 10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	October 30, 2024
Temperature / Humidity	24 deg. C / 59 % RH
Engineer	Tomoya Sone
	(1 GHz to 6 GHz)
Mode	Tx 11ax-20 [OFDM] 2462 MHz

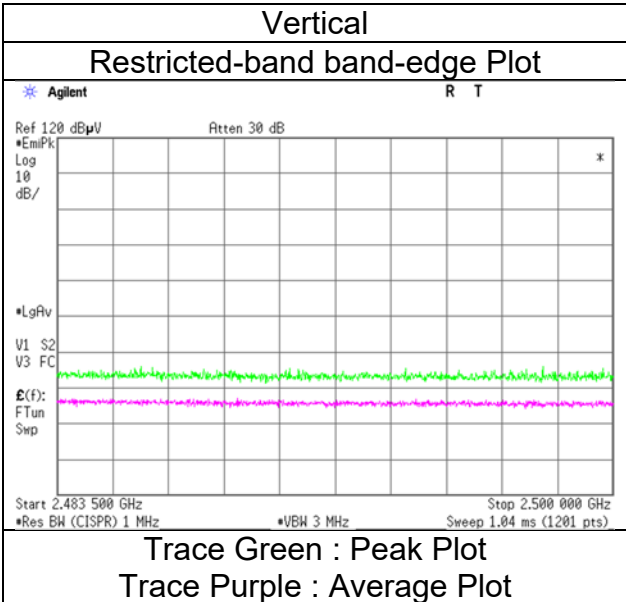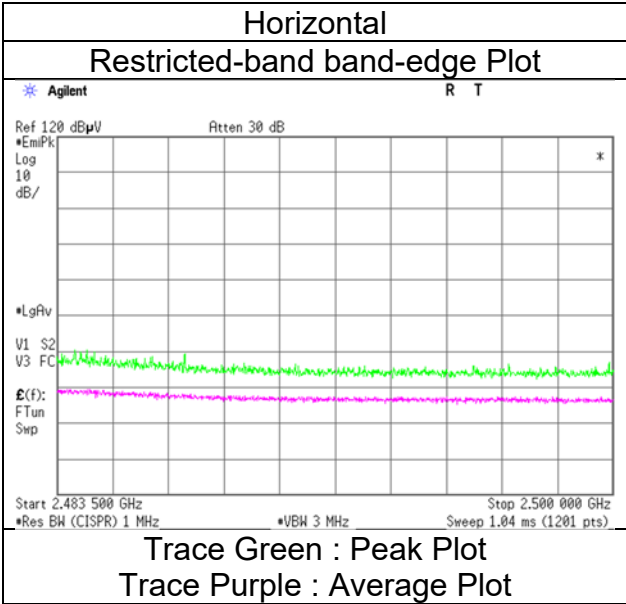

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	October 30, 2024
Temperature / Humidity	24 deg. C / 59 % RH
Engineer	Tomoya Sone (1 GHz to 6 GHz)
Mode	Tx 11ax-20 [26-tone RU/Index 0] 2412 MHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	2390.0	47.7	35.4	27.5	5.0	32.2	-	48.1	35.8	73.9	53.9	25.8	18.2	
Vert.	2390.0	43.8	32.8	27.5	5.0	32.2	-	44.2	33.2	73.9	53.9	29.7	20.7	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

$$\text{Result (AV)} = \text{Reading} + \text{Ant Factor} + \text{Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))} - \text{Gain(Amplifier)} + \text{Duty factor}$$

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1 GHz.

20dBc Data Sheet



Polarity	Frequency	Reading (PK)	Ant Factor	Loss	Gain	Result	Limit	Margin	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dB/m]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
Hori.	2412.0	100.8	27.5	5.1	32.2	101.1	-	-	Carrier
Hori.	2400.0	63.5	27.5	5.1	32.2	63.8	81.1	17.4	
Vert.	2412.0	95.7	27.5	5.1	32.2	96.0	-	-	Carrier
Vert.	2400.0	58.7	27.5	5.1	32.2	59.0	76.0	17.0	

$$\text{Result} = \text{Reading} + \text{Ant Factor} + \text{Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))} - \text{Gain(Amplifier)}$$

Distance factor: 1 GHz - 6 GHz $20 \log (3.8 \text{ m} / 3.0 \text{ m}) = 2.06 \text{ dB}$

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	October 30, 2024
Temperature / Humidity	24 deg. C / 59 % RH
Engineer	Tomoya Sone
Mode	(1 GHz to 6 GHz)

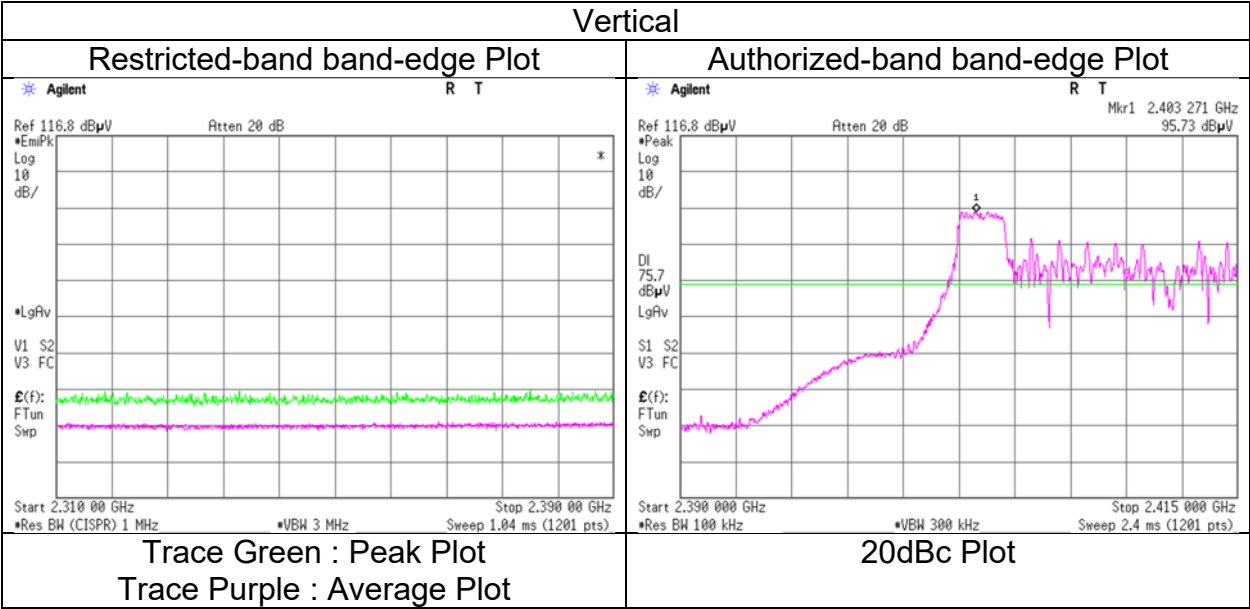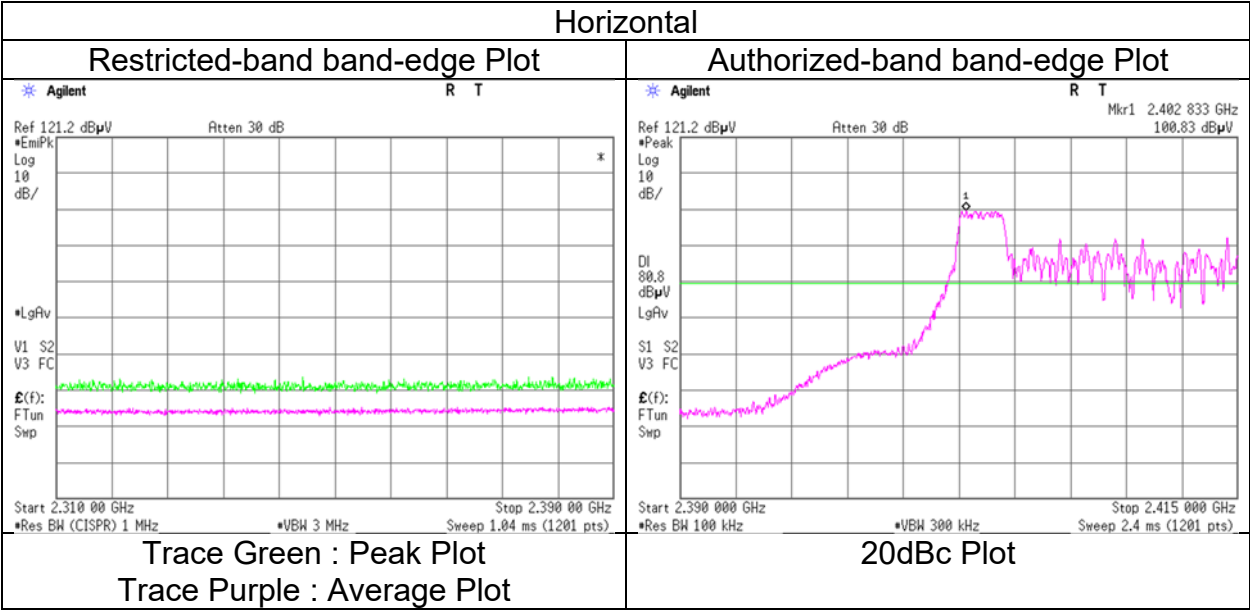

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge and authorized band edge were shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	October 30, 2024
Temperature / Humidity	24 deg. C / 59 % RH
Engineer	Tomoya Sone (1 GHz to 6 GHz)
Mode	Tx 11ax-20 [52-tone RU/Index 37] 2412 MHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	2390.0	49.8	36.9	27.5	5.0	32.2	-	50.1	37.3	73.9	53.9	23.8	16.6	
Vert.	2390.0	44.9	34.2	27.5	5.0	32.2	-	45.3	34.5	73.9	53.9	28.6	19.4	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

$$\text{Result (AV)} = \text{Reading} + \text{Ant Factor} + \text{Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))} - \text{Gain(Amplifier)} + \text{Duty factor}$$

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1 GHz.

20dBc Data Sheet



Polarity	Frequency	Reading (PK)	Ant Factor	Loss	Gain	Result	Limit	Margin	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dB/m]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
Hori.	2412.0	101.8	27.5	5.1	32.2	102.1	-	-	Carrier
Hori.	2400.0	66.8	27.5	5.1	32.2	67.2	82.1	14.9	
Vert.	2412.0	96.3	27.5	5.1	32.2	96.6	-	-	Carrier
Vert.	2400.0	60.0	27.5	5.1	32.2	62.4	76.6	14.2	

$$\text{Result} = \text{Reading} + \text{Ant Factor} + \text{Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))} - \text{Gain(Amplifier)}$$

Distance factor: 1 GHz - 6 GHz $20\log (3.8 \text{ m} / 3.0 \text{ m}) = 2.06 \text{ dB}$

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	October 30, 2024
Temperature / Humidity	24 deg. C / 59 % RH
Engineer	Tomoya Sone
Mode	Tx 11ax-20 [52-tone RU/Index 37] 2412 MHz

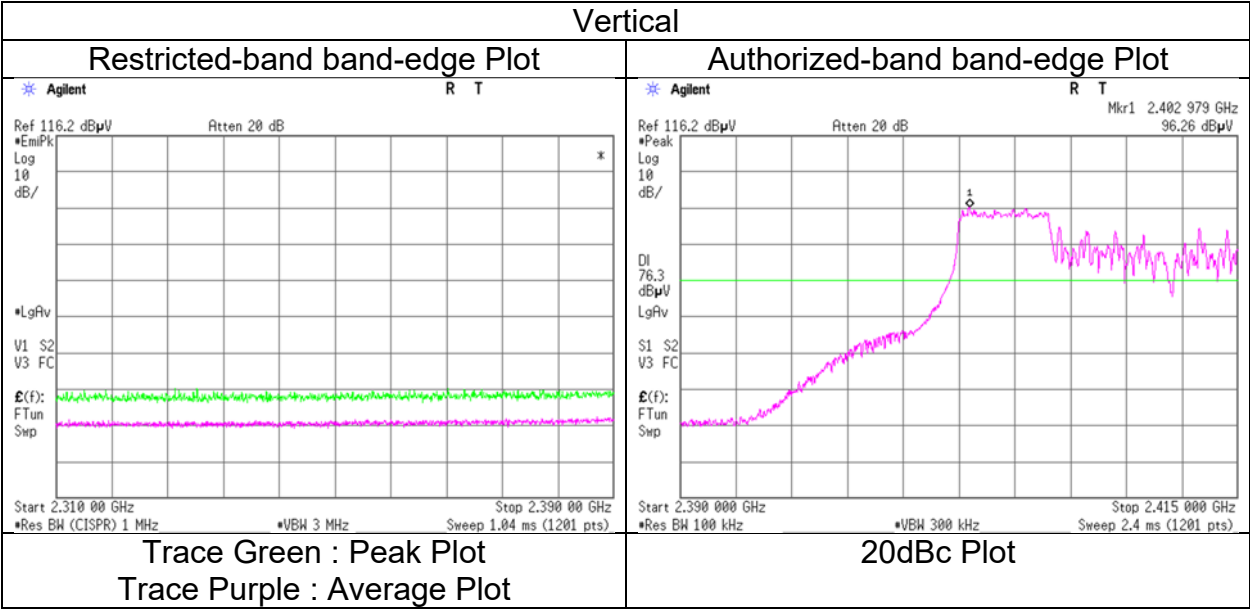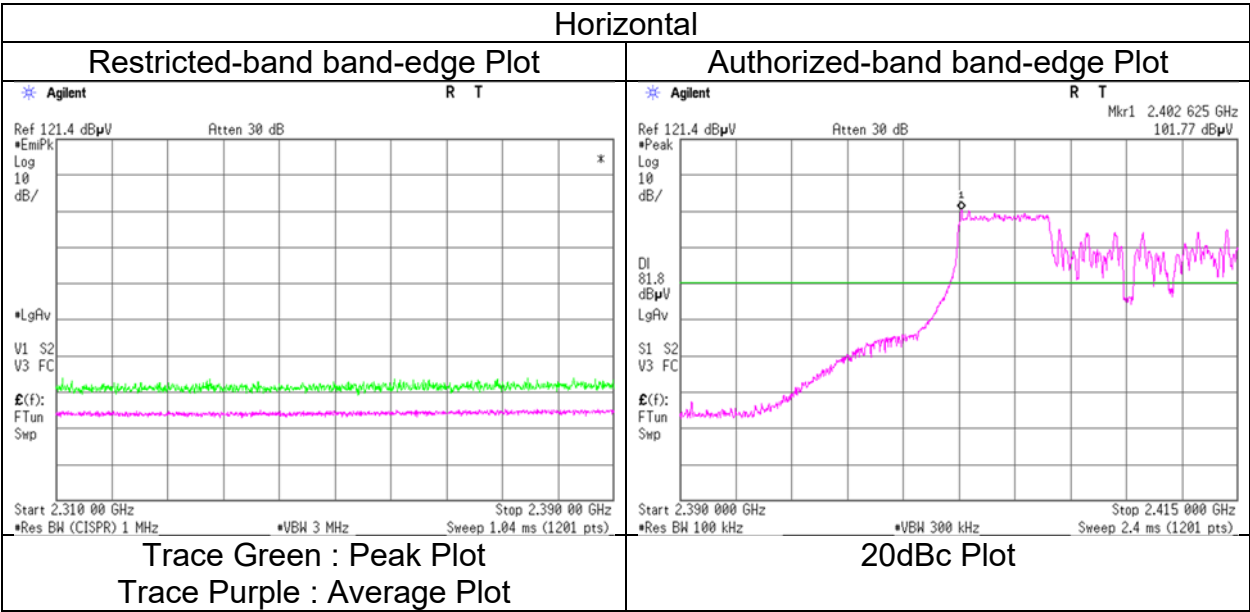

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge and authorized band edge were shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	October 30, 2024
Temperature / Humidity	24 deg. C / 59 % RH
Engineer	Tomoya Sone (1 GHz to 6 GHz)
Mode	Tx 11ax-20 [106-tone RU/Index 53] 2412 MHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	2390.0	53.0	38.7	27.5	5.0	32.2	-	53.4	39.0	73.9	53.9	20.5	14.9	
Vert.	2390.0	47.2	34.6	27.5	5.0	32.2	-	47.6	34.9	73.9	53.9	26.3	19.0	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

$$\text{Result (AV)} = \text{Reading} + \text{Ant Factor} + \text{Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))} - \text{Gain(Amplifier)} + \text{Duty factor}$$

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1 GHz.

20dBc Data Sheet



Polarity	Frequency	Reading (PK)	Ant Factor	Loss	Gain	Result	Limit	Margin	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dB/m]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
Hori.	2412.0	101.6	27.5	5.1	32.2	101.9	-	-	Carrier
Hori.	2400.0	67.1	27.5	5.1	32.2	67.4	81.9	14.5	
Vert.	2412.0	96.6	27.5	5.1	32.2	96.9	-	-	Carrier
Vert.	2400.0	61.4	27.5	5.1	32.2	61.7	76.9	15.2	

$$\text{Result} = \text{Reading} + \text{Ant Factor} + \text{Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))} - \text{Gain(Ampriifier)}$$

Distance factor: 1 GHz - 6 GHz $20\log (3.8 \text{ m} / 3.0 \text{ m}) = 2.06 \text{ dB}$

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	October 30, 2024
Temperature / Humidity	24 deg. C / 59 % RH
Engineer	Tomoya Sone
Mode	Tx 11ax-20 [106-tone RU/Index 53] 2412 MHz

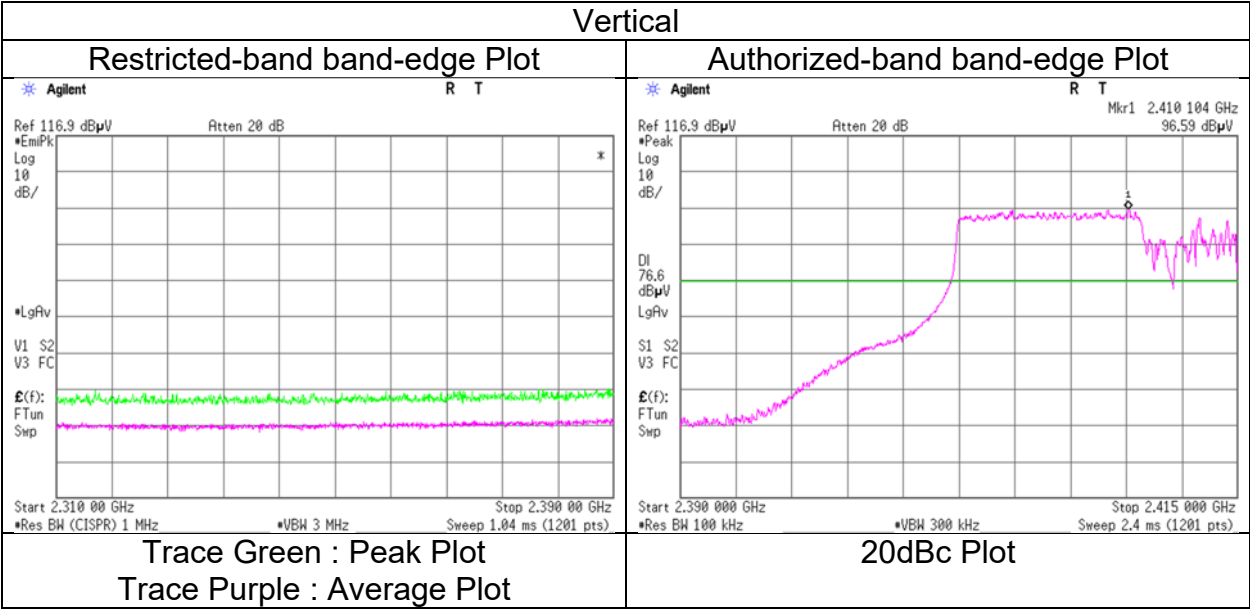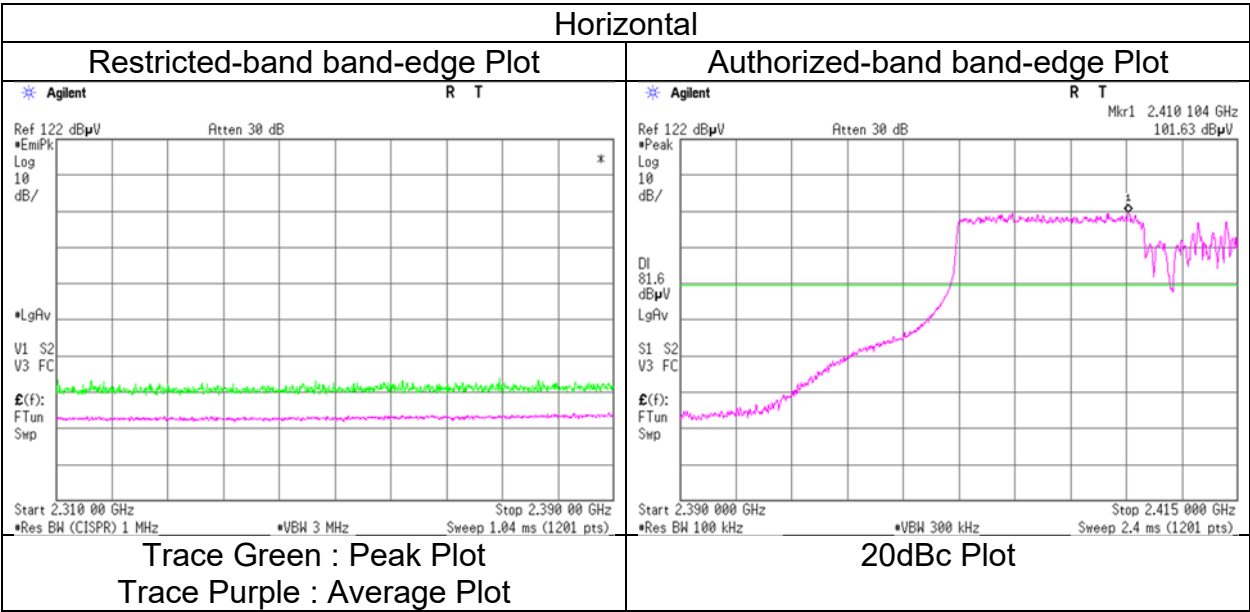

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge and authorized band edge were shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	October 30, 2024
Temperature / Humidity	24 deg. C / 59 % RH
Engineer	Tomoya Sone (1 GHz to 6 GHz)
Mode	Tx 11ax-20 [242-tone RU/Index 61] 2412 MHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	2390.0	52.4	39.8	27.5	5.0	32.2	-	52.8	40.1	73.9	53.9	21.1	13.8	
Vert.	2390.0	49.3	35.5	27.5	5.0	32.2	-	49.7	35.9	73.9	53.9	24.2	18.0	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

$$\text{Result (AV)} = \text{Reading} + \text{Ant Factor} + \text{Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))} - \text{Gain(Amplifier)} + \text{Duty factor}$$

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1 GHz.

20dBc Data Sheet



Polarity	Frequency	Reading (PK)	Ant Factor	Loss	Gain	Result	Limit	Margin	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dB/m]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
Hori.	2412.0	99.4	27.5	5.1	32.2	99.7	-	-	Carrier
Hori.	2400.0	66.0	27.5	5.1	32.2	66.3	79.7	13.3	
Vert.	2412.0	94.5	27.5	5.1	32.2	94.8	-	-	Carrier
Vert.	2400.0	37.3	27.5	5.1	32.2	37.7	74.8	37.2	

$$\text{Result} = \text{Reading} + \text{Ant Factor} + \text{Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))} - \text{Gain(Amplifier)}$$

Distance factor: 1 GHz - 6 GHz $20\log (3.8 \text{ m} / 3.0 \text{ m}) = 2.06 \text{ dB}$

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	October 30, 2024
Temperature / Humidity	24 deg. C / 59 % RH
Engineer	Tomoya Sone
Mode	Tx 11ax-20 [242-tone RU/Index 61] 2412 MHz

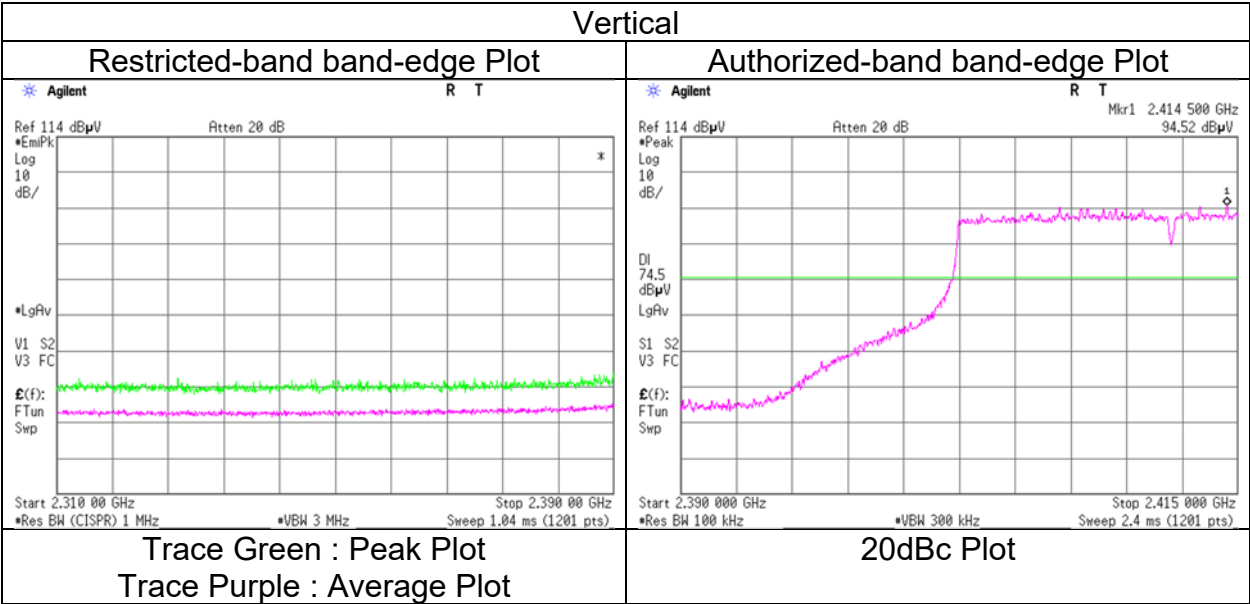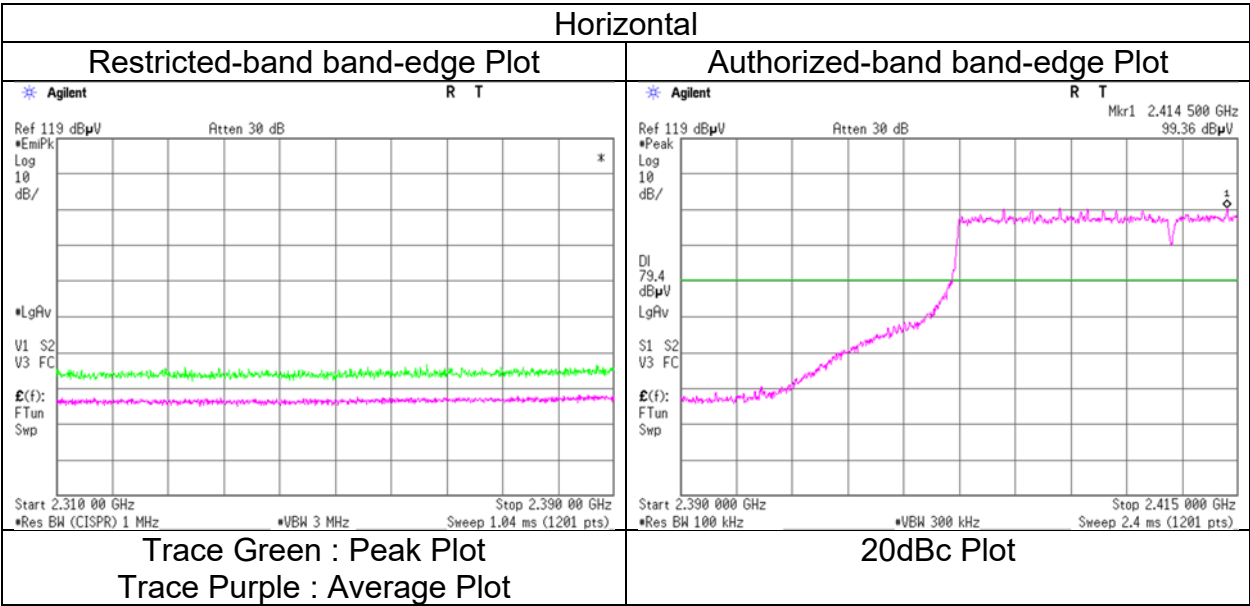

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge and authorized band edge were shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	October 30, 2024
Temperature / Humidity	24 deg. C / 59 % RH
Engineer	Tomoya Sone (1 GHz to 6 GHz)
Mode	Tx 11ax-20 [26-tone RU/Index 8] 2462 MHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	2483.5	48.8	38.2	27.4	5.1	32.2	-	49.1	38.5	73.9	53.9	24.8	15.4	
Vert.	2483.5	44.1	35.1	27.4	5.1	32.2	-	44.4	35.3	73.9	53.9	29.5	18.6	

$$\text{Result (QP / PK)} = \text{Reading} + \text{Ant Factor} + \text{Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))} - \text{Gain(Amplifier)}$$
$$\text{Result (AV)} = \text{Reading} + \text{Ant Factor} + \text{Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))} - \text{Gain(Amplifier)} + \text{Duty factor}$$



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 1 GHz- 6 GHz $20\log(3.8 \text{ m} / 3.0 \text{ m}) = 2.06 \text{ dB}$

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	October 30, 2024
Temperature / Humidity	24 deg. C / 59 % RH
Engineer	Tomoya Sone
Mode	Tx 11ax-20 [26-tone RU/Index 8] 2462 MHz

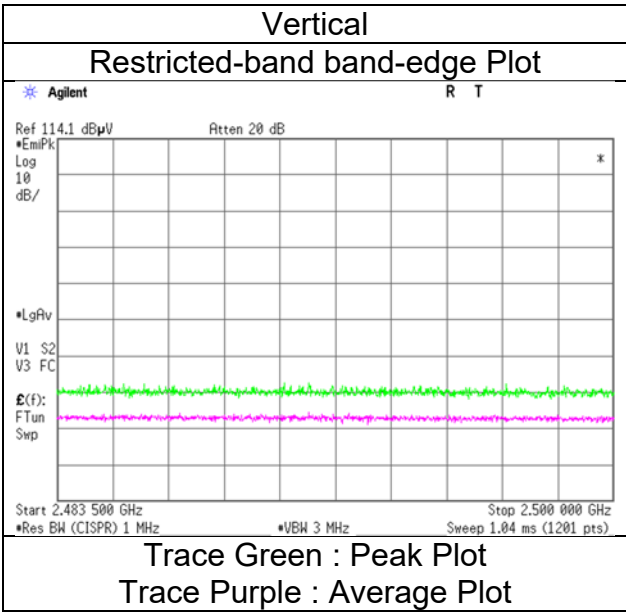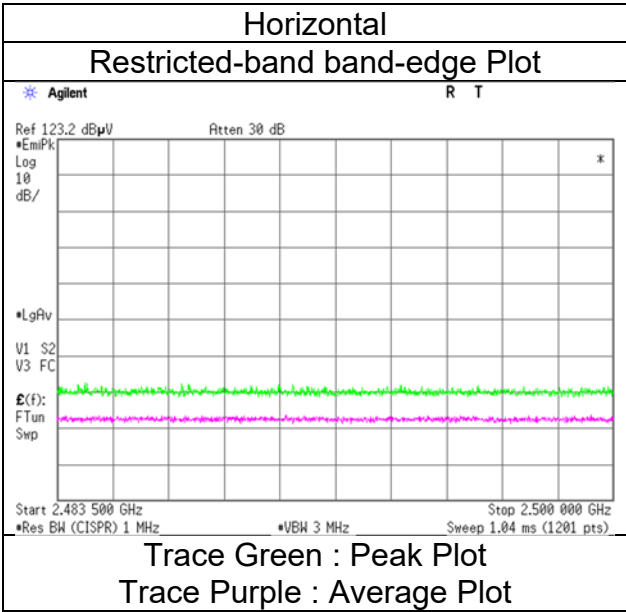

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	October 30, 2024
Temperature / Humidity	24 deg. C / 59 % RH
Engineer	Tomoya Sone (1 GHz to 6 GHz)
Mode	Tx 11ax-20 [52-tone RU/Index 40] 2462 MHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	2483.5	50.7	41.5	27.4	5.1	32.2	-	51.0	41.8	73.9	53.9	22.9	12.1	
Vert.	2483.5	45.4	36.5	27.4	5.1	32.2	-	45.7	36.8	73.9	53.9	28.2	17.1	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

$$\text{Result (AV)} = \text{Reading} + \text{Ant Factor} + \text{Loss (Cable+Attenuator+Filter+Distance factor (above 1 GHz))} - \text{Gain (Amplifier)} + \text{Duty factor}$$

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 6 GHz $20\log(3.8 \text{ m} / 3.0 \text{ m}) = 2.06 \text{ dB}$

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab.
No.3
October 30, 2024
24 deg. C / 59 % RH
Tomoya Sone
Tx 11ax-20 [52-tone RU/Index 40] 2462 MHz

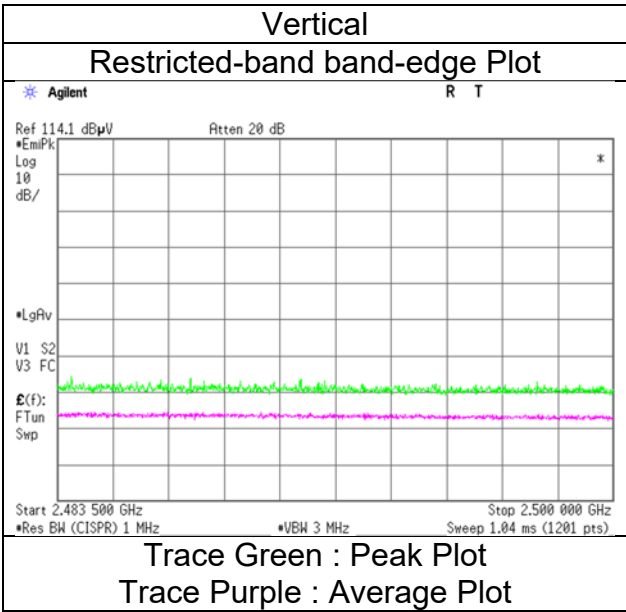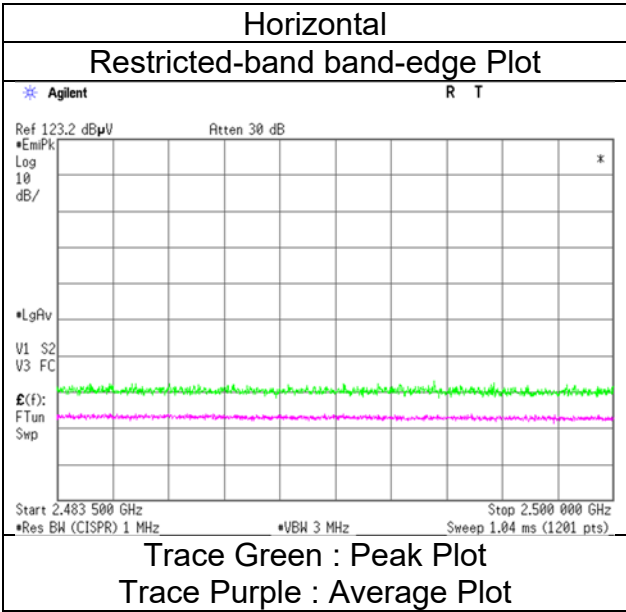

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date October 30, 2024
Temperature / Humidity 24 deg. C / 59 % RH
Engineer Tomoya Sone
 (1 GHz to 6 GHz)
Mode Tx 11ax-20 [106-tone RU/Index 54] 2462 MHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	2483.5	54.7	44.5	27.4	5.1	32.2	-	54.9	44.8	73.9	53.9	19.0	9.2	
Vert.	2483.5	46.9	38.3	27.4	5.1	32.2	-	47.2	38.6	73.9	53.9	26.7	15.3	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 6 GHz 20log (3.8 m / 3.0 m) = 2.06 dB

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	October 30, 2024
Temperature / Humidity	24 deg. C / 59 % RH
Engineer	Tomoya Sone
Mode	Tx 11ax-20 [106-tone RU/Index 54] 2462 MHz

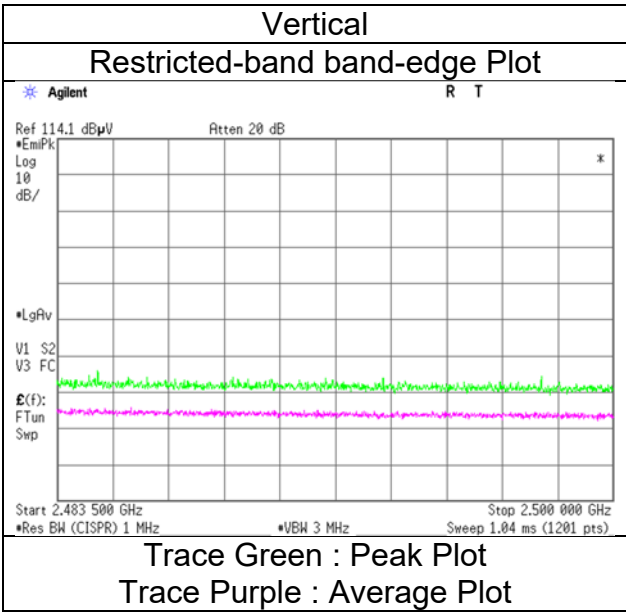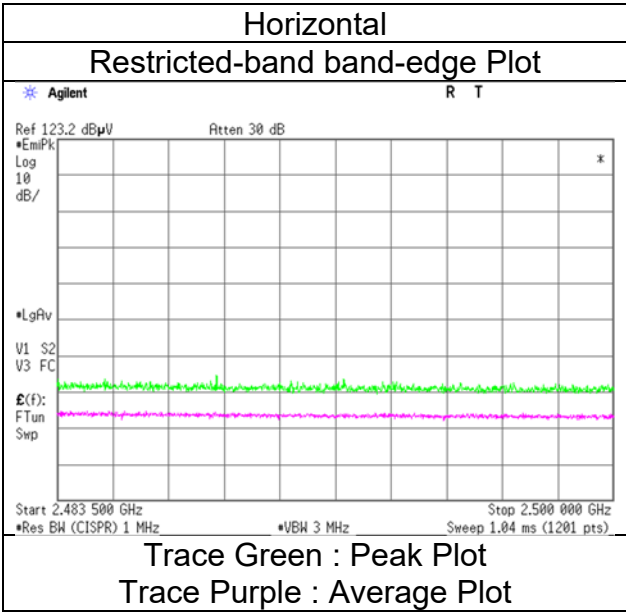

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

$$\text{Result (OP / PK)} = \text{Reading} + \text{Ant Factor} + \text{Loss (Cable+Attenuator+Filter+Distance factor (above 1 GHz))} - \text{Gain (Amplifier)}$$



Result (A)0= Reading + Ant Factor + Loss (Cable Attenuation Filter Distance factor (chain 1 C1)) Gain (Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB)

*QP detector was used up to 1GHz

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	October 30, 2024
Temperature / Humidity	24 deg. C / 59 % RH
Engineer	Tomoya Sone
Mode	Tx 11ax-20 [242-tone RU/Index 61] 2462 MHz

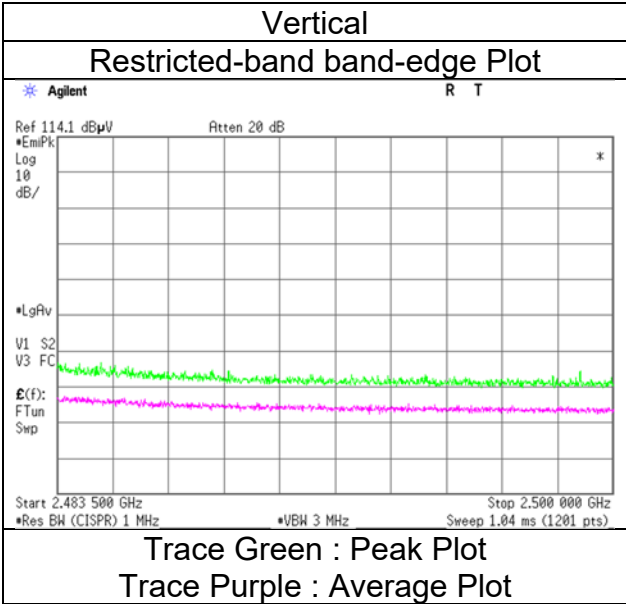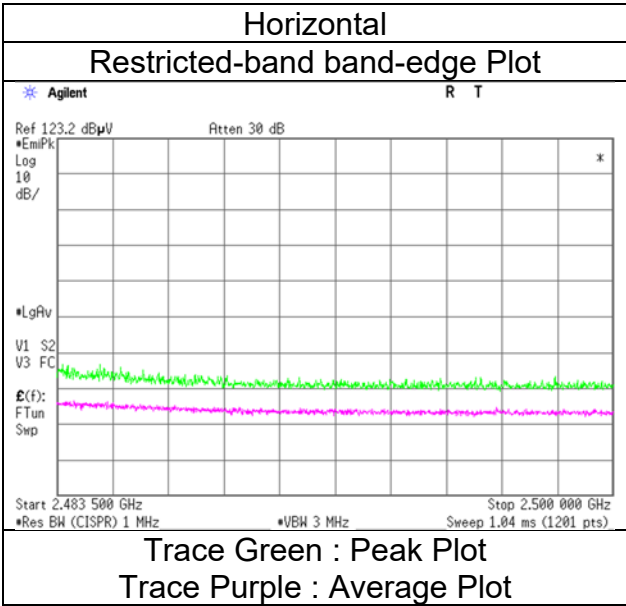

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	October 30, 2024	October 29, 2024	October 29, 2024
Temperature / Humidity	22 deg. C / 63 % RH	23 deg. C / 66 % RH	22 deg. C / 59 % RH
Engineer	Tetsuro Yoshida (1 GHz to 6 GHz)	Tomoya Sone (6 GHz to 10 GHz)	Tetsuro Yoshida (10 GHz to 18 GHz)
Semi Anechoic Chamber	No.3		
Date	October 28, 2024		
Temperature / Humidity	23 deg. C / 56 % RH		
Engineer	Tomoya Sone (Above 18 GHz)		
Mode	Tx BT LE 1M 2402 MHz		

Polarity	Frequency	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
[Hori/Vert]	[MHz]													
Hori.	2354.0	44.0	34.1	27.7	5.0	32.2	1.9	44.4	36.5	73.9	53.9	29.5	17.4	*2)
Hori.	2390.0	44.1	32.4	27.5	5.0	32.2	1.9	44.4	34.7	73.9	53.9	29.5	19.2	*1)
Hori.	2786.0	44.7	36.0	28.3	5.3	32.1	1.9	46.3	39.5	73.9	53.9	27.6	14.4	*2)
Hori.	4804.0	40.2	30.1	31.4	7.2	31.2	-	47.7	37.5	73.9	53.9	26.2	16.4	Floor noise
Hori.	5000.0	40.1	31.2	31.7	7.3	31.1	-	48.0	39.0	73.9	53.9	26.0	14.9	
Hori.	7206.0	42.0	33.7	35.6	8.5	32.0	-	54.0	45.7	73.9	53.9	19.9	8.2	Floor noise
Hori.	9608.0	42.4	34.4	35.6	8.9	32.6	-	54.2	46.3	73.9	53.9	19.7	7.6	Floor noise
Vert.	2354.0	42.0	32.4	27.7	5.0	32.2	1.9	42.5	34.8	73.9	53.9	31.5	19.1	*2)
Vert.	2390.0	42.2	31.8	27.5	5.0	32.2	1.9	42.5	34.1	73.9	53.9	31.4	19.8	*1)
Vert.	2786.0	42.2	32.4	28.3	5.3	32.1	1.9	43.7	35.9	73.9	53.9	30.2	18.0	*2)
Vert.	4804.0	41.9	30.2	31.4	7.2	31.2	-	49.4	37.7	73.9	53.9	24.5	16.2	Floor noise
Vert.	5000.0	41.2	35.4	31.7	7.3	31.1	-	49.0	43.2	73.9	53.9	24.9	10.7	
Vert.	7206.0	41.9	33.6	35.6	8.5	32.0	-	53.9	45.6	73.9	53.9	20.0	8.3	Floor noise
Vert.	9608.0	42.3	34.3	35.6	8.9	32.6	-	54.1	46.2	73.9	53.9	19.8	7.7	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)
 Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor
 *Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).
 *QP detector was used up to 1GHz.
 *1) Not Out of Band emission(Leakage Power)
 *2) Noise synchronized with duty of carrier frequency



20dBc Data Sheet

Polarity	Frequency	Reading (PK)	Ant Factor	Loss	Gain	Result	Limit	Margin	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dB/m]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
Hori.	2402.0	99.6	27.5	5.1	32.2	100.0	-	-	Carrier
Hori.	2400.0	41.1	27.5	5.1	32.2	41.4	80.0	38.5	
Vert.	2400.0	93.3	27.5	5.1	32.2	93.7	-	-	Carrier
Vert.	2400.0	36.6	27.5	5.1	32.2	37.0	73.7	36.7	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)		
Distance factor:	1 GHz - 6 GHz	$20\log (3.8 \text{ m} / 3.0 \text{ m}) = 2.06 \text{ dB}$
	6 GHz - 10 GHz	$20\log (4.8 \text{ m} / 3.0 \text{ m}) = 4.09 \text{ dB}$
	10 GHz - 26.5 GHz	$20\log (1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	October 30, 2024
Temperature / Humidity	22 deg. C / 63 % RH
Engineer	Tetsuro Yoshida
	(1 GHz to 6 GHz)
Mode	Tx BT LE 1M 2402 MHz

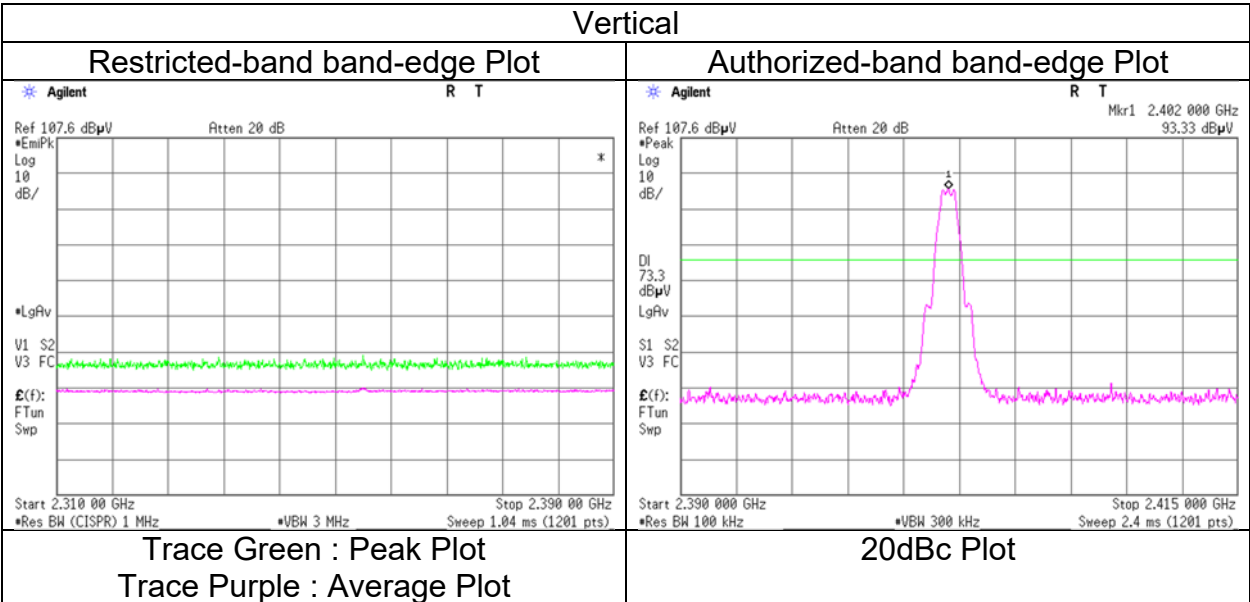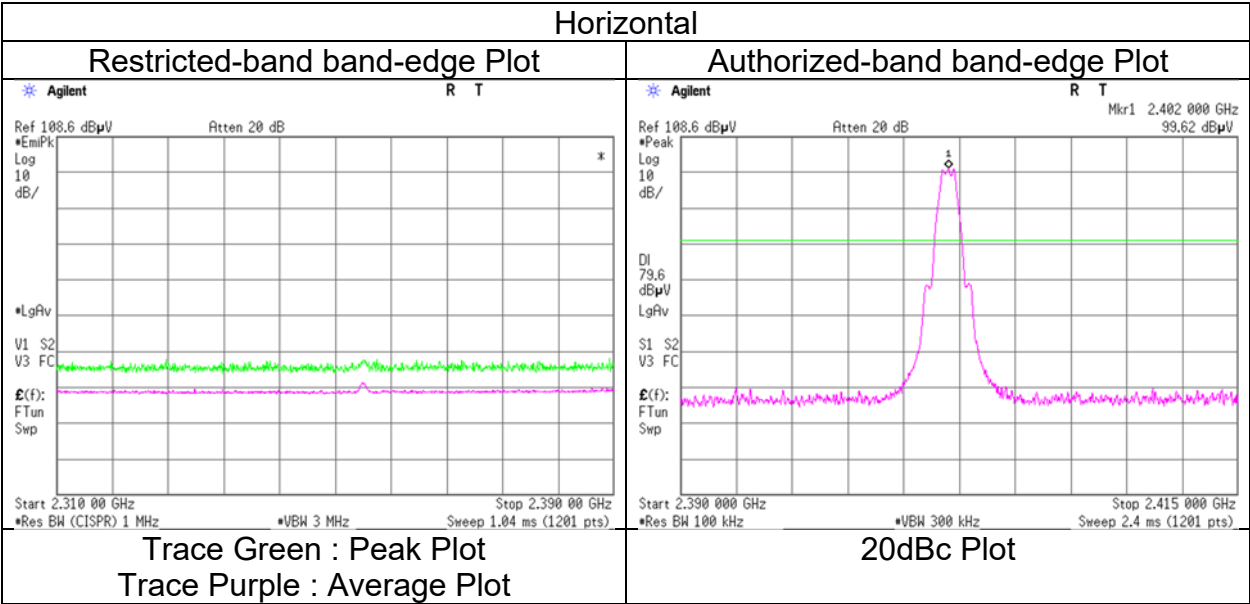

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge and authorized band edge were shown in tabular data.

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	2825.0	43.4	35.4	28.5	5.3	32.0	1.9	45.2	39.1	73.9	53.9	28.7	14.8	*2)
Hori.	4880.0	40.5	32.1	31.4	7.2	31.2	-	48.0	39.6	73.9	53.9	25.9	14.3	Floor noise
Hori.	5000.0	41.0	32.9	31.7	7.3	31.1	-	48.8	40.8	73.9	53.9	25.1	13.2	
Hori.	7320.0	41.5	34.2	35.6	8.5	32.1	-	53.5	46.2	73.9	53.9	20.4	7.7	Floor noise
Hori.	9760.0	40.5	33.7	35.9	9.0	32.7	-	52.7	45.9	73.9	53.9	21.2	8.0	Floor noise
Vert.	2825.0	42.4	34.6	28.5	5.3	32.0	1.9	44.1	38.3	73.9	53.9	29.8	15.6	*2)
Vert.	4880.0	40.1	31.9	31.4	7.2	31.2	-	47.6	39.4	73.9	53.9	26.3	14.5	Floor noise
Vert.	5000.0	42.1	36.5	31.7	7.3	31.1	-	49.9	44.3	73.9	53.9	24.0	9.6	
Vert.	7320.0	41.4	34.1	35.6	8.5	32.1	-	53.4	46.1	73.9	53.9	20.5	7.8	Floor noise
Vert.	9760.0	40.4	33.6	35.9	9.0	32.7	-	52.6	45.8	73.9	53.9	21.3	8.1	Floor noise

*2) Noise synchronized with duty of carrier frequency

Radiated Spurious Emission

Test place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer

Ise EMC Lab.
No.3
October 30, 2024
22 deg. C / 63 % RH
Tetsuro Yoshida
(1 GHz to 6 GHz)

No.3
October 29, 2024
23 deg. C / 66 % RH
Tomoya Sone
(6 GHz to 10 GHz)

No.3
October 29, 2024
22 deg. C / 59 % RH
Tetsuro Yoshida
(10 GHz to 18 GHz)

Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer

No.3
October 28, 2024
23 deg. C / 56 % RH
Tomoya Sone
(Above 18 GHz)
Tx BT LE 1M 2480 MHz

Mode



Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	2483.5	47.5	35.6	27.4	5.1	32.2	1.9	47.8	37.8	73.9	53.9	26.1	16.1	*1)
Hori.	4960.0	40.0	31.9	31.6	7.2	31.1	-	47.7	39.6	73.9	53.9	26.2	14.3	Floor noise
Hori.	5000.0	40.1	32.9	31.7	7.3	31.1	-	47.9	40.7	73.9	53.9	26.0	13.2	
Hori.	7440.0	42.0	33.7	35.5	8.4	32.1	-	53.7	45.5	73.9	53.9	20.2	8.4	Floor noise
Hori.	9920.0	40.4	33.4	36.1	9.0	32.8	-	52.8	45.7	73.9	53.9	21.2	8.2	Floor noise
Vert.	2483.5	43.0	31.7	27.4	5.1	32.2	1.9	43.3	33.9	73.9	53.9	30.6	20.0	*1)
Vert.	4960.0	40.9	31.5	31.6	7.2	31.1	-	48.6	39.1	73.9	53.9	25.3	14.8	Floor noise
Vert.	5000.0	41.6	36.7	31.7	7.3	31.1	-	49.4	44.5	73.9	53.9	24.5	9.4	
Vert.	7440.0	41.9	33.6	35.5	8.4	32.1	-	53.6	45.4	73.9	53.9	20.3	8.5	Floor noise
Vert.	9920.0	40.3	33.3	36.1	9.0	32.8	-	52.7	45.6	73.9	53.9	21.3	8.3	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)
Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor
*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).
*QP detector was used up to 1GHz.
*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 6 GHz 20log (3.8 m / 3.0 m) = 2.06 dB
 6 GHz - 10 GHz 20log (4.8 m / 3.0 m) = 4.09 dB
 10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	October 30, 2024
Temperature / Humidity	22 deg. C / 63 % RH
Engineer	Tetsuro Yoshida
	(1 GHz to 6 GHz)
Mode	Tx BT LE 1M 2480 MHz

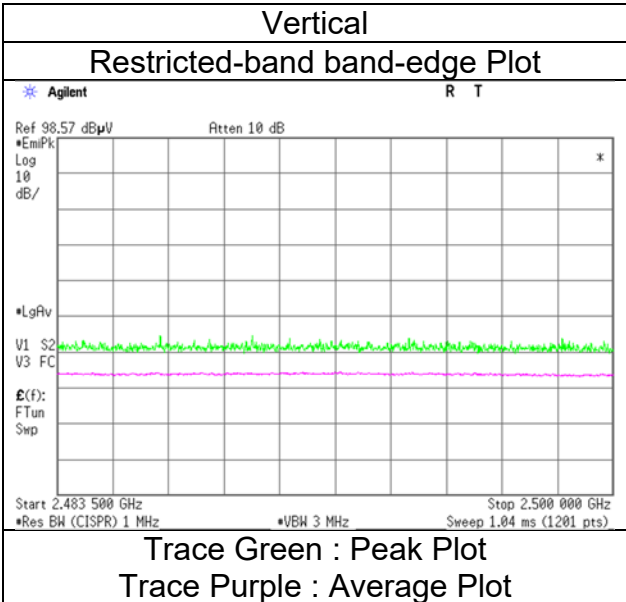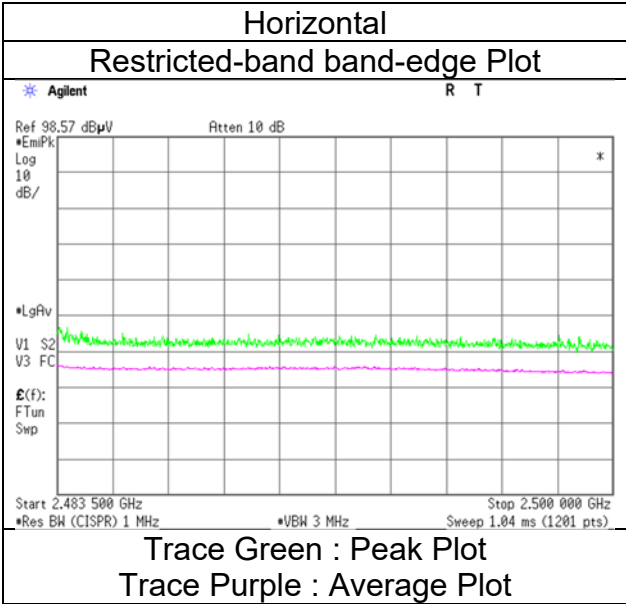

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	October 30, 2024	October 29, 2024	October 29, 2024
Temperature / Humidity	24 deg. C / 59 % RH	23 deg. C / 66 % RH	22 deg. C / 59 % RH
Engineer	Tomoya Sone	Tomoya Sone	Tetsuro Yoshida
	(1 GHz to 6 GHz)	(6 GHz to 10 GHz)	(10 GHz to 18 GHz)

Semi Anechoic Chamber	No.3	No.3
Date	October 28, 2024	November 17, 2024
Temperature / Humidity	23 deg. C / 56 % RH	23 deg. C / 62 % RH
Engineer	Tomoya Sone (Above 18 GHz)	Hiroki Numata (Below 1 GHz)

Mode Tx BT LE 2M 2402 MHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dBuV/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	42.6	26.9	-	13.9	7.2	32.2	-	15.7	-	40.0	-	24.3	-	
Hori.	52.4	31.7	-	10.4	7.3	32.2	-	17.2	-	40.0	-	22.8	-	
Hori.	66.7	28.7	-	6.7	7.5	32.2	-	10.7	-	40.0	-	29.3	-	
Hori.	266.0	33.0	-	12.6	9.4	32.0	-	23.0	-	46.0	-	23.0	-	
Hori.	298.7	30.2	-	13.6	9.7	32.0	-	21.5	-	46.0	-	24.5	-	
Hori.	320.5	27.0	-	14.1	9.8	32.0	-	18.9	-	46.0	-	27.1	-	
Hori.	2354.0	44.7	35.6	27.7	5.0	32.2	4.7	45.1	40.8	73.9	53.9	28.8	13.1	*2)
Hori.	2390.0	46.5	31.7	27.5	5.0	32.2	4.7	46.9	36.7	73.9	53.9	27.0	17.2	*1)
Hori.	2786.0	44.4	35.3	28.3	5.3	32.1	4.7	46.0	41.6	73.9	53.9	27.9	12.3	*2)
Hori.	4804.0	40.1	32.1	31.4	7.2	31.2	-	47.5	39.6	73.9	53.9	26.4	14.3	Floor noise
Hori.	5000.0	40.0	32.8	31.7	7.3	31.1	-	47.8	40.6	73.9	53.9	26.1	13.3	
Hori.	7206.0	42.0	33.7	35.6	8.5	32.0	-	54.0	45.7	73.9	53.9	19.9	8.2	Floor noise
Hori.	9608.0	42.4	34.4	35.6	8.9	32.6	-	54.2	46.3	73.9	53.9	19.7	7.6	Floor noise
Vert.	36.9	32.9	-	16.0	7.1	32.2	-	23.8	-	40.0	-	16.3	-	
Vert.	49.1	32.7	-	11.5	7.3	32.2	-	19.3	-	40.0	-	20.7	-	
Vert.	59.0	27.4	-	8.3	7.4	32.2	-	10.9	-	40.0	-	29.1	-	
Vert.	227.6	30.7	-	11.4	9.1	32.0	-	19.1	-	46.0	-	26.9	-	
Vert.	309.8	26.1	-	13.7	9.8	32.0	-	17.6	-	46.0	-	28.4	-	
Vert.	481.0	28.7	-	17.2	10.9	32.0	-	24.7	-	46.0	-	21.3	-	
Vert.	2354.0	43.1	32.4	27.7	5.0	32.2	4.7	43.6	37.6	73.9	53.9	30.3	16.3	*2)
Vert.	2390.0	42.2	31.4	27.5	5.0	32.2	4.7	42.5	36.4	73.9	53.9	31.4	17.5	*1)
Vert.	2786.0	43.1	31.6	28.3	5.3	32.1	4.7	44.7	37.9	73.9	53.9	29.2	16.0	*2)
Vert.	4804.0	40.0	32.0	31.4	7.2	31.2	-	47.4	39.5	73.9	53.9	26.5	14.4	Floor noise
Vert.	5000.0	41.5	36.6	31.7	7.3	31.1	-	49.3	44.4	73.9	53.9	24.6	9.5	
Vert.	7206.0	41.9	33.6	35.6	8.5	32.0	-	53.9	45.6	73.9	53.9	20.0	8.3	Floor noise
Vert.	9608.0	42.3	34.3	35.6	8.9	32.6	-	54.1	46.2	73.9	53.9	19.8	7.7	Floor noise

$$\text{Result (QP / PK)} = \text{Reading} + \text{Ant Factor} + \text{Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))} - \text{Gain(Amplifier)}$$
$$\text{Result (AV)} = \text{Reading} + \text{Ant Factor} + \text{Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))} - \text{Gain(Amplifier)} + \text{Duty factor}$$

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1 GHz.

*1) Not Out of Band emission(Leakage Power)

*2) Noise synchronized with duty of carrier frequency

20dBc Data Sheet

Polarity	Frequency	Reading (PK)	Ant Factor	Loss	Gain	Result	Limit	Margin	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dB/m]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
Hori.	2402.0	99.8	27.5	5.1	32.2	100.2	-	-	Carrier
Hori.	2400.0	56.0	27.5	5.1	32.2	56.4	80.2	23.8	
Vert.	2402.0	94.1	27.5	5.1	32.2	94.4	-	-	Carrier
Vert.	2400.0	33.0	27.5	5.1	32.2	33.3	74.4	41.1	

$$\text{Result} = \text{Reading} + \text{Ant Factor} + \text{Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))} - \text{Gain(Amplifier)}$$



Distance factor: 1 GHz - 6 GHz $20\log(3.8 \text{ m} / 3.0 \text{ m}) = 2.06 \text{ dB}$

$$20 \log (4.8 \text{ m} / 3.0 \text{ m}) = 4.09 \text{ dB}$$

0 GHz - 10 GHz	$20\log(4.0\text{ m} / 3.0\text{ m}) = -4.55\text{ dB}$
10 GHz - 26.5 GHz	$20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	October 30, 2024
Temperature / Humidity	24 deg. C / 59 % RH
Engineer	Tomoya Sone
	(1 GHz to 6 GHz)
Mode	Tx BT LE 2M 2402 MHz

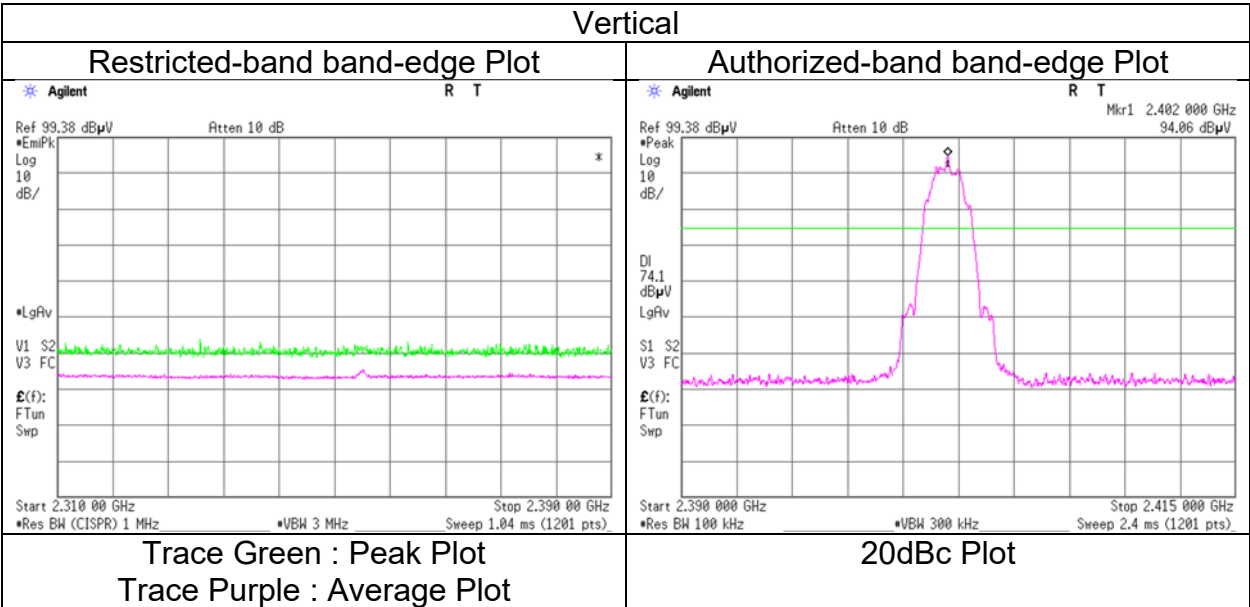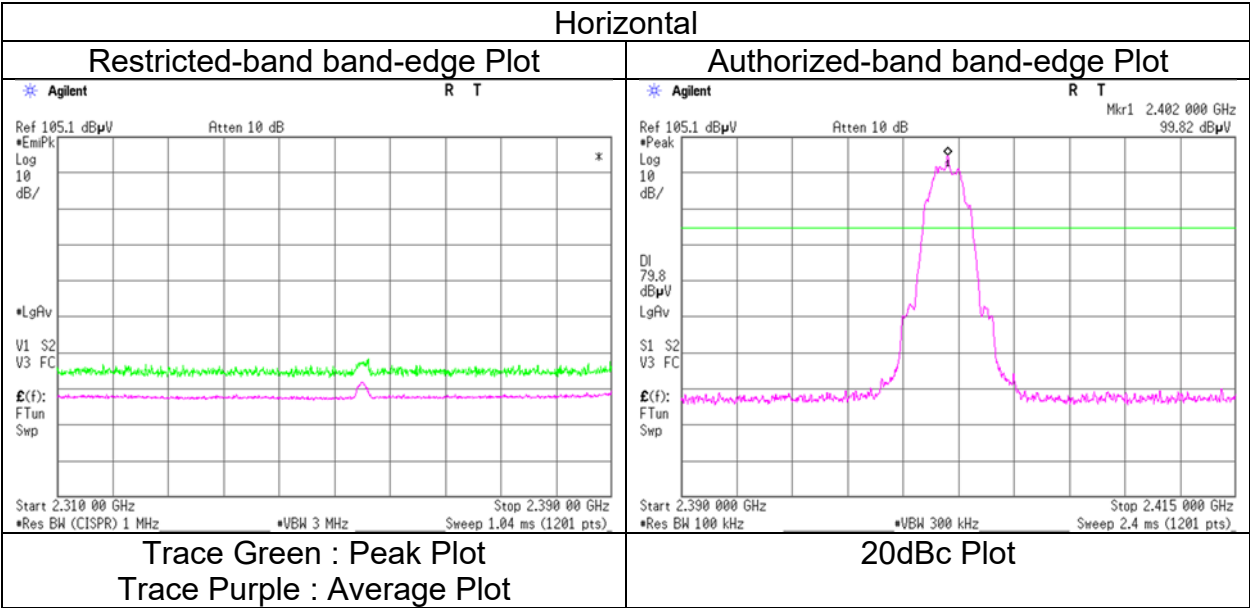

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge and authorized band edge were shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	October 30, 2024	October 29, 2024	October 29, 2024
Temperature / Humidity	24 deg. C / 59 % RH	23 deg. C / 66 % RH	22 deg. C / 59 % RH
Engineer	Tomoya Sone (1 GHz to 6 GHz)	Tomoya Sone (6 GHz to 10 GHz)	Tetsuro Yoshida (10 GHz to 18 GHz)
Semi Anechoic Chamber	No.3		
Date	October 28, 2024		
Temperature / Humidity	23 deg. C / 56 % RH		
Engineer	Tomoya Sone (Above 18 GHz)		
Mode	Tx BT LE 2M 2440 MHz		

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	2825.0	44.2	34.5	28.5	5.3	32.0	4.7	45.9	40.9	73.9	53.9	28.0	13.0	*)
Hori.	4880.0	40.1	32.1	31.4	7.2	31.2	-	47.6	39.6	73.9	53.9	26.4	14.4	Floor noise
Hori.	5000.0	39.9	32.7	31.7	7.3	31.1	-	47.7	40.5	73.9	53.9	26.2	13.4	
Hori.	7320.0	41.5	34.2	35.6	8.5	32.1	-	53.5	46.2	73.9	53.9	20.4	7.7	Floor noise
Hori.	9760.0	40.5	33.7	35.9	9.0	32.7	-	52.7	45.9	73.9	53.9	21.2	8.0	Floor noise
Vert.	2825.0	43.1	33.4	28.5	5.3	32.0	4.7	44.8	39.8	73.9	53.9	29.1	14.1	*)
Vert.	4880.0	40.2	32.2	31.4	7.2	31.2	-	47.7	39.7	73.9	53.9	26.3	14.3	Floor noise
Vert.	5000.0	41.4	36.5	31.7	7.3	31.1	-	49.2	44.3	73.9	53.9	24.7	9.6	
Vert.	7320.0	41.4	34.1	35.6	8.5	32.1	-	53.4	46.1	73.9	53.9	20.5	7.8	Floor noise
Vert.	9760.0	40.4	33.6	35.9	9.0	32.7	-	52.6	45.8	73.9	53.9	21.3	8.1	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

*2) Noise synchronized with duty of carrier frequency

Distance factor:	1 GHz - 6 GHz	$20\log(3.8\text{ m} / 3.0\text{ m}) = 2.06\text{ dB}$
	6 GHz - 10 GHz	$20\log(4.8\text{ m} / 3.0\text{ m}) = 4.09\text{ dB}$
	10 GHz - 26.5 GHz	$20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	October 30, 2024	October 29, 2024	October 29, 2024
Temperature / Humidity	24 deg. C / 59 % RH	23 deg. C / 66 % RH	22 deg. C / 59 % RH
Engineer	Tomoya Sone (1 GHz to 6 GHz)	Tomoya Sone (6 GHz to 10 GHz)	Tetsuro Yoshida (10 GHz to 18 GHz)
Semi Anechoic Chamber	No.3		
Date	October 28, 2024		
Temperature / Humidity	23 deg. C / 56 % RH		
Engineer	Tomoya Sone (Above 18 GHz)		
Mode	Tx BT LE 2M 2480 MHz		

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	2483.5	49.6	33.2	27.4	5.1	32.2	4.7	49.9	38.2	73.9	53.9	24.1	15.7	*1)
Hori.	4960.0	39.4	32.2	31.6	7.2	31.1	-	47.1	39.9	73.9	53.9	26.8	14.0	Floor noise
Hori.	5000.0	40.5	33.1	31.7	7.3	31.1	-	48.3	40.9	73.9	53.9	25.6	13.0	
Hori.	7440.0	42.0	33.7	35.5	8.4	32.1	-	53.7	45.5	73.9	53.9	20.2	8.4	Floor noise
Hori.	9920.0	40.4	33.4	36.1	9.0	32.8	-	52.8	45.7	73.9	53.9	21.2	8.2	Floor noise
Vert.	2483.5	45.3	31.9	27.4	5.1	32.2	4.7	45.6	36.8	73.9	53.9	28.3	17.1	*1)
Vert.	4960.0	39.3	32.1	31.6	7.2	31.1	-	47.0	39.8	73.9	53.9	26.9	14.1	Floor noise
Vert.	5000.0	42.0	36.9	31.7	7.3	31.1	-	49.8	44.7	73.9	53.9	24.1	9.2	
Vert.	7440.0	41.9	33.6	35.5	8.4	32.1	-	53.6	45.4	73.9	53.9	20.3	8.5	Floor noise
Vert.	9920.0	40.3	33.3	36.1	9.0	32.8	-	52.7	45.6	73.9	53.9	21.3	8.3	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

$$\text{Result (AV)} = \text{Reading} + \text{Ant Factor} + \text{Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))} - \text{Gain(Amplifier)} + \text{Duty factor}$$

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor:	1 GHz - 6 GHz	$20\log(3.8\text{ m} / 3.0\text{ m}) = 2.06\text{ dB}$
	6 GHz - 10 GHz	$20\log(4.8\text{ m} / 3.0\text{ m}) = 4.09\text{ dB}$
	10 GHz - 26.5 GHz	$20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$



Radiated Spurious Emission
(Reference Plot for band-edge)

Test place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer

Mode

Ise EMC Lab.

October 30, 2024
24 deg. C / 59 % RH
Tomoya Sone
(1 GHz to 6 GHz)
Tx BT LE 2M 2480 MHz

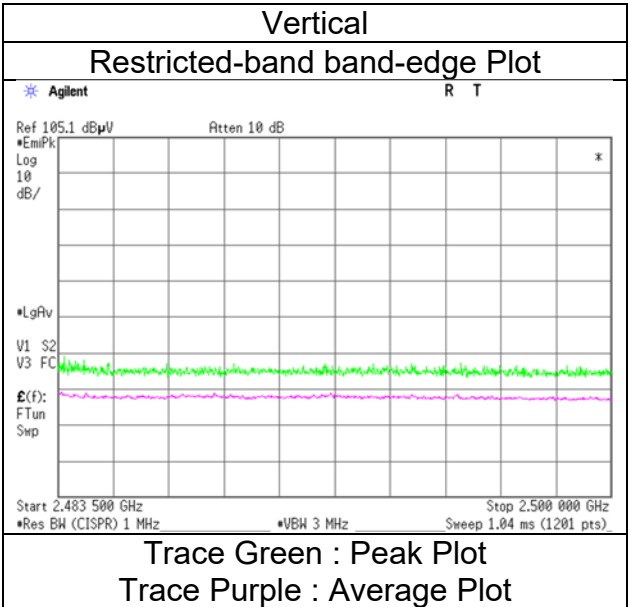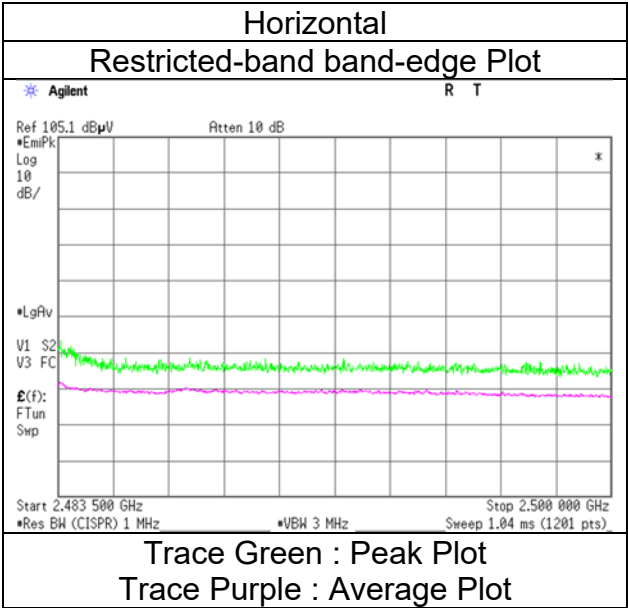

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.	
Semi Anechoic Chamber	No.3	No.3
Date	November 12, 2024	November 17, 2024
Temperature / Humidity	23 deg. C / 51 % RH	23 deg. C / 62 % RH
Engineer	Takumi Nishida	Hiroki Numata
	(Above 1 GHz)	(Below 1 GHz)
Mode	Tx BT LE 2M 2480 MHz + 11ax-20 [52-tone RU/Index 40] 5825 MHz	

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	43.4	28.2	-	13.5	7.2	32.2	-	16.7	-	40.0	-	23.3	-	
Hori.	53.0	32.2	-	10.2	7.3	32.2	-	17.5	-	40.0	-	22.5	-	
Hori.	67.9	26.6	-	6.6	7.5	32.2	-	8.5	-	40.0	-	31.5	-	
Hori.	264.3	34.3	-	12.5	9.4	32.0	-	24.2	-	46.0	-	21.8	-	
Hori.	300.0	29.9	-	13.6	9.7	32.0	-	21.2	-	46.0	-	24.8	-	
Hori.	321.9	30.4	-	14.2	9.8	32.0	-	22.4	-	46.0	-	23.6	-	
Hori.	2483.5	48.2	36.0	27.5	5.1	32.2	4.7	48.6	41.1	73.9	53.9	25.3	12.8	*1)
Hori.	4960.0	41.0	32.1	31.4	7.2	31.1	-	48.5	39.6	73.9	53.9	25.4	14.3	Floor noise
Hori.	5000.0	41.2	33.7	31.5	7.3	31.1	-	48.9	41.4	73.9	53.9	25.0	12.5	
Hori.	7440.0	41.3	33.5	35.5	10.5	32.1	-	55.1	47.3	73.9	53.9	18.8	6.6	Floor noise
Hori.	9920.0	41.5	33.3	36.1	11.1	32.8	-	55.9	47.7	73.9	53.9	18.0	6.2	Floor noise
Vert.	33.1	31.5	-	17.4	7.0	32.2	-	23.7	-	40.0	-	16.3	-	
Vert.	45.8	30.9	-	12.7	7.2	32.2	-	18.6	-	40.0	-	21.4	-	
Vert.	61.1	27.1	-	7.7	7.4	32.2	-	10.1	-	40.0	-	29.9	-	
Vert.	227.3	31.3	-	11.4	9.1	32.0	-	19.7	-	46.0	-	26.3	-	
Vert.	311.1	25.9	-	13.8	9.8	32.0	-	17.4	-	46.0	-	28.6	-	
Vert.	482.0	28.3	-	17.3	10.9	32.0	-	24.4	-	46.0	-	21.6	-	
Vert.	2483.5	44.7	33.7	27.5	5.1	32.2	4.7	45.1	38.8	73.9	53.9	28.8	15.1	*1)
Vert.	4960.0	41.0	31.9	31.4	7.2	31.1	-	48.5	39.5	73.9	53.9	25.4	14.4	Floor noise
Vert.	5000.0	42.6	36.8	31.5	7.3	31.1	-	50.3	44.5	73.9	53.9	23.6	9.4	
Vert.	7440.0	41.2	33.7	35.5	10.5	32.1	-	55.0	47.5	73.9	53.9	18.9	6.4	Floor noise
Vert.	9920.0	41.4	33.4	36.1	11.1	32.8	-	55.8	47.8	73.9	53.9	18.1	6.1	Floor noise



Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)
Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor
*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).
*QP detector was used up to 1GHz.
*1) Not Out of Band emission(Leakage Power)

Distance factor:

1 GHz - 6 GHz	$20\log(3.8\text{ m} / 3.0\text{ m}) = 2.06\text{ dB}$
6 GHz - 10 GHz	$20\log(4.8\text{ m} / 3.0\text{ m}) = 4.09\text{ dB}$
10 GHz - 26.5 GHz	$20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	November 12, 2024
Temperature / Humidity	23 deg. C / 51 % RH
Engineer	Takumi Nishida
	(1 GHz to 10 GHz)
Mode	Tx BT LE 2M 2480 MHz + 11ax-20 [52-tone RU/Index 40] 5825 MHz

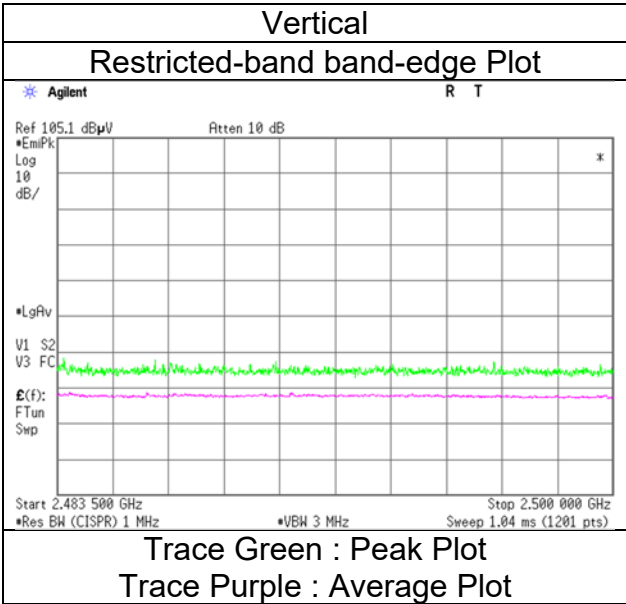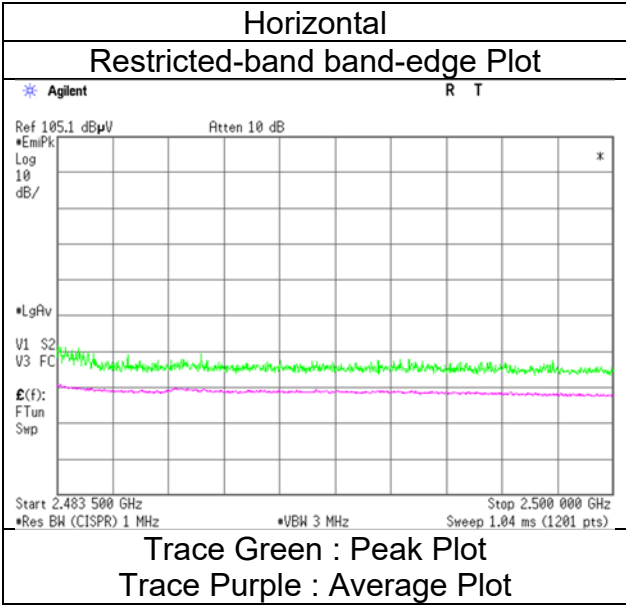

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.	
Semi Anechoic Chamber	No.2	No.2
Date	April 25, 2025	April 27, 2025
Temperature / Humidity	23 deg. C / 48 % RH	24 deg. C / 40 % RH
Engineer	Tetsuro Yoshida	Yuta Moriya
	(Above 1 GHz)	(Below 1 GHz)
Mode	Tx 11ax-20 [OFDM] 2462 MHz + 11ax-40 [OFDM] 5795 MHz	



Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	32.6	25.4	-	17.8	6.9	28.6	-	21.5	-	40.0	-	18.6	-	
Hori.	73.7	24.7	-	6.3	7.3	28.5	-	9.9	-	40.0	-	30.1	-	
Hori.	139.5	22.1	-	14.5	7.9	28.3	-	16.1	-	43.5	-	27.4	-	
Hori.	274.0	25.5	-	13.2	8.7	27.8	-	19.7	-	46.0	-	26.3	-	
Hori.	312.0	23.3	-	14.0	9.0	27.8	-	18.4	-	46.0	-	27.6	-	
Hori.	484.0	22.2	-	17.4	10.0	29.1	-	20.5	-	46.0	-	25.5	-	
Hori.	2483.5	54.8	44.4	27.4	4.5	33.2	-	53.5	43.2	73.9	53.9	20.4	10.8	
Hori.	4924.0	42.1	34.2	31.5	6.6	32.6	-	47.7	39.8	73.9	53.9	26.2	14.1	Floor noise
Hori.	5000.0	44.9	37.5	31.7	6.7	32.6	-	50.7	43.3	73.9	53.9	23.2	10.6	
Hori.	7386.0	43.2	34.6	35.4	7.8	32.5	-	53.9	45.3	73.9	53.9	20.0	8.6	Floor noise
Hori.	9848.0	43.2	34.2	36.0	8.4	33.2	-	54.5	45.5	73.9	53.9	19.4	8.4	Floor noise
Vert.	32.6	22.9	-	17.8	6.9	28.6	-	19.0	-	40.0	-	21.1	-	
Vert.	73.7	25.7	-	6.3	7.3	28.5	-	10.9	-	40.0	-	29.1	-	
Vert.	139.5	23.6	-	14.5	7.9	28.3	-	17.6	-	43.5	-	25.9	-	
Vert.	274.0	23.6	-	13.2	8.7	27.8	-	17.8	-	46.0	-	28.2	-	
Vert.	312.0	22.0	-	14.0	9.0	27.8	-	17.1	-	46.0	-	28.9	-	
Vert.	484.0	22.5	-	17.4	10.0	29.1	-	20.8	-	46.0	-	25.2	-	
Vert.	2483.5	50.7	40.9	27.4	4.5	33.2	-	49.4	39.6	73.9	53.9	24.5	14.3	
Vert.	4924.0	42.2	34.2	31.5	6.6	32.6	-	47.7	39.8	73.9	53.9	26.2	14.2	Floor noise
Vert.	5000.0	44.5	37.7	31.7	6.7	32.6	-	50.3	43.4	73.9	53.9	23.6	10.5	
Vert.	7386.0	43.1	34.5	35.4	7.8	32.5	-	53.9	45.2	73.9	53.9	20.0	8.7	Floor noise
Vert.	9848.0	43.1	34.4	36.0	8.4	33.2	-	54.4	45.6	73.9	53.9	19.5	8.3	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)
Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor
*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).
*QP detector was used up to 1 GHz.

Distance factor: 1 GHz - 6 GHz 20log (3.55 m / 3.0 m) = 1.47 dB
 6 GHz - 10 GHz 20log (3.55 m / 3.0 m) = 1.47 dB
 10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission
(Reference Plot for band-edge)


Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	April 24, 2025
Temperature / Humidity	23 deg. C / 51 % RH
Engineer	Takumi Nishida
	(1 GHz to 10 GHz)
Mode	Tx 11ax-20 [OFDM] 2462 MHz + 11ax-40 [OFDM] 5795 MHz

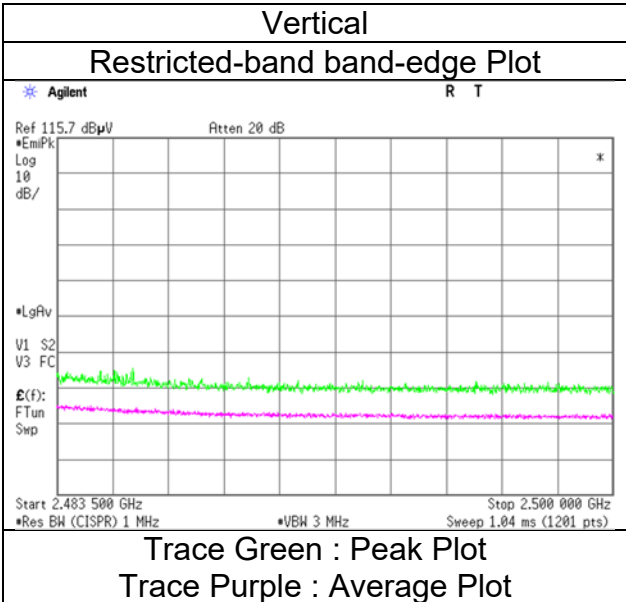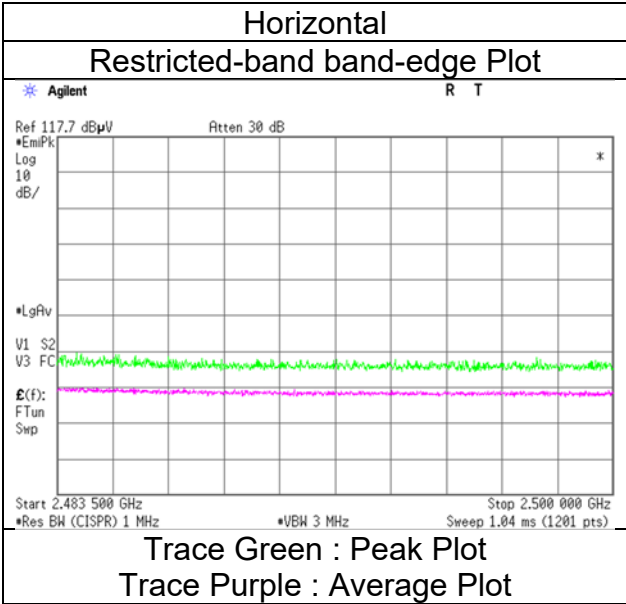

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission
(Plot data, Worst case mode for Maximum Peak Output Power)



Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	October 30, 2024	October 29, 2024	October 29, 2024
Temperature / Humidity	24 deg. C / 59 % RH	23 deg. C / 66 % RH	22 deg. C / 59 % RH
Engineer	Tomoya Sone (1 GHz to 6 GHz)	Tomoya Sone (6 GHz to 10 GHz)	Tetsuro Yoshida (10 GHz to 18 GHz)
Semi Anechoic Chamber	No.3	No.3	
Date	October 28, 2024	November 17, 2024	
Temperature / Humidity	23 deg. C / 56 % RH	23 deg. C / 62 % RH	
Engineer	Tomoya Sone (Above 18 GHz)	Hiroki Numata (Below 1 GHz)	
Mode	Tx 11ax-20 [OFDM] 2462 MHz		

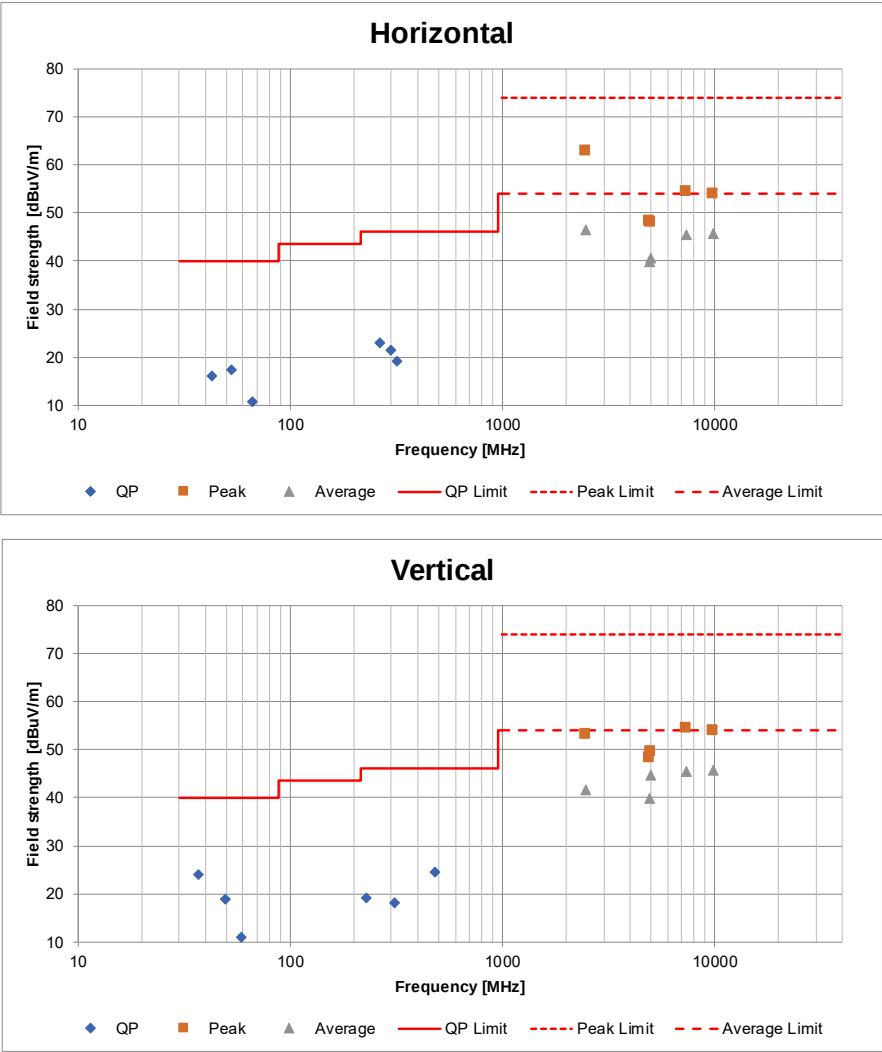

*These plots data contain sufficient number to show the trend of characteristic features for EUT.

Radiated Spurious Emission
(Plot data, Worst case mode for Maximum Peak Output Power)

Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	October 30, 2024	October 29, 2024	October 29, 2024
Temperature / Humidity	24 deg. C / 59 % RH	23 deg. C / 66 % RH	22 deg. C / 59 % RH
Engineer	Tomoya Sone	Tomoya Sone	Tetsuro Yoshida
	(1 GHz to 6 GHz)	(6 GHz to 10 GHz)	(10 GHz to 18 GHz)
Semi Anechoic Chamber	No.3	No.3	
Date	October 28, 2024	November 17, 2024	
Temperature / Humidity	23 deg. C / 56 % RH	23 deg. C / 62 % RH	
Engineer	Tomoya Sone	Hiroki Numata	
	(Above 18 GHz)	(Below 1 GHz)	
Mode	Tx BT LE 2M 2402 MHz		

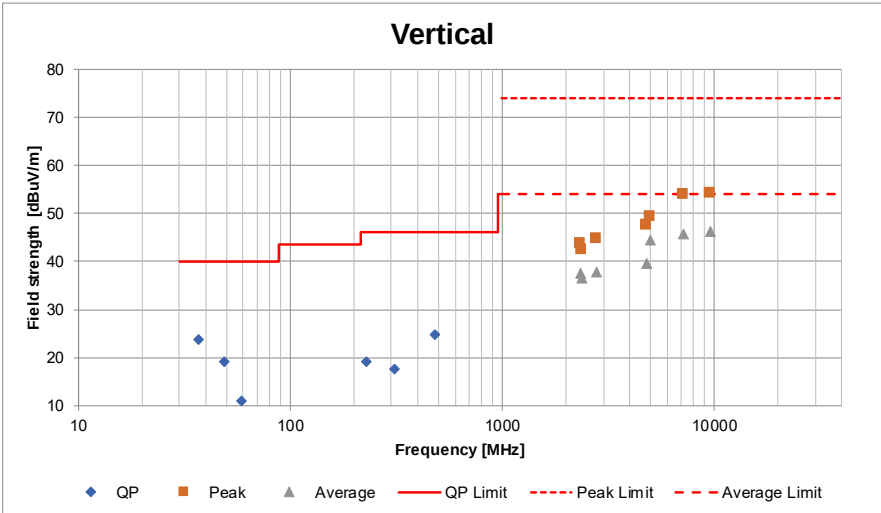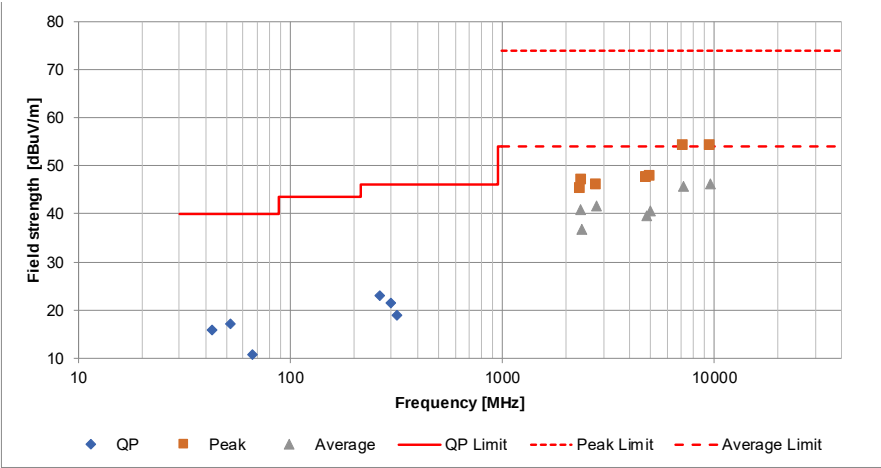

*These plots data contain sufficient number to show the trend of characteristic features for EUT.

APPENDIX 2: Test Instruments

Test Equipment used from October 28 to November 17, 2024

Test Item	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	141232	High Pass Filter 3.5-18.0GHz	UL-ISE	HPF SELECTOR	001	09/13/2024	12
RE	141266	Logperiodic Antenna (200-1000MHz)	Schwarzbeck Mess-Elektronik OHG	VUSLP9111B	9111B-191	08/23/2024	12
RE	141323	Coaxial cable	UL-ISE	-	-	09/13/2024	12
RE	141424	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	VHA9103+BBA9106	1915	03/15/2024	12
RE	141507	Horn Antenna 1-18GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	258	11/20/2023	12
RE	141511	Horn Antenna 1-18GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	253	09/09/2024	12
RE	141513	Horn Antenna 15-40GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9170	BBHA9170306	07/19/2024	12
RE	141532	DIGITAL HiTESTER	HIOKI E.E. CORPORATION	3805	051201197	01/31/2024	12
RE	141576	Pre Amplifier	Keysight Technologies Inc	8449B	3008A01671	02/17/2024	12
RE	141580	Microwave System Amplifier	Keysight Technologies Inc	83017A	MY39500779	03/08/2024	12
RE	141582	Pre Amplifier	SONOMA INSTRUMENT	310	260834	02/17/2024	12
RE	141884	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY44020357	05/09/2024	12
RE	141950	EMI Test Receiver	Rohde & Schwarz	ESU26	100412	11/20/2023	12
RE	142008	AC3_Semi Anechoic Chamber (NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	12/11/2023	24
RE	142013	AC3_Semi Anechoic Chamber (SVSWR)	TDK	Semi Anechoic Chamber 3m	DA-10005	04/12/2023	24
RE	142183	Measure	KOMELON	KMC-36	-	10/21/2024	12
RE	142314	Attenuator	Pasternack Enterprises	PE7390-6	D/C 1504	06/06/2024	12
RE	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
RE	244709	Thermo-Hygrometer	HIOKI E.E. CORPORATION	LR5001	231202103	01/25/2024	12
RE	245787	Double Ridge Horn Antenna	Schwarzbeck Mess-Elektronik OHG	BBHA 9120 C	689	03/06/2024	12
RE	246001	Microwave Cable	Huber+Suhner	SF103/11PC35/ 11PC35/1000mm / SF126E/5000mm	800673(1m) / 610204(5m)	03/06/2024	12

Test Equipment used from April 24 to 27, 2025

Test Item	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	141232	High Pass Filter 3.5-18.0GHz	UL-ISE	HPF SELECTOR	001	09/13/2024	12
RE	141265	Logperiodic Antenna (200-1000MHz)	Schwarzbeck Mess-Elektronik OHG	VUSLP9111B	9111B-190	07/10/2024	12
RE	141279	Microwave Cable	Junkosha	MMX221-00500DMSDMS	1502S303	03/03/2025	12
RE	141317	Coaxial Cable	UL-ISE	-	-	09/11/2024	12
RE	141331	Attenuator(6dB)	TME	UFA-01	-	02/19/2025	12
RE	141406	High Pass Filter 7-20GHz	TOKIMEC	TF37NCCA	7001	09/11/2024	12
RE	141427	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	VHA9103B+BBA9106	08031	07/30/2024	12
RE	141512	Horn Antenna 1-18GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	254	10/17/2024	12
RE	141513	Horn Antenna 15-40GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9170	BBHA9170306	07/19/2024	12
RE	141542	Digital Tester	Fluke Corporation	FLUKE 26-3	78030611	08/06/2024	12
RE	141594	Pre Amplifier	Keysight Technologies Inc	8447D	2944A10150	02/19/2025	12
RE	141950	EMI Test Receiver	Rohde & Schwarz	ESU26	100412	11/28/2024	12
RE	141978	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY46180899	05/09/2024	12
RE	142004	AC2_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-06902	12/12/2023	24
RE	142006	AC2_Semi Anechoic Chamber(SVSWR)	TDK	Semi Anechoic Chamber 3m	DA-06902	04/21/2025	24
RE	142228	Measure, Tape, Steel	KOMELON	KMC-36	-	-	-
RE	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
RE	238713	Double Ridge Horn Antenna	Schwarzbeck Mess-Elektronik OHG	BBHA 9120 C	688	09/02/2024	12
RE	244707	Thermo-Hygrometer	HIOKI E. E. CORPORATION	LR5001	231202102	01/19/2025	12
RE	252663	Microwave Cable	Huber+Suhner	SF126E/11PC35/11PC35/1000MM,5000MM	616276/126E / 616275/126E	09/10/2024	12
RE	253739	Pre Amplifier	Keysight Technologies Inc	8449B	3008A01919	10/23/2024	12

*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item:

RE: Radiated Emission