



Appendix B

Detailed Test Results

1. GSM
GSM850 for Head& Body
GSM1900 for Head& Body
2. WCDMA
WCDMA Band II for Head& Body
WCDMA Band V for Head& Body
3. LTE
LTE Band 2 for Head& Body
LTE Band 5 for Head& Body
LTE Band 7 for Head& Body
LTE Band 12 for Head& Body
LTE Band 66 for Head& Body
4. WIFI
WIFI 2.4GHz for Head& Body



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Test Laboratory: LCS-SAR Lab

GSM850 GSM 251CH Right cheek

DUT: Smart phone; Type: WAVE 8C; Serial: A240702068-1

Communication System: UID 0; Frequency: 848.8 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 848.8 \text{ MHz}$; $\sigma = 0.917 \text{ S/m}$; $\epsilon_r = 42.109$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.26, 9.26, 9.26); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.316 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.944 V/m ; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.396 W/kg

SAR(1 g) = 0.266 W/kg ; **SAR(10 g)** = 0.201 W/kg

Maximum value of SAR (measured) = 0.309 W/kg

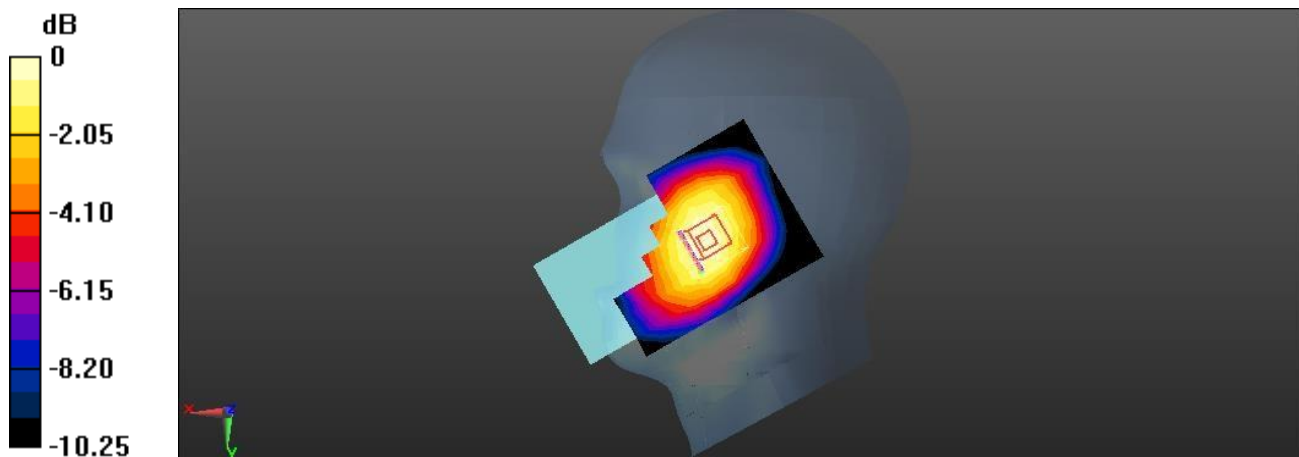

0 dB = 0.309 W/kg = -5.10 dBW/kg



Test Laboratory: LCS-SAR Lab

GSM850 GPRS 4TS 251CH Rear side 10mm

DUT: Smart phone; Type: WAVE 8C; Serial: A240702068-1

Communication System: UID 0, GPRS (0); Frequency: 848.8 MHz; Duty Cycle: 1:2.075

Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.917 \text{ S/m}$; $\epsilon_r = 42.109$; $\rho = 1000$

kg/m^3 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.26, 9.26, 9.26); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.356 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.64 V/m ; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.483 W/kg

SAR(1 g) = 0.274 W/kg ; SAR(10 g) = 0.165 W/kg

Maximum value of SAR (measured) = 0.362 W/kg

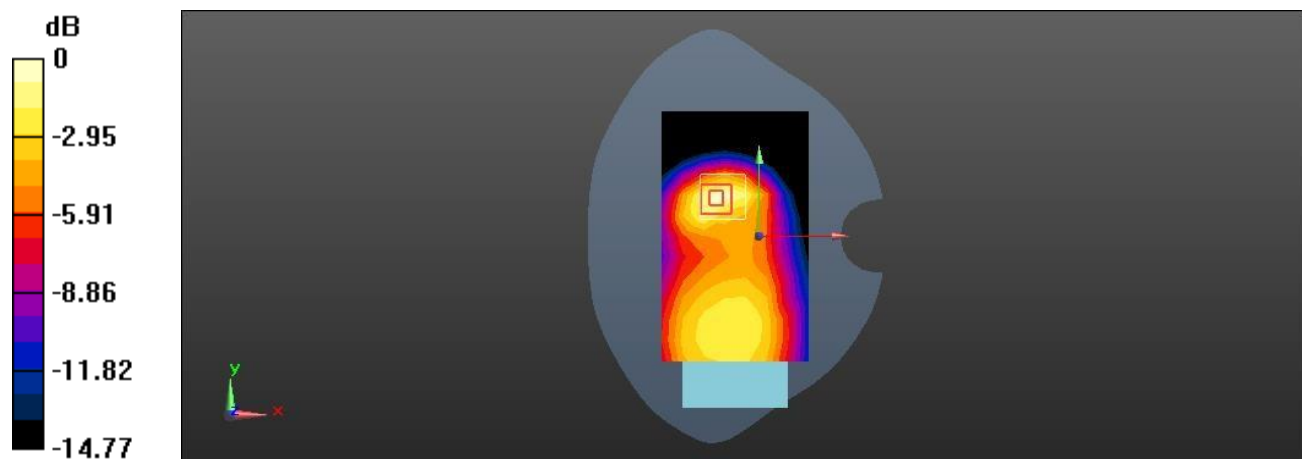

$0 \text{ dB} = 0.362 \text{ W/kg} = -4.41 \text{ dBW/kg}$



Test Laboratory: LCS-SAR Lab

GSM1900 GSM 661CH Left cheek

DUT: Smart phone; Type: WAVE 8C; Serial: A240702068-1

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.431 \text{ S/m}$; $\epsilon_r = 38.544$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.85, 7.85, 7.85); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0368 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.982 V/m ; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0470 W/kg

SAR(1 g) = 0.104 W/kg ; SAR(10 g) = 0.024 W/kg

Maximum value of SAR (measured) = 0.0380 W/kg

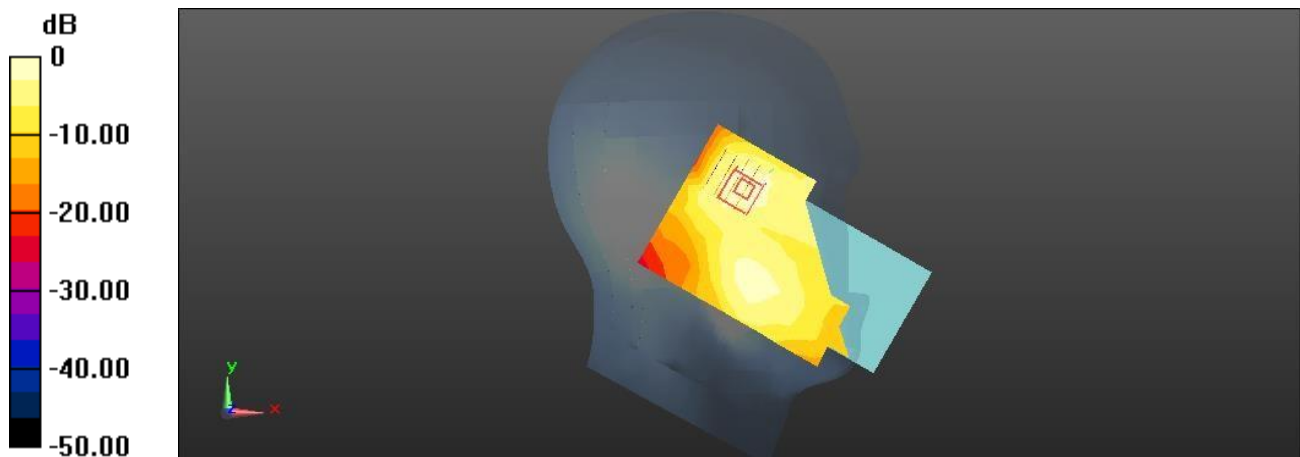

0 dB = 0.0380 W/kg = -14.20 dBW/kg



Test Laboratory: LCS-SAR Lab

GSM1900 GPRS 4TS 661CH Rear side 10mm

DUT: Smart phone; Type: WAVE 8C; Serial: A240702068-1

Communication System: UID 0, GPRS (0); Frequency: 1880 MHz; Duty Cycle: 1:2.075

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.431 \text{ S/m}$; $\epsilon_r = 38.544$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.85, 7.85, 7.85); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.621 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.71 V/m ; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.325 W/kg ; SAR(10 g) = 0.214 W/kg

Maximum value of SAR (measured) = 0.837 W/kg

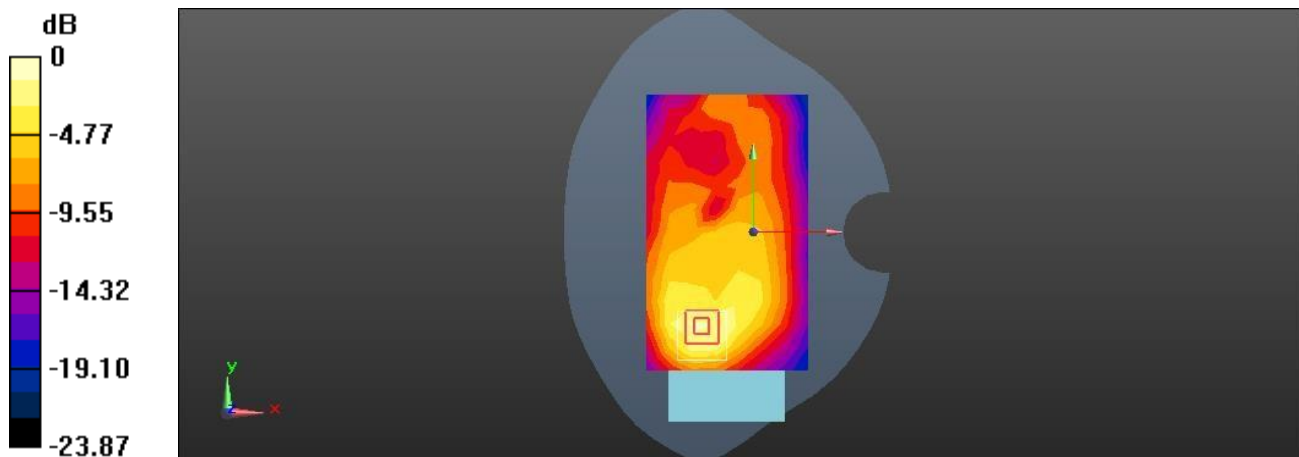

0 dB = 0.837 W/kg = -0.77 dBW/kg



Test Laboratory: LCS-SAR Lab

WCDMA Band II RMC 9262CH Left cheek

DUT: Smart phone; Type: WAVE 8C; Serial: A240702068-1


Communication System: UID 0, WCDMA (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1852.4 \text{ MHz}$; $\sigma = 1.403 \text{ S/m}$; $\epsilon_r = 38.641$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.85, 7.85, 7.85); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.0366 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 1.850 V/m ; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.0450 W/kg
SAR(1 g) = 0.089 W/kg ; SAR(10 g) = 0.042 W/kg
Maximum value of SAR (measured) = 0.0317 W/kg

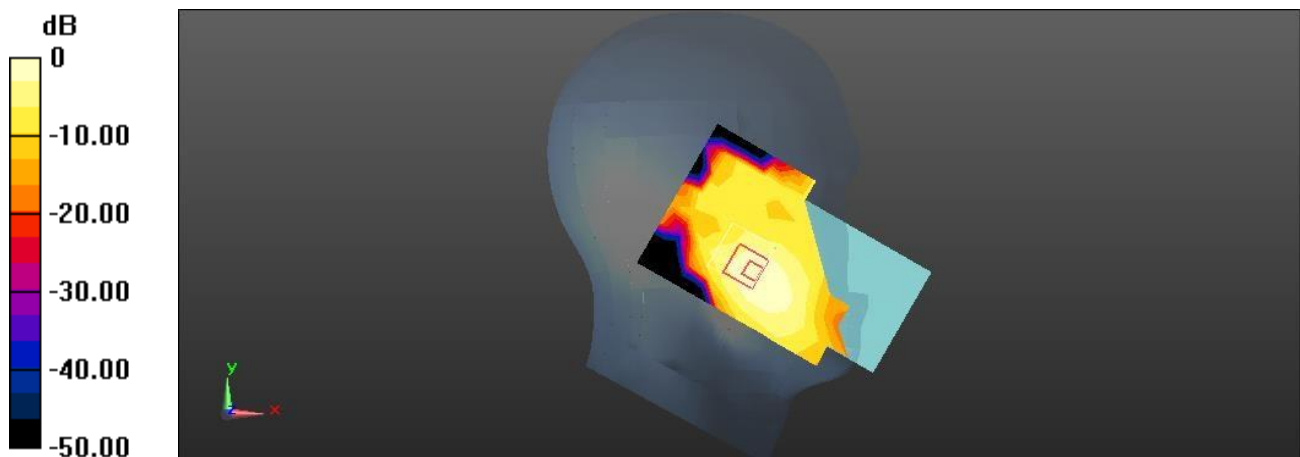

0 dB = 0.0317 W/kg = -14.99 dBW/kg



Test Laboratory: LCS-SAR Lab

WCDMA Band II RMC 9262CH Rear side 10mm

DUT: Smart phone; Type: WAVE 8C; Serial: A240702068-1


Communication System: UID 0, WCDMA (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1852.4 \text{ MHz}$; $\sigma = 1.403 \text{ S/m}$; $\epsilon_r = 38.641$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.85, 7.85, 7.85); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.640 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 4.527 V/m ; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 0.890 W/kg
SAR(1 g) = 0.311 W/kg ; SAR(10 g) = 0.234 W/kg
Maximum value of SAR (measured) = 0.685 W/kg

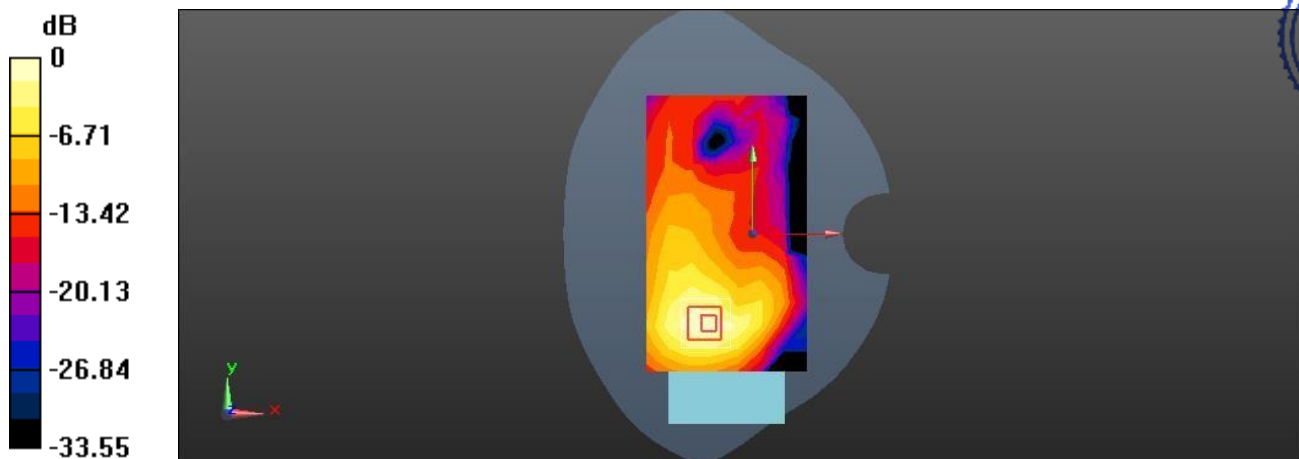

0 dB = 0.685 W/kg = -1.64 dBW/kg



Test Laboratory: LCS-SAR Lab

WCDMA Band V RMC 4132CH Right cheek

DUT: Smart phone; Type: WAVE 8C; Serial: A240702068-1


Communication System: UID 0, WCDMA (0); Frequency: 826.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 42.131$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.26, 9.26, 9.26); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.259 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 2.782 V/m; Power Drift = -0.19 dB
Peak SAR (extrapolated) = 0.289 W/kg
SAR(1 g) = 0.208 W/kg; SAR(10 g) = 0.125 W/kg
Maximum value of SAR (measured) = 0.276 W/kg

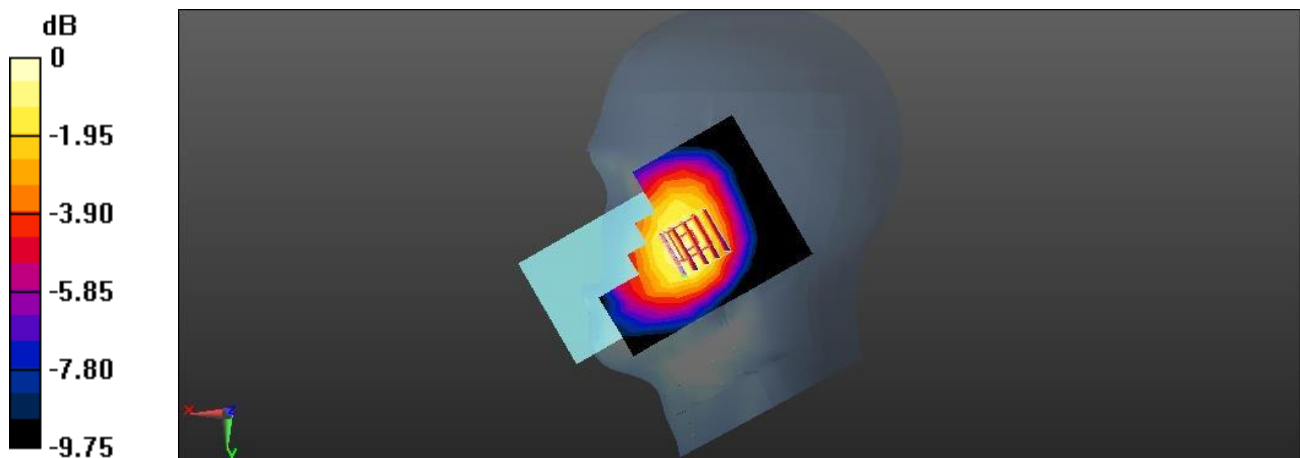

0 dB = 0.276 W/kg = -5.59 dBW/kg



Test Laboratory: LCS-SAR Lab

WCDMA Band V RMC 4132CH Rear side 10mm

DUT: Smart phone; Type: WAVE 8C; Serial: A240702068-1


Communication System: UID 0, WCDMA (0); Frequency: 826.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 826.4 \text{ MHz}$; $\sigma = 0.896 \text{ S/m}$; $\epsilon_r = 42.131$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.26, 9.26, 9.26); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.288 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 13.96 V/m ; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 0.352 W/kg
SAR(1 g) = 0.278 W/kg ; SAR(10 g) = 0.185 W/kg
Maximum value of SAR (measured) = 0.295 W/kg

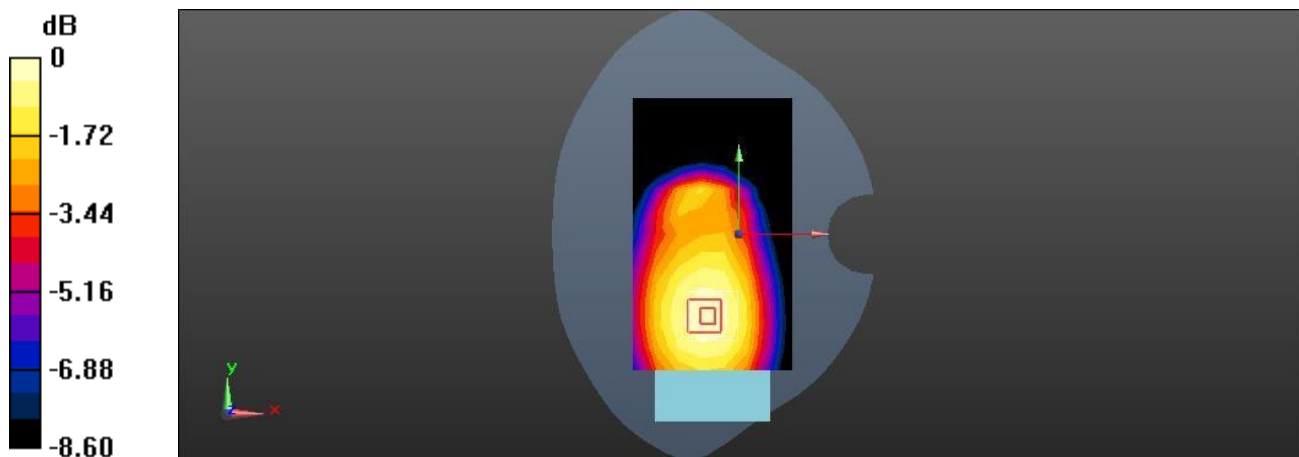

0 dB = 0.295 W/kg = -5.30 dBW/kg



Test Laboratory: LCS-SAR Lab

LTE Band 2 20M QPSK 1RB99 18900CH Left cheek

DUT: Smart phone; Type: WAVE 8C; Serial: A240702068-1

Communication System: UID 0, LTE-FDD (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.431 \text{ S/m}$; $\epsilon_r = 38.544$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.85, 7.85, 7.85); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.0311 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 1.308 V/m ; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 0.0420 W/kg
SAR(1 g) = 0.122 W/kg ; SAR(10 g) = 0.073 W/kg
Maximum value of SAR (measured) = 0.0316 W/kg



0 dB = 0.0316 W/kg = -15.00 dBW/kg



Test Laboratory: LCS-SAR Lab

LTE Band 2 20M QPSK 1RB99 18900CH Rear side 10mm

DUT: Smart phone; Type: WAVE 8C; Serial: A240702068-1

Communication System: UID 0, LTE-FDD (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.431 \text{ S/m}$; $\epsilon_r = 38.544$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.85, 7.85, 7.85); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.857 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.123 V/m ; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.588 W/kg ; SAR(10 g) = 0.369 W/kg

Maximum value of SAR (measured) = 0.928 W/kg

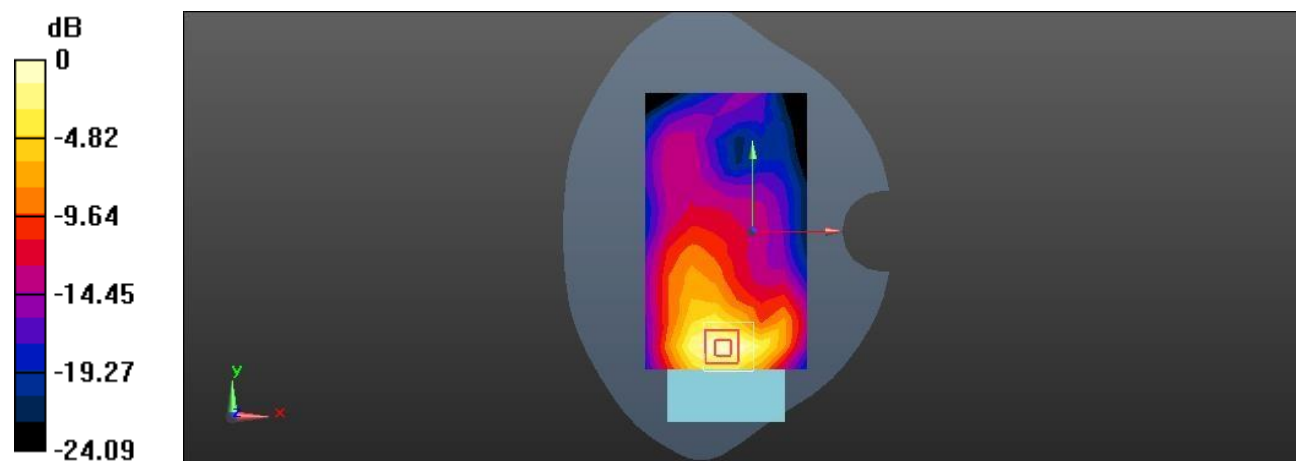

$0 \text{ dB} = 0.928 \text{ W/kg} = -0.32 \text{ dBW/kg}$



Test Laboratory: LCS-SAR Lab

LTE Band 5 10M QPSK 1RB25 20600CH Right cheek

DUT: Smart phone; Type: WAVE 8C; Serial: A240702068-1

Communication System: UID 0, LTE-FDD (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 844 \text{ MHz}$; $\sigma = 0.905 \text{ S/m}$; $\epsilon_r = 41.832$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.26, 9.26, 9.26); Calibrated: 2023/11/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.248 W/kg



Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.783 V/m ; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.291 W/kg

SAR(1 g) = 0.226 W/kg ; SAR(10 g) = 0.142 W/kg

Maximum value of SAR (measured) = 0.262 W/kg

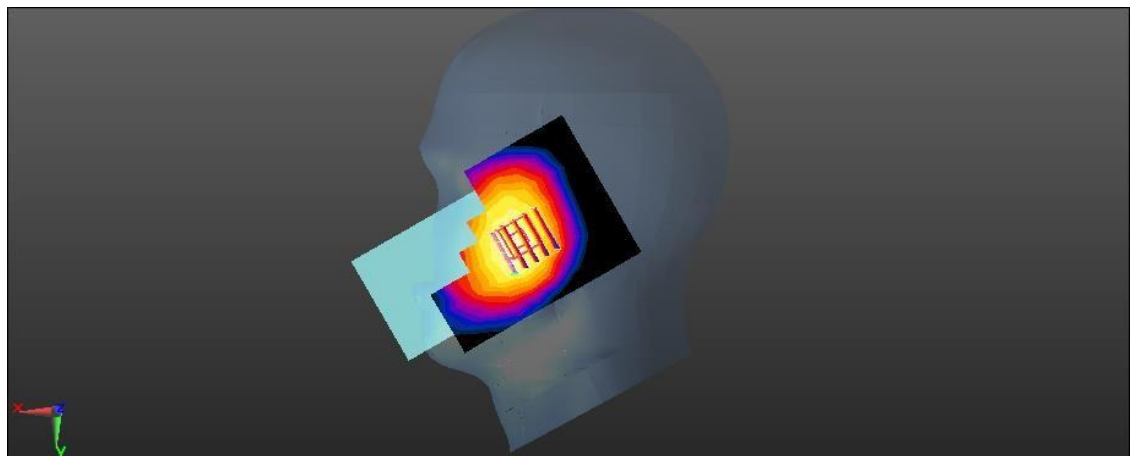

$0 \text{ dB} = 0.262 \text{ W/kg} = -5.82 \text{ dBW/kg}$



Test Laboratory: LCS-SAR Lab

LTE Band 5 10M QPSK 1RB25 20600CH Rear side 10mm

DUT: Smart phone; Type: WAVE 8C; Serial: A240702068-1

Communication System: UID 0, LTE-FDD (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 844 \text{ MHz}$; $\sigma = 0.905 \text{ S/m}$; $\epsilon_r = 41.832$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.26, 9.26, 9.26); Calibrated: 2023/11/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.519 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.71 V/m ; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.596 W/kg

SAR(1 g) = 0.425 W/kg ; SAR(10 g) = 0.332 W/kg

Maximum value of SAR (measured) = 0.535 W/kg

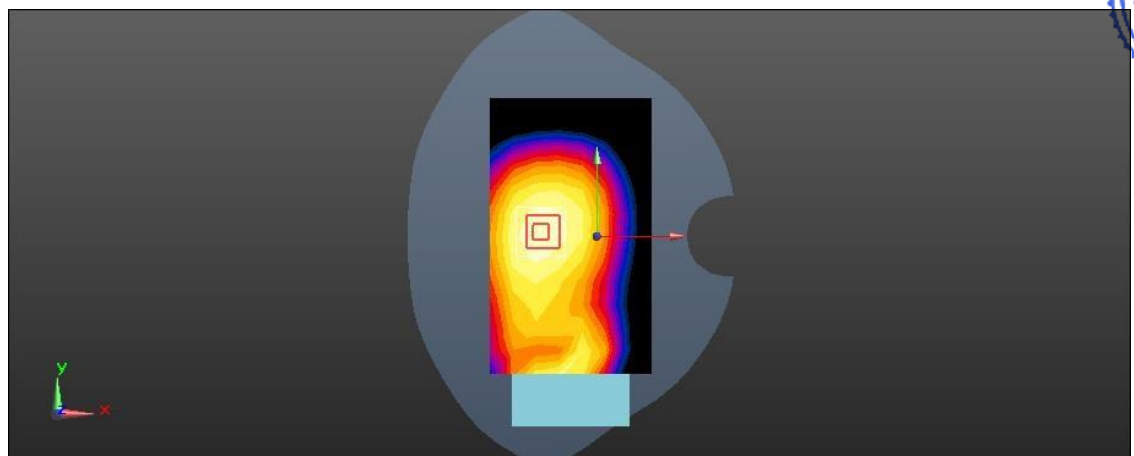

0 dB = 0.535 W/kg = -2.72 dBW/kg



Test Laboratory: LCS-SAR Lab

LTE Band 7 20M QPSK 1RB99 21100CH Left cheek

DUT: Smart phone; Type: WAVE 8C; Serial: A240702068-1

Communication System: UID 0, LTE-FDD (0); Frequency: 2535.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535.5$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.17, 7.17, 7.17); Calibrated: 2023/11/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.178 W/kg



Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.837 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.254 W/kg

SAR(1 g) = 0.145 W/kg; SAR(10 g) = 0.072 W/kg

Maximum value of SAR (measured) = 0.182 W/kg

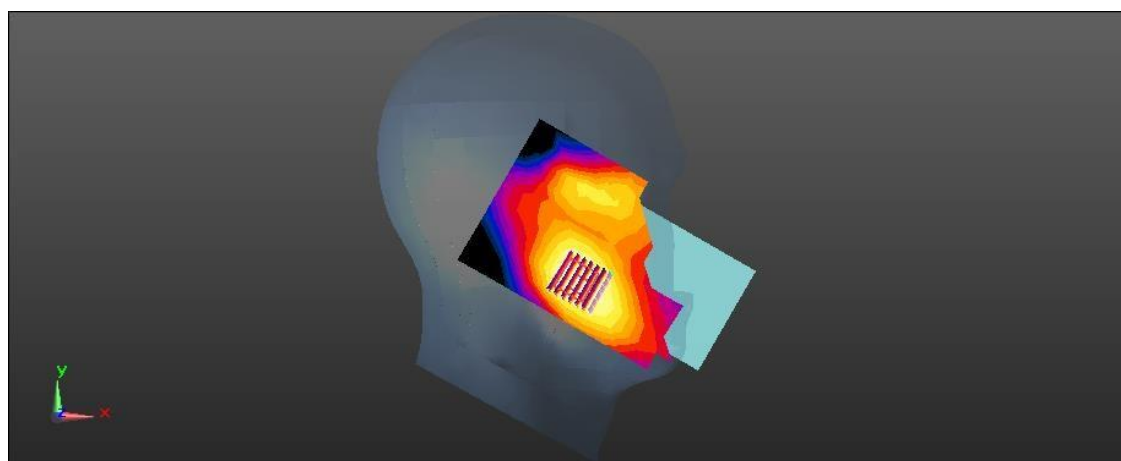

0 dB = 0.182 W/kg = -7.40 dBW/kg



Test Laboratory: LCS-SAR Lab

LTE Band 7 20M QPSK 1RB99 21100CH Rear side 10mm

DUT: Smart phone; Type: WAVE 8C; Serial: A240702068-1

Communication System: UID 0, LTE-FDD (0); Frequency: 2535.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535.5 \text{ MHz}$; $\sigma = 1.92 \text{ S/m}$; $\epsilon_r = 38.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.17, 7.17, 7.17); Calibrated: 2023/11/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.888 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.01 V/m ; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.554 W/kg ; SAR(10 g) = 0.289 W/kg

Maximum value of SAR (measured) = 0.848 W/kg

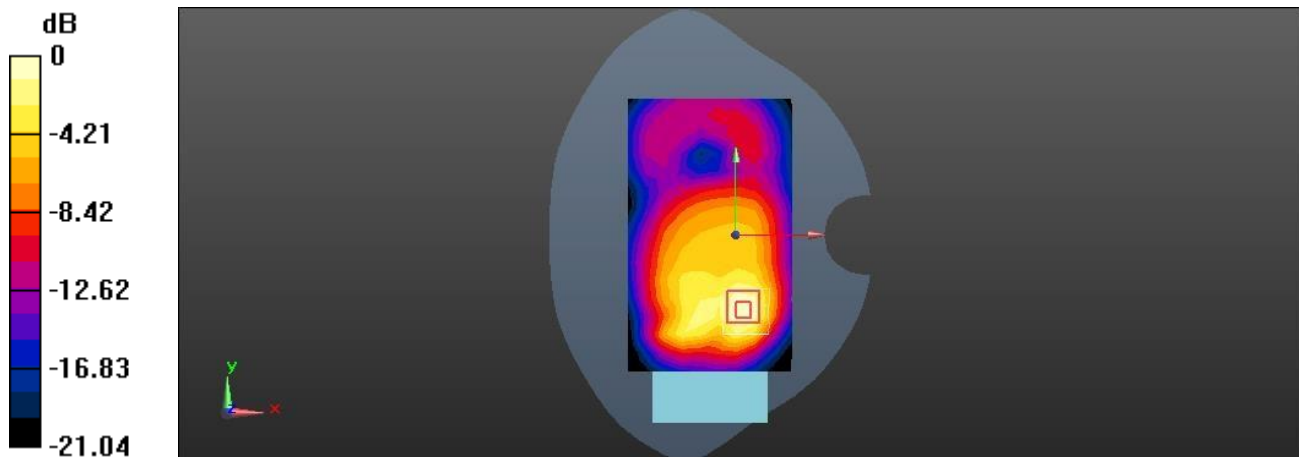

Test Laboratory: LCS-SAR Lab

LTE Band 12 10M QPSK 1RB49 23130CH Right cheek

DUT: Smart phone; Type: WAVE 8C; Serial: A240702068-1


Communication System: UID 0, LTE-FDD (0); Frequency: 711 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.859 \text{ S/m}$; $\epsilon_r = 42.161$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.66, 9.66, 9.66); Calibrated: 2023/11/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.335 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 5.185 V/m ; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 0.341 W/kg
SAR(1 g) = 0.344 W/kg ; SAR(10 g) = 0.265 W/kg
Maximum value of SAR (measured) = 0.351 W/kg

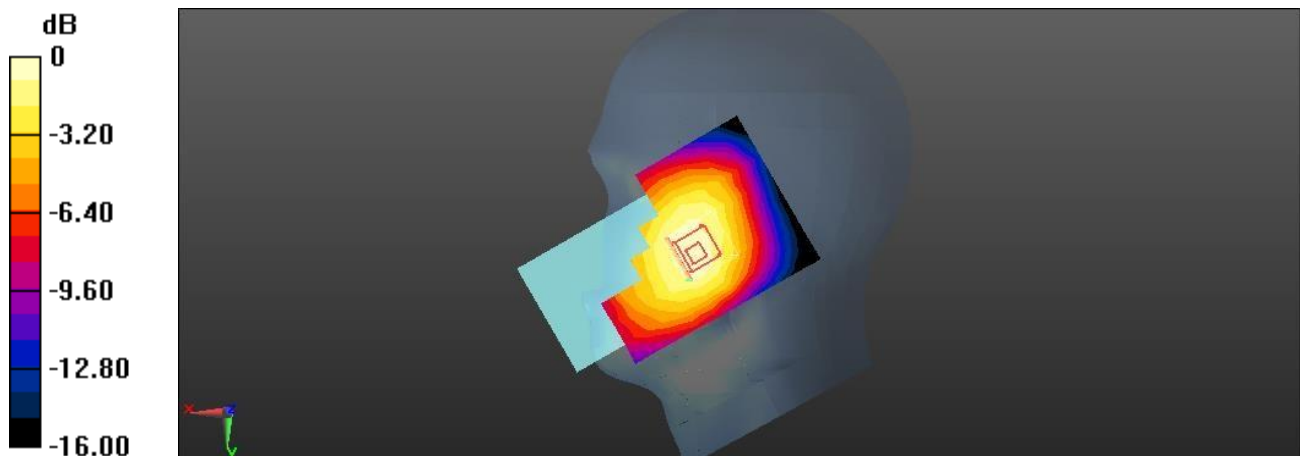

0 dB = 0.351 W/kg = -4.55 dBW/kg



Test Laboratory: LCS-SAR Lab

LTE Band 12 10M QPSK 1RB049 23130CH Rear side 10mm

DUT: Smart phone; Type: WAVE 8C; Serial: A240702068-1

Communication System: UID 0, LTE-FDD (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.859 \text{ S/m}$; $\epsilon_r = 42.161$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.66, 9.66, 9.66); Calibrated: 2023/11/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.472 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.42 V/m ; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.529 W/kg

SAR(1 g) = 0.422 W/kg ; SAR(10 g) = 0.301 W/kg

Maximum value of SAR (measured) = 0.482 W/kg

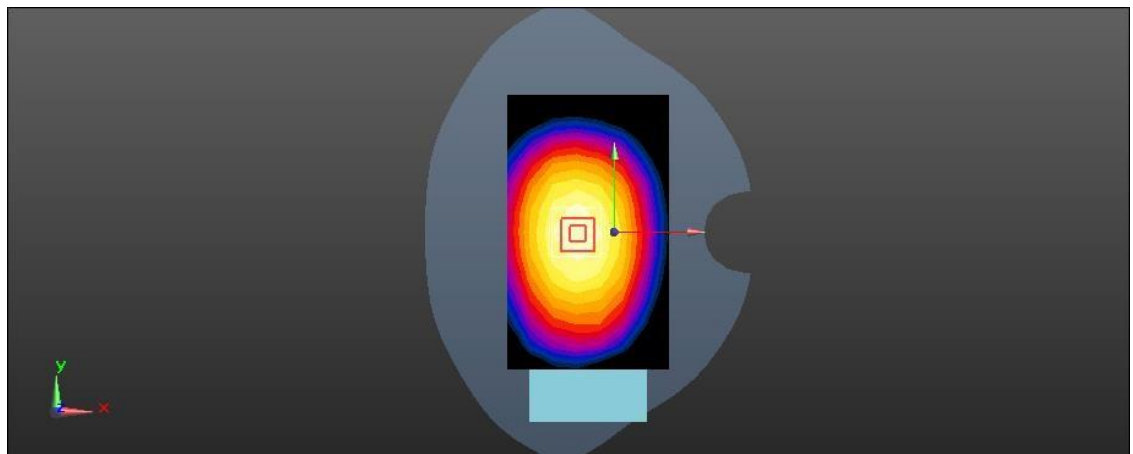

0 dB = 0.482 W/kg = -3.17 dBW/kg



Test Laboratory: LCS-SAR Lab

LTE Band 66 20M QPSK 1RB50 132072CH Left cheek

DUT: Smart phone; Type: WAVE 8C; Serial: A240702068-1

Communication System: UID 0, LTE-FDD (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720 \text{ MHz}$; $\sigma = 1.307 \text{ S/m}$; $\epsilon_r = 40.509$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.16, 8.16, 8.16); Calibrated: 2023/11/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.181 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.695 V/m ; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.251 W/kg

SAR(1 g) = 0.178 W/kg ; SAR(10 g) = 0.082 W/kg

Maximum value of SAR (measured) = 0.196 W/kg

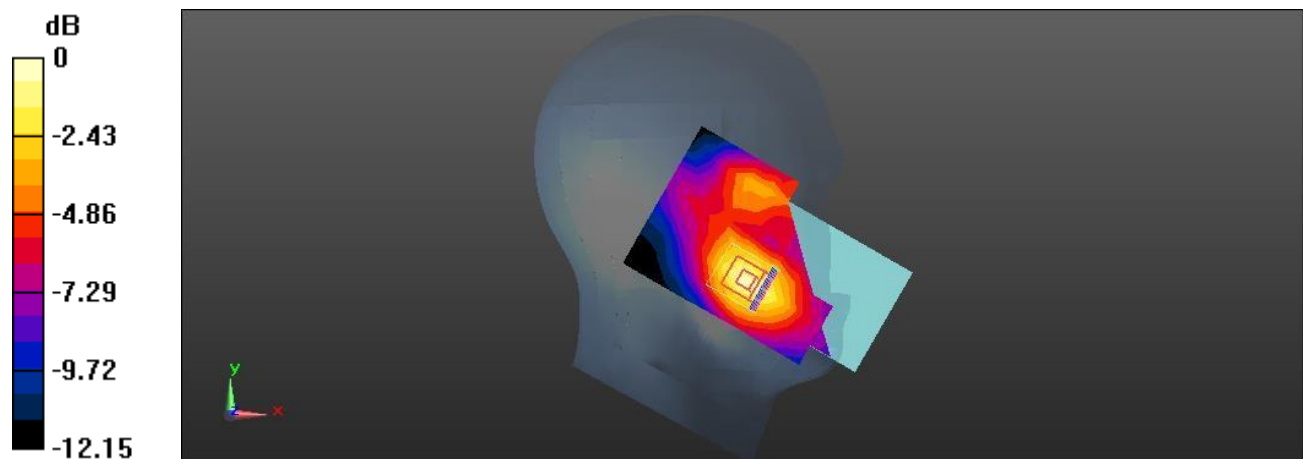

0 dB = 0.196 W/kg = -7.08 dBW/kg



Test Laboratory: LCS-SAR Lab

LTE Band 66 20M QPSK 1RB50 132072CH Rear side 10mm

DUT: Smart phone; Type: WAVE 8C; Serial: A240702068-1

Communication System: UID 0, LTE-FDD (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720 \text{ MHz}$; $\sigma = 1.307 \text{ S/m}$; $\epsilon_r = 40.509$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.16, 8.16, 8.16); Calibrated: 2023/11/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.543 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.952 V/m ; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.865 W/kg

SAR(1 g) = 0.425 W/kg ; SAR(10 g) = 0.232 W/kg

Maximum value of SAR (measured) = 0.587 W/kg

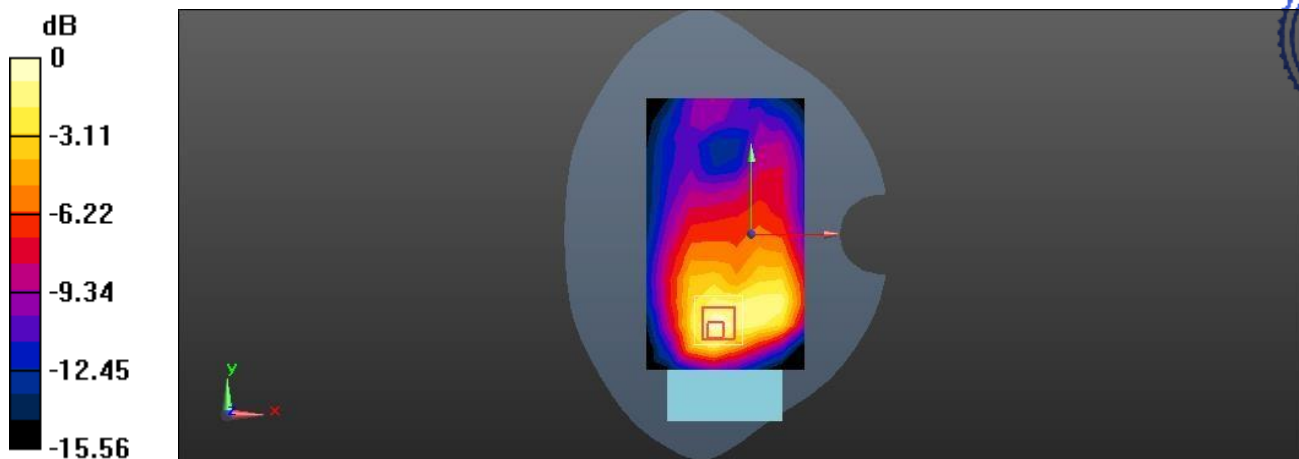

0 dB = 0.587 W/kg = -2.31 dBW/kg



Test Laboratory: LCS-SAR Lab

WIFI 2.4G 802.11g 6CH Left cheek

DUT: Smart phone; Type: WAVE 8C; Serial: A240702068-1

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.811$ S/m; $\epsilon_r = 39.198$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.42, 7.42, 7.42); Calibrated: 2023/11/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.391 W/kg



Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.240 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.661 W/kg

SAR(1 g) = 0.303 W/kg; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 0.428 W/kg

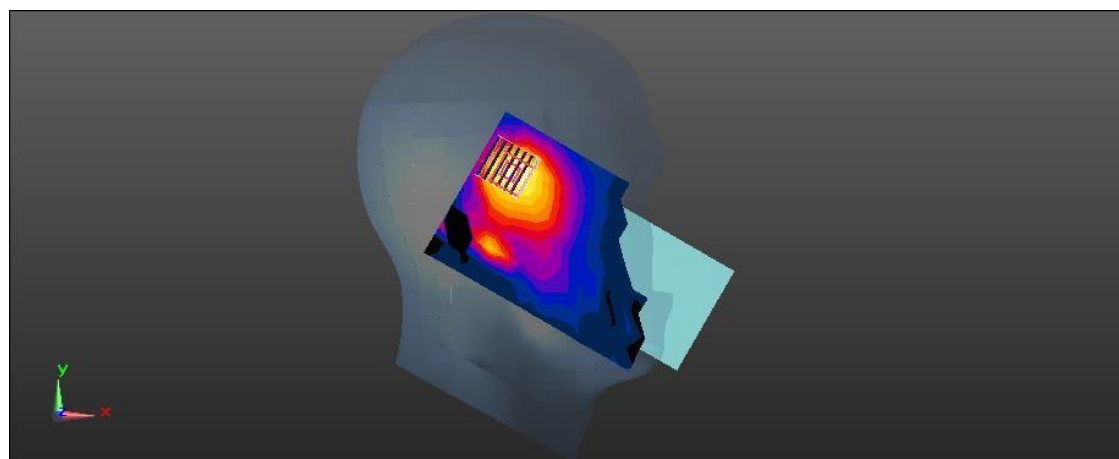

0 dB = 0.428 W/kg = -3.69 dBW/kg



WIFI 2.4G 802.11g 6CH Rear side 10mm

DUT: Smart phone; Type: WAVE 8C; Serial: A240702068-1


Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.811 \text{ S/m}$; $\epsilon_r = 39.198$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.42, 7.42, 7.42); Calibrated: 2023/11/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Maximum value of SAR (measured) = 0.312 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 4.861 V/m ; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 0.515 W/kg
SAR(1 g) = 0.236 W/kg ; SAR(10 g) = 0.106 W/kg
Maximum value of SAR (measured) = 0.325 W/kg

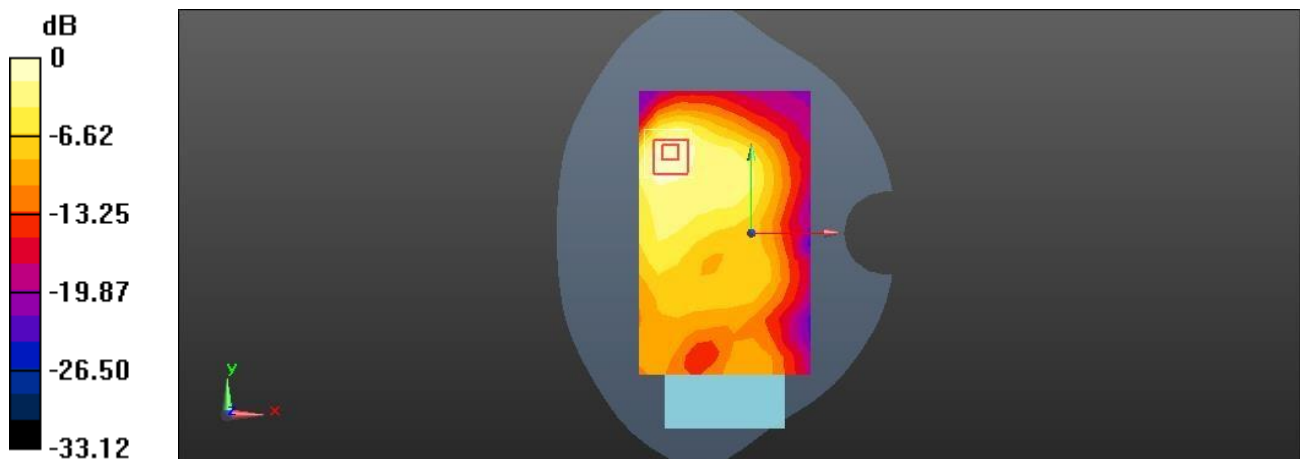

0 dB = 0.325 W/kg = -4.88 dBW/kg

