

深圳市亿圣邦科技有限公司

Shenzhen Yishengbang Technology Co., Ltd. Antenna Test Report

Customer: 艾普达

Project: N1769POYB

Product: WIFI Antenna—FPC

Report date: 2024-06-27

Prepared by : 胡雪文

Checked by : 黄震

Approved by : 林美财

Purpose

This report is to measure the performance of SLK for Master Antenna on 艾普达. All measure data are showed below.

Content

1. Product Overview

2. Test Result

2.1 WIFI MAIN Antenna VSWR

2.2 WIFI MAIN Antenna Gain/Efficiency/3D DATA

2.3 WIFI AUX Antenna VSWR

2.4 WIFI AUX Antenna Gain/Efficiency/3D DATA

2.5 WIFI active test

2.6 WIFI throughput test

2.7 WIFI signal strength test


3. Conclusions

1. Product Overview



2. Test Result

2.1 WIFI MAIN Antenna VSWR/S11

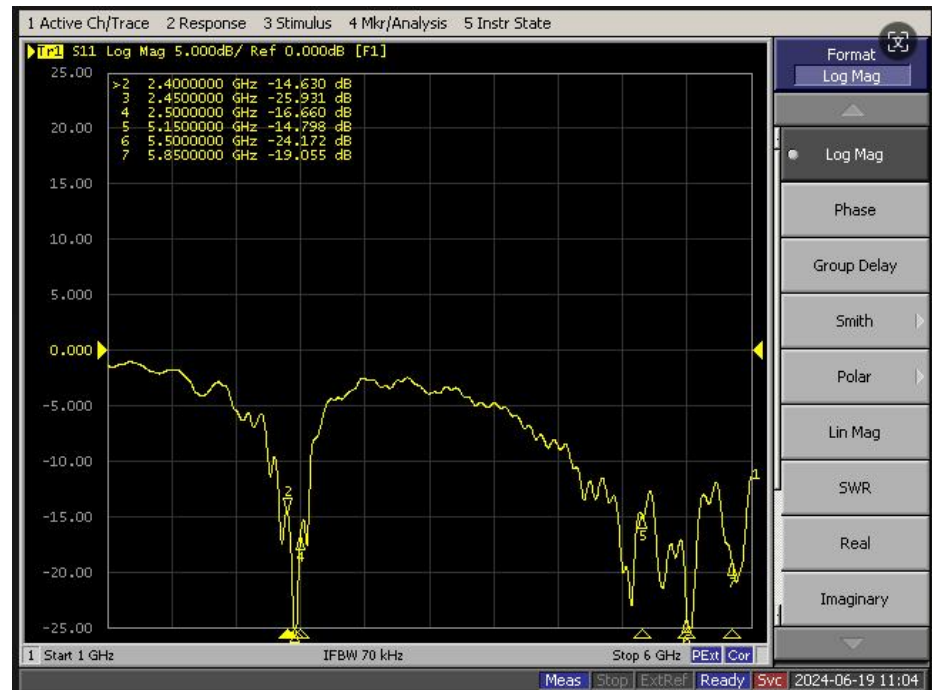


2. Test Result


2.4 WIFI MAIN Antenna Gain/Efficiency/3D DATA

Frequency (MHz)	Efficiency (dBi)	Gain (dBi)	Efficiency (%)
2400	-2.99	1.43	50.23
2410	-2.99	1.34	50.29
2420	-2.75	1.43	53.12
2430	-2.73	1.27	53.28
2440	-2.77	1.23	52.84
2450	-2.85	1.90	51.93
2460	-2.66	1.21	54.23
2470	-2.91	1.78	51.20
2480	-2.85	1.12	51.92
2490	-2.75	1.35	53.14
2500	-2.81	1.32	52.32
5150	-4.57	0.58	44.89
5250	-4.54	0.92	45.14
5350	-4.25	1.81	47.59
5450	-3.85	2.85	51.19
5550	-4.60	2.27	44.66
5650	-4.21	1.35	47.95
5750	-4.22	2.02	47.84
5850	-4.58	1.91	44.85


2450.0MHz H+V, Eff: 51.9%

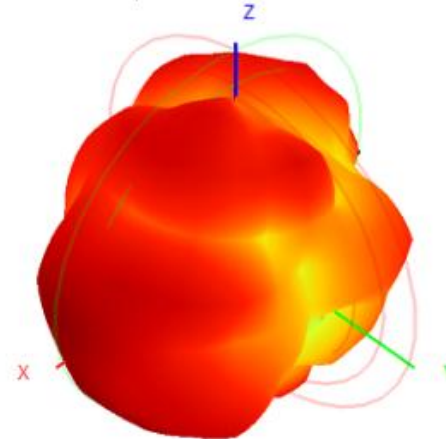


Back View

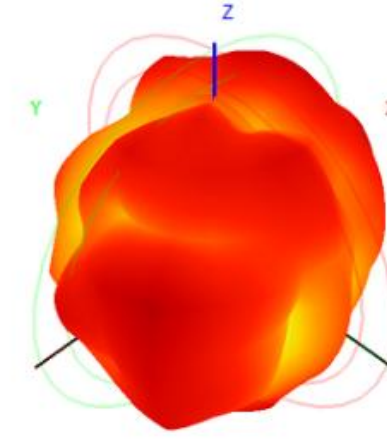

5850.0MHz H+V, Eff: 44.8%

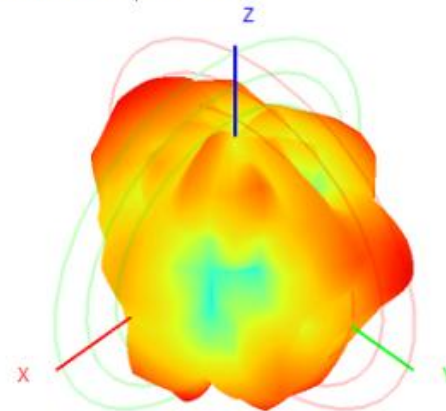


Back View

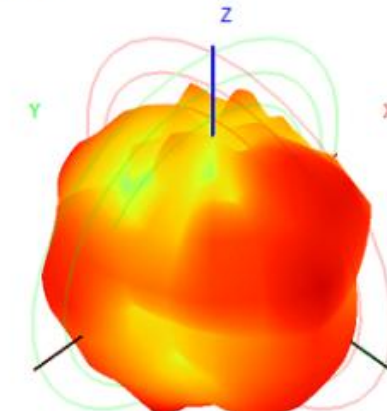

2. Test Result

2.3 WIFI AUX Antenna VSWR/S11

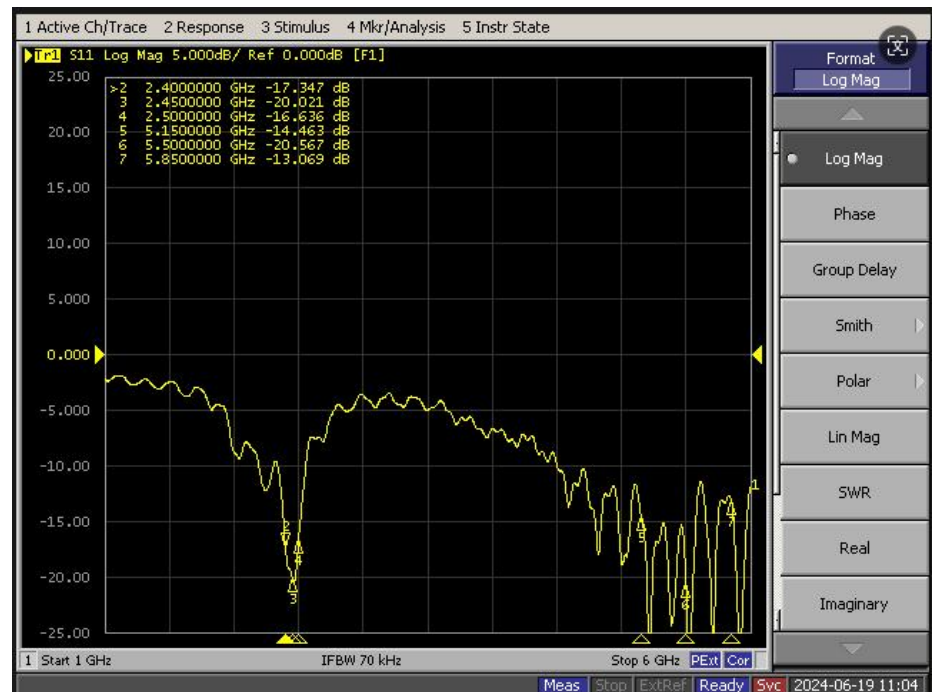


2. Test Result


2.2 WIFI AUX Antenna Gain/Efficiency/3D DATA

Frequency (MHz)	Efficiency (dBi)	Gain (dBi)	Efficiency (%)
2400	-3.08	1.76	49.21
2410	-3.04	1.90	49.66
2420	-2.68	1.40	53.95
2430	-2.85	1.63	51.83
2440	-2.89	1.33	51.38
2450	-3.18	1.44	48.06
2460	-3.15	1.06	48.36
2470	-3.58	1.53	43.89
2480	-3.69	1.35	42.79
2490	-3.58	1.54	43.89
2500	-3.79	1.53	41.81
5150	-5.60	2.30	37.52
5250	-5.27	2.43	39.72
5350	-5.18	1.80	40.33
5450	-4.27	2.25	47.38
5550	-4.78	1.73	43.24
5650	-4.48	2.06	45.61
5750	-4.43	2.26	46.07
5850	-4.99	2.54	41.69


2450.0MHz H+V, Eff: 48.1%

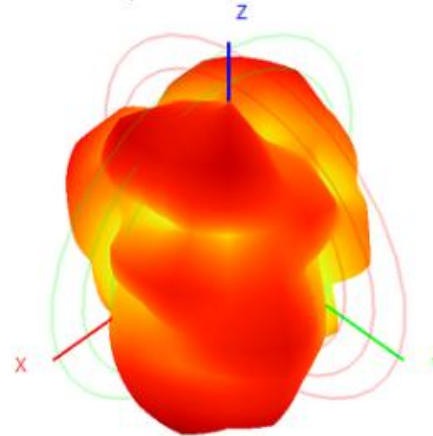


Back View

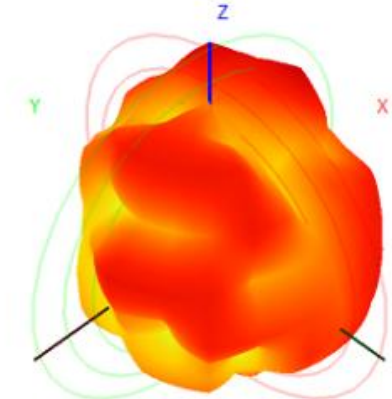

5850.0MHz H+V, Eff: 41.7%

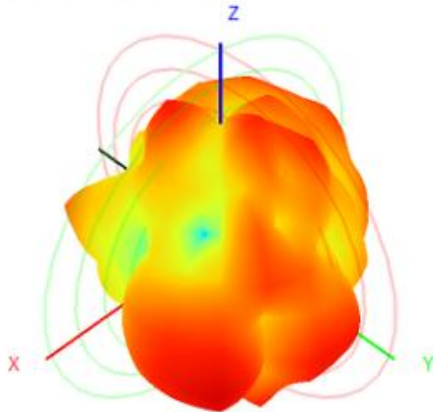

Back View

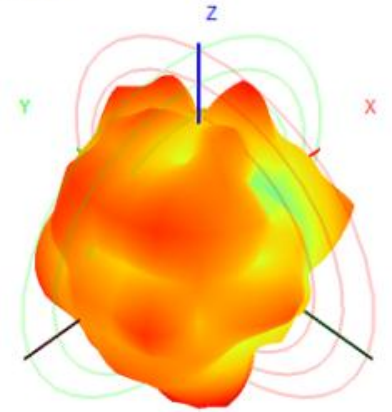

2. Test Result

2.5 WIFI active test

WIFI有源测试			
频段	1	6	11
B-TRP-11MBps	12.78	12.50	12.49
B-TIS-11MBps	-81.22	-81.69	81.45
G-TRP-54MBps	12.44	12.09	12.37
G-TIS-54MBps	-69.21	-69.88	-69.72
N-TRP-MCS7	12.06	12.00	12.37
N-TIS-MCS7	-65.22	-65.89	-66.18
频段	36	149	165
A-TRP-54MBps	10.55	10.88	11.09
A-TIS-54MBps	-70.42	-70.33	-70.19

2. Test Result

2.6 WIFI throughput test

ID	Interval	sec	Transfer	Bandwidth
4	8.00-9.00	sec	11.0 MBytes	92.5 Nbits/sec
4	9.00-10.00	sec	11.5 MBytes	96.5 Nbits/sec
4	10.00-11.00	sec	11.7 MBytes	98.6 Nbits/sec
4	11.00-12.00	sec	11.8 MBytes	99.3 Nbits/sec
4	12.00-13.00	sec	11.7 MBytes	98.3 Nbits/sec
4	13.00-14.00	sec	11.6 MBytes	97.5 Nbits/sec
4	14.00-15.00	sec	11.9 MBytes	99.5 Nbits/sec
4	15.00-16.00	sec	11.9 MBytes	99.8 Nbits/sec
4	16.00-17.00	sec	11.7 MBytes	98.1 Nbits/sec
4	17.00-18.00	sec	11.4 MBytes	96.0 Nbits/sec
4	18.00-19.00	sec	11.5 MBytes	96.3 Nbits/sec
4	19.00-20.00	sec	9.63 MBytes	80.8 Nbits/sec
4	20.00-21.00	sec	11.2 MBytes	94.1 Nbits/sec
4	21.00-22.00	sec	10.8 MBytes	90.2 Nbits/sec
4	22.00-23.00	sec	11.2 MBytes	94.1 Nbits/sec
4	23.00-24.00	sec	11.3 MBytes	95.0 Nbits/sec
4	24.00-25.00	sec	11.2 MBytes	94.2 Nbits/sec
4	25.00-26.00	sec	11.1 MBytes	93.3 Nbits/sec
4	26.00-27.00	sec	11.5 MBytes	96.4 Nbits/sec
4	27.00-28.00	sec	11.8 MBytes	98.9 Nbits/sec
4	28.00-29.00	sec	11.6 MBytes	97.6 Nbits/sec
4	29.00-30.00	sec	11.7 MBytes	97.8 Nbits/sec

ID	Interval		Transfer	Bandwidth
4	0.00-30.00	sec	340 MBytes	95.0 Nbits/sec
4	0.00-30.00	sec	340 MBytes	95.0 Nbits/sec

iperf Done.
C:\iperf-3.1.3-win64>

2.4G吞吐量 上传

ID	Interval	sec	Transfer	Bandwidth
4	8.00-9.00	sec	12.2 MBytes	103 Nbits/sec
4	9.00-10.00	sec	13.6 MBytes	114 Nbits/sec
4	10.00-11.00	sec	13.2 MBytes	111 Nbits/sec
4	11.00-12.00	sec	12.9 MBytes	108 Nbits/sec
4	12.00-13.00	sec	11.8 MBytes	98.6 Nbits/sec
4	13.00-14.00	sec	11.9 MBytes	99.6 Nbits/sec
4	14.00-15.00	sec	12.2 MBytes	103 Nbits/sec
4	15.00-16.00	sec	13.9 MBytes	116 Nbits/sec
4	16.00-17.00	sec	13.5 MBytes	113 Nbits/sec
4	17.00-18.00	sec	13.9 MBytes	116 Nbits/sec
4	18.00-19.00	sec	13.6 MBytes	114 Nbits/sec
4	19.00-20.00	sec	13.1 MBytes	110 Nbits/sec
4	20.00-21.00	sec	13.5 MBytes	113 Nbits/sec
4	21.00-22.00	sec	12.9 MBytes	108 Nbits/sec
4	22.00-23.00	sec	13.9 MBytes	116 Nbits/sec
4	23.00-24.00	sec	13.1 MBytes	110 Nbits/sec
4	24.00-25.00	sec	13.1 MBytes	110 Nbits/sec
4	25.00-26.00	sec	12.6 MBytes	106 Nbits/sec
4	26.00-27.00	sec	12.5 MBytes	105 Nbits/sec
4	27.00-28.00	sec	13.0 MBytes	109 Nbits/sec
4	28.00-29.00	sec	11.8 MBytes	98.5 Nbits/sec
4	29.00-30.00	sec	11.1 MBytes	93.3 Nbits/sec

ID	Interval		Transfer	Bandwidth
4	0.00-30.00	sec	384 MBytes	108 Nbits/sec
4	0.00-30.00	sec	384 MBytes	108 Nbits/sec

iperf Done.
C:\iperf-3.1.3-win64>

2.4G吞吐量 下载

2. Test Result

2.6 WIFI throughput test

C:\Windows\System32\cmd.exe

4]	8.00-9.00	sec	26.6 MBytes	223 Mbits/sec
4]	9.00-10.00	sec	25.4 MBytes	213 Mbits/sec
4]	10.00-11.00	sec	26.5 MBytes	222 Mbits/sec
4]	11.00-12.00	sec	26.0 MBytes	218 Mbits/sec
4]	12.00-13.00	sec	26.2 MBytes	220 Mbits/sec
4]	13.00-14.00	sec	26.0 MBytes	218 Mbits/sec
4]	14.00-15.00	sec	25.5 MBytes	214 Mbits/sec
4]	15.00-16.00	sec	26.1 MBytes	219 Mbits/sec
4]	16.00-17.00	sec	25.4 MBytes	213 Mbits/sec
4]	17.00-18.00	sec	26.1 MBytes	219 Mbits/sec
4]	18.00-19.00	sec	26.2 MBytes	220 Mbits/sec
4]	19.00-20.00	sec	25.1 MBytes	211 Mbits/sec
4]	20.00-21.00	sec	25.1 MBytes	211 Mbits/sec
4]	21.00-22.00	sec	26.1 MBytes	219 Mbits/sec
4]	22.00-23.00	sec	26.5 MBytes	222 Mbits/sec
4]	23.00-24.00	sec	26.0 MBytes	218 Mbits/sec
4]	24.00-25.00	sec	26.2 MBytes	220 Mbits/sec
4]	25.00-26.00	sec	25.6 MBytes	215 Mbits/sec
4]	26.00-27.00	sec	26.5 MBytes	222 Mbits/sec
4]	27.00-28.00	sec	26.9 MBytes	225 Mbits/sec
4]	28.00-29.00	sec	26.6 MBytes	223 Mbits/sec
4]	29.00-30.00	sec	26.2 MBytes	220 Mbits/sec
ID]	Interval		Transfer	Bandwidth
4]	0.00-30.00	sec	772 MBytes	216 Mbits/sec
4]	0.00-30.00	sec	772 MBytes	216 Mbits/sec

iperf Done.

5G吞吐量 上传

C:\Windows\System32\cmd.exe

4]	8.00-9.00	sec	26.2 MBytes	220 Mbits/sec
4]	9.00-10.00	sec	25.4 MBytes	213 Mbits/sec
4]	10.00-11.00	sec	26.3 MBytes	221 Mbits/sec
4]	11.00-12.00	sec	26.8 MBytes	225 Mbits/sec
4]	12.00-13.00	sec	26.8 MBytes	224 Mbits/sec
4]	13.00-14.00	sec	26.6 MBytes	224 Mbits/sec
4]	14.00-15.00	sec	26.5 MBytes	222 Mbits/sec
4]	15.00-16.00	sec	25.5 MBytes	214 Mbits/sec
4]	16.00-17.00	sec	24.8 MBytes	208 Mbits/sec
4]	17.00-18.00	sec	26.3 MBytes	221 Mbits/sec
4]	18.00-19.00	sec	25.2 MBytes	211 Mbits/sec
4]	19.00-20.00	sec	25.0 MBytes	210 Mbits/sec
4]	20.00-21.00	sec	26.0 MBytes	218 Mbits/sec
4]	21.00-22.00	sec	26.2 MBytes	220 Mbits/sec
4]	22.00-23.00	sec	26.3 MBytes	221 Mbits/sec
4]	23.00-24.00	sec	26.0 MBytes	218 Mbits/sec
4]	24.00-25.00	sec	24.7 MBytes	207 Mbits/sec
4]	25.00-26.00	sec	24.3 MBytes	204 Mbits/sec
4]	26.00-27.00	sec	24.4 MBytes	205 Mbits/sec
4]	27.00-28.00	sec	25.1 MBytes	210 Mbits/sec
4]	28.00-29.00	sec	25.4 MBytes	213 Mbits/sec
4]	29.00-30.00	sec	25.1 MBytes	210 Mbits/sec
ID]	Interval		Transfer	Bandwidth
4]	0.00-30.00	sec	770 MBytes	215 Mbits/sec
4]	0.00-30.00	sec	770 MBytes	215 Mbits/sec

iperf Done.

5G吞吐量 下载

2. Test Result

2.7 WIFI signal strength test



测试环境：室内10M，信号强度2.4G为-32dB,5G为-41dB



3. Conclusions

Thank you