



FCC RF Test Report

APPLICANT : MeiG Smart Technology Co., Ltd
EQUIPMENT : Smart Module
BRAND NAME : MEIGLink
MODEL NAME : SNM927
FCC ID : 2APJ4-SNM927
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Jun. 24, 2024 ~ Jun. 28, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (Shenzhen).

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software.....	7
1.8 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 TEST RESULT	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	13
3.3 Power Spectral Density Measurement	14
3.4 Conducted Band Edges and Spurious Emission Measurement	16
3.5 Radiated Band Edges and Spurious Emission Measurement	29
3.6 AC Conducted Emission Measurement.....	33
3.7 Antenna Requirements.....	35
4 LIST OF MEASURING EQUIPMENT	36
5 MEASUREMENT UNCERTAINTY	37
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR462035C	Rev. 01	Initial issue of report	Jul. 05, 2024

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 30\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.40 dB at 422.85 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 17.23 dB at 0.555 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

MeiG Smart Technology Co., Ltd

2nd Floor,Office Building,No.5 Lingxia Road,Fenghuang,Fuyong Street,Bao'an District,Shenzhen City.

1.2 Manufacturer

MeiG Smart Technology Co., Ltd

2nd Floor,Office Building,No.5 Lingxia Road,Fenghuang,Fuyong Street,Bao'an District,Shenzhen City.

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart Module
Brand Name	MEIGLink
Model Name	SNM927
FCC ID	2APJ4-SNM927
SN	Conducted: NM92764BYE051700018 Conduction: NM92764BYE051700091 Radiation: NM92764BYE051700094
HW Version	V1.00
SW Version	T02
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Average) Output Power to antenna	802.11b : 19.40 dBm (0.0871 W) 802.11g : 15.80 dBm (0.0380 W) 802.11n HT20 : 14.90 dBm (0.0309 W) 802.11n HT40 : 14.80 dBm (0.0302 W)
99% Occupied Bandwidth	802.11b : 13.94MHz 802.11g : 16.78MHz 802.11n HT20 : 17.93MHz 802.11n HT40 : 36.66MHz
Antenna Type / Gain	Glue Stick Antenna with gain 0.95 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS	CN1257	314309

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH03-SZ	CN1256	421272

Test data subcontracted: Conducted/RSE test cases in section 3.1~3.5 of this report.



1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	CO01-KS	AUDIX	E3	6.2009-8-24
2.	03CH03-SZ	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

2.2 Test Mode


Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0


Test Cases	
AC Conducted Emission	Mode 1 :Bluetooth Link + WLAN Link (2.4G) + Powered from Test Jig
Remark: For Radiated Test Cases, The tests were performed with Test jig and Adapter.	

2.3 Connection Diagram of Test System

AC Conducted Emission:

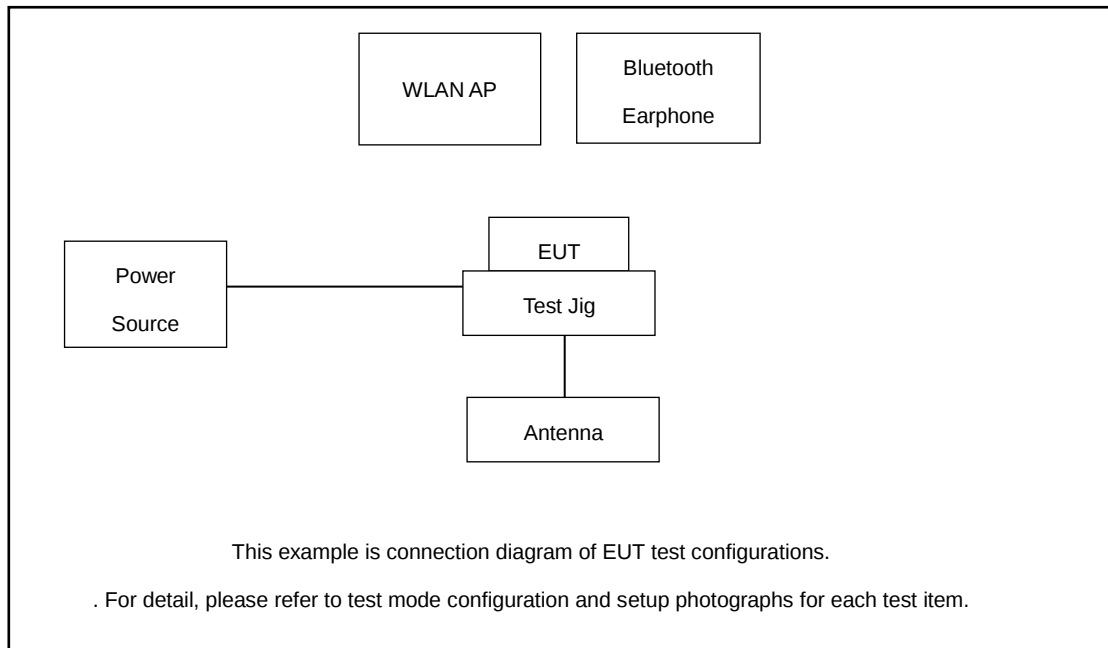

Radiated Emission:

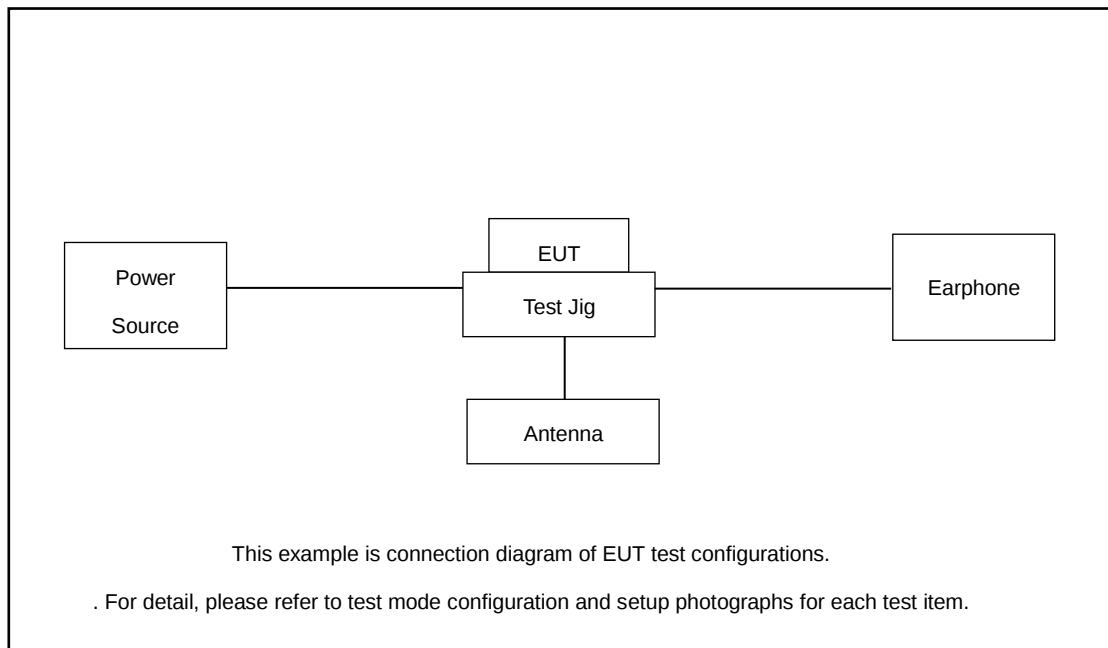

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Lenovo	thinkplus-BH3	N/A	N/A	N/A
2.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	Shielded cable DC O/P 1.8m, Unshielded AC I/P cable 1.8m
3.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
4.	Test Jig	N/A	N/A	N/A	N/A	N/A
5.	Antenna	N/A	N/A	N/A	N/A	N/A
6.	Adapter	N/A	N/A	N/A	N/A	N/A
7.	Earphone	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.0 dB and 10dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 2.0 + 10 = 12.0 (dB)

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.


3.1.4 Test Setup





3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

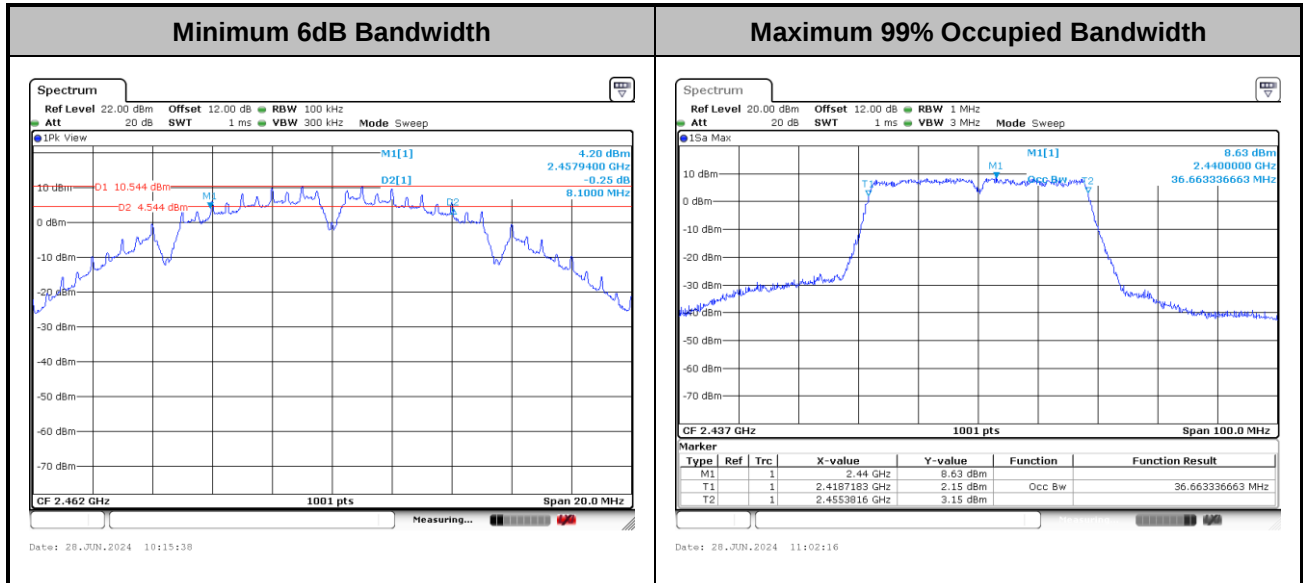

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

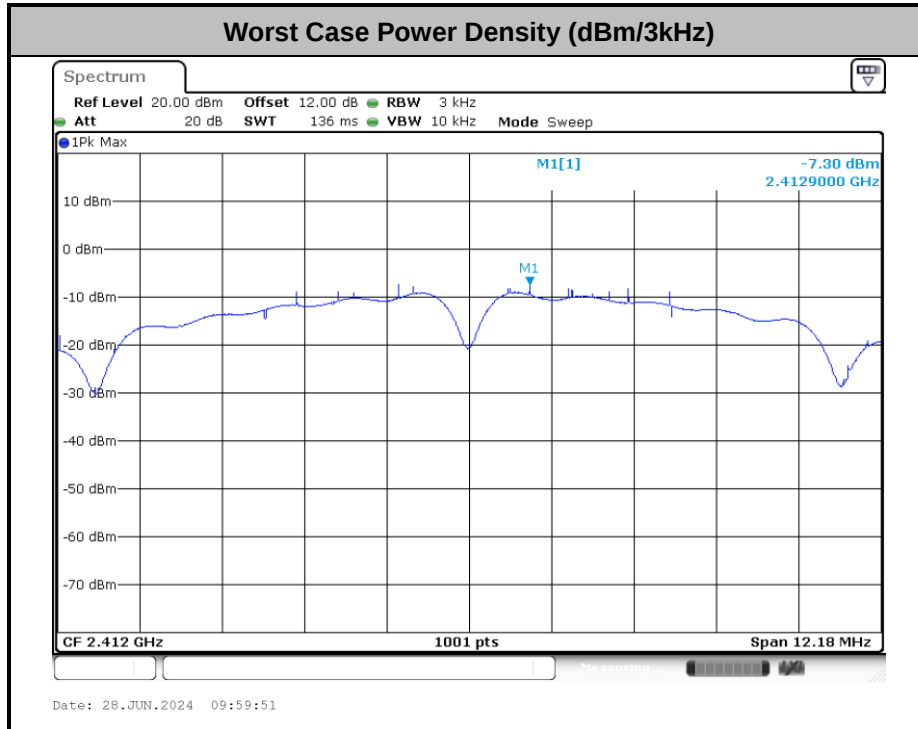

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

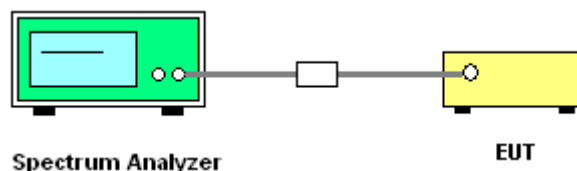




3.4.5 Test Result of Conducted Band Edges and Spurious Emission


Test Engineer :	Wen Shiwei	Temperature :	24~26°C
		Relative Humidity :	50~53%

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

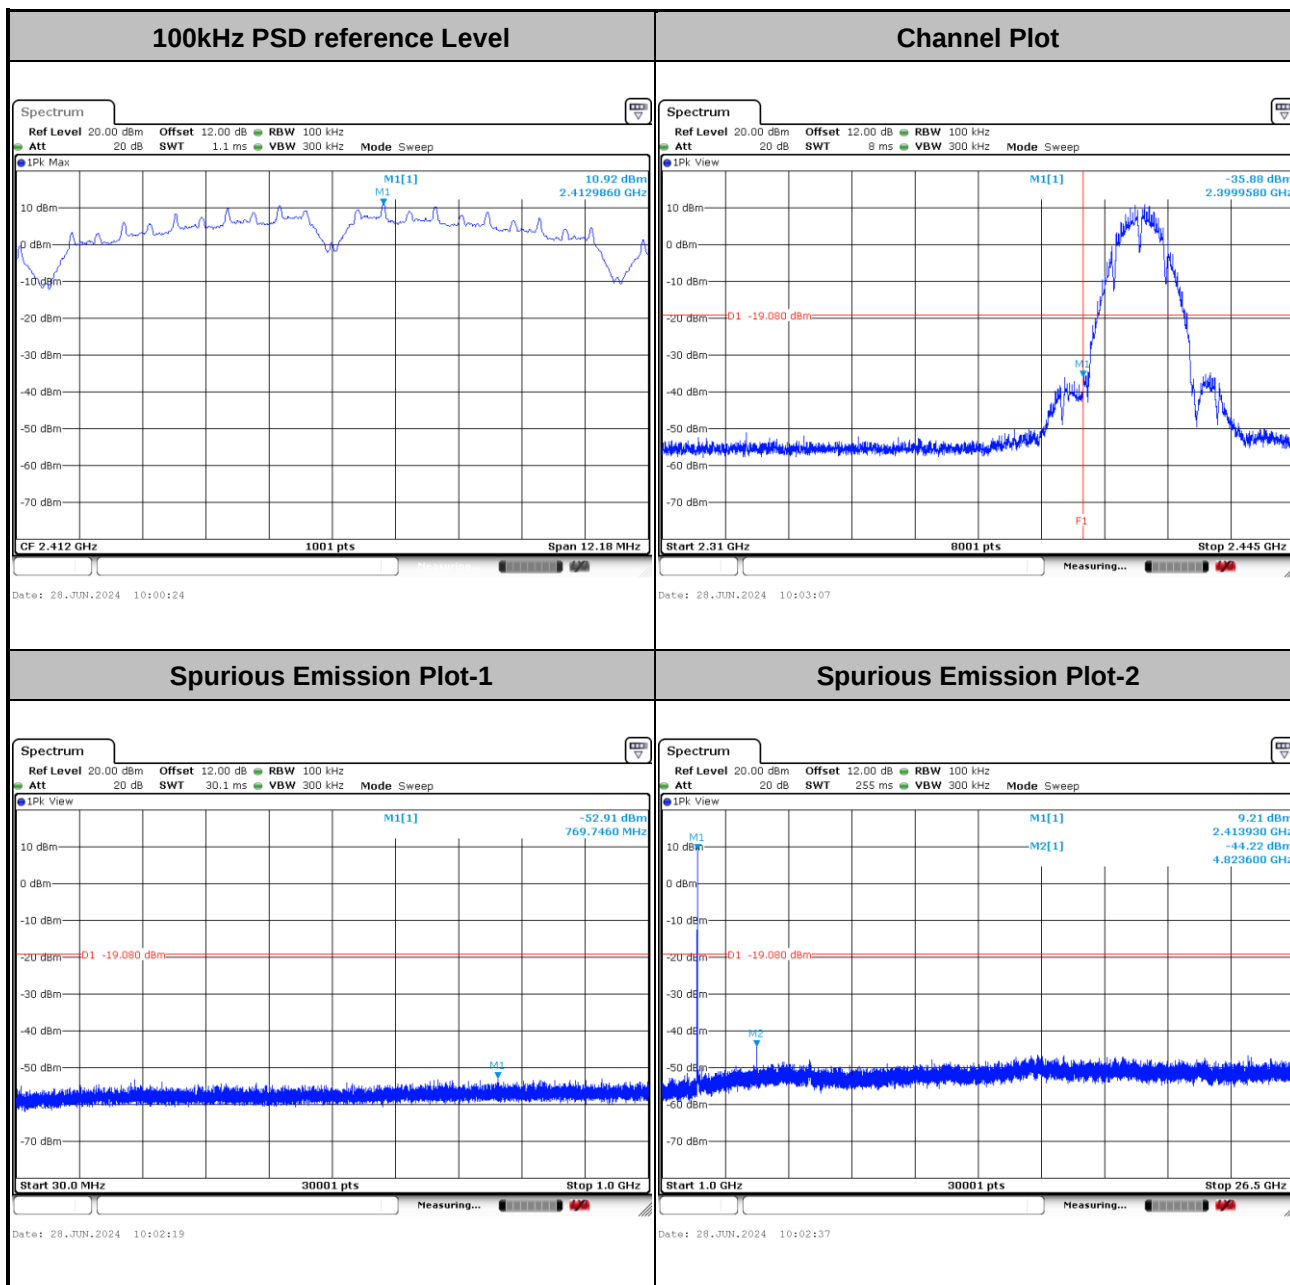




Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

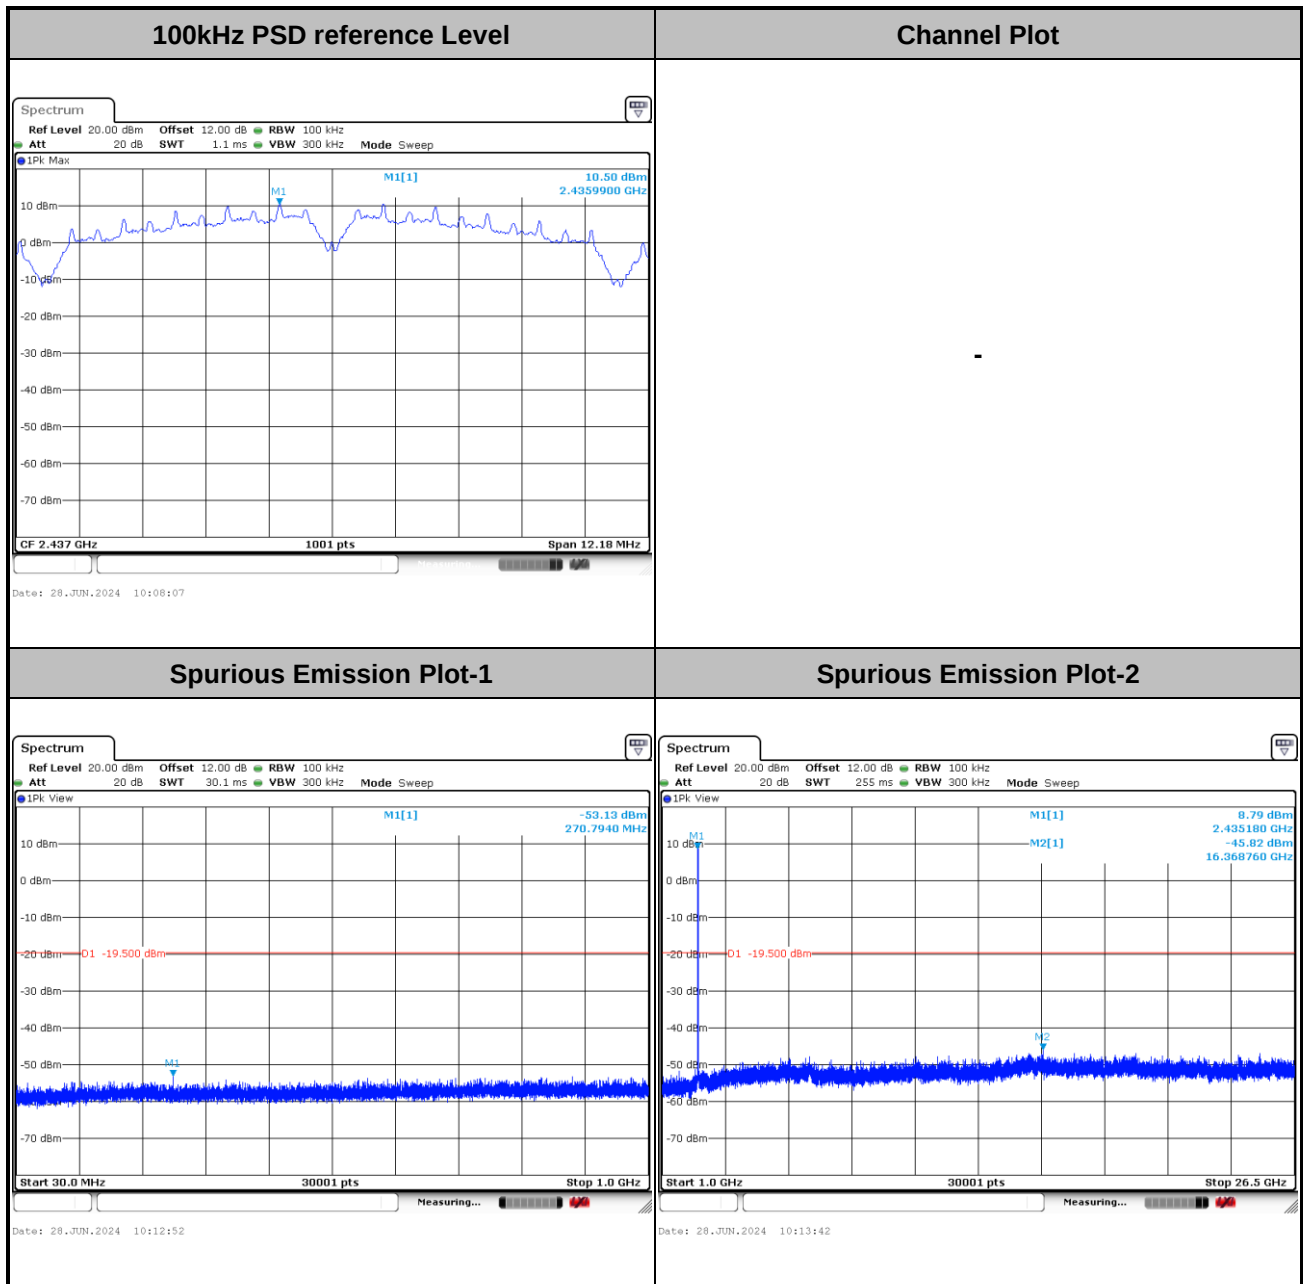


Test Mode :	802.11b	Test Channel :	11
--------------------	---------	-----------------------	----

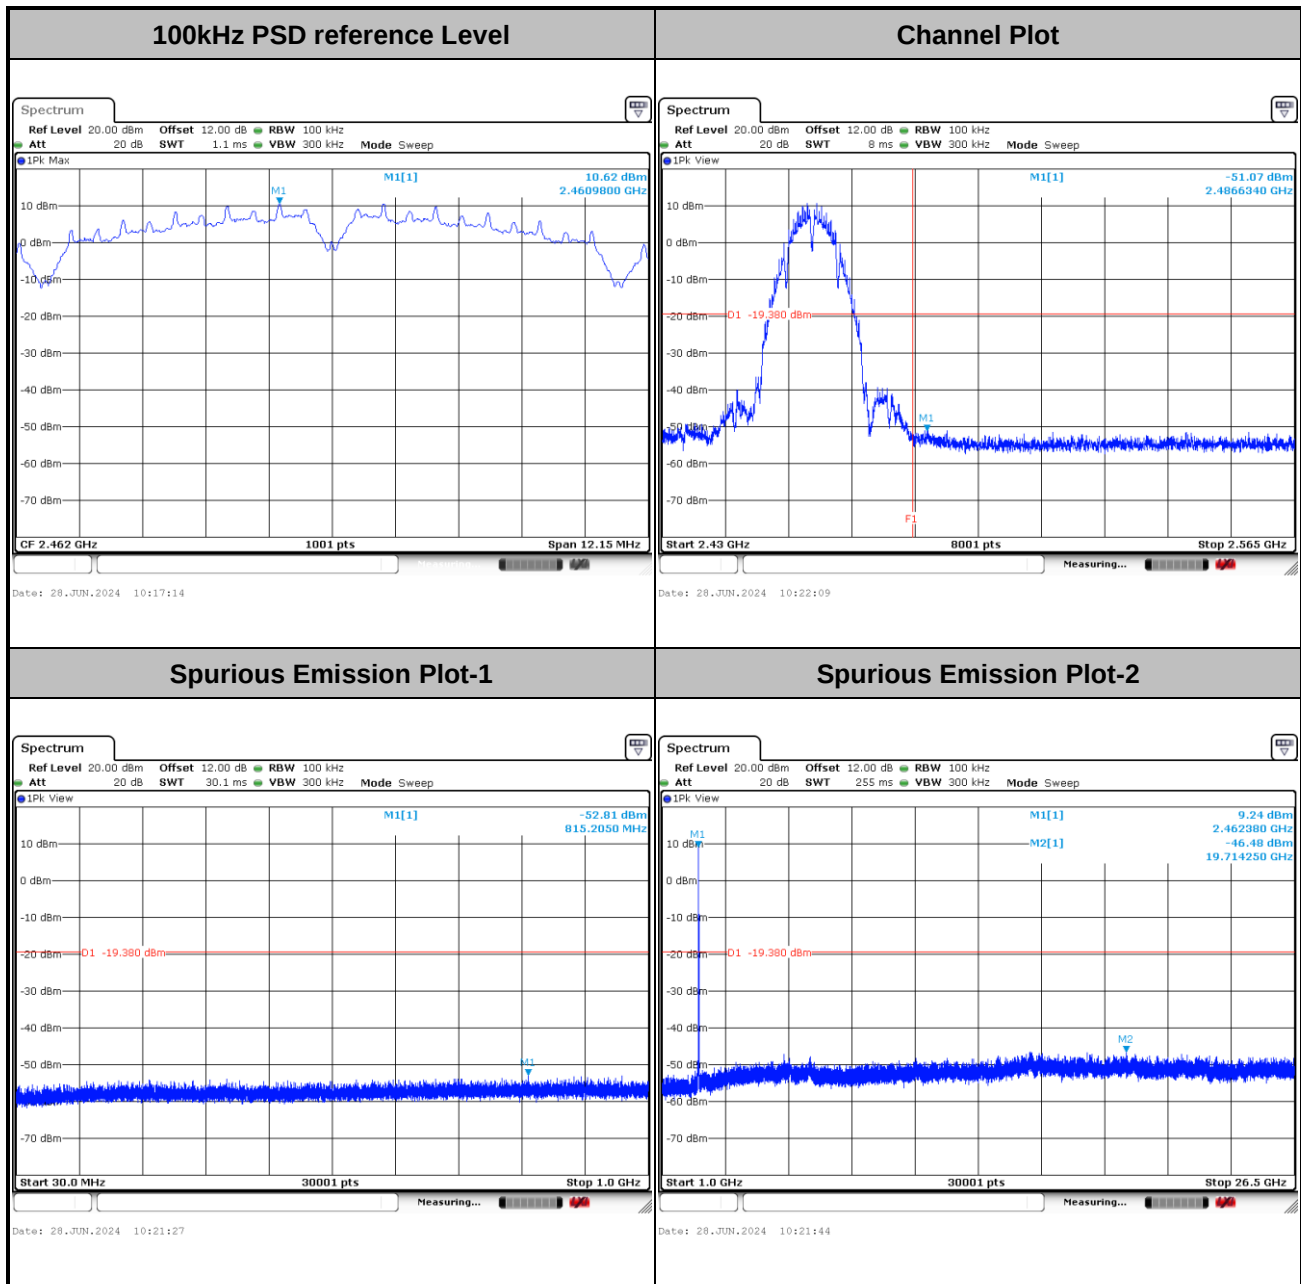




Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----

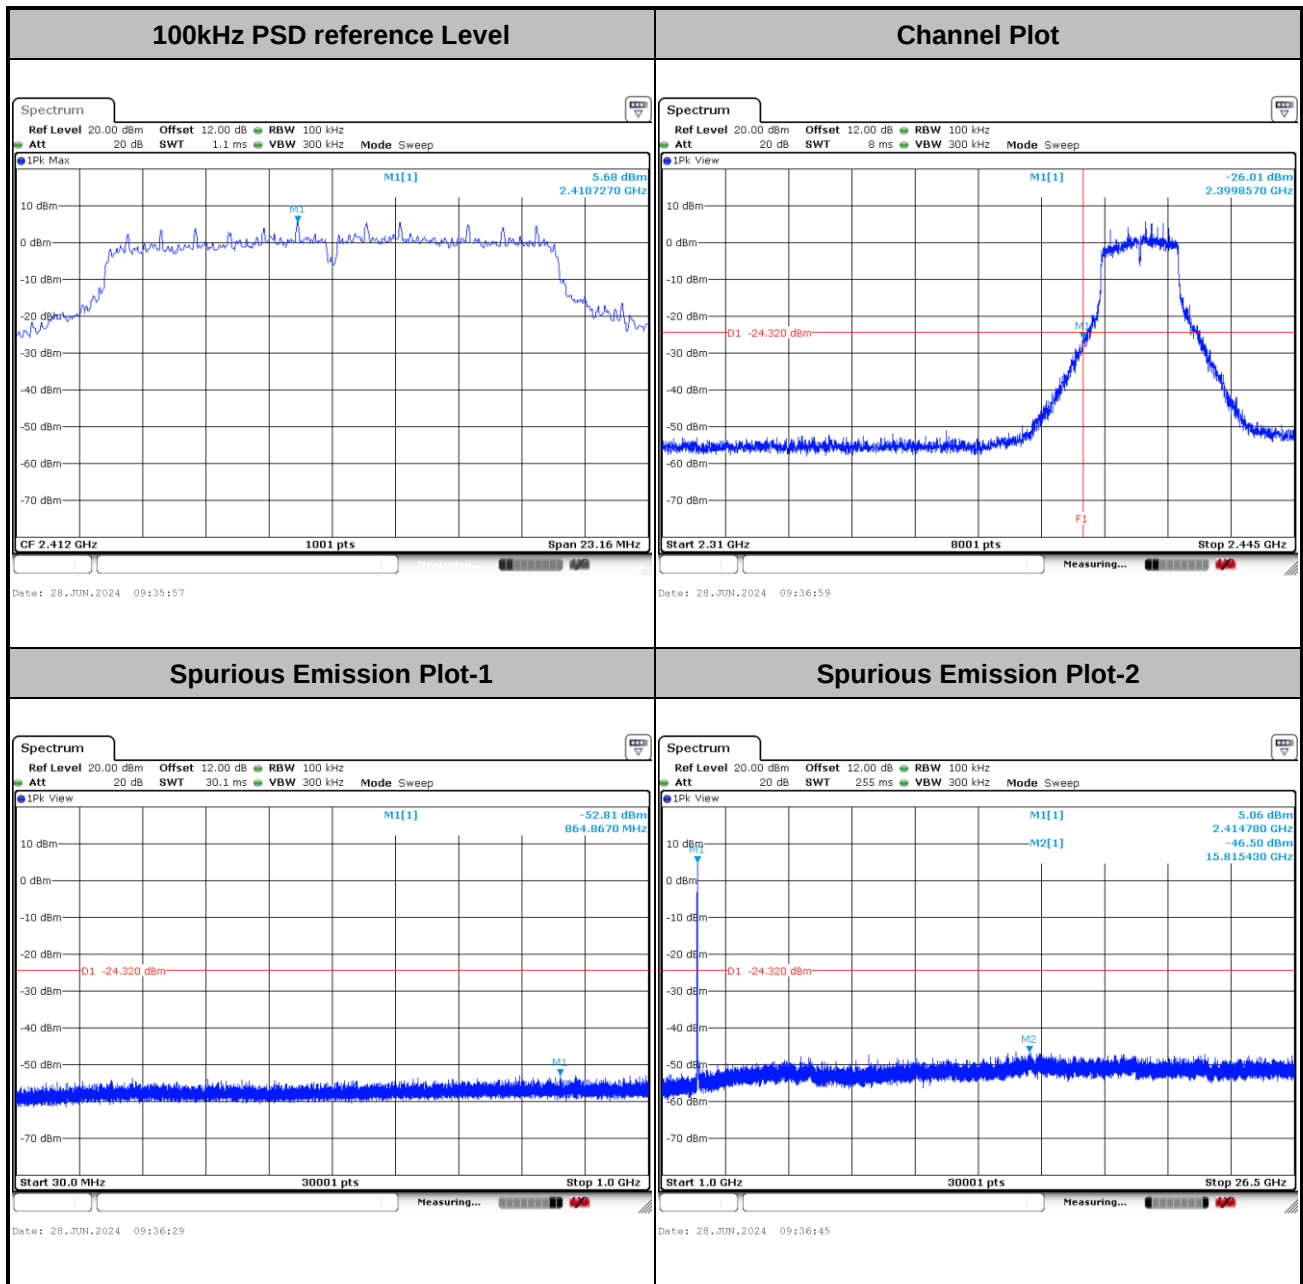




Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

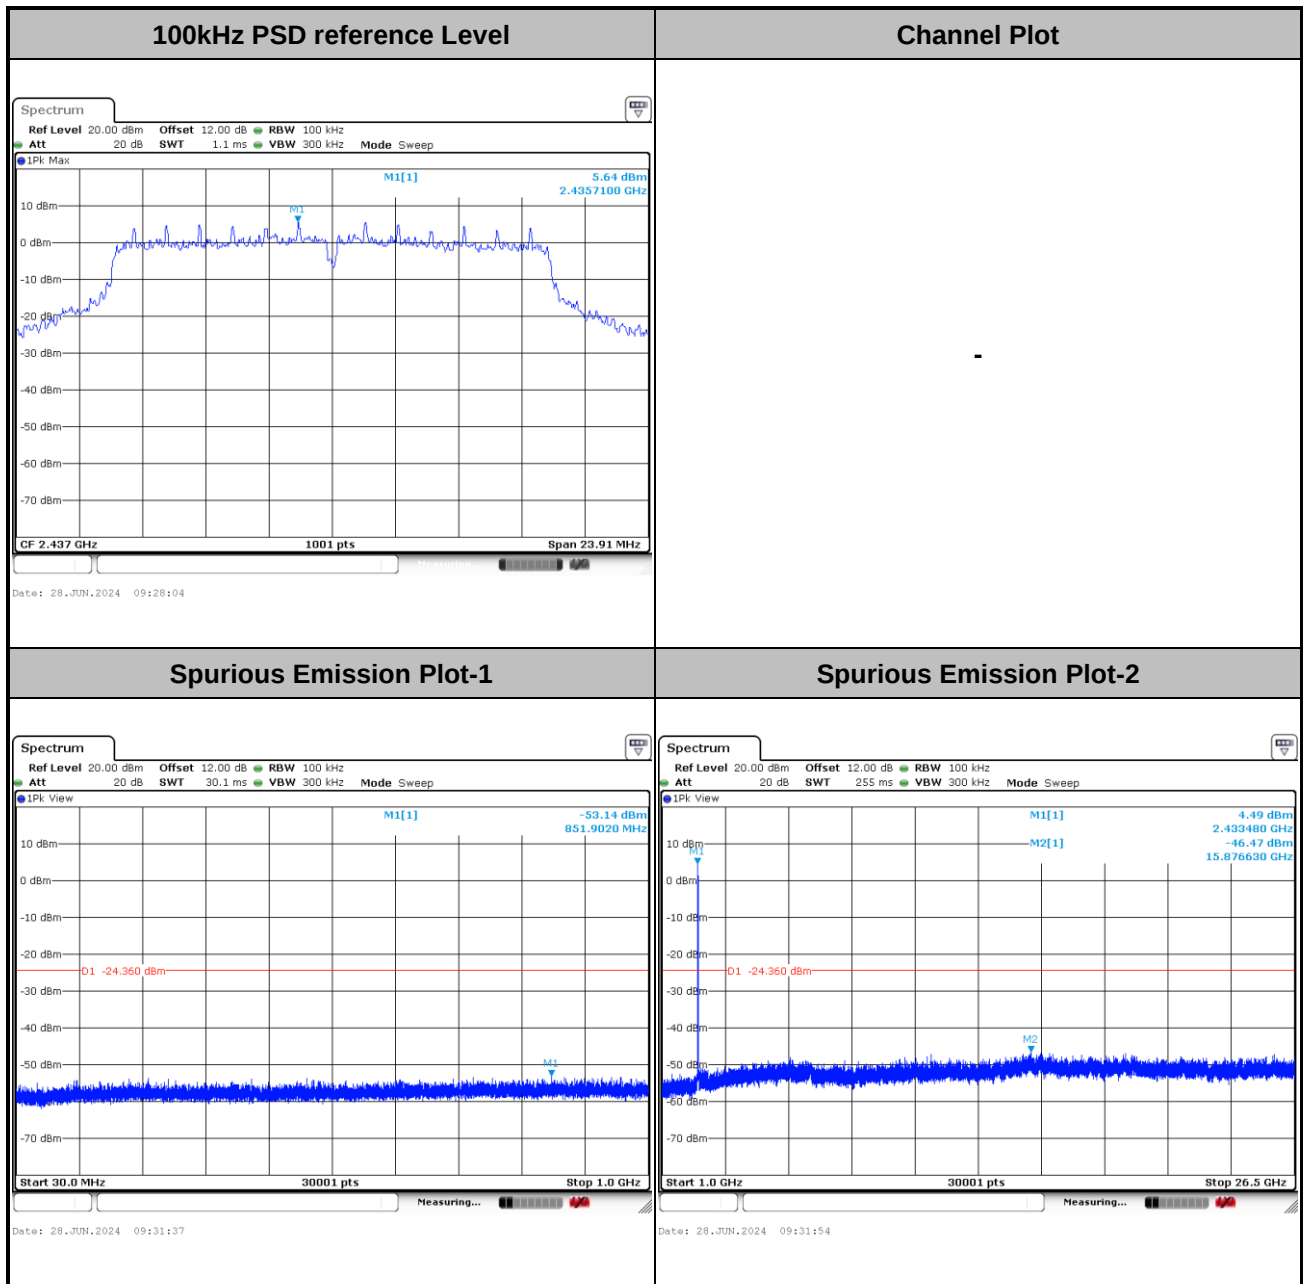




Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

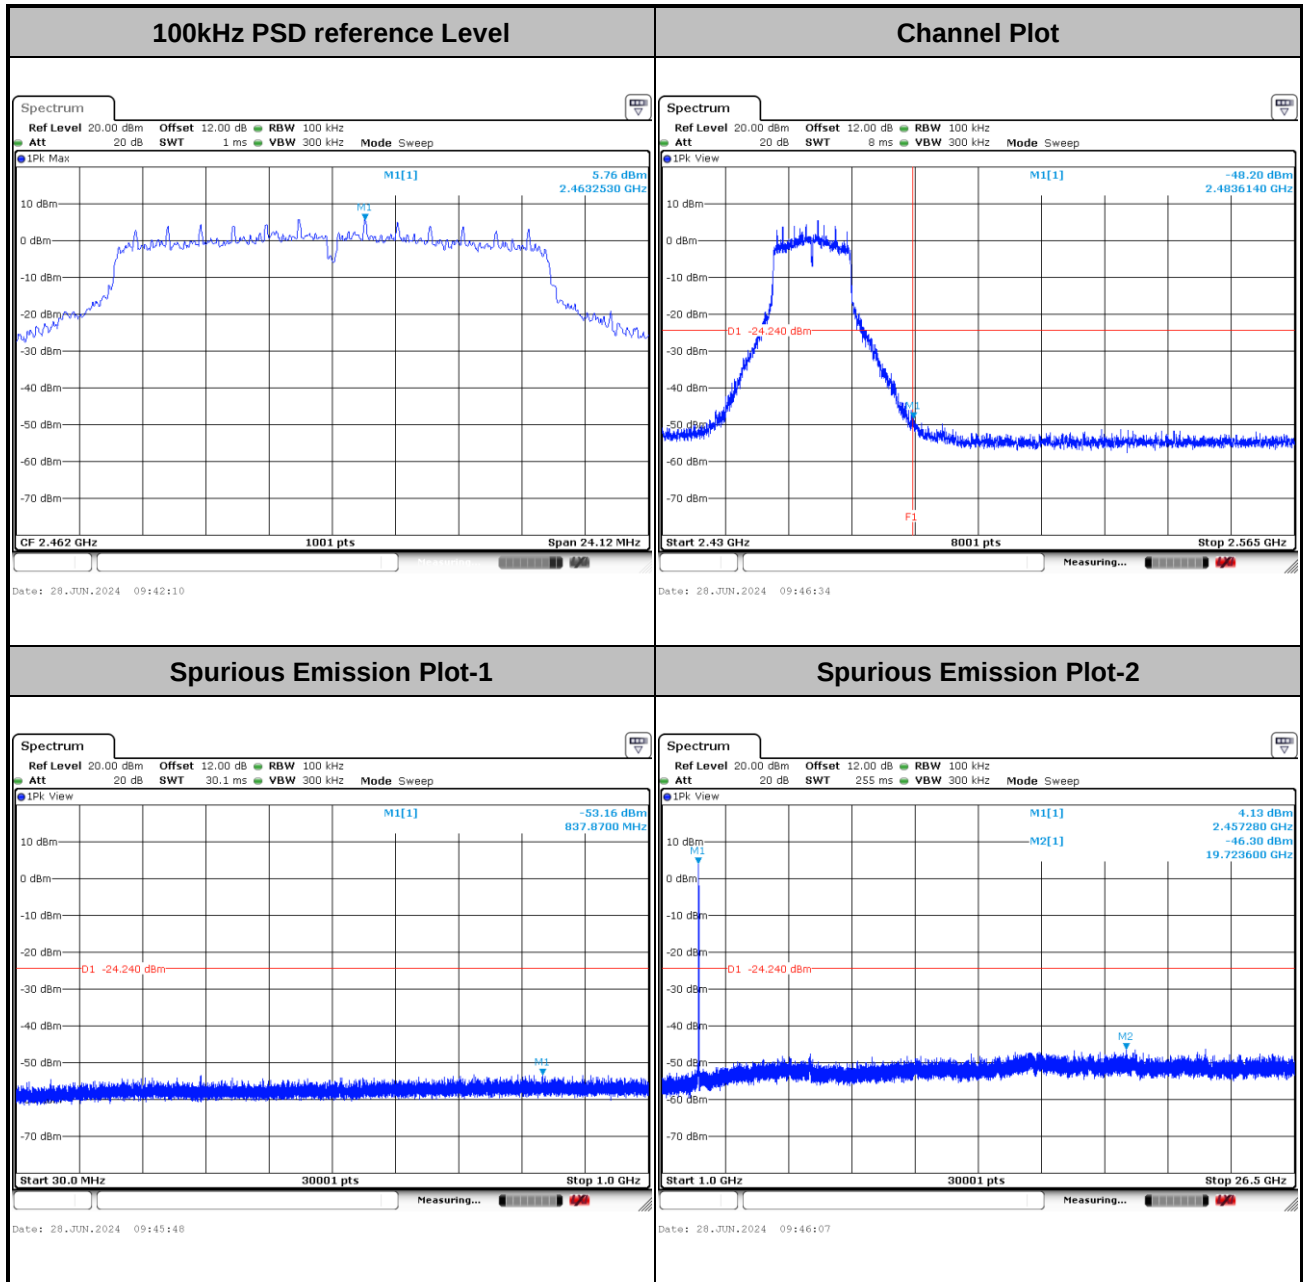





Test Mode :	802.11n HT20	Test Channel :	01
-------------	--------------	----------------	----

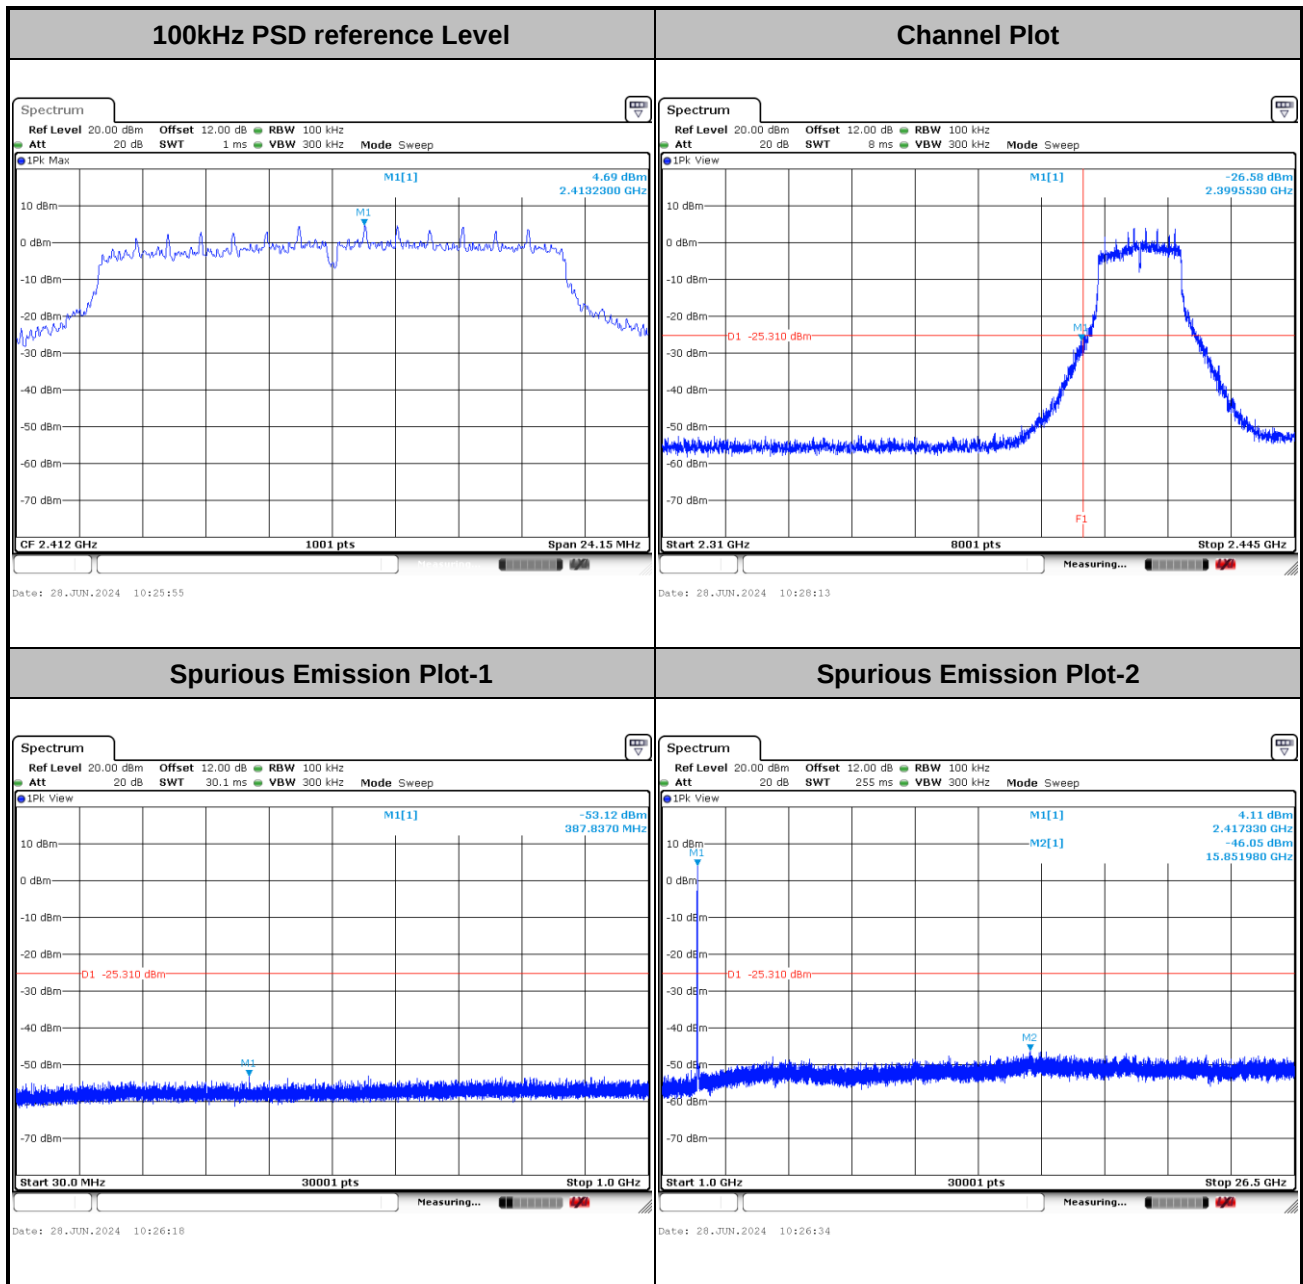




Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

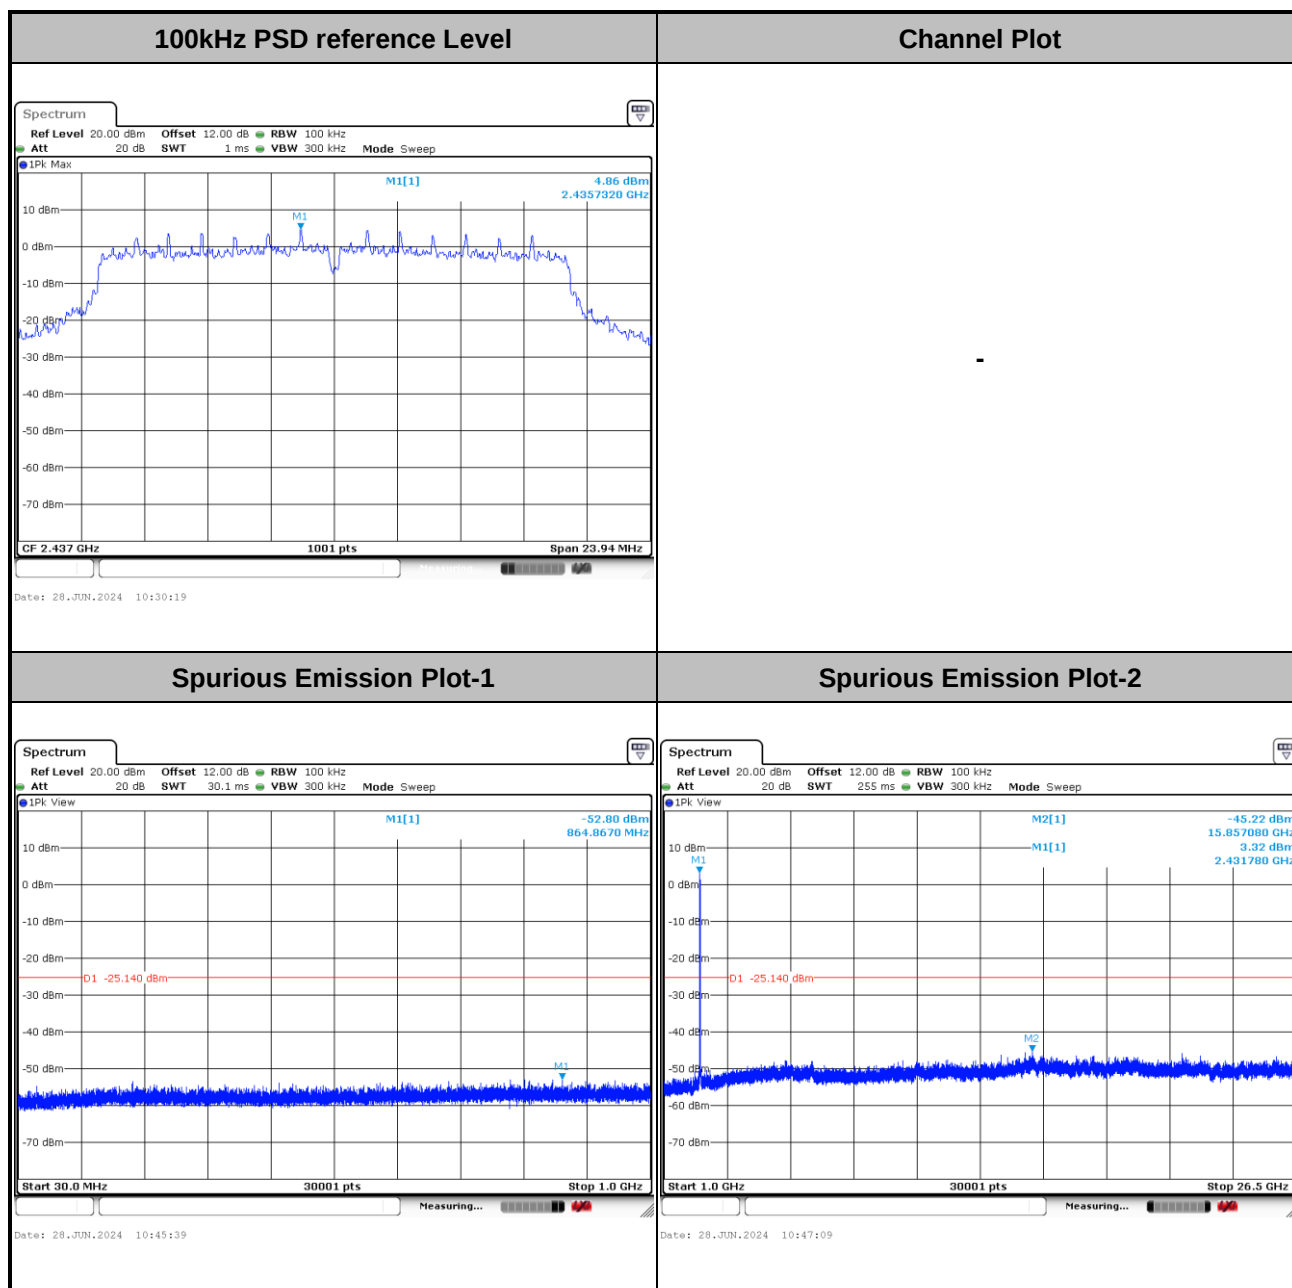

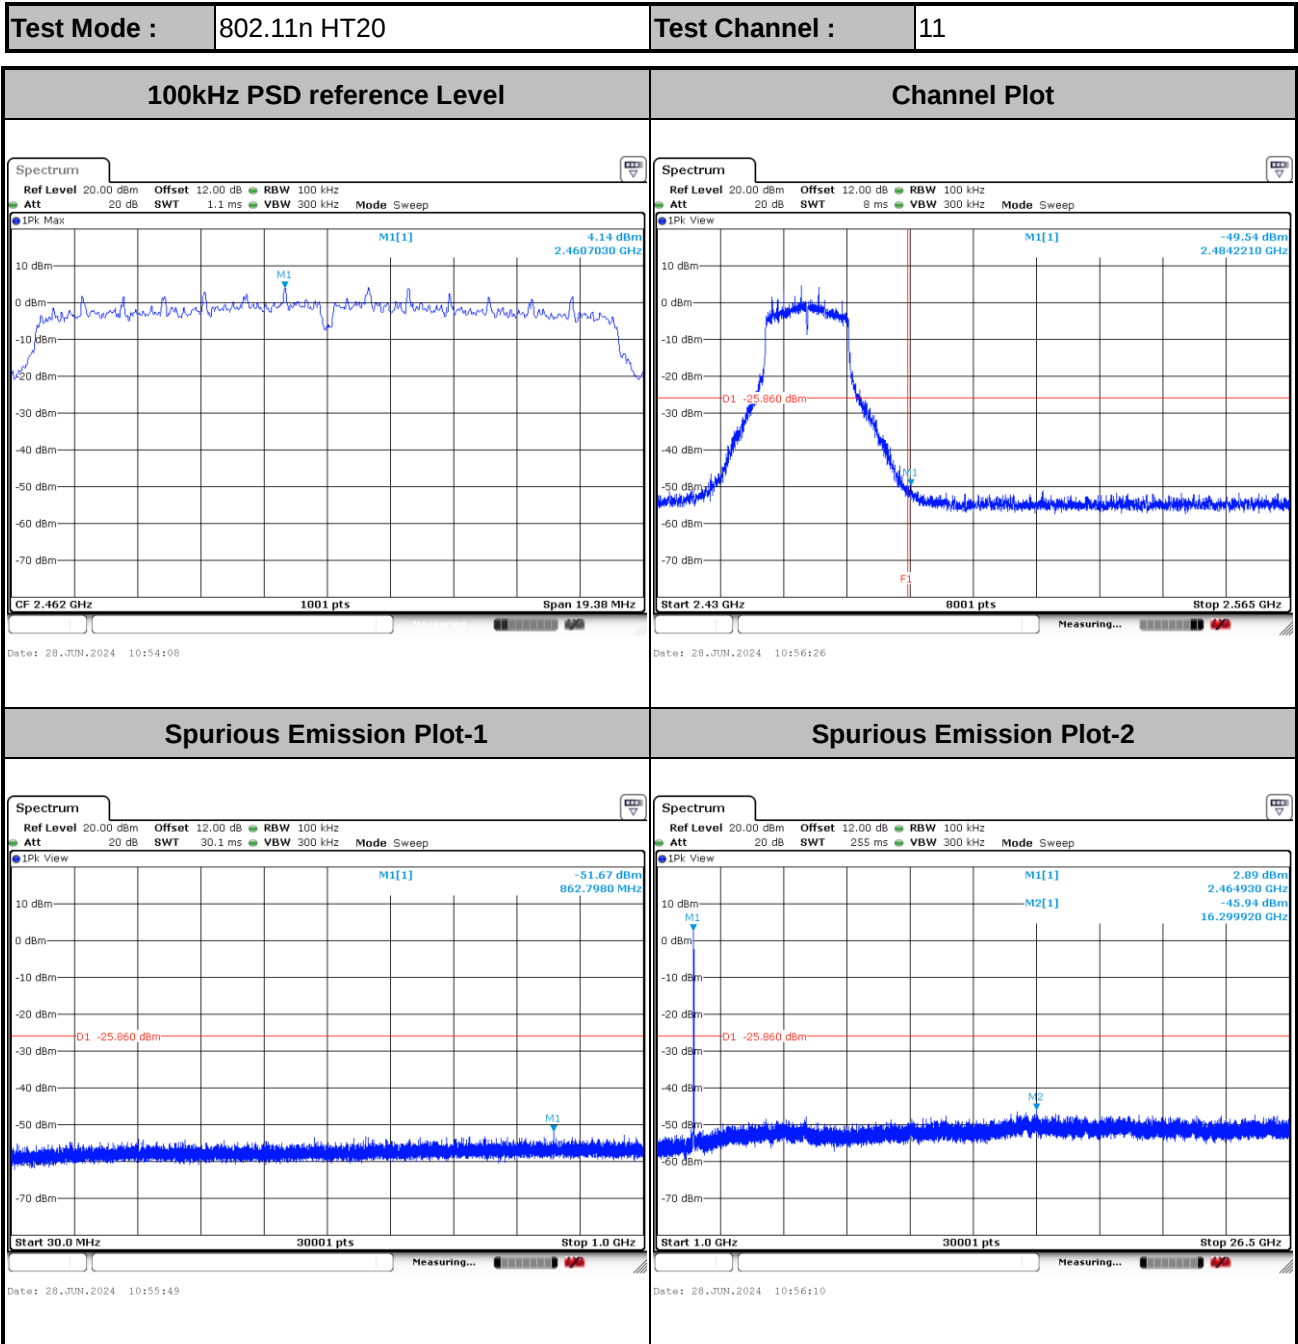




Test Mode :	802.11n HT40	Test Channel :	03
-------------	--------------	----------------	----

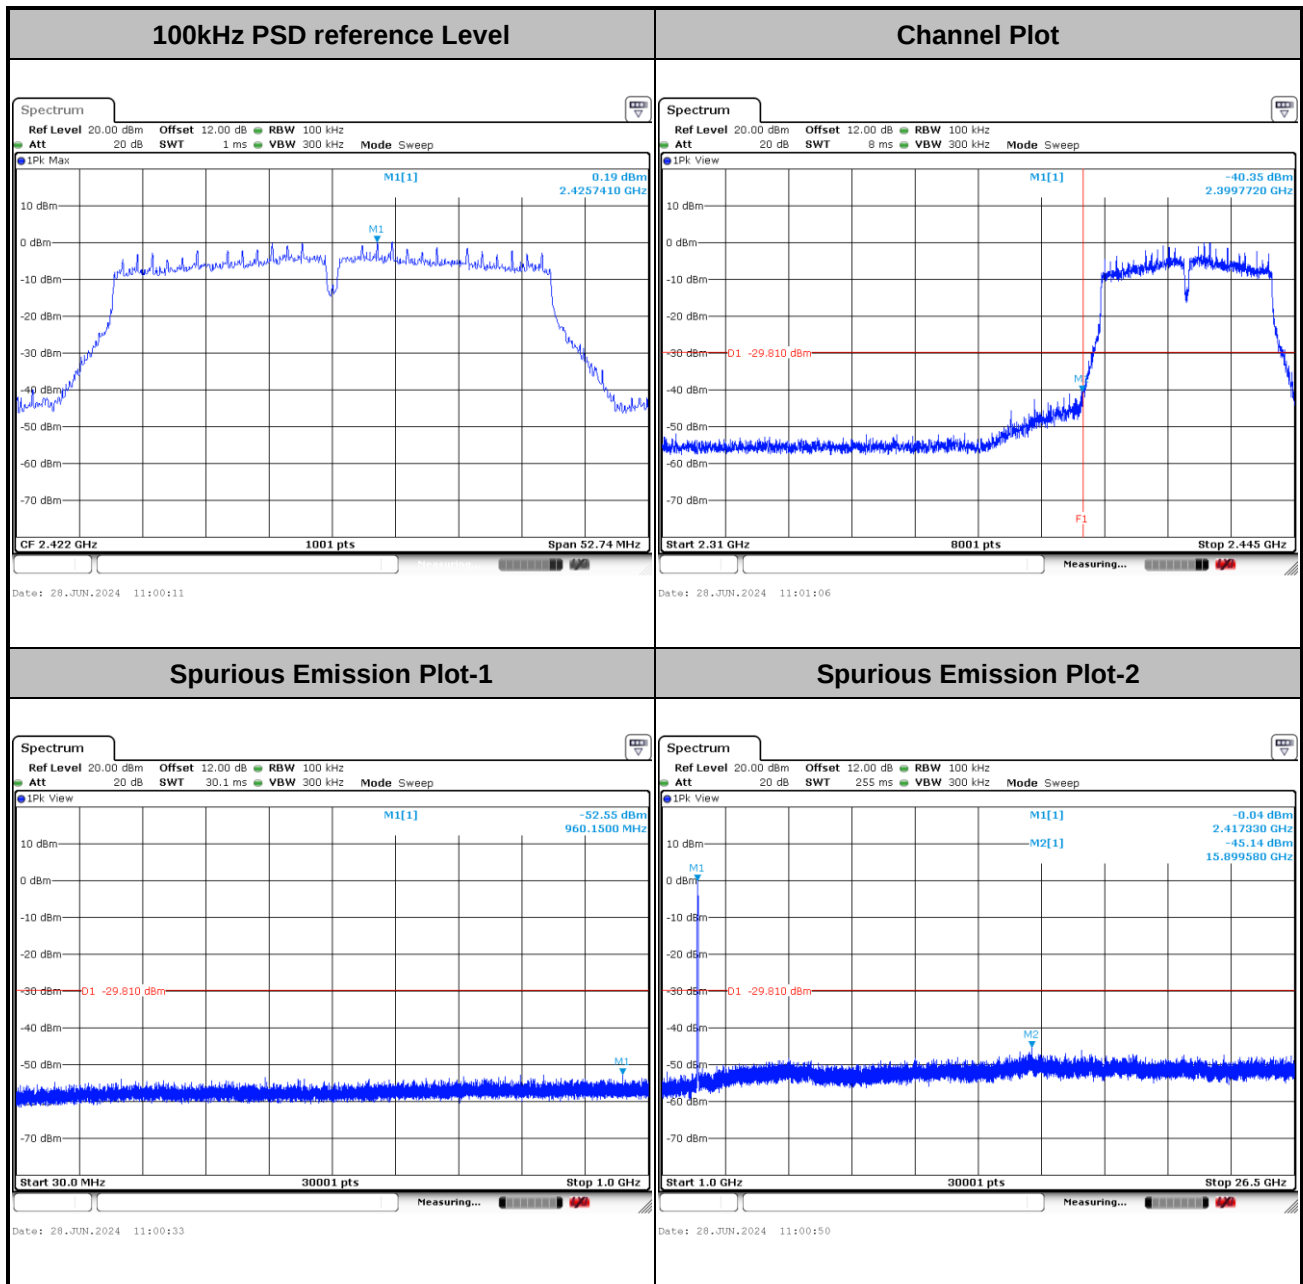



Test Mode :	802.11n HT40	Test Channel :	06
-------------	--------------	----------------	----

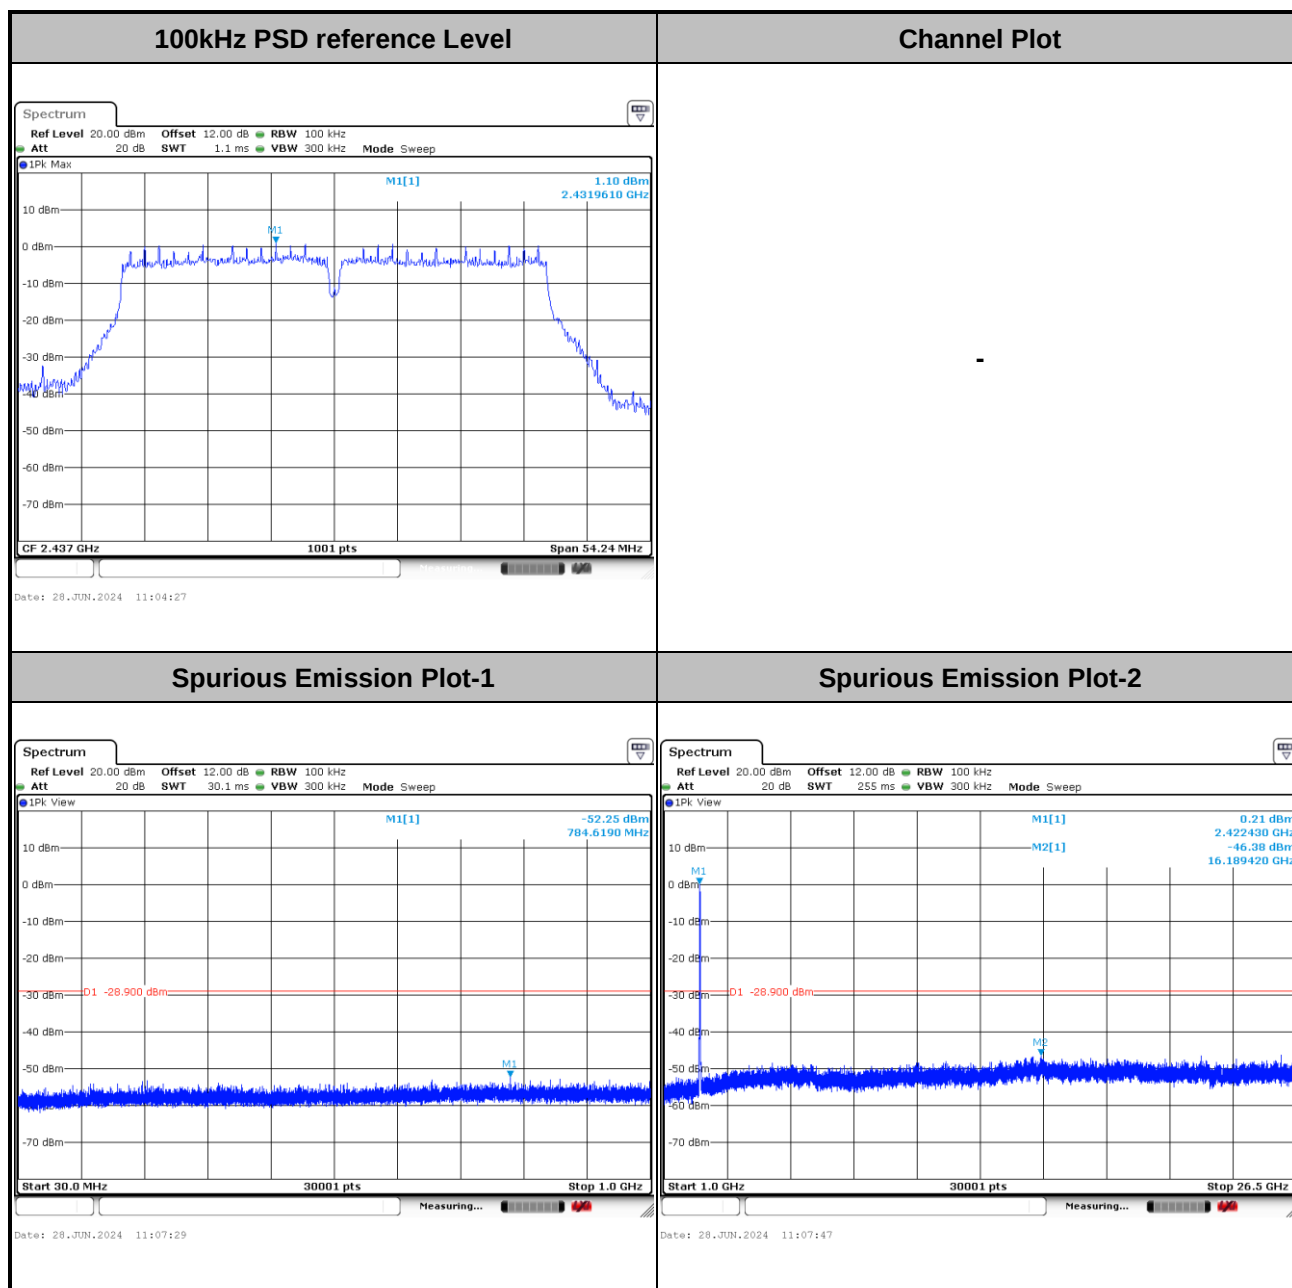





Test Mode : 802.11n HT40

Test Channel : 09


100kHz PSD reference Level

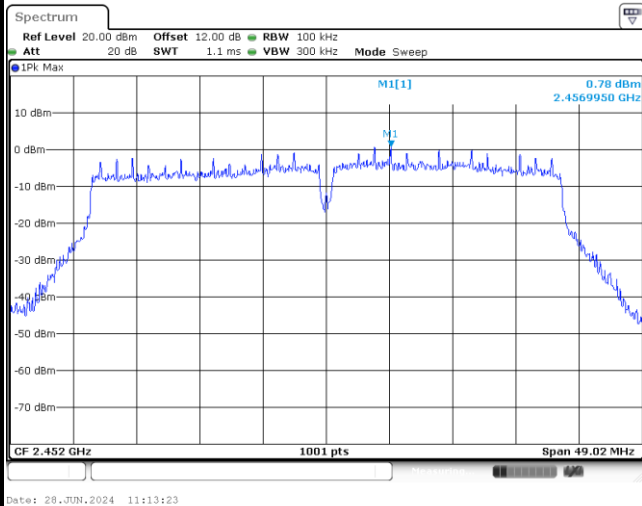


Channel Plot

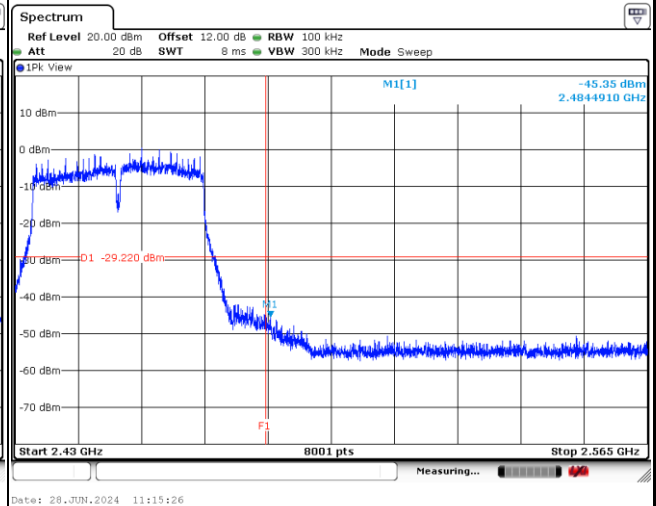

Spurious Emission Plot-1

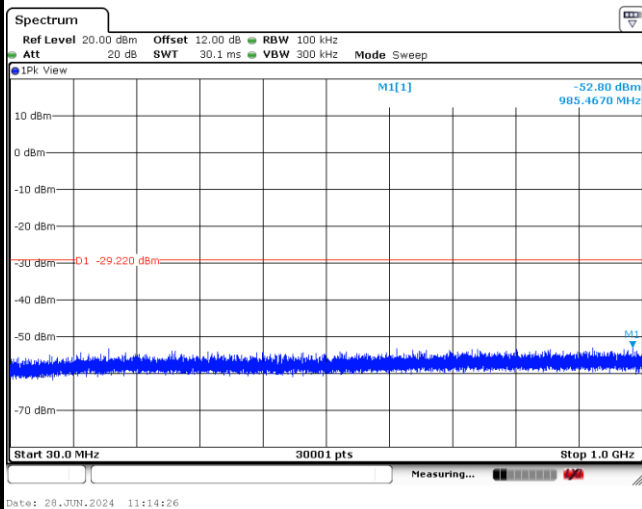

Spurious Emission Plot-2

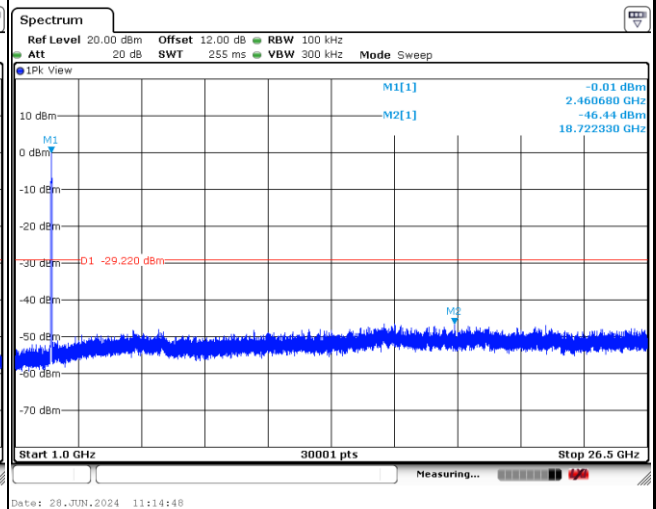

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

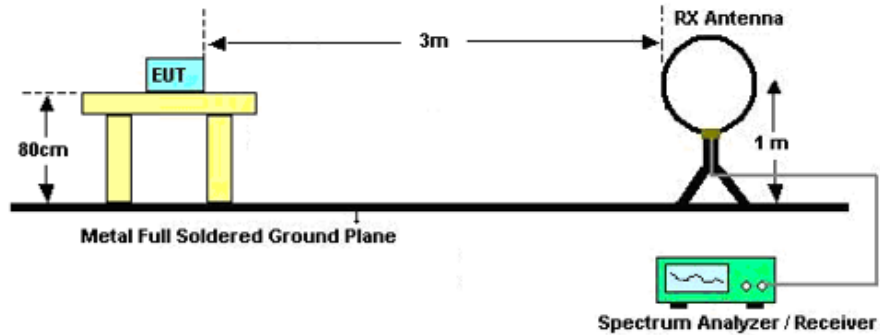

For radiated emissions from 30MHz to 1GHz

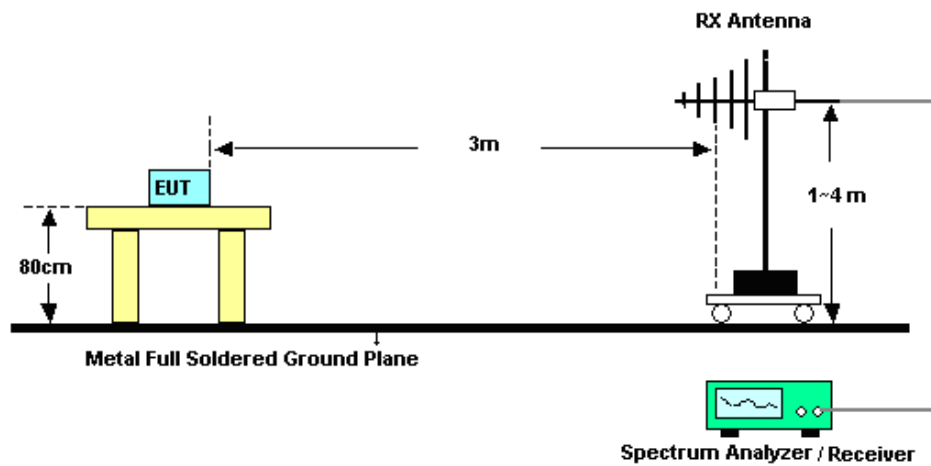

For radiated emissions above 1GHz

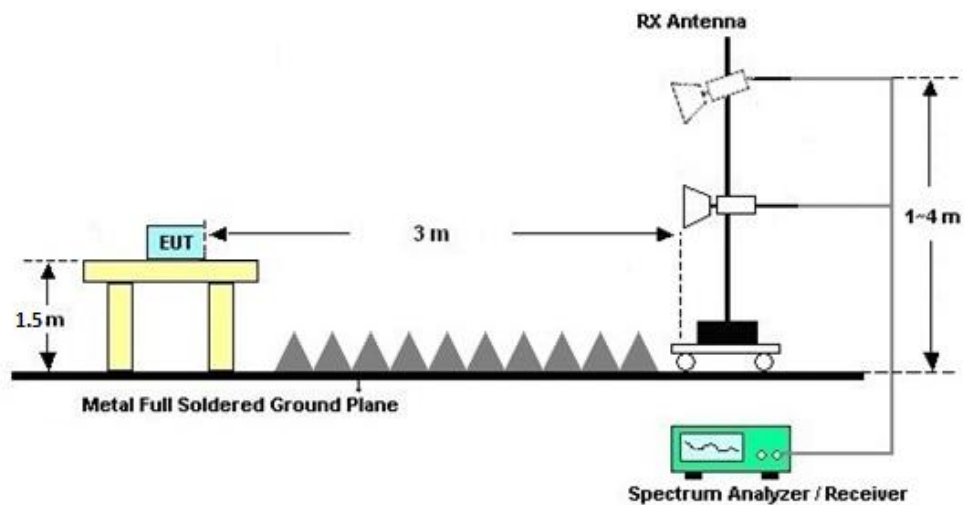

**3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

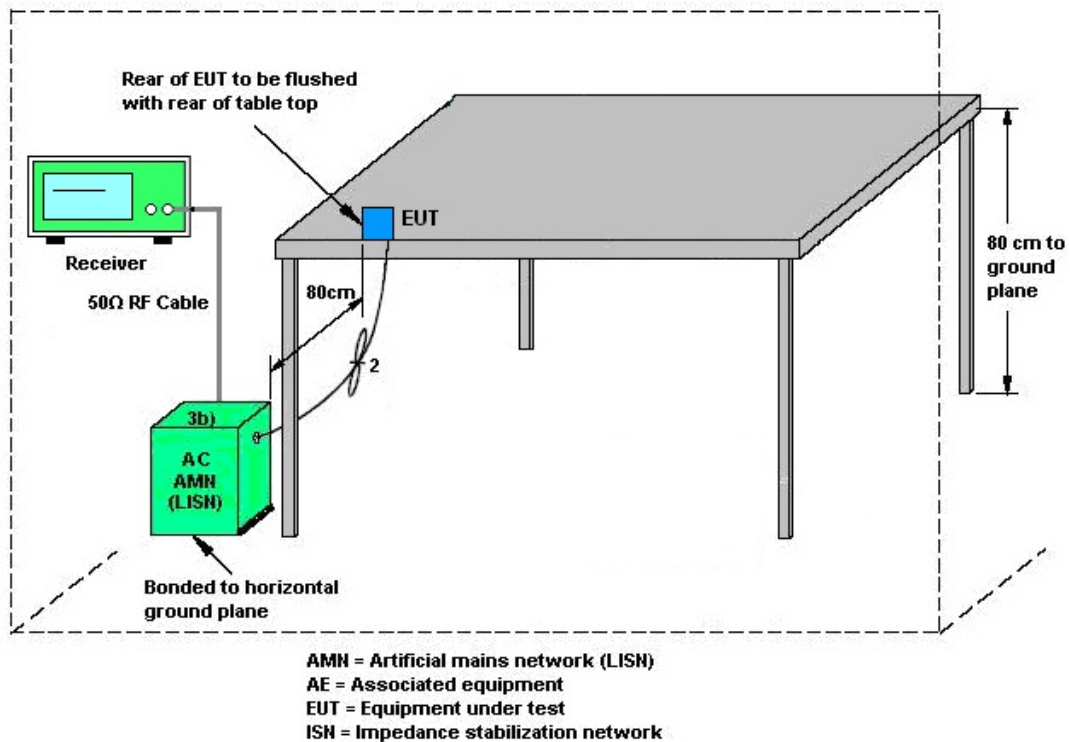

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

Non-standard antenna connector is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Jun. 28, 2024	Apr. 08, 2025	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 29, 2023	Jun. 28, 2024	Dec. 28, 2024	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Aug. 21, 2023	Jun. 28, 2024	Aug. 20, 2024	Conducted (TH01-SZ)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 09, 2024	Jun. 24, 2204~Jun. 28, 2024	Apr. 08, 2025	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 09, 2024	Jun. 24, 2204~Jun. 28, 2024	Apr. 08, 2025	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	Jun. 24, 2204~Jun. 28, 2024	Jul. 27, 2024	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	Aug. 20, 2023	Jun. 24, 2204~Jun. 28, 2024	Aug. 19, 2025	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Apr. 09, 2024	Jun. 24, 2204~Jun. 28, 2024	Apr. 08, 2025	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 07, 2023	Jun. 24, 2204~Jun. 28, 2024	Jul. 06, 2024	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 09, 2024	Jun. 24, 2204~Jun. 28, 2024	Apr. 08, 2025	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct. 18, 2023	Jun. 24, 2204~Jun. 28, 2024	Oct. 17, 2024	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 18, 2023	Jun. 24, 2204~Jun. 28, 2024	Oct. 17, 2024	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Dec. 27, 2023	Jun. 24, 2204~Jun. 28, 2024	Dec. 26, 2024	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010002729	N/A	Oct. 18, 2023	Jun. 24, 2204~Jun. 28, 2024	Oct. 17, 2024	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jun. 24, 2204~Jun. 28, 2024	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jun. 24, 2204~Jun. 28, 2024	NCR	Radiation (03CH03-SZ)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 18, 2024	Jun. 25, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Jun. 25, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Jun. 25, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Jun. 25, 2024	Oct. 10, 2024	Conduction (CO01-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 1.34 dB
Occupied Channel Bandwidth	± 0.012 MHz
Conducted Power	± 1.34 dB
Conducted Power Spectral Density	± 1.32 dB
Frequency	± 1.3 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.84 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Jason Zhang	Temperature:	21~25	°C
Test Date:	2024/6/28	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	13.79	8.12	0.50	Pass
11b	1Mbps	1	6	2437	13.94	8.12	0.50	Pass
11b	1Mbps	1	11	2462	13.44	8.10	0.50	Pass
11g	6Mbps	1	1	2412	16.73	15.44	0.50	Pass
11g	6Mbps	1	6	2437	16.78	15.94	0.50	Pass
11g	6Mbps	1	11	2462	16.53	16.08	0.50	Pass
HT20	MCS0	1	1	2412	17.93	16.10	0.50	Pass
HT20	MCS0	1	6	2437	17.93	15.96	0.50	Pass
HT20	MCS0	1	11	2462	17.73	12.92	0.50	Pass
HT40	MCS0	1	3	2422	36.36	35.16	0.50	Pass
HT40	MCS0	1	6	2437	36.66	36.16	0.50	Pass
HT40	MCS0	1	9	2452	36.36	32.68	0.50	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	19.40	30.00	0.95	20.35	36.00	Pass
11b	1Mbps	1	6	2437	18.90	30.00	0.95	19.85	36.00	Pass
11b	1Mbps	1	11	2462	19.00	30.00	0.95	19.95	36.00	Pass
11g	6Mbps	1	1	2412	15.80	30.00	0.95	16.75	36.00	Pass
11g	6Mbps	1	6	2437	15.60	30.00	0.95	16.55	36.00	Pass
11g	6Mbps	1	11	2462	15.20	30.00	0.95	16.15	36.00	Pass
HT20	MCS0	1	1	2412	14.80	30.00	0.95	15.75	36.00	Pass
HT20	MCS0	1	6	2437	14.90	30.00	0.95	15.85	36.00	Pass
HT20	MCS0	1	11	2462	14.40	30.00	0.95	15.35	36.00	Pass
HT40	MCS0	1	3	2422	13.30	30.00	0.95	14.25	36.00	Pass
HT40	MCS0	1	6	2437	14.80	30.00	0.95	15.75	36.00	Pass
HT40	MCS0	1	9	2452	13.80	30.00	0.95	14.75	36.00	Pass

Note: Measured power (dBm) has offset with cable loss.

Setting
18.00
18.00
18.00
15.00
15.00
15.00
14.00
14.00
14.00
13.00
13.00
13.00


TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)	DG (dBi)	Peak PSD Limit (dBm/3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-7.30	0.95	8.00	Pass
11b	1Mbps	1	6	2437	-7.53	0.95	8.00	Pass
11b	1Mbps	1	11	2462	-7.59	0.95	8.00	Pass
11g	6Mbps	1	1	2412	-11.03	0.95	8.00	Pass
11g	6Mbps	1	6	2437	-11.28	0.95	8.00	Pass
11g	6Mbps	1	11	2462	-10.28	0.95	8.00	Pass
HT20	MCS0	1	1	2412	-11.50	0.95	8.00	Pass
HT20	MCS0	1	6	2437	-12.66	0.95	8.00	Pass
HT20	MCS0	1	11	2462	-12.37	0.95	8.00	Pass
HT40	MCS0	1	3	2422	-16.33	0.95	8.00	Pass
HT40	MCS0	1	6	2437	-14.41	0.95	8.00	Pass
HT40	MCS0	1	9	2452	-15.27	0.95	8.00	Pass

Measured power density (dBm) has offset with cable loss.




Appendix B. AC Conducted Emission Test Results

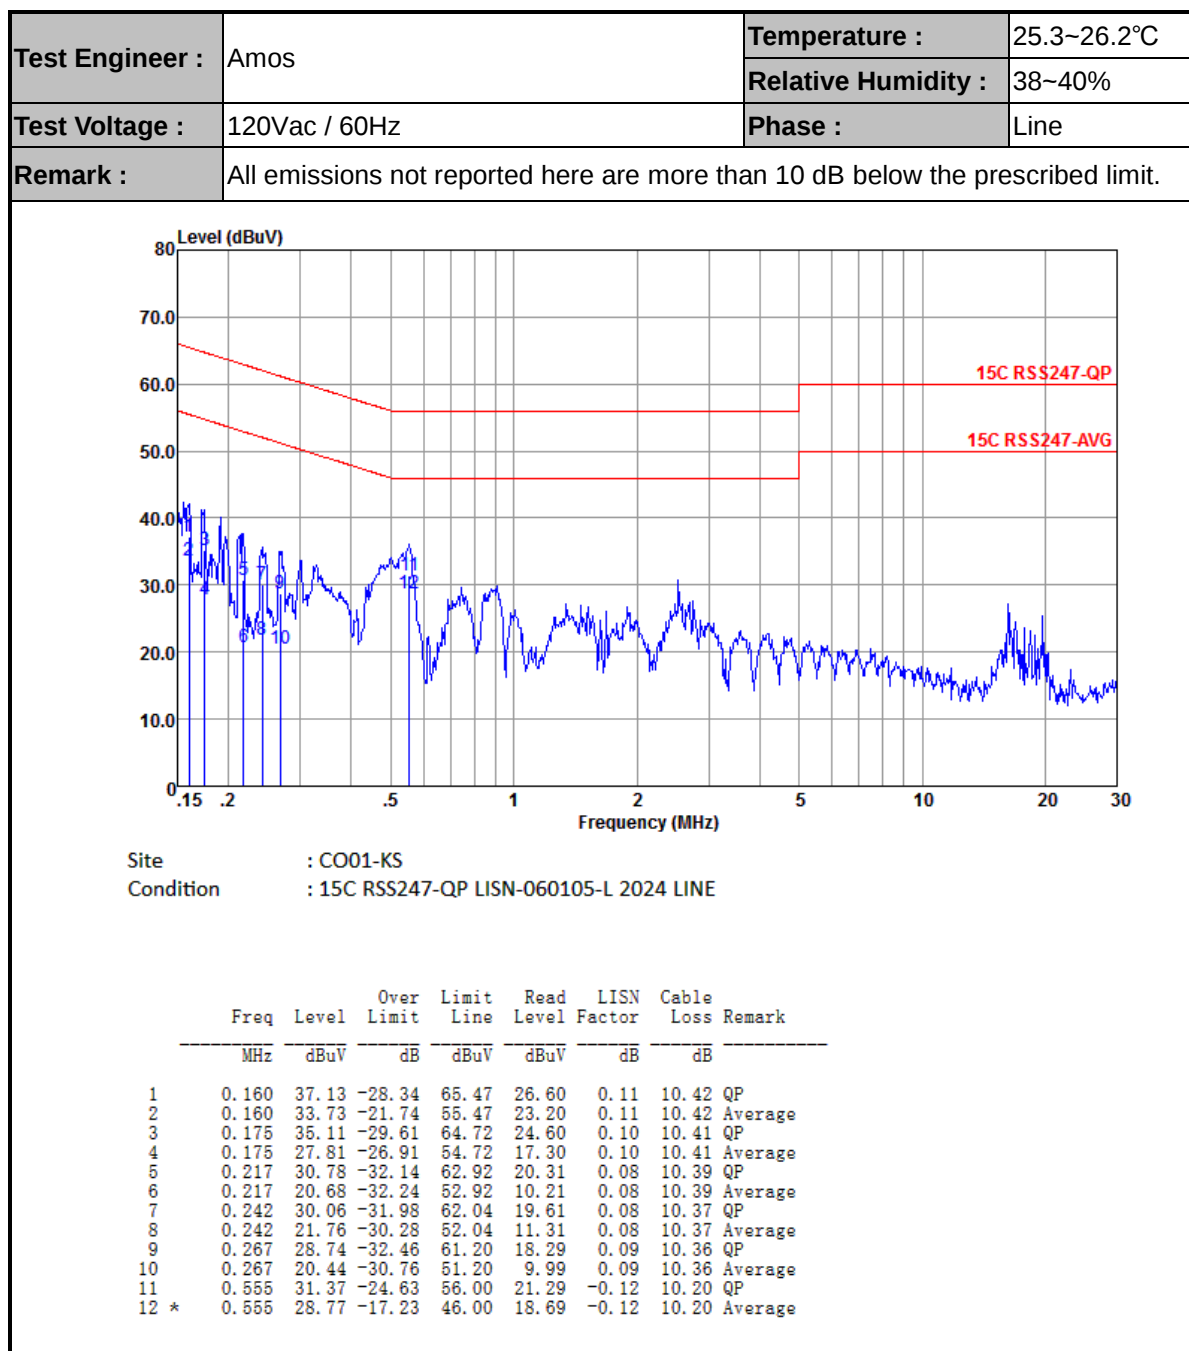



Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

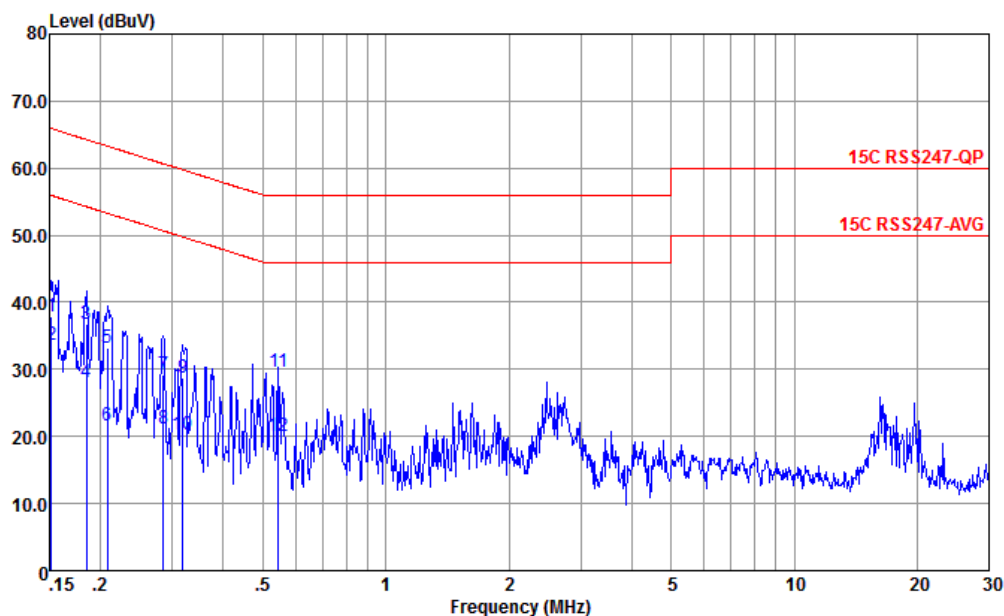

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-N 2024 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.152	37.84	-28.07	65.91	27.30	0.12	10.42	QP
2 *	0.152	33.64	-22.27	55.91	23.10	0.12	10.42	Average
3	0.184	36.84	-27.44	64.28	26.30	0.13	10.41	QP
4	0.184	28.04	-26.24	54.28	17.50	0.13	10.41	Average
5	0.208	33.11	-30.16	63.27	22.61	0.10	10.40	QP
6	0.208	21.71	-31.56	53.27	11.21	0.10	10.40	Average
7	0.285	29.15	-31.53	60.68	18.90	-0.09	10.34	QP
8	0.285	21.21	-29.47	50.68	10.96	-0.09	10.34	Average
9	0.318	28.80	-30.95	59.75	18.60	-0.12	10.32	QP
10	0.318	20.30	-29.45	49.75	10.10	-0.12	10.32	Average
11	0.546	29.65	-26.35	56.00	19.60	-0.15	10.20	QP
12	0.546	20.15	-25.85	46.00	10.10	-0.15	10.20	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Wenbo Xiao	Relative Humidity :	50%
		Temperature :	20℃~22℃

Radiated Spurious Emission Test Modes





Mode	Band (MHz)	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 10	2400-2483.5	802.11b	01	2412	1Mbps	-	-
Mode 11	2400-2483.5	802.11b	06	2437	1Mbps	-	-
Mode 12	2400-2483.5	802.11b	11	2462	1Mbps	-	-
Mode 13	2400-2483.5	802.11g	01	2412	6Mbps	-	-
Mode 14	2400-2483.5	802.11g	06	2437	6Mbps	-	-
Mode 15	2400-2483.5	802.11g	11	2462	6Mbps	-	-
Mode 16	2400-2483.5	802.11n HT20	01	2412	MCS0	-	-
Mode 17	2400-2483.5	802.11n HT20	06	2437	MCS0	-	-
Mode 18	2400-2483.5	802.11n HT20	11	2462	MCS0	-	-
Mode 19	2400-2483.5	802.11n HT40	03	2422	MCS0	-	-
Mode 20	2400-2483.5	802.11n HT40	06	2437	MCS0	-	-
Mode 21	2400-2483.5	802.11n HT40	09	2452	MCS0	-	-
Mode 22	2400-2483.5	802.11g	11	2462	6Mbps	-	LF



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
10	802.11b	01	2389.04	36.72	54.00	-17.28	V	AVERAGE	Pass	Band Edge
10	802.11b	01	4824.00	36.12	54.00	-17.88	V	Average	Pass	Harmonic
11	802.11b	06	-	-	-	-	-	-	-	Band Edge
11	802.11b	06	4874.00	37.46	54.00	-16.54	V	Average	Pass	Harmonic
12	802.11b	11	2487.00	42.68	54.00	-11.32	V	AVERAGE	Pass	Band Edge
12	802.11b	11	4924.00	36.10	54.00	-17.90	V	Average	Pass	Harmonic
13	802.11g	01	2389.95	41.08	54.00	-12.92	V	AVERAGE	Pass	Band Edge
13	802.11g	01	4824.00	42.80	74.00	-31.20	V	Peak	Pass	Harmonic
14	802.11g	06	-	-	-	-	-	-	-	Band Edge
14	802.11g	06	7311.00	46.31	74.00	-27.69	H	Peak	Pass	Harmonic
15	802.11g	11	2483.51	45.16	54.00	-8.84	V	AVERAGE	Pass	Band Edge
15	802.11g	11	7386.00	46.21	74.00	-27.79	V	Peak	Pass	Harmonic
16	802.11n HT20	01	2389.95	42.50	54.00	-11.50	V	AVERAGE	Pass	Band Edge
16	802.11n HT20	01	4824.00	43.17	74.00	-30.83	V	Peak	Pass	Harmonic
17	802.11n HT20	06	-	-	-	-	-	-	-	Band Edge
17	802.11n HT20	06	7311.00	45.38	74.00	-28.62	H	Peak	Pass	Harmonic
18	802.11n HT20	11	2483.51	43.08	54.00	-10.92	V	AVERAGE	Pass	Band Edge
18	802.11n HT20	11	7386.00	44.76	74.00	-29.24	H	Peak	Pass	Harmonic
19	802.11n HT40	03	2389.97	41.95	54.00	-12.05	V	AVERAGE	Pass	Band Edge
19	802.11n HT40	03	7266.00	45.50	74.00	-28.50	V	Peak	Pass	Harmonic
20	802.11n HT40	06	-	-	-	-	-	-	-	Band Edge
20	802.11n HT40	06	7311.00	45.20	74.00	-28.80	H	Peak	Pass	Harmonic
21	802.11n HT40	09	2483.63	42.24	54.00	-11.76	V	AVERAGE	Pass	Band Edge
21	802.11n HT40	09	7356.00	44.21	74.00	-29.79	H	Peak	Pass	Harmonic
22	802.11g	11	422.85	42.60	46.00	-3.40	H	Peak	Pass	LF

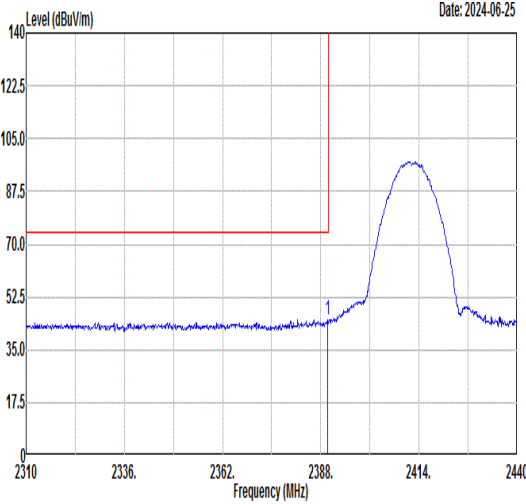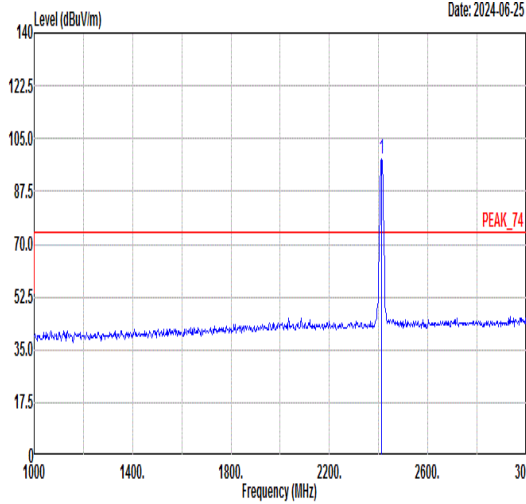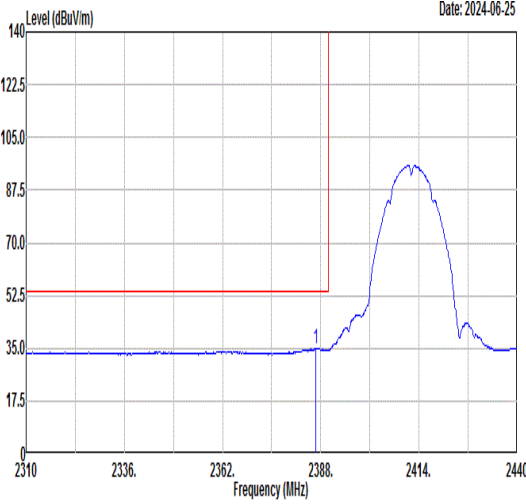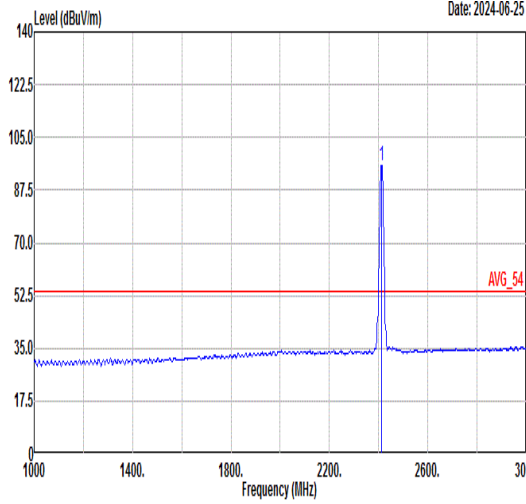

Mode	10																																																																																								
	Band Edge																																																																																								
	2400-2483.5_802.11b_CH01_2412MHz																																																																																								
Pol.	Horizontal					Fundamental																																																																																			
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>45.07</td><td>74.00</td><td>-28.93</td><td>42.52</td><td>30.72</td><td>5.36</td><td>33.53</td><td>110</td><td>303</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	45.07	74.00	-28.93	42.52	30.72	5.36	33.53	110	303	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>98.10</td><td>-----</td><td>-----</td><td>95.55</td><td>30.72</td><td>5.38</td><td>33.55</td><td>110</td><td>303</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	98.10	-----	-----	95.55	30.72	5.38	33.55	110	303
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2389.82	45.07	74.00	-28.93	42.52	30.72	5.36	33.53	110	303	PEAK																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2412.00	98.10	-----	-----	95.55	30.72	5.38	33.55	110	303	PEAK																																																																														
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.57</td><td>34.94</td><td>54.00</td><td>-19.06</td><td>32.39</td><td>30.72</td><td>5.36</td><td>33.53</td><td>110</td><td>303</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.57	34.94	54.00	-19.06	32.39	30.72	5.36	33.53	110	303	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>95.51</td><td>-----</td><td>-----</td><td>92.96</td><td>30.72</td><td>5.38</td><td>33.55</td><td>110</td><td>303</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	95.51	-----	-----	92.96	30.72	5.38	33.55	110	303
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2386.57	34.94	54.00	-19.06	32.39	30.72	5.36	33.53	110	303	AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2412.00	95.51	-----	-----	92.96	30.72	5.38	33.55	110	303	AVERAGE																																																																														



Mode	10	
	Band Edge	
	2400-2483.5_802.11b_CH01_2412MHz	
Pol.	Vertical	Fundamental
Peak	Level (dBuV/m) Date: 2024-06-25 1 2389.56 48.81 74.00 -25.19 46.26 30.72 5.36 33.53 145 118 PEAK	Level (dBuV/m) Date: 2024-06-25 1 2412.00 104.05 ----- 101.50 30.72 5.38 33.55 145 118 PEAK
Avg	Level (dBuV/m) Date: 2024-06-25 1 2389.04 36.72 54.00 -17.28 34.17 30.72 5.36 33.53 145 118 AVERAGE	Level (dBuV/m) Date: 2024-06-25 1 2412.00 101.59 ----- 99.04 30.72 5.38 33.55 145 118 AVERAGE



Mode	10																																																																																																							
	Harmonic																																																																																																							
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																							
Pol.	Horizontal						Vertical																																																																																																	
Peak Avg	Level (dBuV/m) Date: 2024-06-25 Frequency (MHz)						Level (dBuV/m) Date: 2024-06-25 Frequency (MHz)																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>43.29</td><td>74.00</td><td>-30.71</td><td>63.48</td><td>35.78</td><td>8.88</td><td>64.85</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	43.29	74.00	-30.71	63.48	35.78	8.88	64.85	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>45.11</td><td>74.00</td><td>-28.89</td><td>65.30</td><td>35.78</td><td>8.88</td><td>64.85</td><td>100</td><td>194</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>36.12</td><td>54.00</td><td>-17.88</td><td>56.31</td><td>35.78</td><td>8.88</td><td>64.85</td><td>100</td><td>194</td><td>Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	45.11	74.00	-28.89	65.30	35.78	8.88	64.85	100	194	Peak	2	4824.00	36.12	54.00	-17.88	56.31	35.78	8.88	64.85	100	194
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	4824.00	43.29	74.00	-30.71	63.48	35.78	8.88	64.85	---	---	Peak																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	4824.00	45.11	74.00	-28.89	65.30	35.78	8.88	64.85	100	194	Peak																																																																																													
2	4824.00	36.12	54.00	-17.88	56.31	35.78	8.88	64.85	100	194	Average																																																																																													







Mode	11																																																																																																																																			
	Harmonic																																																																																																																																			
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																																													
Peak Avg	Level (dBuV/m) Date: 2024-06-25 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>42.40</td><td>74.00</td><td>-31.60</td><td>62.65</td><td>35.90</td><td>8.72</td><td>64.87</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>44.09</td><td>74.00</td><td>-29.91</td><td>61.89</td><td>36.88</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4874.00	42.40	74.00	-31.60	62.65	35.90	8.72	64.87	---	---	Peak	2	7311.00	44.09	74.00	-29.91	61.89	36.88	10.18	64.86	---	---	Peak	Level (dBuV/m) Date: 2024-06-25 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>44.20</td><td>74.00</td><td>-29.80</td><td>64.45</td><td>35.90</td><td>8.72</td><td>64.87</td><td>100</td><td>201</td><td>Peak</td></tr><tr><td>2</td><td>4874.00</td><td>37.46</td><td>54.00</td><td>-16.54</td><td>57.71</td><td>35.90</td><td>8.72</td><td>64.87</td><td>100</td><td>201</td><td>Average</td></tr><tr><td>3</td><td>7311.00</td><td>45.00</td><td>74.00</td><td>-29.00</td><td>62.80</td><td>36.88</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4874.00	44.20	74.00	-29.80	64.45	35.90	8.72	64.87	100	201	Peak	2	4874.00	37.46	54.00	-16.54	57.71	35.90	8.72	64.87	100	201	Average	3	7311.00	45.00	74.00	-29.00	62.80	36.88	10.18	64.86	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																										
1	4874.00	42.40	74.00	-31.60	62.65	35.90	8.72	64.87	---	---	Peak																																																																																																																									
2	7311.00	44.09	74.00	-29.91	61.89	36.88	10.18	64.86	---	---	Peak																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																										
1	4874.00	44.20	74.00	-29.80	64.45	35.90	8.72	64.87	100	201	Peak																																																																																																																									
2	4874.00	37.46	54.00	-16.54	57.71	35.90	8.72	64.87	100	201	Average																																																																																																																									
3	7311.00	45.00	74.00	-29.00	62.80	36.88	10.18	64.86	---	---	Peak																																																																																																																									



Mode	12																																																																																											
	Band Edge																																																																																											
	2400-2483.5_802.11b_CH11_2462MHz																																																																																											
Pol.	Horizontal						Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2024-06-25 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.00</td><td>46.23</td><td>74.00</td><td>-27.77</td><td>43.66</td><td>30.70</td><td>5.46</td><td>33.59</td><td>100</td><td>299</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2484.00	46.23	74.00	-27.77	43.66	30.70	5.46	33.59	100	299	PEAK	Level (dBuV/m) Date: 2024-06-25 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>97.05</td><td>-----</td><td>-----</td><td>94.48</td><td>30.71</td><td>5.44</td><td>33.58</td><td>100</td><td>299</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2462.00	97.05	-----	-----	94.48	30.71	5.44	33.58	100	299	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2484.00	46.23	74.00	-27.77	43.66	30.70	5.46	33.59	100	299	PEAK																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2462.00	97.05	-----	-----	94.48	30.71	5.44	33.58	100	299	PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2024-06-25 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.04</td><td>36.10</td><td>54.00</td><td>-17.90</td><td>33.53</td><td>30.70</td><td>5.46</td><td>33.59</td><td>100</td><td>299</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2487.04	36.10	54.00	-17.90	33.53	30.70	5.46	33.59	100	299	AVERAGE	Level (dBuV/m) Date: 2024-06-25 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>94.64</td><td>-----</td><td>-----</td><td>92.07</td><td>30.71</td><td>5.44</td><td>33.58</td><td>100</td><td>299</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2462.00	94.64	-----	-----	92.07	30.71	5.44	33.58	100	299	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2487.04	36.10	54.00	-17.90	33.53	30.70	5.46	33.59	100	299	AVERAGE																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2462.00	94.64	-----	-----	92.07	30.71	5.44	33.58	100	299	AVERAGE																																																																																	

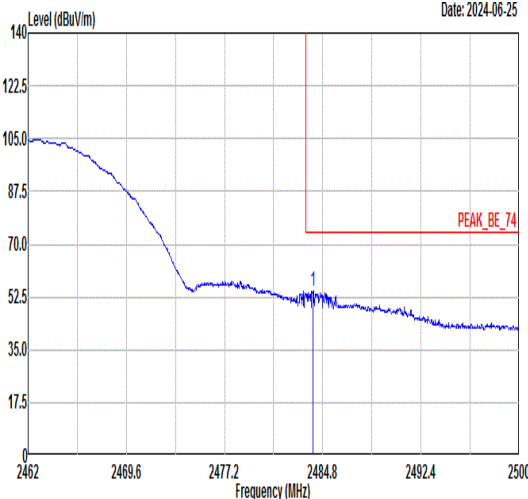
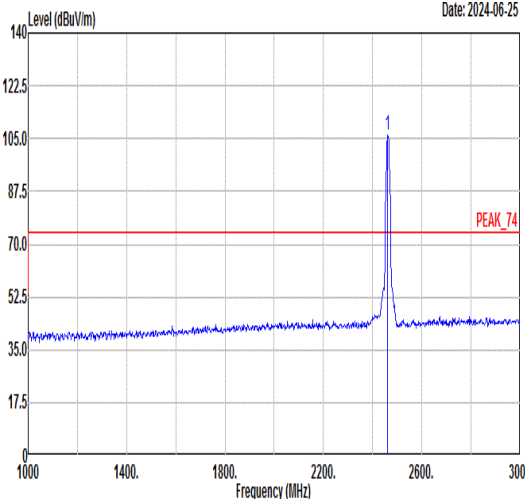
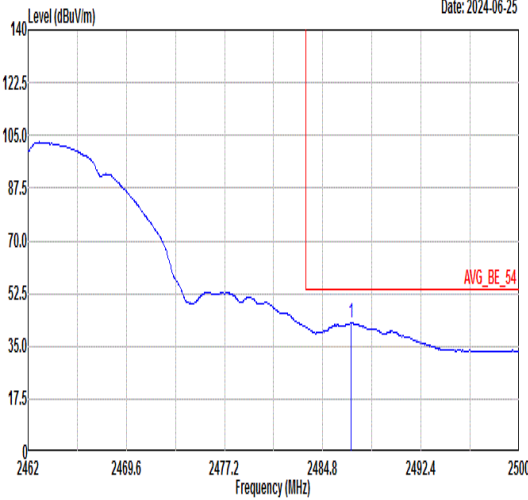
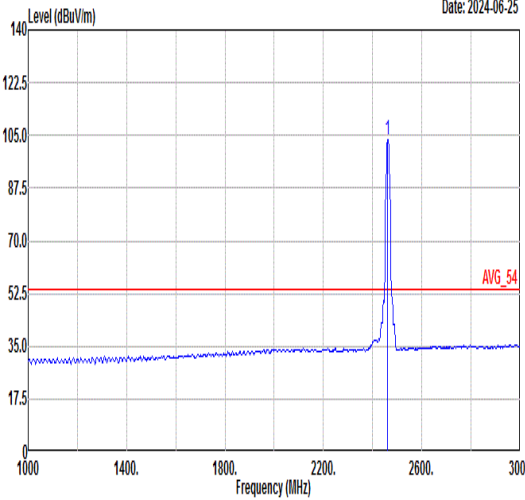


Mode	12																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11b_CH11_2462MHz																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Date: 2024-06-25  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.04</td><td>54.57</td><td>74.00</td><td>-19.43</td><td>52.00</td><td>30.70</td><td>5.46</td><td>33.59</td><td>180 297 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2484.04	54.57	74.00	-19.43	52.00	30.70	5.46	33.59	180 297 PEAK	Date: 2024-06-25  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>106.17</td><td>-----</td><td>103.60</td><td>30.71</td><td>5.44</td><td>33.58</td><td>180</td><td>297 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2462.00	106.17	-----	103.60	30.71	5.44	33.58	180	297 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																									
1	2484.04	54.57	74.00	-19.43	52.00	30.70	5.46	33.59	180 297 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																									
1	2462.00	106.17	-----	103.60	30.71	5.44	33.58	180	297 PEAK																																																																									
Avg	Date: 2024-06-25  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.00</td><td>42.68</td><td>54.00</td><td>-11.32</td><td>40.11</td><td>30.70</td><td>5.46</td><td>33.59</td><td>180 297 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2487.00	42.68	54.00	-11.32	40.11	30.70	5.46	33.59	180 297 AVERAGE	Date: 2024-06-25  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>103.55</td><td>-----</td><td>100.98</td><td>30.71</td><td>5.44</td><td>33.58</td><td>180</td><td>297 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2462.00	103.55	-----	100.98	30.71	5.44	33.58	180	297 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																									
1	2487.00	42.68	54.00	-11.32	40.11	30.70	5.46	33.59	180 297 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																									
1	2462.00	103.55	-----	100.98	30.71	5.44	33.58	180	297 AVERAGE																																																																									



Mode	12																																																																																																																									
	Harmonic																																																																																																																									
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	Level (dBuV/m) Date: 2024-06-25 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>41.77</td><td>74.00</td><td>-32.23</td><td>62.07</td><td>36.02</td><td>8.57</td><td>64.89</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>44.80</td><td>74.00</td><td>-29.20</td><td>62.63</td><td>36.85</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4924.00	41.77	74.00	-32.23	62.07	36.02	8.57	64.89	---	---	Peak	2	7386.00	44.80	74.00	-29.20	62.63	36.85	10.18	64.86	---	---	Peak	Level (dBuV/m) Date: 2024-06-25 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>43.28</td><td>74.00</td><td>-30.72</td><td>63.58</td><td>36.02</td><td>8.57</td><td>64.89</td><td>100</td><td>198</td><td>Peak</td></tr><tr><td>2</td><td>4924.00</td><td>36.10</td><td>54.00</td><td>-17.90</td><td>56.40</td><td>36.02</td><td>8.57</td><td>64.89</td><td>100</td><td>198</td><td>Average</td></tr><tr><td>3</td><td>7386.00</td><td>44.37</td><td>74.00</td><td>-29.63</td><td>62.20</td><td>36.85</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4924.00	43.28	74.00	-30.72	63.58	36.02	8.57	64.89	100	198	Peak	2	4924.00	36.10	54.00	-17.90	56.40	36.02	8.57	64.89	100	198	Average	3	7386.00	44.37	74.00	-29.63	62.20	36.85	10.18	64.86	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	4924.00	41.77	74.00	-32.23	62.07	36.02	8.57	64.89	---	---	Peak																																																																																																															
2	7386.00	44.80	74.00	-29.20	62.63	36.85	10.18	64.86	---	---	Peak																																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	4924.00	43.28	74.00	-30.72	63.58	36.02	8.57	64.89	100	198	Peak																																																																																																															
2	4924.00	36.10	54.00	-17.90	56.40	36.02	8.57	64.89	100	198	Average																																																																																																															
3	7386.00	44.37	74.00	-29.63	62.20	36.85	10.18	64.86	---	---	Peak																																																																																																															

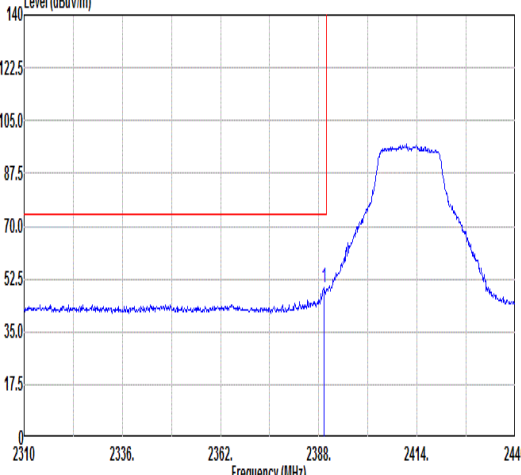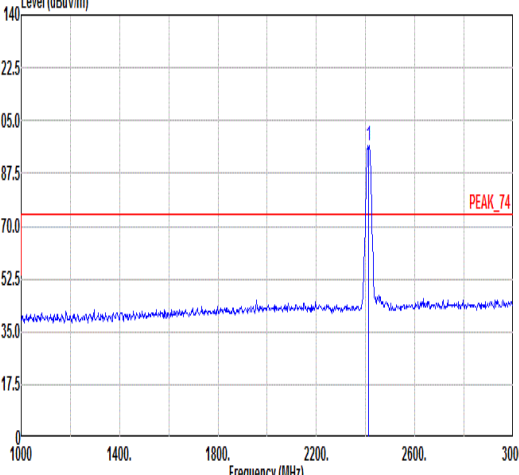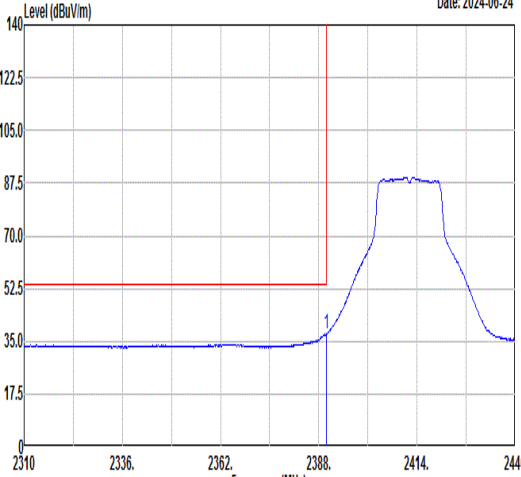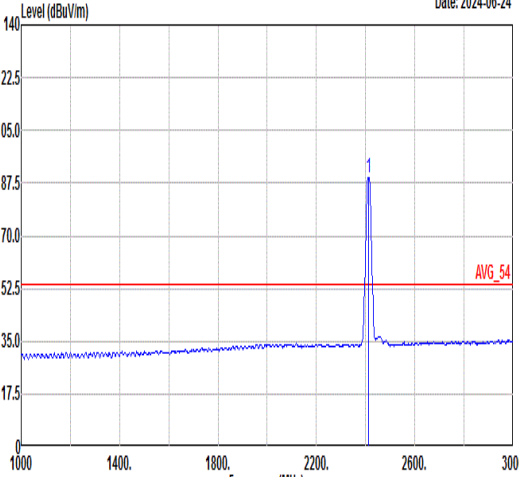

Mode	13																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11g_CH01_2412MHz																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2024-06-24  Frequency (MHz)					Level (dBuV/m) Date: 2024-06-24  Frequency (MHz)																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.30</td><td>49.63</td><td>74.00</td><td>-24.37</td><td>47.08</td><td>30.72</td><td>5.36</td><td>33.53</td><td>100</td><td>300 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2389.30	49.63	74.00	-24.37	47.08	30.72	5.36	33.53	100	300 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>96.70</td><td>-----</td><td>94.15</td><td>30.72</td><td>5.38</td><td>33.55</td><td>100</td><td>300 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2412.00	96.70	-----	94.15	30.72	5.38	33.55	100
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2389.30	49.63	74.00	-24.37	47.08	30.72	5.36	33.53	100	300 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2412.00	96.70	-----	94.15	30.72	5.38	33.55	100	300 PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2024-06-24  Frequency (MHz)					Level (dBuV/m) Date: 2024-06-24  Frequency (MHz)																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>37.37</td><td>54.00</td><td>-16.63</td><td>34.82</td><td>30.72</td><td>5.36</td><td>33.53</td><td>100</td><td>300 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2389.95	37.37	54.00	-16.63	34.82	30.72	5.36	33.53	100	300 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>89.24</td><td>-----</td><td>86.69</td><td>30.72</td><td>5.38</td><td>33.55</td><td>100</td><td>300 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2412.00	89.24	-----	86.69	30.72	5.38	33.55	100
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2389.95	37.37	54.00	-16.63	34.82	30.72	5.36	33.53	100	300 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2412.00	89.24	-----	86.69	30.72	5.38	33.55	100	300 AVERAGE																																																																																	



Mode	13																																									
	Band Edge																																									
	2400-2483.5_802.11g_CH01_2412MHz																																									
Pol.	Vertical	Fundamental																																								
Peak	Level (dBuV/m) Date: 2024-06-24 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2389.30</td><td>54.17</td><td>74.00</td><td>-19.83</td><td>51.62</td><td>30.72</td><td>5.36</td><td>33.53</td><td>200</td><td>301 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark	1 2389.30	54.17	74.00	-19.83	51.62	30.72	5.36	33.53	200	301 PEAK	Level (dBuV/m) Date: 2024-06-24 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2412.00</td><td>102.27</td><td>-----</td><td>-----</td><td>99.72</td><td>30.72</td><td>5.37</td><td>33.54</td><td>200</td><td>301 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark	1 2412.00	102.27	-----	-----	99.72	30.72	5.37	33.54	200	301 PEAK
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark																																
1 2389.30	54.17	74.00	-19.83	51.62	30.72	5.36	33.53	200	301 PEAK																																	
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark																																	
1 2412.00	102.27	-----	-----	99.72	30.72	5.37	33.54	200	301 PEAK																																	
Avg	Level (dBuV/m) Date: 2024-06-24 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2389.95</td><td>41.08</td><td>54.00</td><td>-12.92</td><td>38.53</td><td>30.72</td><td>5.36</td><td>33.53</td><td>200</td><td>301 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark	1 2389.95	41.08	54.00	-12.92	38.53	30.72	5.36	33.53	200	301 AVERAGE	Level (dBuV/m) Date: 2024-06-24 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2412.00</td><td>95.21</td><td>-----</td><td>-----</td><td>92.66</td><td>30.72</td><td>5.38</td><td>33.55</td><td>200</td><td>301 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark	1 2412.00	95.21	-----	-----	92.66	30.72	5.38	33.55	200	301 AVERAGE
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark																																	
1 2389.95	41.08	54.00	-12.92	38.53	30.72	5.36	33.53	200	301 AVERAGE																																	
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark																																	
1 2412.00	95.21	-----	-----	92.66	30.72	5.38	33.55	200	301 AVERAGE																																	



Mode	13																																																																																															
	Harmonic																																																																																															
	2400-2483.5_802.11g_CH01_2412MHz																																																																																															
Pol.	Horizontal						Vertical																																																																																									
Peak Avg	Level (dBuV/m) Date: 2024-06-25 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4824.00</td><td>42.34</td><td>74.00</td><td>-31.66</td><td>62.53</td><td>35.78</td><td>8.88</td><td>64.85</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4824.00	42.34	74.00	-31.66	62.53	35.78	8.88	64.85	---	---	Peak	Level (dBuV/m) Date: 2024-06-25 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4824.00</td><td>42.80</td><td>74.00</td><td>-31.20</td><td>62.99</td><td>35.78</td><td>8.88</td><td>64.85</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4824.00	42.80	74.00	-31.20	62.99	35.78	8.88	64.85	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	4824.00	42.34	74.00	-31.66	62.53	35.78	8.88	64.85	---	---	Peak																																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	4824.00	42.80	74.00	-31.20	62.99	35.78	8.88	64.85	---	---	Peak																																																																																					







Mode	14																																																																																																																																	
	Harmonic																																																																																																																																	
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg	Level (dBuV/m) Date: 2024-06-25 <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>43.11</td><td>74.00</td><td>-30.89</td><td>63.36</td><td>35.90</td><td>8.72</td><td>64.87</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>46.31</td><td>74.00</td><td>-27.69</td><td>64.11</td><td>36.88</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4874.00	43.11	74.00	-30.89	63.36	35.90	8.72	64.87	---	---	Peak	2	7311.00	46.31	74.00	-27.69	64.11	36.88	10.18	64.86	---	---	Peak	Level (dBuV/m) Date: 2024-06-25 <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>42.97</td><td>74.00</td><td>-31.03</td><td>63.22</td><td>35.90</td><td>8.72</td><td>64.87</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>44.31</td><td>74.00</td><td>-29.69</td><td>62.11</td><td>36.88</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4874.00	42.97	74.00	-31.03	63.22	35.90	8.72	64.87	---	---	Peak	2	7311.00	44.31	74.00	-29.69	62.11	36.88	10.18	64.86	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	4874.00	43.11	74.00	-30.89	63.36	35.90	8.72	64.87	---	---	Peak																																																																																																																							
2	7311.00	46.31	74.00	-27.69	64.11	36.88	10.18	64.86	---	---	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	4874.00	42.97	74.00	-31.03	63.22	35.90	8.72	64.87	---	---	Peak																																																																																																																							
2	7311.00	44.31	74.00	-29.69	62.11	36.88	10.18	64.86	---	---	Peak																																																																																																																							



Mode	15																																																																																										
	Band Edge																																																																																										
	2400-2483.5_802.11g_CH11_2462MHz																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2024-06-24 Frequency (MHz) PEAK_BE_74						Level (dBuV/m) Date: 2024-06-24 Frequency (MHz) PEAK_74																																																																																				
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.93</td><td>48.78</td><td>74.00</td><td>-25.22</td><td>46.21</td><td>30.70</td><td>5.46</td><td>33.59</td><td>100 300 PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2483.93	48.78	74.00	-25.22	46.21	30.70	5.46	33.59	100 300 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>96.23</td><td>-----</td><td>-----</td><td>93.67</td><td>30.71</td><td>5.43</td><td>33.58</td><td>100 300 PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2462.00	96.23	-----	-----	93.67	30.71	5.43	33.58
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2483.93	48.78	74.00	-25.22	46.21	30.70	5.46	33.59	100 300 PEAK																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2462.00	96.23	-----	-----	93.67	30.71	5.43	33.58	100 300 PEAK																																																																																		
Avg	Level (dBuV/m) Date: 2024-06-24 Frequency (MHz) AVG_BE_54						Level (dBuV/m) Date: 2024-06-24 Frequency (MHz) AVG_54																																																																																				
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>37.52</td><td>54.00</td><td>-16.48</td><td>34.95</td><td>30.70</td><td>5.46</td><td>33.59</td><td>100 300 AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2483.51	37.52	54.00	-16.48	34.95	30.70	5.46	33.59	100 300 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>88.79</td><td>-----</td><td>-----</td><td>86.22</td><td>30.71</td><td>5.44</td><td>33.58</td><td>100 300 AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2462.00	88.79	-----	-----	86.22	30.71	5.44	33.58
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2483.51	37.52	54.00	-16.48	34.95	30.70	5.46	33.59	100 300 AVERAGE																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2462.00	88.79	-----	-----	86.22	30.71	5.44	33.58	100 300 AVERAGE																																																																																		

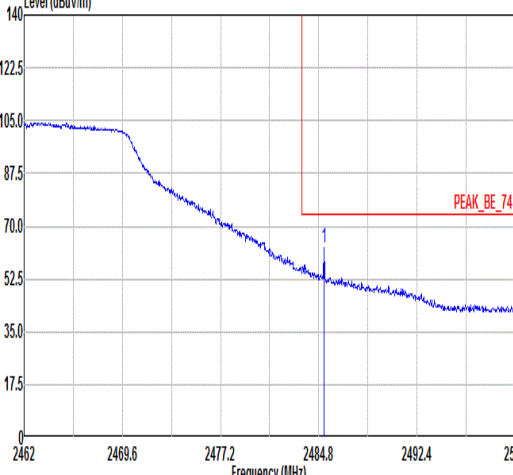
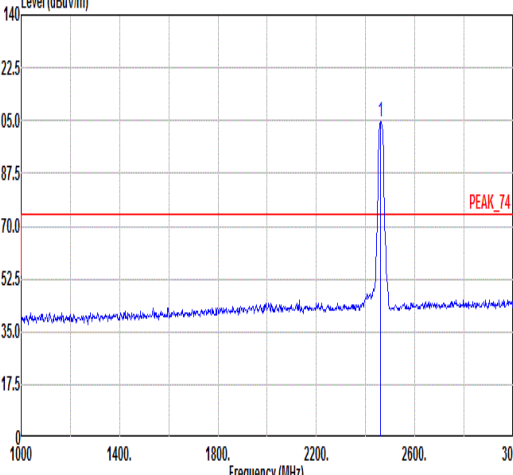
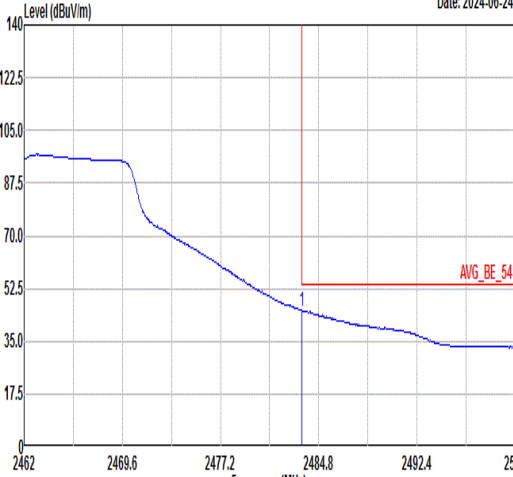
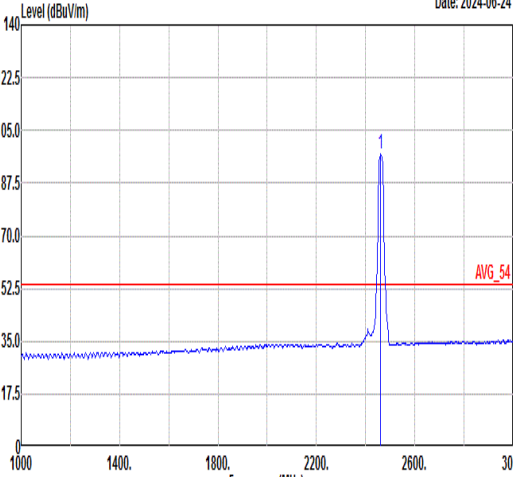


Mode	15																																																																																											
	Band Edge																																																																																											
	2400-2483.5_802.11g_CH11_2462MHz																																																																																											
Pol.	Vertical						Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2024-06-24  PEAK_BE_74 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 24622469.62477.22484.82492.42500 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2485.22</td><td>62.90</td><td>74.00</td><td>-11.10</td><td>60.33</td><td>30.70</td><td>5.46</td><td>33.59</td><td>179 299 PEAK</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2485.22	62.90	74.00	-11.10	60.33	30.70	5.46	33.59	179 299 PEAK	Level (dBuV/m) Date: 2024-06-24  PEAK_74 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 100014001800220026003000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>104.72</td><td>-----</td><td>-----</td><td>102.16</td><td>30.71</td><td>5.43</td><td>33.58</td><td>179 299 PEAK</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2462.00	104.72	-----	-----	102.16	30.71	5.43	33.58	179 299 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2485.22	62.90	74.00	-11.10	60.33	30.70	5.46	33.59	179 299 PEAK																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2462.00	104.72	-----	-----	102.16	30.71	5.43	33.58	179 299 PEAK																																																																																			
Avg	Level (dBuV/m) Date: 2024-06-24  AVG_BE_54 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 24622469.62477.22484.82492.42500 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.51</td><td>45.16</td><td>54.00</td><td>-8.84</td><td>42.59</td><td>30.70</td><td>5.46</td><td>33.59</td><td>179 299 AVERAGE</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2483.51	45.16	54.00	-8.84	42.59	30.70	5.46	33.59	179 299 AVERAGE	Level (dBuV/m) Date: 2024-06-24  AVG_54 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 100014001800220026003000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>97.07</td><td>-----</td><td>-----</td><td>94.50</td><td>30.71</td><td>5.44</td><td>33.58</td><td>179 299 AVERAGE</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2462.00	97.07	-----	-----	94.50	30.71	5.44	33.58	179 299 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2483.51	45.16	54.00	-8.84	42.59	30.70	5.46	33.59	179 299 AVERAGE																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2462.00	97.07	-----	-----	94.50	30.71	5.44	33.58	179 299 AVERAGE																																																																																			



Mode	15																																																																																																																																
	Harmonic																																																																																																																																
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																										
Peak Avg	Level (dBuV/m) Date: 2024-06-28 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4924.00</td><td>41.43</td><td>74.00</td><td>-32.57</td><td>61.73</td><td>36.02</td><td>8.57</td><td>64.89</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>44.41</td><td>74.00</td><td>-29.59</td><td>62.24</td><td>36.85</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4924.00	41.43	74.00	-32.57	61.73	36.02	8.57	64.89	---	---	Peak	2	7386.00	44.41	74.00	-29.59	62.24	36.85	10.18	64.86	---	---	Peak	Level (dBuV/m) Date: 2024-06-28 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4924.00</td><td>43.30</td><td>74.00</td><td>-30.70</td><td>63.60</td><td>36.02</td><td>8.57</td><td>64.89</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>64.04</td><td>36.85</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4924.00	43.30	74.00	-30.70	63.60	36.02	8.57	64.89	---	---	Peak	2	7386.00	46.21	74.00	-27.79	64.04	36.85	10.18	64.86	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	4924.00	41.43	74.00	-32.57	61.73	36.02	8.57	64.89	---	---	Peak																																																																																																																						
2	7386.00	44.41	74.00	-29.59	62.24	36.85	10.18	64.86	---	---	Peak																																																																																																																						
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	4924.00	43.30	74.00	-30.70	63.60	36.02	8.57	64.89	---	---	Peak																																																																																																																						
2	7386.00	46.21	74.00	-27.79	64.04	36.85	10.18	64.86	---	---	Peak																																																																																																																						

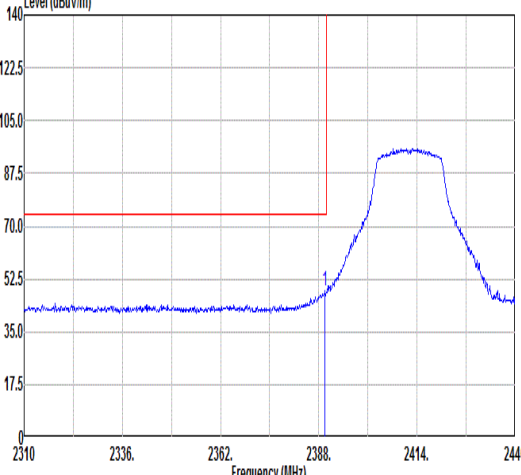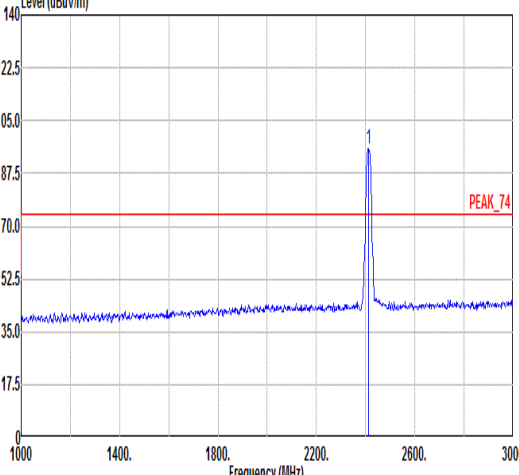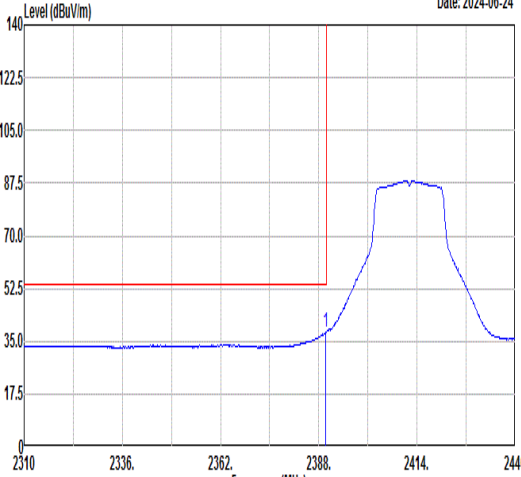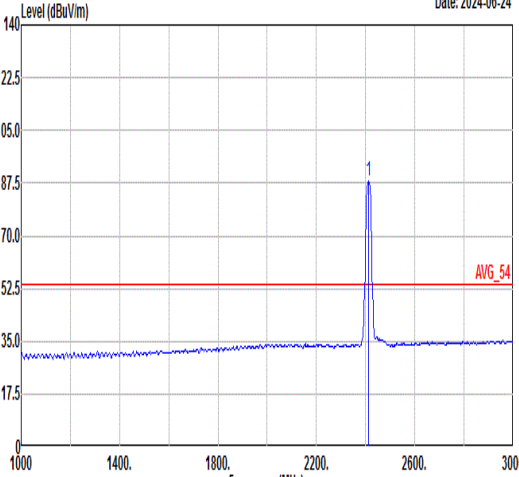

Mode	16																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11n_HT20_CH01_2412MHz																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2024-06-24  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.69</td><td>48.45</td><td>74.00</td><td>-25.55</td><td>45.90</td><td>30.72</td><td>5.36</td><td>33.53</td><td>112 300 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2389.69	48.45	74.00	-25.55	45.90	30.72	5.36	33.53	112 300 PEAK	Level (dBuV/m) Date: 2024-06-24  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>95.69</td><td>-----</td><td>93.14</td><td>30.72</td><td>5.38</td><td>33.55</td><td>112</td><td>300 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2412.00	95.69	-----	93.14	30.72	5.38	33.55	112	300 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2389.69	48.45	74.00	-25.55	45.90	30.72	5.36	33.53	112 300 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2412.00	95.69	-----	93.14	30.72	5.38	33.55	112	300 PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2024-06-24  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.82</td><td>38.10</td><td>54.00</td><td>-15.90</td><td>35.55</td><td>30.72</td><td>5.36</td><td>33.53</td><td>112 300 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2389.82	38.10	54.00	-15.90	35.55	30.72	5.36	33.53	112 300 AVERAGE	Level (dBuV/m) Date: 2024-06-24  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>88.02</td><td>-----</td><td>85.47</td><td>30.72</td><td>5.38</td><td>33.55</td><td>112</td><td>300 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2412.00	88.02	-----	85.47	30.72	5.38	33.55	112	300 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2389.82	38.10	54.00	-15.90	35.55	30.72	5.36	33.53	112 300 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2412.00	88.02	-----	85.47	30.72	5.38	33.55	112	300 AVERAGE																																																																																	



Mode	16																																																																																											
	Band Edge																																																																																											
	2400-2483.5_802.11n_HT20_CH01_2412MHz																																																																																											
Pol.	Vertical					Fundamental																																																																																						
Peak	Level (dBuV/m) Date: 2024-06-24 2310 2336 2362 2388 2414 2440 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2388.91</td><td>53.12</td><td>74.00</td><td>-20.88</td><td>50.57</td><td>30.72</td><td>5.36</td><td>33.53</td><td>100</td><td>121 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2388.91	53.12	74.00	-20.88	50.57	30.72	5.36	33.53	100	121 PEAK	Level (dBuV/m) Date: 2024-06-24 1000 1400 1800 2200 2600 3000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>100.52</td><td>-----</td><td>-----</td><td>97.97</td><td>30.72</td><td>5.38</td><td>33.55</td><td>100</td><td>121 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	100.52	-----	-----	97.97	30.72	5.38	33.55	100	121 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2388.91	53.12	74.00	-20.88	50.57	30.72	5.36	33.53	100	121 PEAK																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2412.00	100.52	-----	-----	97.97	30.72	5.38	33.55	100	121 PEAK																																																																																		
Avg	Level (dBuV/m) Date: 2024-06-24 2310 2336 2362 2388 2414 2440 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>42.50</td><td>54.00</td><td>-11.50</td><td>39.95</td><td>30.72</td><td>5.36</td><td>33.53</td><td>100</td><td>121 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	42.50	54.00	-11.50	39.95	30.72	5.36	33.53	100	121 AVERAGE	Level (dBuV/m) Date: 2024-06-24 1000 1400 1800 2200 2600 3000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>93.04</td><td>-----</td><td>-----</td><td>90.49</td><td>30.72</td><td>5.38</td><td>33.55</td><td>100</td><td>121 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	93.04	-----	-----	90.49	30.72	5.38	33.55	100	121 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2389.95	42.50	54.00	-11.50	39.95	30.72	5.36	33.53	100	121 AVERAGE																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2412.00	93.04	-----	-----	90.49	30.72	5.38	33.55	100	121 AVERAGE																																																																																		



Mode	16																																																																																												
	Harmonic																																																																																												
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																												
Pol.	Horizontal						Vertical																																																																																						
Peak Avg	Level (dBuV/m) Date: 2024-06-25 PEAK_74 AVG_54 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>42.50</td><td>74.00</td><td>-31.50</td><td>62.69</td><td>35.78</td><td>8.88</td><td>64.85</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	42.50	74.00	-31.50	62.69	35.78	8.88	64.85	---	---	Peak	Level (dBuV/m) Date: 2024-06-25 PEAK_74 AVG_54 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>43.17</td><td>74.00</td><td>-30.83</td><td>63.36</td><td>35.78</td><td>8.88</td><td>64.85</td><td>---</td><td>---</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	43.17	74.00	-30.83	63.36	35.78	8.88	64.85	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	4824.00	42.50	74.00	-31.50	62.69	35.78	8.88	64.85	---	---	Peak																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	4824.00	43.17	74.00	-30.83	63.36	35.78	8.88	64.85	---	---	Peak																																																																																		



Mode	17																																																																																																																																
	Harmonic																																																																																																																																
	2400-2483.5_802.11n HT20_CH06_2437MHz																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																										
Peak Avg	Level (dBuV/m) Date: 2024-06-25 <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>43.52</td><td>74.00</td><td>-30.48</td><td>63.77</td><td>35.90</td><td>8.72</td><td>64.87</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>45.38</td><td>74.00</td><td>-28.62</td><td>63.18</td><td>36.88</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4874.00	43.52	74.00	-30.48	63.77	35.90	8.72	64.87	---	---	Peak	2	7311.00	45.38	74.00	-28.62	63.18	36.88	10.18	64.86	---	---	Peak	Level (dBuV/m) Date: 2024-06-25 <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>43.10</td><td>74.00</td><td>-30.90</td><td>63.35</td><td>35.90</td><td>8.72</td><td>64.87</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>44.96</td><td>74.00</td><td>-29.04</td><td>62.76</td><td>36.88</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4874.00	43.10	74.00	-30.90	63.35	35.90	8.72	64.87	---	---	Peak	2	7311.00	44.96	74.00	-29.04	62.76	36.88	10.18	64.86	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	4874.00	43.52	74.00	-30.48	63.77	35.90	8.72	64.87	---	---	Peak																																																																																																																						
2	7311.00	45.38	74.00	-28.62	63.18	36.88	10.18	64.86	---	---	Peak																																																																																																																						
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	4874.00	43.10	74.00	-30.90	63.35	35.90	8.72	64.87	---	---	Peak																																																																																																																						
2	7311.00	44.96	74.00	-29.04	62.76	36.88	10.18	64.86	---	---	Peak																																																																																																																						



Mode	18																																																																									
	Band Edge																																																																									
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2024-06-24 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.62</td><td>46.23</td><td>74.00</td><td>-27.77</td><td>43.66</td><td>30.70</td><td>5.46</td><td>33.59</td><td>100 297 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 2483.62	46.23	74.00	-27.77	43.66	30.70	5.46	33.59	100 297 PEAK	Level (dBuV/m) Date: 2024-06-24 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2462.00</td><td>92.31</td><td>-----</td><td>-----</td><td>89.74</td><td>30.71</td><td>5.44</td><td>33.58</td><td>100 297 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 2462.00	92.31	-----	-----	89.74	30.71	5.44	33.58	100 297 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																		
1 2483.62	46.23	74.00	-27.77	43.66	30.70	5.46	33.59	100 297 PEAK																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																		
1 2462.00	92.31	-----	-----	89.74	30.71	5.44	33.58	100 297 PEAK																																																																		
Avg	Level (dBuV/m) Date: 2024-06-24 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.70</td><td>36.05</td><td>54.00</td><td>-17.95</td><td>33.48</td><td>30.70</td><td>5.46</td><td>33.59</td><td>100 297 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 2483.70	36.05	54.00	-17.95	33.48	30.70	5.46	33.59	100 297 AVERAGE	Level (dBuV/m) Date: 2024-06-24 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2462.00</td><td>84.98</td><td>-----</td><td>-----</td><td>82.42</td><td>30.71</td><td>5.43</td><td>33.58</td><td>100 297 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 2462.00	84.98	-----	-----	82.42	30.71	5.43	33.58	100 297 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																		
1 2483.70	36.05	54.00	-17.95	33.48	30.70	5.46	33.59	100 297 AVERAGE																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																		
1 2462.00	84.98	-----	-----	82.42	30.71	5.43	33.58	100 297 AVERAGE																																																																		



Mode	18																																																																													
	Band Edge																																																																													
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																													
Pol.	Vertical	Fundamental																																																																												
Peak	Level (dBuV/m) Date: 2024-06-24 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2462 2469.6 2477.2 2484.8 2492.4 2500 Frequency (MHz) PEAK_BE_74 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.51</td><td>54.10</td><td>74.00</td><td>-19.90</td><td>51.53</td><td>30.70</td><td>5.46</td><td>33.59</td><td>203</td><td>296 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2483.51	54.10	74.00	-19.90	51.53	30.70	5.46	33.59	203	296 PEAK	Level (dBuV/m) Date: 2024-06-24 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) PEAK_74 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2462.00</td><td>101.37</td><td>-----</td><td>-----</td><td>98.80</td><td>30.71</td><td>5.44</td><td>33.58</td><td>203</td><td>296 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2462.00	101.37	-----	-----	98.80	30.71	5.44	33.58	203	296 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2483.51	54.10	74.00	-19.90	51.53	30.70	5.46	33.59	203	296 PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2462.00	101.37	-----	-----	98.80	30.71	5.44	33.58	203	296 PEAK																																																																					
Avg	Level (dBuV/m) Date: 2024-06-24 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2462 2469.6 2477.2 2484.8 2492.4 2500 Frequency (MHz) AVG_BE_54 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.51</td><td>43.08</td><td>54.00</td><td>-10.92</td><td>40.51</td><td>30.70</td><td>5.46</td><td>33.59</td><td>203</td><td>296 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2483.51	43.08	54.00	-10.92	40.51	30.70	5.46	33.59	203	296 AVERAGE	Level (dBuV/m) Date: 2024-06-24 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) AVG_54 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2462.00</td><td>93.93</td><td>-----</td><td>-----</td><td>91.36</td><td>30.71</td><td>5.44</td><td>33.58</td><td>203</td><td>296 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2462.00	93.93	-----	-----	91.36	30.71	5.44	33.58	203	296 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2483.51	43.08	54.00	-10.92	40.51	30.70	5.46	33.59	203	296 AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2462.00	93.93	-----	-----	91.36	30.71	5.44	33.58	203	296 AVERAGE																																																																					



Mode	18																																																																																																																																
	Harmonic																																																																																																																																
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																										
Peak Avg	Level (dBuV/m) Date: 2024-06-25 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4924.00</td><td>42.78</td><td>74.00</td><td>-31.22</td><td>63.08</td><td>36.02</td><td>8.57</td><td>64.89</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>44.76</td><td>74.00</td><td>-29.24</td><td>62.59</td><td>36.85</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4924.00	42.78	74.00	-31.22	63.08	36.02	8.57	64.89	---	---	Peak	2	7386.00	44.76	74.00	-29.24	62.59	36.85	10.18	64.86	---	---	Peak	Level (dBuV/m) Date: 2024-06-25 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4924.00</td><td>41.68</td><td>74.00</td><td>-32.32</td><td>61.98</td><td>36.02</td><td>8.57</td><td>64.89</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>44.51</td><td>74.00</td><td>-29.49</td><td>62.34</td><td>36.85</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4924.00	41.68	74.00	-32.32	61.98	36.02	8.57	64.89	---	---	Peak	2	7386.00	44.51	74.00	-29.49	62.34	36.85	10.18	64.86	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	4924.00	42.78	74.00	-31.22	63.08	36.02	8.57	64.89	---	---	Peak																																																																																																																						
2	7386.00	44.76	74.00	-29.24	62.59	36.85	10.18	64.86	---	---	Peak																																																																																																																						
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	4924.00	41.68	74.00	-32.32	61.98	36.02	8.57	64.89	---	---	Peak																																																																																																																						
2	7386.00	44.51	74.00	-29.49	62.34	36.85	10.18	64.86	---	---	Peak																																																																																																																						



Mode	19	
	Band Edge - L	
	2400-2483.5_802.11n HT40_CH03_2422MHz	
Pol.	Horizontal	Fundamental
Peak	Level (dBuV/m) Date: 2024-06-25 1 2389.86 46.07 74.00 -27.93 43.52 30.72 5.36 33.53 100 299 PEAK	Level (dBuV/m) Date: 2024-06-25 1 2422.00 90.84 ----- 88.28 30.72 5.39 33.55 100 299 PEAK
Avg	Level (dBuV/m) Date: 2024-06-25 1 2389.97 37.64 54.00 -16.36 35.09 30.72 5.36 33.53 100 299 AVERAGE	Level (dBuV/m) Date: 2024-06-25 1 2422.00 83.87 ----- 81.33 30.71 5.39 33.56 100 299 AVERAGE





Mode	19																																											
	Band Edge - R																																											
	2400-2483.5_802.11n HT40_CH03_2422MHz																																											
Pol.	Horizontal	Fundamental																																										
Peak	Level (dBuV/m) Date: 2024-06-25 PEAK_BE_74 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2485.41</td><td>44.98</td><td>74.00</td><td>-29.02</td><td>42.41</td><td>30.70</td><td>5.46</td><td>33.59</td><td>100</td><td>299</td><td>PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2485.41	44.98	74.00	-29.02	42.41	30.70	5.46	33.59	100	299	PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																			
1	2485.41	44.98	74.00	-29.02	42.41	30.70	5.46	33.59	100	299	PEAK																																	
Avg	Level (dBuV/m) Date: 2024-06-25 AVG_BE_54 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.54</td><td>35.22</td><td>54.00</td><td>-18.78</td><td>32.65</td><td>30.70</td><td>5.46</td><td>33.59</td><td>100</td><td>299</td><td>AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2483.54	35.22	54.00	-18.78	32.65	30.70	5.46	33.59	100	299	AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																			
1	2483.54	35.22	54.00	-18.78	32.65	30.70	5.46	33.59	100	299	AVERAGE																																	



Mode	19	
	Band Edge - L	
	2400-2483.5_802.11n_HT40_CH03_2422MHz	
Pol.	Vertical	Fundamental
Peak	Level (dBuV/m) Date: 2024-06-25 1 2389.41 50.39 74.00 -23.61 47.84 30.72 5.36 33.53 100 125 PEAK	Level (dBuV/m) Date: 2024-06-25 1 2422.00 94.41 ----- 91.87 30.71 5.39 33.56 100 125 PEAK
	Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark MHz dBuV/m dBuV/m dB dB dB cm deg 1 2389.41 50.39 74.00 -23.61 47.84 30.72 5.36 33.53 100 125 PEAK	Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark MHz dBuV/m dBuV/m dB dB dB cm deg 1 2422.00 94.41 ----- 91.87 30.71 5.39 33.56 100 125 PEAK
Avg	Level (dBuV/m) Date: 2024-06-25 1 2389.97 41.95 54.00 -12.05 39.40 30.72 5.36 33.53 100 125 AVERAGE	Level (dBuV/m) Date: 2024-06-25 1 2422.00 87.57 ----- 85.03 30.71 5.39 33.56 100 125 AVERAGE
	Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark MHz dBuV/m dBuV/m dB dB dB cm deg 1 2389.97 41.95 54.00 -12.05 39.40 30.72 5.36 33.53 100 125 AVERAGE	Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark MHz dBuV/m dBuV/m dB dB dB cm deg 1 2422.00 87.57 ----- 85.03 30.71 5.39 33.56 100 125 AVERAGE

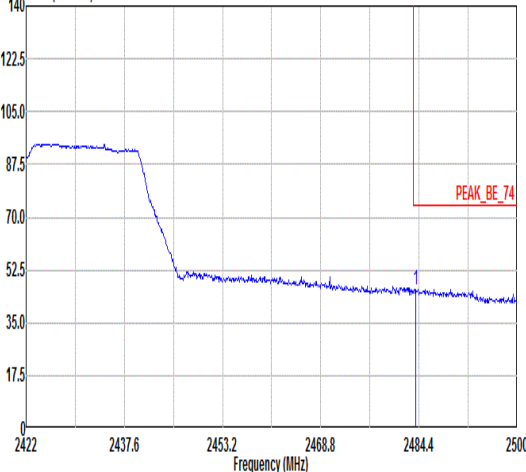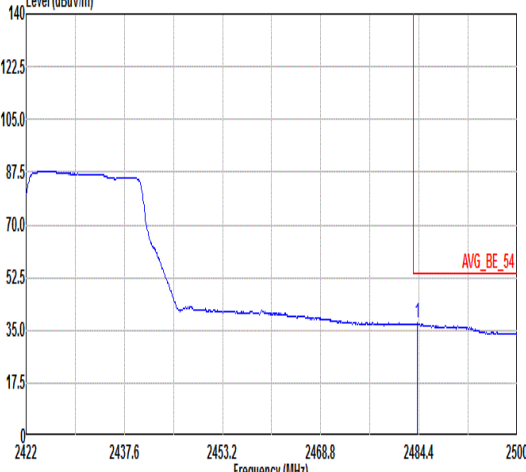

Mode	19																																																																	
	Band Edge - R																																																																	
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																																	
Pol.	Vertical							Fundamental																																																										
Peak	Level (dBuV/m) Date: 2024-06-25  PEAK_BE_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th><th></th></tr><tr><td>1</td><td>2483.93</td><td>46.19</td><td>74.00</td><td>-27.81</td><td>43.62</td><td>30.70</td><td>5.46</td><td>33.59</td><td>100</td><td>125</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>PEAK</td></tr></table>								Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		cm	deg	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB				1	2483.93	46.19	74.00	-27.81	43.62	30.70	5.46	33.59	100	125											PEAK	Blank			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		cm	deg																																																								
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																																																											
1	2483.93	46.19	74.00	-27.81	43.62	30.70	5.46	33.59	100	125																																																								
										PEAK																																																								
Avg	Level (dBuV/m) Date: 2024-06-25  AVG_BE_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th><th></th></tr><tr><td>1</td><td>2484.17</td><td>37.26</td><td>54.00</td><td>-16.74</td><td>34.69</td><td>30.70</td><td>5.46</td><td>33.59</td><td>100</td><td>125</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>AVERAGE</td></tr></table>								Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		cm	deg	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB				1	2484.17	37.26	54.00	-16.74	34.69	30.70	5.46	33.59	100	125											AVERAGE	Blank			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		cm	deg																																																								
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																																																											
1	2484.17	37.26	54.00	-16.74	34.69	30.70	5.46	33.59	100	125																																																								
										AVERAGE																																																								



Mode	19																																																																																																																							
	Harmonic																																																																																																																							
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																						
Peak Avg	Level (dBuV/m) Date: 2024-06-25 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4844.00</td><td>43.05</td><td>74.00</td><td>-30.95</td><td>63.27</td><td>35.83</td><td>8.81</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7266.00</td><td>44.30</td><td>74.00</td><td>-29.70</td><td>62.09</td><td>36.89</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table>			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4844.00	43.05	74.00	-30.95	63.27	35.83	8.81	64.86	---	---	Peak	2	7266.00	44.30	74.00	-29.70	62.09	36.89	10.18	64.86	---	---	Peak	Level (dBuV/m) Date: 2024-06-25 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4844.00</td><td>42.01</td><td>74.00</td><td>-31.99</td><td>62.23</td><td>35.83</td><td>8.81</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7266.00</td><td>45.50</td><td>74.00</td><td>-28.50</td><td>63.29</td><td>36.89</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table>			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4844.00	42.01	74.00	-31.99	62.23	35.83	8.81	64.86	---	---	Peak	2	7266.00	45.50	74.00	-28.50	63.29	36.89	10.18	64.86	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	4844.00	43.05	74.00	-30.95	63.27	35.83	8.81	64.86	---	---	Peak																																																																																																													
2	7266.00	44.30	74.00	-29.70	62.09	36.89	10.18	64.86	---	---	Peak																																																																																																													
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	4844.00	42.01	74.00	-31.99	62.23	35.83	8.81	64.86	---	---	Peak																																																																																																													
2	7266.00	45.50	74.00	-28.50	63.29	36.89	10.18	64.86	---	---	Peak																																																																																																													



Mode	20																																																																																																																																	
	Harmonic																																																																																																																																	
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg	Level (dBuV/m) Date: 2024-06-25 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>42.30</td><td>74.00</td><td>-31.70</td><td>62.55</td><td>35.90</td><td>8.72</td><td>64.87</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>45.20</td><td>74.00</td><td>-28.80</td><td>63.00</td><td>36.88</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4874.00	42.30	74.00	-31.70	62.55	35.90	8.72	64.87	---	---	Peak	2	7311.00	45.20	74.00	-28.80	63.00	36.88	10.18	64.86	---	---	Peak	Level (dBuV/m) Date: 2024-06-25 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>43.08</td><td>74.00</td><td>-30.92</td><td>63.33</td><td>35.90</td><td>8.72</td><td>64.87</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>44.74</td><td>74.00</td><td>-29.26</td><td>62.54</td><td>36.88</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4874.00	43.08	74.00	-30.92	63.33	35.90	8.72	64.87	---	---	Peak	2	7311.00	44.74	74.00	-29.26	62.54	36.88	10.18	64.86	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	4874.00	42.30	74.00	-31.70	62.55	35.90	8.72	64.87	---	---	Peak																																																																																																																							
2	7311.00	45.20	74.00	-28.80	63.00	36.88	10.18	64.86	---	---	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	4874.00	43.08	74.00	-30.92	63.33	35.90	8.72	64.87	---	---	Peak																																																																																																																							
2	7311.00	44.74	74.00	-29.26	62.54	36.88	10.18	64.86	---	---	Peak																																																																																																																							



Mode	21																																	
	Band Edge - L																																	
	2400-2483.5_802.11n HT40_CH09_2452MHz																																	
Pol.	Horizontal	Fundamental																																
Peak	Level (dBuV/m) Date: 2024-06-25 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2361.97</td><td>46.08</td><td>74.00</td><td>-27.92</td><td>43.53</td><td>30.73</td><td>5.34</td><td>33.52 135 303 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dB	dB	cm	deg	Remark	1 2361.97	46.08	74.00	-27.92	43.53	30.73	5.34	33.52 135 303 PEAK	Level (dBuV/m) Date: 2024-06-25 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2452.00</td><td>89.73</td><td>-----</td><td>-----</td><td>87.16</td><td>30.71</td><td>5.43</td><td>33.57 135 303 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dB	dB	cm	deg	Remark	1 2452.00	89.73	-----	-----	87.16	30.71	5.43	33.57 135 303 PEAK
	MHz	dBuV/m	dBuV/m	dB	dB	cm	deg	Remark																										
1 2361.97	46.08	74.00	-27.92	43.53	30.73	5.34	33.52 135 303 PEAK																											
MHz	dBuV/m	dBuV/m	dB	dB	cm	deg	Remark																											
1 2452.00	89.73	-----	-----	87.16	30.71	5.43	33.57 135 303 PEAK																											
Avg	Level (dBuV/m) Date: 2024-06-25 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2388.53</td><td>35.09</td><td>54.00</td><td>-18.91</td><td>32.54</td><td>30.72</td><td>5.36</td><td>33.53 135 303 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dB	dB	cm	deg	Remark	1 2388.53	35.09	54.00	-18.91	32.54	30.72	5.36	33.53 135 303 AVERAGE	Level (dBuV/m) Date: 2024-06-25 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2452.00</td><td>82.83</td><td>-----</td><td>-----</td><td>80.26</td><td>30.71</td><td>5.43</td><td>33.57 135 303 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dB	dB	cm	deg	Remark	1 2452.00	82.83	-----	-----	80.26	30.71	5.43	33.57 135 303 AVERAGE
MHz	dBuV/m	dBuV/m	dB	dB	cm	deg	Remark																											
1 2388.53	35.09	54.00	-18.91	32.54	30.72	5.36	33.53 135 303 AVERAGE																											
MHz	dBuV/m	dBuV/m	dB	dB	cm	deg	Remark																											
1 2452.00	82.83	-----	-----	80.26	30.71	5.43	33.57 135 303 AVERAGE																											



Mode	21																																																		
	Band Edge - R																																																		
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																		
Pol.	Horizontal							Fundamental																																											
Peak	Level (dBuV/m) Date: 2024-06-25 PEAK_BE_74 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.58</td><td>47.34</td><td>74.00</td><td>-26.66</td><td>44.77</td><td>30.70</td><td>5.46</td><td>33.59</td><td>135</td><td>303</td><td>PEAK</td></tr></tbody></table>								Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2483.58	47.34	74.00	-26.66	44.77	30.70	5.46	33.59	135	303	PEAK	Blank			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																										
1	2483.58	47.34	74.00	-26.66	44.77	30.70	5.46	33.59	135	303	PEAK																																								
Avg	Level (dBuV/m) Date: 2024-06-25 AVG_BE_54 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.87</td><td>37.77</td><td>54.00</td><td>-16.23</td><td>35.20</td><td>30.70</td><td>5.46</td><td>33.59</td><td>135</td><td>303</td><td>AVERAGE</td></tr></tbody></table>								Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2483.87	37.77	54.00	-16.23	35.20	30.70	5.46	33.59	135	303	AVERAGE	Blank			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																										
1	2483.87	37.77	54.00	-16.23	35.20	30.70	5.46	33.59	135	303	AVERAGE																																								



Mode	21																																									
	Band Edge - L																																									
	2400-2483.5_802.11n HT40_CH09_2452MHz																																									
Pol.	Vertical	Fundamental																																								
Peak	Level (dBuV/m) Date: 2024-06-25 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2388.81</td><td>45.36</td><td>74.00</td><td>-28.64</td><td>42.81</td><td>30.72</td><td>5.36</td><td>33.53</td><td>200</td><td>301 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2388.81	45.36	74.00	-28.64	42.81	30.72	5.36	33.53	200	301 PEAK	Level (dBuV/m) Date: 2024-06-25 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2452.00</td><td>95.43</td><td>-----</td><td>-----</td><td>92.86</td><td>30.71</td><td>5.43</td><td>33.57</td><td>200</td><td>301 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2452.00	95.43	-----	-----	92.86	30.71	5.43	33.57	200	301 PEAK
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																
1 2388.81	45.36	74.00	-28.64	42.81	30.72	5.36	33.53	200	301 PEAK																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2452.00	95.43	-----	-----	92.86	30.71	5.43	33.57	200	301 PEAK																																	
Avg	Level (dBuV/m) Date: 2024-06-25 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2388.81</td><td>36.02</td><td>54.00</td><td>-17.98</td><td>33.47</td><td>30.72</td><td>5.36</td><td>33.53</td><td>200</td><td>301 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2388.81	36.02	54.00	-17.98	33.47	30.72	5.36	33.53	200	301 AVERAGE	Level (dBuV/m) Date: 2024-06-25 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2452.00</td><td>88.47</td><td>-----</td><td>-----</td><td>85.90</td><td>30.71</td><td>5.43</td><td>33.57</td><td>200</td><td>301 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2452.00	88.47	-----	-----	85.90	30.71	5.43	33.57	200	301 AVERAGE
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2388.81	36.02	54.00	-17.98	33.47	30.72	5.36	33.53	200	301 AVERAGE																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2452.00	88.47	-----	-----	85.90	30.71	5.43	33.57	200	301 AVERAGE																																	



Mode	21																																									
	Band Edge - R																																									
	2400-2483.5_802.11n HT40_CH09_2452MHz																																									
Pol.	Vertical	Fundamental																																								
Peak	Date: 2024-06-25 PEAK_BE_74 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.54</td><td>51.67</td><td>74.00</td><td>-22.33</td><td>49.10</td><td>30.70</td><td>5.46</td><td>33.59</td><td>200</td><td>301</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2483.54	51.67	74.00	-22.33	49.10	30.70	5.46	33.59	200	301	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																	
1	2483.54	51.67	74.00	-22.33	49.10	30.70	5.46	33.59	200	301	PEAK																															
Avg	Date: 2024-06-25 AVG_BE_54 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.63</td><td>42.24</td><td>54.00</td><td>-11.76</td><td>39.67</td><td>30.70</td><td>5.46</td><td>33.59</td><td>200</td><td>301</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2483.63	42.24	54.00	-11.76	39.67	30.70	5.46	33.59	200	301	AVERAGE	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																	
1	2483.63	42.24	54.00	-11.76	39.67	30.70	5.46	33.59	200	301	AVERAGE																															



Mode	21																																																																																																																					
	Harmonic																																																																																																																					
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																				
Peak Avg	Level (dBuV/m) Date: 2024-06-25 Frequency (MHz) <table><thead><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4904.00</td><td>43.64</td><td>74.00</td><td>-30.36</td><td>63.92</td><td>35.97</td><td>8.63</td><td>64.88</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7356.00</td><td>44.21</td><td>74.00</td><td>-29.79</td><td>62.03</td><td>36.86</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4904.00	43.64	74.00	-30.36	63.92	35.97	8.63	64.88	---	---	Peak	2	7356.00	44.21	74.00	-29.79	62.03	36.86	10.18	64.86	---	---	Peak	Level (dBuV/m) Date: 2024-06-25 Frequency (MHz) <table><thead><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4904.00</td><td>43.82</td><td>74.00</td><td>-30.18</td><td>64.10</td><td>35.97</td><td>8.63</td><td>64.88</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7356.00</td><td>44.05</td><td>74.00</td><td>-29.95</td><td>61.87</td><td>36.86</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4904.00	43.82	74.00	-30.18	64.10	35.97	8.63	64.88	---	---	Peak	2	7356.00	44.05	74.00	-29.95	61.87	36.86	10.18	64.86	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	4904.00	43.64	74.00	-30.36	63.92	35.97	8.63	64.88	---	---	Peak																																																																																																											
2	7356.00	44.21	74.00	-29.79	62.03	36.86	10.18	64.86	---	---	Peak																																																																																																											
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	4904.00	43.82	74.00	-30.18	64.10	35.97	8.63	64.88	---	---	Peak																																																																																																											
2	7356.00	44.05	74.00	-29.95	61.87	36.86	10.18	64.86	---	---	Peak																																																																																																											




Mode	22																																																																																																																																																																																																									
	LF																																																																																																																																																																																																									
	2400-2483.5_802.11g-LF_CH11_2462MHz																																																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																																																								
Peak	Level (dBuV/m) Date: 2024-06-24 FCC CLASS-B 6dB Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>30.97</td><td>24.00</td><td>40.00</td><td>-16.00</td><td>30.38</td><td>24.70</td><td>0.54</td><td>31.62</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>167.74</td><td>24.78</td><td>43.50</td><td>-18.72</td><td>39.22</td><td>15.90</td><td>1.32</td><td>31.66</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>308.39</td><td>33.73</td><td>46.00</td><td>-12.27</td><td>43.98</td><td>19.40</td><td>1.83</td><td>31.48</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>369.50</td><td>38.29</td><td>46.00</td><td>-7.71</td><td>46.90</td><td>20.80</td><td>2.03</td><td>31.44</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>422.85</td><td>42.60</td><td>46.00</td><td>-3.40</td><td>49.15</td><td>22.80</td><td>2.15</td><td>31.50</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>466.50</td><td>38.85</td><td>46.00</td><td>-7.15</td><td>44.65</td><td>23.43</td><td>2.24</td><td>31.47</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	30.97	24.00	40.00	-16.00	30.38	24.70	0.54	31.62	---	---	Peak	2	167.74	24.78	43.50	-18.72	39.22	15.90	1.32	31.66	---	---	Peak	3	308.39	33.73	46.00	-12.27	43.98	19.40	1.83	31.48	---	---	Peak	4	369.50	38.29	46.00	-7.71	46.90	20.80	2.03	31.44	---	---	Peak	5	422.85	42.60	46.00	-3.40	49.15	22.80	2.15	31.50	---	---	Peak	6	466.50	38.85	46.00	-7.15	44.65	23.43	2.24	31.47	---	---	Peak	Level (dBuV/m) Date: 2024-06-24 FCC CLASS-B 6dB Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>32.91</td><td>30.76</td><td>40.00</td><td>-9.24</td><td>38.27</td><td>23.60</td><td>0.55</td><td>31.66</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>369.50</td><td>33.72</td><td>46.00</td><td>-12.28</td><td>42.33</td><td>20.80</td><td>2.03</td><td>31.44</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>425.76</td><td>35.38</td><td>46.00</td><td>-10.62</td><td>41.93</td><td>22.80</td><td>2.15</td><td>31.50</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>470.38</td><td>31.73</td><td>46.00</td><td>-14.27</td><td>37.44</td><td>23.50</td><td>2.25</td><td>31.46</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>556.71</td><td>29.18</td><td>46.00</td><td>-16.82</td><td>31.58</td><td>26.32</td><td>2.47</td><td>31.19</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>949.56</td><td>33.42</td><td>46.00</td><td>-12.58</td><td>30.19</td><td>30.80</td><td>3.23</td><td>30.80</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	32.91	30.76	40.00	-9.24	38.27	23.60	0.55	31.66	---	---	Peak	2	369.50	33.72	46.00	-12.28	42.33	20.80	2.03	31.44	---	---	Peak	3	425.76	35.38	46.00	-10.62	41.93	22.80	2.15	31.50	---	---	Peak	4	470.38	31.73	46.00	-14.27	37.44	23.50	2.25	31.46	---	---	Peak	5	556.71	29.18	46.00	-16.82	31.58	26.32	2.47	31.19	---	---	Peak	6	949.56	33.42	46.00	-12.58	30.19	30.80	3.23	30.80	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																	
1	30.97	24.00	40.00	-16.00	30.38	24.70	0.54	31.62	---	---	Peak																																																																																																																																																																																															
2	167.74	24.78	43.50	-18.72	39.22	15.90	1.32	31.66	---	---	Peak																																																																																																																																																																																															
3	308.39	33.73	46.00	-12.27	43.98	19.40	1.83	31.48	---	---	Peak																																																																																																																																																																																															
4	369.50	38.29	46.00	-7.71	46.90	20.80	2.03	31.44	---	---	Peak																																																																																																																																																																																															
5	422.85	42.60	46.00	-3.40	49.15	22.80	2.15	31.50	---	---	Peak																																																																																																																																																																																															
6	466.50	38.85	46.00	-7.15	44.65	23.43	2.24	31.47	---	---	Peak																																																																																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																	
1	32.91	30.76	40.00	-9.24	38.27	23.60	0.55	31.66	---	---	Peak																																																																																																																																																																																															
2	369.50	33.72	46.00	-12.28	42.33	20.80	2.03	31.44	---	---	Peak																																																																																																																																																																																															
3	425.76	35.38	46.00	-10.62	41.93	22.80	2.15	31.50	---	---	Peak																																																																																																																																																																																															
4	470.38	31.73	46.00	-14.27	37.44	23.50	2.25	31.46	---	---	Peak																																																																																																																																																																																															
5	556.71	29.18	46.00	-16.82	31.58	26.32	2.47	31.19	---	---	Peak																																																																																																																																																																																															
6	949.56	33.42	46.00	-12.58	30.19	30.80	3.23	30.80	---	---	Peak																																																																																																																																																																																															

Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	98.65	-	-	10Hz
802.11g	98.10	-	-	10Hz
802.11n HT20	97.97	1.930	0.518	1kHz
802.11n HT40	94.00	0.940	1.064	3kHz

802.11b

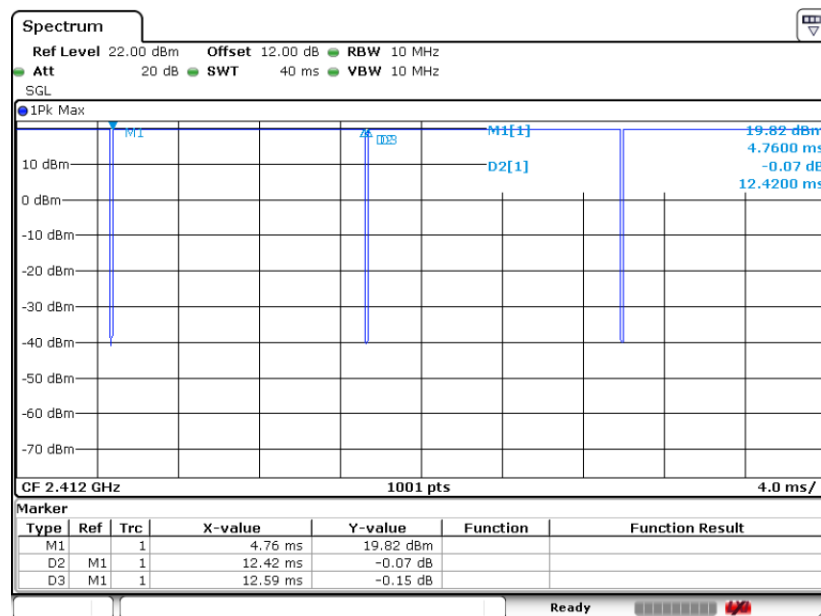




802.11g

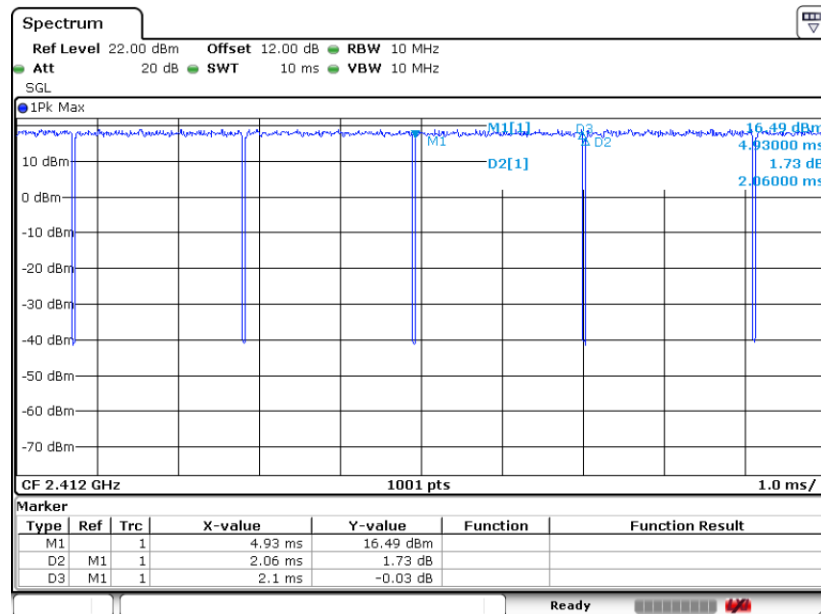

802.11n HT20

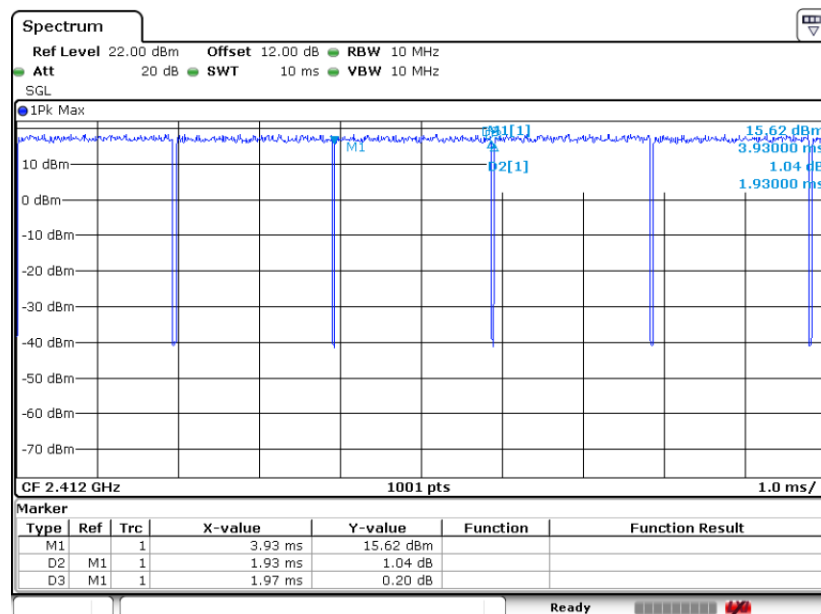

802.11n HT40

