



REPORT No. : SZ14120206W01

# FCC RF TEST REPORT

**APPLICANT** : Lautsprecher Teufel GmbH  
**PRODUCT NAME** : WiFi Module  
**MODEL NAME** : WL-UM01EBS-5572  
**TRADE NAME** : N.A  
**BRAND NAME** : Teufel  
**FCC ID** : 2ADQS-RF001  
**STANDARD(S)** : 47 CFR Part 15 Subpart C  
**ISSUE DATE** : 2015-03-05



**SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.**

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

**MORLAB GROUP**

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,  
Block67, BaoAn District, ShenZhen , Guangdong Province, P. R. China

Tel: 86-755-36698555  
Http://www.morlab.com

Fax: 86-755-36698525  
E-mail: service@morlab.cn



## DIRECTORY

|                                                |          |
|------------------------------------------------|----------|
| <b>TEST REPORT DECLARATION</b>                 | <b>4</b> |
| <b>1. TECHNICAL INFORMATION</b>                | <b>5</b> |
| 1.1 EQUIPMENT UNDER TEST (EUT) DESCRIPTION     | 5        |
| 1.2 IDENTIFICATION OF ALL USED EUTS            | 6        |
| 1.3 TEST STANDARDS AND RESULTS                 | 6        |
| 1.4 TEST ENVIRONMENT CONDITIONS                | 6        |
| <b>2. 47 CFR PART 15C REQUIREMENTS</b>         | <b>7</b> |
| 2.1 ANTENNA REQUIREMENT                        | 7        |
| 2.1.1 APPLICABLE STANDARD                      | 7        |
| 2.1.2 RESULT: COMPLIANT                        | 7        |
| 2.2 PEAK OUTPUT POWER                          | 7        |
| 2.2.1 REQUIREMENT                              | 7        |
| 2.2.2 TEST DESCRIPTION                         | 7        |
| 2.2.3 TEST RESULT                              | 8        |
| 2.3 BANDWIDTH                                  | 10       |
| 2.3.1 REQUIREMENT                              | 10       |
| 2.3.2 TEST DESCRIPTION                         | 10       |
| 2.3.3 TEST RESULT                              | 10       |
| 2.4 CONDUCTED SPURIOUS EMISSIONS AND BAND EDGE | 19       |
| 2.4.1 REQUIREMENT                              | 19       |
| 2.4.2 TEST DESCRIPTION                         | 19       |
| 2.4.3 TEST RESULT                              | 19       |
| 2.5 POWER SPECTRAL DENSITY (PSD)               | 32       |
| 2.5.1 REQUIREMENT                              | 32       |
| 2.5.2 TEST DESCRIPTION                         | 32       |
| 2.5.3 TEST RESULT                              | 33       |
| 2.6 RESTRICTED FREQUENCY BANDS                 | 46       |
| 2.6.1 REQUIREMENT                              | 46       |
| 2.6.2 TEST DESCRIPTION                         | 46       |
| 2.6.3 TEST RESULT                              | 47       |
| 2.7 CONDUCTED EMISSION                         | 58       |



|                                         |                              |           |
|-----------------------------------------|------------------------------|-----------|
| 2.7.1                                   | REQUIREMENT.....             | 58        |
| 2.7.2                                   | TEST DESCRIPTION .....       | 59        |
| 2.7.3                                   | TEST RESULT.....             | 59        |
| 2.8                                     | RADIATED EMISSION .....      | 61        |
| 2.8.1                                   | REQUIREMENT.....             | 61        |
| 2.8.2                                   | TEST DESCRIPTION .....       | 62        |
| 2.8.3                                   | TEST RESULT.....             | 64        |
| 2.9                                     | RF EXPOSURE EVALUATION ..... | 89        |
| <b>ANNEX A GENERAL INFORMATION.....</b> |                              | <b>91</b> |

| Change History |            |                   |
|----------------|------------|-------------------|
| Issue          | Date       | Reason for change |
| 1.0            | 2015-03-05 | First edition     |
|                |            |                   |





REPORT No. : SZ14120206W01

**TEST REPORT DECLARATION**

|                      |                                                      |
|----------------------|------------------------------------------------------|
| Applicant            | Lautsprecher Teufel GmbH                             |
| Applicant Address    | Budapester Str. 44, 10787 Berlin, Germany            |
| Manufacturer         | RF-LINK INTERNATIONAL LIMITED                        |
| Manufacturer Address | H56A.6F.RD3 BaoTian, XiXiang, BaoAn, ShenZhen, China |
| Product Name         | WiFi Module                                          |
| Model Name           | WL-UM01EBS-5572                                      |
| Brand Name           | Teufel                                               |
| HW Version           | WL-UM01EBS-5572-V1.0                                 |
| SW Version           | 1.0                                                  |
| Test Standards       | 47 CFR Part 15 Subpart C                             |
| Test Date            | 2014-12-31 to 2015-01-14                             |
| Test Result          | PASS                                                 |

Tested by : Shen Senping  
Shen Senping

Reviewed by : Qiu Xiaojun  
Qiu Xiaojun

Approved by : Zeng Dexin  
Zeng Dexin



## 1. TECHNICAL INFORMATION

Note: Provide by applicant.

### 1.1 Equipment under Test (EUT) Description

|                  |                                                                              |
|------------------|------------------------------------------------------------------------------|
| Frequency Range: | 802.11b/g/n-20MHz: 2.412GHz - 2.462GHz<br>802.11n-40MHz: 2.422GHz - 2.452GHz |
| Channel Number:  | 802.11b/g/n-20MHz: 11<br>802.11n-40MHz: 7                                    |
| Modulation Type: | DSSS, OFDM                                                                   |
| Antenna Type:    | Dedicated Antenna                                                            |
| Antenna Gain:    | Ant1:3.72dBi<br>Ant2:3.72dBi                                                 |

#### NOTE:

The EUT is a WiFi Module, it contains WIFI Module operating at 2.4GHz ISM; it supports 802.11b, 802.11g, 802.11n and they are all tested in this report.

For 802.11b/g/n-20MHz (2.4GHz band), the frequencies allocated is  $F \text{ (MHz)} = 2412 + 5 \cdot (n-1)$  ( $1 \leq n \leq 11$ ). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 1 (2412MHz), 6 (2437MHz) and 11 (2462MHz).

For 802.11n-40MHz, the frequencies allocated is  $F \text{ (MHz)} = 2412 + 5 \cdot (n-1)$  ( $3 \leq n \leq 9$ ). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 3 (2422MHz), 6 (2437MHz) and 9 (2452MHz).

The EUT incorporates a 2\*2 MIMO function. Physically, the EUT provides two completed transmitters and two receivers (2T2R) for 2.4GHz band. ANT1 and ANT 2 could transmit/receive simultaneously during 802.11n-20MHz and 802.11n-40MHz mode, the specification of each antenna is the same.

| Operation mode / TX mode | 1TX          | 2TX         |
|--------------------------|--------------|-------------|
| 802.11b                  | ANT1 or ANT2 |             |
| 802.11g                  | ANT1 or ANT2 |             |
| 802.11n(20MHz)           |              | ANT1 & ANT2 |
| 802.11n(40MHz)           |              | ANT1 & ANT2 |

For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.





## 1.2 Identification of all used EUTs

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

| EUT Identity | Hardware Version     | Software Version |
|--------------|----------------------|------------------|
| A01          | WL-UM01EBS-5572-V1.0 | 1.0              |

## 1.3 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

| No. | Identity                            | Document Title          |
|-----|-------------------------------------|-------------------------|
| 1   | 47 CFR Part 15<br>(10-1-13 Edition) | Radio Frequency Devices |

Test detailed items/section required by FCC rules and results are as below:

| No. | Section                 | Description                               | Result      |
|-----|-------------------------|-------------------------------------------|-------------|
| 1   | 15.203                  | Antenna Requirement                       | <u>PASS</u> |
| 2   | 15.247(b)               | Peak Output Power                         | <u>PASS</u> |
| 3   | 15.247(a)               | Bandwidth                                 | <u>PASS</u> |
| 4   | 15.247(d)               | Conducted Spurious Emission and Band Edge | <u>PASS</u> |
| 5   | 15.247(d)               | Restricted Frequency Bands                | <u>PASS</u> |
| 6   | 15.207                  | Conducted Emission                        | <u>PASS</u> |
| 7   | 15.209 ,15.247(d)       | Radiated Emission                         | <u>PASS</u> |
| 8   | 15.247(e)               | Power spectral density (PSD)              | <u>PASS</u> |
| 9   | 15.247(i),1.1307&2.1093 | RF exposure evaluation                    | <u>PASS</u> |

The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.4 2009.

These RF tests were performed according to the method of measurements prescribed in KDB558074 D01 v03r02 (05/06/2014).

## 1.4 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

|                             |         |
|-----------------------------|---------|
| Temperature (°C):           | 15 - 35 |
| Relative Humidity (%):      | 30 -60  |
| Atmospheric Pressure (kPa): | 86-106  |

## 2. 47 CFR PART 15C REQUIREMENTS

### 2.1 Antenna requirement

#### 2.1.1 Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### 2.1.2 Result: Compliant

The maximum gain of antenna was defined by manufacture. The max gain is 3.72dBi. The antenna type is omni-directional antenna with a unique connector and it is need be professionally installed. For more information, please refer to the EUT internal photos.

### 2.2 Peak Output Power

#### 2.2.1 Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

#### 2.2.2 Test Description

KDB 558074 Section 9.1.3 was used in order to prove compliance.

The measured output power was calculated by the reading of the Power Meter and calibration.

#### A. Test Setup:



The EUT (Equipment under the test) which is coupled to the Power Meter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in power meter.

**B. Equipments List:**

Please reference ANNEX A(1.4).

**2.2.3 Test Result**

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

**2.2.3.1 802.11b Test Mode**

| Channel | Frequency (MHz) | Measured Output Peak Power |          | Limit |   | Verdict |
|---------|-----------------|----------------------------|----------|-------|---|---------|
|         |                 | dBm                        | W        | dBm   | W |         |
| 1       | 2412            | 22.26                      | 0.168267 | 30    | 1 | PASS    |
| 6       | 2437            | 22.67                      | 0.184927 |       |   | PASS    |
| 11      | 2462            | 22.68                      | 0.185350 |       |   | PASS    |

**2.2.3.2 802.11g Test mode**

| Channel | Frequency (MHz) | Measured Output Peak Power |          | Limit |   | Verdict |
|---------|-----------------|----------------------------|----------|-------|---|---------|
|         |                 | dBm                        | W        | dBm   | W |         |
| 1       | 2412            | 24.55                      | 0.285102 | 30    | 1 | PASS    |
| 6       | 2437            | 24.62                      | 0.289734 |       |   | PASS    |
| 11      | 2462            | 24.71                      | 0.295801 |       |   | PASS    |

**2.2.3.3 802.11n-20MHz Test mode**

ANT 1:

| Channel | Frequency (MHz) | Measured Output Peak Power |          | Limit |   | Verdict |
|---------|-----------------|----------------------------|----------|-------|---|---------|
|         |                 | dBm                        | W        | dBm   | W |         |
| 1       | 2412            | 24.83                      | 0.304089 | 30    | 1 | PASS    |
| 6       | 2437            | 24.81                      | 0.302691 |       |   | PASS    |
| 11      | 2462            | 24.78                      | 0.300610 |       |   | PASS    |

ANT 2:

| Channel | Frequency (MHz) | Measured Output Peak Power |          | Limit |   | Verdict |
|---------|-----------------|----------------------------|----------|-------|---|---------|
|         |                 | dBm                        | W        | dBm   | W |         |
| 1       | 2412            | 24.16                      | 0.260615 | 30    | 1 | PASS    |
| 6       | 2437            | 24.22                      | 0.264241 |       |   | PASS    |
| 11      | 2462            | 24.24                      | 0.265461 |       |   | PASS    |





Ant1+Ant2:

| Channel | Frequency (MHz) | Measured Output Peak Power |          | Limit |   | Verdict |
|---------|-----------------|----------------------------|----------|-------|---|---------|
|         |                 | dBm                        | W        | dBm   | W |         |
| 1       | 2412            | 27.52                      | 0.564704 | 30    | 1 | PASS    |
| 6       | 2437            | 27.54                      | 0.566932 |       |   | PASS    |
| 11      | 2462            | 27.53                      | 0.566068 |       |   | PASS    |

**2.2.3.4 802.11n-40MHz Test mode**

Ant1:

| Channel | Frequency (MHz) | Measured Output Peak Power |          | Limit |   | Verdict |
|---------|-----------------|----------------------------|----------|-------|---|---------|
|         |                 | dBm                        | W        | dBm   | W |         |
| 3       | 2422            | 23.64                      | 0.231206 | 30    | 1 | PASS    |
| 6       | 2437            | 23.44                      | 0.220800 |       |   | PASS    |
| 9       | 2452            | 23.52                      | 0.224905 |       |   | PASS    |

Ant2:

| Channel | Frequency (MHz) | Measured Output Peak Power |          | Limit |   | Verdict |
|---------|-----------------|----------------------------|----------|-------|---|---------|
|         |                 | dBm                        | W        | dBm   | W |         |
| 3       | 2422            | 24.14                      | 0.259418 | 30    | 1 | PASS    |
| 6       | 2437            | 25.13                      | 0.325837 |       |   | PASS    |
| 9       | 2452            | 24.42                      | 0.276694 |       |   | PASS    |

Ant1+Ant2:

| Channel | Frequency (MHz) | Measured Output Peak Power |          | Limit |   | Verdict |
|---------|-----------------|----------------------------|----------|-------|---|---------|
|         |                 | dBm                        | W        | dBm   | W |         |
| 3       | 2422            | 26.91                      | 0.490624 | 30    | 1 | PASS    |
| 6       | 2437            | 27.38                      | 0.546637 |       |   | PASS    |
| 9       | 2452            | 27.00                      | 0.501600 |       |   | PASS    |

Note: Each antenna port was measured individually, and the aggregated power was summed mathematically.

Remark:

- 1) The MIMO test requirement, RF conducted output power shall measure each transmitter chain. And after obtain each individual transmitter chain power, then sum the output power by using the following formula;

$((\text{dBm}/\text{Chain 1})/10^{\text{Log}}) + ((\text{dBm}/\text{Chain 2})/10^{\text{Log}}) + ((\text{dBm}/\text{Chain N})/10^{\text{Log}}) = \text{Combined peak output power in mW.}$


## 2.3 Bandwidth

### 2.3.1 Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 2.3.2 Test Description

#### A. Test Set:

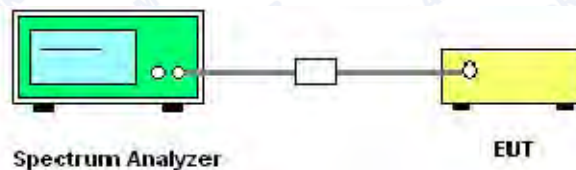

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

KDB 558074 Section 8.1 Option 1 was used in order to prove compliance.

#### B. Equipments List:

Please reference ANNEX A(1.4).

### 2.3.3 Test Result

The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the Module.



### 2.3.3.1 802.11b Test mode

#### A. Test Verdict:


| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Limits(kHz) | Result |
|---------|-----------------|----------------------|-------------|--------|
| 1       | 2412            | 11.10                | ≥500        | PASS   |
| 6       | 2437            | 11.11                | ≥500        | PASS   |
| 11      | 2462            | 12.06                | ≥500        | PASS   |

#### B. Test Plots



(Channel 1: 2412MHz @ 802.11b)



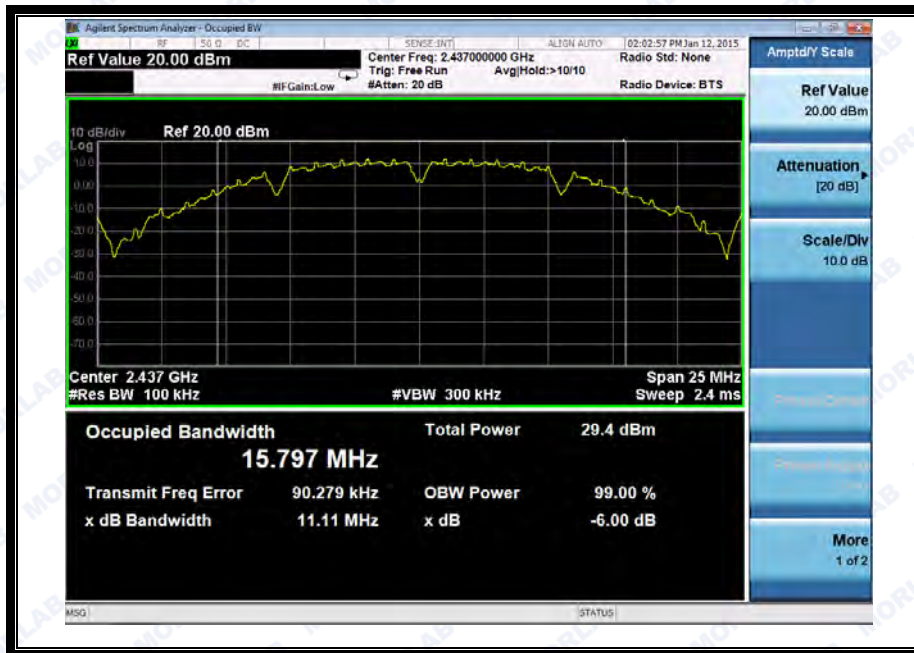

(Channel 6: 2437 MHz @ 802.11b)



(Channel 11: 2462MHz @ 802.11b)

**2.3.3.2 802.11g Test mode****A. Test Verdict:**


| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Limits (kHz) | Result |
|---------|-----------------|----------------------|--------------|--------|
| 1       | 2412            | 16.43                | ≥500         | PASS   |
| 6       | 2437            | 16.45                | ≥500         | PASS   |
| 11      | 2462            | 16.46                | ≥500         | PASS   |

**B. Test Plots:**


(Channel 1: 2412MHz @ 802.11g)



REPORT No. : SZ14120206W01

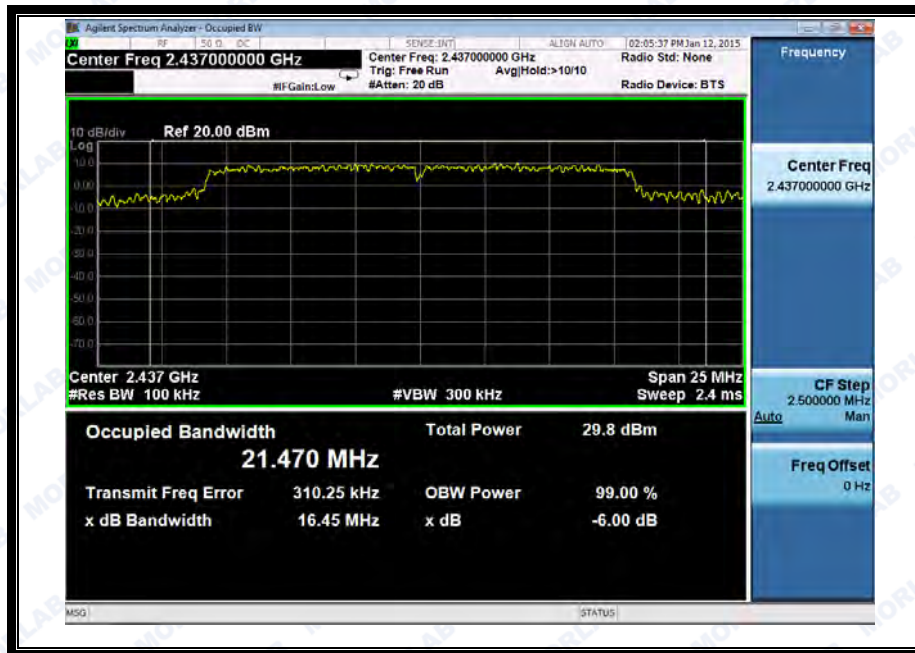

(Channel 6: 2437MHz @ 802.11g)

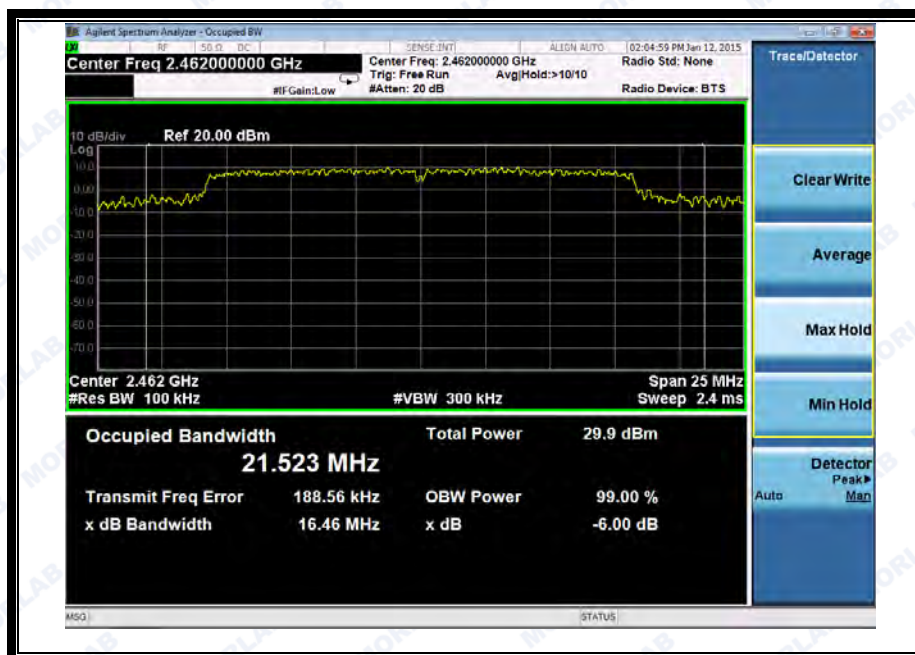


(Channel 11: 2462MHz @ 802.11g)



**2.3.3.3 802.11n-20 Test mode****A. Test Verdict:**


| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Limits (kHz) | Result |
|---------|-----------------|----------------------|--------------|--------|
| 1       | 2412            | 17.65                | ≥500         | PASS   |
| 6       | 2437            | 17.65                | ≥500         | PASS   |
| 11      | 2462            | 17.63                | ≥500         | PASS   |

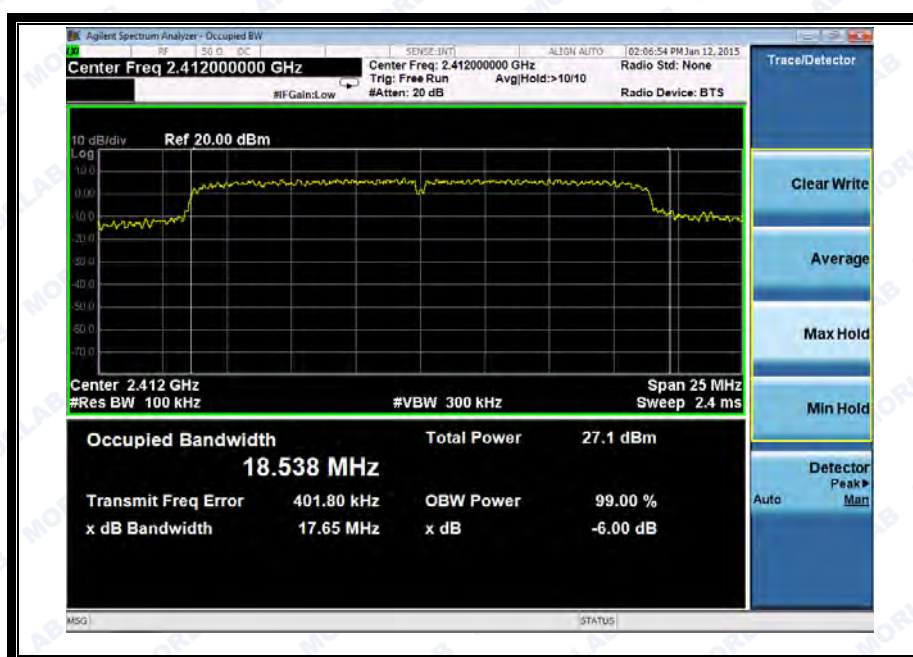**B. Test Plots:**


(Channel 1: 2412MHz @ 802.11n-20)



REPORT No. : SZ14120206W01

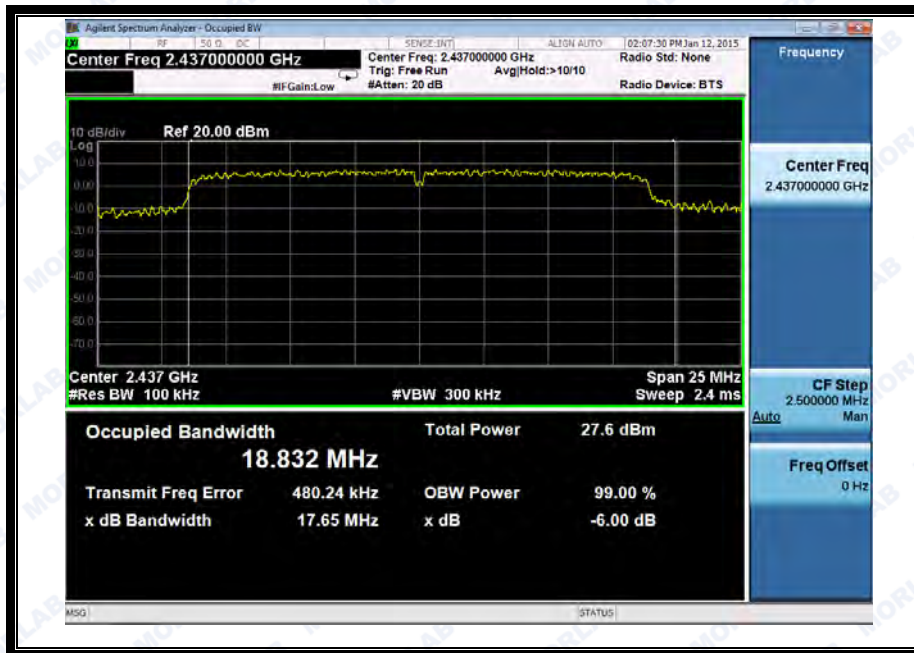


(Channel 6: 2437MHz @ 802.11n-20)

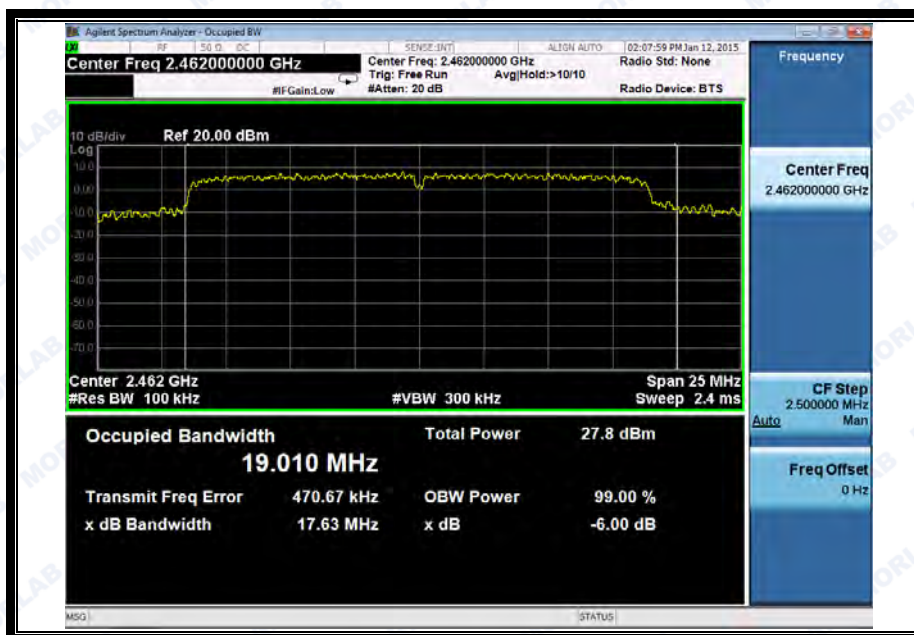

(Channel 11: 2462MHz @ 802.11n-20)


**2.3.3.4 802.11n-40 Test mode****A. Test Verdict:**

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Limits (kHz) | Result |
|---------|-----------------|----------------------|--------------|--------|
| 3       | 2422            | 36.43                | ≥500         | PASS   |
| 6       | 2437            | 36.44                | ≥500         | PASS   |
| 9       | 2452            | 36.42                | ≥500         | PASS   |

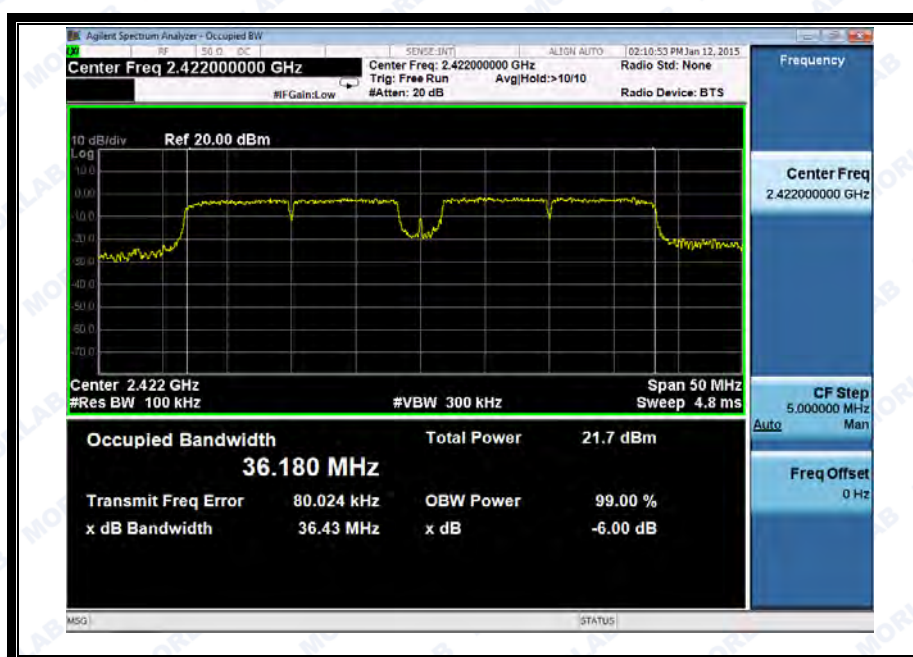
**B. Test Plots:**

(Channel 3: 2422MHz @ 802.11n-40)



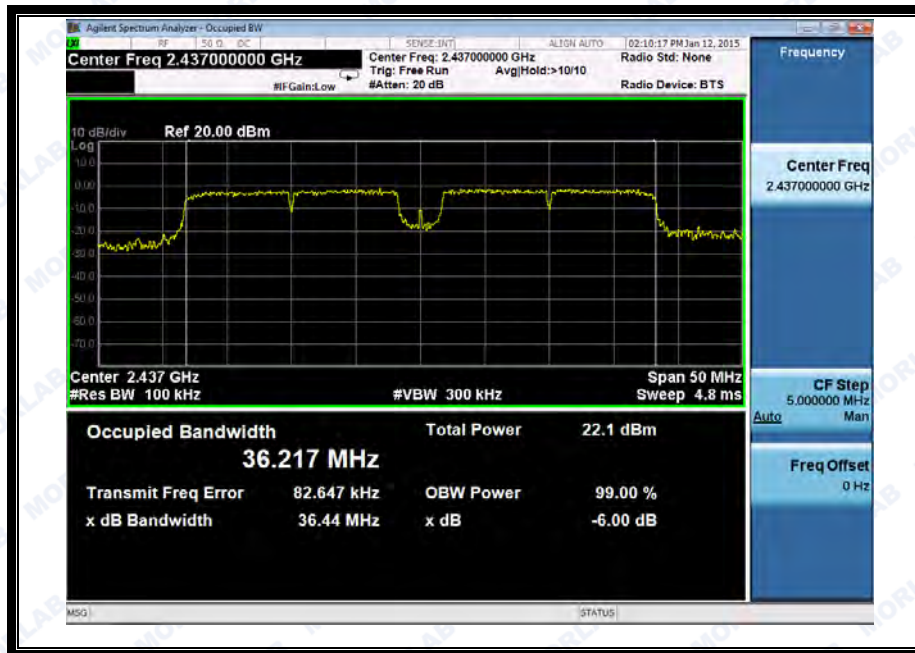

(Channel 6: 2437MHz @ 802.11n-40)

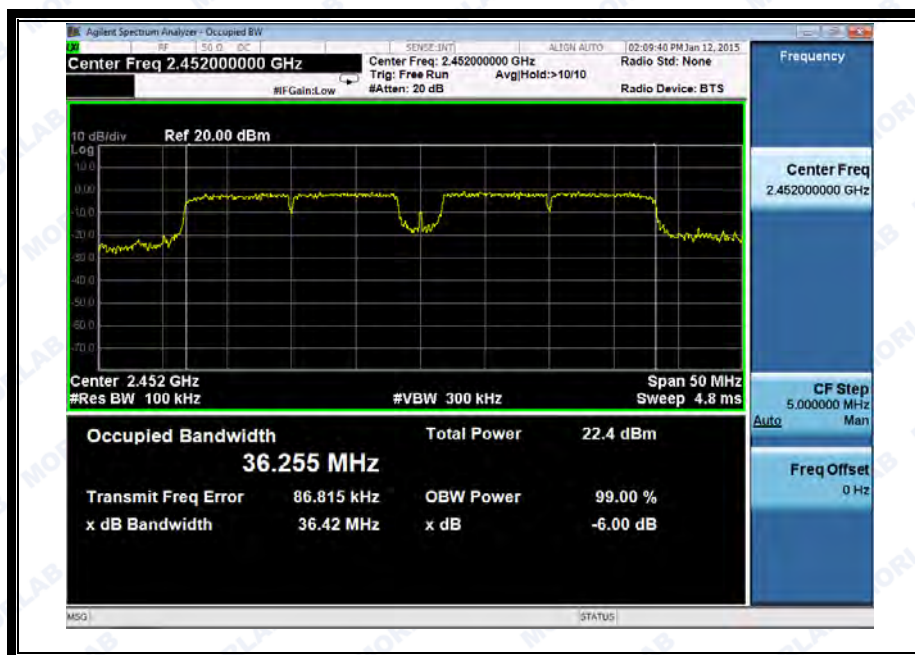

(Channel 9: 2452MHz @ 802.11n-40)


## 2.4 Conducted Spurious Emissions and Band Edge

### 2.4.1 Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 2.4.2 Test Description

#### A. Test Set:

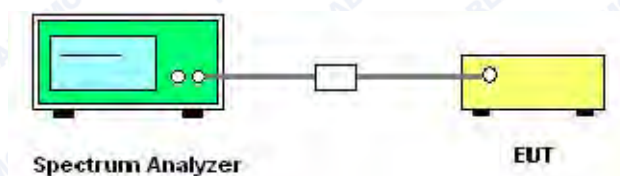

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

KDB 558074 Section 11.0 was used in order to prove compliance.

#### B. Equipments List:

Please reference ANNEX A(1.4).

### 2.4.3 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.




### 2.4.3.1 802.11b Test mode

#### A. Test Verdict:

| Channel | Frequency (MHz) | Measured Max. Out of Band Emission (dBm) | Limit (dBm)   |                         | Verdict |
|---------|-----------------|------------------------------------------|---------------|-------------------------|---------|
|         |                 |                                          | Carrier Level | Calculated -20dBc Limit |         |
| 1       | 2412            | -13.122                                  | 13.787        | -6.213                  | PASS    |
| 6       | 2437            | -13.205                                  | 11.758        | -8.242                  | PASS    |
| 11      | 2462            | -12.374                                  | 12.059        | -7.941                  | PASS    |


#### B. Test Plots:

**Note:** the power of the Module transmitting frequency should be ignored.

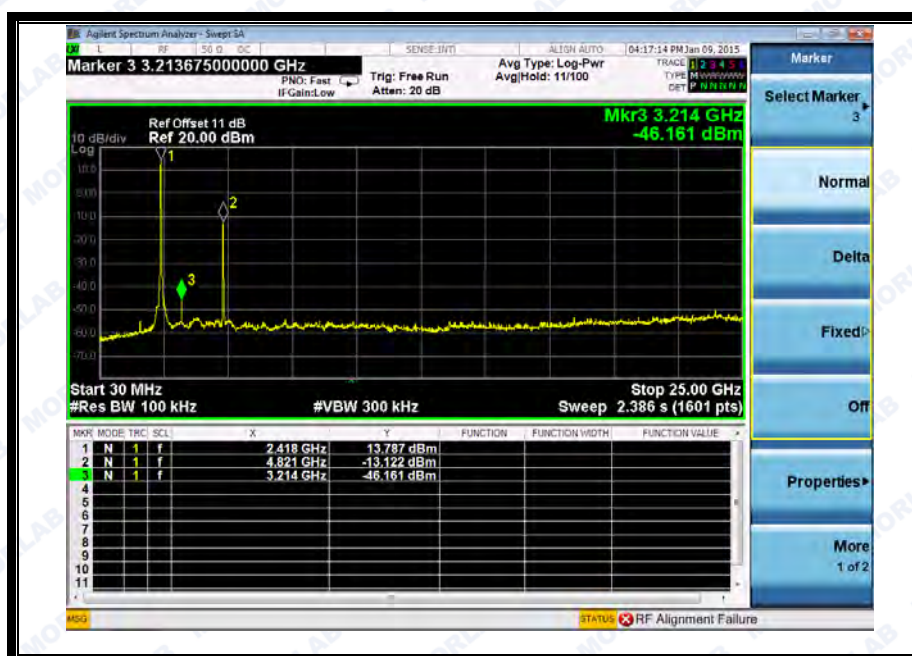


(Channel = 1, 30MHz to 25GHz)




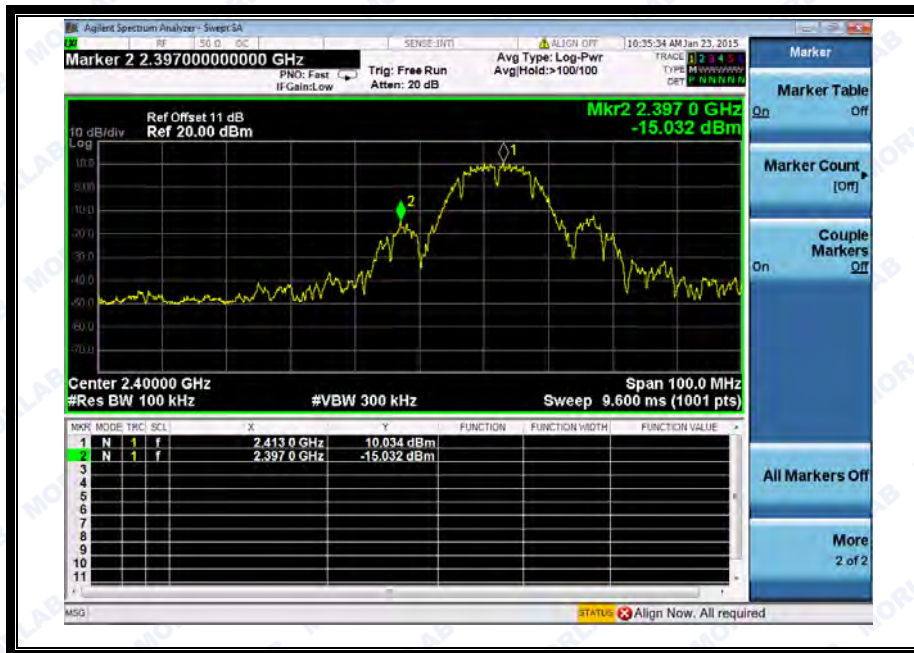


(Band Edge @ Channel = 1)

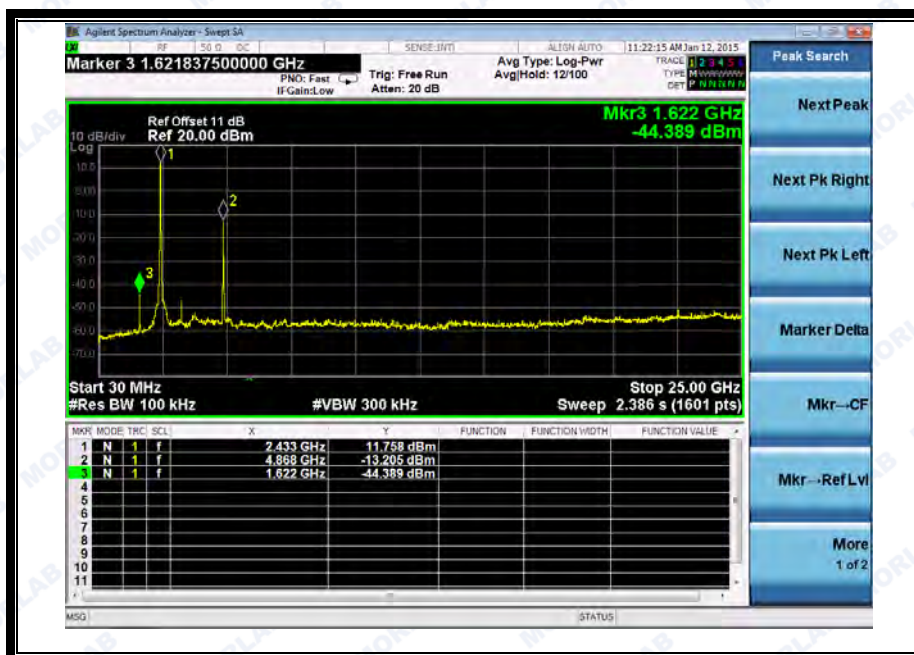

(Channel = 6, 30MHz to 25GHz)

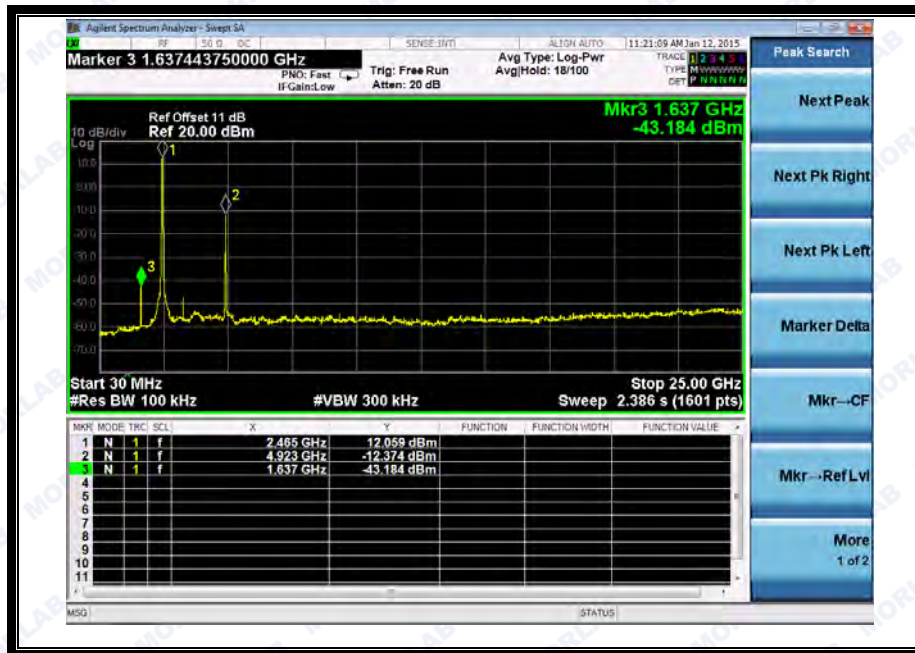

(Channel = 11, 30MHz to 25GHz)

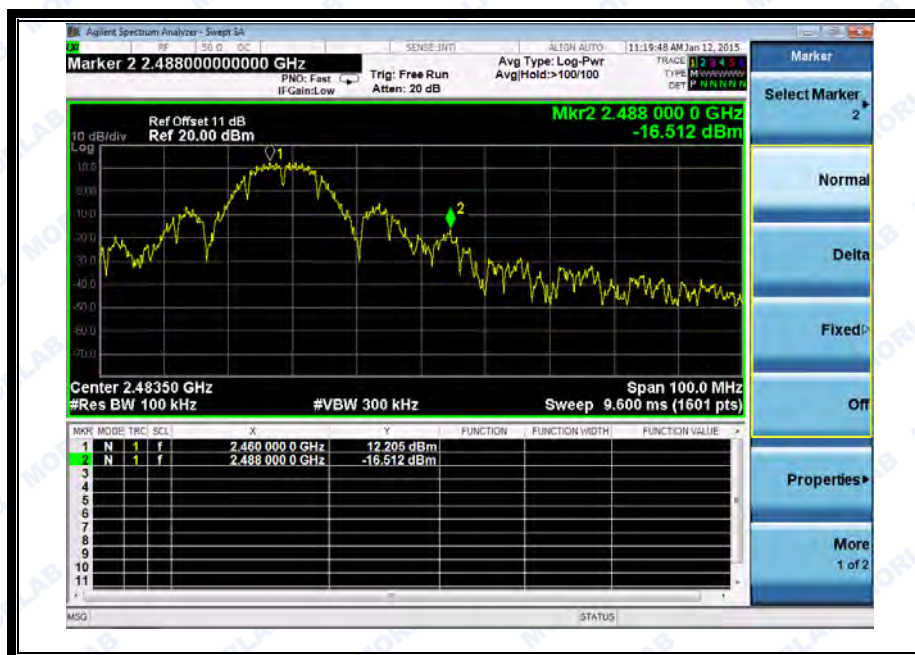

(Band Edge @ Channel = 11)






### 2.4.3.2 802.11g Test mode

#### A. Test Verdict:

| Channel | Frequency (MHz) | Measured Max. Out of Band Emission (dBm) | Limit (dBm)   |                         | Verdict |
|---------|-----------------|------------------------------------------|---------------|-------------------------|---------|
|         |                 |                                          | Carrier Level | Calculated -20dBc Limit |         |
| 1       | 2412            | -20.932                                  | 9.842         | -10.158                 | PASS    |
| 6       | 2437            | -20.382                                  | 9.955         | -10.045                 | PASS    |
| 11      | 2462            | -22.810                                  | 8.543         | -11.457                 | PASS    |


#### B. Test Plots:

**Note:** the power of the Module transmitting frequency should be ignored.

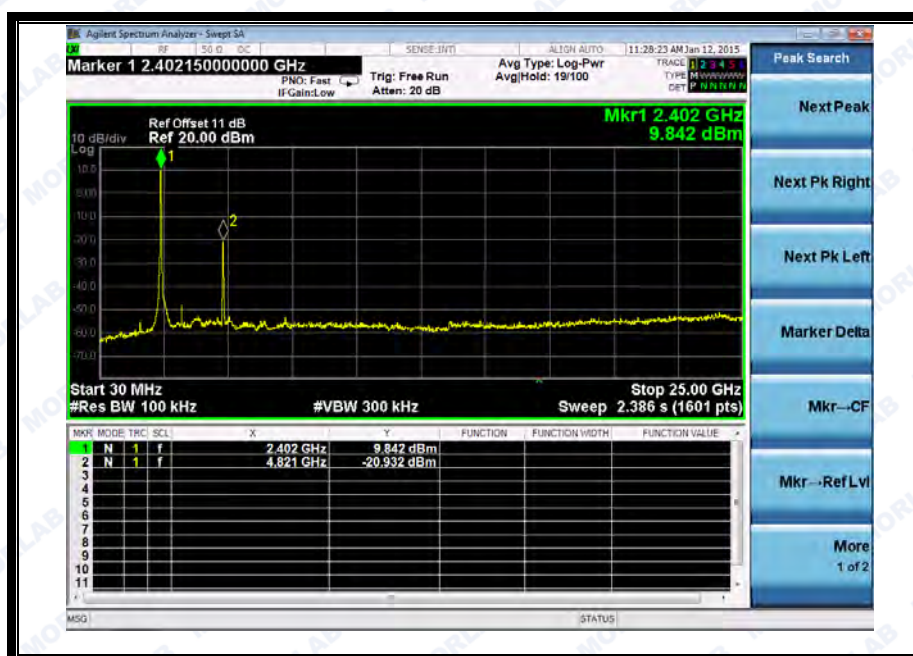


(Channel = 1, 30MHz to 25GHz)




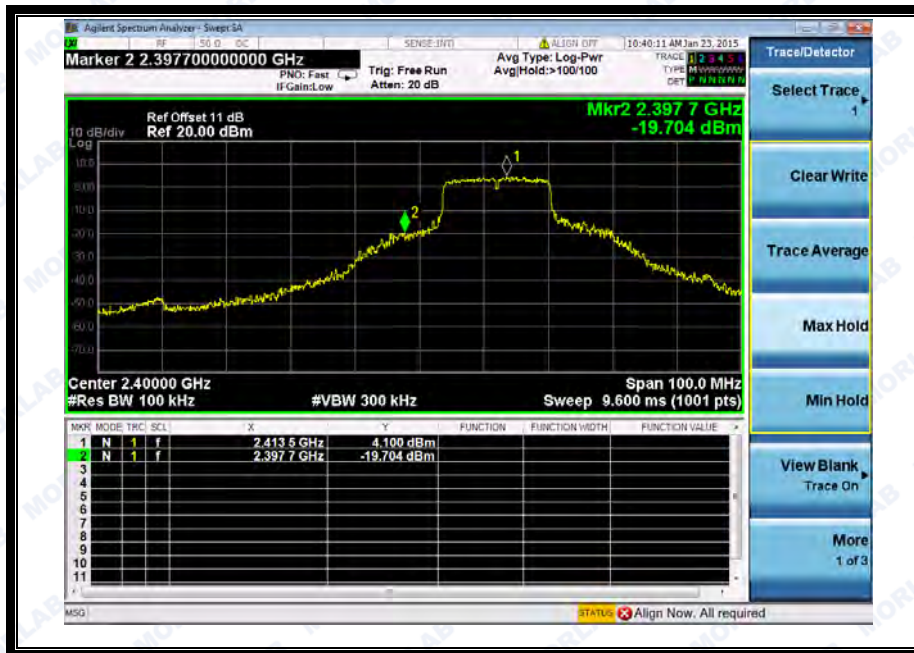


(Band Edge @ Channel = 1)

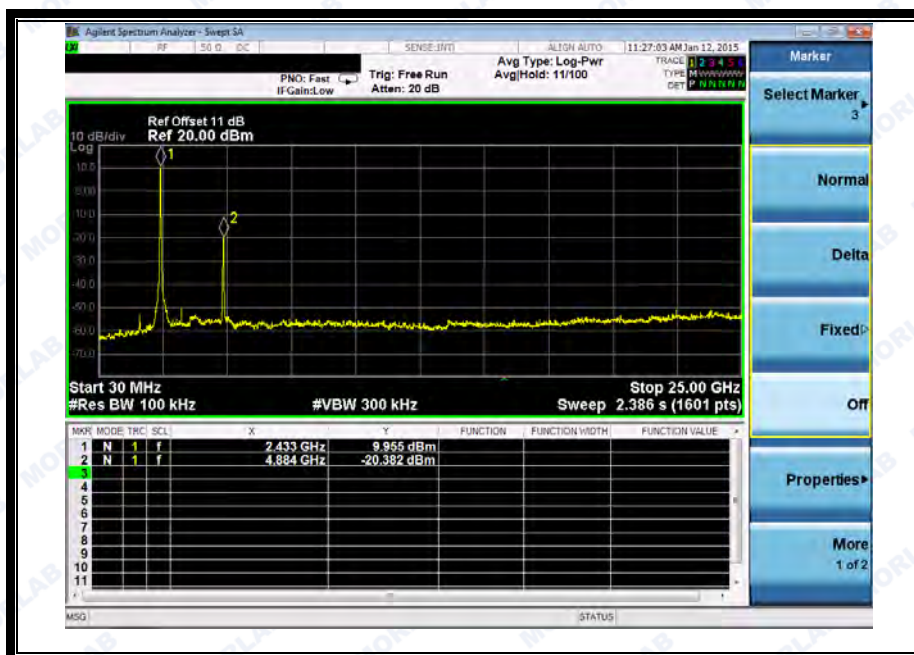

(Channel = 6, 30MHz to 25GHz)

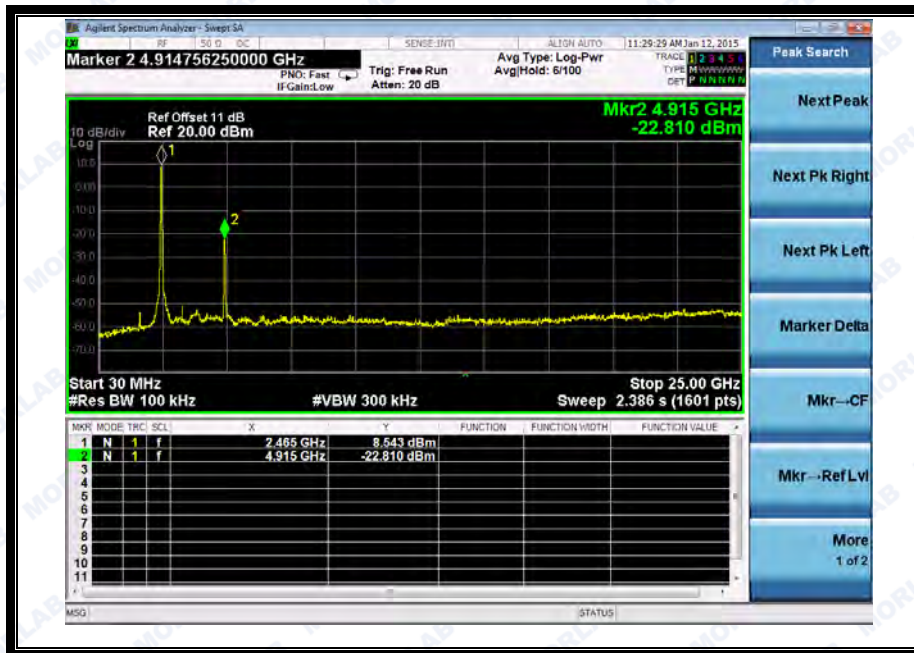

(Channel = 11, 30MHz to 25GHz)

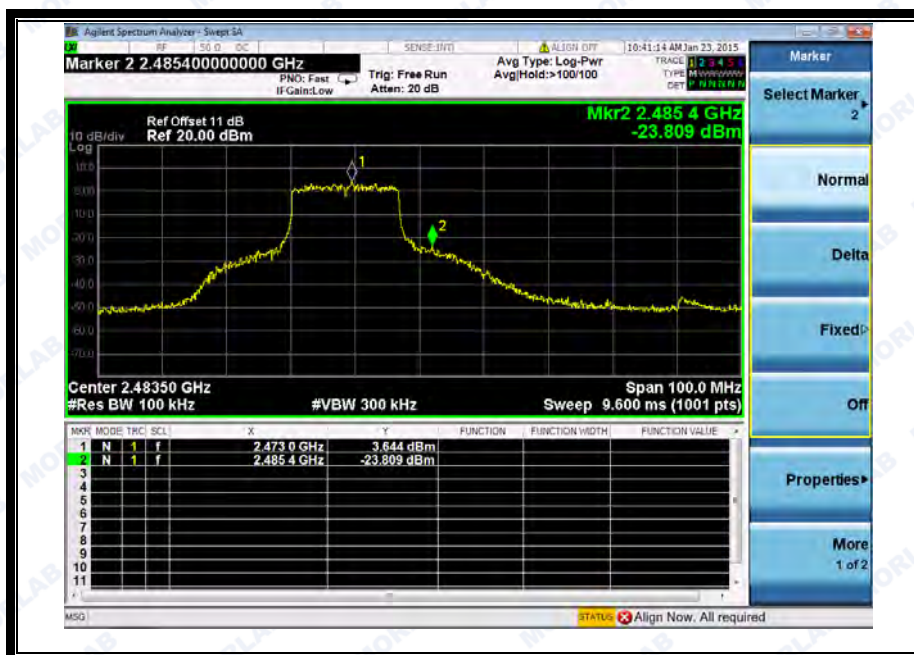

(Band Edge @ Channel = 11)





### 2.4.3.3 802.11n -20MHz Test mode

#### A. Test Verdict:

| Channel | Frequency (MHz) | Measured Max. Out of Band Emission (dBm) | Limit (dBm)   |                         | Verdict |
|---------|-----------------|------------------------------------------|---------------|-------------------------|---------|
|         |                 |                                          | Carrier Level | Calculated -20dBc Limit |         |
| 1       | 2412            | -27.501                                  | 6.201         | -13.799                 | PASS    |
| 6       | 2437            | -26.104                                  | 6.005         | -13.995                 | PASS    |
| 11      | 2462            | -26.846                                  | 6.443         | -13.557                 | PASS    |


#### B. Test Plots:

**Note:** the power of the Module transmitting frequency should be ignored.




(Channel = 1, 30MHz to 25GHz)




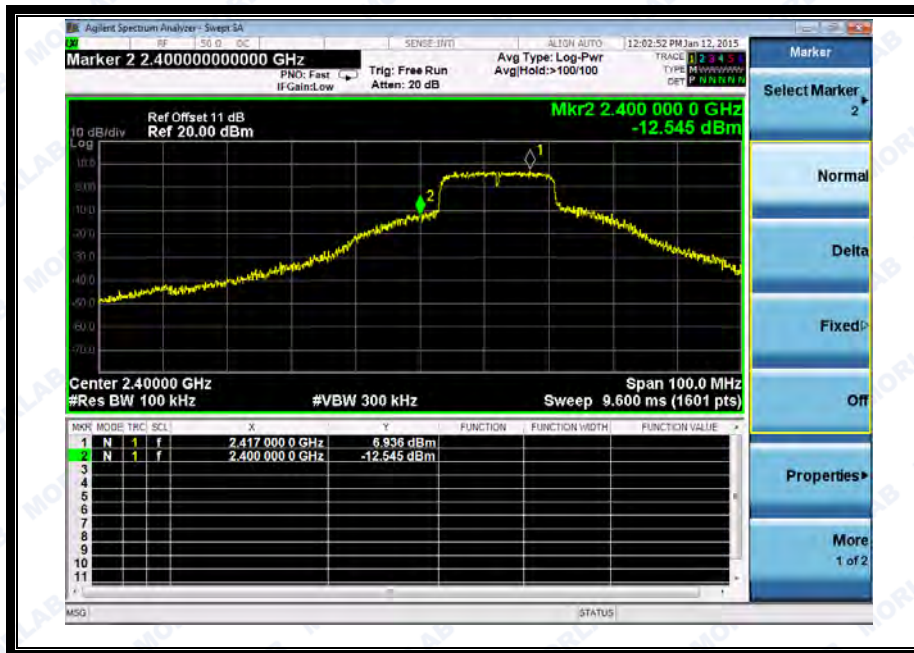


(Band Edge @ Channel = 1)

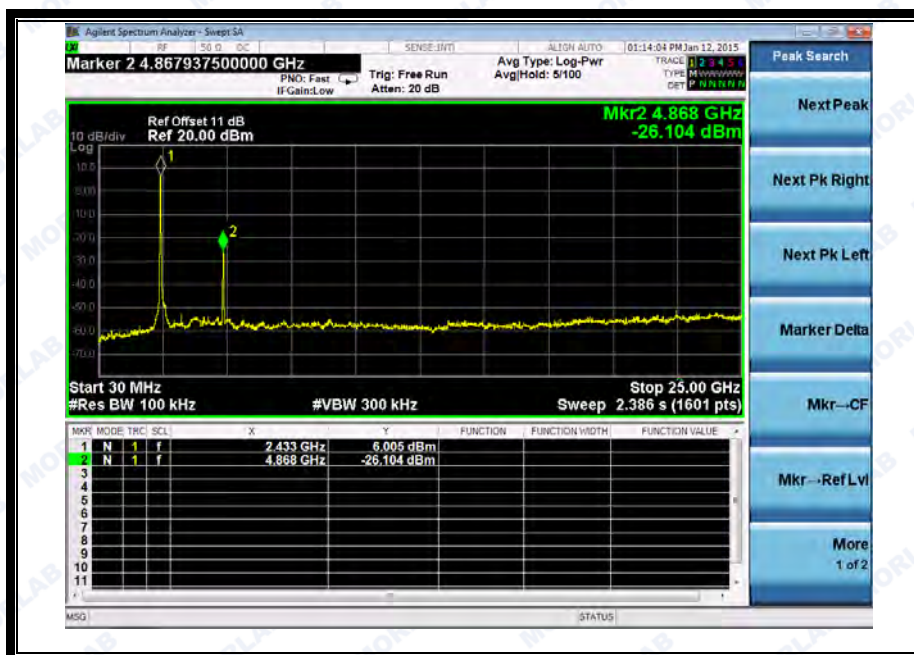

(Channel = 6, 30MHz to 25GHz)

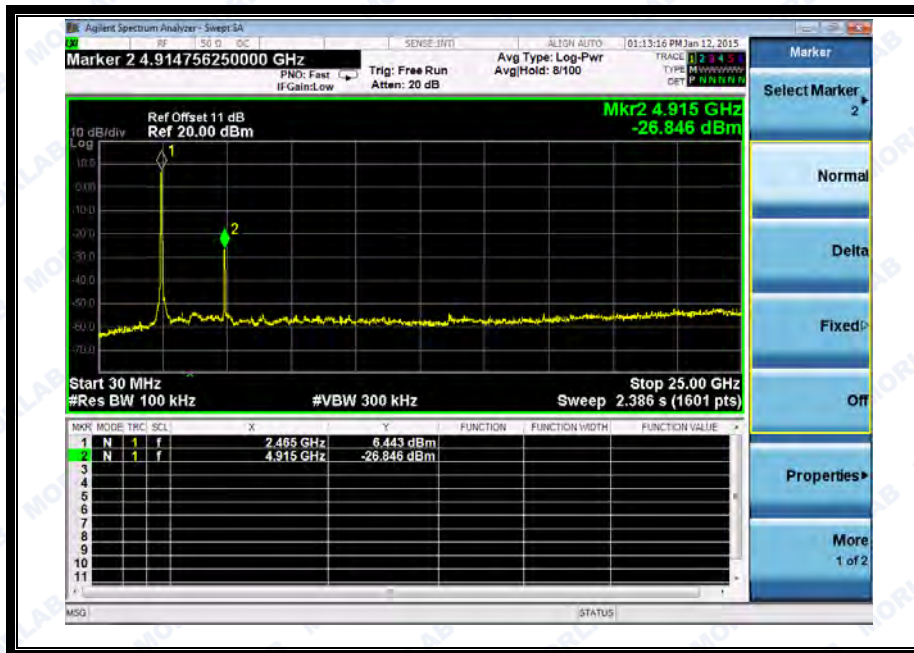

(Channel = 11, 30MHz to 25GHz)

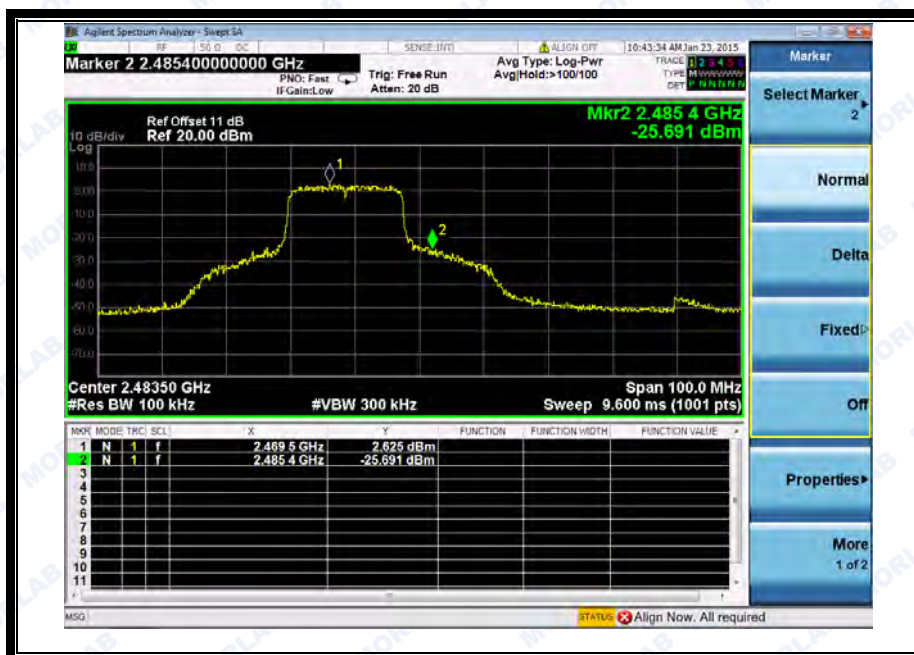

(Band Edge @ Channel = 11)






### 2.4.3.4 802.11n -40MHz Test mode

#### A. Test Verdict:

| Channel | Frequency (MHz) | Measured Max. Out of Band Emission (dBm) | Limit (dBm)   |                         | Verdict |
|---------|-----------------|------------------------------------------|---------------|-------------------------|---------|
|         |                 |                                          | Carrier Level | Calculated -20dBc Limit |         |
| 3       | 2422            | -41.035                                  | -3.062        | -23.062                 | PASS    |
| 6       | 2437            | -38.355                                  | -1.706        | -21.706                 | PASS    |
| 9       | 2452            | -38.273                                  | -1.959        | -21.959                 | PASS    |


#### B. Test Plots:

**Note:** the power of the Module transmitting frequency should be ignored.

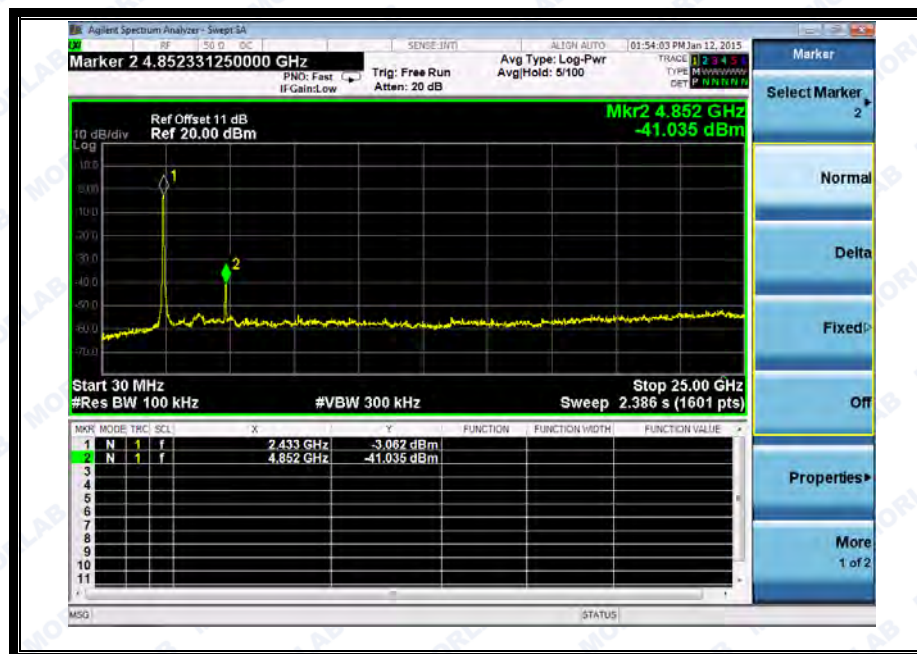


(Channel = 3, 30MHz to 25GHz)




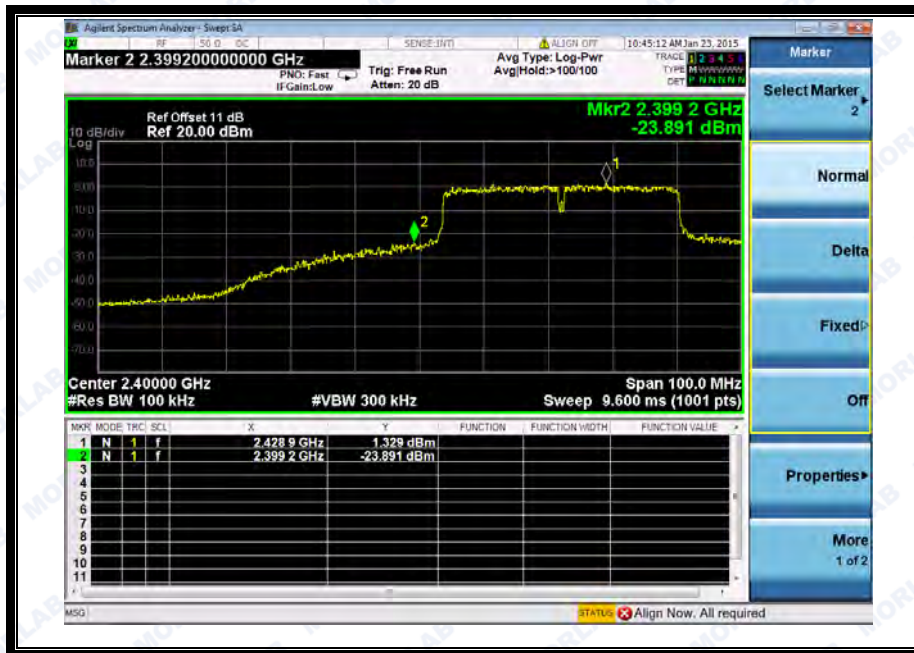

(Band Edge @ Channel = 3)

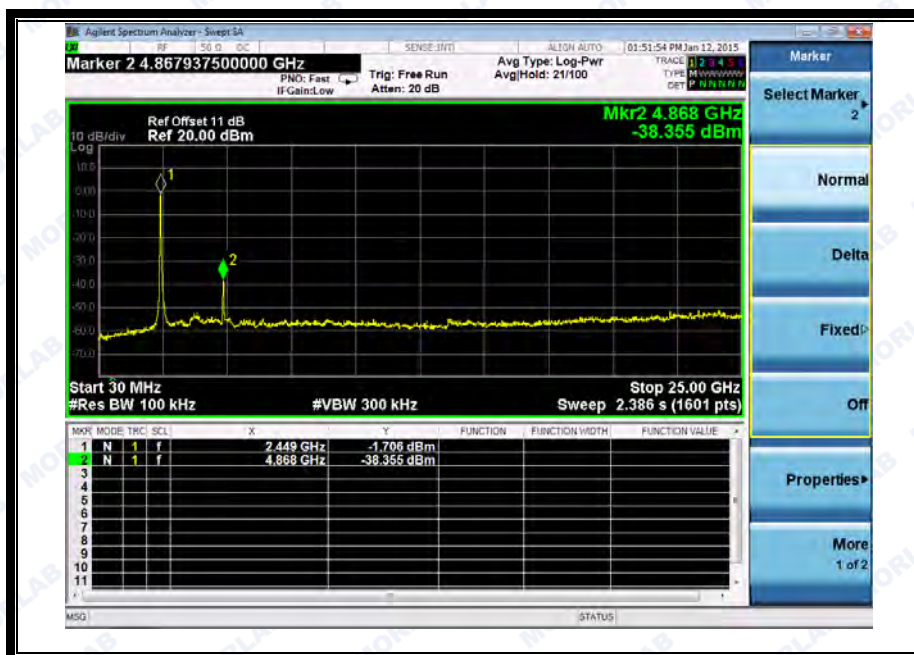

(Channel = 6, 30MHz to 25GHz)

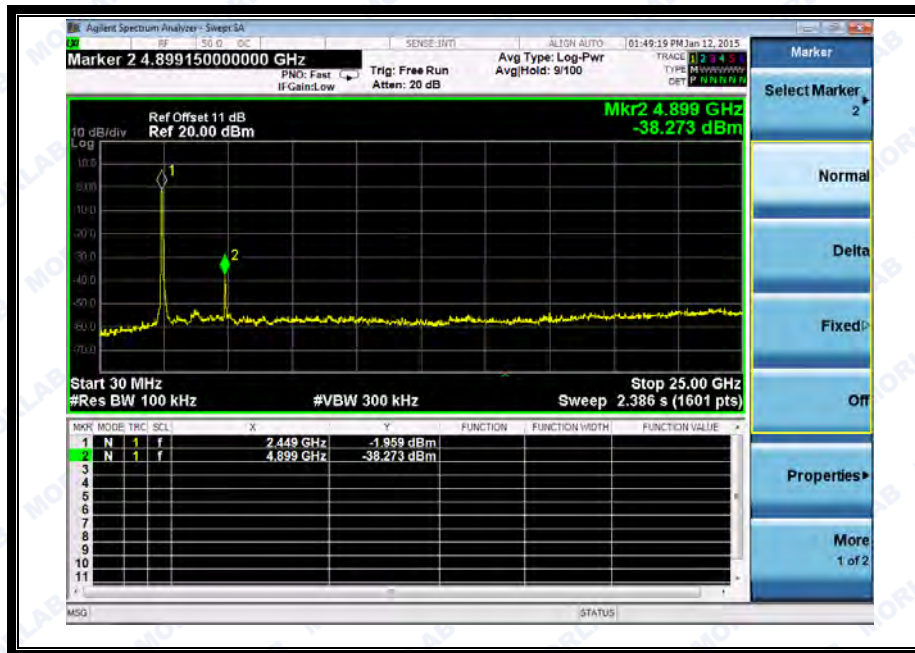

(Channel = 9, 30MHz to 25GHz)



(Band Edge @ Channel = 9)




## 2.5 Power spectral density (PSD)

### 2.5.1 Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### 2.5.2 Test Description

#### A. Test Set:

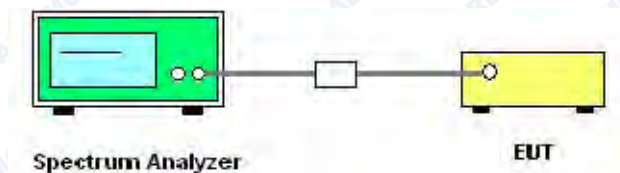

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

KDB 558074 Section 10.2 was used in order to prove compliance.

#### B. Equipments List:

Please reference ANNEX A(1.4).





## 2.5.3 Test Result

### 2.5.3.1 802.11b Test mode

#### A. Test Verdict:

| Spectral power density (dBm/3kHz)     |                 |                         |                  |         |
|---------------------------------------|-----------------|-------------------------|------------------|---------|
| Channel                               | Frequency (MHz) | Measured PSD (dBm/3kHz) | Limit (dBm/3kHz) | Verdict |
| 1                                     | 2412            | -6.254                  | 8                | PASS    |
| 6                                     | 2437            | -6.413                  | 8                | PASS    |
| 11                                    | 2462            | -6.552                  | 8                | PASS    |
| Measurement uncertainty: $\pm 1.3$ dB |                 |                         |                  |         |

#### B. Test Plots:



(Channel = 1 @ 802.11b)



REPORT No. : SZ14120206W01



(Channel = 6 @ 802.11b)



(Channel = 11 @ 802.11b)




## 2.5.3.2 802.11g Test mode

## A. Test Verdict:

| Spectral power density (dBm/3kHz)     |                 |                         |                  |         |
|---------------------------------------|-----------------|-------------------------|------------------|---------|
| Channel                               | Frequency (MHz) | Measured PSD (dBm/3kHz) | Limit (dBm/3kHz) | Verdict |
| 1                                     | 2412            | -7.79                   | 8                | PASS    |
| 6                                     | 2437            | -4.431                  | 8                | PASS    |
| 11                                    | 2462            | -4.803                  | 8                | PASS    |
| Measurement uncertainty: $\pm 1.3$ dB |                 |                         |                  |         |

## B. Test Plots:

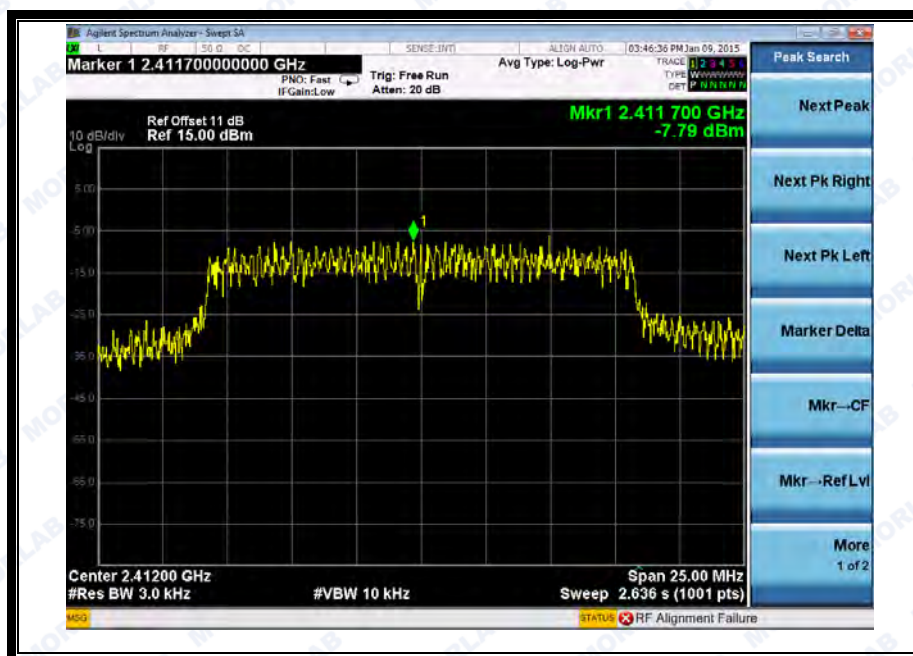


(Channel = 1 @ 802.11g)






REPORT No. : SZ14120206W01

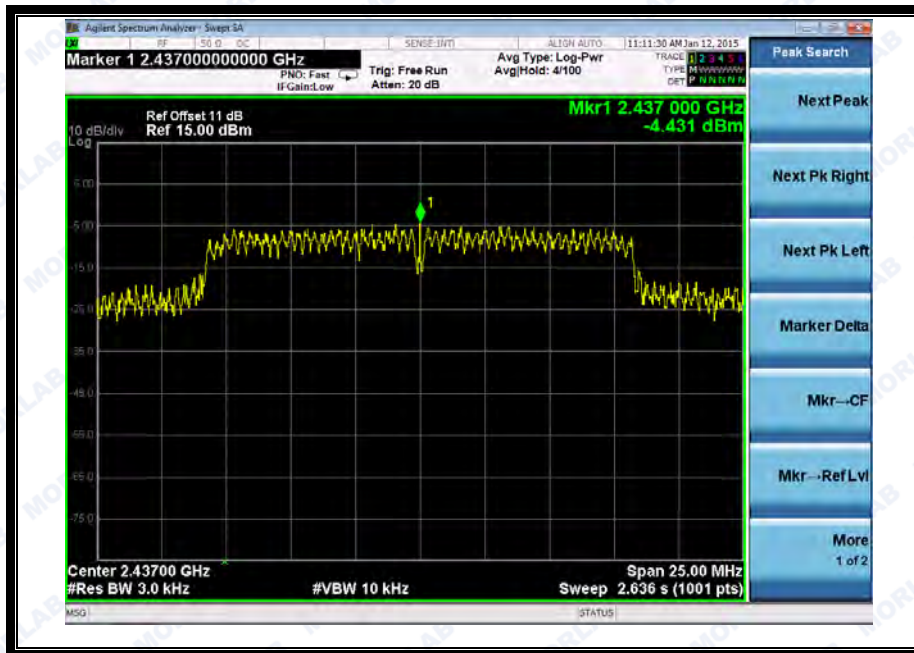

(Channel = 6 @ 802.11g)

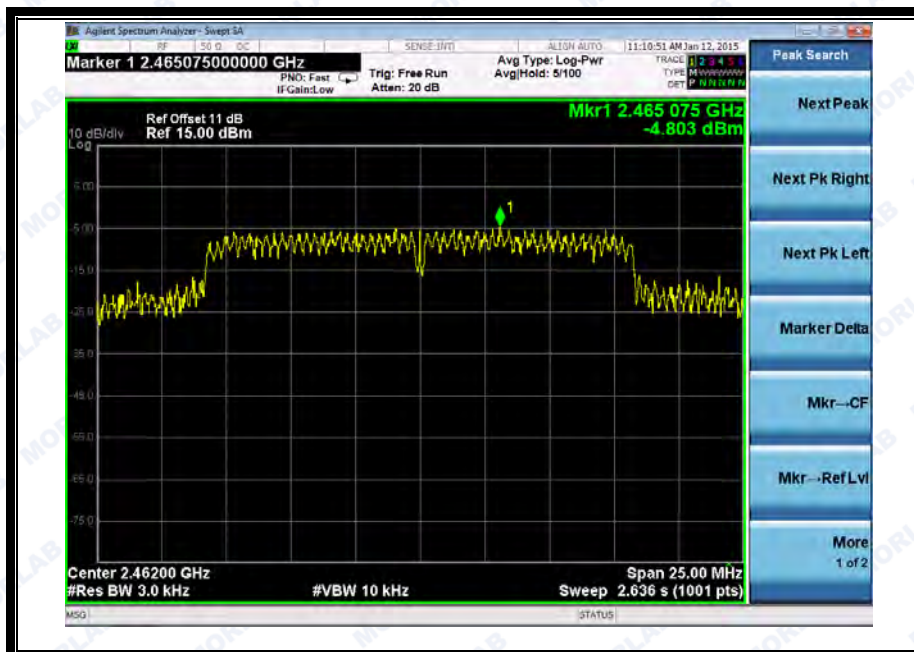


(Channel = 11 @ 802.11g)

**2.5.3.3 802.11n-20MHz Test mode**


ANT 1:

**A. Test Verdict:**


| Spectral power density (dBm/3kHz)     |                 |                         |                  |         |
|---------------------------------------|-----------------|-------------------------|------------------|---------|
| Channel                               | Frequency (MHz) | Measured PSD (dBm/3kHz) | Limit (dBm/3kHz) | Verdict |
| 1                                     | 2412            | -7.437                  | 8                | PASS    |
| 6                                     | 2437            | -6.969                  | 8                | PASS    |
| 11                                    | 2462            | -5.958                  | 8                | PASS    |
| Measurement uncertainty: $\pm 1.3$ dB |                 |                         |                  |         |

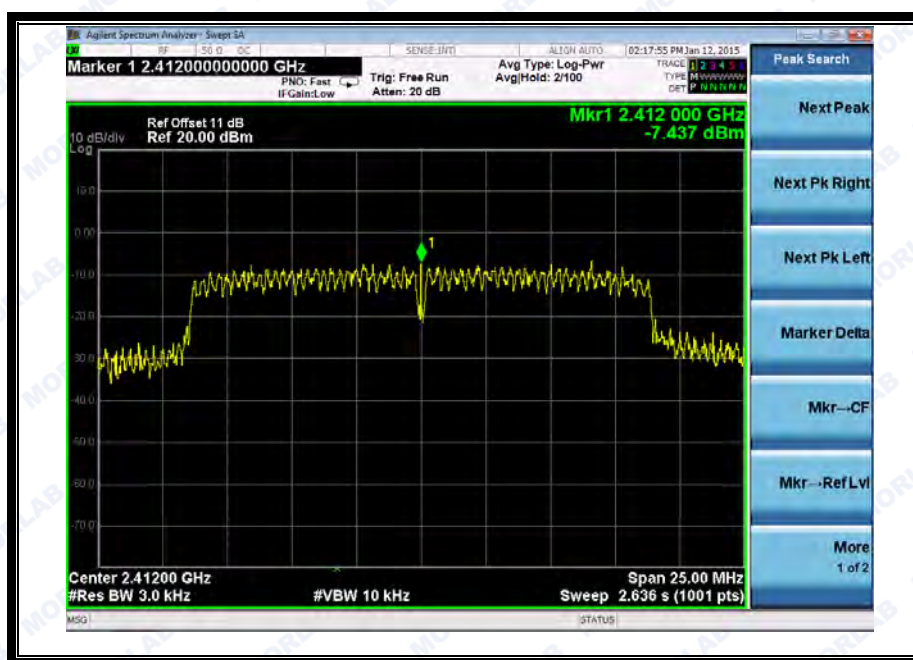**B. Test Plots:**

(Channel = 1 @ 802.11n-20MHz)

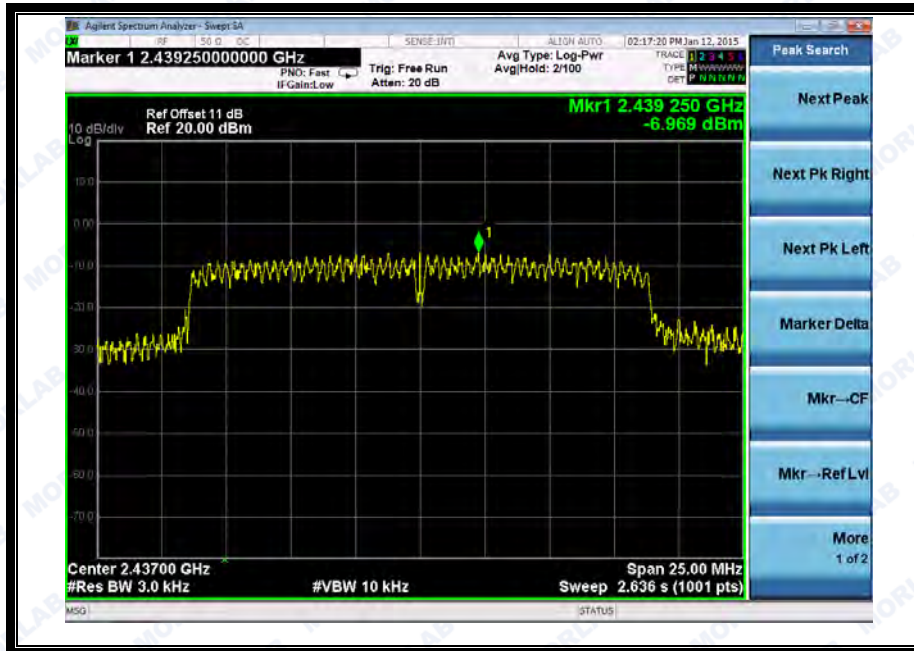

(Channel = 6 @ 802.11n-20MHz)

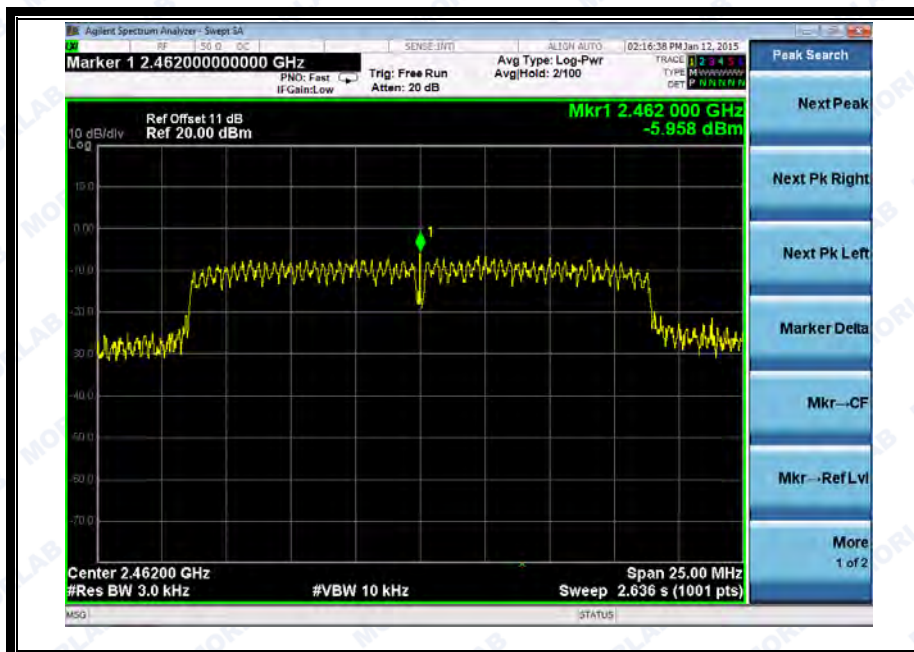

(Channel = 11 @ 802.11n-20MHz)






ANT 2:

**A. Test Verdict:**


| Spectral power density (dBm/3kHz)     |                 |                         |                  |         |
|---------------------------------------|-----------------|-------------------------|------------------|---------|
| Channel                               | Frequency (MHz) | Measured PSD (dBm/3kHz) | Limit (dBm/3kHz) | Verdict |
| 1                                     | 2412            | -1.650                  | 8                | PASS    |
| 6                                     | 2437            | -1.356                  | 8                | PASS    |
| 11                                    | 2462            | -1.477                  | 8                | PASS    |
| Measurement uncertainty: $\pm 1.3$ dB |                 |                         |                  |         |

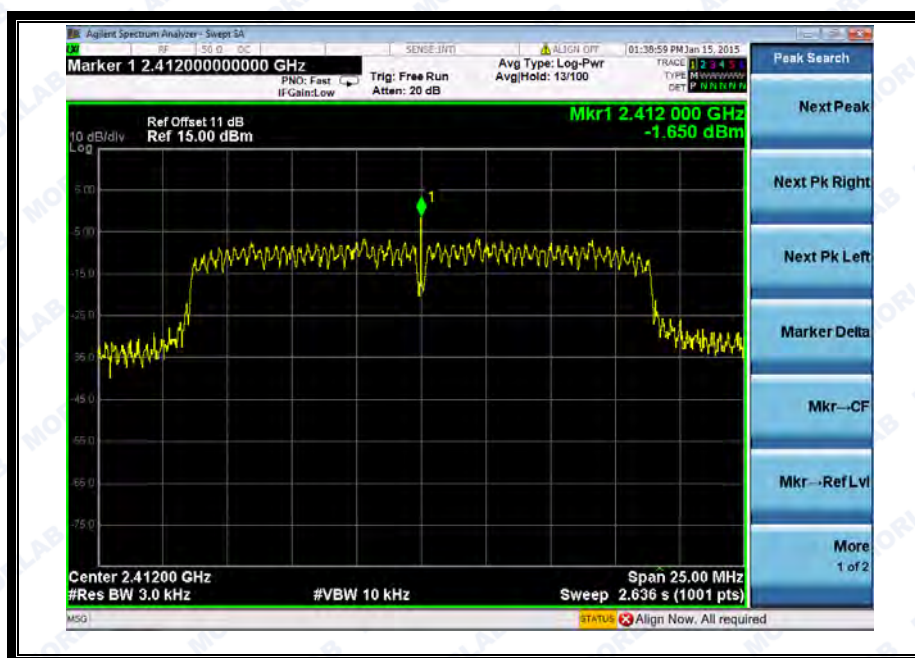**B. Test Plots:**


(Channel = 1 @ 802.11n-20MHz)



REPORT No. : SZ14120206W01

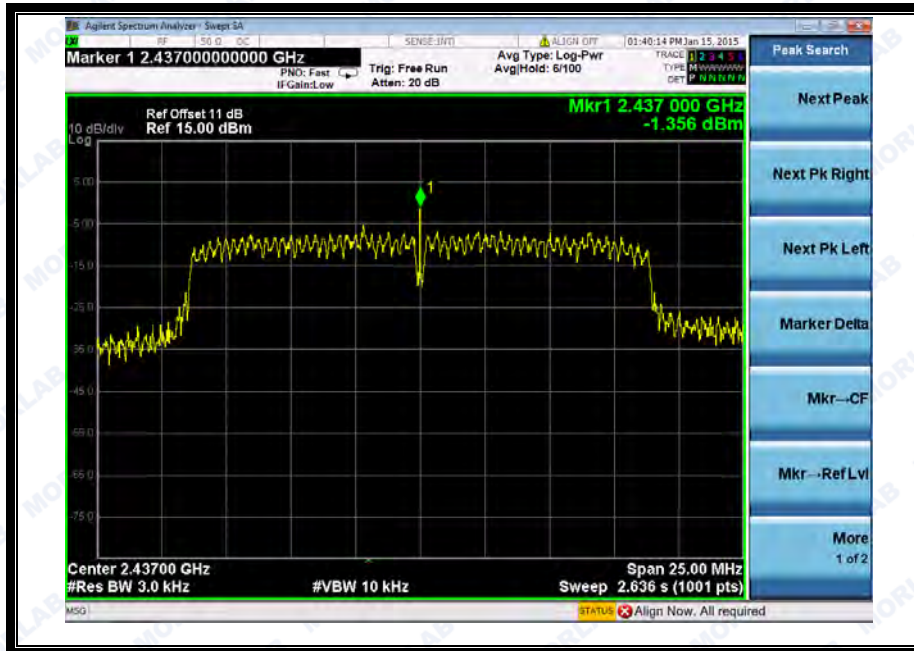

(Channel = 6 @ 802.11n-20MHz)

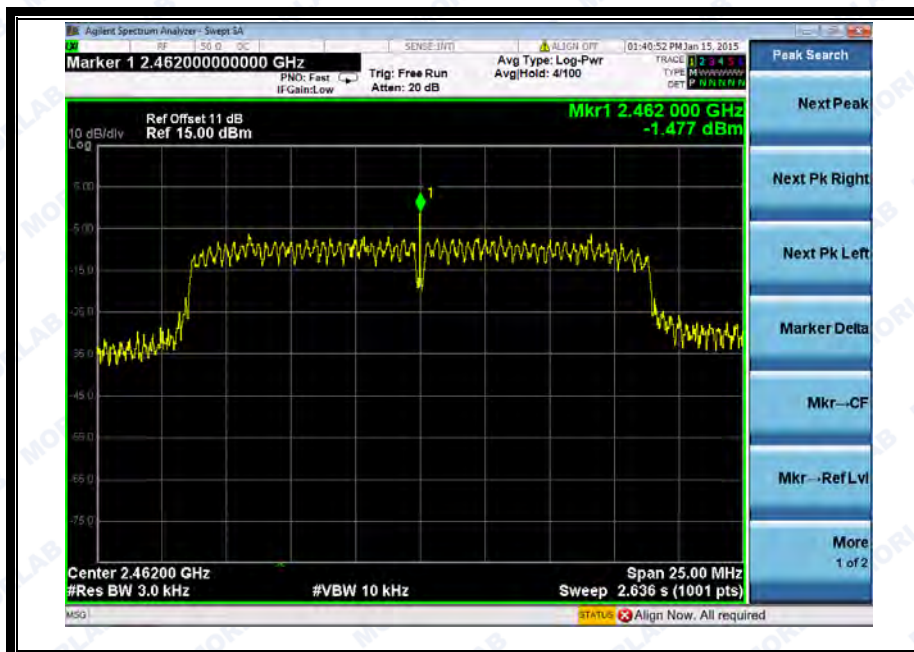

(Channel = 11 @ 802.11n-20MHz)



Ant 1 + Ant 2:

**A. Test Verdict:**

| Spectral power density (dBm/3kHz)           |                 |                         |                  |         |
|---------------------------------------------|-----------------|-------------------------|------------------|---------|
| Channel                                     | Frequency (MHz) | Measured PSD (dBm/3kHz) | Limit (dBm/3kHz) | Verdict |
| 1                                           | 2412            | -1.54                   | 8                | PASS    |
| 6                                           | 2437            | -0.30                   | 8                | PASS    |
| 11                                          | 2462            | -0.18                   | 8                | PASS    |
| Measurement uncertainty: $\pm 1.3\text{dB}$ |                 |                         |                  |         |

**2.5.3.4 802.11n-40MHz Test mode**

Ant 1:


**A. Test Verdict:**

| Spectral power density (dBm/3kHz)           |                 |                         |                  |         |
|---------------------------------------------|-----------------|-------------------------|------------------|---------|
| Channel                                     | Frequency (MHz) | Measured PSD (dBm/3kHz) | Limit (dBm/3kHz) | Verdict |
| 3                                           | 2422            | -15.314                 | 8                | PASS    |
| 6                                           | 2437            | -14.401                 | 8                | PASS    |
| 9                                           | 2452            | -14.586                 | 8                | PASS    |
| Measurement uncertainty: $\pm 1.3\text{dB}$ |                 |                         |                  |         |






## B. Test Plots:

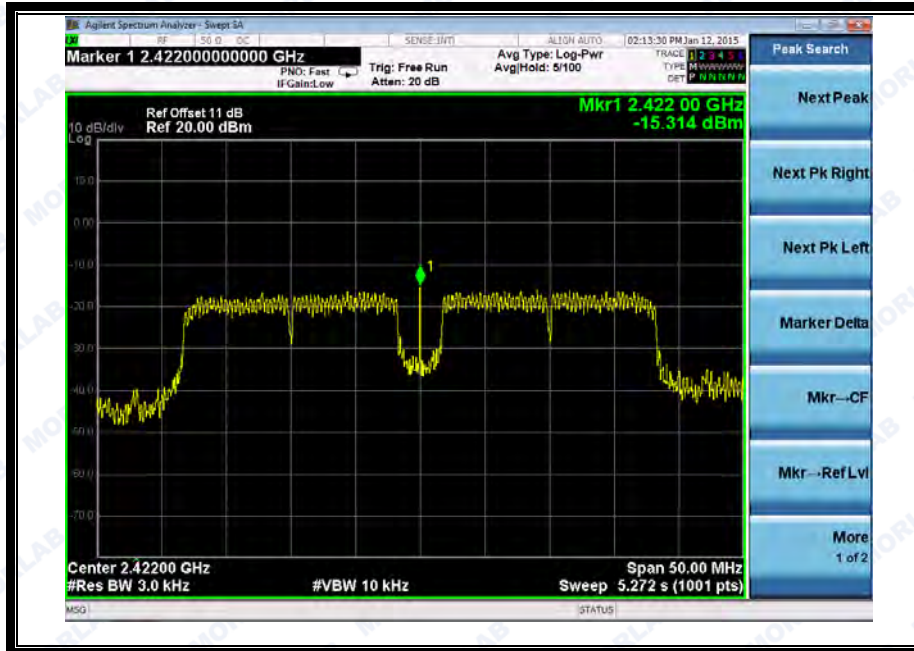


(Channel = 3 @ 802.11n-40MHz)

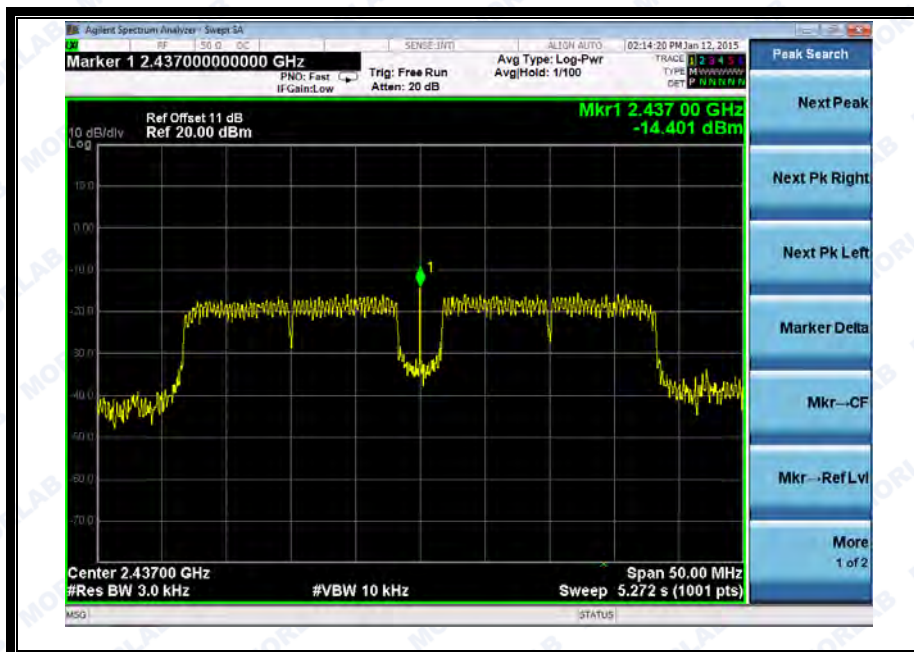

(Channel = 6 @ 802.11n-40MHz)



REPORT No. : SZ14120206W01

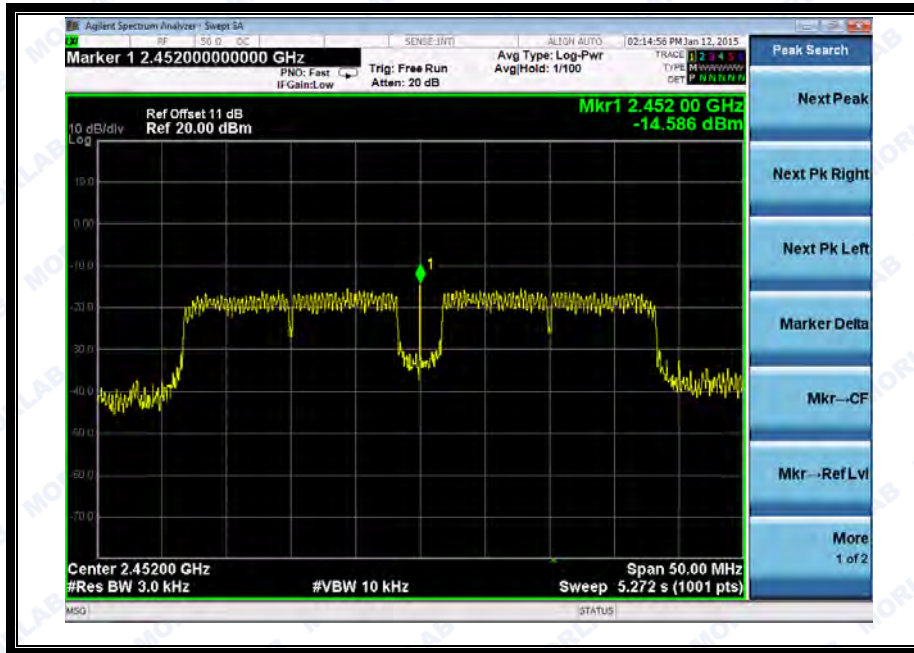


(Channel = 9 @ 802.11n-40MHz)



Ant 2:

**A. Test Verdict:**

| Spectral power density (dBm/3kHz)     |                 |                         |                  |         |
|---------------------------------------|-----------------|-------------------------|------------------|---------|
| Channel                               | Frequency (MHz) | Measured PSD (dBm/3kHz) | Limit (dBm/3kHz) | Verdict |
| 3                                     | 2422            | -4.527                  | 8                | PASS    |
| 6                                     | 2437            | -4.450                  | 8                | PASS    |
| 9                                     | 2452            | -4.536                  | 8                | PASS    |
| Measurement uncertainty: $\pm 1.3$ dB |                 |                         |                  |         |

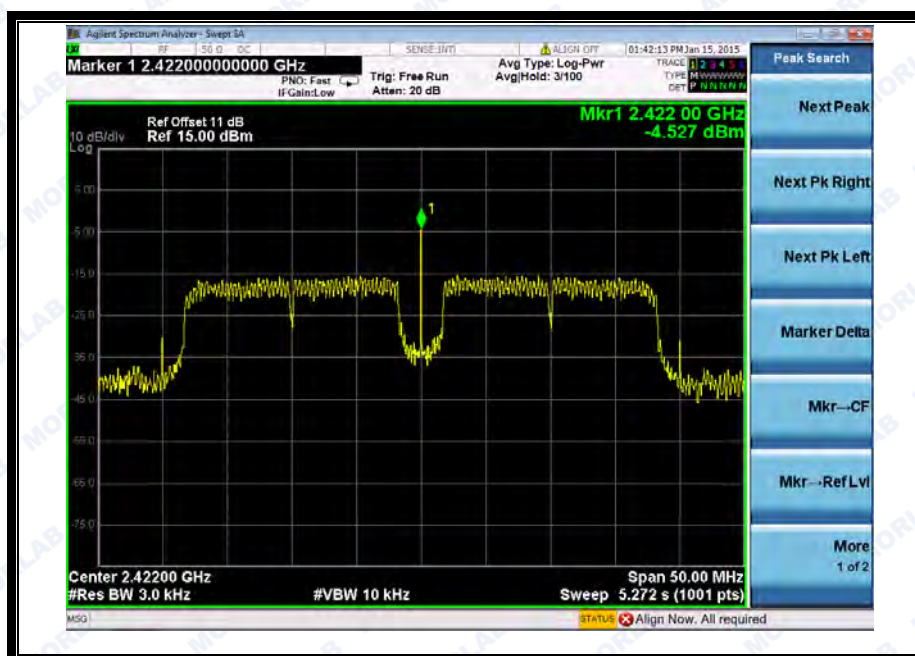
**B. Test Plots:**

(Channel = 3 @ 802.11n-40MHz)






REPORT No. : SZ14120206W01

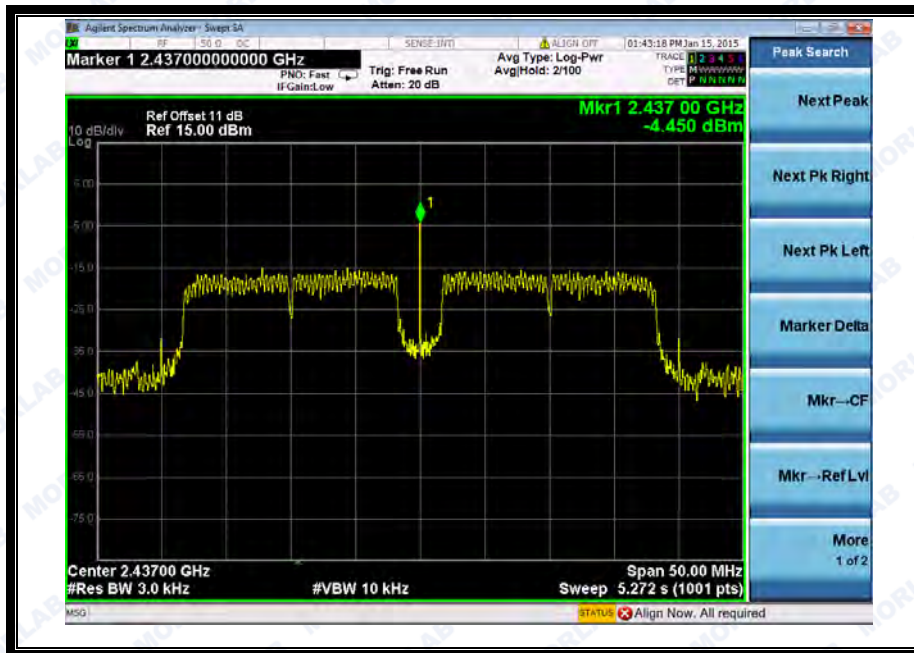

(Channel = 6 @ 802.11n-40MHz)

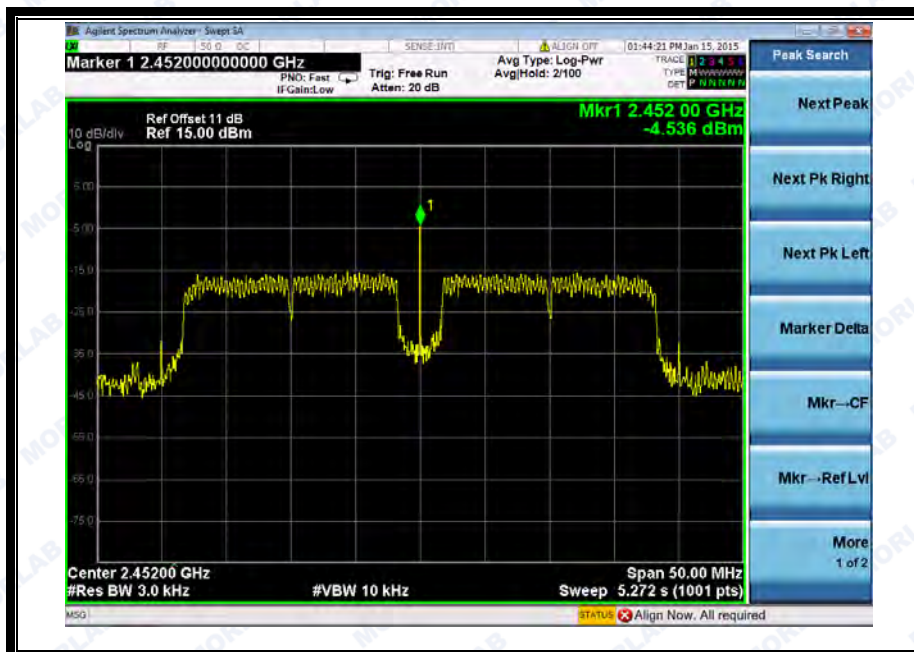

(Channel = 9 @ 802.11n-40MHz)



Ant 1 + Ant 2:


**A. Test Verdict:**

| Spectral power density (dBm/3kHz)     |                 |                         |                  |         |
|---------------------------------------|-----------------|-------------------------|------------------|---------|
| Channel                               | Frequency (MHz) | Measured PSD (dBm/3kHz) | Limit (dBm/3kHz) | Verdict |
| 3                                     | 2422            | -4.179                  | 8                | PASS    |
| 6                                     | 2437            | -4.032                  | 8                | PASS    |
| 9                                     | 2452            | -4.127                  | 8                | PASS    |
| Measurement uncertainty: $\pm 1.3$ dB |                 |                         |                  |         |

**2.6 Restricted Frequency Bands****2.6.1 Requirement**

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

**2.6.2 Test Description****A. Test Setup**

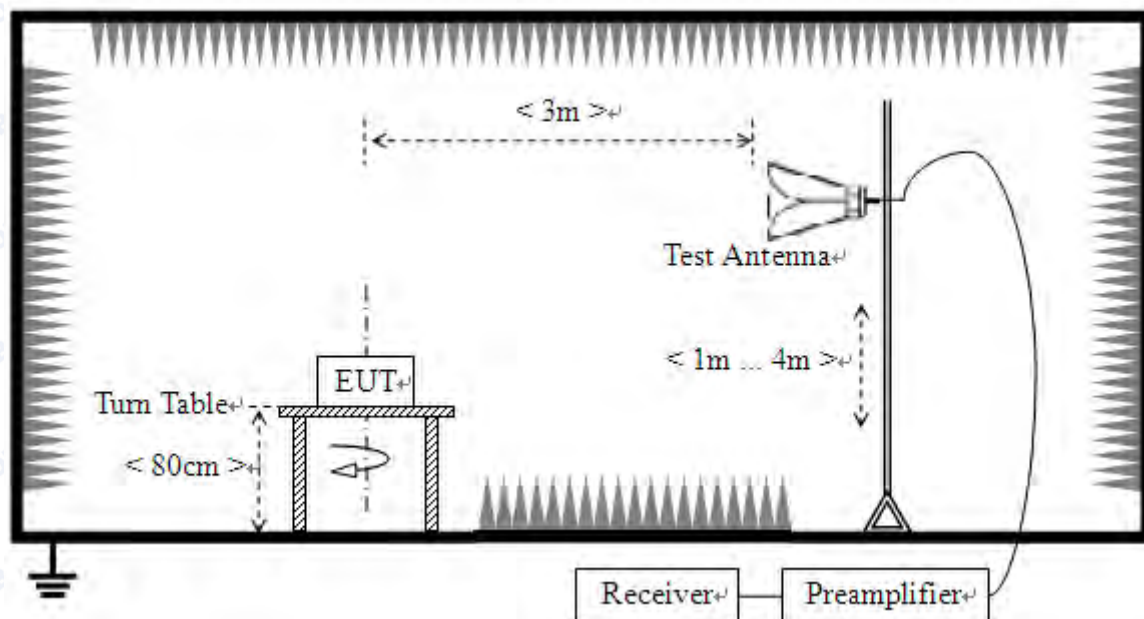

The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

KDB 558074 Section 12.1 was used in order to prove compliance.

## B. Equipments List:

Please reference ANNEX A(1.4).

### 2.6.3 Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m

**Note:** Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.






### 2.6.3.1 802.11b Test mode

The lowest and highest channels are tested to verify the band edge emissions.

#### A. Test Verdict:

| Channel | Frequency (MHz) | Detector | Receiver Reading UR (dBuV) | AT (dB) | AFactor (dB@3m) | Max. Emission E (dBμV/m) | Limit (dBμV/m) | Verdict |
|---------|-----------------|----------|----------------------------|---------|-----------------|--------------------------|----------------|---------|
|         |                 | PK/ AV   |                            |         |                 |                          |                |         |
| 1       | 2347.31         | PK       | 58.74                      | -33.63  | 32.56           | 57.67                    | 74             | Pass    |
| 1       | 2390.00         | AV       | 46.18                      | -33.63  | 32.56           | 45.11                    | 54             | Pass    |
| 11      | 2486.04         | PK       | 58.60                      | -33.18  | 32.5            | 57.92                    | 74             | Pass    |
| 11      | 2483.50         | AV       | 47.29                      | -33.18  | 32.5            | 46.61                    | 54             | Pass    |


#### B. Test Plots:

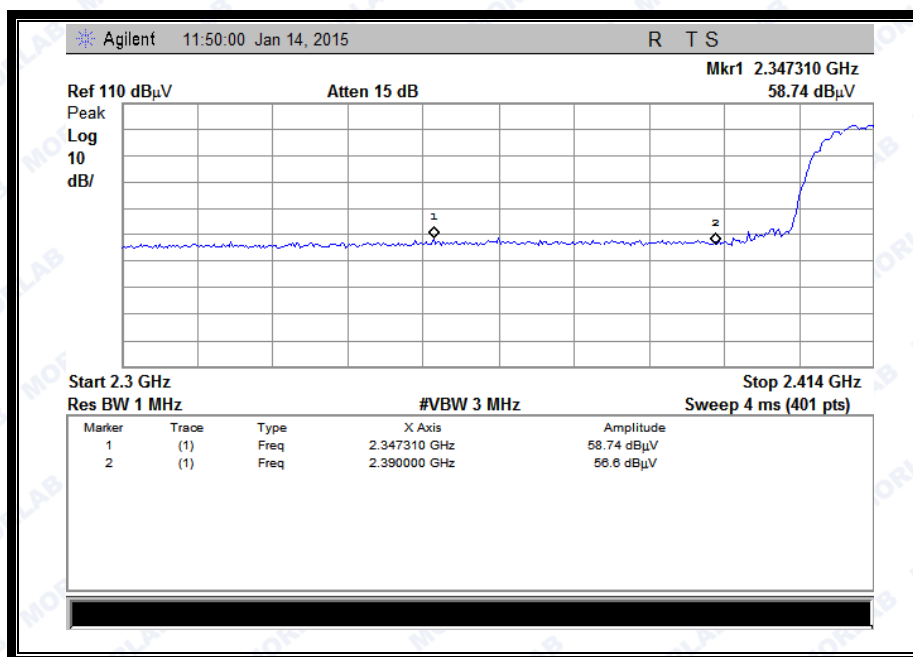


(Plot A1: Channel = 1 PEAK @ 802.11b)




REPORT No. : SZ14120206W01

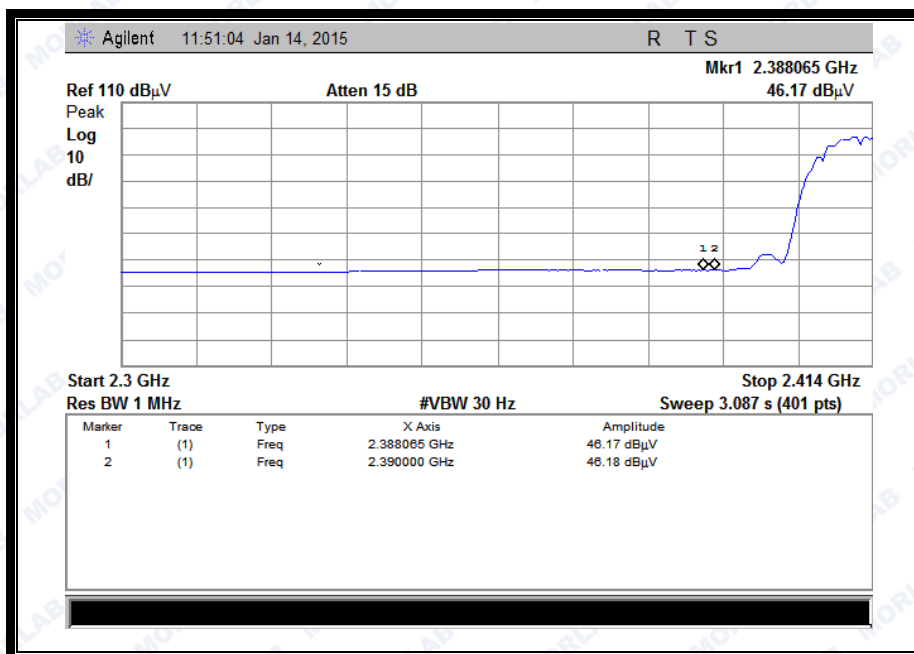

(Plot A2: Channel = 1 AVG @ 802.11b)

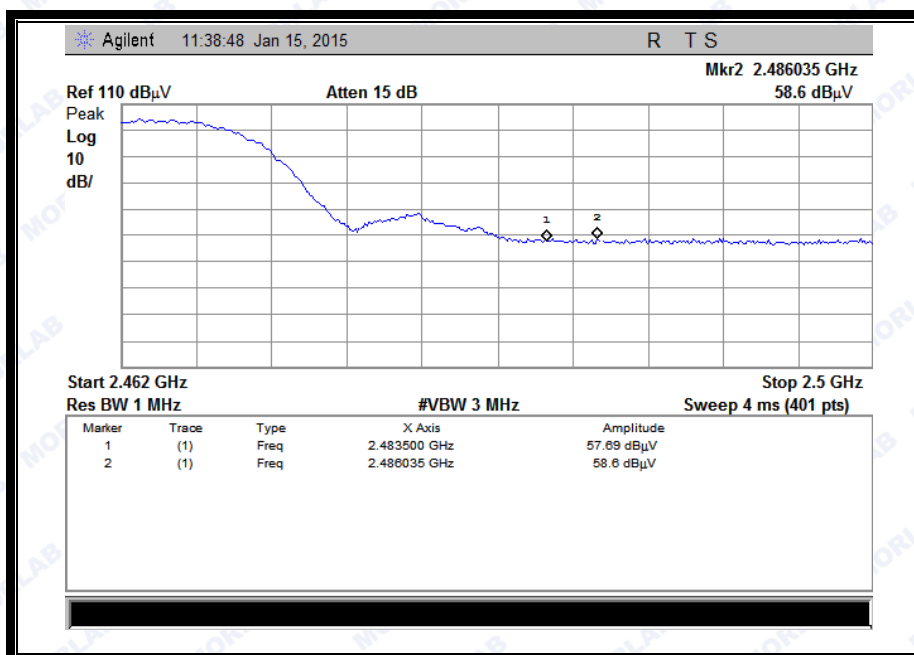

(Plot B1: Channel = 11 PEAK @ 802.11b)

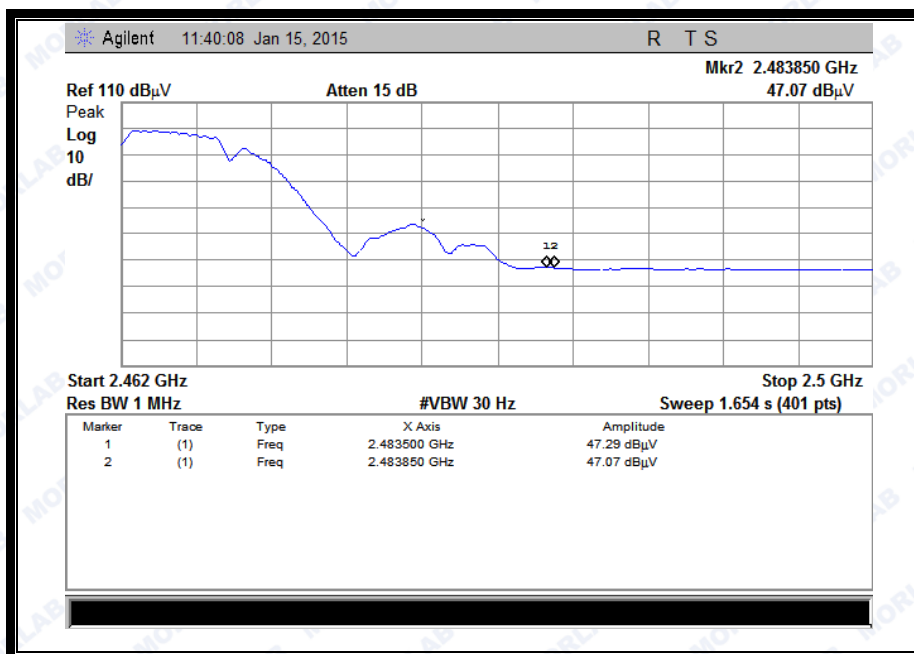

(Plot B2: Channel = 11 AVG @ 802.11b)

### 2.6.3.2 802.11g Test mode

The lowest and highest channels are tested to verify the band edge emissions.


#### A. Test Verdict:

| Channel | Frequency (MHz) | Detector | Receiver Reading UR (dBμV) | AT (dB) | AFactor (dB@3m) | Max. Emission E (dBμV/m) | Limit (dBμV/m) | Verdict |
|---------|-----------------|----------|----------------------------|---------|-----------------|--------------------------|----------------|---------|
|         |                 | PK/ AV   |                            |         |                 |                          |                |         |
| 1       | 2359.57         | PK       | 56.74                      | -33.63  | 32.56           | 55.67                    | 74             | Pass    |
| 1       | 2359.57         | AV       | 46.62                      | -33.63  | 32.56           | 45.55                    | 54             | Pass    |
| 11      | 2483.50         | PK       | 65.09                      | -33.18  | 32.5            | 64.41                    | 74             | Pass    |
| 11      | 2483.50         | AV       | 47.71                      | -33.18  | 32.5            | 47.03                    | 54             | Pass    |






## B. Test Plots:

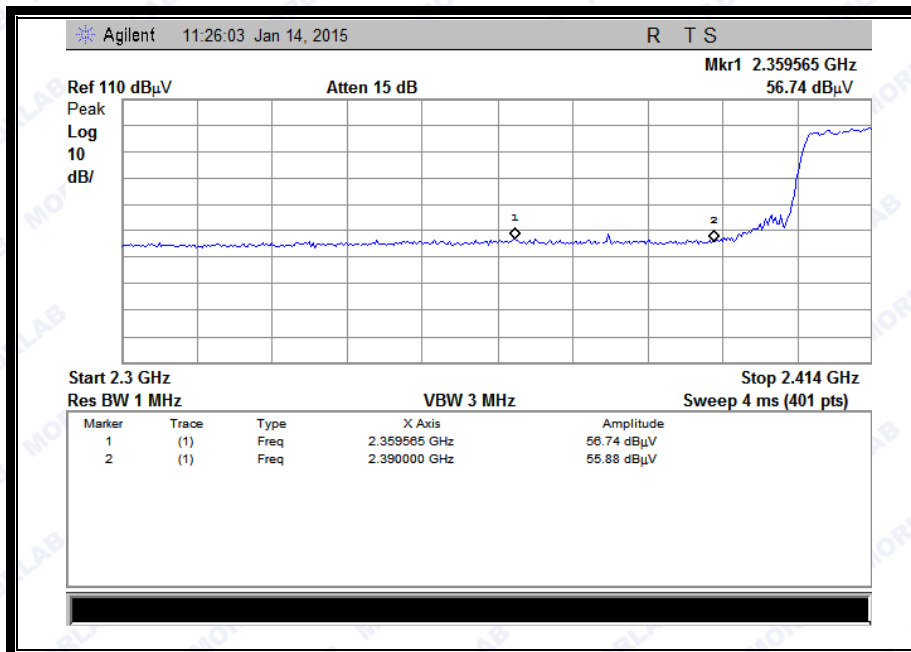


(Plot C1: Channel = 1 PEAK @ 802.11g)

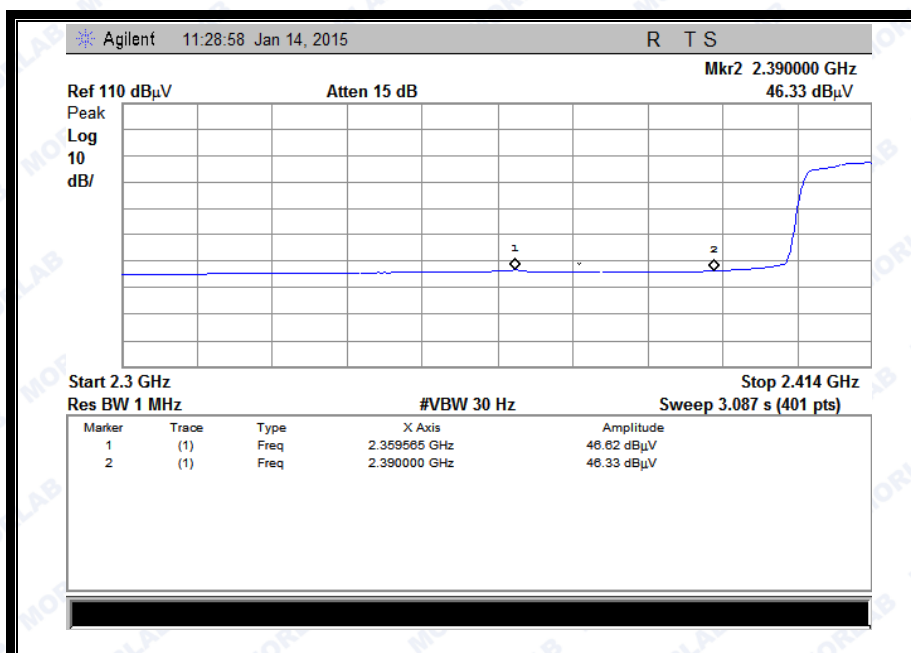


(Plot C2: Channel = 1 AVG @ 802.11g)



REPORT No. : SZ14120206W01

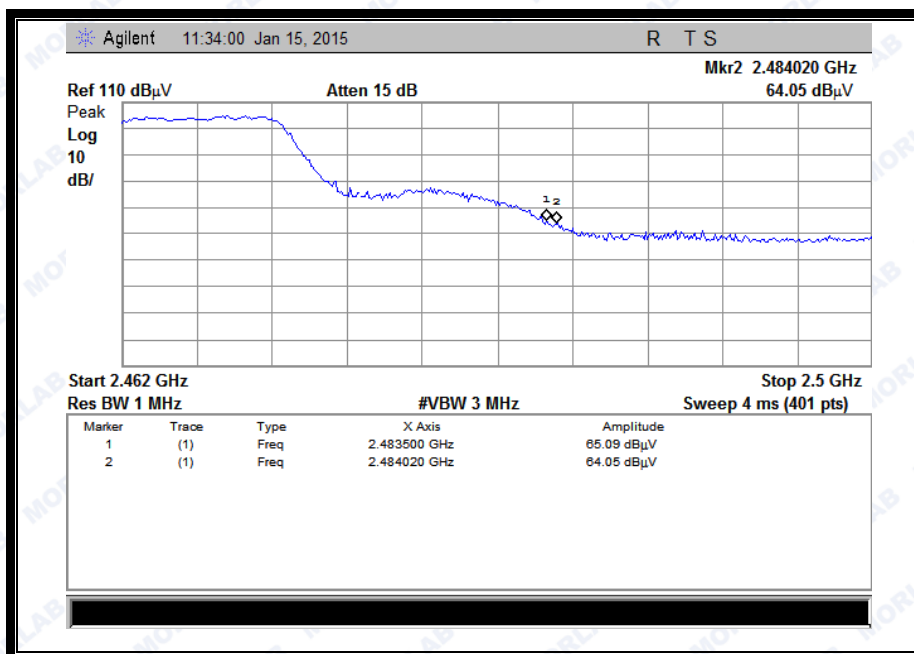

(Plot D1: Channel = 11 PEAK @ 802.11g)

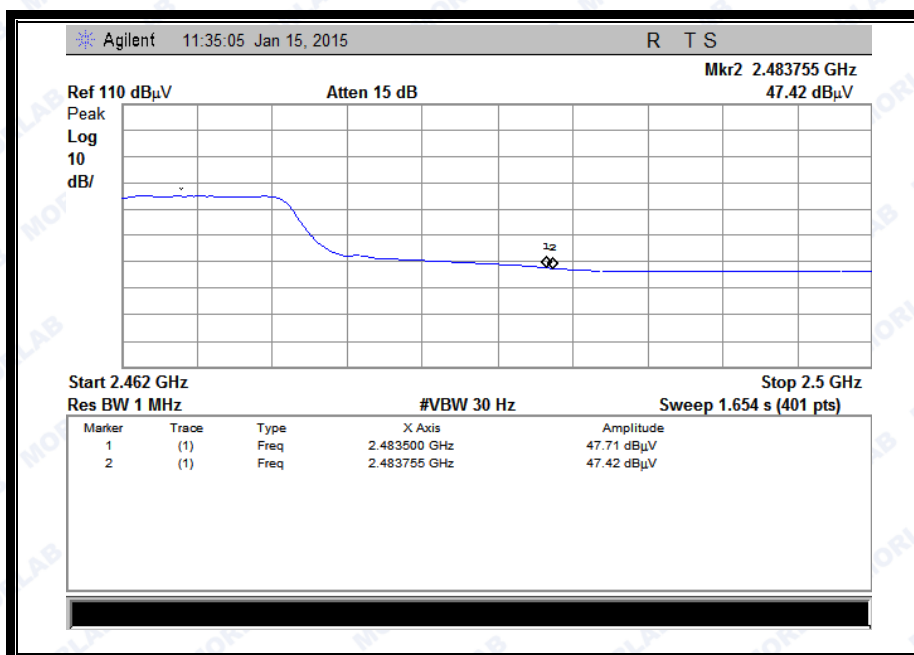

(Plot D2: Channel = 11 AVG @ 802.11g)

**2.6.3.3 802.11n-20MHz Test mode**

The lowest and highest channels are tested to verify the band edge emissions.

**A. Test Verdict:**


| Channel | Frequency (MHz) | Detector | Receiver Reading UR (dBuV) | AT (dB) | AFactor (dB@3m) | Max. Emission E (dBμV/m) | Limit (dBμV/m) | Verdict |
|---------|-----------------|----------|----------------------------|---------|-----------------|--------------------------|----------------|---------|
|         |                 | PK/ AV   |                            |         |                 |                          |                |         |
| 1       | 2353.58         | PK       | 58.17                      | -33.63  | 32.56           | 57.1                     | 74             | Pass    |
| 1       | 2360.42         | AV       | 46.41                      | -33.63  | 32.56           | 45.34                    | 54             | Pass    |
| 11      | 2484.33         | PK       | 66.80                      | -33.18  | 32.5            | 66.12                    | 74             | Pass    |
| 11      | 2483.50         | AV       | 47.61                      | -33.18  | 32.5            | 46.93                    | 54             | Pass    |

**B. Test Plots:**







REPORT No. : SZ14120206W01

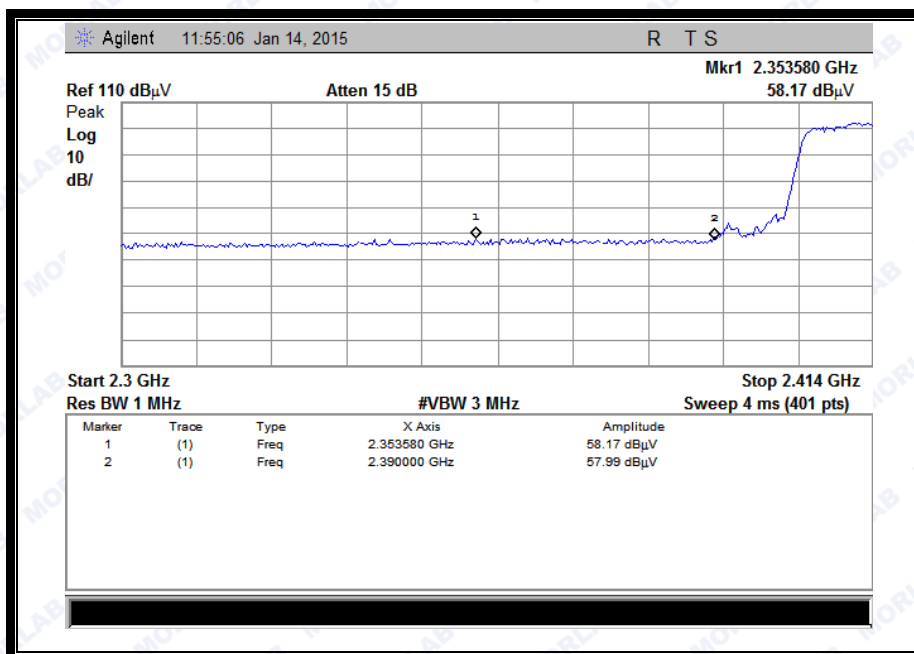


(Plot E1: Channel = 1 PEAK @ 802.11n-20)

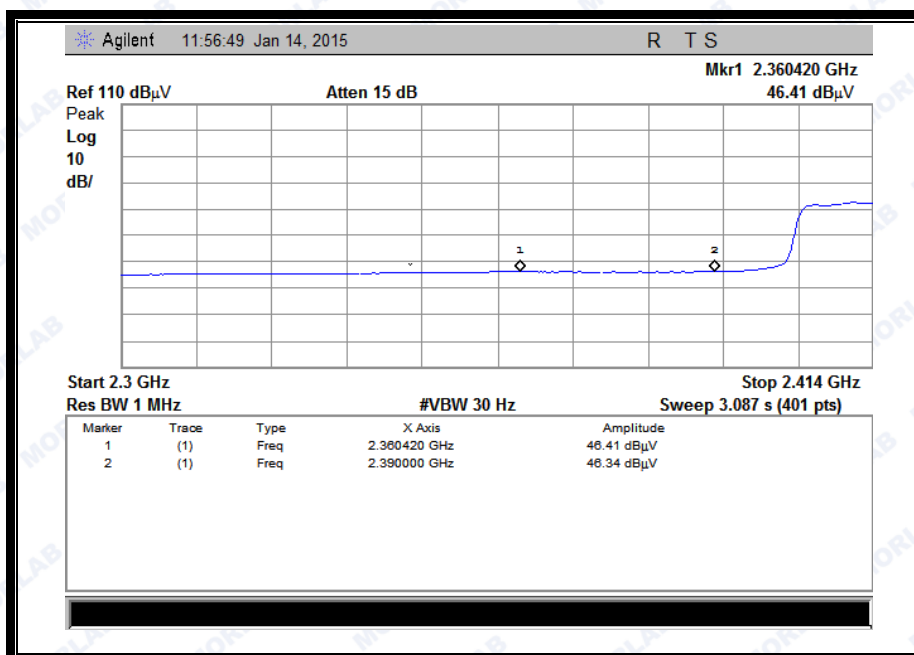

(Plot E2: Channel = 1 AVG @ 802.11n-20)

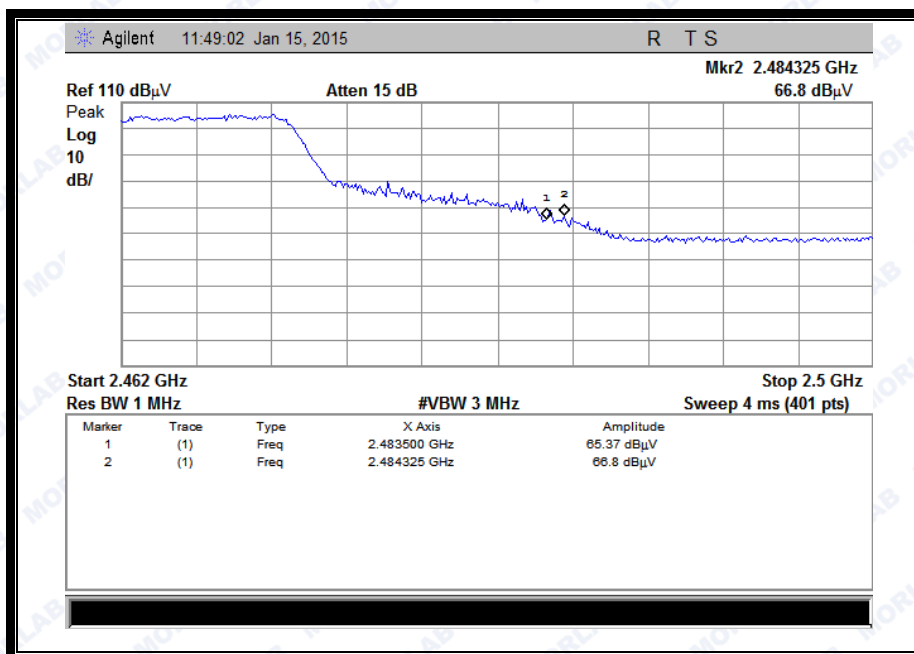

(Plot F1: Channel = 11 PEAK @ 802.11n-20)

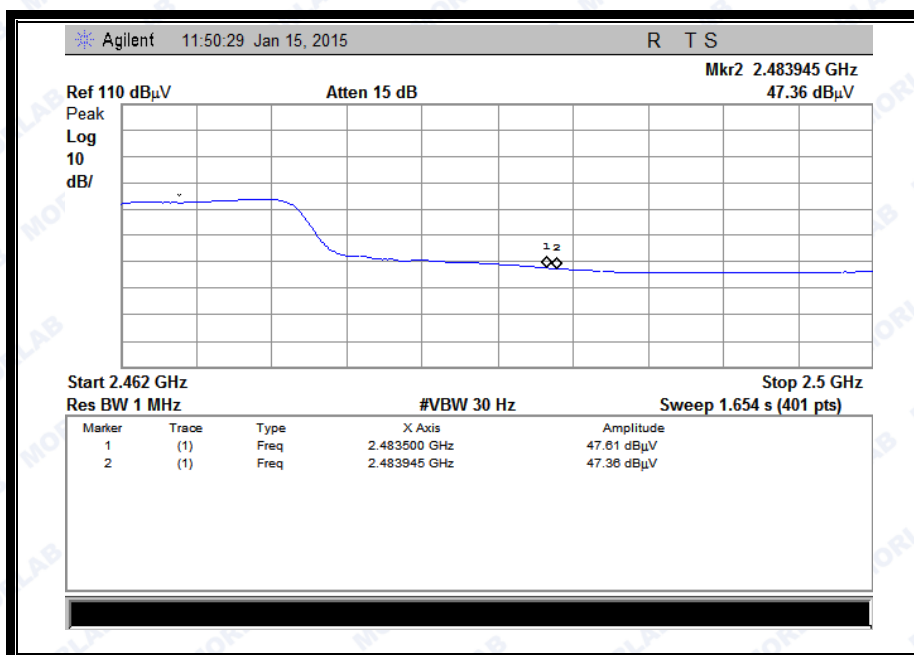

(Plot F2: Channel = 11 AVG @ 802.11n-20)

#### 2.6.3.4 802.11n-40MHz Test mode


The lowest and highest channels are tested to verify the band edge emissions.

##### A. Test Verdict:



REPORT No. : SZ14120206W01

| Channel | Frequency<br>(MHz) | Detector | Receiver<br>Reading<br>UR<br>(dBuV) | AT<br>(dB) | AFactor<br>(dB@3m) | Max.<br>Emission<br>E<br>(dBμV/m) | Limit<br>(dBμV/m) | Verdict |
|---------|--------------------|----------|-------------------------------------|------------|--------------------|-----------------------------------|-------------------|---------|
|         |                    | PK/ AV   |                                     |            |                    |                                   |                   |         |
| 3       | 2353.58            | PK       | 58.17                               | -33.63     | 32.56              | 57.1                              | 74                | Pass    |
| 3       | 2360.42            | AV       | 46.41                               | -33.63     | 32.56              | 45.34                             | 54                | Pass    |
| 9       | 2484.33            | PK       | 66.8                                | -33.18     | 32.5               | 66.12                             | 74                | Pass    |
| 9       | 2483.50            | AV       | 47.61                               | -33.18     | 32.5               | 46.93                             | 54                | Pass    |

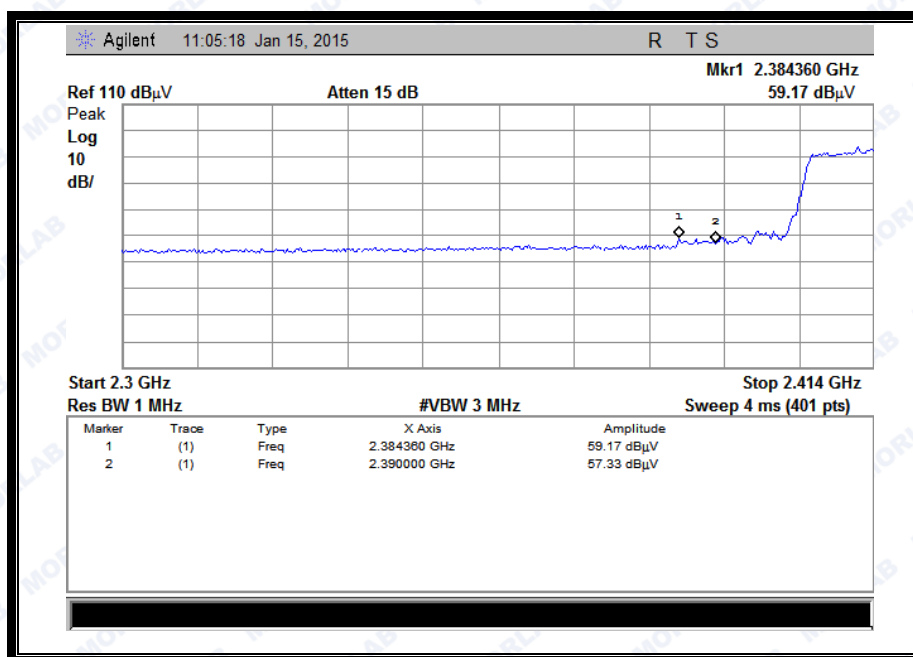
**B. Test Plots:**

(Plot E1: Channel = 3 PEAK @ 802.11n-40)







REPORT No. : SZ14120206W01

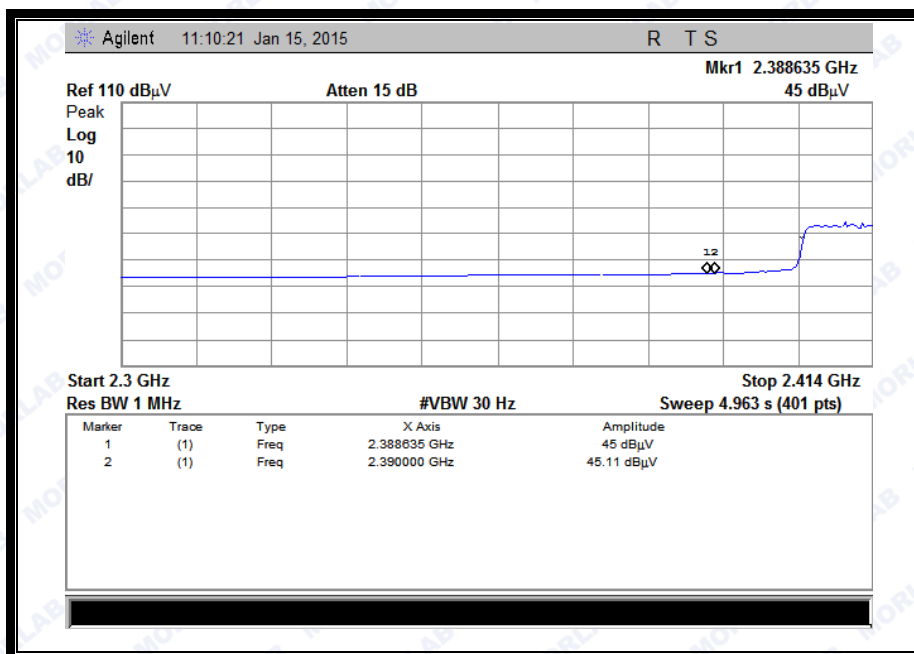

(Plot E2: Channel = 3 AVG @ 802.11n-40)

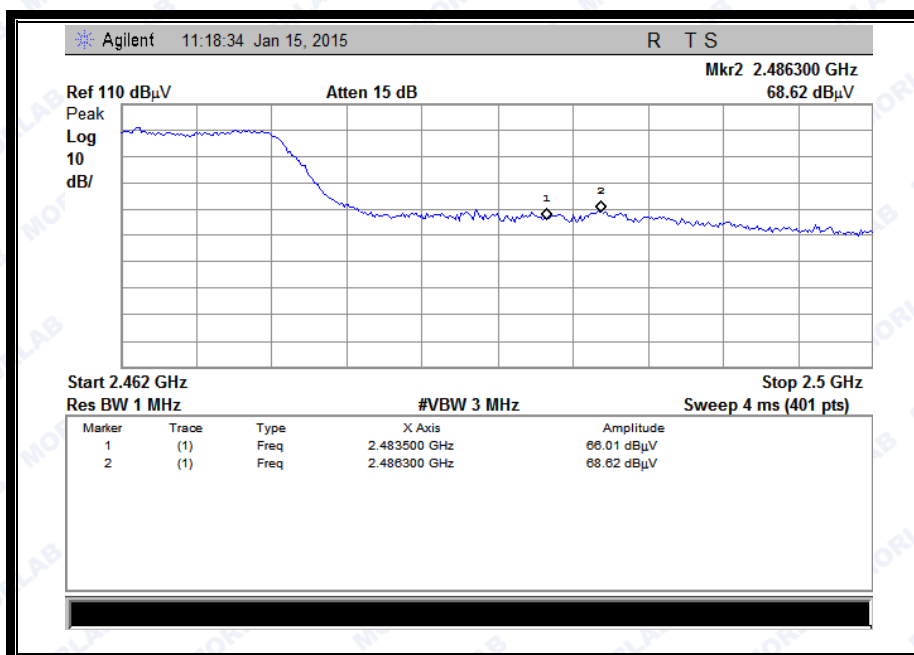

(Plot F1: Channel = 9 PEAK @ 802.11n-40)

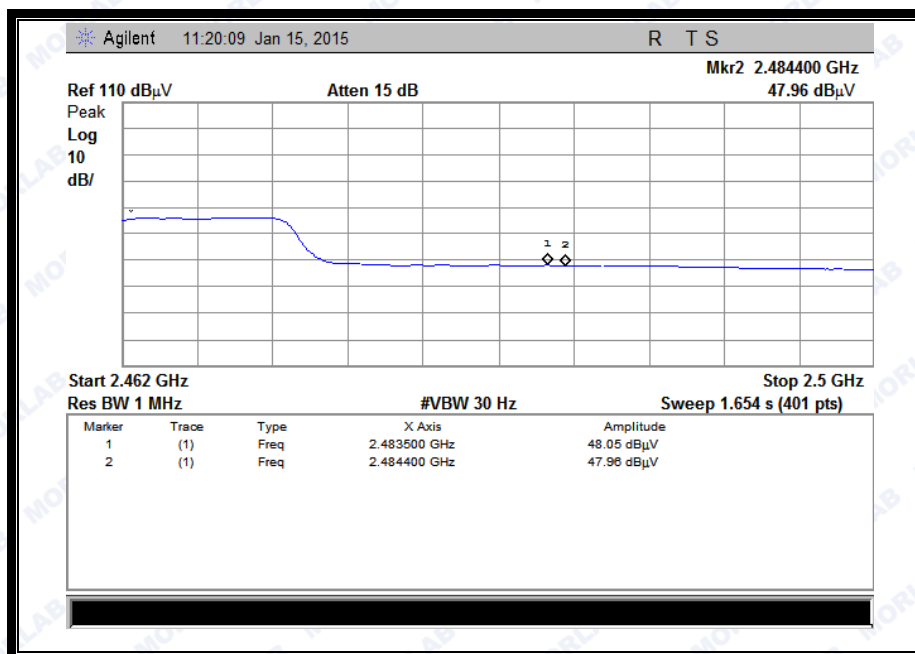

(Plot F2: Channel = 9 AVG @ 802.11n-40)

## 2.7 Conducted Emission

### 2.7.1 Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50μH/50Ω line impedance stabilization network (LISN).


| Frequency range<br>(MHz) | Conducted Limit (dBμV) |          |
|--------------------------|------------------------|----------|
|                          | Quai-peak              | Average  |
| 0.15 - 0.50              | 66 to 56               | 56 to 46 |
| 0.50 - 5                 | 56                     | 46       |
| 5 - 30                   | 60                     | 50       |

#### NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

## 2.7.2 Test Description

### A. Test Setup:

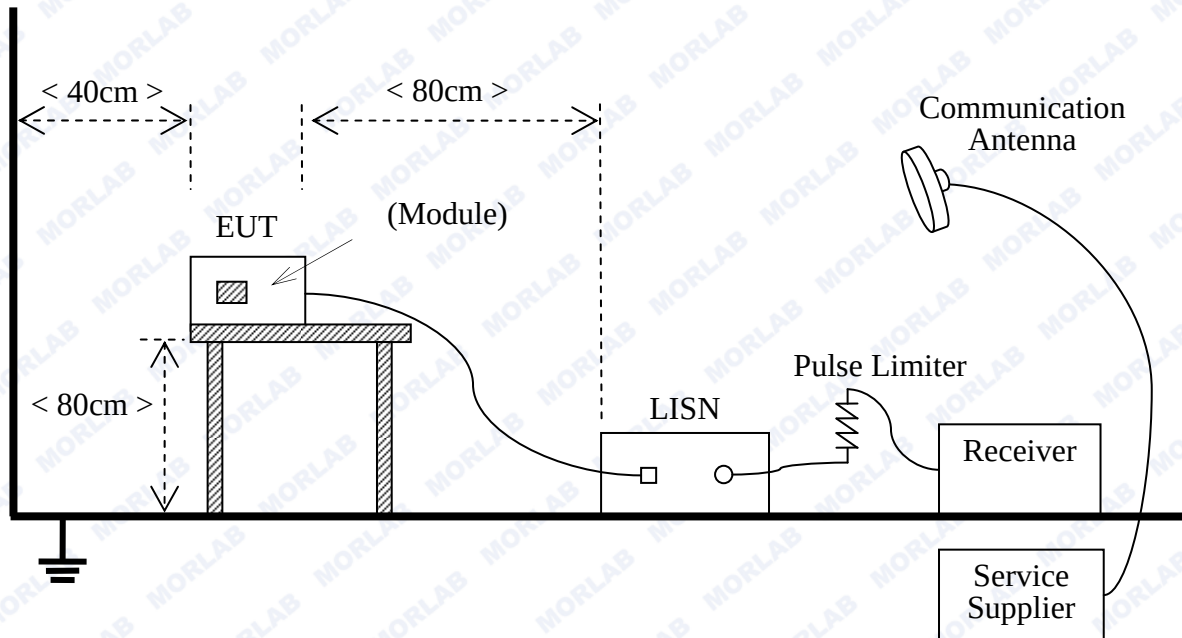

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4:2009

### B. Equipments List:

Please reference ANNEX A(1.4).

## 2.7.3 Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.


Note: All test modes are performed, only the worst case is recorded in this report.

### A. Test setup:


The EUT configuration of the emission tests is EUT + Link.

### B. Test Plots:



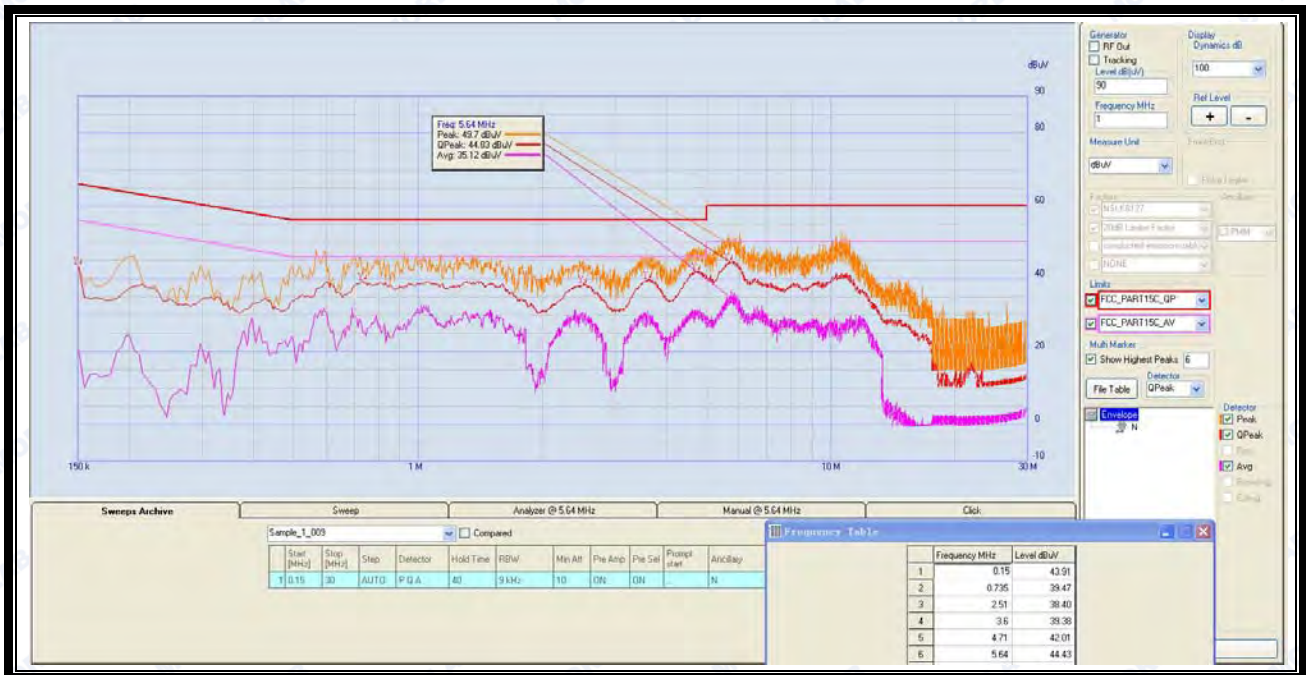

(Plot A: L Phase)

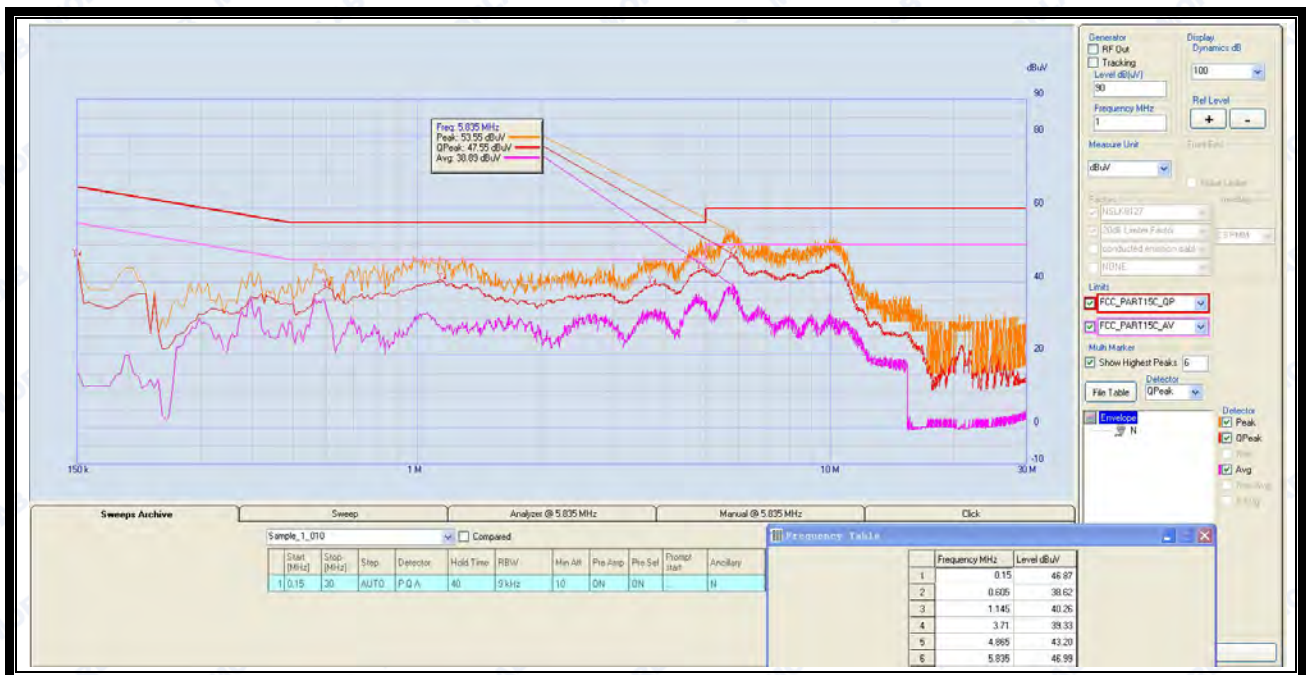

(Plot B: N Phase)



## 2.8 Radiated Emission

### 2.8.1 Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength ( $\mu\text{V/m}$ ) | Measurement Distance (m) |
|-----------------|------------------------------------|--------------------------|
| 0.009 - 0.490   | 2400/F(kHz)                        | 300                      |
| 0.490 - 1.705   | 24000/F(kHz)                       | 30                       |
| 1.705 - 30.0    | 30                                 | 30                       |
| 30 - 88         | 100                                | 3                        |
| 88 - 216        | 150                                | 3                        |
| 216 - 960       | 200                                | 3                        |
| Above 960       | 500                                | 3                        |

Note:

For Above 1000MHz, the emission limit in this paragraph is based on measurement

instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.


For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)

## 2.8.2 Test Description


### A. Test Setup:

- 1) For radiated emissions from 9kHz to 30MHz

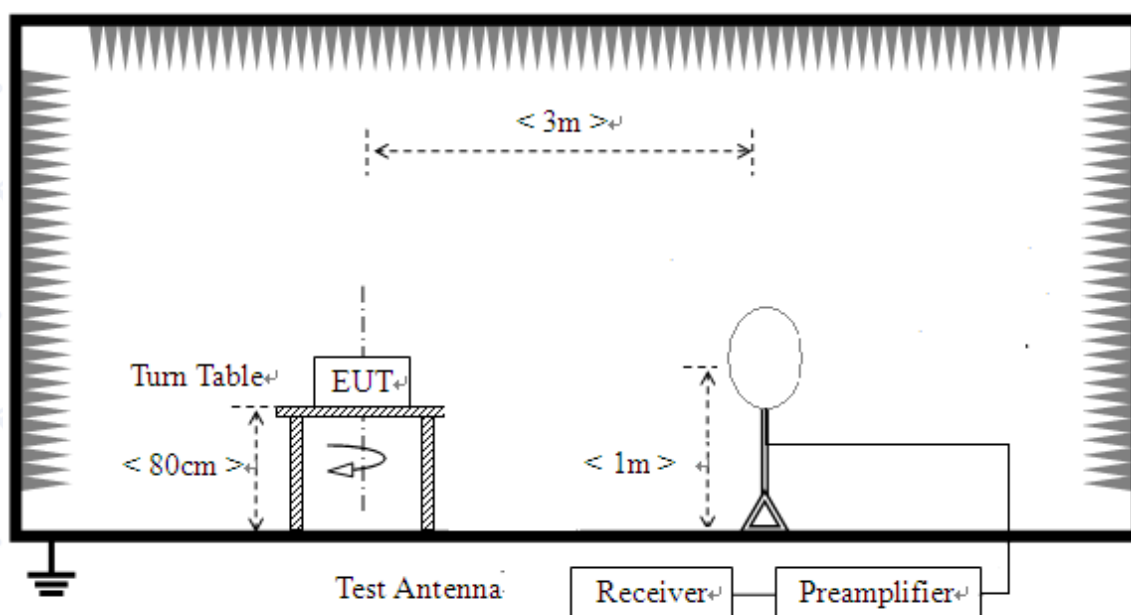




2) For radiated emissions from 30MHz to1GHz

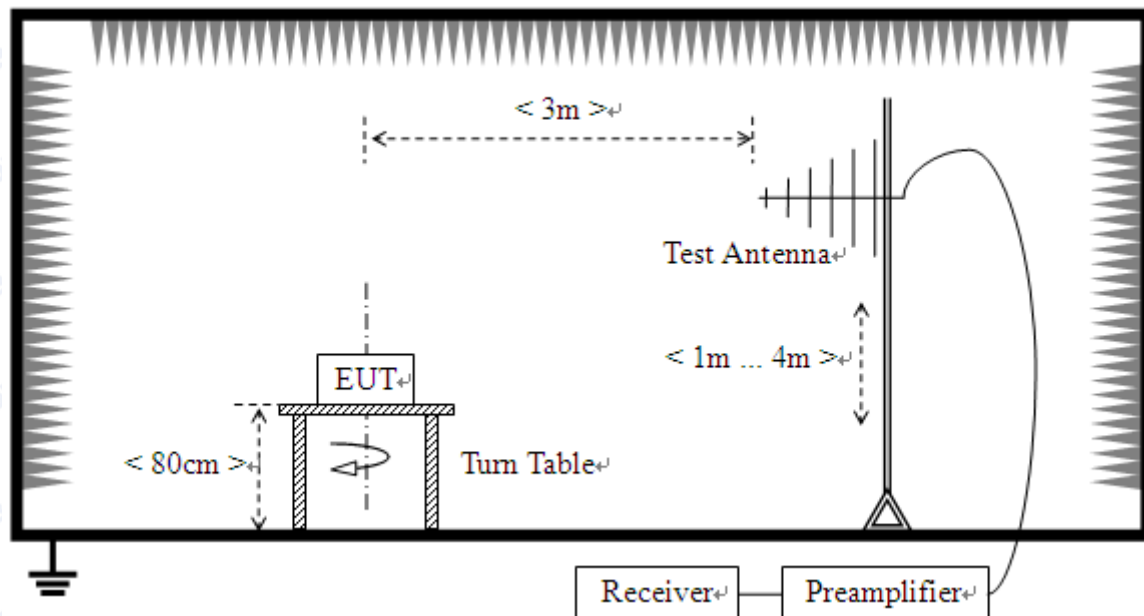

3) For radiated emissions above 1GHz

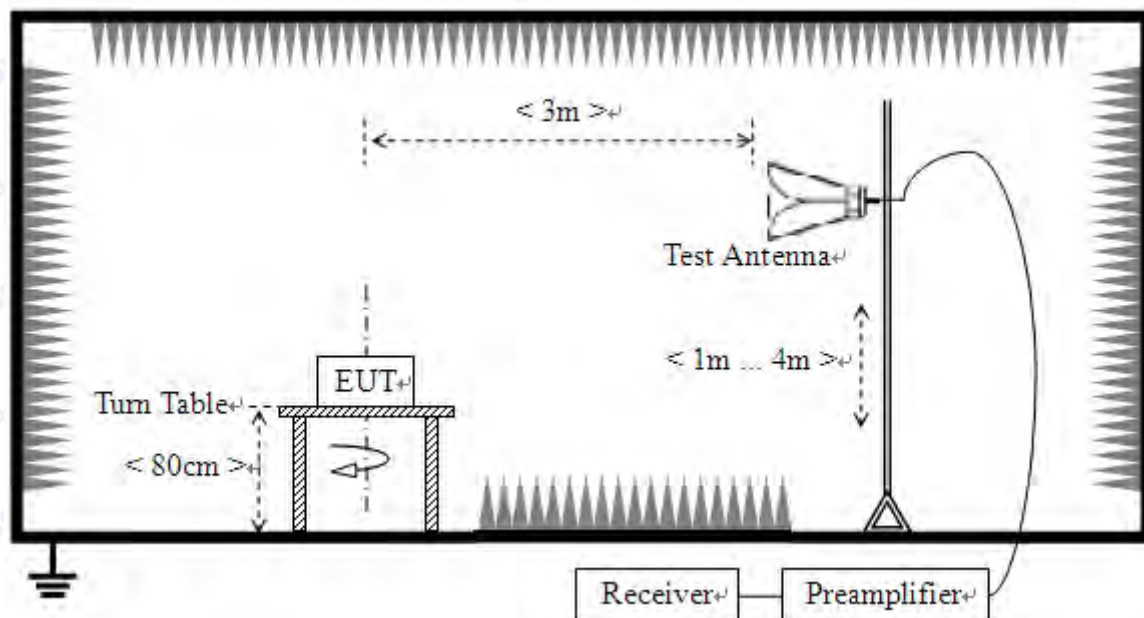

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2009). The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4.



The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading

For the Test Antenna:

(a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

## B. Equipments List:

Please reference ANNEX A(1.4).

### 2.8.3 Test Result

According to ANSI C63.4 selection 4.2.2, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m


During the test, the total correction Factor  $A_T$  and  $A_{\text{Factor}}$  were built in test software.

**Note:** All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

**2.8.3.1 802.11b Test mode****A. Test Plots for the Whole Measurement Frequency Range:**


Plots for Channel = 1

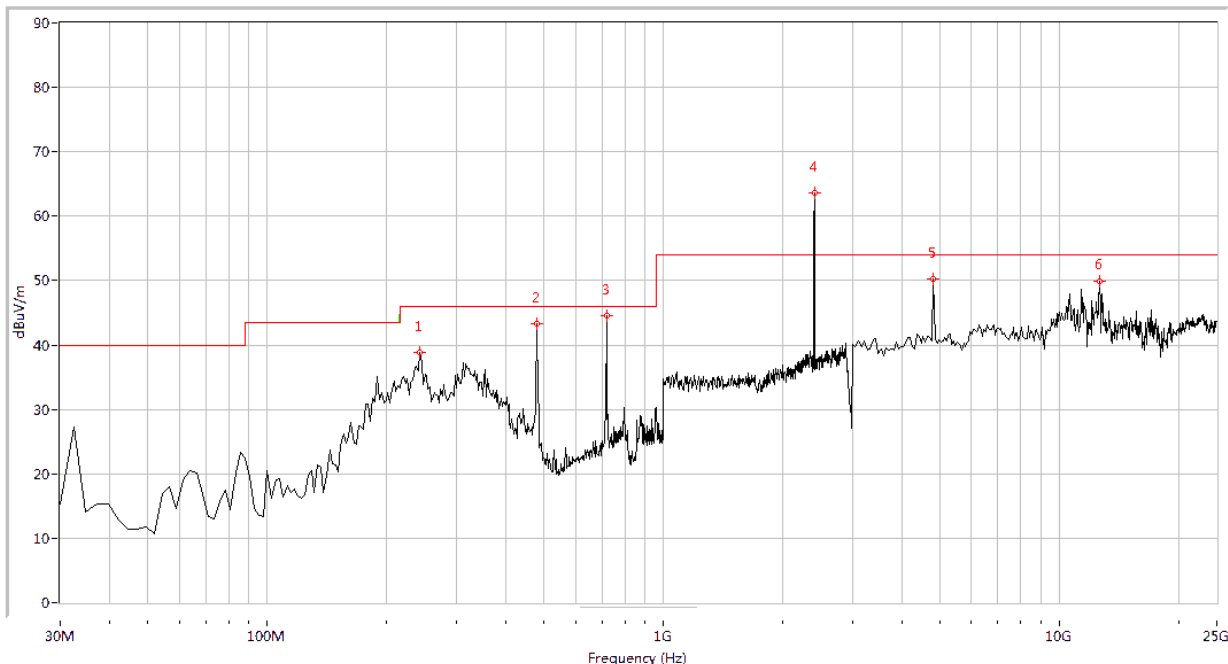

| Fre.<br>(MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna    | Verdict |
|---------------|-------|-----|-----|----------|----------|----------|------------|---------|
| 242.868       | 38.83 | N.A | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 479.925       | 43.22 | N.A | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 719.401       | 44.60 | N.A | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 2412.000      | 63.64 | N.A | N.A | N.A      | N.A      | N.A      | Horizontal | N.A     |
| 4810.474      | 50.17 | N.A | N.A | 74.0     | N.A      | 54.0     | Horizontal | PASS    |
| 12655.860     | 49.86 | N.A | N.A | 74.0     | N.A      | 54.0     | Horizontal | PASS    |

(Antenna Horizontal, 30MHz to 25GHz)



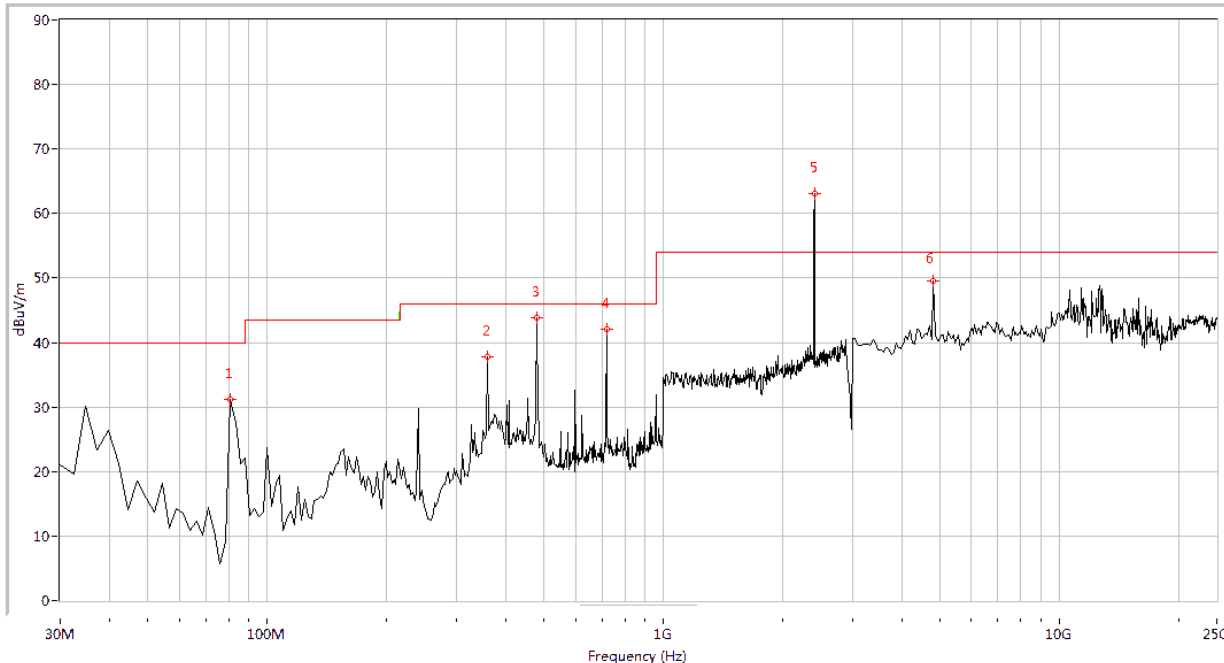


| Fre.<br>(MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna  | Verdict |
|---------------|-------|-----|-----|----------|----------|----------|----------|---------|
| 80.798        | 31.25 | N.A | N.A | N.A      | 40.0     | N.A      | Vertical | PASS    |
| 358.978       | 37.76 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 479.925       | 43.88 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 719.401       | 42.01 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 2412.000      | 63.03 | N.A | N.A | N.A      | N.A      | N.A      | Vertical | N.A     |
| 4810.474      | 49.48 | N.A | N.A | 74.0     | N.A      | 54.0     | Vertical | PASS    |

(Antenna Vertical, 30MHz to 25GHz)




Plot for Channel = 6

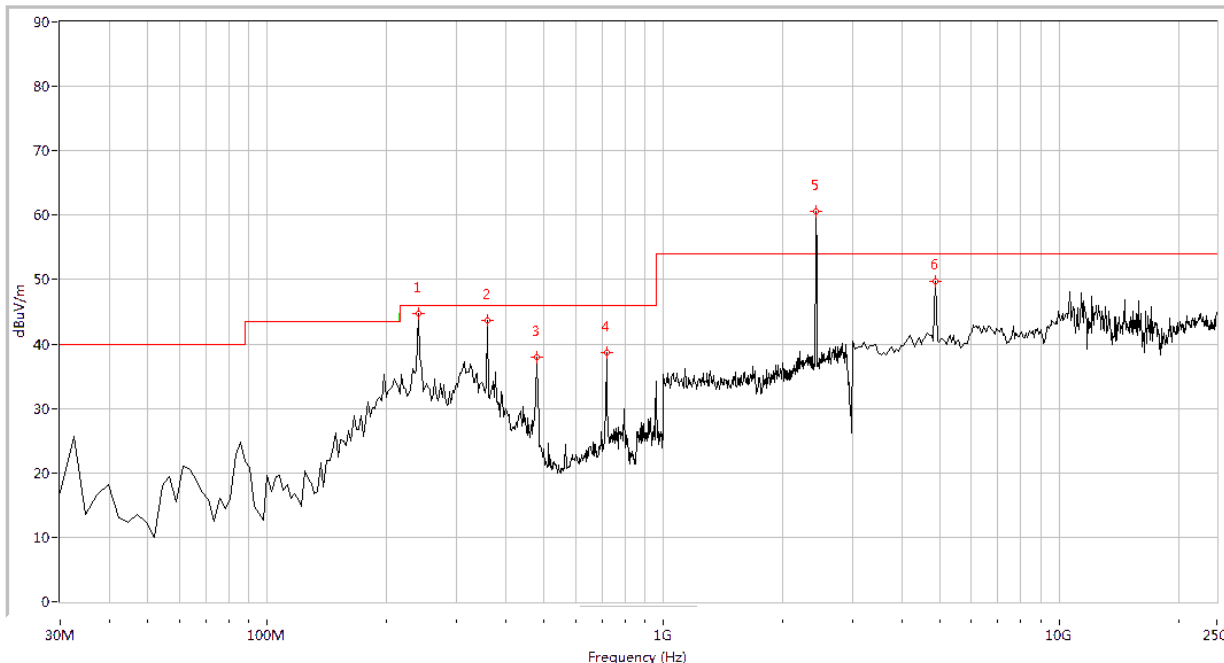

| Fre.<br>(MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna    | Verdict |
|---------------|-------|-----|-----|----------|----------|----------|------------|---------|
| 240.449       | 44.75 | N.A | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 358.978       | 43.62 | N.A | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 479.925       | 38.02 | N.A | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 719.401       | 38.62 | N.A | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 2437.000      | 60.59 | N.A | N.A | N.A      | N.A      | N.A      | Horizontal | N.A     |
| 4865.337      | 49.78 | N.A | N.A | 74.0     | N.A      | 54.0     | Horizontal | PASS    |


(Antenna Horizontal, 30MHz to 25GHz)

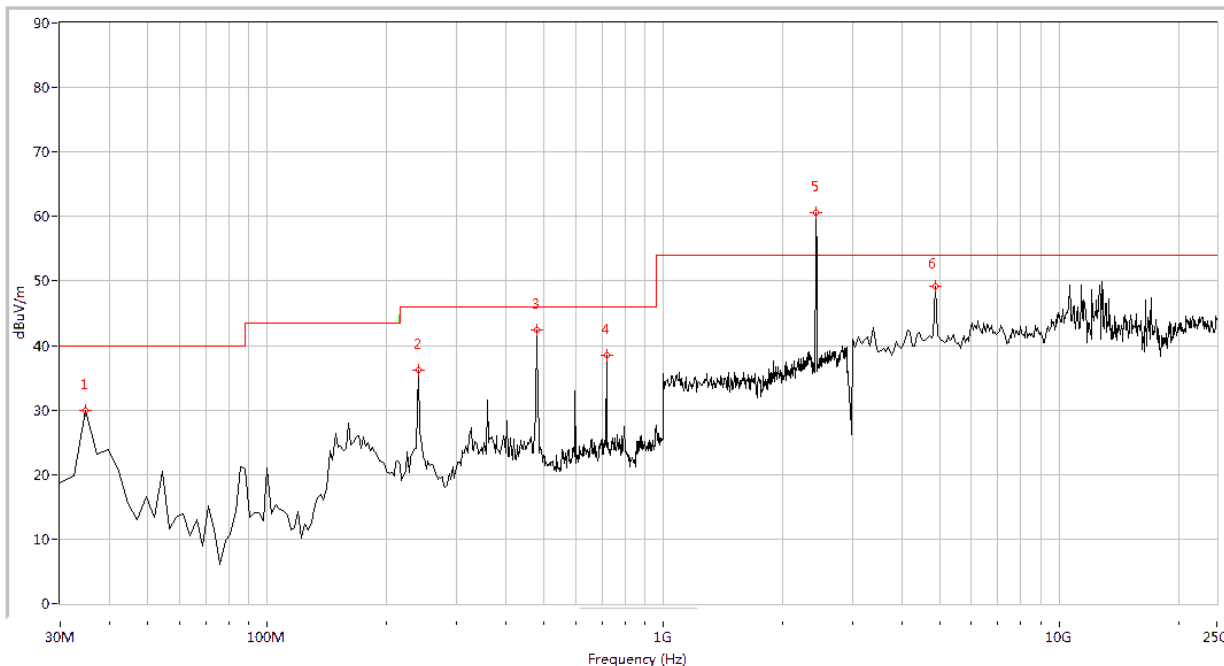

| Fre.<br>(MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna  | Verdict |
|---------------|-------|-----|-----|----------|----------|----------|----------|---------|
| 34.838        | 30.00 | N.A | N.A | N.A      | 40.0     | N.A      | Vertical | PASS    |
| 240.449       | 36.12 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 479.925       | 42.40 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 719.401       | 38.58 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 2437.000      | 60.64 | N.A | N.A | N.A      | N.A      | N.A      | Vertical | N.A     |
| 4865.337      | 49.23 | N.A | N.A | 74.0     | N.A      | 54.0     | Vertical | PASS    |


(Antenna Vertical, 30MHz to 25GHz)

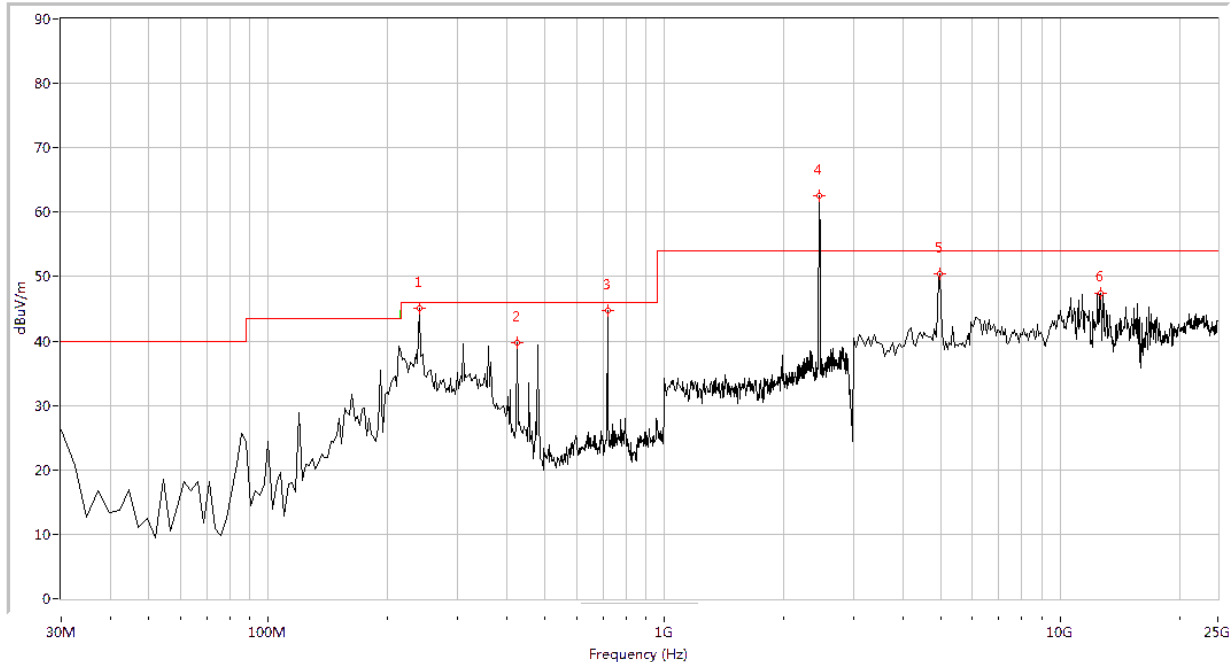

Plot for Channel = 11

| Fre.<br>(MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna    | Verdict |
|---------------|-------|-----|-----|----------|----------|----------|------------|---------|
| 240.449       | 45.01 | N.A | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 424.289       | 39.71 | N.A | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 719.401       | 44.66 | N.A | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 2462.000      | 62.50 | N.A | N.A | N.A      | N.A      | N.A      | Horizontal | N.A     |
| 4975.062      | 50.39 | N.A | N.A | 74.0     | N.A      | 54.0     | Horizontal | PASS    |
| 12655.860     | 47.38 | N.A | N.A | 74.0     | N.A      | 54.0     | Horizontal | PASS    |

(Antenna Horizontal, 30MHz to 25GHz)

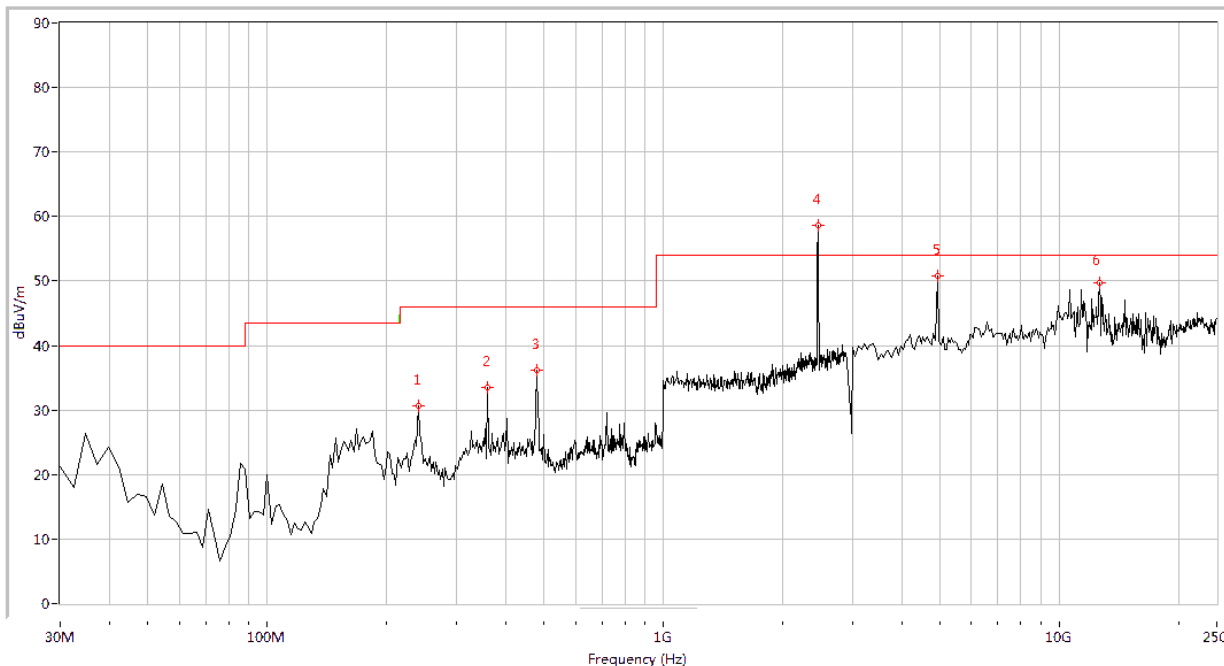


| Fre.<br>(MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna  | Verdict |
|---------------|-------|-----|-----|----------|----------|----------|----------|---------|
| 240.449       | 30.61 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 358.978       | 33.44 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 479.925       | 36.22 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 2462.000      | 58.67 | N.A | N.A | N.A      | N.A      | N.A      | Vertical | N.A     |
| 4920.200      | 50.81 | N.A | N.A | 74.0     | N.A      | 54.0     | Vertical | PASS    |
| 12655.860     | 49.77 | N.A | N.A | 74.0     | N.A      | 54.0     | Vertical | PASS    |

(Antenna Vertical, 30MHz to 25GHz)

**2.8.3.2 802.11g Test mode****A. Test Plots for the Whole Measurement Frequency Range:**


Plots for Channel = 1

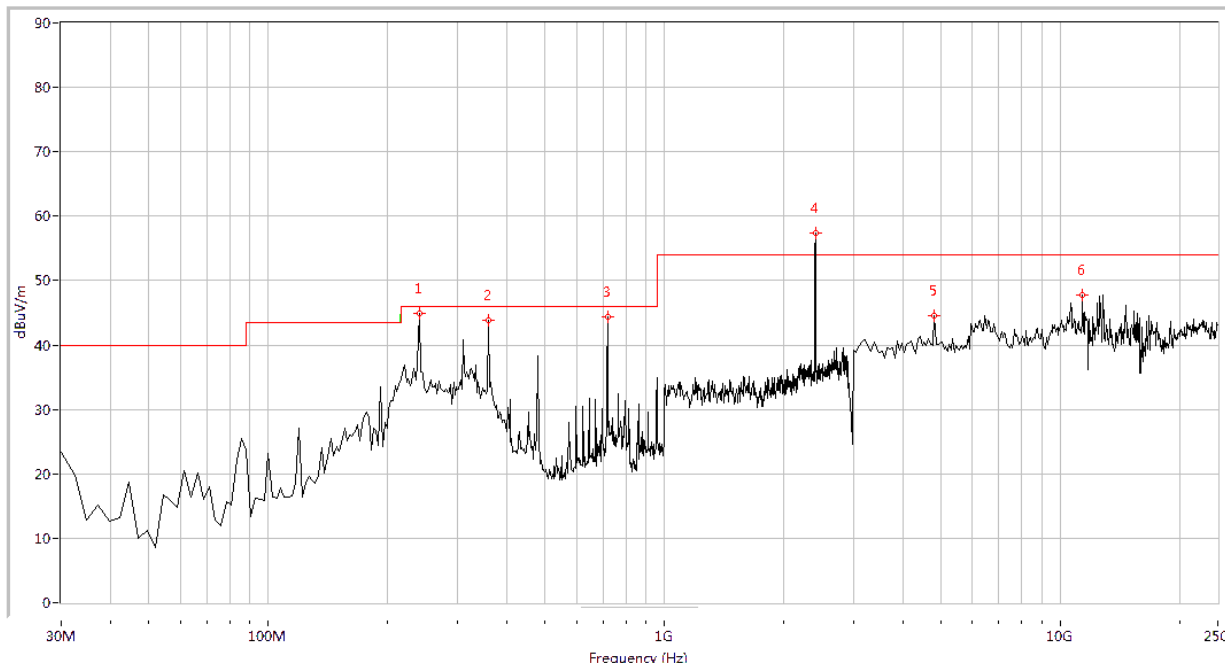

| Fre.<br>(MHz) | Pk    | QP    | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna    | Verdict |
|---------------|-------|-------|-----|----------|----------|----------|------------|---------|
| 240.449       | 44.88 | 42.35 | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 358.978       | 43.90 | 41.23 | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 719.401       | 44.40 | 42.12 | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 2412.000      | 57.37 | N.A   | N.A | N.A      | N.A      | N.A      | Horizontal | N.A     |
| 4810.474      | 44.53 | N.A   | N.A | 74.0     | N.A      | 54.0     | Horizontal | PASS    |
| 11394.015     | 47.78 | N.A   | N.A | 74.0     | N.A      | 54.0     | Horizontal | PASS    |

(Antenna Horizontal, 30MHz to 25GHz)



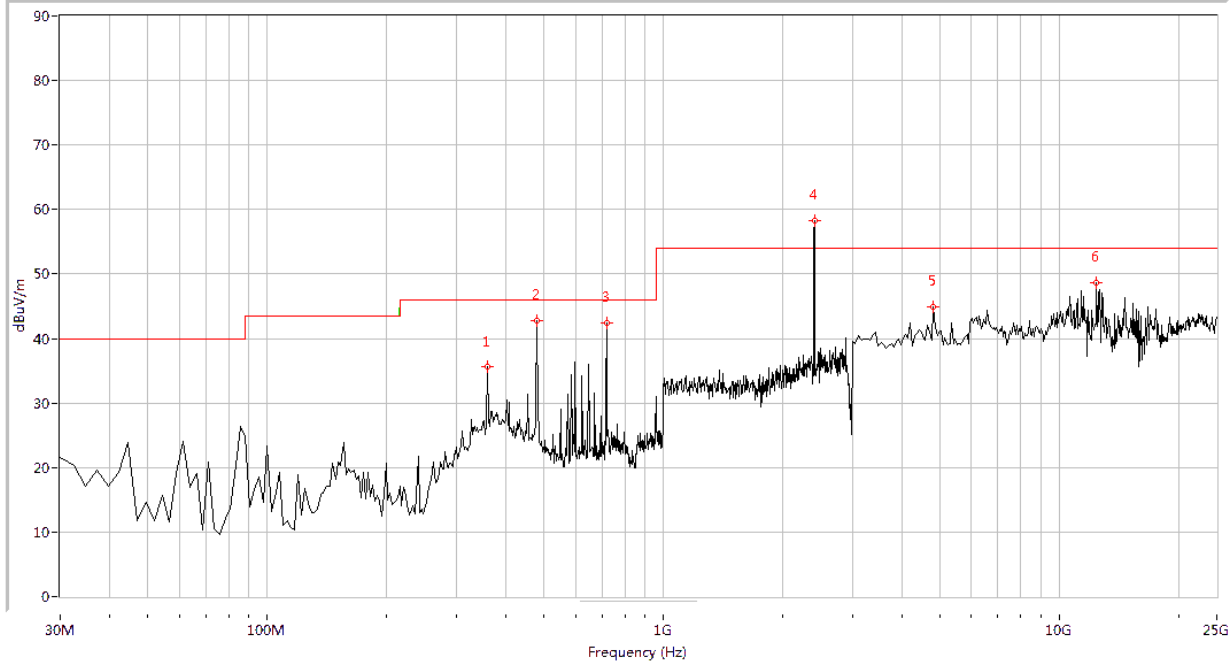


| Fre.<br>(MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna  | Verdict |
|---------------|-------|-----|-----|----------|----------|----------|----------|---------|
| 358.978       | 35.65 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 479.925       | 42.84 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 719.401       | 42.42 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 2412.000      | 58.22 | N.A | N.A | N.A      | N.A      | N.A      | Vertical | N.A     |
| 4810.474      | 44.86 | N.A | N.A | 74.0     | N.A      | 54.0     | Vertical | PASS    |
| 12436.409     | 48.69 | N.A | N.A | 74.0     | N.A      | 54.0     | Vertical | PASS    |

(Antenna Vertical, 30MHz to 25GHz)




Plot for Channel = 6

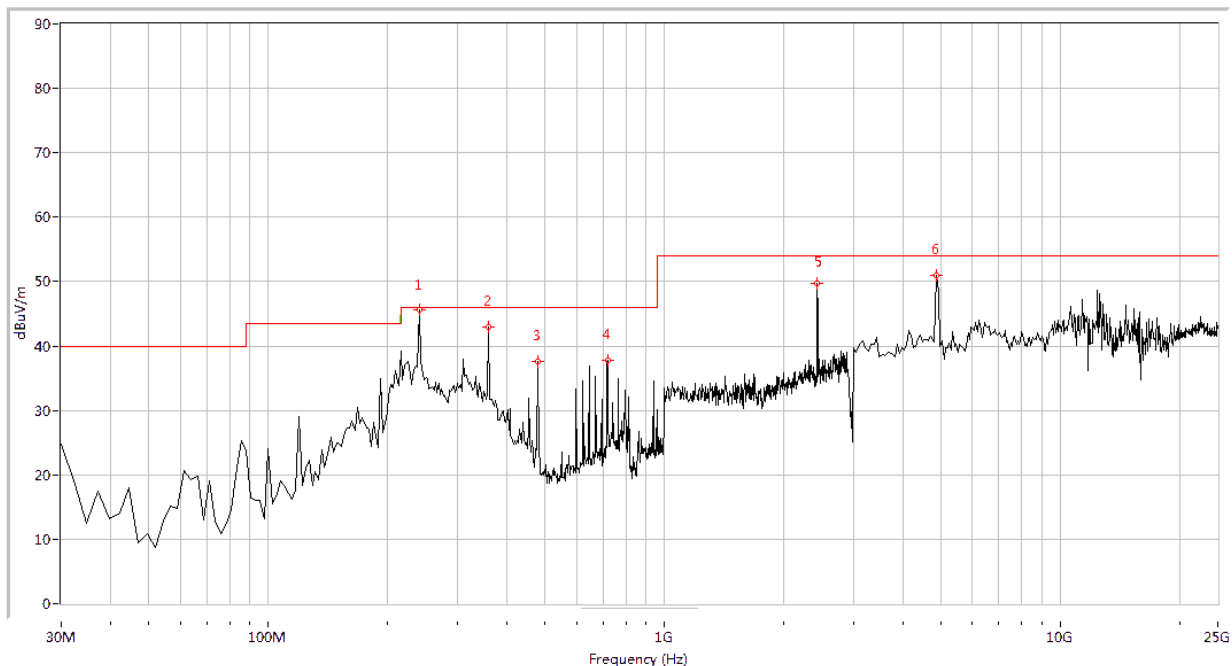

| Fre.<br>(MHz) | Pk    | QP    | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna    | Verdict |
|---------------|-------|-------|-----|----------|----------|----------|------------|---------|
| 240.449       | 45.69 | 42.69 | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 358.978       | 42.87 | N.A   | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 479.925       | 37.53 | N.A   | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 719.401       | 37.74 | N.A   | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 2437.000      | 49.68 | N.A   | N.A | N.A      | N.A      | N.A      | Horizontal | N.A     |
| 4865.337      | 50.93 | N.A   | N.A | 74.0     | N.A      | 54.0     | Horizontal | PASS    |

(Antenna Horizontal, 30MHz to 25GHz)

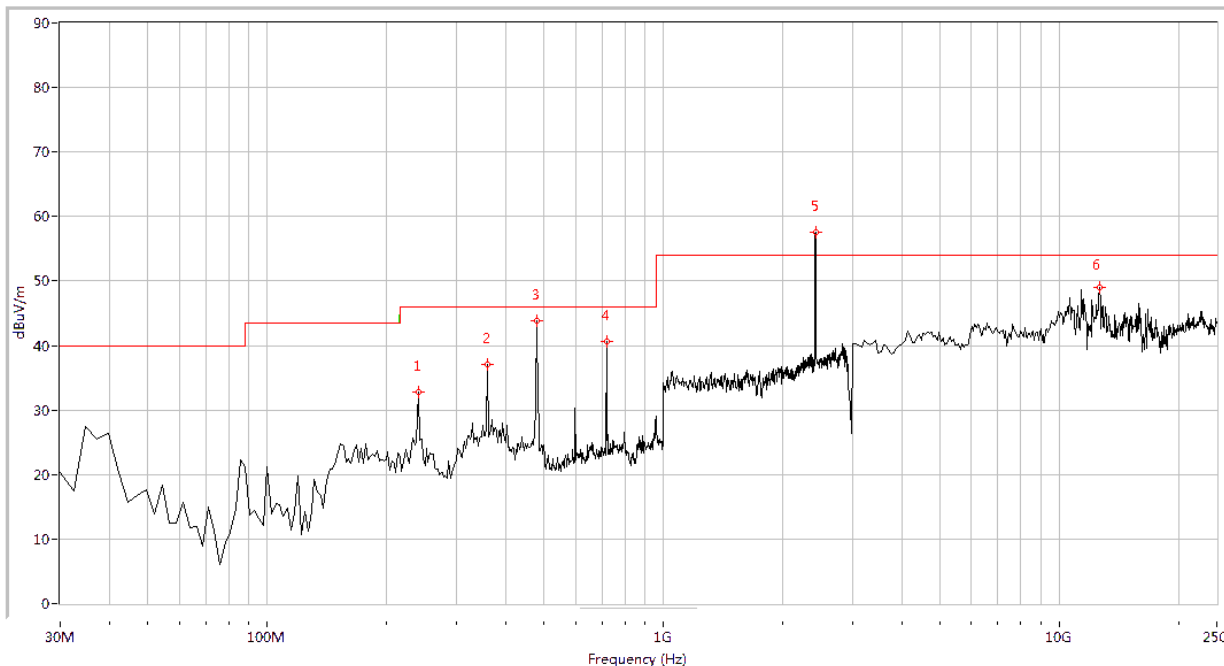


| Fre.<br>(MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna  | Verdict |
|---------------|-------|-----|-----|----------|----------|----------|----------|---------|
| 240.449       | 32.78 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 358.978       | 37.02 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 479.925       | 43.93 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 719.401       | 40.59 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 2437.000      | 57.51 | N.A | N.A | N.A      | N.A      | N.A      | Vertical | N.A     |
| 12655.860     | 48.93 | N.A | N.A | 74.0     | N.A      | 54.0     | Vertical | PASS    |

(Antenna Vertical, 30MHz to 25GHz)






## Plot for Channel = 11

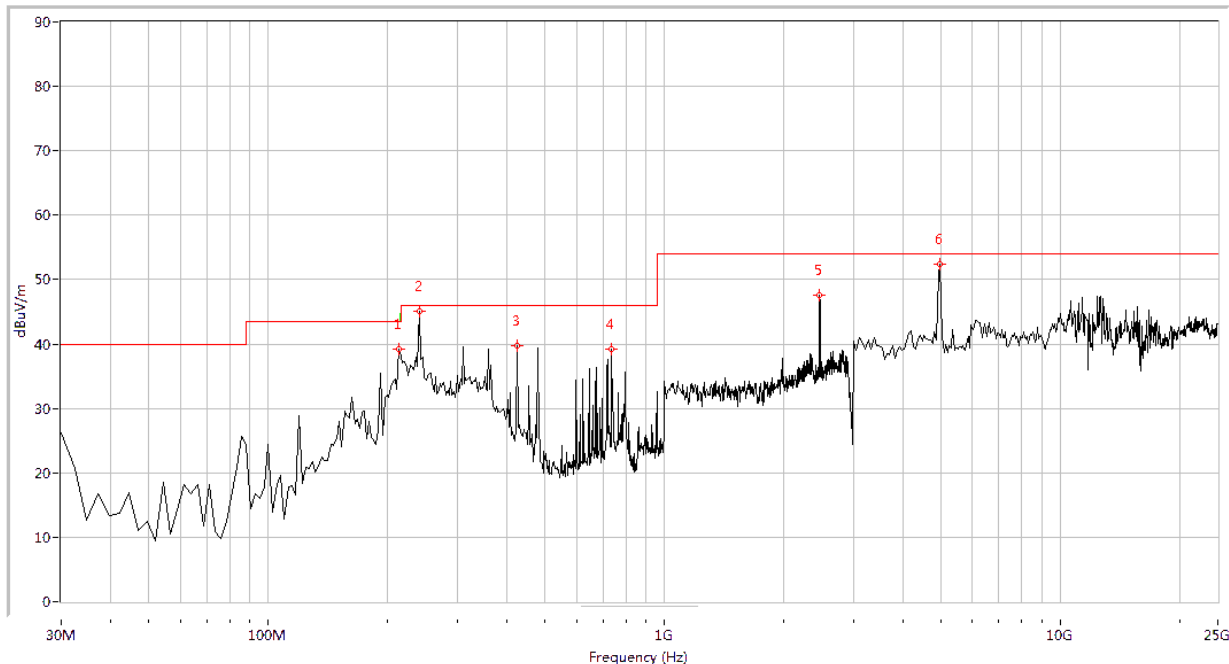

| Fre.<br>(MHz) | Pk    | QP    | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna    | Verdict |
|---------------|-------|-------|-----|----------|----------|----------|------------|---------|
| 213.840       | 39.23 | N.A   | N.A | N.A      | 43.5     | N.A      | Horizontal | PASS    |
| 240.449       | 45.01 | 42.37 | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 424.289       | 39.71 | N.A   | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 736.334       | 39.16 | N.A   | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 2462.000      | 47.50 | N.A   | N.A | N.A      | N.A      | N.A      | Horizontal | N.A     |
| 4975.062      | 52.39 | N.A   | N.A | 74.0     | N.A      | 54.0     | Horizontal | PASS    |

(Antenna Horizontal, 30MHz to 25GHz)

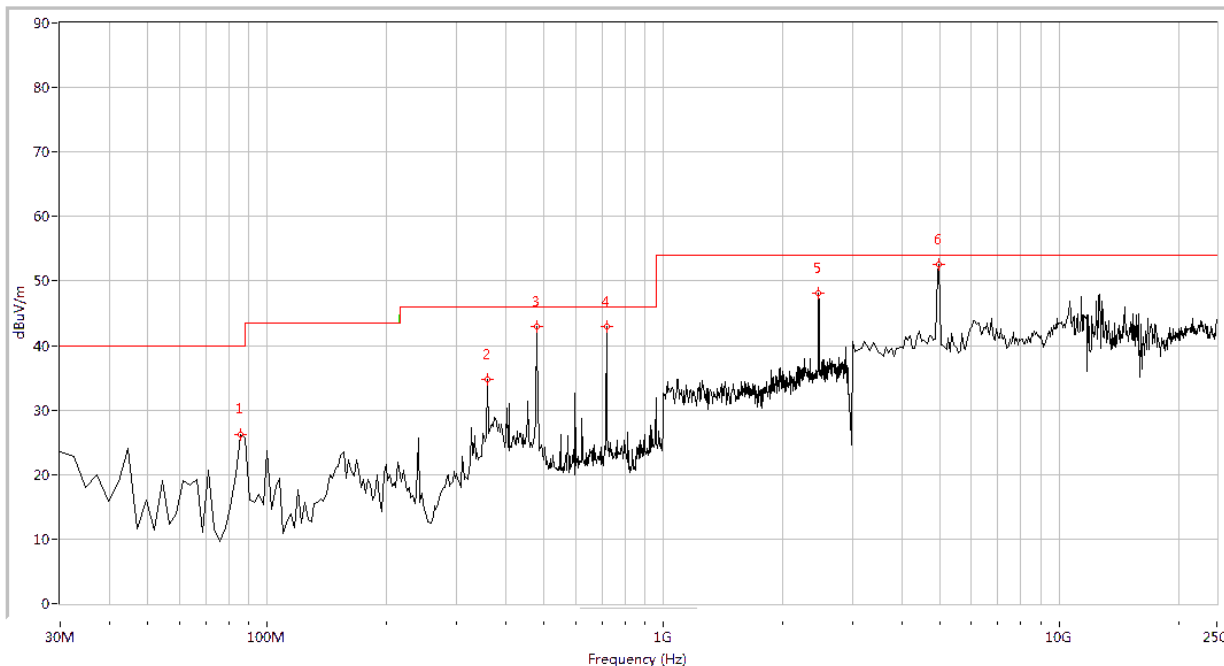


| Fre.<br>(MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna  | Verdict |
|---------------|-------|-----|-----|----------|----------|----------|----------|---------|
| 85.636        | 26.19 | N.A | N.A | N.A      | 40.0     | N.A      | Vertical | PASS    |
| 358.978       | 34.76 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 479.925       | 42.88 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 719.401       | 43.01 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 2462.000      | 48.08 | N.A | N.A | N.A      | N.A      | N.A      | Vertical | N.A     |
| 4975.062      | 52.61 | N.A | N.A | 74.0     | N.A      | 54.0     | Vertical | PASS    |

(Antenna Vertical, 30MHz to 25GHz)

**2.8.3.3 802.11n-20MHz Test mode****A. Test Plots for the Whole Measurement Frequency Range:**


Plots for Channel = 1

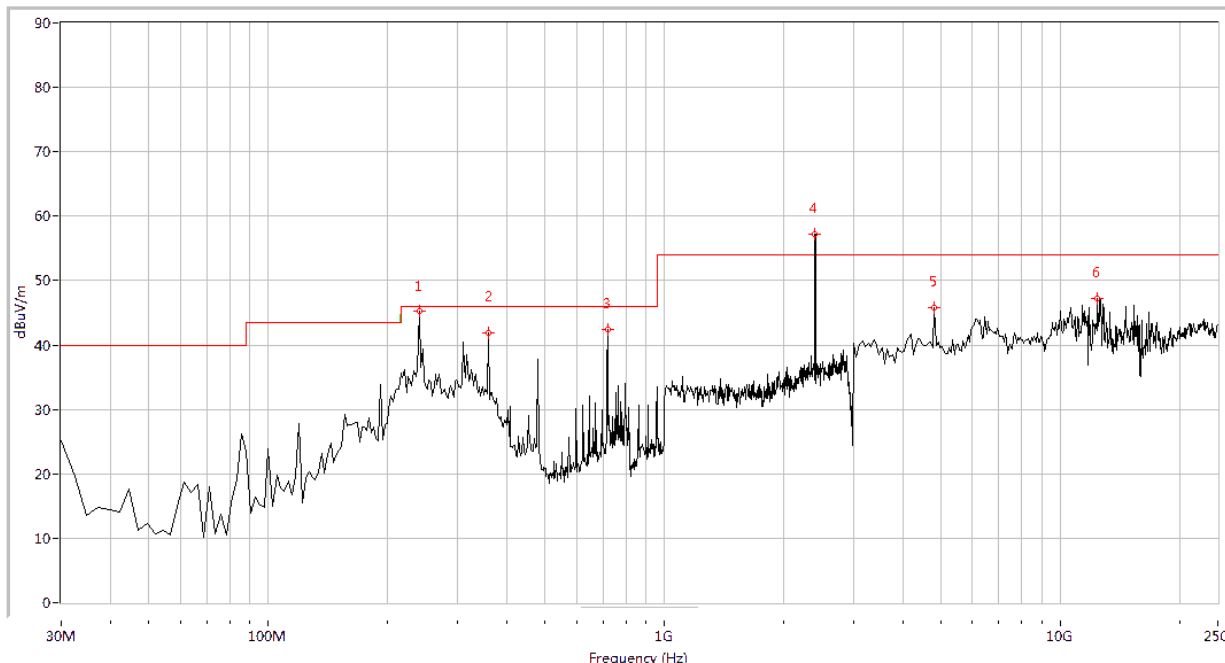

| Fre.<br>(MHz) | Pk    | QP    | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna    | Verdict |
|---------------|-------|-------|-----|----------|----------|----------|------------|---------|
| 240.449       | 45.31 | 42.37 | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 358.978       | 41.96 | N.A   | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 719.401       | 42.46 | N.A   | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 2412.000      | 57.13 | N.A   | N.A | N.A      | N.A      | N.A      | Horizontal | N.A     |
| 4810.474      | 45.76 | N.A   | N.A | 74.0     | N.A      | 54.0     | Horizontal | PASS    |
| 12436.409     | 47.16 | N.A   | N.A | 74.0     | N.A      | 54.0     | Horizontal | PASS    |

(Antenna Horizontal, 30MHz to 25GHz)



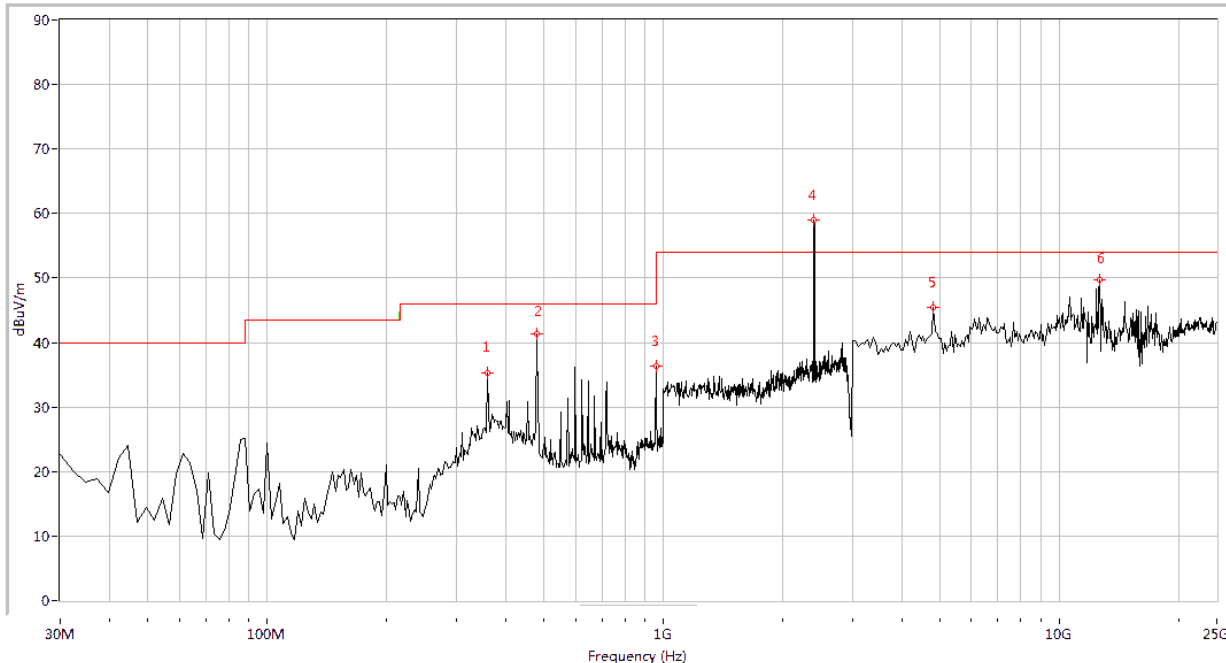


| Fre.<br>(MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna  | Verdict |
|---------------|-------|-----|-----|----------|----------|----------|----------|---------|
| 358.978       | 35.21 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 479.925       | 41.33 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 958.878       | 36.44 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 2412.000      | 58.99 | N.A | N.A | N.A      | N.A      | N.A      | Vertical | N.A     |
| 4810.474      | 45.51 | N.A | N.A | 74.0     | N.A      | 54.0     | Vertical | PASS    |
| 12655.860     | 49.77 | N.A | N.A | 74.0     | N.A      | 54.0     | Vertical | PASS    |

(Antenna Vertical, 30MHz to 25GHz)




## Plot for Channel = 6

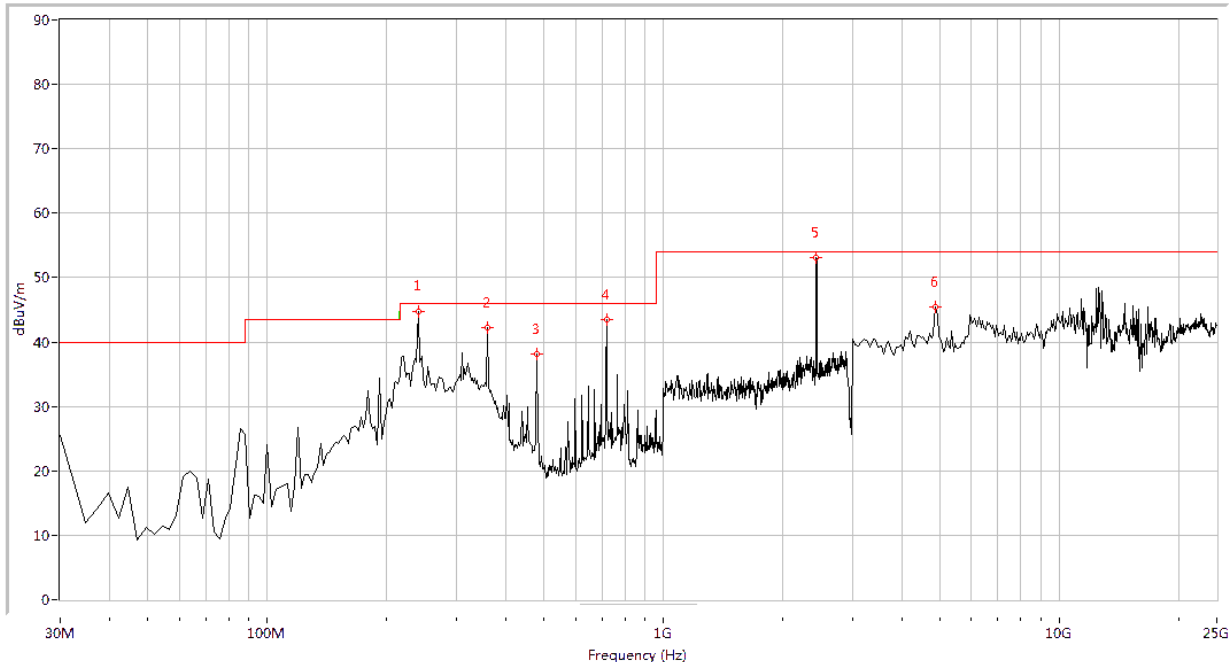

| Fre.<br>(MHz) | Pk    | QP    | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna    | Verdict |
|---------------|-------|-------|-----|----------|----------|----------|------------|---------|
| 240.449       | 44.74 | 42.14 | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 358.978       | 42.23 | N.A   | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 479.925       | 38.20 | N.A   | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 719.401       | 43.55 | N.A   | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 2437.000      | 53.17 | N.A   | N.A | N.A      | N.A      | N.A      | Horizontal | N.A     |
| 4865.337      | 45.44 | N.A   | N.A | 74.0     | N.A      | 54.0     | Horizontal | PASS    |

(Antenna Horizontal, 30MHz to 25GHz)

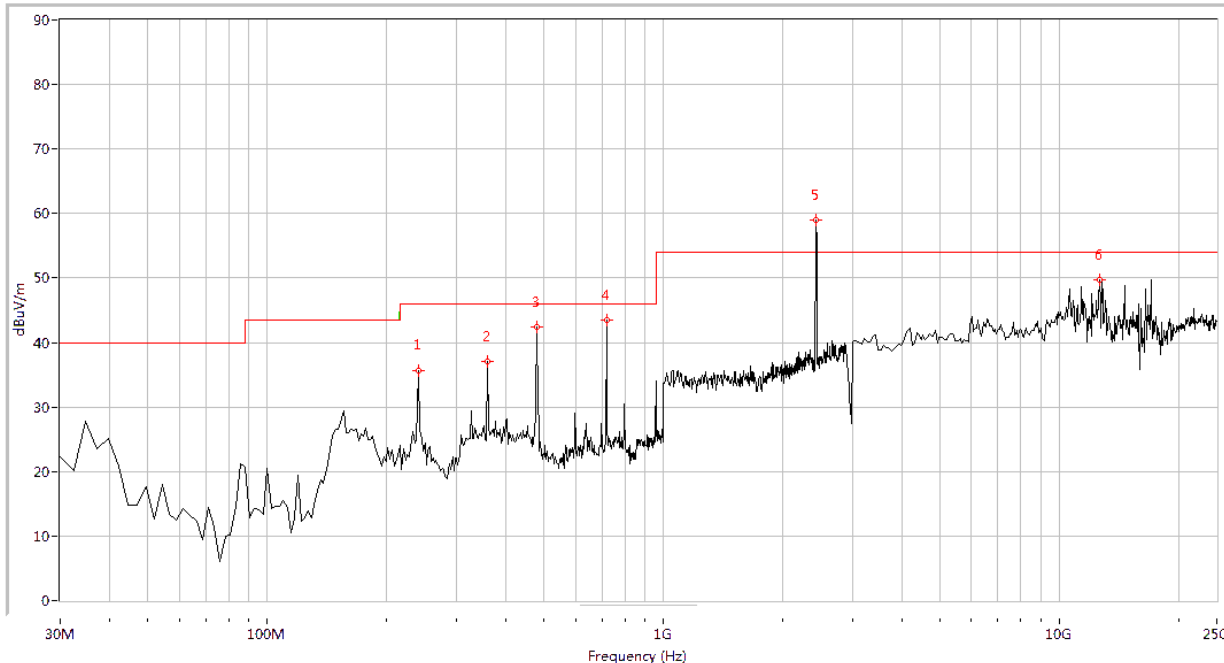


| Fre.<br>(MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna  | Verdict |
|---------------|-------|-----|-----|----------|----------|----------|----------|---------|
| 240.449       | 35.56 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 358.978       | 36.99 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 479.925       | 42.42 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 719.401       | 43.51 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 2437.000      | 59.02 | N.A | N.A | N.A      | N.A      | N.A      | Vertical | N.A     |
| 12655.860     | 49.79 | N.A | N.A | 74.0     | N.A      | 54.0     | Vertical | PASS    |

(Antenna Vertical, 30MHz to 25GHz)






## Plot for Channel = 11

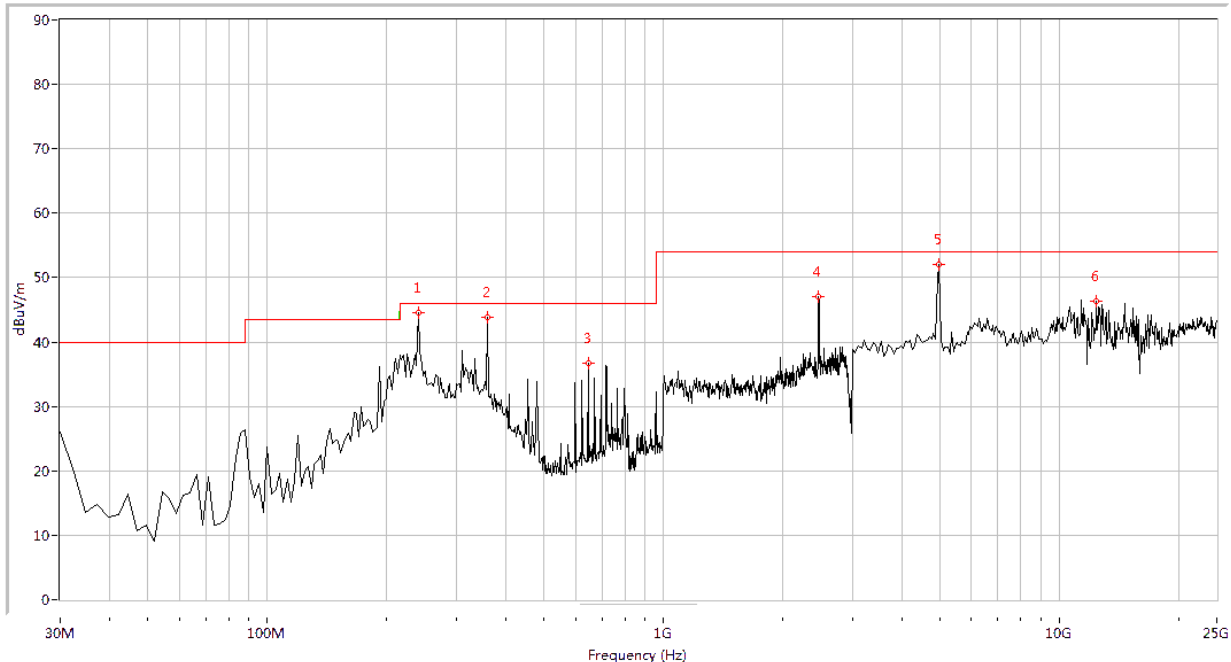

| Fre.<br>(MHz) | Pk    | QP    | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna    | Verdict |
|---------------|-------|-------|-----|----------|----------|----------|------------|---------|
| 240.449       | 44.62 | 42.83 | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 358.978       | 43.90 | N.A   | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 646.833       | 36.76 | N.A   | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 2462.000      | 47.03 | N.A   | N.A | N.A      | N.A      | N.A      | Horizontal | N.A     |
| 4975.062      | 52.10 | N.A   | N.A | 74.0     | N.A      | 54.0     | Horizontal | PASS    |
| 12436.409     | 46.33 | N.A   | N.A | 74.0     | N.A      | 54.0     | Horizontal | PASS    |

(Antenna Horizontal, 30MHz to 25GHz)

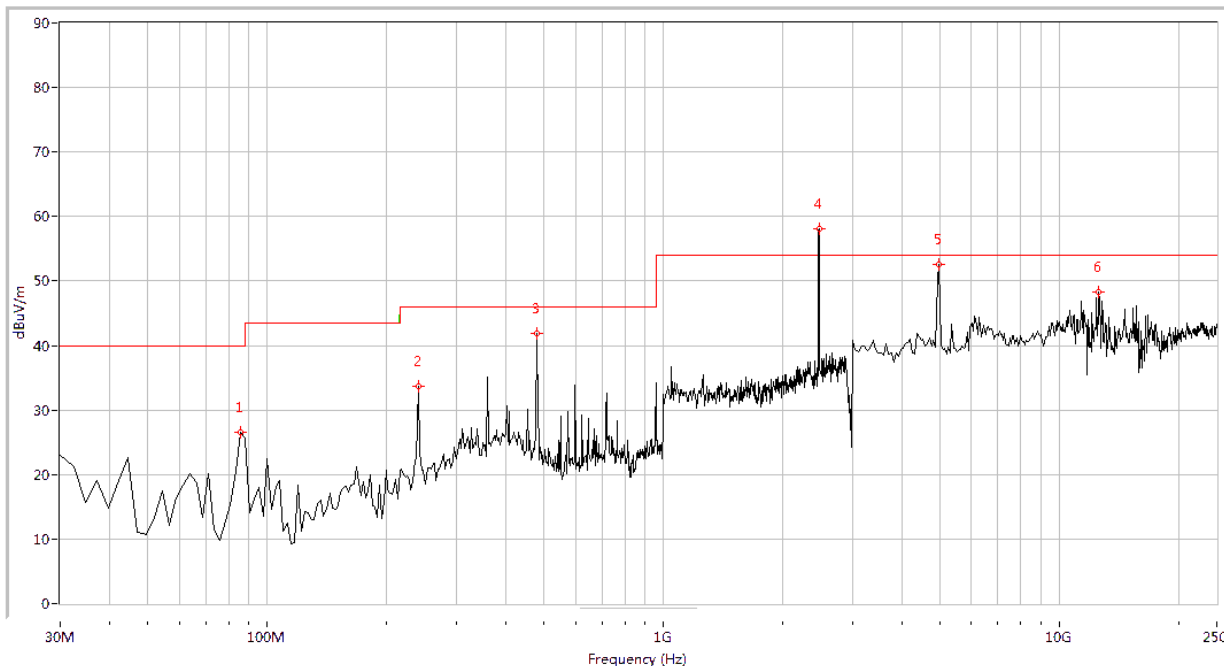


| Fre.<br>(MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna  | Verdict |
|---------------|-------|-----|-----|----------|----------|----------|----------|---------|
| 85.636        | 26.60 | N.A | N.A | N.A      | 40.0     | N.A      | Vertical | PASS    |
| 240.449       | 33.64 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 479.925       | 41.87 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 2462.000      | 58.15 | N.A | N.A | N.A      | N.A      | N.A      | Vertical | N.A     |
| 4975.062      | 52.54 | N.A | N.A | 74.0     | N.A      | 54.0     | Vertical | PASS    |
| 12600.998     | 48.32 | N.A | N.A | 74.0     | N.A      | 54.0     | Vertical | PASS    |

(Antenna Vertical, 30MHz to 25GHz)

**2.8.3.4 802.11n-40MHz Test mode****A. Test Plots for the Whole Measurement Frequency Range:**


Plots for Channel = 3

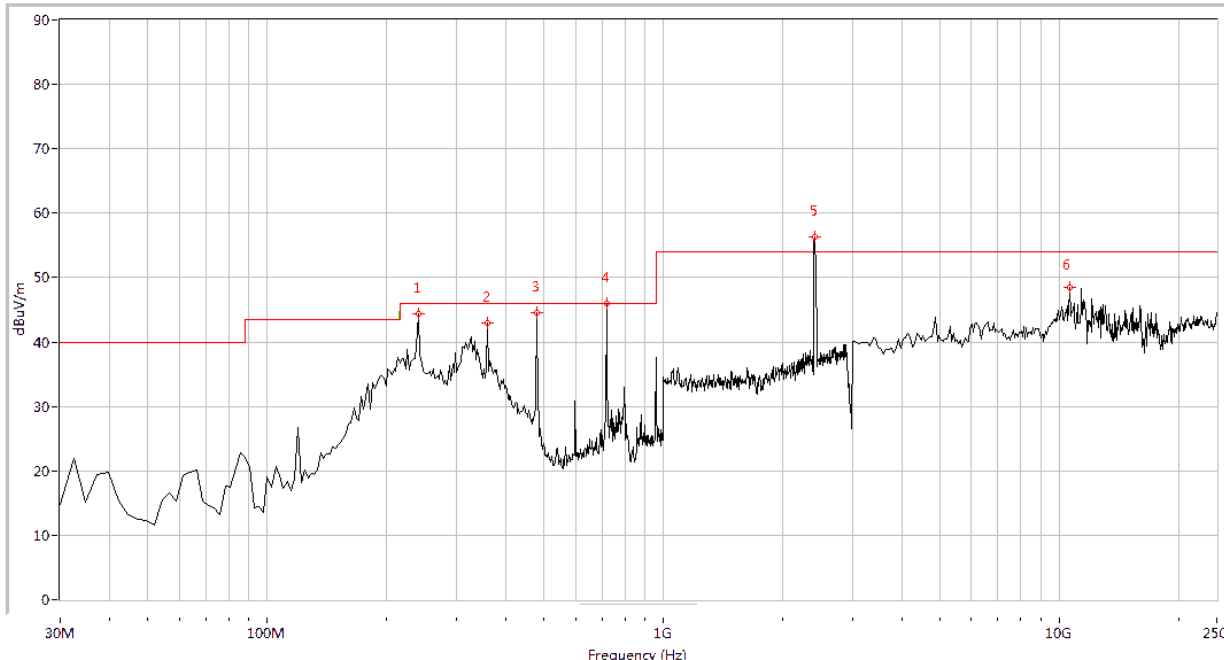

| Fre.<br>(MHz) | Pk    | QP    | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna    | Verdict |
|---------------|-------|-------|-----|----------|----------|----------|------------|---------|
| 240.449       | 44.38 | 41.10 | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 358.978       | 43.01 | N.A   | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 479.925       | 44.62 | 41.27 | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 719.401       | 45.97 | 42.33 | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 2422.000      | 56.32 | N.A   | N.A | N.A      | N.A      | N.A      | Horizontal | N.A     |
| 10625.935     | 48.53 | N.A   | N.A | 74.0     | N.A      | 54.0     | Horizontal | PASS    |

(Plot A.2: Antenna Horizontal, 30MHz to 25GHz)



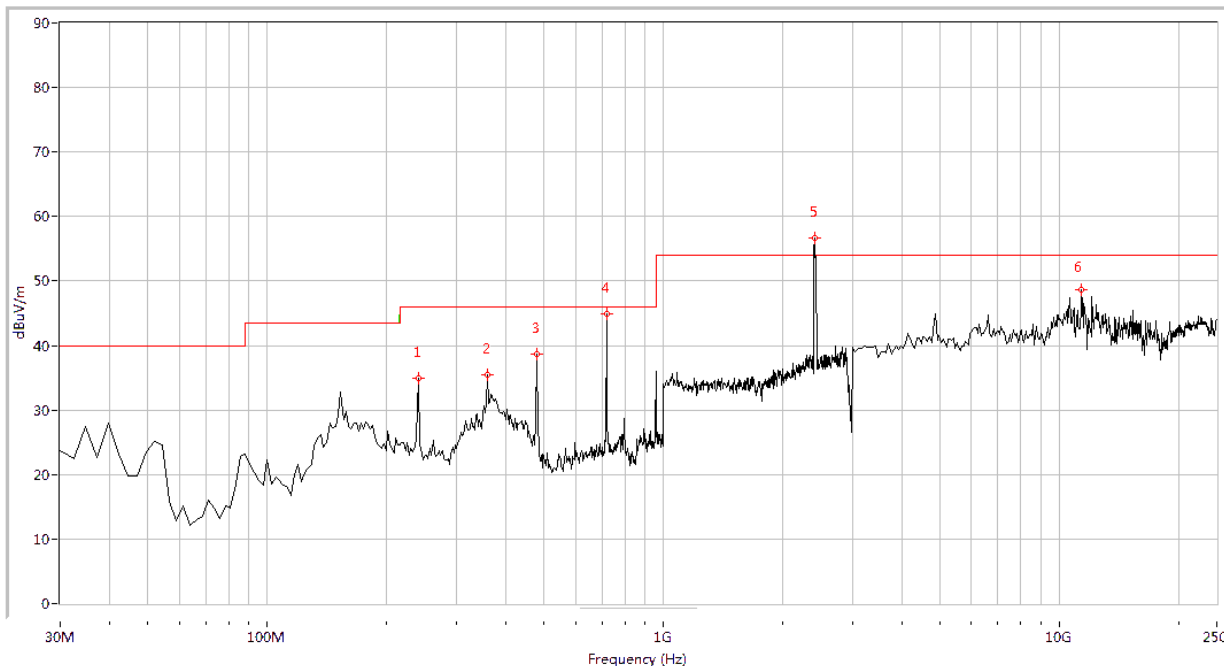


| Fre.<br>(MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna  | Verdict |
|---------------|-------|-----|-----|----------|----------|----------|----------|---------|
| 240.449       | 34.85 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 358.978       | 35.39 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 479.925       | 38.65 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 719.401       | 44.98 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 2422.000      | 56.69 | N.A | N.A | N.A      | N.A      | N.A      | Vertical | N.A     |
| 11394.015     | 48.66 | N.A | N.A | 74.0     | N.A      | 54.0     | Vertical | PASS    |

(Plot A.3: Antenna Vertical, 30MHz to 25GHz)




## Plots for Channel = 6

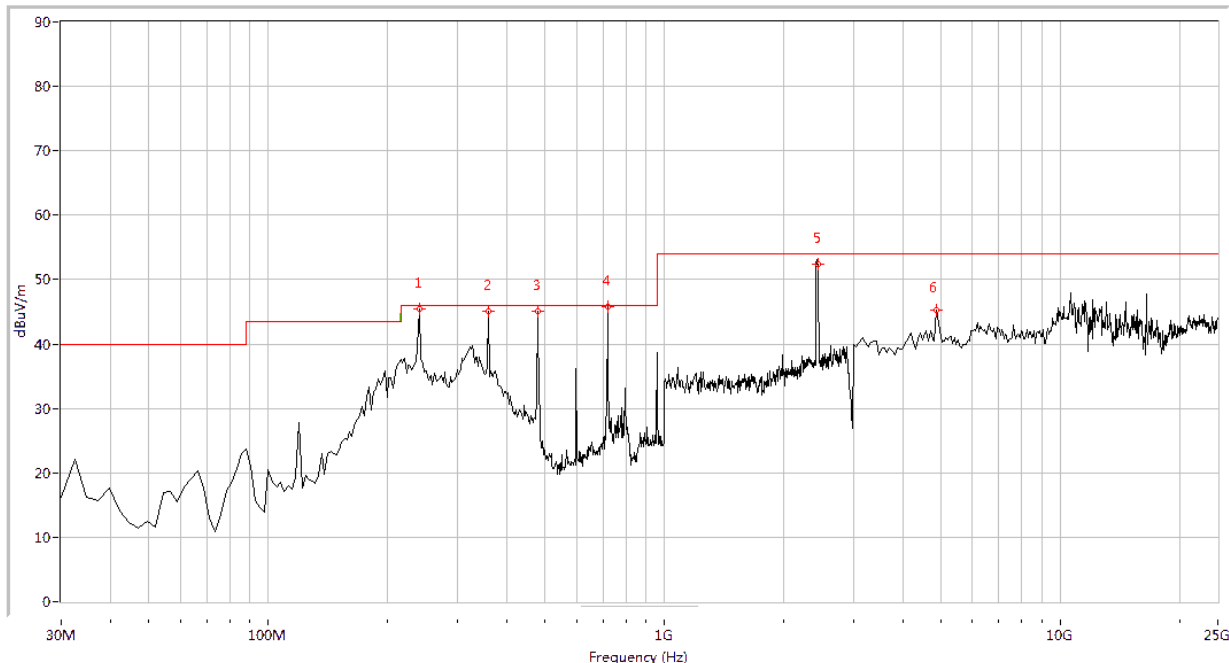

| Fre.<br>(MHz) | Pk    | QP    | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna    | Verdict |
|---------------|-------|-------|-----|----------|----------|----------|------------|---------|
| 240.449       | 45.53 | 42.33 | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 358.978       | 45.10 | 41.85 | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 479.925       | 45.15 | 41.76 | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 719.401       | 45.84 | 42.73 | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 2437.000      | 52.41 | N.A   | N.A | N.A      | N.A      | N.A      | Horizontal | N.A     |
| 4865.337      | 45.30 | N.A   | N.A | 74.0     | N.A      | 54.0     | Horizontal | PASS    |

(Plot B.2: Antenna Horizontal, 30MHz to 25GHz)

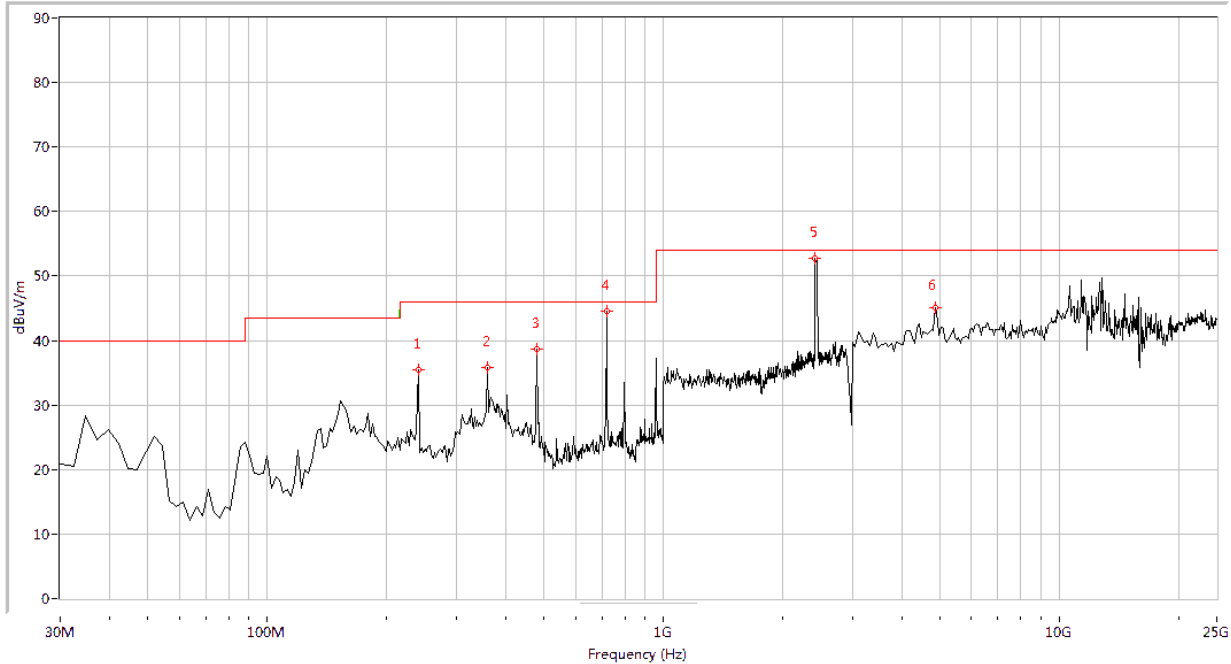


| Fre.<br>(MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna  | Verdict |
|---------------|-------|-----|-----|----------|----------|----------|----------|---------|
| 240.449       | 35.40 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 358.978       | 35.89 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 479.925       | 38.74 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 719.401       | 44.53 | N.A | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 2437.000      | 52.81 | N.A | N.A | N.A      | N.A      | N.A      | Vertical | N.A     |
| 4865.337      | 45.10 | N.A | N.A | 74.0     | N.A      | 54.0     | Vertical | PASS    |

(Plot B.3: Antenna Vertical, 30MHz to 25GHz)






## Plots for Channel = 9

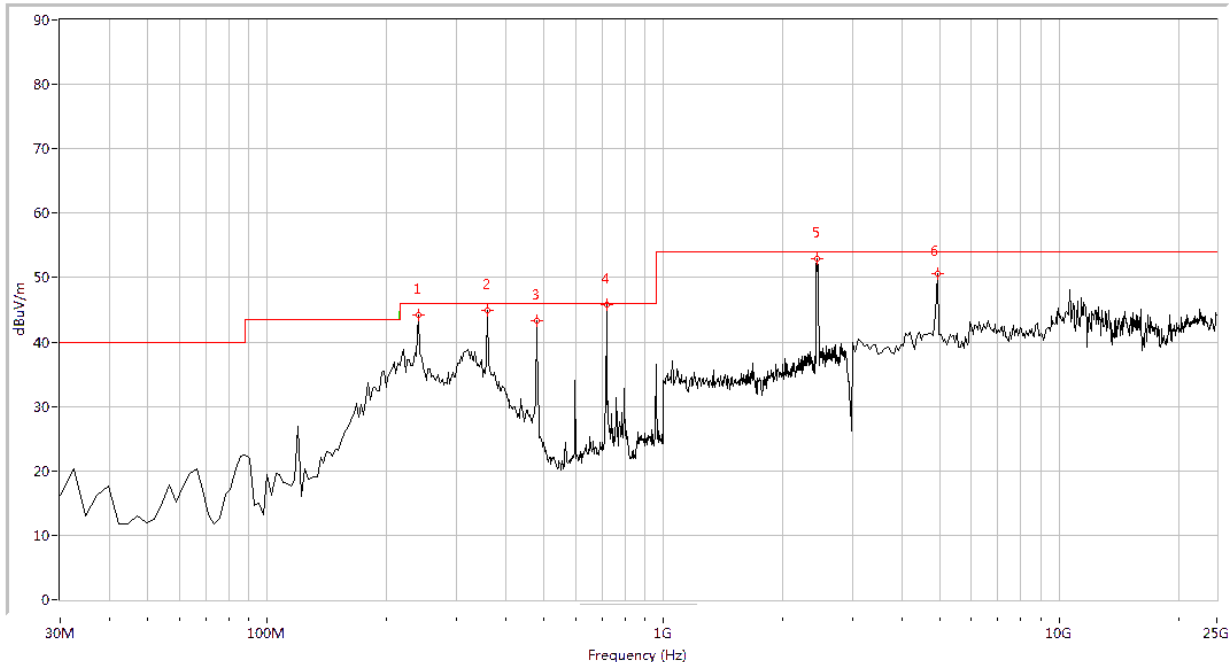

| Fre.<br>(MHz) | Pk    | QP    | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna    | Verdict |
|---------------|-------|-------|-----|----------|----------|----------|------------|---------|
| 240.449       | 44.23 | 40.35 | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 358.978       | 44.87 | 40.91 | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 479.925       | 43.24 | N.A   | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 719.401       | 45.88 | 41.24 | N.A | N.A      | 46.0     | N.A      | Horizontal | PASS    |
| 2452.000      | 52.84 | N.A   | N.A | N.A      | N.A      | N.A      | Horizontal | N.A     |
| 4920.200      | 50.54 | N.A   | N.A | 74.0     | N.A      | 54.0     | Horizontal | PASS    |

(Plot C.2: Antenna Horizontal, 30MHz to 25GHz)

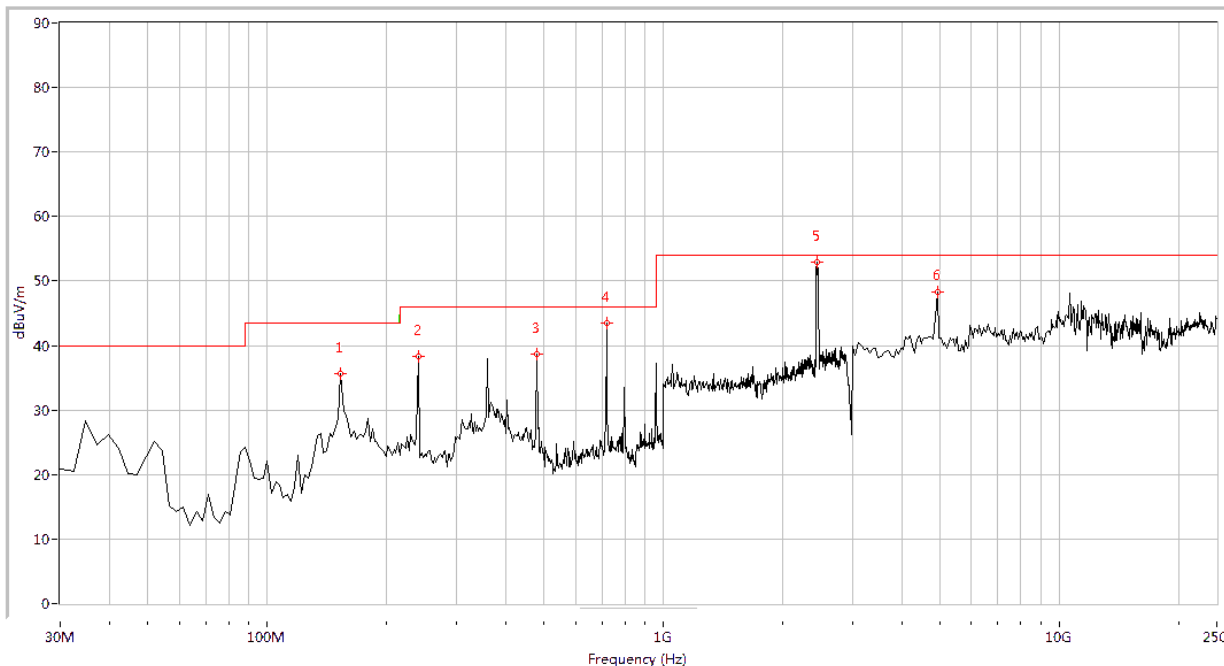

| Fre.<br>(MHz) | Pk    | QP    | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna  | Verdict |
|---------------|-------|-------|-----|----------|----------|----------|----------|---------|
| 153.367       | 35.70 | N.A   | N.A | N.A      | 43.5     | N.A      | Vertical | PASS    |
| 240.449       | 38.40 | N.A   | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 479.925       | 38.74 | N.A   | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 719.401       | 43.53 | 40.11 | N.A | N.A      | 46.0     | N.A      | Vertical | PASS    |
| 2452.000      | 52.15 | N.A   | N.A | N.A      | N.A      | N.A      | Vertical | N.A     |
| 4920.200      | 48.24 | N.A   | N.A | 74.0     | N.A      | 54.0     | Vertical | PASS    |

(Plot C.3: Antenna Vertical, 30MHz to 25GHz)



## 2.9 RF exposure evaluation

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = \frac{PG}{4 \pi R^2}$$

Where:

S = power density

P = power input to the antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

### 2.1.1 Limits for Maximum Permissible Exposure

According to FCC Part 1.1307, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the commission's guidelines.

According to FCC Part 1.1310 RF exposure is calculated.

| Limits for General Population/ Uncontrolled Exposure |                                 |                                  |                                        |
|------------------------------------------------------|---------------------------------|----------------------------------|----------------------------------------|
| Frequency Range (MHz)                                | Electric Field Strength(E)(V/m) | Magnetic Field Strength (H)(A/m) | Power Density (S)(mW/cm <sup>2</sup> ) |
| 0.3-1.34                                             | 614                             | 1.63                             | (100)*                                 |
| 1.34-30                                              | 824/f                           | 2.19/f                           | (180/f2)*                              |
| 30-300                                               | 27.5                            | 0.073                            | 0.2                                    |
| 300-1500                                             |                                 |                                  | f/1500                                 |
| 1500-100,000                                         |                                 |                                  | 1.0                                    |





### 2.1.2 Test result

|                                                                              |          |
|------------------------------------------------------------------------------|----------|
| Maximum peak output power at antenna input terminal(dBm):                    | 27.54    |
| Maximum peak output power at antenna input terminal(mW):                     | 566.932  |
| Source-based time-averaged output power:                                     | --       |
| Prediction distance(cm):                                                     | 20       |
| Predication frequency(MHz):                                                  | 2437     |
| Antenna Gain (typical) (dBi):                                                | 3.72     |
| Power density at predication frequency at <u>20</u> cm(mW/cm <sup>2</sup> ): | 0.265907 |
| MPE limit for RF exposure at prediction frequency(mW/cm <sup>2</sup> ):      | 1.0      |

### 2.1.3 Conclusion

Since the test result is passed, the SAR measurement is not required.



REPORT No. : SZ14120206W01

## ANNEX A GENERAL INFORMATION

### 1.1 Identification of the Responsible Testing Laboratory

|                               |                                                                                                                                  |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| Company Name:                 | Shenzhen Morlab Communications Technology Co., Ltd.                                                                              |
| Department:                   | Morlab Laboratory                                                                                                                |
| Address:                      | FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China |
| Responsible Test Lab Manager: | Mr. Su Feng                                                                                                                      |
| Telephone:                    | +86 755 36698555                                                                                                                 |
| Facsimile:                    | +86 755 36698525                                                                                                                 |

### 1.2 Identification of the Responsible Testing Location

|          |                                                                                                                                  |
|----------|----------------------------------------------------------------------------------------------------------------------------------|
| Name:    | Shenzhen Morlab Communications Technology Co., Ltd.<br>Morlab Laboratory                                                         |
| Address: | FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China |



REPORT No. : SZ14120206W01

### 1.3 Test Equipments Utilized

#### 1.3.1 Conducted Test Equipments

| Conducted Test Equipment |                           |            |         |              |            |            |
|--------------------------|---------------------------|------------|---------|--------------|------------|------------|
| No.                      | Equipment Name            | Serial No. | Type    | Manufacturer | Cal. Date  | Cal. Due   |
| 1                        | Spectrum Analyzer         | MY45101810 | E4407B  | Agilent      | 2014.02.26 | 2015.02.25 |
| 2                        | Power Splitter            | NW521      | 1506A   | Weinschel    | 2014.02.26 | 2015.02.25 |
| 3                        | Attenuator 1              | (n.a.)     | 10dB    | Resnet       | 2014.02.26 | 2015.02.25 |
| 4                        | Attenuator 2              | (n.a.)     | 3dB     | Resnet       | 2014.02.26 | 2015.02.25 |
| 5                        | USB Wideband Power Sensor | MY52280010 | U2021XA | Agilent      | 2014.02.26 | 2015.02.25 |
| 6                        | EXA Signal Analyzer       | MY51440152 | N9010A  | Agilent      | 2014.02.26 | 2015.02.25 |
| 7                        | RF cable                  | CB01       | RF01    | Morlab       | N/A        | N/A        |
| 8                        | Coaxial cable             | CB02       | RF02    | Morlab       | N/A        | N/A        |
| 9                        | SMA connector             | CN01       | RF03    | HUBER-SUHNER | N/A        | N/A        |

#### 1.3.2 Conducted Emission Test Equipments

| Conducted Emission Test Equipments |                      |            |             |              |            |            |
|------------------------------------|----------------------|------------|-------------|--------------|------------|------------|
| No.                                | Equipment Name       | Serial No. | Type        | Manufacturer | Cal. Date  | Cal. Due   |
| 1                                  | Receiver             | US44210471 | E7405A      | Agilent      | 2014.02.26 | 2015.02.25 |
| 2                                  | LISN                 | 812744     | NSLK 8127   | Schwarzbeck  | 2014.02.26 | 2015.02.25 |
| 3                                  | Service Supplier     | 100448     | CMU200      | R&S          | 2014.02.26 | 2015.02.25 |
| 4                                  | Pulse Limiter (20dB) | 9391       | VTSD 9561-D | Schwarzbeck  | 2014.02.26 | 2015.02.25 |
| 5                                  | Coaxial cable(BNC)   | CB01       | EMC01       | Morlab       | N/A        | N/A        |





REPORT No. : SZ14120206W01

### 1.3.3 Radiated Test Equipments

| Radiated Test Equipments |                           |            |            |               |            |              |
|--------------------------|---------------------------|------------|------------|---------------|------------|--------------|
| No.                      | Equipment Name            | Serial No. | Type       | Manufacturer  | Cal. Date  | Cal.Due Date |
| 1                        | System Simulator          | 100448     | CMU200     | R&S           | 2014.02.26 | 2015.02.25   |
| 2                        | Receiver                  | US44210471 | E7405A     | Agilent       | 2014.02.26 | 2015.02.25   |
| 3                        | Test Antenna -<br>Bi-Log  | 9163-274   | 9m*6m*6m   | Albatross     | 2014.02.26 | 2015.02.25   |
| 4                        | Test Antenna -<br>Horn    | 9120D-963  | VULB 9163  | Schwarzbeck   | 2014.02.26 | 2015.02.25   |
| 5                        | Test Antenna -<br>Horn    | 71688      | BBHA 9120D | Schwarzbeck   | 2014.02.26 | 2015.02.25   |
| 6                        | Test Antenna -<br>Loop    | 1519-022   | HL050S7    | R&S           | 2014.02.26 | 2015.02.25   |
| 7                        | Reject Filter             | (n.a.)     | BRM50702   | Micro-Tronics | 2014.02.26 | 2015.02.25   |
| 8                        | Coaxial cable<br>(N male) | CB02       | EMC02      | Morlab        | N/A        | N/A          |
| 9                        | Coaxial cable<br>(N male) | CB03       | EMC03      | Morlab        | N/A        | N/A          |

### 1.3.4 Climate Chamber

| Climate Chamber |                 |            |         |              |            |              |
|-----------------|-----------------|------------|---------|--------------|------------|--------------|
| No.             | Equipment Name  | Serial No. | Type    | Manufacturer | Cal.Date   | Cal.Due Date |
| 1               | Climate Chamber | 2004012    | HL4003T | Yinhe        | 2014.02.26 | 2015.02.25   |

### 1.3.5 Vibration Table

| Vibration Table |                 |            |               |              |            |              |
|-----------------|-----------------|------------|---------------|--------------|------------|--------------|
| No.             | Equipment Name  | Serial No. | Type          | Manufacturer | Cal.Date   | Cal.Due Date |
| 1               | Vibration Table | N/A        | ACT2000-S015L | CMI-COM      | 2014.02.26 | 2015.02.25   |

### 1.3.6 Anechoic Chamber

| Anechoic Chamber |                  |            |          |              |            |              |
|------------------|------------------|------------|----------|--------------|------------|--------------|
| No.              | Equipment Name   | Serial No. | Type     | Manufacturer | Cal.Date   | Cal.Due Date |
| 1                | Anechoic Chamber | N/A        | 9m*6m*6m | Albatross    | 2014.02.26 | 2015.02.25   |

\*\*\*\*\* END OF REPORT \*\*\*\*\*