

Partial FCC Test Report

(Part 27 – WCDMA B4, LTE B4/B7/B12/B13/B17/B38/B41/B42/B66/B71)

Report No.: RFCDVB-WTW-P22100074-2

FCC ID: QYLEM9190V

Test Model: EM9190

Received Date: Nov. 15, 2022

Test Date: Nov. 29, 2022 ~ Dec. 06, 2022

Issued Date: Apr. 07, 2023

Applicant: Getac Technology Corporation.

Address: 5F., Building A, No. 209, Sec.1, Nangang Rd., Nangang Dist., Taipei City
11568, Taiwan, R.O.C.

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, TAIWAN

FCC Registration / 788550 / TW0003
Designation Number:



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate of Conformity.....	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Test Site and Instruments.....	6
3 General Information.....	7
3.1 General Description of EUT	7
3.2 Configuration of System under Test.....	11
3.2.1 Description of Support Units.....	11
3.3 Test Mode Applicability and Tested Channel Detail	12
3.4 EUT Operating Conditions	22
3.5 General Description of Applied Standards and References	22
4 Test Types and Results	23
4.1 Output Power Measurement	23
4.1.1 Limits of Output Power Measurement.....	23
4.1.2 Test Procedures.....	23
4.1.3 Test Setup.....	23
4.1.4 Test Results	24
4.2 Radiated Emission Measurement	114
4.2.1 Limits of Radiated Emission Measurement.....	114
4.2.2 Test Procedure	115
4.2.3 Deviation from Test Standard	115
4.2.4 Test Setup.....	116
4.2.5 Test Results	117
5 Pictures of Test Arrangements.....	186
Appendix – Information of the Testing Laboratories	187

Release Control Record

Issue No.	Description	Date Issued
RFCDVB-WTW-P22100074-2	Original Release	Apr. 07, 2023

1 Certificate of Conformity

Product: Radio Module

Brand: Getac

Test Model: EM9190

Sample Status: Engineering Sample

Applicant: Getac Technology Corporation.

Test Date: Nov. 29, 2022 ~ Dec. 06, 2022

Standards: FCC Part 27, Subpart C, F, H, L, M, N, Q

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Vera Huang , Date: Apr. 07, 2023
Vera Huang / Specialist

Approved by : Jeremy Lin , Date: Apr. 07, 2023
Jeremy Lin / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 27 & Part 2									
FCC Clause							Test Item	Result	Remarks
WCDMA B4 / LTE B4	LTE B12 / LTE B71	LTE B13	LTE B17	LTE B7 / LTE B38 / LTE B41	LTE B42	LTE B66			
2.1046 27.50 (d)(4)	2.1046 27.50 (c)	2.1046 27.50 (b)	2.1046 27.50 (c)	2.1046 27.50 (h)(2)	2.1046 27.50(k)(3)	2.1046 27.50 (d)(4)	Equivalent Isotropically Radiated Power / Equivalent Radiated Power	Pass	Meet the requirement of limit.
2.1047	2.1047	2.1047	2.1047	2.1047	2.1047	2.1047	Modulation Characteristics	N/A	Refer to Note
27.50 (d)(5)	----	----	----	----	27.50(k)(4)	27.50 (d)(5)	Peak To Average Ratio	N/A	Refer to Note
2.1055 27.54	2.1055 27.54	2.1055 27.54	2.1055 27.54	2.1055 27.54	2.1055 27.54	2.1055 27.54	Frequency Stability Stay with the authorized bands of operation	N/A	Refer to Note
2.1049	2.1049	2.1049	2.1049	2.1049	2.1049	2.1049	Occupied Bandwidth	N/A	Refer to Note
2.1051 27.53 (h)	2.1051 27.53 (g)	2.1051 27.53 (c)	2.1051 27.53 (g)	2.1051 27.53 (m)(4)(6)	27.53(n)(2)	2.1051 27.53 (h)	Band Edge / Out of Band Emissions Measurements	N/A	Refer to Note
2.1051 27.53 (h)	2.1051 27.53 (g)	2.1051 27.53 (c)(f)	2.1051 27.53 (g)	2.1051 27.53 (m)(4)(6)	2.1051 27.53(n)(2)	2.1051 27.53 (h)	Conducted Spurious Emissions	N/A	Refer to Note
2.1053 27.53 (h)	2.1053 27.53 (g)	2.1053 27.53 (c)(f)	2.1053 27.53 (g)	2.1053 27.53 (m)(4)(6)	2.1053 27.53(n)(2)	2.1053 27.53 (h)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -2.03dB at 5186.00MHz.

Note:

1. This report is a Class II change partial report. Therefore, only test item of Radiated Spurious Emissions tests and Effective Radiated Power / Equivalent Isotropic Radiated Power were performed for this report. Other testing data please refer to Sporton International (Shenzhen) Inc. report no.: FG021501A_Rev. 02, FG021501B_Rev. 02, FG021501C_Rev. 02, FG021501D_Rev. 02, and FG1N1001A_Rev. 01 for module (Brand: Airprime, Model: EM9190).
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.59 dB
	30 MHz ~ 1000 MHz	3.6 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model no.	Serial No.	Calibrated Date	Calibrated Until
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower & Turn BV ADT	AT100	AT93021705	NA	NA
Turn Table BV ADT	TT100	TT93021705	NA	NA
Turn Table Controller BV ADT	SC100	SC93021705	NA	NA
Test Receiver KEYSIGHT	N9038A	MY55420137	Apr. 27, 2022	Apr. 26, 2023
Spectrum Analyzer R&S	FSW43	101867	Jan. 07, 2022	Jan. 06, 2023
Loop Antenna TESEQ	HLA 6121	45745	Jul. 27, 2022	Jul. 26, 2023
Loop Antenna EMCI	EM-6879	269	Sep. 19, 2022	Sep. 18, 2023
Pre-amplifier EMCI	EMC001340	980201	Sep. 23, 2022	Sep. 22, 2023
RF Coaxial Cable EMCI	5D-NM-BM	140903+140902	Jan. 15, 2022	Jan. 14, 2023
Preamplifier Agilent	8447D	2944A10638	May 14, 2022	May 13, 2023
Bi_Log Antenna Schwarzbeck	VULB9168	9168-160	Oct. 20, 2022	Oct. 19, 2023
RF Coaxial Cable WOKEN	8D-FB	Cable-CH9-01	May 14, 2022	May 13, 2023
Horn Antenna Schwarzbeck	9120D	9120D-1169	Nov. 13, 2022	Nov. 12, 2023
Preamplifier Agilent	8449B	3008A02367	Feb. 16, 2022	Feb. 15, 2023
RF Coaxial Cable HUBER+SUHNER&EMCI	SUCOFLEX 104& EMC104-SM-SM8000	CABLE-CH9-02 (248780+171006)	Jan. 15, 2022	Jan. 14, 2023
RF Coaxial Cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9- (250795/4)	Jan. 15, 2022	Jan. 14, 2023
RF FLITER MICRO-TRONICS	BRM50716	060	Jan. 10, 2022	Jan. 09, 2023
RF FLITER MICRO-TRONICS	BRM17690	004	Jan. 10, 2022	Jan. 09, 2023
Boresight antenna tower fixture BV	BAF-02	5	NA	NA
Pre-Amplifier EMCI	EMC 184045	980116	Oct. 01, 2022	Sep. 30, 2023
Horn Antenna Schwarzbeck	BBHA 9170	9170-480	Nov. 13, 2022	Nov. 12, 2023
Horn Antenna Schwarzbeck	BBHA 9170	BBHA9170243	Nov. 13, 2022	Nov. 12, 2023
RF Coaxial Cable EMCI	EMC102-KM-KM-3000	150929	Jul. 09, 2022	Jul. 08, 2023
RF Coaxial Cable EMCI	EMC102-KM-KM-600	150928	Jul. 09, 2022	Jul. 08, 2023
Boresight antenna tower fixture BV	BAF-02	5	NA	NA
Radio Communication Analyzer Anritsu	MT8821C	6201462755	Mar. 03, 2022	Mar. 02, 2023

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HY - 966 chamber 4.

3 General Information

3.1 General Description of EUT

Product	Radio Module	
Brand	Getac	
Test Model	EM9190	
Status of EUT	Engineering Sample	
Power Supply Rating	3.3 Vdc (Host equipment)	
Modulation Type	WCDMA: BPSK HSDPA/DC-HSDPA: QPSK HSUPA: QPSK LTE: QPSK, 16QAM, 64QAM, 256QAM	
Operating Frequency	WCDMA Band 4	1712.4MHz ~ 1752.6MHz
	LTE Band 4 (Channel Bandwidth 1.4MHz)	1710.7MHz ~ 1754.3MHz
	LTE Band 4 (Channel Bandwidth 3MHz)	1711.5MHz ~ 1753.5MHz
	LTE Band 4 (Channel Bandwidth 5MHz)	1712.5MHz ~ 1752.5MHz
	LTE Band 4 (Channel Bandwidth 10MHz)	1715.0MHz ~ 1750.0MHz
	LTE Band 4 (Channel Bandwidth 15MHz)	1717.5MHz ~ 1747.5MHz
	LTE Band 4 (Channel Bandwidth 20MHz)	1720.0MHz ~ 1745.0MHz
	LTE Band 7 (Channel Bandwidth 5MHz)	2502.5MHz ~ 2567.5MHz
	LTE Band 7 (Channel Bandwidth 10MHz)	2505.0MHz ~ 2565.0MHz
	LTE Band 7 (Channel Bandwidth 15MHz)	2507.5MHz ~ 2562.5MHz
	LTE Band 7 (Channel Bandwidth 20MHz)	2510.0MHz ~ 2560.0MHz
	LTE Band 12 (Channel Bandwidth 1.4MHz)	699.7MHz ~ 715.3MHz
	LTE Band 12 (Channel Bandwidth 3MHz)	700.5MHz ~ 714.5MHz
	LTE Band 12 (Channel Bandwidth 5MHz)	701.5MHz ~ 713.5MHz
	LTE Band 12 (Channel Bandwidth 10MHz)	704.0MHz ~ 711.0MHz
	LTE Band 13 (Channel Bandwidth 5MHz)	779.5MHz ~ 784.5MHz
	LTE Band 13 (Channel Bandwidth 10MHz)	782.0MHz
	LTE Band 17 (Channel Bandwidth 5MHz)	706.5MHz ~ 713.5MHz
	LTE Band 17 (Channel Bandwidth 10MHz)	709.0MHz ~ 711.0MHz
	LTE Band 38 (Channel Bandwidth 5MHz)	2572.5MHz ~ 2617.5MHz
	LTE Band 38 (Channel Bandwidth 10MHz)	2575.0MHz ~ 2615.0MHz
	LTE Band 38 (Channel Bandwidth 15MHz)	2577.5MHz ~ 2612.5MHz
	LTE Band 38 (Channel Bandwidth 20MHz)	2580.0MHz ~ 2610.0MHz

Operating Frequency	LTE Band 41 (Channel Bandwidth 5MHz)	2498.5MHz ~ 2687.5MHz
	LTE Band 41 (Channel Bandwidth 10MHz)	2501.0MHz ~ 2685.0 MHz
	LTE Band 41 (Channel Bandwidth 15MHz)	2503.5MHz ~ 2682.5MHz
	LTE Band 41 (Channel Bandwidth 20MHz)	2506.0MHz ~ 2680.0MHz
	LTE Band 42 (Channel Bandwidth 5MHz)	3452.5MHz ~3547.5MHz
	LTE Band 42 (Channel Bandwidth 10MHz)	3455MHz ~3545MHz
	LTE Band 42 (Channel Bandwidth 15MHz)	3457.5MHz ~3542.5MHz
	LTE Band 42 (Channel Bandwidth 20MHz)	3460MHz ~ 3540MHz
	LTE Band 66 (Channel Bandwidth 1.4 MHz)	1710.7MHz ~ 1779.3 MHz
	LTE Band 66 (Channel Bandwidth 3 MHz)	1711.5MHz ~ 1778.5 MHz
	LTE Band 66 (Channel Bandwidth 5 MHz)	1712.5MHz ~ 1777.5 MHz
	LTE Band 66 (Channel Bandwidth 10 MHz)	1715.0MHz ~ 1775.0 MHz
	LTE Band 66 (Channel Bandwidth 15 MHz)	1717.5MHz ~ 1772.5 MHz
	LTE Band 66 (Channel Bandwidth 20 MHz)	1720.0MHz ~ 1770.0 MHz
	LTE Band 71 (Channel Bandwidth 5 MHz)	665.5MHz ~ 695.5 MHz
	LTE Band 71 (Channel Bandwidth 10 MHz)	668.0MHz ~ 693.0 MHz
	LTE Band 71 (Channel Bandwidth 15 MHz)	670.5MHz ~ 690.5 MHz
	LTE Band 71 (Channel Bandwidth 20 MHz)	673.0MHz ~ 688.0 MHz
Max. EIRP Power	WCDMA Band 4	382.825mW (25.83dBm)
	LTE Band 4 (Channel Bandwidth 1.4MHz)	333.426mW (25.23dBm)
	LTE Band 4 (Channel Bandwidth 3MHz)	334.965mW (25.25dBm)
	LTE Band 4 (Channel Bandwidth 5MHz)	334.195mW (25.24dBm)
	LTE Band 4 (Channel Bandwidth 10MHz)	331.894mW (25.21dBm)
	LTE Band 4 (Channel Bandwidth 15MHz)	332.660mW (25.22dBm)
	LTE Band 4 (Channel Bandwidth 20MHz)	338.844mW (25.30dBm)
	LTE Band 7 (Channel Bandwidth 5MHz)	338.844mW (25.30dBm)
	LTE Band 7 (Channel Bandwidth 10MHz)	339.625mW (25.31dBm)
	LTE Band 7 (Channel Bandwidth 15MHz)	339.625mW (25.31dBm)
	LTE Band 7 (Channel Bandwidth 20MHz)	340.408mW (25.32dBm)
	LTE Band 38 (Channel Bandwidth 5MHz)	350.752mW (25.45dBm)
	LTE Band 38 (Channel Bandwidth 10MHz)	351.560mW (25.46dBm)
	LTE Band 38 (Channel Bandwidth 15MHz)	346.737mW (25.40dBm)
	LTE Band 38 (Channel Bandwidth 20MHz)	355.631mW (25.51 dBm)
	LTE Band 41 (Channel Bandwidth 5MHz)	672.977mW (28.28dBm)
	LTE Band 41 (Channel Bandwidth 10MHz)	669.885mW (28.26dBm)
	LTE Band 41 (Channel Bandwidth 15MHz)	666.807mW (28.24dBm)
	LTE Band 41 (Channel Bandwidth 20MHz)	680.769mW (28.33dBm)
	LTE Band 42 (Channel Bandwidth 5MHz)	140.929mW (21.49dBm)
	LTE Band 42 (Channel Bandwidth 10MHz)	135.831mW (21.33dBm)
	LTE Band 42 (Channel Bandwidth 15MHz)	136.144mW (21.34dBm)
	LTE Band 42 (Channel Bandwidth 20MHz)	141.254mW (21.50dBm)

Max. EIRP Power	LTE Band 66 (Channel Bandwidth 1.4 MHz)	345.939mW (25.39dBm)
	LTE Band 66 (Channel Bandwidth 3 MHz)	347.536mW (25.41dBm)
	LTE Band 66 (Channel Bandwidth 5 MHz)	349.945mW (25.44dBm)
	LTE Band 66 (Channel Bandwidth 10 MHz)	353.183mW (25.48dBm)
	LTE Band 66 (Channel Bandwidth 15 MHz)	350.752mW (25.45dBm)
	LTE Band 66 (Channel Bandwidth 20 MHz)	353.997mW (25.49dBm)
Max. ERP Power	LTE Band 12 (Channel Bandwidth 1.4MHz)	243.781mW (23.87dBm)
	LTE Band 12 (Channel Bandwidth 3MHz)	244.343mW (23.88dBm)
	LTE Band 12 (Channel Bandwidth 5MHz)	246.037mW (23.91dBm)
	LTE Band 12 (Channel Bandwidth 10MHz)	247.742mW (23.94dBm)
	LTE Band 13 (Channel Bandwidth 5MHz)	141.579mW (21.51dBm)
	LTE Band 13 (Channel Bandwidth 10MHz)	144.212mW (21.59dBm)
	LTE Band 17 (Channel Bandwidth 5MHz)	251.189mW (24.00dBm)
	LTE Band 17 (Channel Bandwidth 10MHz)	252.348mW (24.02dBm)
	LTE Band 71 (Channel Bandwidth 5 MHz)	230.144mW (23.62dBm)
	LTE Band 71 (Channel Bandwidth 10 MHz)	229.615mW (23.61dBm)
	LTE Band 71 (Channel Bandwidth 15 MHz)	229.087mW (23.60dBm)
	LTE Band 71 (Channel Bandwidth 20 MHz)	230.675mW (23.63dBm)
Antenna Type	Refer to Note as below	
Accessory Device	N/A	
Cable Supplied	N/A	

Note:

1. The EUT is authorized for use in specific End-product.

Product	Brand	Model	Difference
Notebook	Getac	V110	For marketing purpose
		V110G7	
		V110Y (Y= 10 characters, Y can be 0 to 9, A to Z, a to z, "\", "-", " " or blank for marketing purpose)	

* The model of the V110G7 was chosen for final test.

2. The antenna information is listed as below.

Antenna Type	Antenna Gain (dBi)										
	WCDMA 4	LTE B4	LTE B7	LTE B12	LTE B13	LTE B17	LTE B38	LTE B41	LTE B42	LTE B66	LTE B71
PIFA	2.28	2.28	1.92	3.16	0.87	3.16	2.15	2.82	-1.36	2.28	2.65

* Detail antenna specification please refer to antenna datasheet or an antenna gain measurement report.

3. The End-product contains following accessory devices.


Part	Brand	Model	Specification
Adapter 1	FSP	FSP065-RBBN3	I/P: 100-240Vac, 50-60Hz, 1.5A O/P: 19.0Vdc, 3.42A 1.5m DC power cable with one core attached on adapter
Adapter 2	Getac	MTA190474W4	I/P: 100-240Vac, 50-60Hz, 1.6A O/P: 19.0Vdc, 4.74A 1.55m DC power cable with two cores attached on adapter
Battery	Getac	BP3S1P2100-S	Rating: 11.1Vdc, 2040mAh, 23Wh Typical name: 2100mAh, 24Wh
Digitizer Pen	EMpen Technology Corp	DIGITIZER PEN	-

4. The End-product has three SKUs for sale, after pre-test. SKU 3 was chosen for final test and presented in the test report.


Part	Brand	Model	Specification	Configuration		
				SKU 1	SKU 2	SKU 3
CPU	Intel	Alder Lake	i5-1235U (Non Vpro)	V		V
			i7-1265U (Vpro)		V	
DDR	Kingston	---	16GB (8GB+8GB)	V		
		---	32GB (16GB+16GB)		V	
		---	64GB (32GB+32GB)			V
SSD	SSSTC	---	256GB	V		
		---	512GB		V	
		---	1TB			V
LCD Panel	AUO	G116HAN01	11.6"	V	V	V
Finger Print	Egistec	---	---	V	V	V
WLAN Module	Intel	AX211NGW	---	V	V	V
WWAN Module	Sierra	EM9190	---	V	V	V
GPS	GlobalSat	MC1010G	---	V	V	V
RFID Module	NXP	PN-7462	---		V	V
Digitizer Module	Getac	EMR116-UA00	---		V	V
Bottom Camera	FOXLINK	FN80AF-443H	---	V	V	V
	Chicony	CKAM816	---	V	V	V
Camera	FOXLINK	FN20FF-679H	---	V	V	V
IR Camera	FOXLINK	FN23FF-678H	---		V	V
Option Bay	Honeywell	N6703	Barcode	V		V
	Getac	---	SD Card reader		V	
	Getac	---	Smart Card		V	

5. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

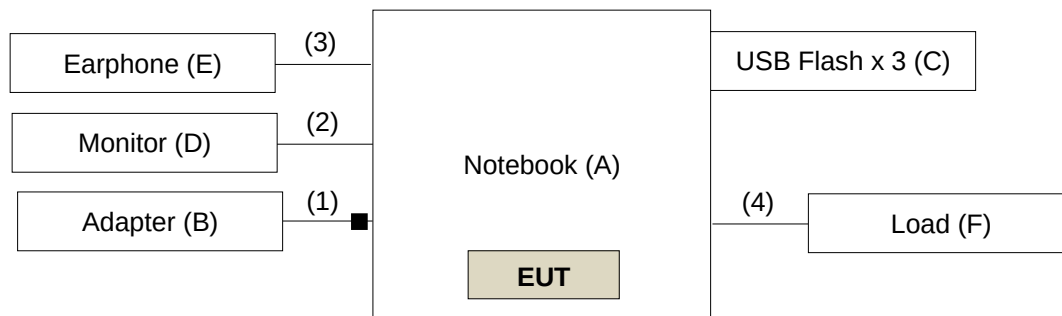

Remote site



3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	Getac	V110G7	NA	NA	Provided by manufacturer
B.	Adapter	FSP	FSP065-RBBN3	NA	NA	Provided by manufacturer
C.	USB Flash x 3	SanDisk	SDDDC3-032G	NA	NA	-
D.	Monitor	ASUS	VA24EHE	LCLMTF243824	NA	-
E.	Earphone	Apple	MB77PFEB	NA	NA	-
F.	Load	NA	NA	NA	NA	-
G.	Radio Communication Analyzer	Anritsu	MT8821C	6201462755	NA	-

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item G acted as a communication partner to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Power Cable	1	1.5	N	1	Provided by manufacturer Attached on adapter
2.	HDMI Cable	1	1.0	Y	0	-
3.	Earphone Cable	1	1.5	N	0	-
4.	RJ45 Cable	1	1.5	N	0	-

Note: The core(s) is(are) originally attached to the cable(s).

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis for tablet mode, and NB mode. The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	Radiated Emission
WCDMA Band 4	NB mode
LTE Band 4	NB mode
LTE Band 7	NB mode
LTE Band 12	NB mode
LTE Band 13	NB mode
LTE Band 17	NB mode
LTE Band 38	NB mode
LTE Band 41	NB mode
LTE Band 42	NB mode
LTE Band 66	NB mode
LTE Band 71	NB mode

WCDMA Band 4

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	EIRP	1312 to 1513	1312 (1712.4MHz), 1413 (1732.6MHz), 1513 (1752.6MHz)	WCDMA, HSDPA, HSUPA
-	Radiated Emission Below 1GHz	1312 to 1513	1513 (1752.6MHz)	WCDMA
-	Radiated Emission Above 1GHz	1312 to 1513	1312 (1712.4MHz), 1413 (1732.6MHz), 1513 (1752.6MHz)	WCDMA

Note: For radiated emission below 1GHz, select the worst radiated emission channel (above 1GHz) for final testing.

LTE Band 4

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	19957 to 20393	19957 (1710.7MHz), 20175 (1732.5MHz), 20393 (1754.3MHz)	1.4MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
		19965 to 20385	19965 (1711.5MHz), 20175 (1732.5MHz), 20385 (1753.5MHz)	3MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
		19975 to 20375	19975 (1712.5MHz), 20175 (1732.5MHz), 20375 (1752.5MHz)	5MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
		20000 to 20350	20000 (1715.0MHz), 20175 (1732.5MHz), 20350 (1750.0MHz)	10MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
		20025 to 20325	20025 (1717.5MHz), 20175 (1732.5MHz), 20325 (1747.5MHz)	15MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
		20050 to 20300	20050 (1720.0MHz), 20175 (1732.5MHz), 20300 (1745.0MHz)	20MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
-	Radiated Emission Below 1GHz	19975 to 20375	20375 (1752.5MHz)	5MHz	QPSK	1
-	Radiated Emission Above 1GHz	19957 to 20393	19957 (1710.7MHz), 20175 (1732.5MHz), 20393 (1754.3MHz)	1.4MHz	QPSK	1
		19975 to 20375	19975 (1712.5MHz), 20175 (1732.5MHz), 20375 (1752.5MHz)	5MHz	QPSK	1
		20050 to 20300	20050 (1720.0MHz), 20175 (1732.5MHz), 20300 (1745.0MHz)	20MHz	QPSK	1

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission below 1GHz, select the worst radiated emission channel (above 1GHz) for final testing.
3. For radiated emission above 1GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5MHz & highest channel bandwidth for final test.

LTE Band 7

EUT Configure Mode	Test item	Available channel	Tested channel	Channel Bandwidth	Modulation	Mode
-	EIRP	20775 to 21425	20775 (2502.5MHz), 21100 (2535.0MHz), 21425 (2567.5MHz)	5MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
		20800 to 21400	20800 (2505.0MHz), 21100 (2535.0MHz), 21400 (2565.0MHz)	10MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
		20825 to 21375	20825 (2507.5MHz), 21100 (2535.0MHz), 21375 (2562.5MHz)	15MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
		20850 to 21350	20850 (2510.0MHz), 21100 (2535.0MHz), 21350 (2560.0MHz)	20MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
-	Radiated Emission Below 1GHz	20775 to 21425	21425 (2567.5MHz)	5MHz	QPSK	1
-	Radiated Emission Above 1GHz	20775 to 21425	20775 (2502.5MHz), 21100 (2535.0MHz), 21425 (2567.5MHz)	5MHz	QPSK	1
		20850 to 21350	20850 (2510.0MHz), 21100 (2535.0MHz), 21350 (2560.0MHz)	20MHz	QPSK	1

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission below 1GHz, select the worst radiated emission channel (above 1GHz) for final testing.
3. For radiated emission above 1GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest & highest channel bandwidth for final test.

LTE Band 12

EUT Configure Mode	Test item	Available channel	Tested channel	Channel Bandwidth	Modulation	Mode
-	ERP	23017 to 23173	23017 (699.7MHz), 23095 (707.5MHz), 23173 (715.3MHz)	1.4MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
		23025 to 23165	23025 (700.5MHz), 23095 (707.5MHz), 23165 (714.5MHz)	3MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
		23035 to 23155	23035 (701.5MHz), 23095 (707.5MHz), 23155 (713.5MHz)	5MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
		23060 to 23130	23060 (704.0MHz), 23095 (707.5MHz), 23130 (711.0 MHz)	10MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
-	Radiated Emission Below 1GHz	23017 to 23173	23173 (715.3MHz)	1.4MHz	QPSK	1
-	Radiated Emission Above 1GHz	23017 to 23173	23017 (699.7MHz), 23095 (707.5MHz), 23173 (715.3MHz)	1.4MHz	QPSK	1
		23035 to 23155	23035 (701.5MHz), 23095 (707.5MHz), 23155 (713.5MHz)	5MHz	QPSK	1
		23060 to 23130	23060 (704.0MHz), 23095 (707.5MHz), 23130 (711.0MHz)	10MHz	QPSK	1

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission below 1GHz, select the worst radiated emission channel (above 1GHz) for final testing.
3. For radiated emission above 1GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5MHz & highest channel bandwidth for final test.

LTE Band 13

EUT Configure Mode	Test item	Available channel	Tested channel	Channel Bandwidth	Modulation	Mode
-	ERP	23205 to 23255	23205 (779.5MHz), 23230 (782.0MHz), 23255 (784.5MHz)	5MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
		23230	23230 (782.0MHz)	10MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
-	Radiated Emission Below 1GHz	23205 to 23255	23255 (784.5MHz)	5MHz	QPSK	1
-	Radiated Emission Above 1GHz	23205 to 23255	23205 (779.5MHz), 23230 (782.0MHz), 23255 (784.5MHz)	5MHz	QPSK	1
		23230	23230 (782.0MHz)	10MHz	QPSK	1

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission below 1GHz, select the worst radiated emission channel (above 1GHz) for final testing.
3. For radiated emission above 1GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest & highest channel bandwidth for final test.

LTE Band 17

EUT Configure Mode	Test item	Available channel	Tested channel	Channel Bandwidth	Modulation	Mode
-	ERP	23755 to 23825	23755 (706.5MHz), 23790 (710.0MHz), 23825 (713.5MHz)	5MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
		23780 to 23800	23780 (709.0MHz), 23790 (710.0MHz), 23800 (711.0MHz)	10MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
-	Radiated Emission Below 1GHz	23780 to 23800	23790 (710.0MHz)	10MHz	QPSK	1
-	Radiated Emission Above 1GHz	23755 to 23825	23755 (706.5MHz), 23790 (710.0MHz), 23825 (713.5MHz)	5MHz	QPSK	1
		23780 to 23800	23780 (709.0MHz), 23790 (710.0MHz), 23800 (711.0MHz)	10MHz	QPSK	1

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission below 1GHz, select the worst radiated emission channel (above 1GHz) for final testing.
3. For radiated emission above 1GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest & highest channel bandwidth for final test.

LTE Band 38

EUT Configure Mode	Test item	Available channel	Tested channel	Channel Bandwidth	Modulation	Mode
-	EIRP	37775 to 38225	37775 (2572.5MHz), 38000 (2595.0MHz), 38225 (2617.5MHz)	5MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
		37800 to 38200	37800 (2575.0MHz), 38000 (2595.0MHz), 38200 (2615.0MHz)	10MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
		37825 to 38175	37825 (2577.5MHz), 38000 (2595.0MHz), 38175 (2612.5MHz)	15MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
		37850 to 38150	37850 (2580.0MHz), 38000 (2595.0MHz), 38150 (2610.0MHz)	20MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
-	Radiated Emission Below 1GHz	37850 to 38150	38000 (2595.0MHz)	20MHz	QPSK	1
-	Radiated Emission Above 1GHz	37775 to 38225	37775 (2572.5MHz), 38000 (2595.0MHz), 38225 (2617.5MHz)	5MHz	QPSK	1
		37850 to 38150	37850 (2580.0MHz), 38000 (2595.0MHz), 38150 (2610.0MHz)	20MHz	QPSK	1

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission below 1GHz, select the worst radiated emission channel (above 1GHz) for final testing.
3. For radiated emission above 1GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest & highest channel bandwidth for final test.

LTE Band 41

EUT Configure Mode	Test item	Available channel	Tested channel	Channel Bandwidth	Modulation	Mode
-	EIRP	39675 to 41565	39675 (2498.5MHz), 40620 (2593.0MHz), 41565 (2687.5MHz)	5MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
		39700 to 41540	39700 (2501.0MHz), 40620 (2593.0MHz), 41540 (2685.0MHz)	10MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
		39725 to 41515	39725 (2503.5MHz), 40620 (2593.0MHz), 41515 (2682.5MHz)	15MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
		39750 to 41490	39750 (2506.0MHz), 40620 (2593.0MHz), 41490 (2680.0MHz)	20MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
-	Radiated Emission Below 1GHz	39750 to 41490	40620 (2593.0MHz)	20MHz	QPSK	1
-	Radiated Emission Above 1GHz	39675 to 41565	39675 (2498.5MHz), 40620 (2593.0MHz), 41565 (2687.5MHz)	5MHz	QPSK	1
		39750 to 41490	39750 (2506.0MHz), 40620 (2593.0MHz), 41490 (2680.0MHz)	20MHz	QPSK	1

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission below 1GHz, select the worst radiated emission channel (above 1GHz) for final testing.
3. For radiated emission above 1GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest & highest channel bandwidth for final test.

LTE Band 42

EUT Configure Mode	Test item	Available channel	Tested channel	Channel Bandwidth	Modulation	Mode
-	EIRP	42115 to 43065	42115 (3452.5MHz), 42590 (3500.0MHz), 43065 (3547.5MHz)	5MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
		42140 to 43040	42140 (3455.0MHz), 42590 (3500.0MHz), 43040 (3545.0MHz)	10MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
		42165 to 43015	42165 (3457.5MHz), 42590 (3500.0MHz), 43015 (3542.5MHz)	15MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
		42190 to 42990	42190 (3460.0MHz), 42590 (3500.0MHz), 42990 (3540.0MHz)	20MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
-	Radiated Emission Below 1GHz	42190 to 42990	42990 (3540.0MHz)	20MHz	QPSK	1
-	Radiated Emission Above 1GHz	42115 to 43065	42115 (3452.5MHz), 42590 (3500.0MHz), 43065 (3547.5MHz)	5MHz	QPSK	1
		42190 to 42990	42190 (3460.0MHz), 42590 (3500.0MHz), 42990 (3540.0MHz)	20MHz	QPSK	1

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission below 1GHz, select the worst radiated emission channel (above 1GHz) for final testing.
3. For radiated emission above 1GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest & highest channel bandwidth for final test.

LTE Band 66

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	131979 to 132665	131979 (1710.7MHz), 132322 (1745.0MHz), 132665 (1779.3MHz)	1.4MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
		131987 to 132657	131987 (1711.5MHz), 132322 (1745.0MHz), 132657 (1778.5MHz)	3MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
		131997 to 132647	131997 (1712.5MHz), 132322 (1745.0MHz), 132647 (1777.5MHz)	5MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
		132022 to 132622	132022 (1715.0MHz), 132322 (1745.0MHz), 132622 (1775.0MHz)	10MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
		132047 to 132597	132047 (1717.5MHz), 132322 (1745.0MHz), 132597 (1772.5MHz)	15MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
		132072 to 132572	132072 (1720.0MHz), 132322 (1745.0MHz), 132572 (1770.0MHz)	20MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
-	Radiated Emission Below 1GHz	131997 to 132647	132647 (1777.5MHz)	5MHz	QPSK	1
-	Radiated Emission Above 1GHz	131979 to 132665	131979 (1710.7MHz), 132322 (1745.0MHz), 132665 (1779.3MHz)	1.4MHz	QPSK	1
		131997 to 132647	131997 (1712.5MHz), 132322 (1745.0MHz), 132647 (1777.5MHz)	5MHz	QPSK	1
		132072 to 132572	132072 (1720.0MHz), 132322 (1745.0MHz), 132572 (1770.0MHz)	20MHz	QPSK	1

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission below 1GHz, select the worst radiated emission channel (above 1GHz) for final testing.
3. For radiated emission above 1GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5MHz & highest channel bandwidth for final test.

LTE Band 71

EUT Configure Mode	Test item	Available channel	Tested channel	Channel Bandwidth	Modulation	Mode
-	ERP	133147 to 133447	133147 (665.5MHz), 133297 (680.5MHz), 133447 (695.5MHz)	5MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
		133172 to 133422	133172 (668.0MHz), 133297 (680.5MHz), 133422 (693.0MHz)	10MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
		133197 to 133397	133197 (670.5MHz), 133297 (680.5MHz), 133397 (690.5MHz)	15MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
		133222 to 133372	133222 (673.0MHz), 133297 (680.5MHz), 133372 (688.0MHz)	20MHz	QPSK / 16QAM / 64QAM / 256QAM	1 Half Full
-	Radiated Emission Below 1GHz	133147 to 133447	133297 (680.5MHz)	5MHz	QPSK	1
-	Radiated Emission Above 1GHz	133147 to 133447	133147 (665.5MHz), 133297 (680.5MHz), 133447 (695.5MHz)	5MHz	QPSK	1
		133222 to 133372	133222 (673.0MHz), 133297 (680.5MHz), 133372 (688.0MHz)	20MHz	QPSK	1

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission below 1GHz, select the worst radiated emission channel (above 1GHz) for final testing.
3. For radiated emission above 1GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest & highest channel bandwidth for final test.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
EIRP / ERP	25deg. C, 60%RH	120Vac, 60Hz (System)	Willy Cheng
Radiated Emission	23deg. C, 67%RH 24deg. C, 75%RH	120Vac, 60Hz (System)	Rex Wang Adair Peng Vincent Chen

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and References:

Test Standard:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

References Test Guidance:

KDB 971168 D01 Power Meas License Digital Systems v03r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

For WCDMA Band 4, LTE Band 4, LTE Band 66:
Mobile / Portable station are limited to 1 watts e.i.r.p.

For LTE Band 12, LTE Band 13, LTE Band 17, LTE Band 71:

Control and mobile stations in the 698-746 MHz, 746-757 MHz, 787-788 MHz and 805-806 MHz band are limited to 30 watts ERP.

Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink, 746-757 MHz, 787-788 MHz and 805-806 MHz band are limited to 3 watts ERP.

For LTE Band 7, LTE Band 38, LTE Band 41:

Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

LTE Band 42:

Mobile devices are limited to 1Watt (30 dBm) EIRP. Mobile devices operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

4.1.2 Test Procedures

Conducted Power Measurement:

The EUT was set up for the maximum power with WCDMA, LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

Maximum EIRP / ERP

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation as follows:

$$\text{EIRP} = P_{\text{Meas}} + G_T$$

$$\text{ERP} = P_{\text{Meas}} + G_T - 2.15$$

where

ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively
(expressed in the same units as P_{Meas} , e.g., dBm or dBW)

P_{Meas} measured transmitter output power or PSD, in dBm or dBW

G_T gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

4.1.3 Test Setup

Conducted Power Measurement:



4.1.4 Test Results

Conducted Output Power (dBm)

Band	WCDMA IV		
TX Channel	1312	1413	1513
Rx Channel	1537	1638	1738
Frequency	1712.4	1732.6	1752.6
RMC 12.2K	23.55	23.49	23.50
HSDPA Subtest-1	23.05	22.94	23.03
HSDPA Subtest-2	23.06	22.93	22.97
HSDPA Subtest-3	22.55	22.44	22.50
HSDPA Subtest-4	22.50	22.42	22.48
DC-HSDPA Subtest-1	22.96	22.85	22.92
DC-HSDPA Subtest-2	22.98	22.82	22.88
DC-HSDPA Subtest-3	22.44	22.35	22.40
DC-HSDPA Subtest-4	22.40	22.31	22.38
HSUPA Subtest-1	22.79	22.85	22.98
HSUPA Subtest-2	20.76	20.68	20.80
HSUPA Subtest-3	21.75	21.60	21.76
HSUPA Subtest-4	20.73	20.66	20.79
HSUPA Subtest-5	22.78	22.65	22.75

LTE Band 4						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		20050	20175	20300
		Frequency (MHz)		1720	1732.5	1745
20M	QPSK	1	0	22.85	23.02	22.97
		1	50	22.61	22.71	22.63
		1	99	22.65	22.69	22.67
		50	0	21.95	22.05	21.96
		50	25	21.90	21.97	21.92
		50	50	21.81	21.89	21.83
		100	0	21.83	21.87	21.86
20M	16QAM	1	0	22.12	22.25	22.17
		1	50	22.06	22.17	22.09
		1	99	21.96	22.10	22.03
		50	0	20.90	21.06	20.97
		50	25	21.01	21.04	21.04
		50	50	20.93	21.01	20.93
		100	0	20.86	20.98	20.89
20M	64QAM	1	0	21.15	21.22	21.22
		1	50	21.03	21.18	21.11
		1	99	21.01	21.14	21.09
		50	0	20.15	20.26	20.21
		50	25	20.05	20.21	20.14
		50	50	20.12	20.16	20.15
		100	0	20.03	20.11	20.04
20M	256QAM	1	0	18.24	18.28	18.23
		1	50	17.87	17.95	17.82
		1	99	17.91	17.91	17.90
		50	0	17.89	17.89	17.82
		50	25	17.77	17.87	17.76
		50	50	17.77	17.85	17.71
		100	0	17.80	17.83	17.79

LTE Band 4						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		20025	20175	20325
		Frequency (MHz)		1717.5	1732.5	1747.5
15M	QPSK	1	0	22.79	22.91	22.94
		1	37	22.59	22.61	22.56
		1	74	22.64	22.65	22.60
		36	0	21.92	22.04	21.88
		36	19	21.84	21.91	21.89
		36	39	21.81	21.80	21.81
		75	0	21.76	21.87	21.82
15M	16QAM	1	0	22.11	22.20	22.13
		1	37	22.00	22.17	22.09
		1	74	21.92	22.02	22.01
		36	0	20.83	20.96	20.87
		36	19	20.94	20.98	21.03
		36	39	20.89	20.95	20.90
		75	0	20.76	20.95	20.85
15M	64QAM	1	0	21.09	21.19	21.19
		1	37	20.93	21.09	21.11
		1	74	20.98	21.14	21.03
		36	0	20.13	20.23	20.15
		36	19	20.01	20.16	20.08
		36	39	20.02	20.16	20.12
		75	0	19.97	20.05	19.94
15M	256QAM	1	0	18.19	18.28	18.23
		1	37	17.86	17.93	17.73
		1	74	17.81	17.81	17.84
		36	0	17.87	17.80	17.82
		36	19	17.67	17.85	17.69
		36	39	17.73	17.84	17.70
		75	0	17.77	17.77	17.72

LTE Band 4						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		20000	20175	20350
		Frequency (MHz)		1715	1732.5	1750
10M	QPSK	1	0	22.81	22.93	22.91
		1	24	22.56	22.63	22.63
		1	49	22.59	22.63	22.67
		25	0	21.88	21.99	21.89
		25	12	21.89	21.88	21.89
		25	25	21.80	21.85	21.73
		50	0	21.75	21.80	21.76
10M	16QAM	1	0	22.08	22.17	22.11
		1	24	22.05	22.17	22.04
		1	49	21.95	22.00	21.95
		25	0	20.82	21.00	20.87
		25	12	21.00	20.96	20.96
		25	25	20.91	20.98	20.91
		50	0	20.86	20.98	20.86
10M	64QAM	1	0	21.10	21.16	21.13
		1	24	21.01	21.13	21.05
		1	49	20.93	21.07	20.99
		25	0	20.07	20.26	20.11
		25	12	20.01	20.20	20.07
		25	25	20.05	20.13	20.07
		50	0	19.97	20.01	19.98
10M	256QAM	1	0	18.17	18.19	18.18
		1	24	17.85	17.89	17.81
		1	49	17.81	17.91	17.86
		25	0	17.80	17.86	17.77
		25	12	17.74	17.87	17.69
		25	25	17.74	17.79	17.66
		50	0	17.72	17.80	17.78

LTE Band 4						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		19975	20175	20375
		Frequency (MHz)		1712.5	1732.5	1752.5
5M	QPSK	1	0	22.78	22.96	22.92
		1	12	22.58	22.64	22.57
		1	24	22.65	22.69	22.59
		12	0	21.91	22.00	21.93
		12	6	21.85	21.93	21.82
		12	13	21.80	21.81	21.80
		25	0	21.82	21.79	21.76
5M	16QAM	1	0	22.08	22.23	22.09
		1	12	22.06	22.17	22.04
		1	24	21.94	22.07	22.03
		12	0	20.84	21.01	20.90
		12	6	21.01	21.03	21.02
		12	13	20.93	20.98	20.90
		25	0	20.77	20.95	20.89
5M	64QAM	1	0	21.06	21.12	21.21
		1	12	20.93	21.08	21.06
		1	24	20.99	21.09	21.04
		12	0	20.13	20.16	20.16
		12	6	19.98	20.17	20.11
		12	13	20.02	20.12	20.09
		25	0	19.94	20.06	19.97
5M	256QAM	1	0	18.24	18.20	18.15
		1	12	17.80	17.86	17.78
		1	24	17.90	17.84	17.88
		12	0	17.84	17.83	17.75
		12	6	17.75	17.79	17.71
		12	13	17.72	17.83	17.71
		25	0	17.80	17.73	17.75

LTE Band 4						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		19965	20175	20385
		Frequency (MHz)		1711.5	1732.5	1753.5
3M	QPSK	1	0	22.77	22.93	22.97
		1	7	22.56	22.63	22.58
		1	14	22.61	22.65	22.64
		8	0	21.91	22.02	21.94
		8	3	21.88	21.89	21.83
		8	7	21.71	21.88	21.79
		15	0	21.79	21.86	21.79
3M	16QAM	1	0	22.12	22.21	22.11
		1	7	22.03	22.07	22.07
		1	14	21.92	22.09	21.95
		8	0	20.85	21.05	20.88
		8	3	20.94	21.02	20.94
		8	7	20.89	20.94	20.86
		15	0	20.78	20.98	20.82
3M	64QAM	1	0	21.05	21.19	21.15
		1	7	21.00	21.08	21.05
		1	14	20.94	21.09	21.06
		8	0	20.11	20.16	20.18
		8	3	20.03	20.18	20.04
		8	7	20.05	20.13	20.12
		15	0	19.96	20.09	19.94
3M	256QAM	1	0	18.24	18.27	18.19
		1	7	17.85	17.90	17.81
		1	14	17.84	17.89	17.86
		8	0	17.86	17.80	17.77
		8	3	17.72	17.83	17.68
		8	7	17.76	17.85	17.68
		15	0	17.73	17.81	17.70

LTE Band 4						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		19957	20175	20393
		Frequency (MHz)		1710.7	1732.5	1754.3
1.4M	QPSK	1	0	22.77	22.92	22.74
		1	2	22.52	22.58	22.57
		1	5	22.60	22.60	22.49
		3	0	22.86	22.93	22.95
		3	1	22.80	22.86	22.74
		3	3	22.67	22.73	22.72
		6	0	21.81	21.73	21.76
1.4M	16QAM	1	0	22.04	22.19	22.08
		1	2	21.97	22.10	22.01
		1	5	21.80	22.04	21.97
		3	0	21.87	22.00	21.88
		3	1	21.87	21.84	21.89
		3	3	21.86	21.81	21.73
		6	0	20.68	20.91	20.77
1.4M	64QAM	1	0	20.98	21.13	21.00
		1	2	20.87	21.02	21.04
		1	5	20.85	20.95	20.94
		3	0	21.04	21.19	20.98
		3	1	20.93	21.13	20.97
		3	3	20.99	21.05	20.92
		6	0	19.87	19.91	19.83
1.4M	256QAM	1	0	18.16	18.28	18.23
		1	2	17.82	17.91	17.78
		1	5	17.85	17.81	17.85
		3	0	17.88	17.85	17.76
		3	1	17.72	17.86	17.73
		3	3	17.67	17.82	17.63
		6	0	17.70	17.81	17.75

LTE Band 7						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		20850	21100	21350
		Frequency (MHz)		2510	2535	2560
20M	QPSK	1	0	23.40	23.39	23.36
		1	50	23.29	23.34	23.34
		1	99	23.12	23.31	23.22
		50	0	22.42	22.46	22.42
		50	25	22.25	22.41	22.34
		50	50	22.24	22.39	22.32
		100	0	22.32	22.37	22.33
20M	16QAM	1	0	22.66	22.74	22.66
		1	50	22.48	22.68	22.58
		1	99	22.49	22.62	22.58
		50	0	21.47	21.58	21.49
		50	25	21.44	21.49	21.47
		50	50	21.41	21.47	21.46
		100	0	21.29	21.41	21.34
20M	64QAM	1	0	21.31	21.38	21.33
		1	50	21.27	21.35	21.25
		1	99	21.25	21.32	21.21
		50	0	20.51	20.56	20.48
		50	25	20.48	20.51	20.44
		50	50	20.42	20.47	20.37
		100	0	20.37	20.45	20.35
20M	256QAM	1	0	18.46	18.59	18.55
		1	50	18.46	18.53	18.47
		1	99	18.37	18.51	18.45
		50	0	18.37	18.49	18.46
		50	25	18.36	18.46	18.38
		50	50	18.36	18.44	18.36
		100	0	18.31	18.43	18.37

LTE Band 7						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		20825	21100	21375
		Frequency (MHz)		2507.5	2535	2562.5
15M	QPSK	1	0	23.39	23.31	23.36
		1	37	23.29	23.37	23.27
		1	74	23.08	23.24	23.19
		36	0	22.34	22.45	22.33
		36	19	22.15	22.34	22.34
		36	39	22.15	22.39	22.29
		75	0	22.27	22.32	22.32
15M	16QAM	1	0	22.60	22.67	22.56
		1	37	22.44	22.59	22.50
		1	74	22.42	22.59	22.54
		36	0	21.45	21.54	21.45
		36	19	21.42	21.45	21.39
		36	39	21.41	21.37	21.37
		75	0	21.21	21.40	21.34
15M	64QAM	1	0	21.28	21.34	21.28
		1	37	21.21	21.35	21.16
		1	74	21.24	21.24	21.15
		36	0	20.48	20.55	20.45
		36	19	20.43	20.43	20.43
		36	39	20.39	20.41	20.27
		75	0	20.29	20.38	20.34
15M	256QAM	1	0	18.36	18.59	18.51
		1	37	18.42	18.44	18.38
		1	74	18.32	18.43	18.45
		36	0	18.27	18.45	18.46
		36	19	18.30	18.39	18.33
		36	39	18.31	18.39	18.26
		75	0	18.30	18.37	18.30

LTE Band 7						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		20800	21100	21400
		Frequency (MHz)		2505	2535	2565
10M	QPSK	1	0	23.35	23.36	23.34
		1	24	23.25	23.39	23.30
		1	49	23.08	23.24	23.17
		25	0	22.37	22.38	22.36
		25	12	22.22	22.33	22.31
		25	25	22.17	22.35	22.25
		50	0	22.31	22.34	22.23
10M	16QAM	1	0	22.65	22.72	22.56
		1	24	22.41	22.58	22.58
		1	49	22.40	22.61	22.53
		25	0	21.46	21.56	21.41
		25	12	21.39	21.42	21.45
		25	25	21.39	21.44	21.45
		50	0	21.28	21.40	21.34
10M	64QAM	1	0	21.22	21.38	21.23
		1	24	21.24	21.35	21.22
		1	49	21.16	21.25	21.21
		25	0	20.42	20.55	20.41
		25	12	20.40	20.42	20.37
		25	25	20.37	20.37	20.32
		50	0	20.32	20.42	20.33
10M	256QAM	1	0	18.45	18.58	18.54
		1	24	18.40	18.53	18.37
		1	49	18.31	18.49	18.40
		25	0	18.36	18.43	18.41
		25	12	18.28	18.38	18.33
		25	25	18.32	18.37	18.33
		50	0	18.30	18.42	18.27

LTE Band 7						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		20775	21100	21425
		Frequency (MHz)		2502.5	2535	2567.5
5M	QPSK	1	0	23.34	23.38	23.37
		1	12	23.25	23.32	23.28
		1	24	23.12	23.24	23.19
		12	0	22.33	22.44	22.37
		12	6	22.25	22.39	22.28
		12	13	22.24	22.34	22.29
		25	0	22.26	22.28	22.29
5M	16QAM	1	0	22.63	22.71	22.65
		1	12	22.48	22.63	22.56
		1	24	22.46	22.61	22.52
		12	0	21.39	21.55	21.44
		12	6	21.41	21.49	21.46
		12	13	21.34	21.37	21.39
		25	0	21.26	21.33	21.28
5M	64QAM	1	0	21.27	21.34	21.32
		1	12	21.19	21.27	21.24
		1	24	21.18	21.25	21.12
		12	0	20.44	20.52	20.48
		12	6	20.41	20.49	20.35
		12	13	20.34	20.37	20.31
		25	0	20.35	20.39	20.30
5M	256QAM	1	0	18.40	18.56	18.55
		1	12	18.42	18.45	18.44
		1	24	18.30	18.48	18.44
		12	0	18.36	18.44	18.38
		12	6	18.28	18.46	18.30
		12	13	18.28	18.34	18.28
		25	0	18.28	18.39	18.29

LTE Band 12						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		23060	23095	23130
		Frequency (MHz)		704	707.5	711
10M	QPSK	1	0	22.91	22.93	22.89
		1	24	22.88	22.91	22.85
		1	49	22.82	22.89	22.79
		25	0	21.95	21.98	21.94
		25	12	21.95	21.96	21.92
		25	25	21.86	21.93	21.78
		50	0	21.89	21.91	21.86
10M	16QAM	1	0	22.10	22.14	22.10
		1	24	22.09	22.12	22.03
		1	49	22.01	22.09	21.98
		25	0	21.02	21.03	20.95
		25	12	20.95	21.01	20.94
		25	25	20.95	20.98	20.95
		50	0	20.91	20.96	20.90
10M	64QAM	1	0	21.12	21.18	21.09
		1	24	21.11	21.13	21.05
		1	49	20.98	21.06	20.88
		25	0	20.17	20.17	20.15
		25	12	20.05	20.12	19.96
		25	25	20.02	20.08	20.01
		50	0	20.05	20.06	19.99
10M	256QAM	1	0	17.97	18.02	17.96
		1	24	17.94	17.95	17.90
		1	49	17.86	17.91	17.85
		25	0	17.78	17.88	17.78
		25	12	17.82	17.84	17.73
		25	25	17.74	17.80	17.68
		50	0	17.94	17.96	17.89

LTE Band 12						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		23035	23095	23155
		Frequency (MHz)		701.5	707.5	713.5
5M	QPSK	1	0	22.88	22.88	22.86
		1	12	22.87	22.90	22.85
		1	24	22.77	22.89	22.74
		12	0	21.90	21.92	21.88
		12	6	21.89	21.87	21.92
		12	13	21.85	21.91	21.77
		25	0	21.82	21.82	21.77
5M	16QAM	1	0	22.03	22.04	22.02
		1	12	22.02	22.05	21.96
		1	24	21.94	22.01	21.96
		12	0	21.02	21.01	20.92
		12	6	20.94	20.97	20.90
		12	13	20.88	20.91	20.90
		25	0	20.86	20.93	20.84
5M	64QAM	1	0	21.09	21.14	21.09
		1	12	21.04	21.04	21.03
		1	24	20.98	20.99	20.80
		12	0	20.10	20.16	20.06
		12	6	20.03	20.12	19.91
		12	13	20.02	20.05	19.99
		25	0	20.04	19.97	19.99
5M	256QAM	1	0	17.94	17.95	17.94
		1	12	17.91	17.93	17.87
		1	24	17.76	17.84	17.75
		12	0	17.74	17.81	17.70
		12	6	17.80	17.78	17.67
		12	13	17.64	17.72	17.66
		25	0	17.93	17.86	17.88

LTE Band 12						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		23025	23095	23165
		Frequency (MHz)		700.5	707.5	714.5
3M	QPSK	1	0	22.82	22.83	22.87
		1	7	22.80	22.87	22.76
		1	14	22.74	22.86	22.75
		8	0	21.91	21.94	21.94
		8	3	21.85	21.92	21.84
		8	7	21.78	21.87	21.72
		15	0	21.81	21.91	21.80
3M	16QAM	1	0	22.08	22.04	22.10
		1	7	22.06	22.05	21.96
		1	14	21.99	22.08	21.88
		8	0	20.93	20.98	20.90
		8	3	20.86	20.94	20.85
		8	7	20.91	20.90	20.91
		15	0	20.83	20.91	20.81
3M	64QAM	1	0	21.08	21.18	21.03
		1	7	21.02	21.06	21.03
		1	14	20.91	20.96	20.86
		8	0	20.10	20.09	20.10
		8	3	19.99	20.08	19.95
		8	7	19.96	20.05	19.97
		15	0	19.98	19.98	19.97
3M	256QAM	1	0	17.93	17.96	17.86
		1	7	17.92	17.85	17.85
		1	14	17.86	17.88	17.79
		8	0	17.70	17.88	17.69
		8	3	17.78	17.80	17.66
		8	7	17.71	17.76	17.65
		15	0	17.89	17.96	17.82

LTE Band 12						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		23017	23095	23173
		Frequency (MHz)		699.7	707.5	715.3
1.4M	QPSK	1	0	22.83	22.80	22.79
		1	2	22.76	22.74	22.76
		1	5	22.76	22.75	22.65
		3	0	22.86	22.82	22.77
		3	1	22.73	22.74	22.72
		3	3	22.71	22.83	22.64
		6	0	21.75	21.69	21.73
1.4M	16QAM	1	0	21.94	22.08	21.91
		1	2	22.05	22.05	21.96
		1	5	21.80	22.06	21.91
		3	0	21.91	21.91	21.88
		3	1	21.88	21.95	21.78
		3	3	21.86	21.80	21.85
		6	0	20.75	20.86	20.72
1.4M	64QAM	1	0	21.05	20.99	20.91
		1	2	21.08	21.03	20.91
		1	5	20.84	20.95	20.68
		3	0	21.03	20.98	20.96
		3	1	20.99	20.98	20.84
		3	3	20.93	20.94	20.90
		6	0	19.97	19.90	19.93
1.4M	256QAM	1	0	17.94	17.94	17.96
		1	2	17.85	17.94	17.85
		1	5	17.86	17.81	17.85
		3	0	17.76	17.80	17.72
		3	1	17.76	17.74	17.64
		3	3	17.67	17.79	17.63
		6	0	17.94	17.86	17.85

LTE Band 13				
BW	MCS Index	RB Size	RB Offset	Low
		Channel		23230
		Frequency (MHz)		782
10M	QPSK	1	0	22.87
		1	24	22.76
		1	49	22.64
		25	0	21.74
		25	12	21.72
		25	25	21.69
		50	0	21.65
10M	16QAM	1	0	22.01
		1	24	21.96
		1	49	21.93
		25	0	20.74
		25	12	20.71
		25	25	20.68
		50	0	20.62
10M	64QAM	1	0	20.81
		1	24	20.76
		1	49	20.74
		25	0	19.98
		25	12	19.92
		25	25	19.90
		50	0	19.87
10M	256QAM	1	0	17.87
		1	24	17.82
		1	49	17.76
		25	0	17.73
		25	12	17.71
		25	25	17.69
		50	0	17.66

LTE Band 13						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		23205	23230	23255
		Frequency (MHz)		779.5	782	784.5
5M	QPSK	1	0	22.79	22.79	22.64
		1	12	22.68	22.69	22.62
		1	24	22.53	22.55	22.46
		12	0	21.69	21.70	21.63
		12	6	21.64	21.66	21.49
		12	13	21.63	21.67	21.46
		25	0	21.51	21.58	21.51
5M	16QAM	1	0	21.84	21.92	21.86
		1	12	21.89	21.92	21.72
		1	24	21.85	21.90	21.84
		12	0	20.65	20.68	20.64
		12	6	20.54	20.66	20.52
		12	13	20.60	20.58	20.56
		25	0	20.48	20.61	20.41
5M	64QAM	1	0	20.69	20.77	20.68
		1	12	20.65	20.71	20.62
		1	24	20.62	20.73	20.54
		12	0	19.83	19.98	19.79
		12	6	19.79	19.88	19.78
		12	13	19.87	19.89	19.86
		25	0	19.79	19.86	19.82
5M	256QAM	1	0	17.81	17.80	17.72
		1	12	17.80	17.81	17.77
		1	24	17.60	17.73	17.55
		12	0	17.61	17.66	17.61
		12	6	17.60	17.62	17.53
		12	13	17.55	17.69	17.49
		25	0	17.63	17.57	17.59

LTE Band 17						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		23780	23790	23800
		Frequency (MHz)		709	710	711
10M	QPSK	1	0	22.87	23.01	22.92
		1	24	22.82	22.99	22.91
		1	49	22.79	22.96	22.88
		25	0	21.79	21.97	21.87
		25	12	21.90	21.95	21.93
		25	25	21.73	21.93	21.83
		50	0	21.74	21.91	21.84
10M	16QAM	1	0	22.15	22.17	22.17
		1	24	22.02	22.14	22.05
		1	49	22.01	22.10	22.01
		25	0	20.97	21.04	21.02
		25	12	20.95	21.01	21.00
		25	25	20.84	20.99	20.93
		50	0	20.83	20.96	20.91
10M	64QAM	1	0	21.06	21.26	21.16
		1	24	21.22	21.24	21.24
		1	49	21.07	21.18	21.13
		25	0	19.92	20.08	19.99
		25	12	19.91	20.06	19.96
		25	25	19.90	20.01	19.99
		50	0	19.87	19.99	19.93
10M	256QAM	1	0	17.96	18.06	18.05
		1	24	17.95	18.03	17.97
		1	49	17.82	18.00	17.91
		25	0	17.88	17.96	17.92
		25	12	17.87	17.92	17.90
		25	25	17.80	17.90	17.89
		50	0	17.79	17.88	17.79

LTE Band 17						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		23755	23790	23825
		Frequency (MHz)		706.5	710	713.5
5M	QPSK	1	0	22.84	22.90	22.86
		1	12	22.81	22.99	22.83
		1	24	22.72	22.94	22.79
		12	0	21.75	21.87	21.87
		12	6	21.83	21.87	21.88
		12	13	21.72	21.86	21.83
		25	0	21.70	21.87	21.76
5M	16QAM	1	0	22.13	22.13	22.12
		1	12	21.92	22.05	22.02
		1	24	22.01	22.05	21.98
		12	0	20.92	21.00	20.97
		12	6	20.95	20.93	20.90
		12	13	20.75	20.89	20.91
		25	0	20.73	20.92	20.85
5M	64QAM	1	0	21.00	21.23	21.12
		1	12	21.17	21.21	21.21
		1	24	20.98	21.18	21.12
		12	0	19.84	20.03	19.96
		12	6	19.82	20.05	19.87
		12	13	19.86	20.01	19.95
		25	0	19.84	19.99	19.88
5M	256QAM	1	0	17.94	18.03	17.99
		1	12	17.85	18.01	17.93
		1	24	17.79	18.00	17.84
		12	0	17.78	17.92	17.88
		12	6	17.77	17.89	17.82
		12	13	17.72	17.89	17.86
		25	0	17.76	17.78	17.71

LTE Band 38						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		37850	38000	38150
		Frequency (MHz)		2580	2595	2610
20M	QPSK	1	0	23.31	23.36	23.30
		1	50	23.23	23.29	23.14
		1	99	23.18	23.27	23.14
		50	0	22.47	22.48	22.39
		50	25	22.44	22.46	22.40
		50	50	22.38	22.43	22.35
		100	0	22.35	22.42	22.31
20M	16QAM	1	0	22.46	22.47	22.45
		1	50	22.43	22.43	22.43
		1	99	22.38	22.41	22.30
		50	0	21.44	21.54	21.38
		50	25	21.45	21.47	21.41
		50	50	21.39	21.43	21.34
		100	0	21.41	21.41	21.40
20M	64QAM	1	0	21.21	21.21	21.15
		1	50	21.06	21.14	20.98
		1	99	21.03	21.08	21.02
		50	0	20.54	20.55	20.47
		50	25	20.43	20.48	20.34
		50	50	20.42	20.42	20.33
		100	0	20.33	20.37	20.23
20M	256QAM	1	0	18.36	18.46	18.33
		1	50	18.37	18.43	18.34
		1	99	18.33	18.42	18.24
		50	0	18.29	18.38	18.29
		50	25	18.32	18.36	18.25
		50	50	18.32	18.33	18.22
		100	0	18.26	18.31	18.22

LTE Band 38						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		37825	38000	38175
		Frequency (MHz)		2577.5	2595	2612.5
15M	QPSK	1	0	23.21	23.25	23.22
		1	37	23.23	23.19	23.13
		1	74	23.15	23.23	23.13
		36	0	22.44	22.46	22.35
		36	19	22.34	22.39	22.40
		36	39	22.36	22.36	22.31
		75	0	22.26	22.42	22.23
15M	16QAM	1	0	22.45	22.45	22.36
		1	37	22.34	22.36	22.41
		1	74	22.36	22.35	22.23
		36	0	21.41	21.44	21.29
		36	19	21.35	21.40	21.35
		36	39	21.31	21.37	21.30
		75	0	21.40	21.34	21.40
15M	64QAM	1	0	21.21	21.20	21.15
		1	37	20.99	21.04	20.89
		1	74	20.94	21.07	20.96
		36	0	20.48	20.47	20.38
		36	19	20.42	20.40	20.34
		36	39	20.40	20.32	20.31
		75	0	20.30	20.28	20.20
15M	256QAM	1	0	18.36	18.36	18.23
		1	37	18.28	18.34	18.32
		1	74	18.28	18.38	18.16
		36	0	18.23	18.31	18.28
		36	19	18.22	18.29	18.21
		36	39	18.31	18.26	18.18
		75	0	18.19	18.28	18.12

LTE Band 38						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		37800	38000	38200
		Frequency (MHz)		2575	2595	2615
10M	QPSK	1	0	23.30	23.31	23.20
		1	24	23.22	23.27	23.13
		1	49	23.10	23.18	23.05
		25	0	22.42	22.44	22.38
		25	12	22.35	22.37	22.40
		25	25	22.34	22.38	22.27
		50	0	22.34	22.38	22.26
10M	16QAM	1	0	22.36	22.43	22.36
		1	24	22.36	22.37	22.40
		1	49	22.29	22.39	22.28
		25	0	21.42	21.50	21.33
		25	12	21.42	21.41	21.31
		25	25	21.30	21.39	21.30
		50	0	21.33	21.38	21.32
10M	64QAM	1	0	21.12	21.20	21.13
		1	24	21.04	21.05	20.89
		1	49	21.02	21.05	20.92
		25	0	20.48	20.51	20.41
		25	12	20.42	20.46	20.34
		25	25	20.33	20.36	20.29
		50	0	20.30	20.35	20.21
10M	256QAM	1	0	18.29	18.42	18.27
		1	24	18.30	18.38	18.24
		1	49	18.27	18.38	18.15
		25	0	18.29	18.28	18.25
		25	12	18.29	18.33	18.17
		25	25	18.26	18.28	18.15
		50	0	18.23	18.26	18.12

LTE Band 38						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		37775	38000	38225
		Frequency (MHz)		2572.5	2595	2617.5
5M	QPSK	1	0	23.28	23.30	23.21
		1	12	23.14	23.19	23.05
		1	24	23.13	23.22	23.12
		12	0	22.45	22.41	22.31
		12	6	22.44	22.37	22.35
		12	13	22.31	22.41	22.34
		25	0	22.31	22.38	22.26
5M	16QAM	1	0	22.46	22.47	22.37
		1	12	22.43	22.38	22.33
		1	24	22.36	22.34	22.30
		12	0	21.38	21.49	21.32
		12	6	21.39	21.39	21.38
		12	13	21.34	21.33	21.32
		25	0	21.39	21.39	21.32
5M	64QAM	1	0	21.21	21.12	21.05
		1	12	21.01	21.14	20.92
		1	24	21.01	20.98	20.92
		12	0	20.53	20.47	20.37
		12	6	20.37	20.43	20.31
		12	13	20.35	20.33	20.33
		25	0	20.30	20.35	20.16
5M	256QAM	1	0	18.35	18.40	18.24
		1	12	18.32	18.40	18.28
		1	24	18.23	18.40	18.17
		12	0	18.27	18.28	18.28
		12	6	18.32	18.26	18.25
		12	13	18.32	18.31	18.12
		25	0	18.19	18.29	18.12

LTE Band 41 (Power Class 2)						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		39750	40620	41490
		Frequency (MHz)		2506	2593	2680
20M	QPSK	1	0	25.27	25.51	25.22
		1	50	25.19	25.30	25.11
		1	99	25.06	25.26	24.97
		50	0	24.32	24.50	24.22
		50	25	24.27	24.44	24.26
		50	50	24.30	24.41	24.30
		100	0	24.27	24.38	24.21
20M	16QAM	1	0	24.62	24.75	24.61
		1	50	24.42	24.55	24.32
		1	99	24.37	24.51	24.28
		50	0	23.44	23.52	23.44
		50	25	23.29	23.48	23.29
		50	50	23.40	23.45	23.36
		100	0	23.40	23.41	23.35
20M	64QAM	1	0	23.29	23.45	23.29
		1	50	23.32	23.36	23.29
		1	99	23.22	23.34	23.21
		50	0	22.39	22.44	22.32
		50	25	22.25	22.41	22.25
		50	50	22.28	22.37	22.21
		100	0	22.21	22.35	22.20
20M	256QAM	1	0	20.47	20.58	20.41
		1	50	20.50	20.55	20.47
		1	99	20.37	20.51	20.27
		50	0	20.38	20.47	20.30
		50	25	20.34	20.44	20.24
		50	50	20.28	20.42	20.27
		100	0	20.34	20.38	20.29

LTE Band 41 (Power Class 2)						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		39725	40620	41515
		Frequency (MHz)		2503.5	2593	2682.5
15M	QPSK	1	0	25.21	25.42	25.14
		1	37	25.19	25.24	25.08
		1	74	25.03	25.26	24.92
		36	0	24.27	24.46	24.15
		36	19	24.22	24.39	24.20
		36	39	24.22	24.34	24.23
		75	0	24.18	24.28	24.21
15M	16QAM	1	0	24.52	24.69	24.19
		1	37	24.32	24.49	24.06
		1	74	24.37	24.42	23.89
		36	0	23.38	23.49	23.14
		36	19	23.22	23.41	23.22
		36	39	23.35	23.35	23.21
		75	0	23.38	23.40	23.15
15M	64QAM	1	0	23.29	23.40	23.20
		1	37	23.29	23.28	23.03
		1	74	23.17	23.28	22.97
		36	0	22.36	22.38	22.15
		36	19	22.17	22.39	22.18
		36	39	22.27	22.36	22.28
		75	0	22.14	22.26	22.17
15M	256QAM	1	0	20.40	20.49	20.39
		1	37	20.43	20.53	20.43
		1	74	20.35	20.51	20.17
		36	0	20.32	20.37	20.26
		36	19	20.26	20.38	20.18
		36	39	20.19	20.33	20.21
		75	0	20.30	20.36	20.24

LTE Band 41 (Power Class 2)						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		39700	40620	41540
		Frequency (MHz)		2501	2593	2685
10M	QPSK	1	0	25.24	25.44	25.14
		1	24	25.15	25.28	25.02
		1	49	25.05	25.16	24.89
		25	0	24.28	24.42	24.13
		25	12	24.25	24.36	24.20
		25	25	24.28	24.41	24.28
		50	0	24.26	24.36	24.19
10M	16QAM	1	0	24.53	24.73	24.19
		1	24	24.41	24.52	24.05
		1	49	24.31	24.44	23.95
		25	0	23.34	23.50	23.20
		25	12	23.20	23.42	23.24
		25	25	23.38	23.39	23.20
		50	0	23.31	23.41	23.20
10M	64QAM	1	0	23.24	23.37	23.14
		1	24	23.28	23.36	23.08
		1	49	23.17	23.34	22.94
		25	0	22.35	22.43	22.14
		25	12	22.23	22.34	22.25
		25	25	22.23	22.29	22.25
		50	0	22.17	22.27	22.13
10M	256QAM	1	0	20.44	20.50	20.33
		1	24	20.45	20.46	20.45
		1	49	20.31	20.51	20.22
		25	0	20.34	20.41	20.21
		25	12	20.31	20.44	20.17
		25	25	20.24	20.32	20.22
		50	0	20.29	20.33	20.29

LTE Band 41 (Power Class 2)						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		39675	40620	41565
		Frequency (MHz)		2498.5	2593	2687.5
5M	QPSK	1	0	25.21	25.46	25.18
		1	12	25.11	25.26	25.11
		1	24	25.04	25.17	24.91
		12	0	24.27	24.49	24.21
		12	6	24.18	24.35	24.23
		12	13	24.29	24.36	24.27
		25	0	24.22	24.29	24.18
5M	16QAM	1	0	24.62	24.72	24.21
		1	12	24.38	24.50	24.06
		1	24	24.34	24.46	23.96
		12	0	23.44	23.42	23.22
		12	6	23.27	23.44	23.17
		12	13	23.30	23.37	23.24
		25	0	23.34	23.36	23.12
5M	64QAM	1	0	23.23	23.39	23.19
		1	12	23.28	23.28	23.08
		1	24	23.20	23.30	22.89
		12	0	22.36	22.40	22.21
		12	6	22.22	22.40	22.22
		12	13	22.19	22.27	22.21
		25	0	22.12	22.30	22.15
5M	256QAM	1	0	20.47	20.48	20.33
		1	12	20.50	20.49	20.42
		1	24	20.34	20.45	20.21
		12	0	20.32	20.43	20.27
		12	6	20.25	20.41	20.18
		12	13	20.28	20.38	20.24
		25	0	20.24	20.30	20.20

LTE Band 41 (Power Class 3)						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		39750	40620	41490
		Frequency (MHz)		2506	2593	2680
20M	QPSK	1	0	23.22	23.45	23.18
		1	50	23.21	23.35	23.11
		1	99	23.21	23.32	23.21
		50	0	22.31	22.45	22.22
		50	25	22.26	22.41	22.18
		50	50	22.21	22.39	22.21
		100	0	22.23	22.37	22.20
20M	16QAM	1	0	22.49	22.60	22.40
		1	50	22.27	22.41	22.18
		1	99	22.18	22.25	22.17
		50	0	21.30	21.49	21.30
		50	25	21.38	21.42	21.37
		50	50	21.22	21.38	21.20
		100	0	21.16	21.35	21.12
20M	64QAM	1	0	20.86	21.08	20.98
		1	50	20.93	21.03	20.86
		1	99	20.87	20.96	20.84
		50	0	20.44	20.62	20.36
		50	25	20.47	20.58	20.39
		50	50	20.42	20.51	20.41
		100	0	20.36	20.47	20.28
20M	256QAM	1	0	18.54	18.61	18.52
		1	50	18.37	18.58	18.33
		1	99	18.34	18.53	18.31
		50	0	18.31	18.47	18.23
		50	25	18.26	18.44	18.16
		50	50	18.28	18.41	18.23
		100	0	18.30	18.39	18.21

LTE Band 41 (Power Class 3)						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		39725	40620	41515
		Frequency (MHz)		2503.5	2593	2682.5
15M	QPSK	1	0	23.20	23.40	23.14
		1	37	23.17	23.35	23.03
		1	74	23.20	23.29	23.11
		36	0	22.21	22.42	22.19
		36	19	22.22	22.31	22.09
		36	39	22.20	22.29	22.18
		75	0	22.17	22.31	22.13
15M	16QAM	1	0	22.47	22.60	22.16
		1	37	22.23	22.33	22.09
		1	74	22.15	22.23	22.19
		36	0	21.27	21.39	21.22
		36	19	21.29	21.36	21.13
		36	39	21.15	21.28	21.21
		75	0	21.14	21.31	21.14
15M	64QAM	1	0	20.84	21.00	21.16
		1	37	20.85	20.98	21.06
		1	74	20.81	20.95	21.20
		36	0	20.37	20.55	20.16
		36	19	20.41	20.58	20.13
		36	39	20.33	20.44	20.21
		75	0	20.31	20.41	20.16
15M	256QAM	1	0	18.49	18.53	18.46
		1	37	18.36	18.55	18.29
		1	74	18.24	18.53	18.25
		36	0	18.24	18.45	18.19
		36	19	18.20	18.36	18.13
		36	39	18.24	18.34	18.16
		75	0	18.30	18.31	18.18

LTE Band 41 (Power Class 3)						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		39700	40620	41540
		Frequency (MHz)		2501	2593	2685
10M	QPSK	1	0	23.15	23.36	23.11
		1	24	23.11	23.25	22.94
		1	49	23.13	23.21	23.02
		25	0	22.19	22.40	22.19
		25	12	22.12	22.23	22.07
		25	25	22.18	22.22	22.17
		50	0	22.08	22.29	22.09
10M	16QAM	1	0	22.18	22.35	22.04
		1	24	22.15	22.29	22.03
		1	49	22.15	22.24	22.11
		25	0	21.16	21.38	21.13
		25	12	21.17	21.25	21.09
		25	25	21.17	21.22	21.15
		50	0	21.09	21.21	21.05
10M	64QAM	1	0	21.14	21.37	21.05
		1	24	21.09	21.33	20.95
		1	49	21.13	21.22	21.10
		25	0	20.16	20.40	20.15
		25	12	20.16	20.28	20.00
		25	25	20.20	20.23	20.15
		50	0	20.16	20.21	20.05
10M	256QAM	1	0	18.43	18.50	18.38
		1	24	18.29	18.53	18.29
		1	49	18.22	18.49	18.21
		25	0	18.22	18.37	18.14
		25	12	18.12	18.29	18.10
		25	25	18.18	18.32	18.10
		50	0	18.28	18.21	18.08

LTE Band 41 (Power Class 3)						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		39675	40620	41565
		Frequency (MHz)		2498.5	2593	2687.5
5M	QPSK	1	0	23.18	23.34	23.04
		1	12	23.09	23.26	23.00
		1	24	23.17	23.27	23.03
		12	0	22.16	22.38	22.10
		12	6	22.18	22.21	22.01
		12	13	22.19	22.23	22.10
		25	0	22.15	22.27	22.06
5M	16QAM	1	0	22.12	22.39	22.12
		1	12	22.09	22.29	21.98
		1	24	22.10	22.19	22.02
		12	0	21.11	21.42	21.17
		12	6	21.13	21.28	21.08
		12	13	21.17	21.29	21.11
		25	0	21.09	21.22	21.07
5M	64QAM	1	0	21.12	21.37	21.08
		1	12	21.07	21.30	20.99
		1	24	21.18	21.29	21.03
		12	0	20.20	20.42	20.11
		12	6	20.20	20.27	20.07
		12	13	20.14	20.24	20.17
		25	0	20.08	20.29	20.13
5M	256QAM	1	0	18.46	18.52	18.43
		1	12	18.30	18.53	18.20
		1	24	18.23	18.51	18.22
		12	0	18.14	18.44	18.17
		12	6	18.18	18.36	18.07
		12	13	18.24	18.28	18.13
		25	0	18.21	18.23	18.09

LTE Band 42						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		42190	42590	42990
		Frequency (MHz)		3460	3500	3540
20M	QPSK	1	0	22.59	22.66	22.42
		1	50	22.80	22.86	22.79
		1	99	22.47	22.70	22.47
		50	0	21.88	21.93	21.84
		50	25	21.90	21.90	21.77
		50	50	21.87	22.06	21.79
		100	0	21.87	21.78	21.66
20M	16QAM	1	0	22.48	22.45	22.34
		1	50	22.42	22.33	22.09
		1	99	21.45	21.49	21.38
		50	0	20.96	20.93	20.69
		50	25	21.00	21.00	21.04
		50	50	20.99	20.99	21.03
		100	0	20.89	20.89	20.84
20M	64QAM	1	0	21.51	21.53	21.45
		1	50	21.37	21.45	21.23
		1	99	20.44	20.47	20.37
		50	0	19.97	19.98	19.94
		50	25	19.95	20.08	19.90
		50	50	19.95	20.02	19.84
		100	0	19.89	19.86	19.73
20M	256QAM	1	0	16.98	17.08	17.54
		1	50	17.17	17.04	17.43
		1	99	17.23	17.22	17.67
		50	0	17.39	17.25	17.69
		50	25	17.18	17.18	17.02
		50	50	17.08	17.07	16.99
		100	0	17.00	17.04	17.02

LTE Band 42						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		42165	42590	43015
		Frequency (MHz)		3457.5	3500	3542.5
15M	QPSK	1	0	22.37	22.41	22.12
		1	37	22.59	22.70	22.70
		1	74	22.25	22.47	22.31
		36	0	21.86	21.91	21.72
		36	19	21.97	22.00	21.76
		36	39	21.84	22.16	21.82
		75	0	21.79	21.68	21.80
15M	16QAM	1	0	22.43	22.36	22.30
		1	37	22.35	22.35	22.25
		1	74	21.37	21.54	21.52
		36	0	21.00	20.87	20.67
		36	19	21.07	20.99	20.90
		36	39	20.94	21.18	20.90
		75	0	20.88	20.93	20.98
15M	64QAM	1	0	21.45	21.46	21.35
		1	37	21.47	21.38	21.13
		1	74	20.45	20.53	20.37
		36	0	19.88	20.05	19.83
		36	19	20.04	20.03	19.89
		36	39	19.92	19.88	19.86
		75	0	19.87	19.98	19.75
15M	256QAM	1	0	17.00	16.99	17.55
		1	37	17.19	17.08	17.53
		1	74	17.28	17.29	17.73
		36	0	17.43	17.38	17.67
		36	19	17.25	17.23	17.09
		36	39	16.94	17.14	17.14
		75	0	17.11	17.07	17.02

LTE Band 42						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		42140	42590	43040
		Frequency (MHz)		3455	3500	3545
10M	QPSK	1	0	22.31	22.47	22.06
		1	24	22.54	22.69	22.67
		1	49	22.27	22.32	22.35
		25	0	21.84	22.02	21.86
		25	12	22.04	22.05	21.84
		25	25	21.97	22.30	21.82
		50	0	21.77	21.77	21.77
10M	16QAM	1	0	22.47	22.43	22.24
		1	24	22.43	22.37	22.19
		1	49	21.32	21.65	21.51
		25	0	20.95	20.86	20.66
		25	12	21.01	21.00	20.89
		25	25	21.04	21.16	21.08
		50	0	20.94	20.87	20.99
10M	64QAM	1	0	21.39	21.34	21.39
		1	24	21.55	21.33	21.09
		1	49	20.41	20.48	20.40
		25	0	19.94	20.00	19.78
		25	12	20.15	19.97	19.91
		25	25	20.04	20.03	19.84
		50	0	19.82	19.84	19.83
10M	256QAM	1	0	17.11	17.11	17.60
		1	24	17.10	17.07	17.44
		1	49	17.34	17.17	17.60
		25	0	17.39	17.51	17.82
		25	12	17.22	17.19	17.07
		25	25	16.97	17.14	17.05
		50	0	17.09	17.12	16.95

LTE Band 42						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		42115	42590	43065
		Frequency (MHz)		3452.5	3500	3547.5
5M	QPSK	1	0	22.22	22.33	22.04
		1	12	22.52	22.64	22.85
		1	24	22.32	22.45	22.54
		12	0	21.83	21.98	21.78
		12	6	21.97	22.24	21.75
		12	13	21.89	22.36	21.81
		25	0	21.67	21.62	21.91
5M	16QAM	1	0	22.35	22.32	22.30
		1	12	22.34	22.31	22.36
		1	24	21.31	21.63	21.53
		12	0	21.03	20.92	20.70
		12	6	21.21	21.05	20.97
		12	13	21.05	21.22	21.04
		25	0	20.82	20.95	20.92
5M	64QAM	1	0	21.36	21.39	21.31
		1	12	21.65	21.29	21.15
		1	24	20.38	20.50	20.57
		12	0	19.92	20.19	19.81
		12	6	20.31	20.05	19.88
		12	13	19.99	20.06	19.95
		25	0	19.82	19.93	19.88
5M	256QAM	1	0	17.04	17.08	17.65
		1	12	17.09	17.02	17.41
		1	24	17.37	17.19	17.52
		12	0	17.51	17.53	17.75
		12	6	17.31	17.27	17.20
		12	13	17.00	17.11	17.17
		25	0	17.01	17.04	16.90

LTE Band 66						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		132072	132322	132572
		Frequency (MHz)		1720	1745	1770
20M	QPSK	1	0	23.15	23.17	23.21
		1	50	22.99	23.09	23.15
		1	99	23.00	23.04	23.11
		50	0	22.16	22.22	22.25
		50	25	22.15	22.20	22.21
		50	50	22.05	22.14	22.18
		100	0	22.10	22.12	22.15
20M	16QAM	1	0	22.49	22.52	22.56
		1	50	22.44	22.48	22.53
		1	99	22.31	22.38	22.47
		50	0	21.27	21.34	21.38
		50	25	21.26	21.28	21.34
		50	50	21.21	21.25	21.31
		100	0	21.19	21.21	21.28
20M	64QAM	1	0	21.11	21.11	21.21
		1	50	21.15	21.16	21.18
		1	99	21.02	21.06	21.14
		50	0	20.15	20.22	20.29
		50	25	20.17	20.20	20.27
		50	50	20.09	20.12	20.22
		100	0	20.03	20.12	20.18
20M	256QAM	1	0	18.39	18.40	18.47
		1	50	18.26	18.32	18.42
		1	99	18.30	18.31	18.39
		50	0	18.36	18.36	18.36
		50	25	18.18	18.27	18.33
		50	50	18.17	18.27	18.31
		100	0	18.15	18.21	18.28

LTE Band 66						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		132047	132322	132597
		Frequency (MHz)		1717.5	1745	1772.5
15M	QPSK	1	0	23.14	23.17	23.12
		1	37	22.90	23.06	23.15
		1	74	22.93	23.04	23.08
		36	0	22.15	22.19	22.22
		36	19	22.09	22.11	22.12
		36	39	21.95	22.04	22.13
		75	0	22.06	22.12	22.06
15M	16QAM	1	0	22.43	22.42	22.56
		1	37	22.36	22.42	22.46
		1	74	22.31	22.33	22.38
		36	0	21.27	21.27	21.29
		36	19	21.22	21.28	21.25
		36	39	21.11	21.16	21.21
		75	0	21.16	21.12	21.24
15M	64QAM	1	0	21.05	21.11	21.17
		1	37	21.09	21.07	21.13
		1	74	20.94	21.05	21.05
		36	0	20.08	20.20	20.24
		36	19	20.14	20.18	20.23
		36	39	20.09	20.07	20.18
		75	0	19.96	20.05	20.08
15M	256QAM	1	0	18.35	18.34	18.40
		1	37	18.24	18.29	18.41
		1	74	18.30	18.26	18.36
		36	0	18.34	18.33	18.35
		36	19	18.14	18.26	18.30
		36	39	18.17	18.20	18.24
		75	0	18.06	18.11	18.26

LTE Band 66						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		132022	132322	132622
		Frequency (MHz)		1715	1745	1775
10M	QPSK	1	0	23.09	23.16	23.20
		1	24	22.94	23.01	23.08
		1	49	23.00	22.98	23.04
		25	0	22.15	22.19	22.25
		25	12	22.12	22.13	22.18
		25	25	21.97	22.12	22.08
		50	0	22.00	22.14	22.09
10M	16QAM	1	0	22.39	22.43	22.55
		1	24	22.44	22.42	22.49
		1	49	22.22	22.36	22.37
		25	0	21.17	21.25	21.32
		25	12	21.21	21.26	21.26
		25	25	21.16	21.24	21.23
		50	0	21.12	21.18	21.18
10M	64QAM	1	0	21.10	21.03	21.16
		1	24	21.14	21.13	21.13
		1	49	20.97	20.97	21.04
		25	0	20.09	20.17	20.26
		25	12	20.07	20.14	20.22
		25	25	20.08	20.10	20.19
		50	0	19.97	20.08	20.12
10M	256QAM	1	0	18.34	18.36	18.44
		1	24	18.21	18.24	18.32
		1	49	18.23	18.27	18.29
		25	0	18.36	18.30	18.34
		25	12	18.18	18.21	18.32
		25	25	18.09	18.22	18.22
		50	0	18.09	18.17	18.20

LTE Band 66						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		131997	132322	132647
		Frequency (MHz)		1712.5	1745	1777.5
5M	QPSK	1	0	23.14	23.07	23.16
		1	12	22.93	23.02	23.13
		1	24	22.98	23.02	23.11
		12	0	22.08	22.16	22.19
		12	6	22.15	22.13	22.16
		12	13	22.05	22.07	22.18
		25	0	22.07	22.10	22.13
5M	16QAM	1	0	22.40	22.44	22.52
		1	12	22.42	22.45	22.48
		1	24	22.24	22.31	22.38
		12	0	21.23	21.25	21.31
		12	6	21.22	21.28	21.27
		12	13	21.19	21.20	21.26
		25	0	21.16	21.16	21.27
5M	64QAM	1	0	21.04	21.03	21.21
		1	12	21.05	21.10	21.09
		1	24	20.93	20.99	21.12
		12	0	20.13	20.13	20.19
		12	6	20.11	20.10	20.18
		12	13	20.08	20.09	20.16
		25	0	20.03	20.08	20.18
5M	256QAM	1	0	18.36	18.33	18.44
		1	12	18.21	18.32	18.36
		1	24	18.25	18.22	18.33
		12	0	18.29	18.36	18.31
		12	6	18.15	18.24	18.33
		12	13	18.13	18.20	18.21
		25	0	18.13	18.19	18.19

LTE Band 66						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		131987	132322	132657
		Frequency (MHz)		1711.5	1745	1778.5
3M	QPSK	1	0	23.13	23.10	23.13
		1	7	22.97	23.00	23.11
		1	14	23.00	22.94	23.02
		8	0	22.13	22.20	22.25
		8	3	22.06	22.20	22.14
		8	7	21.99	22.11	22.18
		15	0	22.10	22.13	22.05
3M	16QAM	1	0	22.40	22.52	22.54
		1	7	22.37	22.41	22.43
		1	14	22.22	22.38	22.39
		8	0	21.26	21.25	21.37
		8	3	21.25	21.23	21.26
		8	7	21.13	21.23	21.26
		15	0	21.11	21.13	21.19
3M	64QAM	1	0	21.01	21.05	21.21
		1	7	21.08	21.11	21.08
		1	14	20.99	21.06	21.13
		8	0	20.14	20.15	20.27
		8	3	20.13	20.14	20.25
		8	7	20.09	20.11	20.19
		15	0	19.93	20.05	20.13
3M	256QAM	1	0	18.32	18.33	18.40
		1	7	18.23	18.30	18.41
		1	14	18.28	18.31	18.36
		8	0	18.34	18.29	18.34
		8	3	18.11	18.22	18.30
		8	7	18.08	18.19	18.27
		15	0	18.06	18.15	18.25

LTE Band 66						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		131979	132322	132665
		Frequency (MHz)		1710.7	1745	1779.3
1.4M	QPSK	1	0	23.07	23.06	23.04
		1	2	22.86	22.94	23.11
		1	5	22.90	22.89	23.00
		3	0	22.90	22.91	22.92
		3	1	22.92	22.94	22.91
		3	3	22.93	22.97	22.93
		6	0	22.05	22.07	21.98
1.4M	16QAM	1	0	22.34	22.44	22.53
		1	2	22.33	22.29	22.33
		1	5	22.09	22.24	22.30
		3	0	22.23	22.21	22.31
		3	1	22.15	22.18	22.18
		3	3	22.02	22.09	22.16
		6	0	21.05	20.99	21.06
1.4M	64QAM	1	0	20.86	20.96	21.15
		1	2	20.95	21.05	20.94
		1	5	20.98	20.91	21.09
		3	0	21.00	21.07	21.20
		3	1	21.00	20.99	21.16
		3	3	20.94	21.00	21.15
		6	0	19.83	19.94	20.12
1.4M	256QAM	1	0	18.35	18.38	18.47
		1	2	18.21	18.32	18.35
		1	5	18.29	18.28	18.30
		3	0	18.30	18.26	18.33
		3	1	18.17	18.27	18.31
		3	3	18.07	18.23	18.22
		6	0	18.09	18.15	18.23

LTE Band 71						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		133222	133297	133372
		Frequency (MHz)		673	680.5	688
20M	QPSK	1	0	23.13	23.06	23.01
		1	50	23.11	23.05	22.97
		1	99	23.08	23.04	22.98
		50	0	22.21	22.20	22.11
		50	25	22.18	22.09	22.03
		50	50	22.14	22.09	21.99
		100	0	22.11	22.03	21.94
20M	16QAM	1	0	22.51	22.51	22.48
		1	50	22.47	22.38	22.28
		1	99	22.41	22.41	22.39
		50	0	21.19	21.13	21.11
		50	25	21.17	21.17	21.10
		50	50	21.14	21.09	21.08
		100	0	21.10	21.00	20.99
20M	64QAM	1	0	20.46	20.40	20.39
		1	50	20.42	20.33	20.28
		1	99	20.38	20.32	20.25
		50	0	19.88	19.79	19.77
		50	25	19.84	19.80	19.79
		50	50	19.81	19.71	19.71
		100	0	19.79	19.70	19.69
20M	256QAM	1	0	18.34	18.26	18.21
		1	50	18.32	18.14	18.27
		1	99	18.28	18.15	18.21
		50	0	18.27	18.23	18.16
		50	25	18.25	18.16	18.12
		50	50	18.23	18.11	18.17
		100	0	18.21	17.98	18.13

LTE Band 71						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		133197	133297	133397
		Frequency (MHz)		670.5	680.5	690.5
15M	QPSK	1	0	23.09	23.06	22.94
		1	37	23.10	22.95	22.95
		1	74	23.06	22.95	22.89
		36	0	22.13	22.20	22.04
		36	19	22.18	22.09	22.03
		36	39	22.12	21.99	21.98
		75	0	22.05	21.95	21.85
15M	16QAM	1	0	22.45	22.48	22.42
		1	37	22.41	22.29	22.22
		1	74	22.40	22.37	22.30
		36	0	21.16	21.03	21.10
		36	19	21.08	21.13	21.04
		36	39	21.10	21.01	21.04
		75	0	21.07	20.99	20.97
15M	64QAM	1	0	20.39	20.35	20.30
		1	37	20.35	20.23	20.26
		1	74	20.34	20.32	20.24
		36	0	19.84	19.72	19.76
		36	19	19.78	19.74	19.76
		36	39	19.71	19.70	19.71
		75	0	19.70	19.70	19.61
15M	256QAM	1	0	18.34	18.29	18.22
		1	37	18.32	18.29	18.28
		1	74	18.28	18.24	18.22
		36	0	18.27	18.21	18.13
		36	19	18.25	18.17	18.12
		36	39	18.23	18.19	18.12
		75	0	18.21	18.13	18.09

LTE Band 71						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		133172	133297	133422
		Frequency (MHz)		668	680.5	693
10M	QPSK	1	0	23.08	22.98	22.99
		1	24	23.11	22.96	22.90
		1	49	23.02	23.04	22.88
		25	0	22.18	22.19	22.03
		25	12	22.10	22.06	21.93
		25	25	22.07	22.05	21.89
		50	0	22.01	21.94	21.86
10M	16QAM	1	0	22.46	22.50	22.48
		1	24	22.45	22.28	22.28
		1	49	22.31	22.39	22.38
		25	0	21.10	21.11	21.05
		25	12	21.09	21.08	21.00
		25	25	21.13	21.01	21.07
		50	0	21.09	20.91	20.91
10M	64QAM	1	0	20.43	20.38	20.39
		1	24	20.36	20.26	20.28
		1	49	20.30	20.27	20.24
		25	0	19.85	19.77	19.74
		25	12	19.83	19.75	19.72
		25	25	19.80	19.63	19.69
		50	0	19.69	19.68	19.60
10M	256QAM	1	0	18.27	18.21	18.15
		1	24	18.27	18.27	18.18
		1	49	18.25	18.21	18.17
		25	0	18.23	18.16	18.13
		25	12	18.18	18.12	18.06
		25	25	18.15	18.17	18.05
		50	0	18.11	18.13	18.03

LTE Band 71						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		133147	133297	133447
		Frequency (MHz)		665.5	680.5	695.5
5M	QPSK	1	0	23.12	22.97	22.96
		1	12	23.01	23.04	22.93
		1	24	23.03	22.94	22.93
		12	0	22.16	22.20	22.08
		12	6	22.08	22.01	22.00
		12	13	22.10	22.00	21.96
		25	0	22.08	22.02	21.92
5M	16QAM	1	0	22.44	22.51	22.43
		1	12	22.42	22.37	22.21
		1	24	22.32	22.40	22.36
		12	0	21.14	21.13	21.04
		12	6	21.10	21.10	21.03
		12	13	21.09	21.06	21.05
		25	0	21.05	20.98	20.89
5M	64QAM	1	0	20.37	20.34	20.31
		1	12	20.41	20.25	20.21
		1	24	20.34	20.25	20.23
		12	0	19.80	19.70	19.72
		12	6	19.83	19.77	19.72
		12	13	19.74	19.65	19.71
		25	0	19.71	19.69	19.65
5M	256QAM	1	0	18.26	18.08	18.11
		1	12	18.14	18.26	18.18
		1	24	18.15	18.06	18.02
		12	0	18.23	18.13	18.03
		12	6	18.16	18.05	18.02
		12	13	18.11	18.11	18.02
		25	0	17.98	18.06	17.98

EIRP / ERP Power (dBm)

Band	WCDMA IV		
TX Channel	1312	1413	1513
Rx Channel	1537	1638	1738
Frequency	1712.4	1732.6	1752.6
RMC 12.2K	25.83	25.77	25.78
HSDPA Subtest-1	25.33	25.22	25.31
HSDPA Subtest-2	25.34	25.21	25.25
HSDPA Subtest-3	24.83	24.72	24.78
HSDPA Subtest-4	24.78	24.70	24.76
DC-HSDPA Subtest-1	25.24	25.13	25.20
DC-HSDPA Subtest-2	25.26	25.10	25.16
DC-HSDPA Subtest-3	24.72	24.63	24.68
DC-HSDPA Subtest-4	24.68	24.59	24.66
HSUPA Subtest-1	25.07	25.13	25.26
HSUPA Subtest-2	23.04	22.96	23.08
HSUPA Subtest-3	24.03	23.88	24.04
HSUPA Subtest-4	23.01	22.94	23.07
HSUPA Subtest-5	25.06	24.93	25.03

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 4						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		20050	20175	20300
		Frequency (MHz)		1720	1732.5	1745
20M	QPSK	1	0	25.13	25.30	25.25
		1	50	24.89	24.99	24.91
		1	99	24.93	24.97	24.95
		50	0	24.23	24.33	24.24
		50	25	24.18	24.25	24.20
		50	50	24.09	24.17	24.11
		100	0	24.11	24.15	24.14
20M	16QAM	1	0	24.40	24.53	24.45
		1	50	24.34	24.45	24.37
		1	99	24.24	24.38	24.31
		50	0	23.18	23.34	23.25
		50	25	23.29	23.32	23.32
		50	50	23.21	23.29	23.21
		100	0	23.14	23.26	23.17
20M	64QAM	1	0	23.43	23.50	23.50
		1	50	23.31	23.46	23.39
		1	99	23.29	23.42	23.37
		50	0	22.43	22.54	22.49
		50	25	22.33	22.49	22.42
		50	50	22.40	22.44	22.43
		100	0	22.31	22.39	22.32
20M	256QAM	1	0	20.52	20.56	20.51
		1	50	20.15	20.23	20.10
		1	99	20.19	20.19	20.18
		50	0	20.17	20.17	20.10
		50	25	20.05	20.15	20.04
		50	50	20.05	20.13	19.99
		100	0	20.08	20.11	20.07

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 4						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		20025	20175	20325
		Frequency (MHz)		1717.5	1732.5	1747.5
15M	QPSK	1	0	25.07	25.19	25.22
		1	37	24.87	24.89	24.84
		1	74	24.92	24.93	24.88
		36	0	24.20	24.32	24.16
		36	19	24.12	24.19	24.17
		36	39	24.09	24.08	24.09
		75	0	24.04	24.15	24.10
15M	16QAM	1	0	24.39	24.48	24.41
		1	37	24.28	24.45	24.37
		1	74	24.20	24.30	24.29
		36	0	23.11	23.24	23.15
		36	19	23.22	23.26	23.31
		36	39	23.17	23.23	23.18
		75	0	23.04	23.23	23.13
15M	64QAM	1	0	23.37	23.47	23.47
		1	37	23.21	23.37	23.39
		1	74	23.26	23.42	23.31
		36	0	22.41	22.51	22.43
		36	19	22.29	22.44	22.36
		36	39	22.30	22.44	22.40
		75	0	22.25	22.33	22.22
15M	256QAM	1	0	20.47	20.56	20.51
		1	37	20.14	20.21	20.01
		1	74	20.09	20.09	20.12
		36	0	20.15	20.08	20.10
		36	19	19.95	20.13	19.97
		36	39	20.01	20.12	19.98
		75	0	20.05	20.05	20.00

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 4						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		20000	20175	20350
		Frequency (MHz)		1715	1732.5	1750
10M	QPSK	1	0	25.09	25.21	25.19
		1	24	24.84	24.91	24.91
		1	49	24.87	24.91	24.95
		25	0	24.16	24.27	24.17
		25	12	24.17	24.16	24.17
		25	25	24.08	24.13	24.01
		50	0	24.03	24.08	24.04
10M	16QAM	1	0	24.36	24.45	24.39
		1	24	24.33	24.45	24.32
		1	49	24.23	24.28	24.23
		25	0	23.10	23.28	23.15
		25	12	23.28	23.24	23.24
		25	25	23.19	23.26	23.19
		50	0	23.14	23.26	23.14
10M	64QAM	1	0	23.38	23.44	23.41
		1	24	23.29	23.41	23.33
		1	49	23.21	23.35	23.27
		25	0	22.35	22.54	22.39
		25	12	22.29	22.48	22.35
		25	25	22.33	22.41	22.35
		50	0	22.25	22.29	22.26
10M	256QAM	1	0	20.45	20.47	20.46
		1	24	20.13	20.17	20.09
		1	49	20.09	20.19	20.14
		25	0	20.08	20.14	20.05
		25	12	20.02	20.15	19.97
		25	25	20.02	20.07	19.94
		50	0	20.00	20.08	20.06

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 4						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		19975	20175	20375
		Frequency (MHz)		1712.5	1732.5	1752.5
5M	QPSK	1	0	25.06	25.24	25.20
		1	12	24.86	24.92	24.85
		1	24	24.93	24.97	24.87
		12	0	24.19	24.28	24.21
		12	6	24.13	24.21	24.10
		12	13	24.08	24.09	24.08
		25	0	24.10	24.07	24.04
5M	16QAM	1	0	24.36	24.51	24.37
		1	12	24.34	24.45	24.32
		1	24	24.22	24.35	24.31
		12	0	23.12	23.29	23.18
		12	6	23.29	23.31	23.30
		12	13	23.21	23.26	23.18
		25	0	23.05	23.23	23.17
5M	64QAM	1	0	23.34	23.40	23.49
		1	12	23.21	23.36	23.34
		1	24	23.27	23.37	23.32
		12	0	22.41	22.44	22.44
		12	6	22.26	22.45	22.39
		12	13	22.30	22.40	22.37
		25	0	22.22	22.34	22.25
5M	256QAM	1	0	20.52	20.48	20.43
		1	12	20.08	20.14	20.06
		1	24	20.18	20.12	20.16
		12	0	20.12	20.11	20.03
		12	6	20.03	20.07	19.99
		12	13	20.00	20.11	19.99
		25	0	20.08	20.01	20.03

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 4						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		19965	20175	20385
		Frequency (MHz)		1711.5	1732.5	1753.5
3M	QPSK	1	0	25.05	25.21	25.25
		1	7	24.84	24.91	24.86
		1	14	24.89	24.93	24.92
		8	0	24.19	24.30	24.22
		8	3	24.16	24.17	24.11
		8	7	23.99	24.16	24.07
		15	0	24.07	24.14	24.07
3M	16QAM	1	0	24.40	24.49	24.39
		1	7	24.31	24.35	24.35
		1	14	24.20	24.37	24.23
		8	0	23.13	23.33	23.16
		8	3	23.22	23.30	23.22
		8	7	23.17	23.22	23.14
		15	0	23.06	23.26	23.10
3M	64QAM	1	0	23.33	23.47	23.43
		1	7	23.28	23.36	23.33
		1	14	23.22	23.37	23.34
		8	0	22.39	22.44	22.46
		8	3	22.31	22.46	22.32
		8	7	22.33	22.41	22.40
		15	0	22.24	22.37	22.22
3M	256QAM	1	0	20.52	20.55	20.47
		1	7	20.13	20.18	20.09
		1	14	20.12	20.17	20.14
		8	0	20.14	20.08	20.05
		8	3	20.00	20.11	19.96
		8	7	20.04	20.13	19.96
		15	0	20.01	20.09	19.98

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 4						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		19957	20175	20393
		Frequency (MHz)		1710.7	1732.5	1754.3
1.4M	QPSK	1	0	25.05	25.20	25.02
		1	2	24.80	24.86	24.85
		1	5	24.88	24.88	24.77
		3	0	25.14	25.21	25.23
		3	1	25.08	25.14	25.02
		3	3	24.95	25.01	25.00
		6	0	24.09	24.01	24.04
1.4M	16QAM	1	0	24.32	24.47	24.36
		1	2	24.25	24.38	24.29
		1	5	24.08	24.32	24.25
		3	0	24.15	24.28	24.16
		3	1	24.15	24.12	24.17
		3	3	24.14	24.09	24.01
		6	0	22.96	23.19	23.05
1.4M	64QAM	1	0	23.26	23.41	23.28
		1	2	23.15	23.30	23.32
		1	5	23.13	23.23	23.22
		3	0	23.32	23.47	23.26
		3	1	23.21	23.41	23.25
		3	3	23.27	23.33	23.20
		6	0	22.15	22.19	22.11
1.4M	256QAM	1	0	20.44	20.56	20.51
		1	2	20.10	20.19	20.06
		1	5	20.13	20.09	20.13
		3	0	20.16	20.13	20.04
		3	1	20.00	20.14	20.01
		3	3	19.95	20.10	19.91
		6	0	19.98	20.09	20.03

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 7						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		20850	21100	21350
		Frequency (MHz)		2510	2535	2560
20M	QPSK	1	0	25.32	25.31	25.28
		1	50	25.21	25.26	25.26
		1	99	25.04	25.23	25.14
		50	0	24.34	24.38	24.34
		50	25	24.17	24.33	24.26
		50	50	24.16	24.31	24.24
		100	0	24.24	24.29	24.25
20M	16QAM	1	0	24.58	24.66	24.58
		1	50	24.40	24.60	24.50
		1	99	24.41	24.54	24.50
		50	0	23.39	23.50	23.41
		50	25	23.36	23.41	23.39
		50	50	23.33	23.39	23.38
		100	0	23.21	23.33	23.26
20M	64QAM	1	0	23.23	23.30	23.25
		1	50	23.19	23.27	23.17
		1	99	23.17	23.24	23.13
		50	0	22.43	22.48	22.40
		50	25	22.40	22.43	22.36
		50	50	22.34	22.39	22.29
		100	0	22.29	22.37	22.27
20M	256QAM	1	0	20.38	20.51	20.47
		1	50	20.38	20.45	20.39
		1	99	20.29	20.43	20.37
		50	0	20.29	20.41	20.38
		50	25	20.28	20.38	20.30
		50	50	20.28	20.36	20.28
		100	0	20.23	20.35	20.29

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 7						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		20825	21100	21375
		Frequency (MHz)		2507.5	2535	2562.5
15M	QPSK	1	0	25.31	25.23	25.28
		1	37	25.21	25.29	25.19
		1	74	25.00	25.16	25.11
		36	0	24.26	24.37	24.25
		36	19	24.07	24.26	24.26
		36	39	24.07	24.31	24.21
		75	0	24.19	24.24	24.24
15M	16QAM	1	0	24.52	24.59	24.48
		1	37	24.36	24.51	24.42
		1	74	24.34	24.51	24.46
		36	0	23.37	23.46	23.37
		36	19	23.34	23.37	23.31
		36	39	23.33	23.29	23.29
		75	0	23.13	23.32	23.26
15M	64QAM	1	0	23.20	23.26	23.20
		1	37	23.13	23.27	23.08
		1	74	23.16	23.16	23.07
		36	0	22.40	22.47	22.37
		36	19	22.35	22.35	22.35
		36	39	22.31	22.33	22.19
		75	0	22.21	22.30	22.26
15M	256QAM	1	0	20.28	20.51	20.43
		1	37	20.34	20.36	20.30
		1	74	20.24	20.35	20.37
		36	0	20.19	20.37	20.38
		36	19	20.22	20.31	20.25
		36	39	20.23	20.31	20.18
		75	0	20.22	20.29	20.22

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 7						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		20800	21100	21400
		Frequency (MHz)		2505	2535	2565
10M	QPSK	1	0	25.27	25.28	25.26
		1	24	25.17	25.31	25.22
		1	49	25.00	25.16	25.09
		25	0	24.29	24.30	24.28
		25	12	24.14	24.25	24.23
		25	25	24.09	24.27	24.17
		50	0	24.23	24.26	24.15
10M	16QAM	1	0	24.57	24.64	24.48
		1	24	24.33	24.50	24.50
		1	49	24.32	24.53	24.45
		25	0	23.38	23.48	23.33
		25	12	23.31	23.34	23.37
		25	25	23.31	23.36	23.37
		50	0	23.20	23.32	23.26
10M	64QAM	1	0	23.14	23.30	23.15
		1	24	23.16	23.27	23.14
		1	49	23.08	23.17	23.13
		25	0	22.34	22.47	22.33
		25	12	22.32	22.34	22.29
		25	25	22.29	22.29	22.24
		50	0	22.24	22.34	22.25
10M	256QAM	1	0	20.37	20.50	20.46
		1	24	20.32	20.45	20.29
		1	49	20.23	20.41	20.32
		25	0	20.28	20.35	20.33
		25	12	20.20	20.30	20.25
		25	25	20.24	20.29	20.25
		50	0	20.22	20.34	20.19

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 7						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		20775	21100	21425
		Frequency (MHz)		2502.5	2535	2567.5
5M	QPSK	1	0	25.26	25.30	25.29
		1	12	25.17	25.24	25.20
		1	24	25.04	25.16	25.11
		12	0	24.25	24.36	24.29
		12	6	24.17	24.31	24.20
		12	13	24.16	24.26	24.21
		25	0	24.18	24.20	24.21
5M	16QAM	1	0	24.55	24.63	24.57
		1	12	24.40	24.55	24.48
		1	24	24.38	24.53	24.44
		12	0	23.31	23.47	23.36
		12	6	23.33	23.41	23.38
		12	13	23.26	23.29	23.31
		25	0	23.18	23.25	23.20
5M	64QAM	1	0	23.19	23.26	23.24
		1	12	23.11	23.19	23.16
		1	24	23.10	23.17	23.04
		12	0	22.36	22.44	22.40
		12	6	22.33	22.41	22.27
		12	13	22.26	22.29	22.23
		25	0	22.27	22.31	22.22
5M	256QAM	1	0	20.32	20.48	20.47
		1	12	20.34	20.37	20.36
		1	24	20.22	20.40	20.36
		12	0	20.28	20.36	20.30
		12	6	20.20	20.38	20.22
		12	13	20.20	20.26	20.20
		25	0	20.20	20.31	20.21

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 12						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		23060	23095	23130
		Frequency (MHz)		704	707.5	711
10M	QPSK	1	0	23.92	23.94	23.90
		1	24	23.89	23.92	23.86
		1	49	23.83	23.90	23.80
		25	0	22.96	22.99	22.95
		25	12	22.96	22.97	22.93
		25	25	22.87	22.94	22.79
		50	0	22.90	22.92	22.87
10M	16QAM	1	0	23.11	23.15	23.11
		1	24	23.10	23.13	23.04
		1	49	23.02	23.10	22.99
		25	0	22.03	22.04	21.96
		25	12	21.96	22.02	21.95
		25	25	21.96	21.99	21.96
		50	0	21.92	21.97	21.91
10M	64QAM	1	0	22.13	22.19	22.10
		1	24	22.12	22.14	22.06
		1	49	21.99	22.07	21.89
		25	0	21.18	21.18	21.16
		25	12	21.06	21.13	20.97
		25	25	21.03	21.09	21.02
		50	0	21.06	21.07	21.00
10M	256QAM	1	0	18.98	19.03	18.97
		1	24	18.95	18.96	18.91
		1	49	18.87	18.92	18.86
		25	0	18.79	18.89	18.79
		25	12	18.83	18.85	18.74
		25	25	18.75	18.81	18.69
		50	0	18.95	18.97	18.90

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

LTE Band 12						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		23035	23095	23155
		Frequency (MHz)		701.5	707.5	713.5
5M	QPSK	1	0	23.89	23.89	23.87
		1	12	23.88	23.91	23.86
		1	24	23.78	23.90	23.75
		12	0	22.91	22.93	22.89
		12	6	22.90	22.88	22.93
		12	13	22.86	22.92	22.78
		25	0	22.83	22.83	22.78
5M	16QAM	1	0	23.04	23.05	23.03
		1	12	23.03	23.06	22.97
		1	24	22.95	23.02	22.97
		12	0	22.03	22.02	21.93
		12	6	21.95	21.98	21.91
		12	13	21.89	21.92	21.91
		25	0	21.87	21.94	21.85
5M	64QAM	1	0	22.10	22.15	22.10
		1	12	22.05	22.05	22.04
		1	24	21.99	22.00	21.81
		12	0	21.11	21.17	21.07
		12	6	21.04	21.13	20.92
		12	13	21.03	21.06	21.00
		25	0	21.05	20.98	21.00
5M	256QAM	1	0	18.95	18.96	18.95
		1	12	18.92	18.94	18.88
		1	24	18.77	18.85	18.76
		12	0	18.75	18.82	18.71
		12	6	18.81	18.79	18.68
		12	13	18.65	18.73	18.67
		25	0	18.94	18.87	18.89

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

LTE Band 12						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		23025	23095	23165
		Frequency (MHz)		700.5	707.5	714.5
3M	QPSK	1	0	23.83	23.84	23.88
		1	7	23.81	23.88	23.77
		1	14	23.75	23.87	23.76
		8	0	22.92	22.95	22.95
		8	3	22.86	22.93	22.85
		8	7	22.79	22.88	22.73
		15	0	22.82	22.92	22.81
3M	16QAM	1	0	23.09	23.05	23.11
		1	7	23.07	23.06	22.97
		1	14	23.00	23.09	22.89
		8	0	21.94	21.99	21.91
		8	3	21.87	21.95	21.86
		8	7	21.92	21.91	21.92
		15	0	21.84	21.92	21.82
3M	64QAM	1	0	22.09	22.19	22.04
		1	7	22.03	22.07	22.04
		1	14	21.92	21.97	21.87
		8	0	21.11	21.10	21.11
		8	3	21.00	21.09	20.96
		8	7	20.97	21.06	20.98
		15	0	20.99	20.99	20.98
3M	256QAM	1	0	18.94	18.97	18.87
		1	7	18.93	18.86	18.86
		1	14	18.87	18.89	18.80
		8	0	18.71	18.89	18.70
		8	3	18.79	18.81	18.67
		8	7	18.72	18.77	18.66
		15	0	18.90	18.97	18.83

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

LTE Band 12						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		23017	23095	23173
		Frequency (MHz)		699.7	707.5	715.3
1.4M	QPSK	1	0	23.84	23.81	23.80
		1	2	23.77	23.75	23.77
		1	5	23.77	23.76	23.66
		3	0	23.87	23.83	23.78
		3	1	23.74	23.75	23.73
		3	3	23.72	23.84	23.65
		6	0	22.76	22.70	22.74
1.4M	16QAM	1	0	22.95	23.09	22.92
		1	2	23.06	23.06	22.97
		1	5	22.81	23.07	22.92
		3	0	22.92	22.92	22.89
		3	1	22.89	22.96	22.79
		3	3	22.87	22.81	22.86
		6	0	21.76	21.87	21.73
1.4M	64QAM	1	0	22.06	22.00	21.92
		1	2	22.09	22.04	21.92
		1	5	21.85	21.96	21.69
		3	0	22.04	21.99	21.97
		3	1	22.00	21.99	21.85
		3	3	21.94	21.95	21.91
		6	0	20.98	20.91	20.94
1.4M	256QAM	1	0	18.95	18.95	18.97
		1	2	18.86	18.95	18.86
		1	5	18.87	18.82	18.86
		3	0	18.77	18.81	18.73
		3	1	18.77	18.75	18.65
		3	3	18.68	18.80	18.64
		6	0	18.95	18.87	18.86

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

LTE Band 13				
BW	MCS Index	RB Size	RB Offset	Low
		Channel		23230
		Frequency (MHz)		782
10M	QPSK	1	0	21.59
		1	24	21.48
		1	49	21.36
		25	0	20.46
		25	12	20.44
		25	25	20.41
		50	0	20.37
10M	16QAM	1	0	20.73
		1	24	20.68
		1	49	20.65
		25	0	19.46
		25	12	19.43
		25	25	19.40
		50	0	19.34
10M	64QAM	1	0	19.53
		1	24	19.48
		1	49	19.46
		25	0	18.70
		25	12	18.64
		25	25	18.62
		50	0	18.59
10M	256QAM	1	0	16.59
		1	24	16.54
		1	49	16.48
		25	0	16.45
		25	12	16.43
		25	25	16.41
		50	0	16.38

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

LTE Band 13						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		23205	23230	23255
		Frequency (MHz)		779.5	782	784.5
5M	QPSK	1	0	21.51	21.51	21.36
		1	12	21.40	21.41	21.34
		1	24	21.25	21.27	21.18
		12	0	20.41	20.42	20.35
		12	6	20.36	20.38	20.21
		12	13	20.35	20.39	20.18
		25	0	20.23	20.30	20.23
5M	16QAM	1	0	20.56	20.64	20.58
		1	12	20.61	20.64	20.44
		1	24	20.57	20.62	20.56
		12	0	19.37	19.40	19.36
		12	6	19.26	19.38	19.24
		12	13	19.32	19.30	19.28
		25	0	19.20	19.33	19.13
5M	64QAM	1	0	19.41	19.49	19.40
		1	12	19.37	19.43	19.34
		1	24	19.34	19.45	19.26
		12	0	18.55	18.70	18.51
		12	6	18.51	18.60	18.50
		12	13	18.59	18.61	18.58
		25	0	18.51	18.58	18.54
5M	256QAM	1	0	16.53	16.52	16.44
		1	12	16.52	16.53	16.49
		1	24	16.32	16.45	16.27
		12	0	16.33	16.38	16.33
		12	6	16.32	16.34	16.25
		12	13	16.27	16.41	16.21
		25	0	16.35	16.29	16.31

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

LTE Band 17						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		23780	23790	23800
		Frequency (MHz)		709	710	711
10M	QPSK	1	0	23.88	24.02	23.93
		1	24	23.83	24.00	23.92
		1	49	23.80	23.97	23.89
		25	0	22.80	22.98	22.88
		25	12	22.91	22.96	22.94
		25	25	22.74	22.94	22.84
		50	0	22.75	22.92	22.85
10M	16QAM	1	0	23.16	23.18	23.18
		1	24	23.03	23.15	23.06
		1	49	23.02	23.11	23.02
		25	0	21.98	22.05	22.03
		25	12	21.96	22.02	22.01
		25	25	21.85	22.00	21.94
		50	0	21.84	21.97	21.92
10M	64QAM	1	0	22.07	22.27	22.17
		1	24	22.23	22.25	22.25
		1	49	22.08	22.19	22.14
		25	0	20.93	21.09	21.00
		25	12	20.92	21.07	20.97
		25	25	20.91	21.02	21.00
		50	0	20.88	21.00	20.94
10M	256QAM	1	0	18.97	19.07	19.06
		1	24	18.96	19.04	18.98
		1	49	18.83	19.01	18.92
		25	0	18.89	18.97	18.93
		25	12	18.88	18.93	18.91
		25	25	18.81	18.91	18.90
		50	0	18.80	18.89	18.80

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

LTE Band 17						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		23755	23790	23825
		Frequency (MHz)		706.5	710	713.5
5M	QPSK	1	0	23.85	23.91	23.87
		1	12	23.82	24.00	23.84
		1	24	23.73	23.95	23.80
		12	0	22.76	22.88	22.88
		12	6	22.84	22.88	22.89
		12	13	22.73	22.87	22.84
		25	0	22.71	22.88	22.77
5M	16QAM	1	0	23.14	23.14	23.13
		1	12	22.93	23.06	23.03
		1	24	23.02	23.06	22.99
		12	0	21.93	22.01	21.98
		12	6	21.96	21.94	21.91
		12	13	21.76	21.90	21.92
		25	0	21.74	21.93	21.86
5M	64QAM	1	0	22.01	22.24	22.13
		1	12	22.18	22.22	22.22
		1	24	21.99	22.19	22.13
		12	0	20.85	21.04	20.97
		12	6	20.83	21.06	20.88
		12	13	20.87	21.02	20.96
		25	0	20.85	21.00	20.89
5M	256QAM	1	0	18.95	19.04	19.00
		1	12	18.86	19.02	18.94
		1	24	18.80	19.01	18.85
		12	0	18.79	18.93	18.89
		12	6	18.78	18.90	18.83
		12	13	18.73	18.90	18.87
		25	0	18.77	18.79	18.72

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

LTE Band 38						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		37850	38000	38150
		Frequency (MHz)		2580	2595	2610
20M	QPSK	1	50	25.46	25.51	25.45
		1	99	25.38	25.44	25.29
		50	0	25.33	25.42	25.29
		50	25	24.62	24.63	24.54
		50	50	24.59	24.61	24.55
		100	0	24.53	24.58	24.50
		1	0	24.50	24.57	24.46
20M	16QAM	1	50	24.61	24.62	24.60
		1	99	24.58	24.58	24.58
		50	0	24.53	24.56	24.45
		50	25	23.59	23.69	23.53
		50	50	23.60	23.62	23.56
		100	0	23.54	23.58	23.49
		1	0	23.56	23.56	23.55
20M	64QAM	1	50	23.36	23.36	23.30
		1	99	23.21	23.29	23.13
		50	0	23.18	23.23	23.17
		50	25	22.69	22.70	22.62
		50	50	22.58	22.63	22.49
		100	0	22.57	22.57	22.48
		1	0	22.48	22.52	22.38
20M	256QAM	1	50	20.51	20.61	20.48
		1	99	20.52	20.58	20.49
		50	0	20.48	20.57	20.39
		50	25	20.44	20.53	20.44
		50	50	20.47	20.51	20.40
		100	0	20.47	20.48	20.37
		1	50	20.41	20.46	20.37

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 38						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		37825	38000	38175
		Frequency (MHz)		2577.5	2595	2612.5
15M	QPSK	1	0	25.36	25.40	25.37
		1	37	25.38	25.34	25.28
		1	74	25.30	25.38	25.28
		36	0	24.59	24.61	24.50
		36	19	24.49	24.54	24.55
		36	39	24.51	24.51	24.46
		75	0	24.41	24.57	24.38
15M	16QAM	1	0	24.60	24.60	24.51
		1	37	24.49	24.51	24.56
		1	74	24.51	24.50	24.38
		36	0	23.56	23.59	23.44
		36	19	23.50	23.55	23.50
		36	39	23.46	23.52	23.45
		75	0	23.55	23.49	23.55
15M	64QAM	1	0	23.36	23.35	23.30
		1	37	23.14	23.19	23.04
		1	74	23.09	23.22	23.11
		36	0	22.63	22.62	22.53
		36	19	22.57	22.55	22.49
		36	39	22.55	22.47	22.46
		75	0	22.45	22.43	22.35
15M	256QAM	1	0	20.51	20.51	20.38
		1	37	20.43	20.49	20.47
		1	74	20.43	20.53	20.31
		36	0	20.38	20.46	20.43
		36	19	20.37	20.44	20.36
		36	39	20.46	20.41	20.33
		75	0	20.34	20.43	20.27

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 38						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		37800	38000	38200
		Frequency (MHz)		2575	2595	2615
10M	QPSK	1	0	25.45	25.46	25.35
		1	24	25.37	25.42	25.28
		1	49	25.25	25.33	25.20
		25	0	24.57	24.59	24.53
		25	12	24.50	24.52	24.55
		25	25	24.49	24.53	24.42
		50	0	24.49	24.53	24.41
10M	16QAM	1	0	24.51	24.58	24.51
		1	24	24.51	24.52	24.55
		1	49	24.44	24.54	24.43
		25	0	23.57	23.65	23.48
		25	12	23.57	23.56	23.46
		25	25	23.45	23.54	23.45
		50	0	23.48	23.53	23.47
10M	64QAM	1	0	23.27	23.35	23.28
		1	24	23.19	23.20	23.04
		1	49	23.17	23.20	23.07
		25	0	22.63	22.66	22.56
		25	12	22.57	22.61	22.49
		25	25	22.48	22.51	22.44
		50	0	22.45	22.50	22.36
10M	256QAM	1	0	20.44	20.57	20.42
		1	24	20.45	20.53	20.39
		1	49	20.42	20.53	20.30
		25	0	20.44	20.43	20.40
		25	12	20.44	20.48	20.32
		25	25	20.41	20.43	20.30
		50	0	20.38	20.41	20.27

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 38						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		37775	38000	38225
		Frequency (MHz)		2572.5	2595	2617.5
5M	QPSK	1	0	25.43	25.45	25.36
		1	12	25.29	25.34	25.20
		1	24	25.28	25.37	25.27
		12	0	24.60	24.56	24.46
		12	6	24.59	24.52	24.50
		12	13	24.46	24.56	24.49
		25	0	24.46	24.53	24.41
5M	16QAM	1	0	24.61	24.62	24.52
		1	12	24.58	24.53	24.48
		1	24	24.51	24.49	24.45
		12	0	23.53	23.64	23.47
		12	6	23.54	23.54	23.53
		12	13	23.49	23.48	23.47
		25	0	23.54	23.54	23.47
5M	64QAM	1	0	23.36	23.27	23.20
		1	12	23.16	23.29	23.07
		1	24	23.16	23.13	23.07
		12	0	22.68	22.62	22.52
		12	6	22.52	22.58	22.46
		12	13	22.50	22.48	22.48
		25	0	22.45	22.50	22.31
5M	256QAM	1	0	20.50	20.55	20.39
		1	12	20.47	20.55	20.43
		1	24	20.38	20.55	20.32
		12	0	20.42	20.43	20.43
		12	6	20.47	20.41	20.40
		12	13	20.47	20.46	20.27
		25	0	20.34	20.44	20.27

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 41 (Power Class 2)						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		39750	40620	41490
		Frequency (MHz)		2506	2593	2680
20M	QPSK	1	0	28.09	28.33	28.04
		1	50	28.01	28.12	27.93
		1	99	27.88	28.08	27.79
		50	0	27.14	27.32	27.04
		50	25	27.09	27.26	27.08
		50	50	27.12	27.23	27.12
		100	0	27.09	27.20	27.03
20M	16QAM	1	0	27.44	27.57	27.43
		1	50	27.24	27.37	27.14
		1	99	27.19	27.33	27.10
		50	0	26.26	26.34	26.26
		50	25	26.11	26.30	26.11
		50	50	26.22	26.27	26.18
		100	0	26.22	26.23	26.17
20M	64QAM	1	0	26.11	26.27	26.11
		1	50	26.14	26.18	26.11
		1	99	26.04	26.16	26.03
		50	0	25.21	25.26	25.14
		50	25	25.07	25.23	25.07
		50	50	25.10	25.19	25.03
		100	0	25.03	25.17	25.02
20M	256QAM	1	0	23.29	23.40	23.23
		1	50	23.32	23.37	23.29
		1	99	23.19	23.33	23.09
		50	0	23.20	23.29	23.12
		50	25	23.16	23.26	23.06
		50	50	23.10	23.24	23.09
		100	0	23.16	23.20	23.11

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 41 (Power Class 2)						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		39725	40620	41515
		Frequency (MHz)		2503.5	2593	2682.5
15M	QPSK	1	0	28.03	28.24	27.96
		1	37	28.01	28.06	27.90
		1	74	27.85	28.08	27.74
		36	0	27.09	27.28	26.97
		36	19	27.04	27.21	27.02
		36	39	27.04	27.16	27.05
		75	0	27.00	27.10	27.03
15M	16QAM	1	0	27.34	27.51	27.01
		1	37	27.14	27.31	26.88
		1	74	27.19	27.24	26.71
		36	0	26.20	26.31	25.96
		36	19	26.04	26.23	26.04
		36	39	26.17	26.17	26.03
		75	0	26.20	26.22	25.97
15M	64QAM	1	0	26.11	26.22	26.02
		1	37	26.11	26.10	25.85
		1	74	25.99	26.10	25.79
		36	0	25.18	25.20	24.97
		36	19	24.99	25.21	25.00
		36	39	25.09	25.18	25.10
		75	0	24.96	25.08	24.99
15M	256QAM	1	0	23.22	23.31	23.21
		1	37	23.25	23.35	23.25
		1	74	23.17	23.33	22.99
		36	0	23.14	23.19	23.08
		36	19	23.08	23.20	23.00
		36	39	23.01	23.15	23.03
		75	0	23.12	23.18	23.06

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 41 (Power Class 2)						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		39700	40620	41540
		Frequency (MHz)		2501	2593	2685
10M	QPSK	1	0	28.06	28.26	27.96
		1	24	27.97	28.10	27.84
		1	49	27.87	27.98	27.71
		25	0	27.10	27.24	26.95
		25	12	27.07	27.18	27.02
		25	25	27.10	27.23	27.10
		50	0	27.08	27.18	27.01
10M	16QAM	1	0	27.35	27.55	27.01
		1	24	27.23	27.34	26.87
		1	49	27.13	27.26	26.77
		25	0	26.16	26.32	26.02
		25	12	26.02	26.24	26.06
		25	25	26.20	26.21	26.02
		50	0	26.13	26.23	26.02
10M	64QAM	1	0	26.06	26.19	25.96
		1	24	26.10	26.18	25.90
		1	49	25.99	26.16	25.76
		25	0	25.17	25.25	24.96
		25	12	25.05	25.16	25.07
		25	25	25.05	25.11	25.07
		50	0	24.99	25.09	24.95
10M	256QAM	1	0	23.26	23.32	23.15
		1	24	23.27	23.28	23.27
		1	49	23.13	23.33	23.04
		25	0	23.16	23.23	23.03
		25	12	23.13	23.26	22.99
		25	25	23.06	23.14	23.04
		50	0	23.11	23.15	23.11

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 41 (Power Class 2)						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		39675	40620	41565
		Frequency (MHz)		2498.5	2593	2687.5
5M	QPSK	1	0	28.03	28.28	28.00
		1	12	27.93	28.08	27.93
		1	24	27.86	27.99	27.73
		12	0	27.09	27.31	27.03
		12	6	27.00	27.17	27.05
		12	13	27.11	27.18	27.09
		25	0	27.04	27.11	27.00
5M	16QAM	1	0	27.44	27.54	27.03
		1	12	27.20	27.32	26.88
		1	24	27.16	27.28	26.78
		12	0	26.26	26.24	26.04
		12	6	26.09	26.26	25.99
		12	13	26.12	26.19	26.06
		25	0	26.16	26.18	25.94
5M	64QAM	1	0	26.05	26.21	26.01
		1	12	26.10	26.10	25.90
		1	24	26.02	26.12	25.71
		12	0	25.18	25.22	25.03
		12	6	25.04	25.22	25.04
		12	13	25.01	25.09	25.03
		25	0	24.94	25.12	24.97
5M	256QAM	1	0	23.29	23.30	23.15
		1	12	23.32	23.31	23.24
		1	24	23.16	23.27	23.03
		12	0	23.14	23.25	23.09
		12	6	23.07	23.23	23.00
		12	13	23.10	23.20	23.06
		25	0	23.06	23.12	23.02

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 41 (Power Class 3)						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		39750	40620	41490
		Frequency (MHz)		2506	2593	2680
20M	QPSK	1	0	26.04	26.27	26.00
		1	50	26.03	26.17	25.93
		1	99	26.03	26.14	26.03
		50	0	25.13	25.27	25.04
		50	25	25.08	25.23	25.00
		50	50	25.03	25.21	25.03
		100	0	25.05	25.19	25.02
20M	16QAM	1	0	25.31	25.42	25.22
		1	50	25.09	25.23	25.00
		1	99	25.00	25.07	24.99
		50	0	24.12	24.31	24.12
		50	25	24.20	24.24	24.19
		50	50	24.04	24.20	24.02
		100	0	23.98	24.17	23.94
20M	64QAM	1	0	23.68	23.90	23.80
		1	50	23.75	23.85	23.68
		1	99	23.69	23.78	23.66
		50	0	23.26	23.44	23.18
		50	25	23.29	23.40	23.21
		50	50	23.24	23.33	23.23
		100	0	23.18	23.29	23.10
20M	256QAM	1	0	21.36	21.43	21.34
		1	50	21.19	21.40	21.15
		1	99	21.16	21.35	21.13
		50	0	21.13	21.29	21.05
		50	25	21.08	21.26	20.98
		50	50	21.10	21.23	21.05
		100	0	21.12	21.21	21.03

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 41 (Power Class 3)						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		39725	40620	41515
		Frequency (MHz)		2503.5	2593	2682.5
15M	QPSK	1	0	26.02	26.22	25.96
		1	37	25.99	26.17	25.85
		1	74	26.02	26.11	25.93
		36	0	25.03	25.24	25.01
		36	19	25.04	25.13	24.91
		36	39	25.02	25.11	25.00
		75	0	24.99	25.13	24.95
15M	16QAM	1	0	25.29	25.42	24.98
		1	37	25.05	25.15	24.91
		1	74	24.97	25.05	25.01
		36	0	24.09	24.21	24.04
		36	19	24.11	24.18	23.95
		36	39	23.97	24.10	24.03
		75	0	23.96	24.13	23.96
15M	64QAM	1	0	23.66	23.82	23.98
		1	37	23.67	23.80	23.88
		1	74	23.63	23.77	24.02
		36	0	23.19	23.37	22.98
		36	19	23.23	23.40	22.95
		36	39	23.15	23.26	23.03
		75	0	23.13	23.23	22.98
15M	256QAM	1	0	21.31	21.35	21.28
		1	37	21.18	21.37	21.11
		1	74	21.06	21.35	21.07
		36	0	21.06	21.27	21.01
		36	19	21.02	21.18	20.95
		36	39	21.06	21.16	20.98
		75	0	21.12	21.13	21.00

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 41 (Power Class 3)						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		39700	40620	41540
		Frequency (MHz)		2501	2593	2685
10M	QPSK	1	0	25.97	26.18	25.93
		1	24	25.93	26.07	25.76
		1	49	25.95	26.03	25.84
		25	0	25.01	25.22	25.01
		25	12	24.94	25.05	24.89
		25	25	25.00	25.04	24.99
		50	0	24.90	25.11	24.91
10M	16QAM	1	0	25.00	25.17	24.86
		1	24	24.97	25.11	24.85
		1	49	24.97	25.06	24.93
		25	0	23.98	24.20	23.95
		25	12	23.99	24.07	23.91
		25	25	23.99	24.04	23.97
		50	0	23.91	24.03	23.87
10M	64QAM	1	0	23.96	24.19	23.87
		1	24	23.91	24.15	23.77
		1	49	23.95	24.04	23.92
		25	0	22.98	23.22	22.97
		25	12	22.98	23.10	22.82
		25	25	23.02	23.05	22.97
		50	0	22.98	23.03	22.87
10M	256QAM	1	0	21.25	21.32	21.20
		1	24	21.11	21.35	21.11
		1	49	21.04	21.31	21.03
		25	0	21.04	21.19	20.96
		25	12	20.94	21.11	20.92
		25	25	21.00	21.14	20.92
		50	0	21.10	21.03	20.90

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 41 (Power Class 3)						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		39675	40620	41565
		Frequency (MHz)		2498.5	2593	2687.5
5M	QPSK	1	0	26.00	26.16	25.86
		1	12	25.91	26.08	25.82
		1	24	25.99	26.09	25.85
		12	0	24.98	25.20	24.92
		12	6	25.00	25.03	24.83
		12	13	25.01	25.05	24.92
		25	0	24.97	25.09	24.88
5M	16QAM	1	0	24.94	25.21	24.94
		1	12	24.91	25.11	24.80
		1	24	24.92	25.01	24.84
		12	0	23.93	24.24	23.99
		12	6	23.95	24.10	23.90
		12	13	23.99	24.11	23.93
		25	0	23.91	24.04	23.89
5M	64QAM	1	0	23.94	24.19	23.90
		1	12	23.89	24.12	23.81
		1	24	24.00	24.11	23.85
		12	0	23.02	23.24	22.93
		12	6	23.02	23.09	22.89
		12	13	22.96	23.06	22.99
		25	0	22.90	23.11	22.95
5M	256QAM	1	0	21.28	21.34	21.25
		1	12	21.12	21.35	21.02
		1	24	21.05	21.33	21.04
		12	0	20.96	21.26	20.99
		12	6	21.00	21.18	20.89
		12	13	21.06	21.10	20.95
		25	0	21.03	21.05	20.91

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 42						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		42190	42590	42990
		Frequency (MHz)		3460	3500	3540
20M	QPSK	1	0	21.23	21.30	21.06
		1	50	21.44	21.50	21.43
		1	99	21.11	21.34	21.11
		50	0	20.52	20.57	20.48
		50	25	20.54	20.54	20.41
		50	50	20.51	20.70	20.43
		100	0	20.51	20.42	20.30
20M	16QAM	1	0	21.12	21.09	20.98
		1	50	21.06	20.97	20.73
		1	99	20.09	20.13	20.02
		50	0	19.60	19.57	19.33
		50	25	19.64	19.64	19.68
		50	50	19.63	19.63	19.67
		100	0	19.53	19.53	19.48
20M	64QAM	1	0	20.15	20.17	20.09
		1	50	20.01	20.09	19.87
		1	99	19.08	19.11	19.01
		50	0	18.61	18.62	18.58
		50	25	18.59	18.72	18.54
		50	50	18.59	18.66	18.48
		100	0	18.53	18.50	18.37
20M	256QAM	1	0	15.62	15.72	16.18
		1	50	15.81	15.68	16.07
		1	99	15.87	15.86	16.31
		50	0	16.03	15.89	16.33
		50	25	15.82	15.82	15.66
		50	50	15.72	15.71	15.63
		100	0	15.64	15.68	15.66

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 42						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		42165	42590	43015
		Frequency (MHz)		3457.5	3500	3542.5
15M	QPSK	1	0	21.01	21.05	20.76
		1	37	21.23	21.34	21.34
		1	74	20.89	21.11	20.95
		36	0	20.50	20.55	20.36
		36	19	20.61	20.64	20.40
		36	39	20.48	20.80	20.46
		75	0	20.43	20.32	20.44
15M	16QAM	1	0	21.07	21.00	20.94
		1	37	20.99	20.99	20.89
		1	74	20.01	20.18	20.16
		36	0	19.64	19.51	19.31
		36	19	19.71	19.63	19.54
		36	39	19.58	19.82	19.54
		75	0	19.52	19.57	19.62
15M	64QAM	1	0	20.09	20.10	19.99
		1	37	20.11	20.02	19.77
		1	74	19.09	19.17	19.01
		36	0	18.52	18.69	18.47
		36	19	18.68	18.67	18.53
		36	39	18.56	18.52	18.50
		75	0	18.51	18.62	18.39
15M	256QAM	1	0	15.64	15.63	16.19
		1	37	15.83	15.72	16.17
		1	74	15.92	15.93	16.37
		36	0	16.07	16.02	16.31
		36	19	15.89	15.87	15.73
		36	39	15.58	15.78	15.78
		75	0	15.75	15.71	15.66

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 42						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		42140	42590	43040
		Frequency (MHz)		3455	3500	3545
10M	QPSK	1	0	20.95	21.11	20.70
		1	24	21.18	21.33	21.31
		1	49	20.91	20.96	20.99
		25	0	20.48	20.66	20.50
		25	12	20.68	20.69	20.48
		25	25	20.61	20.94	20.46
		50	0	20.41	20.41	20.41
10M	16QAM	1	0	21.11	21.07	20.88
		1	24	21.07	21.01	20.83
		1	49	19.96	20.29	20.15
		25	0	19.59	19.50	19.30
		25	12	19.65	19.64	19.53
		25	25	19.68	19.80	19.72
		50	0	19.58	19.51	19.63
10M	64QAM	1	0	20.03	19.98	20.03
		1	24	20.19	19.97	19.73
		1	49	19.05	19.12	19.04
		25	0	18.58	18.64	18.42
		25	12	18.79	18.61	18.55
		25	25	18.68	18.67	18.48
		50	0	18.46	18.48	18.47
10M	256QAM	1	0	15.75	15.75	16.24
		1	24	15.74	15.71	16.08
		1	49	15.98	15.81	16.24
		25	0	16.03	16.15	16.46
		25	12	15.86	15.83	15.71
		25	25	15.61	15.78	15.69
		50	0	15.73	15.76	15.59

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 42						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		42115	42590	43065
		Frequency (MHz)		3452.5	3500	3547.5
5M	QPSK	1	0	20.86	20.97	20.68
		1	12	21.16	21.28	21.49
		1	24	20.96	21.09	21.18
		12	0	20.47	20.62	20.42
		12	6	20.61	20.88	20.39
		12	13	20.53	21.00	20.45
		25	0	20.31	20.26	20.55
5M	16QAM	1	0	20.99	20.96	20.94
		1	12	20.98	20.95	21.00
		1	24	19.95	20.27	20.17
		12	0	19.67	19.56	19.34
		12	6	19.85	19.69	19.61
		12	13	19.69	19.86	19.68
		25	0	19.46	19.59	19.56
5M	64QAM	1	0	20.00	20.03	19.95
		1	12	20.29	19.93	19.79
		1	24	19.02	19.14	19.21
		12	0	18.56	18.83	18.45
		12	6	18.95	18.69	18.52
		12	13	18.63	18.70	18.59
		25	0	18.46	18.57	18.52
5M	256QAM	1	0	15.68	15.72	16.29
		1	12	15.73	15.66	16.05
		1	24	16.01	15.83	16.16
		12	0	16.15	16.17	16.39
		12	6	15.95	15.91	15.84
		12	13	15.64	15.75	15.81
		25	0	15.65	15.68	15.54

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 66						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		132072	132322	132572
		Frequency (MHz)		1720	1745	1770
20M	QPSK	1	0	25.43	25.45	25.49
		1	50	25.27	25.37	25.43
		1	99	25.28	25.32	25.39
		50	0	24.44	24.50	24.53
		50	25	24.43	24.48	24.49
		50	50	24.33	24.42	24.46
		100	0	24.38	24.40	24.43
20M	16QAM	1	0	24.77	24.80	24.84
		1	50	24.72	24.76	24.81
		1	99	24.59	24.66	24.75
		50	0	23.55	23.62	23.66
		50	25	23.54	23.56	23.62
		50	50	23.49	23.53	23.59
		100	0	23.47	23.49	23.56
20M	64QAM	1	0	23.39	23.39	23.49
		1	50	23.43	23.44	23.46
		1	99	23.30	23.34	23.42
		50	0	22.43	22.50	22.57
		50	25	22.45	22.48	22.55
		50	50	22.37	22.40	22.50
		100	0	22.31	22.40	22.46
20M	256QAM	1	0	20.67	20.68	20.75
		1	50	20.54	20.60	20.70
		1	99	20.58	20.59	20.67
		50	0	20.64	20.64	20.64
		50	25	20.46	20.55	20.61
		50	50	20.45	20.55	20.59
		100	0	20.43	20.49	20.56

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 66						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		132047	132322	132597
		Frequency (MHz)		1717.5	1745	1772.5
15M	QPSK	1	0	25.42	25.45	25.40
		1	37	25.18	25.34	25.43
		1	74	25.21	25.32	25.36
		36	0	24.43	24.47	24.50
		36	19	24.37	24.39	24.40
		36	39	24.23	24.32	24.41
		75	0	24.34	24.40	24.34
15M	16QAM	1	0	24.71	24.70	24.84
		1	37	24.64	24.70	24.74
		1	74	24.59	24.61	24.66
		36	0	23.55	23.55	23.57
		36	19	23.50	23.56	23.53
		36	39	23.39	23.44	23.49
		75	0	23.44	23.40	23.52
15M	64QAM	1	0	23.33	23.39	23.45
		1	37	23.37	23.35	23.41
		1	74	23.22	23.33	23.33
		36	0	22.36	22.48	22.52
		36	19	22.42	22.46	22.51
		36	39	22.37	22.35	22.46
		75	0	22.24	22.33	22.36
15M	256QAM	1	0	20.63	20.62	20.68
		1	37	20.52	20.57	20.69
		1	74	20.58	20.54	20.64
		36	0	20.62	20.61	20.63
		36	19	20.42	20.54	20.58
		36	39	20.45	20.48	20.52
		75	0	20.34	20.39	20.54

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 66						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		132022	132322	132622
		Frequency (MHz)		1715	1745	1775
10M	QPSK	1	0	25.37	25.44	25.48
		1	24	25.22	25.29	25.36
		1	49	25.28	25.26	25.32
		25	0	24.43	24.47	24.53
		25	12	24.40	24.41	24.46
		25	25	24.25	24.40	24.36
		50	0	24.28	24.42	24.37
10M	16QAM	1	0	24.67	24.71	24.83
		1	24	24.72	24.70	24.77
		1	49	24.50	24.64	24.65
		25	0	23.45	23.53	23.60
		25	12	23.49	23.54	23.54
		25	25	23.44	23.52	23.51
		50	0	23.40	23.46	23.46
10M	64QAM	1	0	23.38	23.31	23.44
		1	24	23.42	23.41	23.41
		1	49	23.25	23.25	23.32
		25	0	22.37	22.45	22.54
		25	12	22.35	22.42	22.50
		25	25	22.36	22.38	22.47
		50	0	22.25	22.36	22.40
10M	256QAM	1	0	20.62	20.64	20.72
		1	24	20.49	20.52	20.60
		1	49	20.51	20.55	20.57
		25	0	20.64	20.58	20.62
		25	12	20.46	20.49	20.60
		25	25	20.37	20.50	20.50
		50	0	20.37	20.45	20.48

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 66						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		131997	132322	132647
		Frequency (MHz)		1712.5	1745	1777.5
5M	QPSK	1	0	25.42	25.35	25.44
		1	12	25.21	25.30	25.41
		1	24	25.26	25.30	25.39
		12	0	24.36	24.44	24.47
		12	6	24.43	24.41	24.44
		12	13	24.33	24.35	24.46
		25	0	24.35	24.38	24.41
5M	16QAM	1	0	24.68	24.72	24.80
		1	12	24.70	24.73	24.76
		1	24	24.52	24.59	24.66
		12	0	23.51	23.53	23.59
		12	6	23.50	23.56	23.55
		12	13	23.47	23.48	23.54
		25	0	23.44	23.44	23.55
5M	64QAM	1	0	23.32	23.31	23.49
		1	12	23.33	23.38	23.37
		1	24	23.21	23.27	23.40
		12	0	22.41	22.41	22.47
		12	6	22.39	22.38	22.46
		12	13	22.36	22.37	22.44
		25	0	22.31	22.36	22.46
5M	256QAM	1	0	20.64	20.61	20.72
		1	12	20.49	20.60	20.64
		1	24	20.53	20.50	20.61
		12	0	20.57	20.64	20.59
		12	6	20.43	20.52	20.61
		12	13	20.41	20.48	20.49
		25	0	20.41	20.47	20.47

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 66						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		131987	132322	132657
		Frequency (MHz)		1711.5	1745	1778.5
3M	QPSK	1	0	25.41	25.38	25.41
		1	7	25.25	25.28	25.39
		1	14	25.28	25.22	25.30
		8	0	24.41	24.48	24.53
		8	3	24.34	24.48	24.42
		8	7	24.27	24.39	24.46
		15	0	24.38	24.41	24.33
3M	16QAM	1	0	24.68	24.80	24.82
		1	7	24.65	24.69	24.71
		1	14	24.50	24.66	24.67
		8	0	23.54	23.53	23.65
		8	3	23.53	23.51	23.54
		8	7	23.41	23.51	23.54
		15	0	23.39	23.41	23.47
3M	64QAM	1	0	23.29	23.33	23.49
		1	7	23.36	23.39	23.36
		1	14	23.27	23.34	23.41
		8	0	22.42	22.43	22.55
		8	3	22.41	22.42	22.53
		8	7	22.37	22.39	22.47
		15	0	22.21	22.33	22.41
3M	256QAM	1	0	20.60	20.61	20.68
		1	7	20.51	20.58	20.69
		1	14	20.56	20.59	20.64
		8	0	20.62	20.57	20.62
		8	3	20.39	20.50	20.58
		8	7	20.36	20.47	20.55
		15	0	20.34	20.43	20.53

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 66						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		131979	132322	132665
		Frequency (MHz)		1710.7	1745	1779.3
1.4M	QPSK	1	0	25.35	25.34	25.32
		1	2	25.14	25.22	25.39
		1	5	25.18	25.17	25.28
		3	0	25.18	25.19	25.20
		3	1	25.20	25.22	25.19
		3	3	25.21	25.25	25.21
		6	0	24.33	24.35	24.26
1.4M	16QAM	1	0	24.62	24.72	24.81
		1	2	24.61	24.57	24.61
		1	5	24.37	24.52	24.58
		3	0	24.51	24.49	24.59
		3	1	24.43	24.46	24.46
		3	3	24.30	24.37	24.44
		6	0	23.33	23.27	23.34
1.4M	64QAM	1	0	23.14	23.24	23.43
		1	2	23.23	23.33	23.22
		1	5	23.26	23.19	23.37
		3	0	23.28	23.35	23.48
		3	1	23.28	23.27	23.44
		3	3	23.22	23.28	23.43
		6	0	22.11	22.22	22.40
1.4M	256QAM	1	0	20.63	20.66	20.75
		1	2	20.49	20.60	20.63
		1	5	20.57	20.56	20.58
		3	0	20.58	20.54	20.61
		3	1	20.45	20.55	20.59
		3	3	20.35	20.51	20.50
		6	0	20.37	20.43	20.51

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

LTE Band 71						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		133222	133297	133372
		Frequency (MHz)		673	680.5	688
20M	QPSK	1	0	23.63	23.56	23.51
		1	50	23.61	23.55	23.47
		1	99	23.58	23.54	23.48
		50	0	22.71	22.70	22.61
		50	25	22.68	22.59	22.53
		50	50	22.64	22.59	22.49
		100	0	22.61	22.53	22.44
20M	16QAM	1	0	23.01	23.01	22.98
		1	50	22.97	22.88	22.78
		1	99	22.91	22.91	22.89
		50	0	21.69	21.63	21.61
		50	25	21.67	21.67	21.60
		50	50	21.64	21.59	21.58
		100	0	21.60	21.50	21.49
20M	64QAM	1	0	20.96	20.90	20.89
		1	50	20.92	20.83	20.78
		1	99	20.88	20.82	20.75
		50	0	20.38	20.29	20.27
		50	25	20.34	20.30	20.29
		50	50	20.31	20.21	20.21
		100	0	20.29	20.20	20.19
20M	256QAM	1	0	18.84	18.76	18.71
		1	50	18.82	18.64	18.77
		1	99	18.78	18.65	18.71
		50	0	18.77	18.73	18.66
		50	25	18.75	18.66	18.62
		50	50	18.73	18.61	18.67
		100	0	18.71	18.48	18.63

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

LTE Band 71						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		133197	133297	133397
		Frequency (MHz)		670.5	680.5	690.5
15M	QPSK	1	0	23.59	23.56	23.44
		1	37	23.60	23.45	23.45
		1	74	23.56	23.45	23.39
		36	0	22.63	22.70	22.54
		36	19	22.68	22.59	22.53
		36	39	22.62	22.49	22.48
		75	0	22.55	22.45	22.35
15M	16QAM	1	0	22.95	22.98	22.92
		1	37	22.91	22.79	22.72
		1	74	22.90	22.87	22.80
		36	0	21.66	21.53	21.60
		36	19	21.58	21.63	21.54
		36	39	21.60	21.51	21.54
		75	0	21.57	21.49	21.47
15M	64QAM	1	0	20.89	20.85	20.80
		1	37	20.85	20.73	20.76
		1	74	20.84	20.82	20.74
		36	0	20.34	20.22	20.26
		36	19	20.28	20.24	20.26
		36	39	20.21	20.20	20.21
		75	0	20.20	20.20	20.11
15M	256QAM	1	0	18.84	18.79	18.72
		1	37	18.82	18.79	18.78
		1	74	18.78	18.74	18.72
		36	0	18.77	18.71	18.63
		36	19	18.75	18.67	18.62
		36	39	18.73	18.69	18.62
		75	0	18.71	18.63	18.59

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

LTE Band 71						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		133172	133297	133422
		Frequency (MHz)		668	680.5	693
10M	QPSK	1	0	23.58	23.48	23.49
		1	24	23.61	23.46	23.40
		1	49	23.52	23.54	23.38
		25	0	22.68	22.69	22.53
		25	12	22.60	22.56	22.43
		25	25	22.57	22.55	22.39
		50	0	22.51	22.44	22.36
10M	16QAM	1	0	22.96	23.00	22.98
		1	24	22.95	22.78	22.78
		1	49	22.81	22.89	22.88
		25	0	21.60	21.61	21.55
		25	12	21.59	21.58	21.50
		25	25	21.63	21.51	21.57
		50	0	21.59	21.41	21.41
10M	64QAM	1	0	20.93	20.88	20.89
		1	24	20.86	20.76	20.78
		1	49	20.80	20.77	20.74
		25	0	20.35	20.27	20.24
		25	12	20.33	20.25	20.22
		25	25	20.30	20.13	20.19
		50	0	20.19	20.18	20.10
10M	256QAM	1	0	18.77	18.71	18.65
		1	24	18.77	18.77	18.68
		1	49	18.75	18.71	18.67
		25	0	18.73	18.66	18.63
		25	12	18.68	18.62	18.56
		25	25	18.65	18.67	18.55
		50	0	18.61	18.63	18.53

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

LTE Band 71						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		133147	133297	133447
		Frequency (MHz)		665.5	680.5	695.5
5M	QPSK	1	0	23.62	23.47	23.46
		1	12	23.51	23.54	23.43
		1	24	23.53	23.44	23.43
		12	0	22.66	22.70	22.58
		12	6	22.58	22.51	22.50
		12	13	22.60	22.50	22.46
		25	0	22.58	22.52	22.42
5M	16QAM	1	0	22.94	23.01	22.93
		1	12	22.92	22.87	22.71
		1	24	22.82	22.90	22.86
		12	0	21.64	21.63	21.54
		12	6	21.60	21.60	21.53
		12	13	21.59	21.56	21.55
		25	0	21.55	21.48	21.39
5M	64QAM	1	0	20.87	20.84	20.81
		1	12	20.91	20.75	20.71
		1	24	20.84	20.75	20.73
		12	0	20.30	20.20	20.22
		12	6	20.33	20.27	20.22
		12	13	20.24	20.15	20.21
		25	0	20.21	20.19	20.15
5M	256QAM	1	0	18.76	18.58	18.61
		1	12	18.64	18.76	18.68
		1	24	18.65	18.56	18.52
		12	0	18.73	18.63	18.53
		12	6	18.66	18.55	18.52
		12	13	18.61	18.61	18.52
		25	0	18.48	18.56	18.48

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

4.2 Radiated Emission Measurement

4.2.1 Limits of Radiated Emission Measurement

For WCDMA Band 4, LTE Band 4, LTE Band 66:

According to FCC 27.53(h) for operations in the 1695-1710MHz, 1710-1755MHz, 1755-1780 MHz, 1915-1920MHz, 1995-2000 MHz, 2000-2020MHz, 2110-2155MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log (P)$ dB.

For LTE Band 7, LTE Band 38, LTE Band 41:

In the FCC 27.53(m)(4), On any frequency outside a licensee's frequency block, The power of any emission shall be attenuated below the transmitter power (P) by at least $55 + 10 \log (P)$ dB. The emission limit equal to -25dBm.

For LTE Band 12, LTE Band 17, LTE Band 71:

According to FCC 27.53(g) for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater.

For LTE Band 13:

According to FCC 27.53(c)(2) for on any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB.

According to FCC 27.53(f) for operations in the 775-788 MHz, emissions in the band 1559-1610MHz shall be limited to -70 dBW/MHz. The limit of emissions is equal to -40 dBm.

LTE Band 42:

For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

4.2.2 Test Procedure

- a. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- d. Following C63.26 section 5.5 and 5.2.7.
$$\text{EIRP (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8;$$
 where D is the measurement distance (in the far field region) in m.
$$\text{ERP (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8 - 2.15;$$
 where D is the measurement distance (in the far field region) in m.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.
2. The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:
The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

4.2.3 Deviation from Test Standard


No deviation.

4.2.4 Test Setup

For radiated emission 30MHz to 1GHz

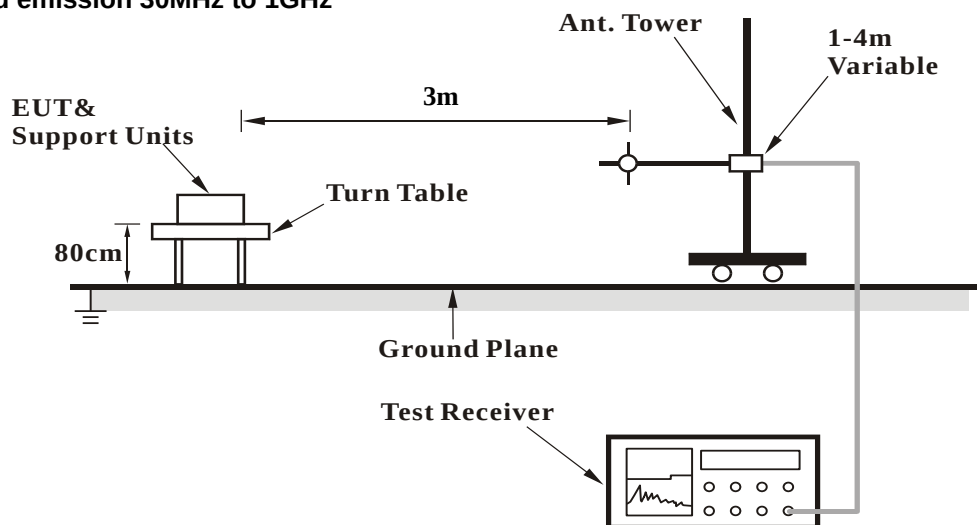

For radiated emission above 1GHz

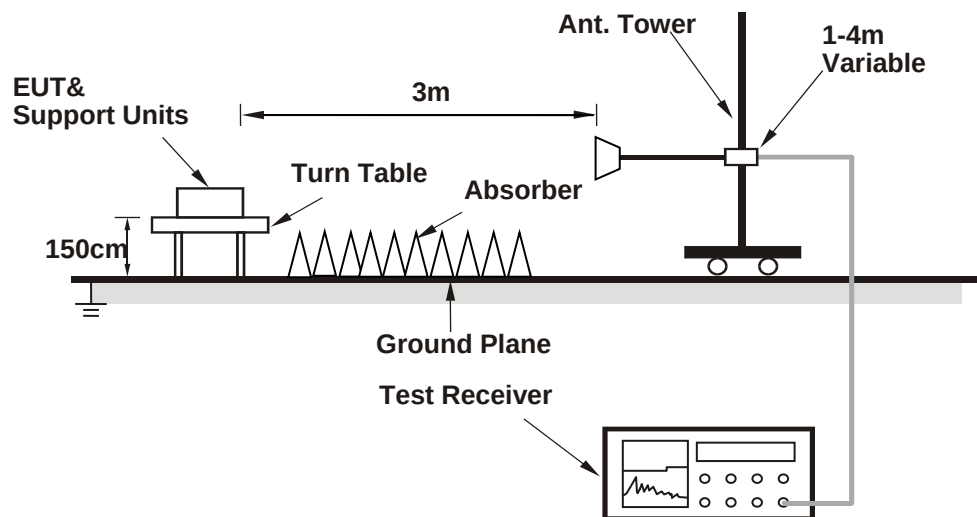

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.5 Test Results

Below 1GHz


WCDMA Band 4

Mode	TX channel 1513 (1752.6MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	47.46	-50.44	-13.00	-37.44	1.25 H	163	53.93	-104.37
2	81.41	-50.72	-13.00	-37.72	1.50 H	235	58.42	-109.14
3	181.32	-52.10	-13.00	-39.10	1.00 H	93	53.54	-105.64
4	226.91	-53.38	-13.00	-40.38	1.00 H	201	52.97	-106.35
5	565.44	-56.23	-13.00	-43.23	2.00 H	132	40.46	-96.69
6	954.41	-53.22	-13.00	-40.22	1.50 H	7	35.84	-89.06

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

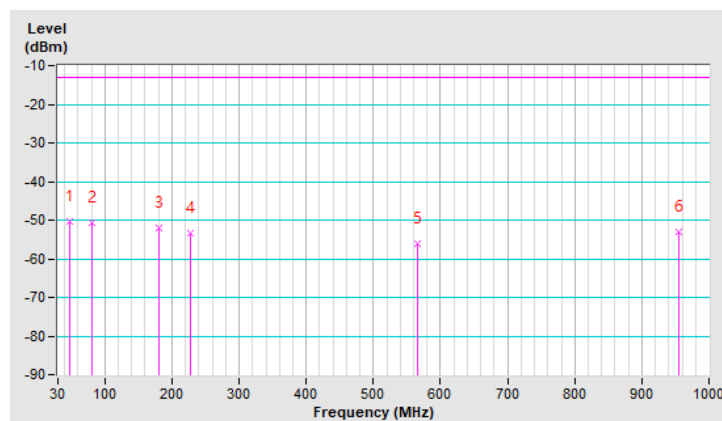


Mode	TX channel 1513 (1752.6MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	73.65	-50.32	-13.00	-37.32	1.50 V	258	56.94	-107.26
2	101.78	-51.13	-13.00	-38.13	1.25 V	60	57.52	-108.65
3	135.73	-44.52	-13.00	-31.52	1.00 V	102	60.43	-104.95
4	276.38	-55.70	-13.00	-42.70	1.00 V	256	47.18	-102.88
5	512.09	-52.89	-13.00	-39.89	1.50 V	112	44.67	-97.56
6	927.25	-49.74	-13.00	-36.74	2.00 V	148	39.65	-89.39

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

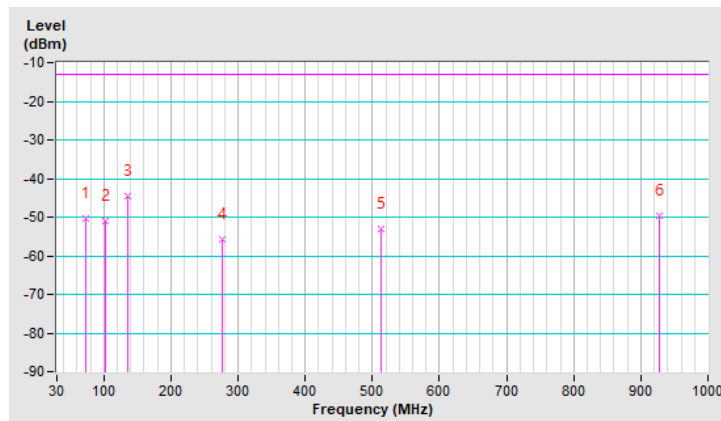


LTE Band 4, Channel Bandwidth 5MHz

Mode	TX channel 20375 (1752.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	49.40	-53.90	-13.00	-40.90	1.00 H	244	50.41	-104.31
2	76.56	-51.65	-13.00	-38.65	1.50 H	234	56.35	-108.00
3	97.90	-51.69	-13.00	-38.69	1.00 H	173	57.59	-109.28
4	269.59	-56.40	-13.00	-43.40	2.00 H	252	46.80	-103.20
5	367.56	-60.01	-13.00	-47.01	1.50 H	184	40.91	-100.92
6	517.91	-57.44	-13.00	-44.44	1.00 H	8	40.03	-97.47

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

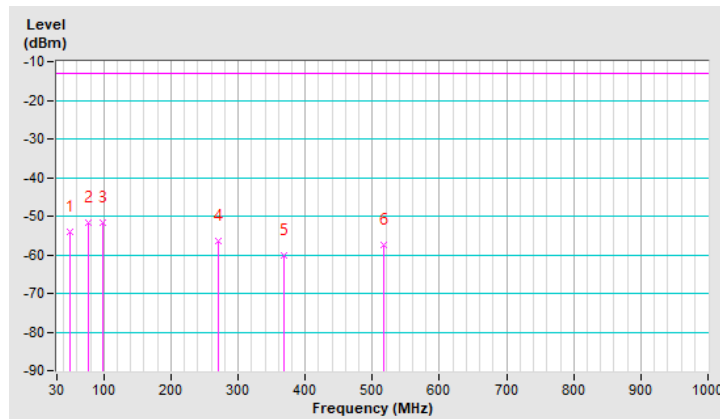


Mode	TX channel 20375 (1752.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	56.19	-51.62	-13.00	-38.62	1.50 V	339	52.95	-104.57
2	88.20	-49.28	-13.00	-36.28	1.00 V	106	60.73	-110.01
3	98.87	-51.04	-13.00	-38.04	1.50 V	161	58.04	-109.08
4	270.56	-56.91	-13.00	-43.91	2.00 V	256	46.24	-103.15
5	361.74	-59.68	-13.00	-46.68	1.00 V	221	41.38	-101.06
6	562.53	-57.69	-13.00	-44.69	1.00 V	208	39.03	-96.72

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

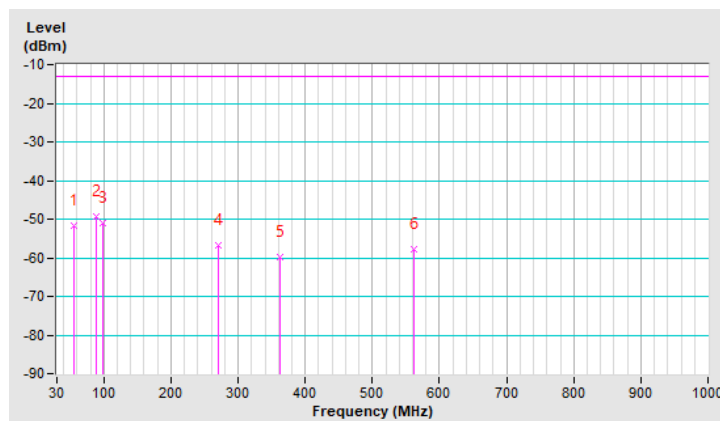


LTE Band 7, Channel Bandwidth 5MHz

Mode	TX channel 21425 (2567.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	42.61	-49.00	-25.00	-24.00	2.00 H	57	55.69	-104.69
2	56.19	-48.67	-25.00	-23.67	1.00 H	301	55.90	-104.57
3	99.84	-49.89	-25.00	-24.89	1.50 H	157	58.99	-108.88
4	260.86	-54.46	-25.00	-29.46	1.00 H	154	49.35	-103.81
5	463.59	-60.27	-25.00	-35.27	1.50 H	42	38.20	-98.47
6	575.14	-57.33	-25.00	-32.33	1.00 H	14	39.13	-96.46

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

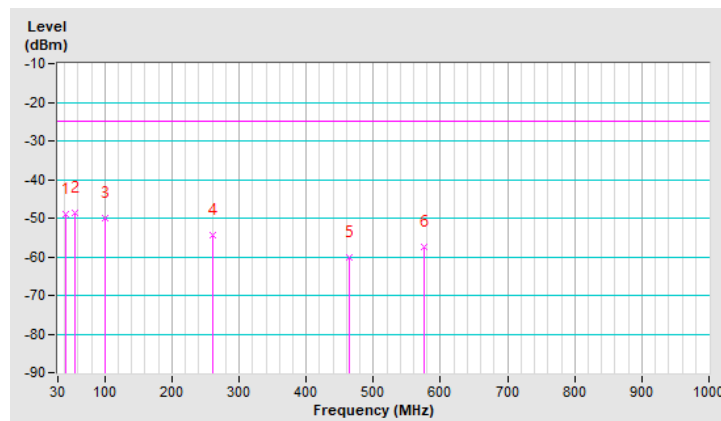


Mode	TX channel 21425 (2567.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	74.62	-53.03	-25.00	-28.03	1.00 V	6	54.39	-107.42
2	98.87	-49.03	-25.00	-24.03	2.00 V	150	60.05	-109.08
3	242.43	-59.17	-25.00	-34.17	2.00 V	302	45.37	-104.54
4	271.53	-54.45	-25.00	-29.45	1.00 V	165	48.64	-103.09
5	490.75	-59.52	-25.00	-34.52	1.50 V	186	38.55	-98.07
6	602.30	-56.57	-25.00	-31.57	1.00 V	134	39.14	-95.71

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

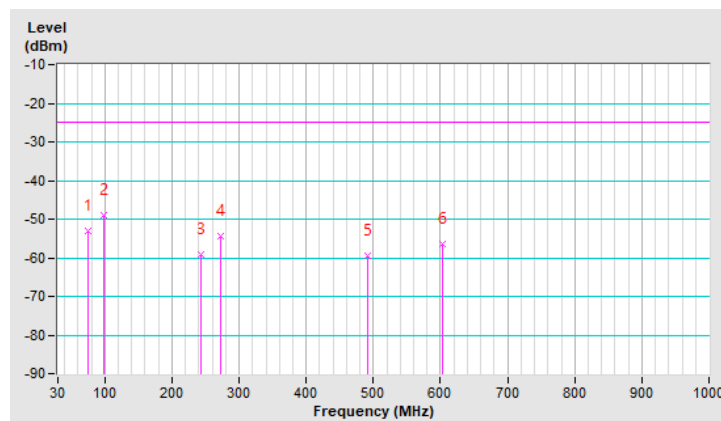


LTE Band 12, Channel Bandwidth 1.4MHz

Mode	TX channel 23173 (715.3MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	56.19	-44.58	-13.00	-31.58	1.00 H	343	62.14	-106.72
2	75.59	-52.33	-13.00	-39.33	2.00 H	272	57.51	-109.84
3	100.81	-49.04	-13.00	-36.04	1.00 H	4	61.84	-110.88
4	270.56	-58.59	-13.00	-45.59	2.00 H	272	46.71	-105.30
5	431.58	-59.35	-13.00	-46.35	1.50 H	106	41.87	-101.22
6	508.21	-57.27	-13.00	-44.27	1.00 H	191	42.52	-99.79

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

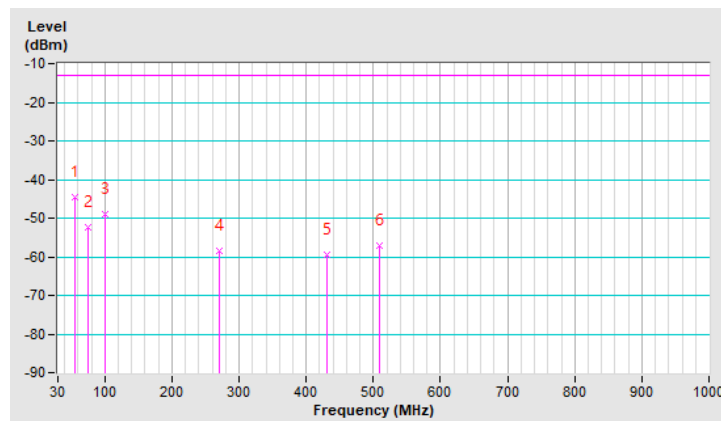


Mode	TX channel 23173 (715.3MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	76.56	-52.16	-13.00	-39.16	1.50 V	283	57.99	-110.15
2	101.78	-49.74	-13.00	-36.74	1.50 V	13	61.06	-110.80
3	248.25	-59.15	-13.00	-46.15	1.00 V	304	47.30	-106.45
4	269.59	-59.17	-13.00	-46.17	2.00 V	256	46.18	-105.35
5	462.62	-62.13	-13.00	-49.13	1.00 V	13	38.51	-100.64
6	509.18	-58.45	-13.00	-45.45	1.00 V	183	41.32	-99.77

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

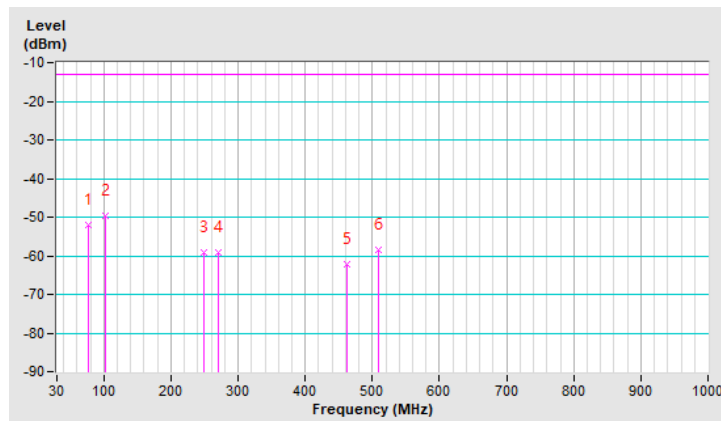


LTE Band 13, Channel Bandwidth 5MHz

Mode	TX channel 23255 (784.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	73.65	-49.85	-13.00	-36.85	1.50 H	162	59.56	-109.41
2	100.81	-48.27	-13.00	-35.27	1.50 H	2	62.61	-110.88
3	140.58	-47.87	-13.00	-34.87	1.00 H	146	58.89	-106.76
4	190.05	-55.57	-13.00	-42.57	1.00 H	272	53.18	-108.75
5	268.62	-58.05	-13.00	-45.05	1.50 H	253	47.38	-105.43
6	515.00	-57.38	-13.00	-44.38	1.00 H	180	42.27	-99.65

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

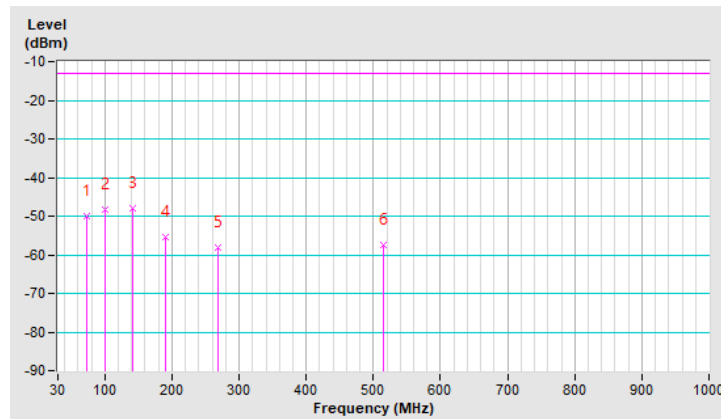


Mode	TX channel 23255 (784.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	56.19	-46.11	-13.00	-33.11	1.00 V	318	60.61	-106.72
2	98.87	-48.78	-13.00	-35.78	2.00 V	294	62.45	-111.23
3	224.97	-47.11	-13.00	-34.11	1.00 V	126	61.54	-108.65
4	509.18	-58.39	-13.00	-45.39	1.50 V	197	41.38	-99.77
5	606.18	-59.49	-13.00	-46.49	1.00 V	336	38.32	-97.81
6	667.29	-57.17	-13.00	-44.17	1.50 V	334	39.69	-96.86

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

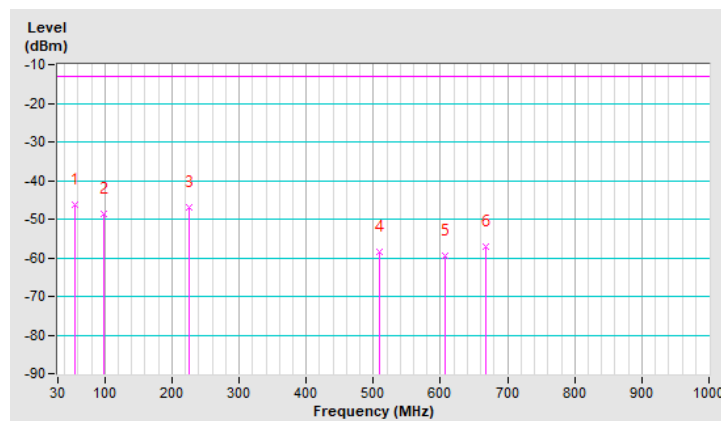


LTE Band 17, Channel Bandwidth 10MHz

Mode	TX channel 23790 (710.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	56.19	-45.27	-13.00	-32.27	1.00 H	320	61.45	-106.72
2	98.87	-48.71	-13.00	-35.71	1.50 H	121	62.52	-111.23
3	249.22	-59.40	-13.00	-46.40	1.50 H	331	47.00	-106.40
4	370.47	-63.76	-13.00	-50.76	1.00 H	158	39.22	-102.98
5	460.68	-61.74	-13.00	-48.74	1.50 H	210	38.94	-100.68
6	567.38	-58.93	-13.00	-45.93	1.00 H	6	39.89	-98.82

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

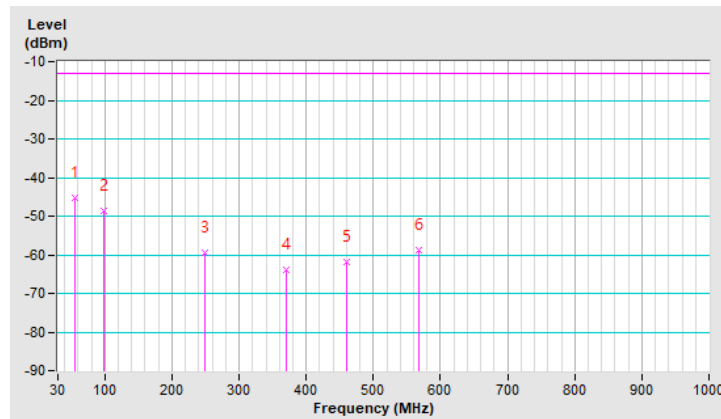


Mode	TX channel 23790 (710.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	75.59	-52.68	-13.00	-39.68	1.00 V	352	57.16	-109.84
2	99.84	-48.73	-13.00	-35.73	2.00 V	143	62.30	-111.03
3	266.68	-58.20	-13.00	-45.20	1.00 V	264	47.37	-105.57
4	461.65	-61.94	-13.00	-48.94	1.50 V	256	38.71	-100.65
5	633.34	-58.49	-13.00	-45.49	1.50 V	272	38.71	-97.20
6	707.06	-53.58	-13.00	-40.58	1.00 V	355	42.77	-96.35

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

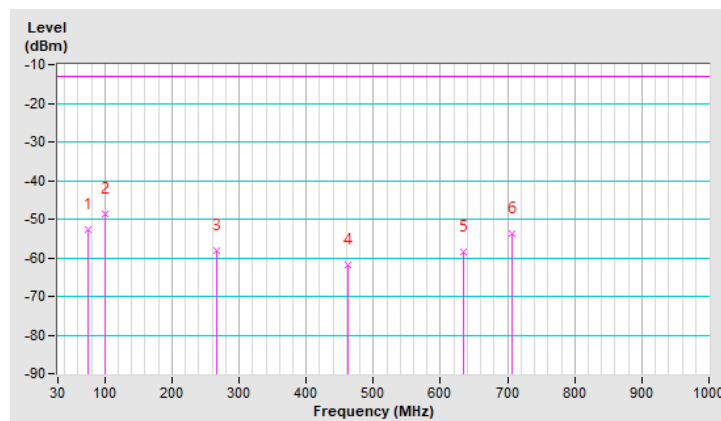


LTE Band 38, Channel Bandwidth 20MHz

Mode	TX channel 38000 (2595.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	69.77	-50.58	-25.00	-25.58	1.00 H	344	55.73	-106.31
2	88.20	-50.34	-25.00	-25.34	1.50 H	331	59.67	-110.01
3	250.19	-56.48	-25.00	-31.48	1.50 H	323	47.75	-104.23
4	279.29	-58.57	-25.00	-33.57	1.00 H	270	44.21	-102.78
5	486.87	-58.15	-25.00	-33.15	1.00 H	6	39.99	-98.14
6	535.37	-56.45	-25.00	-31.45	1.00 H	346	40.79	-97.24

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

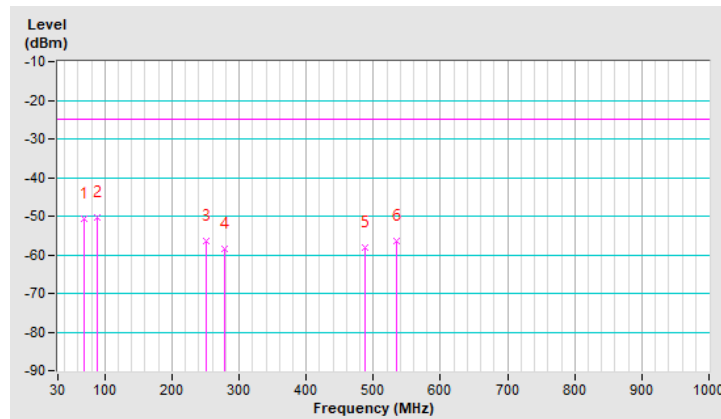


Mode	TX channel 38000 (2595.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	68.80	-51.07	-25.00	-26.07	1.50 V	358	55.18	-106.25
2	88.20	-50.33	-25.00	-25.33	1.00 V	24	59.68	-110.01
3	241.46	-59.41	-25.00	-34.41	1.00 V	274	45.19	-104.60
4	276.38	-57.48	-25.00	-32.48	2.00 V	177	45.40	-102.88
5	433.52	-60.29	-25.00	-35.29	1.50 V	355	38.74	-99.03
6	488.81	-59.23	-25.00	-34.23	1.00 V	11	38.87	-98.10

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

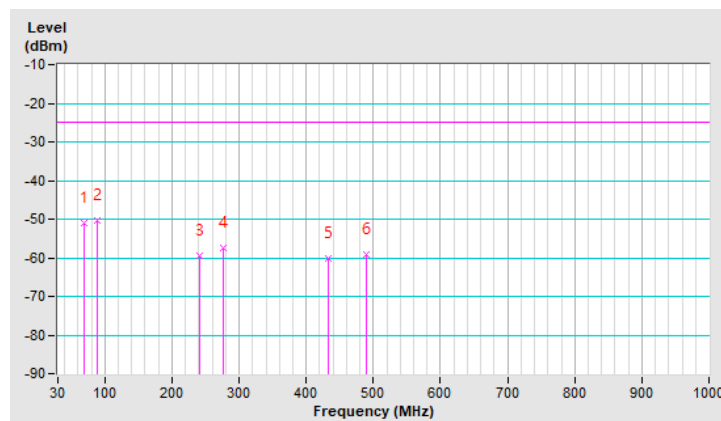


LTE Band 41, Channel Bandwidth 20MHz

Mode	TX channel 40620 (2593.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.91	-39.81	-25.00	-14.81	2.00 H	331	66.02	-105.83
2	87.23	-50.52	-25.00	-25.52	1.00 H	137	59.43	-109.95
3	167.74	-58.41	-25.00	-33.41	1.00 H	32	45.87	-104.28
4	245.34	-58.99	-25.00	-33.99	1.00 H	250	45.40	-104.39
5	661.47	-54.49	-25.00	-29.49	1.00 H	315	40.30	-94.79
6	891.36	-52.14	-25.00	-27.14	1.00 H	310	38.18	-90.32

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

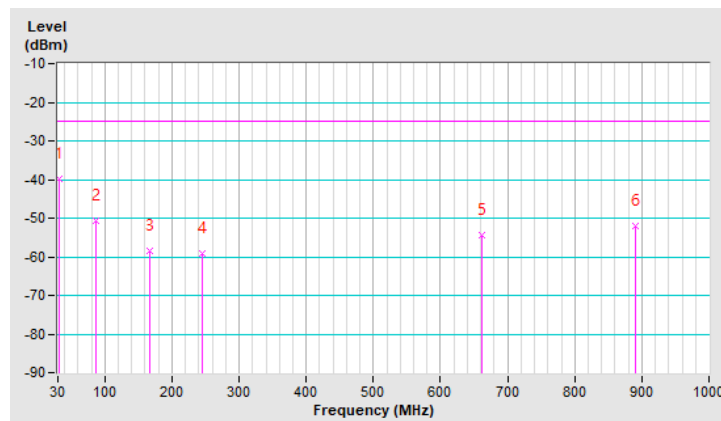


Mode	TX channel 40620 (2593.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	88.20	-51.16	-25.00	-26.16	1.00 V	185	58.85	-110.01
2	242.43	-59.08	-25.00	-34.08	1.00 V	285	45.46	-104.54
3	508.21	-56.35	-25.00	-31.35	1.00 V	196	41.29	-97.64
4	670.20	-53.64	-25.00	-28.64	1.00 V	319	41.06	-94.70
5	767.20	-51.19	-25.00	-26.19	1.00 V	38	41.37	-92.56
6	937.92	-51.13	-25.00	-26.13	1.00 V	109	38.25	-89.38

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

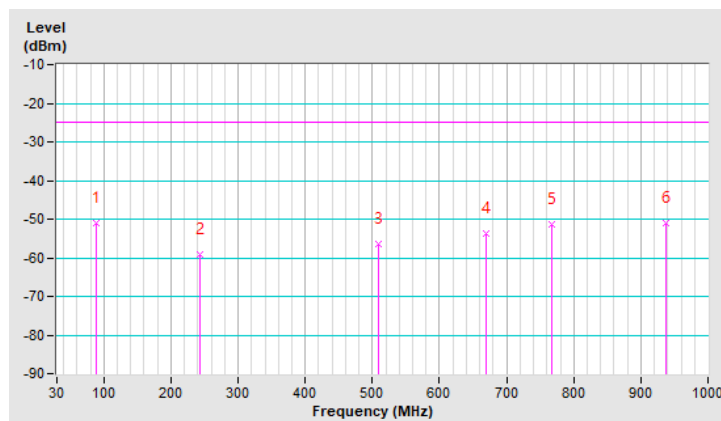


LTE Band 42, Channel Bandwidth 20MHz

Mode	TX channel 42990 (3540.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	24deg. C, 75%RH	Input Power	120Vac, 60Hz (System)
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.94	-60.16	-13.00	-47.16	1.50 H	294	47.94	-108.10
2	108.57	-62.86	-13.00	-49.86	1.50 H	18	47.70	-110.56
3	291.90	-63.13	-13.00	-50.13	1.00 H	265	44.08	-107.21
4	553.80	-54.81	-13.00	-41.81	1.50 H	182	46.70	-101.51
5	753.62	-56.51	-13.00	-43.51	1.50 H	18	40.65	-97.16
6	1000.00	-55.67	-13.00	-42.67	1.00 H	184	39.47	-95.14

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

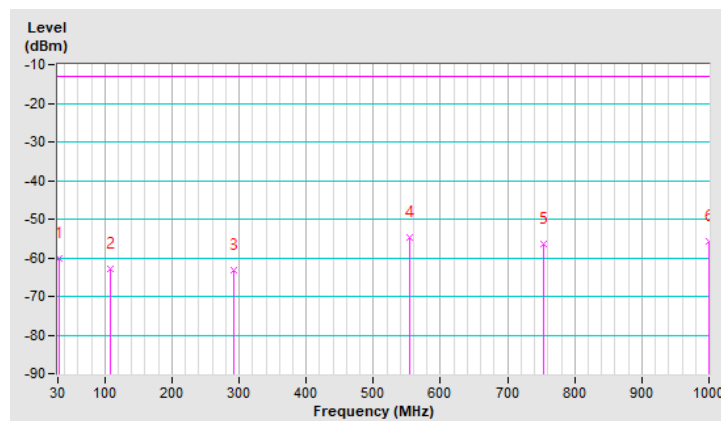


Mode	TX channel 42990 (3540.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	24deg. C, 75%RH	Input Power	120Vac, 60Hz (System)
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.88	-54.14	-13.00	-41.14	1.00 V	123	53.86	-108.00
2	105.66	-59.82	-13.00	-46.82	1.50 V	133	51.26	-111.08
3	270.56	-59.18	-13.00	-46.18	1.50 V	342	48.77	-107.95
4	532.46	-57.58	-13.00	-44.58	2.00 V	289	43.97	-101.55
5	725.49	-57.24	-13.00	-44.24	1.50 V	40	41.21	-98.45
6	1000.00	-55.56	-13.00	-42.56	1.00 V	0	39.58	-95.14

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

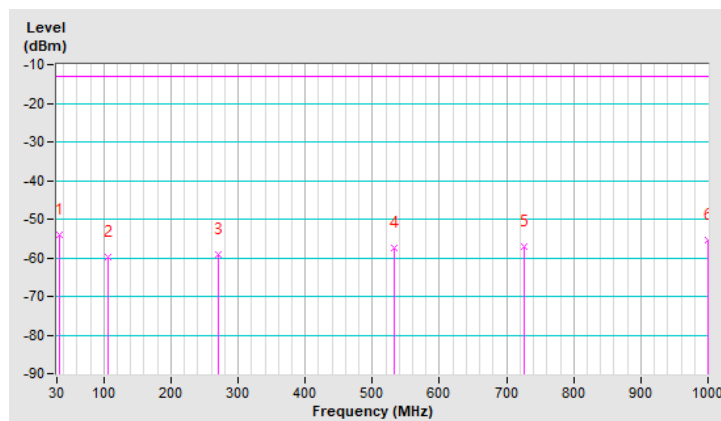


LTE Band 66, Channel Bandwidth 5MHz

Mode	TX channel 132647 (1777.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	70.74	-52.23	-13.00	-39.23	1.50 H	13	54.26	-106.49
2	87.23	-50.57	-13.00	-37.57	1.50 H	226	59.38	-109.95
3	263.77	-57.91	-13.00	-44.91	1.00 H	60	45.71	-103.62
4	329.73	-60.83	-13.00	-47.83	1.00 H	184	40.50	-101.33
5	475.23	-59.03	-13.00	-46.03	2.00 H	213	39.26	-98.29
6	657.59	-55.22	-13.00	-42.22	1.00 H	252	39.58	-94.80

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

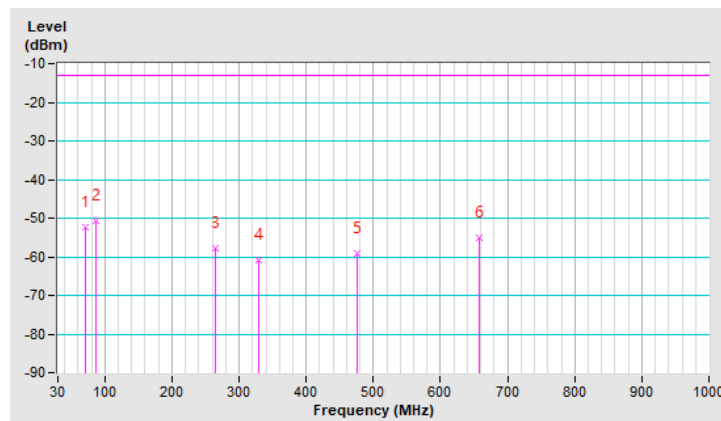


Mode	TX channel 132647 (1777.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	74.62	-48.83	-13.00	-35.83	1.00 V	144	58.59	-107.42
2	89.17	-52.46	-13.00	-39.46	1.00 V	34	57.54	-110.00
3	260.86	-58.34	-13.00	-45.34	1.50 V	331	45.47	-103.81
4	269.59	-55.97	-13.00	-42.97	1.50 V	268	47.23	-103.20
5	396.66	-61.51	-13.00	-48.51	1.00 V	352	38.72	-100.23
6	513.06	-54.74	-13.00	-41.74	1.00 V	186	42.80	-97.54

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

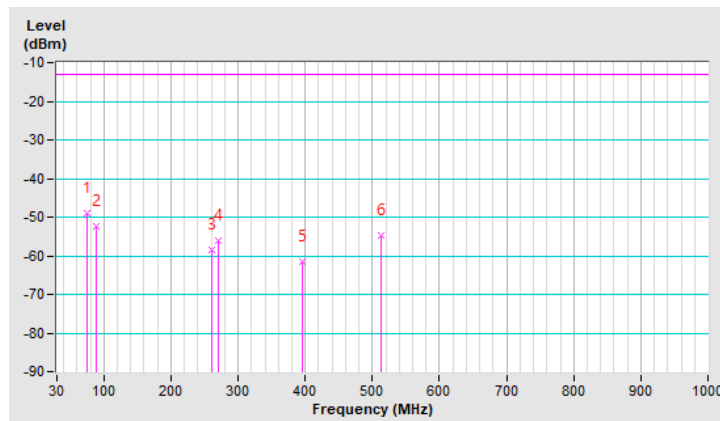


LTE Band 71, Channel Bandwidth 5MHz

Mode	TX channel 133297 (680.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	70.74	-51.15	-13.00	-38.15	1.00 H	32	57.49	-108.64
2	87.23	-52.79	-13.00	-39.79	1.00 H	6	59.31	-112.10
3	250.19	-59.85	-13.00	-46.85	2.00 H	337	46.53	-106.38
4	269.59	-58.17	-13.00	-45.17	1.00 H	6	47.18	-105.35
5	368.53	-63.05	-13.00	-50.05	1.50 H	197	39.99	-103.04
6	535.37	-60.73	-13.00	-47.73	1.00 H	237	38.66	-99.39

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

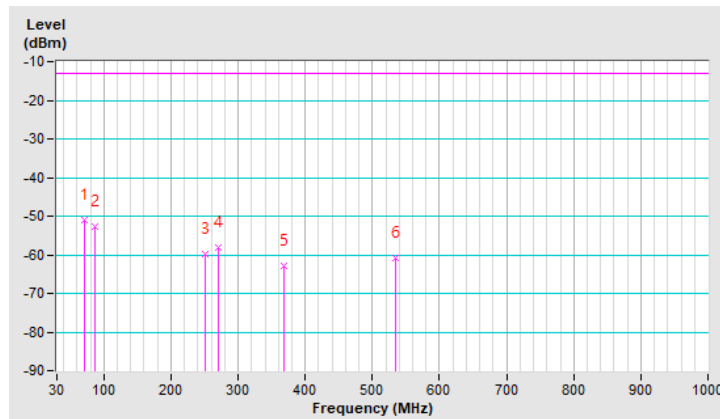


Mode	TX channel 133297 (680.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	73.65	-51.50	-13.00	-38.50	1.00 V	70	57.91	-109.41
2	88.20	-54.35	-13.00	-41.35	2.00 V	204	57.81	-112.16
3	271.53	-58.74	-13.00	-45.74	1.00 V	256	46.50	-105.24
4	499.48	-61.37	-13.00	-48.37	1.00 V	14	38.66	-100.03
5	532.46	-60.46	-13.00	-47.46	1.50 V	144	38.93	-99.39
6	572.23	-59.65	-13.00	-46.65	1.50 V	344	39.05	-98.70

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

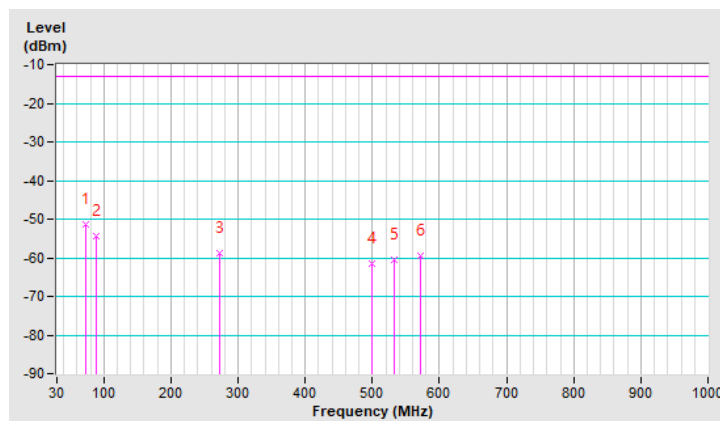

Above 1GHz

WCDMA Band 4

Mode	TX channel 1312 (1712.4MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3424.80	-50.70	-13.00	-37.70	1.57 H	309	44.12	-94.82
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3424.80	-49.55	-13.00	-36.55	2.59 V	243	45.27	-94.82

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 1413 (1732.6MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.20	-50.22	-13.00	-37.22	1.63 H	311	44.29	-94.51
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.20	-49.05	-13.00	-36.05	2.63 V	255	45.46	-94.51

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 1513 (1752.6MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3505.20	-49.82	-13.00	-36.82	1.66 H	315	44.34	-94.16
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3505.20	-48.64	-13.00	-35.64	2.55 V	241	45.52	-94.16

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

LTE Band 4, Channel Bandwidth 1.4MHz

Mode	TX channel 19957 (1710.7MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3421.40	-48.25	-13.00	-35.25	1.87 H	302	46.59	-94.84
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3421.40	-47.02	-13.00	-34.02	1.59 V	37	47.82	-94.84

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 20175 (1732.5MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-47.28	-13.00	-34.28	1.84 H	301	47.24	-94.52
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-46.80	-13.00	-33.80	1.62 V	37	47.72	-94.52

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 20393 (1754.3MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3508.60	-47.72	-13.00	-34.72	1.88 H	304	46.42	-94.14
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3508.60	-46.28	-13.00	-33.28	1.63 V	36	47.86	-94.14

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

LTE Band 4, Channel Bandwidth 5MHz

Mode	TX channel 19975 (1712.5MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3425.00	-47.64	-13.00	-34.64	1.92 H	302	47.18	-94.82
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3425.00	-46.04	-13.00	-33.04	1.55 V	34	48.78	-94.82

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 20175 (1732.5MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-47.95	-13.00	-34.95	1.91 H	302	46.57	-94.52
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-46.65	-13.00	-33.65	1.57 V	35	47.87	-94.52

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 20375 (1752.5MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3505.00	-46.42	-13.00	-33.42	1.85 H	306	47.74	-94.16
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3505.00	-45.63	-13.00	-32.63	1.59 V	34	48.53	-94.16

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

LTE Band 4, Channel Bandwidth 20MHz

Mode	TX channel 20050 (1720.0MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-47.71	-13.00	-34.71	1.83 H	299	47.02	-94.73
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-46.39	-13.00	-33.39	1.55 V	38	48.34	-94.73

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 20175 (1732.5MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-46.73	-13.00	-33.73	1.86 H	304	47.79	-94.52
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-46.41	-13.00	-33.41	1.56 V	40	48.11	-94.52

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 20300 (1745.0MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-47.54	-13.00	-34.54	1.92 H	306	46.75	-94.29
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-45.88	-13.00	-32.88	1.63 V	38	48.41	-94.29

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

LTE Band 7, Channel Bandwidth 5MHz

Mode	TX channel 20775 (2502.5MHz)	Frequency Range	1GHz ~ 26GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5005.00	-42.03	-25.00	-17.03	2.41 H	56	47.88	-89.91
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5005.00	-40.80	-25.00	-15.80	2.20 V	63	49.11	-89.91

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 21100 (2535.0MHz)	Frequency Range	1GHz ~ 26GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5070.00	-41.57	-25.00	-16.57	2.35 H	55	48.01	-89.58
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5070.00	-39.76	-25.00	-14.76	2.17 V	63	49.82	-89.58

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 21425 (2567.5MHz)	Frequency Range	1GHz ~ 26GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5135.00	-40.92	-25.00	-15.92	2.45 H	56	48.51	-89.43
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5135.00	-39.15	-25.00	-14.15	2.17 V	61	50.28	-89.43

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

LTE Band 7, Channel Bandwidth 20MHz

Mode	TX channel 20850 (2510.0MHz)	Frequency Range	1GHz ~ 26GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5020.00	-41.27	-25.00	-16.27	2.46 H	57	48.59	-89.86
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5020.00	-40.15	-25.00	-15.15	2.16 V	63	49.71	-89.86

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 21100 (2535.0MHz)	Frequency Range	1GHz ~ 26GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5070.00	-41.09	-25.00	-16.09	2.46 H	53	48.49	-89.58
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5070.00	-39.91	-25.00	-14.91	2.24 V	60	49.67	-89.58

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 21350 (2560.0MHz)	Frequency Range	1GHz ~ 26GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5120.00	-40.63	-25.00	-15.63	2.39 H	58	48.76	-89.39
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5120.00	-39.34	-25.00	-14.34	2.22 V	63	50.05	-89.39

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

LTE Band 12, Channel Bandwidth 1.4MHz

Mode	TX channel 23017 (699.7MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1399.40	-53.05	-13.00	-40.05	2.11 H	335	49.03	-102.08
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1399.40	-55.33	-13.00	-42.33	1.72 V	128	46.75	-102.08

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 23095 (707.5MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-52.55	-13.00	-39.55	2.11 H	332	49.53	-102.08
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-54.82	-13.00	-41.82	1.67 V	126	47.26	-102.08

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 23173 (715.3MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1430.60	-52.03	-13.00	-39.03	2.14 H	337	50.07	-102.10
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1430.60	-54.52	-13.00	-41.52	1.68 V	125	47.58	-102.10

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

LTE Band 12, Channel Bandwidth 5MHz

Mode	TX channel 23035 (701.5MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1403.00	-52.51	-13.00	-39.51	2.06 H	337	49.57	-102.08
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1403.00	-55.49	-13.00	-42.49	1.73 V	130	46.59	-102.08

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 23095 (707.5MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-53.19	-13.00	-40.19	2.08 H	339	48.89	-102.08
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-54.25	-13.00	-41.25	1.74 V	133	47.83	-102.08

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 23155 (713.5MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1427.00	-54.70	-13.00	-41.70	1.70 H	130	47.39	-102.09
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1427.00	-54.70	-13.00	-41.70	1.70 V	130	47.39	-102.09

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

LTE Band 12, Channel Bandwidth 10MHz

Mode	TX channel 23060 (704.0MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1408.00	-52.45	-13.00	-39.45	2.16 H	338	49.64	-102.09
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1408.00	-54.71	-13.00	-41.71	1.70 V	129	47.38	-102.09

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 23095 (707.5MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-52.43	-13.00	-39.43	2.18 H	339	49.65	-102.08
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-55.02	-13.00	-42.02	1.74 V	128	47.06	-102.08

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 23130 (711.0MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1422.00	-52.25	-13.00	-39.25	2.09 H	337	49.84	-102.09
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1422.00	-54.25	-13.00	-41.25	1.71 V	126	47.84	-102.09

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

LTE Band 13, Channel Bandwidth 5MHz

Mode	TX channel 23205 (779.5MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1559.00	-43.73	-40.00	-3.73	2.15 H	310	56.35	-100.08
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1559.00	-46.25	-40.00	-6.25	2.05 V	199	53.83	-100.08

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 23230 (782.0MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1564.00	-43.23	-40.00	-3.23	2.13 H	313	56.86	-100.09
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1564.00	-45.48	-40.00	-5.48	2.07 V	198	54.61	-100.09

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 23255 (784.5MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1569.00	-42.73	-40.00	-2.73	2.11 H	317	57.37	-100.10
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1569.00	-45.82	-40.00	-5.82	2.09 V	203	54.28	-100.10

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

LTE Band 13, Channel Bandwidth 10MHz

Mode	TX channel 23230 (782.0MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1564.00	-43.21	-40.00	-3.21	2.19 H	314	56.88	-100.09
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1564.00	-45.60	-40.00	-5.60	2.08 V	200	54.49	-100.09

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

LTE Band 17, Channel Bandwidth 5MHz

Mode	TX channel 23755 (706.5MHz)	Frequency Range	1GHz ~ 8GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1413.00	-55.39	-13.00	-42.39	2.22 H	147	46.70	-102.09
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1413.00	-53.59	-13.00	-40.59	1.78 V	12	48.50	-102.09

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 23790 (710.0MHz)	Frequency Range	1GHz ~ 8GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1420.00	-55.87	-13.00	-42.87	2.26 H	151	46.22	-102.09
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1420.00	-53.75	-13.00	-40.75	1.74 V	15	48.34	-102.09

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 23825 (713.5MHz)	Frequency Range	1GHz ~ 8GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1427.00	-56.17	-13.00	-43.17	2.23 H	149	45.92	-102.09
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1427.00	-54.13	-13.00	-41.13	1.76 V	13	47.96	-102.09

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

LTE Band 17, Channel Bandwidth 10MHz

Mode	TX channel 23780 (709.0MHz)	Frequency Range	1GHz ~ 8GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1418.00	-56.04	-13.00	-43.04	2.20 H	144	46.05	-102.09
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1418.00	-54.54	-13.00	-41.54	1.83 V	10	47.55	-102.09

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 23790 (710.0MHz)	Frequency Range	1GHz ~ 8GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1420.00	-55.39	-13.00	-42.39	2.22 H	148	46.70	-102.09
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1420.00	-53.54	-13.00	-40.54	1.78 V	14	48.55	-102.09

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 23800 (711.0MHz)	Frequency Range	1GHz ~ 8GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1422.00	-56.00	-13.00	-43.00	2.18 H	150	46.09	-102.09
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1422.00	-54.43	-13.00	-41.43	1.74 V	10	47.66	-102.09

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

LTE Band 38, Channel Bandwidth 5MHz

Mode	TX channel 37775 (2572.5MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5145.00	-42.06	-25.00	-17.06	1.45 H	256	47.40	-89.46
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5145.00	-41.36	-25.00	-16.36	2.36 V	334	48.10	-89.46

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 38000 (2595.0MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5190.00	-43.15	-25.00	-18.15	1.44 H	255	46.43	-89.58
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5190.00	-41.76	-25.00	-16.76	2.32 V	331	47.82	-89.58

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 38225 (2617.5MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5235.00	-43.38	-25.00	-18.38	1.41 H	255	46.36	-89.74
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5235.00	-42.29	-25.00	-17.29	2.36 V	337	47.45	-89.74

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

LTE Band 38, Channel Bandwidth 20MHz

Mode	TX channel 37850 (2580.0MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5160.00	-43.11	-25.00	-18.11	1.46 H	259	46.38	-89.49
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5160.00	-41.92	-25.00	-16.92	2.38 V	336	47.57	-89.49

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 38000 (2595.0MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5190.00	-42.42	-25.00	-17.42	1.49 H	255	47.16	-89.58
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5190.00	-41.25	-25.00	-16.25	2.37 V	331	48.33	-89.58

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 38150 (2610.0MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5220.00	-43.45	-25.00	-18.45	1.48 H	255	46.23	-89.68
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5220.00	-42.02	-25.00	-17.02	2.41 V	334	47.66	-89.68

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

LTE Band 41, Channel Bandwidth 5MHz

Mode	TX channel 39675 (2498.5MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4997.00	-29.23	-25.00	-4.23	1.49 H	266	60.72	-89.95
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4997.00	-27.79	-25.00	-2.79	1.57 V	350	62.16	-89.95

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 40620 (2593.0MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5186.00	-30.24	-25.00	-5.24	1.46 H	269	59.33	-89.57
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5186.00	-27.09	-25.00	-2.09	1.35 V	303	62.48	-89.57

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 41565 (2687.5MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5375.00	-30.57	-25.00	-5.57	1.47 H	268	58.94	-89.51
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5375.00	-27.56	-25.00	-2.56	1.30 V	339	61.95	-89.51

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

LTE Band 41, Channel Bandwidth 20MHz

Mode	TX channel 39750 (2506.0MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5012.00	-30.67	-25.00	-5.67	1.55 H	269	59.21	-89.88
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5012.00	-27.09	-25.00	-2.09	1.42 V	346	62.79	-89.88

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 40620 (2593.0MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5186.00	-31.07	-25.00	-6.07	1.45 H	260	58.50	-89.57
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5186.00	-27.03	-25.00	-2.03	1.36 V	340	62.54	-89.57

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 41490 (2680.0MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5360.00	-30.23	-25.00	-5.23	1.50 H	263	59.35	-89.58
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5360.00	-27.48	-25.00	-2.48	1.38 V	338	62.10	-89.58

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

LTE Band 42, Channel Bandwidth 5MHz

Mode	TX channel 42115 (3452.5MHz)	Frequency Range	1GHz ~ 40GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	6905.00	-44.35	-13.00	-31.35	3.25 H	130	41.66	-86.01
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	6905.00	-42.95	-13.00	-29.95	2.54 V	268	43.06	-86.01

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 42590 (3500.0MHz)	Frequency Range	1GHz ~ 40GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7000.00	-42.83	-13.00	-29.83	3.29 H	140	42.07	-84.90
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7000.00	-41.39	-13.00	-28.39	2.55 V	270	43.51	-84.90

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 43065 (3547.5MHz)	Frequency Range	1GHz ~ 40GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7095.00	-43.23	-13.00	-30.23	3.30 H	139	41.21	-84.44
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7095.00	-41.29	-13.00	-28.29	2.50 V	260	43.15	-84.44

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

LTE Band 42, Channel Bandwidth 20MHz

Mode	TX channel 42190 (3460.0MHz)	Frequency Range	1GHz ~ 40GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	6920.00	-42.68	-13.00	-29.68	3.42 H	130	43.15	-85.83
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	6920.00	-42.12	-13.00	-29.12	2.39 V	264	43.71	-85.83

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 42590 (3500.0MHz)	Frequency Range	1GHz ~ 40GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7000.00	-40.89	-13.00	-27.89	3.40 H	125	44.01	-84.90
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7000.00	-40.39	-13.00	-27.39	2.39 V	259	44.51	-84.90

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 42990 (3540.0MHz)	Frequency Range	1GHz ~ 40GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7080.00	-41.04	-13.00	-28.04	3.35 H	123	43.40	-84.44
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7080.00	-40.32	-13.00	-27.32	2.33 V	252	44.12	-84.44

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

LTE Band 66, Channel Bandwidth 1.4MHz

Mode	TX channel 131979 (1710.7MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3421.40	-38.55	-13.00	-25.55	1.79 H	335	56.29	-94.84
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3421.40	-37.63	-13.00	-24.63	2.54 V	204	57.21	-94.84

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 132322 (1745.0MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-38.27	-13.00	-25.27	1.80 H	330	56.02	-94.29
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-36.41	-13.00	-23.41	2.46 V	198	57.88	-94.29

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 132665 (1779.3MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3558.60	-38.30	-13.00	-25.30	1.72 H	332	55.61	-93.91
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3558.60	-36.55	-13.00	-23.55	2.45 V	204	57.36	-93.91

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

LTE Band 66, Channel Bandwidth 5MHz

Mode	TX channel 131997 (1712.5MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3425.00	-38.38	-13.00	-25.38	1.81 H	334	56.44	-94.82
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3425.00	-36.84	-13.00	-23.84	2.49 V	205	57.98	-94.82

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 132322 (1745.0MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-37.82	-13.00	-24.82	1.77 H	335	56.47	-94.29
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-36.24	-13.00	-23.24	2.44 V	201	58.05	-94.29

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 132647 (1777.5MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3555.00	-37.63	-13.00	-24.63	1.71 H	330	56.29	-93.92
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3555.00	-35.76	-13.00	-22.76	2.50 V	204	58.16	-93.92

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

LTE Band 66, Channel Bandwidth 20MHz

Mode	TX channel 132072 (1720.0MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-39.58	-13.00	-26.58	1.74 H	335	55.15	-94.73
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-36.79	-13.00	-23.79	2.53 V	198	57.94	-94.73

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 132322 (1745.0MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-38.42	-13.00	-25.42	1.70 H	337	55.87	-94.29
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-37.41	-13.00	-24.41	2.50 V	203	56.88	-94.29

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 132572 (1770.0MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3540.00	-38.69	-13.00	-25.69	1.70 H	332	55.29	-93.98
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3540.00	-37.11	-13.00	-24.11	2.46 V	201	56.87	-93.98

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

LTE Band 71, Channel Bandwidth 5MHz

Mode	TX channel 133147 (665.5MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1331.00	-53.51	-13.00	-40.51	1.92 H	180	48.79	-102.30
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1331.00	-52.71	-13.00	-39.71	2.63 V	229	49.59	-102.30

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 133297 (680.5MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1361.00	-53.54	-13.00	-40.54	1.87 H	181	48.69	-102.23
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1361.00	-51.74	-13.00	-38.74	2.64 V	226	50.49	-102.23

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 133447 (695.5MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1391.00	-53.90	-13.00	-40.90	1.95 H	179	48.22	-102.12
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1391.00	-52.98	-13.00	-39.98	2.64 V	229	49.14	-102.12

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

LTE Band 71, Channel Bandwidth 20MHz

Mode	TX channel 133222 (673.0MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1346.00	-53.16	-13.00	-40.16	1.97 H	175	49.11	-102.27
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1346.00	-52.11	-13.00	-39.11	2.71 V	224	50.16	-102.27

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 133297 (680.5MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1361.00	-53.79	-13.00	-40.79	1.99 H	170	48.44	-102.23
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1361.00	-52.68	-13.00	-39.68	2.77 V	227	49.55	-102.23

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 133372 (688.0MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1376.00	-54.22	-13.00	-41.22	1.95 H	174	47.94	-102.16
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1376.00	-52.28	-13.00	-39.28	2.69 V	230	49.88	-102.16

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---