



TEST REPORT

Report number : Z101C-14016

Issue date : April 22, 2014

The device, as described herewith, was tested pursuant to applicable test procedure and complies with the requirements of;

FCC Part15 Subpart C

The test results are traceable to the international or national standards.

Applicant	: KYOCERA Corporation
Equipment under test (EUT)	: Mobile Phone
Model number	: KYY23
FCC ID	: JOYKYY23

Date of test : March 28, April 3, 12, 2014
Test place : TÜV SÜD Zacta Ltd. Yonezawa Testing Center
4149-7 Hachimanpara 5-chome
Yonezawa-shi Yamagata 992-1128 Japan
Phone: +81-238-28-2880 Fax: +81-238-28-2888
Test results : Complied

The results in this report are applicable only to the equipment tested.
This report shall not be re-produced except in full without the written approval of TÜV SÜD Zacta Ltd.
This test report must not be used by client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Tested by : N. Toda Taiki Watanabe
Nobuyuki Toda Taiki Watanabe

Authorized by : Eiji Akiba
Eiji Akiba
Deputy General Manager of technical Department

NVLAP®
NVLAP LAB CODE 200306-0

Table of contents

	Page
1. Summary of Test	3
1.1 Purpose of test	3
1.2 Standards	3
1.3 List of applied test to the EUT	3
1.4 Modification to the EUT by laboratory	3
2. Equipment Under Test	4
2.1 General Description of equipment	4
2.2 EUT information	4
2.3 Variation of the family model(s)	4
2.4 Description of Test mode	5
2.5 Operating mode	5
3. Configuration of equipment	6
3.1 Equipment(s) used	6
3.2 Cable(s) used	6
3.3 System configuration	6
4. Occupied Bandwidth	7
4.1 Measurement procedure	7
4.2 Limit	7
4.3 Measurement result	7
4.4 Trace data	8
5. Operation within the band 13.110-14.010MHz	9
5.1 Measurement procedure	9
5.2 Calculation method	9
5.3 Limit	10
5.4 Test data	10
5.5 Trace data	11
6. Radiated Emissions	13
6.1 Measurement procedure	13
6.2 Calculation method	14
6.3 Limit	15
6.4 Test data	16
7. Frequency Tolerance	17
7.1 Measurement procedure	17
7.2 Limit	17
7.3 Test data	18
8. AC Power Line Conducted Emissions	19
8.1 Measurement procedure	19
8.2 Calculation method	19
8.3 Limit	19
8.4 Test data	20
9. Uncertainty of measurement	22
10. Laboratory description	23
Appendix A. Test equipment	24

1. Summary of Test

1.1 Purpose of test

It is the original test in order to verify conformance to FCC Part 15 Subpart C.

1.2 Standards

CFR47 FCC Part 15 Subpart C

1.2.1 Test Methods

ANSI C63.4-2003

1.2.2 Deviation from standards

None

1.3 List of applied test to the EUT

Test items Section	Classification of EUT	Condition	Result
RSS-Gen 4.6.1	Occupied Bandwidth	Conducted	PASS
15.209 15.225 (a)(b)(c)(d)	Operation within the band 13.110-14.010MHz	Radiated	PASS
15.209 15.225 (d)	Transmitter Radiated Spurious Emissions	Radiated	PASS
15.225 (e)	Frequency Tolerance	Conducted	PASS
15.207	AC Power Line Conducted Emissions	Conducted	PASS

1.3.1 Test set up

Table-Top

1.4 Modification to the EUT by laboratory

None

2. Equipment Under Test

2.1 General Description of equipment

EUT is the Mobile Phone.

2.2 EUT information

Applicant	:	KYOCERA Corporation Yokohama Office2-1-1 Kagahara, Tsuzuki-ku, Yokohama-shi, Kanagawa, Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314
Equipment under test	:	Mobile Phone
Trade name	:	Kyocera
Model number	:	KYY23
Serial number	:	N/A
EUT condition	:	Pre-production
Power ratings	:	Battery: DC 3.8V
Size	:	Qi mounted type: (W) 70.3 × (D) 10.3 × (H) 140.3 mm Qi non-mounted type: (W) 70.3 × (D) 9.9 × (H) 140.3 mm
Environment	:	Indoor and Outdoor USE
Terminal limitation	:	-20°C to 60°C
RF Specification Frequency range	:	13.56MHz
Modulation method	:	ASK
Antenna type	:	Loop antenna

2.3 Variation of the family model(s)

KYY23 has Qi mounted type and Qi non-mounted type.

2.4 Description of Test mode

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in Z axis and the worst case recorded.

Qi non-mounted type is measured only radiation emission.

2.5 Operating mode

[Transmit mode]

- i) NFC test program setup to the DM tool
- ii) Start test mode

3. Configuration of equipment

3.1 Equipment(s) used

No.	Equipment	Company	Model No.	Serial No.	FCC ID / DoC	Comment
1	Mobile Phone	KYOCERA	KYY23	N/A	JOYKYY23	EUT
2	AC Adapter	au	N/A	N/A	-	*


*: AC power line Conducted Emission Test.

3.2 Cable(s) used

No.	Cable	Length[m]	Shield	Connector	Comment
a	Micro USB cable	1.1	Yes	Metal	*

*: AC power line Conducted Emission Test.

3.3 System configuration

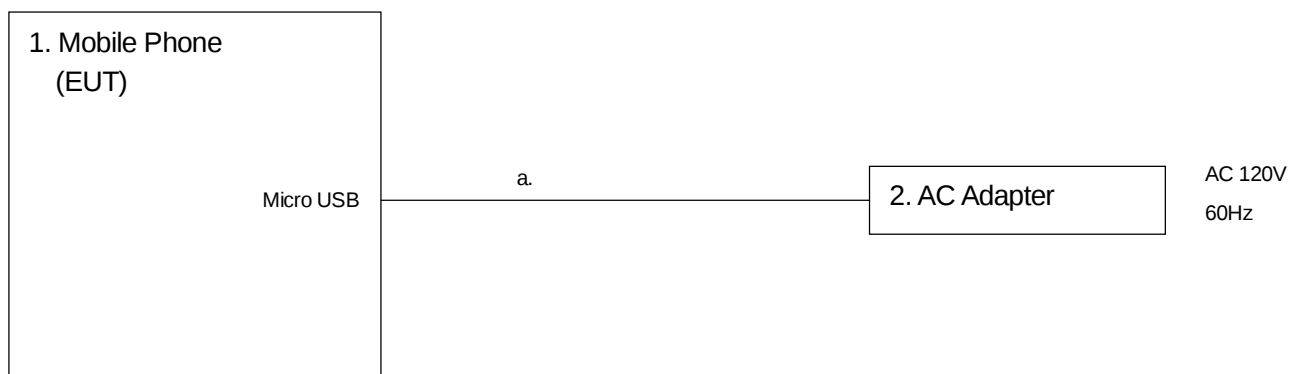

Note: Numbers assigned to equipment or cables on this diagram correspond to the list in "3.1 Equipment(s) used" and "3.2 Cable(s) used".

4. Occupied Bandwidth

4.1 Measurement procedure [IC RSS-Gen 4.6.1]

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99% bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

The spectrum analyzer is set to;

- RBW=1kHz, VBW=3kHz, Span=100kHz, Sweep=auto, Detector=Sample


The EUT was set to operate with following conditions.

- 13.56MHz

The test mode of EUT is as follows.

- Transmit mode

- Test configuration

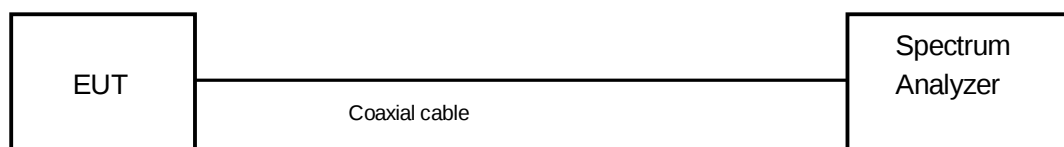

4.2 Limit

None

4.3 Measurement result

Date : Mar. 28, 2014
 Temperature : 22.0 [°C]
 Humidity : 46.0 [%]
 Test place : Shielded room No.4


Test personnel :

Tested by :

Nobuyuki Toda

Frequency [MHz]	Occupied bandwidth [kHz]
13.56	12.6794

4.4 Trace data

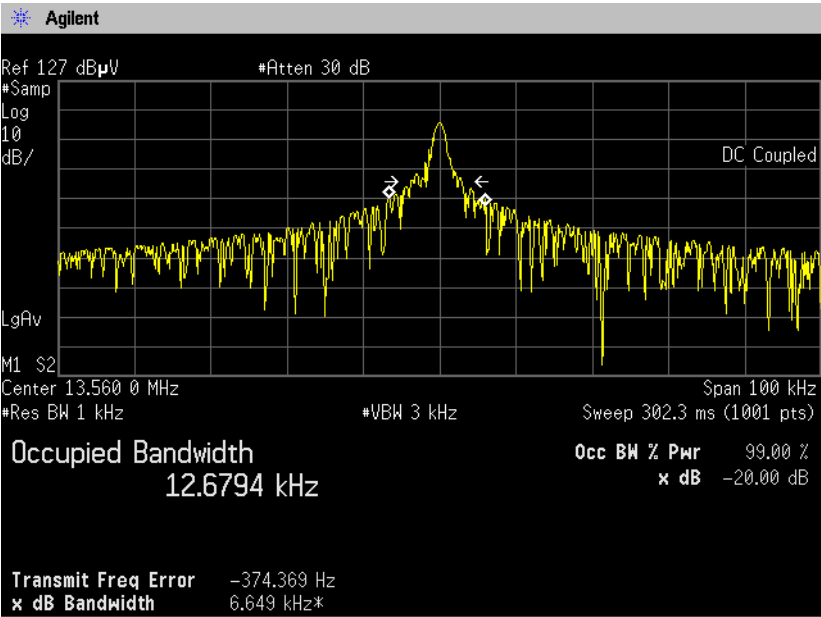

5. Operation within the band 13.110-14.010MHz

5.1 Measurement procedure [FCC 15.209, 15.225 (a)(b)(c)(d)]


Test was applied by following conditions.

Test method	: ANSI C63.4
Frequency range	: 13.110MHz to 14.010MHz
Test place	: 3m Semi-anechoic chamber
EUT was placed on	: FRP table / (W)2.0m × (D)1.0m × (H)0.8m
Antenna distance	: 3m

Test receiver setting	
- Detector	: Quasi-peak
- Bandwidth	: 9kHz

EUT operating mode is selected to emit the maximum noise. Overall frequency range is investigated with spectrum analyzer using peak detector. Then, emission measurements frequency range 13.110MHz to 14.010MHz were performed with test receiver in above setting. The turntable and the Loop antenna are rotated by 360 degrees and stopped at azimuth of producing the maximum emission. Sufficient time for EUT, peripherals and test equipment is provided in order for them to warm up to their normal operating condition.

- Test configuration

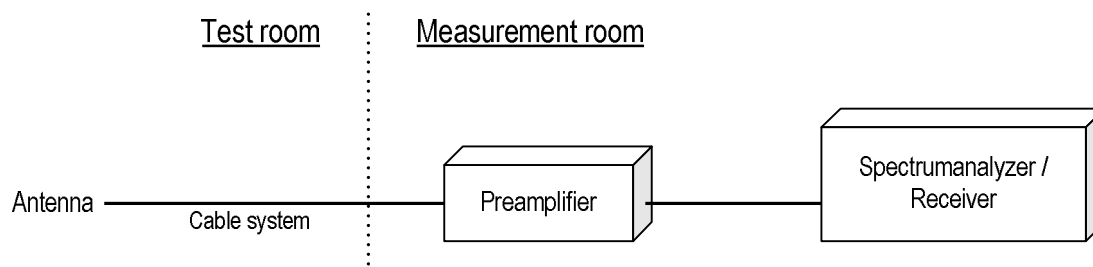

5.2 Calculation method

Emission level = Reading + (Ant. factor + Cable system loss – Amp. Gain)

Margin = Limit – Emission level

5.3 Limit

- (a) The field strength of any emissions within the band 13.553-13.567MHz shall not exceed 15,848uV/m at 30m.
- (b) Within the band 13.410-13.553MHz and 13.567-13.710MHz, the field strength of any emissions shall not exceed 334uV/m at 30m.
- (c) Within the band 13.110-13.410MHz and 13.710-14.010MHz, the field strength of any emissions shall not exceed 106uV/m at 30m.
- (d) The field strength of any emissions appearing outside of the 13.110-14.010MHz and shall not exceed the general radiated emission limits in FCC 15.209.

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level [dBuV/m] = 20log Emission [uV/m]
3. Measurements were corrected to 30m using $40\log(3/30) = -40.0\text{dB}$


5.4 Test data

Date	: Apr. 3, 2014	Test personnel	:
Temperature	: 23.0 [°C]	Tested by	:
Humidity	: 26.0 [%]		
Test place	: 3m Semi-anechoic chamber		<u>Nobuyuki Toda</u>

Frequency range (MHz)	Frequency (MHz)	Level		Limit (dBuV/m)	Margin (dB)	Result
		Measured at 3m (dBuV/m)	Measured at 30m (dBuV/m)			
13.553-13.567	13.560	43.1	3.1	84.0	80.9	PASS
13.41-13.553	13.553	29.0	-11	50.5	61.5	PASS
13.567-13.71	13.568	24.9	-15.1	50.5	65.6	PASS
13.11-13.41	13.314	18.7	-21.3	40.5	61.8	PASS
13.71-14.01	13.802	18.7	-21.3	40.5	61.8	PASS
12.66-13.11	13.082	18.7	-21.3	29.5	50.8	PASS
14.01-14.46	14.169	18.8	-21.2	29.5	50.7	PASS

5.5 Trace data


***** RADIATED EMISSION *****
 << 3m Semi-anechoic chamber >>

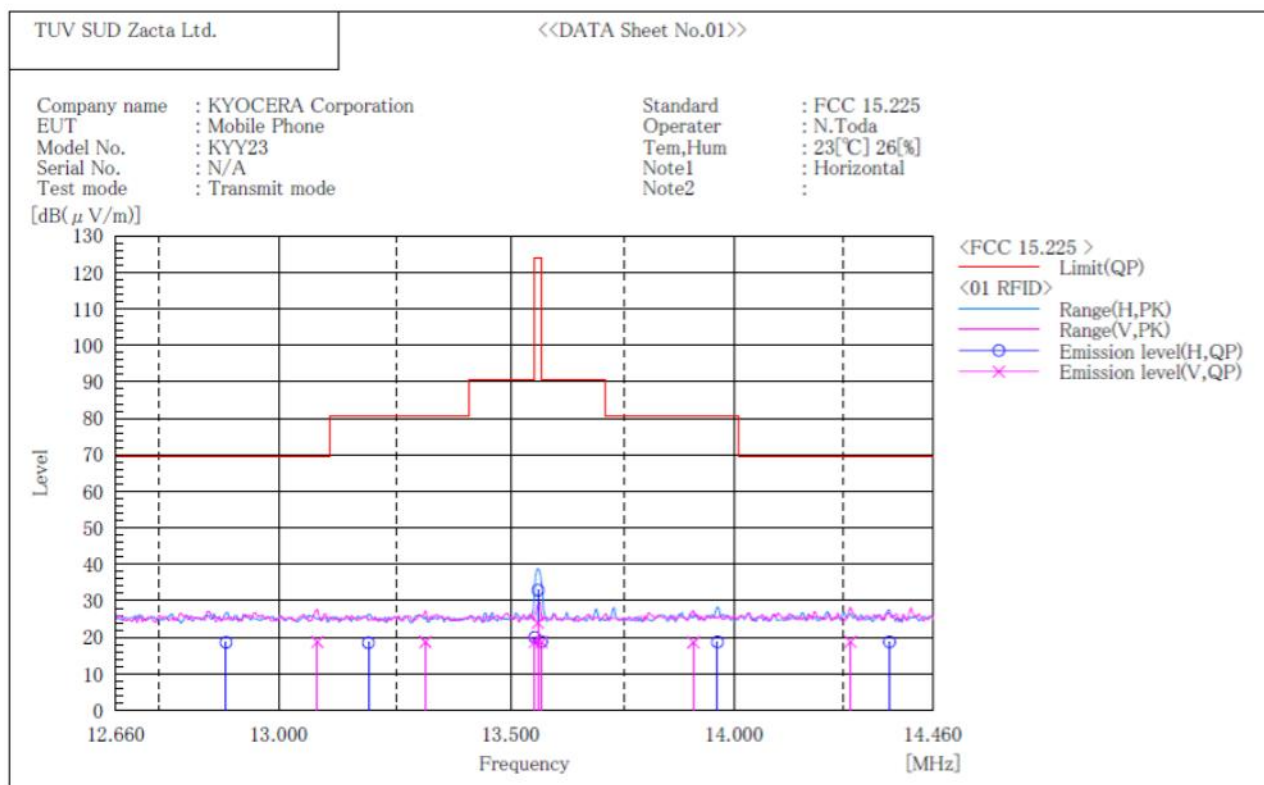

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c. f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	13.560	V	33.7	-9.7	24.0	124.0	100.0	100.0	75.0	
2	13.553	V	28.4	-9.7	18.7	90.5	71.8	100.0	75.0	
3	13.568	V	28.4	-9.7	18.7	90.5	71.8	100.0	75.0	
4	13.314	V	28.5	-9.8	18.7	80.5	61.8	100.0	283.0	
5	13.907	V	28.3	-9.7	18.6	80.5	61.9	100.0	220.0	
6	13.082	V	28.5	-9.8	18.7	69.5	50.8	100.0	296.0	
7	14.267	V	28.4	-9.6	18.8	69.5	50.7	100.0	5.0	
8	13.560	H	42.6	-9.7	32.9	124.0	91.1	100.0	261.0	
9	13.553	H	29.7	-9.7	20.0	90.5	70.5	100.0	261.0	
10	13.568	H	28.5	-9.7	18.8	90.5	71.7	100.0	261.0	
11	13.191	H	28.3	-9.8	18.5	80.5	62.0	100.0	189.0	
12	13.962	H	28.3	-9.6	18.7	80.5	61.8	100.0	224.0	
13	12.889	H	28.4	-9.8	18.6	69.5	50.9	100.0	311.0	
14	14.358	H	28.3	-9.6	18.7	69.5	50.8	100.0	21.0	

***** RADIATED EMISSION *****
 << 3m Semi-anechoic chamber >>

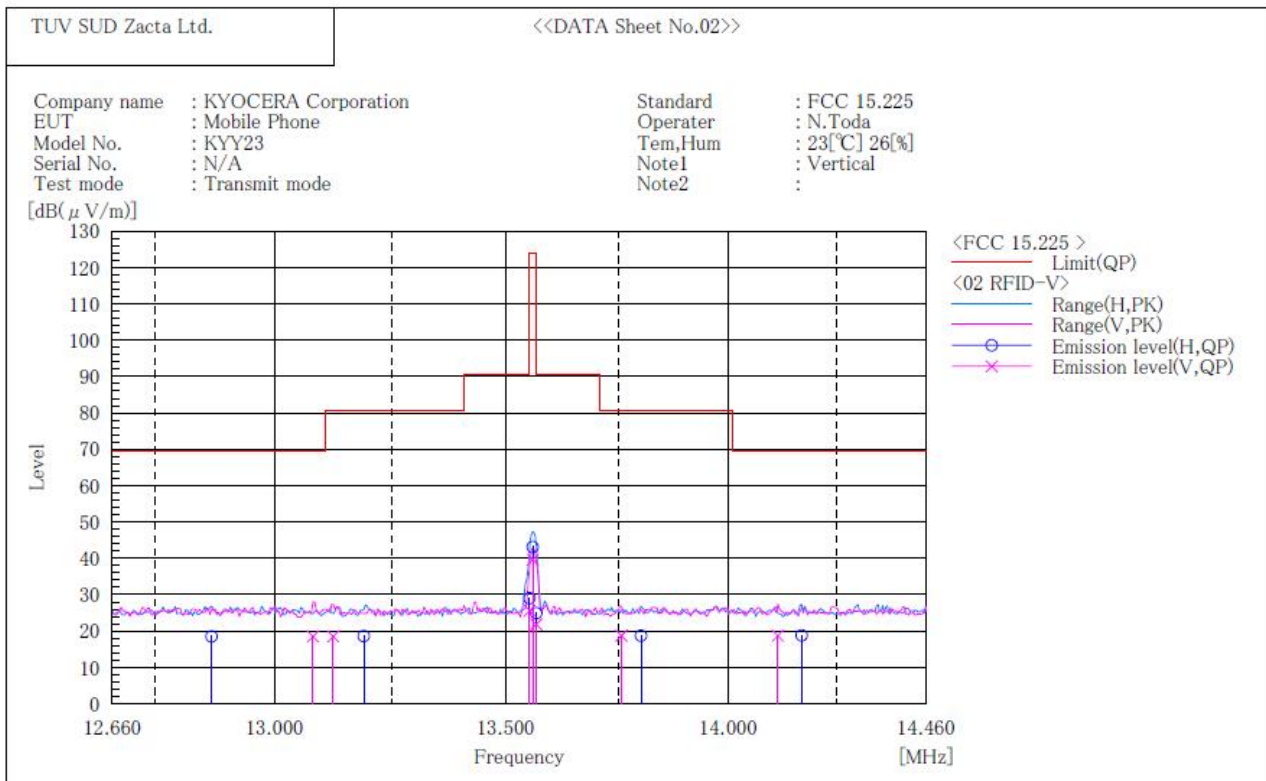

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c. f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	13.560	V	49.3	-9.7	39.6	124.0	84.4	100.0	269.0	
2	13.553	V	35.3	-9.7	25.6	90.5	64.9	100.0	269.0	
3	13.568	V	31.5	-9.7	21.8	90.5	68.7	100.0	269.0	
4	13.125	V	28.3	-9.8	18.5	80.5	62.0	100.0	291.0	
5	13.758	V	28.4	-9.7	18.7	80.5	61.8	100.0	236.0	
6	13.082	V	28.3	-9.8	18.5	69.5	51.0	100.0	107.0	
7	14.114	V	28.3	-9.6	18.7	69.5	50.8	100.0	206.0	
8	13.560	H	52.8	-9.7	43.1	124.0	80.9	100.0	2.0	
9	13.553	H	38.7	-9.7	29.0	90.5	61.5	100.0	2.0	
10	13.568	H	34.6	-9.7	24.9	90.5	65.6	100.0	2.0	
11	13.191	H	28.4	-9.8	18.6	80.5	61.9	100.0	46.0	
12	13.802	H	28.4	-9.7	18.7	80.5	61.8	100.0	120.0	
13	12.867	H	28.3	-9.8	18.5	69.5	51.0	100.0	95.0	
14	14.169	H	28.4	-9.6	18.8	69.5	50.7	100.0	127.0	

6. Radiated Emissions

6.1 Measurement procedure [FCC 15.209, 15.225 (d)]


Test was applied by following conditions.

Test method	: ANSI C63.4
Frequency range	: 9kHz to 30MHz
Test place	: 3m Semi-anechoic chamber
EUT was placed on	: FRP table / (W)2.0m × (D)1.0m × (H)0.8m
Antenna distance	: 3m

Test receiver setting	
- Detector	: Average (9kHz-90kHz, 110kHz-490kHz), Quasi-peak
- Bandwidth	: 200Hz, 9kHz

EUT operating mode is selected to emit the maximum noise. Overall frequency range is investigated with spectrum analyzer using peak detector. Then, emission measurements up to 30MHz were performed with test receiver in above setting. The turntable and the Loop antenna are rotated by 360 degrees and stopped at azimuth of producing the maximum emission. Sufficient time for EUT, peripherals and test equipment is provided in order for them to warm up to their normal operating condition.

- Test configuration

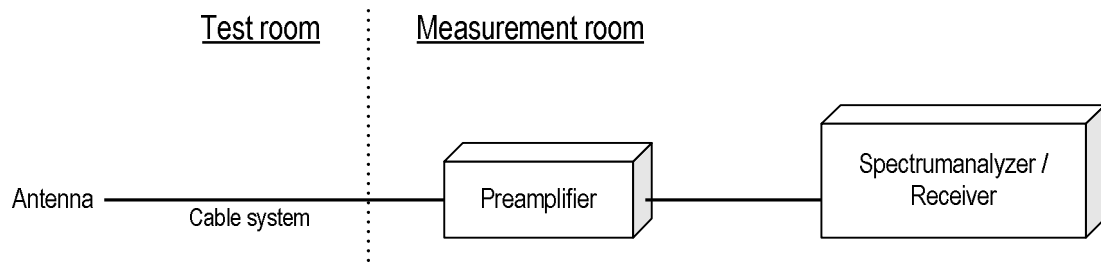


Test was applied by following conditions.

Test method	: ANSI C63.4
Frequency range	: 30MHz to 1000MHz
Test place	: 3m Semi-anechoic chamber
EUT was placed on	: FRP table / (W)2.0m × (D)1.0m × (H)0.8m
Antenna distance	: 3m

Test receiver setting	
- Detector	: Quasi-peak
- Bandwidth	: 120kHz

EUT operating mode is selected to emit the maximum noise. Overall frequency range is investigated with spectrum analyzer using peak detector. Then, emission measurements up to 1000MHz were performed with test receiver in above setting. In order to find the maximum emissions, antenna is adjusted between 1m and 4m in height and varied its polarization (horizontal and vertical), and EUT azimuth was also varied by rotating turntable 0 to 360 degrees. Sufficient time for EUT, peripherals and test equipment is provided in order for them to warm up to their normal operating condition.

- Test configuration

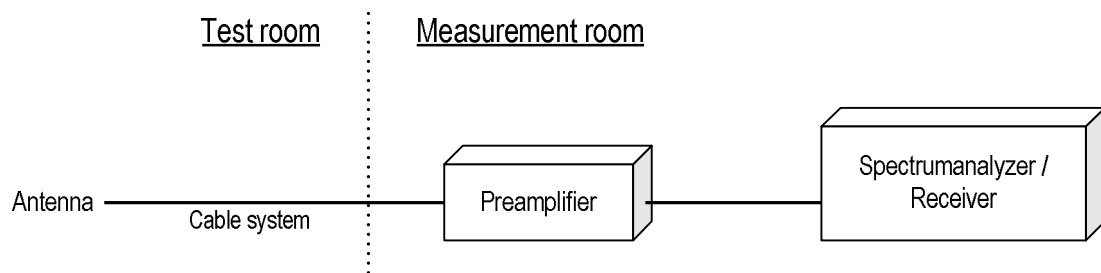

6.2 Calculation method

[9kHz to 150kHz]

Emission level = Reading + (Ant. factor + Cable system loss)

Margin = Limit – Emission level

[150kHz to 1000MHz]

Emission level = Reading + (Ant. factor + Cable system loss – Amp. Gain)

Margin = Limit – Emission level

6.3 Limit

Frequency [MHz]	Field strength		Distance [m]
	[uV/m]	[dBuV/m]	
0.009-0.490	$2400 / F$ [kHz]	$20\log E$ [uV/m]	300
0.490-1.705	$24000 / F$ [kHz]	$20\log E$ [uV/m]	30
1.705-30	30	29.5	30
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level [dBuV/m] = $20\log$ Emission [uV/m]
3. Measurements were corrected to 30m using $40\log (3/30) = -40.0\text{dB}$

6.4 Test data

Date : Apr. 3, 2014 Test personnel :
 Temperature : 23.0 [°C]
 Humidity : 26.0 [%] Tested by :
 Test place : 3m Semi-anechoic chamber Nobuyuki Toda

<Qi mounted type>

[9kHz to 30MHz]

Frequency [MHz]	Reading [dBuV] At 3m	c.f [dB(1/m)]	Result [dBuV/m] At 3m	Result [dBuV/m] At 30m	Limit [dBuV/m] At 30m	Margin [dB]	Result
27.12	25.2	-5.9	19.3	-20.7	29.5	50.2	PASS

[30MHz to 1000MHz]

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]
1	40.680	V	37.2	-8.2	29.0	40.0	11.0	103.0	82.0
2	67.800	V	48.6	-15.5	33.1	40.0	6.9	100.0	115.0
3	94.918	V	40.7	-13.1	27.6	43.5	15.9	100.0	146.0
4	149.162	H	37.5	-6.7	30.8	43.5	12.7	205.0	283.0

Note: Expect for above emissions, no emissions were observed during Radiated testing.

Date : Apr. 12, 2014 Test personnel :
 Temperature : 25.1 [°C]
 Humidity : 23.1 [%] Tested by :
 Test place : 3m Semi-anechoic chamber Taiki Watanabe

<Qi non-mounted type>

[9kHz to 30MHz]

Frequency [MHz]	Reading [dBuV] At 3m	c.f [dB(1/m)]	Result [dBuV/m] At 3m	Result [dBuV/m] At 30m	Limit [dBuV/m] At 30m	Margin [dB]	Result
27.12	25.2	-5.9	19.3	-20.7	29.5	50.2	PASS

[30MHz to 1000MHz]

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]
1	40.680	V	37.0	-8.2	28.8	40.0	11.2	100.0	95.0
2	67.800	V	48.2	-15.5	32.7	40.0	7.3	100.0	118.0
3	94.920	V	42.1	-13.1	29.0	43.5	14.5	100.0	144.0
4	149.160	H	37.0	-6.7	30.3	43.5	13.2	199.0	275.0

Note: Expect for above emissions, no emissions were observed during Radiated testing.

7. Frequency Tolerance

7.1 Measurement procedure [FCC 15.205 (e)]

The EUT was placed inside of a constant temperature chamber as the temperature in the chamber was varied between -30°C and +60°C. The temperature was incremented by 10°C intervals and the unit was allowed to stabilize at each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.


The EUT was set to operate with the following conditions.

- 13.56MHz

The test mode of EUT is as follows.

- Transmit mode

- Test configuration

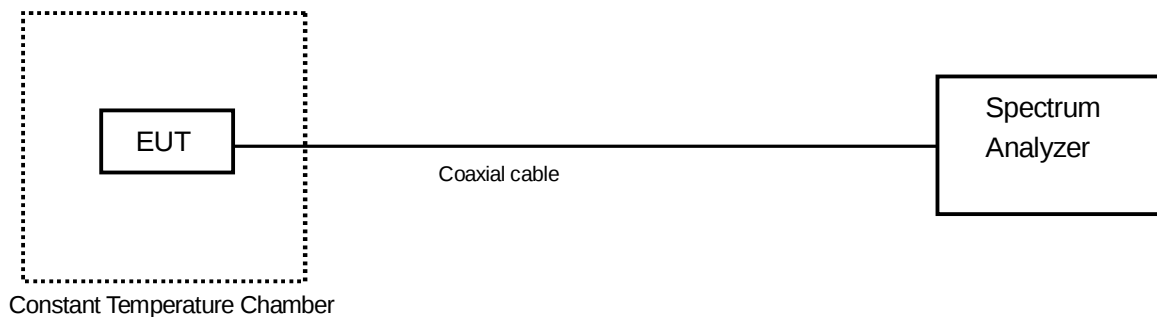

7.2 Limit

The Frequency tolerance of the carrier signal shall be maintained within +/- 0.01% over a temperature variation of -30 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

7.3 Test data

Date : Mar. 28, 2014 Test personnel :
 Temperature : 22.0 [°C]
 Humidity : 46.0 [%] Tested by :
 Test place : Shielded room No.4 Nobuyuki Toda

Reference Frequency: EUT Channel 13.56MHz at 20°C					
Limit: $\pm 0.01\% = \pm 100\text{ppm} = 0.135603\text{MHz}$					
Power Supply [V]	Temperature [°C]	Measurements Frequency [MHz]	Frequency Tolerance [ppm]	Limit [ppm]	Result
3.8	50	13.55993	3.687348266	± 100	PASS
	40	13.5599	1.474939306	± 100	PASS
	30	13.55988	0	± 100	PASS
	20	13.55988	-	± 100	PASS
	10	13.55988	0	± 100	PASS
	0	13.55982	-4.424817919	± 100	PASS
	-10	13.5598	-5.899757225	± 100	PASS
	-20	13.55974	-10.32457514	± 100	PASS
	-30	13.55966	-16.22433237	± 100	PASS
3.23	20	13.55989	0.737469653	± 100	PASS
4.37	20	13.55987	-0.737469653	± 100	PASS

Note. Frequency Tolerance (ppm) = Measurements Frequency (MHz) – Reference Frequency (MHz) / Reference Frequency (MHz) x 1000000

8. AC Power Line Conducted Emissions

8.1 Measurement procedure [FCC 15.207]

Test was applied by following conditions.


Test method	: ANSI C63.4
Frequency range	: 0.15MHz to 30MHz
Test place	: 3m Semi-anechoic chamber
EUT was placed on	: FRP table / (W)2.0m × (D)1.0m × (H)0.8m
Vertical Metal Reference Plane	: (W)2.0m × (H)2.0m 0.4m away from EUT
Test receiver setting	
- Detector	: Quasi-peak, Average
- Bandwidth	: 9kHz

EUT and peripherals are connected to 50Ω/50μH Line Impedance Stabilization Network (LISN) which are connected to reference ground plane, and are placed 80cm away from EUT. Excess of AC power cable is bundled in center.

LISN for peripheral is terminated in 50Ω.

EUT operating mode is selected to emit the maximum noise. Overall frequency range is investigated with spectrum analyzer using peak detector. Maximum emission configuration is determined by manipulating the EUT, peripherals, interconnecting cables. Then, emission measurements are performed with test receiver in above setting to each current-carrying conductor of the mains port. Sufficient time for EUT, peripherals and test equipment is provided in order for them to warm up to their normal operating condition. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits.

- Test configuration

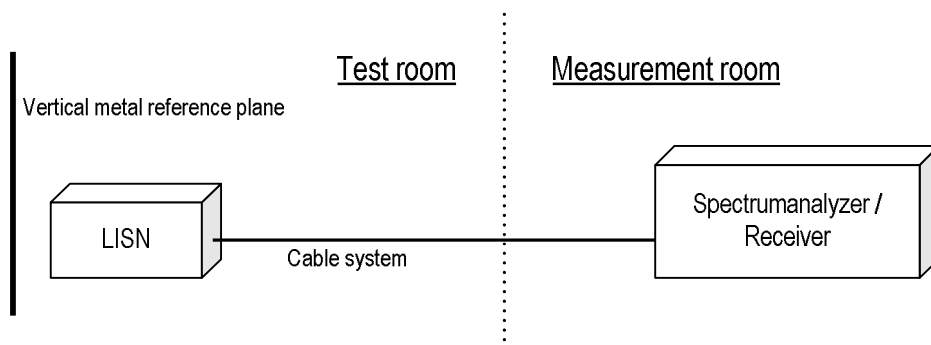

8.2 Calculation method

Emission level = Reading + (LISN. factor + Cable system loss)

Margin = Limit – Emission level


8.3 Limit

Frequency [MHz]	Limit	
	QP [dBuV]	AV [dBuV]
0.15-0.5	66-56*	56-46*
0.5-5	56	46
5-30	60	50

*: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

8.4 Test data [Transmit ON]

***** CONDUCTED EMISSION at MAINS PORT *****
 << 3m Semi-anechoic chamber >>

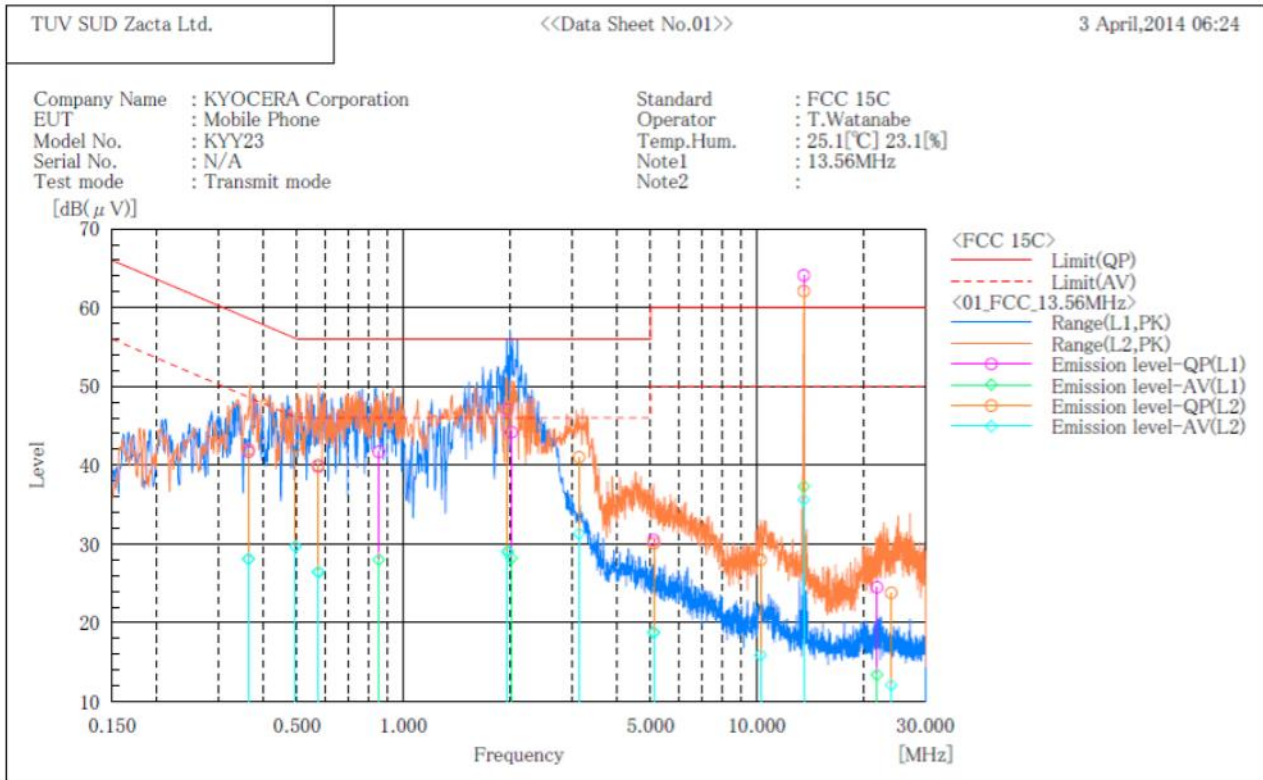

Final Result

--- L1 Phase ---										
No.	Frequency	Reading QP	Reading AV	c. f	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV
	[MHz]	[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]
1	0.364	31.4	17.8	10.3	41.7	28.1	58.6	48.6	16.9	20.5
2	0.574	29.5	16.1	10.3	39.8	26.4	56.0	46.0	16.2	19.6
3	0.851	31.4	17.7	10.3	41.7	28.0	56.0	46.0	14.3	18.0
4	1.970	36.7	18.7	10.4	47.1	29.1	56.0	46.0	8.9	16.9
5	2.019	33.8	17.8	10.4	44.2	28.2	56.0	46.0	11.8	17.8
6	5.100	20.0	8.3	10.5	30.5	18.8	60.0	50.0	29.5	31.2
7	13.560	53.3	26.5	10.8	64.1	37.3	60.0	50.0	-4.1	12.7
8	21.839	13.3	2.2	11.2	24.5	13.4	60.0	50.0	35.5	36.6


--- L2 Phase ---										
No.	Frequency	Reading QP	Reading AV	c. f	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV
	[MHz]	[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]
1	0.364	31.6	17.7	10.4	42.0	28.1	58.6	48.6	16.6	20.5
2	0.495	32.0	19.3	10.4	42.4	29.7	56.1	46.1	13.7	16.4
3	0.574	29.6	16.1	10.4	40.0	26.5	56.0	46.0	16.0	19.5
4	1.972	36.9	18.5	10.4	47.3	28.9	56.0	46.0	8.7	17.1
5	3.138	30.5	20.8	10.5	41.0	31.3	56.0	46.0	15.0	14.7
6	5.103	19.5	8.1	10.6	30.1	18.7	60.0	50.0	29.9	31.3
7	10.230	17.2	5.1	10.8	28.0	15.9	60.0	50.0	32.0	34.1
8	13.563	51.2	24.7	10.9	62.1	35.6	60.0	50.0	-2.1	14.4
9	23.971	12.6	0.9	11.2	23.8	12.1	60.0	50.0	36.2	37.9



Zacta

[Transmit OFF]

***** CONDUCTED EMISSION at MAINS PORT *****
 << 3m Semi-anechoic chamber >>

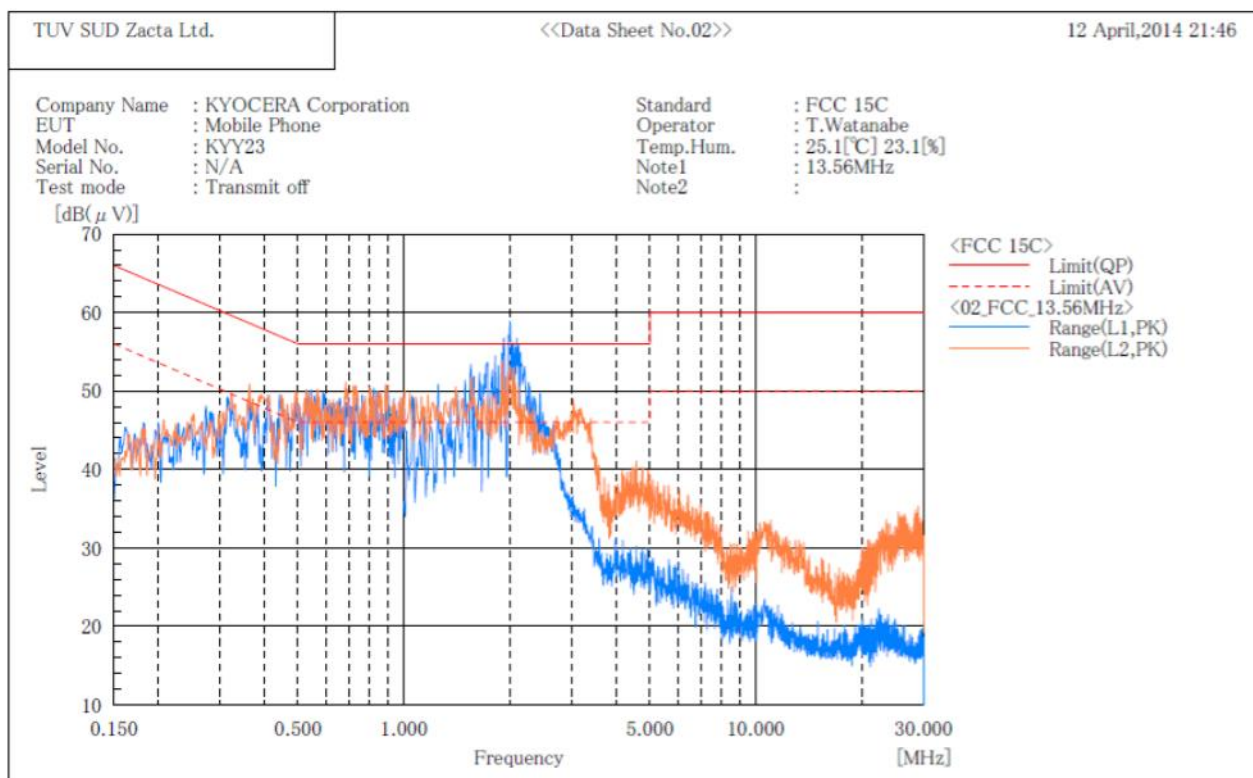

9. Uncertainty of measurement

Expanded uncertainties stated are calculated with a coverage Factor $k=2$.

Please note that these results are not taken into account when determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission at mains port	$\pm 3.0\text{dB}$
Radiated emission (9kHz – 30MHz)	$\pm 4.4\text{dB}$
Radiated emission (30MHz – 1000MHz)	$\pm 4.5\text{dB}$
Radiated emission (1000MHz – 26GHz)	$\pm 3.9\text{dB}$

10. Laboratory description

1. Location:

TÜV SÜD Zacta Ltd. Yonezawa Testing Center
4149-7 Hachimanpara 5-chome Yonezawa-shi Yamagata 992-1128 Japan
Phone: +81-238-28-2880 Fax: +81-238-28-2888

2. Facility filing information:

1) NVLAP accreditation: NVLAP Lab. code: 200306-0

2) VLAC accreditation: Lab. code: VLAC-013

Site name	Radiated emission	Conducted emission for mains port	Conducted emission for telecom port	Radiated emission (CMAD)	Expiry Date
3m Semi-anechoic chamber	VLAC-013	VLAC-013	VLAC-013	-	Jul. 3, 2015
10m Semi-anechoic chamber No.1				VLAC-013	
10m Semi-anechoic chamber No.2				VLAC-013	
Shielded room No.1	-	VLAC-013	-	-	

3) FCC filing:

Site name	Registration Number	Expiry Date
Site 3	91065	Oct.31, 2014
3m Semi-anechoic chamber	540072	Feb. 20, 2017
10m Semi-anechoic chamber No.1		
10m Semi-anechoic chamber No.2		
Shielded room No.1		

4) Industry Canada Oats site filing:

Site name	Sites on file: Oats 3m/10m	Expiry Date
Site 3	4224A-3	Jan. 23, 2015
3m Semi-anechoic chamber	4224A-4	
10m Semi-anechoic chamber No.1	4224A-5	
10m Semi-anechoic chamber No.2	4224A-6	Jan. 15, 2017

5) VCCI site filing:

Site name	Radiated emission	Conducted emission for mains port	Conducted emission for telecom port	Expiry Date
Site 3	R-138	C-134	T-1222	Nov. 16, 2014 Nov. 28, 2014* (*:Telecom port)
3m Semi-anechoic chamber	A-0166	A-0166	A-0166	Jul. 3, 2015
10m Semi-anechoic chamber No.1				
10m Semi-anechoic chamber No.2				
Shielded room No.1	-	A-0166		

6) TÜV SÜD PS authorization:

Authorized as an EMC test laboratory

7) TÜV Rheinland authorization:

Authorized as an EMC test laboratory

Appendix A. Test equipment

Antenna port conducted test

Equipment	Company	Model No.	Serial No.	Cal. due	Cal. date
Spectrum analyzer	Agilent Technologies	E4440A	US40420937	Jul. 2014	Jul. 25, 2013
Microwave cable	SUHNER	SUCOFLEX104/1.5m	199121/4	Oct. 2014	Oct. 7, 2013
EMI probe	Anritsu	MA2601C	N/A	Aug. 2014	Aug. 17, 2013
Operation type temperature controlled bath	Espec	PL1KP	14007261	Dec. 2014	Dec. 27, 2013

Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ECSI	100451	Nov. 2014	Nov. 16, 2013
Preamplifier	ANRITSU	MH648A	M96057	Jun. 2014	Jun. 12, 2013
Loop antenna	ROHDE&SCHWARZ	HFH2-Z2	892246/010	Oct. 2014	Oct. 5, 2013
Biconical antenna	Schwarzbeck	VHA9103/BBA9106	2155	May 2014	May 1, 2013
Log periodic antenna	Schwarzbeck	UHALP9108A	0560	May 2014	May 1, 2013
Attenuator	TME	CFA-01NPJ-6	N/A (S275)	Jun. 2014	Jun. 12, 2013
Attenuator	TME	CFA-01NPJ-3	N/A (S272)	Jun. 2014	Jun. 12, 2013
Microwave cable	SUHNER	SUCOFLEX104/9m	346316/4	May 2014	May 14, 2013
		SUCOFLEX104/1m	322084/4	Oct. 2014	Oct. 6, 2013
		SUCOFLEX104/1.5m	317226/4	Oct. 2014	Oct. 6, 2013
		SUCOFLEX104/7m	41625/6	Oct. 2014	Oct. 6, 2013
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V5.3.61	N/A	N/A
3m Semi-anechoic chamber	TOKIN	N/A	N/A (9002-NSA)	May 2014	May 6, 2013

Conducted emission at mains port

Equipment	Company	Model No.	Serial No.	Cal. due	Cal. date
EMI Receiver	ROHDE&SCHWARZ	ECSI	100451	Nov. 2014	Nov. 16, 2013
Attenuator	HUBER+SUHNER	6810.01.A	N/A (S411)	Feb. 2015	Feb. 28, 2014
Line impedance stabilization network for EUT	Kyoritsu Electrical Works, Ltd.	KNW-407F	8-2003-1	Mar. 2015	Mar. 13, 2014
Coaxial cable	FUJIKURA	5D-2W/4m	N/A (S350)	Feb. 2015	Feb. 5, 2014
Coaxial cable	FUJIKURA	5D-2W/1m	N/A (S193)	Feb. 2015	Feb. 5, 2014
Coaxial cable	SUHNER	RG214/U/10m	N/A (S194)	Feb. 2015	Feb. 5, 2014
PC	HP	dc7800small	JPA7450FPJ	N/A	N/A
Software	TOYO Corporation	EP5/CE-AJ	0611193/V5.2.41	N/A	N/A