



“mfr” file

Modulation Frequency Response

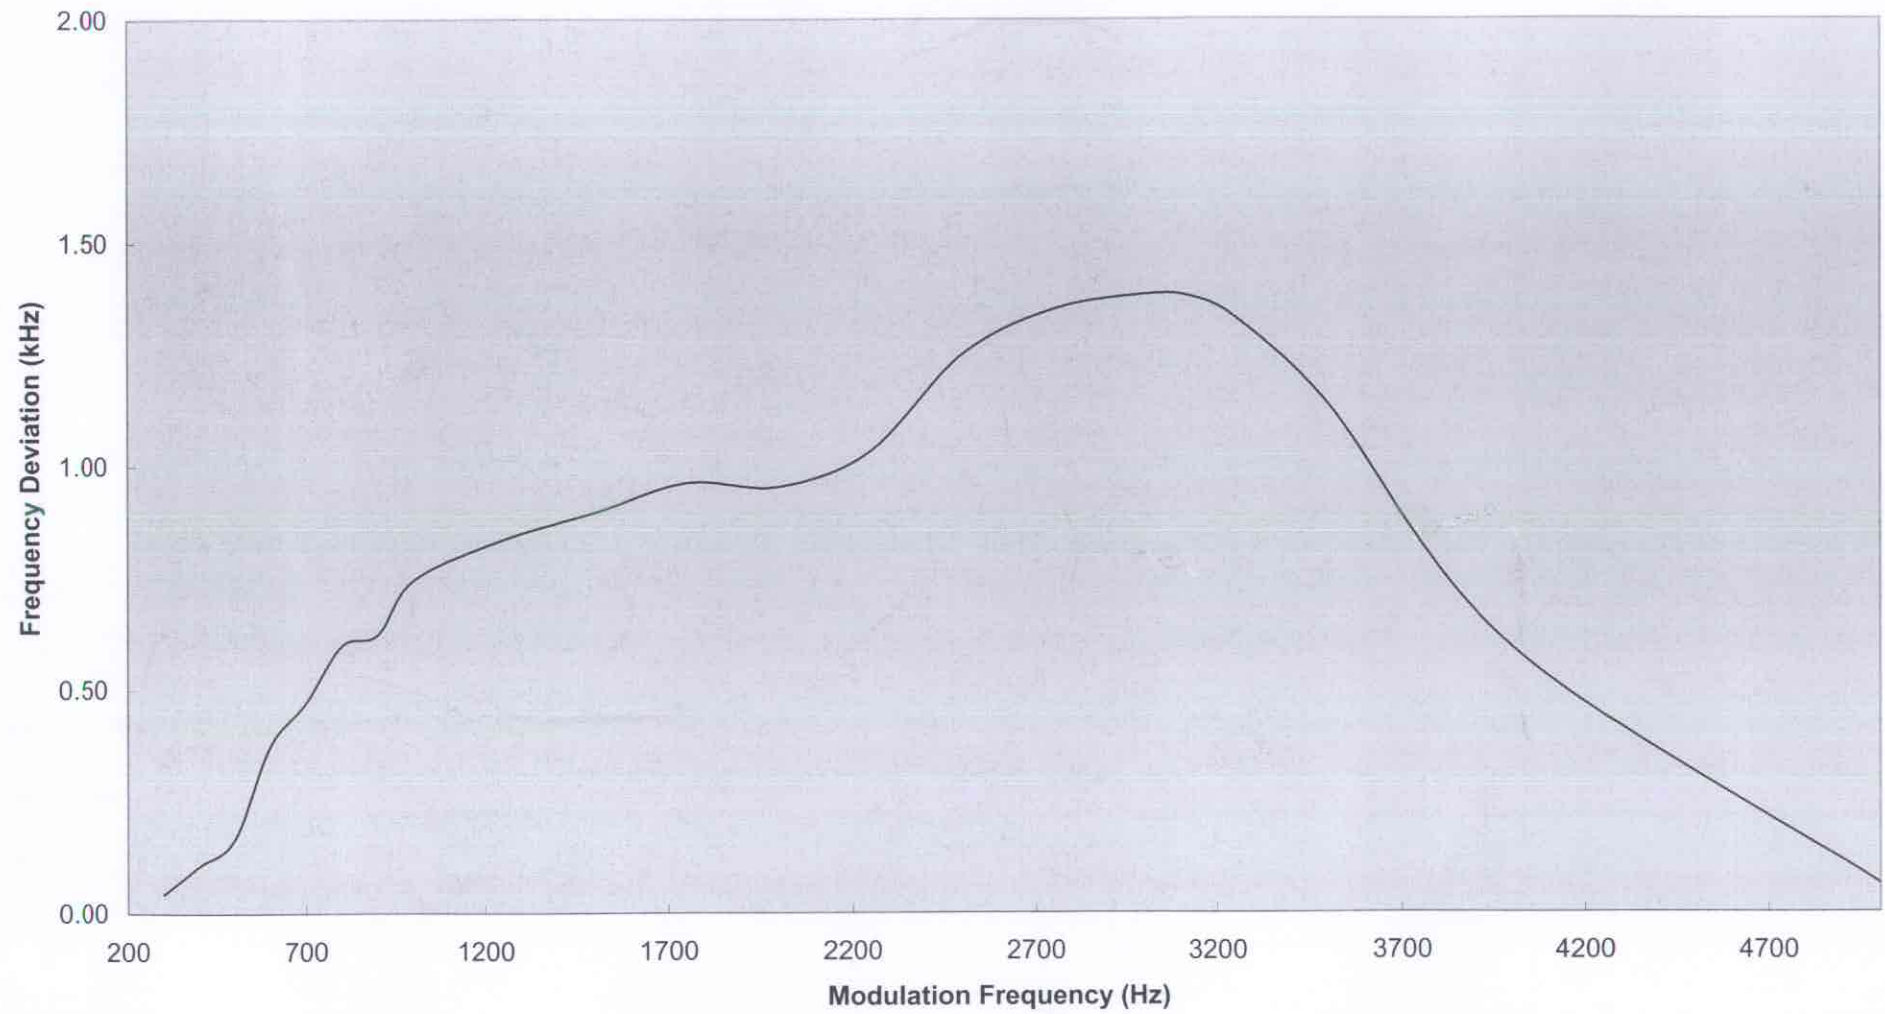


Modulation Frequency Response

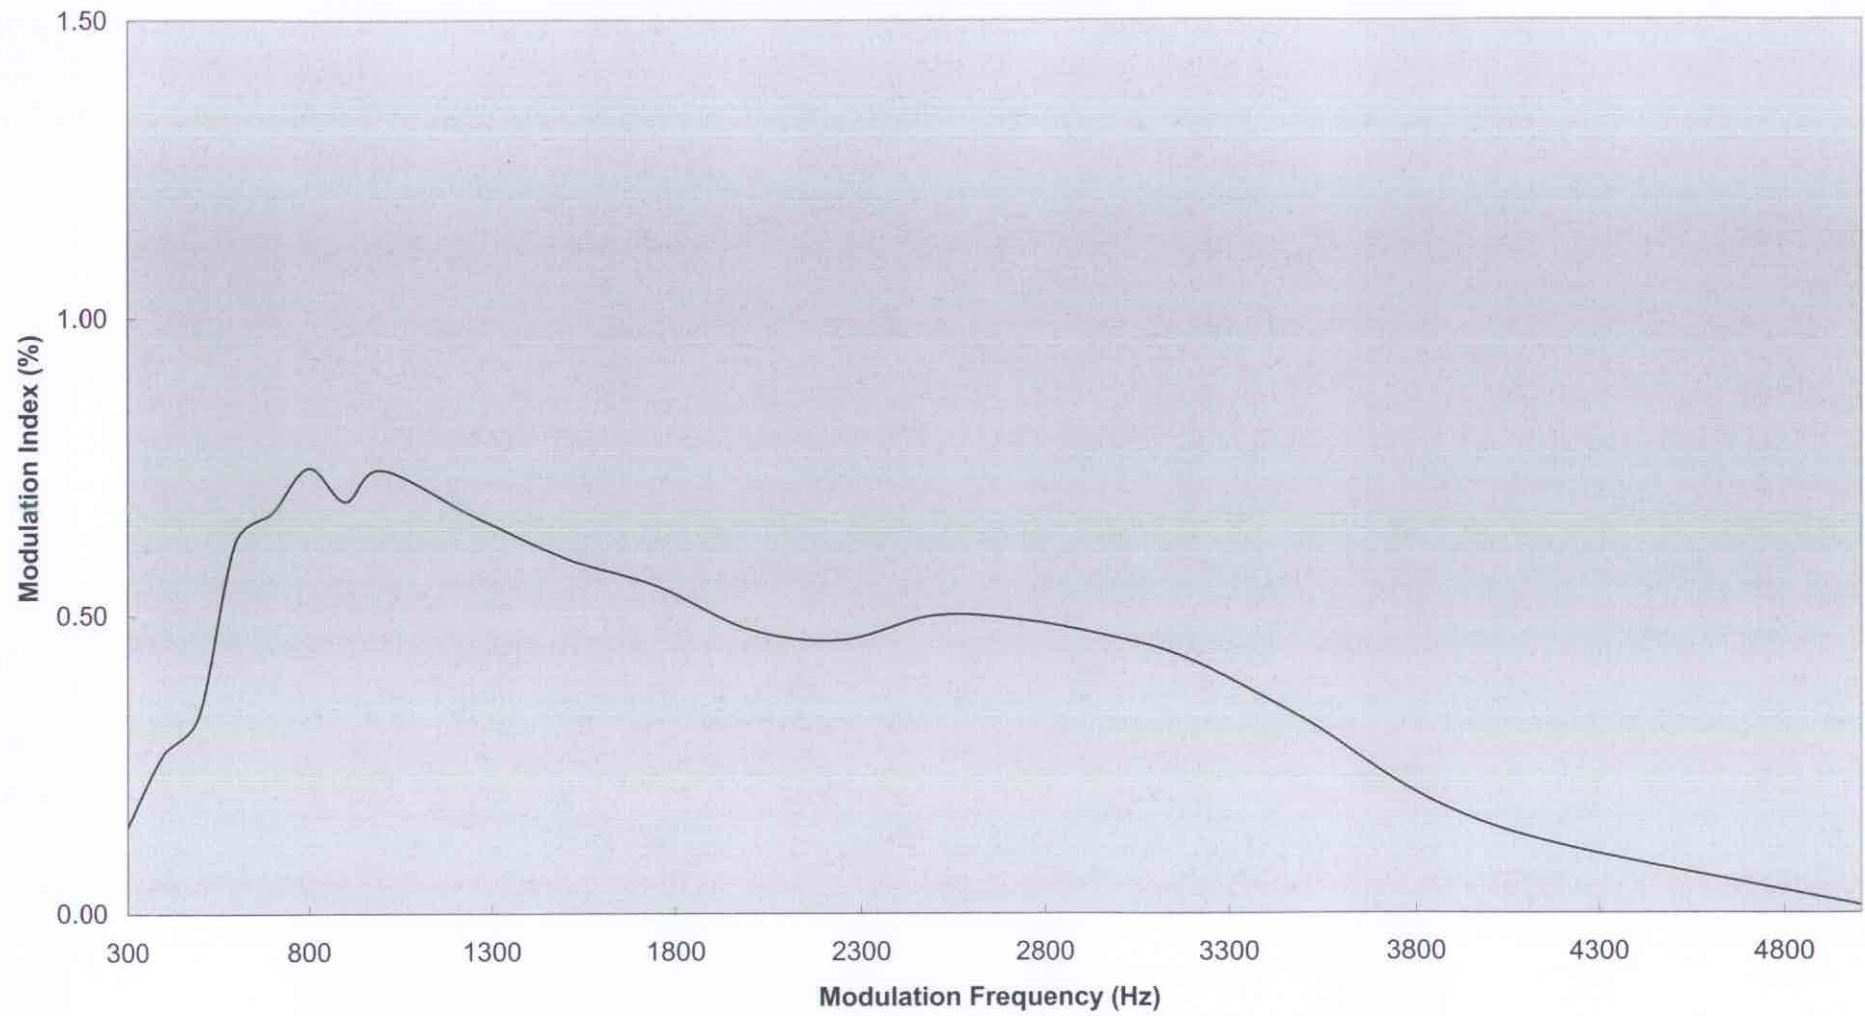


“mlc” file

Modulation Limiting Characteristic

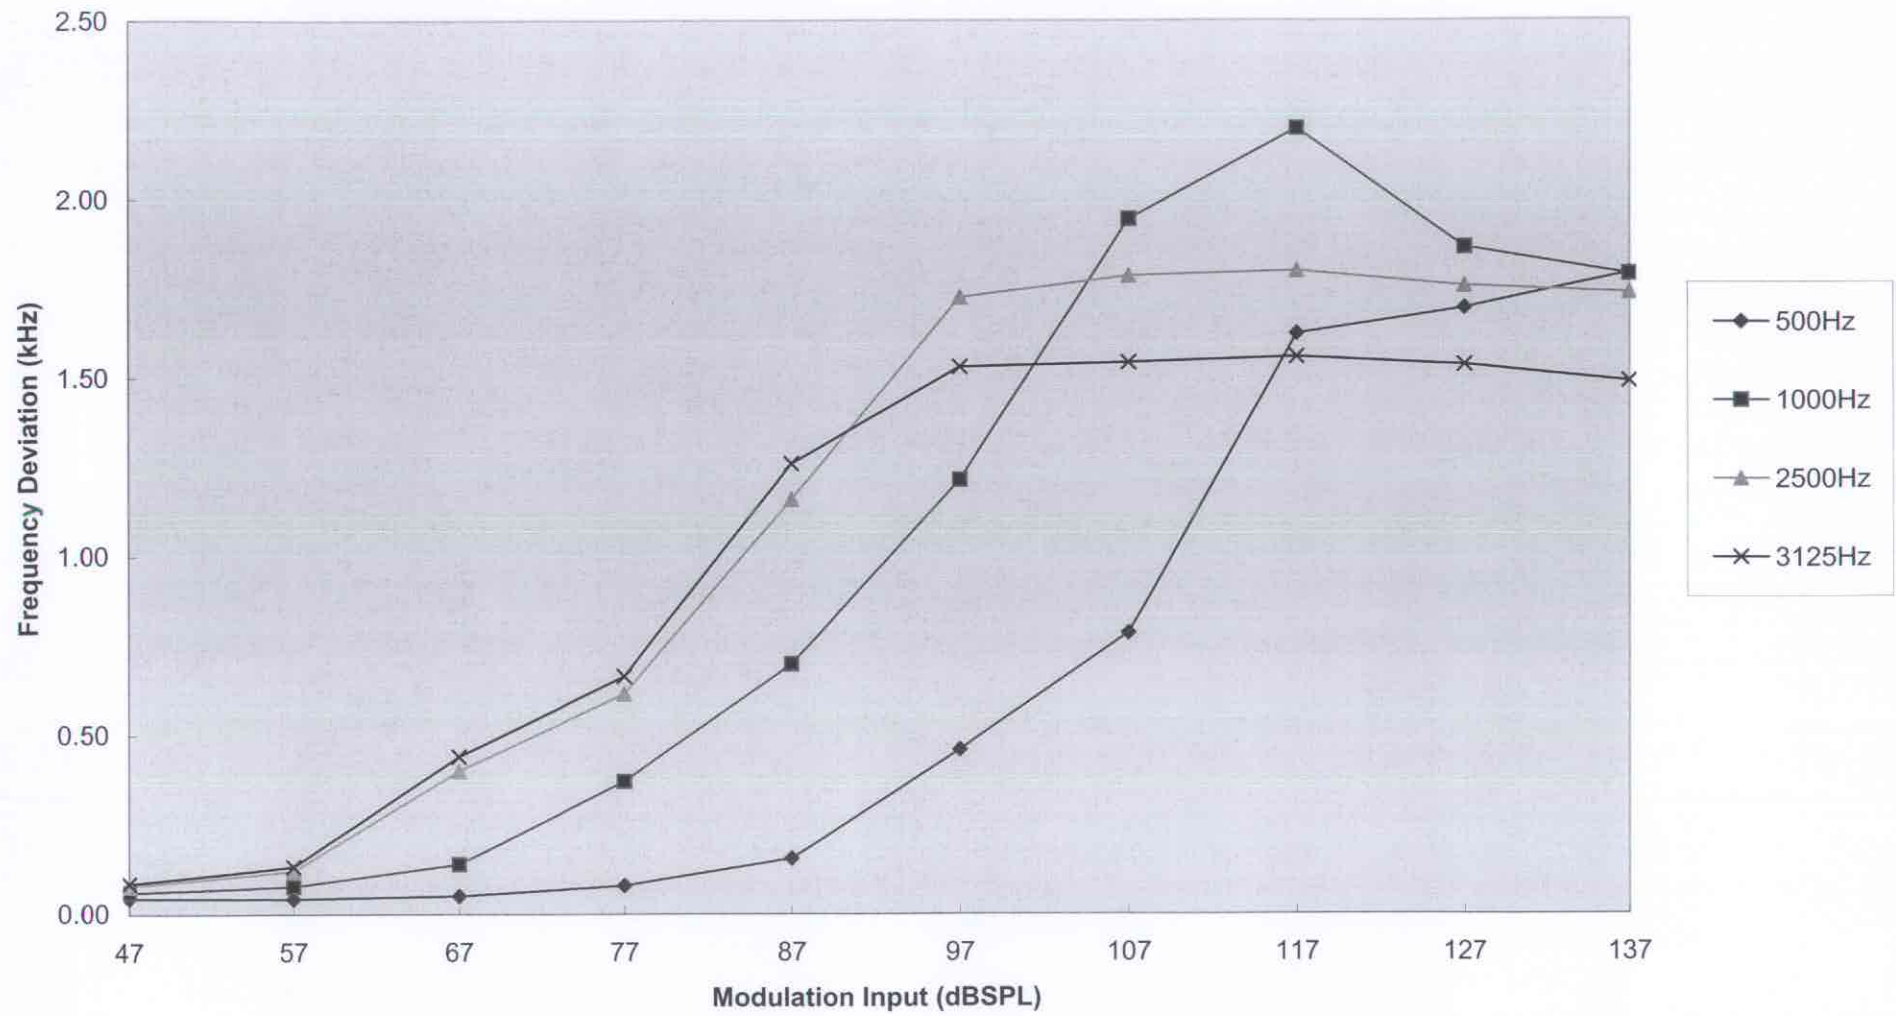

“lpf” file

Audio Low Pass Filter Response

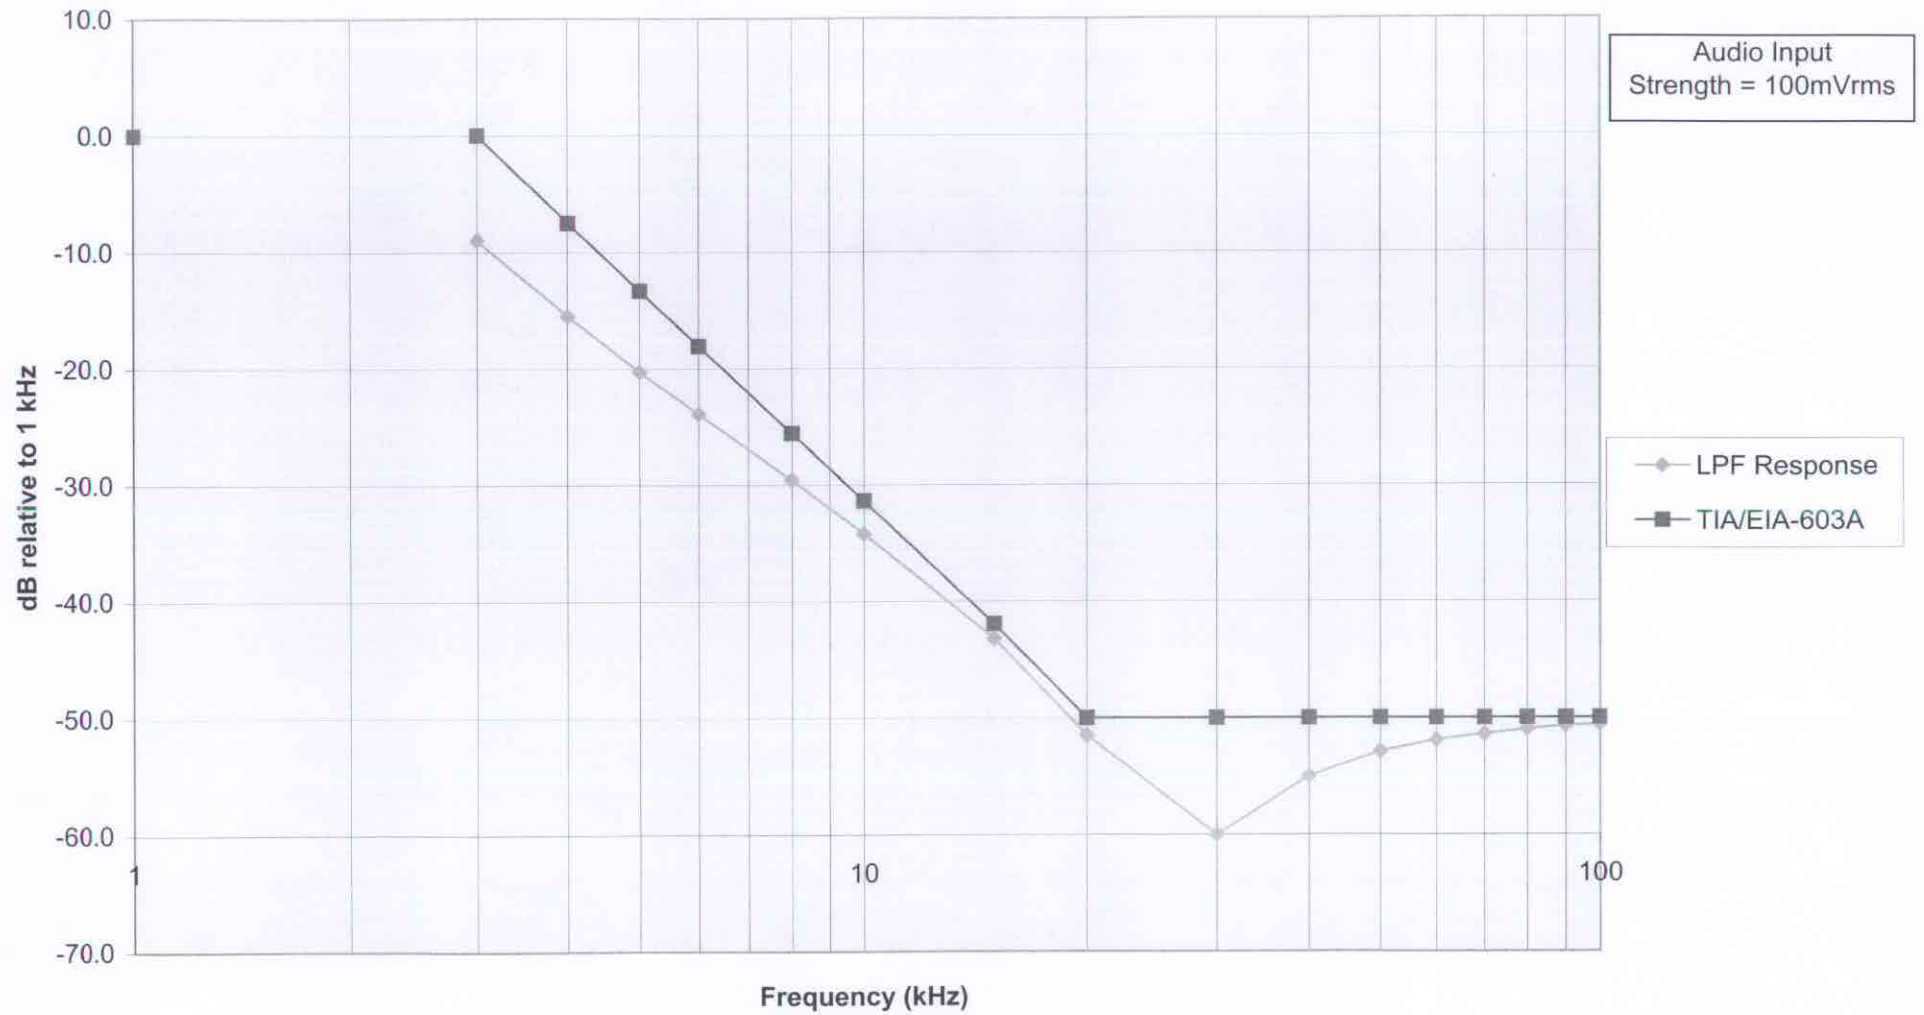

“bw” file

hp

REF 17.0 dBm

AT 30 dB

MKR -10.25 kHz

.24 dB

PEAK

LOG


10

dB/

VA VB

SC FC

CORR

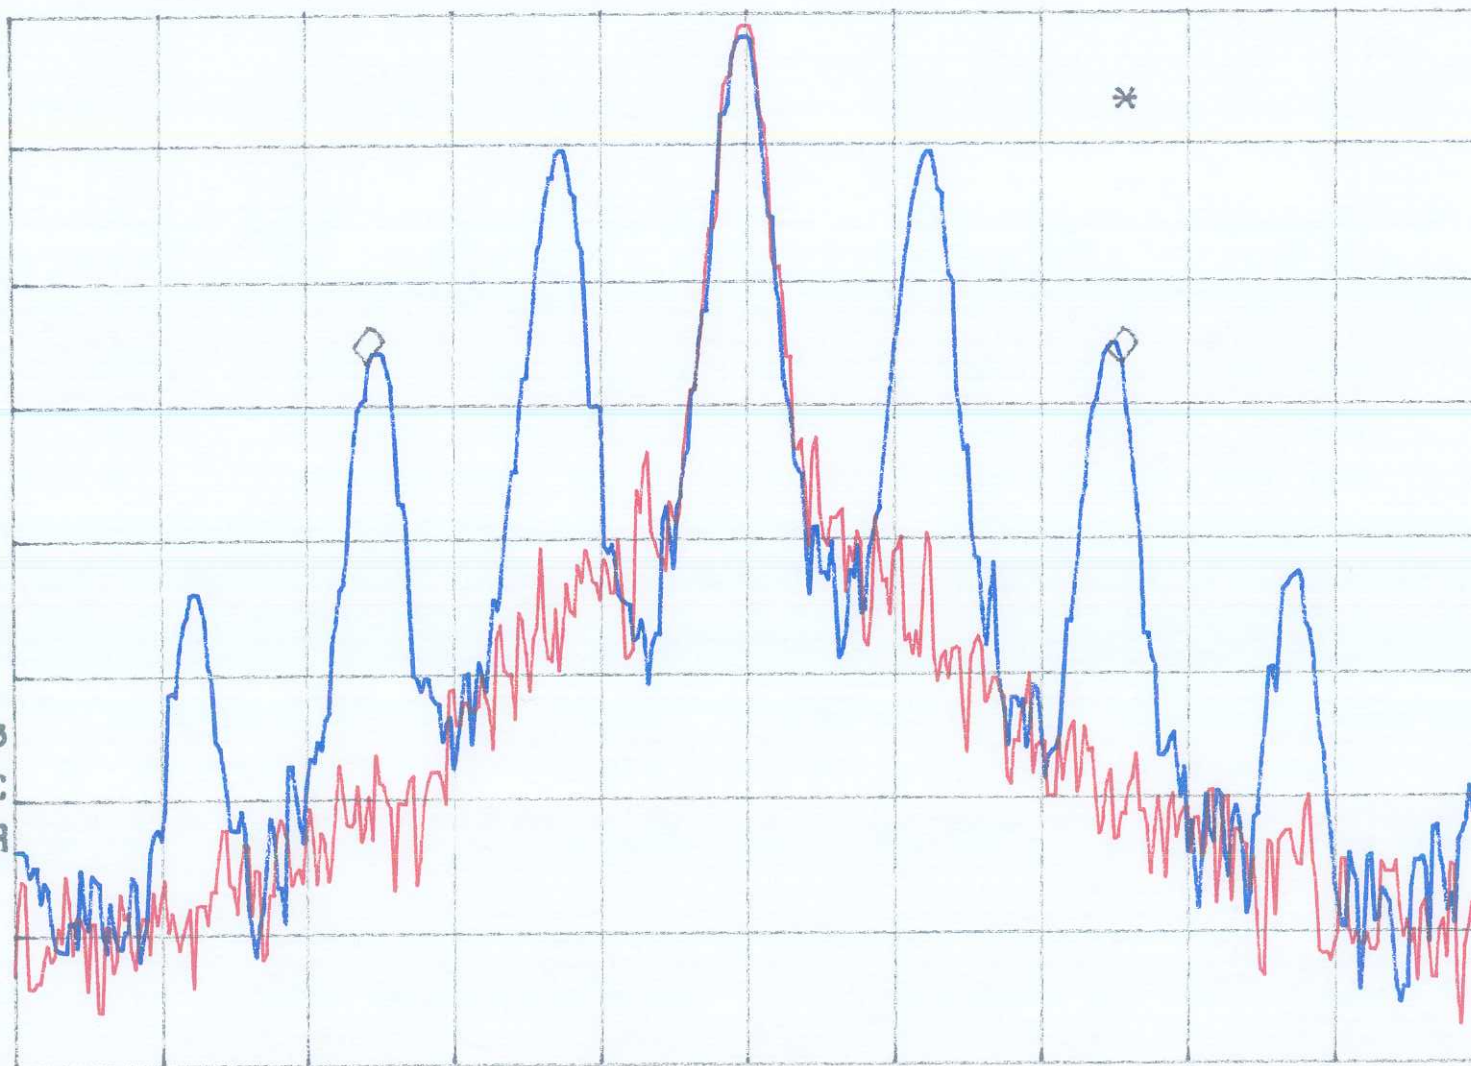

CENTER 462.63750 MHz

#RES BW 300 Hz

VBW 300 Hz

SPAN 20.00 kHz

SWP 1.00 sec

hp

REF 17.0 dBm


AT 30 dB

MKR -10.30 kHz

-.60 dB

PEAK
LOG
10
dB/

VA VB
SC FC
CORR

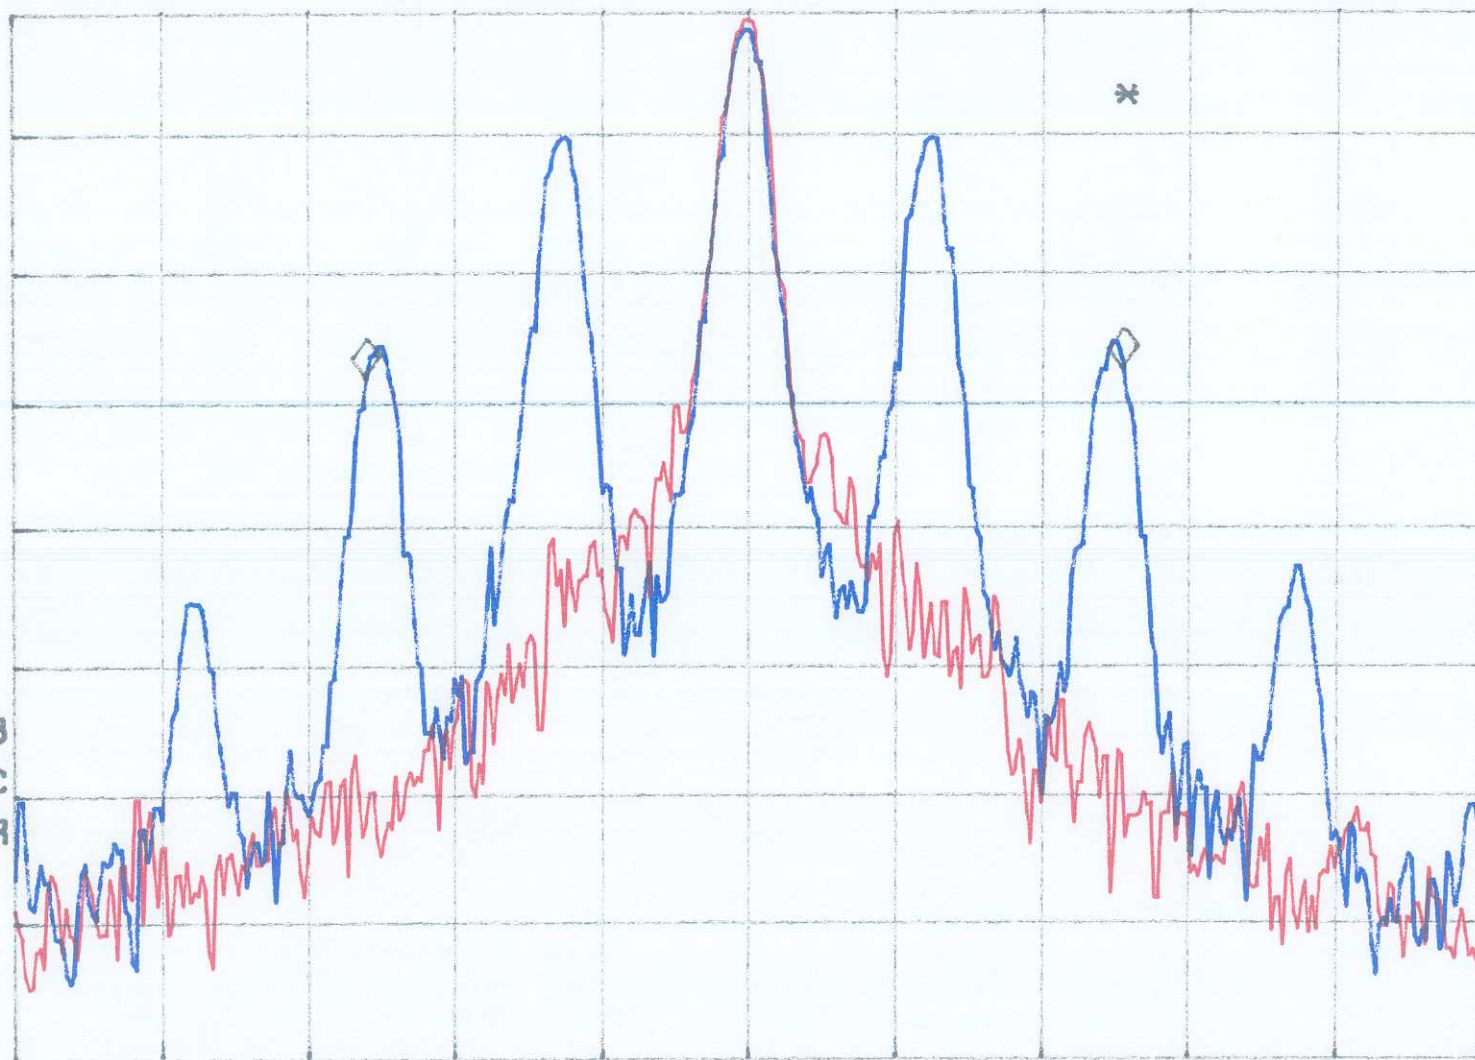

CENTER 467.63750 MHz

#RES BW 300 Hz

VBW 300 Hz

SPAN 20.00 kHz

SWP 1.00 sec

Emission mask
“spurious” file


hp

REF 17.0 dBm

AT 30 dB

PEAK
LOG
10
dB/

VA VB
SC FC
CORR

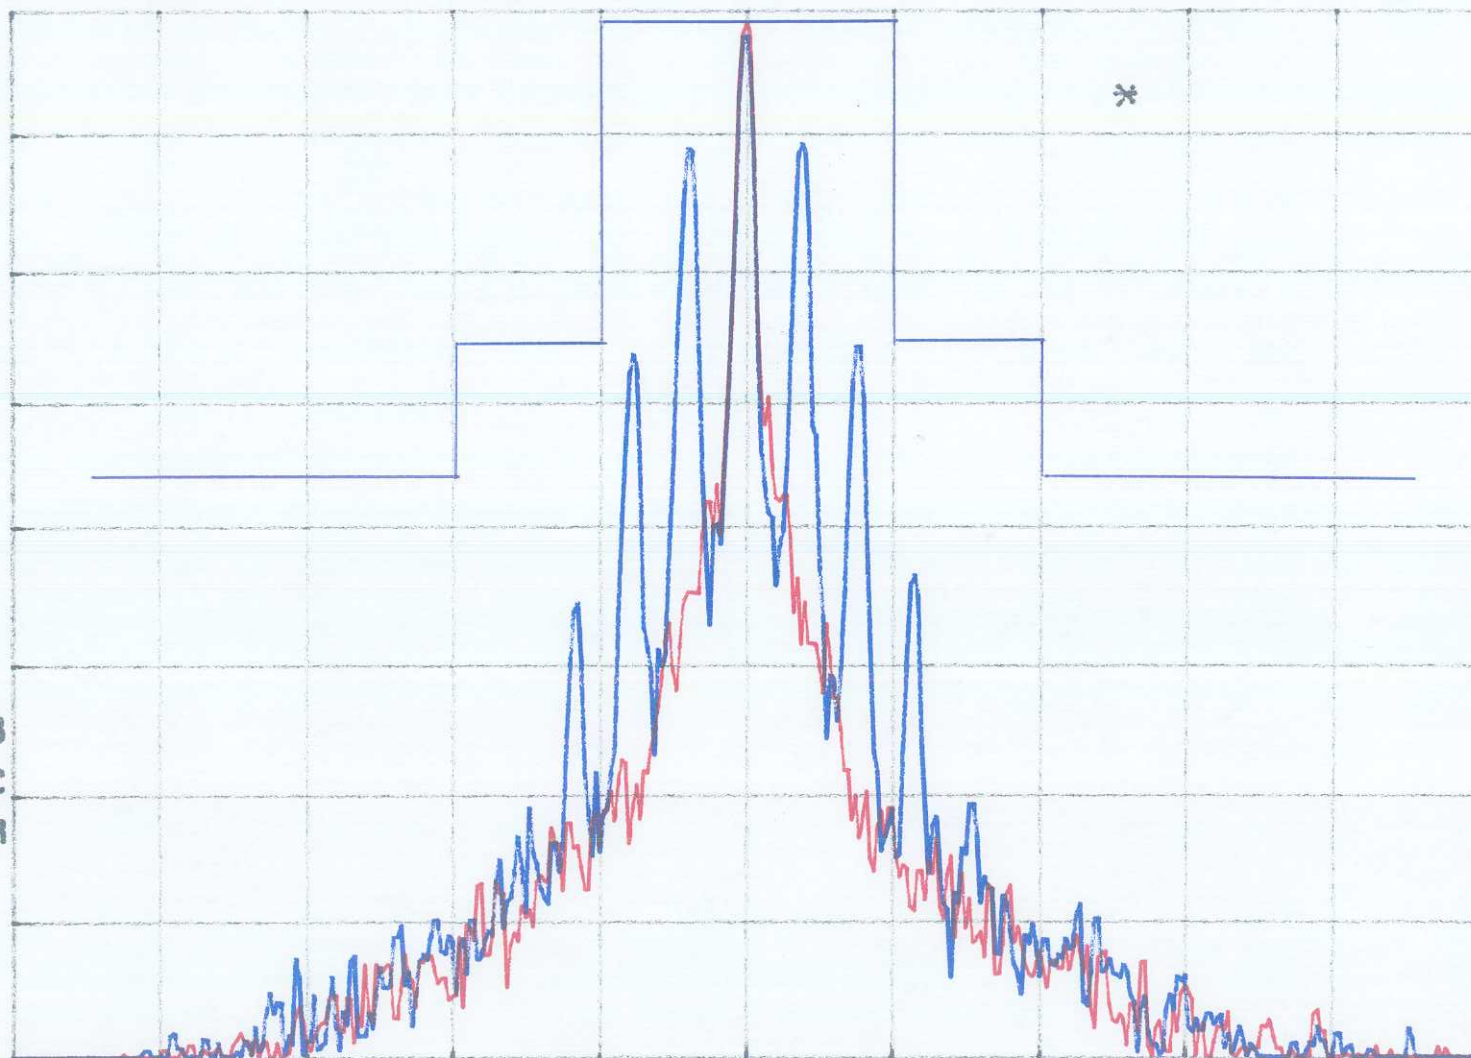

CENTER 462.63750 MHz

#RES BW 300 Hz

VBW 300 Hz

SPAN 65.00 KHz

SWP 2.17 sec

4/2

REF 17.0 dBm

AT 30 dB

PEAK

LOG


10

dB/

VA VB

SC FC

CORR

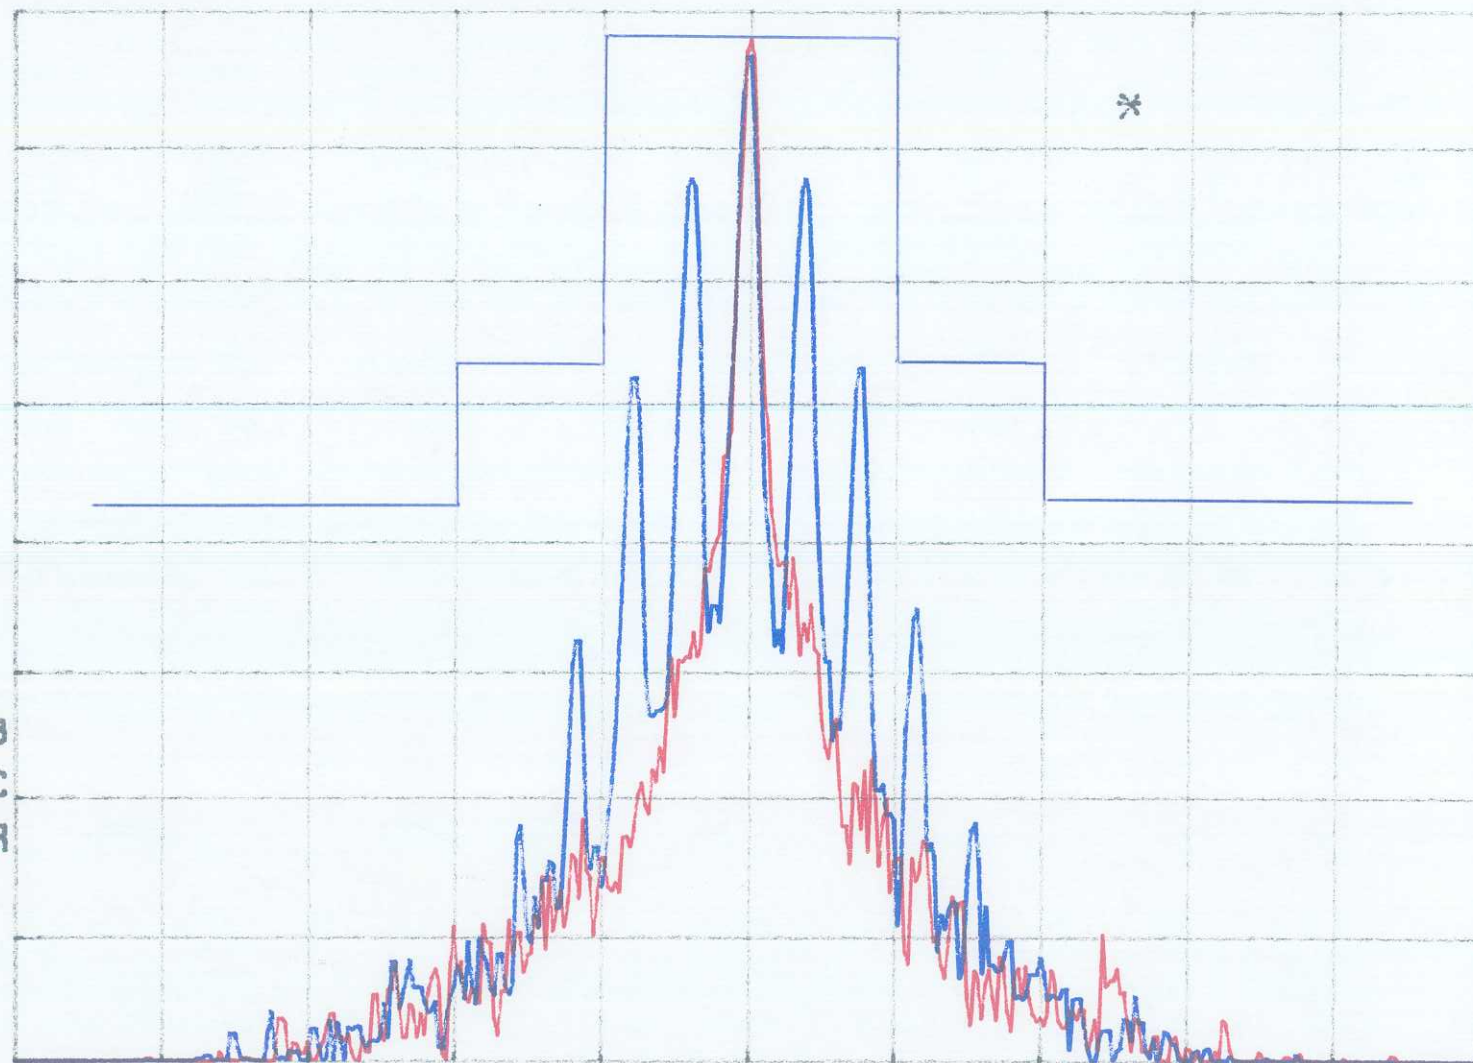

CENTER 467.63750 MHz

#RES BW 300 Hz

VBW 300 Hz

SPAN 65.00 KHz

SWP 2.17 sec