

Prüfbericht-Nr.: Test report no.:	CN23WD1J 002	Auftrags-Nr.: Order no.:	168425752	Seite 1 von 22 Page 1 of 22
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2023-05-08	
Auftraggeber: Client:	Minami Acoustics Limited No. 13, Maonan Road, Torch Development District, Zhongshan City, Guangdong Province, P.R. China			
Prüfgegenstand: Test item:	Bluetooth Wireless On-Ear Headphones			
Bezeichnung / Typ-Nr.: Identification / Type no.:	MB6073B			
Auftrags-Inhalt: Order content:	Test Report			
Prüfgrundlage: Test specification:	CFR47 FCC Part 15: Subpart C Section 15.247 RSS-247 Issue 2 February 2017 RSS-Gen Issue 5 March 2019			
Wareneingangsdatum: Date of sample receipt:	2023-05-17	Please refer to Photo Document		
Prüfmuster-Nr.: Test sample no.:	A003471445-001~002			
Prüfzeitraum: Testing period:	2023-05-23 to 2023-06-07			
Ort der Prüfung: Place of testing:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:	 Hardy Suo		genehmigt von: authorized by:	 Lin Lin
Datum: Date:	2023-06-08		Ausstellungsdatum: Issue date:	2023-06-08
Stellung / Position:	Sachverständige(r)/Expert		Stellung / Position:	Sachverständige(r)/Expert
Sonstiges / Other:	FCC ID: 2BBBFB0BVM1PSYN IC: 30577-B0BVM1PSYN, HVIN: MB6073B ASIN: B0BVM1PSYN			
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet			
* Legend:	P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested			
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

V05

Prüfbericht-Nr.: CN23WD1J 002
Test report no.:

Seite 2 von 22
Page 2 of 22

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. <i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged.</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

RESULT: Pass

5.1.3 99% BANDWIDTH

RESULT: Pass

5.1.4 20dB BANDWIDTH

RESULT: Pass

5.1.5 CARRIER FREQUENCY SEPARATION

RESULT: Pass

5.1.6 NUMBER OF HOPPING FREQUENCY

RESULT: Pass

5.1.7 TIME OF OCCUPANCY

RESULT: Pass

5.1.8 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHz BANDWIDTH

RESULT: Pass

5.1.9 RADIATED SPURIOUS EMISSION

RESULT: Pass

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2	TEST SITES	6
2.1	TEST FACILITIES	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3	TRACEABILITY	7
2.4	CALIBRATION	7
2.5	MEASUREMENT UNCERTAINTY.....	7
2.6	LOCATION OF ORIGINAL DATA.....	7
2.7	STATUS OF FACILITY USED FOR TESTING.....	7
3	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	9
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	9
3.5	SUBMITTED DOCUMENTS.....	10
4	TEST SET-UP AND OPERATION MODES	11
4.1	PRINCIPLE OF CONFIGURATION SELECTION	11
4.2	TEST OPERATION AND TEST SOFTWARE.....	11
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	11
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	11
4.5	TEST SETUP DIAGRAM	12
5	TEST RESULTS	13
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	13
5.1.1	<i>Antenna Requirement</i>	<i>13</i>
5.1.2	<i>Maximum Peak Conducted Output Power</i>	<i>14</i>
5.1.3	<i>99% Bandwidth</i>	<i>15</i>
5.1.4	<i>20dB Bandwidth</i>	<i>16</i>
5.1.5	<i>Carrier Frequency Separation.....</i>	<i>17</i>
5.1.6	<i>Number of Hopping Frequency</i>	<i>18</i>
5.1.7	<i>Time of Occupancy</i>	<i>19</i>
5.1.8	<i>Conducted Spurious Emissions Measured in 100 kHz Bandwidth</i>	<i>20</i>
5.1.9	<i>Radiated Spurious Emission</i>	<i>21</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	22
7	LIST OF TABLES.....	22

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of Bluetooth BR/EDR mode

Appendix B: Photographs of the Test Set-up

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

No.362, Huanguan Middle Road, Songyuansha Community, Guanhu Subdistrict, Longhua District, Shenzhen 518110, Guangdong, China

FCC Registration No.: 694916

ISED wireless device testing laboratory: 25069

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (SRD-Tonscend)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
EXA Signal Analyzer, Multi-touch	Keysight	N9010B	MY60241175	2023-10-10
MXG X-Series RF Vector Signal Generator	Keysight	N5182B	MY61250137	2023-10-10
EXG X-Series Microwave Analog Signal Generator	Keysight	N5173B	MY61250141	2023-10-10
DC power supply	Keysight	E3642A	MY61276100	2023-10-10
Power Control Unit	Tonscend	JS0806-4ADC	N/A	2023-10-10
Automation Control Unit	Tonscend	JS0806-2	21C8060396	2023-10-10
Test Software	Tonscend	JS1120-3	N/A	N/A
Control PC	Lenovo	TianYi510S-071MB	YLY23JMF	N/A
Shielding Room 8#	Albatross	SR8	APC17151-SR8	2024-06-22
Unwanted Emission Testing (TS9975)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2023-08-02
Signal Analyzer	R&S	FSV 40	101439	2023-08-01
System Controller Interface	R&S	SCI-100	S10010038	N/A
Filterbank	R&S	Wlan	100759	2023-08-01
OSP	R&S	OSP 120	102040	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2023-08-02
Amplifier	R&S	SCU-18F	180070	2023-08-02
Amplifier	R&S	SCU40A	100475	2023-08-02
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2024-08-06
Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	2024-08-06
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	2024-08-27
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2023-08-06
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A

Prüfbericht - Nr.: CN23WD1J 002
Test Report No.:Seite 7 von 22
Page 7 of 22

3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-06-22
--------------------------	-----------	--------	--------------	------------

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Table 2: Measurement Uncertainty

Parameter	Uncertainty (k=2)
Occupied Channel Bandwidth	± 2.08 %
RF output power, conducted	± 0.99 dB
Unwanted Emissions, conducted	± 0.89 dB
All emissions, radiated	±4.17 dB

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at No.362, Huanguan Middle Road, Songyuansha Community, Guanhu Subdistrict, Longhua District, Shenzhen 518110, Guangdong, China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUT is a Bluetooth Wireless On-Ear Headphones which supports Classic Bluetooth wireless technology.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	Bluetooth Wireless On-Ear Headphones
Type Designation:	MB6073B
FCC ID:	2BBBFB0BVM1PSYN
IC:	30577-B0BVM1PSYN
HVIN:	MB6073B
Operating Voltage:	Internal battery operated (3.7Vdc) or USB-C operated (5Vdc)
Testing Voltage:	Internal battery operated (3.7Vdc)
Operating Temperature Range:	0 °C ~ 40 °C
Technical Specification of Bluetooth BR/EDR	
Operating Frequency:	2402 MHz to 2480 MHz
Type of Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Channel Number:	79 channels
Channel Separation:	1MHz
Antenna Type:	Integral Antenna
Antenna Gain of Bluetooth:	1.60 dBi

Table 4: RF Channel and Frequency of Bluetooth BR/EDR

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
0	2402.00	20	2422.00	40	2442.00	60	2462.00
1	2403.00	21	2423.00	41	2443.00	61	2463.00
2	2404.00	22	2424.00	42	2444.00	62	2464.00
3	2405.00	23	2425.00	43	2445.00	63	2465.00
4	2406.00	24	2426.00	44	2446.00	64	2466.00
5	2407.00	25	2427.00	45	2447.00	65	2467.00
6	2408.00	26	2428.00	46	2448.00	66	2468.00
7	2409.00	27	2429.00	47	2449.00	67	2469.00
8	2410.00	28	2430.00	48	2450.00	68	2470.00
9	2411.00	29	2431.00	49	2451.00	69	2471.00
10	2412.00	30	2432.00	50	2452.00	70	2472.00
11	2413.00	31	2433.00	51	2453.00	71	2473.00
12	2414.00	32	2434.00	52	2454.00	72	2474.00
13	2415.00	33	2435.00	53	2455.00	73	2475.00
14	2416.00	34	2436.00	54	2456.00	74	2476.00
15	2417.00	35	2437.00	55	2457.00	75	2477.00
16	2418.00	36	2438.00	56	2458.00	76	2478.00
17	2419.00	37	2439.00	57	2459.00	77	2479.00
18	2420.00	38	2440.00	58	2460.00	78	2480.00
19	2421.00	39	2441.00	59	2461.00		

Test frequencies are lowest channel: 2402 MHz, middle channel: 2441 MHz and highest channel: 2480 MHz for Bluetooth BR/EDR

3.3 Independent Operation Modes

The basic operation modes are:

A. On, Bluetooth transmitting mode

- 1) Low Channel
- 2) Middle Channel
- 3) High Channel

B. On, Transmitting on Hopping channel

C. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

Prüfbericht - Nr.: CN23WD1J 002
Test Report No.:

Seite 10 von 22
Page 10 of 22

3.5 Submitted Documents

- Application Form

- User Manual

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013.

According to clause 3.1, all tests were performed on model MB6073B in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 5: Auxiliary Equipment Used during Test

Description	Manufacturer	Model	S/N
Laptop	Lenovo	T480	PF-16A6N8

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)


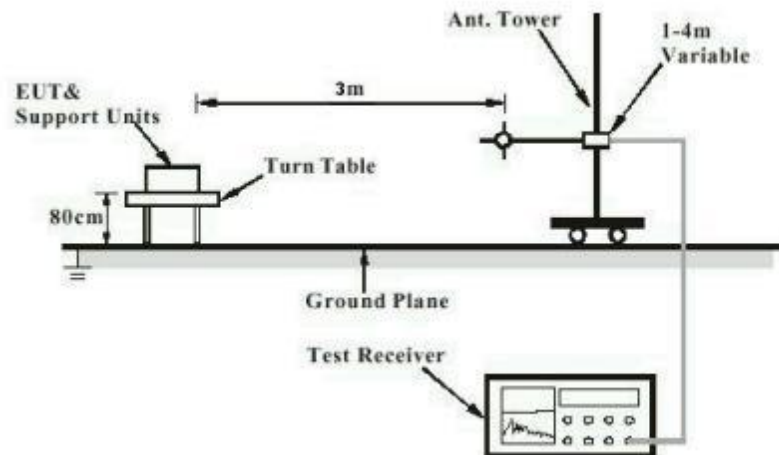


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)



Diagram of Measurement Configuration for Conducted Transmitter Measurement

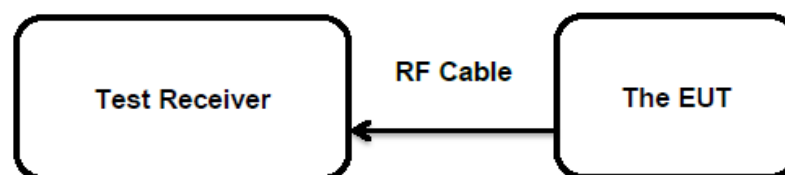

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(b)(4) and Part 15.203
RSS-Gen Clause 6.8

According to the manufacturer declared, the EUT has an Integral antenna, the directional gain of antenna is 1.60 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

5.1.2 Maximum Peak Conducted Output Power

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.247(b)(1) RSS-247 Clause 5.4(b)
Basic standard	: ANSI C63.10: 2013
Limits	: FHSS < 0.125 Watts
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2023-05-26
Input voltage	: Internal battery operated
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 25.2 °C
Relative humidity	: 52 %
Atmospheric pressure	: 101 kPa

Table 6: Test Result of Maximum Peak Conducted Output Power, Bluetooth BR & EDR

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(W)	
GFSK (BR)	2402.0	2.26	0.0017	< 0.125
	2441.0	2.35	0.0017	
	2480.0	2.60	0.0018	
Maximum Measured Value		2.60	0.0018	

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(W)	
8DPSK (EDR)	2402.0	2.28	0.0017	< 0.125
	2441.0	2.67	0.0018	
	2480.0	3.18	0.0021	
Maximum Measured Value		3.18	0.0021	

Maximum e.i.r.p. is 4.78 dBm less than 4W(36dBm).

Note:

- 1) The cable loss is taken into account in results.
- 2) Antenna gain(G): 1.60 dBi

Prüfbericht - Nr.: CN23WD1J 002
Test Report No.:

Seite 15 von 22
Page 15 of 22

5.1.3 99% Bandwidth

RESULT:

Pass

Test Specification

Test standard	:	FCC Part 15.247(a) RSS-Gen Clause 6.7
Basic standard	:	ANSI C63.10: 2013
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2023-05-26
Input voltage	:	Internal battery operated
Operation mode	:	A
Test channel	:	Low / Middle / High
Ambient temperature	:	25.2 °C
Relative humidity	:	52 %
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN23WD1J 002
Test Report No.:Seite 16 von 22
Page 16 of 22

5.1.4 20dB Bandwidth

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(a)(1) RSS-247 Clause 5.1(a)
Basic standard	: ANSI C63.10: 2013
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2023-05-26
Input voltage	: Internal battery operated
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 25.2 °C
Relative humidity	: 52 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN23WD1J 002
Test Report No.:

Seite 17 von 22
Page 17 of 22

5.1.5 Carrier Frequency Separation

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.247(a)(1) RSS-247 Clause 5.1(b)
Basic standard	: ANSI C63.10: 2013
Limits	: $\geq 25\text{kHz}$ or 2/3 of 20dB bandwidth, whichever is greater
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2023-05-26
Input voltage	: Internal battery operated
Operation mode	: B
Test channel	: Low / Middle / High
Ambient temperature	: 25.2 °C
Relative humidity	: 52 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN23WD1J 002
Test Report No.:Seite 18 von 22
Page 18 of 22

5.1.6 Number of Hopping Frequency

RESULT:**Pass****Test Specification**

Test standard	: FCC part 15.247(a)(1)(iii) RSS-247 Clause 5.1(d)
Basic standard	: ANSI C63.10: 2013
Limits	: ≥ 15 non-overlapping channels
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2023-05-26
Input voltage	: Internal battery operated
Operation mode	: B
Ambient temperature	: 25.2 °C
Relative humidity	: 52 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN23WD1J 002
Test Report No.:Seite 19 von 22
Page 19 of 22

5.1.7 Time of Occupancy

RESULT:**Pass****Test Specification**

Test standard	:	FCC part 15.247(a)(1)(iii) RSS-247 Clause 5.1(d)
Basic standard	:	ANSI C63.10: 2013
Limits	:	< 0.4s
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2023-06-07
Input voltage	:	Internal battery operated
Operation mode	:	B
Test channel	:	Low / Middle / High
Ambient temperature	:	25.2 °C
Relative humidity	:	52 %
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN23WD1J 002

Test Report No.:

Seite 20 von 22

Page 20 of 22

5.1.8 Conducted Spurious Emissions Measured in 100 kHz Bandwidth

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.247(d) RSS-247 Clause 5.5
Basic standard	: ANSI C63.10: 2013
Limits	: 20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power); In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2023-05-26
Input voltage	: Internal battery operated
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 25.2 °C
Relative humidity	: 52 %
Atmospheric pressure	: 101 kPa

Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to test plots, and compliance is achieved as well.

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN23WD1J 002
Test Report No.:Seite 21 von 22
Page 21 of 22

5.1.9 Radiated Spurious Emission

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.247(d) & FCC Part 15.205 RSS-247 Clause 3.3
Basic standard	: ANSI C63.10: 2013
Limits	: Refer to 15.209(a) of FCC part 15.247(d) RSS-Gen Section 8.9 & 8.10
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2023-05-23 to 2023-05-24
Input voltage	: Internal battery operated
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101 kPa

Remark:

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix A.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix B.

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	6
Table 2: Measurement Uncertainty	7
Table 3: Technical Specification of EUT	8
Table 4: RF Channel and Frequency of Bluetooth BR/EDR.....	9
Table 5: Auxiliary Equipment Used during Test	11
Table 6: Test Result of Maximum Peak Conducted Output Power, Bluetooth BR & EDR	14


Appendix A: Test Results of Bluetooth BR & EDR mode

APPENDIX A: TEST RESULTS OF BLUETOOTH BR & EDR MODE	1
APPENDIX A.1: TEST RESULTS OF 99% BANDWIDTH	2
APPENDIX A.2: TEST RESULTS OF 20dB BANDWIDTH	5
APPENDIX A.3: TEST RESULTS OF CARRIER FREQUENCY SEPARATION.....	8
APPENDIX A.4: TEST RESULTS OF NUMBER OF HOPPING FREQUENCY	9
APPENDIX A.5: TEST RESULTS OF TIME OF OCCUPANCY	10
APPENDIX A.6: TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 kHz BANDWIDTH	15
<i>Band Edge</i>	15
<i>Conducted Spurious Emission</i>	18
APPENDIX A.7: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	25
30 MHz - 1GHz.....	25
1GHz - 18GHz	27
APPENDIX A.8: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS	39

Appendix A.1: Test Results of 99% Bandwidth

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.91009	2401.4824	2402.3925	---	PASS
		2441	0.90891	2440.4810	2441.3899	---	PASS
		2480	0.90695	2479.4833	2480.3902	---	PASS
3DH5	Ant1	2402	1.2178	2401.3205	2402.5383	---	PASS
		2441	1.2207	2440.3167	2441.5374	---	PASS
		2480	1.2212	2479.3146	2480.5358	---	PASS

DH5_Ant1_2402

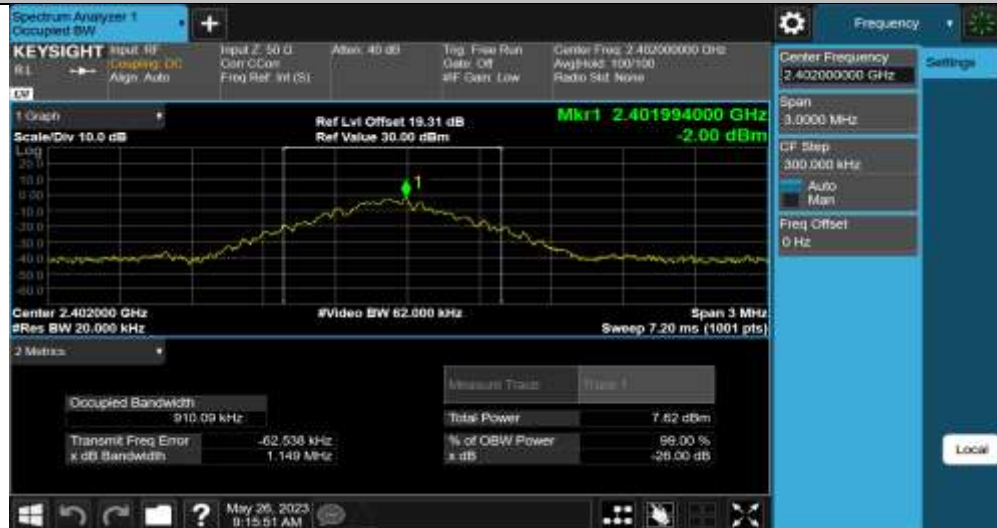

DH5_Ant1_2441



DH5_Ant1_2480



3DH5_Ant1_2402



3DH5_Ant1_2441



3DH5_Ant1_2480



Appendix A.2: Test Results of 20dB Bandwidth

TestMode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.948	2401.472	2402.420	---	PASS
		2441	0.945	2440.469	2441.414	---	PASS
		2480	0.951	2479.472	2480.423	---	PASS
3DH5	Ant1	2402	1.353	2401.256	2402.609	---	PASS
		2441	1.350	2440.256	2441.606	---	PASS
		2480	1.350	2479.256	2480.606	---	PASS

DH5_Ant1_2402



DH5_Ant1_2441



DH5_Ant1_2480



3DH5_Ant1_2402



3DH5_Ant1_2441



3DH5_Ant1_2480



Appendix A.3: Test Results of Carrier Frequency Separation

TestMode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.172	≥0.951	PASS
3DH5	Ant1	Hop	1.008	≥0.902	PASS

DH5_Ant1_Hop




3DH5_Ant1_Hop



Appendix A.4: Test Results of Number of Hopping Frequency

TestMode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

DH5_Ant1_Hop

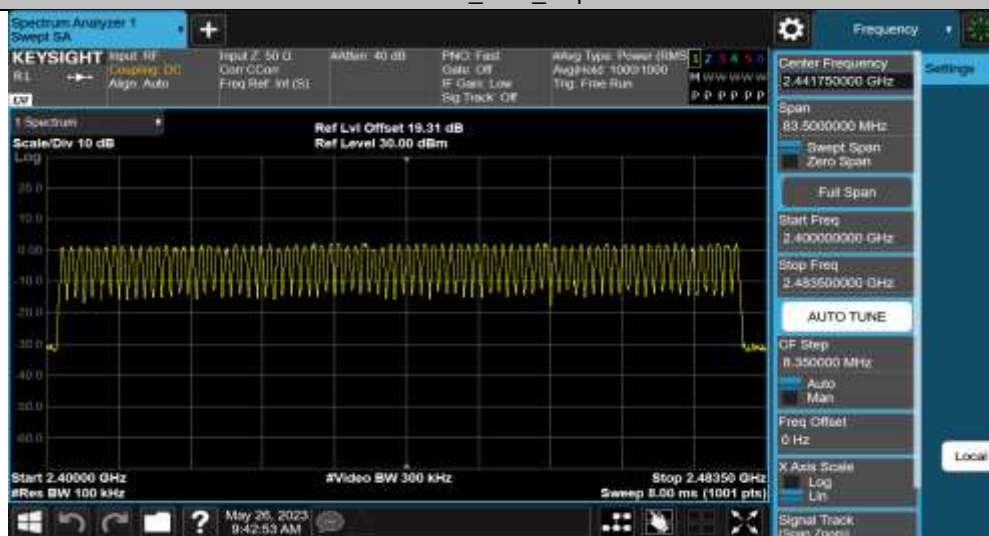

3DH5_Ant1_Hop



Appendix A.5: Test Results of Time of Occupancy

TestMode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.381	319	0.122	≤0.4	PASS
DH3	Ant1	Hop	1.637	156	0.255	≤0.4	PASS
DH5	Ant1	Hop	2.885	91	0.263	≤0.4	PASS
3DH1	Ant1	Hop	0.390	318	0.124	≤0.4	PASS
3DH3	Ant1	Hop	1.640	157	0.257	≤0.4	PASS
3DH5	Ant1	Hop	2.892	119	0.344	≤0.4	PASS

DH1_Ant1_Hop




DH3_Ant1_Hop






DH5 Ant1 Hop



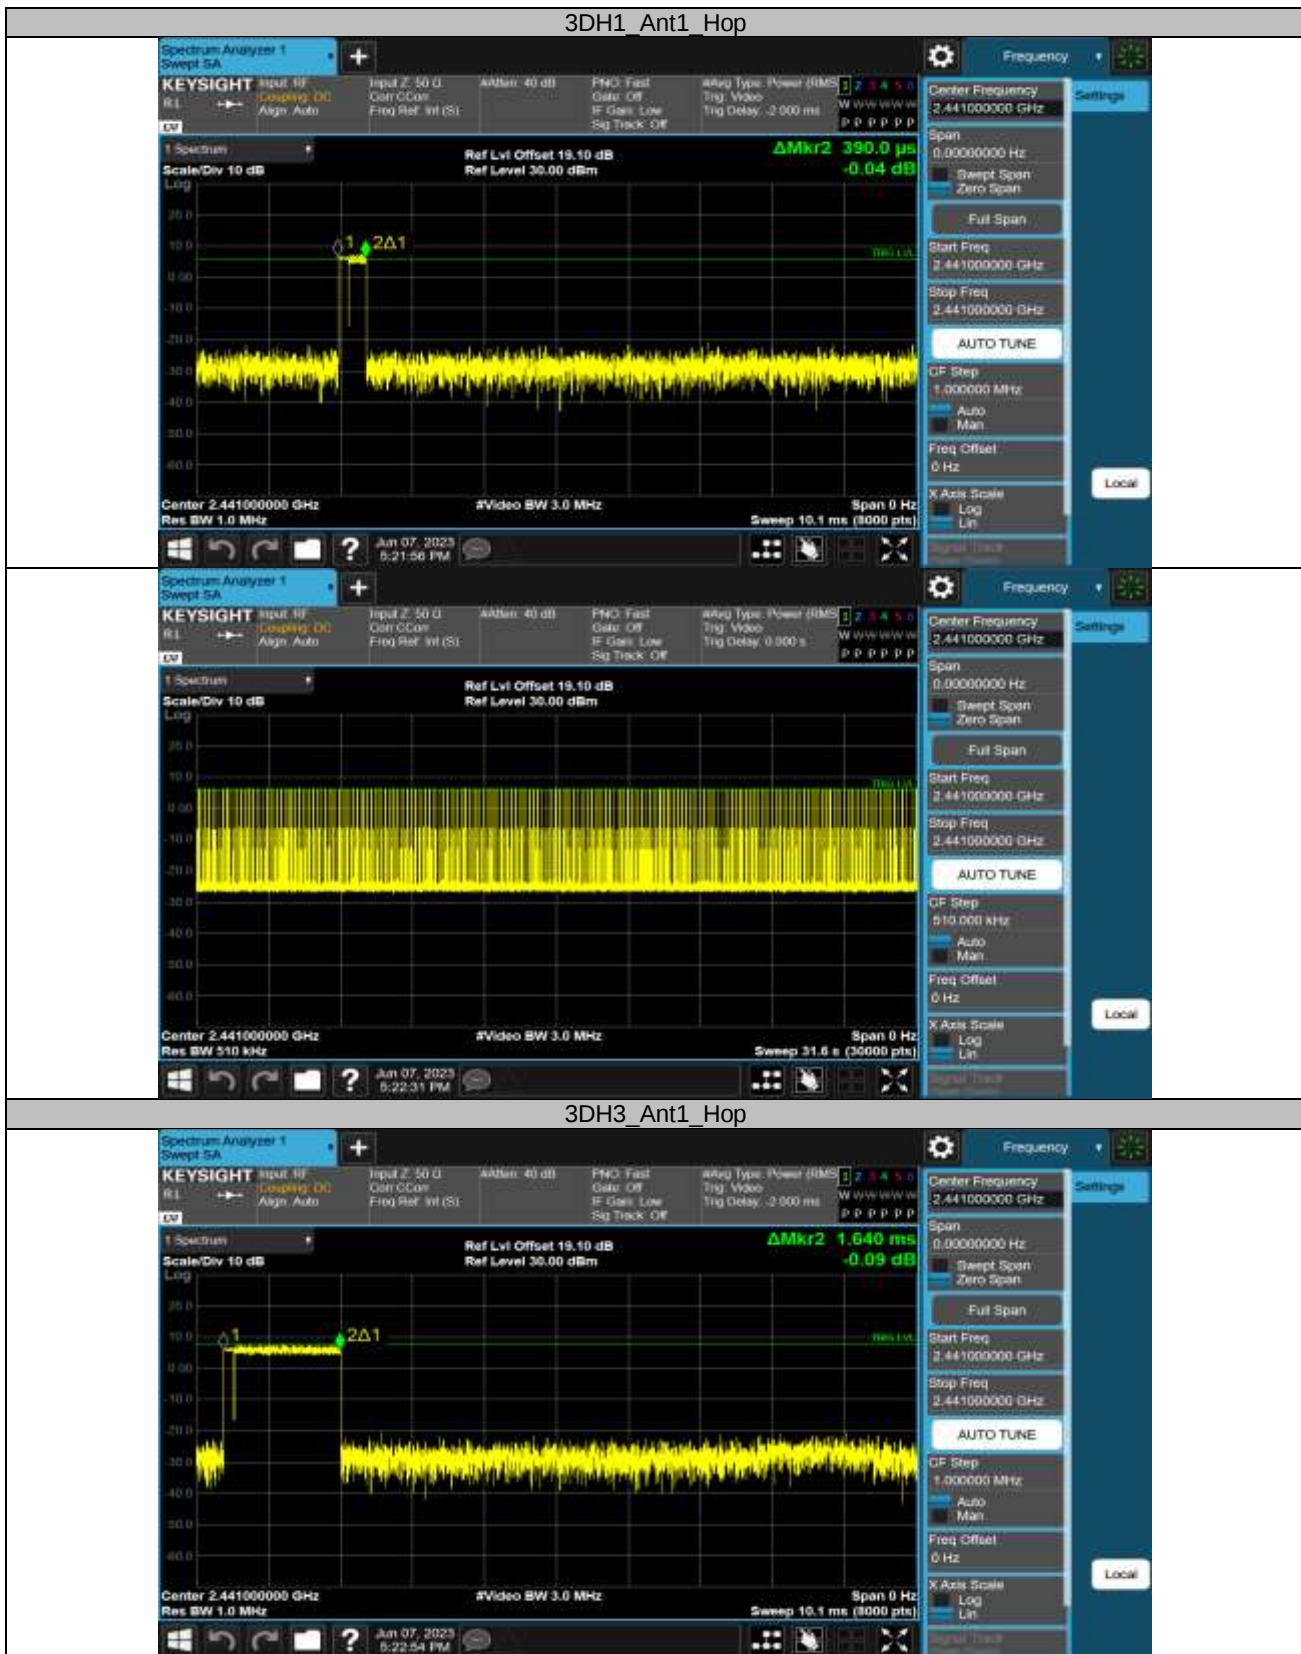

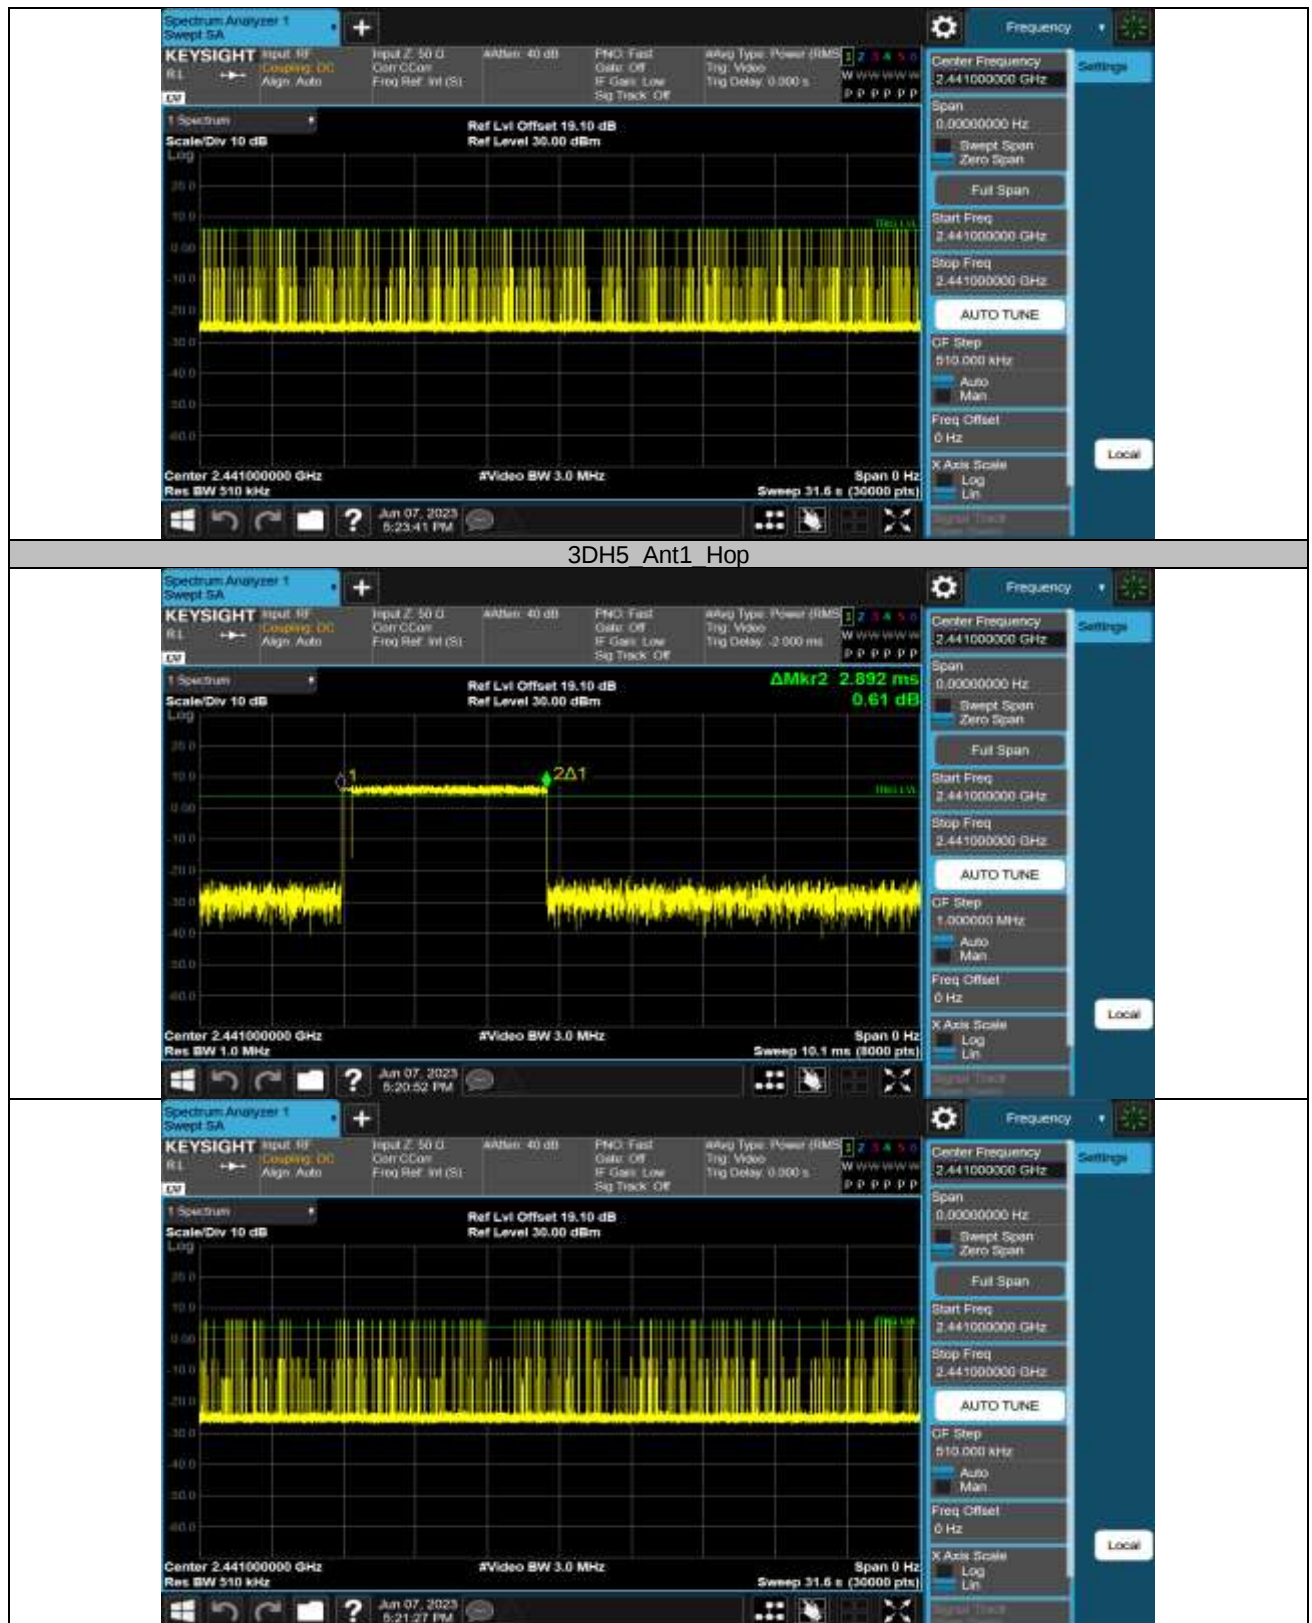

Appendix A.6: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth

Band Edge

TestMode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	0.3975	-43.08	≤-19.06	PASS
DH5	Ant1	Low	2402	0.9519	-41.97	≤-19.05	PASS
3DH5	Ant1	High	2480	-2.921	-42.34	≤-22.92	PASS
3DH5	Ant1	High	2480	-2.225	-43.78	≤-22.23	PASS
DH5	Ant1	Hopping	2402	0.4265	-43.29	≤-19.57	PASS
DH5	Ant1	Hopping	2402	0.3925	-42.45	≤-19.61	PASS
3DH5	Ant1	Hopping	2480	-2.965	-43.14	≤-22.97	PASS
3DH5	Ant1	Hopping	2480	-0.6867	-42.85	≤-20.69	PASS

DH5_Ant1_Low_2402



DH5_Ant1_High_2480



3DH5_Ant1_Low_2402



3DH5_Ant1_High_2480



DH5_Ant1_Hopping_2402



DH5_Ant1_Hopping_2480



3DH5_Ant1_Hopping_2402



3DH5_Ant1_Hopping_2480



Conducted Spurious Emission

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	0.62	0.62	---	PASS
			30~1000	0.62	-41.62	≤-19.38	PASS
			1000~26500	0.62	-32.11	≤-19.38	PASS
		2441	Reference	1.20	1.20	---	PASS
			30~1000	1.20	-41.05	≤-18.8	PASS
			1000~26500	1.20	-32.88	≤-18.8	PASS
		2480	Reference	0.79	0.79	---	PASS
			30~1000	0.79	-40.68	≤-19.21	PASS
			1000~26500	0.79	-32.87	≤-19.21	PASS
3DH5	Ant1	2402	Reference	-2.98	-2.98	---	PASS
			30~1000	-2.98	-40.17	≤-22.98	PASS
			1000~26500	-2.98	-31.91	≤-22.98	PASS
		2441	Reference	-2.47	-2.47	---	PASS
			30~1000	-2.47	-40.42	≤-22.47	PASS
			1000~26500	-2.47	-31.82	≤-22.47	PASS
		2480	Reference	-2.48	-2.48	---	PASS
			30~1000	-2.48	-41.2	≤-22.48	PASS
			1000~26500	-2.48	-31.78	≤-22.48	PASS

DH5_Ant1_2402_0-Reference



DH5_Ant1_2402_30-1000



DH5_Ant1_2402_1000-26500



DH5_Ant1_2441_0-Reference



DH5_Ant1_2441_30-1000



DH5_Ant1_2441_1000-26500



DH5_Ant1_2480_0-Reference



DH5_Ant1_2480_30-1000



DH5_Ant1_2480_1000-26500



3DH5_Ant1_2402_0-Reference



3DH5_Ant1_2402_30-1000



3DH5_Ant1_2402_1000-26500



3DH5_Ant1_2441_0-Reference



3DH5_Ant1_2441_30-1000



3DH5_Ant1_2441_1000-26500



3DH5_Ant1_2480_0-Reference



3DH5_Ant1_2480_30-1000



3DH5_Ant1_2480_1000-26500




Appendix A.7: Test Results of Radiated Spurious Emissions

Note: 1. Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported. 2. This testing was carried out on different modulations, but only the worst case (GFSK) was presented in this report.

30 MHz - 1GHz

EUT Information

EUT Name:	Bluetooth Wireless On-Ear Headphones
Model:	MB6073B
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168425752/A003471445-001
Test Voltage:	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

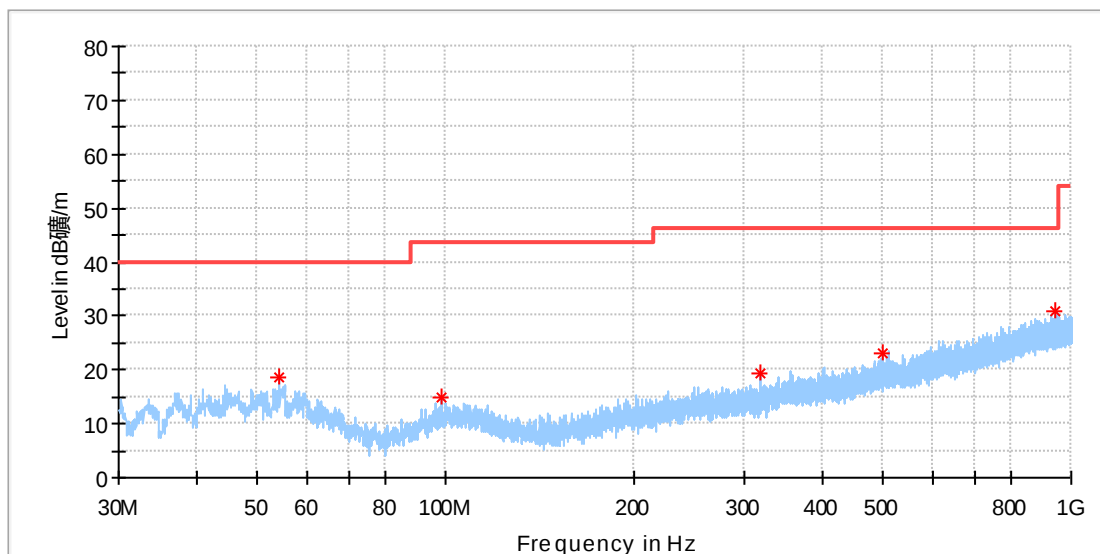

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
54.007500	18.42	40.00	21.58	100.0	H	213.0	-18.4
98.627500	15.02	43.50	28.48	100.0	H	75.0	-19.2
318.720500	19.33	46.00	26.67	100.0	H	115.0	-15.8
499.965000	23.16	46.00	22.84	100.0	H	231.0	-11.8
939.666000	30.73	46.00	15.27	100.0	H	137.0	-4.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Bluetooth Wireless On-Ear Headphones
Model:	MB6073B
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168425752/A003471445-001
Test Voltage:	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

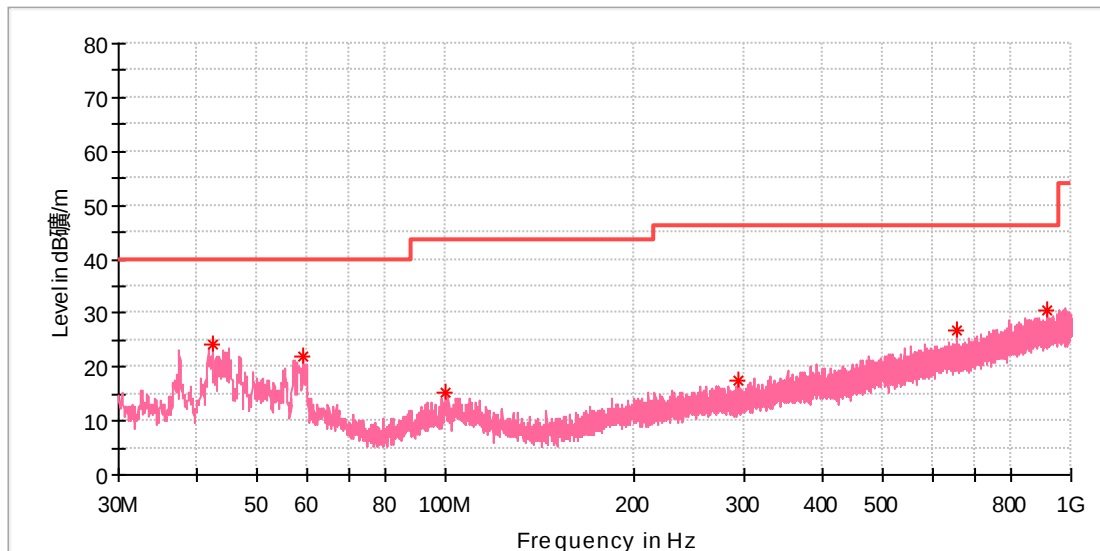

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
42.416000	24.11	40.00	15.89	100.0	V	176.0	-19.5
59.100000	21.83	40.00	18.17	100.0	V	212.0	-18.9
100.228000	15.18	43.50	28.32	100.0	V	305.0	-19.0
294.131000	17.56	46.00	28.44	100.0	V	353.0	-16.5
658.172000	26.85	46.00	19.15	100.0	V	198.0	-8.9
912.748500	30.55	46.00	15.45	100.0	V	345.0	-4.9

Final Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

1GHz - 18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

EUT Information

EUT Name:	Bluetooth Wireless On-Ear Headphones
Model:	MB6073B
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168425752/A003471445-001
Test Voltage:	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

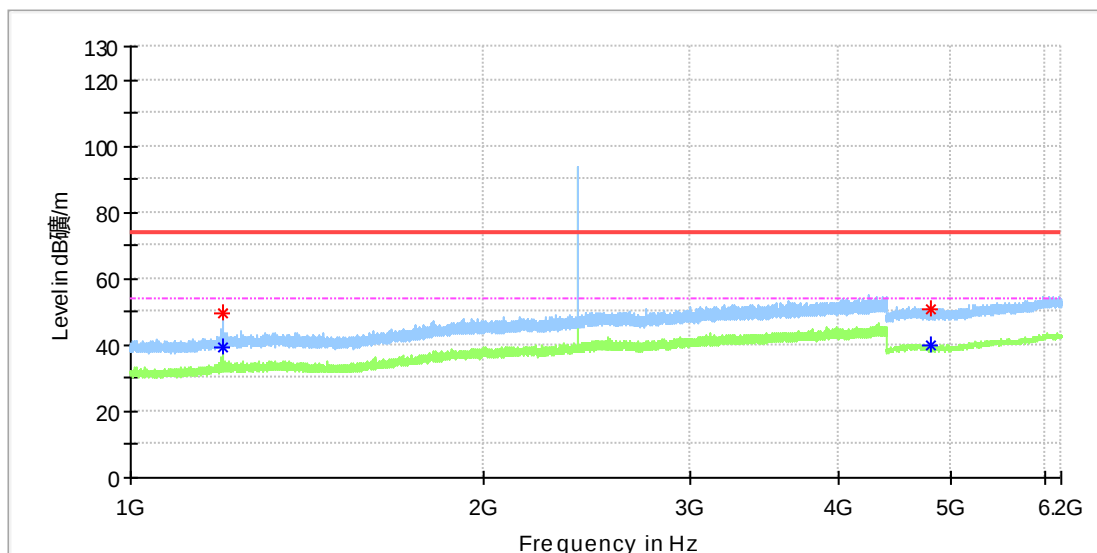

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1199.070000	---	39.35	54.00	14.65	150.0	H	94.0	1.1
1199.070000	49.38	---	74.00	24.62	150.0	H	94.0	1.1
4807.000000	---	39.78	54.00	14.22	150.0	H	346.0	11.8
4810.000000	51.04	---	74.00	22.96	150.0	H	218.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Bluetooth Wireless On-Ear Headphones
Model: MB6073B
Test Mode: BR_DH5_Low channel
Order No/Sample No: 168425752/A003471445-001
Test Voltage: Battery
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

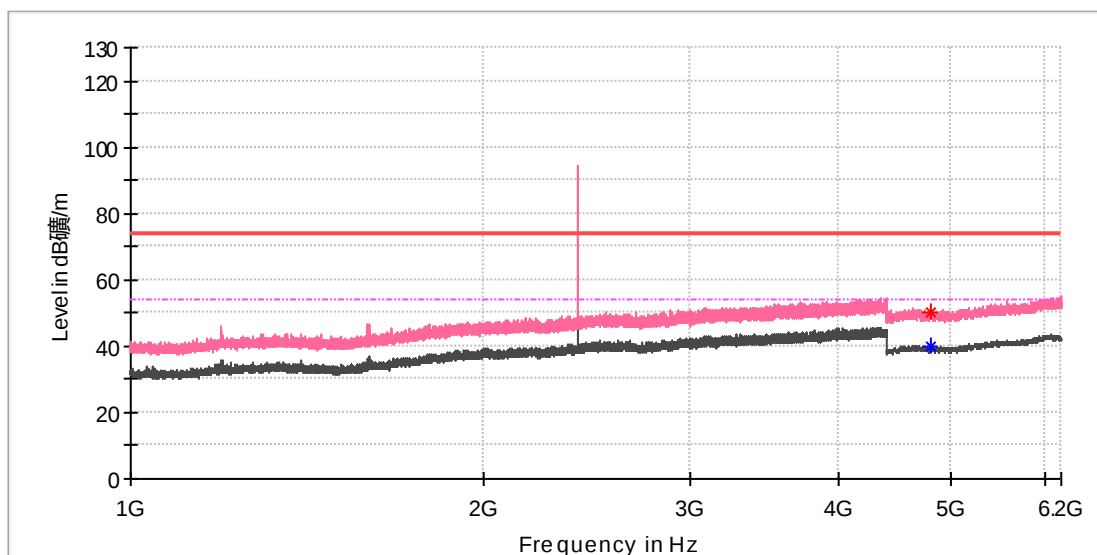

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4803.500000	---	40.00	54.00	14.00	150.0	V	359.0	11.8
4807.500000	50.31	---	74.00	23.69	150.0	V	359.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Bluetooth Wireless On-Ear Headphones
Model:	MB6073B
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168425752/A003471445-001
Test Voltage:	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

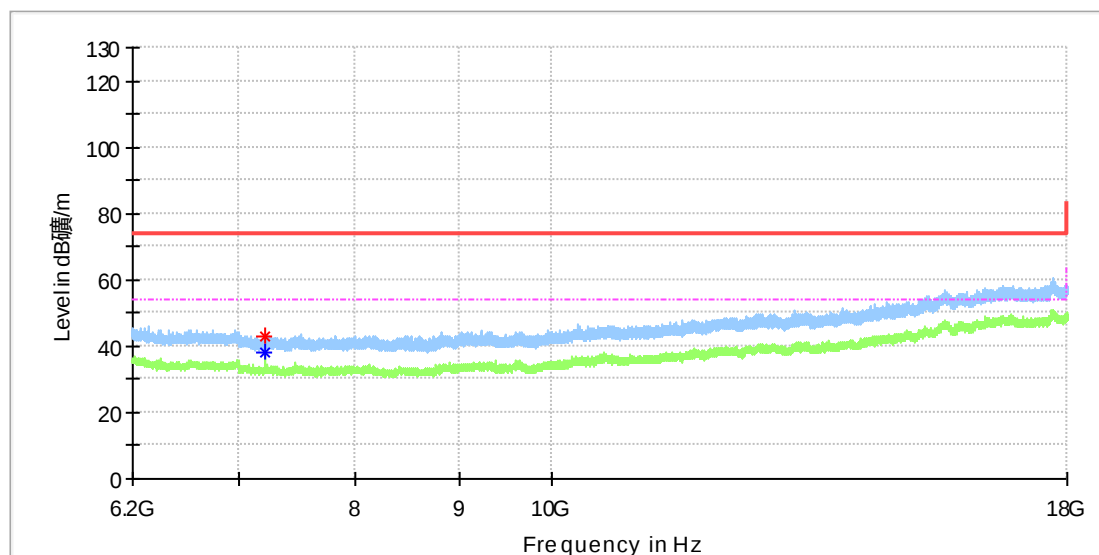

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7205.458333	---	37.79	54.00	16.21	150.0	H	271.0	8.8
7205.950000	42.73	---	74.00	31.27	150.0	H	283.0	8.8

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Bluetooth Wireless On-Ear Headphones
Model: MB6073B
Test Mode: BR_DH5_Low channel
Order No/Sample No: 168425752/A003471445-001
Test Voltage: Battery
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

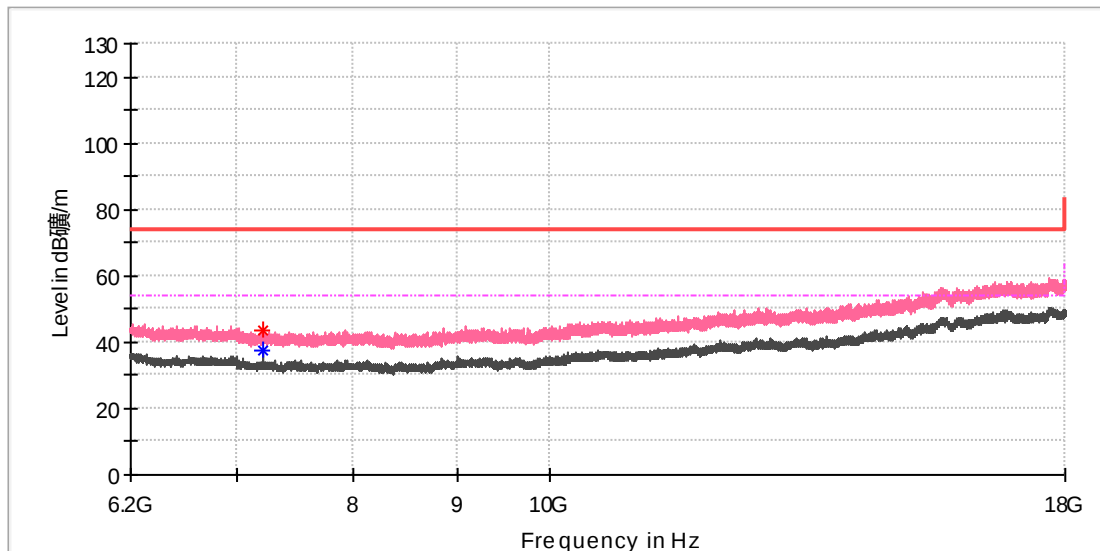

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7205.950000	43.77	---	74.00	30.23	150.0	V	124.0	8.8
7205.950000	---	37.59	54.00	16.41	150.0	V	124.0	8.8

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Bluetooth Wireless On-Ear Headphones
 Model: MB6073B
 Test Mode: BR_DH5_Mid channel
 Order No/Sample No: 168425752/A003471445-001
 Test Voltage: Battery
 Remark: Temp 23 Humi:56%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

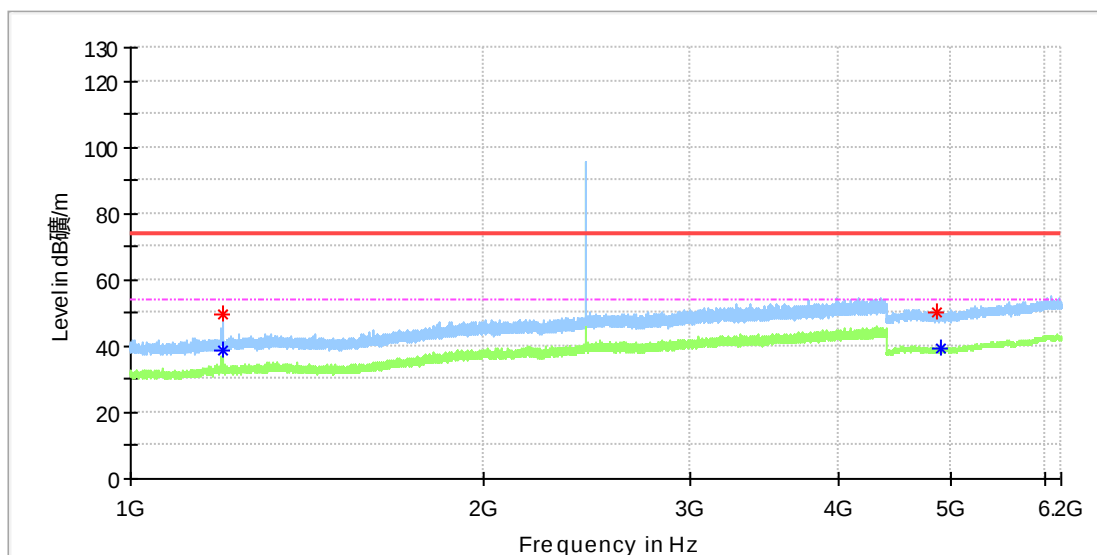

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1197.880000	---	38.56	54.00	15.44	150.0	H	119.0	1.1
1198.390000	49.79	---	74.00	24.21	150.0	H	99.0	1.1
4863.500000	50.11	---	74.00	23.89	150.0	H	358.0	11.8
4892.000000	---	39.26	54.00	14.74	150.0	H	205.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Bluetooth Wireless On-Ear Headphones
Model: MB6073B
Test Mode: BR_DH5_Mid channel
Order No/Sample No: 168425752/A003471445-001
Test Voltage: Battery
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

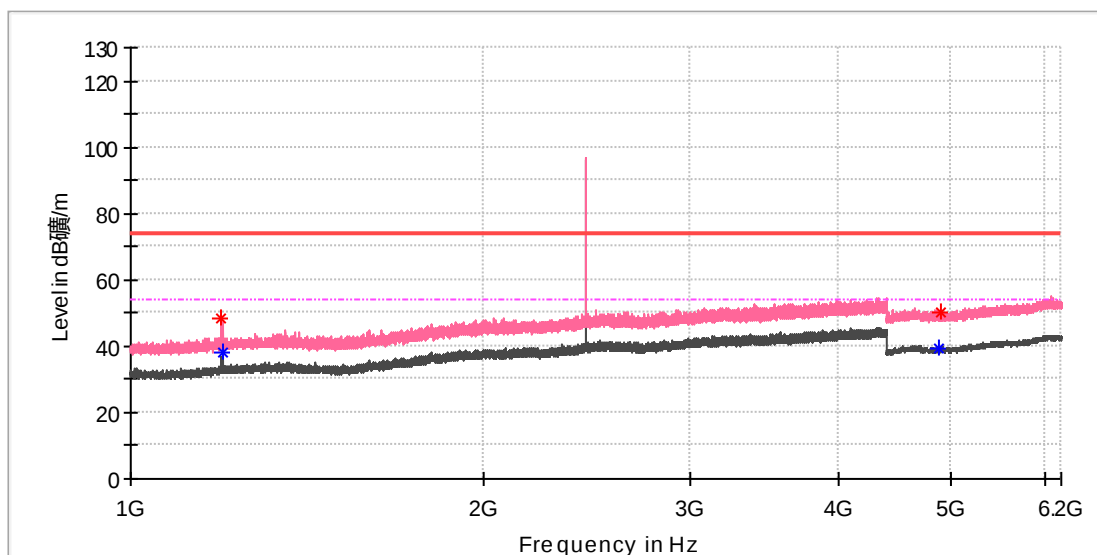

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1195.840000	48.26	---	74.00	25.74	150.0	V	277.0	1.1
1197.370000	---	37.96	54.00	16.04	150.0	V	132.0	1.1
4881.500000	---	39.34	54.00	14.66	150.0	V	343.0	11.8
4895.500000	50.00	---	74.00	24.00	150.0	V	113.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Bluetooth Wireless On-Ear Headphones
Model: MB6073B
Test Mode: BR_DH5_Mid channel
Order No/Sample No: 168425752/A003471445-001
Test Voltage: Battery
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

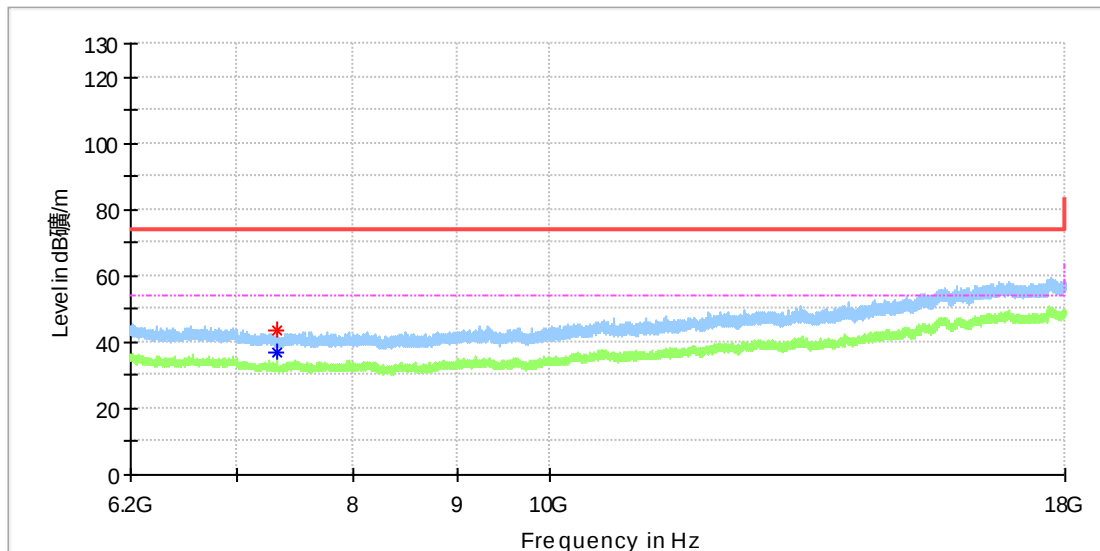

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7322.966667	43.24	---	74.00	30.76	150.0	H	6.0	8.2
7322.966667	---	36.95	54.00	17.05	150.0	H	6.0	8.2

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Bluetooth Wireless On-Ear Headphones
Model: MB6073B
Test Mode: BR_DH5_Mid channel
Order No/Sample No: 168425752/A003471445-001
Test Voltage: Battery
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

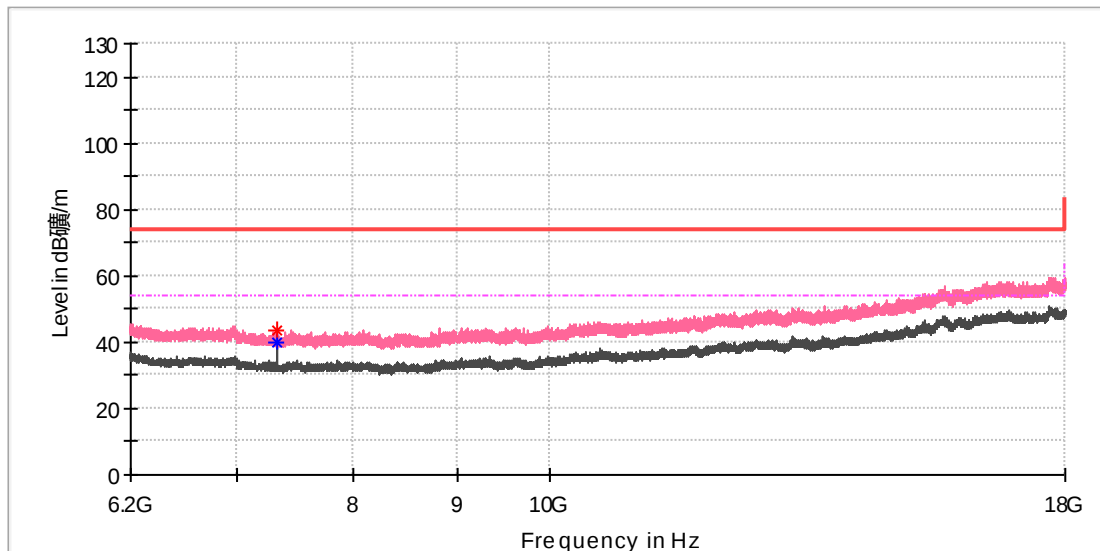

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7322.966667	---	39.66	54.00	14.34	150.0	V	126.0	8.2
7323.458333	43.73	---	74.00	30.27	150.0	V	126.0	8.2

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Bluetooth Wireless On-Ear Headphones
 Model: MB6073B
 Test Mode: BR_DH5_High channel
 Order No/Sample No: 168425752/A003471445-001
 Test Voltage: Battery
 Remark: Temp 23 Humi:56%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

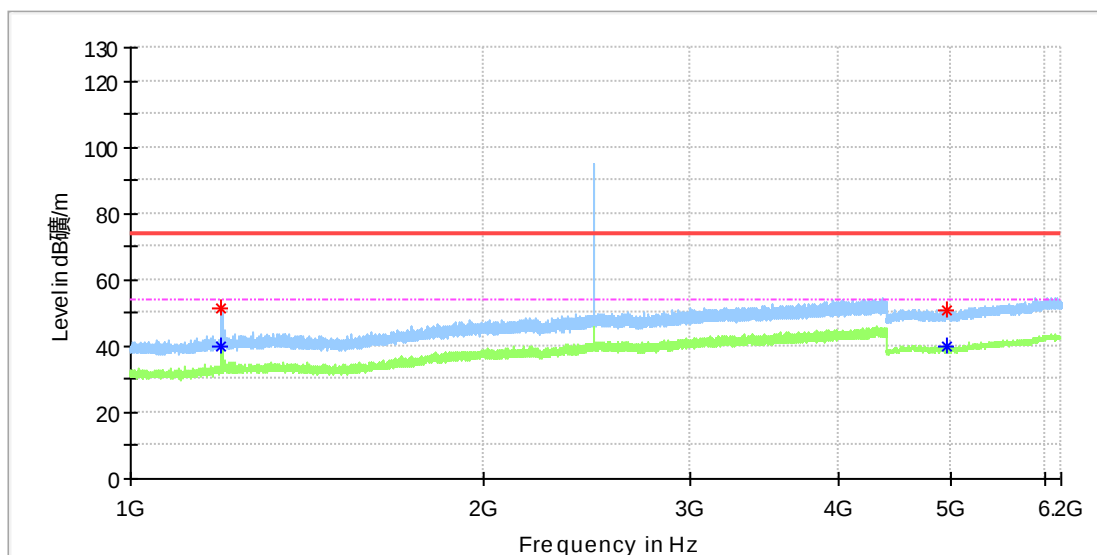

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1194.650000	---	39.96	54.00	14.04	150.0	H	96.0	1.1
1194.650000	51.17	---	74.00	22.83	150.0	H	96.0	1.1
4949.000000	50.59	---	74.00	23.41	150.0	H	95.0	11.8
4959.000000	---	39.89	54.00	14.11	150.0	H	314.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Bluetooth Wireless On-Ear Headphones
Model: MB6073B
Test Mode: BR_DH5_High channel
Order No/Sample No: 168425752/A003471445-001
Test Voltage: Battery
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

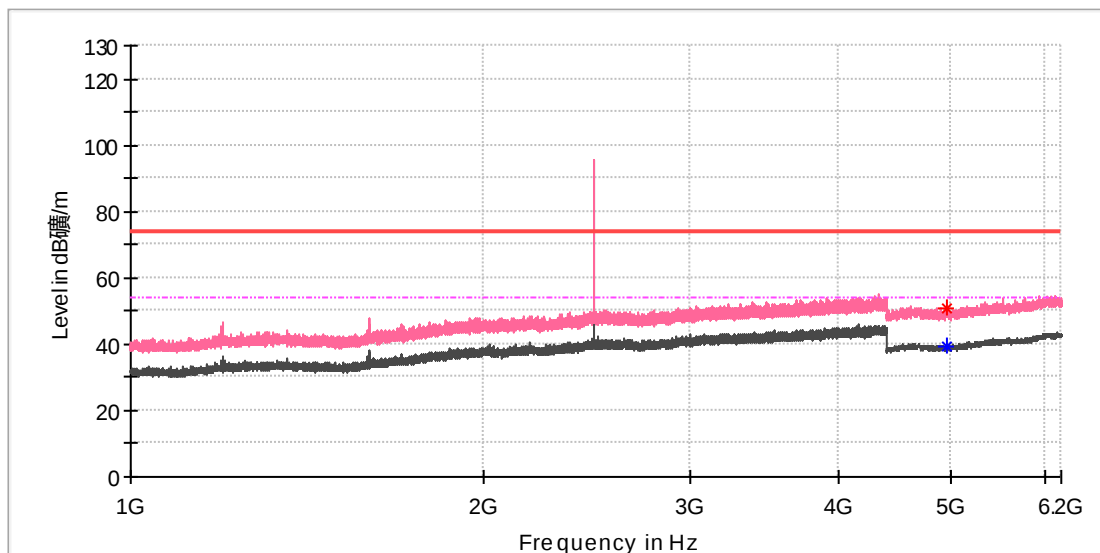

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4958.000000	50.86	---	74.00	23.14	150.0	V	318.0	11.8
4959.000000	---	39.60	54.00	14.40	150.0	V	311.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Bluetooth Wireless On-Ear Headphones
Model: MB6073B
Test Mode: BR_DH5_High channel
Order No/Sample No: 168425752/A003471445-001
Test Voltage: Battery
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

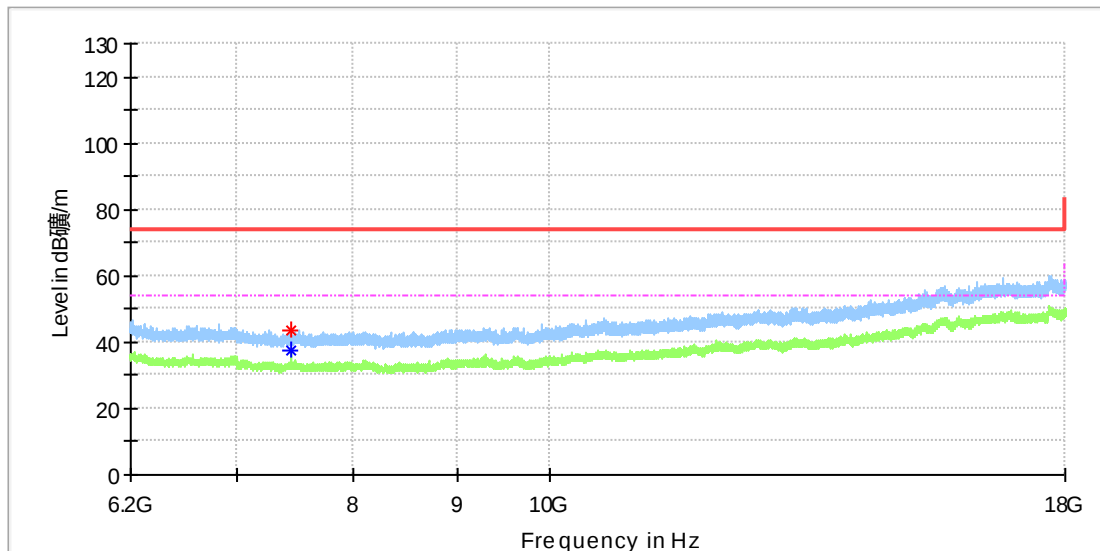

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7439.983333	43.48	---	74.00	30.52	150.0	H	171.0	8.4
7439.983333	---	37.56	54.00	16.44	150.0	H	171.0	8.4

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Bluetooth Wireless On-Ear Headphones
Model: MB6073B
Test Mode: BR_DH5_High channel
Order No/Sample No: 168425752/A003471445-001
Test Voltage: Battery
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

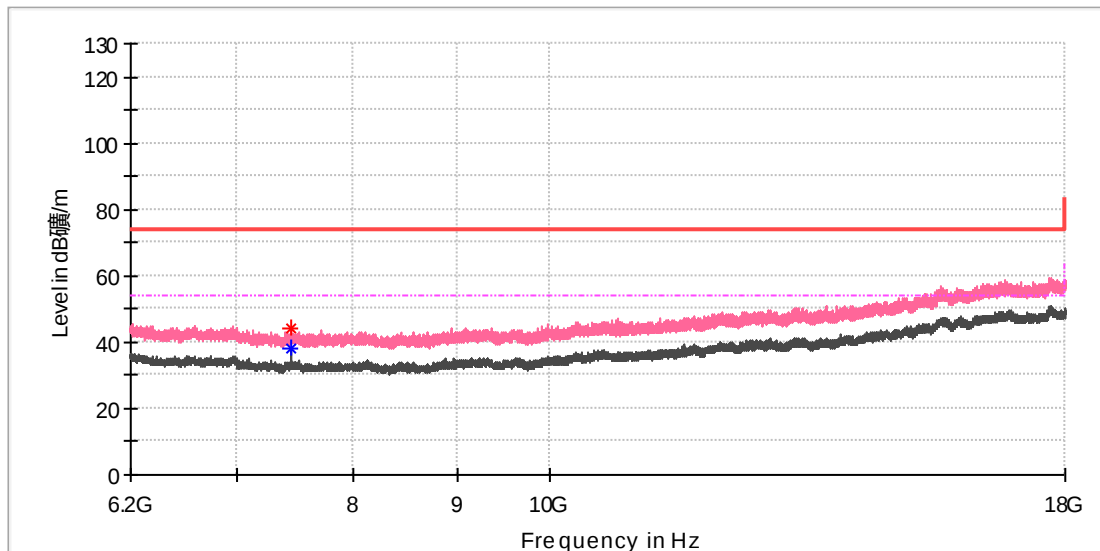

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7439.491667	43.93	---	74.00	30.07	150.0	V	120.0	8.4
7439.983333	---	38.11	54.00	15.89	150.0	V	120.0	8.4


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix A.8: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name:	Bluetooth Wireless On-Ear Headphones
Model:	MB6073B
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168425752/A003471445-001
Test Voltage:	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

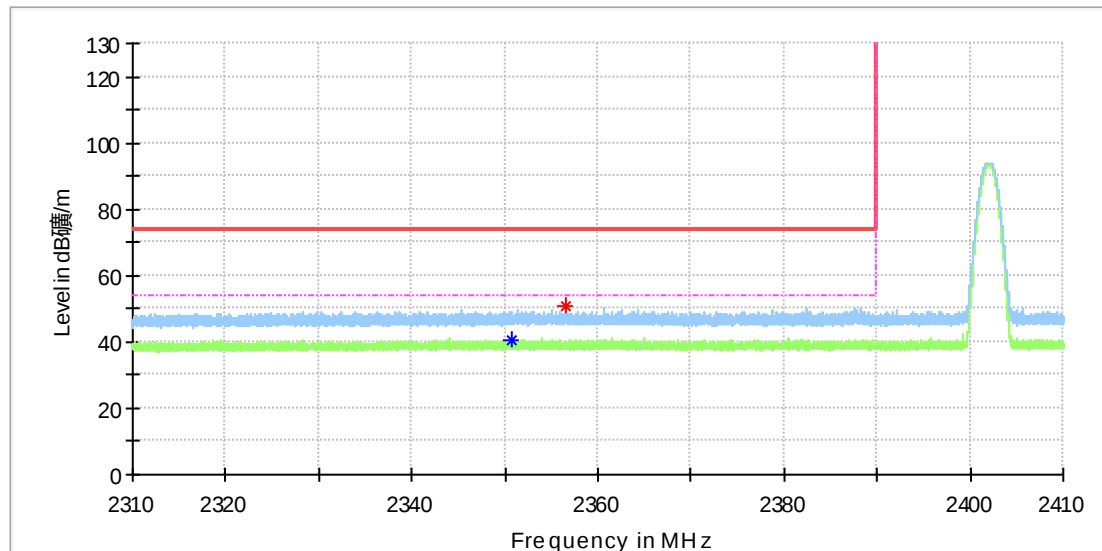

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2350.640000	---	40.29	54.00	13.71	150.0	H	169.0	6.9
2356.630000	50.73	---	74.00	23.27	150.0	H	201.0	6.9

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Bluetooth Wireless On-Ear Headphones
Model:	MB6073B
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168425752/A003471445-001
Test Voltage:	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

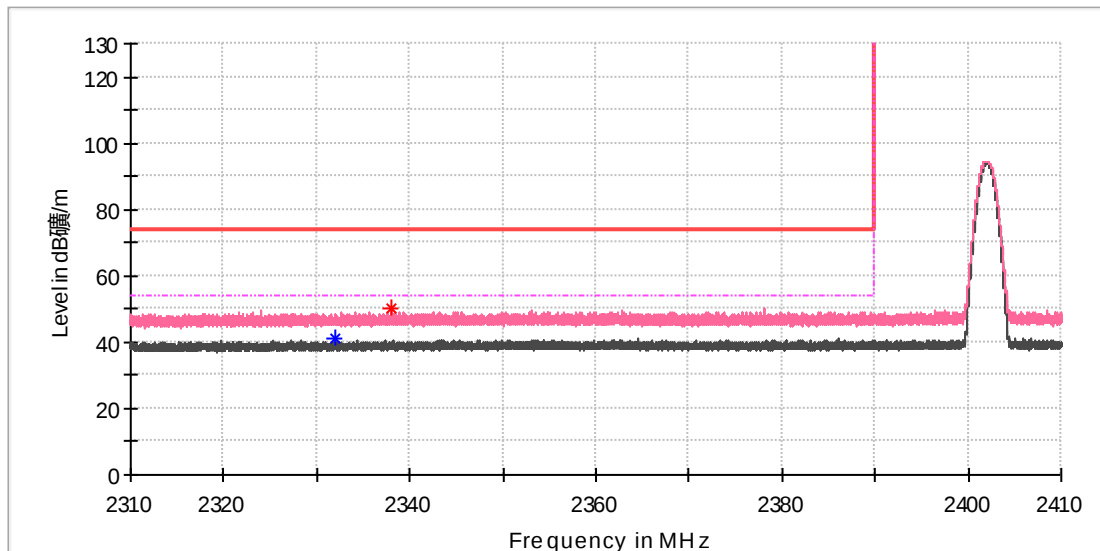

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2332.045000	---	40.85	54.00	13.15	150.0	V	0.0	6.7
2338.070000	49.99	---	74.00	24.01	150.0	V	345.0	6.8

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Bluetooth Wireless On-Ear Headphones
Model: MB6073B
Test Mode: BR_DH5_High channel
Order No/Sample No: 168425752/A003471445-001
Test Voltage: Battery
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

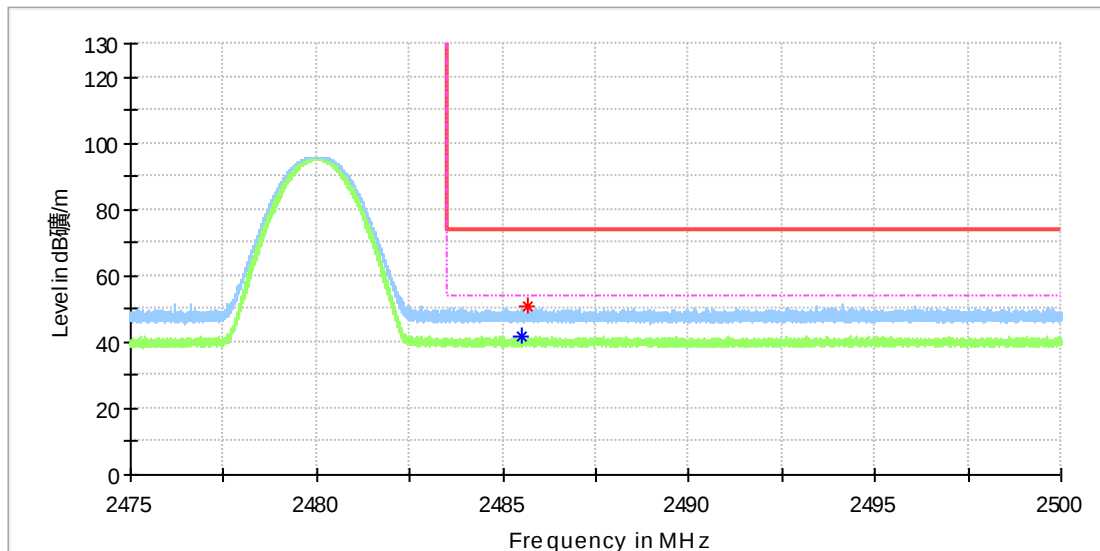

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2485.486250	---	41.74	54.00	12.26	150.0	H	21.0	7.4
2485.683750	50.52	---	74.00	23.48	150.0	H	153.0	7.4

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Bluetooth Wireless On-Ear Headphones
Model: MB6073B
Test Mode: BR_DH5_High channel
Order No/Sample No: 168425752/A003471445-001
Test Voltage: Battery
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

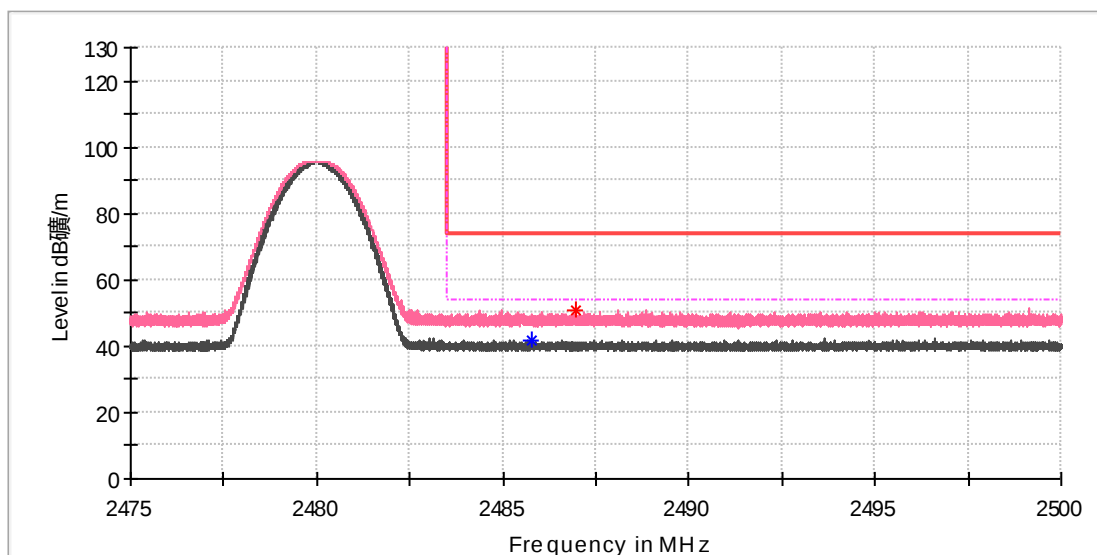

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2485.778750	---	41.75	54.00	12.25	150.0	V	230.0	7.4
2486.972500	50.65	---	74.00	23.35	150.0	V	63.0	7.4

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---