

Part 0 SAR Char Report



The following samples were submitted and identified on behalf of the client as:

Equipment Under Test Smart phone
Brand Name HONOR
Model No. ANY-NX1
Applicant HONOR Device Co., Ltd.
Shum Yip Sky Park, No. 8089, Hongli West Road,
Shenzhen, China
Standards IEEE/ANSI C95.1-1992, IEEE 1528-2013
FCC ID 2AYGCANY-NX1
Date of Receipt Feb. 17, 2022
Date of Test(s) Mar. 06, 2022 ~ Mar. 31, 2022
Date of Issue Apr. 12, 2022

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Ltd. Central RF Lab or testing done by SGS Taiwan Ltd. Central RF Lab in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Ltd. Central RF Lab in writing.

Signed on behalf of SGS

Clerk / Ruby Ou	PM / Kiki Lin	Approved By / John Yeh

Date: Apr. 12, 2022

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Revision History

Report Number	Revision	Description	Issue Date	Revised By	Remark
ES/2022/30012	Rev.00	Initial creation of document	Apr. 08, 2022	Ruby Ou	*
ES/2022/30012	Rev.01	Modify report according to customer requirements	Apr. 11, 2022	Ruby Ou	*
ES/2022/30012	Rev.02	Modify Plimit table in p. 27	Apr. 12, 2022	Ruby Ou	
Note:					
1. The mark " * " is the revised version of the report due to comments submitted by the certification.					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Contents

0.Guidance applied	4
1. General Information	5
1.1 Testing Laboratory	5
1.2 Details of Applicant.....	5
1.3 Description of EUT	6
1.4 Time-Averaging for SAR	9
1.5 Nomenclature for Part 0 Report	10
1.6 Bibliography	10
1.7 Test Environment	11
1.8 Operation Description	11
1.9 The SAR Measurement System.....	13
1.10 System Components.....	15
1.11 Evaluation Procedures	17
1.12 Probe Calibration Procedures	18
1.13 Test Standards and Limits	21
2. Instruments List	23
3. Uncertainty Budget.....	24
4. SAR Characterization	26
4.1 SAR_design_target and Uncertainty	26
4.2 SAR Characterization.....	26
5. SAR test results for Plimit calculations	28

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

0. Guidance applied

The SAR testing method and procedure for this device is in accordance with the following standards:

IEEE/ANSI C95.1-1992

IEEE 1528-2013

KDB648474D04v01r03

KDB865664D01v01r04

KDB865664D02v01r02

KDB941225D01v03r01

KDB941225D05v02r05

KDB941225D05Av01r02

KDB941225D06v02r01

KDB447498D01v06

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1. General Information

1.1 Testing Laboratory

SGS Taiwan Ltd. Central RF Lab	
No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan	
FCC Designation Number	TW0027
Tel	+886-2-2299-3279
Fax	+886-2-2298-0488
Internet	http://www.tw.sgs.com/

1.2 Details of Applicant

Company Name	HONOR Device Co., Ltd.
Company Address	Shum Yip Sky Park, No. 8089, Hongli West Road, Shenzhen, China

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1.3 Description of EUT

Equipment Under Test	Smart phone		
Brand Name	HONOR		
Model No.	ANY-NX1		
Hardware Version	HN3ANYM		
Software Version	4.2.0.42(C900E42R1P3)		
FCC ID	2AYGCANY-NX1		
Mode of Operation	☒ GSM ☒ GPRS ☒ EDGE ☒ WCDMA ☒ HSDPA ☒ HSUPA ☒ DC-HSDPA ☒ LTE FDD ☒ LTE TDD ☒ 5G NR ☒ WLAN802.11 ☒ Bluetooth		
Duty Cycle	GSM (DTM multi class B)	1/8.3	
	GPRS / EDGE (support multi class 12 max)	1/2 (1Dn4UP) 1/2.76 (1Dn3UP) 1/4.1 (1Dn2UP) 1/8.3 (1Dn1UP)	
	WCDMA	1	
	LTE FDD	1	
	LTE TDD	0.633	
	5G NR	1	
	WLAN802.11	1	
	Bluetooth	1	
TX Frequency Range (MHz)	GSM850	824	— 849
	GSM1900	1850	— 1910
	WCDMA Band II	1850	— 1910
	WCDMA Band V	824	— 849

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

TX Frequency Range (MHz)	LTE FDD Band 5	824 — 849
	LTE FDD Band 7	2500 — 2570
	LTE TDD Band 38	2570 — 2620
	LTE TDD Band 41	2496 — 2690
	n7	2500 — 2570
	n38	2570 — 2620
	n41	2496 — 2690
	WLAN802.11 b/g/n	2.4GHz (2400.0 – 2483.5)
	WLAN802.11 a/n/ac	5.2GHz (5150.0 – 5350.0) 5.6GHz (5470.0 – 5725.0) 5.8GHz (5725.0 – 5850.0)
RX Frequency Range (MHz)	Bluetooth	2.4GHz (2400.0 – 2483.5)
	GSM850	869-894
	GSM1900	1930-1990
	WCDMA Band II	1930-1990
	WCDMA Band V	869-894
	LTE FDD Band 5	869–894
	LTE FDD Band 7	2620–2690
	LTE TDD Band 38	2570–2620
	LTE TDD Band 41	2496-2690
	n7	2620–2690
	n38	2570-2620
	n41	2496-2690
	WLAN802.11 b/g/n	2.4GHz (2400.0 – 2483.5)
	WLAN802.11 a/n/ac	5.2GHz (5150.0 – 5350.0) 5.6GHz (5470.0 – 5725.0) 5.8GHz (5725.0 – 5850.0)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

RX Frequency Range (MHz)	Bluetooth	2.4GHz (2400.0 – 2483.5)
--------------------------	-----------	--------------------------

This device uses the Qualcomm® Smart Transmit feature to control and manage transmitting power in real time and to ensure the time-averaged RF exposure is in compliance with the FCC requirement at all times for 2G/3G/4G/5G Sub-6 NR WWAN operations. Additionally, this device supports WLAN/BT technologies, but the output power of these modems is not controlled by the Smart Transmit algorithm.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

1.4 Time-Averaging for SAR

This device is enabled with Qualcomm® Smart Transmit algorithm to control and manage transmitting power in real time and to ensure that the time-averaged RF exposure from 2G/3G/4G/5G Sub-6 NR WWAN is in compliance with FCC requirements. This Part 0 report shows SAR characterization of WWAN radios for 2G/3G/4G and 5G Sub-6 NR. Characterization is achieved by determining Plimit for 2G/3G/4G and 5G Sub-6 NR that correspond to the exposure design targets after accounting for all device design related uncertainties, i.e., SAR_design_target (< FCC SAR limit) for sub-6 radio. The SAR characterization is denoted as SAR Char in this report. Section 1.5 includes a nomenclature of the specific terms used in this report.

The compliance test under the static transmission scenario and simultaneous transmission analysis are reported in Part 1 report. The validation of the time-averaging algorithm and compliance under the dynamic (time-varying) transmission scenario for WWAN technologies are reported in Part 2 report (report Number could be found in Section 1.6 – Bibliography).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1.5 Nomenclature for Part 0 Report

Technology	Term	Description
2G/3G/4G/5G Sub-6 NR	Plimit	The time-averaged RF power which corresponds to SAR_design_target
	Pmax	Maximum tune-up power level
	SAR_design_target	The SAR design target for SAR compliance. It shall be less than SAR limit after accounting for all device design related uncertainties.
	SAR Char	Plimit for all technologies/bands for all applicable DSI

1.6 Bibliography

Report Type	Report Number
FCC SAR Test Report (Part 1)	ES/2022/30012
RF Exposure Part 2 Test Report	ES/2022/30012

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1.7 Test Environment

Ambient Temperature: $22\pm 2^{\circ}\text{C}$

Tissue Simulating Liquid: $22\pm 2^{\circ}\text{C}$

1.8 Operation Description

For WWAN, the EUT is controlled by using a Radio Communication Tester, and the communication between the EUT and the tester is established by air link. The device was tested based on KDB648474D04v01r03.

Head SAR (0mm)

Cheek/Touch Position:

The handset was brought toward the mouth of the head phantom by pivoting against the ear reference point until any point of the mouthpiece or keypad touched the phantom.

Ear/Tilt Position:

With the phone aligned in the Cheek/Touch position, the handset was tilted away from the mouth with respect to the test device reference point by 15 degrees

Body-worn SAR (15mm)

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative test separation distance configuration may be used to support both SAR conditions. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2\text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for the body-worn accessory with a headset attached to the handset.

Hotspot SAR (10mm)

A test separation distance of 10 mm is required between the phantom and all

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge when the form factor of a handset is larger than 9 cm × 5 cm.

Product specific 10-g SAR (0mm)

Since the device is a phablet (overall diagonal dimension > 16.0 cm), the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for product specific 10-g SAR. When hotspot mode applies, product specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg. However, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold. Based on KDB941225D06v02r01, the hotspot mode and body-worn accessory SAR test configurations may overlap for handsets. When the same wireless mode transmission configurations for voice and data are required for SAR measurements, the more conservative configuration with a smaller separation distance should be tested for the overlapping SAR configurations.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1.9 The SAR Measurement System

A block diagram of the SAR measurement System is given in Fig. a. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY 5 professional system). The model EX3DV4 field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E|)^2 / \rho$ where σ and ρ are the conductivity and mass density of the tissue-simulant.

The DASY 5 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

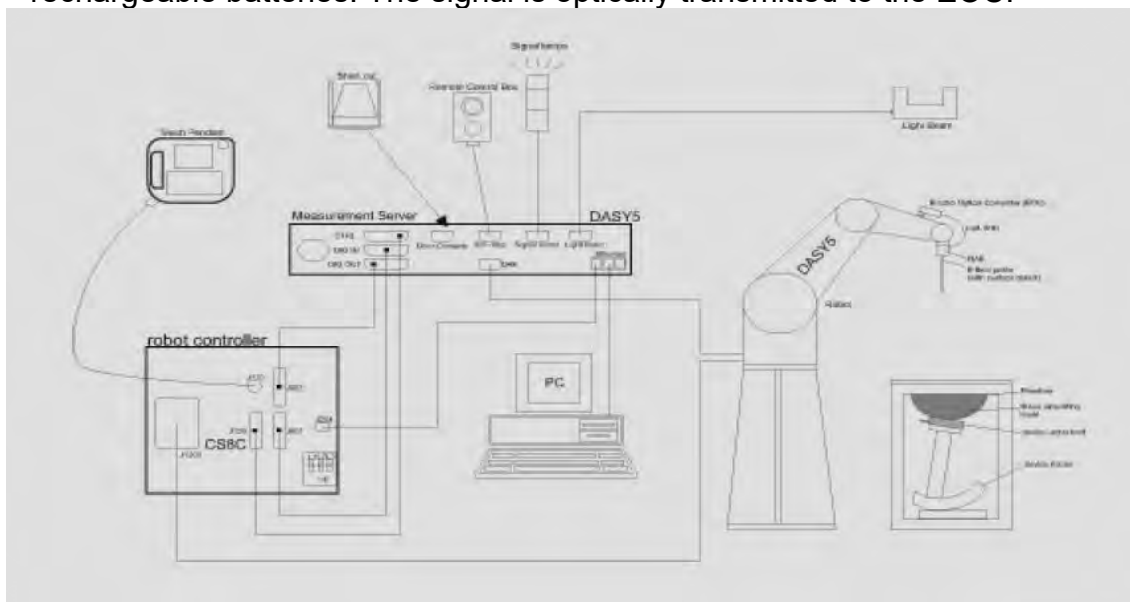


Fig. a The block diagram of SAR system

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

4. The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
5. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
6. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
7. A computer operating Windows 7.
8. DASY 5 software.
9. Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
10. Tissue simulating liquid mixed according to the given recipes.
11. Validation dipole kits allowing to validate the proper functioning of the system.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1.10 System Components

EX3DV4 E-Field Probe

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)		
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 835/1900/2600MHz Additional CF for other liquids and frequencies upon request		
Frequency	10 MHz to > 6 GHz		
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)		
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)		
Dimensions	Tip diameter: 2.5 mm		
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Phantom

Model	Twin SAM	
Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.	
Shell Thickness	2 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Height: 850 mm; Length: 1000 mm; Width: 500 mm	

DEVICE HOLDER

Construction	In combination with the Twin SAM Phantom V4.0/V4.0C or Twin SAM, the Mounting Device (made from POM) enables the rotation of the mounted transmitter in spherical coordinates, whereby the rotation point is the ear opening. The devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).	 Device Holder
--------------	--	--

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1.11 Evaluation Procedures

The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

1. The extraction of the measured data (grid and values) from the Zoom Scan.
2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. The generation of a high-resolution mesh within the measured volume
4. The interpolation of all measured values from the measurement grid to the high-resolution grid
5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. The calculation of the averaged SAR within masses of 1g and 10g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

In the Area Scan, the gradient of the interpolation function is evaluated to find all the extreme of the SAR distribution. The uncertainty on the locations of the extreme is less than 1/20 of the grid size. Only local maximum within -2 dB of the global maximum are searched and passed for the Cube Scan measurement. In the Cube Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5mm.

The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7x7x7 scans. The routines are verified and optimized for the grid dimensions used in these cube measurements.

The measured volume of 30x30x30mm contains about 30g of tissue.

The first procedure is an extrapolation (incl. Boundary correction) to get the points

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume. In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is moved around until the highest averaged SAR is found. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

1.12 Probe Calibration Procedures

For the calibration of E-field probes in lossy liquids, an electric field with an accurately known field strength must be produced within the measured liquid. For standardization purposes it would be desirable if all measurements which are necessary to assess the correct field strength would be traceable to standardized measurement procedures. In the following two different calibration techniques are summarized:

1.12.1 Transfer Calibration with Temperature Probes

In lossy liquids the specific absorption rate (SAR) is related both to the electric field (E) and the temperature gradient ($\delta T / \delta t$) in the liquid.

$$SAR = \frac{\sigma}{\rho} |E|^2 = c \frac{\delta T}{\delta t}$$

whereby σ is the conductivity, ρ the density and c the heat capacity of the liquid.

Hence, the electric field in lossy liquid can be measured indirectly by measuring the temperature gradient in the liquid. Non-disturbing temperature probes (optical probes or thermistor probes with resistive lines) with high spatial resolution (<1-2 mm) and fast reaction time (<1 s) are available and can be easily calibrated with high precision [1]. The setup and the exciting source have no influence on the calibration; only the relative positioning uncertainties of the standard temperature probe and the E-field probe to be calibrated must be considered. However, several problems limit the available accuracy of probe calibrations with temperature probes:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1. The temperature gradient is not directly measurable but must be evaluated from temperature measurements at different time steps. Special precaution is necessary to avoid measurement errors caused by temperature gradients due to energy equalizing effects or convection currents in the liquid. Such effects cannot be completely avoided, as the measured field itself destroys the thermal equilibrium in the liquid. With a careful setup these errors can be kept small.
2. The measured volume around the temperature probe is not well defined. It is difficult to calculate the energy transfer from a surrounding gradient temperature field into the probe. These effects must be considered, since temperature probes are calibrated in liquid with homogeneous temperatures. There is no traceable standard for temperature rise measurements.
3. The calibration depends on the assessment of the specific density, the heat capacity and the conductivity of the medium. While the specific density and heat capacity can be measured accurately with standardized procedures ($\sim 2\%$ for c ; much better for ρ), there is no standard for the measurement of the conductivity. Depending on the method and liquid, the error can well exceed $\pm 5\%$.
4. Temperature rise measurements are not very sensitive and therefore are often performed at a higher power level than the E-field measurements. The nonlinearities in the system (e.g., power measurements, different components, etc.) must be considered.

Considering these problems, the possible accuracy of the calibration of E-field probes with temperature gradient measurements in a carefully designed setup is about $\pm 10\%$ (RSS) [2]. Recently, a setup which is a combination of the waveguide techniques and the thermal measurements was presented in [3]. The estimated uncertainty of the setup is $\pm 5\%$ (RSS) when the same liquid is used for the calibration and for actual measurements and $\pm 7-9\%$ (RSS) when not, which is in good agreement with the estimates given in [2].

1.12.2 Calibration with Analytical Fields

In this method a technical setup is used in which the field can be calculated analytically from measurements of other physical magnitudes (e.g., input power). This corresponds to the standard field method for probe calibration in air; however, there is no standard defined for fields in lossy liquids.

When using calculated fields in lossy liquids for probe calibration, several points must be considered in the assessment of the uncertainty:

1. The setup must enable accurate determination of the incident power.
2. The accuracy of the calculated field strength will depend on the assessment of the dielectric parameters of the liquid.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

3. Due to the small wavelength in liquids with high permittivity, even small setups might be above the resonant cutoff frequencies. The field distribution in the setup must be carefully checked for conformity with the theoretical field distribution.

References

1. N. Kuster, Q. Balzano, and J.C. Lin, Eds., *Mobile Communications Safety*, Chapman & Hall, London, 1997.
2. K. Meier, M. Burkhardt, T. Schmid, and N. Kuster, "Broadband calibration of E-field probes in lossy media", *IEEE Transactions on Microwave Theory and Techniques*, vol. 44, no. 10, pp. 1954-1962, Oct. 1996.
3. K. Jokela, P. Hyysalo, and L. Puranen, "Calibration of specific absorption rate (SAR) probes in waveguide at 900 MHz", *IEEE Transactions on Instrumentation and Measurements*, vol. 47, no. 2, pp. 432-438, Apr. 1998.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1.13 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.1, By the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter. Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

1. Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over an 10 grams of tissue (defined as a tissue volume in the shape of a cube).
2. Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.
3. Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure. Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section. (Table 4.)

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR (Brain)	1.60 W/Kg	8.00 W/Kg
Spatial Average SAR (Whole Body)	0.08 W/Kg	0.40 W/Kg
Spatial Peak SAR (Hands/Feet/Ankle/Wrist)	4.00 W/Kg	20.00 W/Kg

Table 4. RF exposure limits

Notes:

1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

2. Instruments List

Manufacturer	Device	Type	Serial number	Date of last calibration	Date of next calibration
SPEAG	Dosimetric E-Field Probe	EX3DV4	7686	Oct.05,2021	Oct.04,2022
SPEAG	System Validation Dipole	D835V2	4d063	Oct.18,2021	Oct.17,2022
		D1900V2	5d173	Apr.15,2021	Apr.14,2022
		D2600V2	1005	Jan.18,2022	Jan.17,2023
SPEAG	Data acquisition Electronics	DAE4	1665	Feb.28,2022	Feb.27,2023
SPEAG	Software	DASY 52 V52.10.4	N/A	Calibration not required	Calibration not required
SPEAG	Phantom	SAM	N/A	Calibration not required	Calibration not required
SPEAG	Dielectric Assessment Kit	DAKS-3.5	1053	Feb.28,2022	Feb.27,2023
Agilent	Dual-directional coupler	772D	MY46151242	Aug.16,2021	Aug.15,2022
		778D	MY48220468	Aug.16,2021	Aug.15,2022
Agilent	RF Signal Generator	N5181A	MY50145142	Dec.23,2021	Dec.22,2022
R&S	Power Meter	NRX	102191	Jan.22,2022	Jan.21,2023
R&S	Power Sensor	NRP18S	101358	Jan.22,2022	Jan.21,2023
			109065	Oct.12,2021	Oct.11,2022
TECPEL	Digital thermometer	DTM-303A	TP190085	Jan.14,2022	Jan.13,2023
Anritsu	Radio Communication Test	MT8820C	6201061014	Jun.06,2021	Jun.05,2022
R&S	Radio Communication Test	CMW 500	125470	May.03,2021	May.02,2022

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions>, and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

3. Uncertainty Budget

Measurement Uncertainty evaluation template for DUT SAR test (3-6G)

A	c	D	e		f	g	$h=c * f / e$	$i=c * g / e$	k
Source of Uncertainty	Tolerance/ Uncertainty	Probabilit y	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.55%	N	1	1	1	1	6.55%	6.55%	∞
Isotropy , Axial	3.50%	R	$\sqrt{3}$	1.732	1	1	2.02%	2.02%	∞
Isotropy, Hemispherical	9.60%	R	$\sqrt{3}$	1.732	1	1	5.54%	5.54%	∞
Modulation Response	2.40%	R	$\sqrt{3}$	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	$\sqrt{3}$	1.732	1	1	0.58%	0.58%	∞
Linearity	4.70%	R	$\sqrt{3}$	1.732	1	1	2.71%	2.71%	∞
Detection Limits	1.00%	R	$\sqrt{3}$	1.732	1	1	0.58%	0.58%	∞
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	∞
Response time	0.80%	R	$\sqrt{3}$	1.732	1	1	0.46%	0.46%	∞
Integration Time	2.60%	R	$\sqrt{3}$	1.732	1	1	1.50%	1.50%	∞
Measurement drift (class A evaluation)	1.75%	R	$\sqrt{3}$	1.732	1	1	1.01%	1.01%	∞
RF ambient condition - noise	3.00%	R	$\sqrt{3}$	1.732	1	1	1.73%	1.73%	∞
RF ambient conditions - reflections	3.00%	R	$\sqrt{3}$	1.732	1	1	1.73%	1.73%	∞
Probe positioner Mechanical restrictions	0.40%	R	$\sqrt{3}$	1.732	1	1	0.23%	0.23%	∞
Probe Positioning with respect to phantom	2.90%	R	$\sqrt{3}$	1.732	1	1	1.67%	1.67%	∞
Post-processing	1.00%	R	$\sqrt{3}$	1.732	1	1	0.58%	0.58%	∞
Max SAR Eval	1.00%	R	$\sqrt{3}$	1.732	1	1	0.58%	0.58%	∞
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	$\sqrt{3}$	1.732	1	1	2.89%	2.89%	∞
Phantom and Setup									
Phantom Uncertainty	4.00%	R	$\sqrt{3}$	1.732	1	1	2.31%	2.31%	∞
Liquid permittivity (mea.)	1.07%	N	1	1	0.64	0.43	0.68%	0.46%	M
Liquid Conductivity (mea.)	0.85%	N	1	1	0.6	0.49	0.51%	0.42%	M
Combined standard uncertainty		RSS					11.75%	11.72%	
Expan uncertainty (95% confidence)							23.49%	23.45%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Measurement Uncertainty evaluation template for DUT SAR test (0.3-3G)

A	c	D	e		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probabilit y	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.00%	N	1	1	1	1	6.00%	6.00%	∞
Isotropy , Axial	3.50%	R	$\sqrt{3}$	1.732	1	1	2.02%	2.02%	∞
Isotropy, Hemispherical	9.60%	R	$\sqrt{3}$	1.732	1	1	5.54%	5.54%	∞
Modulation Response	2.40%	R	$\sqrt{3}$	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	$\sqrt{3}$	1.732	1	1	0.58%	0.58%	∞
Linearity	4.70%	R	$\sqrt{3}$	1.732	1	1	2.71%	2.71%	∞
Detection Limits	1.00%	R	$\sqrt{3}$	1.732	1	1	0.58%	0.58%	∞
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	∞
Response time	0.80%	R	$\sqrt{3}$	1.732	1	1	0.46%	0.46%	∞
Integration Time	2.60%	R	$\sqrt{3}$	1.732	1	1	1.50%	1.50%	∞
Measurement drift (class A evaluation)	1.75%	R	$\sqrt{3}$	1.732	1	1	1.01%	1.01%	∞
RF ambient condition - noise	3.00%	R	$\sqrt{3}$	1.732	1	1	1.73%	1.73%	∞
RF ambient conditions - reflections	3.00%	R	$\sqrt{3}$	1.732	1	1	1.73%	1.73%	∞
Probe positioner	0.40%	R	$\sqrt{3}$	1.732	1	1	0.23%	0.23%	∞
Mechanical restrictions									
Probe Positioning with respect to phantom	2.90%	R	$\sqrt{3}$	1.732	1	1	1.67%	1.67%	∞
Post-processing	1.00%	R	$\sqrt{3}$	1.732	1	1	0.58%	0.58%	∞
Max SAR Eval	1.00%	R	$\sqrt{3}$	1.732	1	1	0.58%	0.58%	∞
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	$\sqrt{3}$	1.732	1	1	2.89%	2.89%	∞
Phantom and Setup									
Phantom Uncertainty	4.00%	R	$\sqrt{3}$	1.732	1	1	2.31%	2.31%	∞
Liquid permittivity (mea.)	1.15%	N	1	1	0.64	0.43	0.74%	0.49%	M
Liquid Conductivity (mea.)	1.36%	N	1	1	0.6	0.49	0.82%	0.67%	M
Combined standard uncertainty		RSS					11.47%	11.44%	
Expant uncertainty (95% confidence)							22.94%	22.88%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

4. SAR Characterization

4.1 SAR_design_target and Uncertainty

SAR_design_target is determined by ensuring that it is less than FCC SAR limit after accounting for total device designed related uncertainties specified by the manufacturer (see Table 4-1).

$$\text{SAR_design_target} < \text{SAR_limit} \times 10^{(-\text{total uncertainty}/10)}$$

	Uncertainty dB 2/3/4G (except B7/B38/B41)	Uncertainty dB B7/B38/B41	Uncertainty dB NR
TxAGC Uncertainty	1	1.2	1.5
Device to device variation	0.5	0.5	0.5
Total uncertainty	1.1	1.3	1.55

Exposure	Frequency band	SAR_design_target
Head / Body-worn / Hotspot	All	1g, 1.0 W/Kg
Product specific 10-g SAR	All	10g, 2.8 W/Kg

4.2 SAR Characterization

SAR test results corresponding to Pmax for each antenna/technology/band/DSI can be found in next chapter.

Plimit is calculated by linearly scaling the measured SAR at the Pmax to SAR_design_target. Plimit determination corresponding to SAR_design_target are shown in next chapter.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

<Plimit for supported technologies and bands (calculated Plimit)>

Band	Antenna	Plimit (average)			Pmax* (average)
		Body-worn / product-specific 10g-SAR	Head	Hotspot	
		DSI 3	DSI 8	DSI 13	
GSM_B850	1	31.4	32.2	-	23.6
GPRS_B850_2Tx Slot	1	27.4	-	29.2	23.7
GSM_B1900	0	29.7	29.8	-	20.3
GSM_B1900	2	28.1	18.8	-	20.3
GPRS 1900 4Tx Slot	0	24.3	-	24.8	20.5
GPRS 1900 4Tx Slot	2	23.7	-	24	20.5
LTE_B5	1	26.7	32.2	29.5	24
LTE_B7	4	22.3	19.8	23.4	22.5
LTE_B7	0	23.7	32.7	20	22.5
LTE_B38	4	22.3	20	23.7	21.5
LTE_B38	0	25	33.8	23.8	21.5
LTE_B38	3	22.5	25.8	23.1	20.8
LTE_B38	7	25.9	22.3	26.3	20.5
LTE_B41	4	22.3	20	20	21.5
LTE_B41	0	24.8	31	23.3	21.5
LTE_B41	3	22.6	23.7	22.8	21
LTE_B41	7	25.5	22	25.9	20.5
NR5G_N7	4	21.8	18.5	23.7	22.5
NR5G_N7	0	21	32.6	19.5	22.5
NR5G_N38	4	20.9	18.5	18.5	23.5
NR5G_N38	0	21.5	34.3	21.5	23.5
NR5G_N38	3	21	25.1	19.3	22.8
NR5G_N38	7	24.9	20.5	26	22.5
NR5G_N41	4	21	18.5	18.5	23.5
NR5G_N41	0	23.8	34.1	21.5	23.5
NR5G_N41	3	21	26.8	17.5	23
NR5G_N41	7	24.7	20.5	26.1	22.5
WCDMA_B2	0	21.5	30.9	20	22.5
WCDMA_B2	2	19.5	18.5	18.5	22.5
WCDMA_B5	1	28	31.9	28.3	24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

5. SAR test results for Plimit calculations

Head

Band / Mode	Antenna	Bandwidth	Modulation	RB size	RB offset	Frequency (MHz)	Channel	Duty cycle	Test position	Test Distance	MPR (dBm)	Measured conducted power (dBm)	Duty Correction	Measured 1g-SAR (W/Kg)	Plimit** (dBm)	Minimum Plimit** (dBm)	Pmax* (dBm)
GSM 850	1	na	GMSK	na	na	824.2	128	12.05%	Left Touch	0mm	0	32.11	22.92	0.104	32.75	32.25	23.6
GSM 850	1	na	GMSK	na	na	848.8	251	12.05%	Left Touch	0mm	0	32.27	23.08	0.098	33.17		23.6
GSM 850	1	na	GMSK	na	na	836.6	190	12.05%	Right Touch	0mm	0	32.34	23.15	0.045	36.62		23.6
GSM 850	1	na	GMSK	na	na	836.6	190	12.05%	Right Tilt	0mm	0	32.34	23.15	0.049	36.25		23.6
GSM 850	1	na	GMSK	na	na	836.6	190	12.05%	Left Touch	0mm	0	32.34	23.15	0.123	32.25		23.6
GSM 850	1	na	GMSK	na	na	836.6	190	12.05%	Left Tilt	0mm	0	32.34	23.15	0.051	36.07	29.86	23.6
GSM 1900	0	na	GMSK	na	na	1850.2	512	12.05%	Left Touch	0mm	0	29.53	20.34	0.087	30.94		20.3
GSM 1900	0	na	GMSK	na	na	1880	661	12.05%	Left Touch	0mm	0	29.62	20.43	0.096	30.61		20.3
GSM 1900	0	na	GMSK	na	na	1909.8	810	12.05%	Right Touch	0mm	0	29.66	20.47	0.069	32.08		20.3
GSM 1900	0	na	GMSK	na	na	1909.8	810	12.05%	Right Tilt	0mm	0	29.66	20.47	0.079	31.49		20.3
GSM 1900	0	na	GMSK	na	na	1909.8	810	12.05%	Left Touch	0mm	0	29.66	20.47	0.115	29.86		20.3
GSM 1900	0	na	GMSK	na	na	1909.8	810	12.05%	Left Tilt	0mm	0	29.66	20.47	0.024	36.67	18.95	20.3
GSM 1900	2	na	GMSK	na	na	1850.2	512	12.05%	Right Tilt	0mm	0	29.45	20.26	1.035	20.11		20.3
GSM 1900	2	na	GMSK	na	na	1909.8	810	12.05%	Right Tilt	0mm	0	29.50	20.31	0.909	20.72		20.3
GSM 1900	2	na	GMSK	na	na	1880	661	12.05%	Right Touch	0mm	0	29.51	20.32	1.080	19.98		20.3
GSM 1900	2	na	GMSK	na	na	1880	661	12.05%	Right Tilt	0mm	0	29.51	20.32	1.370	18.95		20.3
GSM 1900	2	na	GMSK	na	na	1880	661	12.05%	Left Touch	0mm	0	29.51	20.32	0.702	21.86	30.93	20.3
GSM 1900	2	na	GMSK	na	na	1880	661	12.05%	Left Tilt	0mm	0	29.51	20.32	0.902	20.77		20.3
WCDMA II	0	na	3GPP Rel99	na	na	1852.4	9262	100.00%	Left Touch	0mm	0	22.18		0.126	31.18	20.15	22.5
WCDMA II	0	na	3GPP Rel99	na	na	1880	9400	100.00%	Left Touch	0mm	0	22.38		0.105	32.17		22.5
WCDMA II	0	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Right Touch	0mm	0	22.48		0.112	31.99		22.5
WCDMA II	0	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Right Tilt	0mm	0	22.48		0.069	34.09		22.5
WCDMA II	0	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Left Touch	0mm	0	22.48		0.143	30.93		22.5
WCDMA II	0	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Left Tilt	0mm	0	22.48		0.044	36.05	31.95	22.5
WCDMA II	2	na	3GPP Rel99	na	na	1852.4	9262	100.00%	Right Tilt	0mm	0	22.14		1.477	20.45		22.5
WCDMA II	2	na	3GPP Rel99	na	na	1880	9400	100.00%	Right Tilt	0mm	0	22.18		1.336	20.92		22.5
WCDMA II	2	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Right Touch	0mm	0	22.22		1.340	20.95		22.5
WCDMA II	2	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Right Tilt	0mm	0	22.22		1.610	20.15		22.5
WCDMA II	2	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Left Touch	0mm	0	22.22		0.999	22.22	32.29	22.5
WCDMA II	2	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Left Tilt	0mm	0	22.22		1.230	21.32		22.5
WCDMA V	1	na	3GPP Rel99	na	na	826.4	4132	100.00%	Left Touch	0mm	0	23.75		0.133	32.51	32.29	24
WCDMA V	1	na	3GPP Rel99	na	na	846.6	4233	100.00%	Left Touch	0mm	0	23.82		0.129	32.71		24
WCDMA V	1	na	3GPP Rel99	na	na	836.6	4183	100.00%	Right Touch	0mm	0	23.83		0.066	35.63		24
WCDMA V	1	na	3GPP Rel99	na	na	836.6	4183	100.00%	Right Tilt	0mm	0	23.83		0.059	36.12		24
WCDMA V	1	na	3GPP Rel99	na	na	836.6	4183	100.00%	Left Touch	0mm	0	23.83		0.154	31.95		24
WCDMA V	1	na	3GPP Rel99	na	na	836.6	4183	100.00%	Left Tilt	0mm	0	23.83		0.065	35.70	32.29	24
LTE B5	1	10	QPSK	1	0	829	20450	100.00%	Left Touch	0mm	0	23.85		0.128	32.78		24
LTE B5	1	10	QPSK	1	0	844	20600	100.00%	Left Touch	0mm	0	23.84		0.104	33.67		24
LTE B5	1	10	QPSK	1	0	836.5	20525	100.00%	Right Touch	0mm	0	23.93		0.041	37.80		24
LTE B5	1	10	QPSK	1	0	836.5	20525	100.00%	Right Tilt	0mm	0	23.93		0.032	38.88		24
LTE B5	1	10	QPSK	1	0	836.5	20525	100.00%	Left Touch	0mm	0	23.93		0.146	32.29		24
LTE B5	1	10	QPSK	1	0	836.5	20525	100.00%	Left Tilt	0mm	0	23.93		0.058	36.30		24

Note:

Qualcomm Smart Transmit feature which enables more elegant power control mechanisms for RF exposure management does not apply to GSM bands with DSI 13(hotspot mode).

* Pmax is used for RF tune-up procedure. The maximum allowed output power is equal to Pmax + TxAGC uncertainty.

** All Plimit power levels in above table corresponding to average power levels after accounting for duty cycle in the case TDD modulation schemes (LTE TDD).

The maximum allowed output power is the Plimit + TxAGC uncertainty, and if Plimit is higher than Pmax, the device output power will be Pmax instead.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Band / Mode	Antenna	Bandwidth	Modulation	RB size	RB offset	Frequency (MHz)	Channel	Duty cycle	Test position	Test Distance	MPR (dBm)	Measured conducted power (dBm)	Duty Correction	Measured 1g-SAR (W/Kg)	Plimit** (dBm)	Minimum Plimit** (dBm)	Pmax* (dBm)
LTE B7	4	20	QPSK	1	0	2535	21100	100.00%	Right Touch	0mm	0	21.89		0.658	23.71	23.10	22.5
LTE B7	4	20	QPSK	1	0	2560	21350	100.00%	Right Touch	0mm	0	21.86		0.702	23.40		22.5
LTE B7	4	20	QPSK	1	0	2510	20850	100.00%	Right Touch	0mm	0	21.95		0.767	23.10		22.5
LTE B7	4	20	QPSK	1	0	2510	20850	100.00%	Right Tilt	0mm	0	21.95		0.677	23.64		22.5
LTE B7	4	20	QPSK	1	0	2510	20850	100.00%	Left Touch	0mm	0	21.95		0.184	29.30		22.5
LTE B7	4	20	QPSK	1	0	2510	20850	100.00%	Left Tilt	0mm	0	21.95		0.155	30.05	32.70	22.5
LTE B7	0	20	QPSK	1	0	2535	21100	100.00%	Left Touch	0mm	0	22.01		0.057	34.45		22.5
LTE B7	0	20	QPSK	1	0	2560	21350	100.00%	Left Touch	0mm	0	21.98		0.066	33.78		22.5
LTE B7	0	20	QPSK	1	0	2510	20850	100.00%	Right Touch	0mm	0	22.04		0.052	34.88		22.5
LTE B7	0	20	QPSK	1	0	2510	20850	100.00%	Right Tilt	0mm	0	22.04		0.050	35.05		22.5
LTE B7	0	20	QPSK	1	0	2510	20850	100.00%	Left Touch	0mm	0	22.04		0.086	32.70		22.5
LTE B7	0	20	QPSK	1	0	2510	20850	100.00%	Left Tilt	0mm	0	22.04		0.041	35.91	21.55	22.5
LTE B38	4	20	QPSK	1	0	2580	37850	63.29%	Right Touch	0mm	0	23.03	21.04	0.768	22.19		21.5
LTE B38	4	20	QPSK	1	0	2610	38150	63.29%	Right Touch	0mm	0	23.11	21.12	0.707	22.63		21.5
LTE B38	4	20	QPSK	1	0	2595	38000	63.29%	Right Touch	0mm	0	23.12	21.13	0.909	21.55		21.5
LTE B38	4	20	QPSK	1	0	2595	38000	63.29%	Right Tilt	0mm	0	23.12	21.13	0.625	23.17		21.5
LTE B38	4	20	QPSK	1	0	2595	38000	63.29%	Left Touch	0mm	0	23.12	21.13	0.211	27.89		21.5
LTE B38	4	20	QPSK	1	0	2595	38000	63.29%	Left Tilt	0mm	0	23.12	21.13	0.169	28.85	33.83	21.5
LTE B38	0	20	QPSK	1	0	2595	38000	63.29%	Left Touch	0mm	0	23.15	21.16	0.035	35.72		21.5
LTE B38	0	20	QPSK	1	0	2610	38150	63.29%	Left Touch	0mm	0	23.04	21.05	0.041	34.93		21.5
LTE B38	0	20	QPSK	1	0	2580	37850	63.29%	Right Touch	0mm	0	23.22	21.23	0.052	34.07		21.5
LTE B38	0	20	QPSK	1	0	2580	37850	63.29%	Right Tilt	0mm	0	23.22	21.23	0.050	34.24		21.5
LTE B38	0	20	QPSK	1	0	2580	37850	63.29%	Left Touch	0mm	0	23.22	21.23	0.055	33.83	25.89	21.5
LTE B38	0	20	QPSK	1	0	2580	37850	63.29%	Left Tilt	0mm	0	23.22	21.23	0.035	35.79		21.5
LTE B38	3	20	QPSK	1	0	2595	38000	63.29%	Left Touch	0mm	0	22.25	20.26	0.243	26.41		20.8
LTE B38	3	20	QPSK	1	0	2610	38150	63.29%	Left Touch	0mm	0	22.23	20.24	0.232	26.59		20.8
LTE B38	3	20	QPSK	1	0	2580	37850	63.29%	Right Touch	0mm	0	22.29	20.30	0.237	26.56		20.8
LTE B38	3	20	QPSK	1	0	2580	37850	63.29%	Right Tilt	0mm	0	22.29	20.30	0.033	35.12	22.35	20.8
LTE B38	3	20	QPSK	1	0	2580	37850	63.29%	Left Touch	0mm	0	22.29	20.30	0.276	25.89		20.8
LTE B38	3	20	QPSK	1	0	2580	37850	63.29%	Left Tilt	0mm	0	22.29	20.30	0.031	35.39		20.8
LTE B38	7	20	QPSK	1	0	2580	37850	63.29%	Left Tilt	0mm	0	22.32	20.33	0.629	22.35		20.5
LTE B38	7	20	QPSK	1	0	2610	38150	63.29%	Left Tilt	0mm	0	22.02	20.03	0.441	23.59		20.5
LTE B38	7	20	QPSK	1	0	2595	38000	63.29%	Right Touch	0mm	0	22.50	20.51	0.254	26.47	21.83	20.5
LTE B38	7	20	QPSK	1	0	2595	38000	63.29%	Right Tilt	0mm	0	22.50	20.51	0.232	26.86		20.5
LTE B38	7	20	QPSK	1	0	2595	38000	63.29%	Left Touch	0mm	0	22.50	20.51	0.464	23.85		20.5
LTE B38	7	20	QPSK	1	0	2595	38000	63.29%	Left Tilt	0mm	0	22.50	20.51	0.546	23.14		20.5
LTE B41	4	20	QPSK	1	0	2506	39750	63.29%	Right Touch	0mm	0	22.91	20.92	0.614	23.04		21.5
LTE B41	4	20	QPSK	1	0	2593	40620	63.29%	Right Touch	0mm	0	22.94	20.95	0.637	22.91	31.01	21.5
LTE B41	4	20	QPSK	1	0	2636.5	41055	63.29%	Right Touch	0mm	0	23.03	21.04	0.588	23.35		21.5
LTE B41	4	20	QPSK	1	0	2680	41490	63.29%	Right Touch	0mm	0	23.01	21.02	0.722	22.44		21.5
LTE B41	4	20	QPSK	1	0	2549.5	40185	63.29%	Right Touch	0mm	0	23.21	21.22	0.869	21.83		21.5
LTE B41	4	20	QPSK	1	0	2549.5	40185	63.29%	Right Tilt	0mm	0	23.21	21.22	0.584	23.56		21.5
LTE B41	4	20	QPSK	1	0	2549.5	40185	63.29%	Left Touch	0mm	0	23.21	21.22	0.203	28.15	23.70	21.5
LTE B41	4	20	QPSK	1	0	2549.5	40185	63.29%	Left Tilt	0mm	0	23.21	21.22	0.172	28.87		21.5
LTE B41	0	20	QPSK	1	0	2506	39750	63.29%	Left Touch	0mm	0	23.13	21.14	0.077	32.28		21.5
LTE B41	0	20	QPSK	1	0	2593	40620	63.29%	Left Touch	0mm	0	23.05	21.06	0.084	31.82		21.5
LTE B41	0	20	QPSK	1	0	2636.5	41055	63.29%	Left Touch	0mm	0	23.01	21.02	0.072	32.45		21.5
LTE B41	0	20	QPSK	1	0	2680	41490	63.29%	Left Touch	0mm	0	23.21	21.22	0.091	31.63	22.02	21.5
LTE B41	0	20	QPSK	1	0	2549.5	40185	63.29%	Right Touch	0mm	0	23.25	21.26	0.061	33.41		21.5
LTE B41	0	20	QPSK	1	0	2549.5	40185	63.29%	Right Tilt	0mm	0	23.25	21.26	0.055	33.86		21.5
LTE B41	0	20	QPSK	1	0	2549.5	40185	63.29%	Left Touch	0mm	0	23.25	21.26	0.106	31.01		21.5
LTE B41	0	20	QPSK	1	0	2549.5	40185	63.29%	Left Tilt	0mm	0	23.25	21.26	0.042	35.03		21.5
LTE B41	3	20	QPSK	1	0	2506	39750	63.29%	Left Touch	0mm	0	22.44	20.45	0.425	24.17	22.02	21
LTE B41	3	20	QPSK	1	0	2549.5	40185	63.29%	Left Touch	0mm	0	22.58	20.59	0.411	24.46		21
LTE B41	3	20	QPSK	1	0	2593	40620	63.29%	Left Touch	0mm	0	22.41	20.42	0.397	24.44		21
LTE B41	3	20	QPSK	1	0	2636.5	41055	63.29%	Left Touch	0mm	0	22.47	20.48	0.431	24.14		21
LTE B41	3	20	QPSK	1	0	2680	41490	63.29%	Right Touch	0mm	0	22.93	20.94	0.252	26.93		21
LTE B41	3	20	QPSK	1	0	2680	41490	63.29%	Right Tilt	0mm	0	22.93	20.94	0.051	33.87	22.02	21
LTE B41	3	20	QPSK	1	0	2680	41490	63.29%	Left Touch	0mm	0	22.93	20.94	0.530	23.70		21
LTE B41	3	20	QPSK	1	0	2680	41490	63.29%	Left Tilt	0mm	0	22.93	20.94	0.059	33.23		21
LTE B41	7	20	QPSK	1	0	2506	39750	63.29%	Left Tilt	0mm	0	22.21	20.22	0.476	23.45		20.5
LTE B41	7	20	QPSK	1	0	2593	40620	63.29%	Left Tilt	0mm	0	22.04	20.05	0.523	22.87		20.5
LTE B41	7	20	QPSK	1	0	2636.5	41055	63.29%	Left Tilt	0mm	0	22.03	20.04	0.327	24.90	22.02	20.5
LTE B41	7	20	QPSK	1	0	2680	41490	63.29%	Left Tilt	0mm	0	22.02	20.03	0.302	25.23		20.5
LTE B41	7	20	QPSK	1	0	2549.5	40185	63.29%	Right Touch	0mm	0	22.69	20.70	0.270	26.39		20.5
LTE B41	7	20	QPSK	1	0	2549.5	40185	63.29%	Right Tilt	0mm	0	22.69	20.70	0.323	25.61		20.5
LTE B41	7	20	QPSK	1	0	2549.5	40185	63.29%	Left Touch	0mm	0	22.69	20.70	0.606	22.88		20.5
LTE B41	7	20	QPSK	1	0	2549.5	40185	63.29%	Left Tilt	0mm	0	22.69	20.70	0.738	22.02	22.02	20.5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Band / Mode	Antenna	Bandwidth	Modulation	RB size	RB offset	Frequency (MHz)	Channel	Duty cycle	Test position	Test Distance	MPR (dBm)	Measured conducted power (dBm)	Duty Correction	Measured 1g-SAR (W/Kg)	Plimit** (dBm)	Minimum Plimit** (dBm)	Pmax* (dBm)
5G n7	4	20	PV2 BPSK	1	1	2510	502000	100.00%	Right Touch	0mm	0	22.33		1.660	20.13		22.5
5G n7	4	20	PV2 BPSK	1	1	2535	507000	100.00%	Right Touch	0mm	0	22.54		1.780	20.04		22.5
5G n7	4	20	PV2 BPSK	1	1	2560	512000	100.00%	Right Touch	0mm	0	22.60		1.940	19.72	19.72	22.5
5G n7	4	20	PV2 BPSK	1	1	2560	512000	100.00%	Right Tilt	0mm	0	22.60		1.100	22.19		22.5
5G n7	4	20	PV2 BPSK	1	1	2560	512000	100.00%	Left Touch	0mm	0	22.60		0.348	27.18		22.5
5G n7	4	20	PV2 BPSK	1	1	2560	512000	100.00%	Left Tilt	0mm	0	22.60		0.284	28.07		22.5
5G n7	0	20	PV2 BPSK	1	1	2510	502000	100.00%	Left Touch	0mm	0	22.17		0.089	32.68		22.5
5G n7	0	20	PV2 BPSK	1	1	2535	507000	100.00%	Left Touch	0mm	0	22.10		0.081	33.02		22.5
5G n7	0	20	PV2 BPSK	1	1	2560	512000	100.00%	Left Touch	0mm	0	22.05		0.072	33.48		22.5
5G n7	0	20	PV2 BPSK	1	1	2510	502000	100.00%	Right Touch	0mm	0	22.17		0.051	35.09		22.5
5G n7	0	20	PV2 BPSK	1	1	2510	502000	100.00%	Right Tilt	0mm	0	22.17		0.042	35.94		22.5
5G n7	0	20	PV2 BPSK	1	1	2510	502000	100.00%	Left Tilt	0mm	0	22.17		0.019	39.38		22.5
5G n38	4	20	PV2 BPSK	1	1	2580	516000	100.00%	Right Touch	0mm	0	23.40		2.420	19.56		23.5
5G n38	4	20	PV2 BPSK	1	1	2595	519000	100.00%	Right Touch	0mm	0	23.22		2.120	19.96		23.5
5G n38	4	20	PV2 BPSK	1	1	2610	522000	100.00%	Right Touch	0mm	0	23.21		2.200	19.79		23.5
5G n38	4	20	PV2 BPSK	1	1	2580	516000	100.00%	Right Tilt	0mm	0	23.40		1.340	22.13		23.5
5G n38	4	20	PV2 BPSK	1	1	2580	516000	100.00%	Left Touch	0mm	0	23.40		0.478	26.61		23.5
5G n38	4	20	PV2 BPSK	1	1	2580	516000	100.00%	Left Tilt	0mm	0	23.40		0.432	27.05		23.5
5G n38	0	20	PV2 BPSK	1	1	2580	516000	100.00%	Left Touch	0mm	0	23.16		0.066	34.96		23.5
5G n38	0	20	PV2 BPSK	1	1	2595	519000	100.00%	Left Touch	0mm	0	23.25		0.078	34.33		23.5
5G n38	0	20	PV2 BPSK	1	1	2610	522000	100.00%	Left Touch	0mm	0	23.09		0.072	34.52		23.5
5G n38	0	20	PV2 BPSK	1	1	2595	519000	100.00%	Right Touch	0mm	0	23.25		0.051	36.17		23.5
5G n38	0	20	PV2 BPSK	1	1	2595	519000	100.00%	Right Tilt	0mm	0	23.25		0.037	37.57		23.5
5G n38	0	20	PV2 BPSK	1	1	2595	519000	100.00%	Left Tilt	0mm	0	23.25		0.032	38.20		23.5
5G n38	3	20	PV2 BPSK	1	1	2580	516000	100.00%	Left Touch	0mm	0	22.95		0.597	25.19		22.8
5G n38	3	20	PV2 BPSK	1	1	2595	519000	100.00%	Left Touch	0mm	0	22.90		0.485	26.04		22.8
5G n38	3	20	PV2 BPSK	1	1	2610	522000	100.00%	Left Touch	0mm	0	22.80		0.527	25.58		22.8
5G n38	3	20	PV2 BPSK	1	1	2580	516000	100.00%	Right Touch	0mm	0	22.95		0.255	28.88		22.8
5G n38	3	20	PV2 BPSK	1	1	2580	516000	100.00%	Right Tilt	0mm	0	22.95		0.146	31.31		22.8
5G n38	3	20	PV2 BPSK	1	1	2580	516000	100.00%	Left Tilt	0mm	0	22.95		0.103	32.82		22.8
5G n38	7	20	PV2 BPSK	1	1	2580	516000	100.00%	Left Touch	0mm	0	23.40		1.170	22.72		22.5
5G n38	7	20	PV2 BPSK	1	1	2595	519000	100.00%	Left Touch	0mm	0	23.17		1.020	23.08		22.5
5G n38	7	20	PV2 BPSK	1	1	2610	522000	100.00%	Left Touch	0mm	0	22.60		0.968	22.74		22.5
5G n38	7	20	PV2 BPSK	1	1	2580	516000	100.00%	Right Touch	0mm	0	23.40		0.403	27.35		22.5
5G n38	7	20	PV2 BPSK	1	1	2580	516000	100.00%	Right Tilt	0mm	0	23.40		0.487	26.52		22.5
5G n38	7	20	PV2 BPSK	1	1	2580	516000	100.00%	Left Tilt	0mm	0	23.40		1.130	22.87		22.5
5G n41	4	100	PV2 BPSK	1	1	2546.01	509202	100.00%	Right Touch	0mm	0	23.26		2.000	20.25		23.5
5G n41	4	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Right Touch	0mm	0	23.43		2.080	20.25		23.5
5G n41	4	100	PV2 BPSK	1	1	2640	528000	100.00%	Right Touch	0mm	0	23.34		1.930	20.48		23.5
5G n41	4	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Right Tilt	0mm	0	23.43		1.520	21.61		23.5
5G n41	4	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Left Touch	0mm	0	23.43		0.531	26.18		23.5
5G n41	4	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Left Tilt	0mm	0	23.43		0.460	26.80		23.5
5G n41	0	100	PV2 BPSK	1	1	2546.01	509202	100.00%	Left Touch	0mm	0	23.33		0.083	34.14		23.5
5G n41	0	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Left Touch	0mm	0	23.08		0.075	34.33		23.5
5G n41	0	100	PV2 BPSK	1	1	2640	528000	100.00%	Left Touch	0mm	0	23.10		0.072	34.53		23.5
5G n41	0	100	PV2 BPSK	1	1	2546.01	509202	100.00%	Right Touch	0mm	0	23.33		0.048	36.52		23.5
5G n41	0	100	PV2 BPSK	1	1	2546.01	509202	100.00%	Right Tilt	0mm	0	23.33		0.039	37.42		23.5
5G n41	0	100	PV2 BPSK	1	1	2546.01	509202	100.00%	Left Tilt	0mm	0	23.33		0.035	37.89		23.5
5G n41	3	100	PV2 BPSK	1	1	2546.01	509202	100.00%	Right Touch	0mm	0	23.02		0.331	27.82		23
5G n41	3	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Right Touch	0mm	0	23.07		0.420	26.84		23
5G n41	3	100	PV2 BPSK	1	1	2640	528000	100.00%	Right Touch	0mm	0	22.80		0.372	27.09		23
5G n41	3	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Right Tilt	0mm	0	23.07		0.164	30.92		23
5G n41	3	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Left Touch	0mm	0	23.07		0.350	27.63		23
5G n41	3	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Left Tilt	0mm	0	23.07		0.054	35.75		23
5G n41	7	100	PV2 BPSK	1	1	2546.01	509202	100.00%	Left Touch	0mm	0	23.57		1.010	23.53		22.5
5G n41	7	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Left Touch	0mm	0	23.69		1.100	23.28		22.5
5G n41	7	100	PV2 BPSK	1	1	2640	528000	100.00%	Left Touch	0mm	0	22.80		0.866	23.42		22.5
5G n41	7	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Right Touch	0mm	0	23.69		0.710	25.18		22.5
5G n41	7	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Right Tilt	0mm	0	23.69		0.583	26.03		22.5
5G n41	7	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Left Tilt	0mm	0	23.69		1.060	23.44		22.5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Hotspot

Band / Mode	Antenna	Bandwidth	Modulation	RB size	RB offset	Frequency (MHz)	Channel	Duty cycle	Test position	Test Distance	MPR (dBm)	Measured conducted power (dBm)	Duty Correction	Measured 1g-SAR (W/kg)	Plimit** (dBm)	Minimum Plimit** (dBm)	Pmax* (dBm)
GPRS 850 2Tx Slot	1	na	GMSK	na	na	824.2	128	24.39%	Back Surface	10mm	0	29.60	23.47	0.248	29.53	29.22	23.7
GPRS 850 2Tx Slot	1	na	GMSK	na	na	848.8	251	24.39%	Back Surface	10mm	0	29.63	23.50	0.256	29.42		23.7
GPRS 850 2Tx Slot	1	na	GMSK	na	na	836.6	190	24.39%	Front Surface	10mm	0	29.65	23.52	0.225	30.00		23.7
GPRS 850 2Tx Slot	1	na	GMSK	na	na	836.6	190	24.39%	Back Surface	10mm	0	29.65	23.52	0.269	29.22		23.7
GPRS 850 2Tx Slot	1	na	GMSK	na	na	836.6	190	24.39%	Top Edge	10mm	0	29.65	23.52	0.001	53.52		23.7
GPRS 850 2Tx Slot	1	na	GMSK	na	na	836.6	190	24.39%	Bottom Edge	10mm	0	29.65	23.52	0.218	30.14		23.7
GPRS 850 2Tx Slot	1	na	GMSK	na	na	836.6	190	24.39%	Left Edge	10mm	0	29.65	23.52	0.101	33.48		23.7
GPRS 850 2Tx Slot	1	na	GMSK	na	na	836.6	190	24.39%	Right Edge	10mm	0	29.65	23.52	0.085	34.23		23.7
GPRS 1900 4Tx Slot	0	na	GMSK	na	na	1850.2	512	50.00%	Bottom Edge	10mm	0	24.06	21.05	0.403	25.00		20.5
GPRS 1900 4Tx Slot	0	na	GMSK	na	na	1880	661	50.00%	Bottom Edge	10mm	0	24.16	21.15	0.392	25.22		20.5
GPRS 1900 4Tx Slot	0	na	GMSK	na	na	1909.8	810	50.00%	Front Surface	10mm	0	24.48	21.47	0.220	28.05	24.81	20.5
GPRS 1900 4Tx Slot	0	na	GMSK	na	na	1909.8	810	50.00%	Back Surface	10mm	0	24.48	21.47	0.331	26.27		20.5
GPRS 1900 4Tx Slot	0	na	GMSK	na	na	1909.8	810	50.00%	Top Edge	10mm	0	24.48	21.47	0.001	51.47		20.5
GPRS 1900 4Tx Slot	0	na	GMSK	na	na	1909.8	810	50.00%	Bottom Edge	10mm	0	24.48	21.47	0.463	24.81		20.5
GPRS 1900 4Tx Slot	0	na	GMSK	na	na	1909.8	810	50.00%	Left Edge	10mm	0	24.48	21.47	0.091	31.88		20.5
GPRS 1900 4Tx Slot	0	na	GMSK	na	na	1909.8	810	50.00%	Right Edge	10mm	0	24.48	21.47	0.088	32.02		20.5
GPRS 1900 4Tx Slot	2	na	GMSK	na	na	1850.2	512	50.00%	Top Edge	10mm	0	23.50	20.49	0.392	24.56		20.5
GPRS 1900 4Tx Slot	2	na	GMSK	na	na	1909.8	810	50.00%	Top Edge	10mm	0	24.33	21.32	0.507	24.27		20.5
GPRS 1900 4Tx Slot	2	na	GMSK	na	na	1880	661	50.00%	Front Surface	10mm	0	24.37	21.36	0.226	27.82		20.5
GPRS 1900 4Tx Slot	2	na	GMSK	na	na	1880	661	50.00%	Back Surface	10mm	0	24.37	21.36	0.373	25.61		20.5
GPRS 1900 4Tx Slot	2	na	GMSK	na	na	1880	661	50.00%	Top Edge	10mm	0	24.37	21.36	0.543	24.01	24.01	20.5
GPRS 1900 4Tx Slot	2	na	GMSK	na	na	1880	661	50.00%	Bottom Edge	10mm	0	24.37	21.36	0.001	51.36		20.5
GPRS 1900 4Tx Slot	2	na	GMSK	na	na	1880	661	50.00%	Left Edge	10mm	0	24.37	21.36	0.107	31.07		20.5
GPRS 1900 4Tx Slot	2	na	GMSK	na	na	1880	661	50.00%	Right Edge	10mm	0	24.37	21.36	0.061	33.51		20.5
WCDMA II	0	na	3GPP Rel99	na	na	1852.4	9262	100.00%	Bottom Edge	10mm	0	22.18		0.911	22.58	22.52	22.5
WCDMA II	0	na	3GPP Rel99	na	na	1880	9400	100.00%	Bottom Edge	10mm	0	22.38		0.969	22.52		22.5
WCDMA II	0	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Front Surface	10mm	0	22.48		0.425	26.20		22.5
WCDMA II	0	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Back Surface	10mm	0	22.48		0.584	24.82		22.5
WCDMA II	0	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Top Edge	10mm	0	22.48		0.001	52.48		22.5
WCDMA II	0	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Bottom Edge	10mm	0	22.48		0.954	22.68		22.5
WCDMA II	0	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Left Edge	10mm	0	22.48		0.163	30.36		22.5
WCDMA II	0	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Right Edge	10mm	0	22.48		0.182	29.88		22.5
WCDMA II	2	na	3GPP Rel99	na	na	1852.4	9262	100.00%	Top Edge	10mm	0	22.14		1.030	22.01		22.5
WCDMA II	2	na	3GPP Rel99	na	na	1880	9400	100.00%	Top Edge	10mm	0	22.18		1.050	21.97		22.5
WCDMA II	2	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Front Surface	10mm	0	22.22		0.392	26.29	21.97	22.5
WCDMA II	2	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Back Surface	10mm	0	22.22		0.661	24.02		22.5
WCDMA II	2	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Top Edge	10mm	0	22.22		0.988	22.27		22.5
WCDMA II	2	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Bottom Edge	10mm	0	22.22		0.001	52.22		22.5
WCDMA II	2	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Left Edge	10mm	0	22.22		0.211	28.98		22.5
WCDMA II	2	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Right Edge	10mm	0	22.22		0.100	32.22		22.5
WCDMA V	1	na	3GPP Rel99	na	na	826.4	4132	100.00%	Back Surface	10mm	0	23.75		0.344	28.38	28.38	24
WCDMA V	1	na	3GPP Rel99	na	na	846.6	4233	100.00%	Back Surface	10mm	0	23.82		0.321	28.75		24
WCDMA V	1	na	3GPP Rel99	na	na	836.6	4183	100.00%	Front Surface	10mm	0	23.83		0.253	29.80		24
WCDMA V	1	na	3GPP Rel99	na	na	836.6	4183	100.00%	Back Surface	10mm	0	23.83		0.328	28.67		24
WCDMA V	1	na	3GPP Rel99	na	na	836.6	4183	100.00%	Top Edge	10mm	0	23.83		0.001	53.83		24
WCDMA V	1	na	3GPP Rel99	na	na	836.6	4183	100.00%	Bottom Edge	10mm	0	23.83		0.267	29.56		24
WCDMA V	1	na	3GPP Rel99	na	na	836.6	4183	100.00%	Left Edge	10mm	0	23.83		0.113	33.30		24
WCDMA V	1	na	3GPP Rel99	na	na	836.6	4183	100.00%	Right Edge	10mm	0	23.83		0.162	31.73		24
LTE B5	1	10	QPSK	1	0	829	20450	100.00%	Back Surface	10mm	0	23.85		0.259	29.72	29.55	24
LTE B5	1	10	QPSK	1	0	844	20600	100.00%	Back Surface	10mm	0	23.84		0.263	29.64		24
LTE B5	1	10	QPSK	1	0	836.5	20525	100.00%	Front Surface	10mm	0	23.93		0.224	30.43		24
LTE B5	1	10	QPSK	1	0	836.5	20525	100.00%	Back Surface	10mm	0	23.93		0.274	29.55		24
LTE B5	1	10	QPSK	1	0	836.5	20525	100.00%	Top Edge	10mm	0	23.93		0.001	53.93		24
LTE B5	1	10	QPSK	1	0	836.5	20525	100.00%	Bottom Edge	10mm	0	23.93		0.224	30.43		24
LTE B5	1	10	QPSK	1	0	836.5	20525	100.00%	Left Edge	10mm	0	23.93		0.001	53.93		24
LTE B5	1	10	QPSK	1	0	836.5	20525	100.00%	Right Edge	10mm	0	23.93		0.001	53.93		24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Band / Mode	Antenna	Bandwidth	Modulation	RB size	RB offset	Frequency (MHz)	Channel	Duty cycle	Test position	Test Distance	MPR (dBm)	Measured conducted power (dBm)	Duty Correction	Measured 1g-SAR (W/kg)	Plimit** (dBm)	Minimum Plimit** (dBm)	Pmax* (dBm)
LTE B7	4	20	QPSK	1	0	2535	21100	100.00%	Left Edge	10mm	0	21.89		0.639	23.83	23.49	22.5
LTE B7	4	20	QPSK	1	0	2560	21350	100.00%	Left Edge	10mm	0	21.86		0.687	23.49		22.5
LTE B7	4	20	QPSK	1	0	2510	20850	100.00%	Front Surface	10mm	0	21.95		0.183	29.33		22.5
LTE B7	4	20	QPSK	1	0	2510	20850	100.00%	Back Surface	10mm	0	21.95		0.318	26.93		22.5
LTE B7	4	20	QPSK	1	0	2510	20850	100.00%	Top Edge	10mm	0	21.95		0.139	30.52		22.5
LTE B7	4	20	QPSK	1	0	2510	20850	100.00%	Bottom Edge	10mm	0	21.95		0.019	39.16		22.5
LTE B7	4	20	QPSK	1	0	2510	20850	100.00%	Left Edge	10mm	0	21.95		0.533	24.68		22.5
LTE B7	4	20	QPSK	1	0	2510	20850	100.00%	Right Edge	10mm	0	21.95		0.001	51.95		22.5
LTE B7	0	20	QPSK	1	0	2535	21100	100.00%	Bottom Edge	10mm	0	22.01		0.738	23.33		22.5
LTE B7	0	20	QPSK	1	0	2560	21350	100.00%	Bottom Edge	10mm	0	21.98		0.818	22.85		22.5
LTE B7	0	20	QPSK	1	0	2510	20850	100.00%	Front Surface	10mm	0	22.04		0.228	28.46	22.5	
LTE B7	0	20	QPSK	1	0	2510	20850	100.00%	Back Surface	10mm	0	22.04		0.461	25.40	22.5	
LTE B7	0	20	QPSK	1	0	2510	20850	100.00%	Top Edge	10mm	0	22.04		0.001	52.04	22.5	
LTE B7	0	20	QPSK	1	0	2510	20850	100.00%	Bottom Edge	10mm	0	22.04		0.715	23.50	22.5	
LTE B7	0	20	QPSK	1	0	2510	20850	100.00%	Left Edge	10mm	0	22.04		0.091	32.45	22.5	
LTE B7	0	20	QPSK	1	0	2510	20850	100.00%	Right Edge	10mm	0	22.04		0.079	33.06	22.5	
LTE B38	4	20	QPSK	1	0	2580	37850	63.29%	Left Edge	10mm	0	23.03	21.04	0.537	23.74	23.74	21.5
LTE B38	4	20	QPSK	1	0	2610	38150	63.29%	Left Edge	10mm	0	23.11	21.12	0.519	23.97		21.5
LTE B38	4	20	QPSK	1	0	2595	38000	63.29%	Front Surface	10mm	0	23.12	21.13	0.204	28.04		21.5
LTE B38	4	20	QPSK	1	0	2595	38000	63.29%	Back Surface	10mm	0	23.12	21.13	0.353	25.66		21.5
LTE B38	4	20	QPSK	1	0	2595	38000	63.29%	Top Edge	10mm	0	23.12	21.13	0.163	29.01		21.5
LTE B38	4	20	QPSK	1	0	2595	38000	63.29%	Bottom Edge	10mm	0	23.12	21.13	0.003	46.36		21.5
LTE B38	4	20	QPSK	1	0	2595	38000	63.29%	Left Edge	10mm	0	23.12	21.13	0.517	24.00		21.5
LTE B38	4	20	QPSK	1	0	2595	38000	63.29%	Right Edge	10mm	0	23.12	21.13	0.001	51.13		21.5
LTE B38	0	20	QPSK	1	0	2595	38000	63.29%	Bottom Edge	10mm	0	23.15	21.16	0.537	23.86		21.5
LTE B38	0	20	QPSK	1	0	2610	38150	63.29%	Bottom Edge	10mm	0	23.04	21.05	0.428	24.74		21.5
LTE B38	0	20	QPSK	1	0	2580	37850	63.29%	Front Surface	10mm	0	23.22	21.23	0.266	26.98	23.86	21.5
LTE B38	0	20	QPSK	1	0	2580	37850	63.29%	Back Surface	10mm	0	23.22	21.23	0.345	25.86		21.5
LTE B38	0	20	QPSK	1	0	2580	37850	63.29%	Top Edge	10mm	0	23.22	21.23	0.001	51.23		21.5
LTE B38	0	20	QPSK	1	0	2580	37850	63.29%	Bottom Edge	10mm	0	23.22	21.23	0.524	24.04		21.5
LTE B38	0	20	QPSK	1	0	2580	37850	63.29%	Left Edge	10mm	0	23.22	21.23	0.085	31.94		21.5
LTE B38	0	20	QPSK	1	0	2580	37850	63.29%	Right Edge	10mm	0	23.22	21.23	0.087	31.84		21.5
LTE B38	3	20	QPSK	1	0	2595	38000	63.29%	Left Edge	10mm	0	22.25	20.26	0.442	23.81	23.17	20.8
LTE B38	3	20	QPSK	1	0	2610	38150	63.29%	Left Edge	10mm	0	22.23	20.24	0.510	23.17		20.8
LTE B38	3	20	QPSK	1	0	2580	37850	63.29%	Front Surface	10mm	0	22.29	20.30	0.103	30.18		20.8
LTE B38	3	20	QPSK	1	0	2580	37850	63.29%	Back Surface	10mm	0	22.29	20.30	0.149	28.57		20.8
LTE B38	3	20	QPSK	1	0	2580	37850	63.29%	Top Edge	10mm	0	22.29	20.30	0.001	50.30		20.8
LTE B38	3	20	QPSK	1	0	2580	37850	63.29%	Bottom Edge	10mm	0	22.29	20.30	0.001	50.30		20.8
LTE B38	3	20	QPSK	1	0	2580	37850	63.29%	Left Edge	10mm	0	22.29	20.30	0.354	24.81		20.8
LTE B38	3	20	QPSK	1	0	2580	37850	63.29%	Right Edge	10mm	0	22.29	20.30	0.001	50.30		20.8
LTE B38	7	20	QPSK	1	0	2580	37850	63.29%	Top Edge	10mm	0	22.32	20.33	0.253	26.30		20.5
LTE B38	7	20	QPSK	1	0	2610	38150	63.29%	Top Edge	10mm	0	22.02	20.03	0.166	27.83		20.5
LTE B38	7	20	QPSK	1	0	2595	38000	63.29%	Front Surface	10mm	0	22.50	20.51	0.099	30.57	26.30	20.5
LTE B38	7	20	QPSK	1	0	2595	38000	63.29%	Back Surface	10mm	0	22.50	20.51	0.129	29.41		20.5
LTE B38	7	20	QPSK	1	0	2595	38000	63.29%	Top Edge	10mm	0	22.50	20.51	0.207	27.35		20.5
LTE B38	7	20	QPSK	1	0	2595	38000	63.29%	Bottom Edge	10mm	0	22.50	20.51	0.022	37.13		20.5
LTE B38	7	20	QPSK	1	0	2595	38000	63.29%	Left Edge	10mm	0	22.50	20.51	0.018	38.06		20.5
LTE B38	7	20	QPSK	1	0	2595	38000	63.29%	Right Edge	10mm	0	22.50	20.51	0.059	32.80		20.5
LTE B41	4	20	QPSK	1	0	2506	39750	63.29%	Left Edge	10mm	0	22.91	20.92	0.418	24.71	23.75	21.5
LTE B41	4	20	QPSK	1	0	2593	40620	63.29%	Left Edge	10mm	0	22.94	20.95	0.525	23.75		21.5
LTE B41	4	20	QPSK	1	0	2636.5	41055	63.29%	Left Edge	10mm	0	23.03	21.04	0.433	24.68		21.5
LTE B41	4	20	QPSK	1	0	2680	41490	63.29%	Left Edge	10mm	0	23.01	21.02	0.421	24.78		21.5
LTE B41	4	20	QPSK	1	0	2549.5	40185	63.29%	Front Surface	10mm	0	23.21	21.22	0.211	27.98		21.5
LTE B41	4	20	QPSK	1	0	2549.5	40185	63.29%	Back Surface	10mm	0	23.21	21.22	0.371	25.53		21.5
LTE B41	4	20	QPSK	1	0	2549.5	40185	63.29%	Top Edge	10mm	0	23.21	21.22	0.149	29.49		21.5
LTE B41	4	20	QPSK	1	0	2549.5	40185	63.29%	Bottom Edge	10mm	0	23.21	21.22	0.044	34.79		21.5
LTE B41	4	20	QPSK	1	0	2549.5	40185	63.29%	Left Edge	10mm	0	23.21	21.22	0.512	24.13		21.5
LTE B41	4	20	QPSK	1	0	2549.5	40185	63.29%	Right Edge	10mm	0	23.21	21.22	0.001	51.22		21.5
LTE B41	0	20	QPSK	1	0	2506	39750	63.29%	Bottom Edge	10mm	0	23.13	21.14	0.513	24.04	23.38	21.5
LTE B41	0	20	QPSK	1	0	2593	40620	63.29%	Bottom Edge	10mm	0	23.05	21.06	0.586	23.38		21.5
LTE B41	0	20	QPSK	1	0	2636.5	41055	63.29%	Bottom Edge	10mm	0	23.01	21.02	0.451	24.48		21.5
LTE B41	0	20	QPSK	1	0	2680	41490	63.29%	Bottom Edge	10mm	0	23.21	21.22	0.511	24.14		21.5
LTE B41	0	20	QPSK	1	0	2549.5	40185	63.29%	Front Surface	10mm	0	23.25	21.26	0.224	27.76		21.5
LTE B41	0	20	QPSK	1	0	2549.5	40185	63.29%	Back Surface	10mm	0	23.25	21.26	0.471	24.53		21.5
LTE B41	0	20	QPSK	1	0	2549.5	40185	63.29%	Top Edge	10mm	0	23.25	21.26	0.041	35.14		21.5
LTE B41	0	20	QPSK	1	0	2549.5	40185	63.29%	Bottom Edge	10mm	0	23.25	21.26	0.552	23.84		21.5
LTE B41	0	20	QPSK	1	0	2549.5	40185	63.29%	Left Edge	10mm	0	23.25	21.26	0.106	31.01		21.5
LTE B41	0	20	QPSK	1	0	2549.5	40185	63.29%	Right Edge	10mm	0	23.25	21.26	0.067	33.00		21.5
LTE B41	3	20	QPSK	1	0	2506	39750	63.29%	Left Edge	10mm	0	22.44	20.45	0.219	27.05	22.85	21
LTE B41	3	20	QPSK	1	0	2549.5	40185	63.29%	Left Edge	10mm	0	22.58	20.59	0.292	25.94		21
LTE B41	3	20	QPSK	1	0	2593	40620	63.29%	Left Edge	10mm	0	22.41	20.42	0.416	24.23		21
LTE B41	3	20	QPSK	1	0	2636.5	41055	63.29%	Left Edge	10mm	0	22.47	20.48	0.580	22.85		21
LTE B41	3	20	QPSK	1	0	2680	41490	63.29%	Front Surface	10mm	0	22.93	20.94	0.155	29.04		21
LTE B41	3	20	QPSK	1	0	2680	41490	63.29%	Back Surface	10mm	0</						

Band / Mode	Antenna	Bandwidth	Modulation	RB size	RB offset	Frequency (MHz)	Channel	Duty cycle	Test position	Test Distance	MPR (dBm)	Measured conducted power (dBm)	Duty Correction	Measured 1g-SAR (W/Kg)	Plimit** (dBm)	Minimum Plimit** (dBm)	Pmax* (dBm)
5G n7	4	20	PI/2 BPSK	1	1	2510	502000	100.00%	Left Edge	10mm	0	22.33		0.574	24.74		22.5
5G n7	4	20	PI/2 BPSK	1	1	2535	507000	100.00%	Left Edge	10mm	0	22.54		0.780	23.62		22.5
5G n7	4	20	PI/2 BPSK	1	1	2560	512000	100.00%	Front Surface	10mm	0	22.60		0.262	28.42		22.5
5G n7	4	20	PI/2 BPSK	1	1	2560	512000	100.00%	Back Surface	10mm	0	22.60		0.357	27.07		22.5
5G n7	4	20	PI/2 BPSK	1	1	2560	512000	100.00%	Top Edge	10mm	0	22.60		0.227	29.04		22.5
5G n7	4	20	PI/2 BPSK	1	1	2560	512000	100.00%	Bottom Edge	10mm	0	22.60		0.050	35.61		22.5
5G n7	4	20	PI/2 BPSK	1	1	2560	512000	100.00%	Left Edge	10mm	0	22.60		0.741	23.90		22.5
5G n7	4	20	PI/2 BPSK	1	1	2560	512000	100.00%	Right Edge	10mm	0	22.60		0.001	52.60		22.5
5G n7	0	20	PI/2 BPSK	1	1	2535	507000	100.00%	Bottom Edge	10mm	0	22.10		0.504	25.08		22.5
5G n7	0	20	PI/2 BPSK	1	1	2560	512000	100.00%	Bottom Edge	10mm	0	22.05		0.762	23.23		22.5
5G n7	0	20	PI/2 BPSK	1	1	2510	502000	100.00%	Front Surface	10mm	0	22.17		0.228	28.59		22.5
5G n7	0	20	PI/2 BPSK	1	1	2510	502000	100.00%	Back Surface	10mm	0	22.17		0.325	27.05		22.5
5G n7	0	20	PI/2 BPSK	1	1	2510	502000	100.00%	Top Edge	10mm	0	22.17		0.001	52.17		22.5
5G n7	0	20	PI/2 BPSK	1	1	2510	502000	100.00%	Bottom Edge	10mm	0	22.17		0.615	24.28		22.5
5G n7	0	20	PI/2 BPSK	1	1	2510	502000	100.00%	Left Edge	10mm	0	22.17		0.086	32.83		22.5
5G n7	0	20	PI/2 BPSK	1	1	2510	502000	100.00%	Right Edge	10mm	0	22.17		0.073	33.54		22.5
5G n38	4	20	PI/2 BPSK	1	1	2595	519000	100.00%	Left Edge	10mm	0	23.22		0.924	23.56		23.5
5G n38	4	20	PI/2 BPSK	1	1	2610	522000	100.00%	Left Edge	10mm	0	23.21		0.879	23.77		23.5
5G n38	4	20	PI/2 BPSK	1	1	2580	516000	100.00%	Front Surface	10mm	0	23.40		0.337	28.12		23.5
5G n38	4	20	PI/2 BPSK	1	1	2580	516000	100.00%	Back Surface	10mm	0	23.40		0.585	25.73		23.5
5G n38	4	20	PI/2 BPSK	1	1	2580	516000	100.00%	Top Edge	10mm	0	23.40		0.251	29.40		23.5
5G n38	4	20	PI/2 BPSK	1	1	2580	516000	100.00%	Bottom Edge	10mm	0	23.40		0.073	34.77		23.5
5G n38	4	20	PI/2 BPSK	1	1	2580	516000	100.00%	Left Edge	10mm	0	23.40		0.902	23.85		23.5
5G n38	4	20	PI/2 BPSK	1	1	2580	516000	100.00%	Right Edge	10mm	0	23.40		0.010	43.40		23.5
5G n38	0	20	PI/2 BPSK	1	1	2580	516000	100.00%	Bottom Edge	10mm	0	23.16		0.859	23.82		23.5
5G n38	0	20	PI/2 BPSK	1	1	2610	522000	100.00%	Bottom Edge	10mm	0	23.09		0.617	25.19		23.5
5G n38	0	20	PI/2 BPSK	1	1	2595	519000	100.00%	Front Surface	10mm	0	23.25		0.392	27.32		23.5
5G n38	0	20	PI/2 BPSK	1	1	2595	519000	100.00%	Back Surface	10mm	0	23.25		0.561	25.76		23.5
5G n38	0	20	PI/2 BPSK	1	1	2595	519000	100.00%	Top Edge	10mm	0	23.25		0.059	35.54		23.5
5G n38	0	20	PI/2 BPSK	1	1	2595	519000	100.00%	Bottom Edge	10mm	0	23.25		0.750	24.50		23.5
5G n38	0	20	PI/2 BPSK	1	1	2595	519000	100.00%	Left Edge	10mm	0	23.25		0.129	32.14		23.5
5G n38	0	20	PI/2 BPSK	1	1	2595	519000	100.00%	Right Edge	10mm	0	23.25		0.119	32.49		23.5
5G n38	3	20	PI/2 BPSK	1	1	2595	519000	100.00%	Left Edge	10mm	0	22.90		0.890	23.41		22.8
5G n38	3	20	PI/2 BPSK	1	1	2610	522000	100.00%	Left Edge	10mm	0	22.80		0.973	22.92		22.8
5G n38	3	20	PI/2 BPSK	1	1	2580	516000	100.00%	Front Surface	10mm	0	22.95		0.192	30.12		22.8
5G n38	3	20	PI/2 BPSK	1	1	2580	516000	100.00%	Back Surface	10mm	0	22.95		0.274	28.57		22.8
5G n38	3	20	PI/2 BPSK	1	1	2580	516000	100.00%	Top Edge	10mm	0	22.95		0.001	52.95		22.8
5G n38	3	20	PI/2 BPSK	1	1	2580	516000	100.00%	Bottom Edge	10mm	0	22.95		0.001	52.95		22.8
5G n38	3	20	PI/2 BPSK	1	1	2580	516000	100.00%	Left Edge	10mm	0	22.95		0.656	24.78		22.8
5G n38	3	20	PI/2 BPSK	1	1	2580	516000	100.00%	Right Edge	10mm	0	22.95		0.001	52.95		22.8
5G n38	7	20	PI/2 BPSK	1	1	2595	519000	100.00%	Top Edge	10mm	0	23.17		0.492	26.25		22.5
5G n38	7	20	PI/2 BPSK	1	1	2610	522000	100.00%	Top Edge	10mm	0	22.60		0.383	26.77		22.5
5G n38	7	20	PI/2 BPSK	1	1	2580	516000	100.00%	Front Surface	10mm	0	23.40		0.171	31.07		22.5
5G n38	7	20	PI/2 BPSK	1	1	2580	516000	100.00%	Back Surface	10mm	0	23.40		0.273	29.04		22.5
5G n38	7	20	PI/2 BPSK	1	1	2580	516000	100.00%	Top Edge	10mm	0	23.40		0.542	26.06		22.5
5G n38	7	20	PI/2 BPSK	1	1	2580	516000	100.00%	Bottom Edge	10mm	0	23.40		0.001	53.40		22.5
5G n38	7	20	PI/2 BPSK	1	1	2580	516000	100.00%	Left Edge	10mm	0	23.40		0.001	53.40		22.5
5G n38	7	20	PI/2 BPSK	1	1	2580	516000	100.00%	Right Edge	10mm	0	23.40		0.174	30.99		22.5
5G n41	4	100	PI/2 BPSK	1	1	2546.01	509202	100.00%	Left Edge	10mm	0	23.26		0.834	24.05		23.5
5G n41	4	100	PI/2 BPSK	1	1	2640	528000	100.00%	Left Edge	10mm	0	23.34		0.921	23.70		23.5
5G n41	4	100	PI/2 BPSK	1	1	2592.99	518598	100.00%	Front Surface	10mm	0	23.43		0.341	28.10		23.5
5G n41	4	100	PI/2 BPSK	1	1	2592.99	518598	100.00%	Back Surface	10mm	0	23.43		0.588	25.74		23.5
5G n41	4	100	PI/2 BPSK	1	1	2592.99	518598	100.00%	Top Edge	10mm	0	23.43		0.226	29.89		23.5
5G n41	4	100	PI/2 BPSK	1	1	2592.99	518598	100.00%	Bottom Edge	10mm	0	23.43		0.077	34.57		23.5
5G n41	4	100	PI/2 BPSK	1	1	2592.99	518598	100.00%	Left Edge	10mm	0	23.43		1.060	23.18		23.5
5G n41	4	100	PI/2 BPSK	1	1	2592.99	518598	100.00%	Right Edge	10mm	0	23.43		0.001	53.43		23.5
5G n41	0	100	PI/2 BPSK	1	1	2592.99	518598	100.00%	Bottom Edge	10mm	0	23.08		0.723	24.49		23.5
5G n41	0	100	PI/2 BPSK	1	1	2640	528000	100.00%	Bottom Edge	10mm	0	23.10		0.756	24.31		23.5
5G n41	0	100	PI/2 BPSK	1	1	2546.01	509202	100.00%	Front Surface	10mm	0	23.33		0.233	29.66		23.5
5G n41	0	100	PI/2 BPSK	1	1	2546.01	509202	100.00%	Back Surface	10mm	0	23.33		0.472	26.59		23.5
5G n41	0	100	PI/2 BPSK	1	1	2546.01	509202	100.00%	Top Edge	10mm	0	23.33		0.044	36.90		23.5
5G n41	0	100	PI/2 BPSK	1	1	2546.01	509202	100.00%	Bottom Edge	10mm	0	23.33		0.562	25.83		23.5
5G n41	0	100	PI/2 BPSK	1	1	2546.01	509202	100.00%	Left Edge	10mm	0	23.33		0.098	33.42		23.5
5G n41	0	100	PI/2 BPSK	1	1	2546.01	509202	100.00%	Right Edge	10mm	0	23.33		0.082	34.19		23.5
5G n41	3	100	PI/2 BPSK	1	1	2546.01	509202	100.00%	Left Edge	10mm	0	23.02		0.582	25.37		23
5G n41	3	100	PI/2 BPSK	1	1	2640	528000	100.00%	Left Edge	10mm	0	22.80		1.030	22.67		23
5G n41	3	100	PI/2 BPSK	1	1	2592.99	518598	100.00%	Front Surface	10mm	0	23.07		0.143	31.52		23
5G n41	3	100	PI/2 BPSK	1	1	2592.99	518598	100.00%	Back Surface	10mm	0	23.07		0.192	30.24		23
5G n41	3	100	PI/2 BPSK	1	1	2592.99	518598	100.00%	Top Edge	10mm	0	23.07		0.001	53.07		23
5G n41	3	100	PI/2 BPSK	1	1	2592.99	518598	100.00%	Bottom Edge	10mm	0	23.07		0.002	50.06		23
5G n41	3	100	PI/2 BPSK	1	1	2592.99	518598	100.00%	Left Edge	10mm	0	23.07		0.733	24.42		23
5G n41	3	100	PI/2 BPSK	1	1	2592.99	518598	100.00%	Right Edge	10mm	0	23.07		0.001	53.07		23
5G n41	7	100	PI/2 BPSK	1	1	2546.01	509202	100.00%	Top Edge	10mm	0	23.57		0.332	28.36		22.5
5G n41	7	100	PI/2 BPSK	1	1	2640	528000	100.00%	Top Edge	10mm	0	22.80		0.244	28.93		22.5
5G n41	7	100	PI/2 BPSK	1	1	2592.99	518598	100.00%	Front Surface	10mm	0	23.69		0.199	30.70		22.5
5G n41	7	100	PI/2 BPSK	1	1	2592.99	518598	100.00%	Back Surface	10mm	0	23.69		0.334	28.45		22.5
5G n41	7	100	PI/2 BPSK	1	1	2592.99	518598	100.00%	Top Edge	10mm	0	23.69		0.573	26.11		22.5
5G n41	7	100	PI/2 BPSK	1	1	2592.99	518598	100.00%	Bottom Edge	10mm	0	23.69		0.001	53.69		22.5
5G n41	7	100	PI/2 BPSK	1	1	2592.99	518598	100.00%	Left Edge	10mm	0	23.69		0.001	53.69		22.5
5G n41	7	100	PI/2 BPSK	1	1	2592.99	518598	100.00%	Right Edge	10mm	0	23.69		0.235	29.98		22.5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Body-worn

Band / Mode	Antenna	Bandwidth	Modulation	RB size	RB offset	Frequency (MHz)	Channel	Duty cycle	Test position	Test Distance	MPR (dBm)	Measured conducted power (dBm)	Duty Correction	Measured 1g-SAR (W/Kg)	Plimit** (dBm)	Minimum Plimit** (dBm)	Pmax* (dBm)
GSM 850	1	na	GMSK	na	na	824.2	128	12.05%	Back Surface	15mm	0	32.11	22.92	0.135	31.62	31.48	23.6
GSM 850	1	na	GMSK	na	na	848.8	251	12.05%	Back Surface	15mm	0	32.27	23.08	0.138	31.68		23.6
GSM 850	1	na	GMSK	na	na	836.6	190	12.05%	Front Surface	15mm	0	32.34	23.15	0.123	32.25		23.6
GSM 850	1	na	GMSK	na	na	836.6	190	12.05%	Back Surface	15mm	0	32.34	23.15	0.147	31.48		23.6
GSM 1900	0	na	GMSK	na	na	1850.2	512	12.05%	Back Surface	15mm	0	29.53	20.34	0.084	31.10	29.71	20.3
GSM 1900	0	na	GMSK	na	na	1880	661	12.05%	Back Surface	15mm	0	29.62	20.43	0.118	29.71		20.3
GSM 1900	0	na	GMSK	na	na	1909.8	810	12.05%	Front Surface	15mm	0	29.66	20.47	0.111	30.02		20.3
GSM 1900	0	na	GMSK	na	na	1909.8	810	12.05%	Back Surface	15mm	0	29.66	20.47	0.117	29.79		20.3
GSM 1900	2	na	GMSK	na	na	1850.2	512	12.05%	Back Surface	15mm	0	29.45	20.26	0.159	28.25	28.12	20.3
GSM 1900	2	na	GMSK	na	na	1909.8	810	12.05%	Back Surface	15mm	0	29.50	20.31	0.162	28.21		20.3
GSM 1900	2	na	GMSK	na	na	1880	661	12.05%	Front Surface	15mm	0	29.51	20.32	0.115	29.71		20.3
GSM 1900	2	na	GMSK	na	na	1880	661	12.05%	Back Surface	15mm	0	29.51	20.32	0.166	28.12		20.3
WCDMA II	0	na	3GPP Rel99	na	na	1852.4	9262	100.00%	Back Surface	15mm	0	22.18		0.387	26.30	24.30	22.5
WCDMA II	0	na	3GPP Rel99	na	na	1880	9400	100.00%	Back Surface	15mm	0	22.38		0.642	24.30		22.5
WCDMA II	0	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Front Surface	15mm	0	22.48		0.284	27.95		22.5
WCDMA II	0	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Back Surface	15mm	0	22.48		0.405	26.41		22.5
WCDMA II	2	na	3GPP Rel99	na	na	1852.4	9262	100.00%	Back Surface	15mm	0	22.14		0.281	27.65	25.32	22.5
WCDMA II	2	na	3GPP Rel99	na	na	1880	9400	100.00%	Back Surface	15mm	0	22.18		0.485	25.32		22.5
WCDMA II	2	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Front Surface	15mm	0	22.22		0.225	28.70		22.5
WCDMA II	2	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Back Surface	15mm	0	22.22		0.345	26.84		22.5
WCDMA V	1	na	3GPP Rel99	na	na	826.4	4132	100.00%	Back Surface	15mm	0	23.75		0.233	30.08	28.80	24
WCDMA V	1	na	3GPP Rel99	na	na	846.6	4233	100.00%	Back Surface	15mm	0	23.82		0.236	30.09		24
WCDMA V	1	na	3GPP Rel99	na	na	836.6	4183	100.00%	Front Surface	15mm	0	23.83		0.213	30.54		24
WCDMA V	1	na	3GPP Rel99	na	na	836.6	4183	100.00%	Back Surface	15mm	0	23.83		0.318	28.80		24
LTE B5	1	10	QPSK	1	0	829	20450	100.00%	Back Surface	15mm	0	23.85		0.152	32.03	31.65	24
LTE B5	1	10	QPSK	1	0	844	20600	100.00%	Back Surface	15mm	0	23.84		0.159	31.83		24
LTE B5	1	10	QPSK	1	0	836.5	20525	100.00%	Front Surface	15mm	0	23.93		0.135	32.63		24
LTE B5	1	10	QPSK	1	0	836.5	20525	100.00%	Back Surface	15mm	0	23.93		0.169	31.65		24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Band / Mode	Antenna	Bandwidth	Modulation	RB size	RB offset	Frequency (MHz)	Channel	Duty cycle	Test position	Test Distance	MPR (dBm)	Measured conducted power (dBm)	Duty Correction	Measured 1g-SAR (W/Kg)	Plimit** (dBm)	Minimum Plimit** (dBm)	Pmax* (dBm)
LTE B7	4	20	QPSK	1	0	2535	21100	100.00%	Back Surface	15mm	0	21.89		0.186	29.19		22.5
LTE B7	4	20	QPSK	1	0	2560	21350	100.00%	Back Surface	15mm	0	21.86		0.199	28.87	28.87	22.5
LTE B7	4	20	QPSK	1	0	2510	20850	100.00%	Front Surface	15mm	0	21.95		0.089	32.46		22.5
LTE B7	4	20	QPSK	1	0	2510	20850	100.00%	Back Surface	15mm	0	21.95		0.167	29.72		22.5
LTE B7	0	20	QPSK	1	0	2535	21100	100.00%	Back Surface	15mm	0	22.01		0.237	28.26		22.5
LTE B7	0	20	QPSK	1	0	2560	21350	100.00%	Back Surface	15mm	0	21.98		0.239	28.20	28.20	22.5
LTE B7	0	20	QPSK	1	0	2510	20850	100.00%	Front Surface	15mm	0	22.04		0.123	31.14		22.5
LTE B7	0	20	QPSK	1	0	2510	20850	100.00%	Back Surface	15mm	0	22.04		0.228	28.46		22.5
LTE B38	4	20	QPSK	1	0	2580	37850	63.29%	Back Surface	15mm	0	23.03	21.04	0.122	30.18		21.5
LTE B38	4	20	QPSK	1	0	2610	38150	63.29%	Back Surface	15mm	0	23.11	21.12	0.131	29.95		21.5
LTE B38	4	20	QPSK	1	0	2595	38000	63.29%	Front Surface	15mm	0	23.12	21.13	0.102	31.05		21.5
LTE B38	4	20	QPSK	1	0	2595	38000	63.29%	Back Surface	15mm	0	23.12	21.13	0.119	30.38		21.5
LTE B38	0	20	QPSK	1	0	2595	38000	63.29%	Back Surface	15mm	0	23.15	21.16	0.157	29.20		21.5
LTE B38	0	20	QPSK	1	0	2610	38150	63.29%	Back Surface	15mm	0	23.04	21.05	0.112	30.56		21.5
LTE B38	0	20	QPSK	1	0	2580	37850	63.29%	Front Surface	15mm	0	23.22	21.23	0.102	31.15		21.5
LTE B38	0	20	QPSK	1	0	2580	37850	63.29%	Back Surface	15mm	0	23.22	21.23	0.139	29.80		21.5
LTE B38	3	20	QPSK	1	0	2595	38000	63.29%	Back Surface	15mm	0	22.25	20.26	0.067	32.00		20.8
LTE B38	3	20	QPSK	1	0	2610	38150	63.29%	Back Surface	15mm	0	22.23	20.24	0.086	30.91		20.8
LTE B38	3	20	QPSK	1	0	2580	37850	63.29%	Front Surface	15mm	0	22.29	20.30	0.047	33.58		20.8
LTE B38	3	20	QPSK	1	0	2580	37850	63.29%	Back Surface	15mm	0	22.29	20.30	0.058	32.67		20.8
LTE B38	7	20	QPSK	1	0	2580	37850	63.29%	Back Surface	15mm	0	22.32	20.33	0.098	30.44		20.5
LTE B38	7	20	QPSK	1	0	2610	38150	63.29%	Back Surface	15mm	0	22.02	20.03	0.080	31.02		20.5
LTE B38	7	20	QPSK	1	0	2595	38000	63.29%	Front Surface	15mm	0	22.50	20.51	0.052	33.35		20.5
LTE B38	7	20	QPSK	1	0	2595	38000	63.29%	Back Surface	15mm	0	22.50	20.51	0.071	32.03		20.5
LTE B41	4	20	QPSK	1	0	2506	39750	63.29%	Back Surface	15mm	0	22.91	20.92	0.110	30.51		21.5
LTE B41	4	20	QPSK	1	0	2593	40620	63.29%	Back Surface	15mm	0	22.94	20.95	0.117	30.27		21.5
LTE B41	4	20	QPSK	1	0	2636.5	41055	63.29%	Back Surface	15mm	0	23.03	21.04	0.122	30.18		21.5
LTE B41	4	20	QPSK	1	0	2680	41490	63.29%	Back Surface	15mm	0	23.01	21.02	0.096	31.20		21.5
LTE B41	4	20	QPSK	1	0	2549.5	40185	63.29%	Front Surface	15mm	0	23.21	21.22	0.105	31.01		21.5
LTE B41	4	20	QPSK	1	0	2549.5	40185	63.29%	Back Surface	15mm	0	23.21	21.22	0.118	30.50		21.5
LTE B41	0	20	QPSK	1	0	2506	39750	63.29%	Back Surface	15mm	0	23.13	21.14	0.147	29.47		21.5
LTE B41	0	20	QPSK	1	0	2593	40620	63.29%	Back Surface	15mm	0	23.05	21.06	0.162	28.97		21.5
LTE B41	0	20	QPSK	1	0	2636.5	41055	63.29%	Back Surface	15mm	0	23.01	21.02	0.138	29.62		21.5
LTE B41	0	20	QPSK	1	0	2680	41490	63.29%	Back Surface	15mm	0	23.21	21.22	0.161	29.16		21.5
LTE B41	0	20	QPSK	1	0	2549.5	40185	63.29%	Front Surface	15mm	0	23.25	21.26	0.129	30.16		21.5
LTE B41	0	20	QPSK	1	0	2549.5	40185	63.29%	Back Surface	15mm	0	23.25	21.26	0.145	29.65		21.5
LTE B41	3	20	QPSK	1	0	2506	39750	63.29%	Back Surface	15mm	0	22.44	20.45	0.041	34.33		21
LTE B41	3	20	QPSK	1	0	2549.5	40185	63.29%	Back Surface	15mm	0	22.58	20.59	0.054	33.27		21
LTE B41	3	20	QPSK	1	0	2593	40620	63.29%	Back Surface	15mm	0	22.41	20.42	0.076	31.62		21
LTE B41	3	20	QPSK	1	0	2636.5	41055	63.29%	Back Surface	15mm	0	22.47	20.48	0.086	31.15		21
LTE B41	3	20	QPSK	1	0	2680	41490	63.29%	Front Surface	15mm	0	22.93	20.94	0.076	32.14		21
LTE B41	3	20	QPSK	1	0	2680	41490	63.29%	Back Surface	15mm	0	22.93	20.94	0.075	32.19		21
LTE B41	7	20	QPSK	1	0	2506	39750	63.29%	Back Surface	15mm	0	22.21	20.22	0.101	30.18		20.5
LTE B41	7	20	QPSK	1	0	2593	40620	63.29%	Back Surface	15mm	0	22.04	20.05	0.081	30.95		20.5
LTE B41	7	20	QPSK	1	0	2636.5	41055	63.29%	Back Surface	15mm	0	22.03	20.04	0.053	32.81		20.5
LTE B41	7	20	QPSK	1	0	2680	41490	63.29%	Back Surface	15mm	0	22.02	20.03	0.064	31.99		20.5
LTE B41	7	20	QPSK	1	0	2549.5	40185	63.29%	Front Surface	15mm	0	22.69	20.70	0.076	31.91		20.5
LTE B41	7	20	QPSK	1	0	2549.5	40185	63.29%	Back Surface	15mm	0	22.69	20.70	0.115	30.10		20.5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Band / Mode	Antenna	Bandwidth	Modulation	RB size	RB offset	Frequency (MHz)	Channel	Duty cycle	Test position	Test Distance	MPR (dBm)	Measured conducted power (dBm)	Duty Correction	Measured 1g-SAR (W/Kg)	Plimit** (dBm)	Minimum Plimit** (dBm)	Pmax* (dBm)
5G n7	4	20	PV2 BPSK	1	1	2510	502000	100.00%	Back Surface	15mm	0	22.33		0.181	29.75	28.35	22.5
5G n7	4	20	PV2 BPSK	1	1	2535	507000	100.00%	Back Surface	15mm	0	22.54		0.253	28.51		22.5
5G n7	4	20	PV2 BPSK	1	1	2560	512000	100.00%	Front Surface	15mm	0	22.60		0.128	31.53		22.5
5G n7	4	20	PV2 BPSK	1	1	2560	512000	100.00%	Back Surface	15mm	0	22.60		0.266	28.35		22.5
5G n7	0	20	PV2 BPSK	1	1	2535	507000	100.00%	Back Surface	15mm	0	22.10		0.136	30.76	29.00	22.5
5G n7	0	20	PV2 BPSK	1	1	2560	512000	100.00%	Back Surface	15mm	0	22.05		0.202	29.00		22.5
5G n7	0	20	PV2 BPSK	1	1	2510	502000	100.00%	Front Surface	15mm	0	22.17		0.126	31.17		22.5
5G n7	0	20	PV2 BPSK	1	1	2510	502000	100.00%	Back Surface	15mm	0	22.17		0.165	30.00		22.5
5G n38	4	20	PV2 BPSK	1	1	2595	519000	100.00%	Back Surface	15mm	0	23.22		0.272	28.87	28.87	23.5
5G n38	4	20	PV2 BPSK	1	1	2610	522000	100.00%	Back Surface	15mm	0	23.21		0.261	29.04		23.5
5G n38	4	20	PV2 BPSK	1	1	2580	516000	100.00%	Front Surface	15mm	0	23.40		0.169	31.12		23.5
5G n38	4	20	PV2 BPSK	1	1	2580	516000	100.00%	Back Surface	15mm	0	23.40		0.221	29.96		23.5
5G n38	0	20	PV2 BPSK	1	1	2580	516000	100.00%	Back Surface	15mm	0	23.16		0.150	31.40	30.31	23.5
5G n38	0	20	PV2 BPSK	1	1	2610	522000	100.00%	Back Surface	15mm	0	23.09		0.169	30.81		23.5
5G n38	0	20	PV2 BPSK	1	1	2595	519000	100.00%	Front Surface	15mm	0	23.25		0.110	32.84		23.5
5G n38	0	20	PV2 BPSK	1	1	2595	519000	100.00%	Back Surface	15mm	0	23.25		0.197	30.31		23.5
5G n38	3	20	PV2 BPSK	1	1	2595	519000	100.00%	Back Surface	15mm	0	22.90		0.098	32.98	31.97	22.8
5G n38	3	20	PV2 BPSK	1	1	2610	522000	100.00%	Back Surface	15mm	0	22.80		0.121	31.97		22.8
5G n38	3	20	PV2 BPSK	1	1	2580	516000	100.00%	Front Surface	15mm	0	22.95		0.087	33.55		22.8
5G n38	3	20	PV2 BPSK	1	1	2580	516000	100.00%	Back Surface	15mm	0	22.95		0.102	32.86		22.8
5G n38	7	20	PV2 BPSK	1	1	2595	519000	100.00%	Back Surface	15mm	0	23.17		0.130	32.03	30.43	22.5
5G n38	7	20	PV2 BPSK	1	1	2610	522000	100.00%	Back Surface	15mm	0	22.60		0.105	32.39		22.5
5G n38	7	20	PV2 BPSK	1	1	2580	516000	100.00%	Front Surface	15mm	0	23.40		0.090	33.86		22.5
5G n38	7	20	PV2 BPSK	1	1	2580	516000	100.00%	Back Surface	15mm	0	23.40		0.198	30.43		22.5
5G n41	4	100	PV2 BPSK	1	1	2546.01	509202	100.00%	Back Surface	15mm	0	23.26		0.201	30.23	28.61	23.5
5G n41	4	100	PV2 BPSK	1	1	2640	528000	100.00%	Back Surface	15mm	0	23.34		0.297	28.61		23.5
5G n41	4	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Front Surface	15mm	0	23.43		0.164	31.28		23.5
5G n41	4	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Back Surface	15mm	0	23.43		0.249	29.47		23.5
5G n41	0	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Back Surface	15mm	0	23.08		0.163	30.96	30.52	23.5
5G n41	0	100	PV2 BPSK	1	1	2640	528000	100.00%	Back Surface	15mm	0	23.10		0.159	31.09		23.5
5G n41	0	100	PV2 BPSK	1	1	2546.01	509202	100.00%	Front Surface	15mm	0	23.33		0.132	32.12		23.5
5G n41	0	100	PV2 BPSK	1	1	2546.01	509202	100.00%	Back Surface	15mm	0	23.33		0.191	30.52		23.5
5G n41	3	100	PV2 BPSK	1	1	2546.01	509202	100.00%	Back Surface	15mm	0	23.02		0.069	34.63	30.55	23
5G n41	3	100	PV2 BPSK	1	1	2640	528000	100.00%	Back Surface	15mm	0	22.80		0.168	30.55		23
5G n41	3	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Front Surface	15mm	0	23.07		0.051	35.99		23
5G n41	3	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Back Surface	15mm	0	23.07		0.095	33.29		23
5G n41	7	100	PV2 BPSK	1	1	2546.01	509202	100.00%	Back Surface	15mm	0	23.57		0.124	32.64	29.76	22.5
5G n41	7	100	PV2 BPSK	1	1	2640	528000	100.00%	Back Surface	15mm	0	22.80		0.105	32.59		22.5
5G n41	7	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Front Surface	15mm	0	23.69		0.100	33.69		22.5
5G n41	7	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Back Surface	15mm	0	23.69		0.247	29.76		22.5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Product specific 10-g SAR

Band / Mode	Antenna	Bandwidth	Modulation	RB size	RB offset	Frequency (MHz)	Channel	Duty cycle	Test position	Test Distance	MPR (dBm)	Measured conducted power (dBm)	Duty Correction	Measured 10g-SAR (W/Kg)	Plimit** (dBm)	Minimum Plimit** (dBm)	Pmax* (dBm)
GPRS 850 2Tx Slot	1	na	GMSK	na	na	824.2	128	24.39%	Back Surface	0mm	0	29.60	23.47	1.110	27.49	27.49	23.7
GPRS 850 2Tx Slot	1	na	GMSK	na	na	848.8	251	24.39%	Back Surface	0mm	0	29.63	23.50	0.803	28.93		23.7
GPRS 850 2Tx Slot	1	na	GMSK	na	na	836.6	190	24.39%	Front Surface	0mm	0	29.65	23.52	0.844	28.73		23.7
GPRS 850 2Tx Slot	1	na	GMSK	na	na	836.6	190	24.39%	Back Surface	0mm	0	29.65	23.52	0.961	28.17		23.7
GPRS 850 2Tx Slot	1	na	GMSK	na	na	836.6	190	24.39%	Top Edge	0mm	0	29.65	23.52	0.001	57.99		23.7
GPRS 850 2Tx Slot	1	na	GMSK	na	na	836.6	190	24.39%	Bottom Edge	0mm	0	29.65	23.52	0.825	28.83		23.7
GPRS 850 2Tx Slot	1	na	GMSK	na	na	836.6	190	24.39%	Left Edge	0mm	0	29.65	23.52	0.101	37.95		23.7
GPRS 850 2Tx Slot	1	na	GMSK	na	na	836.6	190	24.39%	Right Edge	0mm	0	29.65	23.52	0.260	33.84		23.7
GPRS 1900 4Tx Slot	0	na	GMSK	na	na	1850.2	512	50.00%	Bottom Edge	0mm	0	24.06	21.05	1.190	24.77	24.35	20.5
GPRS 1900 4Tx Slot	0	na	GMSK	na	na	1880	661	50.00%	Bottom Edge	0mm	0	24.16	21.15	1.340	24.35		20.5
GPRS 1900 4Tx Slot	0	na	GMSK	na	na	1909.8	810	50.00%	Front Surface	0mm	0	24.48	21.47	0.557	28.48		20.5
GPRS 1900 4Tx Slot	0	na	GMSK	na	na	1909.8	810	50.00%	Back Surface	0mm	0	24.48	21.47	1.260	24.94		20.5
GPRS 1900 4Tx Slot	0	na	GMSK	na	na	1909.8	810	50.00%	Top Edge	0mm	0	24.48	21.47	0.001	55.94		20.5
GPRS 1900 4Tx Slot	0	na	GMSK	na	na	1909.8	810	50.00%	Bottom Edge	0mm	0	24.48	21.47	1.050	25.73		20.5
GPRS 1900 4Tx Slot	0	na	GMSK	na	na	1909.8	810	50.00%	Left Edge	0mm	0	24.48	21.47	0.234	32.25		20.5
GPRS 1900 4Tx Slot	0	na	GMSK	na	na	1909.8	810	50.00%	Right Edge	0mm	0	24.48	21.47	0.186	33.25		20.5
GPRS 1900 4Tx Slot	2	na	GMSK	na	na	1850.2	512	50.00%	Top Edge	0mm	0	23.50	20.49	1.230	24.06	23.78	20.5
GPRS 1900 4Tx Slot	2	na	GMSK	na	na	1909.8	810	50.00%	Top Edge	0mm	0	24.33	21.32	1.590	23.78		20.5
GPRS 1900 4Tx Slot	2	na	GMSK	na	na	1880	661	50.00%	Front Surface	0mm	0	24.37	21.36	0.914	26.22		20.5
GPRS 1900 4Tx Slot	2	na	GMSK	na	na	1880	661	50.00%	Back Surface	0mm	0	24.37	21.36	1.290	24.73		20.5
GPRS 1900 4Tx Slot	2	na	GMSK	na	na	1880	661	50.00%	Top Edge	0mm	0	24.37	21.36	1.490	24.10		20.5
GPRS 1900 4Tx Slot	2	na	GMSK	na	na	1880	661	50.00%	Bottom Edge	0mm	0	24.37	21.36	0.001	55.83		20.5
GPRS 1900 4Tx Slot	2	na	GMSK	na	na	1880	661	50.00%	Left Edge	0mm	0	24.37	21.36	0.342	30.49		20.5
GPRS 1900 4Tx Slot	2	na	GMSK	na	na	1880	661	50.00%	Right Edge	0mm	0	24.37	21.36	0.096	36.01		20.5
WCDMA II	0	na	3GPP Rel99	na	na	1852.4	9262	100.00%	Bottom Edge	0mm	0	22.18		1.910	23.84	23.73	22.5
WCDMA II	0	na	3GPP Rel99	na	na	1880	9400	100.00%	Bottom Edge	0mm	0	22.38		2.050	23.73		22.5
WCDMA II	0	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Front Surface	0mm	0	22.48		1.340	25.68		22.5
WCDMA II	0	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Back Surface	0mm	0	22.48		1.875	24.22		22.5
WCDMA II	0	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Top Edge	0mm	0	22.48		0.001	56.95		22.5
WCDMA II	0	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Bottom Edge	0mm	0	22.48		1.630	24.83		22.5
WCDMA II	0	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Left Edge	0mm	0	22.48		0.406	30.87		22.5
WCDMA II	0	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Right Edge	0mm	0	22.48		0.488	30.07		22.5
WCDMA II	2	na	3GPP Rel99	na	na	1852.4	9262	100.00%	Top Edge	0mm	0	22.14		1.310	25.44	25.25	22.5
WCDMA II	2	na	3GPP Rel99	na	na	1880	9400	100.00%	Top Edge	0mm	0	22.18		1.390	25.25		22.5
WCDMA II	2	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Front Surface	0mm	0	22.22		0.894	27.18		22.5
WCDMA II	2	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Back Surface	0mm	0	22.22		0.962	26.86		22.5
WCDMA II	2	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Top Edge	0mm	0	22.22		1.270	25.65		22.5
WCDMA II	2	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Bottom Edge	0mm	0	22.22		0.001	56.69		22.5
WCDMA II	2	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Left Edge	0mm	0	22.22		0.603	28.89		22.5
WCDMA II	2	na	3GPP Rel99	na	na	1907.6	9538	100.00%	Right Edge	0mm	0	22.22		0.179	34.16		22.5
WCDMA V	1	na	3GPP Rel99	na	na	826.4	4132	100.00%	Back Surface	0mm	0	23.75		1.050	28.01	28.01	24
WCDMA V	1	na	3GPP Rel99	na	na	846.6	4233	100.00%	Back Surface	0mm	0	23.82		0.960	28.47		24
WCDMA V	1	na	3GPP Rel99	na	na	836.6	4183	100.00%	Front Surface	0mm	0	23.83		1.020	28.21		24
WCDMA V	1	na	3GPP Rel99	na	na	836.6	4183	100.00%	Back Surface	0mm	0	23.83		0.960	28.48		24
WCDMA V	1	na	3GPP Rel99	na	na	836.6	4183	100.00%	Top Edge	0mm	0	23.83		0.001	58.30		24
WCDMA V	1	na	3GPP Rel99	na	na	836.6	4183	100.00%	Bottom Edge	0mm	0	23.83		0.950	28.52		24
WCDMA V	1	na	3GPP Rel99	na	na	836.6	4183	100.00%	Left Edge	0mm	0	23.83		0.119	37.54		24
WCDMA V	1	na	3GPP Rel99	na	na	836.6	4183	100.00%	Right Edge	0mm	0	23.83		0.418	32.09		24
LTE B5	1	10	QPSK	1	0	829	20450	100.00%	Back Surface	0mm	0	23.85		1.430	26.77	26.77	24
LTE B5	1	10	QPSK	1	0	844	20600	100.00%	Back Surface	0mm	0	23.84		1.310	27.14		24
LTE B5	1	10	QPSK	1	0	836.5	20525	100.00%	Front Surface	0mm	0	23.93		0.955	28.60		24
LTE B5	1	10	QPSK	1	0	836.5	20525	100.00%	Back Surface	0mm	0	23.93		1.260	27.40		24
LTE B5	1	10	QPSK	1	0	836.5	20525	100.00%	Top Edge	0mm	0	23.93		0.001	58.40		24
LTE B5	1	10	QPSK	1	0	836.5	20525	100.00%	Bottom Edge	0mm	0	23.93		0.800	29.37		24
LTE B5	1	10	QPSK	1	0	836.5	20525	100.00%	Left Edge	0mm	0	23.93		0.001	58.40		24
LTE B5	1	10	QPSK	1	0	836.5	20525	100.00%	Right Edge	0mm	0	23.93		0.099	38.45		24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Band / Mode	Antenna	Bandwidth	Modulation	RB size	RB offset	Frequency (MHz)	Channel	Duty cycle	Test position	Test Distance	MPR (dBm)	Measured conducted power (dBm)	Duty Correction	Measured 10g-SAR (W/kg)	Plimit** (dBm)	Minimum Plimit** (dBm)	Pmax* (dBm)
LTE B7	4	20	QPSK	1	0	2535	21100	100.00%	Left Edge	0mm	0	21.89		2.510	22.36		22.5
LTE B7	4	20	QPSK	1	0	2560	21350	100.00%	Left Edge	0mm	0	21.86		2.450	22.44		22.5
LTE B7	4	20	QPSK	1	0	2510	20850	100.00%	Front Surface	0mm	0	21.95		0.857	27.09		22.5
LTE B7	4	20	QPSK	1	0	2510	20850	100.00%	Back Surface	0mm	0	21.95		1.140	25.85		22.5
LTE B7	4	20	QPSK	1	0	2510	20850	100.00%	Top Edge	0mm	0	21.95		0.416	30.23		22.5
LTE B7	4	20	QPSK	1	0	2510	20850	100.00%	Bottom Edge	0mm	0	21.95		0.094	36.69		22.5
LTE B7	4	20	QPSK	1	0	2510	20850	100.00%	Left Edge	0mm	0	21.95		2.190	23.02		22.5
LTE B7	4	20	QPSK	1	0	2510	20850	100.00%	Right Edge	0mm	0	21.95		0.019	43.63		22.5
LTE B7	0	20	QPSK	1	0	2535	21100	100.00%	Bottom Edge	0mm	0	22.01		1.650	24.31		22.5
LTE B7	0	20	QPSK	1	0	2560	21350	100.00%	Bottom Edge	0mm	0	21.98		1.870	23.73		22.5
LTE B7	0	20	QPSK	1	0	2510	20850	100.00%	Front Surface	0mm	0	22.04		0.695	28.09		22.5
LTE B7	0	20	QPSK	1	0	2510	20850	100.00%	Back Surface	0mm	0	22.04		1.470	24.84		22.5
LTE B7	0	20	QPSK	1	0	2510	20850	100.00%	Top Edge	0mm	0	22.04		0.001	56.51		22.5
LTE B7	0	20	QPSK	1	0	2510	20850	100.00%	Bottom Edge	0mm	0	22.04		1.510	24.72		22.5
LTE B7	0	20	QPSK	1	0	2510	20850	100.00%	Left Edge	0mm	0	22.04		0.261	32.35		22.5
LTE B7	0	20	QPSK	1	0	2510	20850	100.00%	Right Edge	0mm	0	22.04		0.203	33.44		22.5
LTE B38	4	20	QPSK	1	0	2580	37850	63.29%	Left Edge	0mm	0	23.03	21.04	2.080	22.33		21.5
LTE B38	4	20	QPSK	1	0	2610	38150	63.29%	Left Edge	0mm	0	23.11	21.12	2.020	22.54		21.5
LTE B38	4	20	QPSK	1	0	2595	38000	63.29%	Front Surface	0mm	0	23.12	21.13	0.915	25.99		21.5
LTE B38	4	20	QPSK	1	0	2595	38000	63.29%	Back Surface	0mm	0	23.12	21.13	1.280	24.53		21.5
LTE B38	4	20	QPSK	1	0	2595	38000	63.29%	Top Edge	0mm	0	23.12	21.13	0.453	29.04		21.5
LTE B38	4	20	QPSK	1	0	2595	38000	63.29%	Bottom Edge	0mm	0	23.12	21.13	0.115	35.00		21.5
LTE B38	4	20	QPSK	1	0	2595	38000	63.29%	Left Edge	0mm	0	23.12	21.13	2.016	22.56		21.5
LTE B38	4	20	QPSK	1	0	2595	38000	63.29%	Right Edge	0mm	0	23.12	21.13	0.024	41.80		21.5
LTE B38	0	20	QPSK	1	0	2595	38000	63.29%	Bottom Edge	0mm	0	23.15	21.16	0.976	25.74		21.5
LTE B38	0	20	QPSK	1	0	2610	38150	63.29%	Bottom Edge	0mm	0	23.04	21.05	1.050	25.31		21.5
LTE B38	0	20	QPSK	1	0	2580	37850	63.29%	Front Surface	0mm	0	23.22	21.23	0.645	27.61		21.5
LTE B38	0	20	QPSK	1	0	2580	37850	63.29%	Back Surface	0mm	0	23.22	21.23	1.092	25.32		21.5
LTE B38	0	20	QPSK	1	0	2580	37850	63.29%	Top Edge	0mm	0	23.22	21.23	0.001	55.71		21.5
LTE B38	0	20	QPSK	1	0	2580	37850	63.29%	Bottom Edge	0mm	0	23.22	21.23	1.170	25.02		21.5
LTE B38	0	20	QPSK	1	0	2580	37850	63.29%	Left Edge	0mm	0	23.22	21.23	0.238	31.94		21.5
LTE B38	0	20	QPSK	1	0	2580	37850	63.29%	Right Edge	0mm	0	23.22	21.23	0.211	32.46		21.5
LTE B38	3	20	QPSK	1	0	2595	38000	63.29%	Left Edge	0mm	0	22.25	20.26	1.600	22.69		20.8
LTE B38	3	20	QPSK	1	0	2610	38150	63.29%	Left Edge	0mm	0	22.23	20.24	1.660	22.51		20.8
LTE B38	3	20	QPSK	1	0	2580	37850	63.29%	Front Surface	0mm	0	22.29	20.30	0.432	28.42		20.8
LTE B38	3	20	QPSK	1	0	2580	37850	63.29%	Back Surface	0mm	0	22.29	20.30	0.521	27.61		20.8
LTE B38	3	20	QPSK	1	0	2580	37850	63.29%	Top Edge	0mm	0	22.29	20.30	0.001	54.78		20.8
LTE B38	3	20	QPSK	1	0	2580	37850	63.29%	Bottom Edge	0mm	0	22.29	20.30	0.007	46.32		20.8
LTE B38	3	20	QPSK	1	0	2580	37850	63.29%	Left Edge	0mm	0	22.29	20.30	1.410	23.28		20.8
LTE B38	3	20	QPSK	1	0	2580	37850	63.29%	Right Edge	0mm	0	22.29	20.30	0.001	54.78		20.8
LTE B38	7	20	QPSK	1	0	2580	37850	63.29%	Top Edge	0mm	0	22.32	20.33	0.777	25.90		20.5
LTE B38	7	20	QPSK	1	0	2610	38150	63.29%	Top Edge	0mm	0	22.02	20.03	0.552	27.09		20.5
LTE B38	7	20	QPSK	1	0	2595	38000	63.29%	Front Surface	0mm	0	22.50	20.51	0.364	29.37		20.5
LTE B38	7	20	QPSK	1	0	2595	38000	63.29%	Back Surface	0mm	0	22.50	20.51	0.557	27.53		20.5
LTE B38	7	20	QPSK	1	0	2595	38000	63.29%	Top Edge	0mm	0	22.50	20.51	0.656	26.82		20.5
LTE B38	7	20	QPSK	1	0	2595	38000	63.29%	Bottom Edge	0mm	0	22.50	20.51	0.003	50.21		20.5
LTE B38	7	20	QPSK	1	0	2595	38000	63.29%	Left Edge	0mm	0	22.50	20.51	0.028	40.51		20.5
LTE B38	7	20	QPSK	1	0	2595	38000	63.29%	Right Edge	0mm	0	22.50	20.51	0.450	28.45		20.5
LTE B41	4	20	QPSK	1	0	2506	39750	63.29%	Left Edge	0mm	0	22.91	20.92	1.860	22.70		21.5
LTE B41	4	20	QPSK	1	0	2593	40620	63.29%	Left Edge	0mm	0	22.94	20.95	2.050	22.31		21.5
LTE B41	4	20	QPSK	1	0	2636.5	41055	63.29%	Left Edge	0mm	0	23.03	21.04	1.963	22.59		21.5
LTE B41	4	20	QPSK	1	0	2680	41490	63.29%	Left Edge	0mm	0	23.01	21.02	1.150	24.89		21.5
LTE B41	4	20	QPSK	1	0	2549.5	40185	63.29%	Front Surface	0mm	0	23.21	21.22	1.060	25.44		21.5
LTE B41	4	20	QPSK	1	0	2549.5	40185	63.29%	Back Surface	0mm	0	23.21	21.22	1.260	24.69		21.5
LTE B41	4	20	QPSK	1	0	2549.5	40185	63.29%	Top Edge	0mm	0	23.21	21.22	0.475	28.93		21.5
LTE B41	4	20	QPSK	1	0	2549.5	40185	63.29%	Bottom Edge	0mm	0	23.21	21.22	0.126	34.69		21.5
LTE B41	4	20	QPSK	1	0	2549.5	40185	63.29%	Left Edge	0mm	0	23.21	21.22	2.011	22.66		21.5
LTE B41	4	20	QPSK	1	0	2549.5	40185	63.29%	Right Edge	0mm	0	23.21	21.22	0.001	55.70		21.5
LTE B41	0	20	QPSK	1	0	2506	39750	63.29%	Bottom Edge	0mm	0	23.13	21.14	1.040	25.44		21.5
LTE B41	0	20	QPSK	1	0	2593	40620	63.29%	Bottom Edge	0mm	0	23.05	21.06	1.060	25.28		21.5
LTE B41	0	20	QPSK	1	0	2636.5	41055	63.29%	Bottom Edge	0mm	0	23.01	21.02	0.666	27.26		21.5
LTE B41	0	20	QPSK	1	0	2680	41490	63.29%	Bottom Edge	0mm	0	23.21	21.22	1.050	25.48		21.5
LTE B41	0	20	QPSK	1	0	2549.5	40185	63.29%	Front Surface	0mm	0	23.25	21.26	0.522	28.56		21.5
LTE B41	0	20	QPSK	1	0	2549.5	40185	63.29%	Back Surface	0mm	0	23.25	21.26	1.180	25.02		21.5
LTE B41	0	20	QPSK	1	0	2549.5	40185	63.29%	Top Edge	0mm	0	23.25	21.26	0.039	39.82		21.5
LTE B41	0	20	QPSK	1	0	2549.5	40185	63.29%	Bottom Edge	0mm	0	23.25	21.26	1.220	24.87		21.5
LTE B41	0	20	QPSK	1	0	2549.5	40185	63.29%	Left Edge	0mm	0	23.25	21.26	0.174	33.33		21.5
LTE B41	0	20	QPSK	1	0	2549.5	40185	63.29%	Right Edge	0mm	0	23.25	21.26	0.225	32.21		21.5
LTE B41	3	20	QPSK	1	0	2506	39750	63.29%	Back Surface	0mm	0	22.44	20.45	1.120	24.43		21
LTE B41	3	20	QPSK	1	0	2549.5	40185	63.29%	Back Surface	0mm	0	22.58	20.59	1.310	23.89		21
LTE B41	3	20	QPSK	1	0	2593	40620	63.29%	Back Surface	0mm	0	22.41	20.42	1.660	22.69		21
LTE B41	3	20	QPSK	1	0	2636.5	41055	63.29%	Back Surface	0mm	0	22.47	20.48	1.410	23.46		21
LTE B41	3	20	QPSK	1	0	2680	41490	63.29%	Front Surface	0mm	0	22.93	20.94	0.741	26.72		21
LTE B41	3	20	QPSK	1	0	2680	41490	63.29%	Back Surface	0mm	0	22.93	20.94	0.781	26.49		21
LTE B41	3	20	QPSK	1	0	2680	41490	63.29%	Top Edge	0mm	0	22.93	20.94	0.021	42.19		21
LTE B41	3	20	QPSK	1	0	2680	41490	63.29%	Bottom Edge	0mm	0	22.93	20.94	0.001	55.42		21
LTE B41	3	20	QPSK	1	0	2680	41490	63.29%	Left Edge	0mm	0	22.93	20.94	1.410	23.92		21
LTE B41	3	20	QPSK	1	0	2680	41490	63.29%	Right Edge	0mm	0	22.93	20.94	0.001	55.42		21
LTE B41	7	20	QPSK	1	0	2506	39750	63.29%	Top Edge	0mm	0	22.21	20.22	0.812	25.60		20.5
LTE B41	7	20	QPSK	1	0	2593	40620	63.29%	Top Edge	0mm	0	22.04	20.05	0.676	26.23		20.5
LTE B41	7	20	QPSK	1	0	2636.5	41055	63.29%	Top Edge	0mm	0	22.03	20.04	0.402	28.47		20.5
LTE B41	7	20	QPSK	1	0	2680	41490	63.29%	Top Edge	0mm	0	22.02	20.03	0.328	29.35		20.5
LTE B41	7	20	QPSK														

Band / Mode	Antenna	Bandwidth	Modulation	RB size	RB offset	Frequency (MHz)	Channel	Duty cycle	Test position	Test Distance	MPR (dBm)	Measured conducted power (dBm)	Duty Correction	Measured 10g-SAR (W/Kg)	Plimit** (dBm)	Minimum Plimit** (dBm)	Pmax* (dBm)
5G n7	4	20	PV2 BPSK	1	1	2510	502000	100.00%	Left Edge	0mm	0	22.33		2.260	23.26		22.5
5G n7	4	20	PV2 BPSK	1	1	2535	507000	100.00%	Left Edge	0mm	0	22.54		3.310	21.81		22.5
5G n7	4	20	PV2 BPSK	1	1	2560	512000	100.00%	Front Surface	0mm	0	22.60		1.180	26.35		22.5
5G n7	4	20	PV2 BPSK	1	1	2560	512000	100.00%	Back Surface	0mm	0	22.60		1.240	26.14		22.5
5G n7	4	20	PV2 BPSK	1	1	2560	512000	100.00%	Top Edge	0mm	0	22.60		0.727	28.46		22.5
5G n7	4	20	PV2 BPSK	1	1	2560	512000	100.00%	Bottom Edge	0mm	0	22.60		0.131	35.90		22.5
5G n7	4	20	PV2 BPSK	1	1	2560	512000	100.00%	Left Edge	0mm	0	22.60		2.540	23.02		22.5
5G n7	4	20	PV2 BPSK	1	1	2560	512000	100.00%	Right Edge	0mm	0	22.60		0.017	44.77		22.5
5G n7	0	20	PV2 BPSK	1	1	2535	507000	100.00%	Bottom Edge	0mm	0	22.10		1.840	23.92		22.5
5G n7	0	20	PV2 BPSK	1	1	2560	512000	100.00%	Bottom Edge	0mm	0	22.05		2.100	23.30		22.5
5G n7	0	20	PV2 BPSK	1	1	2510	502000	100.00%	Front Surface	0mm	0	22.17		0.697	28.21		22.5
5G n7	0	20	PV2 BPSK	1	1	2510	502000	100.00%	Back Surface	0mm	0	22.17		1.340	25.37		22.5
5G n7	0	20	PV2 BPSK	1	1	2510	502000	100.00%	Top Edge	0mm	0	22.17		0.040	40.62		22.5
5G n7	0	20	PV2 BPSK	1	1	2510	502000	100.00%	Bottom Edge	0mm	0	22.17		1.600	24.60		22.5
5G n7	0	20	PV2 BPSK	1	1	2510	502000	100.00%	Left Edge	0mm	0	22.17		0.242	32.80		22.5
5G n7	0	20	PV2 BPSK	1	1	2510	502000	100.00%	Right Edge	0mm	0	22.17		0.221	33.20		22.5
5G n38	4	20	PV2 BPSK	1	1	2595	519000	100.00%	Left Edge	0mm	0	23.22		4.180	21.48		23.5
5G n38	4	20	PV2 BPSK	1	1	2610	522000	100.00%	Left Edge	0mm	0	23.21		4.060	21.60		23.5
5G n38	4	20	PV2 BPSK	1	1	2580	516000	100.00%	Front Surface	0mm	0	23.40		1.640	25.72		23.5
5G n38	4	20	PV2 BPSK	1	1	2580	516000	100.00%	Back Surface	0mm	0	23.40		2.130	24.59		23.5
5G n38	4	20	PV2 BPSK	1	1	2580	516000	100.00%	Top Edge	0mm	0	23.40		0.763	29.05		23.5
5G n38	4	20	PV2 BPSK	1	1	2580	516000	100.00%	Bottom Edge	0mm	0	23.40		0.190	35.08		23.5
5G n38	4	20	PV2 BPSK	1	1	2580	516000	100.00%	Left Edge	0mm	0	23.40		4.980	20.90		23.5
5G n38	4	20	PV2 BPSK	1	1	2580	516000	100.00%	Right Edge	0mm	0	23.40		0.075	39.12		23.5
5G n38	0	20	PV2 BPSK	1	1	2580	516000	100.00%	Bottom Edge	0mm	0	23.16		1.950	24.73		23.5
5G n38	0	20	PV2 BPSK	1	1	2610	522000	100.00%	Bottom Edge	0mm	0	23.09		1.310	26.39		23.5
5G n38	0	20	PV2 BPSK	1	1	2595	519000	100.00%	Front Surface	0mm	0	23.25		1.010	27.68		23.5
5G n38	0	20	PV2 BPSK	1	1	2595	519000	100.00%	Back Surface	0mm	0	23.25		1.880	24.98		23.5
5G n38	0	20	PV2 BPSK	1	1	2595	519000	100.00%	Top Edge	0mm	0	23.25		0.062	39.80		23.5
5G n38	0	20	PV2 BPSK	1	1	2595	519000	100.00%	Bottom Edge	0mm	0	23.25		2.400	23.92		23.5
5G n38	0	20	PV2 BPSK	1	1	2595	519000	100.00%	Left Edge	0mm	0	23.25		0.414	31.55		23.5
5G n38	0	20	PV2 BPSK	1	1	2595	519000	100.00%	Right Edge	0mm	0	23.25		0.316	32.72		23.5
5G n38	3	20	PV2 BPSK	1	1	2595	519000	100.00%	Left Edge	0mm	0	22.90		4.260	21.08		22.8
5G n38	3	20	PV2 BPSK	1	1	2610	522000	100.00%	Left Edge	0mm	0	22.80		3.070	22.40		22.8
5G n38	3	20	PV2 BPSK	1	1	2580	516000	100.00%	Front Surface	0mm	0	22.95		0.797	28.41		22.8
5G n38	3	20	PV2 BPSK	1	1	2580	516000	100.00%	Back Surface	0mm	0	22.95		0.961	27.59		22.8
5G n38	3	20	PV2 BPSK	1	1	2580	516000	100.00%	Top Edge	0mm	0	22.95		0.220	34.00		22.8
5G n38	3	20	PV2 BPSK	1	1	2580	516000	100.00%	Bottom Edge	0mm	0	22.95		0.017	45.12		22.8
5G n38	3	20	PV2 BPSK	1	1	2580	516000	100.00%	Left Edge	0mm	0	22.95		3.840	21.58		22.8
5G n38	3	20	PV2 BPSK	1	1	2580	516000	100.00%	Right Edge	0mm	0	22.95		0.001	57.42		22.8
5G n38	7	20	PV2 BPSK	1	1	2595	519000	100.00%	Top Edge	0mm	0	23.17		1.716	25.30		22.5
5G n38	7	20	PV2 BPSK	1	1	2610	522000	100.00%	Top Edge	0mm	0	22.60		1.577	25.09		22.5
5G n38	7	20	PV2 BPSK	1	1	2580	516000	100.00%	Front Surface	0mm	0	23.40		0.566	30.34		22.5
5G n38	7	20	PV2 BPSK	1	1	2580	516000	100.00%	Back Surface	0mm	0	23.40		0.857	28.54		22.5
5G n38	7	20	PV2 BPSK	1	1	2580	516000	100.00%	Top Edge	0mm	0	23.40		1.980	24.90		22.5
5G n38	7	20	PV2 BPSK	1	1	2580	516000	100.00%	Bottom Edge	0mm	0	23.40		0.001	57.87		22.5
5G n38	7	20	PV2 BPSK	1	1	2580	516000	100.00%	Left Edge	0mm	0	23.40		0.001	57.87		22.5
5G n38	7	20	PV2 BPSK	1	1	2580	516000	100.00%	Right Edge	0mm	0	23.40		0.629	29.89		22.5
5G n41	4	100	PV2 BPSK	1	1	2546.01	509202	100.00%	Left Edge	0mm	0	23.26		3.080	22.85		23.5
5G n41	4	100	PV2 BPSK	1	1	2640	528000	100.00%	Left Edge	0mm	0	23.34		3.700	22.13		23.5
5G n41	4	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Front Surface	0mm	0	23.43		1.690	25.62		23.5
5G n41	4	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Back Surface	0mm	0	23.43		2.050	24.78		23.5
5G n41	4	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Top Edge	0mm	0	23.43		0.750	29.15		23.5
5G n41	4	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Bottom Edge	0mm	0	23.43		0.218	34.52		23.5
5G n41	4	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Left Edge	0mm	0	23.43		4.840	21.05		23.5
5G n41	4	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Right Edge	0mm	0	23.43		0.025	43.92		23.5
5G n41	0	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Bottom Edge	0mm	0	23.08		2.360	23.82		23.5
5G n41	0	100	PV2 BPSK	1	1	2640	528000	100.00%	Bottom Edge	0mm	0	23.10		1.790	25.04		23.5
5G n41	0	100	PV2 BPSK	1	1	2546.01	509202	100.00%	Front Surface	0mm	0	23.33		0.867	28.42		23.5
5G n41	0	100	PV2 BPSK	1	1	2546.01	509202	100.00%	Back Surface	0mm	0	23.33		1.360	26.47		23.5
5G n41	0	100	PV2 BPSK	1	1	2546.01	509202	100.00%	Top Edge	0mm	0	23.33		0.054	40.48		23.5
5G n41	0	100	PV2 BPSK	1	1	2546.01	509202	100.00%	Bottom Edge	0mm	0	23.33		1.690	25.52		23.5
5G n41	0	100	PV2 BPSK	1	1	2546.01	509202	100.00%	Left Edge	0mm	0	23.33		0.270	33.49		23.5
5G n41	0	100	PV2 BPSK	1	1	2546.01	509202	100.00%	Right Edge	0mm	0	23.33		0.235	34.09		23.5
5G n41	3	100	PV2 BPSK	1	1	2546.01	509202	100.00%	Left Edge	0mm	0	23.02		2.720	23.15		23
5G n41	3	100	PV2 BPSK	1	1	2640	528000	100.00%	Left Edge	0mm	0	22.80		4.230	21.01		23
5G n41	3	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Front Surface	0mm	0	23.07		0.577	29.93		23
5G n41	3	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Back Surface	0mm	0	23.07		0.693	29.13		23
5G n41	3	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Top Edge	0mm	0	23.07		0.015	45.81		23
5G n41	3	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Bottom Edge	0mm	0	23.07		0.028	43.07		23
5G n41	3	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Left Edge	0mm	0	23.07		2.170	24.18		23
5G n41	3	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Right Edge	0mm	0	23.07		0.011	47.13		23
5G n41	7	100	PV2 BPSK	1	1	2546.01	509202	100.00%	Top Edge	0mm	0	23.57		2.160	24.70		22.5
5G n41	7	100	PV2 BPSK	1	1	2640	528000	100.00%	Top Edge	0mm	0	22.80		1.498	25.52		22.5
5G n41	7	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Front Surface	0mm	0	23.69		0.595	30.42		22.5
5G n41	7	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Back Surface	0mm	0	23.69		0.901	28.61		22.5
5G n41	7	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Top Edge	0mm	0	23.69		1.447	26.56		22.5
5G n41	7	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Bottom Edge	0mm	0	23.69		0.085	38.87		22.5
5G n41	7	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Left Edge	0mm	0	23.69		0.061	40.31		22.5
5G n41	7	100	PV2 BPSK	1	1	2592.99	518598	100.00%	Right Edge	0mm	0	23.69		0.533	30.89		22.5

- End of report -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [http](http://www.sgs.com.tw/Terms-and-Conditions)