

# FCC Test Report

**REPORT NO.:** RF921020R03

**MODEL NO.:** GCCP2 (56D92)

**RECEIVED:** October 20, 2003

**TESTED:** November 19 ~ December 16, 2003

**APPLICANT:** BENQ Corporation

**ADDRESS:** 157, Shan-Ying Road, Gueishan Taoyuan  
333, Taiwan , R.O.C.

**ISSUED BY:** Advance Data Technology Corporation

**LAB LOCATION:** 47 14th Lin, Chiapau Tsun, Linko, Taipei,  
Taiwan, R.O.C.

This test report consists of 65 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528  
ILAC MRA



Lab Code: 200102-0

## Table of Contents

|       |                                                   |    |
|-------|---------------------------------------------------|----|
| 1     | CERTIFICATION .....                               | 4  |
| 2     | SUMMARY OF TEST RESULTS .....                     | 4  |
| 3     | GENERAL INFORMATION .....                         | 6  |
| 3.1   | GENERAL DESCRIPTION OF EUT .....                  | 6  |
| 3.2   | DESCRIPTION OF TEST MODES .....                   | 6  |
| 3.3   | GENERAL DESCRIPTION OF APPLIED STANDARDS .....    | 7  |
| 3.4   | DESCRIPTION OF SUPPORT UNITS .....                | 8  |
| 4     | TEST TYPES AND RESULTS .....                      | 9  |
| 4.1   | MODULATION CHARACTERISTICS .....                  | 9  |
| 4.1.1 | DESCRIPTION OF MODULATION TECHNIQUE .....         | 9  |
| 4.1.2 | THE ACTIVE TIME SLOT 3 MODULATED FRAME PLOT ..... | 9  |
| 4.2   | OUTPUT POWER MEASUREMENT .....                    | 11 |
| 4.2.1 | LIMITS OF OUTPUT POWER MEASUREMENT .....          | 11 |
| 4.2.2 | TEST INSTRUMENTS .....                            | 11 |
| 4.2.3 | TEST PROCEDURES .....                             | 12 |
| 4.2.4 | TEST SETUP .....                                  | 13 |
| 4.2.5 | EUT OPERATING CONDITIONS .....                    | 14 |
| 4.2.6 | TEST RESULTS .....                                | 15 |
| 4.3   | FREQUENCY STABILITY MEASUREMENT .....             | 17 |
| 4.3.1 | LIMITS OF FREQUENCY STABILITY MEASUREMENT .....   | 17 |
| 4.3.2 | TEST INSTRUMENTS .....                            | 17 |
| 4.3.3 | TEST PROCEDURE .....                              | 18 |
| 4.3.4 | TEST SETUP .....                                  | 18 |
| 4.3.5 | TEST RESULTS .....                                | 19 |
| 4.4   | OCCUPIED BANDWIDTH MEASUREMENT .....              | 21 |
| 4.4.1 | LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT .....    | 21 |
| 4.4.2 | TEST INSTRUMENTS .....                            | 21 |
| 4.4.3 | TEST SETUP .....                                  | 21 |
| 4.4.4 | TEST PROCEDURES .....                             | 22 |
| 4.4.5 | EUT OPERATING CONDITION .....                     | 22 |
| 4.4.6 | TEST RESULTS .....                                | 22 |
| 4.5   | BAND EDGE MEASUREMENT .....                       | 29 |
| 4.5.1 | LIMITS OF BAND EDGE MEASUREMENT .....             | 29 |
| 4.5.2 | TEST INSTRUMENTS .....                            | 29 |
| 4.5.3 | TEST SETUP .....                                  | 29 |

|       |                                                         |    |
|-------|---------------------------------------------------------|----|
| 4.5.4 | TEST PROCEDURES.....                                    | 30 |
| 4.5.5 | EUT OPERATING CONDITION .....                           | 30 |
| 4.5.6 | TEST RESULTS.....                                       | 31 |
| 4.6   | CONDUCTED SPURIOUS EMISSIONS.....                       | 33 |
| 4.6.1 | LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT..... | 33 |
| 4.6.2 | TEST INSTRUMENTS .....                                  | 33 |
| 4.6.3 | TEST PROCEDURE .....                                    | 34 |
| 4.6.4 | TEST SETUP .....                                        | 34 |
| 4.6.5 | EUT OPERATING CONDITIONS.....                           | 34 |
| 4.6.6 | TEST RESULTS.....                                       | 35 |
| 4.7   | RADIATED EMISSION MEASUREMENT .....                     | 47 |
| 4.7.1 | LIMITS OF RADIATED EMISSION MEASUREMENT.....            | 47 |
| 4.7.2 | TEST INSTRUMENTS .....                                  | 47 |
| 4.7.3 | TEST PROCEDURES.....                                    | 48 |
| 4.7.4 | TEST SETUP .....                                        | 49 |
| 4.7.5 | EUT OPERATING CONDITIONS.....                           | 49 |
| 4.7.6 | TEST RESULTS.....                                       | 50 |
| 5     | PHOTOGRAPHS OF THE TEST CONFIGURATION.....              | 62 |
| 6     | INFORMATION ON THE TESTING LABORATORIES .....           | 65 |

## 1 CERTIFICATION

**PRODUCT :** S660C Mobile Phone  
**BRAND NAME :** GCCP2(56D92)  
**MODEL NO. :** BenQ  
**TEST ITEM:** BENQ Corporation  
**APPLICANT :** ENGINEERING SAMPLE  
**TEST STANDARDS :** 47 CFR Part 24, Subpart E,  
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from November 19 to December 16, 2003. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

**PREPARED BY:** Wendy Liao , **DATE:** December 18, 2003  
Wendy Liao

**APPROVED BY:** Ellis Wu , **DATE:** December 18, 2003  
Ellis Wu / Manager

## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| <b>APPLIED STANDARD: FCC 47 CFR Part 24 &amp; Part 2 / IC RSS-133</b> |                                                                                                                    |               |                                                                                   |
|-----------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------------------------------------------------------------|
| <b>Standard Section</b>                                               | <b>Test Type and Limit</b>                                                                                         | <b>Result</b> | <b>REMARK</b>                                                                     |
| 2.1047(d)                                                             | Modulation Characteristics                                                                                         | PASS          | NA                                                                                |
| 2.1046,<br>24.232                                                     | Maximum Peak Output Power<br>Limit: max. 2 watts e.i.r.p peak power                                                | PASS          | Meet the requirement of limit<br>Minimum passing margin is 29.60dBm at 1880.00MHz |
| 2.1055,<br>24.235                                                     | Frequency Stability<br>AFC Freq. Error vs. Voltage<br>AFC Freq. Error vs. Temperature<br>Limit: max. $\pm 0.1$ ppm | PASS          | Meet the requirement of limit                                                     |
| 2.1049,<br>24.238(b)                                                  | Occupied Bandwidth                                                                                                 | PASS          | Meet the requirement of limit                                                     |
| 24.238(b)                                                             | Band Edge Measurements                                                                                             | PASS          | NA                                                                                |
| 2.1051,<br>24.238                                                     | Conducted Spurious Emissions                                                                                       | PASS          | Meet the requirement of limit<br>Minimum passing margin is -47.18dB at 3812.00MHz |
| 2.1053,<br>24.238                                                     | Radiated Spurious Emissions                                                                                        | PASS          | Meet the requirement of limit<br>Minimum passing margin is -5.64dB at 11458.80MHz |

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|                                            |                                                                                                      |
|--------------------------------------------|------------------------------------------------------------------------------------------------------|
| <b>PRODUCT</b>                             | S660C Mobile Phone                                                                                   |
| <b>MODEL NO.</b>                           | GCCP2(56D92)                                                                                         |
| <b>POWER SUPPLY</b>                        | 3.6V dc from Battery                                                                                 |
| <b>MODULATION TYPE</b>                     | GMSK                                                                                                 |
| <b>FREQUENCY RANGE</b>                     | Tx Frequency :<br>1850.2MHz~1909.8MHz (PCS band)<br>Rx Frequency :<br>1930.2MHz~1989.8MHz (PCS band) |
| <b>NUMBER OF CHANNEL</b>                   | 299                                                                                                  |
| <b>MAX. CONDUCTED PEAK OUTPUT POWER</b>    | 28.80dBm(0.759Watts)                                                                                 |
| <b>MAX. RADITED EIRP PEAK OUTPUT POWER</b> | 29.60dBm(0.912Watts)                                                                                 |
| <b>ANTENNA TYPE</b>                        | External antenna with Tri-band 50 Ohm                                                                |
| <b>DATA CABLE</b>                          | NA                                                                                                   |
| <b>I/O PORTS</b>                           | NA                                                                                                   |
| <b>ASSOCIATED DEVICES</b>                  | Earphone plus Microphone                                                                             |
| <b>EUT Temp. Tolerance</b>                 | -30°C to +50°C                                                                                       |
| <b>EUT Extreme Vol. Range</b>              | 3.0Vdc to 4.2Vdc                                                                                     |

#### NOTE

1. For more detailed features description, please refer to the manufacturer's specifications or User's Manual.
2. The IMEI code of the EUT is the 35249200-000001~999999
3. The hardware version: 4.0
4. The software version: 1.0

### 3.2 DESCRIPTION OF TEST MODES

299 channels are provided to this EUT in the PCS1900 band. Therefore choice the low, middle and high channel to testing.

| Channel        | Frequency  | Channel          | Frequency  |
|----------------|------------|------------------|------------|
| 512(low cha.)  | 1850.2MHz  | 661(middle cha.) | 1880.0 MHz |
| 810(high cha.) | 1909.8 MHz | NA               |            |

**NOTE:**

1. Below 1 GHz, the channel 512, 661, and 810 were pre-tested in chamber. The channel 512, worst case one, was chosen for final test.
2. Above 1 GHz, the channel 512, 661, and 810 were tested individually.
3. When the Power Control Level set 0, the worst case, was chosen for final test.
4. The channel space is 0.2MHz.

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a S660C Mobile Phone. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 24**

**IC RSS-133**

**ANSI C63.4 : 1992**

**TIA/EIA-603-A: 2001**

All test items have been performed and recorded as per the above standards.

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| NO. | PRODUCT    | BRAND             | MODEL NO. | SERIAL NO. | CAL. DATE  |
|-----|------------|-------------------|-----------|------------|------------|
| 1   | GSM MS SET | ROHDE<br>&SCHWARZ | CMU 200   | 8360721086 | 2004/04/21 |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
|-----|-----------------------------------------------------|
| 1   | NA                                                  |

**NOTE:** All power cords of the above support units are non shielded (1.8m).

## 4 TEST TYPES AND RESULTS

### 4.1 MODULATION CHARACTERISTICS


#### 4.1.1 DESCRIPTION OF MODULATION TECHNIQUE


According to FCC 2.1047(d), the system is used the digital modulation and accomplished with the PCS requirement as defined in the 3GPP TS 05:01, TS 05:02, TS 05:04. It uses narrowband TDMA. Eight simultaneous calls can occupy the same radio frequency.

There are 299 channels and channel space is 200kHz. The frequency band 1850~1910MHz is allocated to the uplink and 1930~1990MHz to the downlink. The uplink and downlink channel space is 80MHz and is duplex at the same time.

The modulation scheme used the GMSK (Gaussian Minimum Shift Keying) that is the special case of FSK (frequency Shift Keying). The each time slot is last about 580 $\mu$ s and data length is 156.25bits. A frame contains the eight time slots.

#### 4.1.2 THE ACTIVE TIME SLOT 8 MODULATED FRAME PLOT

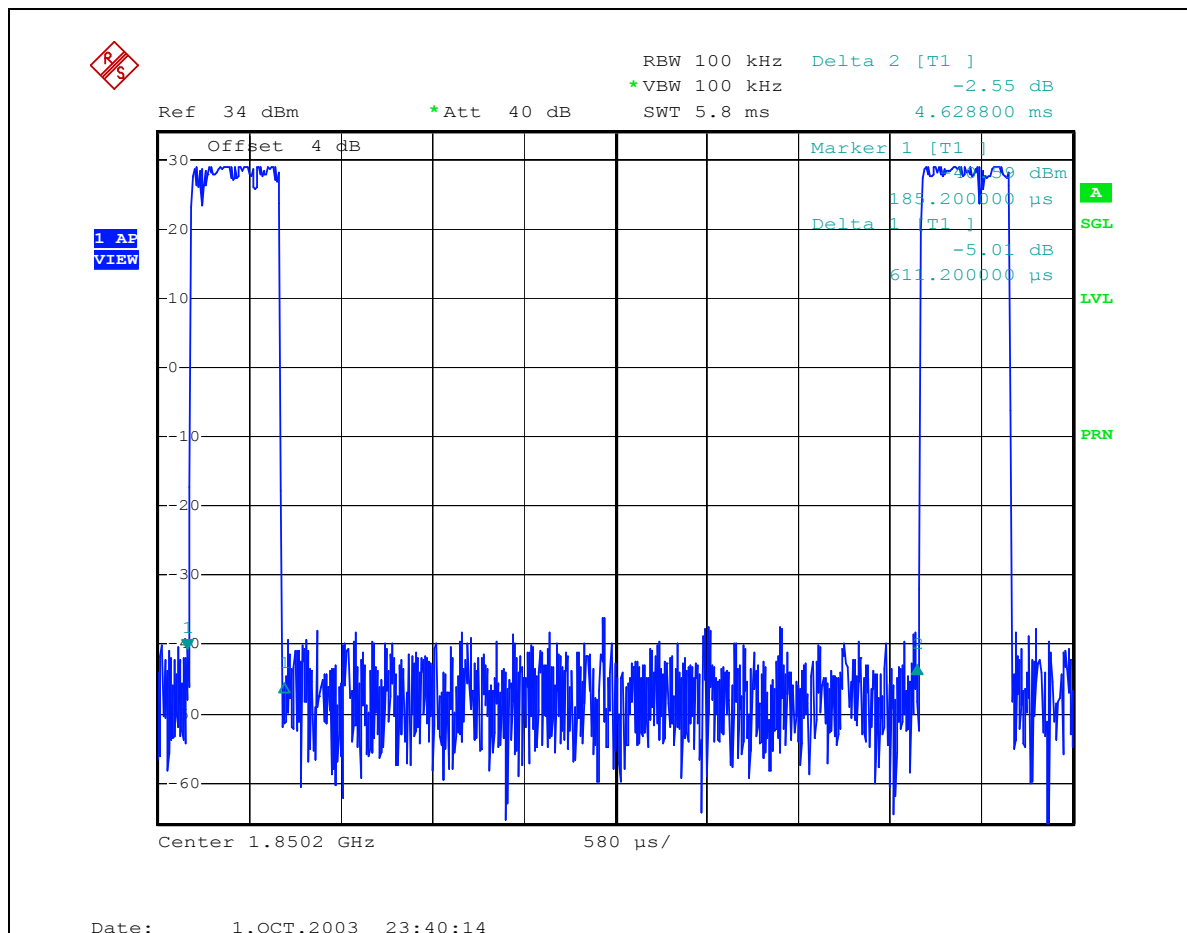

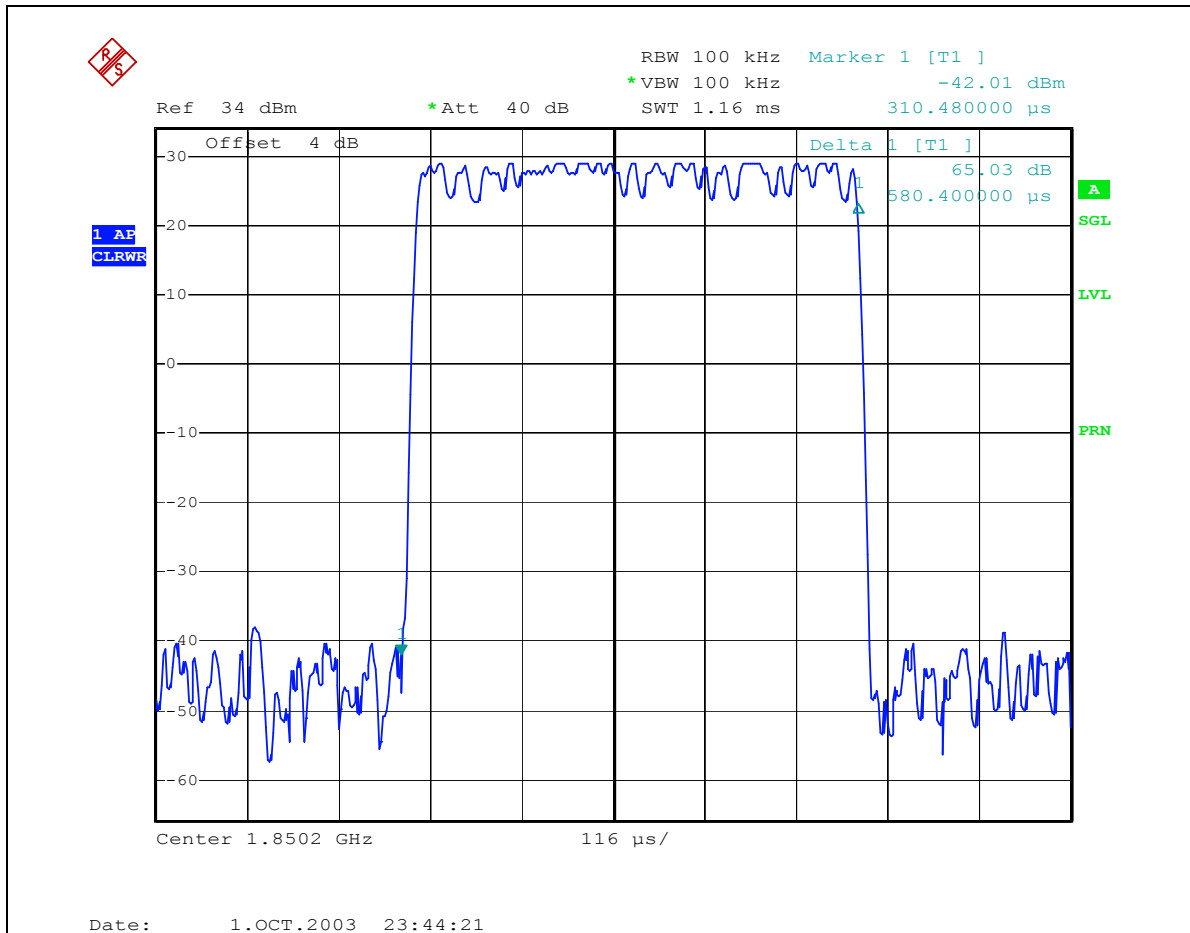

## 4.2 OUTPUT POWER MEASUREMENT

### 4.2.1 LIMITS OF OUTPUT POWER MEASUREMENT

The radiated peak output power shall be according to the specific rule Part 24.232(b) that “Mobile / Portable station are limited to 2 watts e.i.r.p” and 24.232(c) specific that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.”

### 4.2.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER                                | MODEL NO.              | SERIAL NO. | CALIBRATED UNTIL |
|-----------------------------------------------------------|------------------------|------------|------------------|
| * ROHDE & SCHWARZ<br>Spectrum Analyzer                    | FSP40                  | 100035     | Apr. 15, 2004    |
| * ROHDE & SCHWARZ<br>Signal Generator                     | SMP04                  | 10001      | May 05, 2004     |
| * ROHDE & SCHWARZ<br>Universal Radio Communication Tester | CMU200                 | 836072/086 | Apr. 21, 2004    |
| * EMCO Horn Antenna                                       | 3115                   | 9811-5623  | Jul. 27, 2004    |
| * EMCO Horn Antenna                                       | 3115                   | 9811-5619  | Jul. 15, 2004    |
| * EMCO Turn Table &<br>Tower Controller                   | 2090                   | NA         | NA               |
| * Software                                                | ADT_Radiated_V<br>5.14 | NA         | NA               |
| * Mini-Circuits Power Splitter                            | ZAPD-4                 | 400005     | NA               |
| * Hewlett Packard RF cable                                | 8120-6192              | 01428251   | NA               |
| * JFW 20dB attenuation                                    | 50HF-020-SMA           | NA         | NA               |
| * Suhner RF cable                                         | Sucoflex104            | 204850/4   | NA               |

- NOTE:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. “\*” = These equipments are used for the final measurement.
3. The test was performed in ADT RF fully anechoic chamber No. 2.

#### 4.2.3 TEST PROCEDURES


- a. The EUT was set up for the maximum peak power with GPRS link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 512, 661 and 810(low, middle and high operational frequency range.)
- b. The conducted peak output power used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. The path loss included the splitter loss, cable loss and 20dB pad loss. The spectrum set RB/VB 3MHz, then read peak power value and record to the test. (All transmitted path loss shall be considered in the test report data.)
- c. E.I.R.P peak power measurement. In the fully anechoic chamber, EUT placed on the 1.5m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- d. The substitution horn antenna is substituted for EUT at the same position and signal generator export the CW signal to the calibration antenna. Rotated the Turn Table to find the maximum radiation power. "Raw" is the spectrum reading value, "SG" is signal generator export power, "TX Gain" is calibration antenna isotropic gain value, "TX cable" is the transmitted cable loss between the calibration antenna and signal generator. The "Factor" means that the transmission path loss is equal to "SG" - "TX cable" + "TX Gain" - "Raw".
- e. Actually the real E.I.R.P peak power is equal to "Read Value" + "Factor"
- f. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,  $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15\text{dBi}$ .

**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection (PK)


#### 4.2.4 TEST SETUP

##### EIRP Power Measurement

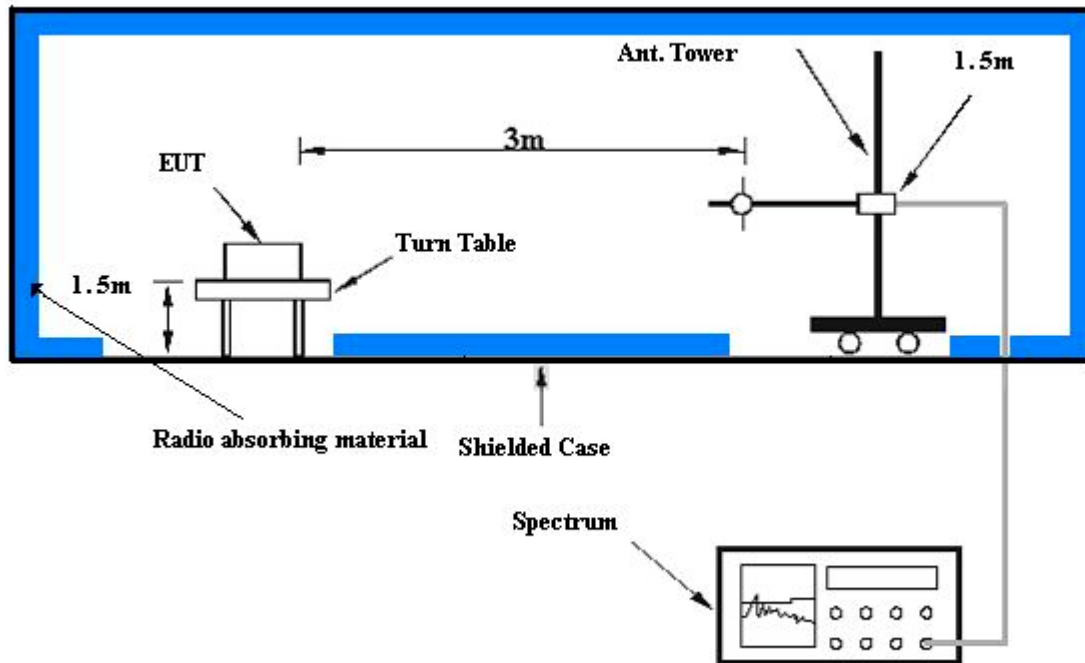

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

##### Conducted Power Measurement

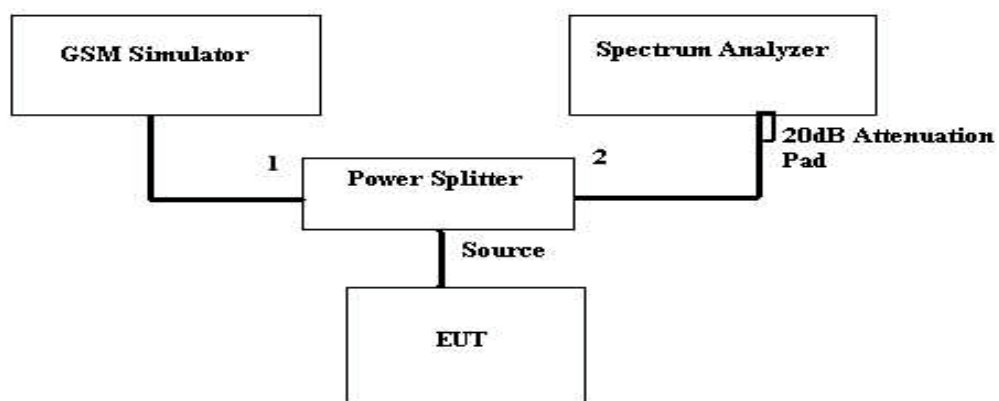

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.2.5 EUT OPERATING CONDITIONS

- a. The EUT makes a phone call to the GSM simulator.
- b. The GSM simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

## 4.2.6 TEST RESULTS

|                                 |                             |                             |              |
|---------------------------------|-----------------------------|-----------------------------|--------------|
| <b>EUT</b>                      | S660C Mobile Phone          | <b>MODEL</b>                | GCCP2(56D92) |
| <b>MODE</b>                     | TX connected                | <b>POWER CONTROL LEVEL</b>  | 0            |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz               | <b>DETECTOR FUNCTION</b>    | Peak         |
| <b>ENVIRONMENTAL CONDITIONS</b> | 24 deg. C, 60 % RH, 999 hPa | <b>TESTED BY:</b> Bunny Yao |              |

| CONDUCTED PEAK OUTPUT POWER |                 |                 |                        |                   |       |
|-----------------------------|-----------------|-----------------|------------------------|-------------------|-------|
| Channel No.                 | Frequency (MHz) | Raw Value (dBm) | Correction Factor (dB) | Peak Output Power |       |
|                             |                 |                 |                        | dBm               | Watt  |
| 512                         | 1850.2          | 25.40           | 3.40                   | 28.80             | 0.759 |
| 661                         | 1880.0          | 25.40           | 3.40                   | 28.80             | 0.759 |
| 810                         | 1909.8          | 25.34           | 3.36                   | 28.70             | 0.741 |

**REMARKS:**

1. Peak Output Power(dBm)=Raw Value(dBm) + Correction Factor(dB)
2. Correction Factor(dB) = Power Splitter Loss(dB) + Cable Loss(dB)

|                                 |                             |                             |              |
|---------------------------------|-----------------------------|-----------------------------|--------------|
| <b>EUT</b>                      | S660C Mobile Phone          | <b>MODEL</b>                | GCCP2(56D92) |
| <b>MODE</b>                     | Tx                          | <b>POWER CONTORL LEVEL</b>  | 0            |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz               | <b>DETECTOR FUNCTION</b>    | Peak         |
| <b>ENVIRONMENTAL CONDITIONS</b> | 24 deg. C, 60 % RH, 999 hPa | <b>TESTED BY:</b> Bunny Yao |              |

| <b>EIRP RADIATED PEAK OUTPUT POWER</b> |                        |                        |                               |                          |              |
|----------------------------------------|------------------------|------------------------|-------------------------------|--------------------------|--------------|
| <b>Channel No.</b>                     | <b>Frequency (MHz)</b> | <b>Raw Value (dBm)</b> | <b>Correction Factor (dB)</b> | <b>Peak Output Power</b> |              |
|                                        |                        |                        |                               | <b>dBm</b>               | <b>Watt</b>  |
| 512                                    | 1850.2                 | -7.00                  | 36.20                         | 29.20                    | 0.832        |
| <b>661</b>                             | <b>1880.0</b>          | <b>-6.90</b>           | <b>36.50</b>                  | <b>29.60</b>             | <b>0.912</b> |
| 810                                    | 1909.8                 | -7.40                  | 36.30                         | 28.90                    | 0.776        |

**REMARKS:**

1. Peak Output Power(dBm)=Raw Value(dBm) + Correction Factor(dB)
2. Correction Factor(dB) = Receiver Antenna Gain(dBi) + Cable Loss(dB) + Free Space Loss(dB)

### 4.3 FREQUENCY STABILITY MEASUREMENT

#### 4.3.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

According to the FCC part 2.4235 shall be tested the frequency stability. The rule is defined that "The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block." The frequency error rate is according to the JTC standard that the frequency error rate shall be accurate to within 0.1 ppm of the received frequency from the base station. The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with the 2.1055(a)(1)  $-30^{\circ}\text{C} \sim 50^{\circ}\text{C}$ .

#### 4.3.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER                                                       | MODEL NO.   | SERIAL NO. | CALIBRATED UNTIL |
|----------------------------------------------------------------------------------|-------------|------------|------------------|
| <input type="checkbox"/> ROHDE & SCHWARZ<br>Universal Radio Communication Tester | CMU200      | 836072/086 | Apr. 21, 2004    |
| * Hewlett Packard RF cable                                                       | 8120-6192   | 01428251   | NA               |
| * Suhner RF cable                                                                | Sucoflex104 | 204850/4   | NA               |
| *WIT<br>Standard Temperature & Humidity<br>Chamber                               | TH-4S-C     | W981030    | Jul. 12, 2004    |

**NOTE:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

☐ "\*" = These equipments are used for the final measurement.


☐ The test was performed in ADT RF OVEN room.

#### 4.3.3 TEST PROCEDURE

- a. Because of the measure the carrier frequency under the condition of the AFC lock, it shall be used the mobile station in the GRRP link mode. This is accomplished with the use of the R&S CMU200 simulator station. The oven room could control the temperatures and humidity. The GPRS link channel is the 661.
- b. Power must be removed when changing from one temperature to another or one voltage to another voltage. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- c. EUT is connected the external power supply to control the DC input power. The various Volts from the minimum 3.3 Volts to 4.2 Volts. Each step shall be record the frequency error rate.
- d. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5^{\circ}\text{C}$  during the measurement testing.
- e. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

**REMARKS:** 1. The frequency error was recorded frequency error from the GSM simulator.

#### 4.3.4 TEST SETUP

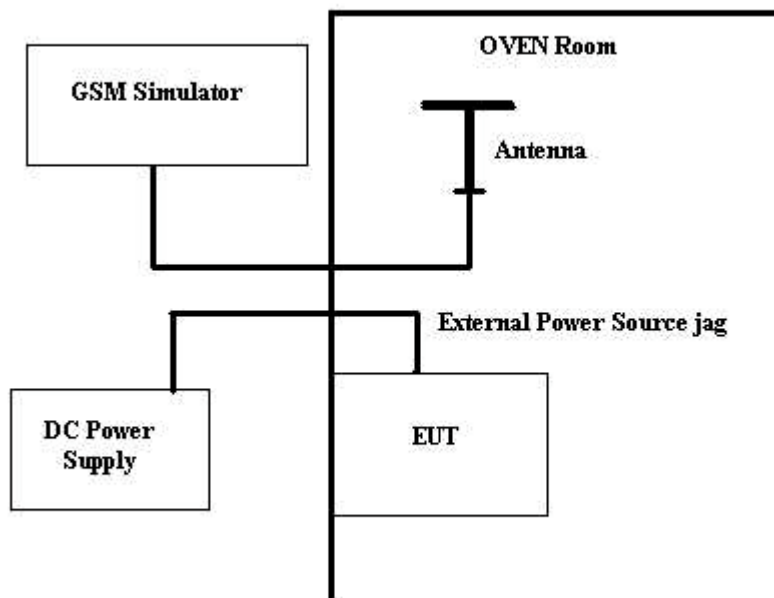

## 4.3.5 TEST RESULTS

|                                 |                             |                             |              |
|---------------------------------|-----------------------------|-----------------------------|--------------|
| <b>EUT</b>                      | S660C Mobile Phone          | <b>MODEL</b>                | GCCP2(56D92) |
| <b>MODE</b>                     | TX connected                | <b>POWER CONTROL LEVEL</b>  | 0            |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz               | <b>DETECTOR FUNCTION</b>    | 500 Bursts   |
| <b>ENVIRONMENTAL CONDITIONS</b> | 24 deg. C, 60 % RH, 999 hPa | <b>TESTED BY:</b> Bunny Yao |              |

| <b>AFC FREQUENCY ERROR vs. VOLTAGE</b> |                             |                              |                   |
|----------------------------------------|-----------------------------|------------------------------|-------------------|
| <b>Voltage (Volts)</b>                 | <b>Frequency Error (Hz)</b> | <b>Frequency Error (ppm)</b> | <b>Limit(ppm)</b> |
| 3.0                                    | 5                           | 0.003                        | 0.1               |
| 3.1                                    | 19                          | 0.010                        | 0.1               |
| 3.2                                    | 24                          | 0.013                        | 0.1               |
| 3.3                                    | 16                          | 0.029                        | 0.1               |
| 3.4                                    | 38                          | 0.020                        | 0.1               |
| 3.5                                    | 42                          | 0.022                        | 0.1               |
| 3.6                                    | 57                          | 0.030                        | 0.1               |
| 3.7                                    | 6                           | 0.003                        | 0.1               |
| 3.8                                    | 23                          | 0.012                        | 0.1               |
| 3.9                                    | 41                          | 0.022                        | 0.1               |
| 4.0                                    | 86                          | 0.046                        | 0.1               |
| 4.1                                    | 58                          | 0.031                        | 0.1               |
| 4.2                                    | 7                           | 0.004                        | 0.1               |

|                                 |                             |                             |              |
|---------------------------------|-----------------------------|-----------------------------|--------------|
| <b>EUT</b>                      | S660C Mobile Phone          | <b>MODEL</b>                | GCCP2(56D92) |
| <b>MODE</b>                     | TX connected                | <b>POWER CONTROL LEVEL</b>  | 0            |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz               | <b>DETECTOR FUNCTION</b>    | 500 Bursts   |
| <b>ENVIRONMENTAL CONDITIONS</b> | 24 deg. C, 60 % RH, 999 hPa | <b>TESTED BY:</b> Bunny Yao |              |

| <b>AFC FREQUENCY ERROR vs. TEMPERATURE</b> |                             |                              |                   |
|--------------------------------------------|-----------------------------|------------------------------|-------------------|
| <b>Temp. (°C)</b>                          | <b>Frequency Error (Hz)</b> | <b>Frequency Error (ppm)</b> | <b>Limit(ppm)</b> |
| 50                                         | 36                          | 0.019                        | 0.1               |
| 40                                         | 10                          | 0.005                        | 0.1               |
| 30                                         | 28                          | 0.015                        | 0.1               |
| 20                                         | 10                          | 0.005                        | 0.1               |
| 10                                         | 39                          | 0.021                        | 0.1               |
| 0                                          | 60                          | 0.032                        | 0.1               |
| -10                                        | 78                          | 0.041                        | 0.1               |
| -20                                        | 102                         | 0.054                        | 0.1               |
| -30                                        | 114                         | 0.061                        | 0.1               |

#### 4.4 OCCUPIED BANDWIDTH MEASUREMENT

##### 4.4.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

According to FCC 24.238(b) specified that emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

##### 4.4.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER                                | MODEL NO.    | SERIAL NO. | CALIBRATED UNTIL |
|-----------------------------------------------------------|--------------|------------|------------------|
| * ROHDE & SCHWARZ<br>Spectrum Analyzer                    | FSP40        | 100035     | Apr. 15, 2004    |
| * ROHDE & SCHWARZ<br>Universal Radio Communication Tester | CMU200       | 836072/086 | Apr. 21, 2004    |
| * Mini-Circuits Power Splitter                            | ZAPD-4       | 400005     | NA               |
| * Hewlett Packard RF cable                                | 8120-6192    | 01428251   | NA               |
| * JFW 20dB attenuation                                    | 50HF-020-SMA | NA         | NA               |
| * Suhner RF cable                                         | Sucoflex104  | 204850/4   | NA               |

**NOTE:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

2. “\*” = These equipments are used for the final measurement.

##### 4.4.3 TEST SETUP

Same as Item 4.2.4 (Conducted Power Setup)

#### 4.4.4 TEST PROCEDURES

- a. The EUT was set up for the maximum peak power with GPRS link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 512, 661 and 810(low, middle and high operational frequency range.)
- b. The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. This splitter loss and cable loss are the worst loss 4dB in the transmitted path track.
- c. FCC 24.238(b) required a measurement bandwidth is the fundamental emission below 26dB bandwidth.


#### 4.4.5 EUT OPERATING CONDITION

- a. The EUT makes a phone call to the GSM simulator.
- b. The GSM simulator station system controlled a EUT to export maximum and minimum output power under transmission mode and specific channel frequency Same as Item 4.4.5


#### 4.4.6 TEST RESULTS

| Frequency (MHz) | Max. Output Power -26 dBc<br>Bandwidth (kHz) | Min. Output Power -26 dBc<br>Bandwidth (kHz) |
|-----------------|----------------------------------------------|----------------------------------------------|
| 1850.2          | 308                                          | 306                                          |
| 1880.0          | 304                                          | 308                                          |
| 1909.8          | 302                                          | 306                                          |


# Channel 512 Max. Power -26 dBc Bandwidth

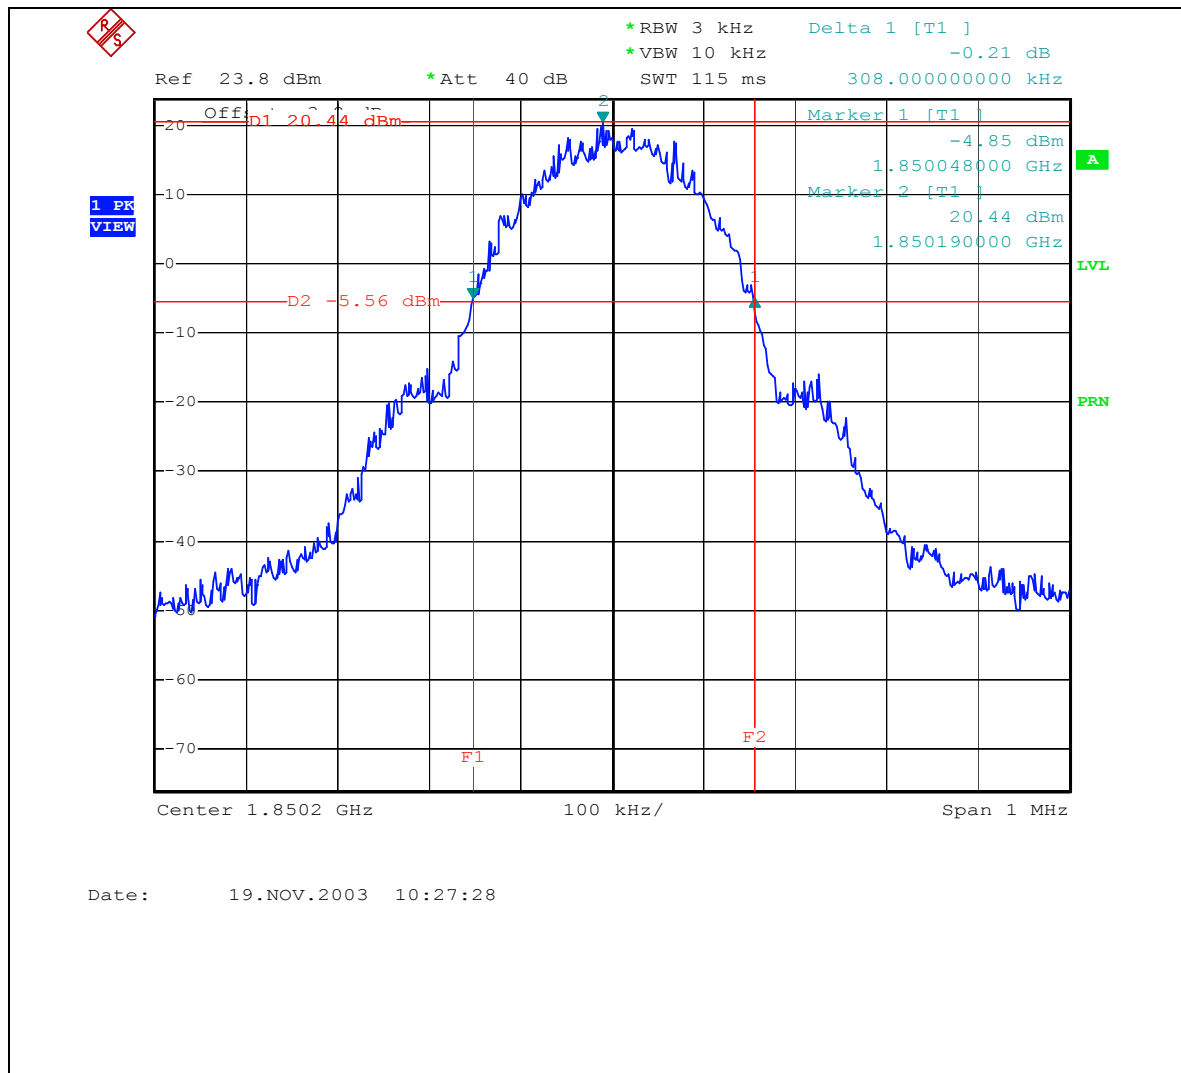


# Channel 512 Min. Power -26 dBc Bandwidth

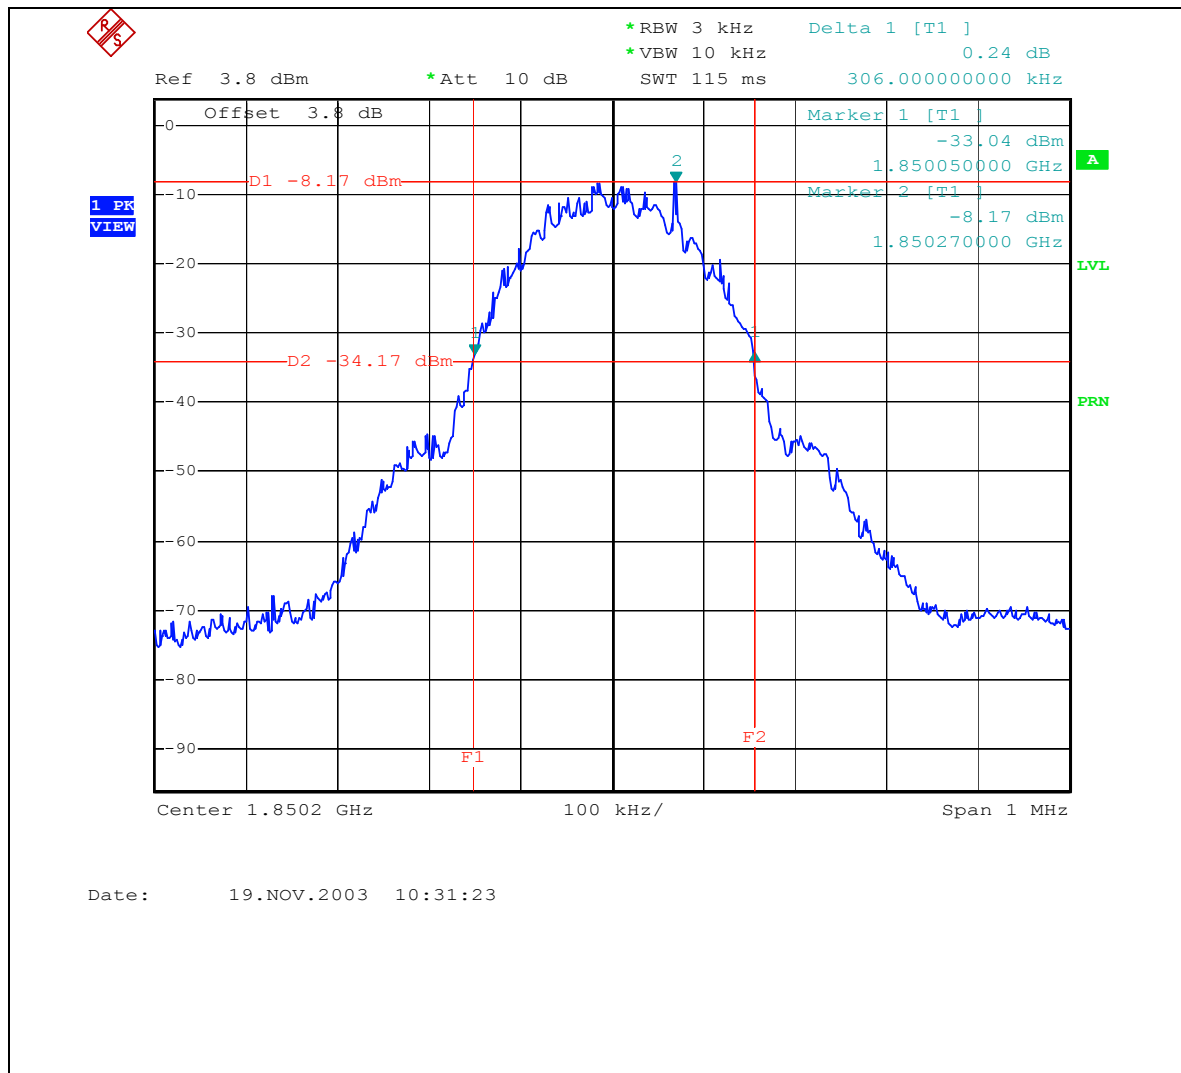


# Channel 661 Max. Power -26 dBc Bandwidth

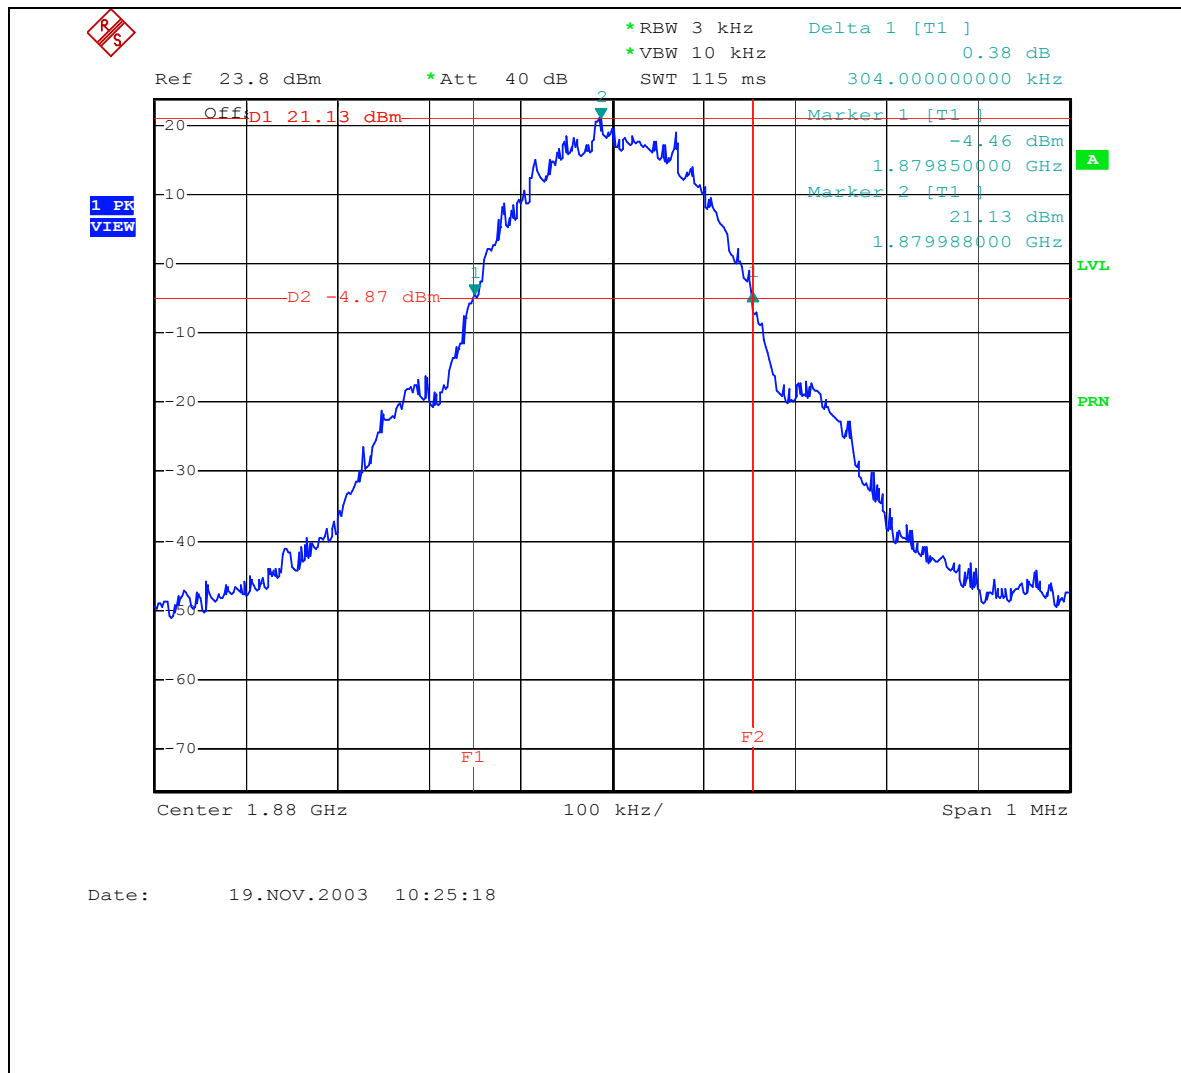


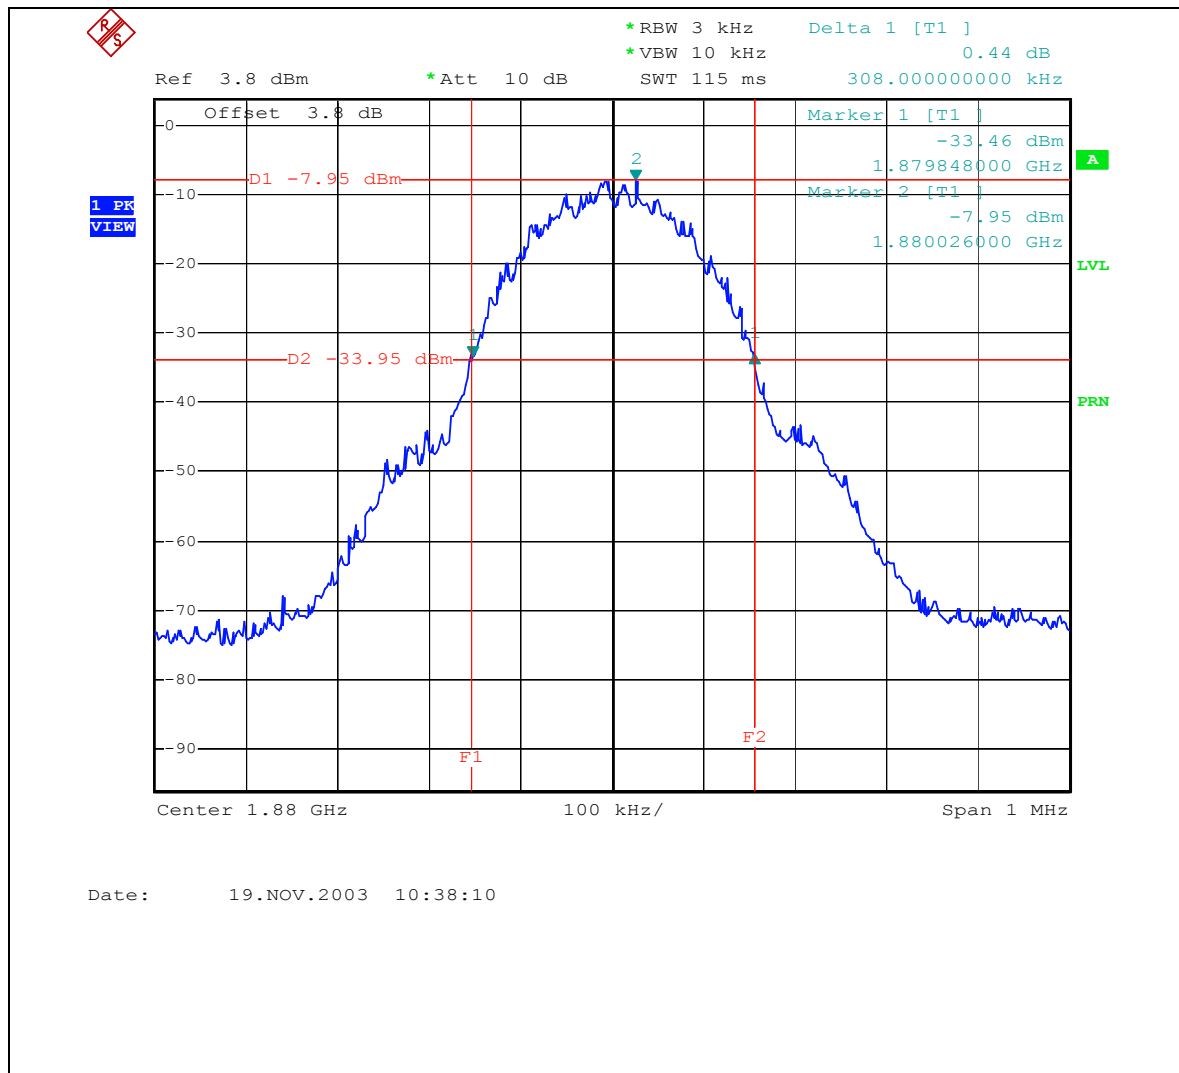**Channel 661 Min. Power  
-26 dBc Bandwidth**

# Channel 810 Max. Power -26 dBc Bandwidth

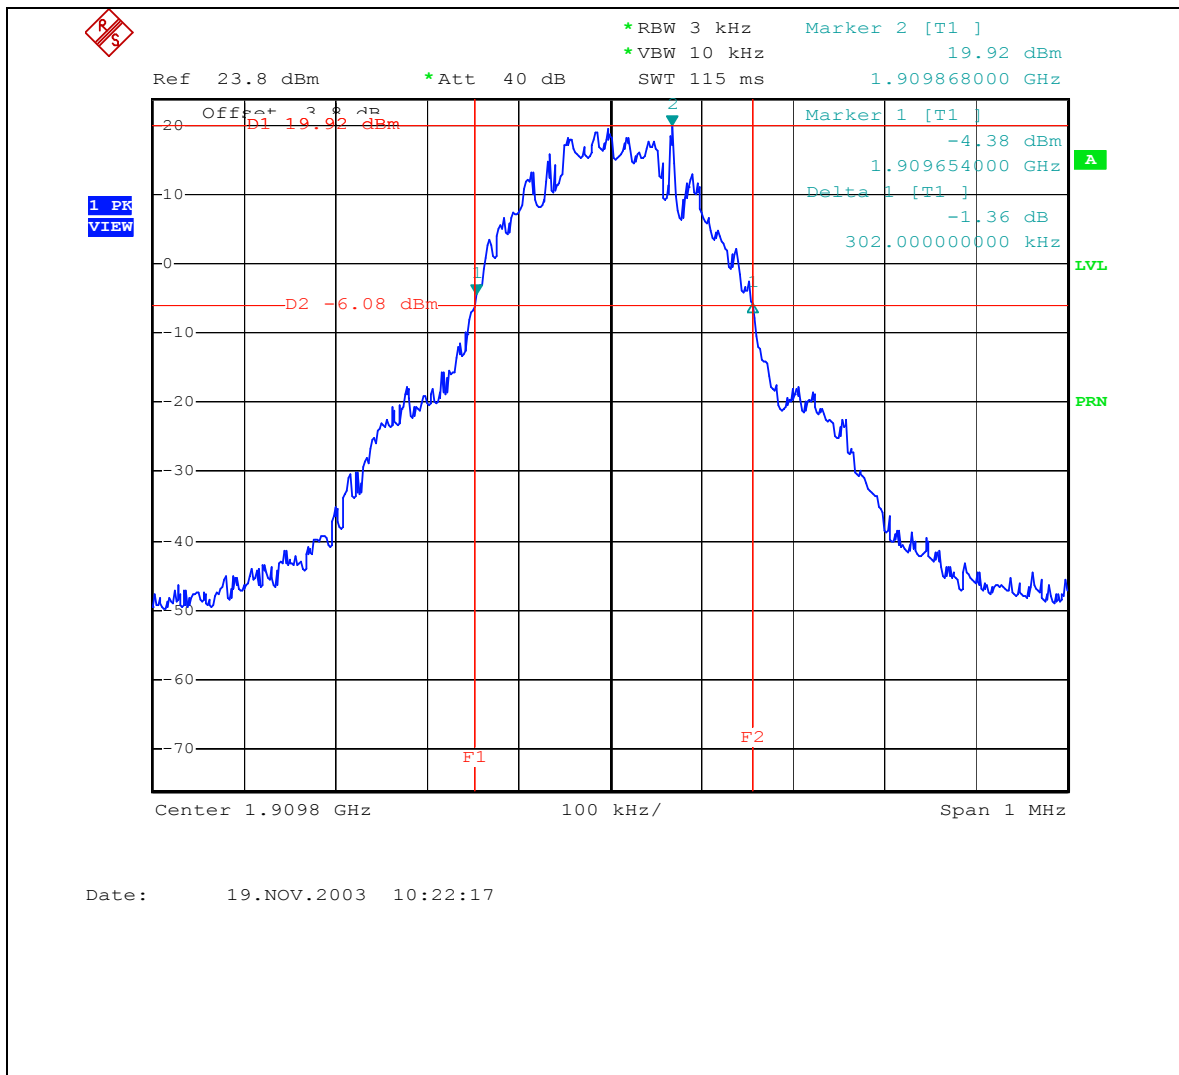

# Channel 810 Min. Power -26 dBc Bandwidth

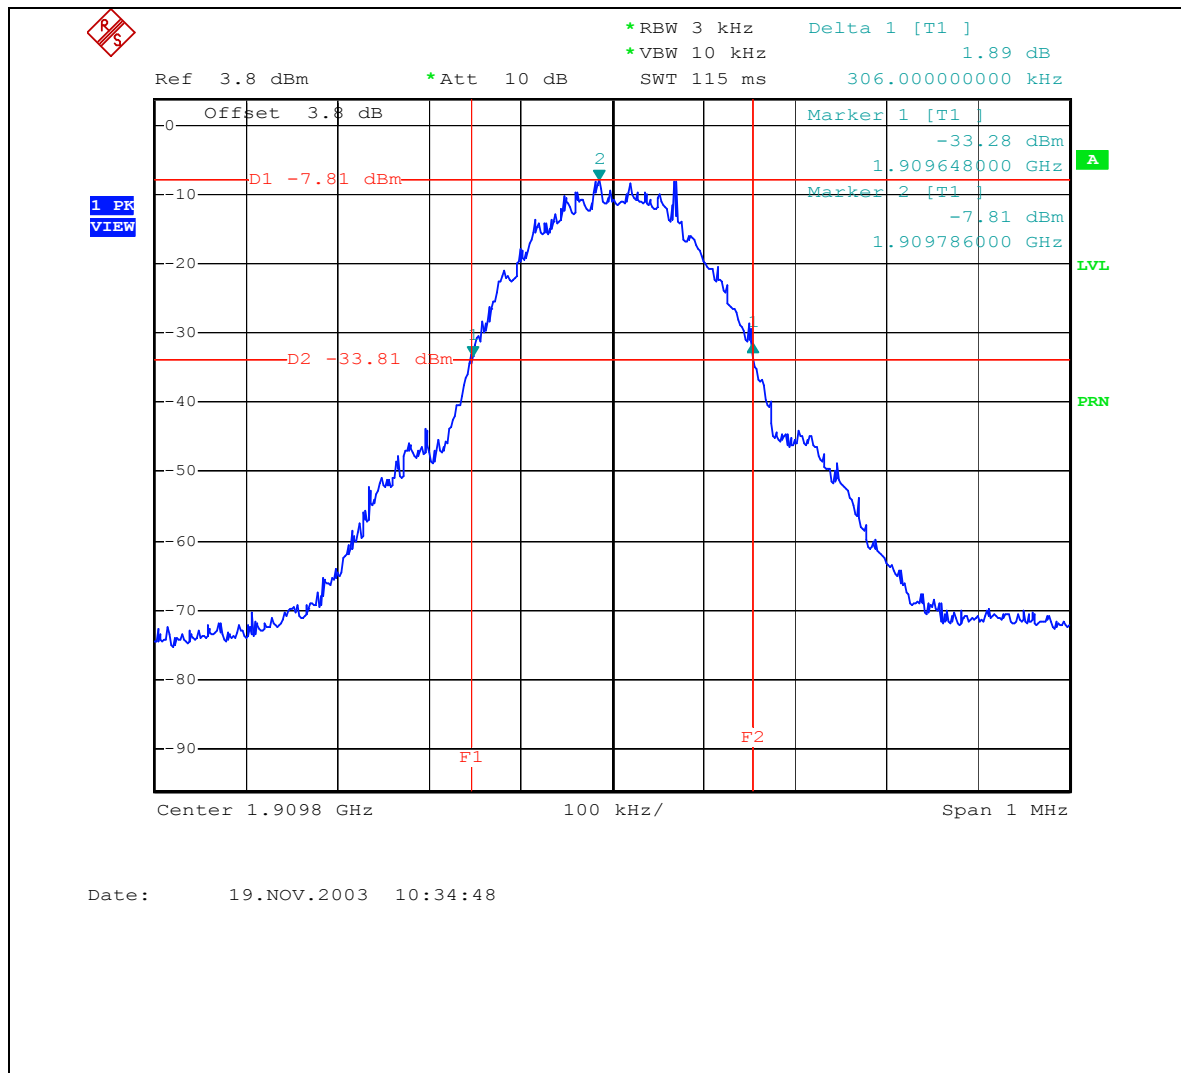

Date: 19.NOV.2003 10:34:48

## 4.5 BAND EDGE MEASUREMENT

### 4.5.1 LIMITS OF BAND EDGE MEASUREMENT

The PCS frequency bands refer to the FCC 24.229 rule. According to FCC 24.238(b) specified that emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. Then we measure that the bandwidth is about 300kHz and the resolution bandwidth is 3kHz.

### 4.5.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER                                | MODEL NO.    | SERIAL NO. | CALIBRATED UNTIL |
|-----------------------------------------------------------|--------------|------------|------------------|
| * ROHDE & SCHWARZ<br>Spectrum Analyzer                    | FSP40        | 100035     | Apr. 15, 2004    |
| * ROHDE & SCHWARZ<br>Universal Radio Communication Tester | CMU200       | 836072/086 | Apr. 21, 2004    |
| * Mini-Circuits Power Splitter                            | ZAPD-4       | 400005     | NA               |
| * Hewlett Packard RF cable                                | 8120-6192    | 01428251   | NA               |
| * JFW 20dB attenuation                                    | 50HF-020-SMA | NA         | NA               |
| * Suhner RF cable                                         | Sucoflex104  | 204850/4   | NA               |

**NOTE:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

2. "\*" = These equipments are used for the final measurement.

### 4.5.3 TEST SETUP

Same as Item 4.2.4 (Conducted Power Setup)

#### 4.5.4 TEST PROCEDURES


- a. The EUT was set up for the maximum peak power with GPRS link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels, 512 and 810(low and high operational frequency range.)
- b. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. This splitter loss and cable loss are the worst loss 4dB in the transmitted path track.
- c. The center frequency of spectrum is the band edge frequency and span is 2 MHz. RB of the spectrum is 3kHz and VB of the spectrum is 10KHz.
- d. Record the max trace plot into the test report.

#### 4.5.5 EUT OPERATING CONDITION


- a. The EUT makes a phone call to the GSM simulator.
- b. The GSM simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency Same as Item 4.4.5.

## 4.5.6 TEST RESULTS

### Lower Band Edge

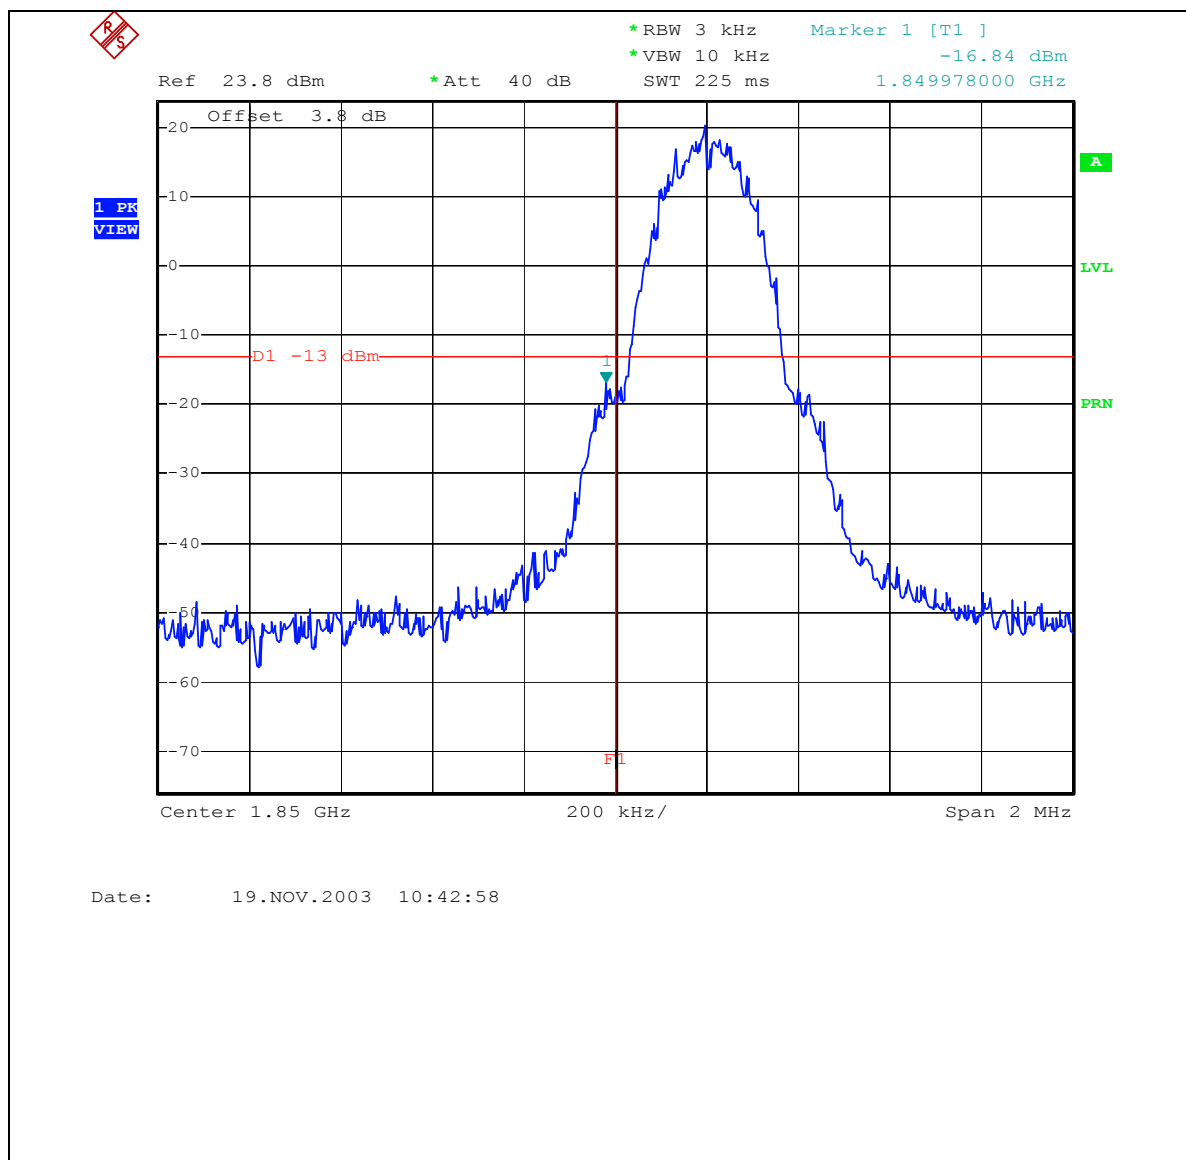

## Higher Band Edge

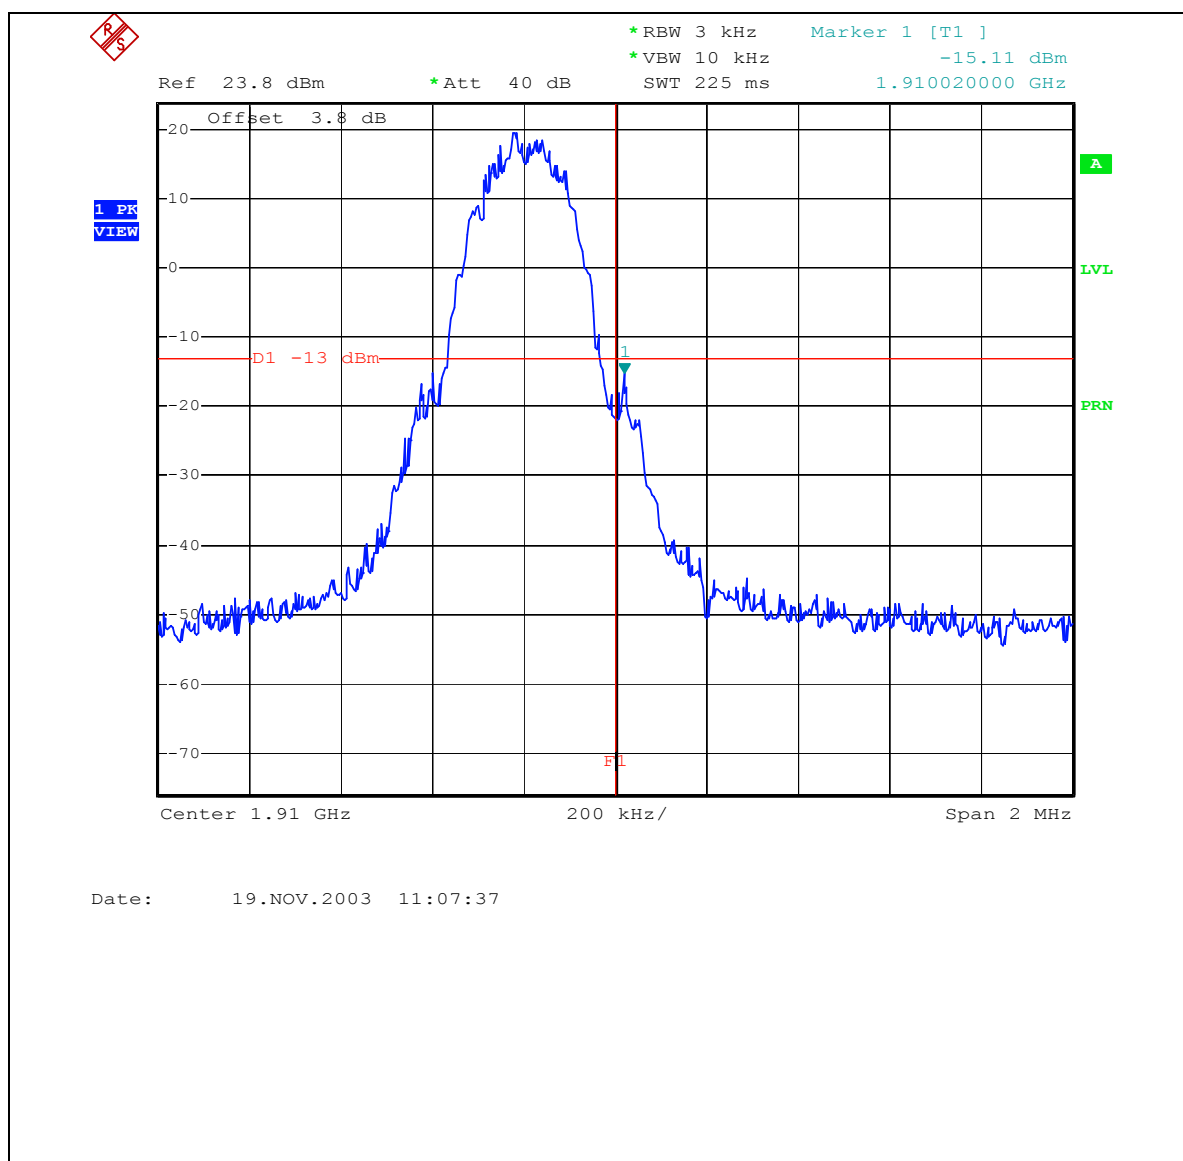

## 4.6 CONDUCTED SPURIOUS EMISSIONS

### 4.6.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

In the FCC 24.238(a), On any frequency outside a licensee's frequency block within USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB. The limit translates in the relevant power range (1 to 0.001W). At 1W(Power Control Level 0) the specified minimum attenuation becomes 43dB and the limit of emission equal to  $-13\text{dBm}$ . At 0.001W(Power Control Level 15) the specified minimum attenuation becomes 13dB and the emission of limit equal to  $-13\text{dBm}$ . So the limit of emission is the same absolute specified line. In the FCC 24.238(c), When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges (low channel 512 and high channel 810), both upper and lower edges are compliance with FCC 24.238(b), Adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

### 4.6.2 TEST INSTRUMENTS


| DESCRIPTION & MANUFACTURER                                | MODEL NO.                               | SERIAL NO. | CALIBRATED UNTIL |
|-----------------------------------------------------------|-----------------------------------------|------------|------------------|
| * ROHDE & SCHWARZ<br>Spectrum Analyzer                    | FSP40                                   | 100035     | Apr. 15, 2004    |
| * ROHDE & SCHWARZ<br>Signal Generator                     | SMP04                                   | 10001      | May 05, 2004     |
| * ROHDE & SCHWARZ<br>Universal Radio Communication Tester | CMU200                                  | 836072/086 | Apr. 21, 2004    |
| * Wainwright Instruments<br>Band Reject Filter            | WRCG1850/1910-<br>1830/1930-<br>60/10SS | SN1        | NA               |
| * Wainwright Instruments<br>High Pass Filter              | WHK3.1/18G-10SS                         | SN1        | NA               |
| * Mini-Circuits Power Splitter                            | ZAPD-4                                  | 400005     | NA               |
| * Hewlett Packard RF cable                                | 8120-6192                               | 01428251   | NA               |
| * JFW 20dB attenuation                                    | 50HF-020-SMA                            | NA         | NA               |
| * Suhner RF cable                                         | Sucoflex104                             | 204850/4   | NA               |

- NOTE:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.  
2. "\*" = These equipments are used for the final measurement.

#### 4.6.3 TEST PROCEDURE

- a. The EUT was set up for the maximum peak power with GPRS link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 512, 661 and 810(low, middle and high operational frequency range.)
- b. The conducted spurious emission used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. This splitter loss and cable loss are the worst loss 4dB in the transmitted path track.
- c. When the spectrum scanned from 9kHz to 3GHz, it shall be connected to the band reject filter attenuated the carried frequency. The spectrum set RB/VB 1MHz.
- d. When the spectrum scanned from 3kHz to 20GHz, it shall be connected to the high pass filter attenuated the carried frequency. The spectrum set RB/VB 1MHz.

#### 4.6.4 TEST SETUP

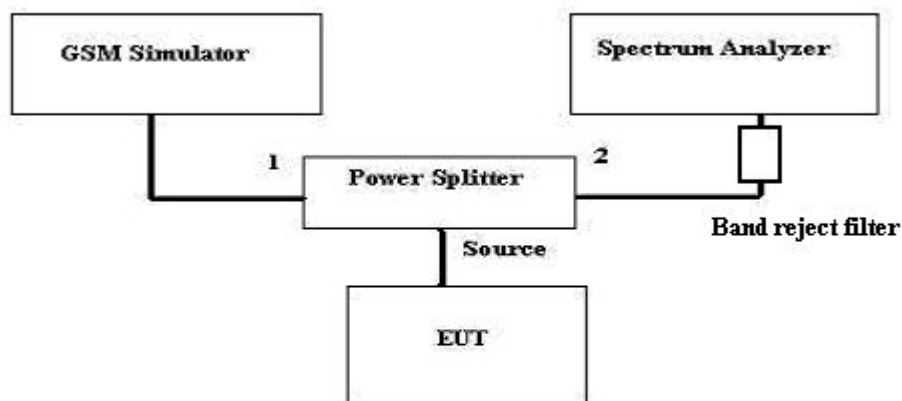


#### 4.6.5 EUT OPERATING CONDITIONS

- a. The EUT makes a phone call to the GSM simulator.
- b. The GSM simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.


## 4.6.6 TEST RESULTS

### Channel 512


9kHz~3GHz

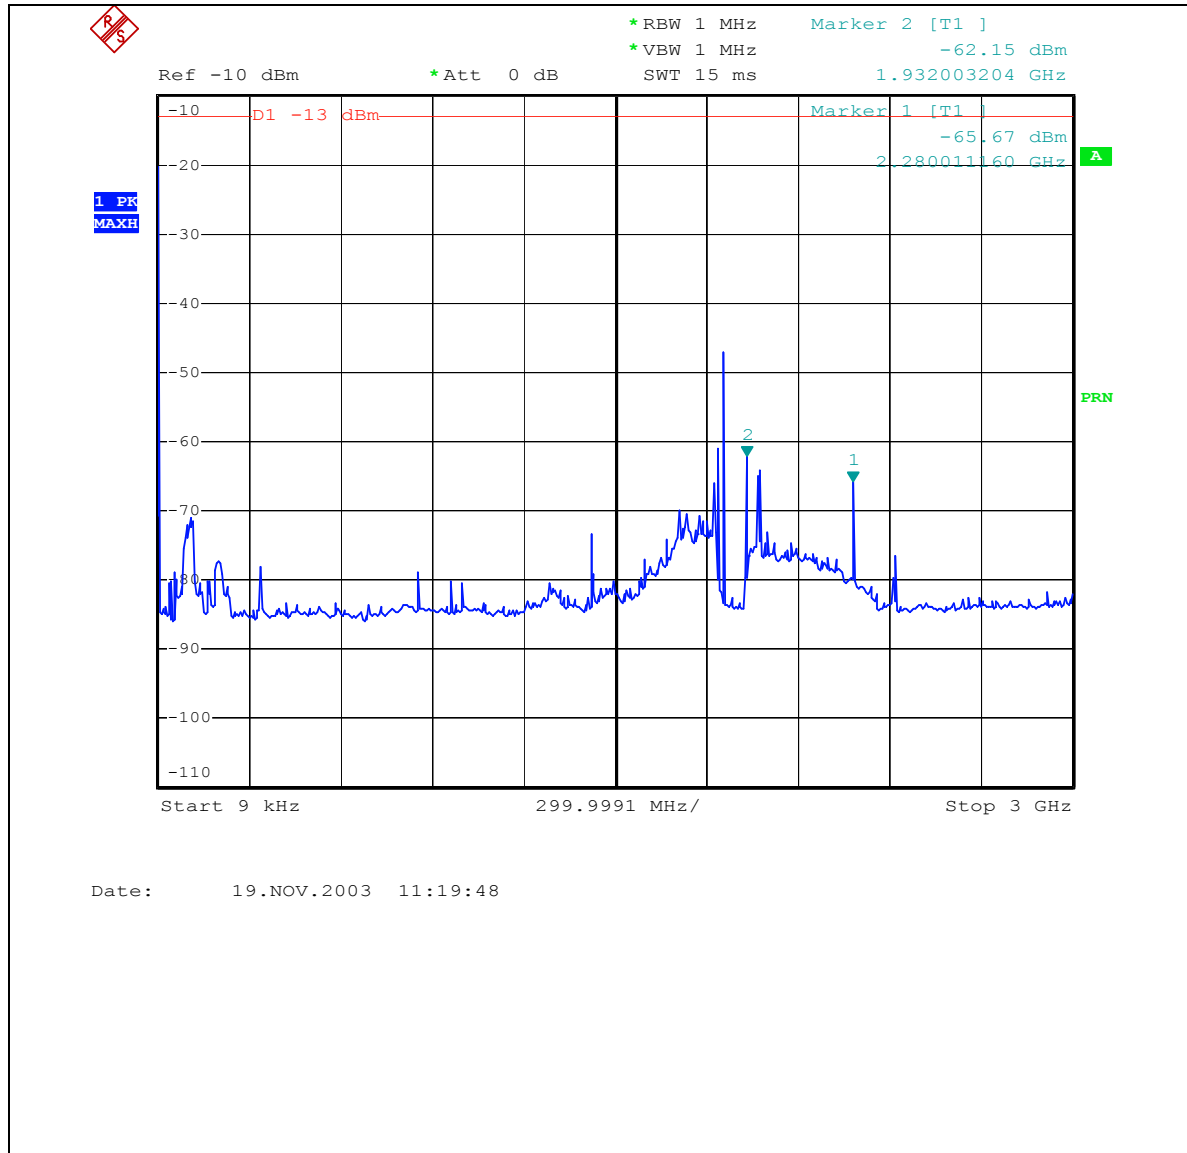


# Channel 512 3GHz~10GHz

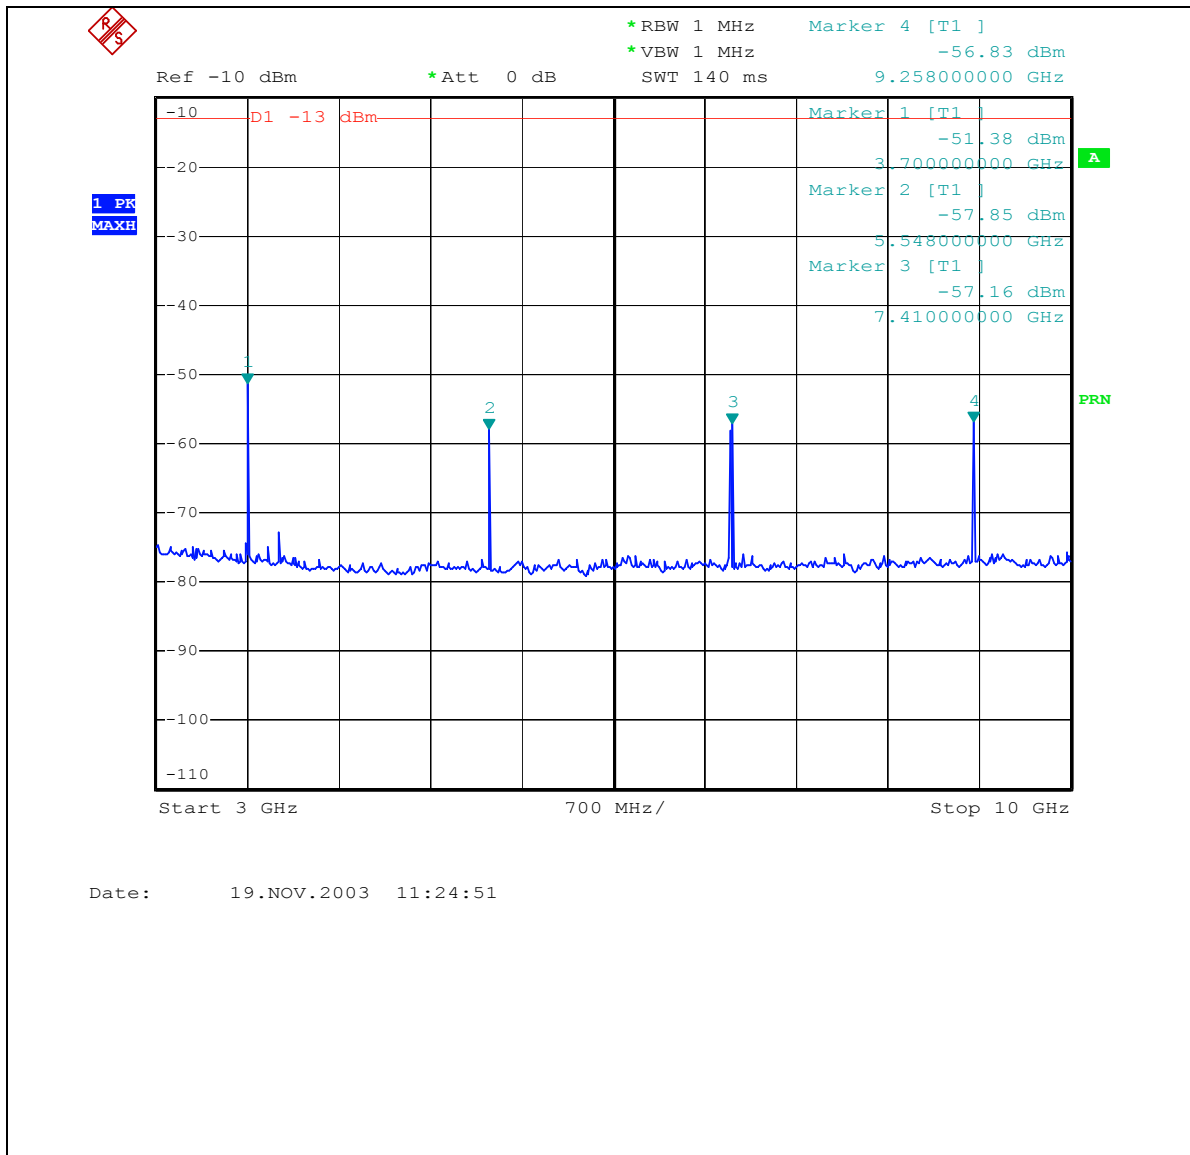


# Channel 512 10GHz~20GHz

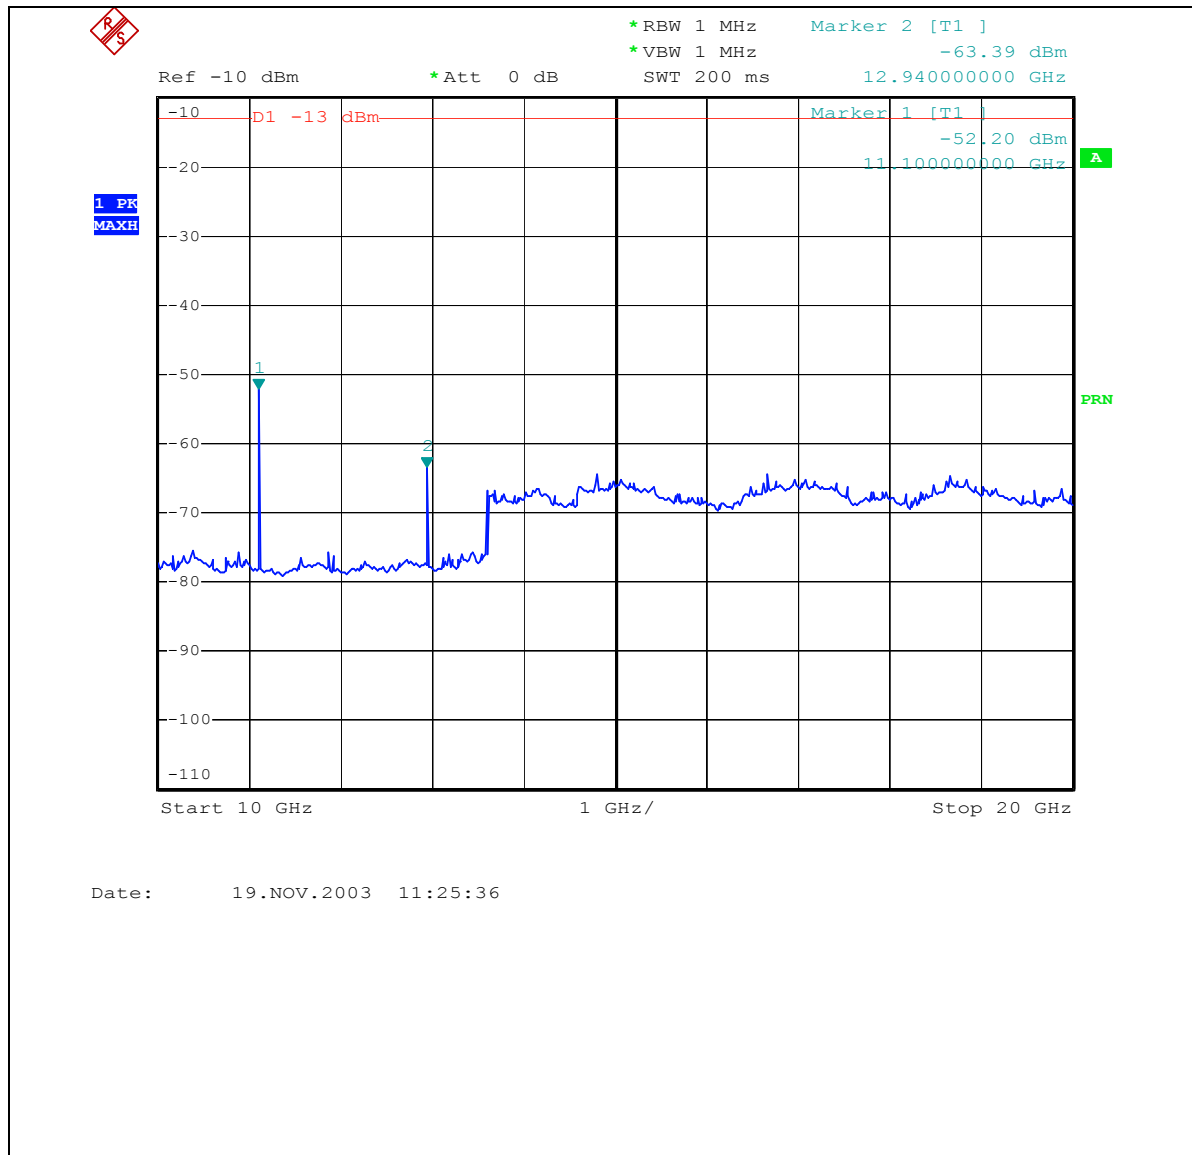


# Channel 661 9kHz~3GHz

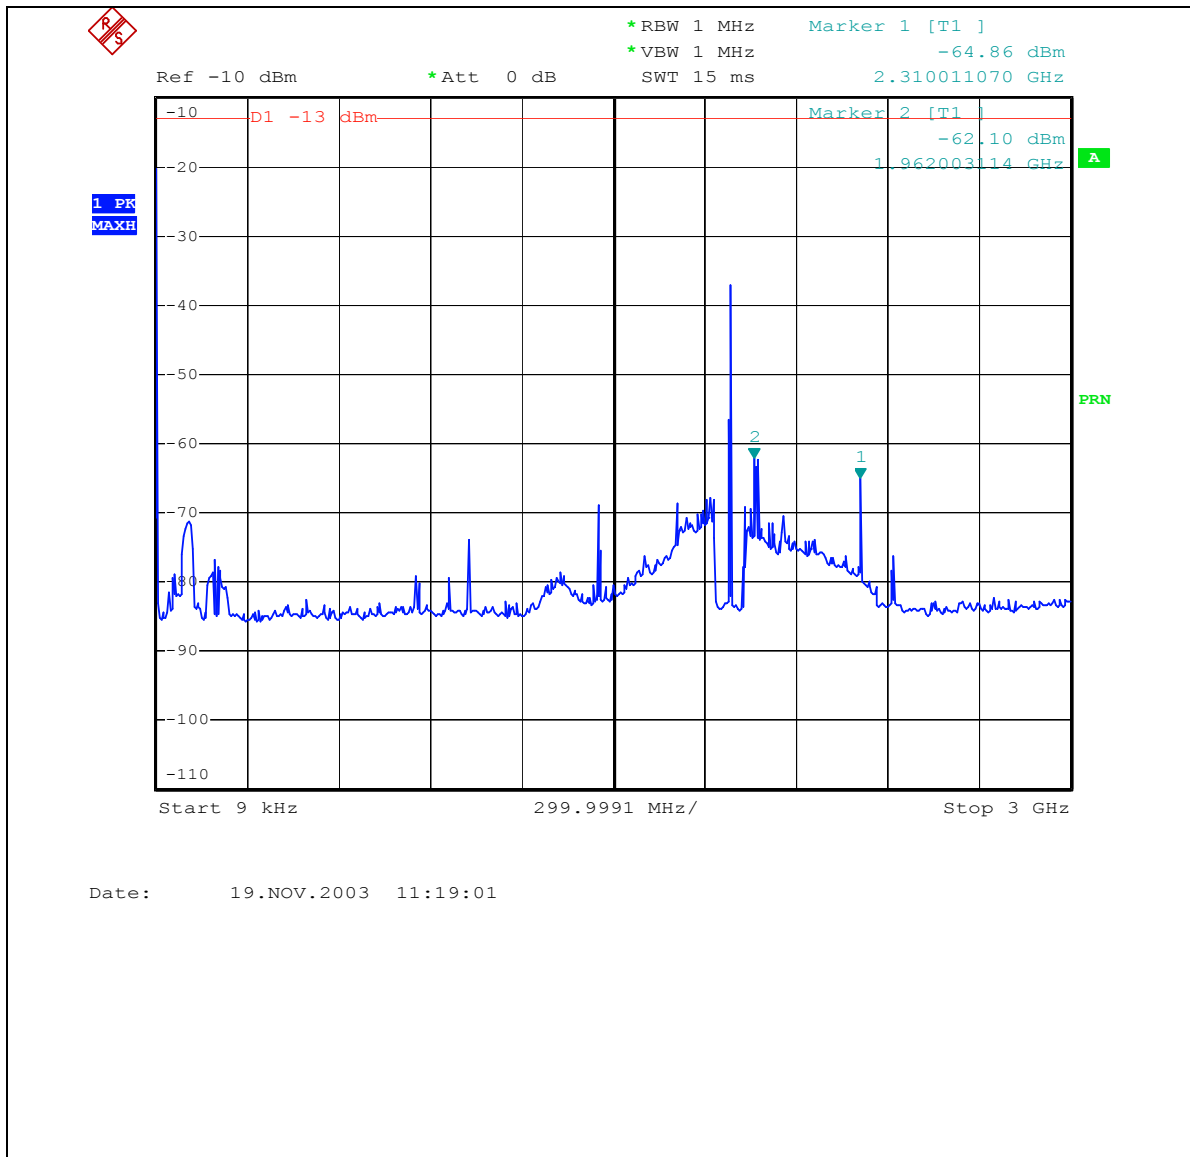


# Channel 661 3GHz~10GHz

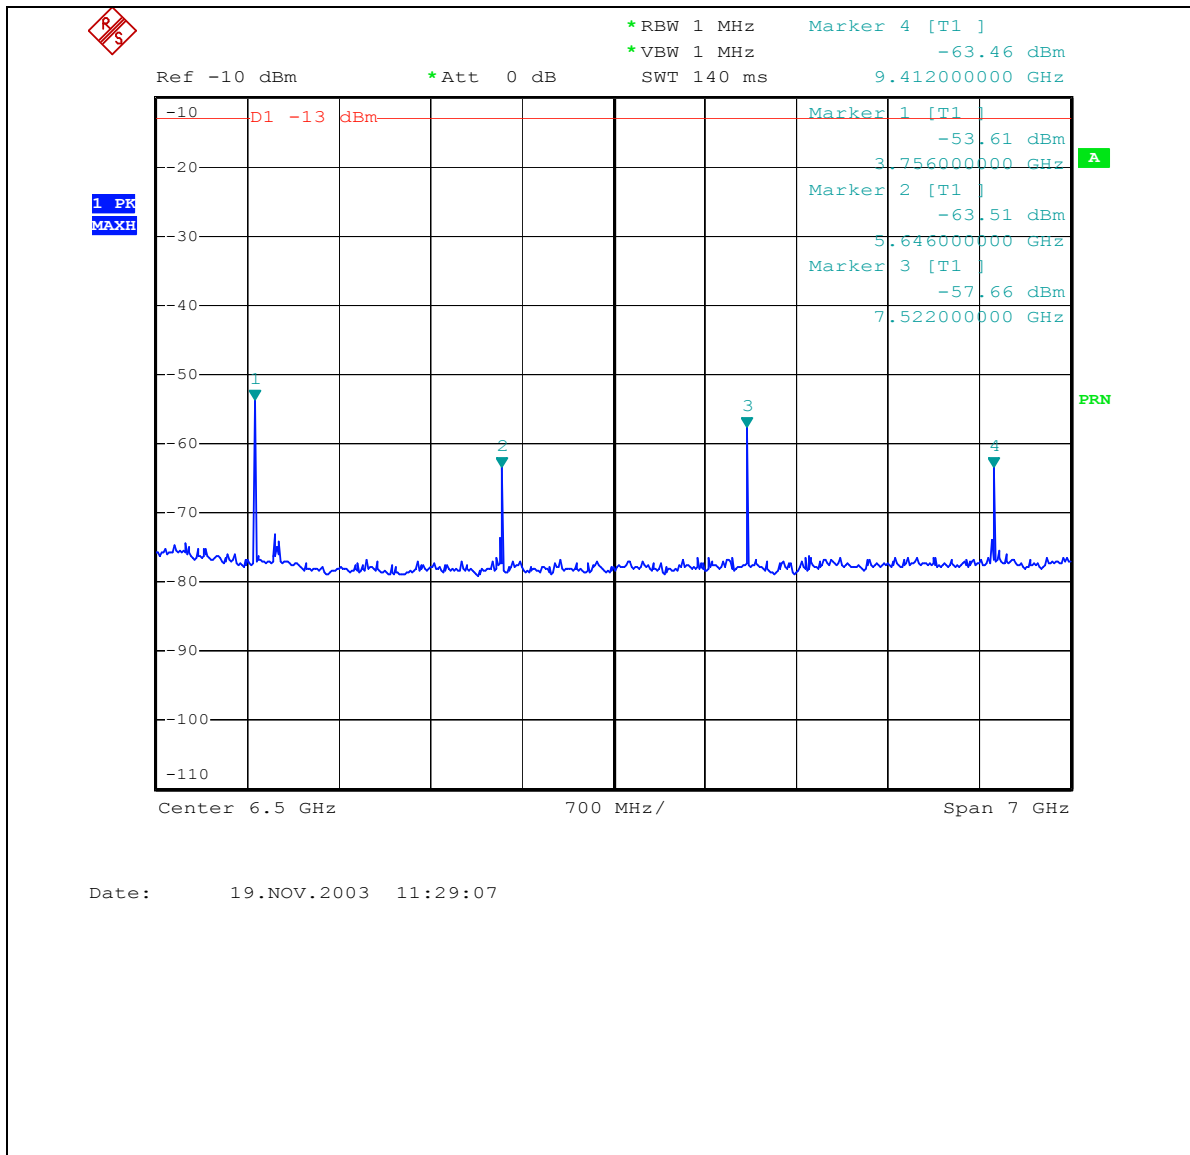


# Channel 661 10GHz~20GHz

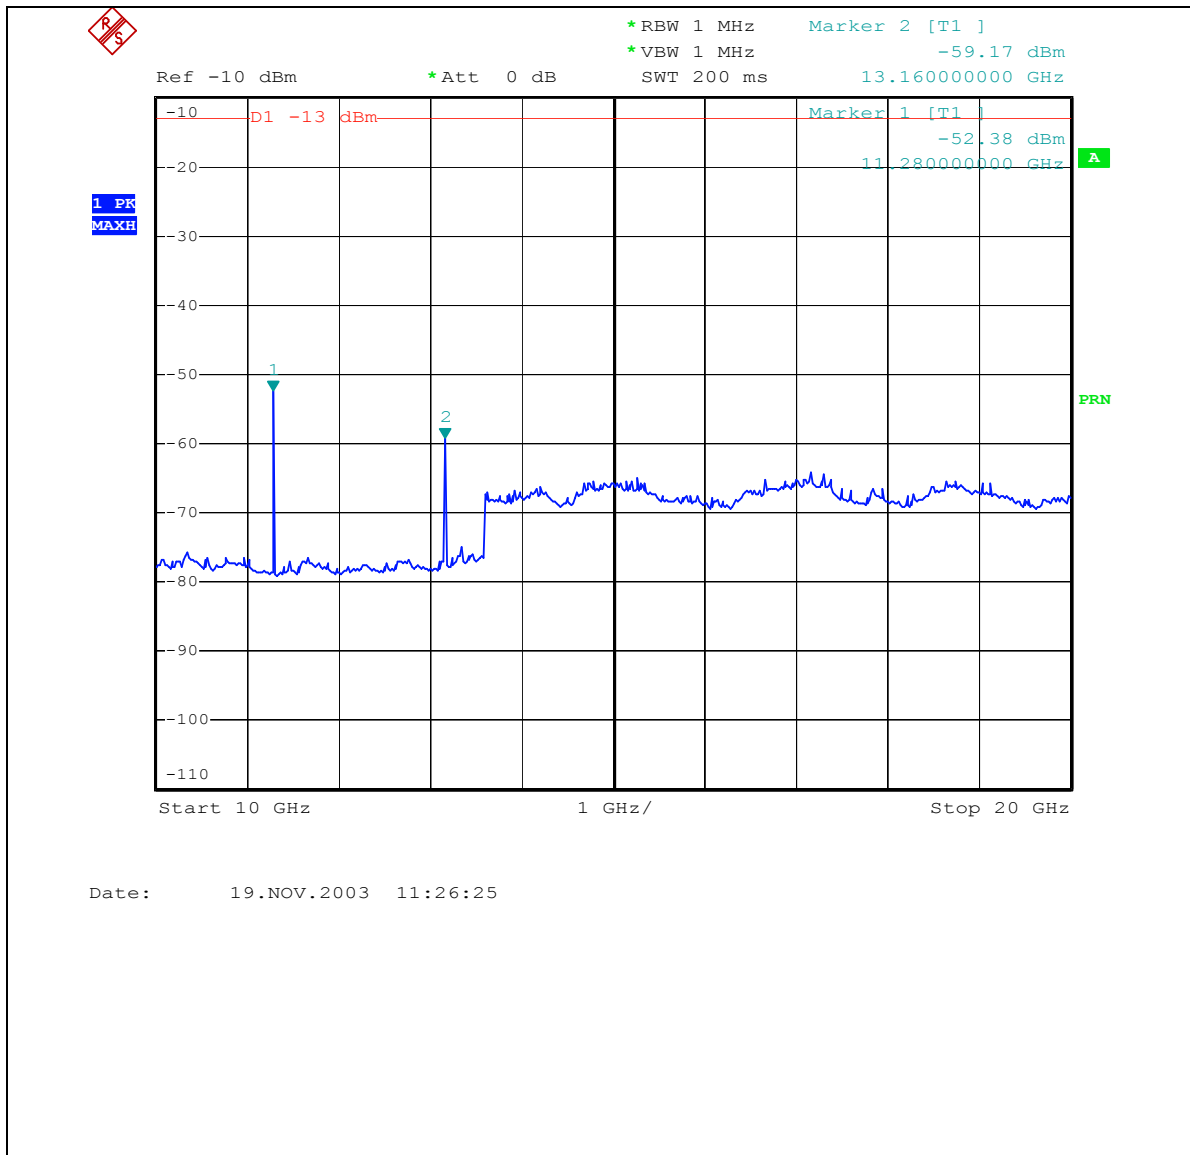


# Channel 810 9kHz~3GHz

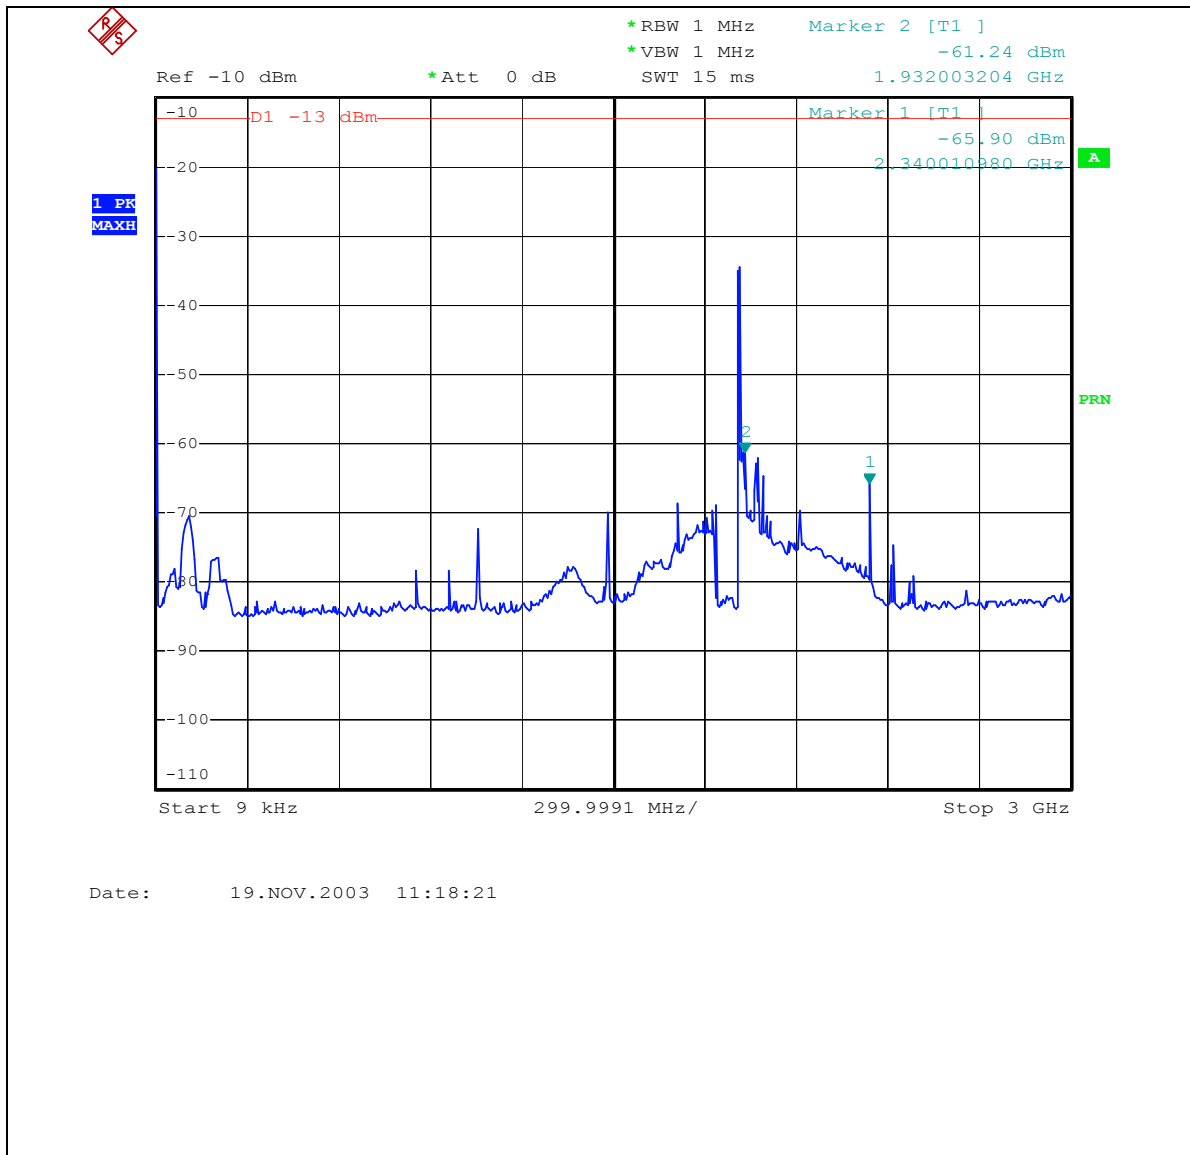

# Channel 810 3GHz~10GHz

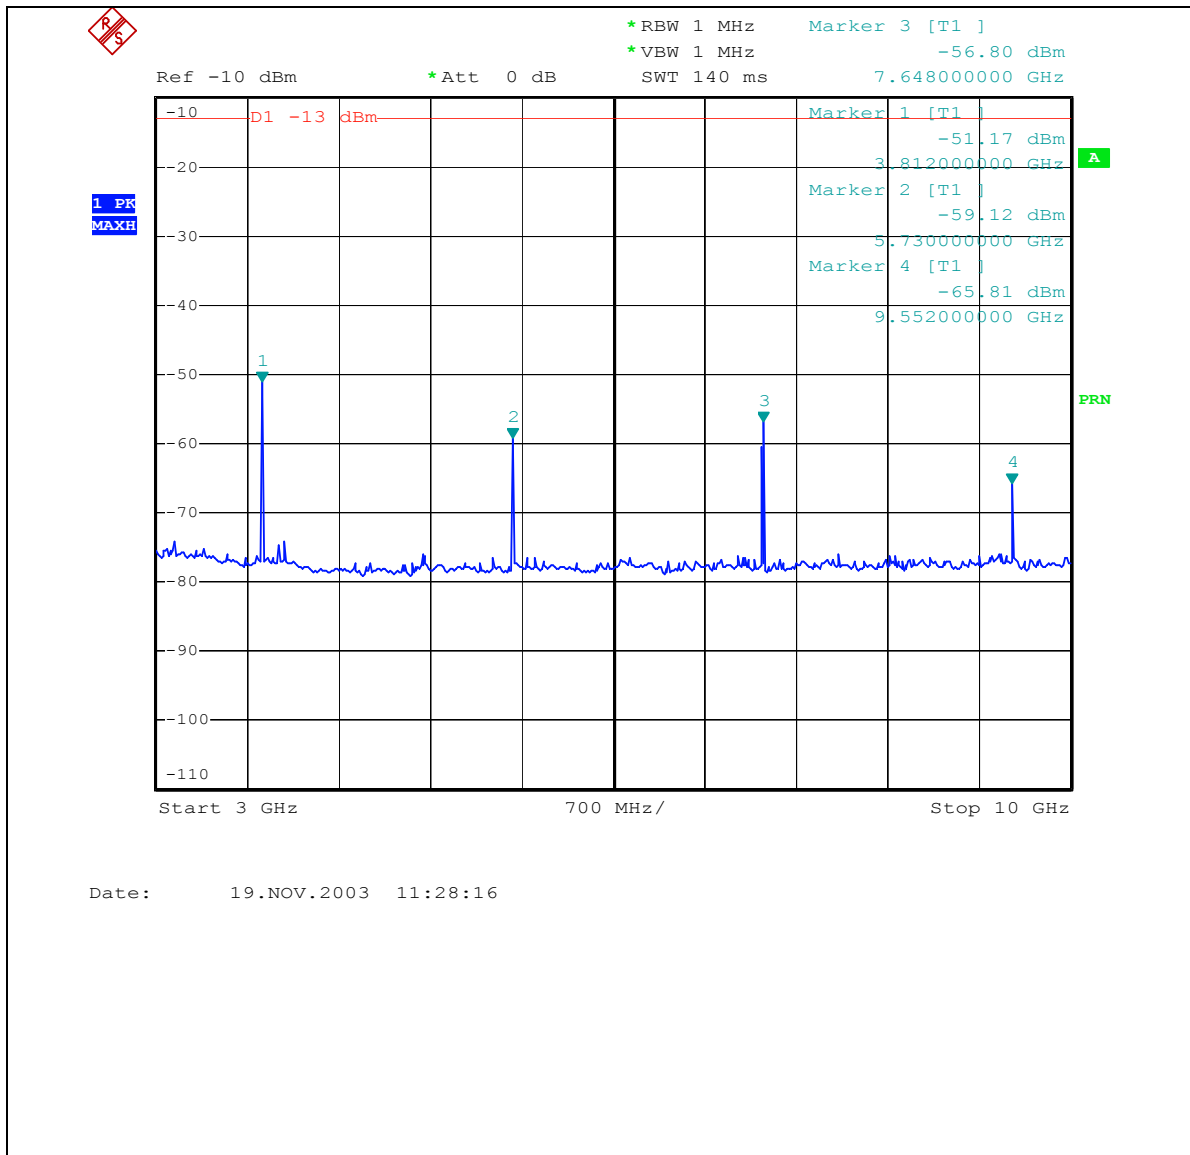

# Channel 810 10GHz~20GHz

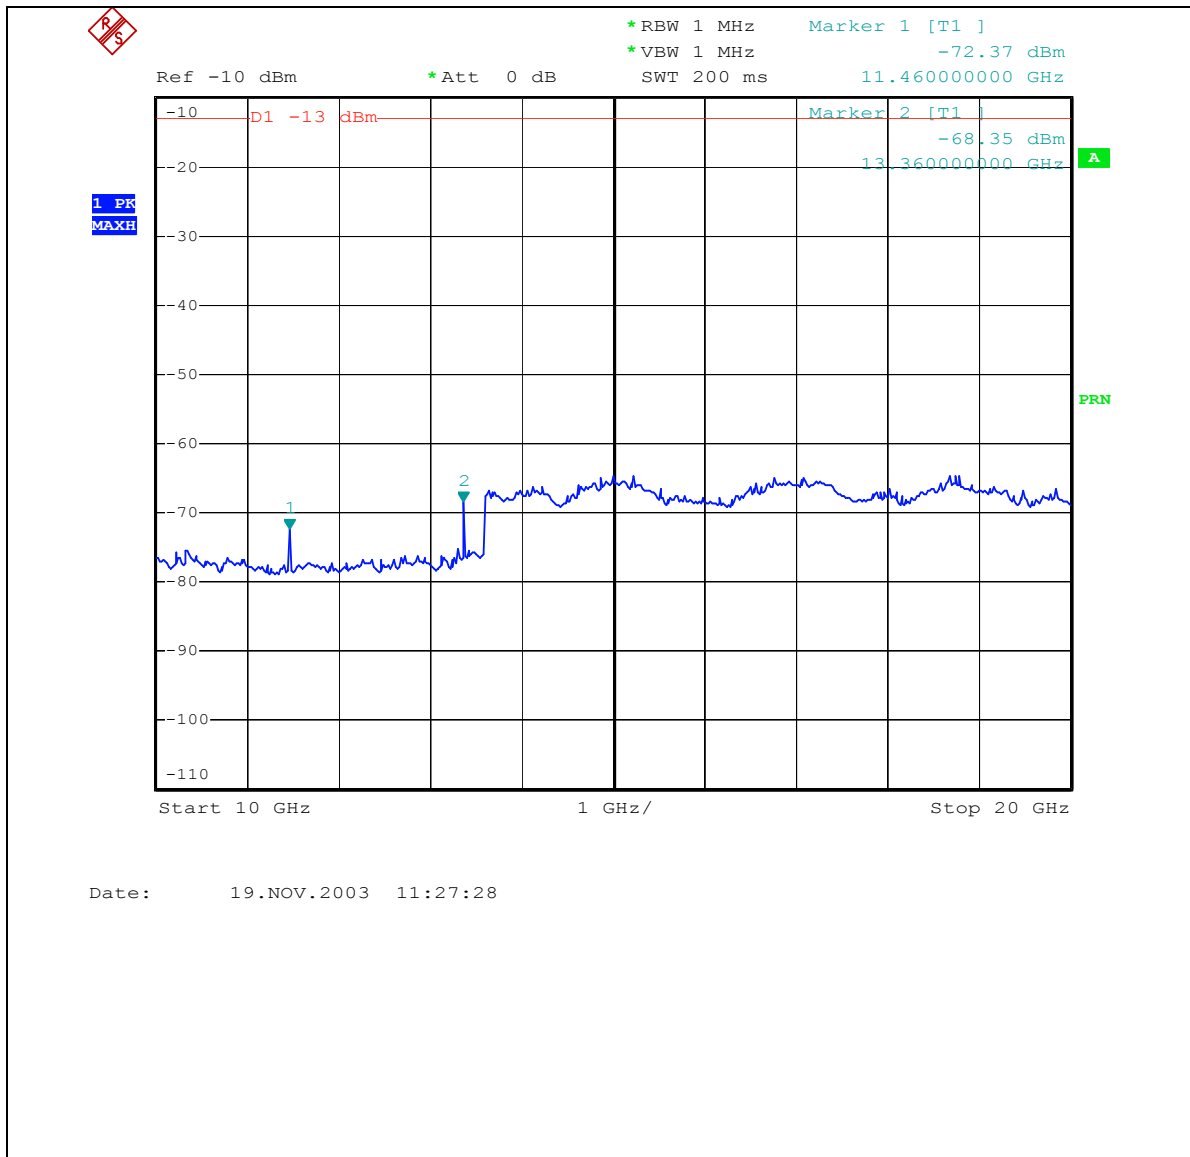

|                                 |                             |                             |              |
|---------------------------------|-----------------------------|-----------------------------|--------------|
| <b>EUT</b>                      | S660C Mobile Phone          | <b>MODEL</b>                | GCCP2(56D92) |
| <b>MODE</b>                     | Tx Channel 512              | <b>POWER CONTROL LEVEL</b>  | 0            |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz               | <b>DETECTOR FUNCTION</b>    | Peak         |
| <b>ENVIRONMENTAL CONDITIONS</b> | 24 deg. C, 60 % RH, 991 hPa | <b>TESTED BY:</b> Bunny Yao |              |

| <b>CONDUCTED SPURIOUS EMISSION</b> |                  |                              |                             |                    |               |
|------------------------------------|------------------|------------------------------|-----------------------------|--------------------|---------------|
| <b>Frequency (MHz)</b>             | <b>Raw (dBm)</b> | <b>Correction Factor(dB)</b> | <b>Conducted Level(dBm)</b> | <b>Limit (dBm)</b> | <b>Margin</b> |
| 1932                               | -62.15           | 3.88                         | -58.27                      | -13.00             | -45.27        |
| 2280                               | -65.67           | 3.90                         | -61.77                      | -13.00             | -48.77        |
| 3700                               | -51.38           | 3.96                         | -47.42                      | -13.00             | -34.42        |
| 5548                               | -57.85           | 4.14                         | -53.71                      | -13.00             | -40.71        |
| 7410                               | -57.16           | 4.32                         | -52.84                      | -13.00             | -39.84        |
| 9258                               | -56.83           | 4.41                         | -52.42                      | -13.00             | -39.42        |
| 11100                              | -52.20           | 4.52                         | -47.68                      | -13.00             | -34.68        |
| 12940                              | -63.39           | 4.63                         | -58.76                      | -13.00             | -45.76        |

**REMARKS:**

1. Peak Output Power(dBm)=Raw Value(dBm) + Correction Factor(dB)
2. Correction Factor(dB) = Power Splitter Loss(dB) + Cable Loss(dB)

|                                 |                             |                             |              |
|---------------------------------|-----------------------------|-----------------------------|--------------|
| <b>EUT</b>                      | S660C Mobile Phone          | <b>MODEL</b>                | GCCP2(56D92) |
| <b>MODE</b>                     | Tx Channel 661              | <b>POWER CONTROL LEVEL</b>  | 0            |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz               | <b>DETECTOR FUNCTION</b>    | Peak         |
| <b>ENVIRONMENTAL CONDITIONS</b> | 24 deg. C, 60 % RH, 991 hPa | <b>TESTED BY:</b> Bunny Yao |              |

| <b>CONDUCTED SPURIOUS EMISSION</b> |                  |                              |                             |                    |               |
|------------------------------------|------------------|------------------------------|-----------------------------|--------------------|---------------|
| <b>Frequency (MHz)</b>             | <b>Raw (dBm)</b> | <b>Correction Factor(dB)</b> | <b>Conducted Level(dBm)</b> | <b>Limit (dBm)</b> | <b>Margin</b> |
| 1962                               | -62.10           | 3.90                         | -58.20                      | -13.00             | -45.20        |
| 2310                               | -64.86           | 3.92                         | -60.94                      | -13.00             | -47.94        |
| 3756                               | -53.61           | 3.96                         | -49.65                      | -13.00             | -36.65        |
| 5646                               | -63.51           | 4.19                         | -59.32                      | -13.00             | -46.32        |
| 7522                               | -57.66           | 4.35                         | -53.31                      | -13.00             | -40.31        |
| 9412                               | -63.46           | 4.48                         | -58.98                      | -13.00             | -45.98        |
| 11280                              | -52.38           | 4.53                         | -47.85                      | -13.00             | -34.85        |
| 13160                              | -59.17           | 4.66                         | -54.51                      | -13.00             | -41.51        |

**REMARKS:**

1. Peak Output Power(dBm)=Raw Value(dBm) + Correction Factor(dB)
2. Correction Factor(dB) = Power Splitter Loss(dB) + Cable Loss(dB)

|                                 |                             |                             |              |
|---------------------------------|-----------------------------|-----------------------------|--------------|
| <b>EUT</b>                      | S660C Mobile Phone          | <b>MODEL</b>                | GCCP2(56D92) |
| <b>MODE</b>                     | Tx Channel 810              | <b>POWER CONTROL LEVEL</b>  | 0            |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz               | <b>DETECTOR FUNCTION</b>    | Peak         |
| <b>ENVIRONMENTAL CONDITIONS</b> | 24 deg. C, 60 % RH, 991 hPa | <b>TESTED BY:</b> Bunny Yao |              |

| <b>CONDUCTED SPURIOUS EMISSION</b> |                  |                              |                             |                    |               |
|------------------------------------|------------------|------------------------------|-----------------------------|--------------------|---------------|
| <b>Frequency (MHz)</b>             | <b>Raw (dBm)</b> | <b>Correction Factor(dB)</b> | <b>Conducted Level(dBm)</b> | <b>Limit (dBm)</b> | <b>Margin</b> |
| 1932                               | -61.24           | 3.86                         | -57.38                      | -13.00             | -44.38        |
| 2340                               | -65.90           | 6.93                         | -61.97                      | -13.00             | -48.97        |
| <b>3812</b>                        | <b>-51.17</b>    | <b>3.99</b>                  | <b>-47.18</b>               | <b>-13.00</b>      | <b>-34.18</b> |
| 5730                               | -59.12           | 4.12                         | -55.00                      | -13.00             | -42.00        |
| 7648                               | -56.80           | 4.22                         | -52.58                      | -13.00             | -39.58        |
| 9552                               | -65.81           | 4.32                         | -61.49                      | -13.00             | -48.49        |
| 11460                              | -72.37           | 4.56                         | -67.81                      | -13.00             | -54.81        |
| 13360                              | -68.35           | 4.86                         | -63.49                      | -13.00             | -50.49        |

**REMARKS:**

1. Peak Output Power(dBm)=Raw Value(dBm) + Correction Factor(dB)
2. Correction Factor(dB) = Power Splitter Loss(dB) + Cable Loss(dB)

## 4.7 RADIATED EMISSION MEASUREMENT

### 4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

In the FCC 24.238(a), On any frequency outside a licensee's frequency block within USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB. The limit translates in the relevant power range (1 to 0.001W). At 1W(Power Control Level 0) the specified minimum attenuation becomes 43dB and the limit of emission equal to -13dBm. At 0.001W(Power Control Level 15) the specified minimum attenuation becomes 13dB and the emission of limit equal to -13dBm. So the limit of emission is the same absolute specified line.

### 4.7.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER         | MODEL NO.              | SERIAL NO.               | CALIBRATED UNTIL |
|------------------------------------|------------------------|--------------------------|------------------|
| * HP Spectrum Analyzer             | 8594E                  | 3911A07465               | July 07, 2004    |
| * HP Preamplifier                  | 8447D                  | 2432A03504               | June 10, 2004    |
| HP Preamplifier                    | 8449B                  | 3008A01201               | Dec. 11, 2004    |
| * HP Preamplifier                  | 8449B                  | 3008A01292               | Aug. 11, 2004    |
| SCHAFFNER Tunable Dipole Antenna   | VHBA 9123              | 459                      | Jun. 26, 2004    |
| SCHWARZBECK Tunable Dipole Antenna | UHA 9105               | 977                      |                  |
| * ROHDE & SCHWARZ TEST RECEIVER    | ESMI                   | 839013/007<br>839379/002 | Feb. 13, 2004    |
| *Schwarzbeck Antenna               | VULB9168               | 137                      | Apr. 03, 2004    |
| * SCHWARZBECK Horn Antenna         | BBHA9120-D1            | D130                     | June 30, 2004    |
| *ADT. Turn Table                   | TT100                  | 0306                     | NA               |
| *ADT. Tower                        | AT100                  | 0306                     | NA               |
| *Software                          | ADT_Radiated_V<br>5.14 | NA                       | NA               |
| *TIMES RF cable                    | LL142                  | CABLE-CH6-01             | Apr. 30, 2004    |

- NOTE:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. "\*" = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Chamber No. 6.

#### 4.7.3 TEST PROCEDURES

- a. The test site arranged for emission measurement. According to ANSI C63.4-1992 requirement and conformed by the FCC to comply with for 3 m and 10 m site. The spectrum calibrated from 30MHz to 10<sup>th</sup> harmonic of the carried frequency.
- b. The highest carried frequency is 1910MHz. Therefore the frequency spectrum scanned up to 20GHz. The resolution bandwidth is set as outline in Part 24.238(b) compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater.
- c. The spectrum scanned carried frequencies assign to USPCS mobile station transmitting carried frequency block that pertain to low, mid and high channels.
- d. The EUT was set 3 meters away from the receiving antenna, which was mounted on the top of a variable-height antenna tower.
- e. When spectrum scanned between 30MHz~1GHz. The receiver antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. A spectrum scanned above 1GHz to replace a double-ridged wave-guide horn antenna.
- f. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotated table was turned from 0 degrees to 360 degrees to find the maximum reading.
- g. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the harmonic could not be detected above the noise floor, the ambient level was recorded.
- h. The level of the carrier measured on each channel is shown below:

The E-field strength at 1850.2MHz(Channel 512)=127.38 dB  $\mu$  V/m

Therefore the limits is  $127.38-(43+10\log(1.0))=127.38-43=84.38$  dB  $\mu$  V/m


The E-field strength at 1880.0MHz(Channel 661)=125.88 dB  $\mu$  V/m

Therefore the limits is  $125.88-(43+10\log(1.0))= 125.88-43=82.88$ dB  $\mu$  V/m

The E-field strength at 1909.8MHz(Channel 810)=126.42 dB  $\mu$  V/m

Therefore the limits is  $126.42-(43+10\log(1.0))= 126.42-43=83.42$  dB  $\mu$  V/m

#### 4.7.4 TEST SETUP

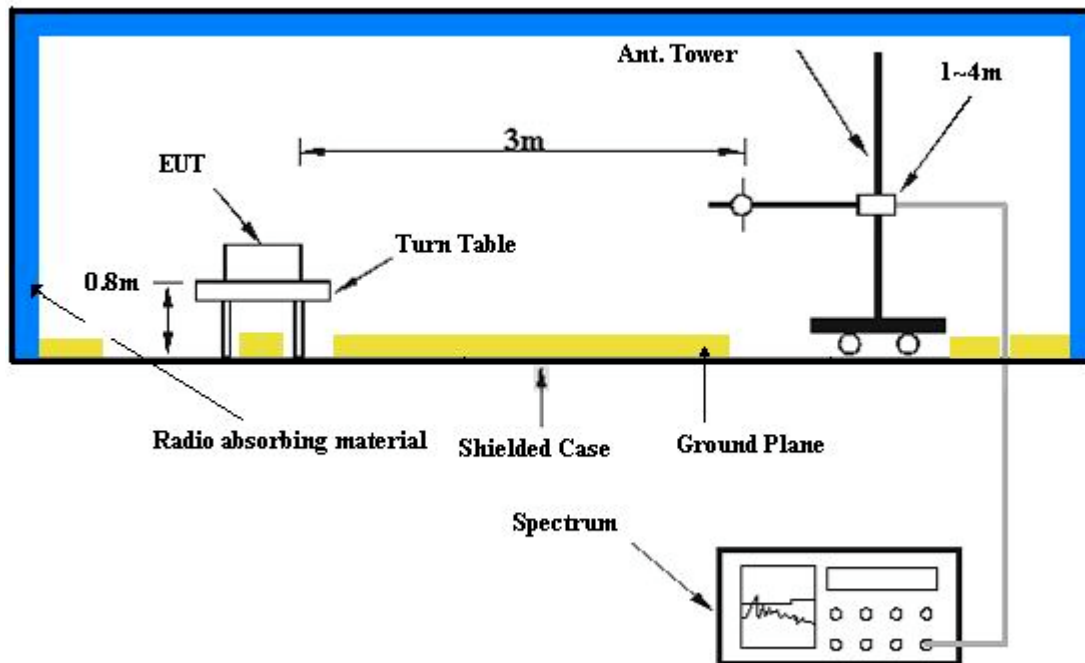

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.7.5 EUT OPERATING CONDITIONS

- The EUT makes a phone call to the GSM simulator.
- The GSM simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.
- Test position



E1 plane

E2 plane

H plane

## 4.7.6 TEST RESULTS

|                                 |                                 |                             |                |
|---------------------------------|---------------------------------|-----------------------------|----------------|
| <b>EUT</b>                      | S660C Mobile Phone              | <b>MODEL</b>                | GCCP2(56D92)   |
| <b>MODE</b>                     | TX connected Ch.512<br>E1 plane | <b>FREQUENCY RANGE</b>      | Below 1000 MHz |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz                   | <b>DETECTOR FUNCTION</b>    | Quasi-Peak     |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25 deg. C, 60 % RH,<br>991 hPa  | <b>TESTED BY:</b> Steven Lu |                |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| No.                                                 | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
| 1                                                   | 35.83          | 31.75 QP                      | 84.38             | -52.63         | 4.00 H                   | 67                         | 18.08                  | 13.66                          |
| 2                                                   | 51.38          | 21.50 QP                      | 84.38             | -62.88         | 3.00 H                   | 178                        | 7.61                   | 13.90                          |
| 3                                                   | 107.76         | 28.43 QP                      | 84.38             | -55.95         | 3.00 H                   | 76                         | 17.35                  | 11.08                          |
| 4                                                   | 115.53         | 27.05 QP                      | 84.38             | -57.33         | 3.00 H                   | 100                        | 15.19                  | 11.87                          |
| 5                                                   | 123.31         | 22.10 QP                      | 84.38             | -62.28         | 3.00 H                   | 46                         | 9.54                   | 12.56                          |
| 6                                                   | 214.67         | 16.44 QP                      | 84.38             | -67.94         | 1.25 H                   | 289                        | 4.52                   | 11.92                          |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| No.                                               | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
| 1                                                 | 36.33          | 37.20 QP                      | 84.38             | -47.18         | 3.00 V                   | 0                          | 23.45                  | 13.75                          |
| 2                                                 | 45.55          | 37.24 QP                      | 84.38             | -47.14         | 1.25 V                   | 245                        | 22.76                  | 14.48                          |
| 3                                                 | 53.33          | 35.69 QP                      | 84.38             | -48.69         | 1.50 V                   | 292                        | 21.96                  | 13.72                          |
| 4                                                 | 84.43          | 19.22 QP                      | 84.38             | -65.16         | 2.00 V                   | 298                        | 9.87                   | 9.35                           |
| 5                                                 | 115.53         | 21.96 QP                      | 84.38             | -62.42         | 1.00 V                   | 247                        | 10.09                  | 11.87                          |
| 6                                                 | 238.00         | 17.46 QP                      | 84.38             | -66.92         | 1.00 V                   | 166                        | 4.38                   | 13.08                          |

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. This is valid for all 3 channels

|                                 |                                 |                             |                |
|---------------------------------|---------------------------------|-----------------------------|----------------|
| <b>EUT</b>                      | S660C Mobile Phone              | <b>MODEL</b>                | GCCP2(56D92)   |
| <b>MODE</b>                     | TX connected Ch.512<br>E2 plane | <b>FREQUENCY RANGE</b>      | Below 1000 MHz |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz                   | <b>DETECTOR FUNCTION</b>    | Quasi-Peak     |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25 deg. C, 60 % RH,<br>991 hPa  | <b>TESTED BY:</b> Steven Lu |                |

| <b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b> |                |                               |                   |                |                          |                            |                        |                                |
|----------------------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| No.                                                            | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
| 1                                                              | 35.83          | 32.77 QP                      | 84.38             | -51.61         | 4.00 H                   | 262                        | 19.11                  | 13.66                          |
| 2                                                              | 41.66          | 24.08 QP                      | 84.38             | -60.30         | 4.00 H                   | 139                        | 9.65                   | 14.43                          |
| 3                                                              | 107.76         | 23.64 QP                      | 84.38             | -60.74         | 3.00 H                   | 304                        | 12.56                  | 11.08                          |
| 4                                                              | 115.53         | 26.26 QP                      | 84.38             | -58.12         | 2.50 H                   | 283                        | 14.39                  | 11.87                          |
| 5                                                              | 150.52         | 15.64 QP                      | 84.38             | -68.74         | 2.50 H                   | 70                         | 1.60                   | 14.04                          |
| 6                                                              | 214.67         | 15.80 QP                      | 84.38             | -68.58         | 1.50 H                   | 70                         | 3.88                   | 11.92                          |
| 7                                                              | 272.99         | 15.46 QP                      | 84.38             | -68.92         | 1.25 H                   | 316                        | 1.19                   | 14.27                          |

| <b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b> |                |                               |                   |                |                          |                            |                        |                                |
|--------------------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| No.                                                          | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
| 1                                                            | 36.33          | 36.60 QP                      | 84.38             | -47.78         | 2.99 V                   | 117                        | 22.85                  | 13.75                          |
| 2                                                            | 49.44          | 33.25 QP                      | 84.38             | -51.13         | 1.00 V                   | 175                        | 19.17                  | 14.08                          |
| 3                                                            | 53.33          | 33.03 QP                      | 84.38             | -51.35         | 1.00 V                   | 175                        | 19.31                  | 13.72                          |
| 4                                                            | 92.20          | 26.68 QP                      | 84.38             | -57.70         | 1.00 V                   | 58                         | 17.03                  | 9.64                           |
| 5                                                            | 115.53         | 23.42 QP                      | 84.38             | -60.96         | 1.00 V                   | 256                        | 11.55                  | 11.87                          |
| 6                                                            | 241.88         | 19.43 QP                      | 84.38             | -64.95         | 1.00 V                   | 286                        | 6.22                   | 13.21                          |

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. This is valid for all 3 channels

|                                 |                                |                             |                |
|---------------------------------|--------------------------------|-----------------------------|----------------|
| <b>EUT</b>                      | S660C Mobile Phone             | <b>MODEL</b>                | GCCP2(56D92)   |
| <b>MODE</b>                     | TX connected Ch.512<br>H plane | <b>FREQUENCY RANGE</b>      | Below 1000 MHz |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz                  | <b>DETECTOR FUNCTION</b>    | Quasi-Peak     |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25 deg. C, 60 % RH,<br>991 hPa | <b>TESTED BY:</b> Steven Lu |                |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| No. | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 35.83          | 31.30 QP                      | 84.38             | -53.08         | 3.00 H                   | 229                        | 17.64                  | 13.66                          |
| 2   | 45.55          | 21.74 QP                      | 84.38             | -62.64         | 1.00 H                   | 205                        | 7.25                   | 14.48                          |
| 3   | 107.76         | 22.68 QP                      | 84.38             | -61.70         | 3.00 H                   | 61                         | 11.60                  | 11.08                          |
| 4   | 115.53         | 23.72 QP                      | 84.38             | -60.66         | 3.00 H                   | 61                         | 11.85                  | 11.87                          |
| 5   | 214.67         | 14.95 QP                      | 84.38             | -69.43         | 1.00 H                   | 100                        | 3.03                   | 11.92                          |
| 6   | 311.86         | 17.86 QP                      | 84.38             | -66.52         | 1.25 H                   | 55                         | 2.45                   | 15.41                          |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| No. | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 35.83          | 37.52 QP                      | 84.38             | -46.86         | 3.00 V                   | 334                        | 23.86                  | 13.66                          |
| 2   | 51.38          | 36.86 QP                      | 84.38             | -47.52         | 1.00 V                   | 182                        | 22.96                  | 13.90                          |
| 3   | 55.27          | 31.91 QP                      | 84.38             | -52.47         | 1.25 V                   | 340                        | 18.36                  | 13.55                          |
| 4   | 92.20          | 20.07 QP                      | 84.38             | -64.31         | 1.75 V                   | 112                        | 10.42                  | 9.64                           |
| 5   | 115.53         | 22.45 QP                      | 84.38             | -61.93         | 1.00 V                   | 223                        | 10.59                  | 11.87                          |
| 6   | 241.88         | 17.85 QP                      | 84.38             | -66.53         | 1.00 V                   | 292                        | 4.64                   | 13.21                          |

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. This is valid for all 3 channels

|                                     |                                      |                              |                          |
|-------------------------------------|--------------------------------------|------------------------------|--------------------------|
| <b>EUT</b>                          | S660C Mobile Phone                   | <b>MODEL</b>                 | P30 (57P30),<br>BenQ P30 |
| <b>MODE</b>                         | TX connected Channel<br>512 E1 plane | <b>FREQUENCY<br/>RANGE</b>   | Above 1000 MHz           |
| <b>INPUT POWER<br/>(SYSTEM)</b>     | 120Vac, 60 Hz                        | <b>DETECTOR<br/>FUNCTION</b> | Peak                     |
| <b>ENVIRONMENTAL<br/>CONDITIONS</b> | 25 deg. C, 60 % RH,<br>991 hPa       | <b>TESTED BY:</b> Steven Lu  |                          |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| No. | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 3700.40        | 58.94 PK                      | 84.38             | -25.44         | 1.53 H                   | 215                        | 24.78                  | 34.16                          |
| 2   | 5550.60        | 54.43 PK                      | 84.38             | -29.95         | 1.06 H                   | 29                         | 17.27                  | 37.16                          |
| 3   | 7400.80        | 56.74 PK                      | 84.38             | -27.64         | 1.65 H                   | 346                        | 14.20                  | 42.54                          |
| 4   | 9251.00        | 64.63 PK                      | 84.38             | -19.75         | 1.59 H                   | 86                         | 19.67                  | 44.96                          |
| 5   | 11101.20       | 71.28 PK                      | 84.38             | -13.10         | 1.27 H                   | 213                        | 24.38                  | 46.90                          |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| No. | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 3700.40        | 59.41 PK                      | 84.38             | -24.97         | 1.42 V                   | 174                        | 25.25                  | 34.16                          |
| 2   | 5550.60        | 57.54 PK                      | 84.38             | -26.84         | 1.40 V                   | 250                        | 20.38                  | 37.16                          |
| 3   | 7400.80        | 56.03 PK                      | 84.38             | -28.35         | 1.55 V                   | 92                         | 13.49                  | 42.54                          |
| 4   | 9251.00        | 65.11 PK                      | 84.38             | -19.27         | 1.85 V                   | 106                        | 20.15                  | 44.96                          |
| 5   | 11101.20       | 71.21 PK                      | 84.38             | -13.17         | 1.86 V                   | 202                        | 24.31                  | 46.90                          |

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

|                                     |                                      |                              |                          |
|-------------------------------------|--------------------------------------|------------------------------|--------------------------|
| <b>EUT</b>                          | S660C Mobile Phone                   | <b>MODEL</b>                 | P30 (57P30),<br>BenQ P30 |
| <b>MODE</b>                         | TX connected Channel<br>512 E2 plane | <b>FREQUENCY<br/>RANGE</b>   | Above 1000 MHz           |
| <b>INPUT POWER<br/>(SYSTEM)</b>     | 120Vac, 60 Hz                        | <b>DETECTOR<br/>FUNCTION</b> | Peak                     |
| <b>ENVIRONMENTAL<br/>CONDITIONS</b> | 25deg. C, 60 % RH,<br>991 hPa        | <b>TESTED BY:</b> Steven Lu  |                          |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| No. | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 3700.49        | 57.18 PK                      | 84.38             | -27.20         | 1.73 H                   | 198                        | 23.02                  | 34.16                          |
| 2   | 5550.73        | 53.25 PK                      | 84.38             | -31.13         | 1.34 H                   | 148                        | 16.09                  | 37.16                          |
| 3   | 7400.79        | 54.08 PK                      | 84.38             | -30.30         | 1.34 H                   | 148                        | 11.54                  | 42.54                          |
| 4   | 9251.01        | 60.66 PK                      | 84.38             | -23.72         | 1.94 H                   | 300                        | 15.70                  | 44.96                          |
| 5   | 11101.19       | 67.45 PK                      | 84.38             | -16.93         | 1.46 H                   | 25                         | 20.55                  | 46.90                          |
| 6   | 12951.39       | 59.36 PK                      | 84.38             | -25.02         | 1.45 H                   | 334                        | 12.32                  | 47.04                          |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| No. | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 3700.40        | 61.89 PK                      | 84.38             | -22.49         | 1.07 V                   | 152                        | 27.73                  | 34.16                          |
| 2   | 5550.60        | 57.85 PK                      | 84.38             | -26.53         | 1.76 V                   | 202                        | 20.69                  | 37.16                          |
| 3   | 7400.79        | 55.98 PK                      | 84.38             | -28.40         | 1.00 V                   | 320                        | 13.44                  | 42.54                          |
| 4   | 9250.99        | 63.49 PK                      | 84.38             | -20.89         | 1.64 V                   | 84                         | 18.53                  | 44.96                          |
| 5   | 11101.19       | 72.78 PK                      | 84.38             | -11.60         | 1.46 V                   | 110                        | 25.88                  | 46.90                          |
| 6   | 12951.39       | 64.86 PK                      | 84.38             | -19.52         | 1.34 V                   | 120                        | 17.82                  | 47.04                          |

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

|                                     |                                     |                              |                          |
|-------------------------------------|-------------------------------------|------------------------------|--------------------------|
| <b>EUT</b>                          | S660C Mobile Phone                  | <b>MODEL</b>                 | P30 (57P30),<br>BenQ P30 |
| <b>MODE</b>                         | TX connected Channel<br>512 H plane | <b>FREQUENCY<br/>RANGE</b>   | Above 1000 MHz           |
| <b>INPUT POWER<br/>(SYSTEM)</b>     | 120Vac, 60 Hz                       | <b>DETECTOR<br/>FUNCTION</b> | Peak                     |
| <b>ENVIRONMENTAL<br/>CONDITIONS</b> | 20 deg. C, 60 % RH,<br>991 hPa      | <b>TESTED BY:</b> Steven Lu  |                          |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| No. | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 3700.34        | 57.41 PK                      | 84.38             | -26.97         | 1.07 H                   | 259                        | 21.47                  | 35.94                          |
| 2   | 5550.54        | 53.55 PK                      | 84.38             | -30.83         | 1.24 H                   | 34                         | 14.30                  | 39.25                          |
| 3   | 7400.74        | 60.33 PK                      | 84.38             | -24.05         | 1.17 H                   | 232                        | 17.87                  | 42.46                          |
| 4   | 9250.94        | 66.04 PK                      | 84.38             | -18.34         | 1.17 H                   | 262                        | 21.33                  | 44.71                          |
| 5   | 11101.25       | 65.94 PK                      | 84.38             | -18.44         | 1.70 H                   | 0                          | 20.40                  | 45.54                          |
| 6   | 12951.34       | 66.61 PK                      | 84.38             | -17.77         | 1.44 H                   | 275                        | 19.30                  | 47.31                          |
| 7   | 14801.54       | 68.02 PK                      | 84.38             | -16.36         | 1.36 H                   | 280                        | 18.27                  | 49.75                          |
| 8   | 16651.74       | 66.03 PK                      | 84.38             | -18.35         | 1.00 H                   | 302                        | 17.47                  | 48.56                          |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| No. | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 3700.34        | 56.77 PK                      | 84.38             | -27.61         | 1.25 V                   | 274                        | 20.83                  | 35.94                          |
| 2   | 5550.33        | 53.95 PK                      | 84.38             | -30.46         | 1.40 V                   | 46                         | 14.70                  | 39.25                          |
| 3   | 7400.74        | 58.32 PK                      | 84.38             | -26.06         | 1.10 V                   | 138                        | 15.86                  | 42.46                          |
| 4   | 9250.94        | 63.07 PK                      | 84.38             | -21.31         | 1.00 V                   | 22                         | 18.36                  | 44.71                          |
| 5   | 11101.14       | 64.43 PK                      | 84.38             | -19.95         | 1.45 V                   | 82                         | 18.89                  | 45.54                          |
| 6   | 12951.34       | 64.73 PK                      | 84.38             | -19.65         | 1.26 V                   | 27                         | 17.42                  | 47.31                          |
| 7   | 14801.54       | 65.35 PK                      | 84.38             | -19.03         | 1.03 V                   | 12                         | 15.60                  | 49.75                          |

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

|                                 |                                      |                             |                |
|---------------------------------|--------------------------------------|-----------------------------|----------------|
| <b>EUT</b>                      | S660C Mobile Phone                   | <b>MODEL</b>                | GCCP2(56D92)   |
| <b>MODE</b>                     | TX connected Channel<br>661 E1 plane | <b>FREQUENCY RANGE</b>      | Above 1000 MHz |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz                        | <b>DETECTOR FUNCTION</b>    | Peak           |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25 deg. C, 60 % RH,<br>991 hPa       | <b>TESTED BY:</b> Steven Lu |                |

| <b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b> |                |                               |                   |                |                          |                            |                        |                                |
|----------------------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| No.                                                            | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
| 1                                                              | 3775.00        | 61.62 PK                      | 82.88             | -21.26         | 1.50 H                   | 132                        | 27.32                  | 34.29                          |
| 2                                                              | 5662.50        | 56.23 PK                      | 82.88             | -26.65         | 2.00 H                   | 353                        | 18.83                  | 37.40                          |
| 3                                                              | 7549.85        | 58.14 PK                      | 82.88             | -24.74         | 1.35 H                   | 353                        | 15.43                  | 42.71                          |
| 4                                                              | 9437.50        | 63.03 PK                      | 82.88             | -19.85         | 1.59 H                   | 91                         | 18.26                  | 44.78                          |
| 5                                                              | 11325.00       | 72.30 PK                      | 82.88             | -10.58         | 1.26 H                   | 213                        | 25.12                  | 47.19                          |

| <b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b> |                |                               |                   |                |                          |                            |                        |                                |
|--------------------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| No.                                                          | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
| 1                                                            | 3775.00        | 53.39 PK                      | 82.88             | -29.49         | 1.42 V                   | 84                         | 19.10                  | 34.29                          |
| 2                                                            | 5662.50        | 58.57 PK                      | 82.88             | -24.31         | 1.00 V                   | 157                        | 21.17                  | 37.40                          |
| 3                                                            | 7549.54        | 57.35 PK                      | 82.88             | -25.53         | 1.96 V                   | 330                        | 14.64                  | 42.71                          |
| 4                                                            | 9437.40        | 64.60 PK                      | 82.88             | -18.28         | 1.26 V                   | 255                        | 19.83                  | 44.78                          |
| 5                                                            | 11325.00       | 73.43 PK                      | 82.88             | -9.45          | 1.34 V                   | 46                         | 26.25                  | 47.19                          |
| 6                                                            | 13212.50       | 58.93 PK                      | 82.88             | -23.95         | 1.00 V                   | 132                        | 11.76                  | 47.17                          |

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

|                                 |                                      |                             |                |
|---------------------------------|--------------------------------------|-----------------------------|----------------|
| <b>EUT</b>                      | S660C Mobile Phone                   | <b>MODEL</b>                | GCCP2(56D92)   |
| <b>MODE</b>                     | TX connected Channel<br>661 E2 plane | <b>FREQUENCY RANGE</b>      | Above 1000 MHz |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz                        | <b>DETECTOR FUNCTION</b>    | Peak           |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25 deg. C, 60 % RH,<br>991 hPa       | <b>TESTED BY:</b> Steven Lu |                |

| <b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b> |                |                               |                   |                |                          |                            |                        |                                |
|----------------------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| No.                                                            | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
| 1                                                              | 3774.99        | 56.49 PK                      | 82.88             | -26.39         | 1.32 H                   | 210                        | 22.19                  | 34.29                          |
| 2                                                              | 5662.12        | 52.84 PK                      | 82.88             | -30.04         | 1.03 H                   | 262                        | 15.44                  | 37.40                          |
| 3                                                              | 7548.83        | 55.13 PK                      | 82.88             | -27.75         | 1.28 H                   | 35                         | 12.42                  | 42.71                          |
| 4                                                              | 9437.09        | 60.81 PK                      | 82.88             | -22.07         | 1.47 H                   | 0                          | 16.04                  | 44.78                          |
| 5                                                              | 11324.62       | 69.00 PK                      | 82.88             | -13.88         | 1.67 H                   | 157                        | 21.82                  | 47.19                          |
| 6                                                              | 13211.45       | 59.88 PK                      | 82.88             | -23.00         | 1.98 H                   | 352                        | 12.71                  | 47.17                          |

| <b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b> |                |                               |                   |                |                          |                            |                        |                                |
|--------------------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| No.                                                          | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
| 1                                                            | 3774.77        | 59.92 PK                      | 82.88             | -22.96         | 1.08 V                   | 157                        | 25.62                  | 34.29                          |
| 2                                                            | 5662.16        | 57.83 PK                      | 82.88             | -25.05         | 1.24 V                   | 353                        | 20.43                  | 37.40                          |
| 3                                                            | 7549.27        | 56.94 PK                      | 82.88             | -25.94         | 1.21 V                   | 43                         | 14.23                  | 42.71                          |
| 4                                                            | 9437.50        | 63.07 PK                      | 82.88             | -19.81         | 1.44 V                   | 306                        | 18.30                  | 44.78                          |
| 5                                                            | 11324.88       | 70.69 PK                      | 82.88             | -12.19         | 1.49 V                   | 226                        | 23.51                  | 47.19                          |
| 6                                                            | 13211.72       | 67.02 PK                      | 82.88             | -15.86         | 1.40 V                   | 84                         | 19.85                  | 47.17                          |

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

|                                 |                                     |                             |                |
|---------------------------------|-------------------------------------|-----------------------------|----------------|
| <b>EUT</b>                      | S660C Mobile Phone                  | <b>MODEL</b>                | GCCP2(56D92)   |
| <b>MODE</b>                     | TX connected Channel<br>661 H plane | <b>FREQUENCY RANGE</b>      | Above 1000 MHz |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz                       | <b>DETECTOR FUNCTION</b>    | Peak           |
| <b>ENVIRONMENTAL CONDITIONS</b> | 20 deg. C, 60 % RH,<br>991 hPa      | <b>TESTED BY:</b> Steven Lu |                |

| <b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b> |                |                               |                   |                |                          |                            |                        |                                |
|----------------------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| No.                                                            | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
| 1                                                              | 3775.00        | 54.87 PK                      | 82.88             | -28.01         | 1.48 H                   | 90                         | 18.70                  | 36.18                          |
| 2                                                              | 5662.50        | 56.40 PK                      | 82.88             | -26.48         | 1.43 H                   | 27                         | 16.93                  | 39.47                          |
| 3                                                              | 7550.00        | 59.68 PK                      | 82.88             | -23.20         | 1.15 H                   | 50                         | 17.09                  | 42.59                          |
| 4                                                              | 9437.50        | 64.54 PK                      | 82.88             | -18.34         | 1.64 H                   | 149                        | 20.20                  | 44.34                          |
| 5                                                              | 11325.00       | 67.89 PK                      | 82.88             | -14.99         | 1.41 H                   | 122                        | 21.98                  | 45.92                          |
| 6                                                              | 13212.50       | 73.93 PK                      | 82.88             | -8.95          | 1.35 H                   | 88                         | 26.12                  | 47.81                          |
| 7                                                              | 15100.00       | 64.45 PK                      | 82.88             | -18.43         | 1.42 H                   | 63                         | 16.00                  | 48.45                          |

| <b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b> |                |                               |                   |                |                          |                            |                        |                                |
|--------------------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| No.                                                          | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
| 1                                                            | 3775.00        | 63.12 PK                      | 82.88             | -19.76         | 1.48 V                   | 24                         | 26.95                  | 36.18                          |
| 2                                                            | 5662.50        | 60.29 PK                      | 82.88             | -22.59         | 1.23 V                   | 40                         | 20.82                  | 39.47                          |
| 3                                                            | 7550.00        | 65.04 PK                      | 82.88             | -17.84         | 1.16 V                   | 133                        | 22.45                  | 42.59                          |
| 4                                                            | 9437.50        | 70.33 PK                      | 82.88             | -12.55         | 1.52 V                   | 9                          | 25.98                  | 44.34                          |
| 5                                                            | 11325.00       | 71.49 PK                      | 82.88             | -11.39         | 1.40 V                   | 30                         | 25.58                  | 45.92                          |
| 6                                                            | 13212.50       | 74.18 PK                      | 82.88             | -8.70          | 1.24 V                   | 29                         | 26.37                  | 47.81                          |

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

|                                 |                                      |                             |                |
|---------------------------------|--------------------------------------|-----------------------------|----------------|
| <b>EUT</b>                      | S660C Mobile Phone                   | <b>MODEL</b>                | GCCP2(56D92)   |
| <b>MODE</b>                     | TX connected Channel<br>810 E1 plane | <b>FREQUENCY RANGE</b>      | Above 1000 MHz |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz                        | <b>DETECTOR FUNCTION</b>    | Peak           |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25 deg. C, 60 % RH,<br>991 hPa       | <b>TESTED BY:</b> Steven Lu |                |

| <b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b> |                |                               |                   |                |                          |                            |                        |                                |
|----------------------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| No.                                                            | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
| 1                                                              | 3819.60        | 62.08 PK                      | 83.42             | -21.34         | 1.29 H                   | 350                        | 27.65                  | 34.43                          |
| 2                                                              | 5729.40        | 56.83 PK                      | 83.42             | -26.59         | 1.48 H                   | 21                         | 19.26                  | 37.57                          |
| 3                                                              | 7639.20        | 58.00 PK                      | 83.42             | -25.42         | 1.73 H                   | 302                        | 15.11                  | 42.89                          |
| 4                                                              | 9549.00        | 64.06 PK                      | 83.42             | -19.36         | 1.62 H                   | 72                         | 19.26                  | 44.80                          |
| 5                                                              | 11458.80       | 70.90 PK                      | 83.42             | -12.52         | 1.36 H                   | 220                        | 23.73                  | 47.17                          |
| 6                                                              | 13368.60       | 57.42 PK                      | 83.42             | -26.00         | 1.24 H                   | 174                        | 10.10                  | 47.31                          |

| <b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b> |                |                               |                   |                |                          |                            |                        |                                |
|--------------------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| No.                                                          | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
| 1                                                            | 3819.60        | 61.85 PK                      | 83.42             | -21.57         | 1.24 V                   | 154                        | 27.42                  | 34.43                          |
| 2                                                            | 5729.40        | 59.74 PK                      | 83.42             | -23.68         | 1.53 V                   | 274                        | 22.17                  | 37.57                          |
| 3                                                            | 7639.20        | 57.18 PK                      | 83.42             | -26.24         | 1.11 V                   | 65                         | 14.29                  | 42.89                          |
| 4                                                            | 9549.00        | 63.21 PK                      | 83.42             | -20.21         | 1.50 V                   | 289                        | 18.41                  | 44.80                          |
| 5                                                            | 11458.80       | 69.10 PK                      | 83.42             | -14.32         | 1.39 V                   | 62                         | 21.93                  | 47.17                          |

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

|                                 |                                      |                             |                |
|---------------------------------|--------------------------------------|-----------------------------|----------------|
| <b>EUT</b>                      | S660C Mobile Phone                   | <b>MODEL</b>                | GCCP2(56D92)   |
| <b>MODE</b>                     | TX connected Channel<br>810 E2 plane | <b>FREQUENCY RANGE</b>      | Above 1000 MHz |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz                        | <b>DETECTOR FUNCTION</b>    | Peak           |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25 deg. C, 60 % RH,<br>991 hPa       | <b>TESTED BY:</b> Steven Lu |                |

| <b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b> |                |                               |                   |                |                          |                            |                        |                                |
|----------------------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| No.                                                            | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
| 1                                                              | 3819.52        | 58.52 PK                      | 83.42             | -24.90         | 1.52 H                   | 216                        | 24.09                  | 34.43                          |
| 2                                                              | 5729.26        | 54.96 PK                      | 83.42             | -28.46         | 1.10 H                   | 258                        | 17.39                  | 37.57                          |
| 3                                                              | 7639.20        | 55.84 PK                      | 83.42             | -27.58         | 1.34 H                   | 106                        | 12.95                  | 42.89                          |
| 4                                                              | 9549.00        | 59.27 PK                      | 83.42             | -24.15         | 1.34 H                   | 298                        | 14.47                  | 44.80                          |
| 5                                                              | 11459.47       | 65.26 PK                      | 83.42             | -18.16         | 1.34 H                   | 135                        | 18.09                  | 47.17                          |
| 6                                                              | 13368.60       | 60.75 PK                      | 83.42             | -22.67         | 1.40 H                   | 252                        | 13.43                  | 47.31                          |

| <b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b> |                |                               |                   |                |                          |                            |                        |                                |
|--------------------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| No.                                                          | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
| 1                                                            | 3819.69        | 61.87 PK                      | 83.42             | -21.55         | 2.30 V                   | 211                        | 27.44                  | 34.43                          |
| 2                                                            | 5729.40        | 60.17 PK                      | 83.42             | -23.25         | 1.03 V                   | 196                        | 22.60                  | 37.57                          |
| 3                                                            | 7639.45        | 57.46 PK                      | 83.42             | -25.96         | 1.00 V                   | 162                        | 14.56                  | 42.90                          |
| 4                                                            | 9549.43        | 63.06 PK                      | 83.42             | -20.36         | 1.92 V                   | 310                        | 18.26                  | 44.80                          |
| 5                                                            | 11458.80       | 70.20 PK                      | 83.42             | -13.22         | 1.92 V                   | 86                         | 23.03                  | 47.17                          |
| 6                                                            | 13368.60       | 61.57 PK                      | 83.42             | -21.85         | 1.25 V                   | 285                        | 14.25                  | 47.31                          |

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

|                                 |                                     |                             |                |
|---------------------------------|-------------------------------------|-----------------------------|----------------|
| <b>EUT</b>                      | S660C Mobile Phone                  | <b>MODEL</b>                | GCCP2(56D92)   |
| <b>MODE</b>                     | TX connected Channel<br>810 H plane | <b>FREQUENCY RANGE</b>      | Above 1000 MHz |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz                       | <b>DETECTOR FUNCTION</b>    | Peak           |
| <b>ENVIRONMENTAL CONDITIONS</b> | 20 deg. C, 60 % RH,<br>991 hPa      | <b>TESTED BY:</b> Steven Lu |                |

| <b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b> |                 |                               |                   |                |                          |                            |                        |                                |
|----------------------------------------------------------------|-----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| No.                                                            | Freq.<br>(MHz)  | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
| 1                                                              | 3819.60         | 56.32 PK                      | 83.42             | -27.10         | 1.42 H                   | 33                         | 19.94                  | 36.38                          |
| 2                                                              | 5729.40         | 56.35 PK                      | 83.42             | -27.07         | 1.44 H                   | 33                         | 16.73                  | 39.62                          |
| 3                                                              | 7639.20         | 58.56 PK                      | 83.42             | -24.86         | 1.18 H                   | 5                          | 15.82                  | 42.74                          |
| 4                                                              | 9549.00         | 64.23 PK                      | 83.42             | -19.19         | 1.07 H                   | 180                        | 19.93                  | 44.30                          |
| <b>5</b>                                                       | <b>11458.80</b> | <b>77.78 PK</b>               | <b>83.42</b>      | <b>-5.64</b>   | <b>1.05 H</b>            | <b>0</b>                   | <b>31.82</b>           | <b>45.96</b>                   |
| 6                                                              | 13368.60        | 70.07 PK                      | 83.42             | -13.35         | 1.08 H                   | 70                         | 21.86                  | 48.20                          |
| 7                                                              | 15278.40        | 64.47 PK                      | 83.42             | -18.95         | 1.10 H                   | 77                         | 16.79                  | 47.68                          |



| <b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b> |                |                               |                   |                |                          |                            |                        |                                |
|--------------------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| No.                                                          | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
| 1                                                            | 3819.60        | 58.28 PK                      | 83.42             | -25.14         | 1.23 V                   | 33                         | 21.90                  | 36.38                          |
| 2                                                            | 5729.40        | 56.35 PK                      | 83.42             | -27.07         | 1.27 V                   | 83                         | 16.73                  | 39.62                          |
| 3                                                            | 7639.20        | 60.19 PK                      | 83.42             | -23.23         | 1.23 V                   | 131                        | 17.45                  | 42.74                          |
| 4                                                            | 9549.00        | 66.80 PK                      | 83.42             | -16.62         | 1.56 V                   | 14                         | 22.50                  | 44.30                          |
| 5                                                            | 11458.80       | 70.72 PK                      | 83.42             | -12.70         | 1.79 V                   | 28                         | 24.76                  | 45.96                          |
| 6                                                            | 13368.60       | 63.70 PK                      | 83.42             | -19.72         | 1.53 V                   | 10                         | 15.49                  | 48.20                          |


**REMARKS:**



1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

### RADIATED EMISSION TEST

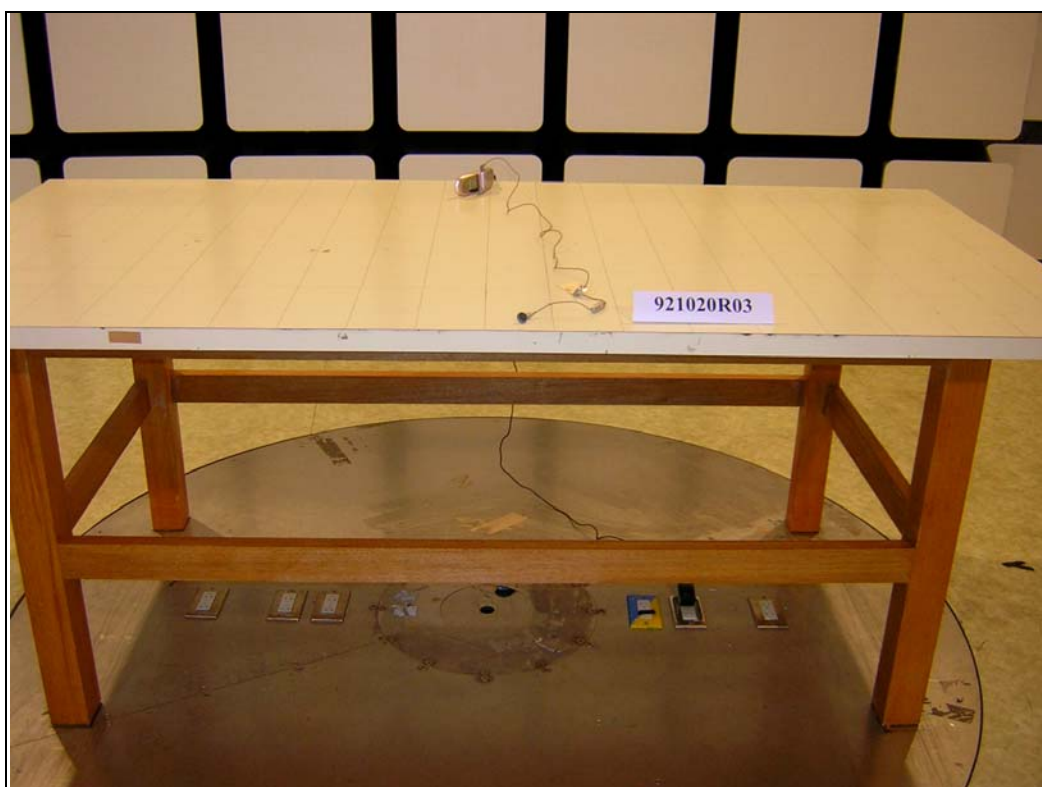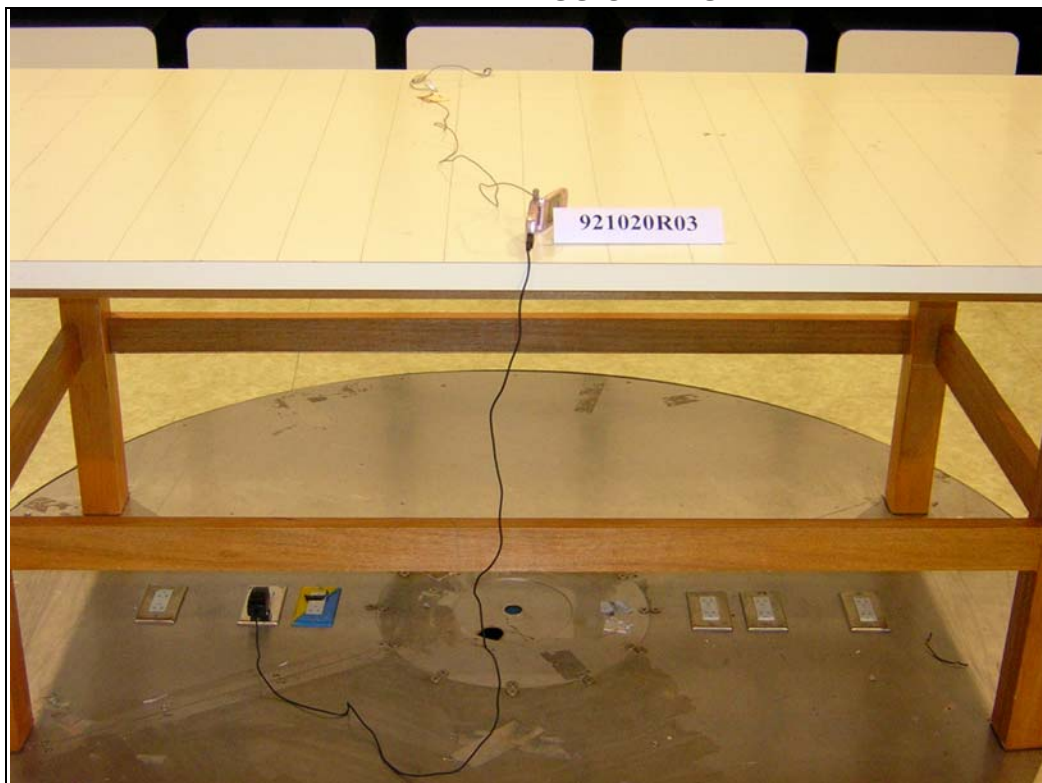

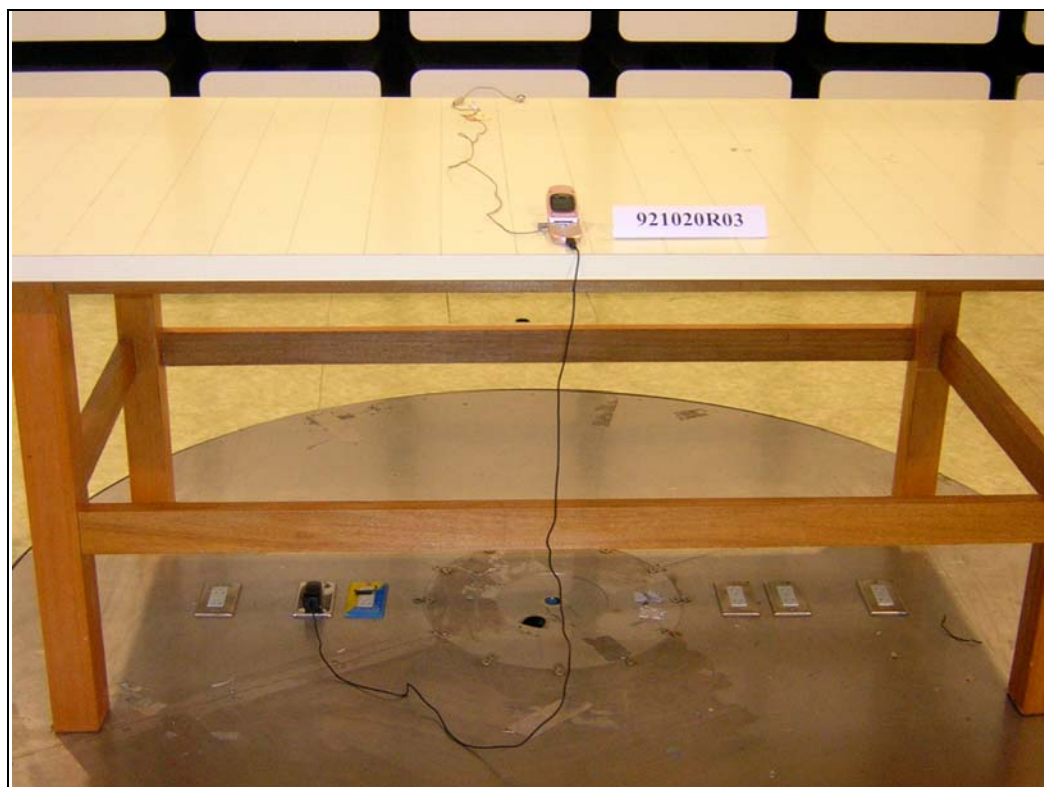

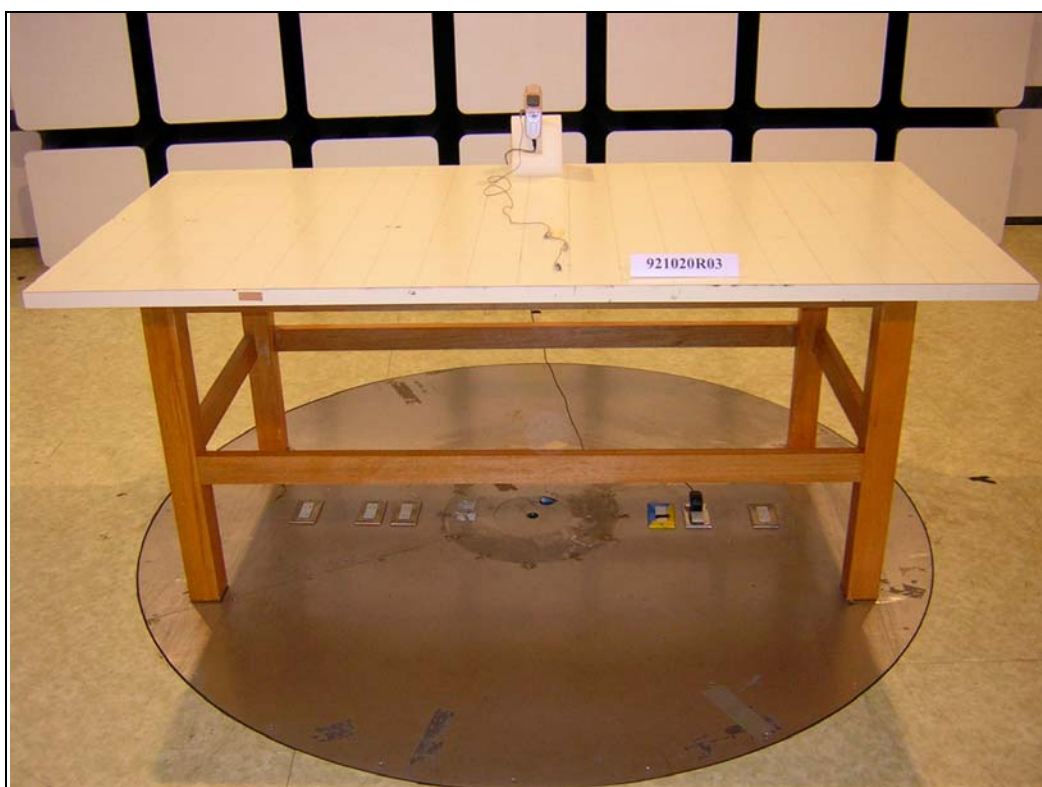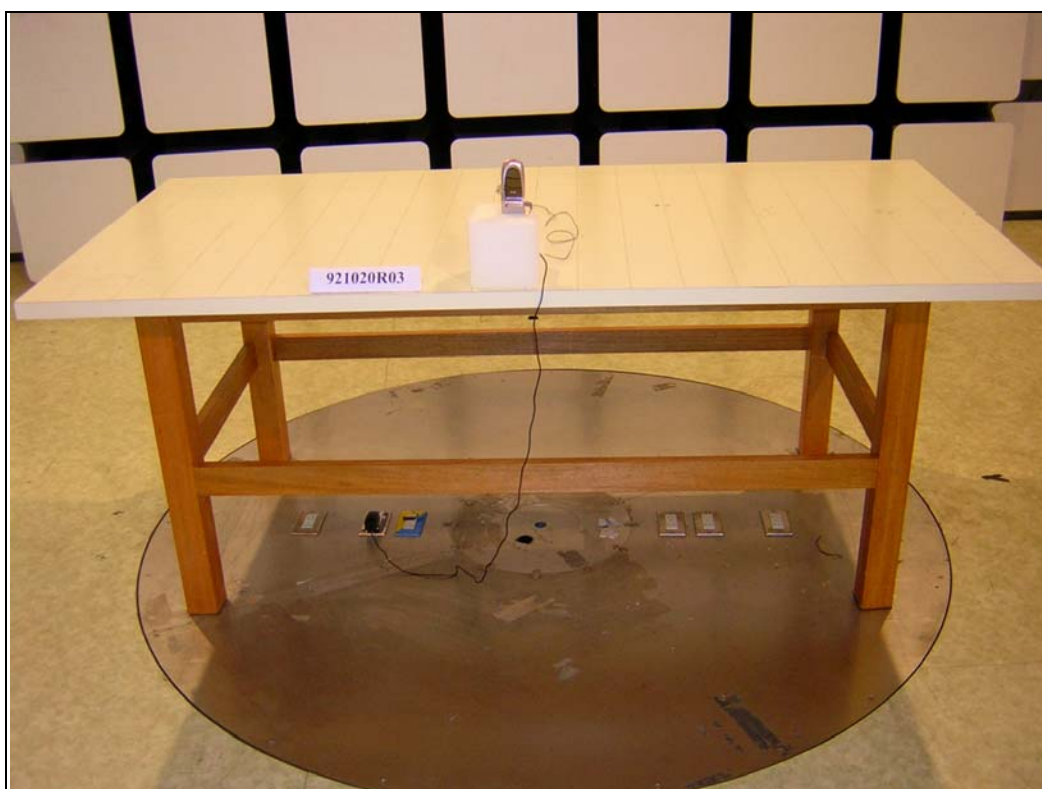

## 6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

|                    |                 |
|--------------------|-----------------|
| <b>USA</b>         | FCC, NVLAP      |
| <b>Germany</b>     | TUV Rheinland   |
| <b>Japan</b>       | VCCI            |
| <b>New Zealand</b> | MoC             |
| <b>Norway</b>      | NEMKO           |
| <b>R.O.C.</b>      | BSMI, DGT, CNLA |

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

[www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml).

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC Lab:**

Tel: 886-2-26052180

Fax: 886-2-26052943

**Hsin Chu EMC Lab:**

Tel: 886-35-935343

Fax: 886-35-935342

**Lin Kou Safety Lab:**

Tel: 886-2-26093195

Fax: 886-2-26093184

**Lin Kou RF&Telecom Lab**

Tel: 886-3-3270910

Fax: 886-3-3270892

**Email:** [service@mail.adt.com.tw](mailto:service@mail.adt.com.tw)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.