


The Result of Radiated Emission below 1GHz:

Site: NS-AC1	Test Data: 2021/12/21
Limit: FCC_Part 15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_VULB9162	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by n-HT20 at channel 2412MHz	

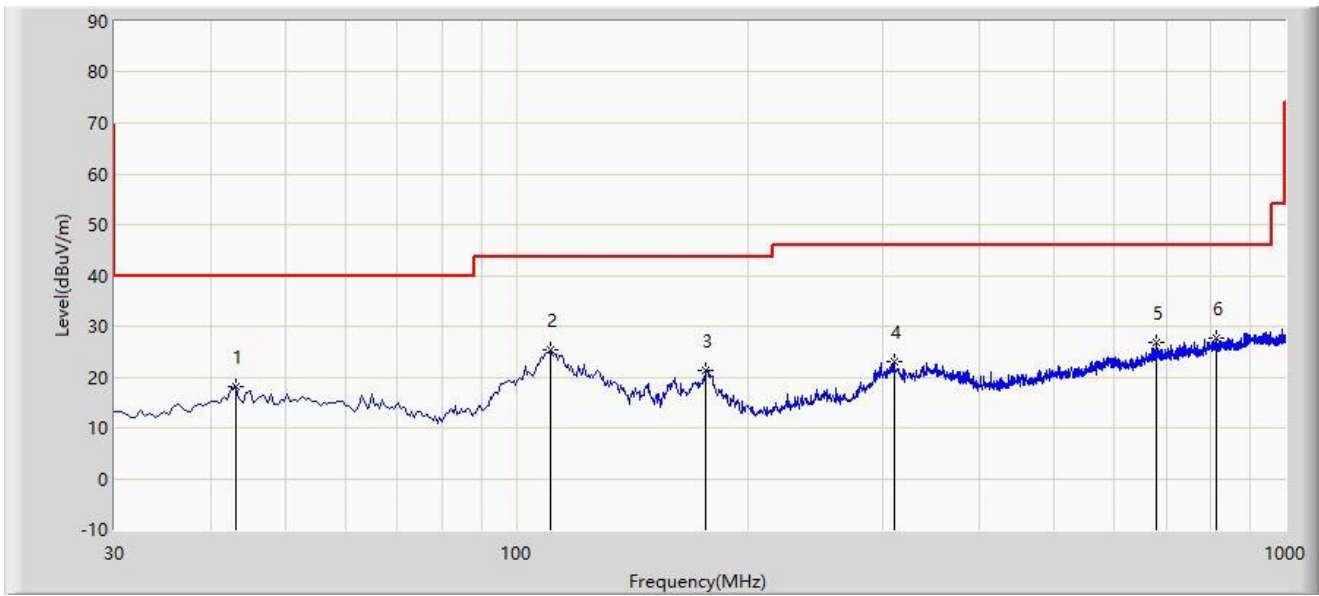

No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			43.095	18.101	1.091	-21.899	40.000	17.010	PK
2		*	110.995	25.373	10.779	-18.127	43.500	14.594	PK
3			175.985	21.323	8.493	-22.177	43.500	12.829	PK
4			310.330	23.097	6.029	-22.903	46.000	17.068	PK
5			678.930	26.860	1.955	-19.140	46.000	24.905	PK
6			812.790	27.822	1.551	-18.178	46.000	26.271	PK

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)


Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: QP measurement was not performed when peak measure level was lower than the QP limit.

Note 3: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: NS-AC1	Test Data: 2021/12/21
Limit: FCC_Part 15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_VULB9162	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by n-HT20 at channel 2412MHz	

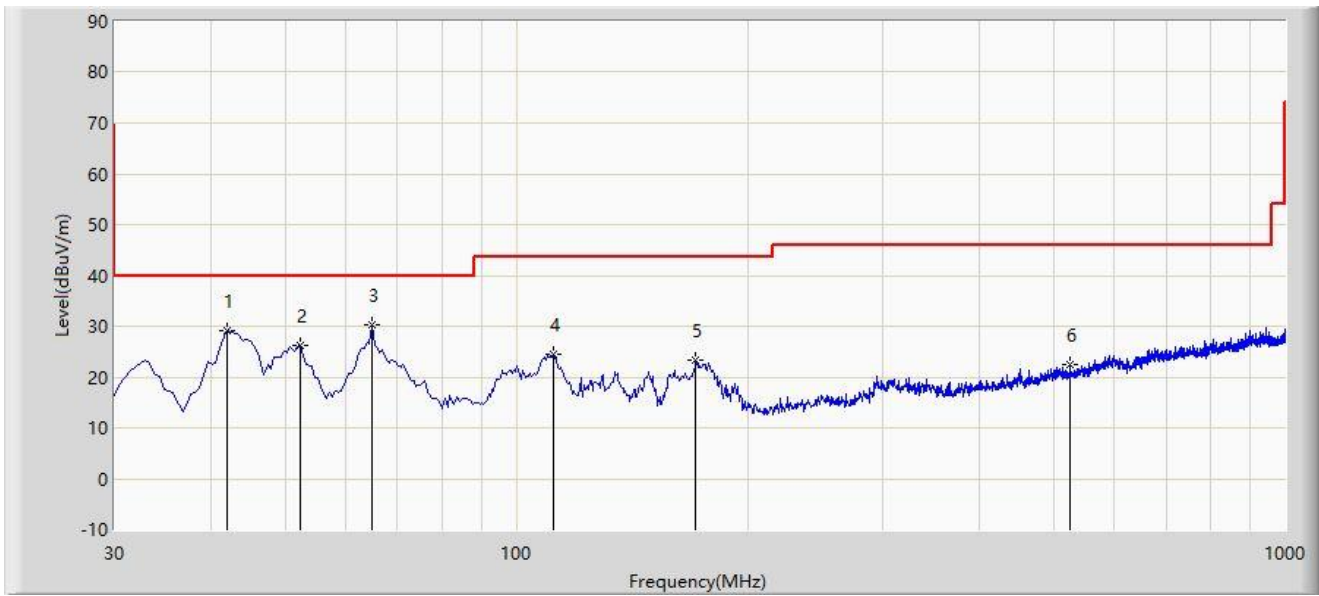

No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			42.125	29.216	12.411	-10.784	40.000	16.805	PK
2			52.310	26.137	8.692	-13.863	40.000	17.445	PK
3		*	64.920	30.333	15.645	-9.667	40.000	14.688	PK
4			111.965	24.503	10.044	-18.997	43.500	14.459	PK
5			171.135	23.408	10.863	-20.092	43.500	12.545	PK
6			525.670	22.359	0.540	-23.641	46.000	21.820	PK

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)


Note 2: QP measurement was not performed when peak measure level was lower than the QP limit.

Note 3: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

A.7 Radiated Restricted Band Edge Test Result

Site: NS-AC1	Test Data: 2021/12/23 - 15:43
Limit: FCC_Part 15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11b at channel 2412MHz	

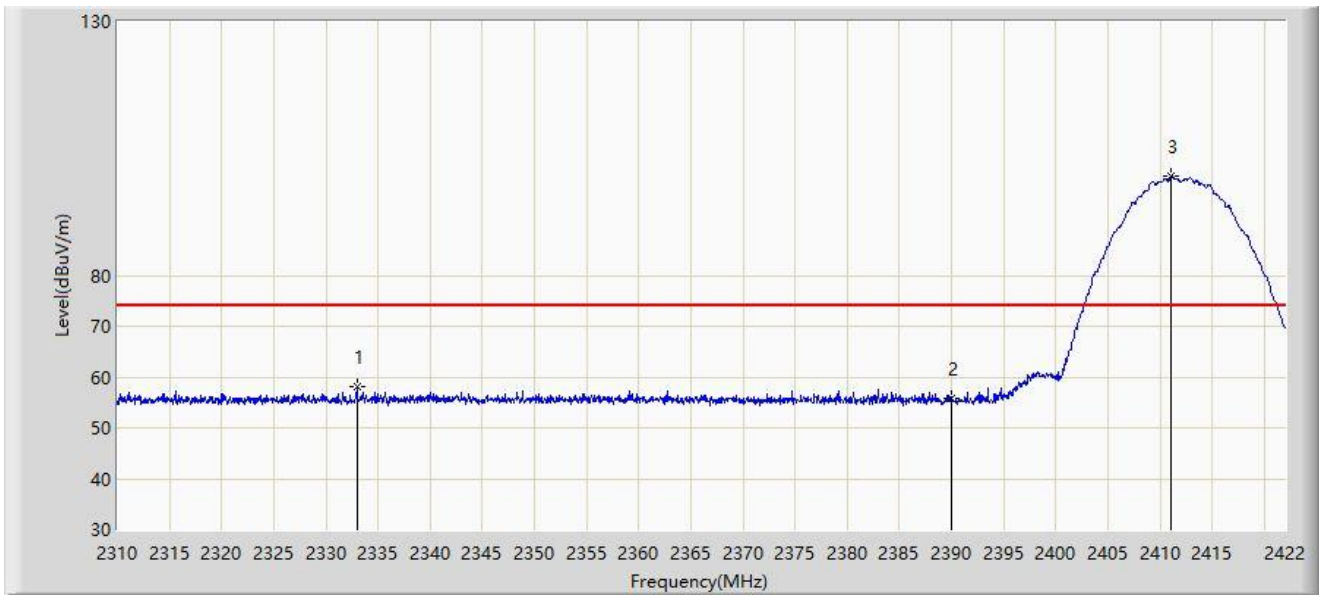


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2332.960	58.064	26.909	-15.936	74.000	31.154	PK
2			2390.000	55.856	24.953	-18.144	74.000	30.903	PK
3		*	2411.024	99.449	68.474	N/A	N/A	30.975	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Data: 2021/12/23 - 15:47
Limit: FCC_Part 15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11b at channel 2412MHz	

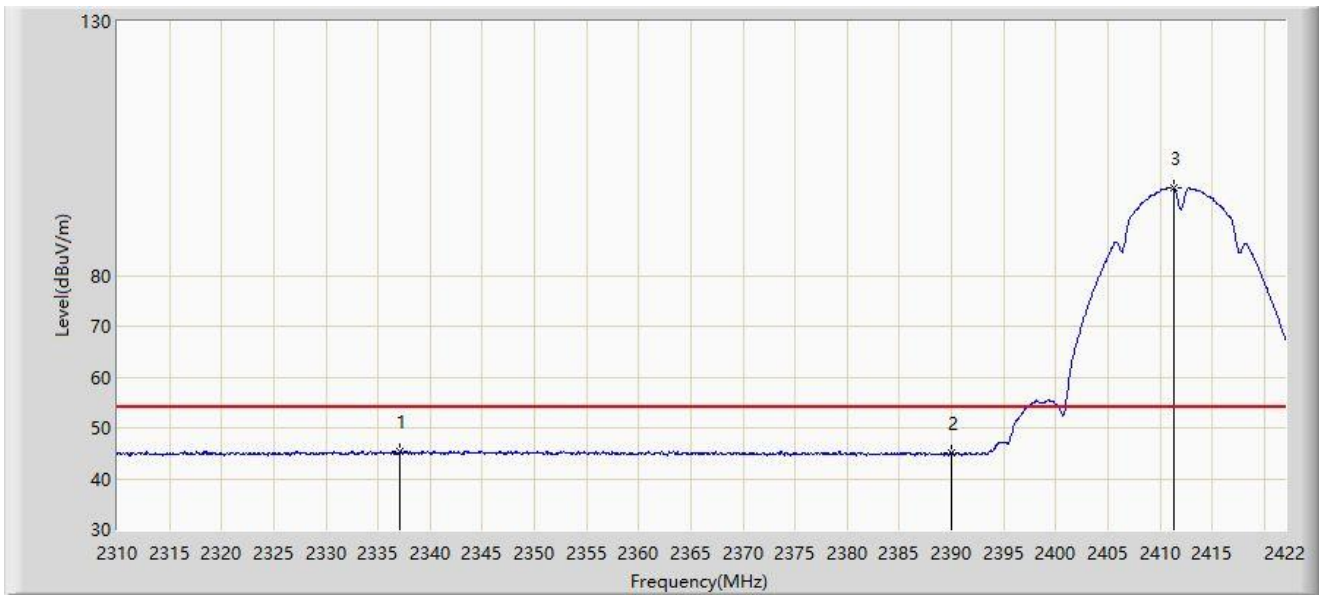


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2337.104	45.405	14.236	-8.595	54.000	31.169	AV
2			2390.000	44.943	14.040	-9.057	54.000	30.903	AV
3		*	2411.304	97.389	66.414	N/A	N/A	30.975	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Data: 2021/12/23 - 15:50
Limit: FCC_Part 15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11b at channel 2412MHz	

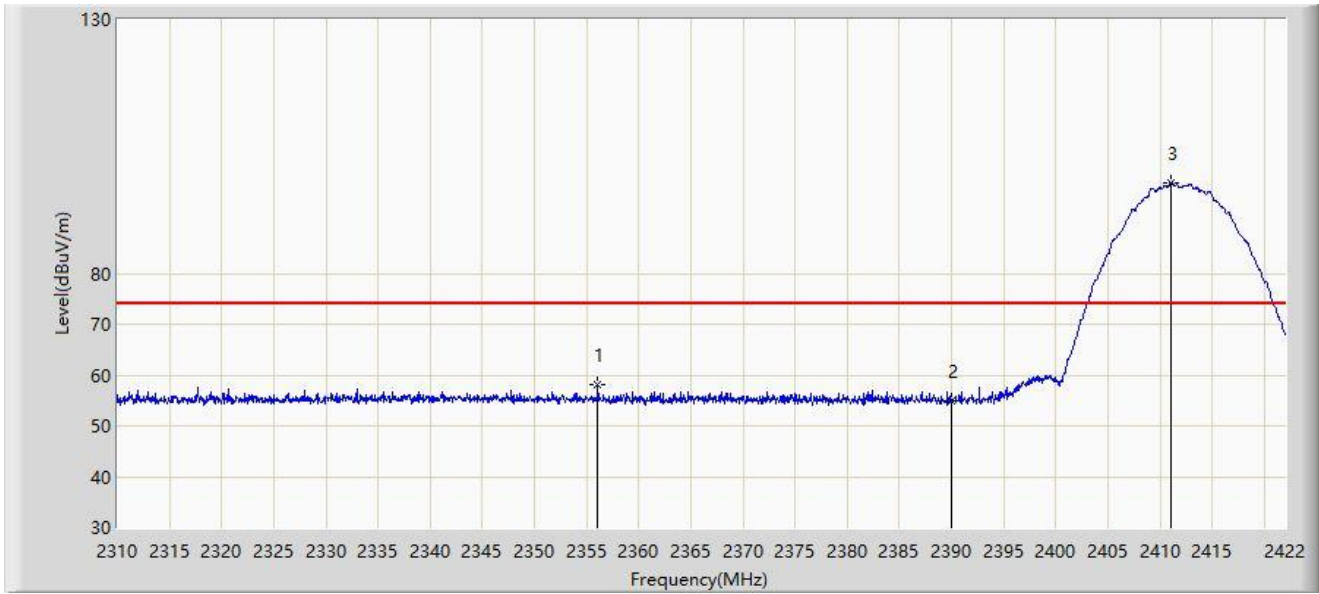


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2356.088	58.217	27.183	-15.783	74.000	31.035	PK
2			2390.000	55.067	24.164	-18.933	74.000	30.903	PK
3		*	2411.080	97.926	66.951	N/A	N/A	30.975	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Data: 2021/12/23 - 15:51
Limit: FCC_Part 15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11b at channel 2412MHz	

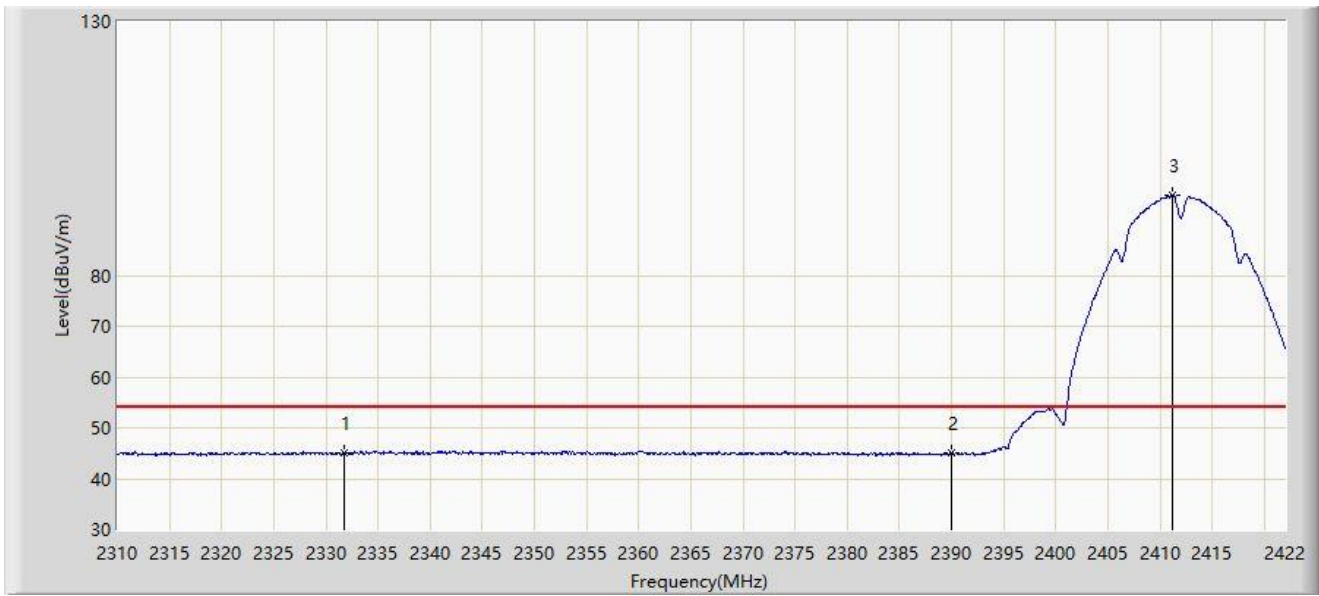


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2331.784	45.072	13.921	-8.928	54.000	31.151	AV
2			2390.000	45.010	14.107	-8.990	54.000	30.903	AV
3		*	2411.136	95.732	64.757	N/A	N/A	30.975	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Data: 2021/12/23 - 15:53
Limit: FCC_Part 15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11b at channel 2462MHz	

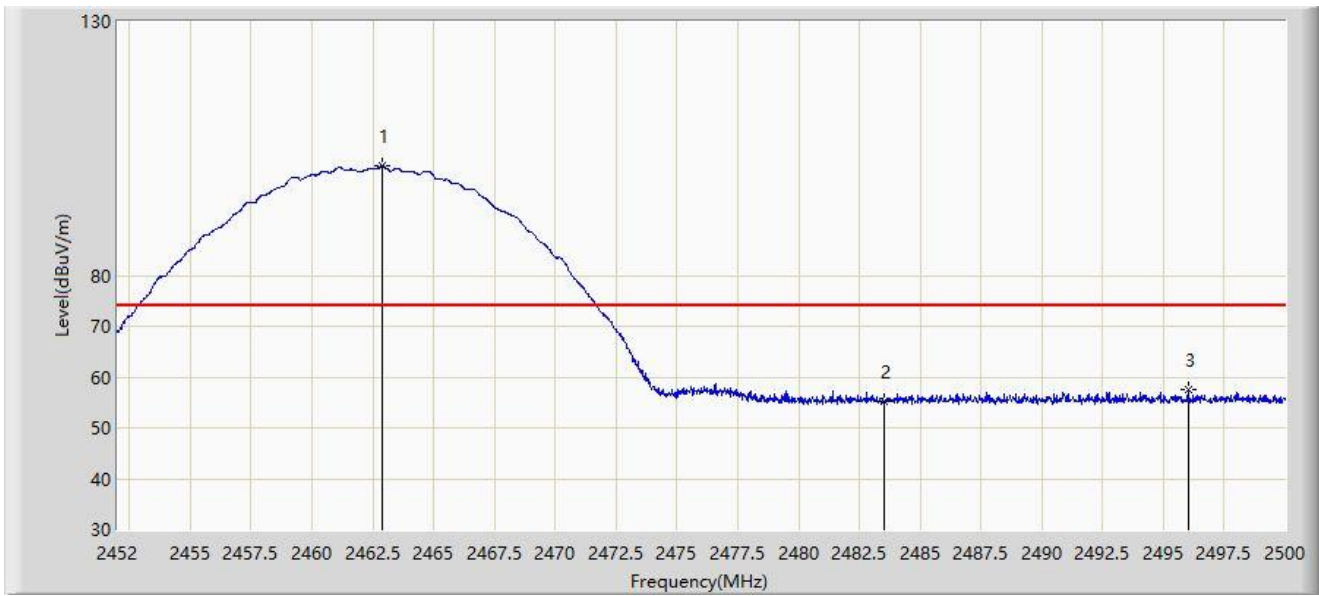


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2462.872	101.558	70.680	N/A	N/A	30.878	PK
2			2483.500	55.236	24.347	-18.764	74.000	30.889	PK
3			2496.016	57.419	26.468	-16.581	74.000	30.951	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Data: 2021/12/23 - 15:55
Limit: FCC_Part 15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11b at channel 2462MHz	

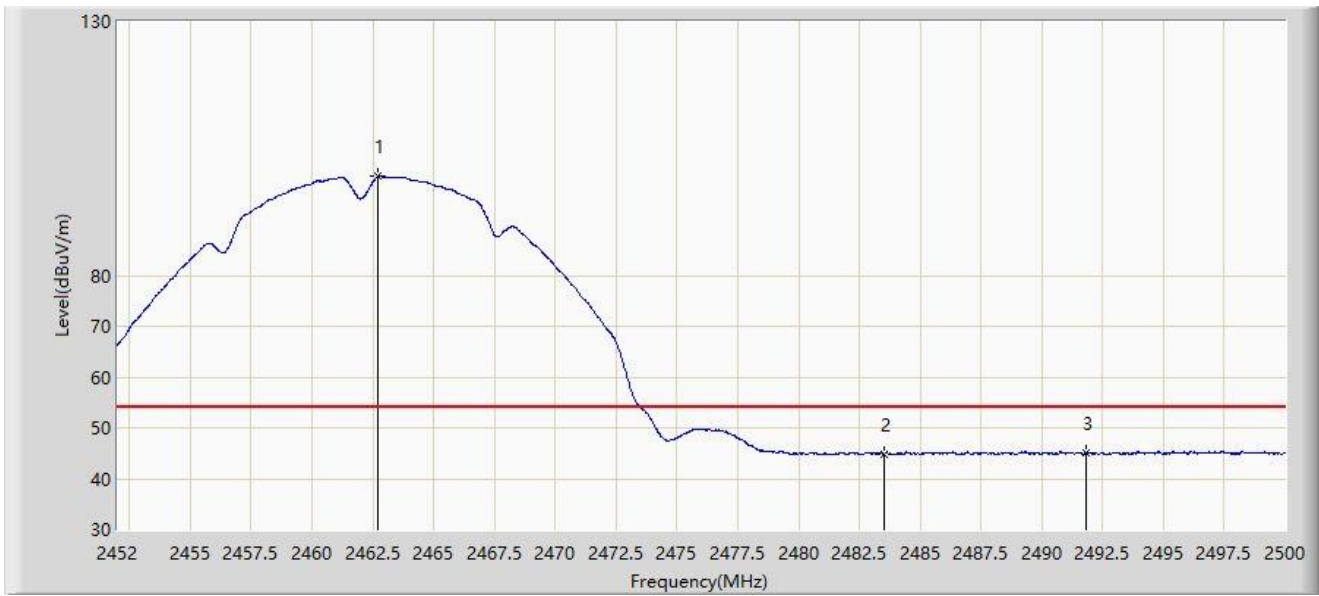


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2462.728	99.426	68.548	N/A	N/A	30.878	AV
2			2483.500	44.894	14.005	-9.106	54.000	30.889	AV
3			2491.792	45.069	14.139	-8.931	54.000	30.930	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Data: 2021/12/23 - 15:58
Limit: FCC_Part 15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11b at channel 2462MHz	

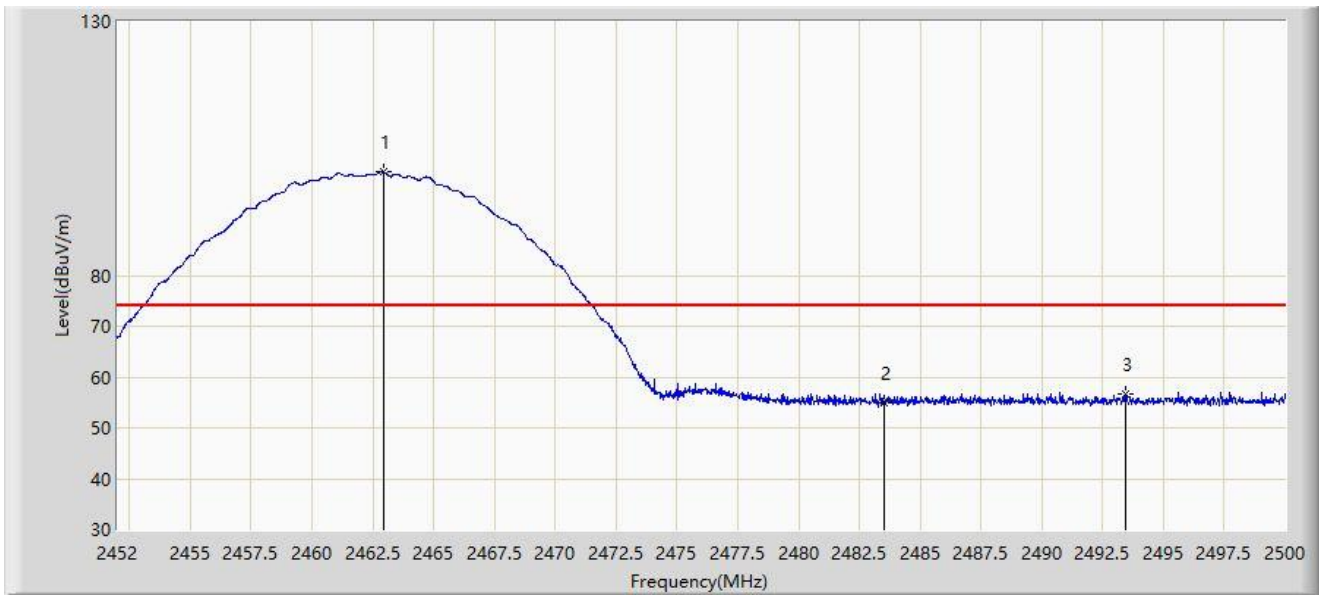


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2462.944	100.353	69.475	N/A	N/A	30.878	PK
2			2483.500	54.961	24.072	-19.039	74.000	30.889	PK
3			2493.448	56.566	25.627	-17.434	74.000	30.939	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Data: 2021/12/23 - 15:59
Limit: FCC_Part 15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11b at channel 2462MHz	

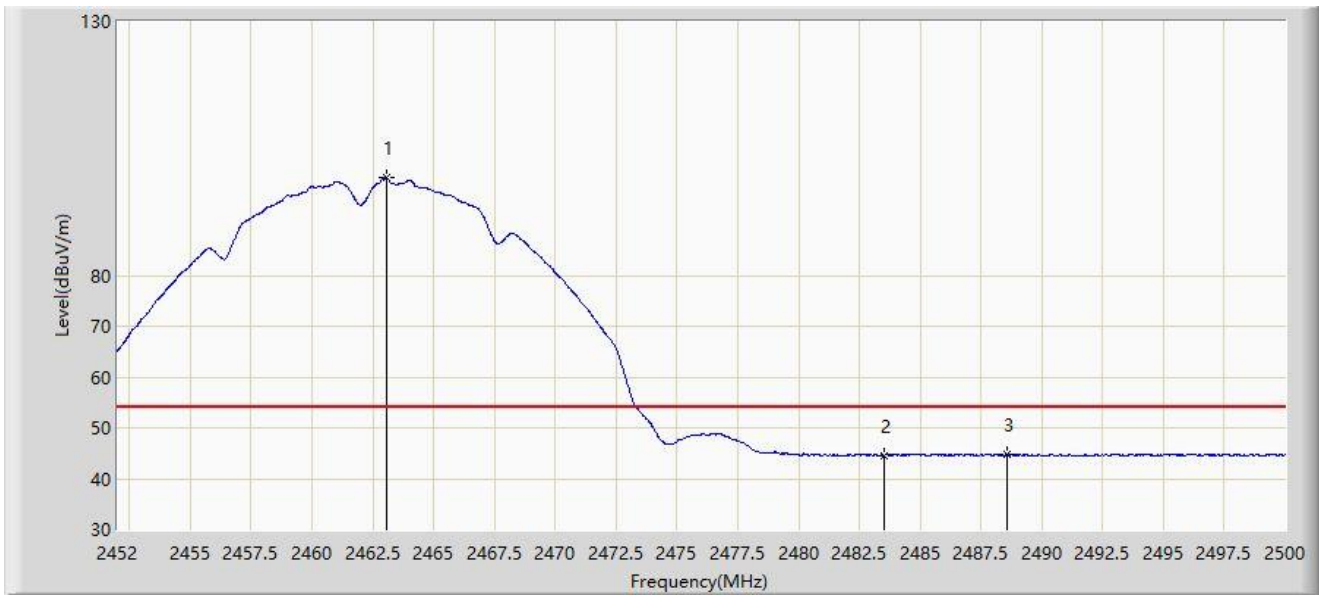


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2463.088	99.182	68.304	N/A	N/A	30.878	AV
2			2483.500	44.567	13.678	-9.433	54.000	30.889	AV
3			2488.552	44.770	13.856	-9.230	54.000	30.914	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Data: 2021/12/23 - 16:01
Limit: FCC_Part 15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11g at channel 2412MHz	

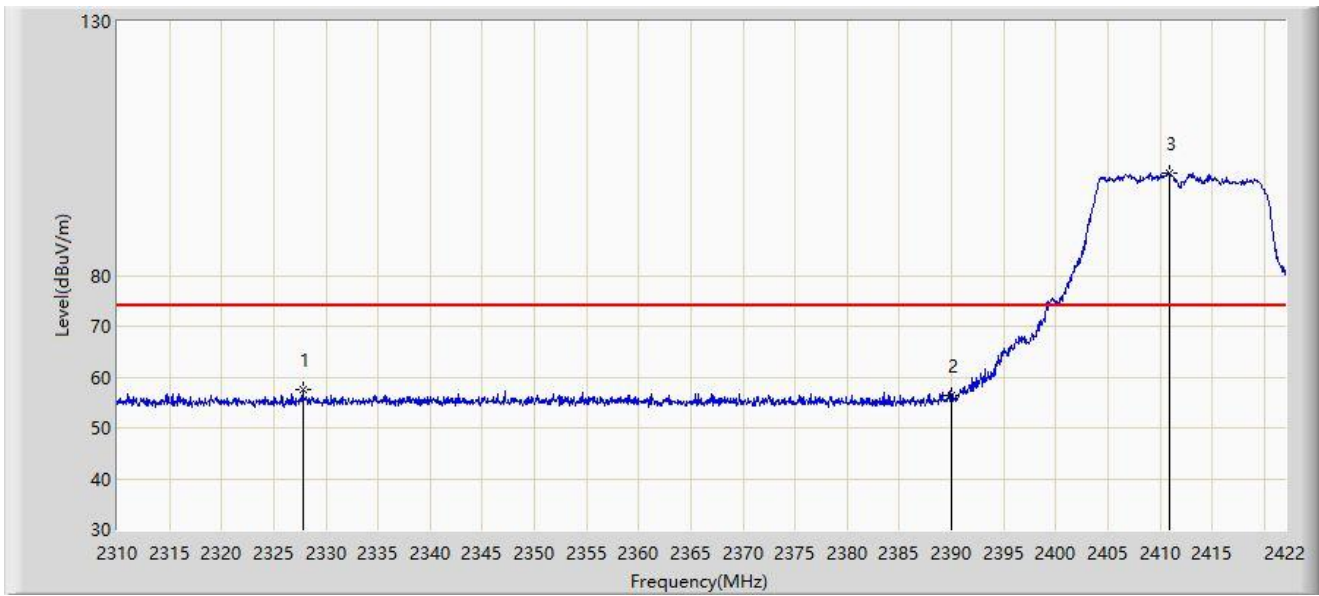


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2327.808	57.401	26.264	-16.599	74.000	31.137	PK
2			2390.000	56.380	25.477	-17.620	74.000	30.903	PK
3		*	2410.968	100.248	69.273	N/A	N/A	30.975	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Data: 2021/12/23 - 16:04
Limit: FCC_Part 15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11g at channel 2412MHz	

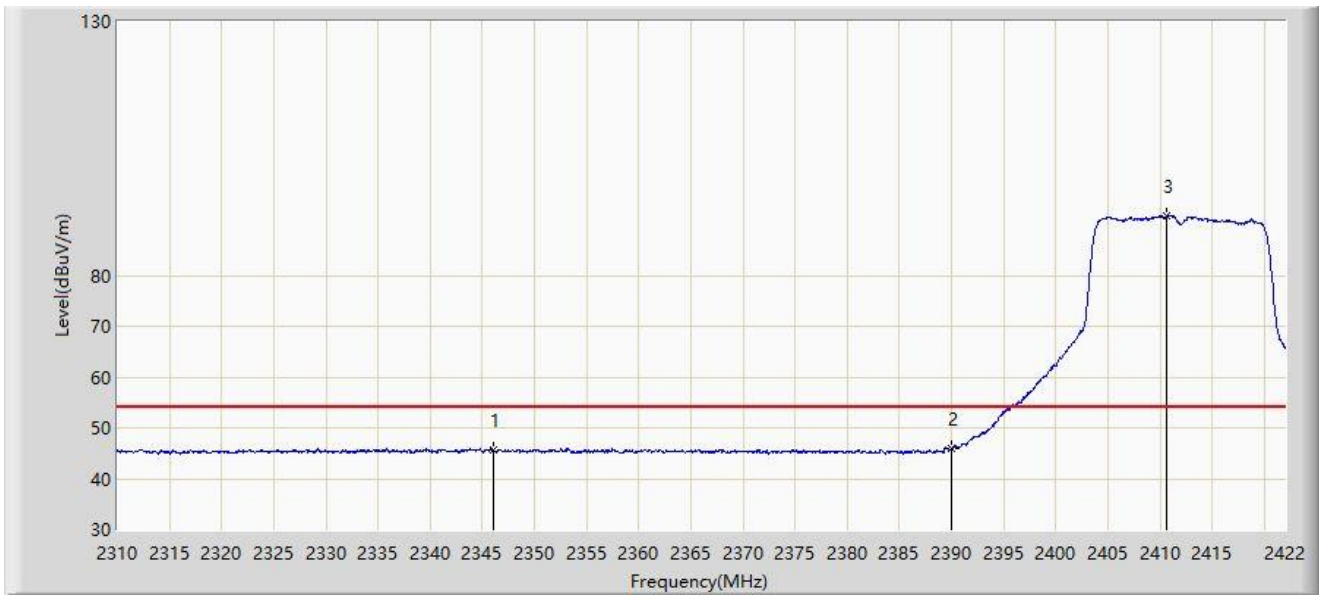


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2346.008	45.792	14.639	-8.208	54.000	31.153	AV
2			2390.000	45.914	15.011	-8.086	54.000	30.903	AV
3		*	2410.688	91.710	60.736	N/A	N/A	30.974	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Data: 2021/12/23 - 16:06
Limit: FCC_Part 15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11g at channel 2412MHz	

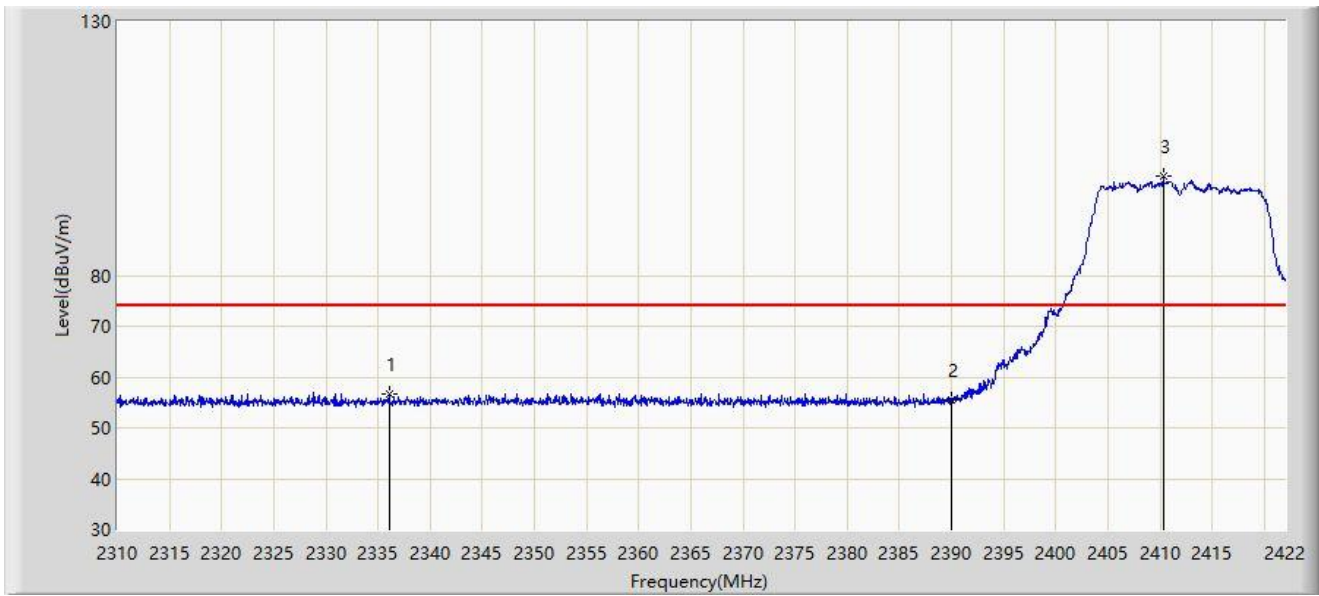


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2336.040	56.589	25.424	-17.411	74.000	31.165	PK
2			2390.000	55.578	24.675	-18.422	74.000	30.903	PK
3		*	2410.296	99.691	68.719	N/A	N/A	30.972	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Data: 2021/12/23 - 16:07
Limit: FCC_Part 15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11g at channel 2412MHz	

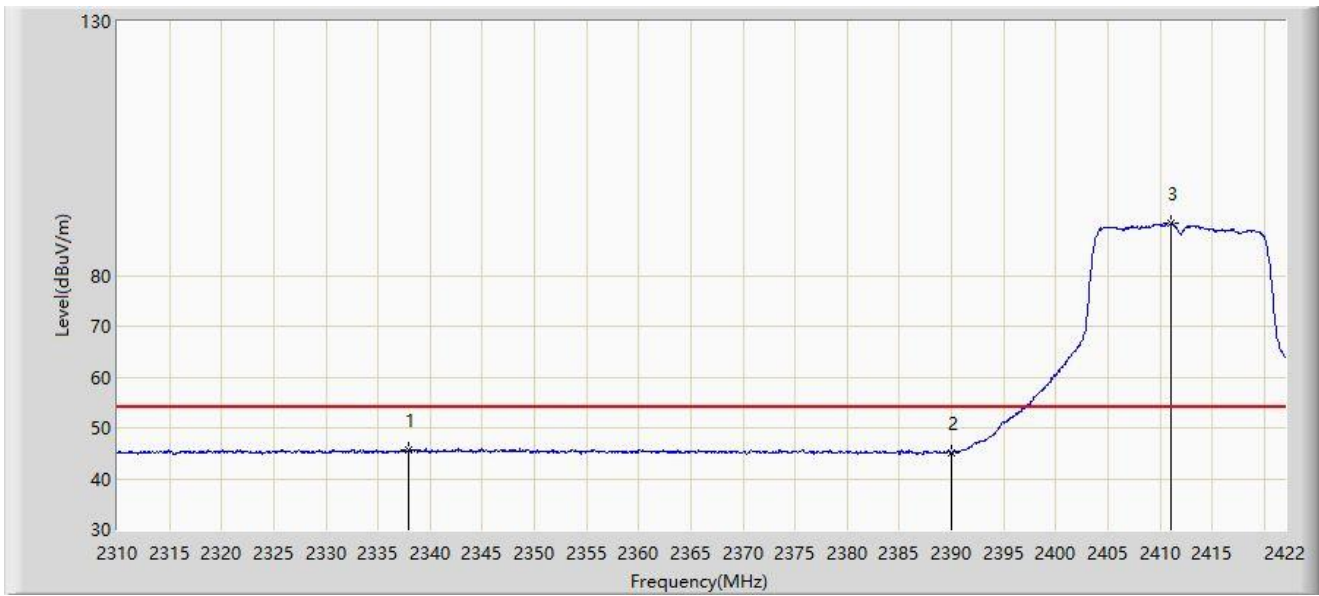


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2337.944	45.725	14.554	-8.275	54.000	31.171	AV
2			2390.000	45.190	14.287	-8.810	54.000	30.903	AV
3		*	2411.024	90.147	59.172	N/A	N/A	30.975	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Data: 2021/12/23 - 16:10
Limit: FCC_Part 15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11g at channel 2462MHz	

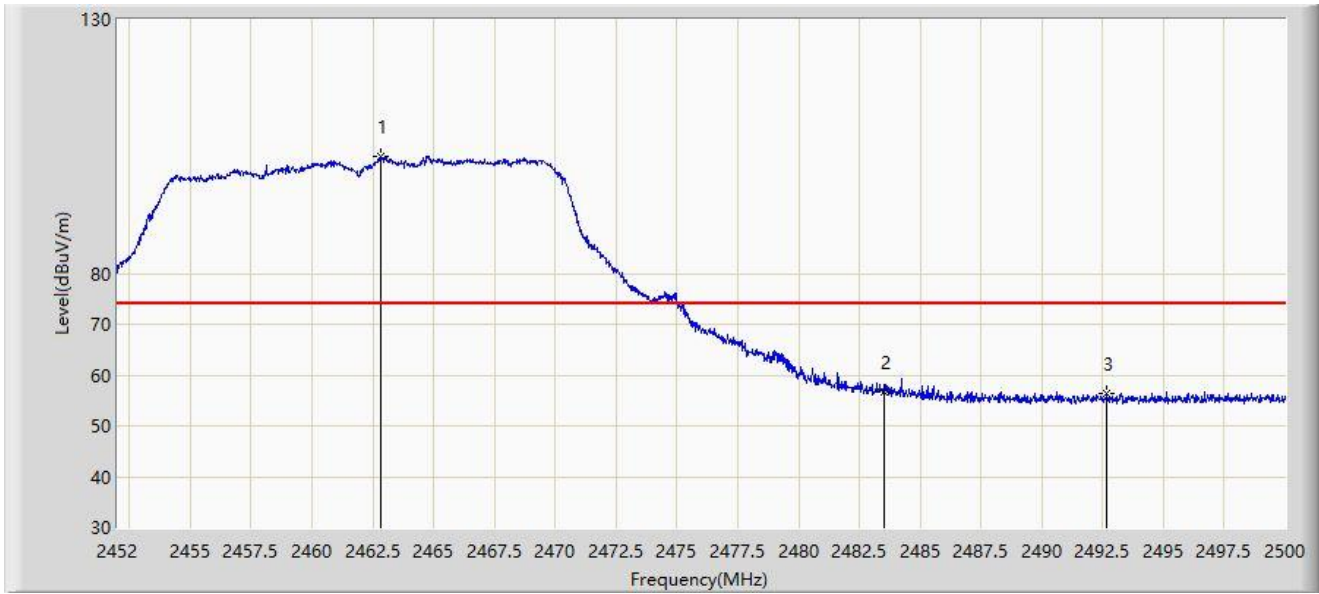


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2462.824	103.157	72.279	N/A	N/A	30.878	PK
2			2483.500	56.757	25.868	-17.243	74.000	30.889	PK
3			2492.656	56.321	25.386	-17.679	74.000	30.935	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Data: 2021/12/23 - 16:12
Limit: FCC_Part 15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11g at channel 2462MHz	

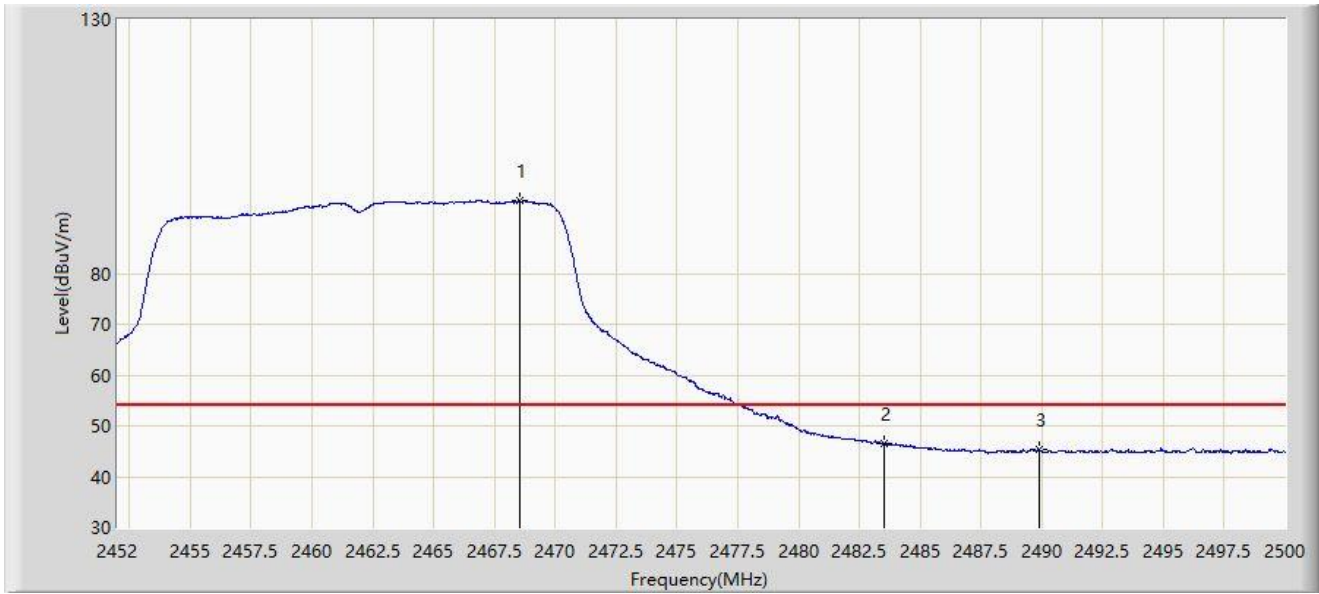


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2468.536	94.461	63.587	N/A	N/A	30.874	AV
2			2483.500	46.520	15.631	-7.480	54.000	30.889	AV
3			2489.872	45.398	14.477	-8.602	54.000	30.921	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Data: 2021/12/23 - 16:13
Limit: FCC_Part 15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11g at channel 2462MHz	

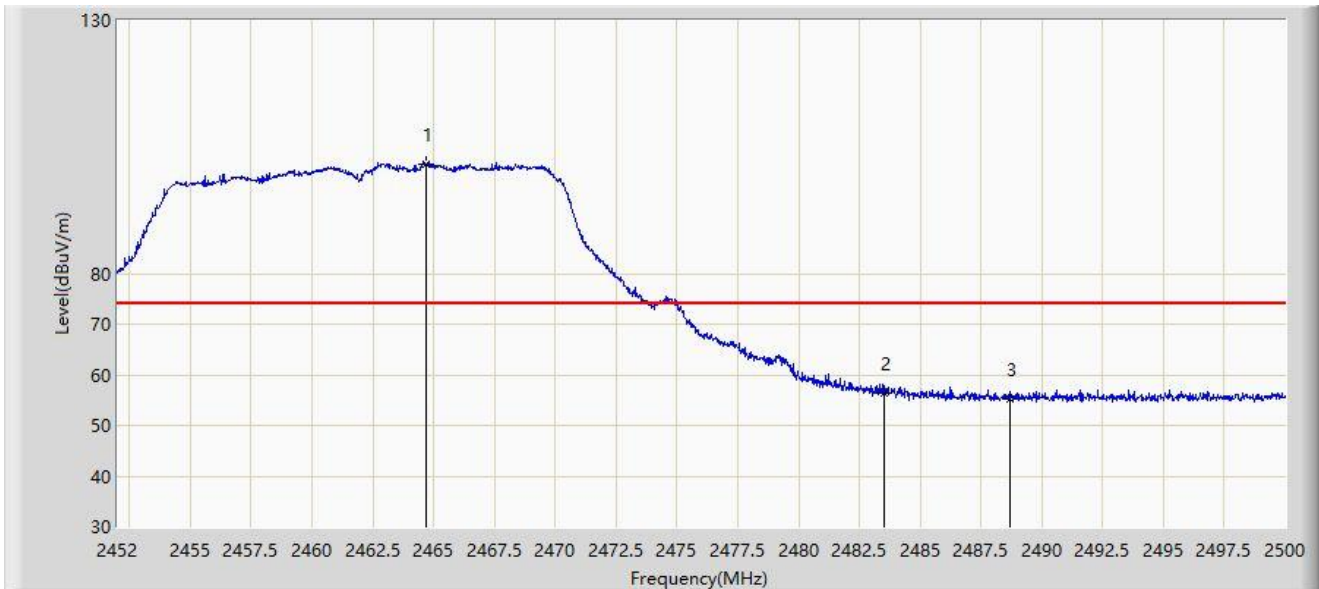


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2464.672	101.691	70.814	N/A	N/A	30.877	PK
2			2483.500	56.416	25.527	-17.584	74.000	30.889	PK
3			2488.696	55.335	24.420	-18.665	74.000	30.915	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Data: 2021/12/23 - 16:16
Limit: FCC_Part 15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11g at channel 2462MHz	

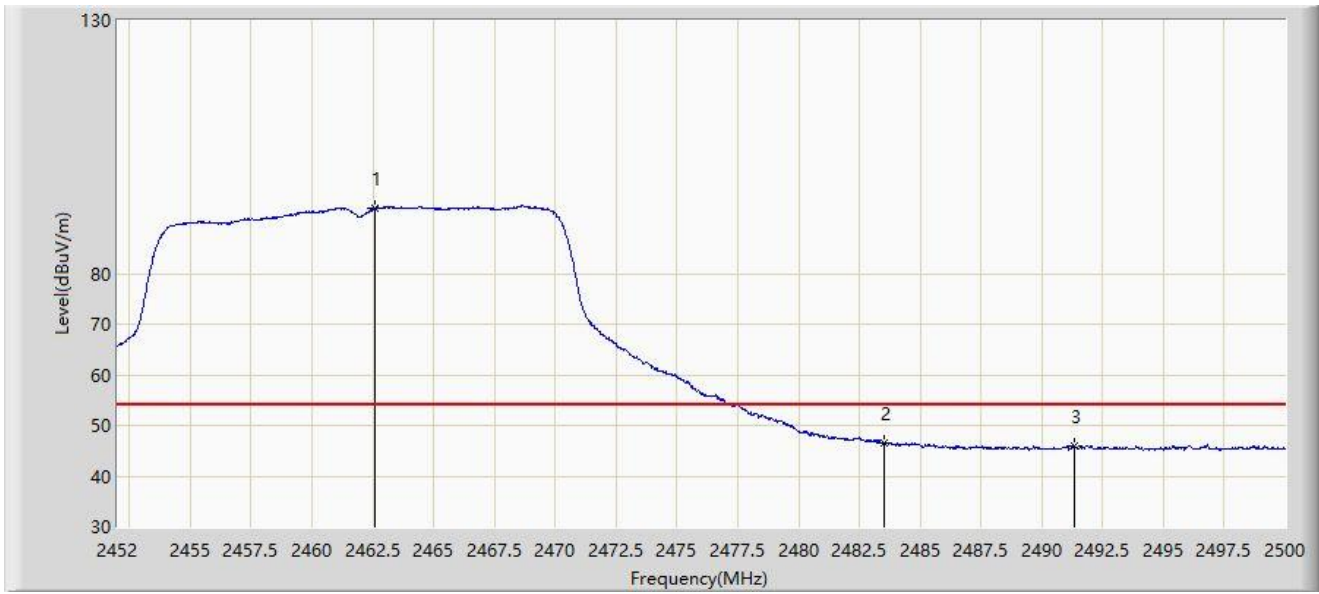


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2462.560	92.906	62.028	N/A	N/A	30.878	AV
2			2483.500	46.631	15.742	-7.369	54.000	30.889	AV
3			2491.336	46.059	15.131	-7.941	54.000	30.928	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Data: 2021/12/23 - 16:18
Limit: FCC_Part 15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz	

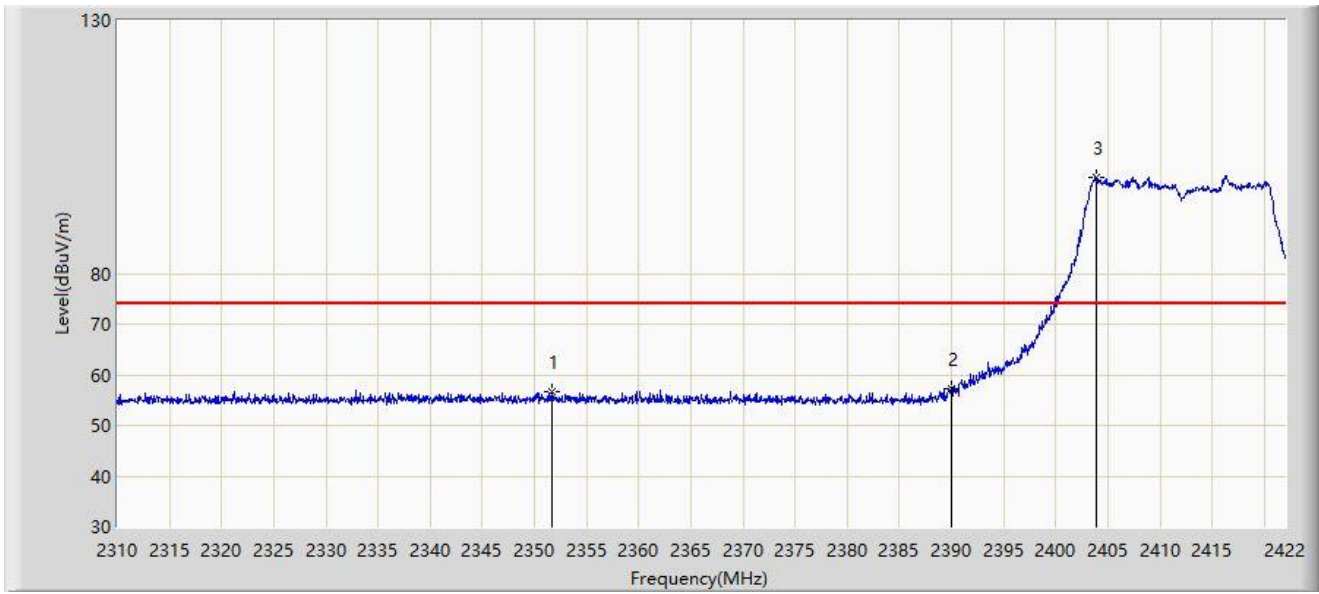


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2351.720	56.647	25.561	-17.353	74.000	31.086	PK
2			2390.000	57.390	26.487	-16.610	74.000	30.903	PK
3		*	2403.912	99.104	68.160	N/A	N/A	30.944	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Data: 2021/12/23 - 16:20
Limit: FCC_Part 15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz	

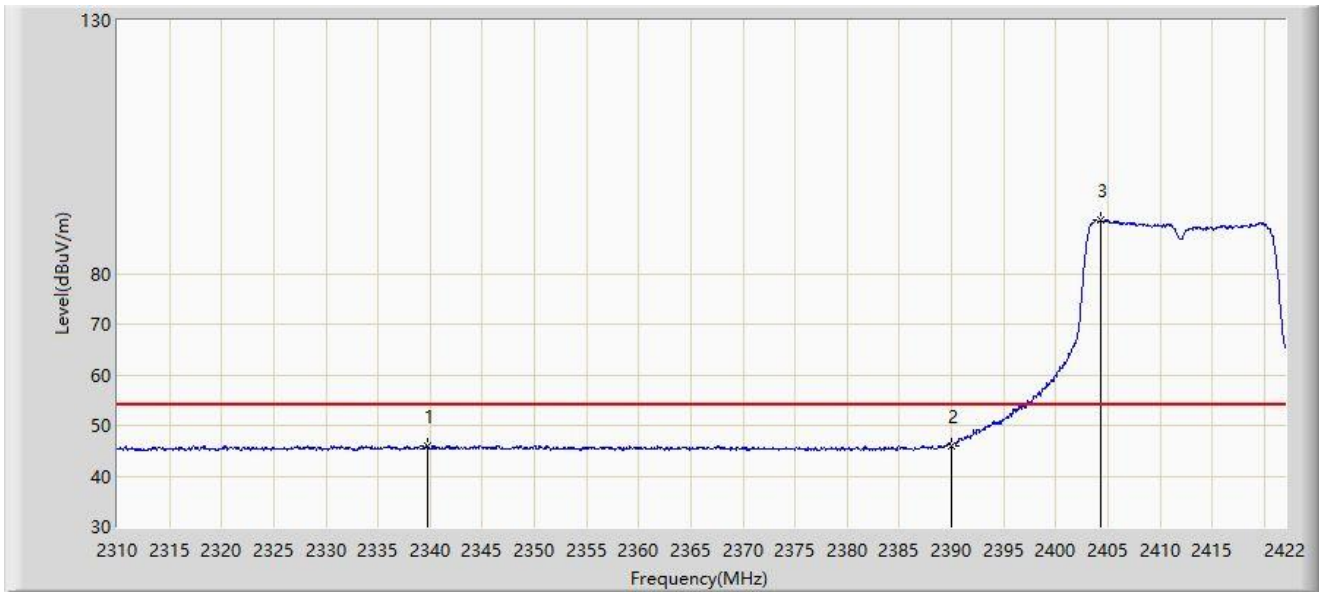


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2339.736	45.902	14.725	-8.098	54.000	31.177	AV
2			2390.000	45.991	15.088	-8.009	54.000	30.903	AV
3		*	2404.360	90.448	59.502	N/A	N/A	30.946	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Data: 2021/12/23 - 16:22
Limit: FCC_Part 15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz	

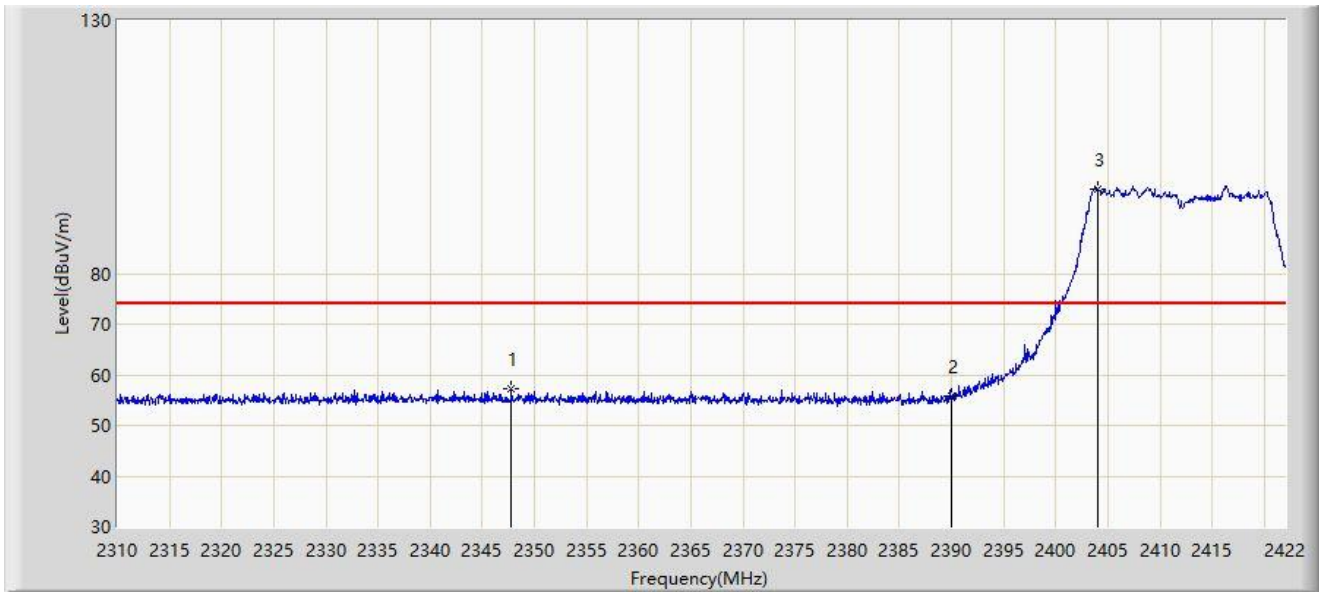


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2347.800	57.325	26.193	-16.675	74.000	31.132	PK
2			2390.000	55.694	24.791	-18.306	74.000	30.903	PK
3		*	2404.024	96.693	65.749	N/A	N/A	30.944	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Data: 2021/12/23 - 16:23
Limit: FCC_Part 15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz	

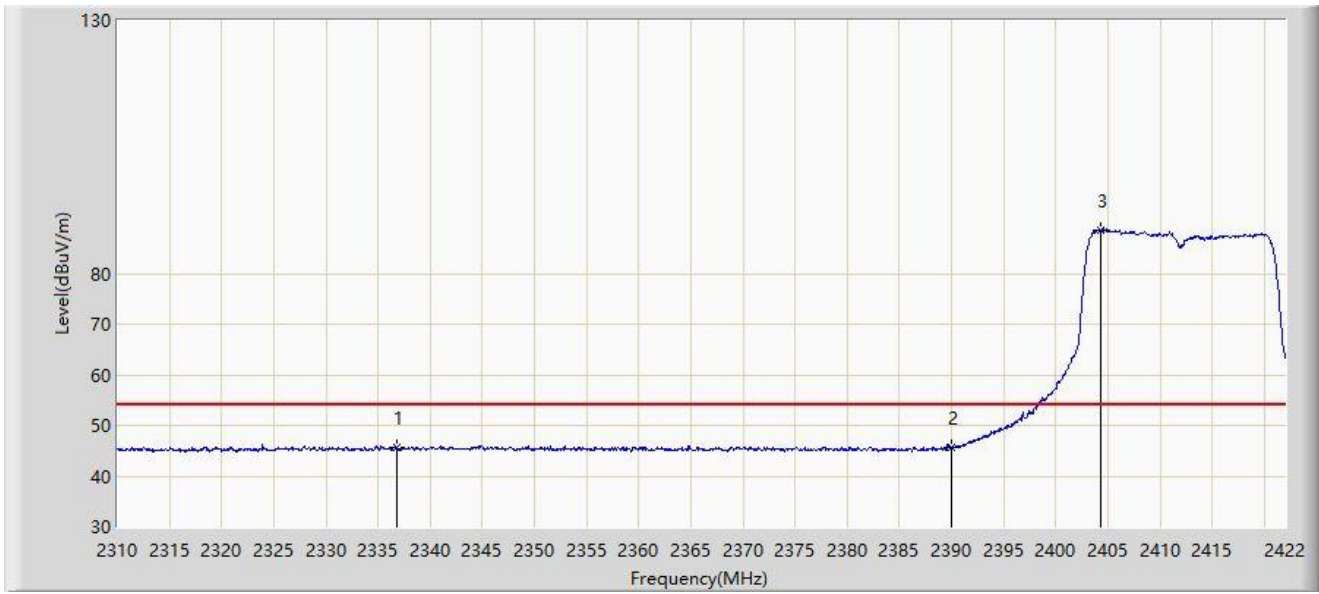


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2336.824	45.704	14.536	-8.296	54.000	31.168	AV
2			2390.000	45.610	14.707	-8.390	54.000	30.903	AV
3		*	2404.360	88.640	57.694	N/A	N/A	30.946	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Data: 2021/12/23 - 16:25
Limit: FCC_Part 15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz	

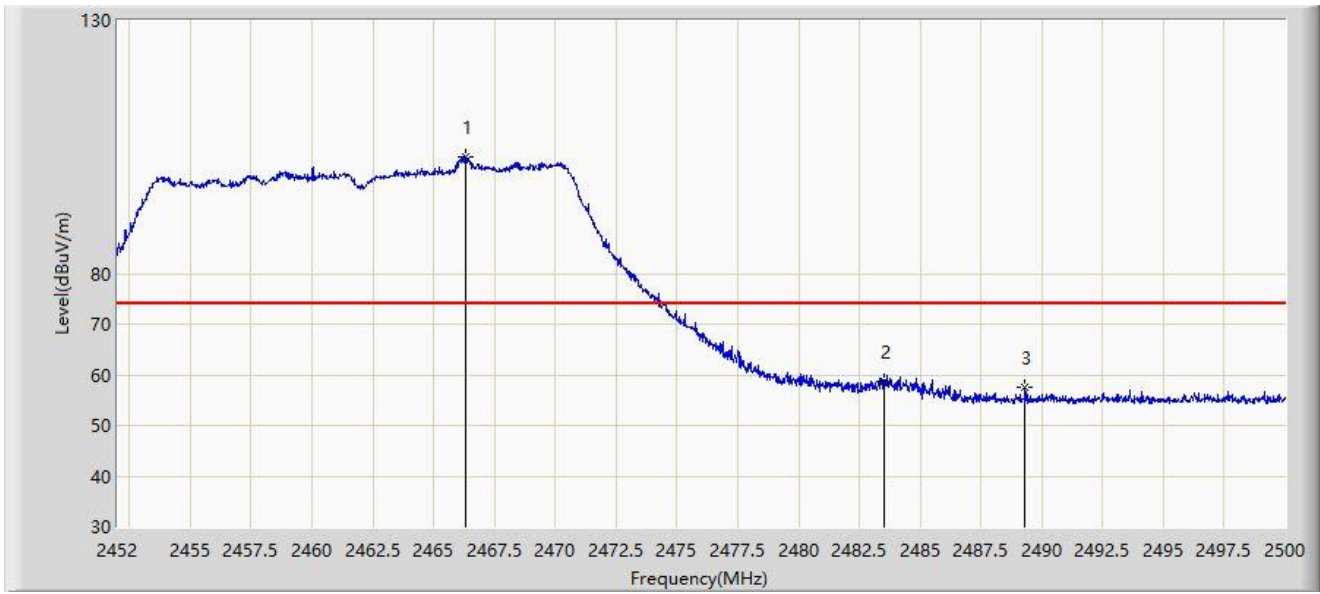


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2466.328	102.901	72.026	N/A	N/A	30.875	PK
2			2483.500	58.779	27.890	-15.221	74.000	30.889	PK
3			2489.320	57.424	26.506	-16.576	74.000	30.918	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Data: 2021/12/23 - 16:26
Limit: FCC_Part 15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz	

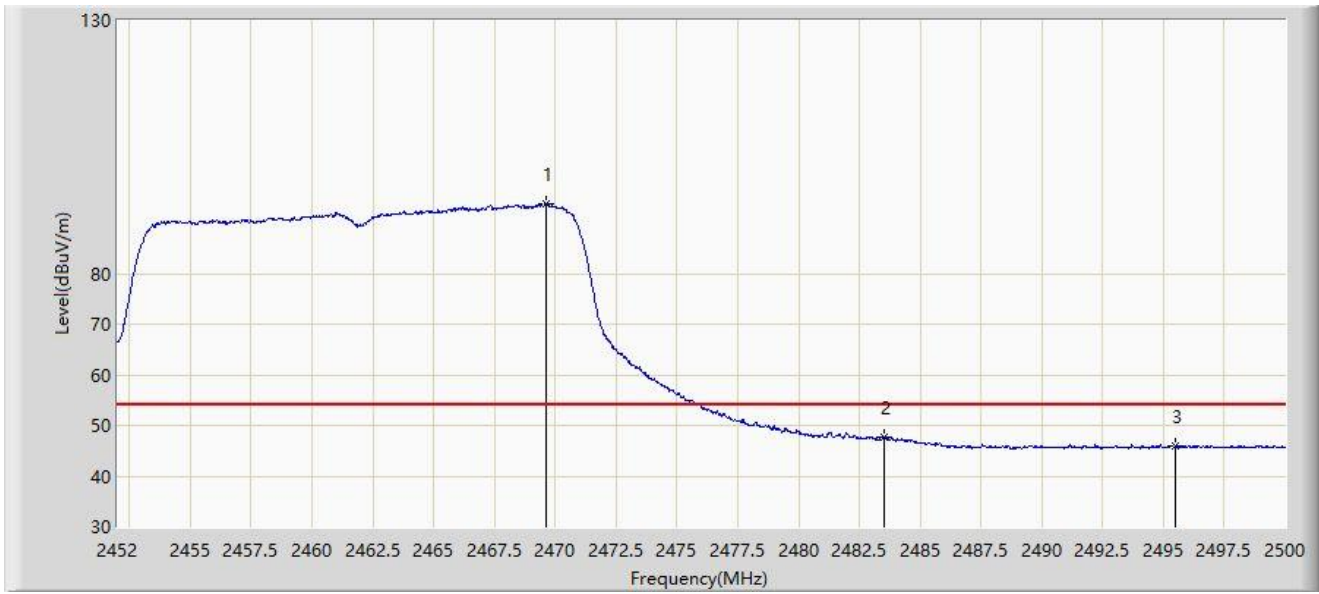


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2469.616	93.901	63.028	N/A	N/A	30.873	AV
2			2483.500	47.549	16.660	-6.451	54.000	30.889	AV
3			2495.512	46.018	15.069	-7.982	54.000	30.949	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Data: 2021/12/23 - 16:39
Limit: FCC_Part 15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz	

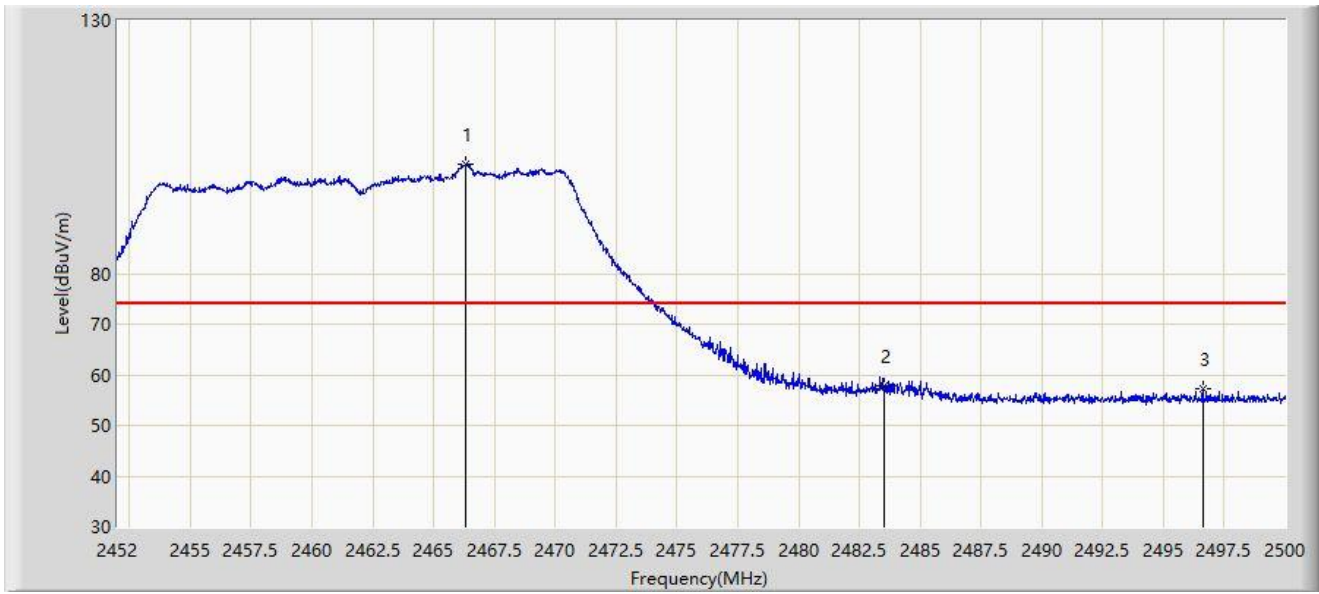


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2466.304	101.593	70.718	N/A	N/A	30.875	PK
2			2483.500	57.829	26.940	-16.171	74.000	30.889	PK
3			2496.616	57.159	26.209	-16.841	74.000	30.950	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Data: 2021/12/23 - 16:40
Limit: FCC_Part 15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz	

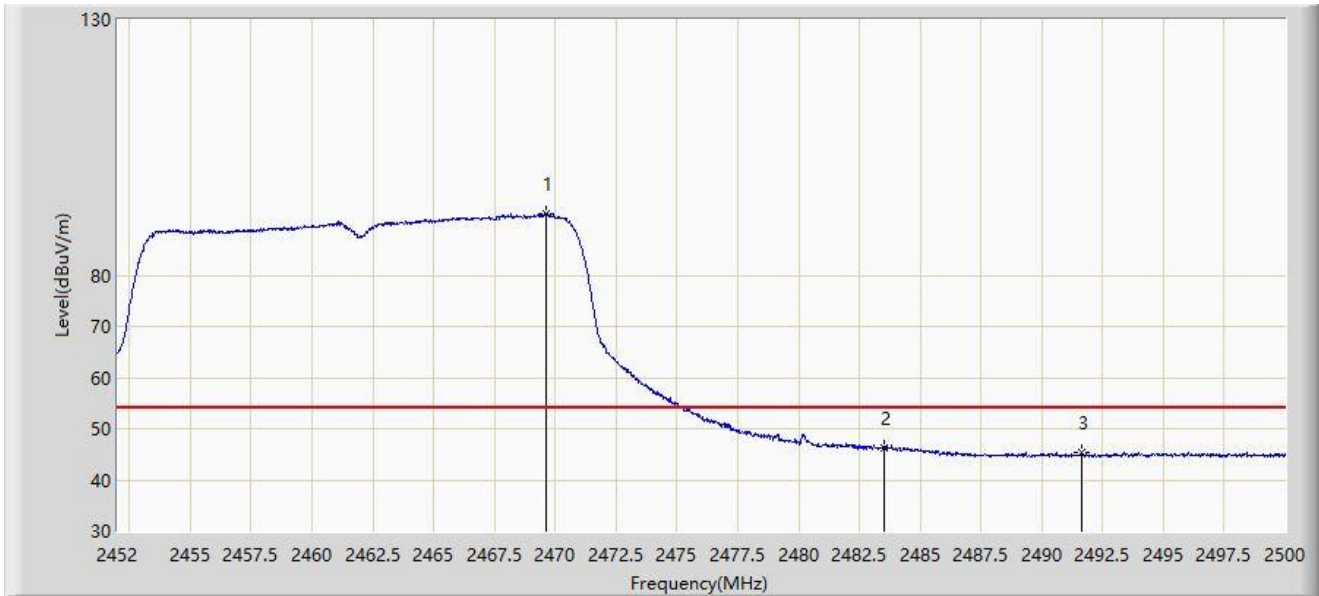


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2469.616	91.995	61.122	N/A	N/A	30.873	AV
2			2483.500	46.341	15.452	-7.659	54.000	30.889	AV
3			2491.648	45.218	14.288	-8.782	54.000	30.930	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

A.8 AC Conducted Emissions Test Result

Site: NS-SR2	Test Data: 2021/12/28
Limit: FCC_Part15.207_CE_AC Power	Engineer: Dillon Diao
Probe: ENV216_102493_150KHz~30MHz	Polarity: Line
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2437MHz	

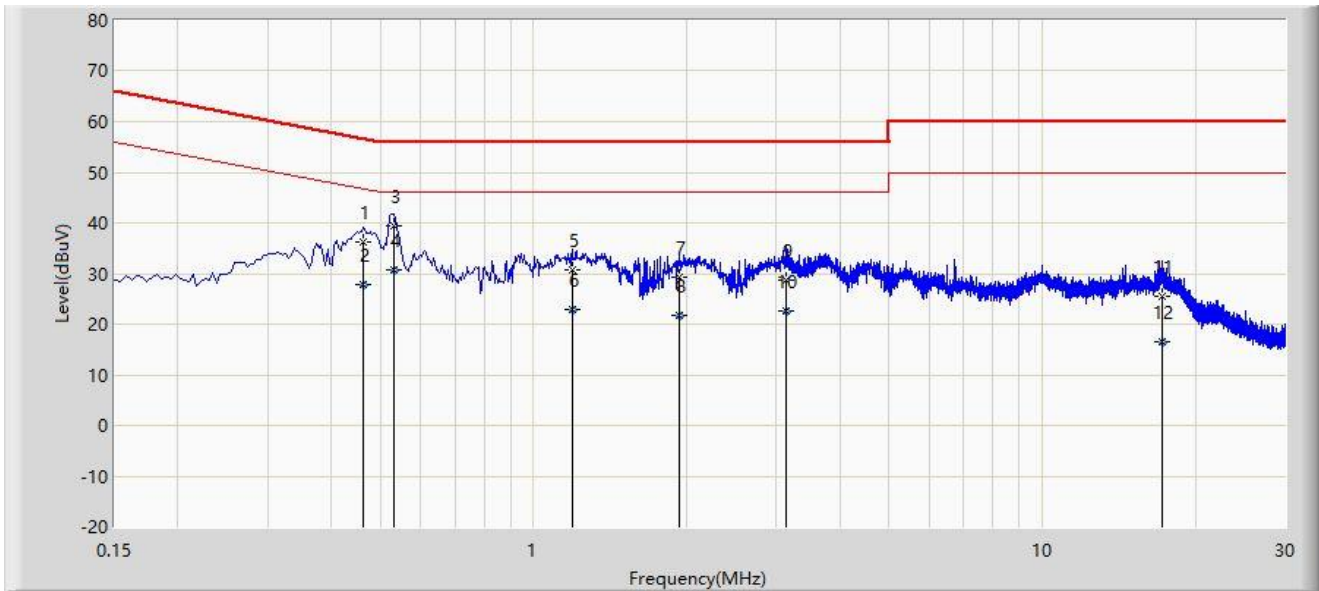


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1			0.462	36.230	26.431	-20.426	56.657	9.800	QP
2			0.462	27.841	18.042	-18.815	46.657	9.800	AV
3			0.530	39.489	29.781	-16.511	56.000	9.707	QP
4		*	0.530	30.682	20.975	-15.318	46.000	9.707	AV
5			1.190	30.657	20.922	-25.343	56.000	9.736	QP
6			1.190	22.974	13.238	-23.026	46.000	9.736	AV
7			1.938	29.301	19.544	-26.699	56.000	9.758	QP
8			1.938	21.814	12.056	-24.186	46.000	9.758	AV
9			3.142	28.837	19.032	-27.163	56.000	9.805	QP
10			3.142	22.614	12.809	-23.386	46.000	9.805	AV
11			17.162	25.493	15.400	-34.507	60.000	10.093	QP
12			17.162	16.455	6.362	-33.545	50.000	10.093	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: NS-SR2	Test Data: 2021/12/28
Limit: FCC_Part15.207_CE_AC Power	Engineer: Dillon Diao
Probe: ENV216_102493_150KHz~30MHz	Polarity: Neutral
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2437MHz	

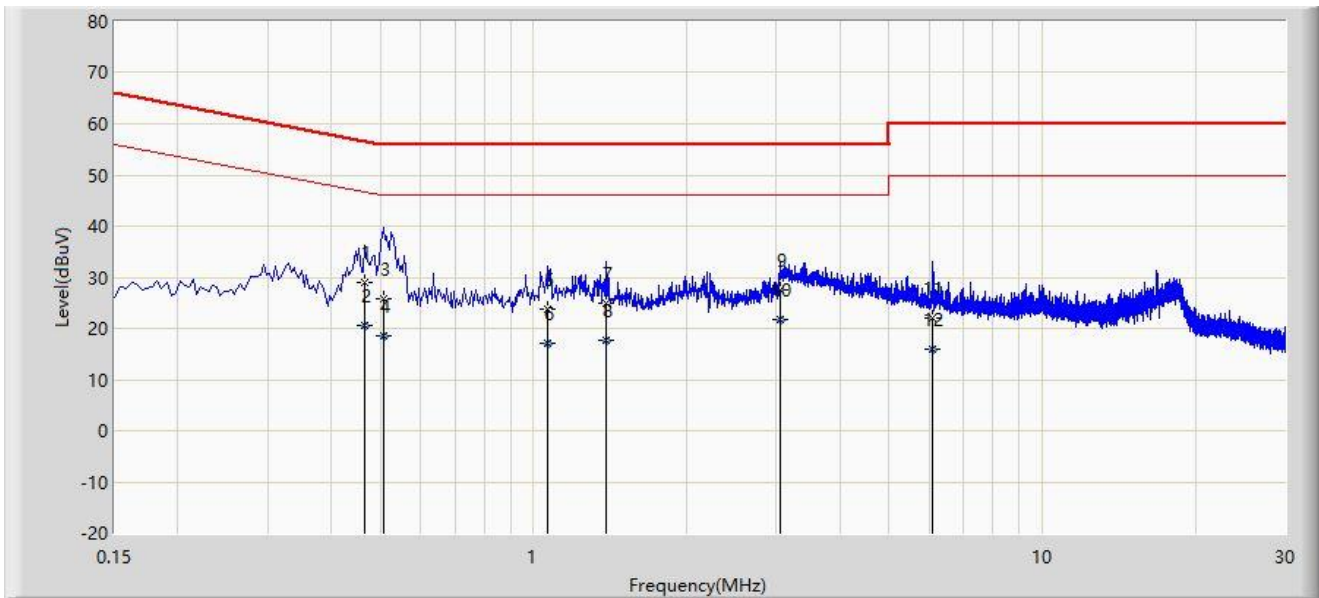

No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1			0.466	29.045	19.335	-27.540	56.585	9.710	QP
2			0.466	20.722	11.012	-25.862	46.585	9.710	AV
3			0.506	25.884	16.251	-30.116	56.000	9.634	QP
4			0.506	18.654	9.021	-27.346	46.000	9.634	AV
5			1.066	23.904	14.233	-32.096	56.000	9.671	QP
6			1.066	17.246	7.575	-28.754	46.000	9.671	AV
7			1.386	25.069	15.389	-30.931	56.000	9.680	QP
8			1.386	17.665	7.985	-28.335	46.000	9.680	AV
9			3.054	27.659	17.916	-28.341	56.000	9.742	QP
10		*	3.054	21.772	12.029	-24.228	46.000	9.742	AV
11			6.090	22.142	12.264	-37.858	60.000	9.878	QP
12			6.090	16.042	6.164	-33.958	50.000	9.878	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Appendix B – Test Setup Photograph

Refer to “2111RSU063-UT” file.

Appendix C – EUT Photograph

Refer to “2111RSU063-UE” file.

_____ The End _____