
Sercomm

HD IP Camera

OC830



Setup Guide

Document Version: 1.0

Copyright 2015. All Rights Reserved.

All trademarks and trade names are the properties of their respective owners.

Package Contents

The following items should be included: If any of these items are damaged or missing, please contact your service provider immediately.

1. Waterproof HD IP Camera x 1



2. Stand x 1



3. 3M DC Power Adapter x 1



4. Screw/Anchor x 2




5. DC In Rubber x 1



6. Rubber Cap x 1



7. RJ-45 USB Cable x 1 (Only for paring, not suitable for outdoor usage)



Chapter 1 Introduction

1

This Chapter provides details of the Waterproof HD IP Camera's features, components and capabilities.

Overview

The HD IP Camera has an Integrated Microcomputer and a high quality Mega Pixel Omni Vision CMOS Sensor, enabling it to display high quality live streaming video over your wired LAN, the Internet, and for the Waterproof HD IP Camera, an 802.11N Wireless LAN.

Using enhanced H.264 technologies, the Waterproof HD IP Camera is able to stream high quality video and audio directly to your PC. The high compression capabilities of H.264 reduce network bandwidth requirements to amazingly low levels.

This weather-resistant camera, which with the IP66 rated housing and internal heater, let you keep an eye on your belongings - even in harsh environments. It is also an all-in-one camera that has automatic and manual day/night switching, PIR sensor and built-in infrared LEDs, which can provide illumination around 6 meters long under low light conditions in a simple, economical manner.

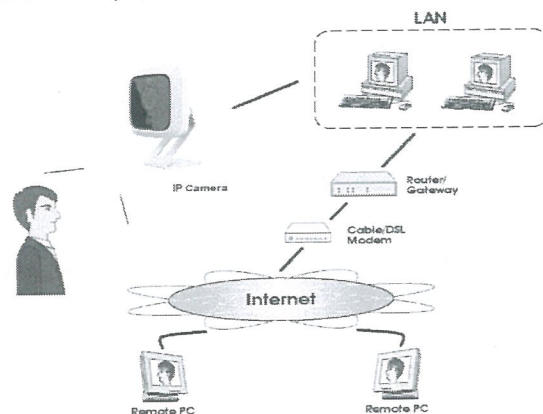


Figure 1: Network Diagram – Waterproof HD IP Camera

Features

- **Standalone Design.** The Waterproof HD IP Camera is a standalone system with built-in CPU and Video encoder. It requires only a power source and a connection to your LAN or Wireless LAN.
- **Dual Video Support.** The Waterproof HD IP Camera can support H.264 and MJPEG video for different image compression.
- **Suitable for Home, Business or Public Facilities.** Whether for Home, Business or Public Facility surveillance, or just for entertainment and fun, the Waterproof HD IP Camera has the features you need.
- **Day/Night Switch:** With the day/night switching feature, you are able to view and record better images even in the dark of night.
- **IR LED Support.** Each Waterproof HD IP Camera has one infrared LED. The LED can provide illumination around 6 meters long, that can help to output a better video quality while under low-light conditions such as on cloudy days, or in the morning or evening.
- **PIR (Passive Infrared Sensor) Support.** The Waterproof HD IP Camera is embedded with a PIR Sensor, which senses infrared light radiating from human bodies in its field of view. This feature is very helpful in enhancing home security systems.
- **Built-in Heater.** The built-in Heater can support the camera to be used in the extreme cold outdoor climate applications. The heater should be turn on when temperature is below 6°C.

Wireless Features

- **Supports 11n Wireless Stations.** The 802.11n standard provides for backward compatibility with the 802.11b standard, so 802.11n, 802.11b and 802.11g Wireless stations can be used simultaneously.
- **Wired and Wireless Network Support.** The Waterproof HD IP Camera supports either wired or wireless transmission.
- **WEP Support.** Full WEP support (64/128 Bit) on the Wireless interface is provided.
- **WPA/WPA2 Support.** The WPA Personal/WPA2 Personal standard is also supported, allowing advanced encryption of wireless data.
- **WPS Support.** WPS (Wi-Fi Protected Setup) can simplify the process of connecting any device to the wireless network by using the push button configuration (PBC) on the Waterproof HD IP Camera, or entering a PIN code if there's no button.

Chapter 2

Basic Setup

2

This Chapter provides details on how to install and configure the Waterproof HD IP Camera.

System Requirements

- To use the Wireless interface on the wireless model, other Wireless devices must be compliant with the IEEE802.11b, IEEE802.11g, or IEEE802.11n specifications. All Wireless stations must use compatible settings.

Physical Details - Waterproof HD IP Camera

Front Panel - Waterproof HD IP Camera

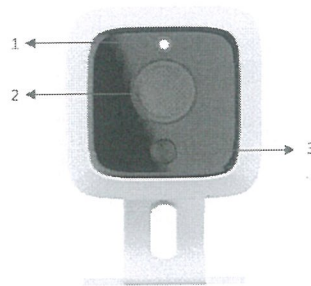


Figure 2: Front Panel

- | | |
|------------------------|--|
| 1. Light Sensor | This is hardware sensor to detect LUX. |
| 2. Lens | No physical adjustment is required or possible for the lens, but you should ensure that the lens cover remains clean. The image quality is degraded if the lens cover is dirty or smudged. |
| 3. PIR Sensor | This is hardware sensor to detect motion. |

Rear Panel - Waterproof HD IP Camera

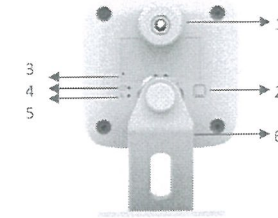


Figure 3: Rear Panel

1. DC Power Input

Connect the supplied 12V/1.5A power adapter here. Do not use other power adapters; doing so may damage the camera.

2. WPS/Reset Button

This button has two functions:

1. **WPS.** Push the WPS button on the device and on your other wireless device to perform WPS function that easily creates an encryption-secured wireless connection automatically.
 - **WPS PBC Mode.** When pressed and released (one second), the Waterproof HD IP Camera will be in the WPS PBC mode (Auto link mode).
 - **WPS Pin Code Mode.** When pressed and held for 3-10 seconds, the Waterproof HD IP Camera will be in the WPS Pin Code mode.
2. **Reset to manufacturer default valued and reboot.** When pressed and held over 10 seconds, the settings of Network Camera will be set to their default values.

3. Microphone

The built-in microphone is useful for bi-direction voice conversation.

4. Power LED (Green, Amber)

On (Green) - Power on.

Off - No power.

Blinking (Green) - The *Power* LED will blink during start up. This will take 55 to 57 seconds.

On (Amber) - Firmware upgrade is failed.

Blinking (Amber) - The firmware is upgrading.

5. Network/Wireless LED (Green, Amber)

On (Green) - Network (Wireless or LAN) connection is available.

Off - Wireless or LAN is not connected or camera is not sending/receiving data.

Blinking (Green) - Data is being transmitted or received via the LAN or Wireless connection.

On (Amber) - If the LED is on for 5 seconds and then off, the WPS function is failed.

Blinking (Amber) - WPS function is being processed.

6. LAN port

Use a RJ-45 USB cable (Only for paring, not suitable for outdoor usage) to connect your camera to a 10/100BaseT hub or switch.

Note:

- Plugging in the RJ-45 USB cable will disable the Wireless interface. Only 1 interface can be active at any time.
- The RJ-45 USB cable should only be connected or disconnected when the camera is powered OFF. Attaching or detaching the RJ-45 USB cable while the camera is powered on does NOT switch the interface between wired and wireless.

Set up of Waterproof HD IP Camera


1. Assemble the Camera

Attach the Camera Stand to the camera.

2. Internet Connection

• Wire Connection

Connect the Camera to a 10/100BaseT hub or switch, using a RJ-45 USB cable (Only for paring, not suitable for outdoor usage) and a standard LAN cable.

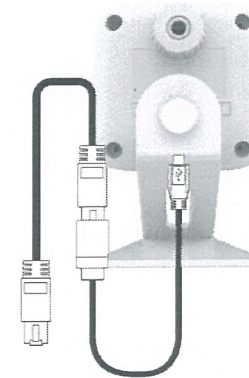


Note!

For this Model, it will disable the Wireless Interface. The Wireless and LAN interfaces cannot be used simultaneously. Using the LAN interface is recommended for initial configuration. After the Wireless settings are correct, the Wireless interface can be used.

The first time you connect to the camera, you should connect the RJ-45 USB cable and configure the Wireless IP Camera with appropriate settings. Then you can unplug the RJ-45 USB cable and power off the camera. The Wireless IP Camera will be in wireless interface when you power on the camera again.


• Wireless Connection

Press the WPS button on the camera for 3-5 seconds and on your other wireless device as well to establish a wireless connection automatically. The wireless connection is successful when the *Network/WPS* LED (green) remains on.



3. Power Up

Connect the supplied 12V/1.5A power adapter to the Wireless IP Camera and power up. Use only the power adapter provided. Using a different one may cause hardware damage.

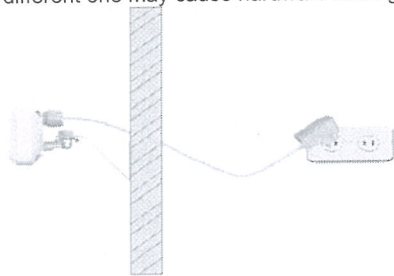

***Note:** The operating temperature of power adapter is 0° C to 40° C. Please ensure the power adapter is indoor usage.


4. Check the LEDs

- The *Power* LED will turn on briefly, then start blinking. It will blink during startup, which will take 55 to 57 seconds. After startup is completed, the *Power* LED should remain ON.
- The *Network/WPS* LED should be ON.


* Optional: Mounting the Waterproof HD IP Camera

***Note:** Please ensure camera is configured and added to the network before permanent mounting.

1. Identify the location for mounting the camera.
2. Align the two mounting holes at the bottom of the camera stand with the two screws, and mount the mounting plate onto the screws.



3. Screw/attach the camera onto the camera stand.




4. There are two methods for Internet connection:

- Connect a USB to RJ-45 cable (Only for paring, not suitable for outdoor usage) to the USB port of the Wireless IP Camera. Then use a standard LAN cable to connect an available port on your router.
- Press the WPS button on the Wireless IP Camera for 3-5 seconds and on your other wireless device as well to establish a wireless connection automatically. The wireless connection is successful when the *Network/WPS* LED (green) is on.

5. Connect the power cable into the back of the camera and then insert the rubber cap.

Caution: Make sure the rubber cap is attached seamlessly and well-positioned to the camera so the water will not get into the camera.

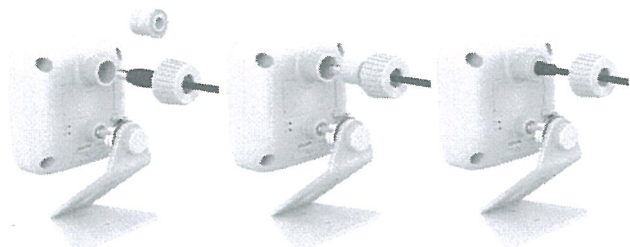

6. Plug the adapter end into a power outlet.
7. Adjust the Wireless IP Camera to a desired position and secure it firmly.

Appendix A Specifications



Waterproof HD IP Camera

Model	Waterproof HD IP Camera
Dimensions	76.4mm (W) x 76.4mm (H) x 32.8mm (D)
Operating Temperature	-20° C to 50° C (Cold Start: -40°C/ heater mode: -40°C to 0°C)
Video compression	H.264 and MJPEG
Image resolution	16:9 720p (1280*720), 640*360 4:3 XGA (1024*720), VGA (640*480), QVGA (320*240) Mixed Mode (720p, VGA, QVGA)
Storage Temperature	-40° C to 70° C
Network Protocols	TCP/IP, HTTP, HTTPS, DHCP, UPnP, NTP, , RTCP, DNS
Network Interface	1 RJ-45 USB connector for Ethernet (Only for paring, not suitable for outdoor usage)
Wireless interface	IEEE 802.11n/802.11b/802.11g compatible, WEP 64/128 bit, WPA/WPA2 personal security support
Button	1 WPS/Network Button
LEDs	2
IR LED	2
Power Adapter	12V/1.5A, 100~240V

Regulatory Approvals

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

-
- Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.

To assure continued compliance, any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. (Example - use only shielded interface cables when connecting to computer or peripheral devices).

FCC Radiation Exposure Statement

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

CE Approval

CE Standards

This product complies with the 99/5/EEC directives, including the following safety and EMC standards:

- EN55 022/24

CE Marking Warning

This is a Class B product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.