


WHITE AREA

BLANK AND WHITE AREA FOR 2D BACODE AND CONTENT



2D BARCODE
24X24 ROW/COLUMN DATAMATRIX ECC200 SYMBOL PERISO/IEC 16022 DATA MATRIX SPECIFICATION.
BARCODE CONTENT IS REFERRED TO SN.
300DPI PRINTER MINIMUM, MINIMUM QUIET ZONE ALL-AROUND BARCODE COMPLIANT WITH
ISO/IEC 16022 & ISO/IEC 15415 SPECIFICATION.

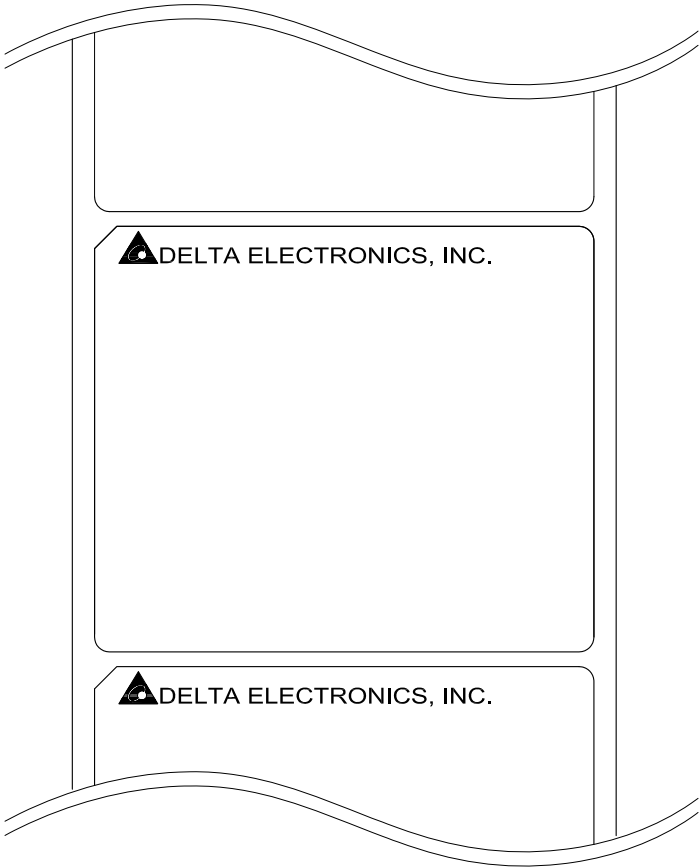

- NOTES:
- MATERIAL:WHITE POLYESTER #125 + PET #50 COATING t=0.20±0.02mm.
ADHESIVE: K K NO.9.
 - BACKGROUND'S COLOR: BLACK.
WORD'S COLOR: WHITE
 - LABEL CAN BE HOT-STAMP BY THERMO-TRANSFER MATCHING.
 - LABEL MUST BE SUITABLE FOR PC, PPO OR ABS CASE.
 - LABEL MUST BE DIE CUT PROPERLY AS PER DIMENSION.
 - LABEL MUST BE UL RECOGNIZED AND CSA CERTIFIED.
 - THE LABEL IS SUPPOSED TO BE PASTED ON ABS CASE EVENLY AND PROPERLY. IT'S NOT ALLOWED TO HAVE ANY BULGE HAPPEEN ON THE LABEL AFTER BE BURNT IN 72 HRS IN OVEN WHICH TEMPERATURE IS 85°C.
 - DIMENSIONS MARKED * MARK MUST BE INSPECTED AND CONTROLLED STRICTLY BY IQC.
 - LABEL MUST MEET DELTA GENERAL SPEC: 10000-0085, 10000-0162, 10000-2003



- NOTES:
- MATERIAL:WHITE POLYESTER #125 + PET #50 COATING t=0.20±0.02mm.
ADHESIVE: K K NO.9.
 - BACKGROUND'S COLOR: BLACK.
WORD'S COLOR: WHITE
 - LABEL CAN BE HOT-STAMP BY THERMO-TRANSFER MATCHING.
 - LABEL MUST BE SUITABLE FOR PC, PPO OR ABS CASE.
 - LABEL MUST BE DIE CUT PROPERLY AS PER DIMENSION.
 - LABEL MUST BE UL RECOGNIZED AND CSA CERTIFIED.
 - THE LABEL IS SUPPOSED TO BE PASTED ON ABS CASE EVENLY AND PROPERLY. IT'S NOT ALLOWED TO HAVE ANY BULGE HAPPEEN ON THE LABEL AFTER BE BURNT IN 72 HRS IN OVEN WHICH TEMPERATURE IS 85°C.
 - DIMENSIONS MARKED * MARK MUST BE INSPECTED AND CONTROLLED STRICTLY BY IQC.
 - LABEL MUST MEET DELTA GENERAL SPEC: 10000-0085, 10000-0162, 10000-2003

 台達電子工業股份有限公司 DELTA ELECTRONICS, INC.		Drawn: JACK.CHEN 2013/12/06	Design: JACK.CHEN 2013/12/06
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUSES OR DEVICES WITHOUT PERMISSION.		 Description: LABEL SPEC	
DIMENSIONAL TOLERANCES () : ±0.25 () : ±0.25 () : ±0.25 () : ±0.25 () : ±0.25 <30 : ±0.25 X : ±0.3 100~150 : ±0.25 250~300 : ±0.4 600~900 : ±1.5 >30~100 : ±0.35 X : ±0.3 150~200 : ±0.3 300~350 : ±0.45 900~OVER : ±3.1 >100~300 : ±0.5 X.X : ±0.2 200~250 : ±0.35 350~400 : ±0.5 ABOVE 300 : ±0.6 X.XX : ±0.1		A3 SIZE	
SCALE	UNIT	MM	USED ON
DDP-A020003	A		
SHEET 1 OF 1		ISSUE DATE: 2013/12/06	
REV.		0B	

