



TEST REPORT

FCC ID:2BE8H-W723A

Applicant: Shenzhen Yuanshang Innovation Industry Limited

Address: 603-4, No. 111-1 Huangjinshan, Bantian Community, Bantian Street, Longgang District, Shenzhen

Manufacturer: Dongguan Hechuang Green Energy Electronic Technology Co., Ltd

Address: Room 301, Building 2, No. 5 Lindong Third Road, Lin Village, Tangxia Town, Dongguan City, Guangdong Province

EUT: Magnetic 5 in 1 wireless charger

Trade Mark: AC ISLAND

Model Number: W7-23A
W7-23B, W7-23C, W7-23D, W7-23E

Date of Receipt: Jan. 25, 2024

Test Date: Jan. 25, 2024 - Feb. 29, 2024

Date of Report: Feb. 29, 2024

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

Applicable Standards: FCC PART 15 Subpart C
ANSI C63.10:2013

Test Result: Pass

Report Number: DL-20240202048E

Prepared (Engineer): Alisa Song

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION.....	3
2. TEST SUMMARY.....	3
3. GENERAL INFORMATION	4
4. TEST INSTRUMENT USED	6
5. CONDUCTED EMISSION TEST	7
6. RADIATION EMISSION TEST.....	11
7. BANDWIDTH TEST.....	16
8. ANTENNA REQUIREMENT.....	19
9. SETUP PHOTOGRAPHS	19
10. EUT PHOTOGRAPHS	19

**1. VERSION**

Version No.	Date	Description
00	Feb. 29, 2024	Original

2. TEST SUMMARY

EMC Emission			
Test Item	Section in CFR 47	Result	Remark
AC Power Line Conducted Emission	15.207	PASS	
Spurious Emission	15.209(a)(f)	PASS	
20dB Bandwidth	15.215	PASS	
Antenna requirement	15.203	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

(2) Test Facility: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone,
Baolong Street, Longgang District, Shenzhen, Guangdong, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB ID.: CN0118



3. GENERAL INFORMATION


3.1 Description of Device (EUT)

Product Name: Magnetic 5 in 1 wireless charger
Trade Mark: AC ISLAND
Model No.: W7-23A
W7-23B, W7-23C, W7-23D, W7-23E
Model Difference: All samples are the same except the model number and appearance color, so we prepare "W7-23A" for test only.
Serial No.: N/A
Hardware version: H1.0
Software version: S1.0
Operation Frequency: 115KHz ~ 205KHz 326.6KHz
Modulation type: MSK
Antenna Type: Inductive loop coil Antenna
Antenna gain: 0dBi
Input: 12V $\overline{\overline{=}}$ 2.91A
Output: Magnetic Wireless Charger: 5W/ 7.5W/ 10W/ 15W
Apple Watch Charger: 3W
Power supply: AirPods Charger: 5W
USB-A: 5V $\overline{\overline{=}}$ 2.4A
USB-C: 5V $\overline{\overline{=}}$ 2.4A

3.2 Tested System Details

None.

3.3 Block Diagram of Test Set-up

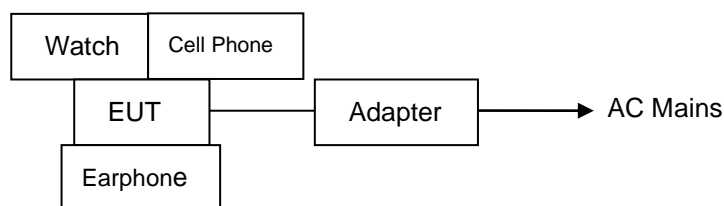



3.4 Test Mode Description

- Mode1. Wireless charger Output Mode(Watch+ Cell Phone+ Earphone)(Full Load)
Mode2. Wireless charger Output Mode(Watch+ Cell Phone+ Earphone) (Half Load)
Mode3. Wireless charger Output Mode(Watch+ Cell Phone+ Earphone) (No Load)
Mode4. Type-C Output+Wireless charger Output Mode(Watch+ Cell Phone+ Earphone) (Full Load)
Mode5. Type-C Output+Wireless charger Output Mode(Watch+ Cell Phone+ Earphone) (Half Load)
Mode6. Type-C Output+Wireless charger Output Mode(Watch+ Cell Phone+ Earphone) (No Load)
Mode7. USB-A Output+Wireless charger Output Mode(Watch+ Cell Phone+ Earphone) (Full Load)
Mode8. USB-A Output+Wireless charger Output Mode(Watch+ Cell Phone+ Earphone) (Half Load)
Mode9. USB-A Output+Wireless charger Output Mode(Watch+ Cell Phone+ Earphone) (No Load)

Note: 1. We have evaluated 1%, 50% and 99% battery level charging mode, and the worst mode (99%) is showed in this report.

2. All modes have been tested, and the report only shows the results of the worst mode1 and mode10.

3 : When the product was in wireless charging mode, we tested charging both the phone and watch simultaneously and separately. The worst mode was simultaneous charging and the data was recorded in the report.

4: No load condition = Phone(or watch) battery 99% Full load condition = Phone(or watch) battery 1%,
Half load condition = Phone(or watch) battery 1%

3.5 Test Auxiliary Equipment

Adapter (Provide by test lab):

Manufacturer: XIAOMI

Model: AD652G

I/P: AC 100-240V 50/60Hz 1.7A

O/P: (USB-A)DC 5V/2.4A, DC 9V/2A, DC 12V/1.5A 18W MAX

(Type-C)DC 5V/3A, DC 9V/3A, DC 11V/5A, DC 12V/3A, DC 15V/3A, DC 20V/3.25A 65W MAX

Total: (USB-A)DC 5V/2.4A, DC 9V/2A, DC 12V/1.5A 18W MAX

(Type-C)DC 5V/3A, DC 9V/3A, DC 11V/5A, DC 12V/3A, DC 15V/3A, DC 20V/3.25A 45W MAX

Earphone (Provide by test lab):

Manufacturer: Apple

Model: AirPods3

Cell Phone(Provide by test lab):

Manufacturer: Apple

Model: iPhone 11 Pro

Watch(Provide by test lab):

Manufacturer: Apple

Model: Watch Series 6

3.6 Test Uncertainty

Conducted Emission Uncertainty(150kHz-30MHz)	:	±2.56dB
20dB Bandwidth	:	±0.5kHz
Radiated Emission Uncertainty(9kHz-1GHz)	:	±3.24dB

**4. TEST INSTRUMENT USED****For Conducted Emission Test (843 Shielded Room)**

Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
843 Shielded Room	ChengYu	843 Room	843	Sep. 20, 2022	Sep. 19, 2025
EMI Receiver	R&S	ESR	101421	Nov. 04, 2023	Nov. 03, 2024
LISN	R&S	ENV216	102417	Nov. 04, 2023	Nov. 03, 2024
Clamp	COM-POWER	CLA-050	431071	Nov. 04, 2023	Nov. 03, 2024
3-Loop Antenna	DAZE	ZN30401	13021	Nov. 04, 2023	Nov. 03, 2024
ISN T8	Schwarzbeck	NTFM 8158	101135	Nov. 04, 2023	Nov. 03, 2024
ISN T5	Schwarzbeck	NTFM 8158	101136	Nov. 04, 2023	Nov. 03, 2024
843 Cable 1#	ChengYu	CE Cable	001	Nov. 04, 2023	Nov. 03, 2024
843 Cable 1#	ChengYu	CE Cable	002	Nov. 04, 2023	Nov. 03, 2024


For Radiated Emission Test (966 chamber)

Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
966 Chamber	ChengYu	966 Room	966	Nov. 06, 2023	Nov. 05, 2026
Spectrum Analyzer	Agilent	E4408B	MY50140780	Nov. 04, 2023	Nov. 03, 2024
EMI Receiver	R&S	ESRP7	101393	Nov. 04, 2023	Nov. 03, 2024
Amplifier	Schwarzbeck	BBV9743B	00153	Nov. 04, 2023	Nov. 03, 2024
Amplifier	EMEC	EM01G8GA	00270	Nov. 04, 2023	Nov. 03, 2024
Broadband Trilog Antenna	Schwarzbeck	VULB9162	00306	Nov. 04, 2023	Nov. 03, 2024
Horn Antenna	Schwarzbeck	BBHA9120D	02139	Nov. 04, 2023	Nov. 03, 2024
Loop Antenna	ZHINAN	ZN30900A	/	Nov. 04, 2023	Nov. 03, 2024
966 Cable 1#	ChengYu	966	004	Nov. 04, 2023	Nov. 03, 2024
966 Cable 2#	ChengYu	966	003	Nov. 04, 2023	Nov. 03, 2024

5. CONDUCTED EMISSION TEST

5.1 Block Diagram of Test Setup

For Mains Terminals Test

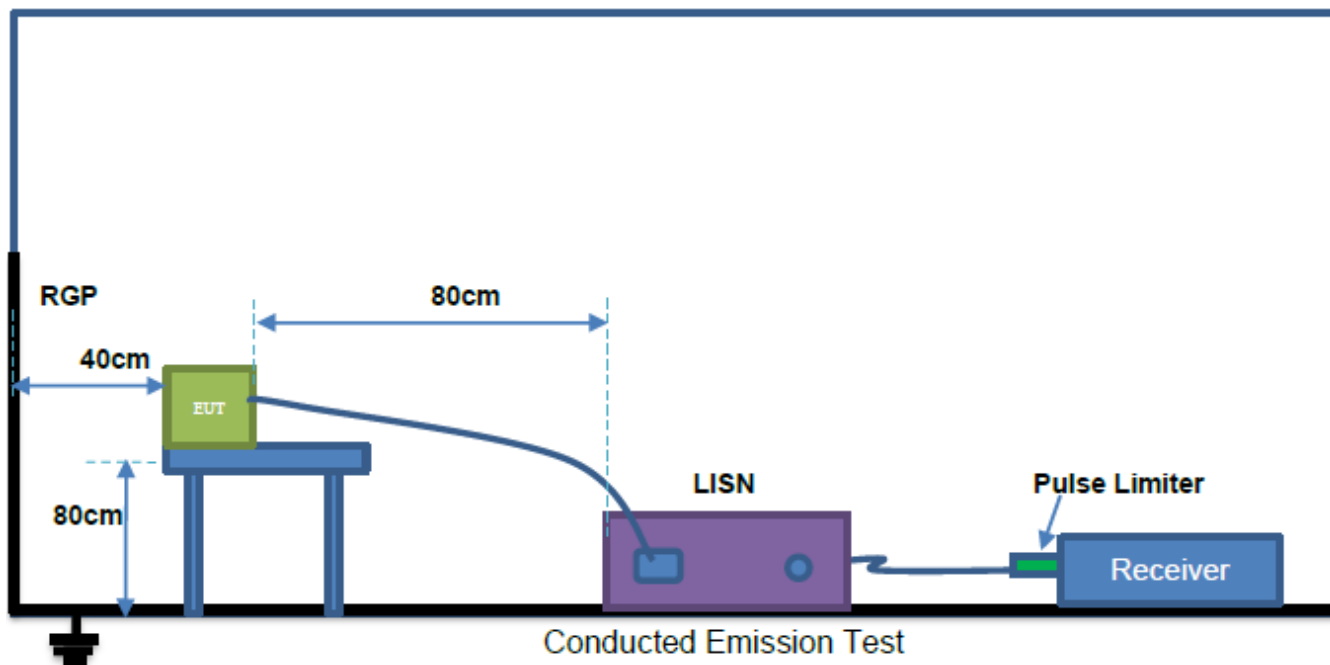

5.2 Test Standard and Limit

FCC Part 15 Subpart C

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15~0.50	66 ~ 56*	55 ~ 46*
0.50~5.00	56	46
5.00~30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

5.3 EUT Configuration on Test

The following equipment's are installed on conducted emission test to meet FCC Part 15 Subpart C requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

5.4 Operating Condition of EUT

5.4.1 Setup the EUT and simulators as shown in Section 5.1.

5.4.2 Turn on the power of all equipments.

5.4.3 Let the EUT work in test modes and test it.



5.5 Test Procedure

The EUT is put on the table and connected to the AC mains through a Artificial Mains Network (AMN) or ISN. This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are checked to find out the maximum conducted emission levels according to the **ANSI C63.10** regulations during conducted emission test.

The bandwidth of the test receiver (R&S Test Receiver ESR) is set at 10kHz.

The frequency range from 150 kHz to 30 MHz is investigated.

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Mesurement Level = Reading level + Correct Factor

5.6 Test Result


PASS

Please refer to the following page.



Conducted Emission Test Data


Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Phase:	Line
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

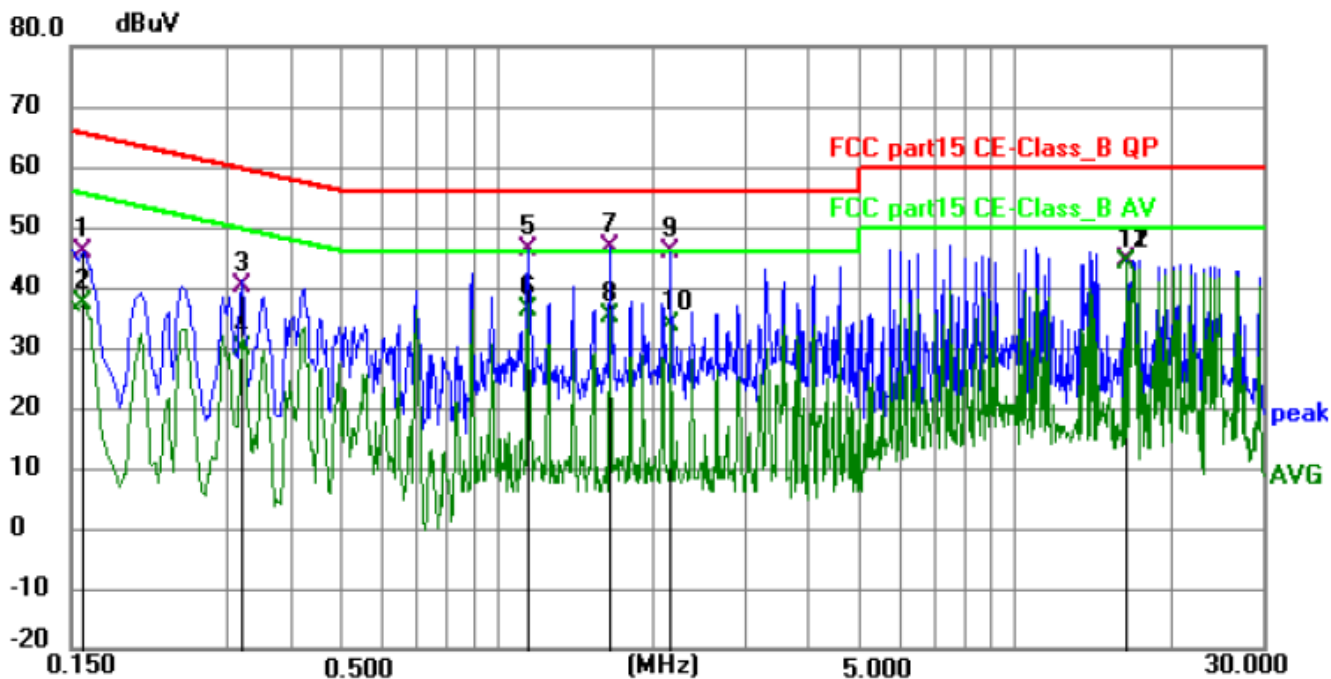

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1590	35.36	10.36	45.72	65.52	-19.80	QP	P	
2	0.1590	26.79	10.36	37.15	55.52	-18.37	AVG	P	
3	0.3209	31.17	9.07	40.24	59.68	-19.44	QP	P	
4	0.3209	20.61	9.07	29.68	49.68	-20.00	AVG	P	
5	1.1445	36.94	9.41	46.35	56.00	-9.65	QP	P	
6	1.1445	26.83	9.41	36.24	46.00	-9.76	AVG	P	
7	1.6530	36.74	9.74	46.48	56.00	-9.52	QP	P	
8	1.6530	25.49	9.74	35.23	46.00	-10.77	AVG	P	
9	2.1614	36.05	9.93	45.98	56.00	-10.02	QP	P	
10	2.1614	23.92	9.93	33.85	46.00	-12.15	AVG	P	
11	16.4220	34.32	10.29	44.61	60.00	-15.39	QP	P	
12 *	16.4220	33.80	10.29	44.09	50.00	-5.91	AVG	P	



Conducted Emission Test Data			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Phase:	Neutral
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

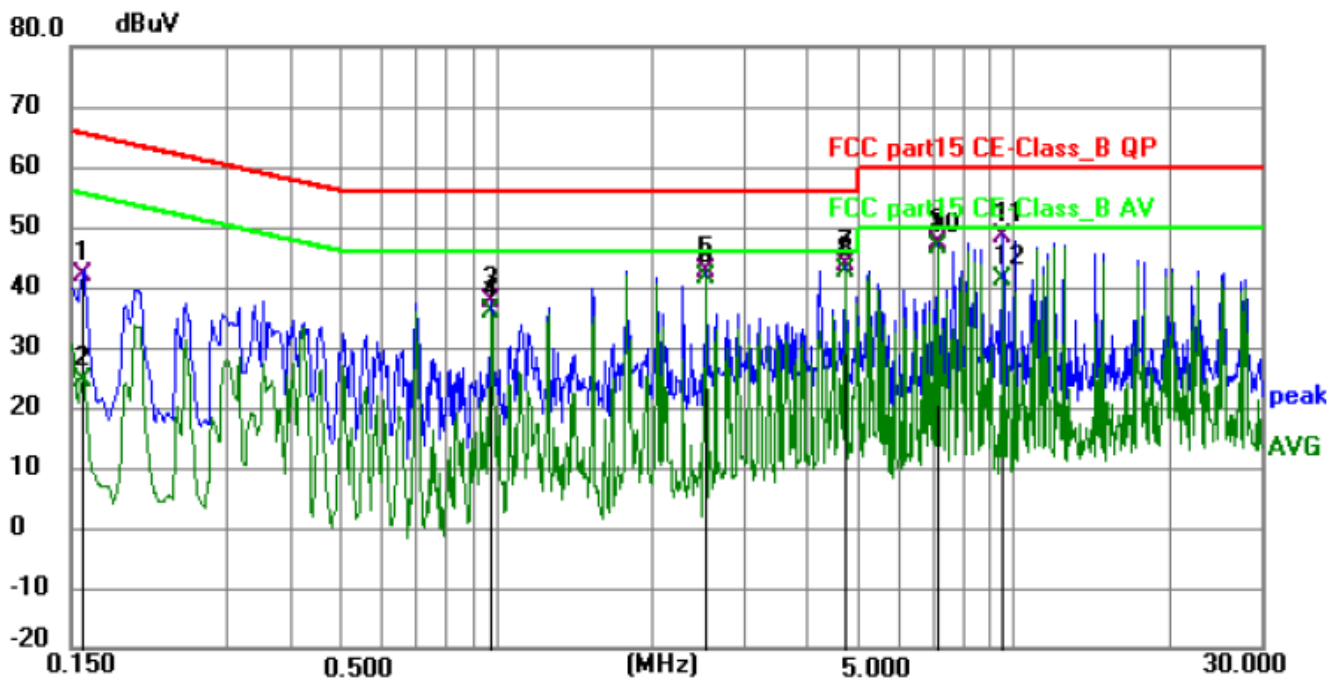

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1590	31.80	10.13	41.93	65.52	-23.59	QP	P	
2	0.1590	14.31	10.13	24.44	55.52	-31.08	AVG	P	
3	0.9780	28.15	9.43	37.58	56.00	-18.42	QP	P	
4	0.9780	26.61	9.43	36.04	46.00	-9.96	AVG	P	
5	2.5440	32.78	9.96	42.74	56.00	-13.26	QP	P	
6	2.5440	31.71	9.96	41.67	46.00	-4.33	AVG	P	
7	4.7085	33.78	10.06	43.84	56.00	-12.16	QP	P	
8 *	4.7085	32.78	10.06	42.84	46.00	-3.16	AVG	P	
9	7.1295	37.36	10.13	47.49	60.00	-12.51	QP	P	
10	7.1295	36.63	10.13	46.76	50.00	-3.24	AVG	P	
11	9.5460	38.30	10.27	48.57	60.00	-11.43	QP	P	
12	9.5460	30.98	10.27	41.25	50.00	-8.75	AVG	P	


Remark:

Margin = Level - Limit, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor


6. RADIATION EMISSION TEST

6.1 Block Diagram of Test Setup

Radiated Emission Test-Up Frequency Below 30MHz

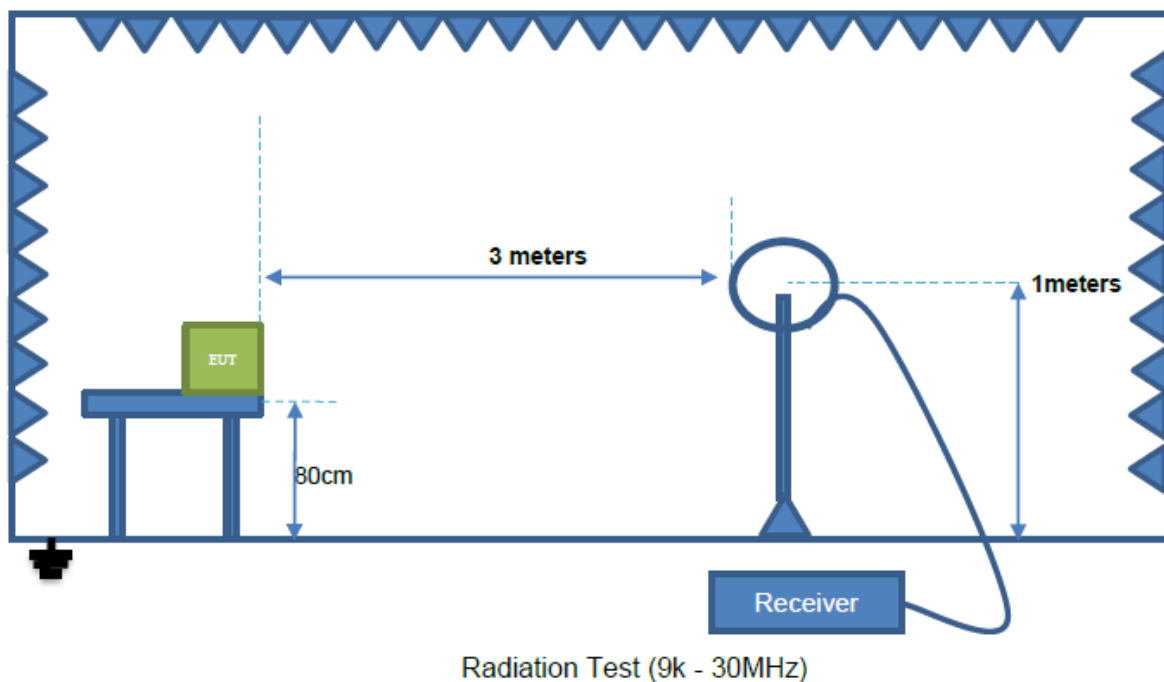

Below 1GHz

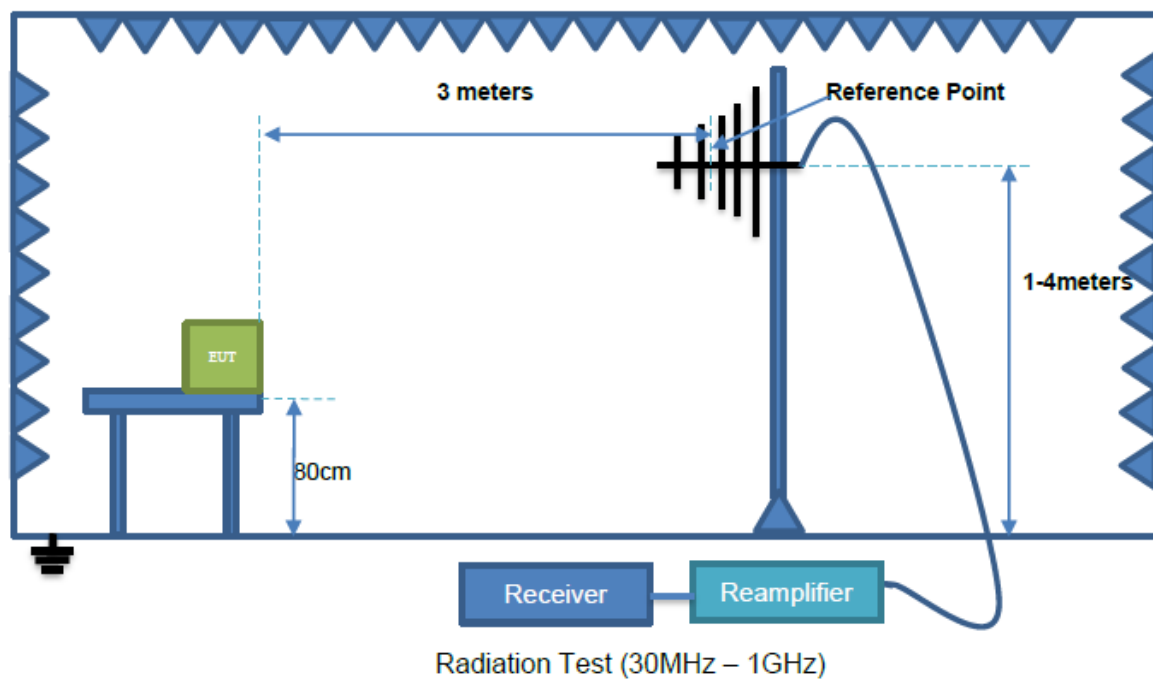

6.2 Test Standard and Limit

FCC Part 15 Subpart C



Limits for frequency below 30MHz

Frequency	Limit (uV/m)	Measurement Distance(m)	Remark
0.009-0.090	2400/F(kHz)	300	AVERAGE
0.090-0.110	2400/F(kHz)	300	Quasi-peak Value
0.110-0.490	2400/F(kHz)	300	AVERAGE
0.490-1.705	24000/F(kHz)	30	Quasi-peak Value
1.705-30	30	30	Quasi-peak Value

Above 30MHz

Frequency (MHz)	Distance (Meters)	Field Strengths Limits (dBμV/m)	Remark
30 ~ 88	3	40.0	Quasi-peak Value
88 ~ 216	3	43.5	Quasi-peak Value
216 ~ 960	3	46.0	Quasi-peak Value
960 ~ 1000	3	54.0	Quasi-peak Value
Above 1000	3	74.0	PEAK
		54.0	AVERAGE

Remark:

(1) The smaller limit shall apply at the cross point between two frequency bands.

(2) Distance refers to the distance in meters between the measuring instrument, antenna and the closed point of any part of the device or system.

6.3 EUT Configuration on Test

The FCC Part 15 Subpart C regulations test method must be used to find the maximum emission during radiated emission test.

The configuration of EUT is the same as used in conducted emission test.

Please refer to Section 5.3.

6.4 Operating Condition of EUT

Same as conducted emission test, which is listed in Section 5.4 except the test set up replaced as Section 6.2.

6.5 Test Procedure

1) The radiated emissions test was conducted in a semi-anechoic chamber.

2) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.

3) Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT.

4) The frequencies of maximum emission were determined in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.

5) The bandwidth setting on the field strength meter (R&S Test Receiver ESCI) is set at 120kHz.

6) The frequency range from 30MHz to 1000MHz is checked.


6.6 Test Result

PASS, Please refer to the following page.



Radiation Emission Test Data 9 kHz~30 MHz

Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	/
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

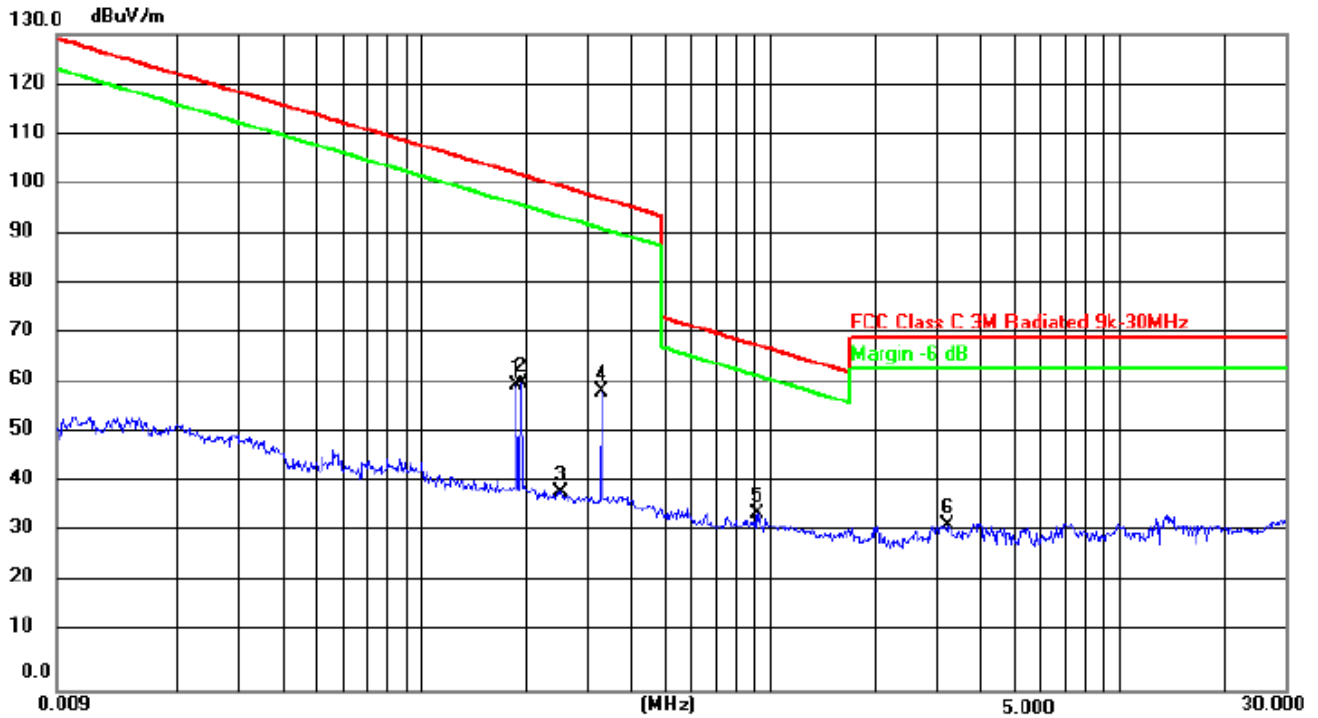

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
0.1869	60.56	10.22	70.78	102.44	-31.66	Peak
0.1930	60.78	10.47	71.25	102.16	-30.91	Peak
0.2503	38.36	10.88	49.24	99.88	-50.64	Peak
0.3271	59.24	10.23	69.47	97.54	-28.07	Peak
0.9163	32.19	10.18	42.37	68.48	-26.11	Peak
3.2235	31.69	10.35	42.04	70	-27.96	Peak

Note:


Pre-scan in the all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Margin = Emission Level(Meter Reading+ Factor) - Limit.




Radiation Emission Test Data			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60HZ	Test Mode:	Mode 1

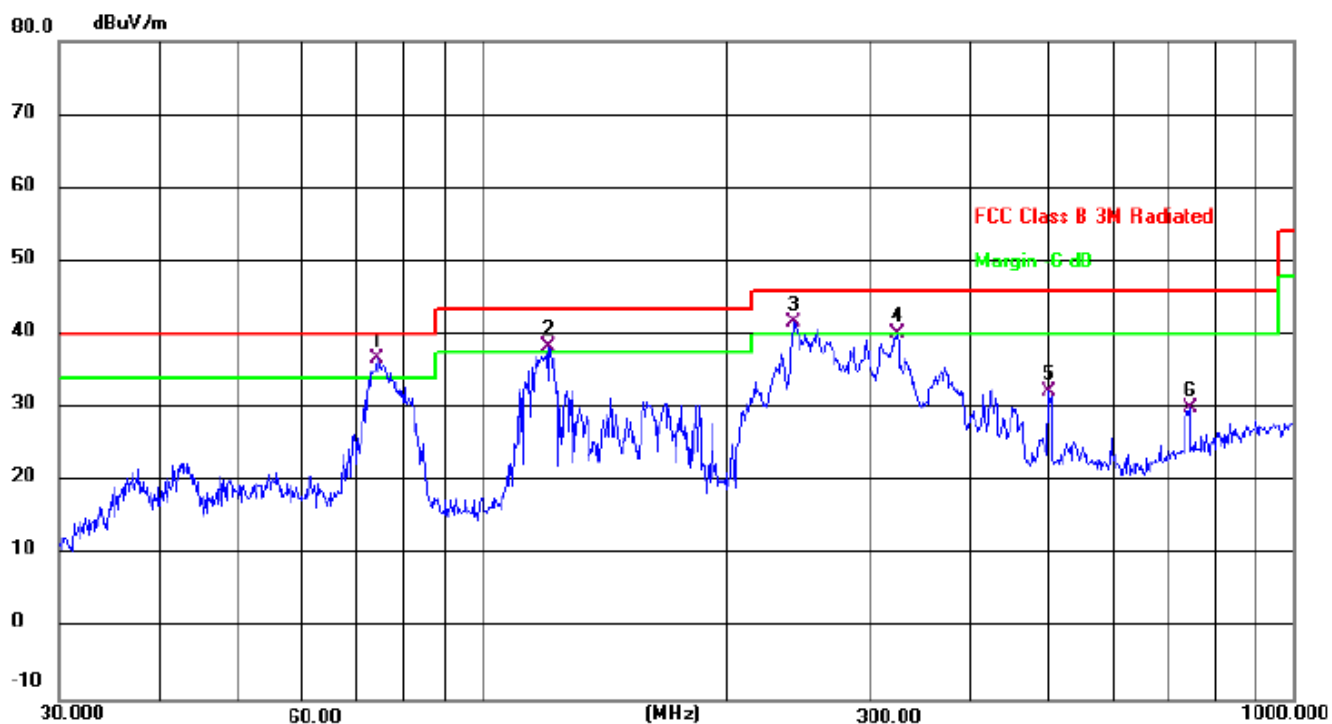

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	74.1350	52.93	-16.28	36.65	40.00	-3.35	QP
2	!	120.6991	54.72	-16.53	38.19	43.50	-5.31	QP
3	!	241.6760	54.62	-13.06	41.56	46.00	-4.44	QP
4		324.4560	50.98	-11.02	39.96	46.00	-6.04	QP
5		499.4245	39.73	-7.56	32.17	46.00	-13.83	QP
6		744.8659	32.99	-3.15	29.84	46.00	-16.16	QP



Radiation Emission Test Data			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Vertical
Test Voltage:	AC 120V/60HZ	Test Mode:	Mode 1

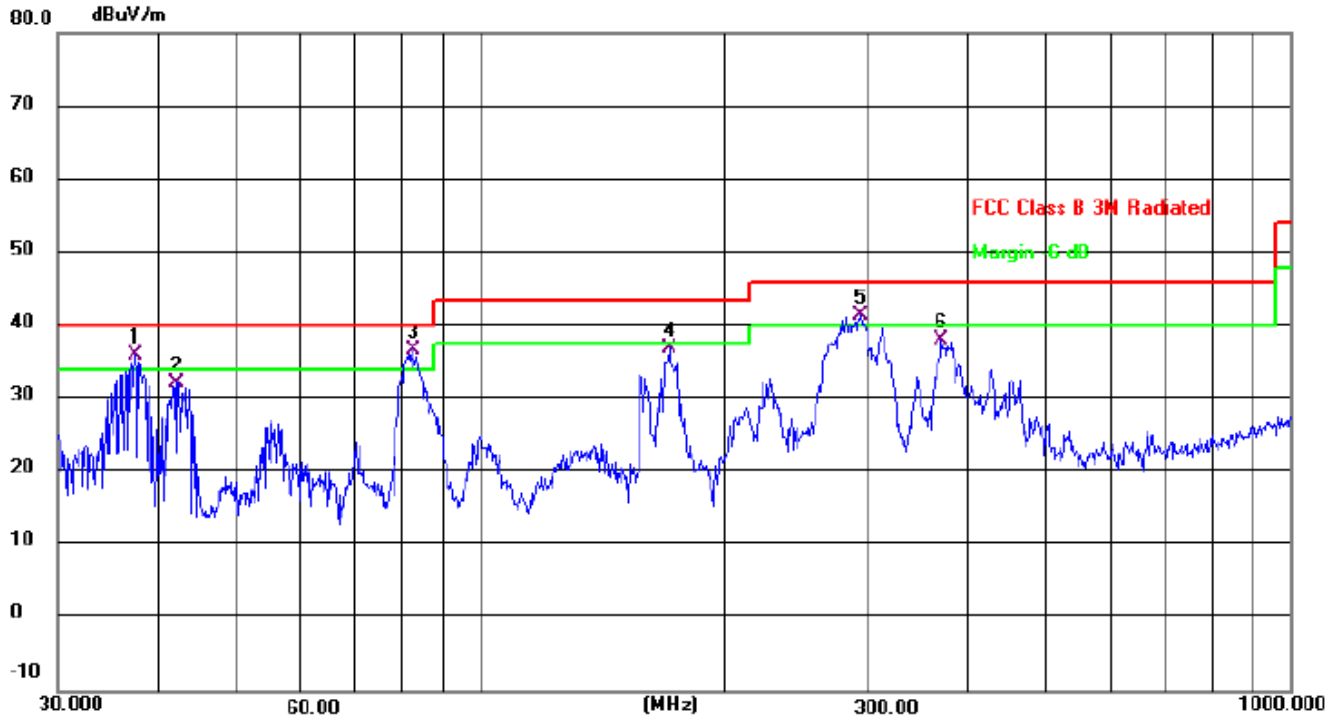

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	!	37.4164	50.41	-14.41	36.00	40.00	-4.00	QP
2		42.1540	45.86	-13.70	32.16	40.00	-7.84	QP
3	*	82.3588	54.02	-17.41	36.61	40.00	-3.39	QP
4		170.7923	53.34	-16.50	36.84	43.50	-6.66	QP
5	!	294.1136	53.06	-11.57	41.49	46.00	-4.51	QP
6		370.7022	48.33	-10.26	38.07	46.00	-7.93	QP

Remarks:

- 1.Final Level =Receiver Read level + Correct factor (Antenna Factor + Cable Loss – Preamplifier Factor)
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.



7. BANDWIDTH TEST

7.1 TEST SETUP



1. Set RBW = 3kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.


7.2 TEST SETUP



7.3 TEST Result

Frequency (kHz)	20dB bandwidth (kHz)	Result
187.8	2.767	Pass
188.0	8.893	Pass
326.6	8.036	Pass

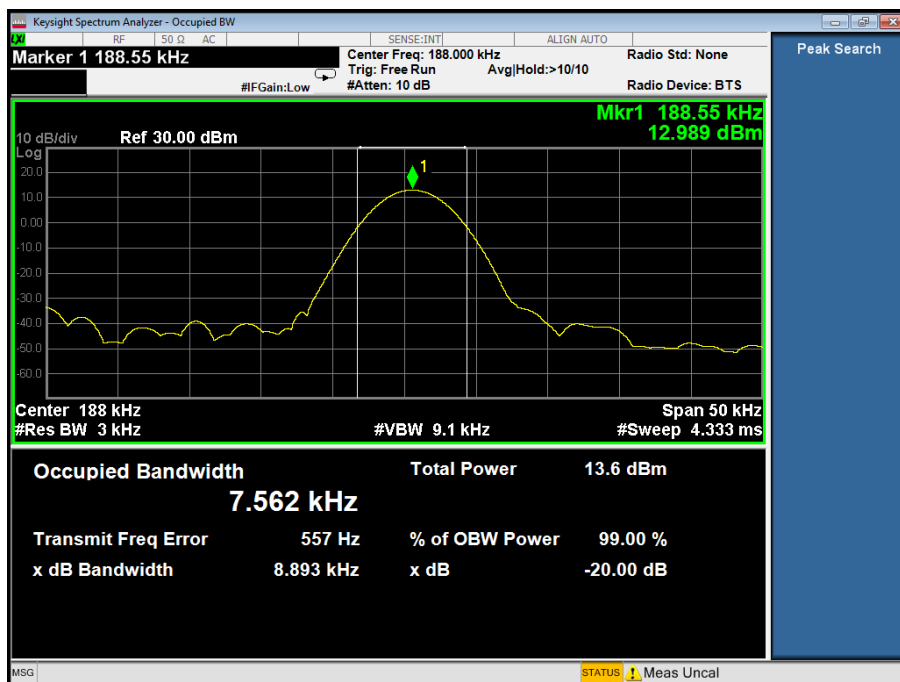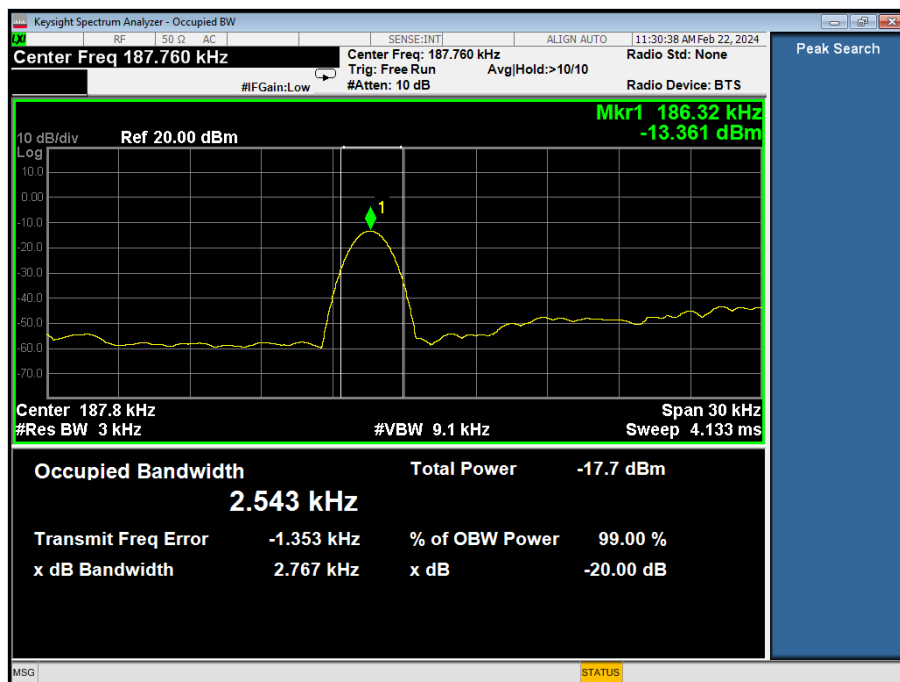

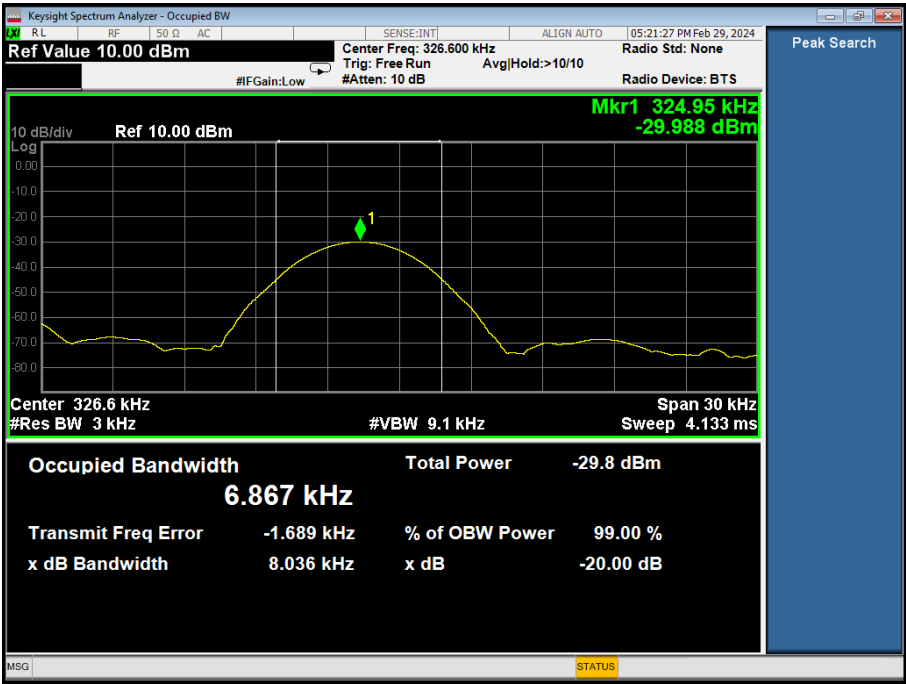



8. ANTENNA REQUIREMENT

a) STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

b) EUT ANTENNA

The EUT antenna is Inductive loop coil Antenna. It comply with the standard requirement.

9. SETUP PHOTOGRAPHS

Reference to the appendix I for details.

10. EUT PHOTOGRAPHS

Reference to the appendix II for details.

***** END OF REPORT *****