



**FCC CFR47 CERTIFICATION
CLASS II PERMISSIVE CHANGE
TEST REPORT**

FOR

PCI EXPRESS 802.11A/B/G TRANSCEIVER

MODEL NUMBER: PA3503U-1MPC

FCC ID: CJ6UPA3503WL

REPORT NUMBER: 06U10442-1

ISSUE DATE: AUGUST 11, 2006

Prepared for

**TOSHIBA CORPORATION DIGITAL MEDIA NETWORK COMPANY
OME COMPLEX, 2-9, SUEHIRO-CHO
TOKYO, 198-8710, JAPAN**

Prepared by

**COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD,
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888**



LAB CODE:200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	8/11/2006	Initial Issue	A. Ilarina

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY.....	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>5</i>
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>5</i>
5. EQUIPMENT UNDER TEST.....	6
5.1. <i>DESCRIPTION OF EUT</i>	<i>6</i>
5.2. <i>DESCRIPTION OF AVAILABLE ANTENNAS.....</i>	<i>6</i>
5.3. <i>DESCRIPTION OF CLASS II PERMISSIVE CHANGE.....</i>	<i>6</i>
5.4. <i>SOFTWARE AND FIRMWARE</i>	<i>6</i>
5.5. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>6</i>
5.6. <i>DESCRIPTION OF TEST SETUP</i>	<i>7</i>
6. TEST AND MEASUREMENT EQUIPMENT	9
7. LIMITS AND RESULTS	10
7.1. <i>CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND</i>	<i>10</i>
7.1.1. <i>AVERAGE POWER.....</i>	<i>10</i>
7.2. <i>CHANNEL TESTS FOR THE 5725 TO 5850 MHz BAND</i>	<i>11</i>
7.2.1. <i>AVERAGE POWER.....</i>	<i>11</i>
7.3. <i>RADIATED EMISSIONS.....</i>	<i>12</i>
7.3.1. <i>TRANSMITTER RADIATED SPURIOUS EMISSIONS</i>	<i>12</i>
7.3.2. <i>TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND</i>	<i>15</i>
7.3.3. <i>TRANSMITTER ABOVE 1 GHz FOR 5725 TO 5850 MHz BAND</i>	<i>33</i>
7.3.4. <i>WORST-CASE RADIATED EMISSIONS BELOW 1 GHz</i>	<i>34</i>
7.4. <i>POWERLINE CONDUCTED EMISSIONS</i>	<i>42</i>
8. SETUP PHOTOS	47

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: TOSHIBA CORPORATION DIGITAL MEDIA NETWORK COMPANY
OME COMPLEX, 2-9, SUEHIRO-CHO
TOKYO, 198-8710, JAPAN

EUT DESCRIPTION: PCI Express 802.11a/b/g transceiver

MODEL: PA3503U-1MPC

SERIAL NUMBER: 6159Y031916

DATE TESTED: AUGUST 04 TO AUGUST 07 2006

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



ALVIN ILARINA
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES



VIEN TRAN
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 802.11a/b/g transceiver

The radio module is manufactured by Atheros Communications Inc.

5.2. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes PIFA antenna model number HFT40 manufactured by Hitachi Cable, Ltd with a peak gain of 0.32 dBi in the 2400-2500MHz band and 3.06 dBi in the 5725-5850MHz band.

5.3. DESCRIPTION OF CLASS II PERMISSIVE CHANGE

Change #1	The subject approved module is being used in a different host.
Change #2	Collocation with CDMA CELL-PCS module.
Change #3	Collocation with Bluetooth Module.

5.4. SOFTWARE AND FIRMWARE

The EUT driver software installed in the host support equipment during testing was Atheros Radio Test, Revision 5.3 Build #11.

The test utility software used during testing was ART-V53_build 13.

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emissions tests above 1 GHz were performed on each applicable L/M/H channel.

The worst-case channel is determined as the channel with the highest output power. The highest measured output power was at 2437 MHz in 11g mode. The worst-case data rate for this channel is determined to be 6 Mb/s, based on previous experience with Atheros WLAN product design architectures.

Thus worst-case radiated emissions below 1 GHz and power line conducted emissions tests were made at 2437 MHz in the 802.11g mode, at 6 Mb/s.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Toshiba	PSR20U-AAAA4	46026672J	DoC
AC/DC Adapter	Toshiba	PA3283U-3ACA	G71000043310	DoC


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	AC	Unshielded	2m	N/A
2	DC	1	DC	Unshielded	2m	N/A

TEST SETUP

The EUT is installed in a host laptop computer. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

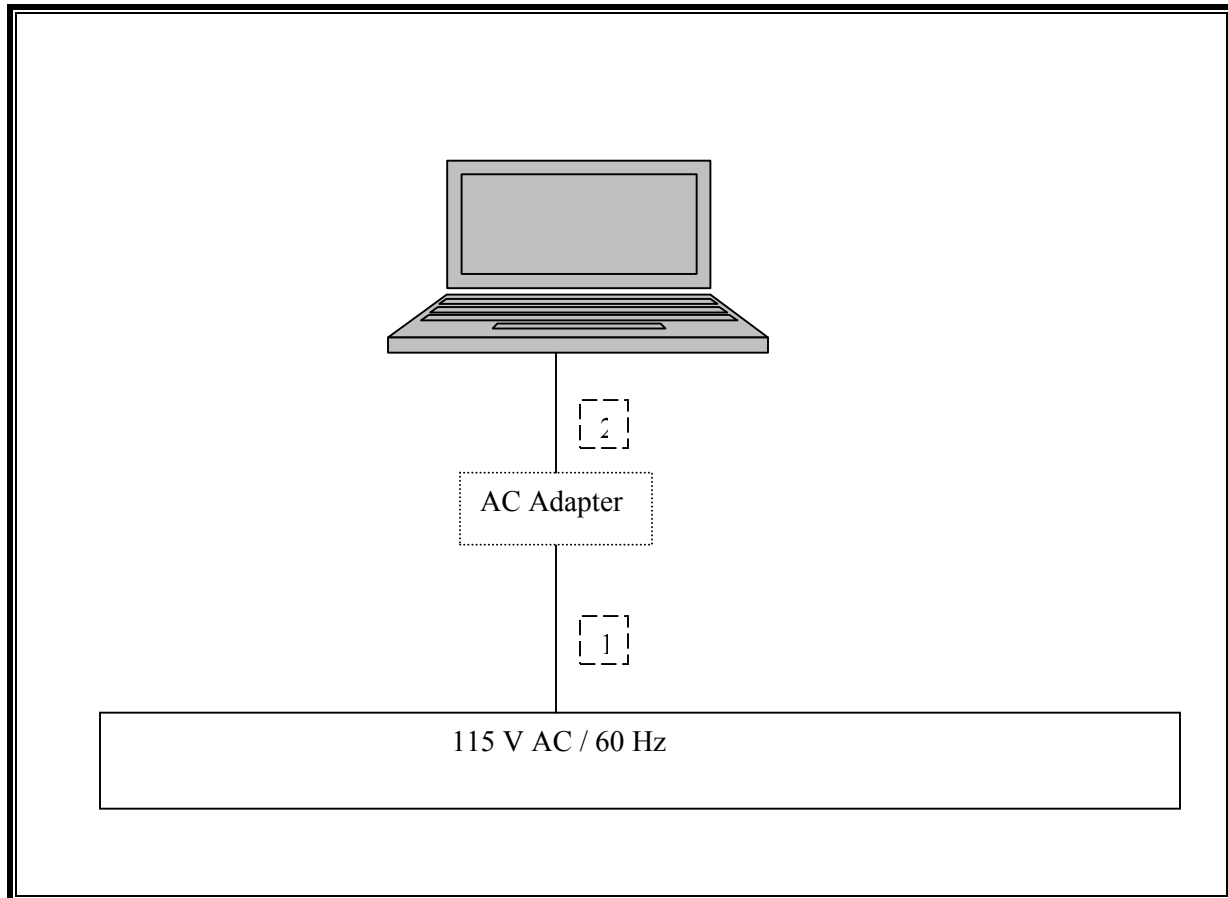

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
EMI Receiver, 9 kHz ~ 2.9 GHz	Agilent / HP	8542E	3942A00286	02/04/2007
RF Filter Section	Agilent / HP	85420E	3705A00256	02/04/2007
Antenna, Bilog 30 MHz ~ 2 Ghz	Sunol Sciences	JB1	A121003	09/03/2006
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	8379443	08/30/2006
EMI Test Receiver	R & S	ESHS 20	827129/006	06/03/2007
Antenna, Horn 1 ~ 18 GHz	ETS	3117	29301	04/22/2007
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	6717	04/22/2007
Preamplifier, 1 ~ 26 GHz	Agilent / HP	8449B	3008A00931	06/24/2007
Spectrum Analyzer 3 Hz ~ 44 GHz	Agilent / HP	E4446A	US42510266	10/19/2006
4.0 GHz High Pass Filter	Micro-Tronics	HPM13351	002	C.N.R.
7.6 GHz High Pass Filter	Micro-Tronics	HPM13195	001	C.N.R.
Preamplifier, 26 ~ 40 GHz	Miteq	NSP4000-SP2	924343	08/18/2006
Antenna, Horn 26 ~ 40 GHz	ARA	MWH-2640/B	1029	12/29/2006

7. LIMITS AND RESULTS

7.1. CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND

7.1.1. AVERAGE POWER

AVERAGE POWER LIMIT

None: for reporting purposes only. The average power for each channel was set to the average power specified in the original filing.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 11.6 dB (including 10 dB pad and 1.6 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

802.11b Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	17.70
Middle	2437	17.80
High	2462	18.10

802.11g Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	16.60
Middle	2437	18.80
High	2462	14.90

7.2. CHANNEL TESTS FOR THE 5725 TO 5850 MHz BAND

7.2.1. AVERAGE POWER

AVERAGE POWER LIMIT

None: for reporting purposes only. The average power for each channel was set to the average power specified in the original filing.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 12.2 dB (including 10 dB pad and 2.2 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

802.11a Mode

Channel	Frequency (MHz)	Average Power (dBm)
Low	5745	18.10
Middle	5785	18.10
High	5825	18.40

7.3. RADIATED EMISSIONS

7.3.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 25 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

The EUT was investigated in the mobile condition and portable condition in the X, Y, and Z orientations. The worst case is reported.


7.3.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

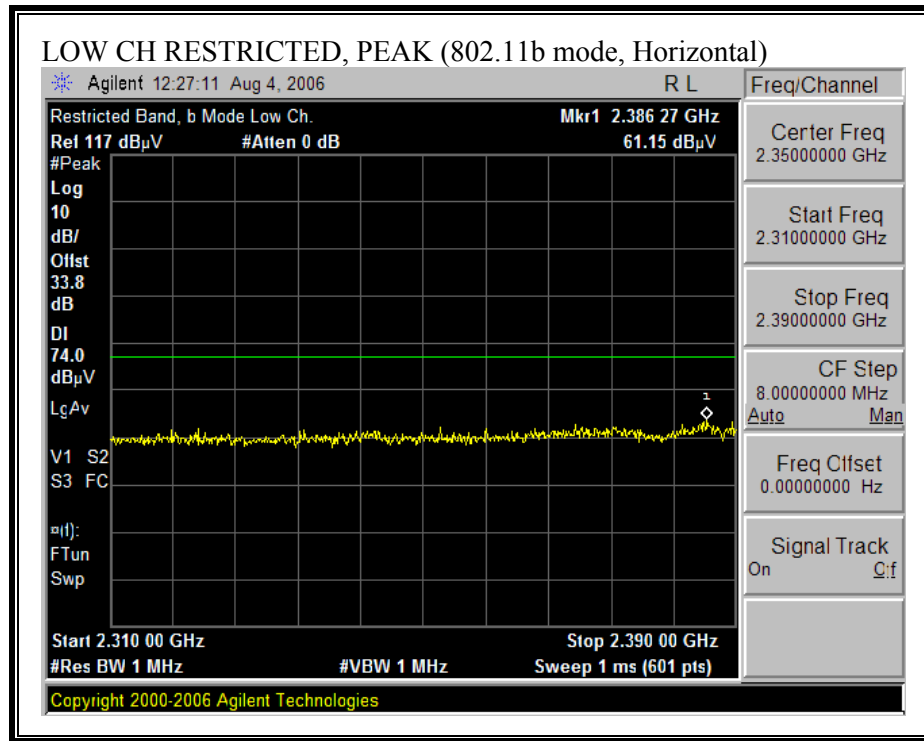

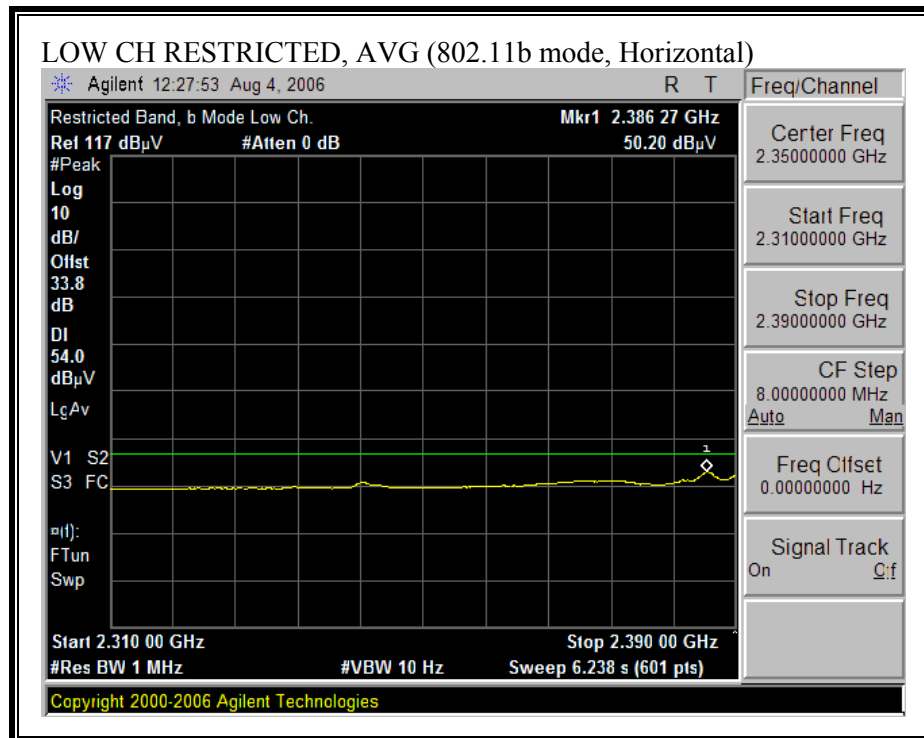



RESTRICTED BANDEGE (b MODE, LOW CHANNEL, VERTICAL)

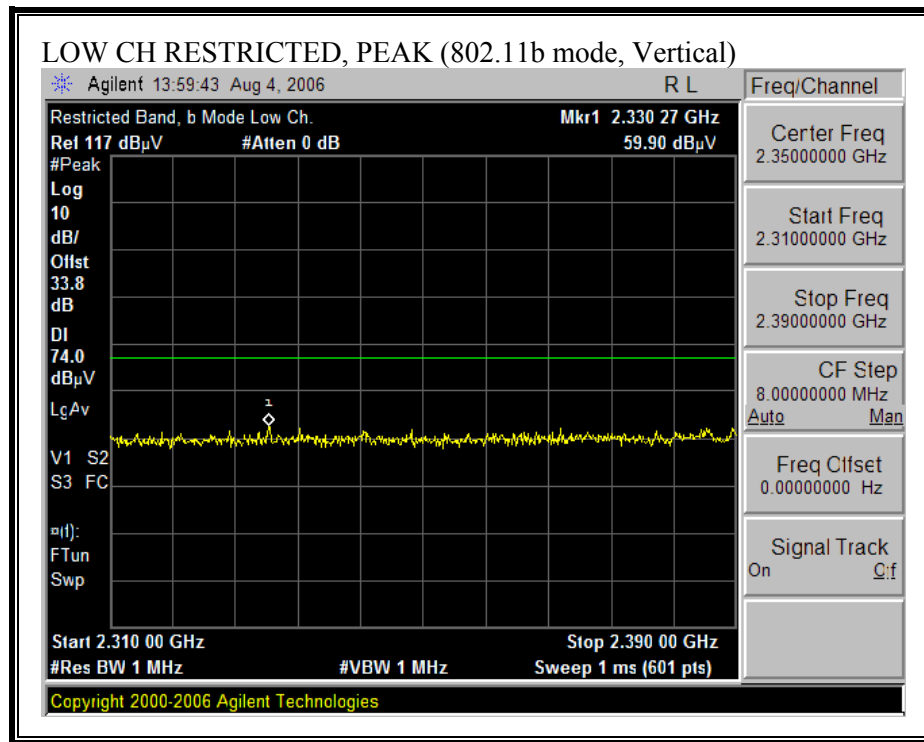

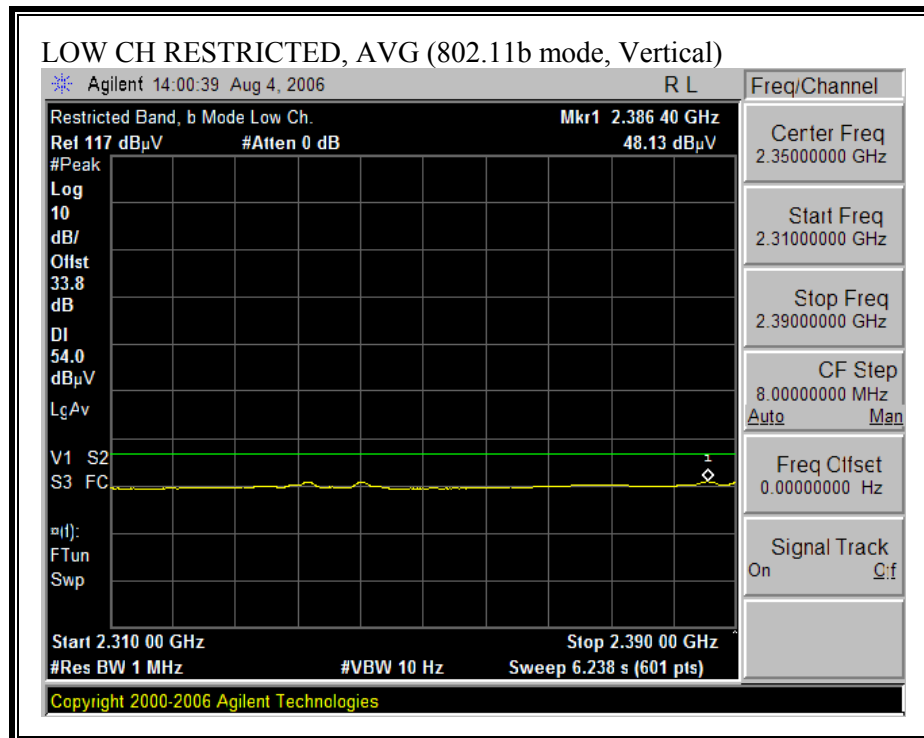



RESTRICTED BANDEGE (b MODE, HIGH CHANNEL, HORIZONTAL)

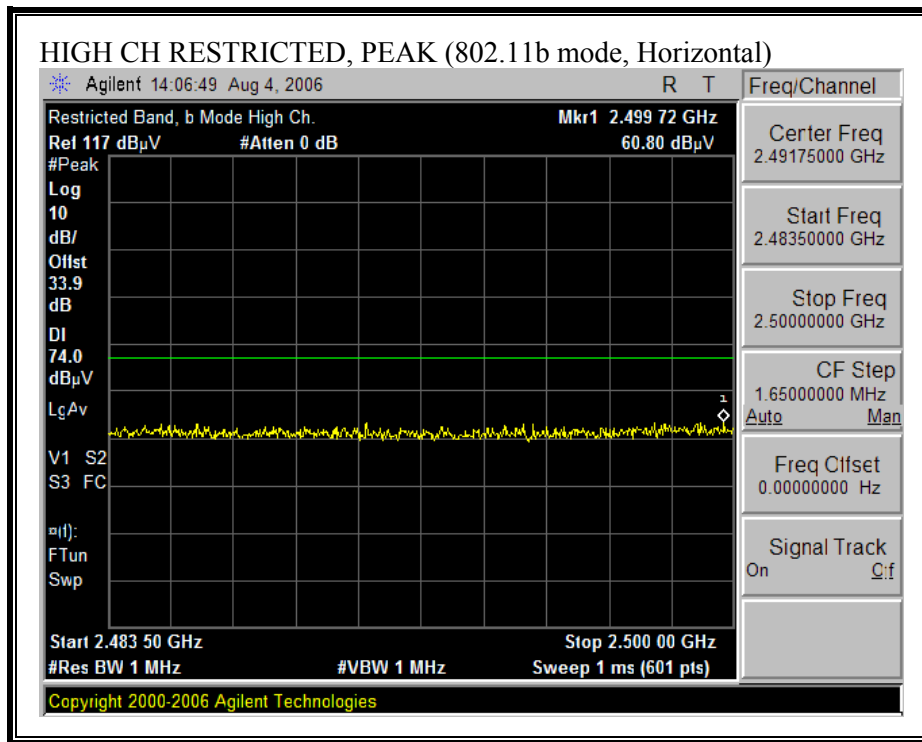

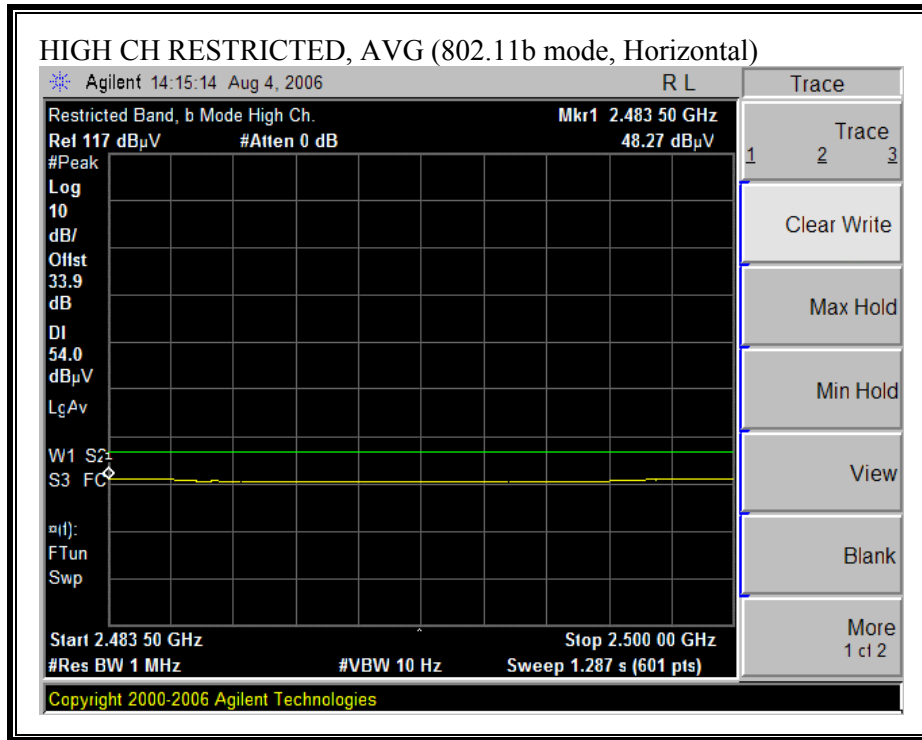

RESTRICTED BANDEGE (b MODE, HIGH CHANNEL, VERTICAL)

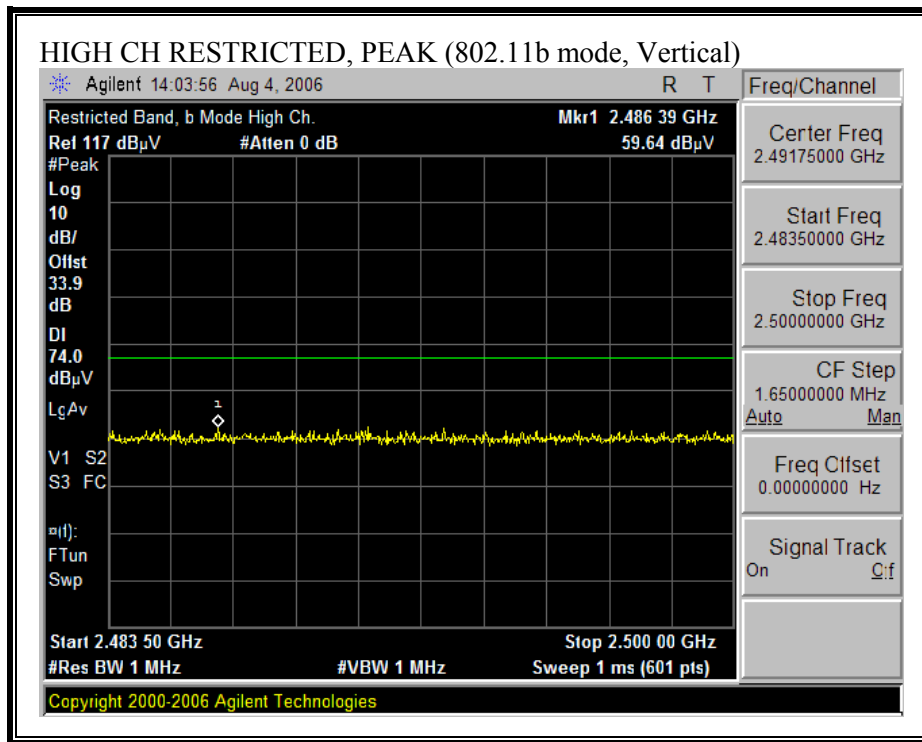


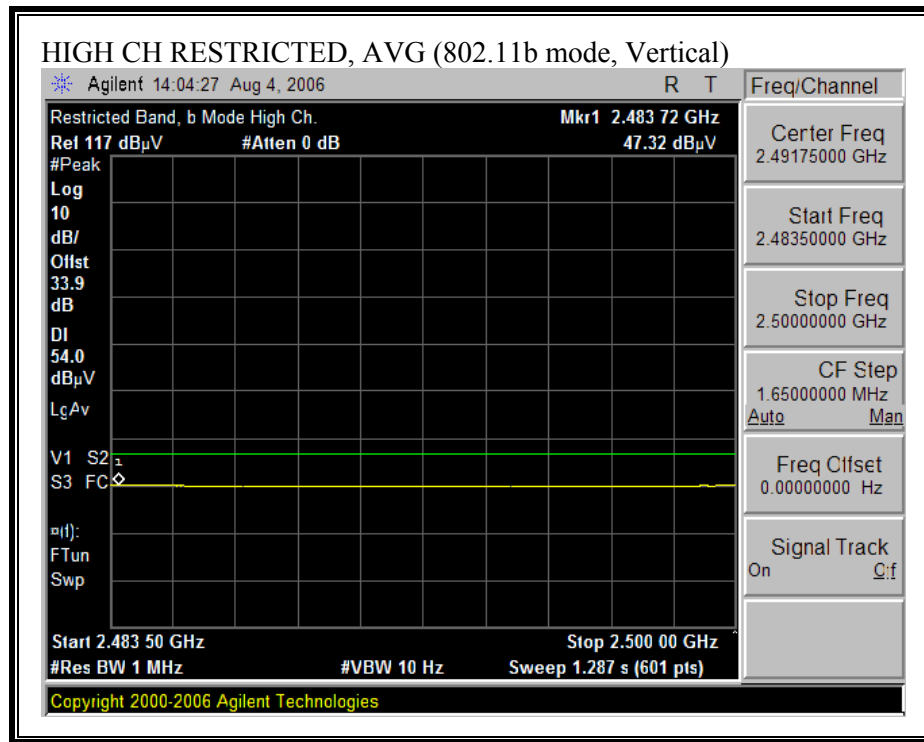


HARMONICS AND SPURIOUS EMISSIONS (b MODE)


High Frequency Measurement																
Compliance Certification Services, Morgan Hill Open Field Site																
Company: TOSHIBA Project #: 06U10442 Date: 08/04/06 Test Engineer: VIEN TRAN Configuration: WLAN card inside laptop Mode: Tx 11b																
Test Equipment:																
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit				
T119; S/N: 29301 @3m			T144 Miteq 3008A00931									FCC 15.205				
Hi Frequency Cables																
2 foot cable			3 foot cable			12 foot cable			HPF			Reject Filter			Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz	
			Vien 187215002			Vien 197209005			HPF_4.0GHz							
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	
LOW CH, 2412 MHz																
4.824	3.0	48.7	43.4	33.7	2.9	-36.5	0.0	0.6	49.5	44.2	74	54	-24.5	-9.8	H	
4.824	3.0	45.8	38.5	33.7	2.9	-36.5	0.0	0.6	46.6	39.3	74	54	-27.4	-14.7	V	
MID CH, 2437 MHz																
4.874	3.0	52.1	48.7	33.7	3.0	-36.5	0.0	0.6	53.0	49.6	74	54	-21.0	-4.4	H	
7.311	3.0	46.6	37.2	35.2	4.2	-36.2	0.0	0.6	50.4	41.0	74	54	-23.6	-13.0	H	
4.874	3.0	49.6	45.7	33.7	3.0	-36.5	0.0	0.6	50.5	46.6	74	54	-23.5	-7.4	V	
7.311	3.0	45.6	37.0	35.2	4.2	-36.2	0.0	0.6	49.4	40.8	74	54	-24.6	-13.2	V	
HI CH, 2462MHz																
4.924	3.0	52.5	50.1	33.8	3.1	-36.5	0.0	0.6	53.5	51.1	74	54	-20.5	-2.9	H	
7.386	3.0	45.8	37.7	35.2	4.2	-36.2	0.0	0.6	49.6	41.5	74	54	-24.4	-12.5	H	
4.924	3.0	49.9	45.7	33.8	3.1	-36.5	0.0	0.6	50.9	46.7	74	54	-23.1	-7.3	V	
7.386	3.0	44.8	35.5	35.2	4.2	-36.2	0.0	0.6	48.6	39.3	74	54	-25.4	-14.7	V	
No other emissions were detected above system noise floor																
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss					HPF	High Pass Filter									


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

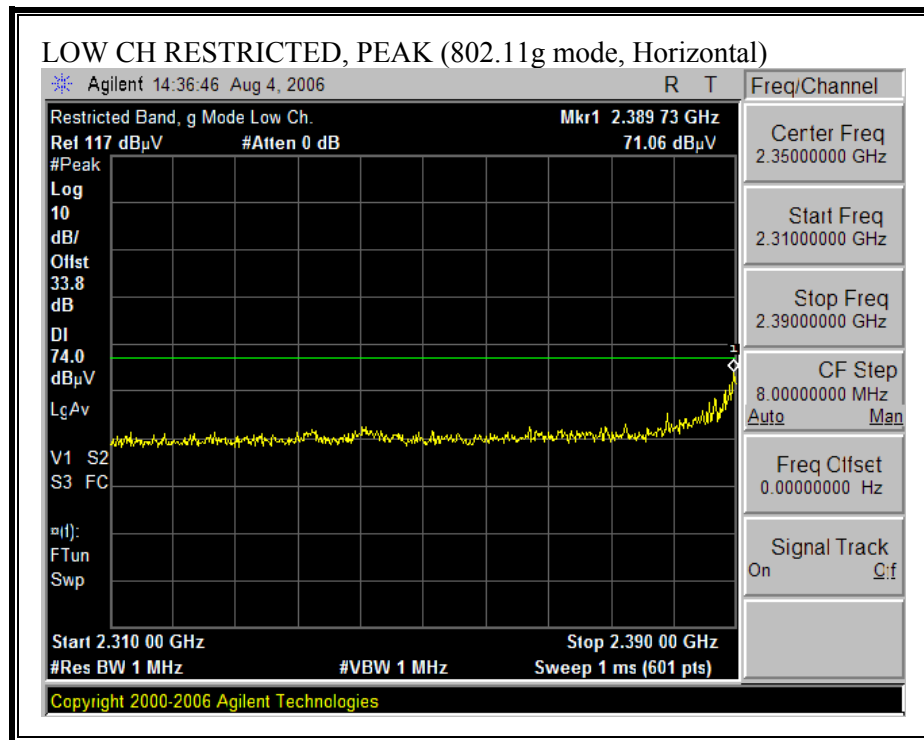

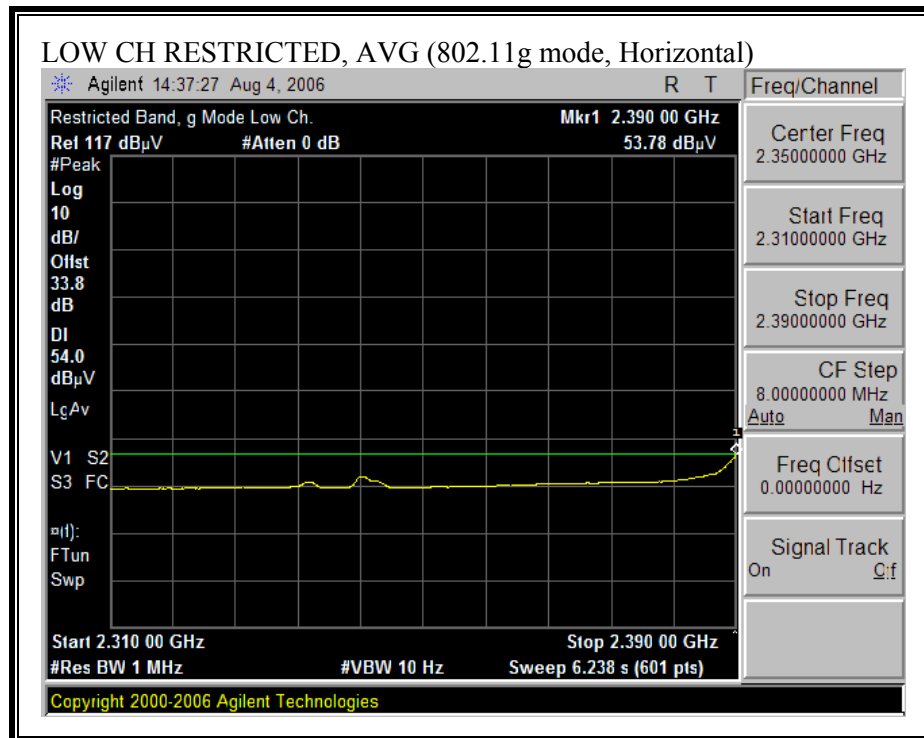



RESTRICTED BANDEGE (g MODE, LOW CHANNEL, VERTICAL)

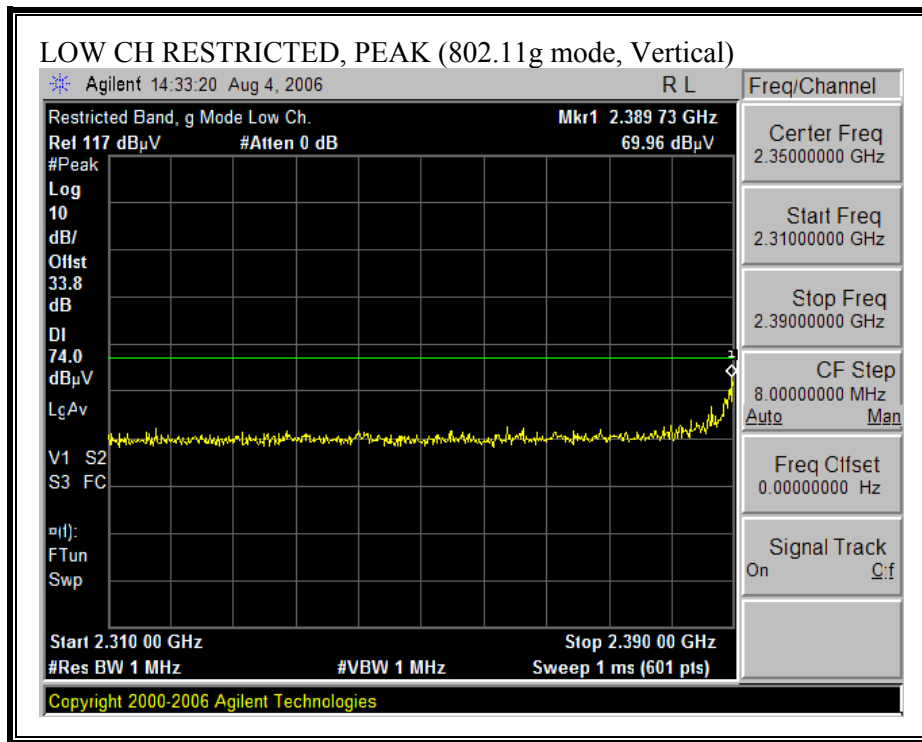

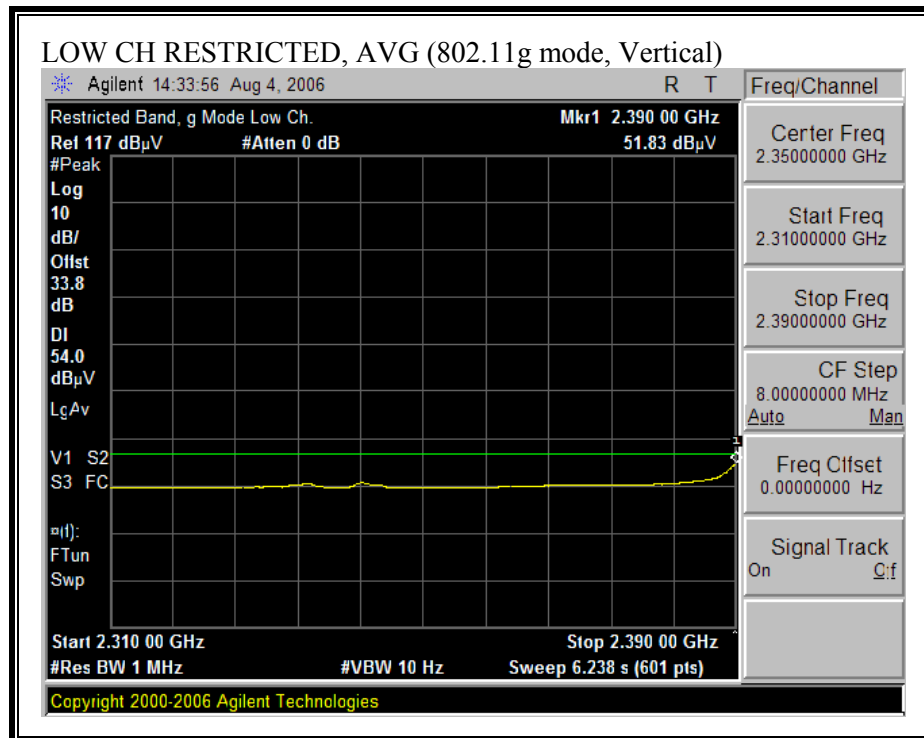



RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

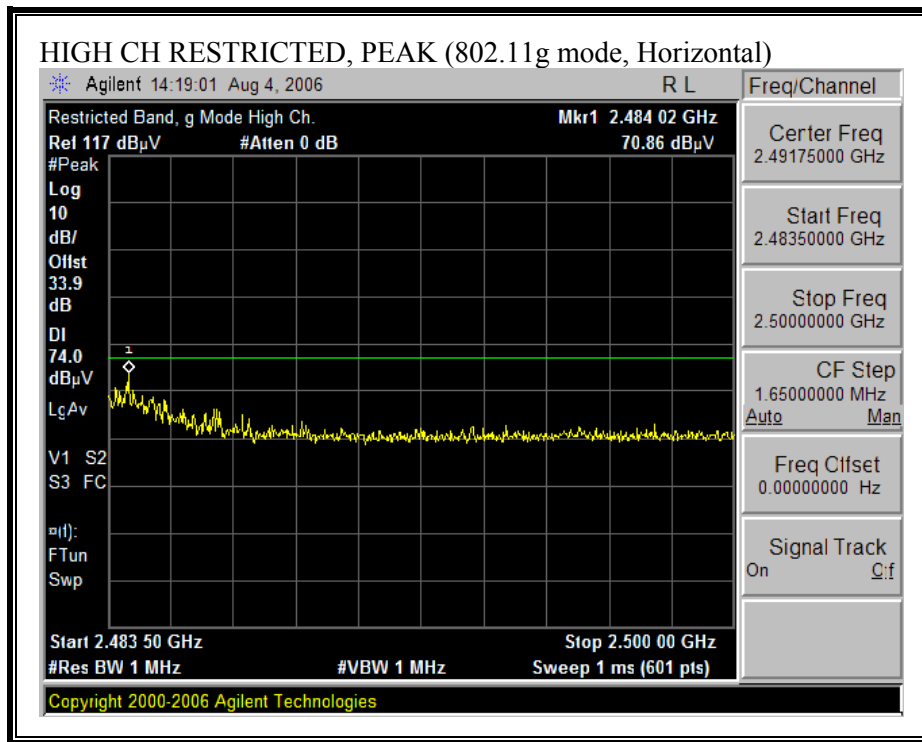

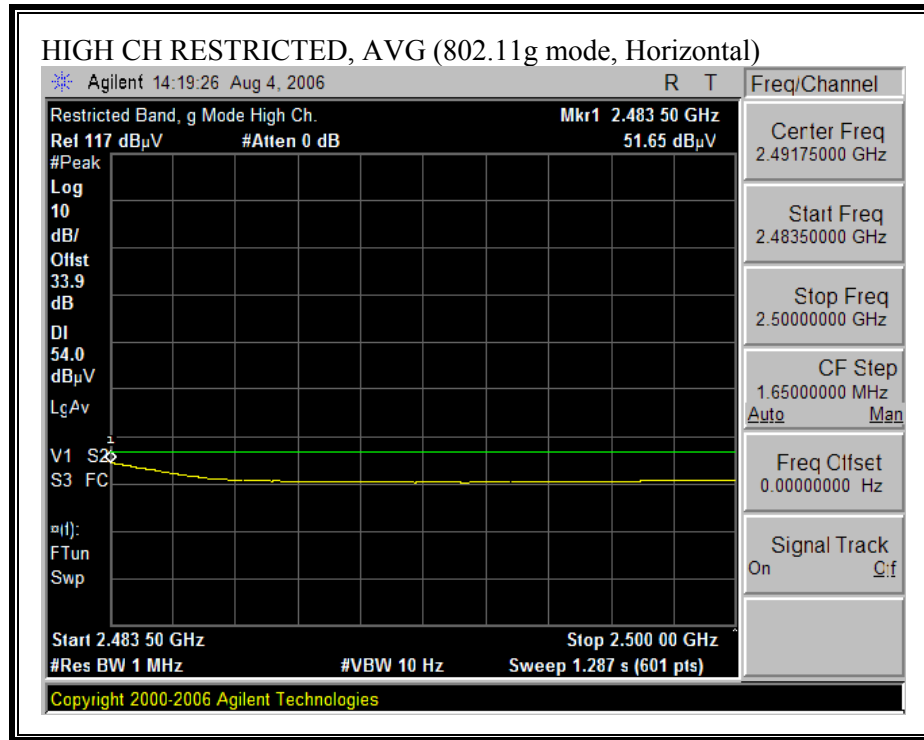

RESTRICTED BANDEGE (g MODE, HIGH CHANNEL, VERTICAL)

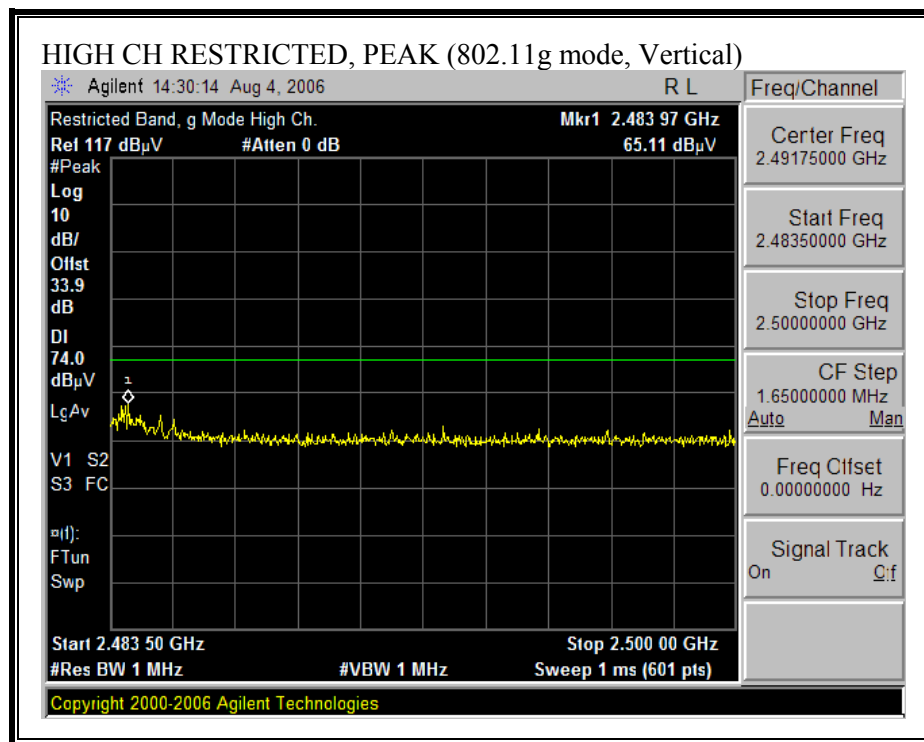

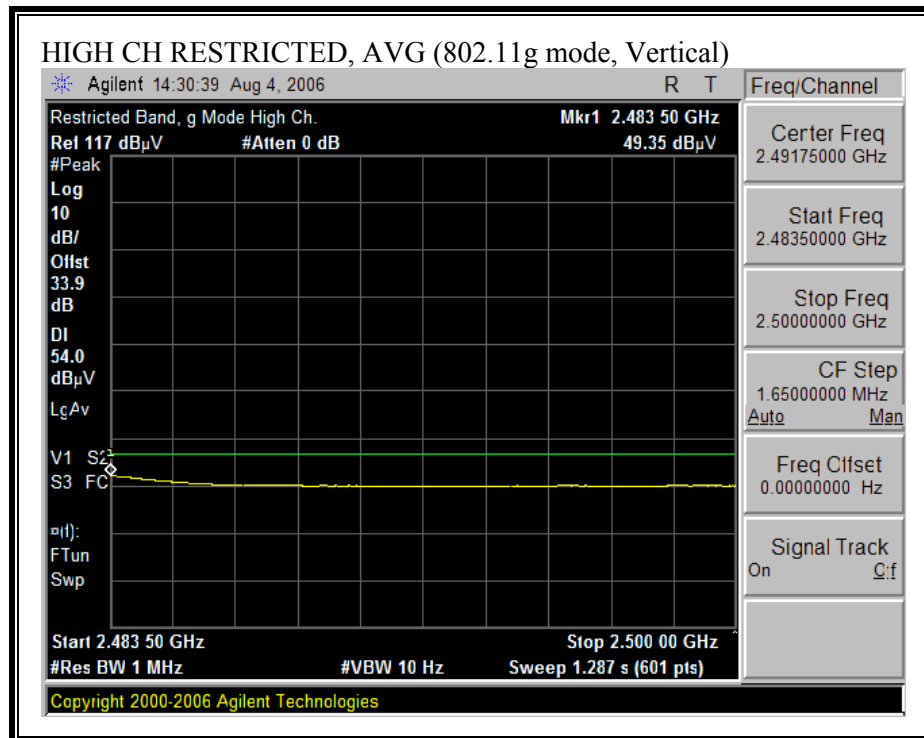

HARMONICS AND SPURIOUS EMISSIONS (g MODE)

High Frequency Measurement																
Compliance Certification Services, Morgan Hill Open Field Site																
Company: TOSHIBA Project #: 06U10442 Date: 08/04/06 Test Engineer: VIEN TRAN Configuration: WLAN card inside laptop Mode: Tx 11g																
Test Equipment:																
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit				
T119; S/N: 29301 @3m			T144 Miteq 3008A00931									FCC 15.205				
Hi Frequency Cables																
2 foot cable			3 foot cable			12 foot cable			HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz			
			Vien 187215002			Vien 197209005			HPF_4.0GHz							
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	
LOW CH, 2412 MHz																
4.824	3.0	45.6	33.8	33.7	2.9	-36.5	0.0	0.6	46.4	34.6	74	54	-27.6	-19.4	H	
4.824	3.0	43.9	32.4	33.7	2.9	-36.5	0.0	0.6	44.7	33.2	74	54	-29.3	-20.8	V	
MID CH, 2437 MHz																
4.874	3.0	48.4	36.7	33.7	3.0	-36.5	0.0	0.6	49.3	37.6	74	54	-24.7	-16.4	H	
7.311	3.0	45.8	35.8	35.2	4.2	-36.2	0.0	0.6	49.6	39.6	74	54	-24.4	-14.4	H	
4.874	3.0	45.1	33.4	33.7	3.0	-36.5	0.0	0.6	46.0	34.3	74	54	-28.0	-19.7	V	
7.311	3.0	43.3	32.6	35.2	4.2	-36.2	0.0	0.6	47.1	36.4	74	54	-26.9	-17.6	V	
HI CH, 2462MHz																
4.924	3.0	45.9	35.3	33.8	3.1	-36.5	0.0	0.6	46.9	36.3	74	54	-27.1	-17.7	H	
7.386	3.0	42.8	32.2	35.2	4.2	-36.2	0.0	0.6	46.6	36.0	74	54	-27.4	-18.0	H	
4.924	3.0	42.9	31.8	33.8	3.1	-36.5	0.0	0.6	43.9	32.8	74	54	-30.1	-21.2	V	
7.386	3.0	43.9	32.8	35.2	4.2	-36.2	0.0	0.6	47.7	36.6	74	54	-26.3	-17.4	V	
No other emissions were detected above system noise floor																
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss					HPF	High Pass Filter									


7.3.3. TRANSMITTER ABOVE 1 GHz FOR 5725 TO 5850 MHz BAND

HARMONICS AND SPURIOUS EMISSIONS (802.11a MODE)

High Frequency Measurement																
Compliance Certification Services, Morgan Hill Open Field Site																
Company: TOSHIBA																
Project #: 06U10442																
Date: 08/05/06																
Test Engineer: VIEN TRAN																
Configuration: WLAN card inside laptop																
Mode: Tx 11a 5.8 GHz																
Test Equipment:																
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit				
T73; S/N: 6717 @3m			T144 Miteq 3008A00931									FCC 15.205				
Hi Frequency Cables																
2 foot cable			3 foot cable			12 foot cable			HPF			Reject Filter			Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz	
			Vien 187215002			Vien 197209005			HPF_7.6GHz							
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	
LOW CH, 5745 MHz																
11.490	3.0	46.9	34.4	37.5	4.8	-35.9	0.0	0.7	54.0	41.5	74	54	-20.0	-12.5	H	
11.490	3.0	45.2	35.4	37.5	4.8	-35.9	0.0	0.7	52.3	42.5	74	54	-21.7	-11.5	V	
MID CH, 5785 MHz																
11.530	3.0	47.7	36.5	37.5	4.8	-35.8	0.0	0.7	54.9	43.7	74	54	-19.1	-10.3	H	
11.530	3.0	46.8	37.2	37.5	4.8	-35.8	0.0	0.7	54.0	44.4	74	54	-20.0	-9.6	V	
HI CH, 5825 MHz																
11.650	3.0	48.0	36.8	37.5	4.8	-35.7	0.0	0.7	55.3	44.1	74	54	-18.7	-9.9	H	
11.650	3.0	48.9	39.6	37.5	4.8	-35.7	0.0	0.7	56.2	46.9	74	54	-17.8	-7.1	V	
No other emissions were detected above system noise floor																
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss					HPF	High Pass Filter									

7.3.4. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, 11g, HORIZONTAL)

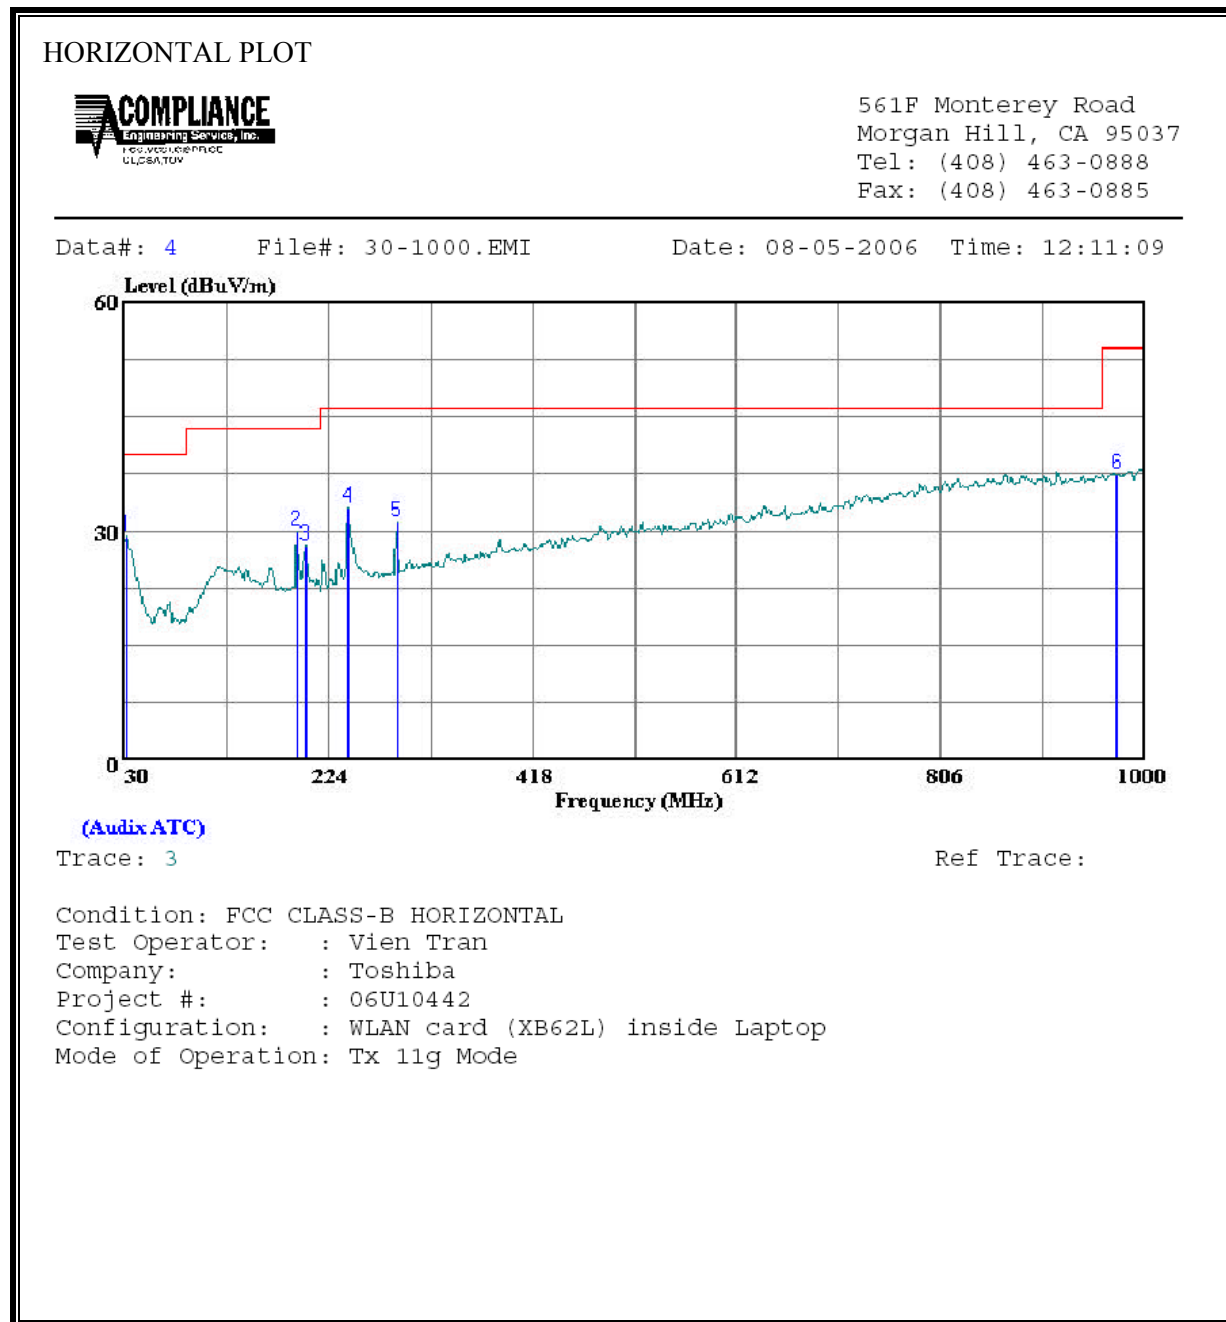

HORIZONTAL DATA

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	30.970	8.79	20.45	29.24	40.00	-10.76	Peak
2	193.930	16.40	13.56	29.96	43.50	-13.54	Peak
3	201.690	13.65	14.32	27.97	43.50	-15.53	Peak
4	242.430	19.49	13.63	33.12	46.00	-12.88	Peak
5	288.990	15.87	15.26	31.13	46.00	-14.87	Peak
6	973.810	10.66	26.68	37.33	54.00	-16.67	Peak


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, 11g, VERTICAL)

VERTICAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 2 File#: 30-1000.EMI Date: 08-05-2006 Time: 11:43:55

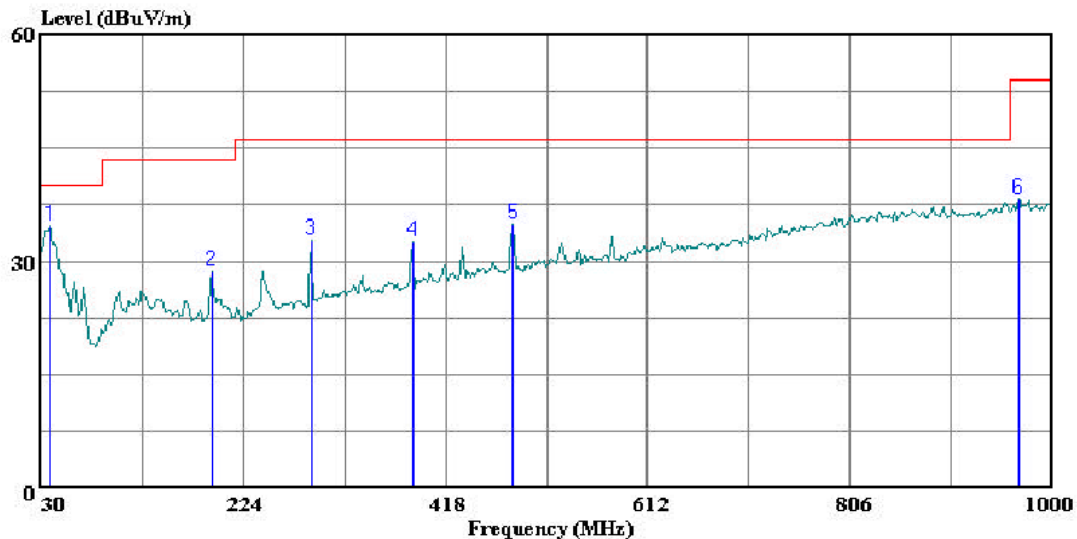

(Auxiliary ATC)

Trace: 1

Ref Trace:

Condition: FCC CLASS-B VERTICAL
Test Operator: : Vien Tran
Company: : Toshiba
Project #: : 06U10442
Configuration: : WLAN card (XB62L) inside Laptop
Mode of Operation: Tx 11g Mode

VERTICAL DATA

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	38.730	18.49	16.12	34.61	40.00	-5.39	Peak
2	193.930	15.00	13.56	28.56	43.50	-14.94	Peak
3	288.990	17.59	15.26	32.85	46.00	-13.15	Peak
4	385.990	14.79	17.73	32.52	46.00	-13.48	Peak
5	482.990	15.02	19.89	34.91	46.00	-11.09	Peak
6	967.990	11.60	26.65	38.25	54.00	-15.75	Peak


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, 11a, HORIZONTAL)

HORIZONTAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 6 File#: 30-1000.EMI Date: 08-05-2006 Time: 12:26:06

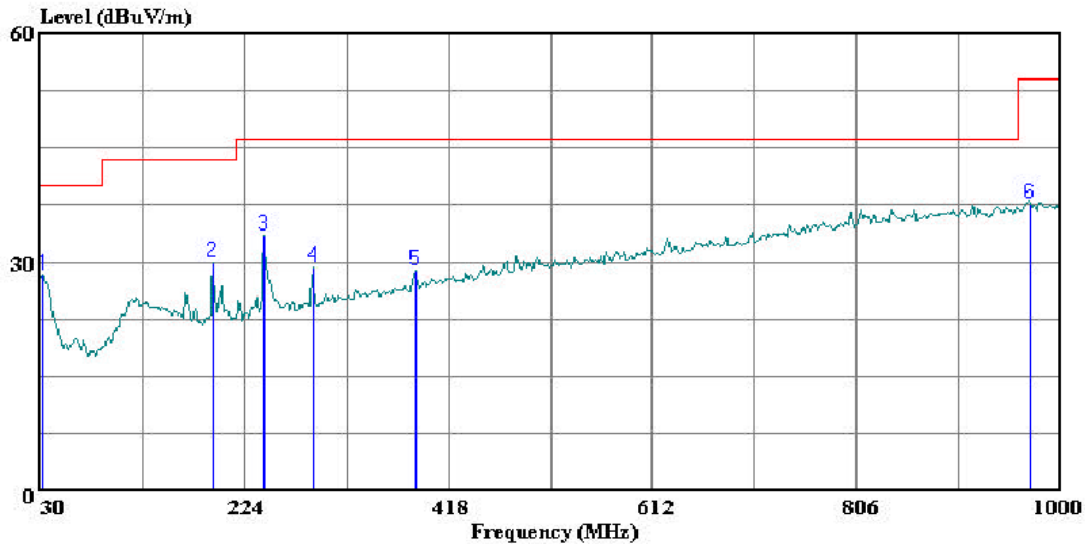

(Audix ATC)

Trace: 5

Ref Trace:

Condition: FCC CLASS-B HORIZONTAL
Test Operator: : Vien Tran
Company: : Toshiba
Project #: : 06U10442
Configuration: : WLAN card (XB62L) inside Laptop
Mode of Operation: Tx 11a Mode

HORIZONTAL DATA

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	31.940	8.35	19.94	28.29	40.00	-11.71	Peak
2	193.930	16.44	13.56	30.00	43.50	-13.50	Peak
3	242.430	19.84	13.63	33.47	46.00	-12.53	Peak
4	288.990	14.09	15.26	29.35	46.00	-16.65	Peak
5	385.990	11.20	17.73	28.93	46.00	-17.07	Peak
6	970.900	11.02	26.67	37.69	54.00	-16.31	Peak


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, 11a, VERTICAL)

VERTICAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 8 File#: 30-1000.EMI Date: 08-05-2006 Time: 12:30:39

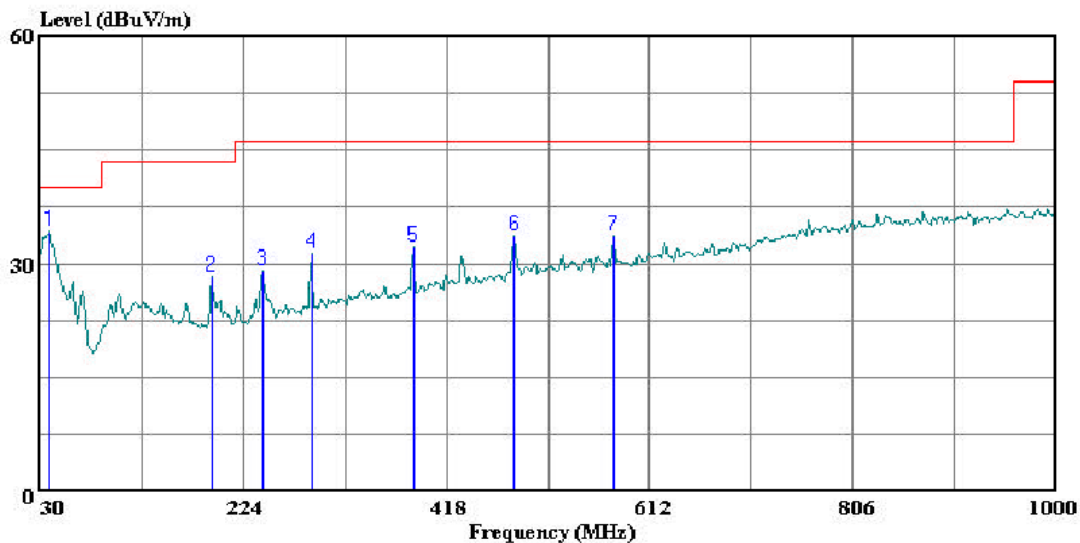

(Audix ATC)

Trace: 7

Ref Trace:

Condition: FCC CLASS-B VERTICAL
Test Operator: : Vien Tran
Company: : Toshiba
Project #: : 06U10442
Configuration: : WLAN card (XB62L) inside Laptop
Mode of Operation: Tx 11a Mode

VERTICAL DATA

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	38.730	18.14	16.12	34.26	40.00	-5.74	Peak
2	193.930	14.74	13.56	28.30	43.50	-15.20	Peak
3	242.430	15.53	13.63	29.16	46.00	-16.84	Peak
4	288.990	16.07	15.26	31.33	46.00	-14.67	Peak
5	385.990	14.37	17.73	32.10	46.00	-13.90	Peak
6	482.990	13.68	19.89	33.57	46.00	-12.43	Peak
7	577.080	12.38	21.22	33.60	46.00	-12.40	Peak

7.4. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

No non-compliance noted:

2.4 GHz BAND

6 WORST EMISSIONS


2.4 GHz BAND									
CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	FCC_B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.15	50.04	--	--	0.00	66.00	56.00	-15.96	-5.96	L1
4.50	36.74	--	--	0.00	56.00	46.00	-19.26	-9.26	L1
14.36	32.30	--	--	0.00	60.00	50.00	-27.70	-17.70	L1
0.15	50.06	--	--	0.00	66.00	56.00	-15.94	-5.94	L2
4.50	36.96	--	--	0.00	56.00	46.00	-19.04	-9.04	L2
14.36	34.00	--	--	0.00	60.00	50.00	-26.00	-16.00	L2
6 Worst Data									

LINE 1 AND LINE 2 RESULTS



Compliance Certification Services
561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0885
Fax: (408) 463-0888

Data#: 30 File#: 06u10442.emi Date: 08-05-2006 Time: 15:08:11

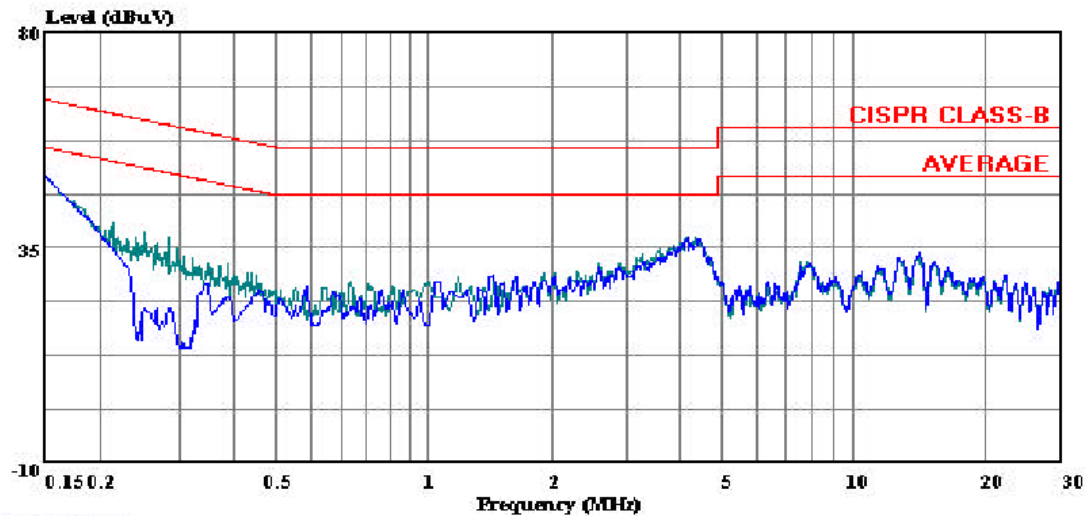

(Auxiliary ATC)

Trace: 22

Ref Trace:

Condition: CISPR CLASS-B
Test Operator : Vien Tran
Project # : 06U10442
Company : Toshiba
EUT configuration: WLAN card inside Laptop
Mode of operation: Tx 11g mode
Power Source : 115VAC, 60 Hz
: Line 1: Peak(Green), Line 2: Peak(Blue)

5.2 GHz BAND

6 WORST EMISSIONS


5.2 GHz BAND									
CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	FCC_B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.15	50.28	--	--	0.00	66.00	56.00	-15.72	-5.72	L1
4.35	36.32	--	--	0.00	56.00	46.00	-19.68	-9.68	L1
14.36	31.58	--	--	0.00	60.00	50.00	-28.42	-18.42	L1
0.15	50.16	--	--	0.00	66.00	56.00	-15.84	-5.84	L2
4.35	37.42	--	--	0.00	56.00	46.00	-18.58	-8.58	L2
14.36	33.72	--	--	0.00	60.00	50.00	-26.28	-16.28	L2
6 Worst Data									

LINE 1 AND LINE 2 RESULTS



Compliance Certification Services
561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0885
Fax: (408) 463-0888

Data#: 15 File#: 06u10442.emi Date: 08-05-2006 Time: 14:30:37

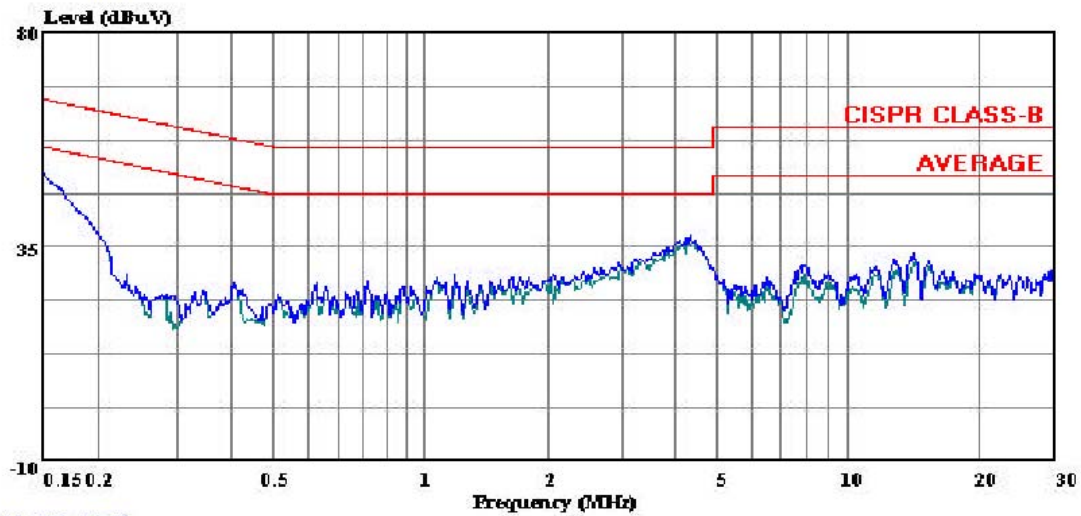

(Auxiliary ATC)

Trace: 7

Ref Trace:

Condition: CISPR CLASS-B
Test Operator : Vien Tran
Project # : 06U10442
Company : Toshiba
EUT configuration: WLAN card inside Laptop
Mode of operation: Tx 11a mode
Power Source : 115VAC, 60 Hz
: Line 1: Peak(Green), Line 2: Peak(Blue)