


Inverted F Antenna Specification

Summary

ITEM	ANT SPEC					
Model Name	2.4G ANT					
Center Frequency	Horizontal			Vertical		
	2400MHz	2450MHz	2500MHz	2400MHz	2450MHz	2500MHz
	-1.73	-0.84	-0.68	-6.15	-3.70	-2.32
MAX. Gain	-0.68dBi					
Polarization	Horizontal andVertical					
Azimuth Beam Pattern	Omni-directional					
Impedance	50 Ohm					
Type of Antenna	PCB antenna					
Manufacture	Xiamen WEITERUL ELECTRONI TECHNOLOGY CO., LTD					
Address	302,3rd Floor,402,4th Floor,No.883-1,Lianting Road,Xiamen Torch High-tech Zone(Xiang an)Industrial Zone					


Antenna Photo &Length (mm)

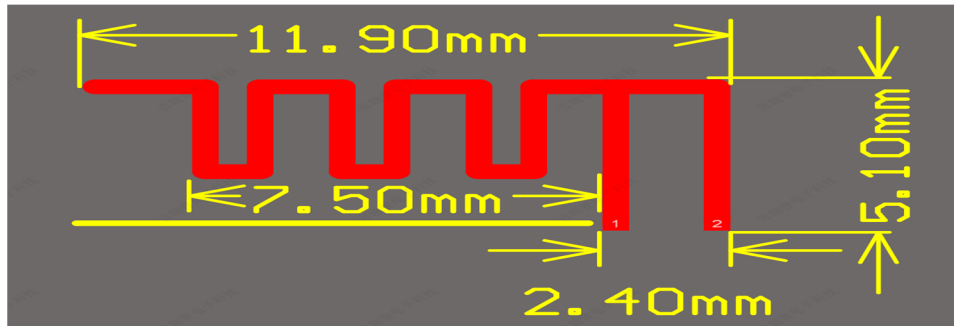

Horizontal:2400 MHz 2450 MHz2500 MHz

Power(dBm)

Max:0 Min:-40 Scale:5/div

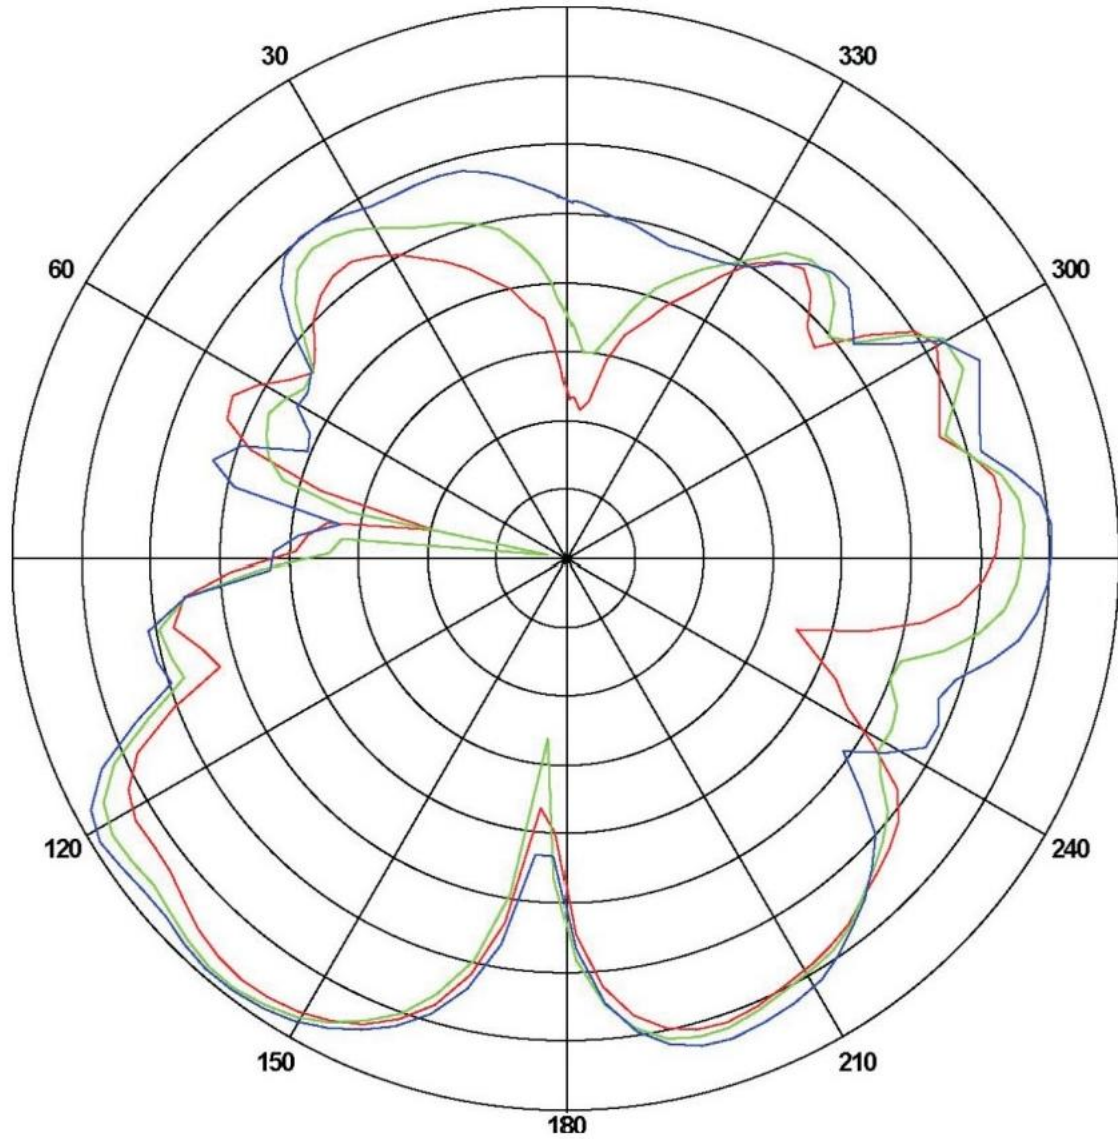


Frequency (MHz)	Gain(dBi)		
	Max	Min	Avg
2400	-1.73178	-30.0815	-8.48713
2450	-0.845801	-38.5605	-7.88012
2500	-0.685586	-24.0318	-6.79139

Vertical:2400 MHz 2450 MHz2500 MHz

Power (dBm)

Max:0 Min:-30 Scale:5/div

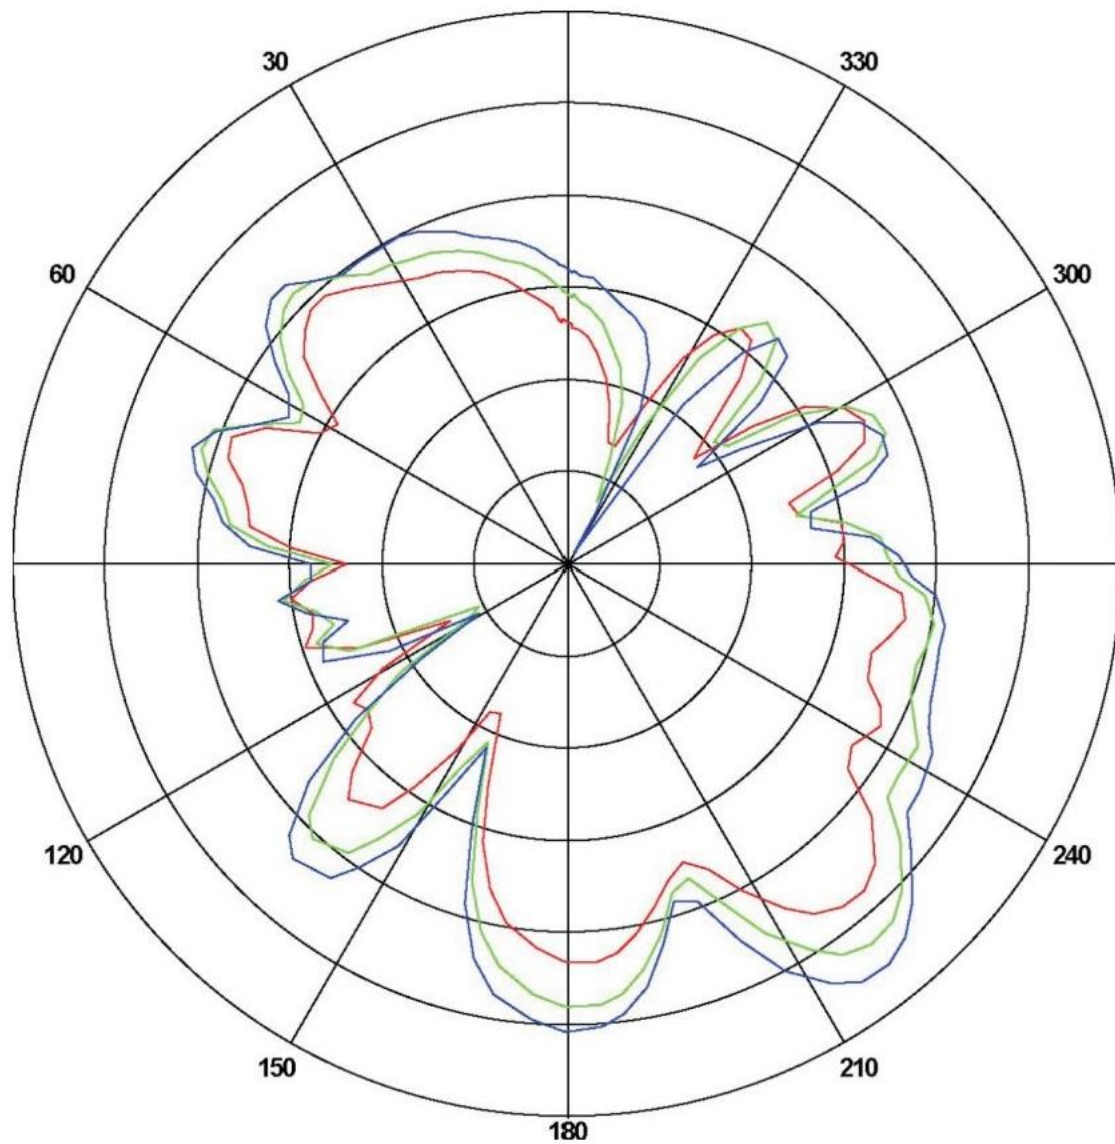

Frequency (MHz)	Gain(dBi)		
	Max	Min	Avg
2400	-6.1530	-24.1420	-13.0295
2450	-3.7054	26.5836	-10.6700
2500	-2.32122	-30.4301	-9.70536

ANT Test Labs:Attestation of Global Compliance Co.,Ltd.