

FCC Part 15C Compliance Test Report

Test Report no.:	Tre_FCC_0610_01.doc	Date of Report:	15.03.2006
Number of pages:	28	Customer's Contact person:	Jorma Hanni
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Client:	Nokia Corporation P.O. Box 50 Elektroniikkatie 10 FIN-90571 OULU, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 47222
FCC listing no.:	94436		
IC recognition no.:	3608		
Tested devices/ accessories:	GSM phone RM-106 / Battery BL-4C, Headset HS-23, AC charger AC-4		
FCC ID:	LJPRM-106	IC:	661E-RM106
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), IC standards RSS-GEN and RSS-210. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Jan-Erik Lilja, System Manager

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	2.3.2006
Testing completed	9.3.2006
The customer's contact person	Jorma Hanni
Test Plan referred to	\\EMC\\TESTPLAN\\
Notes	-
Document name	T:\\Projects\\RM-106\\EMC\\Results\\FCC\\Tre_FCC_0610_01.doc

1.1. EUT and Accessory Information

The EUT is a quadri band (GSM850/900/1800/1900) mobile phone with GPRS, EGPRS and WLAN. WLAN is tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-106	004400631652904	500432	-	3.09	40565
Phone	RM-106	004400631653159	500432	-	3.09	40564
Battery	BL-4C	-	-	-	-	40552
Battery	BL-4C	-	-	-	-	40553
AC-Charger	AC-4	-	-	-	-	40554
Headset	HS-23	-	-	-	-	40556

1.2. Summary of Test Results

WLAN:

Section in CFR 47	Section in RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (4)	Peak output power	PASSED
15.247(c)	A8.5	Band edge compliance of RF emissions	NP
15.247(c)	A8.5	Spurious RF conducted emissions	PASSED
15.247(c), 15.209	A8.5	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	PASSED
15.247(a)(2)	A8.2 (1)	6 dB bandwidth	PASSED
15.247(e)	A8.2 (2)	Power spectral density	PASSED

PASSED
FAILED
NP


The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Tampere Laboratory.

CONTENTS


1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Test setups.....	4
2.1. Conducted RF test setup	4
2.2. AC powerline conducted emissions test setup.....	4
2.3. Spurious radiated emissions test setup	4
3. Peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (4)).....	5
3.1. Test method and limit.....	5
3.2. WLAN Test results	5
4. Spurious RF conducted emissions (FCC §15.247(c), RSS-210 A8.5).....	9
4.1. Test method and limit.....	9
4.2. WLAN Test results	9
5. Spurious radiated emissions (FCC §15.247(c), §15.209, RSS-210 A8.5).....	13
5.1. Test method and limit.....	13
5.2. WLAN Test results	14
6. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)	17
6.1. Test method and limit.....	17
6.2. WLAN Test results	18
7. 6 dB bandwidth (FCC §15.247(a)(2), RSS-210 A8.2 (1))	20
7.1. Test method and limit.....	20
7.2. WLAN test results	20
8. Power spectral density (FCC §15.247(e), RSS-210 A8.2 (2))	24
8.1. Test method and limit.....	24
8.2. WLAN test results	24
9. Test Equipment.....	28
9.1. Conducted measurements	28
9.2. Radiated measurements	28

2. Test setups


2.1. Conducted RF test setup

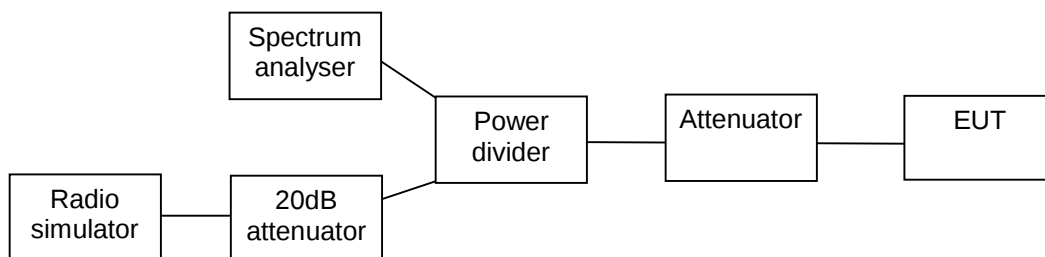

2.2. AC powerline conducted emissions test setup



2.3. Spurious radiated emissions test setup

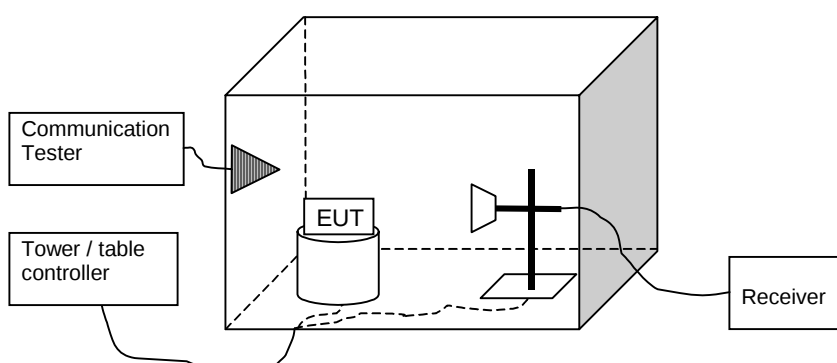

3. Peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (4))

EUT with DUT number	Phone: DUT 40565
Accessories with DUT numbers	Battery: DUT 40552
Operation Voltage [V] / [Hz]	-
Result	Passed
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23/50/100.9
Date of measurements	7.3.2006
Measured by	Jan-Erik Lilja

3.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.

Limits for peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

3.2. WLAN Test results


3.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel / f_c [MHz]	P [dBm]	P [W]	Result
1 / 2412	21.50	0.141	Passed
7 / 2442	22.11	0.163	Passed
11 / 2462	21.81	0.152	Passed


Channel 1 / 2412 MHz

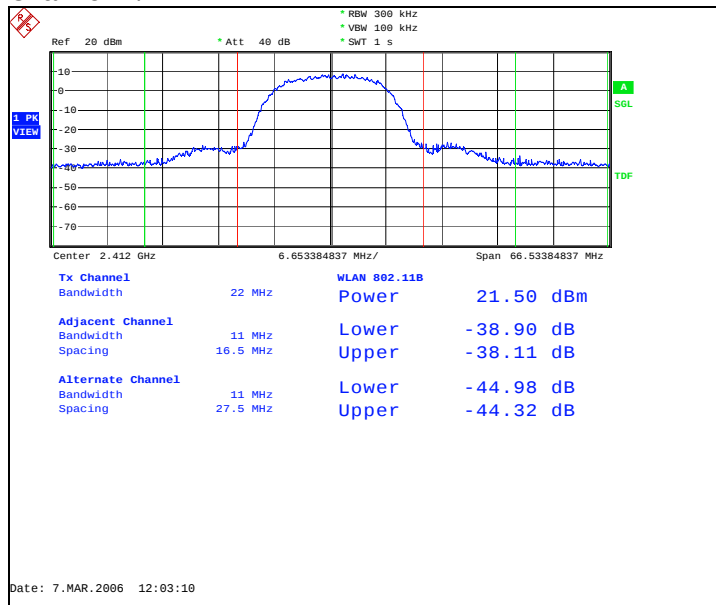

Channel 7 / 2442 MHz

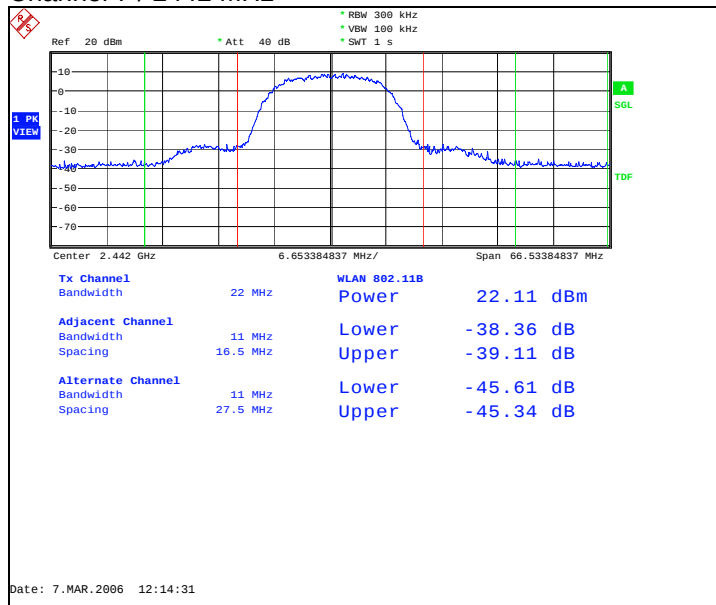


Channel 11 / 2462 MHz

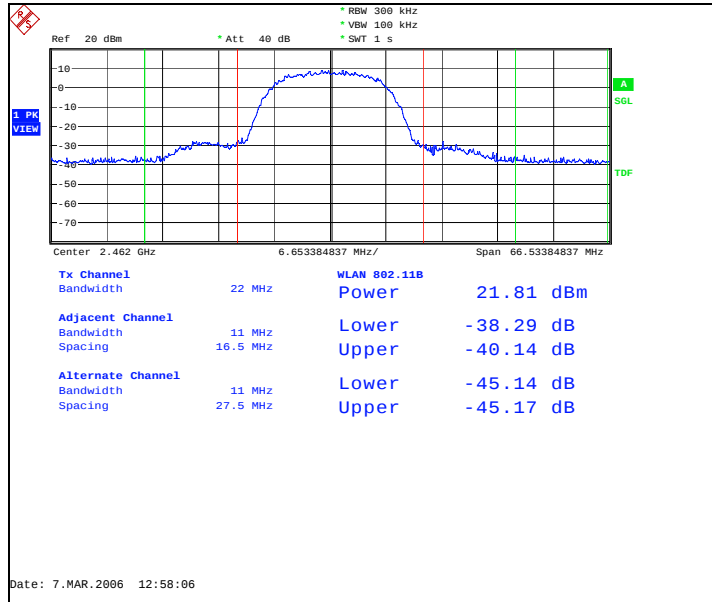


3.2.2 OFDM mode, 64QAM modulation, 48 Mbps data rate

Channel / f _c [MHz]	P [dBm]	P [W]	Result
1 / 2412	17.27	0.053	Passed
7 / 2442	17.81	0.060	Passed
11 / 2462	17.67	0.058	Passed


Channel 1 / 2412 MHz

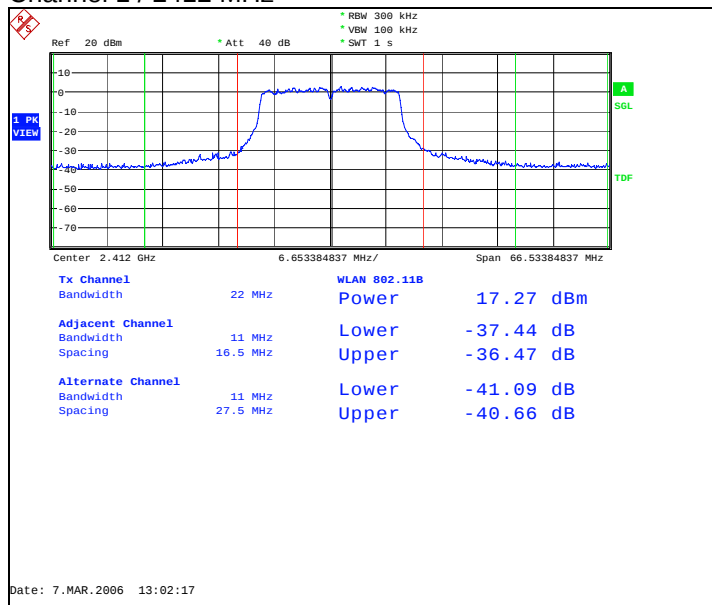

Channel 7 / 2442 MHz

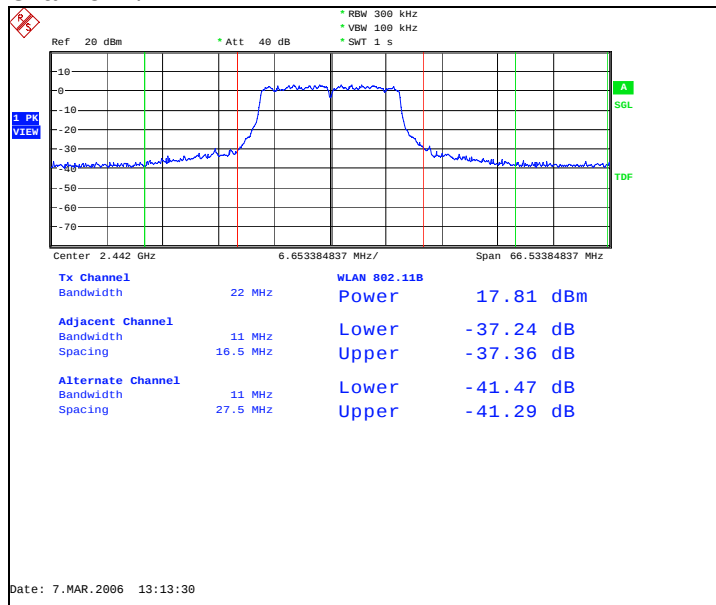

Channel 11 / 2462 MHz

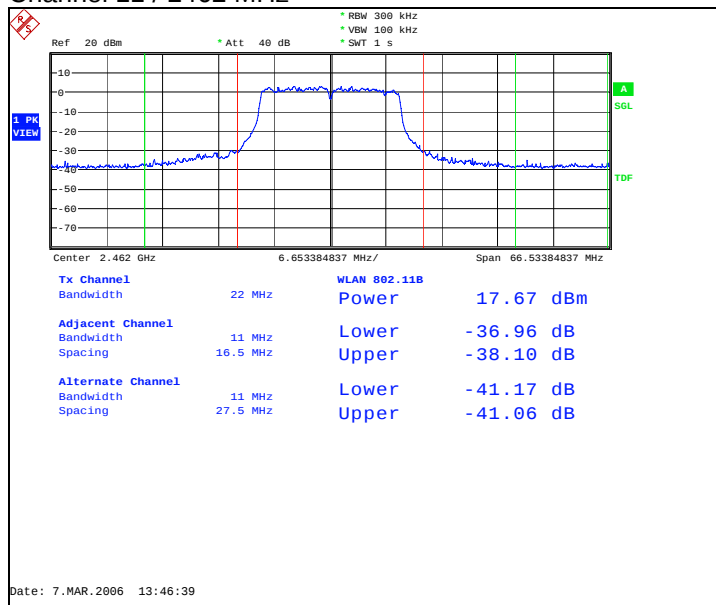

4. Spurious RF conducted emissions (FCC §15.247(c), RSS-210 A8.5)

EUT with DUT number	Phone: DUT 40565
Accessories with DUT numbers	Battery: DUT 40552
Operation Voltage [V] / [Hz]	-
Result	Passed
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23/50/100.9
Date of measurements	7.3.2006
Measured by	Jan-Erik Lilja

4.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

4.2. WLAN Test results


4.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel 1 / 2412 MHz

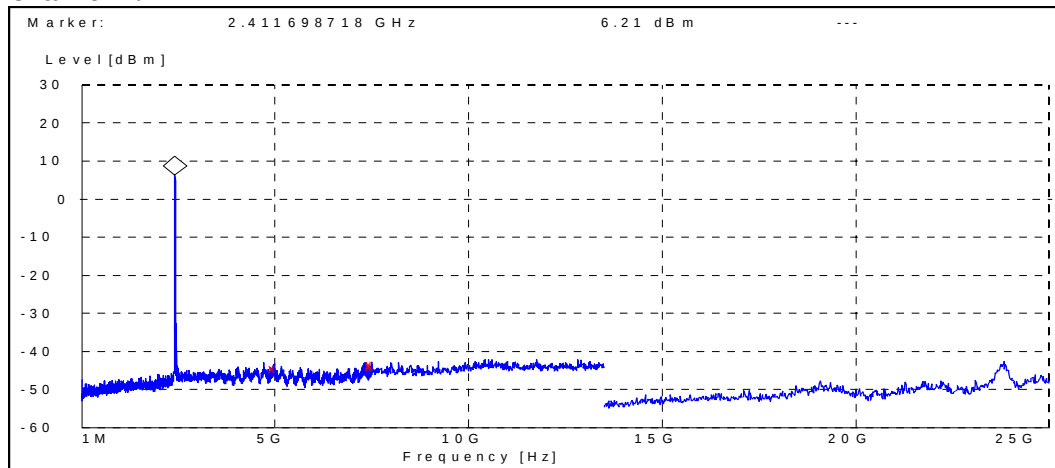


Frequency [MHz]	P [dBc]	Result
4990.064103	-50.609894	Passed
7497.596154	-50.209894	Passed
7500.000000	-49.509894	Passed

Channel 7 / 2442 MHz

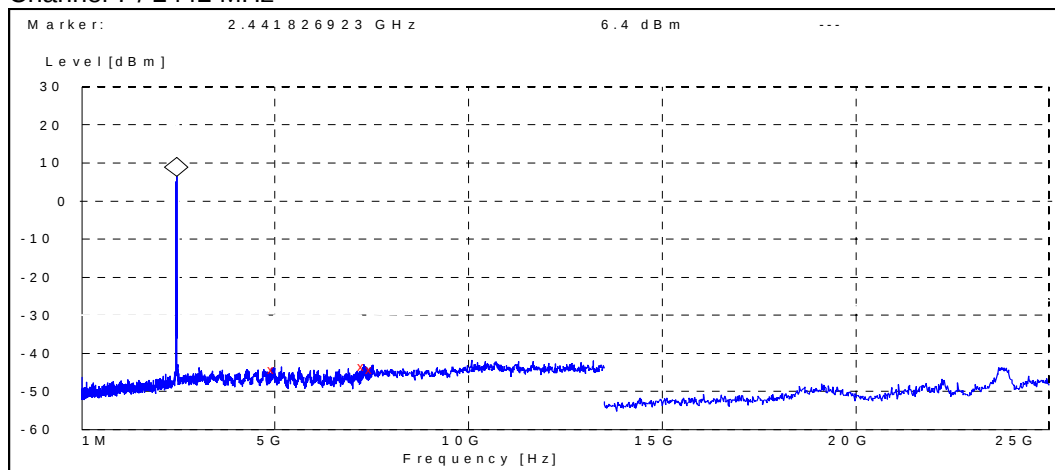

Frequency [MHz]	P [dBc]	Result
4959.294872	-50.702821	Passed
7289.423077	-49.802821	Passed
7500.000000	-50.502821	Passed


Channel 11 / 2462 MHz

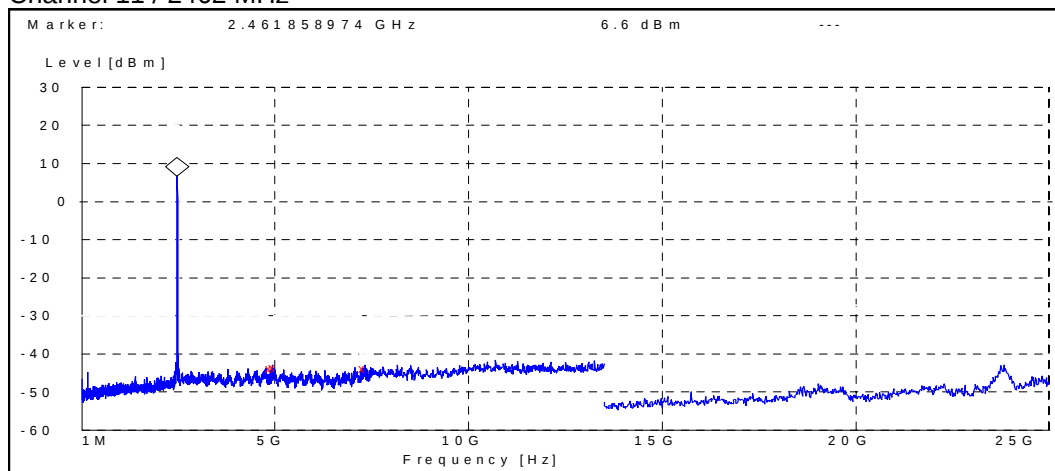

Frequency [MHz]	P [dBc]	Result
4924.038462	-50.403113	Passed
5000.000000	-50.203113	Passed
7331.730769	-50.403113	Passed


4.2.2 OFDM mode, 64QAM modulation, 48 Mbps data rate

Channel 1 / 2412 MHz

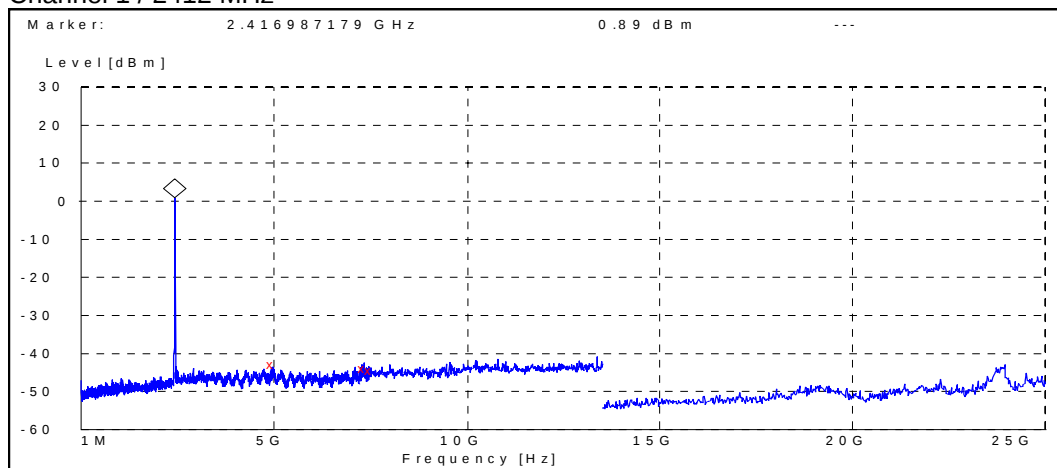


Frequency [MHz]	P [dBc]	Result
4958.974359	-43.794519	Passed
7337.980769	-44.694519	Passed
7500.000000	-45.294519	Passed

Channel 7 / 2442 MHz

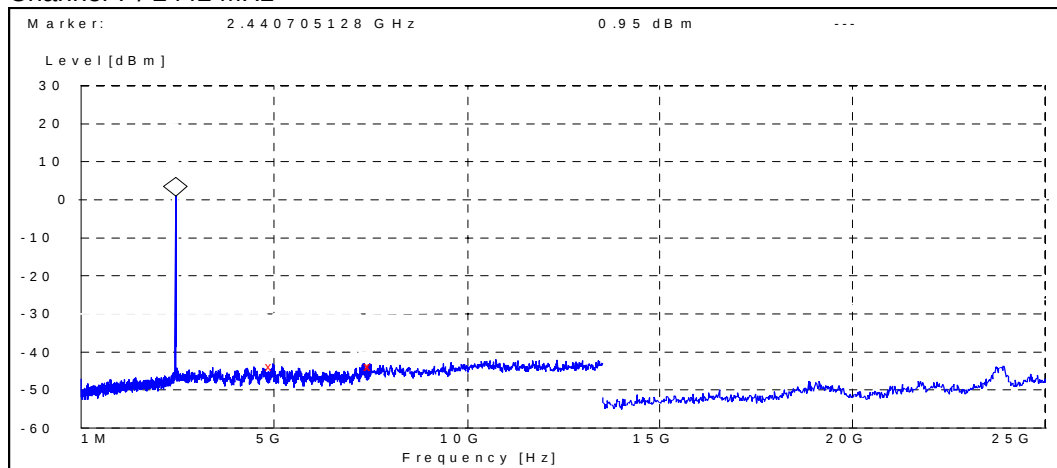

Frequency [MHz]	P [dBc]	Result
4950.961538	-44.750427	Passed
7480.769231	-44.550427	Passed
7500.000000	-44.750427	Passed

Channel 11 / 2462 MHz

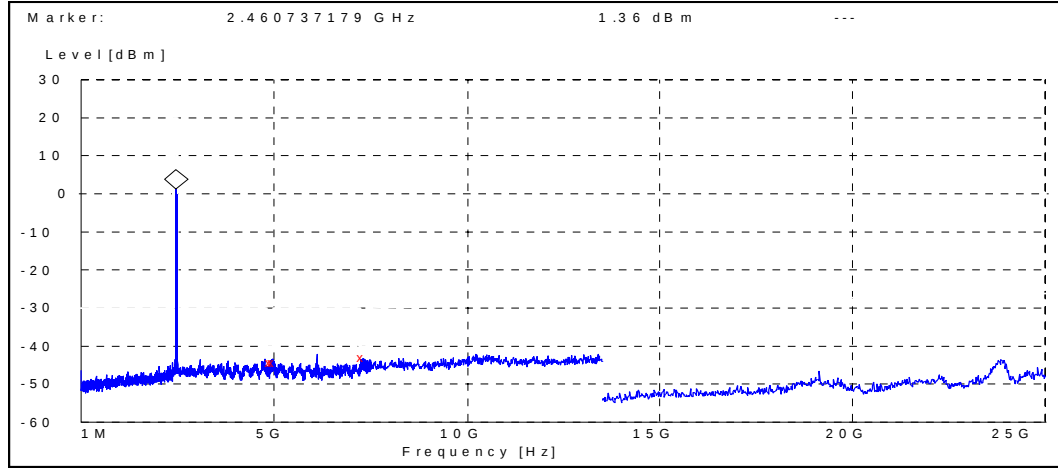

Frequency [MHz]	P [dBc]	Result
4951.282051	-45.463887	Passed
5000.000000	-45.563887	Passed
7305.769231	-44.463887	Passed

5. Spurious radiated emissions (FCC §15.247(c), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-106 DUT 40564
Accessories with DUT numbers	BL-4C DUT 40553, AC-4 DUT 40554, HS-23 DUT 40556
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	Flip open
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 46 / 101.0
Date of measurements	8.3.2006
Measured by	Jari Jantunen

5.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu\text{V/m}] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu\text{V/m}$]	Limit [dB $\mu\text{V/m}$]	Detector
30 – 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average

Above 1000	5000	74	Peak
------------	------	----	------

5.2. WLAN Test results

5.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel 1 / 2412 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4824.000000	46.90	221.31	48.30	-1.40	VERTICAL	PASSED
7236.000000	45.20	181.97	42.90	2.30	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4824.000000	35.10	56.89	36.50	-1.40	VERTICAL	PASSED
7236.000000	32.70	43.15	30.40	2.30	VERTICAL	PASSED

Channel 7 / 2442 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
39.559719	19.90	9.89	33.70	-13.80	VERTICAL	PASSED

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4884.000000	51.20	363.08	52.80	-1.60	VERTICAL	PASSED
7325.647295	50.40	331.13	47.70	2.70	VERTICAL	PASSED
7326.155311	49.40	295.12	46.70	2.70	VERTICAL	PASSED
17990.975952	55.60	602.56	34.10	21.50	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4884.000000	39.30	92.26	40.90	-1.60	VERTICAL	PASSED
7325.647295	38.50	84.14	35.80	2.70	VERTICAL	PASSED
7326.155311	38.20	81.28	35.50	2.70	VERTICAL	PASSED
17988.975952	42.80	138.04	21.30	21.50	HORIZONTAL	PASSED

Channel 11 / 2462 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4924.000000	48.60	269.15	50.10	-1.50	HORIZONTAL	PASSED
7386.000000	50.50	334.97	47.40	3.10	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4924.000000	36.90	69.98	38.40	-1.50	VERTICAL	PASSED
7386.000000	38.20	81.28	35.10	3.10	VERTICAL	PASSED

5.2.2 OFDM mode, 64QAM modulation, 48 Mbps data rate

Channel 1 / 2412 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4824.000000	42.00	125.89	43.40	-1.40	VERTICAL	PASSED
7236.000000	43.40	147.91	41.10	2.30	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4824.000000	29.60	30.20	31.00	-1.40	VERTICAL	PASSED
7236.000000	30.60	33.88	28.30	2.30	VERTICAL	PASSED

Channel 7 / 2442 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
33.385772	18.10	8.04	27.20	-9.10	VERTICAL	PASSED
44.188377	19.60	9.55	37.20	-17.60	VERTICAL	PASSED
74.067535	10.00	3.16	35.80	-25.80	HORIZONTAL	PASSED

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4883.769539	44.50	167.88	46.10	-1.60	VERTICAL	PASSED
7327.655311	50.90	350.75	48.20	2.70	VERTICAL	PASSED
7327.657315	50.00	316.23	47.30	2.70	VERTICAL	PASSED
17480.453908	52.10	402.72	34.20	17.90	VERTICAL	PASSED
17944.395792	55.00	562.34	33.60	21.40	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4883.769539	31.40	37.15	33.00	-1.60	VERTICAL	PASSED
7327.655311	34.40	52.48	31.70	2.70	VERTICAL	PASSED
7327.657315	34.50	53.09	31.80	2.70	VERTICAL	PASSED
17473.453908	38.70	86.10	20.80	17.90	VERTICAL	PASSED
17946.895792	42.50	133.35	21.10	21.40	VERTICAL	PASSED

Channel 11 / 2462 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4924.000000	43.50	149.62	45.00	-1.50	HORIZONTAL	PASSED
7386.000000	48.10	254.10	45.00	3.10	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4924.000000	30.50	33.50	32.00	-1.50	VERTICAL	PASSED
7386.000000	34.00	50.12	30.90	3.10	VERTICAL	PASSED

6. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)

EUT with DUT number	RM-106 DUT 40564
Accessories with DUT numbers	BL-4C DUT 40553, AC-4 DUT 40554, HS-23 DUT 40556
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 45 / 101.3
Date of measurements	9.3.2006
Measured by	Jari Jantunen

6.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

6.2. WLAN Test results

6.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel 7 / 2442 MHz

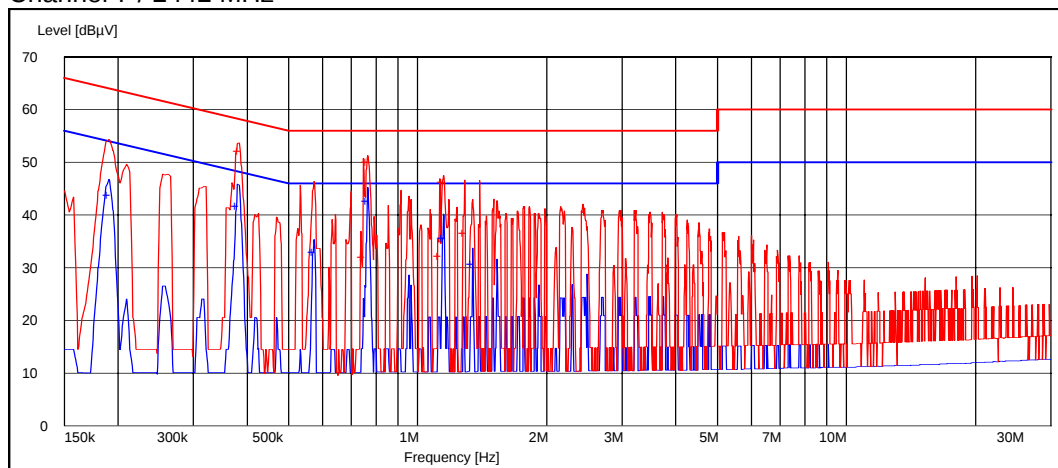

Quasi peak (RBW: 9 kHz)


Frequency [MHz]	U [dBμV]	Line	Result
0.383567	52.20	L1	PASSED
0.746894	31.90	L1	PASSED
0.765431	50.00	L1	PASSED
1.125050	32.20	N	PASSED
1.147295	46.20	L1	PASSED
1.288176	36.50	L1	PASSED

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.190782	43.70	L1	PASSED
0.379860	41.80	L1	PASSED
0.572645	33.00	L1	PASSED
0.765431	42.60	L1	PASSED
1.147295	35.60	L1	PASSED
1.343788	30.70	L1	PASSED

6.2.2 OFDM mode, 64QAM modulation, 48 Mbps data rate

Channel 7 / 2442 MHz

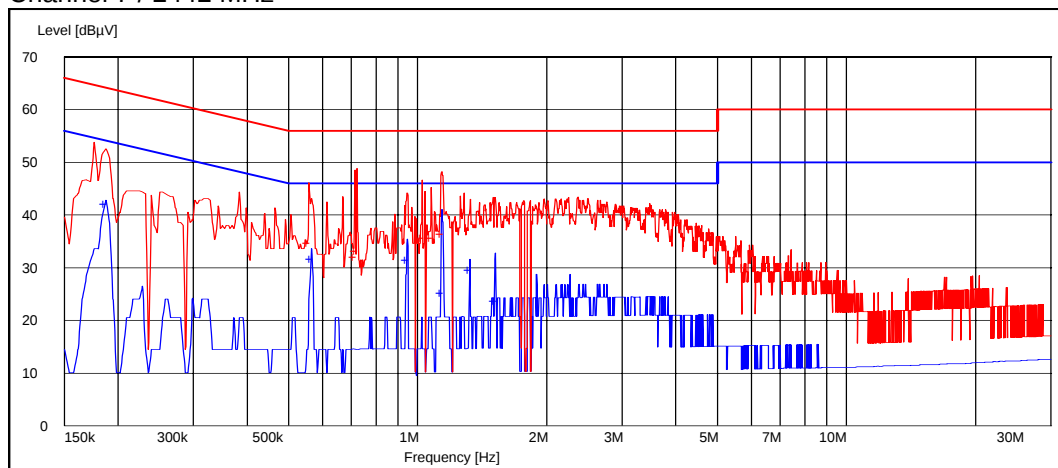

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.557816	34.70	L1	PASSED
0.713527	32.10	L1	PASSED
0.720942	33.10	L1	PASSED
1.024950	35.60	L1	PASSED
1.076854	35.60	L1	PASSED
1.139880	36.40	L1	PASSED

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.187074	42.00	L1	PASSED
0.565230	31.60	L1	PASSED
0.947094	31.50	L1	PASSED
1.139880	25.20	L1	PASSED
1.325251	29.50	L1	PASSED
1.518036	23.70	L1	PASSED

7. 6 dB bandwidth (FCC §15.247(a)(2), RSS-210 A8.2 (1))

EUT with DUT number	Phone: DUT 40565
Accessories with DUT numbers	Battery: DUT 40552
Operation Voltage [V] / [Hz]	-
Result	Passed
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23/50/100.9
Date of measurements	7.3.2006
Measured by	Jan-Erik Lilja

7.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.

Limits for 6 dB bandwidth measurements


Limit [kHz]
≥ 500

7.2. WLAN test results


7.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel / f _c [MHz]	6 dB bandwidth [kHz]	Result
1	11939.103	Passed
7	12500.000	Passed
11	12419.872	Passed


Channel 1 / 2412 MHz

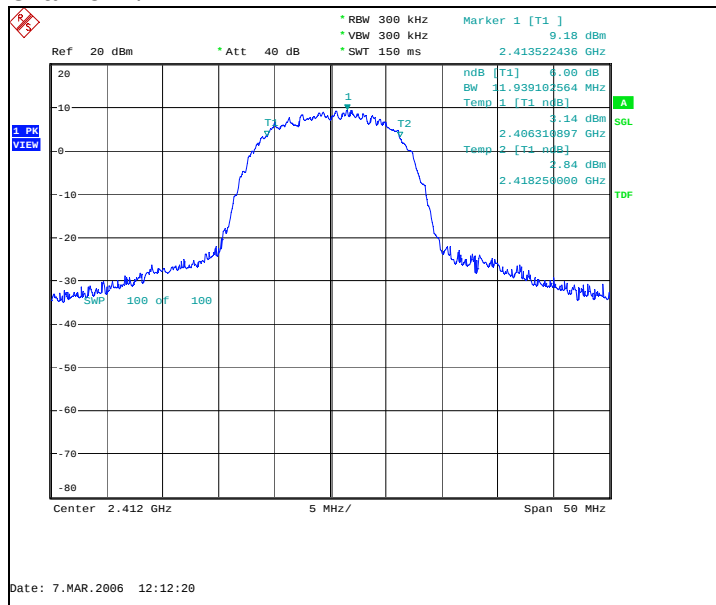

Channel 7 / 2442 MHz

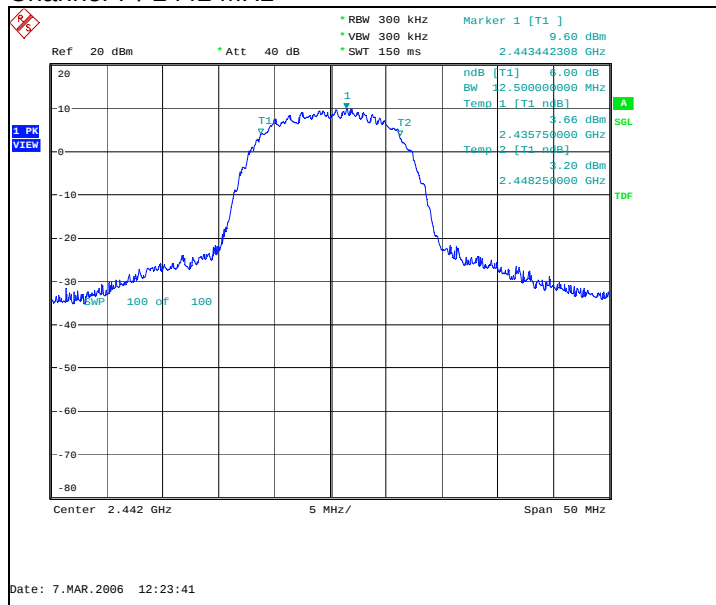


Channel 11 / 2462 MHz

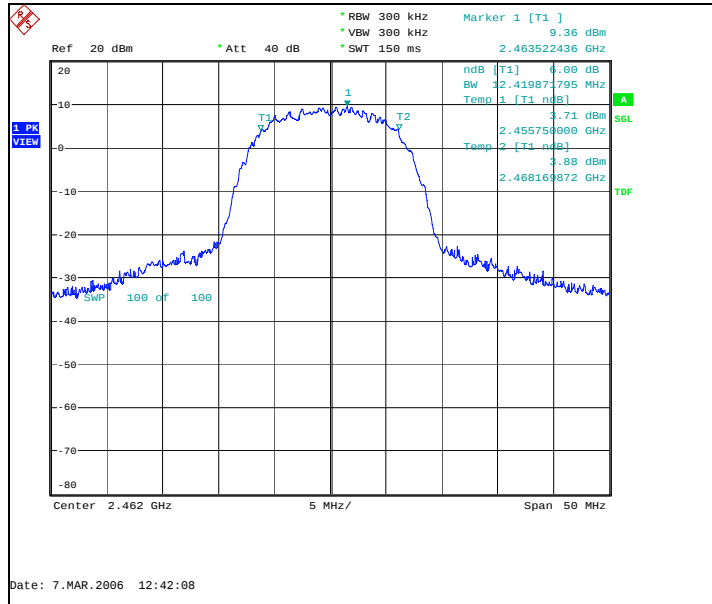


7.2.2 OFDM mode, 64QAM modulation, 48 Mbps data rate

Channel / f _c [MHz]	6 dB bandwidth [kHz]	Result
1	16586.538	Passed
7	16746.795	Passed
11	16666.667	Passed


Channel 1 / 2412 MHz

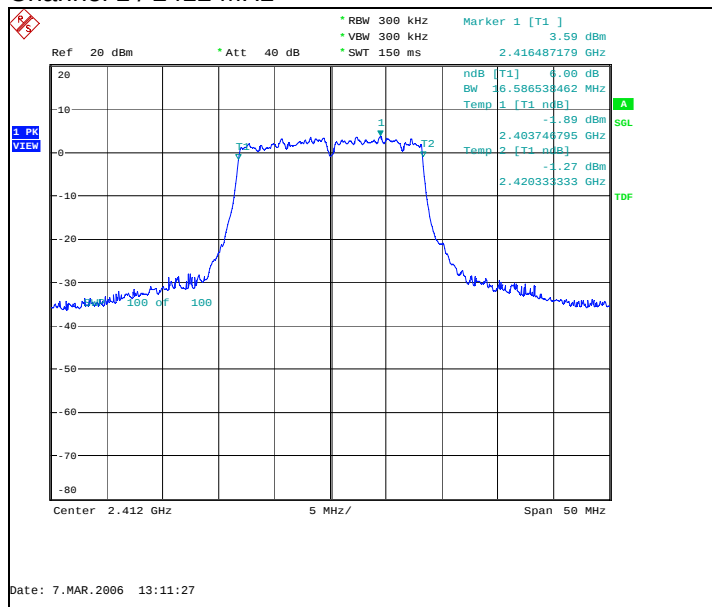

Channel 7 / 2442 MHz

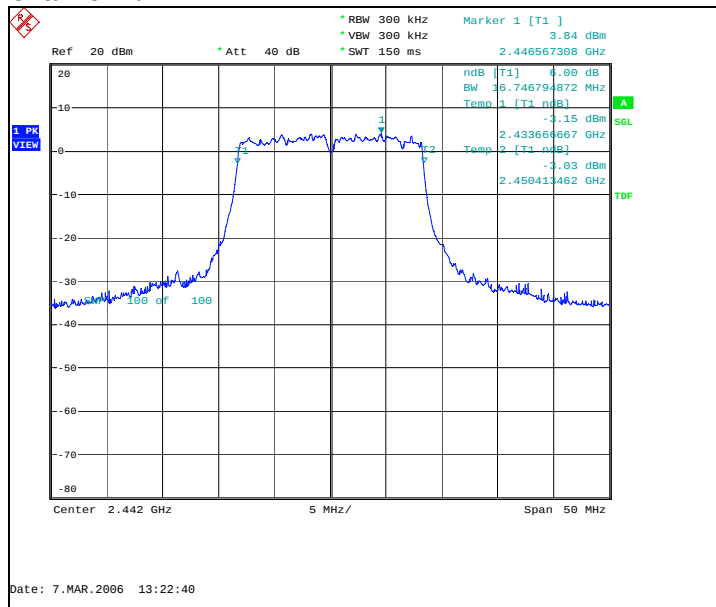

Channel 11 / 2462 MHz

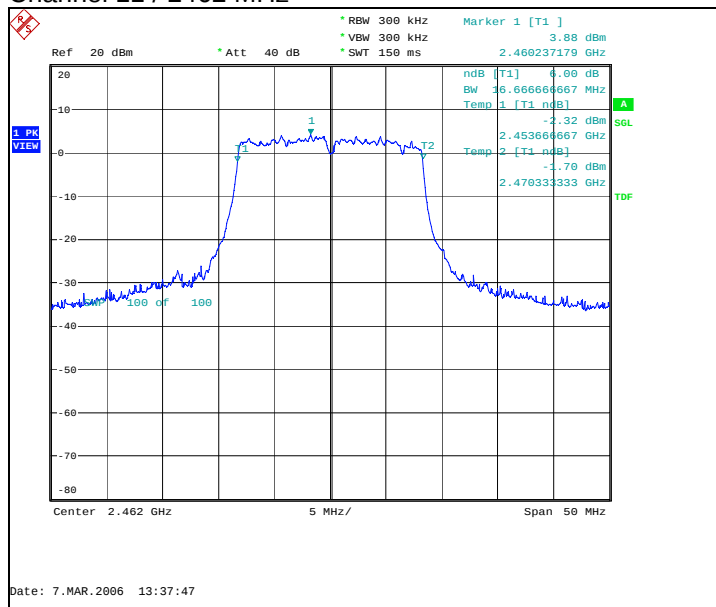

8. Power spectral density (FCC §15.247(e), RSS-210 A8.2 (2))

EUT with DUT number	Phone: DUT 40565
Accessories with DUT numbers	Battery: DUT 40552
Operation Voltage [V] / [Hz]	-
Result	Passed
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23/50/100.9
Date of measurements	7.3.2006
Measured by	Jan-Erik Lilja

8.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.

Limits for power spectral density measurements


Limit [dBm] @ 3 kHz
≤ 8

8.2. WLAN test results


8.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel / f _c [MHz]	P [dBm]	Result
1 / 2412	-7.87	Passed
7 / 2442	-7.19	Passed
11 / 2462	-7.37	Passed


Channel 1 / 2412 MHz

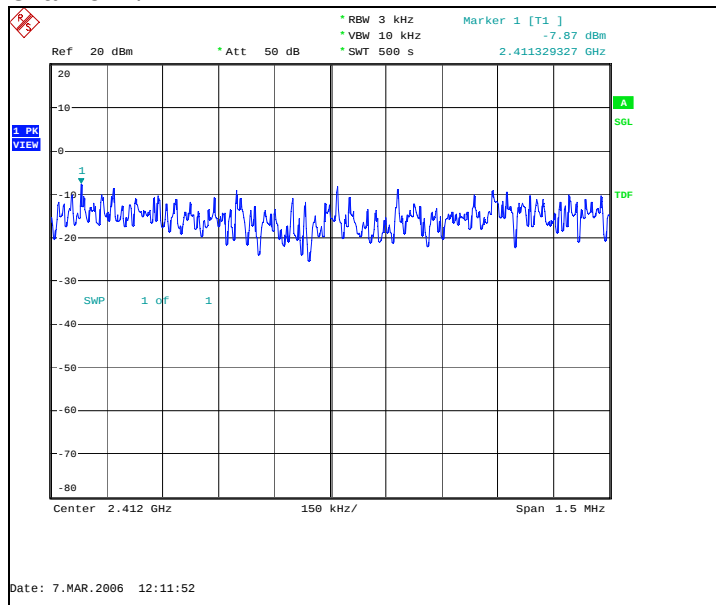

Channel 7 / 2442 MHz

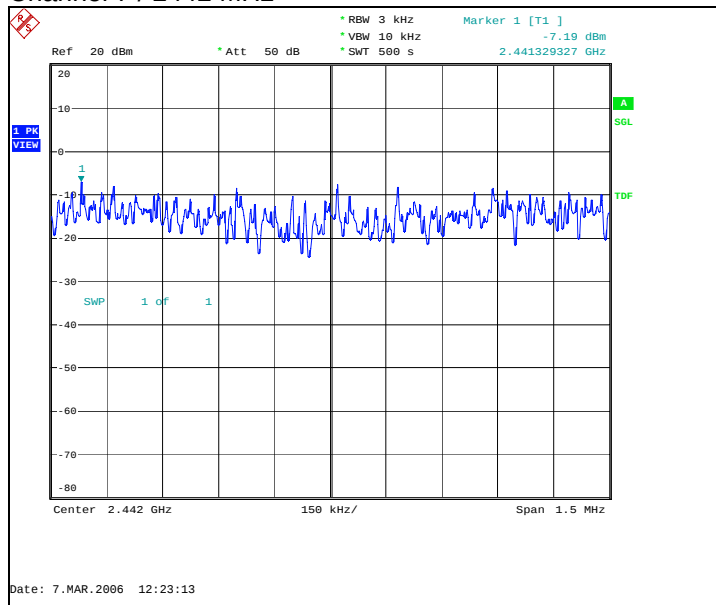


Channel 11 / 2462 MHz

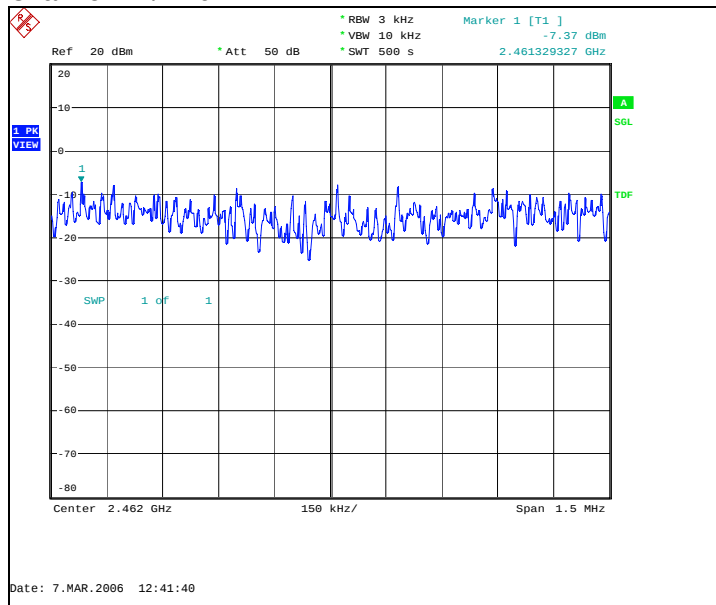

8.2.2 OFDM mode, 64QAM modulation, 48 Mbps data rate

Channel / f_c [MHz]	P [dBm]	Result
1 / 2412	-15.07	Passed
7 / 2442	-14.61	Passed
11 / 2462	-14.63	Passed

Channel 1 / 2412 MHz

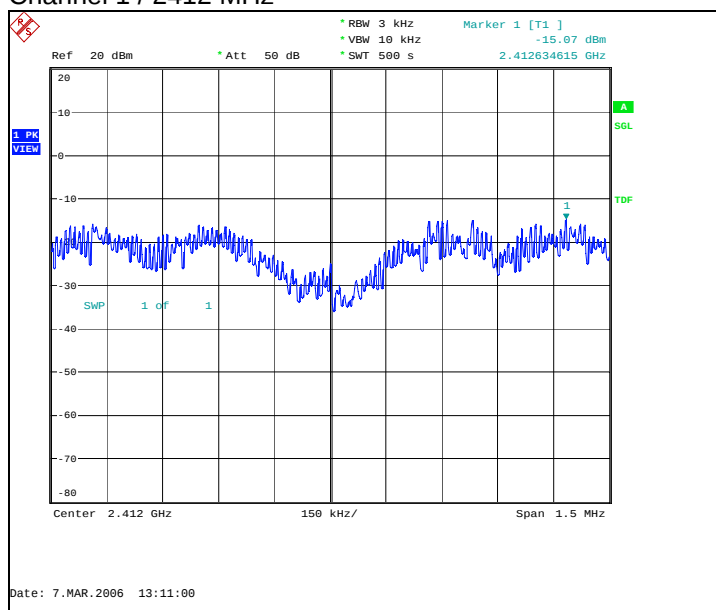

[illegible]

Ref 20 dBm Att 50 dB RBW 3 kHz VBW 10 kHz SWT 500 s Marker 1 [T1] -14.63 dBm 2.462632212 GHz

1 PK VIEW SWP 1 crf 1 A SGL TDF

Center 2.462 GHz 150 kHz/ Span 1.5 MHz

Date: 7.MAR.2006 13:37:19

9. Test Equipment

9.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM37610	Spectrum analyzer	FSU	R&S	15C,22/24
TM37678	Radio communication tester	CMU-200	R&S	15C,22/24
	Attenuator 10 dB	6251.17.A	Huber+Suhner AG	15C,22/24
TM22901	Step attenuator 110dB	8496A	Agilent	15C,22/24
TM37499	Power splitter	11667A	Agilent	15C,22/24
	Temperature chamber	VT4002	Vötsch	15C,22/24
TM38112	DC power supply	6632A	Agilent	15C,22/24
TM38111	Multimeter	34401A	Agilent	15C,22/24
TM38845	EMI receiver	ESI 40	R&S	15B,15C
TM37773	Radio communication tester	CMU-200	R&S	15B,15C
TM38631	Signal generator	83640L	Agilent	15B,15C
TM38114	DC power supply	6632A	Agilent	15B,15C
TM22835	Multimeter	87	Fluke	15B,15C
TM30600	Pulse Limiter	ESH3-Z2	R&S	15B,15C
TM26490	LISN 50 µH	ESH3-Z5/	R&S	15B,15C
TM30636	LISN 50 µH	L2-16/	PMM	15B,15C

9.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30599	3m semi-anechoic chamber		TDK	15B,15C, 22/24
TM38845	EMI receiver	ESI 40	R&S	15B,15C, 22/24
TM37498	Preamplifier	AMF-5D-020180-26-10P	MITEQ	15B,15C, 22/24
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	MITEQ	15B,15C, 22/24
TM37516	Biconilog antenna	HL562	R&S	15B,15C, 22/24
TM26496	Double ridged waveguide antenna	3115	EMCO	15B,15C, 22/24
TM39158	Horn antenna	3116	EMCO	15B,15C, 22/24
TM26492	Reference dipole set	UHAP/VHAP	Schwarzbeck	15B,15C, 22/24
TM37501	Dipole antenna	3125-870	EMCO	22/24
TM37502	Dipole antenna	3125-1880	EMCO	22/24
TM37773	Radio communication tester	CMU-200	R&S	15B,15C, 22/24
TM38631	Signal generator	83640L	Agilent	15B,15C, 22/24
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	15B,15C, 22/24
	High pass filter	WHK2010-10SS	Trilithic	15B,15C, 22/24
	Low pass filter	WLK1750-10SS	Trilithic	15B,15C, 22/24
TM26511	Tunable notch filter	WRCA870	Wainwright	22/24
TM38215	Tunable notch filter	WRCD1850/1910-0.2/40	Wainwright	22/24
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30	Wainwright	15C
TM30642	Turntable controller	HD-100	Deisel	15B,15C, 22/24
TM26500	Turntable	DS412	Deisel	15B,15C, 22/24
TM38842	Antenna mast controller	2090	EMCO	15B,15C, 22/24
TM38843	Antenna mast	2075	EMCO	15B,15C, 22/24
TM38114	DC power supply	6632A	Agilent	15B,15C, 22/24
TM22835	Multimeter	87	Fluke	15B,15C, 22/24