

# TEST REPORT

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 443-390, Korea  
TEL: 82 70 5008 1021  
FAX: 82 505 299 8311

Report No.:KCTL16-SFR0045

Page( 1 ) / ( 14 ) Pages

**KCTL**  
<http://www.kctl.co.kr>

## 1. Applicant

Name: Suprema Inc.  
Address: 16F Parkview Office Tower, Jeongja-dong, Bundang-gu,  
Seongnam, Gyeonggi, 463-863 Korea

## 2. Sample Description:

FCC ID: TKWBEW2-OAP  
Type of equipment: BioEntry W2  
Basic Model: BEW2-OAP  
Variant Model: BEW2-ODP, BEW2-OHP

**3. Date of Test:** June 02 ~ June 10, 2016

**4. Test method used:** FCC Part 15 Subpart C  
Section 15.209

## 5. Test Results

Test Item: Refer to page 6  
Result: Refer to page 7 ~ page 13  
Measurement Uncertainty: Refer to page 6

This result shown in this report refers only to the sample(s) tested unless otherwise stated.

Affirmation	Tested by	Technical Manager
	 Name: HYUN SIK, YUN	 Name: MIN GI, SON

2016. 06. 10

**KCTL Inc.**

**[ Contents ]**

<b>1. Client information .....</b>	<b>3</b>
<b>2. Laboratory information .....</b>	<b>4</b>
<b>3. Description of E.U.T. ....</b>	<b>5</b>
3.1 Basic description.....	5
3.2 General description.....	5
3.3 Test frequency.....	5
<b>4. Summary of test results.....</b>	<b>6</b>
4.1 Standards & results .....	6
4.2 Uncertainty .....	6
<b>5. Test results.....</b>	<b>7</b>
5.1 Antenna Requirement .....	7
5.2 Field Strength of Fundamental Emissions .....	8
5.3 Radiated Emissions.....	11
<b>6. Test equipment used for test .....</b>	<b>14</b>

## 1. Client information

**Applicant:** Suprema Inc.

**Address:** 16F Parkview Office Tower, Jeongja-dong, Bundang-gu,  
Seongnam, Gyeonggi, 463-863 Korea

**Telephone number:** +82-31-710-5669

**Facsimile number:** +82-31-783-4516

**Contact person:** Dong Mok Shin / swyoon@suprema.co.kr

**Manufacturer:** Suprema Inc.

**Address:** 16F Parkview Office Tower, Jeongja-dong, Bundang-gu,  
Seongnam, Gyeonggi, 463-863 Korea

## 2. Laboratory information

### Address

#### **KCTL Inc.**

65 Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, Korea

Telephone Number: 82-70-5008-1016 Facsimile Number: 82-505-299-8311

### Certificate


KOLAS No.: KT231

FCC Site Registration No.: 687132

VCCI Site Registration No.: R-3327, G-198, C-3706, T-1849

IC Site Registration No.:8035A-2

### SITE MAP

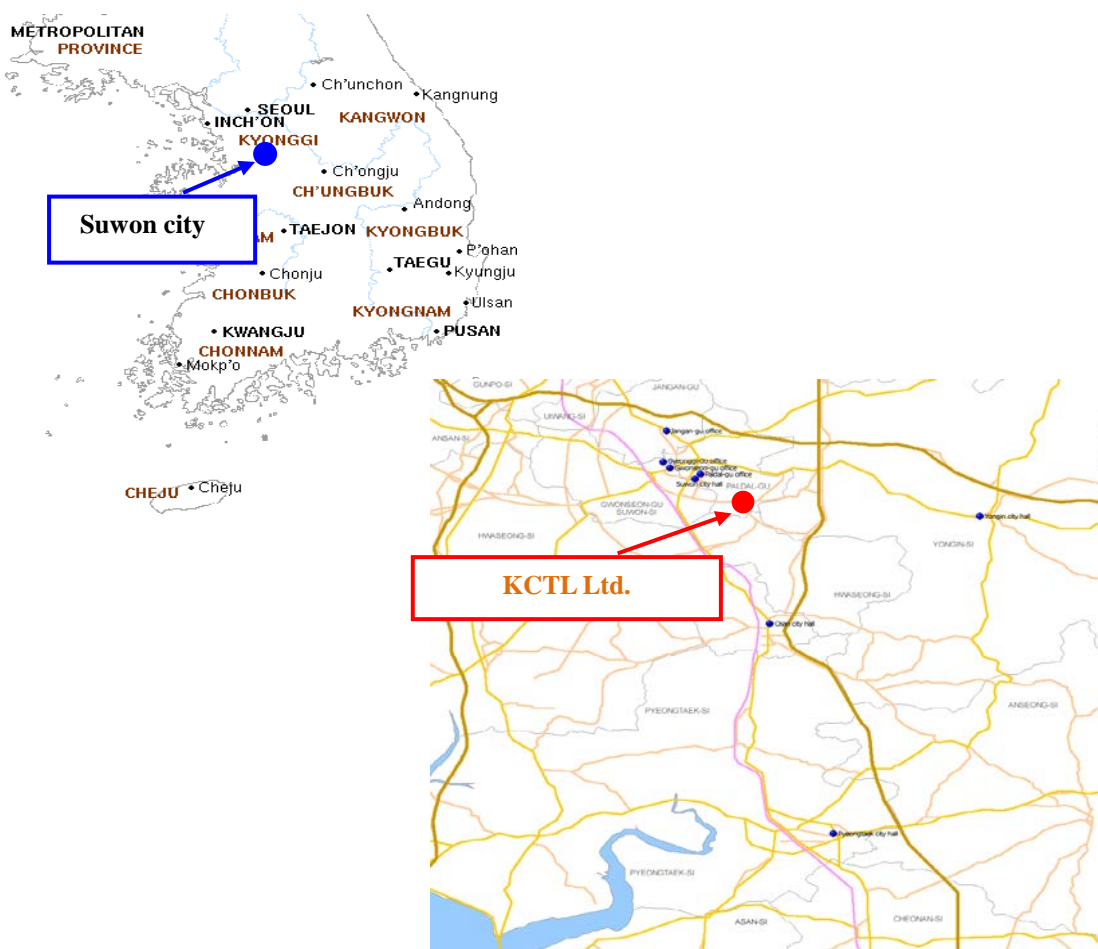

### 3. Description of E.U.T.

#### 3.1 Basic description

Applicant	Suprema Inc.
Address of Applicant	16F Parkview Office Tower, Jeongja-dong, Bundang-gu, Seongnam, Gyeonggi, 463-863 Korea
Manufacturer	Suprema Inc.
Address of Manufacturer	16F Parkview Office Tower, Jeongja-dong, Bundang-gu, Seongnam, Gyeonggi, 463-863 Korea
Type of equipment	BioEntry W2
Basic Model	BEW2-OAP
Variant Model <sub>1)</sub>	BEW2-ODP, BEW2-OHP
Serial number	N/A

1) : Buyer model names

#### 3.2 General description

Frequency Range	13.560 MHz (13.56 MHz RFID), 131 kHz (EM/HID Proxy)
Type of Modulation	ASK (13.56 MHz RFID), AM (EM/HID Proxy)
Number of Channels	1 ch (13.56 MHz RFID), 1 ch (EM/HID Proxy)
Type of Antenna	PCB Loop Antenna (RFID), Coil Antenna (EM/HID Proxy)
Power supply	DC 12.0 V , DC 48.0 V (PoE)
Product SW/HW version	V1.0 / V01
Radio SW/HW version	V1.0 / V01
Test SW Version	N/A

#### 3.3 Test frequency

	Frequency
Low frequency	-
Middle frequency	131 kHz
High frequency	-

## 4. Summary of test results

### 4.1 Standards & results

FCC Rule	Parameter	Report Section	Test Result
15.203	Antenna Requirement	5.1	C
15.209	Field Strength of Fundamental	5.2	C
15.209	Radiated Emissions	5.3	C
Note 1: C=complies NC= Not complies NT=Not tested NA=Not Applicable Note 2: The worst case is Y scheme(Please refer to the "Test setup photos" to check X, Y, Z configuration).			

### 4.2 Uncertainty

Measurement Item	Expanded Uncertainty $U = kU_c (k = 2)$	
Radiated Spurious Emissions	30 MHz ~ 300 MHz:	+4.94 dB, -5.06 dB
		+4.93 dB, -5.05 dB
	300 MHz ~ 1 000 MHz:	+4.97 dB, -5.08 dB
		+4.84 dB, -4.96 dB
Conducted Emissions	9 kHz ~ 150 kHz:	3.75 dB
	150 kHz ~ 30 MHz:	3.36 dB

## 5. Test results

### 5.1 Antenna Requirement

#### 5.1.1 Regulation

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### 5.1.2 Result

-Complied

Using permanent attached antenna and has no general access to end user after it has been installed.

## 5.2 Field Strength of Fundamental Emissions

### 5.2.1 Regulation

According to §15.209(a), for an intentional device, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Field strength (μV/m @ 3m)	Distance(m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

\*\*Except as provided in paragraph(g), fundamental emissions from intentional radiators operating under the section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, Operation within these frequency bands is permitted under other sections of this part. e.g., Section 15.231 and 15.241.

\*\*Limit :  $2400/125=19.2$  uV/m @ 300m  
Distance Correction Factor =  $40\log(\text{test distance} / \text{specific distance})$



### 5.2.2 Measurement Procedure

Test Procedure the Radiated Electric Field Strength intensity has been measured on semi anechoic chamber with a ground plane and at a distance of 3m.

Frequency : From 9 kHz to 30 MHz at distance 3m The EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

Frequency : From 30 MHz to 1 GHz at distance 3m The measuring antenna height varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity. The measurements were performed for both vertical and horizontal antenna polarization.

On any frequency or frequencies below or equal to 1000 MHz, the limits shown are based on measuring equipment employing a CISPR quasi-peak detector function and related measurement bandwidths, unless otherwise specified. The specifications for the measuring instrument using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Interference (CISPR) of the International Electrotechnical Commission. As an alternative to CISPR quasi-peak measurements, the responsible party, at its option, may demonstrate compliance with the emission limits using measuring equipment employing a peak detector function, properly adjusted for such factors as pulse desensitization, as long as the same bandwidths as indicated for CISPR quasi-peak measurements are employed. ( 15.35(a))

below 1GHz : quasi-peak

\* Part 15 Section 15.31 (f)(2) (9 kHz-30 MHz)

[Limit at 3 m]=[Limit at 300 m]-40 x log(3[m]/300[m])

[Limit at 3 m]=[Limit at 30 m]-40 x log (3[m]/30[m])

### 5.2.3 Test Result

#### -Complied

##### - DC 12 V

Measurement Distance: 3 m

Frequency [MHz]	Pol. [V/H]	Reading [dB $\mu$ V]	Factor [dB]	Result [dB $\mu$ V/m] at 30m	Result [dB $\mu$ V/m] at 300m	Limit [dB $\mu$ V/m]	Margin [dB]
<b>PK DATA.</b>							
0.131	H	88.8	-12.8	76.0	-4.0	105.26	29.26

##### - DC 48 V

Measurement Distance: 3 m

Frequency [MHz]	Pol. [V/H]	Reading [dB $\mu$ V]	Factor [dB]	Result [dB $\mu$ V/m] at 30m	Result [dB $\mu$ V/m] at 300m	Limit [dB $\mu$ V/m]	Margin [dB]
<b>PK DATA.</b>							
0.131	H	89.3	-12.8	76.5	-3.5	105.26	28.76

**Margin (dB) = Limit – Actual**

**[Result] = Reading – Amp Gain + Attenuator + AF + CL**

1. H = Horizontal, V = Vertical Polarization

2. ATT = Attenuation (10 dB pad and/or Insertion Loss of HPF), AF/CL = Antenna Factor and Cable Loss

**Note:** This test was performed by using peak detector mode

If peak result meets the limit, QP measurement is skipped.

## 5.3 Radiated Emissions

### 5.3.1 Regulation

According to §15.209(a), for an intentional device, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Field strength ( $\mu\text{V/m}$ @ 3 m)	Distance(m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

\*\*Except as provided in paragraph(g), fundamental emissions from intentional radiators operating under the section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, Operation within these frequency bands is permitted under other sections of this part, e.g., Section 15.231 and 15.241.

\*\*Limit :  $2400/125=17.78\mu\text{V/m}$  @ 300 m  
Distance Correction Factor =  $40\log(\text{test distance} / \text{specific distance})$

### 5.3.2 Measurement Procedure

The spurious emissions from the EUT will be measured on an open area test site in the frequency range of 9 kHz to 30 MHz using a tuned receiver and a shielded loop antenna.

The antenna was positioned 3, 10 or 30 meters horizontally from the EUT.

Measurements have been made in all three orthogonal axes and the shielded loop antenna was rotated to locate the maximum of the emissions.

In the case where larger measuring distances are required the results will extrapolated based on the values measured on the closer distances according to Section 15.31 (f) (2) [2].

The final measurement will be performed with an EMI Receiver set to Quasi Peak detector except for the frequency bands 9 kHz to 90 kHz and 110 to 490 kHz where an average detector will be used according to Section 15.209 (d) [2].

The final level, expressed in  $\text{dB}\mu\text{V/m}$ , is arrived at by taking the reading from the EMI receiver (Level  $\text{dB}\mu\text{V}$ ) and adding the antenna correction factor and cable loss factor (Factor dB) to it. This result then has to be compared with the relevant FCC limit. The resolution bandwidth during the measurement is as follows:

9 kHz – 150 kHz: ResBW: 200 Hz

150 kHz – 30 MHz: ResBW: 9 kHz

### 5.3.3 Test Result

#### -Complied

#### - DC 12 V

Measurement Distance: 3 m

-Below 30MHz

Frequency [MHz]	Pol. [V/H]	Reading [dBμV]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]
<b>PK DATA.</b>						
-	<b>Not Detected</b>	-	-	-	-	-

-Above 30MHz

Frequency [MHz]	Pol. [V/H]	Reading [dBμV]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]
<b>PK DATA.</b>						
84.20	V	40.7	-18.9	21.8	40.0	18.2
395.93	H	40.9	-8.6	32.3	46.0	13.7
948.11	H	34.8	3.1	37.9	46.0	8.1
996.12	H	36.4	4.3	40.7	54.0	13.3
Above 1 000.00 MHz	<b>Not Detected</b>	-	-	-	-	-

- Asteriks mean restricted band.

**Margin (dB) = Limit – Actual**

**[Result] = Reading – Amp Gain + Attenuator + AF + CL**

1. H = Horizontal, V = Vertical Polarization

2. ATT = Attenuation (10dB pad and/or Insertion Loss of HPF), AF/CL = Antenna Factor and Cable Loss

\* The spurious emission at the frequency does not fall in the restricted bands.

\*\* The measured result is within the standard limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95 % level of confidence. However, the result indicates that compliance is more probable than non-compliance.

Note 1: All emissions not reported were more than 20 dB below the specified limit or in the noise floor.

Note 2: This test was performed by using peak detector mode If peak result meets the limit, QP measurement is skipped.

## - DC 48 V

Measurement Distance: 3 m

Measurement Distance: 3 m

-Below 30MHz

Frequency [MHz]	Pol. [V/H]	Reading [dB $\mu$ V]	Factor [dB]	Result [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
<b>PK DATA.</b>						
-	<b>Not Detected</b>	-	-	-	-	-

-Above 30MHz

Frequency [MHz]	Pol. [V/H]	Reading [dB $\mu$ V]	Factor [dB]	Result [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
<b>PK DATA.</b>						
87.59	V	42.1	-19.3	22.8	40.0	17.2
395.93	H	41.3	-8.6	32.7	46.0	13.3
948.11	H	35.8	3.1	38.9	46.0	7.1
996.12	H	36.5	4.3	40.8	54.0	13.2
Above 1 000.00 MHz	<b>Not Detected</b>	-	-	-	-	-

- Asteriks mean restricted band.

**Margin (dB) = Limit – Actual**

**[Result] = Reading – Amp Gain + Attenuator + AF + CL**

1. H = Horizontal, V = Vertical Polarization

2. ATT = Attenuation (10dB pad and/or Insertion Loss of HPF), AF/CL = Antenna Factor and Cable Loss

\* The spurious emission at the frequency does not fall in the restricted bands.

\*\* The measured result is within the test standard limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95 % level of confidence. However, the result indicates that compliance is more probable than non-compliance.

Note 1: All emissions not reported were more than 20 dB below the specified limit or in the noise floor.

Note2: This test was performed by using peak detector mode If peak result meets the limit, QP measurement is skipped.

## 6. Test equipment used for test

	Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
■	Temp & Humid Chamber	ESPEC CORP.	SH-641	92005476	16.12.07
■	DC Power Supply	AGILENT	E3632A	MY40008800	16.12.09
■	Signal Generator	R&S	SMB100A	176206	17.03.14
■	Spectrum Analyzer	R&S	FSV30	100914	16.11.03
■	Spectrum Analyzer	AGILENT	E4440A	MY46186407	17.01.07
■	Bilog Antenna	Teseq GmbH	CBL 6143A	35039	16.07.10
■	Amplifier	SONOMA INSTRUMENT	310N	186402	17.01.14
■	Attenuator	Weinschel Engineering	10	AJ1239	16.07.15
■	RF Selector	TOYO Corporation	NS5800	1003-010	-
■	Band Selector	TOYO Corporation	NS5800	1003-135	-
■	Band Selector	TOYO Corporation	NS5800	1003-320	-
■	Antenna Mast	MATURO	EAS 1.5	042/8941211	-
■	Turn Table	MATURO	TT 0.8 PF	041/8941211	-
■	Turn Devices	MATURO	TD 1.5-2 kg	039/8941211	-
■	Amplifier	Sonoma	310N	344922	16.09.02
■	Loop Antenna	R&S	HFH2-Z2	861971/003	17.03.03
■	Test Receiver	R&S	ESCI7	100732	16.09.02
■	Turn Table	Innco Systems	DT2000S-1t	79	-