

FCC RADIO TEST REPORT

FCC ID: 2AR6E-HBT01

Product : BT handsfree car kit/ FM transmitter/ Bluetooth transmitter

Model Name : HBT01

HK008, HK009, HK011, HK013, HK015,
HK012D, HK012A, HK105, HK005, HK106,
HK006, HK007, HK108, HK109, HK109D, TX80,
TX70, TX90, T10, HK202, HK201, BTT-02,
BTT-03, HK203, HK205, HK206, HK207, HK208,
HK203S, HK206S, HK208S, HK209, HK301,
Family Model : HK302, HK303, HK305, HK306, HK307, HK308,
HK309, BC01, HBC01, HJ01, HK60, HK80,
HK90, TX60, HK901, HK902, HK903, HK904,
HK905, HK906, HK907, HK908, HK909, BT008,
BT009, Blufree-001, Blufree-002, Blufree-002B,
Blufree-003, Blufree-004 , Blufree-005,
Blufree-006, Blufree-007, Blufree-008, DAB-010,
DAB-008

Report No. : S18120400401003

Prepared for

HAIKE PLASTIC AND ELECTRONIC CO LTD
Block B.Shanghenglang Bai Fuli Industrial, Dalang Street,
Long Hua Shenzhen City, Guangdong China.

Prepared by

NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street
Bao'an District, Shenzhen P.R. China
Tel.: +86-0755-61156588 Fax.: +86-0755-61156599
Website: www.ntek.org.cn

TEST RESULT CERTIFICATION**Applicant's name** : HAIKE PLASTIC AND ELECTRONIC CO LTD

Address : Block B.Shanghenglang Bai Fuli Industrial, Dalang Street, Long Hua Shenzhen City, Guangdong China.

Manufacture's Name : HAIKE PLASTIC AND ELECTRONIC CO LTD

Address : Block B.Shanghenglang Bai Fuli Industrial, Dalang Street, Long Hua Shenzhen City, Guangdong China.

Product description

Product name..... : BT handsfree car kit/ FM transmitter/ Bluetooth transmitter

Model and/or type reference : HBT01

Family Model : Refer to page 1

Rating(s)..... : DC 12-24V

Standards : FCC 47 CFR Part 15, Subpart C §15.239

Test procedure ANSI C63.10-2013

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.


Date of Test :

Date (s) of performance of tests..... : 10 Dec. 2018 ~ 24 Dec. 2018

Date of Issue..... : 21 Jan. 2019

Test Result..... : **Pass**

Testing Engineer : _____




(Mary Hu)

Technical Manager : _____



(Jason Chen)

Authorized Signatory : _____



(Sam Chen)

Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	4
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	7
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	9
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	10
3 . ANTENNA REQUIREMENT	11
3.1 STANDARD REQUIREMENT	11
3.2 EUT ANTENNA	11
3.3 CONDUCTED EMISSION MEASUREMENT	12
3.3.1 POWER LINE CONDUCTED EMISSION LIMITS	12
3.3.2 TEST PROCEDURE	12
3.3.3 DEVIATION FROM TEST STANDARD	12
3.3.4 TEST SETUP	12
3.2.5 TEST RESULT	14
3.4 RADIATED EMISSION MEASUREMENT	18
3.4.1 RADIATED EMISSION LIMITS	18
3.4.2 TEST PROCEDURE	19
3.4.3 DEVIATION FROM TEST STANDARD	19
3.4.4 TEST SETUP	20
3.4.5 TEST RESULTS (BLOW 30MHZ)	21
3.4.6 TEST RESULTS (BETWEEN 30 – 1000 MHZ)	22
3.4.7 TEST RESULTS (BAND EDGE EMISSION)	28
4 . BANDWIDTH TEST	32
4.1 TEST PROCEDURE	32
4.2 DEVIATION FROM STANDARD	32
4.3 TEST SETUP	32
4.4 TEST RESULTS	33
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15, Subpart C (15.239)			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	Pass	
15.203	Antenna Requirement	Pass	
15.239	Radiated Spurious Emission	Pass	
15.239	Occupied Bandwidth	Pass	
15.205 15.239	Spurious Emission in Restricted Band	Pass	

1.1 TEST FACILITY

NTEK Testing Technology Co., Ltd

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC FRN Registration No.: 463705; IC Registration No.:9270A-1

CNAS Registration No.:L5516

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	BT handsfree car kit/ FM transmitter/ Bluetooth transmitter	
Trade Name	N/A	
Model Name	HBT01	
Family Model	Refer to page 1	
Model Difference	All models are the same circuit and RF module, except the model name.	
Product Description	The EUT is a BT handsfree car kit/ FM transmitter/ Bluetooth transmitter	
	Product Type	Low Power Communication Device Transmitter
	Operation Frequency:	88.1-107.9MHz
	Modulation Type:	FM
	Number Of Channel	199CH.
	Antenna Designation:	spring Antenna
	Antenna Gain(Peak)	1.5 dBi
Power supply	☒ DC supply: DC 12-24V	
	☐ Adapter supply:	
Battery	N/A	
Hard Ware Version	HBT01-AC6901A-V2	
Soft Ware Version	HBT01-AC6901A-V2	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Carrier Frequency and Channel list:

Channel	Frequency(MHz)
0	88.1
1	88.2
...	...
99	98.1
100	98.2
...	...
197	107.8
198	107.9

Note: $f_c = 88.1\text{MHz} + k \times 0.1\text{MHz}$ $k = 0$ to 198

Pretest Mode	Description
Mode 1	88.1MHz
Mode 2	98.1MHz
Mode 3	107.9MHz

For Conducted Emission	
Final Test Mode	Description
Mode 1	88.1MHz

Note: Three kinds of frequency (88.1MHz, 98.1MHz, 107.9MHz) has been tested, but the worst result was reported.


For Radiated Emission	
Final Test Mode	Description
Mode 1	88.1MHz
Mode 2	98.1MHz
Mode 3	107.9MHz

Note:


- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) During testing, the EUT was actively playing music set to its maximum audio volume in order to generate the worst case emissions (e.g. to generate the maximum bandwidth during bandwidth test). No test tones were used for testing. The tuning range of the EUT was manually verified and the conclusion is that it only works at selected channels within 88.1-107.9MHz, not below and not above this range.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


For AC Conducted Emission Mode

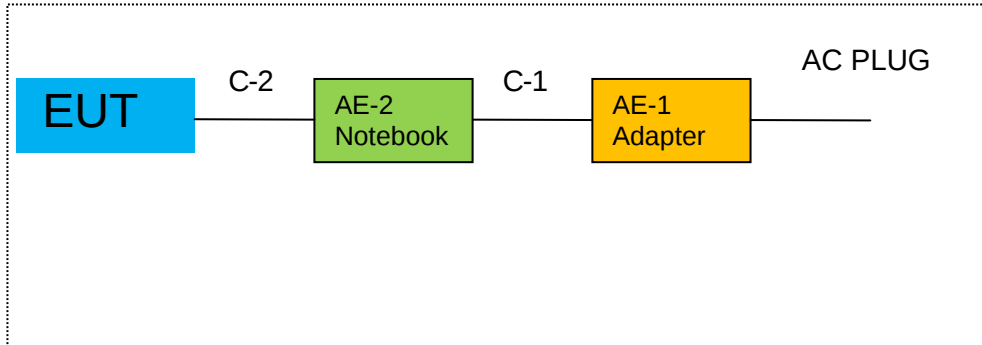

For Radiated Test Cases

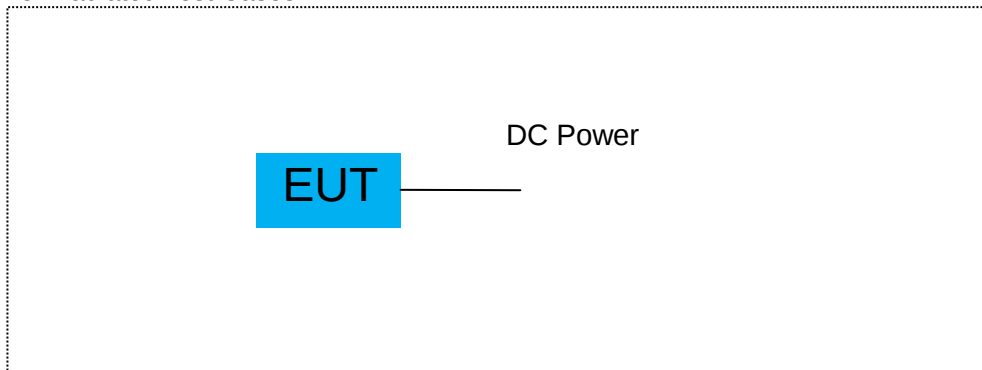

For Conducted Test Cases

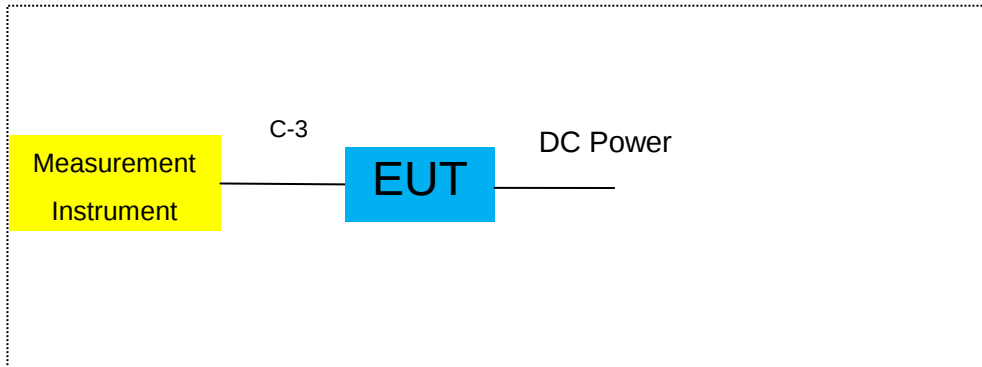

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
AE-1	Adapter	Lenovo	ADLX90NCT3A	N/A	
AE-2	Notebook	Lenovo	Thinkpad Edge E430	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	Power Cable	NO	YES	1.2m
C-2	DC Cable	NO	NO	0.5m
C-3	RF Cable	YES	NO	0.1m

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation& Conducted Test equipment

	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	N9020A	MY49100060	2018.05.19	2019.05.18	1 year
2	Test Receiver	R&S	ESPI	101318	2018.05.19	2019.05.18	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2018.04.08	2019.04.07	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2018.05.19	2020.05.18	1 year
5	Horn Antenna	EM	EM-AH-10180	2011071402	2018.04.08	2019.04.07	1 year
6	Amplifier	EMC	EMC051835SE	980246	2018.08.05	2019.08.04	1 year
7	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2017.04.21	2020.04.20	3 year
8	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2017.04.21	2020.04.20	3 year
9	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2018.05.19	2019.05.18	1 year
2	LISN	R&S	ENV216	101313	2018.04.18	2019.04.19	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2018.05.19	2019.05.18	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2018.05.19	2020.05.18	2 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2017.04.21	2020.04.20	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2017.04.21	2020.04.20	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2017.04.21	2020.04.20	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Aux Equipment & Test Cable which is scheduled for calibration every 2 or 3 years.

3. ANTENNA REQUIREMENT

3.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

3.2 EUT ANTENNA

The EUT antenna is permanent attached spring antenna. It comply with the standard requirement.

3.3 CONDUCTED EMISSION MEASUREMENT

3.3.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. *Decreases with the logarithm of the frequency
2. The lower limit shall apply at the transition frequencies
3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.3.2 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

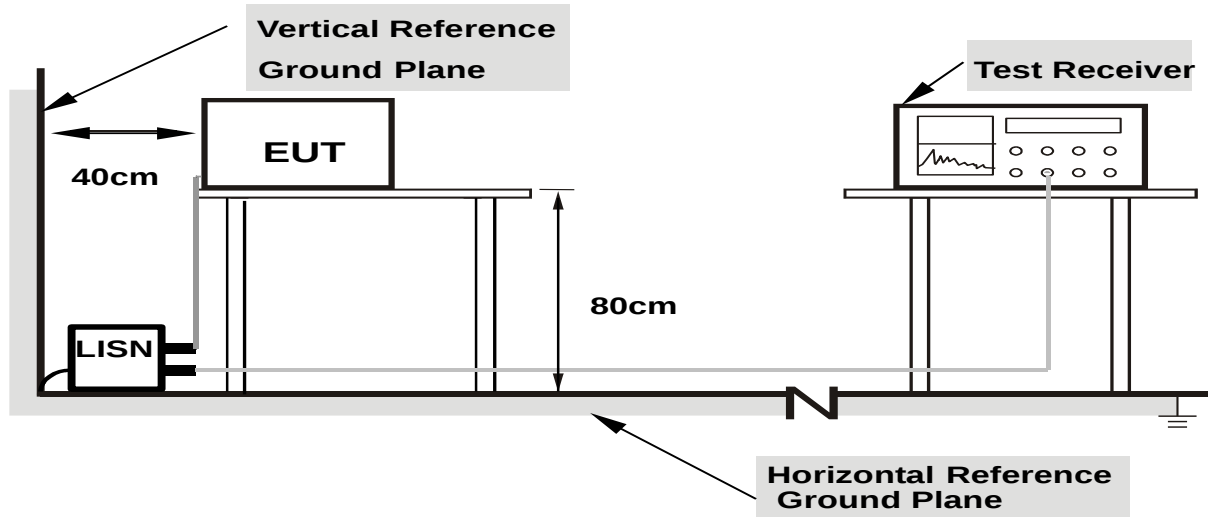

Note: 1.Support units were connected to second LISN.
 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes


3.2.5 TEST RESULT

EUT :	BT handsfree car kit/ FM transmitter/ Bluetooth transmitter	Model Name. :	HBT01
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Notebook AC 120V/60Hz	Test Mode :	Mode 1

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1580	32.89	9.82	42.71	65.56	-22.85	QP
0.1580	16.39	9.82	26.21	55.56	-29.35	AVG
0.2300	28.43	9.82	38.25	62.45	-24.20	QP
0.2300	13.25	9.82	23.07	52.45	-29.38	AVG
0.5540	30.09	9.83	39.92	56.00	-16.08	QP
0.5540	19.68	9.83	29.51	46.00	-16.49	AVG
0.8900	22.60	9.89	32.49	56.00	-23.51	QP
0.8900	12.62	9.89	22.51	46.00	-23.49	AVG
1.5339	19.71	9.89	29.60	56.00	-26.40	QP
1.5339	9.85	9.89	19.74	46.00	-26.26	AVG
1.8620	18.22	9.85	28.07	56.00	-27.93	QP
1.8620	7.41	9.85	17.26	46.00	-28.74	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

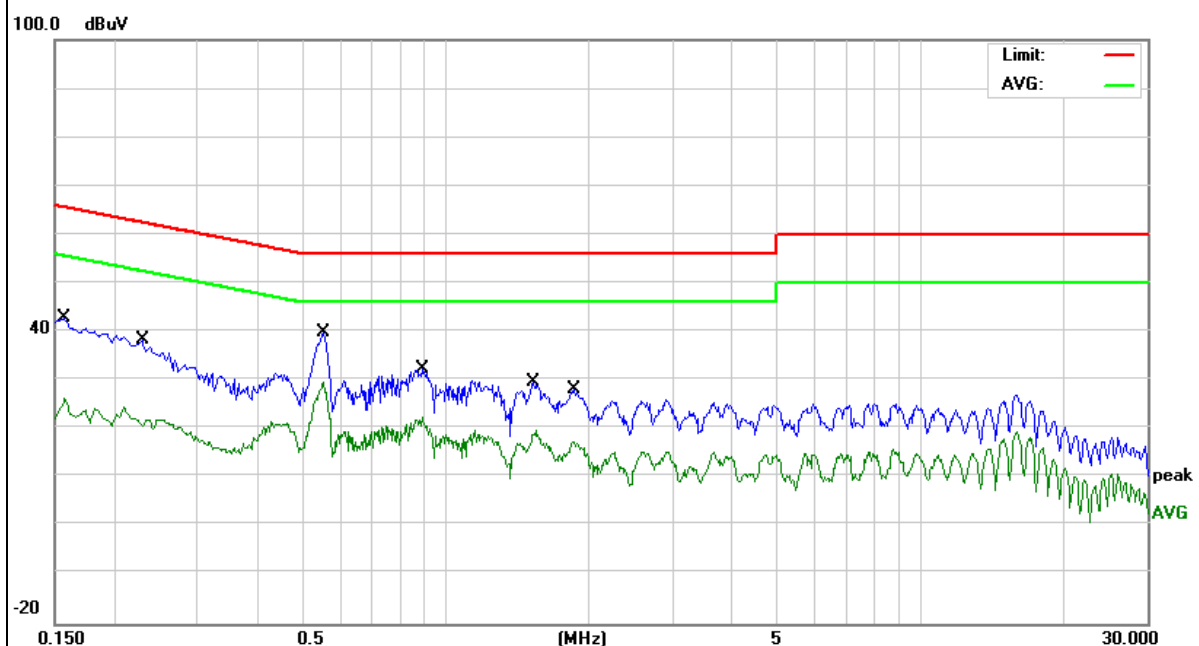


EUT :	BT handsfree car kit/ FM transmitter/ Bluetooth transmitter	Model Name :	HBT01
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Notebook AC 120V/60Hz	Test Mode :	Mode 1

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1539	31.94	9.92	41.86	65.78	-23.92	QP
0.1539	15.30	9.92	25.22	55.78	-30.56	AVG
0.4620	23.90	9.93	33.83	56.66	-22.83	QP
0.4620	17.23	9.93	27.16	46.66	-19.50	AVG
0.5540	31.50	9.93	41.43	56.00	-14.57	QP
0.5540	23.64	9.93	33.57	46.00	-12.43	AVG
0.8860	21.85	9.93	31.78	56.00	-24.22	QP
0.8860	14.70	9.93	24.63	46.00	-21.37	AVG
1.5460	19.82	9.94	29.76	56.00	-26.24	QP
1.5460	12.79	9.94	22.73	46.00	-23.27	AVG
2.2458	17.95	9.94	27.89	56.00	-28.11	QP
2.2458	10.67	9.94	20.61	46.00	-25.39	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

100.0 dBμV

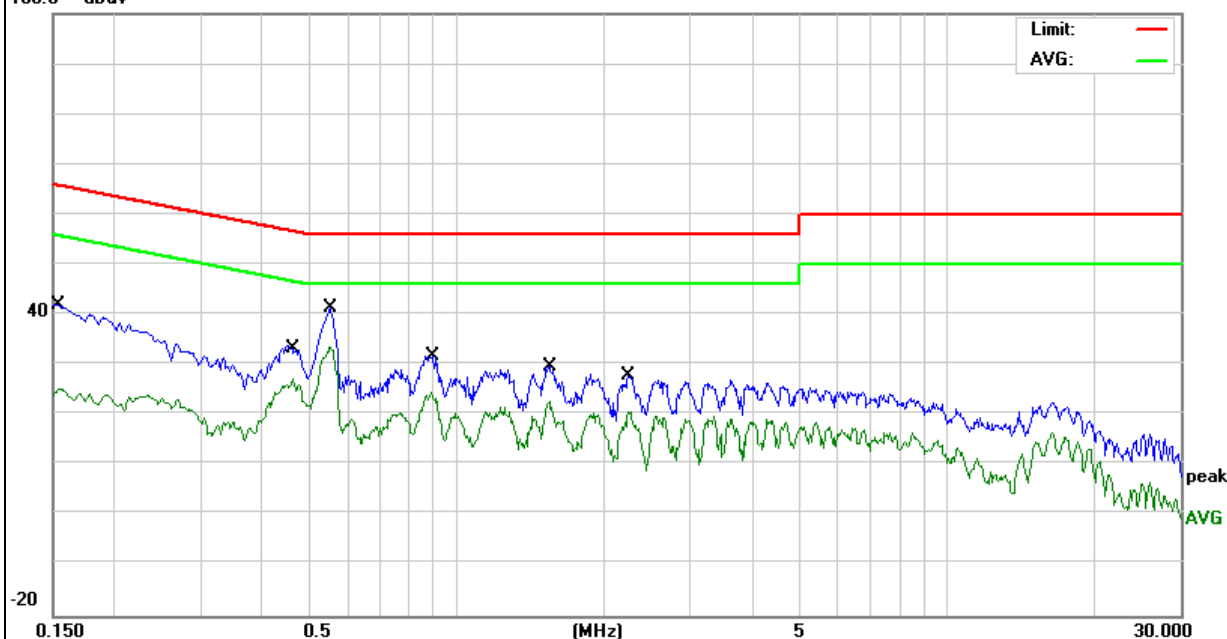


EUT :	BT handsfree car kit/ FM transmitter/ Bluetooth transmitter	Model Name :	HBT01
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Notebook AC 240V/60Hz	Test Mode :	Mode 1

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.3980	23.59	9.83	33.42	57.89	-24.47	QP
0.3980	14.72	9.83	24.55	47.89	-23.34	AVG
0.5540	27.50	9.83	37.33	56.00	-18.67	QP
0.5540	17.66	9.83	27.49	46.00	-18.51	AVG
1.0060	25.26	9.93	35.19	56.00	-20.81	QP
1.0060	14.67	9.93	24.60	46.00	-21.40	AVG
1.6858	21.89	9.87	31.76	56.00	-24.24	QP
1.6858	12.09	9.87	21.96	46.00	-24.04	AVG
2.3699	20.51	9.91	30.42	56.00	-25.58	QP
2.3699	10.06	9.91	19.97	46.00	-26.03	AVG
3.7219	18.80	10.05	28.85	56.00	-27.15	QP
3.7219	8.51	10.05	18.56	46.00	-27.44	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

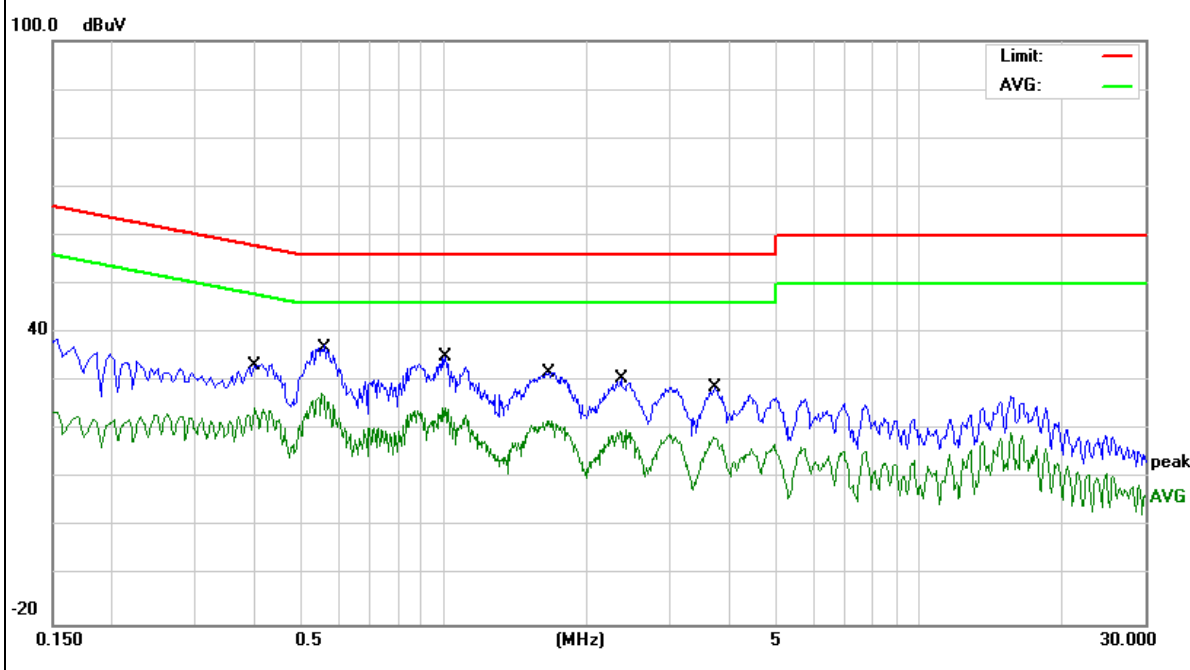


EUT :	BT handsfree car kit/ FM transmitter/ Bluetooth transmitter	Model Name :	HBT01
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Notebook AC 240V/60Hz	Test Mode :	Mode 1

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.4138	24.92	9.93	34.85	57.57	-22.72	QP
0.4138	18.33	9.93	28.26	47.57	-19.31	AVG
0.5620	28.69	9.93	38.62	56.00	-17.38	QP
0.5620	22.21	9.93	32.14	46.00	-13.86	AVG
0.9939	25.11	9.93	35.04	56.00	-20.96	QP
0.9939	19.53	9.93	29.46	46.00	-16.54	AVG
1.6456	22.49	9.94	32.43	56.00	-23.57	QP
1.6456	16.39	9.94	26.33	46.00	-19.67	AVG
2.3820	22.32	9.94	32.26	56.00	-23.74	QP
2.3820	16.58	9.94	26.52	46.00	-19.48	AVG
3.1099	21.20	9.95	31.15	56.00	-24.85	QP
3.1099	13.26	9.95	23.21	46.00	-22.79	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

100.0 dBμV

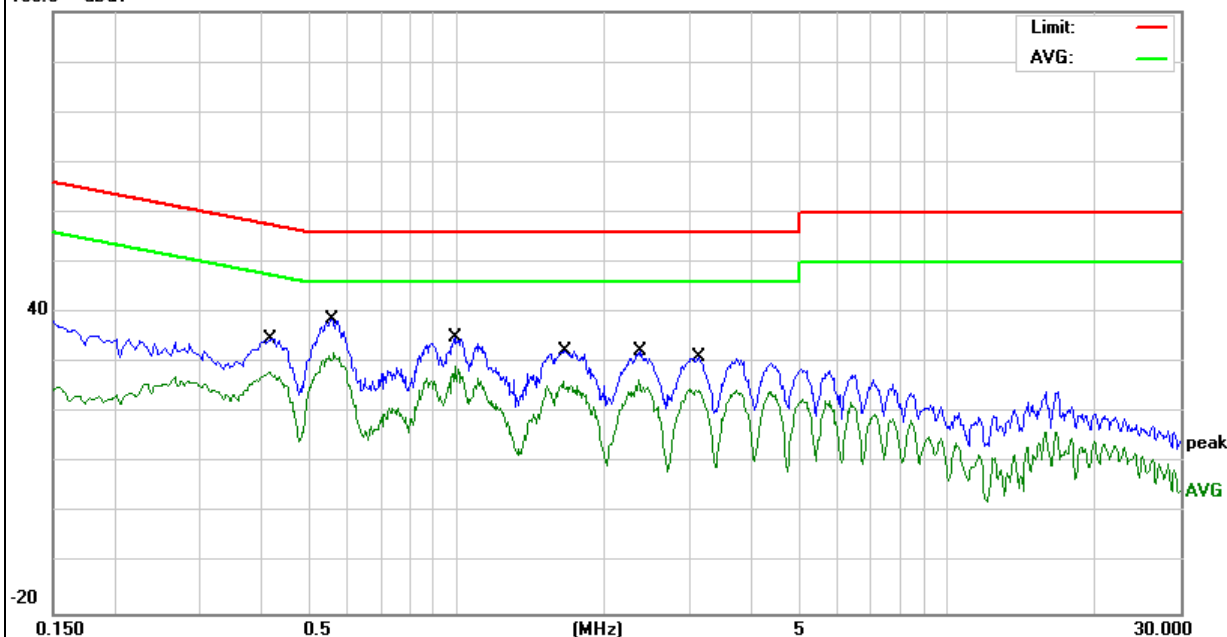

3.4 RADIATED EMISSION MEASUREMENT

3.4.1 Radiated Emission Limits (FCC 15.209)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RADIATED EMISSION MEASUREMENT (FCC 15.239)

Frequency of Emission (MHz)	Field Strength of fundamental (dBμV/m)	
88-108	Peak	AVG
	68	48

Notes:

- (1) Fcc part15.239 (b) The field strength of any emissions within the permitted 200 kHz band shall not exceed 250 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in Section 15.35 for limiting peak emissions apply.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.4.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

3.4.3 DEVIATION FROM TEST STANDARD


No deviation

3.4.4 TEST SETUP


(a) For radiated emissions below 30MHz

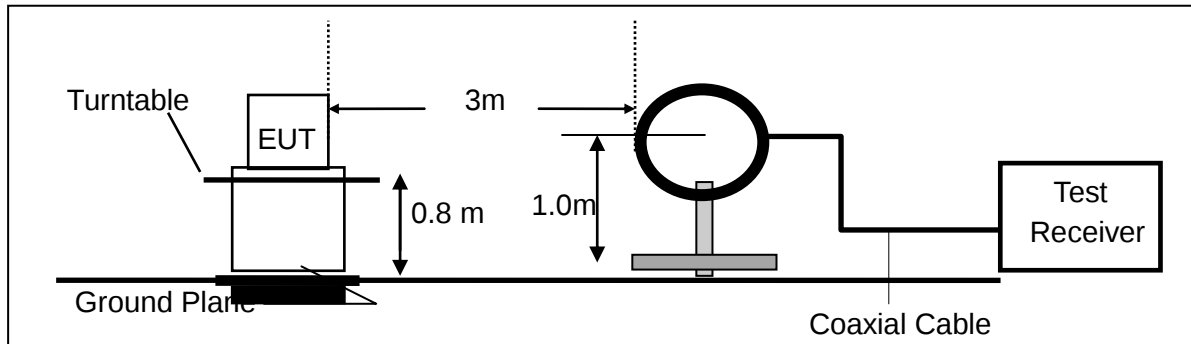

(b) For radiated emissions from 30MHz to 1000MHz

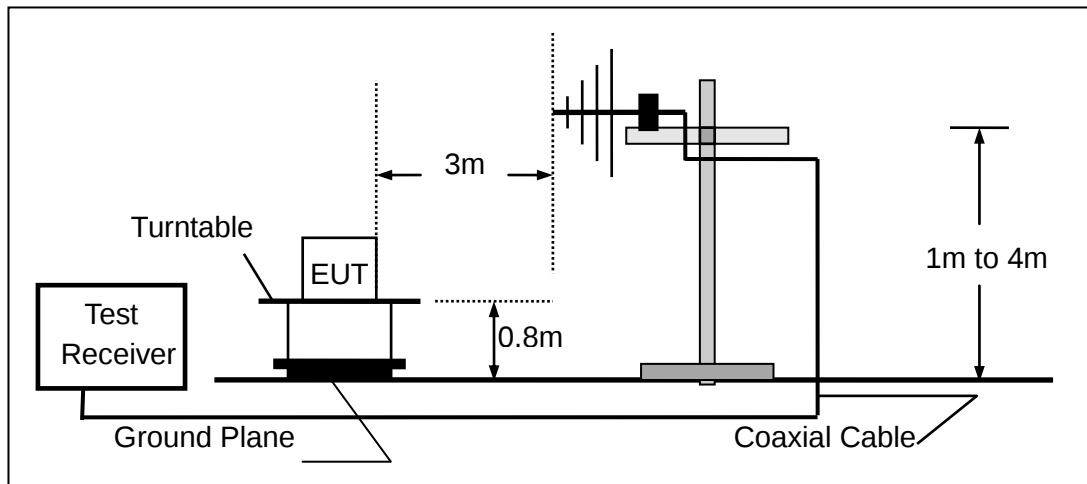

(c) For radiated emissions above 1000MHz

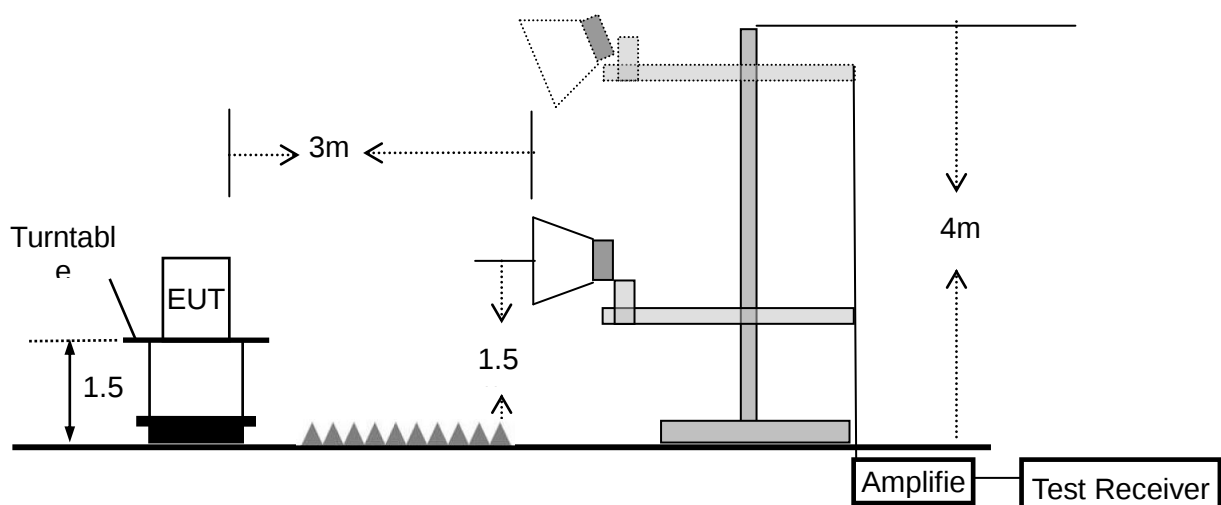

3.4.5 TEST RESULTS (BLOW 30MHz)

EUT :	BT handsfree car kit/ FM transmitter/ Bluetooth transmitter	Model Name. :	HBT01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12.0V
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.


3.4.6 TEST RESULTS (BETWEEN 30 – 1000 MHZ)

EUT :	BT handsfree car kit/ FM transmitter/ Bluetooth transmitter	Model Name :	HBT01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12.0V
Test Mode :	88.1MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
51.3004	6.70	13.29	19.99	40.00	-20.01	QP
88.1000	40.17	11.76	51.93	68.00	-16.07	peak
88.1000	30.26	11.76	42.02	48.00	-5.98	AVG
121.1230	9.44	10.61	20.05	43.50	-23.45	QP
177.5092	16.19	12.69	28.88	43.50	-14.62	QP
277.0935	11.42	14.03	25.45	46.00	-20.55	QP
869.1301	7.51	25.93	33.44	46.00	-12.56	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

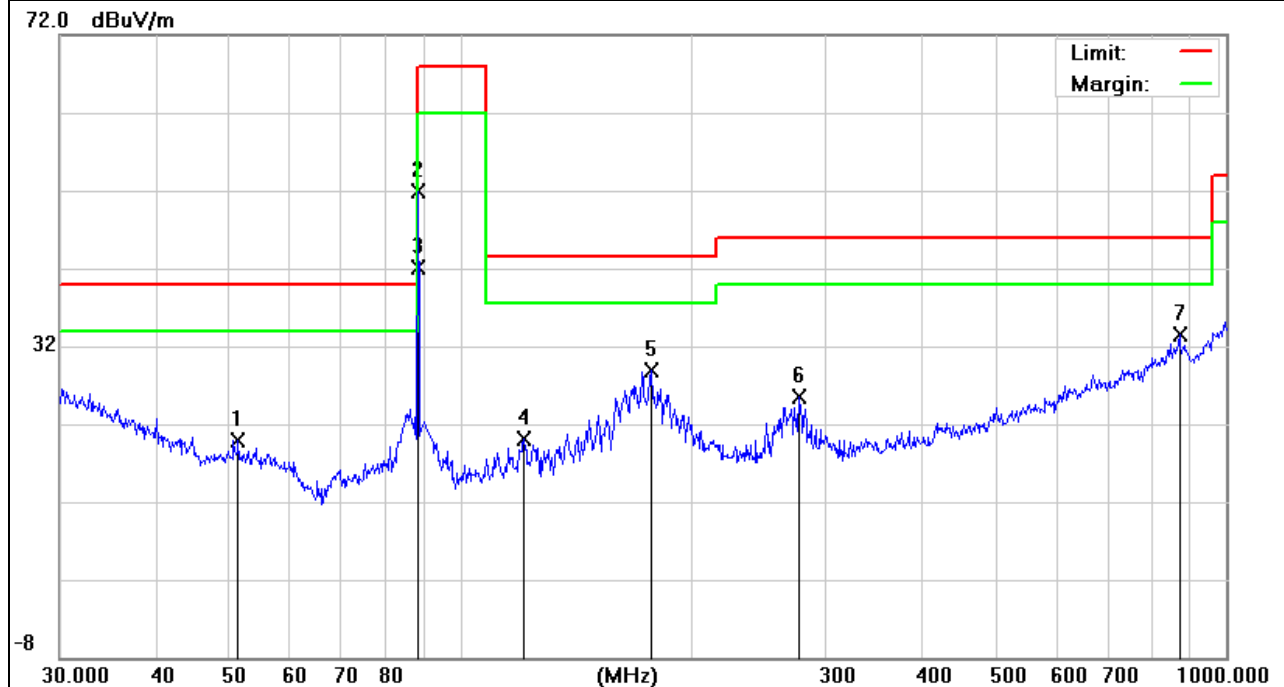


EUT :	BT handsfree car kit/ FM transmitter/ Bluetooth transmitter	Model Name :	HBT01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12.0V
Test Mode :	88.1MHz	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
57.1914	6.88	11.88	18.76	40.00	-21.24	QP
88.1000	35.02	11.76	46.78	68.00	-21.22	peak
88.1000	26.49	11.76	38.25	48.00	-9.75	AVG
119.0180	10.20	10.51	20.71	43.50	-22.79	QP
181.9201	8.29	12.73	21.02	43.50	-22.48	QP
318.8170	7.66	13.39	21.05	46.00	-24.95	QP
423.5403	5.31	16.71	22.02	46.00	-23.98	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

72.0 dBuV/m

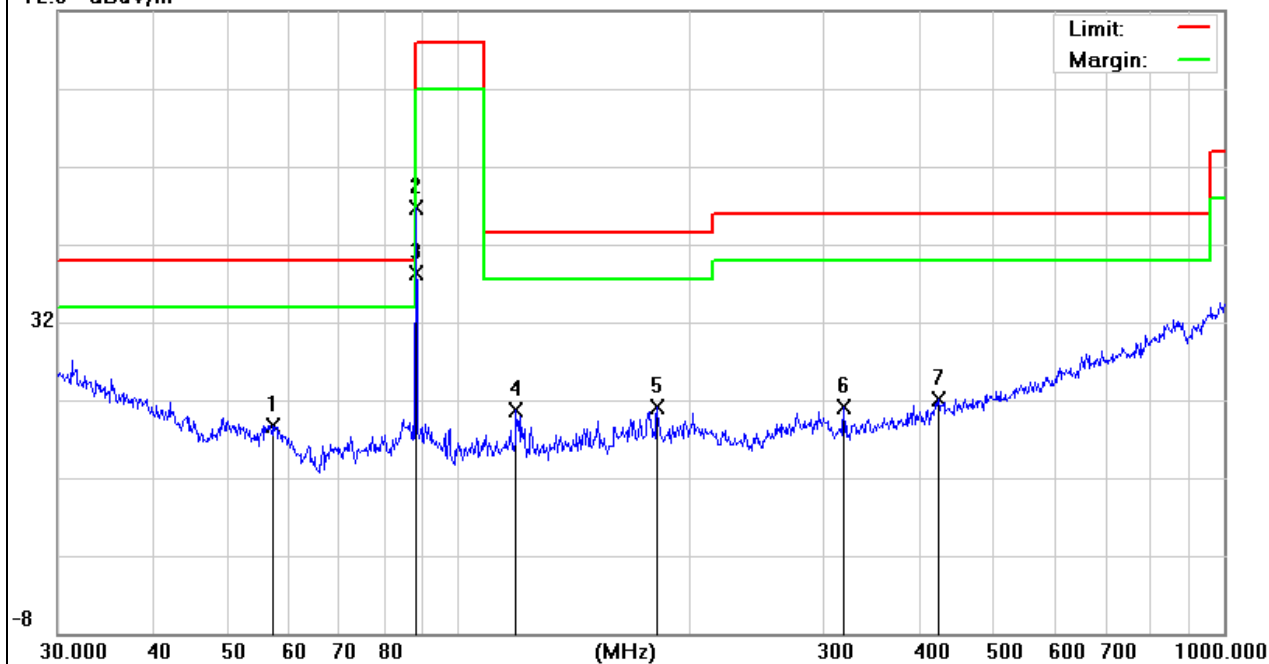


EUT :	BT handsfree car kit/ FM transmitter/ Bluetooth transmitter	Model Name :	HBT01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12.0V
Test Mode :	98.1MHz	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
86.2001	9.77	11.25	21.02	40.00	-18.98	QP
98.1419	32.77	10.23	43.00	68.00	-25.00	peak
98.1419	26.46	10.23	36.69	48.00	-11.31	AVG
120.6991	9.72	10.62	20.34	43.50	-23.16	QP
151.5971	9.20	11.22	20.42	43.50	-23.08	QP
221.3920	12.57	12.21	24.78	46.00	-21.22	QP
495.9343	6.96	17.54	24.50	46.00	-21.50	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

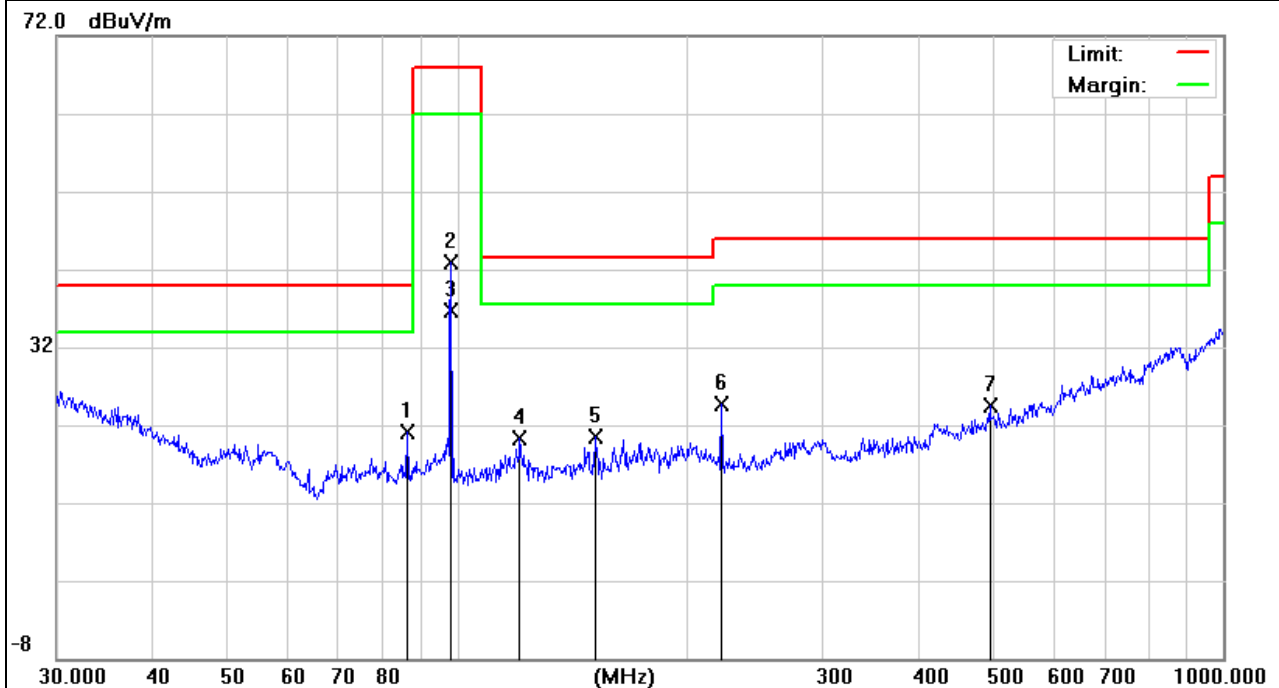


EUT :	BT handsfree car kit/ FM transmitter/ Bluetooth transmitter	Model Name :	HBT01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12.0V
Test Mode :	98.1MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
85.8983	13.56	11.20	24.76	40.00	-15.24	
98.1419	30.13	10.23	40.36	68.00	-27.64	peak
98.1419	23.36	10.23	33.59	48.00	-14.41	AVG
169.0054	14.70	12.61	27.31	43.50	-16.19	QP
178.1325	15.50	12.71	28.21	43.50	-15.29	QP
275.1569	11.71	13.97	25.68	46.00	-20.32	QP
323.3204	7.76	13.57	21.33	46.00	-24.67	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

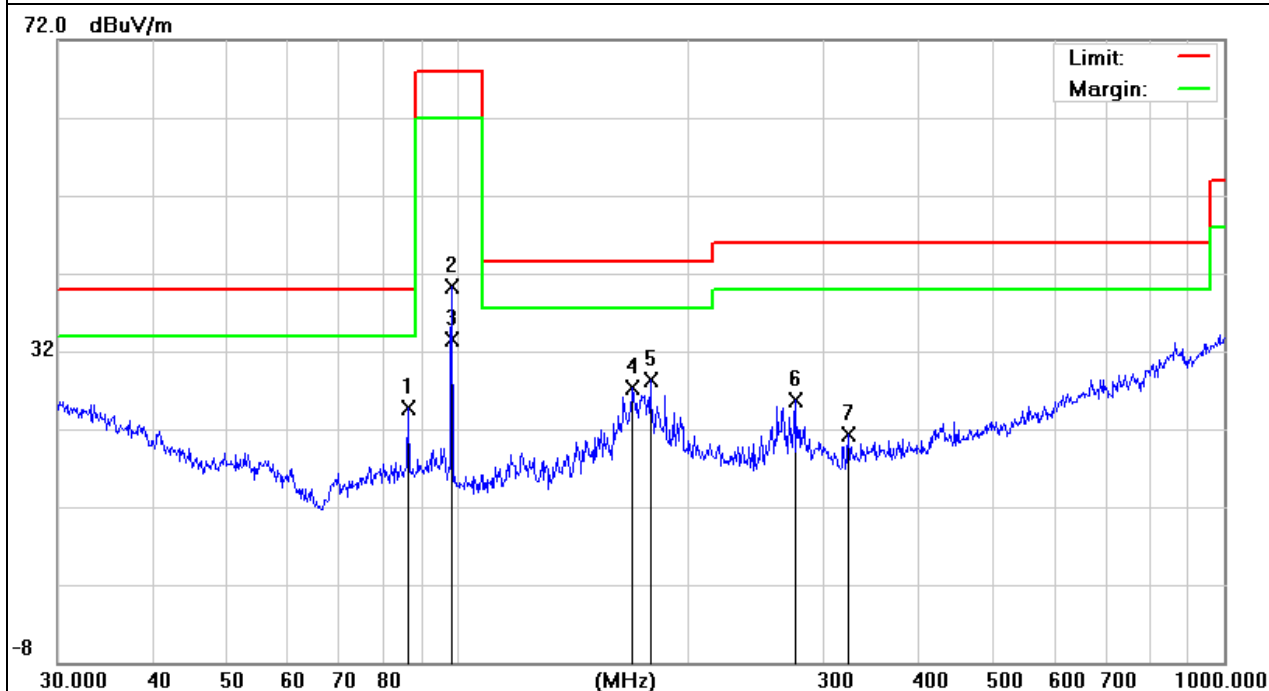


EUT :	BT handsfree car kit/ FM transmitter/ Bluetooth transmitter	Model Name :	HBT01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12.0V
Test Mode :	107.9MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
57.1914	8.39	11.88	20.27	40.00	-19.73	QP
107.8876	21.36	10.28	31.64	68.00	-36.36	peak
107.8877	15.74	10.28	26.02	48.00	-21.98	AVG
127.6645	14.07	10.53	24.60	43.50	-18.90	QP
185.1379	7.66	12.70	20.36	43.50	-23.14	QP
295.1469	6.77	14.60	21.37	46.00	-24.63	QP
760.7036	7.79	22.32	30.11	46.00	-15.89	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

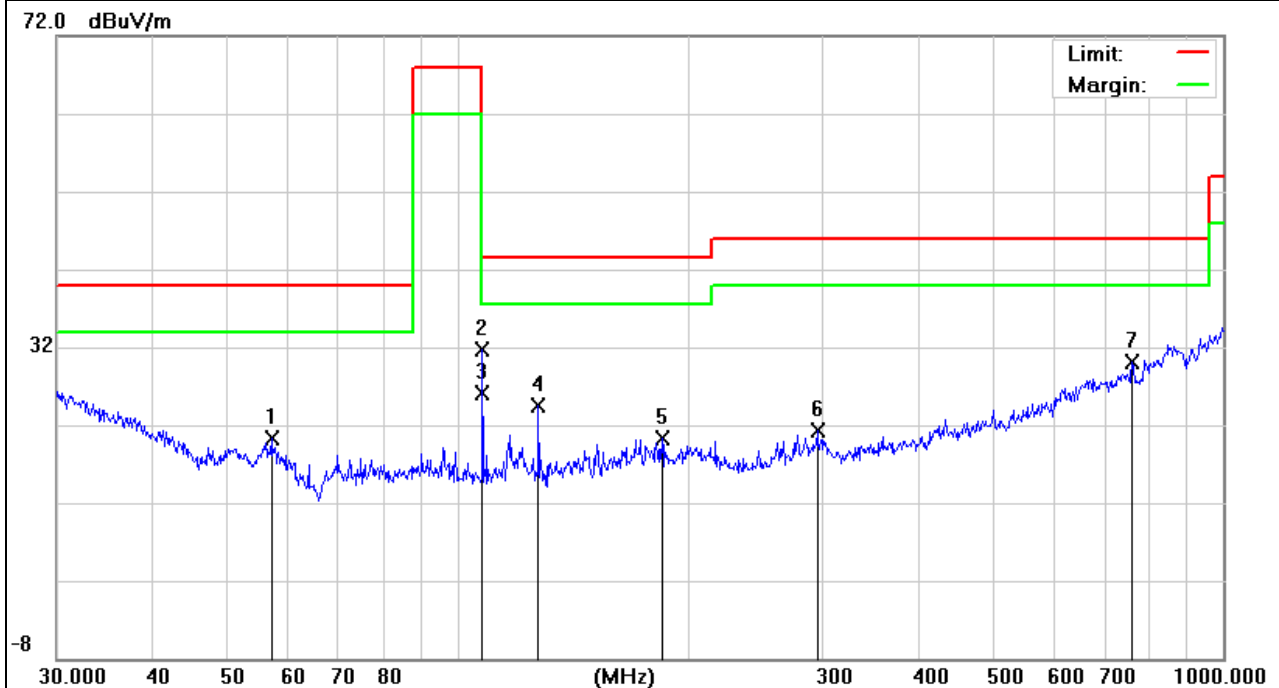


EUT :	BT handsfree car kit/ FM transmitter/ Bluetooth transmitter	Model Name :	HBT01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12.0V
Test Mode :	107.9MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
107.8876	20.42	10.28	30.70	68.00	-37.30	
107.8877	13.32	10.28	23.60	48.00	-24.40	AVG
125.4457	9.60	10.56	20.16	43.50	-23.34	QP
159.7844	12.79	12.23	25.02	43.50	-18.48	QP
173.2050	15.77	12.64	28.41	43.50	-15.09	QP
191.7450	12.02	13.08	25.10	43.50	-18.40	QP
265.6757	10.75	13.45	24.20	46.00	-21.80	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

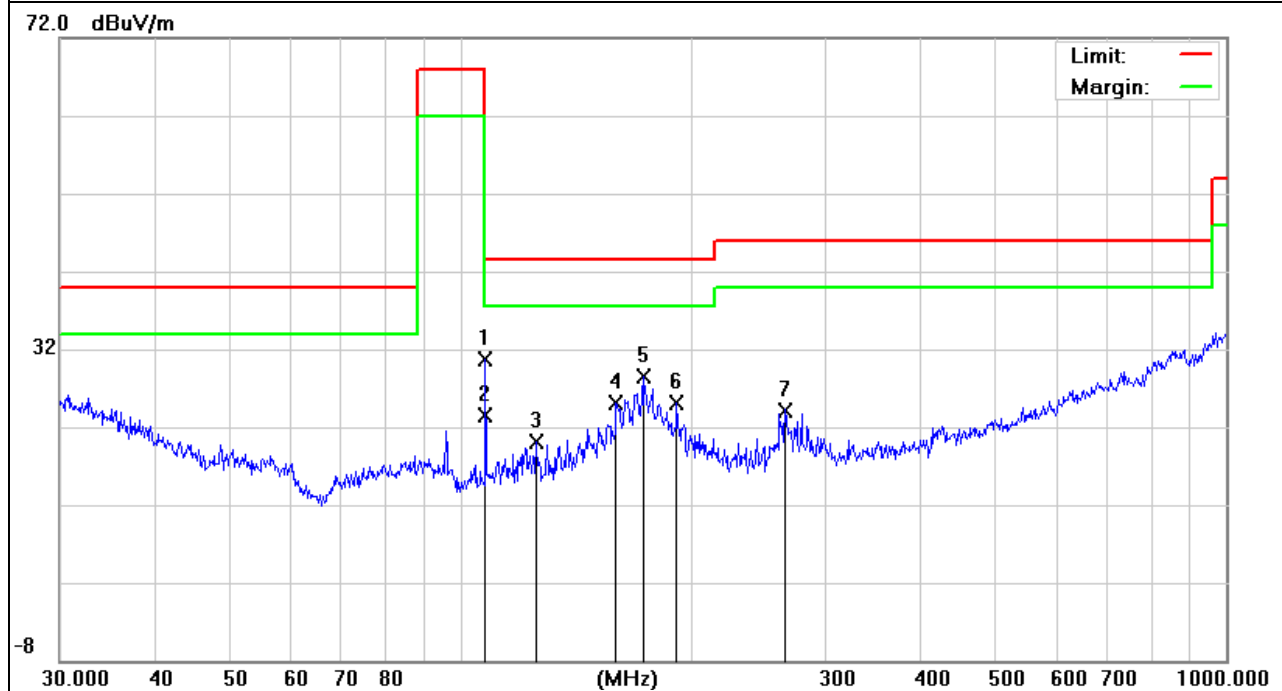


3.4.7 TEST RESULTS (BAND EDGE EMISSION)

EUT :	BT handsfree car kit/ FM transmitter/ Bluetooth transmitter	Model Name :	HBT01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12.0V
Test Mode :	88.1MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
88.0000	16.74	11.76	28.50	40.00	-11.50	QP

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

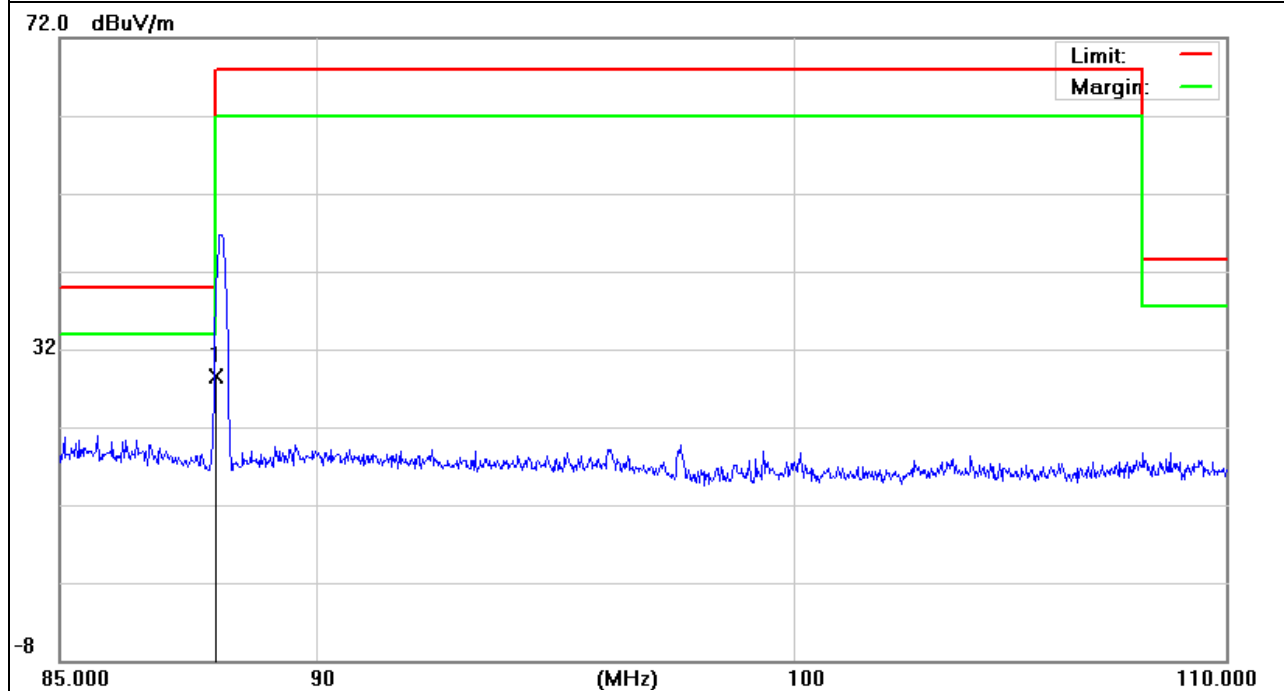


EUT :	BT handsfree car kit/ FM transmitter/ Bluetooth transmitter	Model Name :	HBT01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12.0V
Test Mode :	88.1MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
88.0000	18.74	11.76	30.50	40.00	-9.50	

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

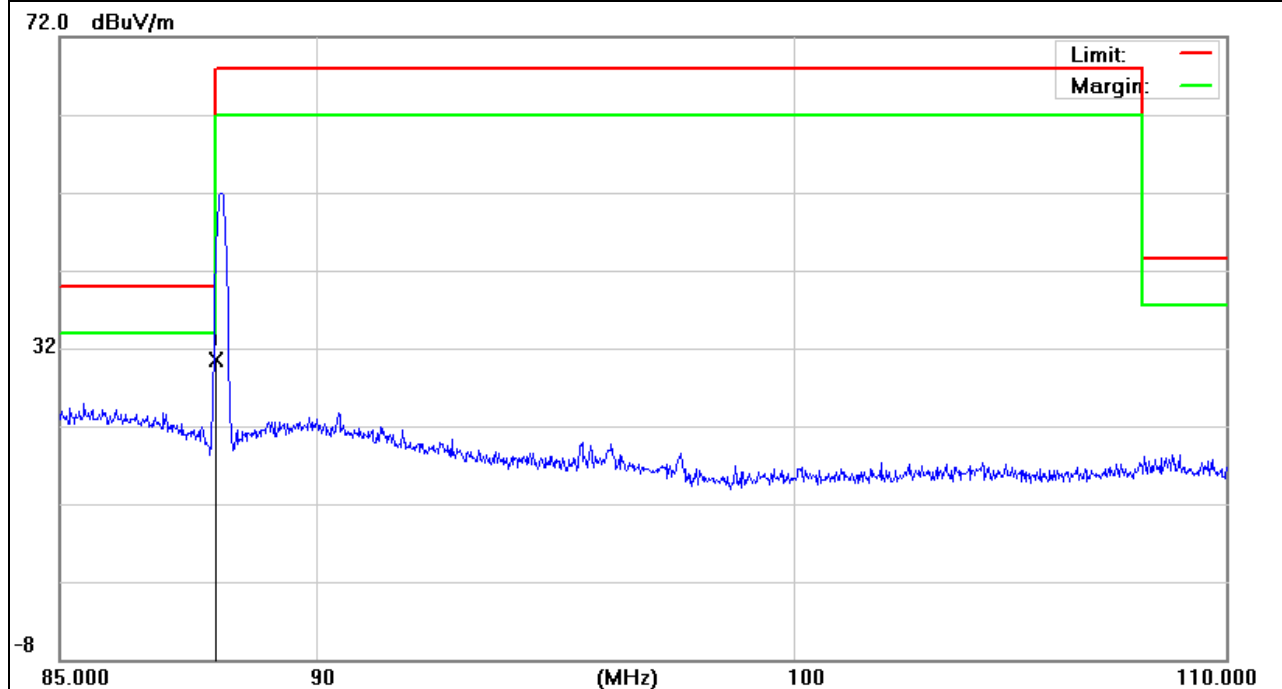


EUT :	BT handsfree car kit/ FM transmitter/ Bluetooth transmitter	Model Name :	HBT01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12.0V
Test Mode :	107.9MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
108.0000	6.02	10.28	16.30	43.50	-27.20	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

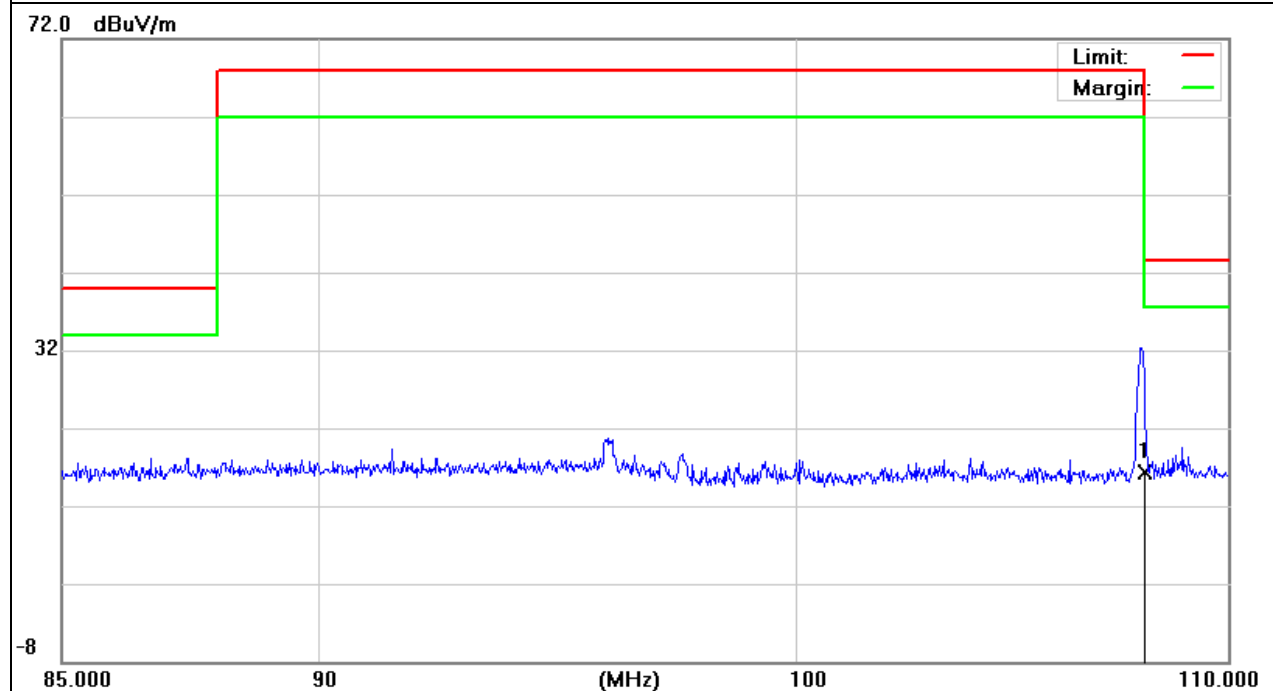


EUT :	BT handsfree car kit/ FM transmitter/ Bluetooth transmitter	Model Name :	HBT01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12.0V
Test Mode :	107.9MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
108.0000	6.52	10.28	16.80	43.50	-26.70	

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

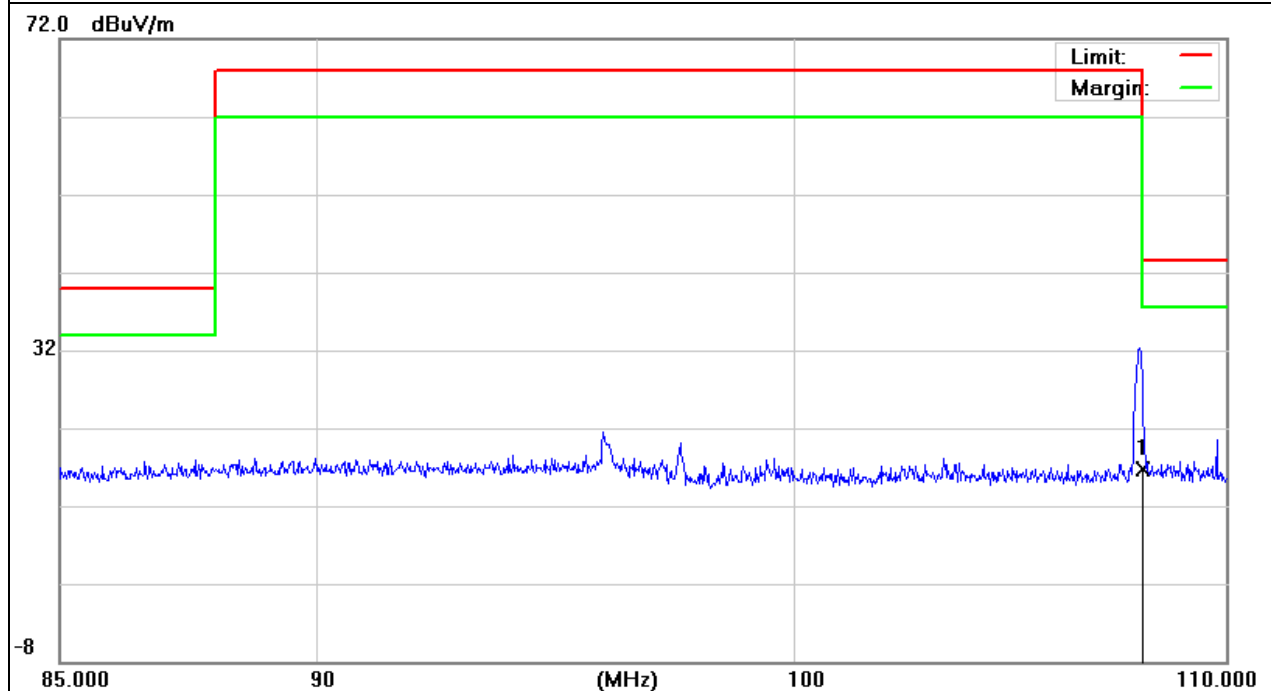

4. BANDWIDTH TEST

4.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 10KHz, VBW $\geq$ RBW, Sweep time = Auto.

4.2 DEVIATION FROM STANDARD

No deviation.

4.3 TEST SETUP




4.4 TEST RESULTS


EUT :	BT handsfree car kit/ FM transmitter/ Bluetooth transmitter	Model Name :	HBT01
Temperature :	26 °C	Relative Humidity :	53%
Pressure :	1020 hPa	Test Power :	DC 12.0V
Test Mode :	TX		

Test Channel	Frequency (MHz)	20 dBc Bandwidth (KHz)	Limit (KHz)
Low	88.1	133.500	200
Mid	98.1	133.612	200
High	107.9	166.193	200

The Lowest Channel: 88.1MHz

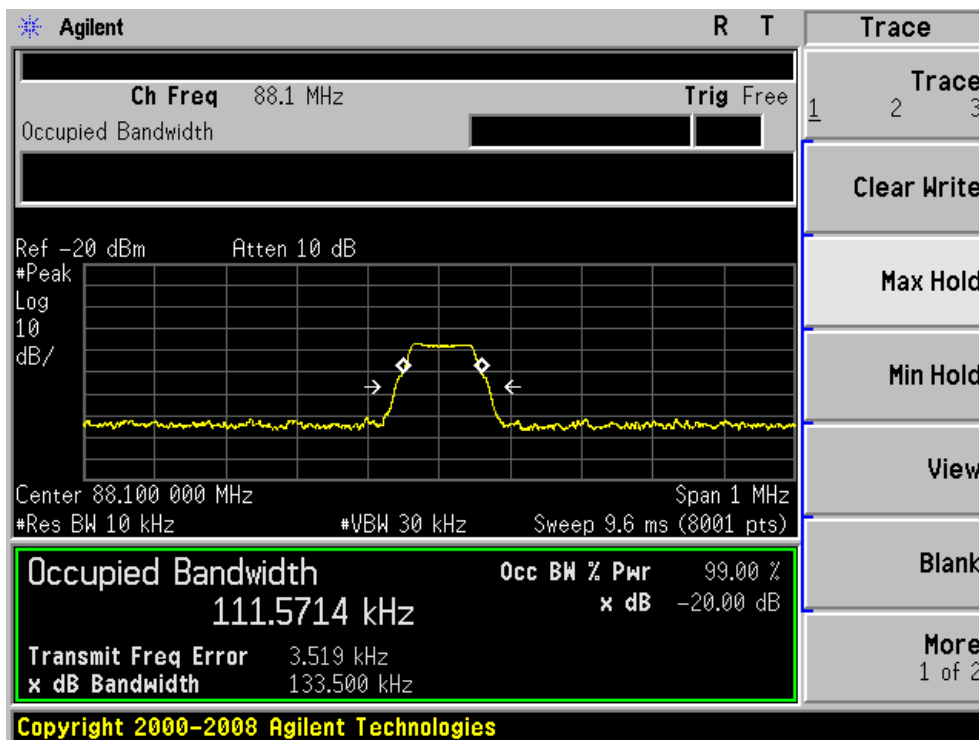

The Middle Channel: 98.1MHz

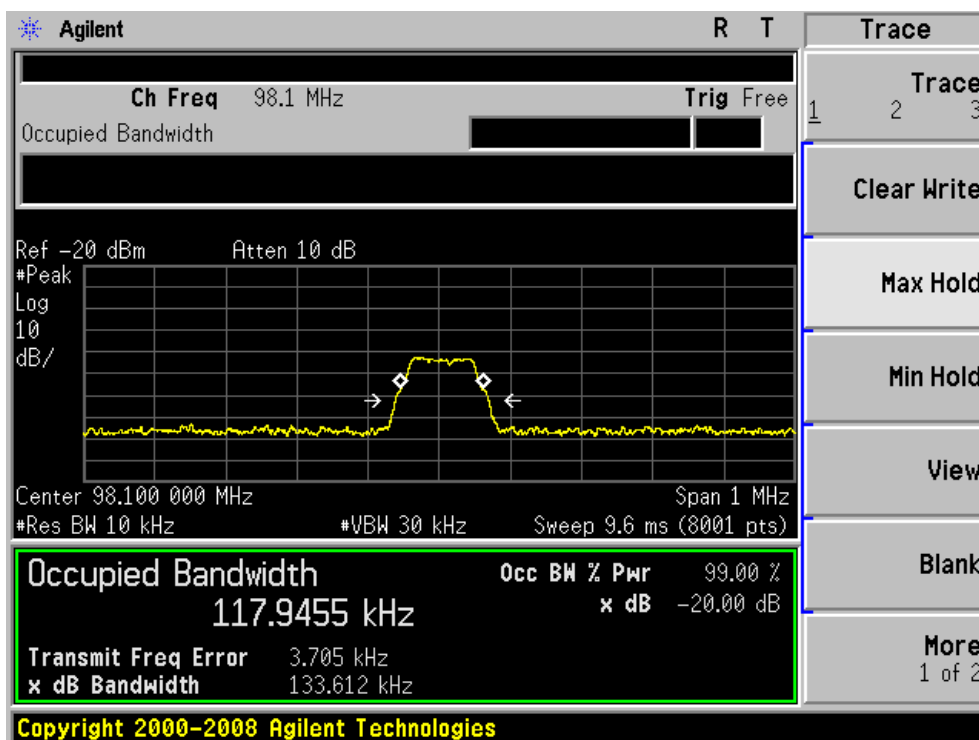

The High Channel:107.9MHz

